

# Product Catalog

## Mobile Hydraulics

### Part 1: Pumps



## The complete Mobile Hydraulics Catalog from Bosch Rexroth at a glance:

Part 1	Pumps	Axial Piston Pumps, External Gear Pumps, Electrohydraulic Pumps, Gerotor Pumps	RE 90010-01
Part 2	Motors, Gears	Axial Piston Motors, External Gear Motors, Radial Piston Motors, Gears	RE 90010-02
Part 3	Mobile Controls	Control Blocks, Valve Modules, Pilot Control Devices, Power Brake Valves	RE 90010-03
Part 4	Mobile Electronics, Accumulators, Filters	Controllers, Application Software, Tools, Sensors, Displays, Video Cameras, Accumulators, Filters, Oil Measurement Technology	RE 90010-04
Part 5	Compact Hydraulics	Mechanical, Solenoid and Proportional Cartridge Valves, Integrated Circuits	RE 90010-05
Part 6	Compact Hydraulics	Load Holding/Motion Control Valves, Compact Directional Valves, Compact Power Modules	RE 90010-06

For the latest product information from Bosch Rexroth, please visit our website:

[www.boschrexroth.com/mobile-hydraulics](http://www.boschrexroth.com/mobile-hydraulics)

### Publisher

**Bosch Rexroth AG**  
Mobile Applications  
Glockeraustrasse 4  
89275 Elchingen, Germany  
Tel. +49 7308 82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

### Catalog No

RE 90010-01/07.2016  
Replaces: RE 90010-01/07.2012

Reprints and translation, in whole or in part, only with the publisher's prior consent. Subject to revision.

**Should you require further technical information, please contact the Rexroth sales partner in your area.**

[www.boschrexroth.com/addresses](http://www.boschrexroth.com/addresses)



# Contents

<b>General</b>	7	1
<b>Axial piston pumps</b>		
Fixed pumps, open circuits	95	2
Variable pumps, open circuits	187	3
Variable pumps, closed circuits	885	4
Accessories	1219	5
<b>External gear pumps</b>		
Standard Performance / High Performance	1259	6
SILENCE / SILENCE PLUS	1485	7
<b>Electrohydraulic pumps</b>	1599	8
<b>Gerotor pumps</b>	1671	9

# Contents

Designation	Type	Size	Series	Data sheet	Page
<b>General</b>					
Hydraulic fluids based on mineral oils and related hydrocarbons				90220	9
Environmentally acceptable hydraulic fluids				90221	25
Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)				90222	39
Fire-resistant hydraulic fluids - water-containing (HFAE, HFAS, HFB, HFC)				90223	55
Axial piston units for operation with fire-resistant hydraulic fluids – water-free and water-containing (HFDR, HFDU, HFA, HFB, HFC)				90225	71
Rating of hydraulic fluids for Rexroth hydraulic components (pumps and motors)				90235	87
<b>Axial piston pumps</b>					
Fixed pump	A2FO	5...1000	6x	91401	97
Fixed pump	A4FO	22...500	10/32	91455	131
Fixed pump	A17FO	23...107	10	91520	159
Fixed pump	A17FNO	125	10	91510	175
Variable pump	A4VSO	40...1000	10/11/30	92050	189
Variable pump	A11V(L)O	40...260	10/11	92500	257
Variable pump	A11V(L)O	110...280	40	92510	321
Variable pump	A1VO	18...35	10	92650	389
Variable pump	A10V(S)O	18...140	31	92701	413
Variable pump	A10VO	45...180	32	92705	473
Variable pump	A10VO/5	10...100	52/53	92703	529
Variable pump	A10VNO	28...85	52/53	92735	597
Variable pump A10V(S)O with electro-proportional EF differential pressure control	for A10V(S)O	18...140	3x/5x	92709	633
Variable pump	A7VO	28...160	63	92202	645
Variable pump	A7VO	250...500	63	92203	689
Variable pump	A18VO	55...107	11	92270	741
Variable pump	A18VLO	80	11	92280	765
Variable double pump	A8VO	55...200	6x	93010	781
Variable double pump	A8VO	225	72	93013	821
Variable double pump	A20VO	60...520	10	93100	837
Variable double pump	A28VO	280	10	93110	853
Variable pump	A4VG	28...125	32	92003	887
Variable pump	A4VG	110...280	40	92004	959
Variable pump	A4VTG	71...90	33	92013	1031
Variable pump	A10VG	18...63	10	92750	1055
Variable pump	A4CSG	250...750		92105	1099
Variable double pump	A22VG	45	40	93221	1135
Variable double pump	A24VG	45...125	10	93240	1161
2-Circuit Axial Piston Variable Pump	A30VG	28		93430	1199
Flushing valve with pressure holding valve	SV	40...90	10	95512	1221
Power valve	LA	6	10	95514	1229
Universal through drive for axial piston variable pump A10VSO, A4VSO, A15VSO/A15VLO and A11V(L)O	A10VSO/32, A4VSO/30, A15VSO/10, A11VO/40			95581	1233
Hydraulic tank made of polymer or steel	TMP, TMS	8	10	95721	1249

Designation	Type	Size	Series	Data sheet	Page
<b>External gear pumps</b>					
External gear pump Standard-Performance	AZPW	4...22	1x/2x	10090	1261
External gear pump High Performance	AZPB	1...7.1	3x	10088	1297
External gear pump High Performance	AZPF	4...28	1x/2x	10089	1329
External gear pump High Performance	AZPN	20...36	1x/2x	10091	1397
External gear pump High Performance	AZPG	22...100	2x/3x	10093	1421
External gear pump SILENCE	AZPS	4...28	1x/2x	10095	1487
External gear pump SILENCE	AZPT	20...36	2x	10092	1519
External gear pump SILENCE	AZPU	22...63	2x	10098	1541
External gear pump SILENCE PLUS	AZPJ	12...28	2x	10094	1567
<b>Electrohydraulic pumps</b>					
Electrohydraulic pumps	EHP	1...22		10104	1601
<b>Gerotor pumps</b>					
Gerotor pump	PGZ	20...140	1x	10545	1673



# General


<b>Designation</b>	<b>Data sheet</b>	<b>Page</b>
Hydraulic fluids based on mineral oils and related hydrocarbons	90220	9
Environmentally acceptable hydraulic fluids	90221	25
Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)	90222	39
Fire-resistant hydraulic fluids - water-containing (HFAE, HFAS, HFB, HFC)	90223	55
Axial piston units for operation with fire-resistant hydraulic fluids – water-free and water-containing (HFDR, HFDU, HFA, HFB, HFC)	90225	71
Rating of hydraulic fluids for Rexroth hydraulic components (pumps and motors)	90235	87



# Hydraulic fluids based on mineral oils and related hydrocarbons

**RE 90220/05.12** 1/16  
Replaces: 05.10

Application notes and requirements for Rexroth hydraulic components

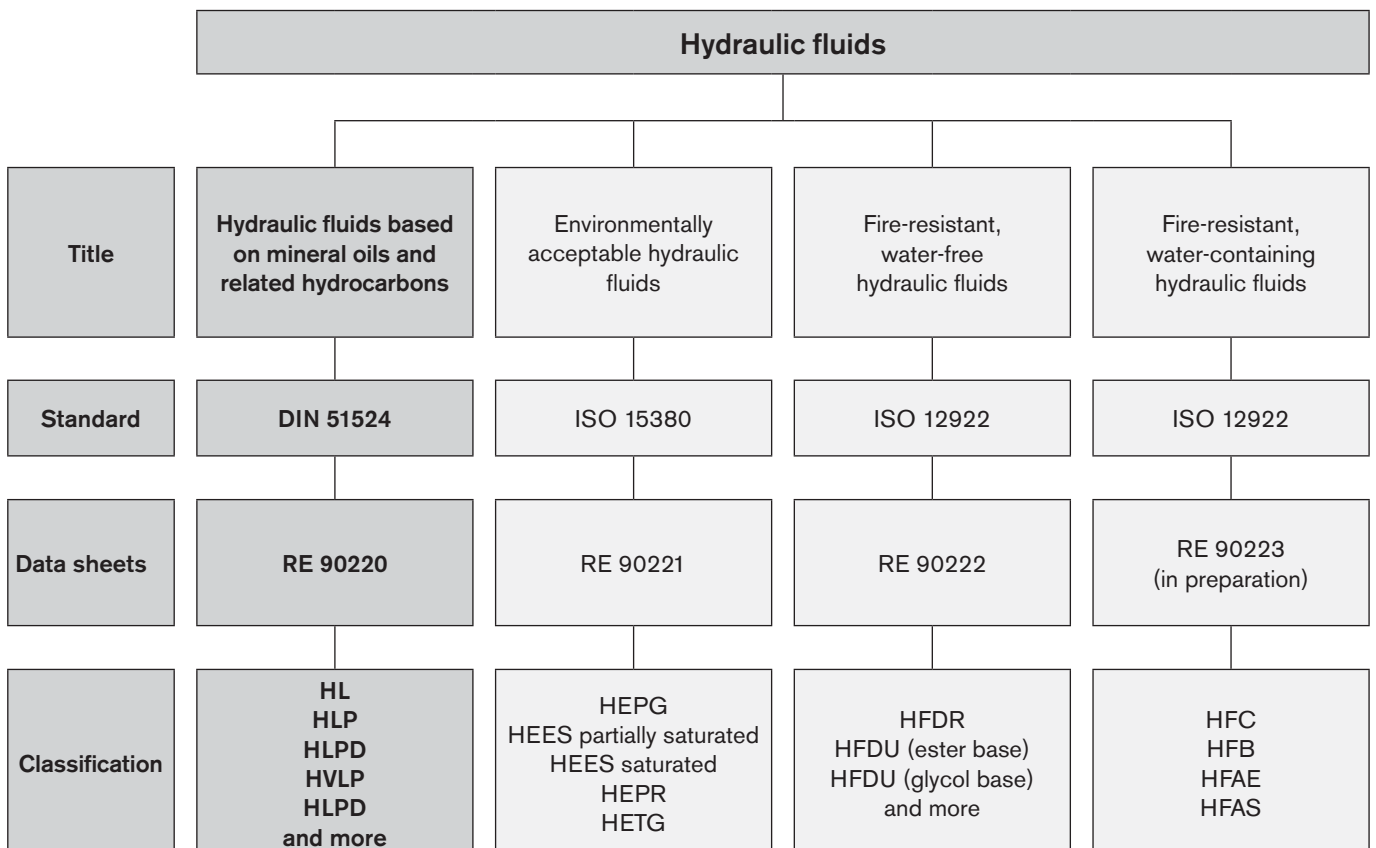



## Contents

1	Basic information .....	3
1.1	General instructions.....	3
1.2	Scope .....	3
1.3	Safety instructions.....	3
2	Solid particle contamination and cleanliness levels .....	4
3	Selection of the hydraulic fluid.....	5
3.1	Selection criteria for the hydraulic fluid.....	5
3.1.1	Viscosity.....	5
3.1.2	Viscosity-temperature behavior.....	5
3.1.3	Wear protection capability.....	6
3.1.4	Material compatibility.....	6
3.1.5	Aging resistance .....	6
3.1.6	Air separation ability (ASA).....	6
3.1.7	Demulsifying ability and water solubility.....	6
3.1.8	Filterability.....	6
3.1.9	Corrosion protection.....	6
3.1.10	Additivation .....	7
3.2	Classification and fields of application .....	7
4	Hydraulic fluids in operation .....	9
4.1	General.....	9
4.2	Storage and handling .....	9
4.3	Filling of new systems.....	9
4.4	Hydraulic fluid changeover .....	9
4.5	Mixing and compatibility of different hydraulic fluids.....	9
4.6	Re-additivation.....	9
4.7	Foaming behavior.....	9
4.8	Corrosion.....	10
4.9	Air.....	10
4.10	Water .....	10
4.11	Fluid servicing, fluid analysis and filtration .....	10
5	Disposal and environmental protection .....	11
6	Other hydraulic fluids based on mineral oil and related hydrocarbons .....	12
7	Glossary.....	15

# 1 Basic information

## 1.1 General instructions

The hydraulic fluid is the common element in any hydraulic component and must be selected very carefully. Quality and cleanliness of the hydraulic fluid are decisive factors for the operational reliability, efficiency and service life of a system.

Hydraulic fluids must conform, be selected and used in accordance with the generally acknowledged rules of technology and safety provisions. Reference is made to the country-specific standards and directives (in Germany the directive of the Employer's Liability Insurance Association BGR 137).

This data sheet includes recommendations and regulations concerning the selection, operation and disposal of hydraulic fluids based on mineral oils and related hydrocarbons in the application of Rexroth hydraulic components.

The individual selection of hydraulic fluid or the choice of classification are the responsibility of the operator.

It is the responsibility of the user to ensure that appropriate measures are taken for safety and health protection and to ensure compliance with statutory regulations. The recommendations of the lubricant manufacturer and the specifications given in the safety data sheet are to be observed when using hydraulic fluid.

This data sheet does not absolve the operator from verifying the conformity and suitability of the respective hydraulic fluid for his system. He is to ensure that the selected fluid meets the minimum requirements of the relevant fluid standard during the whole of the period of use.

Other regulations and legal provisions may also apply. The operator is responsible for their observance, e.g. EU directive 2004/35/EG and their national implementations. In Germany the Water Resources Act (WHG) is also to be observed.

We recommend that you maintain constant, close contact with lubricant manufacturers to support you in the selection, maintenance, care and analyses.

When disposing of used hydraulic fluids, apply the same care as during use.

## 1.2 Scope

This data sheet must be observed when using hydraulic fluids based on mineral oils and related hydrocarbons in Bosch Rexroth hydraulic components.

Please note that the specifications of this data sheet may be restricted further by the specifications given in the product data sheets for the individual components.

The use of the individual hydraulic fluids in accordance with the intended purpose can be found in the safety data sheets or other product description documents of the lubricant manufacturers. In addition, each use is to be individually considered.

Rexroth hydraulic components may only be operated with hydraulic fluids based on mineral oils and related hydrocarbons according to DIN 51524 if specified in the respective component data sheet or if Rexroth approval for use is furnished.

### Notes:

In the market overview RE 90220-01, hydraulic fluid based on mineral oil are described which, according to the information of the lubricant manufacturer, feature the respective parameters of the current requirements standard DIN 51524 and other parameters which are of relevance for suitability in connection with Rexroth components.

These specifications are not checked or monitored by Bosch Rexroth. The list in the market overview does not therefore represent a recommendation on the part of Rexroth or approval of the respective hydraulic fluid for use with Rexroth components and does not release the operator from his responsibility regarding selection of the hydraulic fluid.

**Bosch Rexroth will accept no liability for its components for any damage resulting from failure to comply with the notes below.**

## 1.3 Safety instructions

Hydraulic fluids can constitute a risk for persons and the environment. These risks are described in the hydraulic fluid safety data sheets. The operator is to ensure that a current safety data sheet for the hydraulic fluid used is available and that the measures stipulated therein are complied with.

## 2 Solid particle contamination and cleanliness levels

Solid particle contamination is the major reason for faults occurring in hydraulic systems. It may lead to a number of effects in the hydraulic system. Firstly, single large solid particles may lead directly to a system malfunction, and secondly small particles cause continuous elevated wear.

For hydraulic fluids, the cleanliness level is given as a three-digit numerical code in accordance with ISO 4406. This numerical code denotes the number of particles present in a hydraulic fluid for a defined quantity. Moreover, foreign solid matter is not to exceed a mass of 50 mg/kg (gravimetric examination according to ISO 4405).

In general, compliance with a minimum cleanliness level of 20/18/15 in accordance with ISO 4406 or better is to be maintained in operation. Special servo valves demand improved cleanliness levels of at least 18/16/13. A reduction in cleanliness level by one level means half of the quantity of particles and thus greater cleanliness. Lower numbers in cleanliness levels should always be striven for and extend the service life of hydraulic components. The component with the highest cleanliness requirements determines the required cleanliness of the overall system. Please also observe the specifications in table 1: "Cleanliness levels according to ISO 4406" and in the respective data sheets of the various hydraulic components.

Hydraulic fluids frequently fail to meet these cleanliness requirements on delivery. Careful filtering is therefore required during operation and in particular, during filling in order to ensure the required cleanliness levels. Your lubricant manufacturer can tell you the cleanliness level of hydraulic fluids as delivered. To maintain the required cleanliness level over the operating period, you must use a reservoir breather filter. If the environment is humid, take appropriate measures, such as a breather filter with air drying or permanent off-line water separation.

**Note:** the specifications of the lubricant manufacturer relating to cleanliness levels are based on the time at which the container concerned is filled and not on the conditions during transport and storage.

Further information about contamination with solid matter and cleanliness levels can be found in brochure RE 08016.

Table 1: Cleanliness levels according to ISO 4406

Particles per 100 ml		Scale number	
More than	Up to and including		
8,000,000	16,000,000	24	
4,000,000	8,000,000	23	
2,000,000	4,000,000	22	
1,000,000	2,000,000	21	
500,000	1,000,000	20	20 /
250,000	500,000	19	> 4 µm
130,000	250,000	18	18 /
64,000	130,000	17	> 6 µm
32,000	64,000	16	
16,000	32,000	15	15 /
8,000	16,000	14	> 14 µm
4,000	8,000	13	
2,000	4,000	12	
1,000	2,000	11	
500	1,000	10	
250	500	9	
130	250	8	
64	130	7	
32	64	6	

### 3 Selection of the hydraulic fluid

The use of hydraulic fluids based on mineral oils for Rexroth hydraulic components is based on compliance with the minimum requirements of DIN 51524.

#### 3.1 Selection criteria for the hydraulic fluid

The specified limit values for all components employed in the hydraulic system, for example viscosity and cleanliness level, must be observed with the hydraulic fluid used, taking into account the specified operating conditions.

Hydraulic fluid suitability depends, amongst others, on the following factors:

##### 3.1.1 Viscosity

Viscosity is a basic property of hydraulic fluids. The permissible viscosity range of complete systems needs to be determined taking account of the permissible viscosity of all components and it is to be observed for each individual component.

The viscosity at operating temperature determines the response characteristics of closed control loops, stability and damping of systems, the efficiency factor and the degree of wear.

We recommend that the optimum operating viscosity range of each component be kept within the permissible temperature range. This usually requires either cooling or heating, or both. The permissible viscosity range and the necessary cleanliness level can be found in the product data sheet for the component concerned.

If the viscosity of a hydraulic fluid used is above the permitted operating viscosity, this will result in increased hydraulic-mechanical losses. In return, there will be lower internal leakage losses. If the pressure level is lower, lubrication gaps may not be filled up, which can lead to increased wear. For hydraulic pumps, the permitted suction pressure may not be reached, which may lead to cavitation damage.


If the viscosity of a hydraulic fluid is below the permitted operating viscosity, increased leakage, wear, susceptibility to contamination and a shorter component life cycle will result.

##### 3.1.2 Viscosity-temperature behavior

For hydraulic fluids, the viscosity temperature behavior (V-T behavior) is of particular importance. Viscosity is characterized in that it drops when the temperature increases and rises when the temperature drops; see Fig. 1 "Viscosity temperature chart for HL, HLP, HLPD (VI 100)". The interrelation between viscosity and temperature is described by the viscosity index (VI).

The viscosity temperature diagram in Fig. 1 is extrapolated in the  $< 40^\circ\text{C}$  range. This idealized diagram is for reference purposes only. Measured values can be obtained from your lubricant manufacturer and are to be preferred for design purposes.

Fig. 1: Viscosity-temperature chart for HL, HLP, HLPD (VI 100, double logarithmic representation)

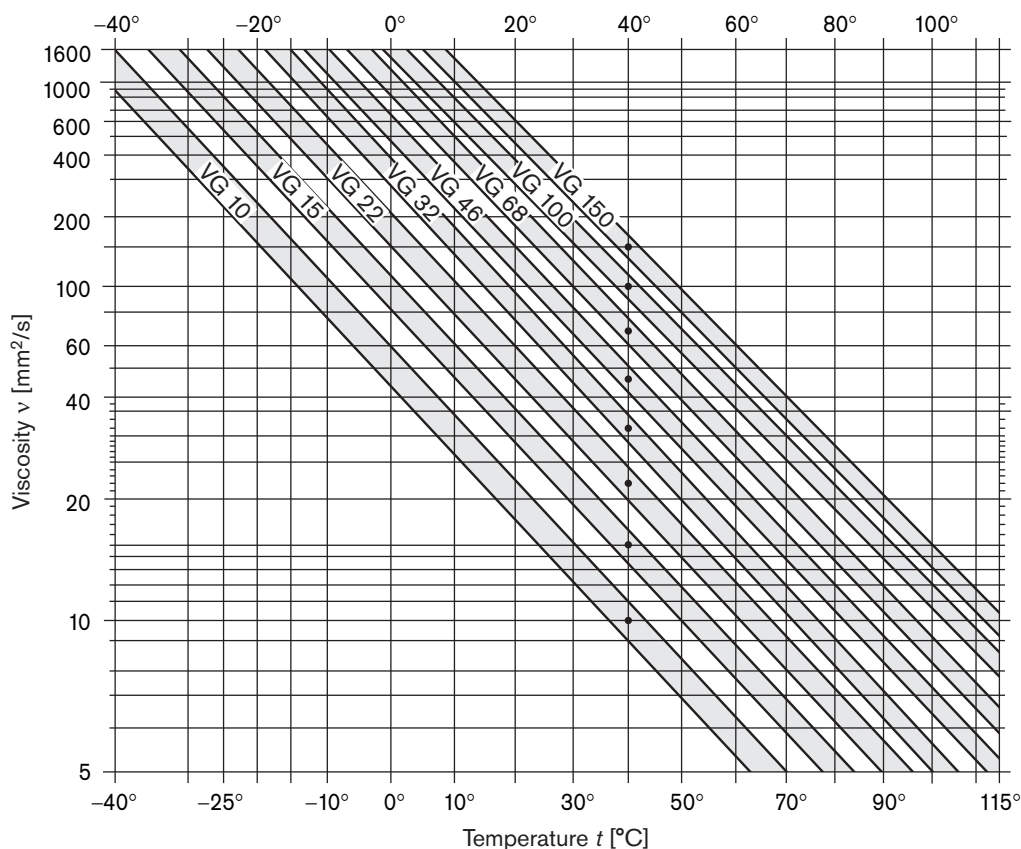

### 3.1.3 Wear protection capability

Wear protection capability describes the property of hydraulic fluids to prevent or minimize wear within the components. The wear protection capability is described in DIN 51524-2,-3 via test procedures "FZG gear test rig" (ISO 14635-1) and "Mechanical test in the vane pump" (ISO 20763). From ISO VG 32 DIN 51524-2,-3 prescribes a rating of at least 10 (FZG test). At present, the FZG test cannot be applied to viscosity classes < ISO VG 32.

### 3.1.4 Material compatibility

The hydraulic fluid must not negatively affect the materials used in the components. Compatibility with coatings, seals, hoses, metals and plastics is to be observed in particular. The fluid classifications specified in the respective component data sheets are tested by the manufacturer with regard to material compatibility. Parts and components not supplied by us are to be checked by the user.

**Table 2: Known material incompatibilities**

Classification	Incompatible with:
HLxx classifications	with EPDM seals
Zinc- and ash/free hydraulic fluids	with bronze-filled PTFE seals

### 3.1.5 Aging resistance

The way a hydraulic fluid ages depends on the thermal, chemical and mechanical stress to which it is subjected. Aging resistance can be greatly influenced by the chemical composition of the hydraulic fluids.

High fluid temperatures (e.g. over 80 °C) result in a approximate halving of the fluid service life for every 10 °C temperature increase and should therefore be avoided. The halving of the fluid service life results from the application of the Arrhenius equation (see Glossary).

**Table 3: Reference values for temperature-dependent aging of the hydraulic fluid**

Reservoir temperature	Fluid life cycle
80 °C	100 %
90 °C	50 %
100 °C	25 %

Hydraulic fluids based on mineral oils and related hydrocarbons are tested with 20% water additive during testing of aging resistance according to ISO 4263-1.

The calculated fluid service life is derived from the results of tests in which the long-term characteristics are simulated in a short period of time by applying more arduous conditions (condensed testing). This calculated fluid service life is not to be equated to the fluid service life in real-life applications.

Table 3 is a practical indicator for hydraulic fluids with water content < 0.1%, cf. chapter 4.10. "Water".

### 3.1.6 Air separation ability (ASA)

The air separation ability (ASA) describes the property of a hydraulic fluid to separate undissolved air. Hydraulic fluids contain approx. 7 to 13 percent by volume of dissolved air (with atmospheric pressure and 50 °C). Hydraulic fluids always contain dissolved air. During operation, dissolved air may be transformed into undissolved air, leading to cavitation damages. Fluid classification, fluid product, reservoir size and design must be coordinated to take into account the dwell time and ASA value of the hydraulic fluid. The air separation capacity depends on the viscosity, temperature, basic fluid and aging.

It cannot be improved by additives.

According to DIN 51524 for instance, an ASA value  $\leq 10$  minutes is required for viscosity class ISO VG 46, 6 minutes are typical, lower values are preferable.

### 3.1.7 Demulsifying ability and water solubility

The capacity of a hydraulic fluid to separate water at a defined temperature is known as the demulsifying ability. ISO 6614 defines the demulsifying properties of hydraulic fluids.

For larger systems with permanent monitoring, a demulsifying fluid with good water separation capability (WSC) is recommended. The water can be drained from the bottom of the reservoir. In smaller systems (e.g. in mobile machines), whose fluid is less closely monitored and where water contamination into the hydraulic fluid, for instance through air condensation, cannot be ruled out completely, an HLPD fluid is recommended.

The demulsifying ability up to ISO-VG 100 is given at 54 °C, and at 82 °C for fluids with higher viscosity.

Water emulsifying HLPD hydraulic fluids have no, or a very poor, demulsifying ability.

### 3.1.8 Filterability

Filterability describes the ability of a hydraulic fluid to pass through a filter, removing solid contaminants. The hydraulic fluids used require a good filterability, not just when new, but also during the whole of their service life. Depending on the basic fluid used and the additives (VI enhancers) there are great differences here.

The filterability is a basic prerequisite for cleanliness, servicing and filtration of hydraulic fluids. Filterability is tested with the new hydraulic fluid and after the addition of 0.2 % water. The underlying standard (ISO 13357-1/-2) stipulates that filterability must have no negative effects on the filters or the hydraulic fluid, see chapter 4 "Hydraulic fluids in operation".

### 3.1.9 Corrosion protection

Hydraulic fluids should not just prevent corrosion formation on steel components, they must also be compatible with non-ferrous metals and alloys. Corrosion protection tests on different metals and metal alloys are described in DIN 51524. Hydraulic fluids that are not compatible with the materials listed above must not be used, even if they are compliant with ISO 51524.

Rexroth components are usually tested with HLP hydraulic fluids or corrosion protection oils based on mineral oils before they are delivered.

### 3.1.10 Additivation

The properties described above can be modified with the help of suitable additives. A general distinction is made for fluids between heavy metal-free and heavy metal-containing (generally zinc) additive systems. Both additive systems are most often incompatible with each other. The mixing of these fluids must be avoided even if the mixing ratio is very low. See chapter 4, "Hydraulic fluids in operation".

Increasing additivation generally leads to deteriorated air separation ability (ASA) and water separation capability (WSC) of the hydraulic fluid. According to the present state of knowledge, all hydraulic fluids described in this document, independently of the actual additivation, can be filtered using all filter materials with all known filtration ratings  $\geq 1 \mu\text{m}$  without filtering out effective additives at the same time.

Bosch Rexroth does not prescribe any specific additive system.

## 3.2 Classification and fields of application

Table 4: Classification and fields of application

Classification	Features	Typical field of application	Notes
HL fluids according to DIN 51524-1 VI = 100	Hydraulic fluids predominantly only with additives for oxidation and corrosion protection, but no specific additives for wear protection in case of mixed friction	HL fluids can be used in hydraulic systems that do not pose any requirements as to wear protection.	HL fluids may be used only for components whose product data sheet specifically allows HL fluids. For components which have not been approved according to the product data sheet, please consult your Bosch Rexroth sales partner.  Hydraulic fluids that only comply with the requirements of classes HL and HR in accordance with ISO 11158 without proving that DIN 51524-1 is also met may be used only with written approval of Bosch Rexroth AG.  Observe restrictions as to pressure, rotation speed etc.
HLP fluids according to DIN 51524-2 VI = 100	Hydraulic fluid with corrosion, oxidation and verified wear protection additives	HLP fluids are suitable for most fields of application and components provided the temperature and viscosity provisions are observed.	For information on approved components, please refer to the respective product data sheet. For components which have not been approved according to the product data sheet, please consult your Bosch Rexroth sales partner.  For the viscosity classes VG10, VG15 and VG22, DIN 51524 defines no requirements as to wear protection (DIN 51354 part 2 and DIN 51389 part 2). Beyond the requirements of DIN 51524 part 2, we require the same base oil type, identical refining procedure, identical additivation and identical additivation level across all viscosity classes.

Continued on page 8



Table 4: Classification and fields of application (continued from page 7)

Classification	Features	Typical field of application	Notes
HVLP fluids according to DIN 51524-3 VI > 140	HLP hydraulic fluid with additional improved viscosity temperature behavior	HVLP fluids are used in systems operated over a wide temperature range.	<p>For information on approved components, please refer to the respective product data sheet. For components which have not been approved according to the product data sheet, please consult your Bosch Rexroth sales partner.</p> <p>The same notes and restrictions as defined for HLP fluids apply accordingly.</p> <p>The effect on Rexroth components (e.g. compatibility with material seals, wear resistance capacity) may differ when using related hydrocarbons instead of mineral oils, cf. Table 6, line 8.</p> <p>When using HVLP fluids, the viscosity may change on account of the shear of the long-chain VI enhancers. The viscosity index, high at the start, decreases during operation. This needs to be taken into account when selecting the hydraulic fluid.</p> <p>The only value at present that can be used to assess viscosity changes in operation is the result of the test in accordance with DIN 51350 part 6. Please note that there are practical applications that create a much higher shear load on such fluids than can be achieved by this test. Up to VI &lt; 160, we recommend a maximum permitted viscosity drop of 15 %, viscosity at 100 °C.</p> <p>The viscosity limits given by Bosch Rexroth for its components are to be observed for all operating conditions, even after the hydraulic fluids have sheared.</p> <p>HVLP fluids should be used only if required by the temperature ranges of the application.</p>
HLPD fluids according to DIN 51524-2, HVLPD fluids in accordance with DIN 51524-3	HLP and HVLP hydraulic fluid with additional detergent and or dispersant additives	HLPD and HVLPD fluids are used in systems where deposits as well as solid or liquid contamination need to be kept temporarily suspended	<p>For information on approved components, please refer to the respective product data sheet. For components which have not been approved according to the product data sheet, please consult your Bosch Rexroth sales partner.</p> <p>Some of these fluids are able to absorb significant quantities of water (&gt; 0.1 %). This may have negative implications for the wear protection and the aging properties of the fluid.</p> <p>The wetting ability of these fluids varies largely depending on the product. Therefore it is not correct to say that they are generally all very well able to prevent stick-slip.</p> <p>In individual cases where higher water contamination is to be expected (such as in steelworks or under humid conditions), the use of HLPD/HVLPD fluids cannot be recommended as the emulsified water does not settle in the reservoir but is evaporated in heavily loaded positions. For such cases, we recommend using HLP hydraulic fluids with particularly good demulsifying ability. The water collected at the reservoir bottom is to be drained regularly.</p> <p>If HLPD/HVLPD fluids are used, contamination does not settle. It rather remains suspended and needs to be filtered out or removed by appropriate draining systems. For this reason, the filter area must be increased.</p> <p>HLPD/HVLPD fluids may contain additives that in the long run are incompatible with plastics, elastomers and non-ferrous metals. Furthermore, these additives may lead to the premature clogging of hydraulic filters. Therefore, test the filterability and the selection of the filter material in consultation with the filter manufacturer.</p>



## 4 Hydraulic fluids in operation

### 4.1 General

The properties of hydraulic fluids can change continually during storage and operation.

Please note that the fluid standard DIN 51524 merely describes minimum requirements for hydraulic fluids in new condition at the time of filling into the bins. The operator of a hydraulic system must ensure that the hydraulic fluid remains in a utilizable condition throughout its entire period of use.

Deviations from the characteristic values are to be clarified with the lubricant manufacturer, the test labs or Bosch Rexroth.

Please note the following aspects in operation.

### 4.2 Storage and handling

Hydraulic fluids must be stored correctly in accordance with the instructions of the lubricant manufacturer. Avoid exposing the containers to lengthy periods of direct heat. Containers are to be stored in such a way that the risk of any foreign liquid or solid matter (e.g. water, foreign fluids or dust) ingress into the inside of the container can be ruled out. After taking hydraulic fluids from the containers, these are immediately to be properly resealed.

#### Recommendation:

- Store containers in a dry, roofed place
- Store barrels on their sides
- Clean reservoir systems and machine reservoirs regularly

### 4.3 Filling of new systems

Usually, the cleanliness levels of the hydraulic fluids as delivered do not meet the requirements of our components. Hydraulic fluids must be filtered using an appropriate filter system to minimize solid particle contamination and water in the system.

As early as possible during test operation, new systems should be filled with the selected hydraulic fluid so as to reduce the risk of accidentally mixing the fluids (see chapter 4.5 "Mixing and compatibility of different hydraulic fluids"). Changing the hydraulic medium at a later point represents significant additional costs (see following chapter).

### 4.4 Hydraulic fluid changeover

Changeovers, in particular between hydraulic fluids with heavy metal-free and heavy metal-containing (generally zinc) additives, frequently lead to malfunctions, see chapter 3.1.10 "Additivation".

In the case of changeovers of the fluid in hydraulic systems, it is important to ensure compatibility of the new hydraulic fluid with the remainder of the previous hydraulic fluid. We recommend obtaining a written performance guarantee from the manufacturer or supplier of the new hydraulic fluid. The quantity of old fluid remaining should be minimized. Mixing hydraulic fluids should be avoided, see following chapter.

For information on changing over hydraulic fluids with different classifications please refer to VDMA 24314, VDMA 24569 and ISO 15380 appendix A.

Bosch Rexroth will not accept liability for any damage to its components resulting from inadequate hydraulic fluid changeovers!

### 4.5 Mixing and compatibility of different hydraulic fluids

If hydraulic fluids from different manufacturers or different types from the same manufacturer are mixed, gelling, silting and deposits may occur. These, in turn, may cause foaming, impaired air separation ability, malfunctions and damage to the hydraulic system.

If the fluid contains more than 2 % of another fluid then it is considered to be a mixture. Exceptions apply for water, see chapter 4.10 "Water".

Mixing with other hydraulic fluids is not generally permitted. This also includes hydraulic fluids with the same classification and from the market overview RE 90220-01. If individual lubricant manufacturers advertise miscibility and/or compatibility, this is entirely the responsibility of the lubricant manufacturer.

Bosch Rexroth customarily tests all components with mineral oil HLP before they are delivered.

**Note:** With connectible accessory units and mobile filtering systems, there is a considerable risk of non-permitted mixing of the hydraulic fluids!

Rexroth will not accept liability for any damage to its components resulting from mixing hydraulic fluids!

### 4.6 Re-additivation

Additives added at a later point in time such as colors, wear reducers, VI enhancers or anti-foam additives, may negatively affect the performance properties of the hydraulic fluid and the compatibility with our components and therefore are not permissible.

Rexroth will not accept liability for any damage to its components resulting from re-additivation!

### 4.7 Foaming behavior

Foam is created by rising air bubbles at the surface of hydraulic fluids in the reservoir. Foam that develops should collapse as quickly as possible.

Common hydraulic fluids in accordance with DIN 51524 are sufficiently inhibited against foam formation in new condition. On account of aging and adsorption onto surfaces, the defoamer concentration may decrease over time, leading to a stable foam.

Defoamers may be re-dosed only after consultation with the lubricant manufacturer and with his written approval.

Defoamers may affect the air separation ability.

## 4.8 Corrosion

The hydraulic fluid is to guarantee sufficient corrosion protection of components under all operating conditions, even in the event of impermissible water contamination.

During storage and operation, hydraulic fluid based on mineral oils with anti-corrosion additives protect components against water and "acidic" oil degradation products.

## 4.9 Air

Under atmospheric conditions, the hydraulic fluid contains dissolved air. In the negative pressure range, for instance in the suction pipe of the pump or downstream of control edges, this dissolved air may transform into undissolved air. The undissolved air content represents a risk of cavitation and of the diesel effect. This results in material erosion of components and increased hydraulic fluid aging.

With the correct measures, such as suction pipe and reservoir design, and an appropriate hydraulic fluid, air intake and separation can be positively influenced.

See also chapter 3.1.7 "Air separation ability (ASA)".

## 4.10 Water

Water contamination in hydraulic fluids can result from direct ingress or indirectly through condensation of water from the air due to temperature variations.

Water in the hydraulic fluid may result in wear or direct failure of hydraulic components. Furthermore, a high water content in the hydraulic fluid negatively affects aging and filterability and increases susceptibility to cavitation.

Undissolved water can be drained from the bottom of the reservoir. Dissolved water can be removed only by using appropriate measures. If the hydraulic system is used in humid conditions, preventive measures need to be taken, such as an air dehumidifier at the reservoir vent. During operation, the water content in all hydraulic fluids, determined according to the "Karl Fischer method" (see chapter 6 "Glossary") for all hydraulic fluids must constantly be kept below 0.1% (1000 ppm). To ensure a long service life of both hydraulic fluids and components, Bosch Rexroth recommends that values below 0.05% (500 ppm) are permanently maintained.

To ensure a long service life for the hydraulic fluids and the components, we recommend that values below 0.05 % (500 ppm) are permanently maintained. Detergent and or dispersant hydraulic fluids (HLPD / HVLDPD) are able to absorb (and keep suspended) more water. Prior to using these hydraulic fluids, please contact the lubricant manufacturer.

## 4.11 Fluid servicing, fluid analysis and filtration

Air, water, operating temperature influences and solid matter contamination will change the performance characteristics of hydraulic fluids and cause them to age.

To preserve the usage properties and ensure a long service life for hydraulic fluid and components, the monitoring of the fluid condition and a filtration adapted to the application requirements (draining and degassing if required) are indispensable.

The effort is higher in the case of unfavorable usage conditions, increased stress for the hydraulic system or high expectations as to availability and service life, see chapter 2 "Solid particle contamination and cleanliness level".

When commissioning a system, please note that the required minimum cleanliness level can frequently be attained only by flushing the system. Due to severe start-up contamination, it may be possible that a fluid and/or filter replacement becomes necessary after a short operating period (< 50 operating hours).

The hydraulic fluid must be replaced in regular intervals and tested by the lubricant manufacturer or recognized, accredited test labs. **We recommend a reference analysis after commissioning.**

The minimum data to be tested for analyses are:

- Viscosity at 40 °C and 100 °C
- Neutralization number NN (acid number AN)
- Water content (Karl-Fischer method)
- Particle measurement with evaluation according to ISO 4406 or mass of solid foreign substances with evaluation to EN 12662
- Element analysis (RFA (EDX) / ICP, specify test method)
- Comparison with new product or available trend analyses
- Assessment / evaluation for further use
- Also recommended: IR spectrum

Compared to the pure unused hydraulic fluid, the changed neutralization number NN (acid number AN) indicates how many aging products are contained in the hydraulic fluid. This value must be kept as low as possible. As soon as the trend analysis notes a significant increase in the acid number, the lubricant manufacturer should be contacted.

In case of warranty, liability or guarantee claims to Bosch Rexroth, service verification and/or the results of fluid analyses are to be provided.

## 5 Disposal and environmental protection

Hydraulic fluids based on mineral oil and related hydrocarbons are hazardous for the environment. They are subject to a special disposal obligation.

The respective lubricant manufacturers provide specifications on environmentally acceptable handling and storage. Please ensure that spilt or splashed fluids are absorbed with appropriate adsorbents or by a technique that prevents it contaminating water courses, the ground or sewerage systems.

It is also not permitted to mix fluids when disposing of hydraulic fluids. Regulations governing the handling of used oils stipulate that used oils are not to be mixed with other products, e.g. substances containing halogen. Non-compliance will increase disposal costs. Comply with the national legal provisions concerning the disposal of the corresponding hydraulic fluid. Comply with the local safety data sheet of the lubricant manufacturer for the country concerned.

## 6 Other hydraulic fluids based on mineral oil and related hydrocarbons

Table 6: Other hydraulic fluids based on mineral oils and related hydrocarbons

Serial number	Hydraulic fluids	Features / Typical field of application / Notes
1	Hydraulic fluids with classification HL, HM, HV according to ISO 11158	<ul style="list-style-type: none"> <li>– Can be used without confirmation provided they are listed in the respective product data sheet and are compliant with DIN 51524. Conformity with DIN 51524 must be verified in the technical data sheet of the fluid concerned. For classification see Table 4: "Hydraulic fluid classification".</li> <li>– Fluids <b>only</b> classified in accordance with ISO 11158 may be used only with prior written approval of Bosch Rexroth AG.</li> </ul>
2	Hydraulic fluids with classification HH, HR, HS, HG according to ISO 11158	<ul style="list-style-type: none"> <li>– May not be used.</li> </ul>
3	Hydraulic fluids with classification HL, HLP, HLPD, HVLP, HVLPD to DIN 51502	<ul style="list-style-type: none"> <li>– DIN 51502 merely describes how fluids are classified / designated on a national level.</li> <li>– It contains no information on minimum requirements for hydraulic fluids.</li> <li>– Hydraulic fluids standardized according to DIN 51502 can be used without confirmation provided they are listed in the respective product data sheet and are compliant with DIN 51524. Conformity with DIN 51524 must be verified in the technical data sheet of the fluid concerned. For classification see Table 4: "Hydraulic fluid classification".</li> </ul>
4	Hydraulic fluids with classification HH, HL, HM, HR, HV, HS, HG according to ISO 6743-4	<ul style="list-style-type: none"> <li>– ISO 6743-4 merely describes how fluids are classified / designated on an international level. It contains no information on minimum requirements for hydraulic fluids.</li> <li>– Hydraulic fluids standardized according to ISO 6743 -4 can be used without confirmation provided they are listed in the respective product data sheet and are compliant with DIN 51524. Conformity with DIN 51524 must be verified in the technical data sheet of the fluid concerned. For classification see table 4: "Classification and fields of application".</li> </ul>
5	Lubricants and regulator fluids for turbines to DIN 51515-1 and -2	<ul style="list-style-type: none"> <li>– Turbine oils can be used after confirmation and with limited performance data.</li> <li>– They usually offer lower wear protection than mineral oil HLP. Classification of turbine oils to DIN 51515-1 comparable to HL, turbine oils to DIN 51515-2 comparable to HLP.</li> <li>– Particular attention must be paid to material compatibility!</li> </ul>
6	Lube oils C, CL, CLP in accordance with DIN 51517	<ul style="list-style-type: none"> <li>– Lube oils in acc. with DIN 51517 can be used after confirmation and with limited performance data. They are mostly higher-viscosity fluids with low wear protection. Classification: CL similar to HL fluids and CLP similar to HLP fluids.</li> <li>– Particular attention must be paid to material compatibility, specifically with non-ferrous metals!</li> </ul>
7	Fluids to be used in pharmaceutical and foodstuff industries, in acc. with FDA / USDA / NSF H1	<ul style="list-style-type: none"> <li>– There are medical white oils and synthetic hydrocarbons (PAO).</li> <li>– Can only be used after consultation and approval for use in the specific application, even if they are compliant with DIN 51524.</li> <li>– May be used only with FKM seals.</li> <li>– Other fluids used in pharmaceutical and foodstuff industries may be used only after confirmation.</li> <li>– Attention is to be paid to material compatibility in accordance with the applicable food law.</li> </ul> <p><b>Caution!</b> Fluids used in pharmaceutical and foodstuff industries should not be confused with environmentally acceptable fluids!</p>

Continued on page 13

**Table 6: Other hydraulic fluids based on mineral oils and related hydrocarbons**

(continued from page 12)

Serial number	Hydraulic fluids	Features / Typical field of application / Notes
8	Hydraulic fluids of classes HVLP and HVLPD based on related hydrocarbons	<ul style="list-style-type: none"> <li>– Can only be used after consultation and approval for use in the specific application, even if they are compliant with DIN 51524.</li> <li>– Lower pour point than HLP</li> <li>– Other wetting (polarity)</li> </ul>
9	Automatic Transmission Fluids (ATF)	<ul style="list-style-type: none"> <li>– ATF are operating fluids for automatic gearboxes in vehicles and machines. In special cases, ATFs are also used for certain synchronous gearboxes and hydraulic systems comprising gearboxes.</li> <li>– To be used only after confirmation!</li> <li>– Some of these fluids have poor air separation abilities and modified wear properties.</li> <li>– Check material compatibility and filterability!</li> </ul>
10	Multi-purpose oil (MFO) – Industry	<ul style="list-style-type: none"> <li>– Multi-purpose oils (industry) combine at least two requirements for a fluid, for instance metal machining and hydraulics.</li> <li>– To be used only after confirmation!</li> <li>– Please pay particular attention to air separation ability, modified wear properties and the reduced material life cycle.</li> <li>– Check material compatibility and filterability!</li> </ul>
11	Multi-purpose oils (MFO) – Mobil UTTO, STOU	<ul style="list-style-type: none"> <li>– Multi-purpose oils combine requirements for wet brakes, gearboxes, motor oil (STOU only) and hydraulics.</li> <li>– Fluids of the types: <ul style="list-style-type: none"> <li>– UTTO (= universal tractor transmission oil) and</li> <li>– STOU (= Super Tractor super tractor universal oil)</li> </ul> </li> <li>– To be used only after confirmation!</li> <li>– Please pay particular attention to shear stability, air separation ability and modified wear properties.</li> <li>– Check material compatibility and filterability!</li> </ul>
12	Single-grade engine oils 10W, 20W, 30W	<ul style="list-style-type: none"> <li>– To be used only after confirmation!</li> <li>– Please pay particular attention to the air separation ability and filtering ability.</li> </ul>
13	Multi-grade engine oils 0Wx-30Wx	<ul style="list-style-type: none"> <li>– To be used only after confirmation!</li> <li>– Please pay particular attention to air separation ability, changes in wear protection capability, viscosity changes during operation, material compatibility, dispersant and detergent properties and filterability.</li> </ul> <p><b>Caution!</b> Multi-grade engine oils have been adapted to specific requirements in combustion engines and are suitable for use in hydraulic systems only to a limited extent.</p>
14	Motor vehicle transmission oils	<ul style="list-style-type: none"> <li>– Motor vehicle transmission oil can be used after confirmation and with limited performance data.</li> <li>– Pay particular attention to wear protection, material compatibility, specifically with non-ferrous metals, as well as viscosity!</li> </ul>
15	Diesel, test diesel in acc. with DIN 4113	<ul style="list-style-type: none"> <li>– Diesel / test diesel has poorer wear protection capabilities and a very low viscosity (&lt; 3 mm<sup>2</sup>/s).</li> <li>– May be used only with FKM seals</li> <li>– Please note their low flash point!</li> <li>– To be used only after confirmation and with limited performance data!</li> </ul>

Continued on page 14

**Table 6: Other hydraulic fluids based on mineral oils and related hydrocarbons**  
(continued from page 13)

Serial number	Hydraulic fluids	Features / Typical field of application / Notes
16	Hydraulic fluids for roller processes	<ul style="list-style-type: none"> <li>– Hydraulic fluids for roller processes have lower wear protection capabilities than mineral oil HLP and a lower viscosity</li> <li>– Please note their low flash point!</li> <li>– Hydraulic fluids for roller processes with limited performance data can be used only after confirmation.</li> </ul>
17	Fluids for power steering, hydro-pneumatic suspension, active chassis etc.	<ul style="list-style-type: none"> <li>– Can only be used after consultation and approval for use in the specific application, even if they are compliant with DIN 51524.</li> <li>– Please note the low viscosity!</li> <li>– In most cases they have poor water separation capability</li> <li>– Check the material compatibility!</li> </ul>

## 7 Glossary

### Additivation

Additives are chemical substances added to the basic fluids to achieve or improve specific properties.

### Aging

Hydraulic fluids age due to oxidation (see chapter 3.1.5 "Aging resistance"). Liquid and solid contamination acts as a catalyzer for aging, meaning that it needs to be minimized as far as possible by careful filtration.

### API classification

Classification of basic fluids by the **American Petroleum Institute (API)** – the largest association representing the US oil and gas industry.

### Arrhenius equation

The quantitative relation between reaction rate and temperature is described by an exponential function, the Arrhenius equation. This function is usually visualized within the typical temperature range of the hydraulic system. For a practical example, see chapter 3.1.5 "Aging resistance".

### Related hydrocarbons

Related hydrocarbons are hydrocarbon compounds that are not classified as API class 1, 2 or 5.

### Basic fluids

In general, a hydraulic fluid is made up of a basic fluid, or base oil, and chemical substances, the so-called additives. The proportion of basic fluid is generally greater than 90%.

### Demulsifying

Ability of a fluid to separate water contamination quickly; achieved with careful selection of base oil and additives.

### Detergent

Ability of certain additives to emulsify part of the water contamination in the oil or to hold it in suspension until it has evaporated with increasing temperature. Larger water quantities, in contrast (above approx. 2 %), are separated immediately.

### Dispersant

Ability of certain additives to keep insoluble liquid and solid contamination in suspension in the fluid.

### Diesel effect

If hydraulic fluid that contains air bubbles is compressed quickly, the bubbles are heated to such a degree that a self-ignition of the air-gas mix may occur. The resultant temperature increase may lead to seal damage and increased aging of the hydraulic fluid.

### Hydraulic fluids based on mineral oils

Hydraulic fluids based on mineral oils are made from petroleum (crude oil).

### ICP (atomic emission spectroscopy)

The ICP procedure can be used to determine various wear metals, contamination types and additives. Practically all elements in the periodic system can be detected with this method.

### Karl Fischer method

Method to determine the water content in fluids. Indirect coulometric determination procedure in accordance with DIN EN ISO 12937 in connection with DIN 51777-2. Only the combination of both standards will assure adequately accurate measured values.

### Cavitation

Cavitation is the creation of cavities in fluids due to pressure reduction below the saturated vapour pressure and subsequent implosion when the pressure increases. When the cavities implode, extremely high acceleration, temperatures and pressure may occur temporarily, which may damage the component surfaces.

### Neutralization number (NN)

The neutralization number (NN) or acid number (AN) specifies the amount of caustic potash required to neutralize the acid contained in one gram of fluid.

### Pour point

The lowest temperature at which the fluid still just flows when cooled down under set conditions. The pour point is specified in the lubricant manufacturers' technical data sheets as a reference value for achieving this flow limit.

### RFA (wavelength dispersive x-ray fluorescence analysis)

Is a procedure to determine nearly all elements in liquid and solid samples with nearly any composition. This analysis method is suitable for examining additives and contamination, delivering fast results.

### Shearing/shear loss

Shearing of molecule chains during operation can change the viscosity of hydraulic fluids with long chain VI enhancers. The initially high viscosity index drops. This needs to be taken into account when selecting the hydraulic fluid.

The only value at present that can be used to assess viscosity changes in operation is the result of the test in accordance with DIN 51350 part -6. Please note that there are practical applications that create a much higher shear load on such hydraulic fluids than can be achieved by this test.

### Stick-slip effect (sliding)

Interaction between a resilient mass system involving friction (such as cylinder + oil column + load) and the pressure increase at very low sliding speeds. The static friction of the system is a decisive value here. The lower it is, the lower the speed that can still be maintained without sticking. Depending on the tribologic system, the stick-slip effect may lead to vibrations generated and sometimes also to significant noise emission. In many cases, the effect can be attenuated by replacing the lubricant.

### Viscosity

Viscosity is the measure of the internal friction of a fluid to flow. It is defined as the property of a substance to flow under tension. Viscosity is the most important characteristic for describing the load-bearing capacity of a hydraulic fluid.

Kinematic viscosity is the ratio of the dynamic viscosity and the density of the fluid; the unit is mm<sup>2</sup>/s. Hydraulic fluids are classified by their kinematic viscosity into ISO viscosity classes. The reference temperature for this is 40 °C.

### Viscosity index (VI)

Refers to the viscosity temperature behavior of a fluid. The lower the change of viscosity in relation to the temperature, the higher the VI.



Bosch Rexroth AG  
Hydraulics  
Zum Eisengießer 1  
97816 Lohr am Main, Germany  
Phone +49 (0) 93 52 / 18-0  
Fax +49 (0) 93 52 / 18-23 58  
documentation@boschrexroth.de  
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

No statements concerning the suitability of a hydraulic fluid for a specific purpose can be derived from our information. The information given does not release the user from the obligation of own judgment and verification.


It must be remembered that our products are subject to a natural process of wear and aging.

Subject to change.

# Environmentally acceptable hydraulic fluids

**RE 90221/05.12** 1/14  
Replaces: 05.10

Application notes and requirements for Rexroth hydraulic components

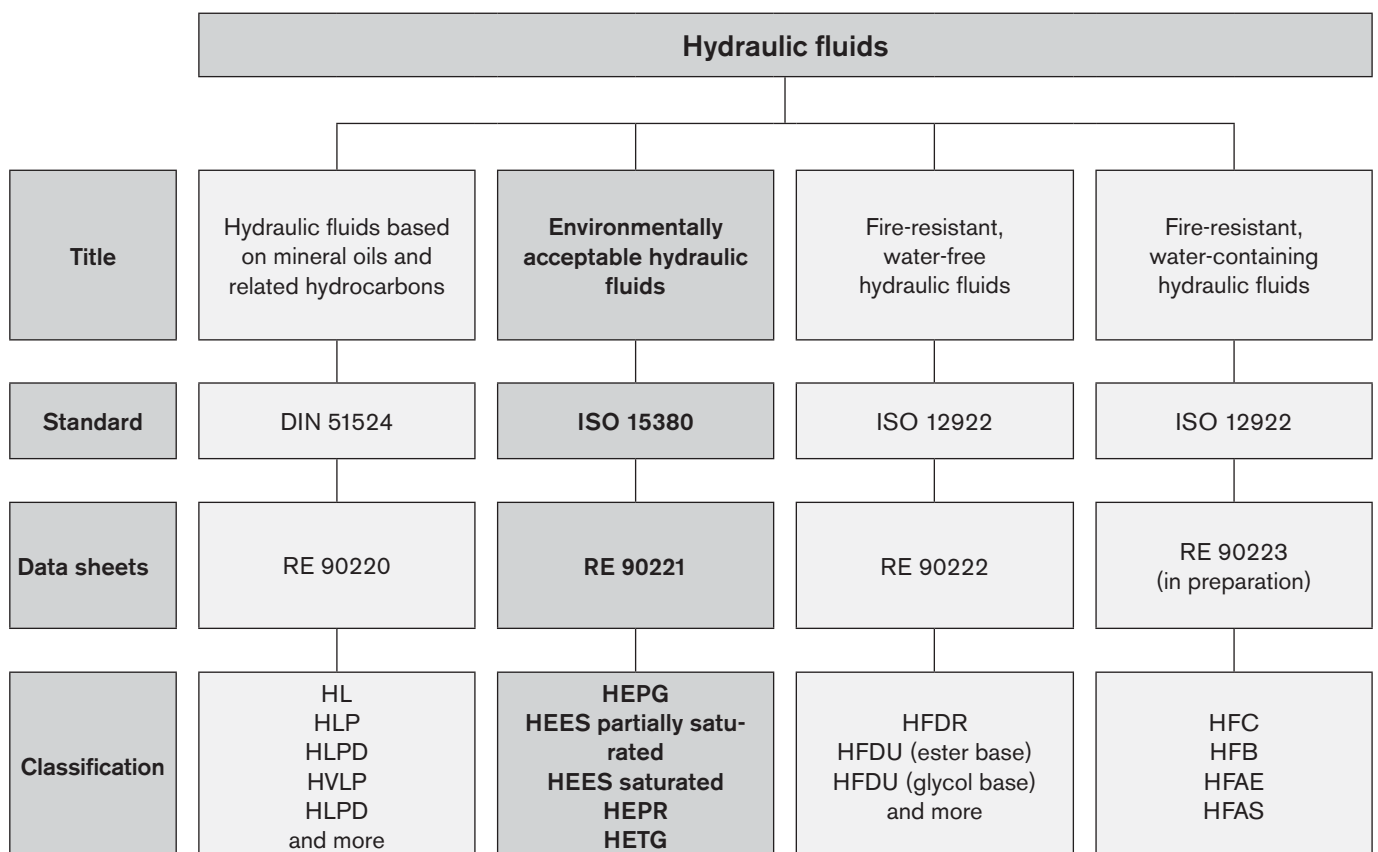

## Contents

1	Basic information .....	3
1.1	General instructions.....	3
1.2	Environmental compatibility .....	3
1.3	Scope .....	3
1.4	Safety instructions .....	3
2	Solid particle contamination and cleanliness levels.....	4
3	Selection of the hydraulic fluid.....	5
3.1	Selection criteria for the hydraulic fluid.....	5
3.1.1	Viscosity.....	5
3.1.2	Viscosity-temperature behavior.....	5
3.1.3	Wear protection capability.....	6
3.1.4	Material compatibility.....	6
3.1.5	Aging resistance .....	6
3.1.6	Biological degradation.....	6
3.1.7	Air separation ability (ASA).....	7
3.1.8	Demulsifying ability and water solubility .....	7
3.1.9	Filterability.....	7
3.1.10	Corrosion protection .....	7
3.1.11	Additivation .....	7
3.2	Classification and fields of application .....	8
4	Hydraulic fluids in operation .....	10
4.1	General.....	10
4.2	Storage and handling .....	10
4.3	Filling of new systems.....	10
4.4	Hydraulic fluid changeover.....	10
4.5	Mixing and compatibility of different hydraulic fluids.....	10
4.6	Re-additivation.....	10
4.7	Foaming behavior.....	10
4.8	Corrosion.....	11
4.9	Air.....	11
4.10	Water .....	11
4.11	Fluid servicing, fluid analysis and filtration .....	11
5	Disposal and environmental protection .....	12
6	Glossary.....	13

# 1 Basic information

## 1.1 General instructions

The hydraulic fluid is the common element in any hydraulic component and must be selected very carefully. Quality and cleanliness of the hydraulic fluid are decisive factors for the operational reliability, efficiency and service life of a system.

Hydraulic fluids must conform, be selected and used in accordance with the generally acknowledged rules of technology and safety provisions. Reference is made to the country-specific standards and directives (in Germany the directive of the Employer's Liability Insurance Association BGR 137).

This data sheet includes recommendations and regulations concerning the selection, operation and disposal of environmentally compatible hydraulic fluids in the application of Rexroth hydraulic components.

The individual selection of hydraulic fluid or the choice of classification are the responsibility of the operator.

It is the responsibility of the user to ensure that appropriate measures are taken for safety and health protection and to ensure compliance with statutory regulations. The recommendations of the lubricant manufacturer and the specifications given in the safety data sheet are to be observed when using hydraulic fluid.

This data sheet does not absolve the operator from verifying the conformity and suitability of the respective hydraulic fluid for his system. He is to ensure that the selected fluid meets the minimum requirements of the relevant fluid standard during the whole of the period of use.

Other regulations and legal provisions may also apply. The operator is responsible for their observance, e.g. EU directive 2004/35/EG, 2005/360/EG and their national implementation. In Germany the Water Resources Act (WHG) is also to be observed.

We recommend that you maintain constant, close contact with lubricant manufacturers to support you in the selection, maintenance, care and analyses.

When disposing of used hydraulic fluids, apply the same care as during use.

Environmentally acceptable hydraulic fluids have been used successfully for many years. In some countries, the use of environmentally acceptable hydraulic fluids is already prescribed in ecologically sensitive areas (e.g. forestry, locks, weirs).

Environmentally acceptable hydraulic fluids may only be used in the pharmaceutical and food industry subject to required certification to FDA/USDA/NSF H1.

## 1.2 Environmental compatibility

There is no unambiguous legal definition for environmentally acceptable hydraulic fluids as different testing procedures can be applied for biological degradation and toxicity.

According to ISO 15380 the definition of "environmentally acceptable" is as follows: Humans, animals, plants, air and soil must not be endangered. With regard to hydraulic fluids in an unused condition in the bin this mainly means:

- biological degradation at least 60 %  
(according to ISO 14593 or ISO 9439)
- acute fish toxicity at least 100 mg/l  
(according to ISO 7346-2)

- acute daphnia toxicity at least 100 mg/l  
(according to ISO 5341)
- acute bacteria toxicity at least 100 mg/l  
(according to ISO 8192)

The same amount of care should be taken when handling environmentally acceptable hydraulic fluids as for mineral oils, leakage from the hydraulic system should be avoided. Environmentally acceptable hydraulic fluids are designed so that in the event of accidents and leakage, less permanent environmental damage is caused than by mineral oils, see also chapter 5 "Disposal and environmental protection".

In comparison to mineral oil HLP/HVLP, the biological degradation of environmentally acceptable hydraulic fluids may change fluid aging, see chapter 3.1.5 "Aging resistance", 3.1.6 "Biological degradation" and 4 "Hydraulic fluids in operation".

## 1.3 Scope

This data sheet must be applied when using environmentally acceptable hydraulic fluids with Rexroth hydraulic components. The specifications of this data sheet may be further restricted by the specification given in the data sheets for the individual components.

The use of the individual environmentally acceptable hydraulic fluids in accordance with the intended purpose can be found in the safety data sheets or other product description documents of the lubricant manufacturers. In addition, each use is to be individually considered.

**Rexroth hydraulic components may only be operated with environmentally acceptable hydraulic fluids according to ISO 15380 if specified in the respective component data sheet or if a Rexroth approval for use is furnished.**

The manufacturers of hydraulic systems must adjust their systems and operating instructions to the environmentally acceptable hydraulic fluids.

### Notes:

In the market overview RE 90221-01, environmentally acceptable hydraulic fluids based on mineral oil are described which, according to the information of the lubricant manufacturer, feature the respective parameters of the current requirements standard ISO 15380 and other parameters which are of relevance for suitability in connection with Rexroth components.

These specifications are not checked or monitored by Bosch Rexroth. The list in the market overview does not therefore represent a recommendation on the part of Rexroth or approval of the respective hydraulic fluid for use with Rexroth components and does not release the operator from his responsibility regarding selection of the hydraulic fluid.

**Bosch Rexroth will accept no liability for its components for any damage resulting from failure to comply with the notes below.**

## 1.4 Safety instructions

Hydraulic fluids can constitute a risk for persons and the environment. These risks are described in the hydraulic fluid safety data sheets. The operator is to ensure that a current safety data sheet for the hydraulic fluid used is available and that the measures stipulated therein are complied with.

## 2 Solid particle contamination and cleanliness levels

Solid particle contamination is the major reason for faults occurring in hydraulic systems. It may lead to a number of effects in the hydraulic system. Firstly, single large solid particles may lead directly to a system malfunction, and secondly small particles cause continuous elevated wear.

For mineral oils, the cleanliness level of environmentally acceptable hydraulic fluids is given as a three-digit numerical code in accordance with ISO 4406. This numerical code denotes the number of particles present in a hydraulic fluid for a defined quantity. Moreover, foreign solid matter is not to exceed a mass of 50 mg/kg (gravimetric examination according to ISO 4405).

In general, compliance with a minimum cleanliness level of 20/18/15 in accordance with ISO 4406 or better is to be maintained in operation. Special servo valves demand improved cleanliness levels of at least 18/16/13. A reduction in cleanliness level by one level means half of the quantity of particles and thus greater cleanliness. Lower numbers in cleanliness levels should always be striven for and extend the service life of hydraulic components. The component with the highest cleanliness requirements determines the required cleanliness of the overall system. Please also observe the specifications in table 1: "Cleanliness levels according to ISO 4406" and in the respective data sheets of the various hydraulic components.

Hydraulic fluids frequently fail to meet these cleanliness requirements on delivery. Careful filtering is therefore required during operation and in particular, during filling in order to ensure the required cleanliness levels. Your lubricant manufacturer can tell you the cleanliness level of hydraulic fluids as delivered. To maintain the required cleanliness level over

the operating period, you must use a reservoir breather filter. If the environment is humid, take appropriate measures, such as a breather filter with air drying or permanent off-line water separation.

**Note:** the specifications of the lubricant manufacturer relating to cleanliness levels are based on the time at which the container concerned is filled and not on the conditions during transport and storage.

Further information about contamination with solid matter and cleanliness levels can be found in brochure RE 08016.

**Table 1: Cleanliness levels according to ISO 4406**

Particles per 100 ml		Scale number	
More than	Up to and including		
8,000,000	16,000,000	24	
4,000,000	8,000,000	23	
2,000,000	4,000,000	22	
1,000,000	2,000,000	21	
500,000	1,000,000	20	20 / 18 / 15 > 4 µm > 6 µm > 14 µm
250,000	500,000	19	
130,000	250,000	18	
64,000	130,000	17	
32,000	64,000	16	
16,000	32,000	15	
8,000	16,000	14	
4,000	8,000	13	
2,000	4,000	12	
1,000	2,000	11	
500	1,000	10	
250	500	9	
130	250	8	
64	130	7	
32	64	6	

### 3 Selection of the hydraulic fluid

Environmentally acceptable hydraulic fluids for Bosch Rexroth hydraulic components are assessed on the basis of their fulfillment of the minimum requirements of ISO 15380.

#### 3.1 Selection criteria for the hydraulic fluid

The specified limit values for all components employed in the hydraulic system, for example viscosity and cleanliness level, must be observed with the hydraulic fluid used, taking into account the specified operating conditions.

Hydraulic fluid suitability depends, amongst others, on the following factors:

##### 3.1.1 Viscosity

Viscosity is a basic property of hydraulic fluids. The permissible viscosity range of complete systems needs to be determined taking account of the permissible viscosity of all components and it is to be observed for each individual component.

The viscosity at operating temperature determines the response characteristics of closed control loops, stability and damping of systems, the efficiency factor and the degree of wear.

We recommend that the optimum operating viscosity range of each component be kept within the permissible temperature range. This usually requires either cooling or heating, or both. The permissible viscosity range and the necessary cleanliness level can be found in the product data sheet for the component concerned.

If the viscosity of a hydraulic fluid used is above the permitted operating viscosity, this will result in increased hydraulic-mechanical losses. In return, there will be lower internal leakage losses. If the pressure level is lower, lubrication gaps may not be filled up, which can lead to increased wear. For hydraulic pumps, the permitted suction pressure may not be reached, which may lead to cavitation damage.

If the viscosity of a hydraulic fluid is below the permitted operating viscosity, increased leakage, wear, susceptibility to contamination and a shorter life cycle will result.

Please ensure that the permissible temperature and viscosity limits are observed for the respective components. This usually requires either cooling or heating, or both.

##### 3.1.2 Viscosity-temperature behavior


For hydraulic fluids, the viscosity temperature behavior (V-T behavior) is of particular importance. Viscosity is characterized in that it drops when the temperature increases and rises when the temperature drops. The interrelation between viscosity and temperature is described by the viscosity index (VI).

If exposed to the cold for several days, viscosity may rise significantly (HETG and HEES). After heating, the characteristic values as specified on the data sheet are restored. Please ask your lubricant manufacturer for the "Flow capacity after 7 days at low temperature" (ASTM D 2532) of fluid classifications HETG and partially saturated HEES.

All known environmentally acceptable hydraulic fluids have better viscosity temperature behavior than mineral oil HLP and generally feature greater shear stability than HVLP mineral oils. This should be taken into consideration when selecting hydraulic fluid for the required temperature range. A lower viscosity level can frequently be used to save any drive power during a cold start and avoid viscosity being too low at higher temperatures. The required viscosity and temperature limits in the product data sheets are to be observed in all operating conditions.

Depending on the basic fluid types/classes, VI indices can be achieved of 140–220, see Fig. 1: "Examples: V-T diagrams in comparison to HLP (reference values)" and Table 4: "Classification and fields of application of environmentally acceptable hydraulic fluids".

Fig. 1: Examples V-T diagrams in comparison to HLP (reference values, double-logarithmic representation)

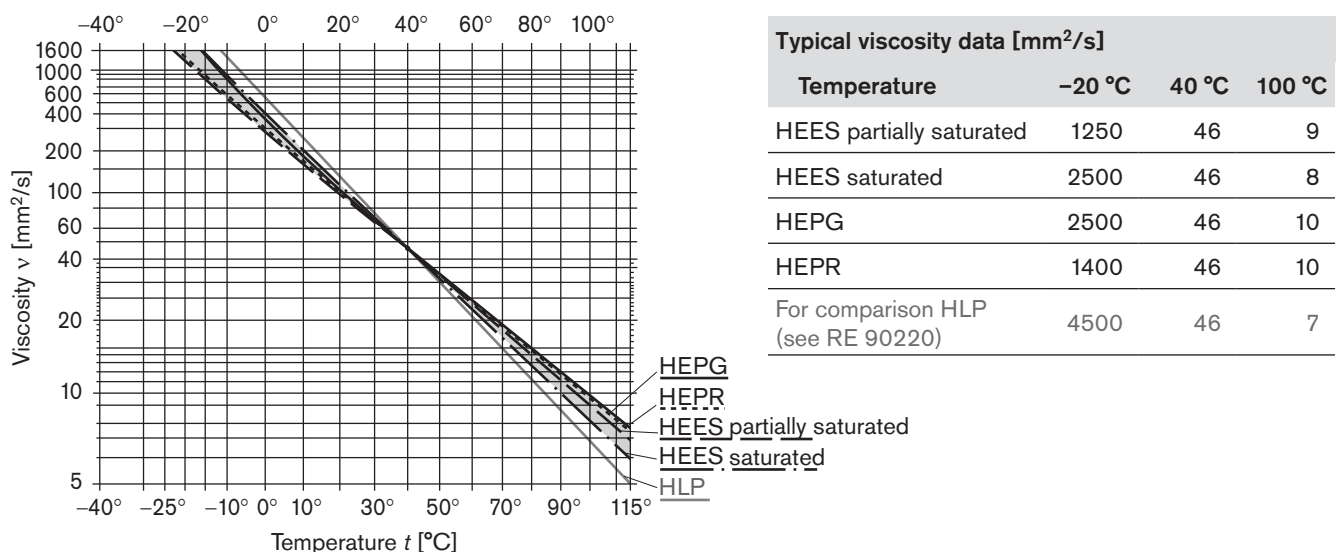

Detailed V-T diagrams may be obtained from your lubricant manufacturer for their specific products.

### 3.1.3 Wear protection capability

Wear protection capability describes the property of hydraulic fluids to prevent or minimize wear within the components. The wear protection capability is described in ISO 15380 via test procedures "FZG gear test rig" (ISO 14635-1) and "Mechanical test in the vane pump" (ISO 20763). From ISO VG 32, ISO 15380 prescribes a rating of at least 10 (FZG test). At present, the FZG test cannot be applied to viscosity classes < ISO VG 32. The wear protection capability of environmentally acceptable hydraulic fluids in relation to the two test procedures is comparable to that of mineral oil HLP/HVLP.

### 3.1.4 Material compatibility

The hydraulic fluid must not negatively affect the materials used in the components. Compatibility with coatings, seals, hoses, metals and plastics is to be observed in particular. The fluid classifications specified in the respective component data sheets are tested by the manufacturer with regard to material compatibility. Parts and components not supplied by us are to be checked by the user.

**Table 2: Known material incompatibilities**

Classification	Incompatible with:
HE... general	One-component color coatings, lead, galvanized zinc coatings, some non-ferrous metals, seals made of NBR. In some cases, the latter show major increases in volume when impermissibly aged hydraulic fluids come into contact with the material. NBR is only permitted by prior consent, please observe the customary seal and tube replacement intervals. Do not use any hydrolysis/susceptible polyurethane qualities.  <b>Note</b> Please check seals and coatings of control cabinets, outer coatings of hydraulic components and accessories (connectors, cables, control cabinets) for resistance to vapors issuing from hydraulic fluids.
HETG/HEES	Zinc, some non-ferrous alloys with zinc
HEPG	Steel/aluminum tribocontacts, paper filters, polymethylmethacrylate (PMMA), NBR  <b>Note</b> Check plastics for resistance

The material incompatibilities mentioned here do not automatically result in function problems. However the elements of the materials are found in the hydraulic fluids after use. The biological degradation of hydraulic fluids is negatively influenced.

### 3.1.5 Aging resistance

The way an environmentally acceptable hydraulic fluids ages depends on the thermal, chemical and mechanical stress to which it is subjected. The influence of water, air, temperature and contamination may be significantly greater than for mineral oils HLP/HVLP. Aging resistance can be greatly influenced by the chemical composition of the hydraulic fluids .

High fluid temperatures (e.g. over 80 °C) result in a approximate halving of the fluid service life for every 10 °C temperature increase and should therefore be avoided. The halving of the fluid service life results from the application of the Arrhenius equation (see Glossary).

**Table 3: Reference values for temperature-dependent aging of the hydraulic fluid**

Reservoir temperature	Fluid life cycle
80 °C	100 %
90 °C	50 %
100 °C	25 %

A modified aging test (without adding water) is prescribed for fluid classifications HETG and HEES. Hydraulic fluids with HEPG and HEPR classification are subjected to the identical test procedure as mineral oils (with 20 % water added). The calculated fluid service life is derived from the results of tests in which the long-term characteristics are simulated in a short period of time by applying more arduous conditions (condensed testing). This calculated fluid service life is not to be equated to the fluid service life in real-life applications.

Table 3 is a practical indicator for hydraulic fluids with water content < 0.1%, cf. chapter 4.10. "Water".

### 3.1.6 Biological degradation

Environmentally acceptable hydraulic fluids are ones which degrade biologically much faster than mineral oils. Biological degradation is a biochemical transformation effected by micro-organisms resulting in mineralization. For environmentally acceptable hydraulic fluids that make reference to ISO 15380, biological degradation according to ISO 14593 or ISO 9439 must be verified. 60% minimum degradation is defined as limit value. Proof of biological degradation is furnished for the new, unmixed, ready-formulated hydraulic fluids. Aged or mixed hydraulic fluids are less able to degrade biologically. Biological degradation outside the defined test procedure is subject to a variety of natural influences. The key factors are temperature, humidity, contamination, fluid concentration, type and quantity of micro-organisms. Environmentally acceptable hydraulic fluids require no extended maintenance in comparison to mineral oils, please observe chapter 4 "Hydraulic fluids in operation".



### 3.1.7 Air separation ability (ASA)

The air separation ability (ASA) describes the property of a hydraulic fluid to separate undissolved air. Hydraulic fluids always contain dissolved air. During operation, dissolved air may be transformed into undissolved air, leading to cavitation damages. Fluid classification, fluid product, reservoir size and design must be coordinated to take into account the dwell time and ASA value of the hydraulic fluid. The air separation capacity depends on the viscosity, temperature, basic fluid and aging. It cannot be improved by additives.

According to ISO 15380, for instance, an ASA value  $\leq 10$  minutes is required for viscosity class ISO VG 46, 6 minutes are typical, lower values are preferable.

### 3.1.8 Demulsifying ability and water solubility

The capacity of a hydraulic fluid to separate water at a defined temperature is known as the demulsifying ability. ISO 6614 defines the demulsifying properties of hydraulic fluids.

Fluids classified HETG, HEES and HEPR separate from water. HETG and HEES hydraulic fluids have a different water separation ability to mineral oil HLP/HVLP. At 20 °C, in comparison to mineral oil HLP/HVLP, a multiple ( $>$  factor 3) of water can separate in the hydraulic fluid. Water solubility is also more temperature-dependent than for mineral oils. With regard to water solubility, HEPR hydraulic fluids behave like HVLP hydraulic fluids (see RE 90220). In the majority of cases, HEPG-classified fluids HEPG dissolve water completely, see chapter "4.10 Water".

### 3.1.9 Filterability

Filterability describes the ability of a hydraulic fluid to pass through a filter, removing solid contaminants. The hydraulic fluids used require a good filterability, not just when new, but also during the whole of their service life. Depending on the different basic fluids (glycols, saturated and partially saturated ester oils, hydrocrack oils, polyalpha olefins, triglycerides) and additives (VI enhancers), there are great differences here.

The filterability is a basic prerequisite for cleanliness, servicing and filtration of hydraulic fluids. Rexroth therefore requires the same degree of filterability of environmentally acceptable hydraulic fluids as for mineral oils HLP/HVLP to DIN 51524. As ISO 15380 does not comment on the filterability of hydraulic fluids, filterability comparable to that of mineral oils HLP/HVLP must be requested of lubricant manufacturers.

Filterability is tested with the new hydraulic fluid and after the addition of 0.2 % water. The underlying standard (ISO 13357-1/-2) stipulates that filterability must have no negative effects on the filters or the hydraulic fluid, see chapter 4 "Hydraulic fluids in operation".

### 3.1.10 Corrosion protection

Hydraulic fluids should not just prevent corrosion formation on steel components, they must also be compatible with non-ferrous metals and alloys. Corrosion protection tests on different metals and metal alloys are described in ISO 15380. Hydraulic fluids that are not compatible with the materials listed above must not be used, even if they are compliant with ISO 15380.

Rexroth components are usually tested with HLP hydraulic fluids or corrosion protection oils based on mineral oils before they are delivered.

### 3.1.11 Additivation

The properties described above can be modified with the help of suitable additives. Environmentally acceptable hydraulic fluids should never contain heavy metals. According to the present state of knowledge, all hydraulic fluids, regardless of additivation, can be filtered with all customary filter materials in all known filtration ratings ( $\geq 0.8 \mu\text{m}$ ), without filtering out effective additives at the same time.

Bosch Rexroth does not prescribe any specific additive system.

## 3.2 Classification and fields of application

Table 4: Classification and fields of application

Classification	Features	Typical field of application	Notes
<p>HEPG according to ISO 15380</p> <p>Density at 15 °C: typically &gt; 0.97 kg/dm<sup>3</sup></p> <p>VI: typical &gt; 170</p>	Basic fluid, glycols	Systems on exposed water courses (locks, weirs, dredgers)	<p>For information on approved components, please refer to the respective product data sheet. For components which have not been approved according to the product data sheet, please consult your Bosch Rexroth sales partner.</p> <ul style="list-style-type: none"> <li>– Very good viscosity/temperature characteristics, shear stability</li> <li>– Resistant to aging</li> <li>– Incompatible with mineral oil (exceptions must be confirmed by the lubricant manufacturer)</li> <li>– Can be water-soluble</li> <li>– Can be mixed with water</li> <li>– Very good wear protection properties</li> <li>– A higher implementation temperature with the same viscosity in comparison to mineral oil is to be expected</li> <li>– Due to the higher density in comparison to HLP, lower suction pressures are to be anticipated for pumps. Reduce the maximum speed as required and optimize suction conditions.</li> <li>– Classified as insignificantly water-endangering (water hazard class WGK 1)</li> <li>– Prior to commissioning, contact the lubricant manufacturer, as the components are tested with mineral oil HLP/corrosion protection oil.</li> </ul>
<p>HEES partially saturated according to ISO 15380</p> <p>Density at 15 °C: typically 0.90–0.93 kg/dm<sup>3</sup></p> <p>VI: typical &gt; 160</p> <p>Iodine count &lt; 90</p>	Basic fluid: Ester based on renewable raw materials, synthetic esters, mixtures of various esters, mixtures with polyalphaolefines (< 30%)	Suitable for most fields of application and components.	<p>For information on approved components, please refer to the respective product data sheet. For components which have not been approved according to the product data sheet, please consult your Bosch Rexroth sales partner.</p> <ul style="list-style-type: none"> <li>– Preferred use of FKM seals. Please enquire for shaft seal rings and implementation temperatures under –15 °C.</li> <li>– In operation, a higher temperature in comparison to mineral oil HLP/HVLP is to be expected given identical design and viscosity</li> <li>– Limit lower (depending on viscosity class) and upper implementation temperatures (maximum 80 °C due to aging)</li> <li>– Good viscosity/temperature characteristics, shear stability.</li> <li>– Good corrosion protection, if correspondingly additivized</li> <li>– Mostly classed as insignificantly water-endangering (water hazard class WGK 1), in some cases as not water-endangering</li> <li>– High dirt dissolving capacity on fluid changeovers</li> <li>– In unfavorable operating conditions (high water content, high temperature), HEES on ester basis have a tendency to hydrolysis. The acidic organic decomposition products can chemically attack materials and components.</li> </ul>

Continued on page 9

Table 4: Classification and fields of application (continued from page 8)

Classification	Features	Typical field of application	Notes
<p>HEES saturated according to ISO 15380</p> <p>Density at 15 °C: typically 0.90–0.93 kg/dm<sup>3</sup></p> <p>VI: typical 140–160</p> <p>Iodine count &lt;15</p>	<p>Basic fluid: Ester based on renewable raw materials, synthetic esters, mixtures of various esters, mixtures with polyalphaolefines (&lt; 30%)</p>	<p>Suitable for most fields of application and components. Saturated HEES should be preferred over partially saturated HEES and HETG for components and systems exposed to high stress levels.</p>	<p>For information on approved components, please refer to the respective product data sheet. For components which have not been approved according to the product data sheet, please consult your Bosch Rexroth sales partner.</p> <ul style="list-style-type: none"> <li>– Preferred use of FKM seals. Please enquire for shaft seal rings and implementation temperatures under –15 °C.</li> <li>– In operation, a higher temperature in comparison to mineral oil HLP/HVLP is to be expected given identical design and viscosity</li> <li>– Good viscosity/temperature characteristics, shear stability</li> <li>– Good corrosion protection, if correspondingly additized</li> <li>– Mostly classed as insignificantly water-endangering (water hazard class WGK 1), in the case of low viscosity classes (up to ISO VG 32) also classed as not water-endangering</li> <li>– High dirt dissolving capacity on fluid changeovers</li> </ul>
<p>HEPR according to ISO 15380</p> <p>Density at 15 °C: typically 0.87 kg/dm<sup>3</sup></p> <p>VI : typical 140–160</p>	<p>Basic fluid: synthetically manufactured hydrocarbons (polyalphaolefins PAO) partly mixed with esters (&lt; 30 %)</p>	<p>Suitable for most fields of application and components. HEPR should be preferred over partially saturated HEES and HETG for components and systems exposed to high stress levels.</p>	<p>For information on approved components, please refer to the respective product data sheet. For components which have not been approved according to the product data sheet, please consult your Bosch Rexroth sales partner.</p> <ul style="list-style-type: none"> <li>– Behaves similarly to HVLP- hydraulic fluids, individual products comply with ISO 15380 HEPR and DIN 51524-3 HVLP</li> <li>– Preferred use of FKM seals. Please enquire for shaft seal rings and implementation temperatures under –15 °C.</li> <li>– Good viscosity-temperature behavior</li> <li>– Classified as insignificantly water-endangering (water hazard class WGK 1)</li> </ul> <p><b>Note:</b> Note shear stability (see chapter 4.11 "Fluid servicing, fluid analysis and filtration" and chapter 6 "Glossary")</p>
<p>HETG according to ISO 15380</p> <p>Density at 15 °C: typically 0.90-0.93 kg/dm<sup>3</sup></p> <p>VI: typical &gt; 200</p> <p>Iodine count &gt; 90</p>	<p>Basic fluid: vegetable oils and triglycerides</p>	<p>Not recommended for Rexroth components!</p>	<p>Practical requirements are frequently not fulfilled by hydraulic fluids in this classification. Use only permissible after consultation.</p> <ul style="list-style-type: none"> <li>– Viscosity is not stable over time</li> <li>– Very fast fluid aging, very hydrolysis-susceptible (please observe neutralization number)</li> <li>– Tendency to gumming, gelling and setting.</li> <li>– Limit the lower (depending on viscosity class) and upper implementation temperatures (see chapter 3.1.5)</li> <li>– Only limited material compatibility</li> <li>– Filterability problems at water ingress</li> <li>– High dirt dissolving capacity on fluid changeovers</li> <li>– Mostly classed as not water-endangering</li> </ul>

## 4 Hydraulic fluids in operation

### 4.1 General

The properties of hydraulic fluids can change continually during storage and operation.

Please note that the fluid standard ISO 15380 merely describes minimum requirements for hydraulic fluids in new condition at the time of filling into the bins. The operator of a hydraulic system must ensure that the hydraulic fluid remains in a utilizable condition throughout its entire period of use.

Deviations from the characteristic values are to be clarified with the lubricant manufacturer, the test labs or Bosch Rexroth.

Bosch Rexroth will accept no liability for damage to its components within the framework of the applicable liability legislation insofar as the latter is due to non-observance of the following instructions.

Please note the following aspects in operation.

### 4.2 Storage and handling

Hydraulic fluids must be stored correctly in accordance with the instructions of the lubricant manufacturer. Avoid exposing the containers to lengthy periods of direct heat. Containers are to be stored in such a way that the risk of any foreign liquid or solid matter (e.g. water, foreign fluids or dust) ingress into the inside of the container can be ruled out. After taking hydraulic fluids from the containers, these are immediately to be properly resealed.

#### Recommendation:

- Store containers in a dry, roofed place
- Store barrels on their sides
- Clean reservoir systems and machine reservoirs regularly

### 4.3 Filling of new systems

Usually, the cleanliness levels of the hydraulic fluids as delivered do not meet the requirements of our components. Hydraulic fluids must be filtered using an appropriate filter system to minimize solid particle contamination and water in the system.

As early as possible during test operation, new systems should be filled with the selected hydraulic fluid so as to reduce the risk of accidentally mixing fluids (see chapter 4.5 "Mixing and compatibility of different hydraulic fluids"). Changing the hydraulic medium at a later point represents significant additional costs (see following chapter).

### 4.4 Hydraulic fluid changeover

In particular with the changeover from mineral oils to environmentally acceptable hydraulic fluids, but also from one environmentally acceptable hydraulic fluids to another, there may be interference (e.g. incompatibility in the form of gelling, silting, stable foam or reduced filterability or filter blockage).

In the case of changeovers of the fluid in hydraulic systems, it is important to ensure compatibility of the new hydraulic fluid with the remains of the previous hydraulic fluid. Bosch Rexroth recommends obtaining verification of compatibility from the

manufacturer or supplier of the new hydraulic fluid. The quantity of old fluid remaining should be minimized. Mixing hydraulic fluids should be avoided, see following chapter.

For information on changing over hydraulic fluids with different classifications, please refer to VDMA 24314, VDMA 24569 and ISO 15380 appendix A.

Bosch Rexroth will not accept liability for any damage to its components resulting from inadequate hydraulic fluid changeovers!

### 4.5 Mixing and compatibility of different hydraulic fluids

If hydraulic fluids from different manufacturers or different types from the same manufacturer are mixed, gelling, silting and deposits may occur. These, in turn, may cause foaming, impaired air separation ability, malfunctions and damage to the hydraulic system.

If the fluid contains more than 2 % of another fluid then it is considered to be a mixture. Exceptions apply for water, see chapter 4.10 "Water".

Mixing with other hydraulic fluids is not generally permitted. This also includes hydraulic fluids with the same classification and from the market overview RE 90221-01. If individual lubricant manufacturers advertise miscibility and/or compatibility, this is entirely the responsibility of the lubricant manufacturer.

Bosch Rexroth customarily tests all components with mineral oil HLP before they are delivered.

**Note:** With connectible accessory units and mobile filtering systems, there is a considerable risk of non-permitted mixing of the hydraulic fluids!

Rexroth will not accept liability for any damage to its components resulting from mixing hydraulic fluids!

### 4.6 Re-additivation

Additives added at a later point in time such as colors, wear reducers, VI enhancers or anti-foam additives, may negatively affect the performance properties of the hydraulic fluid and the compatibility with our components and therefore are not permissible.

Rexroth will not accept liability for any damage to its components resulting from re-additivation!

### 4.7 Foaming behavior

Foam is created by rising air bubbles at the surface of hydraulic fluids in the reservoir. Foam that develops should collapse as quickly as possible.

Common hydraulic fluids in accordance with ISO 15380 are sufficiently inhibited against foam formation in new condition. On account of aging and adsorption onto surfaces, the defoamer concentration may decrease over time, leading to a stable foam.

Defoamers may be re-dosed only after consultation with the lubricant manufacturer and with his written approval.

Defoamers may affect the air separation ability.

## 4.8 Corrosion

The hydraulic fluid is to guarantee sufficient corrosion protection of components under all operating conditions, even in the event of impermissible water contamination.

Environmentally acceptable hydraulic fluids are tested for corrosion protection in the same way as mineral oil HLP/HVLP. When used in practice other corrosion mechanisms are revealed in detail and in individual cases, for the most part in contact with non-ferrous and white alloys.

## 4.9 Air

Under atmospheric conditions the hydraulic fluid contains dissolved air. In the negative pressure range, for instance in the suction pipe of the pump or downstream of control edges, this dissolved air may transform into undissolved air. The undissolved air content represents a risk of cavitation and of the diesel effect. This results in material erosion of components and increased hydraulic fluid aging.

With the correct measures, such as suction pipe and reservoir design, and an appropriate hydraulic fluid, air intake and separation can be positively influenced.

See also chapter 3.1.7 "Air separation ability (ASA)".

## 4.10 Water

Water contamination in hydraulic fluids can result from direct ingress or indirectly through condensation of water from the air due to temperature variations.

HEPG dissolves water completely. This means that any water that has ingressed into the system cannot be drained off in the sump of the reservoir.

In the case of hydraulic fluids classed HETG, HEES and HEPR undissolved water can be drained off from the reservoir sump, the remaining water content is however too high to ensure that the maximum permissible water limit values are observed in the long term.

Water in the hydraulic fluid can result in wear or direct failure of hydraulic components. Furthermore, a high water content in the hydraulic fluid negatively affects aging and filterability and increases susceptibility to cavitation. During operation, the water content in all hydraulic fluids, determined according to the "Karl Fischer method" (see chapter 6 "Glossary") for all environmentally acceptable hydraulic fluids must constantly be kept below 0.1% (1000 ppm). To ensure a long service life of both hydraulic fluids and components, Bosch Rexroth recommends that values below 0.05% (500 ppm) are permanently maintained.

Due to the higher water solubility (except for HEPR) in comparison to mineral oil HLP/HVLP it is urgently advised that precautions be taken when using environmentally acceptable hydraulic fluids, such as a dehumidifier on the reservoir ventilation.

Water content has an affect particularly in the case of HETG and partially saturated HEES in that it accelerates aging (hydrolysis) of the hydraulic fluid and biological degradation, see chapter 4.11 "Fluid servicing, fluid analysis and filtration".

## 4.11 Fluid servicing, fluid analysis and filtration

Air, water, operating temperature influences and solid matter contamination will change the performance characteristics of hydraulic fluids and cause them to age.

To preserve the usage properties and ensure a long service life for hydraulic fluid and components, the monitoring of the fluid condition and a filtration adapted to the application requirements (draining and degassing if required) are indispensable.

The effort is higher in the case of unfavorable usage conditions, increased stress for the hydraulic system or high expectations as to availability and service life, see chapter 2 "Solid particle contamination and cleanliness levels".

When commissioning a system, please note that the required minimum cleanliness level can frequently be attained only by flushing the system. Due to severe start-up contamination, it may be possible that a fluid and/or filter replacement becomes necessary after a short operating period (< 50 operating hours).

The hydraulic fluid must be replaced at regular intervals and tested by the lubricant manufacturer or recognized accredited test labs. **We recommend a reference analysis after commissioning.**

The minimum data to be tested for analyses are:

- Viscosity at 40 °C and 100 °C
- Neutralization number NN (acid number AN)
- Water content (Karl-Fischer method)
- Particle measurement with evaluation according to ISO 4406 or mass of solid foreign substances with evaluation to EN 12662
- Element analysis (RFA (EDX) / ICP, specify test method)
- Comparison with new product or available trend analyses
- Assessment / evaluation for further use
- Also recommended: IR spectrum"

Differences in the maintenance and upkeep of environmentally acceptable hydraulic fluids with the corresponding suitability characteristics (as required in market overview RE 90221-01) in comparison to mineral oil HLP/HVLP are not necessary. Attention is however drawn to the note in chapter 1.3.

After changing over hydraulic fluids it is recommended that the filters be replaced again after 50 operating hours as fluid aging products may have detached themselves ("self-cleaning effect").

Compared to the pure unused hydraulic fluid the changed neutralization number NN (acid number AN) indicates how many aging products are contained in the hydraulic fluid. This difference must be kept as low as possible. As soon as the trend analysis notes a significant increase in the values, the lubricant manufacturer should be contacted.

A higher viscosity than that of new materials indicates that the hydraulic fluid has aged. Evaluation by the test lab or lubricant manufacturers is however authoritative, whose recommendation should be urgently observed.

On systems where the possibility of water contamination cannot be completely ruled out (also condensation), it should be ensured via the hydraulic system circuit that fluid aging products are not accumulating in individual areas of the hydraulic system, but are being removed from the system in a controlled manner via the filtration system. This should be ensured via suitable hydraulic circuits (e.g. flushing circuit) or system manufacturer's operating instructions/specifications.

In case of warranty, liability or guarantee claims to Bosch Rexroth, service verification and/or the results of fluid analyses are to be provided.

## 5 Disposal and environmental protection

All environmentally acceptable hydraulic fluids, are like mineral oil-based hydraulic fluids, subject to special disposal obligations.

The respective lubricant manufacturers provide specifications on environmentally acceptable handling and storage. Please ensure that spilt or splashed fluids are absorbed with appropriate adsorbents or by a technique that prevents it contaminating water courses, the ground or sewerage systems.

It is also not permitted to mix fluids when disposing of hydraulic fluids. Regulations governing the handling of used oils stipulate that used oils are not to be mixed with other products, e.g. substances containing halogen. Non-compliance will increase disposal costs. Comply with the national legal provisions concerning the disposal of the corresponding hydraulic fluid. Comply with the local safety data sheet of the lubricant manufacturer for the country concerned.



## 6 Glossary

### Additivation

Additives are chemical substances added to the basic fluids to achieve or improve specific properties.

### Aging

Hydraulic fluids age due to oxidation (see chapter 3.1.5 "Aging resistance"). Liquid and solid contamination acts as a catalyzer for aging, meaning that it needs to be minimized as far as possible by careful filtration. Please refer to Hydrolysis.

### Arrhenius equation

The quantitative relation between reaction rate and temperature is described by an exponential function, the Arrhenius equation. This function is usually visualized within the typical temperature range of the hydraulic system. For a practical example, see chapter 3.1.5 "Aging resistance".

### Basic fluids

In general, a hydraulic fluid is made up of a basic fluid, or base oil, and chemical substances, the so-called additives. The proportion of basic fluid is generally greater than 90%.

### Diesel effect

If hydraulic fluid that contains air bubbles is compressed quickly, the bubbles are heated to such a degree that a self-ignition of the air-gas mix may occur. The resultant temperature increase may lead to seal damage and increased aging of the hydraulic fluid.

### Saturated esters

Esters differ by the number of C atoms (chain length) and position of the bonds between the C atoms. Saturated esters do not have double/multiple bonds between C atoms and are therefore more resistant to aging than partially saturated esters.

### Partially saturated esters

In contrast to saturated esters, partially saturated esters have double/multiple bonds between C atoms. Rexroth defines partially saturated esters as unsaturated bonds and mixtures of esters with unsaturated and saturated bonds. Esters with unsaturated bonds are produced on the basis of renewable raw materials.

Depending on their number and position, these unsaturated bonds between the C atoms are instable. These bonds can detach themselves and form new bonds, thus changing the properties of those liquids (an aging mechanism). One of the underlying requirements for inclusion in the market overview RE 90221-01 is an aging stability characteristic. Attention is however drawn to the note in chapter 1.3.

### Hydrolysis

Hydrolysis is the splitting of a chemical bond through the reaction with water under the influence of temperature.

### ICP (atomic emission spectroscopy)

The ICP procedure can be used to determine various wear metals, contamination types and additives. Practically all elements in the periodic system can be detected with this method..

### Iodine count

The iodine count is a yardstick for the quantity of single and multiple unsaturated bonds between C atoms in the basic fluid. A low iodine count indicates that the hydraulic fluid contains few unsaturated bonds and is thus considerably more resistant to aging than a hydraulic fluid with a high iodine count. A statement about the position at which these multiple bonds are located and about how "stable" they are against influencing factors cannot be derived simply by stating the iodine count.

### Karl Fischer method

Method to determine the water content in fluids. Indirect coulometric determination procedure in accordance with DIN EN ISO 12937 in connection with DIN 51777-2. Only the combination of both standards will assure adequately accurate measured values. For hydraulic fluids based on glycol, DIN EN ISO 12937 is to be applied in conjunction with DIN 51777-1.

### Cavitation

Cavitation is the creation of cavities in fluids due to pressure reduction below the saturated vapour pressure and subsequent implosion when the pressure increases. When the cavities implode, extremely high acceleration, temperatures and pressure may occur temporarily, which may damage the component surfaces.

### Neutralization number (NN)

The neutralization number (NN) or acid number (AN) specifies the amount of caustic potash required to neutralize the acid contained in one gram of fluid.

### Pour point

The lowest temperature at which the fluid still just flows when cooled down under set conditions. The pour point is specified in the lubricant manufacturers' technical data sheets as a reference value for achieving this flow limit.

### RFA (wavelength dispersive x-ray fluorescence analysis)

Is a procedure to determine nearly all elements in liquid and solid samples with nearly any composition. This analysis method is suitable for examining additives and contamination, delivering fast results.

### Shearing/shear loss

Shearing of molecule chains during operation can change the viscosity of hydraulic fluids with long chain VI enhancers. The initially high viscosity index drops. This needs to be taken into account when selecting the hydraulic fluid.

The only value at present that can be used to assess viscosity changes in operation is the result of the test in accordance with DIN 51350 part -6. Please note that there are practical applications that create a much higher shear load on such hydraulic fluids than can be achieved by this test.

### Stick-slip

Interaction between a resilient mass system involving friction (such as cylinder + oil column + load) and the pressure increase at very low sliding speeds. The static friction of the system is a decisive value here. The lower it is, the lower the speed that can still be maintained without sticking. Depending on the tribologic system, the stick-slip effect may lead to vibrations generated and sometimes also to significant noise emission. In many cases, the effect can be attenuated by replacing the lubricant.

**Viscosity**

Viscosity is the measure of the internal friction of a fluid to flow. It is defined as the property of a substance to flow under tension. Viscosity is the most important characteristic for describing the load-bearing capacity of a hydraulic fluid.

Kinematic viscosity is the ratio of the dynamic viscosity and the density of the fluid; the unit is mm<sup>2</sup>/s. Hydraulic fluids are classified by their kinematic viscosity into ISO viscosity classes. The reference temperature for this is 40 °C.

**Viscosity index (VI)**


Refers to the viscosity temperature behavior of a fluid. The lower the change of viscosity in relation the temperature, the higher the VI.



# Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)

RE 90222/05.12 1/16

Application notes and requirements for Rexroth hydraulic components

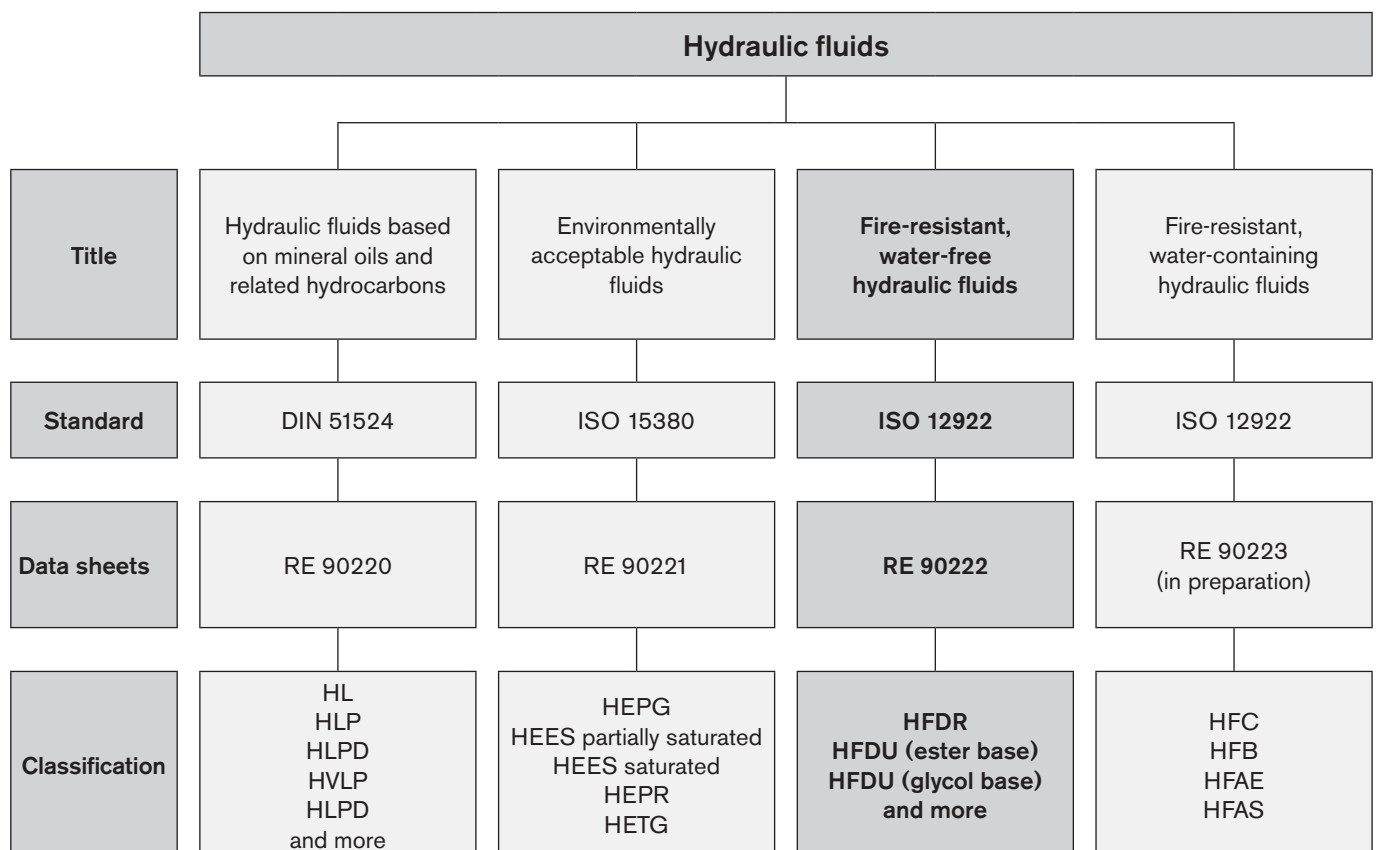

## Contents

1	Basic information .....	3
1.1	General instructions.....	3
1.2	Fire resistance .....	3
1.3	Scope .....	4
1.4	Safety instructions .....	4
2	Solid particle contamination and cleanliness levels.....	5
3	Selection of the hydraulic fluid.....	6
3.1	Selection criteria for the hydraulic fluid.....	6
3.1.1	Viscosity.....	6
3.1.2	Viscosity-temperature behavior.....	7
3.1.3	Wear protection capability.....	7
3.1.4	Material compatibility.....	7
3.1.5	Aging resistance .....	7
3.1.6	Environmentally acceptable.....	8
3.1.7	Air separation ability (ASA).....	8
3.1.8	Demulsifying ability and water solubility .....	8
3.1.9	Filterability.....	8
3.1.10	Corrosion protection .....	8
3.1.11	Additivation .....	8
3.2	Classification and fields of application .....	9
4	Hydraulic fluids in operation .....	11
4.1	General.....	11
4.2	Storage and handling .....	11
4.3	Filling of new systems.....	11
4.4	Hydraulic fluid changeover.....	11
4.5	Mixing and compatibility of different hydraulic fluids.....	11
4.6	Re-additivation.....	11
4.7	Foaming behavior.....	11
4.8	Corrosion.....	12
4.9	Air.....	12
4.10	Water .....	12
4.11	Fluid servicing, fluid analysis and filtration .....	12
5	Disposal and environmental protection .....	13
6	Glossary.....	14

# 1 Basic information

## 1.1 General instructions

The hydraulic fluid is the common element in any hydraulic component and must be selected very carefully. Quality and cleanliness of the hydraulic fluid are decisive factors for the operational reliability, efficiency and service life of a system.

Hydraulic fluids must conform, be selected and used in accordance with the generally acknowledged rules of technology and safety provisions. Reference is made to the country-specific standards and directives (in Germany the directive of the Employer's Liability Insurance Association BGR 137).

This data sheet includes recommendations and regulations concerning the selection, operation and disposal of fire-resistant, water-free hydraulic fluids in the application of Rexroth hydraulic components.

The individual selection of hydraulic fluid or the choice of classification are the responsibility of the operator.

It is the responsibility of the user to ensure that appropriate measures are taken for safety and health protection and to ensure compliance with statutory regulations. The recommendations of the lubricant manufacturer and the specifications given in the safety data sheet are to be observed when using hydraulic fluid.

This data sheet does not absolve the operator from verifying the conformity and suitability of the respective hydraulic fluid for his system. He is to ensure that the selected fluid meets the minimum requirements of the relevant hydraulic fluid standard during the whole of the period of use.

The currently valid standard for fire-resistant hydraulic fluids is the ISO 12922. In addition, other, more detailed documents, guidelines, specifications and legislation may also be valid. The operator is responsible for ensuring that such regulations are observed, for example:

- 7th Luxembourg Report: Luxembourg, April 1994, Doc. No. 4746/10/91 EN "Requirements and tests applicable to fire-resistant hydraulic fluids for hydrostatic and hydrokinetic power transmission and control"
- VDMA 24314 (1981-11): "Changing hydraulic fluids – guidelines"
- VDMA 24317 (2005-11): "Fire-resistant hydraulic fluids – minimum technical requirements"
- FM Approval Standard 6930 (2009-04): "Flammability Classification of Industrial Fluids" (only available in English)
- DIN Technical Report CEN/TR 14489 (2006-01): "Selection guidelines for protecting safety, health and the environment"

We recommend that you maintain constant, close contact with lubricant manufacturers to support you in the selection, maintenance, care and analyses.

When disposing of used hydraulic fluids, apply the same care as during use.

## 1.2 Fire resistance

There is no clear legal definition of fire-resistant hydraulic fluids. There are great differences regarding fire resistance. The selection is the sole responsibility of the system operator with respect to requirements (application, construction and design of the system, hottest source in the system, necessary fire protection).

Different test procedures are applied for evaluating fire resistance.

Fire resistance test procedure according to ISO 12922:

- Ignition properties of spray according to ISO 15029-1 (Spray flame persistence – hollow-cone nozzle method)
- Ignition properties of spray according to ISO 15029-2 (Stabilized flame heat release)
- Wick flame persistence of fluids according to ISO 14935 (average flame persistence)
- Determination of the flammability characteristics of fluids in contact with hot surfaces, ignition process according to ISO 20823 (ignition temperature, flame spread)

In general, fire-resistant hydraulic fluids are distinguished between **water-containing** fire-resistant and **water-free** fire-resistant hydraulic fluids. Water-containing fire-resistant hydraulic fluids are described in RE 90223.

Water-free, fire-resistant hydraulic fluid means hydraulic fluids with a water-proportion of 0.1% by volume ("Karl Fischer method", see chapter 6 "Glossary"), measured at the time of filling in the transport container.

In Europe water-free, fire-resistant hydraulic fluids are not approved for use in underground coal mining. The classification HFDU is no longer included in the VDMA 24317: 2005.

### Note

In contrast to water-containing fluids, all water-free, fire-resistant hydraulic fluids have a flash point and a fire point. Specific parameters for flash point and fire point can be found in the technical and/or safety data sheet for the hydraulic fluid concerned.

Just as much care should be taken when working with fire-resistant hydraulic fluids as with other hydraulic fluids, e.g. mineral oils. A leak from the hydraulic system must be avoided. The best and most cost-effective protection against fire and explosion is to prevent leakage with meticulous service, maintenance and care of the hydraulic system.

### 1.3 Scope

This data sheet must be applied when using water-free, fire-resistant hydraulic fluids with Rexroth hydraulic components. The specifications of this data sheet may be further restricted by the specifications given in data sheets for the individual components concerned.

The use of the individual water-free, fire-resistant hydraulic fluids in accordance with the intended purpose can be found in the safety data sheets or other product description documents of the lubricant manufacturers. In addition, each use is to be individually considered.

**Rexroth hydraulic components may only be operated with water-free, fire-resistant hydraulic fluids according to ISO 12922 if specified in the respective component data sheet or if a Rexroth approval for use is furnished.**

The manufacturers of hydraulic systems must adjust their systems and operating instructions to the water-free, fire-resistant hydraulic fluids.

**Bosch Rexroth will accept no liability for its components for any damage resulting from failure to comply with the notes below.**

### 1.4 Safety instructions

Hydraulic fluids can constitute a risk for persons and the environment. These risks are described in the hydraulic fluid safety data sheets. The operator is to ensure that a current safety data sheet for the hydraulic fluid used is available and that the measures stipulated therein are complied with.

## 2 Solid particle contamination and cleanliness levels

Solid particle contamination is the major reason for faults occurring in hydraulic systems. It may lead to a number of effects in the hydraulic system. Firstly, single large solid particles may lead directly to a system malfunction, and secondly small particles cause continuous elevated wear.

For mineral oils, the cleanliness level of water-free, fire-resistant hydraulic fluids is given as a three-digit numerical code in accordance with ISO 4406. This numerical code denotes the number of particles present in a hydraulic fluid for a defined quantity. Moreover, foreign solid matter is not to exceed a mass of 50 mg/kg (gravimetric examination according to ISO 4405).

In general, compliance with a minimum cleanliness level of 20/18/15 in accordance with ISO 4406 or better is to be maintained in operation. Special servo valves demand improved cleanliness levels of at least 18/16/13. A reduction in cleanliness level by one level means half of the quantity of particles and thus greater cleanliness. Lower numbers in cleanliness levels should always be striven for and extend the service life of hydraulic components. The component with the highest cleanliness requirements determines the required cleanliness of the overall system. Please also observe the specifications in table 1: "Cleanliness levels according to ISO 4406" and in the respective data sheets of the various hydraulic components.

Hydraulic fluids frequently fail to meet these cleanliness requirements on delivery. Careful filtering is therefore required during operation and in particular, during filling in order to ensure the required cleanliness levels. Your lubricant manufacturer can tell you the cleanliness level of hydraulic fluids as delivered. To maintain the required cleanliness level over the operating period, you must use a reservoir breather filter. If the environment is humid, take appropriate measures, such as a breather filter with air drying or permanent off-line water separation.

**Note:** the specifications of the lubricant manufacturer relating to cleanliness levels are based on the time at which the container concerned is filled and not on the conditions during transport and storage.

Further information about contamination with solid matter and cleanliness levels can be found in brochure RE 08016.

Table 1: Cleanliness levels according to ISO 4406

Particles per 100 ml		Scale number
More than	Up to and including	
8,000,000	16,000,000	24
4,000,000	8,000,000	23
2,000,000	4,000,000	22
1,000,000	2,000,000	21
500,000	1,000,000	20
250,000	500,000	19
130,000	250,000	18
64,000	130,000	17
32,000	64,000	16
16,000	32,000	15
8,000	16,000	14
4,000	8,000	13
2,000	4,000	12
1,000	2,000	11
500	1,000	10
250	500	9
130	250	8
64	130	7
32	64	6

20 / 18 / 15  
 > 4 µm > 6 µm > 14 µm

### 3 Selection of the hydraulic fluid

Water-free, fire-resistant hydraulic fluids for Bosch Rexroth hydraulic components are assessed on the basis of their fulfillment of the minimum requirements of ISO 12922.

#### 3.1 Selection criteria for the hydraulic fluid

The specified limit values for all components employed in the hydraulic system, for example viscosity and cleanliness level, must be observed with the hydraulic fluid used, taking into account the specified operating conditions.

Hydraulic fluid suitability depends, amongst others, on the following factors:

##### 3.1.1 Viscosity

Viscosity is a basic property of hydraulic fluids. The permissible viscosity range of complete systems needs to be determined taking account of the permissible viscosity of all components and it is to be observed for each individual component.

The viscosity at operating temperature determines the response characteristics of closed control loops, stability and damping of systems, the efficiency factor and the degree of wear.


We recommend that the optimum operating viscosity range of each component be kept within the permissible temperature range. This usually requires either cooling or heating, or both. The permissible viscosity range and the necessary cleanliness level can be found in the product data sheet for the component concerned.

If the viscosity of a hydraulic fluid used is above the permitted operating viscosity, this will result in increased hydraulic-mechanical losses. In return, there will be lower internal leakage losses. If the pressure level is lower, lubrication gaps may not be filled up, which can lead to increased wear. For hydraulic pumps, the permitted suction pressure may not be reached, which may lead to cavitation damage.

If the viscosity of a hydraulic fluid is below the permitted operating viscosity, increased leakage, wear, susceptibility to contamination and a shorter component life cycle will result.

Please ensure that the permissible temperature and viscosity limits are observed for the respective components. This usually requires either cooling or heating, or both.

Fig. 1: Examples V-T diagrams for water-free, fire-resistant hydraulic fluids in comparison to HLP and HFC (reference values, double-logarithmic representation)

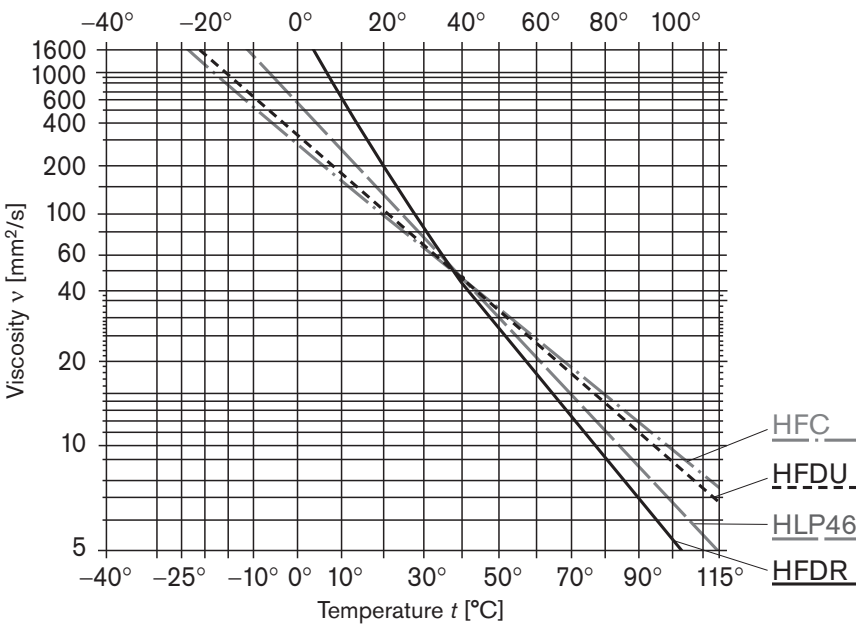

Typical viscosity data [mm <sup>2</sup> /s]			
at temperature	0 °C	40 °C	100 °C
HFDR	2500	43	5,3
HFDU (ester base)	330	46	9,2
HFDU (glycol base)	350	46	8,7
For comparison HLP (see RE 90220)	610	46	7
For comparison HFC (see RE 90223)	280	46	

Detailed V-T diagrams may be obtained from your lubricant manufacturer for their specific products. Descriptions of the individual classifications can be found in chapter 3.2 and in Table 4.

### 3.1.2 Viscosity-temperature behavior

For hydraulic fluids, the viscosity temperature behavior (V-T behavior) is of particular importance. Viscosity is characterized in that it drops when the temperature increases and rises when the temperature drops. The interrelation between viscosity and temperature is described by the viscosity index (VI).

For cold testing over a period of several days, the viscosity of ester-based HFDU can increase greatly. After heating, the characteristic values as specified on the data sheet are restored. Please ask your lubricant manufacturer for the "Flow capacity after seven days at low temperature" (ASTM D 2532) for the fluid classification ester-based HFDU .

HFDU fluid based on ester and glycol have better viscosity/temperature characteristics than mineral oil HLP (see Fig. 1).

This should be taken into consideration when selecting hydraulic fluid for the required temperature range. The viscosity and temperature limits required in the product data sheets are to be observed in all operating conditions.

#### Note

For ambient temperatures below 0 °C, fire-resistant, **water-containing** hydraulic fluids of classification HFC are to be preferred because they observe the component-related viscosity ranges and because they have better pour points (see RE 90223).

### 3.1.3 Wear protection capability

Wear protection capability describes the property of hydraulic fluids to prevent or minimize wear within the components. The wear protection capability is described in ISO 12922 via test procedures "FZG gear test rig" (ISO 14635-1) and "Mechanical test in the vane pump" (ISO 20763). The wear protection capability of water-free, fire-resistant hydraulic fluids in relation to the two test procedures is comparable to that of mineral oil HLP/HVLP.

### 3.1.4 Material compatibility

The hydraulic fluid must not negatively affect the materials used in the components. Compatibility with coatings, seals, hoses, metals and plastics is to be observed in particular. The fluid classifications specified in the respective component data sheets are tested by the manufacturer with regard to material compatibility. Parts and components not supplied by us are to be checked by the user.

**Table 2: Known material incompatibilities**

Classification	Incompatible with:
HFD in general	Seals, plastics and coatings of control cabinets, outer coatings of hydraulic components and accessory components (connectors, wiring harnesses, control cabinets) are to be tested for stability.  <b>Note:</b> hydraulic fluid vapors can also lead to incompatibility!
HFDR	Individual component color coating, lead, galvanic zinc-plating, in part non-ferrous metals with zinc, tin and aluminum in a tribological system. Sealing elements made of NBR. In some cases, the latter show major increases in volume when impermissibly aged hydraulic fluids come into contact with the material. Do not use any hydrolysis/susceptible polyurethane qualities.
HFDU based on ester	Single-component color coatings, lead, galvanized zinc coatings, in part non-ferrous metals with zinc, tin, seals made of NBR. In some cases, the latter show major increases in volume when impermissibly aged hydraulic fluids come into contact with the material. Do not use any hydrolysis/susceptible polyurethane qualities.
HFDU based on glycol	Single-component color coatings, steel/aluminum tribocontacts, paper filters, polymethylmethacrylate (PMMA). The compatibility of NBR is to be examined for individual case.

The material incompatibilities mentioned here do not automatically result in function problems. However the elements of the materials are found in the hydraulic fluids after use. The material incompatibilities described here may lead to accelerated aging of the hydraulic fluid and to reduced fire resistance.

### 3.1.5 Aging resistance

The way a water-free, fire-resistant hydraulic fluid ages depends on the thermal, chemical and mechanical stress to which it is subjected. The influence of water, air, temperature and contamination may be significantly greater than for mineral oils HLP/HVLP. Aging resistance can be greatly influenced by the chemical composition of the hydraulic fluids.

High fluid temperatures (e.g. over 80 °C) result in an approximate halving of the fluid service life for every 10 °C temperature increase and should therefore be avoided. The halving of the fluid service life results from the application of the Arrhenius equation (see Glossary).

**Table 3: Reference values for temperature-dependent aging of the hydraulic fluid**

Reservoir temperature	Fluid life cycle
80 °C	100 %
90 °C	50 %
100 °C	25 %

A modified aging test (ISO 4263-3 or ASTM D943 – without the addition of water) is specified for fluid classification HFDU. Fluid classification HFDR is described with a special procedure with respect to oxidation stability (EN 14832) and oxidation service life (ISO 4263-3). The calculated fluid service life is derived from the results of tests in which the long-term characteristics are simulated in a short period of time by applying more arduous conditions (condensed testing). This calculated fluid service life is not to be equated to the fluid service life in real-life applications.

Table 3 is a practical indicator for hydraulic fluids with water content < 0.1%, cf. chapter 4.10. "Water".

### 3.1.6 Environmentally acceptable

HFDU fluids based on ester and glycol are hydraulic fluids which may also be classified as environmentally acceptable. The main criteria for fire-resistant, water-free hydraulic fluids are the leak-free, technically problem-free use and the necessary fire resistance. Environmentally acceptable is merely a supplementary criterion. Notes on environmentally compatible hydraulic fluids can be found in RE 90221.

### 3.1.7 Air separation ability (ASA)

The air separation ability (ASA) describes the property of a hydraulic fluid to separate undissolved air. Hydraulic fluids always contain dissolved air. During operation, dissolved air may be transformed into undissolved air, leading to cavitation damages. Fluid classification, fluid product, reservoir size and design must be coordinated to take into account the dwell time and ASA value of the hydraulic fluid. The air separation capacity depends on the viscosity, temperature, basic fluid and aging. It cannot be improved by additives.

According to ISO 12922 for instance, an ASA value  $\leq 15$  minutes is required for viscosity class ISO VG 46, practical values on delivery are < 10 minutes, lower values are preferable.

### 3.1.8 Demulsifying ability and water solubility

The capacity of a hydraulic fluid to separate water at a defined temperature is known as the demulsifying ability. ISO 6614 defines the demulsifying properties of hydraulic fluids.

The fluid classifications HFDU based on ester and HFDR separate water, but HFD hydraulic fluids have a different water separation ability to mineral oil HLP/HVLP. At 20 °C, in comparison to mineral oil HLP/HVLP, a multiple (> factor 3) of water can separate in the hydraulic fluid. Water solubility is also more temperature-dependent than for mineral oils. The fluid classification HFDU based on glycol usually dissolves water completely, see chapter "4.10 Water".

### 3.1.9 Filterability

Filterability describes the ability of a hydraulic fluid to pass through a filter, removing solid contaminants. The hydraulic fluids used require a good filterability, not just when new, but also during the whole of their service life. This can differ greatly depending on the different basic fluids (glycols, esters) and additives (VI enhancers, anti-fogging additives).

The filterability is a basic prerequisite for cleanliness, servicing and filtration of hydraulic fluids. Rexroth therefore requires the same degree of filterability of water-free, fire-resistant hydraulic fluids as for mineral oils HLP/HVLP to DIN 51524.

As ISO 12922 does not comment on the filterability of hydraulic fluids, filterability comparable to that of mineral oils HLP/HVLP must be requested of lubricant manufacturers.

Filterability is tested with the new hydraulic fluid and after the addition of 0.2 % water. The underlying standard (ISO 13357-1/-2) stipulates that filterability must have no negative effects on the filters or the hydraulic fluid, see chapter 4 "Hydraulic fluids in operation".

### 3.1.10 Corrosion protection

Hydraulic fluids should not just prevent corrosion formation on steel components, they must also be compatible with non-ferrous metals and alloys. Corrosion protection tests on different metals and metal alloys are described in ISO 12922.

Rexroth components are usually tested with HLP hydraulic fluids or corrosion protection oils based on mineral oils before they are delivered.

### 3.1.11 Additivation

The properties described above can be modified with the help of suitable additives.

Bosch Rexroth does not prescribe any specific additive system.



### 3.2 Classification and fields of application

Table 4: Classification and fields of application

Classification	Features	Typical field of application	Notes
<p>HFDU (glycol-based) according to ISO 12922</p> <p>Density at 15 °C: typically &gt; 0.97 kg/dm<sup>3</sup></p> <p>VI: typical &gt; 170</p> <p>The classification "HFDU" is no longer listed in the current standard sheet VDMA 24317.</p>	<p>Base fluid: Glycols</p>	<p>Mobile systems with high thermal loading</p>	<p>For information on approved components, please refer to the respective product data sheet. For components which have not been approved according to the product data sheet, please consult your Bosch Rexroth sales partner.</p> <ul style="list-style-type: none"> <li>– Very good viscosity/temperature characteristics, shear stability</li> <li>– Resistant to aging</li> <li>– Can be water-soluble</li> <li>– Can be mixed with water</li> <li>– Very good wear protection properties</li> <li>– A higher implementation temperature with the same viscosity in comparison to mineral oil is to be expected</li> <li>– Due to the higher density in comparison to HLP, lower suction pressures are to be anticipated for pumps. Reduce the maximum speed as required and optimize suction conditions.</li> <li>– Prior to commissioning, contact the lubricant manufacturer, as the components are tested with mineral oil HLP/corrosion protection oil.</li> <li>– Incompatible with mineral oil (exceptions must be confirmed by the lubricant manufacturer).</li> </ul>
<p>HFDU (ester-based) according to ISO 12922</p> <p>Density at 15 °C: typically 0.90-0.93 kg/dm<sup>3</sup></p> <p>VI: typical &gt; 160</p> <p>Iodine count &lt; 90</p> <p>The classification "HFDU" is no longer listed in the current standard sheet VDMA 24317.</p>	<p>Base fluid: Ester based on regenerative raw materials, synthetic ester and mixtures of different esters</p> <p>Because of the fire resistance, HFDU hydraulic fluids based on ester are usually partially saturated esters</p>	<p>Suitable for most fields of application and components.</p>	<p>For information on approved components, please refer to the respective product data sheet. For components which have not been approved according to the product data sheet, please consult your Bosch Rexroth sales partner.</p> <ul style="list-style-type: none"> <li>– Preferred use of FKM seals. Please enquire about shaft seal rings and implementation temperatures under –15 °C.</li> <li>– Note shear stability (see chapter 4.11 "Fluid servicing, fluid analysis and filtration" and chapter 6 "Glossary")</li> <li>– Fire resistance is not stable over time</li> <li>– In operation, a higher temperature in comparison to mineral oil HLP/HVLP is to be expected given identical design and viscosity. Please check ATEX approvals for hydraulic components.</li> <li>– Limit the lower (see chapter 3.1.2) and upper implementation temperatures (see chapter 3.1.5)</li> <li>– Good viscosity-temperature behavior</li> <li>– Usually classified as insignificantly water-endangering (water hazard class WGK 1)</li> <li>– High dirt dissolving capacity on fluid changeovers</li> <li>– In unfavorable operating conditions (high water content, high temperature), HFDU on ester basis have a tendency to hydrolysis. The acidic organic decomposition products can chemically attack materials and components.</li> </ul>

Classification	Features	Typical field of application	Notes
HFDR according to ISO 12922  Density at 15 °C: typically 1.1 kg/dm <sup>3</sup>  VI : typical 140–160	Base fluid: phosphoric acid ester	Turbine control systems	<p>For information on approved components, please refer to the respective product data sheet. For components which have not been approved according to the product data sheet, please consult your Bosch Rexroth sales partner.</p> <ul style="list-style-type: none"> <li>– Classified as hazardous materials (for transportation and storage)</li> <li>– Hazardous working material</li> <li>– Water-endangering (Water hazard class 2 – WGK2)</li> <li>– Develops toxic vapors in case of fire</li> <li>– Preferred use of FKM, and possibly PTFE seals. Please enquire for shaft seal rings and implementation temperatures under –15 °C.</li> <li>– In operation, a higher temperature in comparison to mineral oil HLP/HVLP is to be expected given identical design and viscosity</li> <li>– Phosphoric acid esters display a tendency to hydrolysis when they come into contact with moisture. Under the influence of water/moisture, they become unstable or form highly aggressive, acidic components which could damage the hydraulic fluid and component beyond repair.</li> <li>– Poor viscosity/temperature characteristics</li> <li>– Due to the higher density in comparison to HLP, lower suction pressures are to be anticipated for pumps. Reduce the maximum speed as required and optimize suction conditions.</li> <li>– In unfavorable operating conditions (high water content, high temperature), HFDR have a tendency to hydrolysis. The acidic inorganic decomposition products chemically attack materials and components.</li> </ul>
HFDU (continued)	Based on triglycerides, mineral oils or related hydrocarbons	Not recommended for Rexroth components!	<p>Hydraulic fluids based on polyalphaolefines are not recommended on account of their poor fire resistance. This classification can usually be identified from: density &lt; 0.89; VI &lt; 140 to 160</p> <p>Hydraulic fluids based on triglycerides are not recommended on account of their aging resistance. This classification can usually be identified from: density &gt; 0.92; VI &gt; 190; iodine count &gt; 90</p> <p>Consult your lubricant manufacturer or your Bosch Rexroth sales partner if the classification of a hydraulic fluid is not clear.</p>
HFDS HFDT	Based on halogenated hydrocarbons or mixtures with halogenated hydrocarbons	Not approved for Rexroth components!	HFDS and HFDT have not been permitted to be manufactured or used since 1989 for environmental reasons.

## 4 Hydraulic fluids in operation

### 4.1 General

The properties of hydraulic fluids can change continually during storage and operation.

Please note that the fluid standard ISO 12922 merely describes minimum requirements for hydraulic fluids in new condition at the time of filling into the bins. The operator of a hydraulic system must ensure that the hydraulic fluid remains in a utilizable condition throughout its entire period of use.

Deviations from the characteristic values are to be clarified with the lubricant manufacturer, the test labs or Bosch Rexroth.

Bosch Rexroth will accept no liability for damage to its components within the framework of the applicable liability legislation insofar as the latter is due to non-observance of the following instructions.

Please note the following aspects in operation.

### 4.2 Storage and handling

Hydraulic fluids must be stored correctly in accordance with the instructions of the lubricant manufacturer. Avoid exposing the containers to lengthy periods of direct heat. Containers are to be stored in such a way that the risk of any foreign liquid or solid matter (e.g. water, foreign fluids or dust) ingress into the inside of the container can be ruled out. After taking hydraulic fluids from the containers, these are immediately to be properly resealed.

#### Recommendation:

- Store containers in a dry, roofed place
- Store barrels on their sides
- Clean reservoir systems and machine reservoirs regularly

### 4.3 Filling of new systems

Usually, the cleanliness levels of the hydraulic fluids as delivered do not meet the requirements of our components. Hydraulic fluids must be filtered using an appropriate filter system to minimize solid particle contamination and water in the system.

As early as possible during test operation, new systems should be filled with the selected hydraulic fluid so as to reduce the risk of accidentally mixing fluids (see chapter 4.5 "Mixing and compatibility of different hydraulic fluids"). Changing the hydraulic medium at a later point represents significant additional costs (see following chapter).

### 4.4 Hydraulic fluid changeover

Problems may be encountered in particular when changing over from water-containing, fire-resistant hydraulic fluid or mineral oils to water-free, fire-resistant hydraulic fluids (e.g. incompatibilities in the form of gelling, silting, stable foam, reduced filterability or filter blockage). This may also happen when changing products within the same classification.

In the case of changeovers of the fluid in hydraulic systems, it is important to ensure compatibility of the new hydraulic fluid with the remains of the previous hydraulic fluid. Bosch Rexroth recommends obtaining verification of compatibility from the

manufacturer or supplier of the new hydraulic fluid. The quantity of old fluid remaining should be minimized. Mixing hydraulic fluids should be avoided, see following chapter.

Information about changing to a hydraulic fluid of a different classification can be found, for example, in VDMA 24314 and in ISO 7745. In addition, the information given in chapter 3.1.4 "Material compatibility" is also to be observed.

Bosch Rexroth will not accept liability for any damage to its components resulting from inadequate hydraulic fluid changeovers!

### 4.5 Mixing and compatibility of different hydraulic fluids

If hydraulic fluids from different manufacturers or different types from the same manufacturer are mixed, gelling, silting and deposits may occur. These, in turn, may cause foaming, impaired air separation ability, malfunctions and damage to the hydraulic system.

If the fluid contains more than 2 % of another fluid then it is considered to be a mixture. Exceptions apply for water, see chapter 4.10 "Water".

Mixing with other hydraulic fluids is not generally permitted. This includes hydraulic fluids with the same classification. If individual lubricant manufacturers advertise miscibility and/or compatibility, this is entirely the responsibility of the lubricant manufacturer.

Bosch Rexroth customarily tests all components with mineral oil HLP before they are delivered.

Note: With connectible accessory units and mobile filtering systems, there is a considerable risk of non-permitted mixing of the hydraulic fluids!

Rexroth will not accept liability for any damage to its components resulting from mixing hydraulic fluids!

### 4.6 Re-additivation

Additives added at a later point in time such as colors, wear reducers, VI enhancers or anti-foam additives, may negatively affect the performance properties of the hydraulic fluid and the compatibility with our components and therefore are not permissible.

Rexroth will not accept liability for any damage to its components resulting from re-additivation!

### 4.7 Foaming behavior

Foam is created by rising air bubbles at the surface of hydraulic fluids in the reservoir. Foam that develops should collapse as quickly as possible.

Common hydraulic fluids in accordance with ISO 12922 are sufficiently inhibited against foam formation in new condition. On account of aging and adsorption onto surfaces, the defoamer concentration may decrease over time, leading to a stable foam.

Defoamers may be re-dosed only after consultation with the lubricant manufacturer and with his written approval.

Defoamers may affect the air separation ability.

## 4.8 Corrosion

The hydraulic fluid is to guarantee sufficient corrosion protection of components under all operating conditions, even in the event of impermissible water contamination.

Water-free, fire-resistant hydraulic fluids are tested for corrosion protection in the same way as mineral oil HLP/HVLP. When used in practice other corrosion mechanisms are revealed in detail and in individual cases, for the most part in contact with non-ferrous and white alloys.

## 4.9 Air

Under atmospheric conditions the hydraulic fluid contains dissolved air. In the negative pressure range, for instance in the suction pipe of the pump or downstream of control edges, this dissolved air may transform into undissolved air. The undissolved air content represents a risk of cavitation and of the diesel effect. This results in material erosion of components and increased hydraulic fluid aging.

With the correct measures, such as suction pipe and reservoir design, and an appropriate hydraulic fluid, air intake and separation can be positively influenced.

See also chapter 3.1.7 "Air separation ability (ASA)".

## 4.10 Water

Water contamination in hydraulic fluids can result from direct ingress or indirectly through condensation of water from the air due to temperature variations.

HFDU hydraulic fluids on glycol basis are water-soluble or can be mixed with water. This means that any water that has ingressed into the system cannot be drained off in the sump of the reservoir.

In the case of HDFU hydraulic fluids on ester basis, undissolved water can be drained off from the reservoir sump, the remaining water content is however too high to ensure that the maximum permissible water limit values are observed in the long term.

With the fluid classification HFDR, the greater density of the ester means that the any water that has ingressed will be on the surface of the hydraulic fluid. This means that any water that has ingressed into the system cannot be drained off in the sump of the reservoir.

Water in the hydraulic fluid can result in wear or direct failure of hydraulic components. Furthermore, a high water content in the hydraulic fluid negatively affects aging and filterability and increases susceptibility to cavitation. During operation, the water content in all hydraulic fluids, determined according to the "Karl Fischer method" (see chapter 6 "Glossary") for all water-free, fire-resistant hydraulic fluids must constantly be kept below 0.1% (1000 ppm). To ensure a long service life of both hydraulic fluids and components, Bosch Rexroth recommends that values below 0.05% (500 ppm) are permanently maintained.

Due to the higher water solubility in comparison to mineral oil HLP/HVLP it is urgently advised that precautions be taken when using water-free, fire-resistant hydraulic fluids, such as a dehumidifier on the reservoir ventilation.

Water content has an affect particularly in the case of HEDU hydraulic fluid on ester basis and HFDR in that it accelerates aging (hydrolysis) of the hydraulic fluid and biological degradation, see chapter 4.11 "Fluid servicing, fluid analysis and filtration".

## 4.11 Fluid servicing, fluid analysis and filtration

Air, water, operating temperature influences and solid matter contamination will change the performance characteristics of hydraulic fluids and cause them to age.

To preserve the usage properties and ensure a long service life for hydraulic fluid and components, the monitoring of the fluid condition and a filtration adapted to the application requirements (draining and degassing if required) are indispensable.

The effort is higher in the case of unfavorable usage conditions, increased stress for the hydraulic system or high expectations as to availability and service life, see chapter 2 "Solid particle contamination and cleanliness levels".

When commissioning a system, please note that the required minimum cleanliness level can frequently be attained only by flushing the system. Due to severe start-up contamination, it may be possible that a fluid and/or filter replacement becomes necessary after a short operating period (< 50 operating hours).

The hydraulic fluid must be replaced at regular intervals and tested by the lubricant manufacturer or recognized accredited test labs. **We recommend a reference analysis after commissioning.**

The minimum data to be tested for analyses are:

- Viscosity at 40 °C and 100 °C
- Neutralization number NN (acid number AN)
- Water content (Karl-Fischer method)
- Particle measurement with evaluation according to ISO 4406 or mass of solid foreign substances with evaluation to EN 12662
- Element analysis (RFA (EDX) / ICP, specify test method)
- Comparison with new product or available trend analyses
- Assessment / evaluation for further use
- Also recommended: IR spectrum

No differences are needed in the maintenance and care of water-free, fire-resistant hydraulic fluids with the appropriate suitability parameters compared to HLP/HVLP mineral oils. Attention is however drawn to the note in chapter 1.3.

After changing over hydraulic fluids it is recommended that the filters be replaced again after 50 operating hours as fluid aging products may have detached themselves ("self-cleaning effect").

Compared to the pure unused hydraulic fluid the changed neutralization number NN (acid number AN) indicates how many aging products are contained in the hydraulic fluid. This difference must be kept as small as possible. The lubricant manufacturer should be contacted as soon as the trend analysis notes a significant increase in values.

A higher viscosity than that of new materials indicates that the hydraulic fluid has aged. Evaluation by the test lab or lubricant manufacturers is however authoritative, whose recommendation should be urgently observed.

On systems where the possibility of water contamination cannot be completely ruled out (also condensation), it should be ensured via the hydraulic system circuit that fluid aging products are not accumulating in individual areas of the hydraulic system, but are being removed from the system in a controlled manner via the filtration system. This should be ensured via suitable hydraulic circuits (e.g. flushing circuit) or system manufacturer's operating instructions/specifications.

In case of warranty, liability or guarantee claims to Bosch Rexroth, service verification and/or the results of fluid analyses are to be provided.

## 5 Disposal and environmental protection

All water-free, fire-resistant hydraulic fluids, are, like mineral oil-based hydraulic fluids, subject to special disposal obligations.

The respective lubricant manufacturers provide specifications on environmentally acceptable handling and storage. Please ensure that spilt or splashed fluids are absorbed with appropriate adsorbents or by a technique that prevents it contaminating water courses, the ground or sewerage systems.

It is also not permitted to mix fluids when disposing of hydraulic fluids. Regulations governing the handling of used oils stipulate that used oils are not to be mixed with other products, e.g. substances containing halogen. Non-compliance will increase disposal costs. Comply with the national legal provisions concerning the disposal of the corresponding hydraulic fluid. Comply with the local safety data sheet of the lubricant manufacturer for the country concerned.

## 6 Glossary

### Additivation

Additives are chemical substances added to the basic fluids to achieve or improve specific properties.

### Aging

Hydraulic fluids age due to oxidation (see chapter 3.1.5 "Aging resistance"). Liquid and solid contamination acts as a catalyzer for aging, meaning that it needs to be minimized as far as possible by careful filtration. Please refer to Hydrolysis.

### Arrhenius equation

The quantitative relation between reaction rate and temperature is described by an exponential function, the Arrhenius equation. This function is usually visualized within the typical temperature range of the hydraulic system. For a practical example, see chapter 3.1.5 "Aging resistance".

### Basic fluids

In general, a hydraulic fluid is made up of a basic fluid, or base oil, and chemical substances, the so-called additives. The proportion of basic fluid is generally greater than 90%.

### Diesel effect

If hydraulic fluid that contains air bubbles is compressed quickly, the bubbles are heated to such a degree that a self-ignition of the air-gas mix may occur. The resultant temperature increase may lead to seal damage and increased aging of the hydraulic fluid.

### Partially saturated esters

In contrast to saturated esters, partially saturated esters have double/multiple bonds between C atoms. Rexroth defines partially saturated esters as unsaturated bonds and mixtures of esters with unsaturated and saturated bonds. Esters with unsaturated bonds are produced on the basis of renewable raw materials.

Depending on their number and position, these unsaturated bonds between the C atoms are instable. These bonds can detach themselves and form new bonds, thus changing the properties of those liquids (an aging mechanism). Attention is however drawn to the note in chapter 1.3.

### Hydrolysis

Hydrolysis is the splitting of a chemical bond through the reaction with water under the influence of temperature.

### ICP (atomic emission spectroscopy)

The ICP procedure can be used to determine various wear metals, contamination types and additives. Practically all elements in the periodic system can be detected with this method.

### Iodine count

The iodine count is a yardstick for the quantity of single and multiple unsaturated bonds between C atoms in the basic fluid. A low iodine count indicates that the hydraulic fluid contains few unsaturated bonds and is thus considerably more resistant to aging than a hydraulic fluid with a high iodine count. A statement about the position at which these multiple bonds are located and about how "stable" they are against influencing factors cannot be derived simply by stating the iodine count.

### Karl Fischer method

Method to determine the water content in fluids. Indirect coulometric determination procedure in accordance with DIN EN ISO 12937 in connection with DIN 51777-2. Only the combination of both standards will assure adequately accurate measured values. For hydraulic fluids based on glycol, DIN EN ISO 12937 is to be applied in conjunction with DIN 51777-1.

### Cavitation

Cavitation is the creation of cavities in fluids due to pressure reduction below the saturated vapour pressure and subsequent implosion when the pressure increases. When the cavities implode, extremely high acceleration, temperatures and pressure may occur temporarily, which may damage the component surfaces.

### Neutralization number (NN)

The neutralization number (NN) or acid number (AN) specifies the amount of caustic potash required to neutralize the acid contained in one gram of fluid.

### Pour point

The lowest temperature at which the fluid still just flows when cooled down under set conditions. The pour point is specified in the lubricant manufacturers' technical data sheets as a reference value for achieving this flow limit.

### RFA (wavelength dispersive x-ray fluorescence analysis)

Is a procedure to determine nearly all elements in liquid and solid samples with nearly any composition. This analysis method is suitable for examining additives and contamination, delivering fast results.

### Shearing/shear loss

Shearing of molecule chains during operation can change the viscosity of hydraulic fluids with long chain VI enhancers and anti-fogging additives. The initially high viscosity index drops. This needs to be taken into account when selecting the hydraulic fluid.

The only value at present that can be used to assess viscosity changes in operation is the result of the test in accordance with DIN 51350 part -6. Please note that there are practical applications that create a much higher shear load on such hydraulic fluids than can be achieved by this test.

### Viscosity

Viscosity is the measure of the internal friction of a fluid to flow. It is defined as the property of a substance to flow under tension. Viscosity is the most important characteristic for describing the load-bearing capacity of a hydraulic fluid.

Kinematic viscosity is the ratio of the dynamic viscosity and the density of the fluid; the unit is mm<sup>2</sup>/s. Hydraulic fluids are classified by their kinematic viscosity into ISO viscosity classes. The reference temperature for this is 40 °C.

### Viscosity index (VI)

Refers to the viscosity temperature behavior of a fluid. The lower the change of viscosity in relation the temperature, the higher the VI.





Bosch Rexroth AG  
Hydraulics  
Zum Eisengießer 1  
97816 Lohr am Main, Germany  
Phone +49 (0) 93 52 / 18-0  
Fax +49 (0) 93 52 / 18-23 58  
documentation@boschrexroth.de  
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification.

It must be remembered that our products are subject to a natural process of wear and aging.

Subject to change.




# Fire-resistant hydraulic fluids – water-containing (HFAE, HFAS, HFB, HFC)

**RE 90223**

Edition: 01.2015



Application notes and requirements for Rexroth hydraulic components

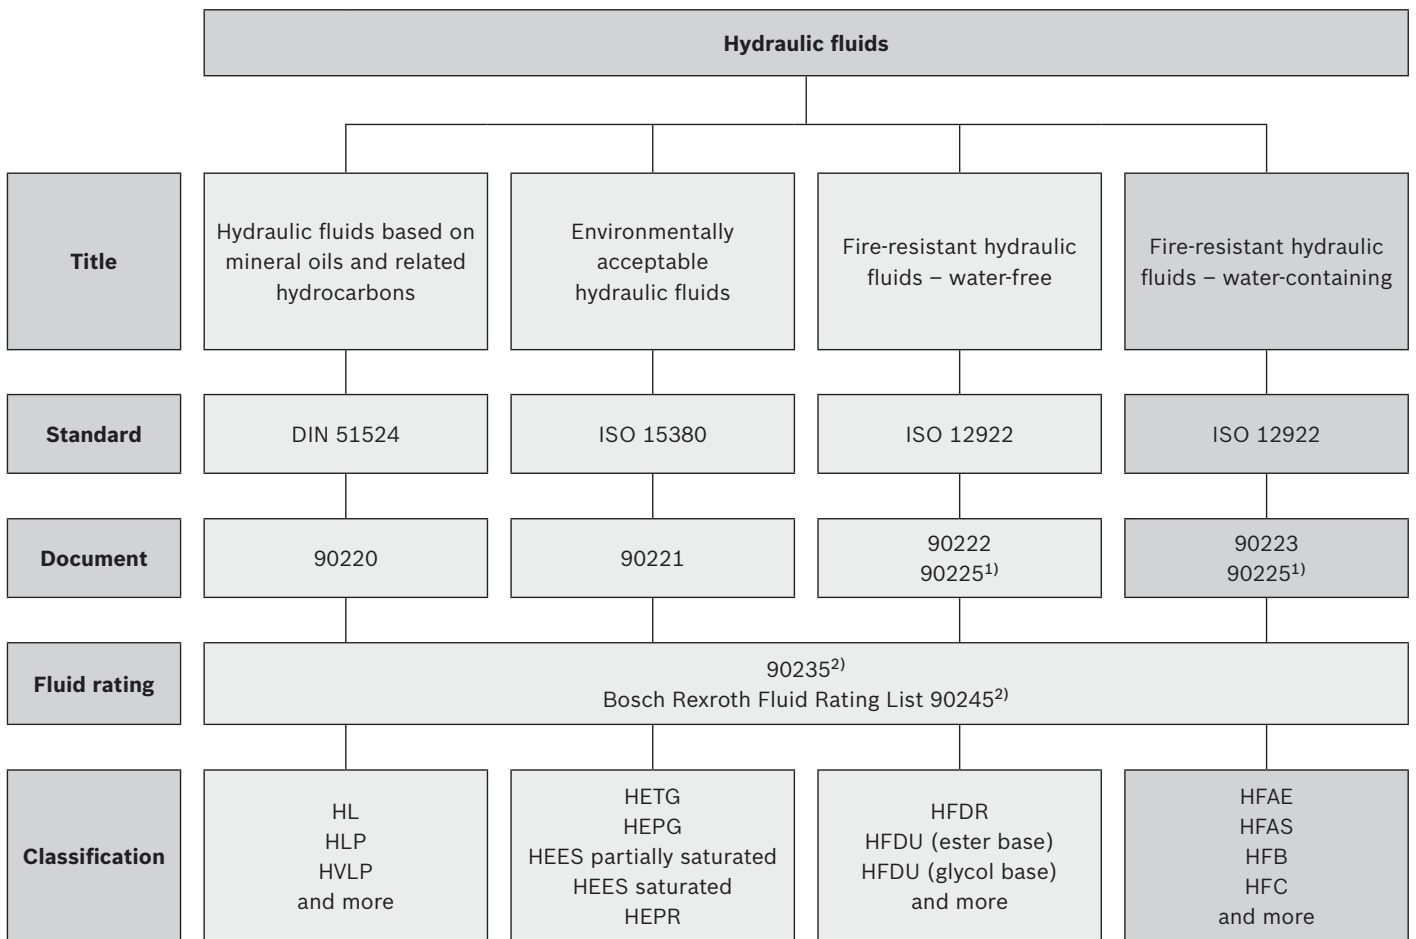

1) Valid for Bosch Rexroth axial piston units

2) Valid for Bosch Rexroth Business Unit “Mobile Applications” – pumps and motors

## **Contents**

1	Basic information	3
1.1	General instructions	3
1.2	Fire resistance	4
1.3	Scope	4
1.4	Safety instructions	5
2	Solid particle contamination and cleanliness levels	5
3	Selection of the hydraulic fluid	6
3.1	Selection criteria for the hydraulic fluid	6
3.1.2	Viscosity temperature behavior	8
3.1.3	Wear protection capability	8
3.1.4	Material compatibility	8
3.1.5	Aging resistance	10
3.1.6	Environmental compatibility	10
3.1.7	Air separation ability (ASA)	10
3.2	Classification and fields of application	11
4	Hydraulic fluids in operation	12
4.1	General	12
4.2	Storage and handling	12
4.3	Filling of new systems	12
4.4	Hydraulic fluid changeover	12
4.5	Mixing and compatibility of different hydraulic fluids	13
4.6	Re-additivation	13
4.7	Foaming behavior	13
4.8	Corrosion protection	13
4.9	Dissolved and undissolved air	13
4.10	Fluid servicing, fluid analysis, and filtration	13
5	Disposal and environmental protection	15
6	Standardization	15
7	Glossary	15

## 1 Basic information

### 1.1 General instructions

Hydraulic fluid is the common element in any hydraulic system and must be selected very carefully. Quality and cleanliness of the hydraulic fluid are decisive factors for the operational reliability, efficiency, and life cycle of the system. Hydraulic fluids must conform, be selected and used in accordance with the generally acknowledged rules of technology and safety provisions. Reference is made to the country-specific standards and directives (in Germany the directive of the Employer's Liability Insurance Association BGR 137).

This document includes recommendations and regulations concerning the selection, operation, and disposal of water-containing, fire-resistant hydraulic fluids in the application of Rexroth hydraulic components.

The individual selection of hydraulic fluid or the choice of classification are the responsibility of the operator.

It is also the responsibility of the operator to ensure that appropriate measures are taken for safety and health protection and to ensure compliance with statutory regulations. The recommendations of the lubricant manufacturer and the specifications given in the safety data sheet are to be observed when using hydraulic fluid.

This document does not release the operator from verifying the conformity and suitability of the respective hydraulic fluid for his system. The operator of a hydraulic system must ensure that the hydraulic fluid remains fit for purpose throughout its entire period of use.

The currently valid standard for fire-resistant hydraulic fluids is ISO 12922. In addition, even more detailed documents, guidelines, specifications, and laws (the observance of which the operator shall also be responsible) may be valid. This includes, for instance:

- a. 90235 - Assessment of hydraulic fluids used in Rexroth hydraulic components (pumps and motors)
- b. 7th Luxembourg Report: Luxembourg, April 1994 - Doc. No. 4746/10/91 EN "Requirements and tests applicable to fire-resistant hydraulic fluids used for power transmission and control (hydrostatic and hydrokinetic)"
- c. VDMA 24314 (1981-11): "Change of pressure liquids – Directives"
- d. VDMA 24317 (2005-11): "Fire-resistant hydraulic fluids - Minimum technical requirements"

- e. FM Approval Standard 6930 (2009-04): "Flammability Classification of Industrial Fluids" (only available in English)
- f. DIN Technical Report CEN/TR 14489 (2006-01): "Selection guidelines for protecting safety, health, and the environment"
- g. BGR 137 - Handling hydraulic fluids (1997-04): German trade association rules health and safety at work.
- h. DIN 24320: "Fire-resistant fluids - Hydraulic fluids of categories HFAE and HFAS - Characteristics and requirements"
- i. List of hydraulic fluids in the set of regulations for the mining sector (coal mining): [http://www.bezregarnsberg.nrw.de/themen/s/schwerentflammbare\\_hydraulikfluessigkeiten/index.php](http://www.bezregarnsberg.nrw.de/themen/s/schwerentflammbare_hydraulikfluessigkeiten/index.php)
- j. RAG N 762010 (2012-10): "Fire-resistant hydraulic fluids HFC-E, requirements"
- k. RAG N 762011 (2012-09): "Requirements on synthetic, fire-resistant hydraulic fluids (HFA-S and synthetic emulsions)"
- l. Ordinance for all mining sectors - ABergV (1995-10): General Federal Mining Ordinance
- m. Occupational Health and Safety Ordinance for Mines (GesBergV) (1991-07): Mining ordinance for the health protection of mineworkers

We recommend that you maintain constant, close contact with lubricant manufacturers to support you in the selection, maintenance, care, and analyses.

When disposing of used hydraulic fluids, apply the same care as during use.

## 1.2 Fire resistance

There is no clear legal definition of fire-resistant hydraulic fluids. There are great differences regarding fire resistance. Selection is the sole responsibility of the system operator with respect to requirements (application, construction and design of the system, hottest ignition source in the system, required fire protection).

The most important task in determining the fire resistance of hydraulic fluids is to find a test method that reproduces the situation occurring in a specific application. Different test methods are used to assess the fire resistance according to ISO 12922:

- ▶ Spray ignition characteristics according to ISO 15029-1 (Spray flame persistence – Hollow-cone nozzle method)
- ▶ Spray ignition characteristics according to ISO 15029-2 (Stabilized flame heat release method) Flammability index (RI)
- ▶ Wick flame persistence of fluids according to ISO 14935 (average flame persistence)
- ▶ Flammability on hot surfaces according to ISO 20823 (ignition temperature, spread of flame)

The required minimum values for the ignition temperature differ according to ISO 12922:

HFB: 650 °C, HFC: 600 °C, HFDU: 400 °C, HFDR: 700 °C

In general, fire-resistant hydraulic fluids are distinguished between fire-resistant, **water-free**, and fire-resistant, **water-containing** hydraulic fluids. The fire-resistant, water-free hydraulic fluids are described in Document 90222.

Fire resistant, water-containing hydraulic fluids are normally understood as hydraulic fluids with a proportion greater than 35% by mass of water (according to ISO 12922).

### Information

- ▶ Only fire-resistant, water-containing hydraulic fluids can currently receive approval from the mining authorities for use in coal mining below ground.
- ▶ In contrast to water-free fluids, all fire-resistant, water-containing hydraulic fluids do not have a flash point or combustion point.
- ▶ The test conditions for determining the flammability on hot surfaces vary significantly within ISO 12922 between fire-resistant, water-free and fire-resistant, water-containing hydraulic fluids (e.g. different testing temperatures).
- ▶ Just as much care should be taken when working with fire-resistant hydraulic fluids as with other hydraulic fluids, e.g. mineral oils. Leakage in the hydraulic system must be prevented. The best and most cost-effective protection against fire and explosion is to prevent leakage with meticulous servicing, and maintenance and care of the hydraulic system.
- ▶ If possible, the system should be designed such that fires and explosions cannot arise.

## 1.3 Scope

This document must be applied when using fire-resistant, water-containing hydraulic fluids in Bosch Rexroth hydraulic components. Please note that the specifications in this document may be further defined by the data sheets for the individual components.

The use of the individual fire-resistant, water-containing hydraulic fluids according to the intended purpose can be found in the safety data sheets or other product description documents of the lubricant manufacturers.

**Rexroth hydraulic components may only be operated with fire-resistant, water-containing hydraulic fluids according to ISO 12922 if this is specified in the respective component data sheet or if a Rexroth approval for use is furnished.**

The manufacturers of hydraulic systems must adjust their systems and operating instructions to the fire-resistant, water-containing hydraulic fluids.

**Bosch Rexroth will accept no liability for its components for any damage resulting from failure to comply with the notes below.**

#### 1.4 Safety instructions

Hydraulic fluids can constitute a risk for persons and the environment. These risks are described in the hydraulic fluid safety data sheets. The operator is to ensure that a current safety data sheet for the hydraulic fluid used is available and that the measures stipulated therein are complied with.

See also sub-paragraphs 1.1 b., f., g., j., k., and l.

## 2 Solid particle contamination and cleanliness levels

Solid particle contamination is the major reason for faults occurring in hydraulic systems. It may lead to a number of effects in the hydraulic system. Firstly, single large solid particles may lead directly to a system malfunction, and secondly small particles cause continuous elevated wear. For fire-resistant, water-containing hydraulic fluids, the cleanliness level is given as a three-digit numerical code in accordance with ISO 4406. The determination of this is made pursuant to the microscope method according to ISO 4407. The automatic method cannot be applied for fire-resistant, water-containing hydraulic fluids, since oil droplets could be counted as particles, for instance. This numerical code denotes the number of particles present in a hydraulic fluid for a defined quantity. Only particles > 5 µm and > 15 µm are counted here. The specification of the cleanliness level according to ISO 4406 thus only relates to those two particle sizes; for example: "ISO 4406: - / 18 / 15". The type of measuring method applied must always be specified as well when the cleanliness level is being determined. ISO 4406 is generally preferred in hydraulics. Moreover, foreign solid matter is not to exceed a mass of 50 mg/kg (gravimetric examination according to ISO 4405).

In general, compliance with a minimum cleanliness level of 20/18/15 according to ISO 4406 or better is to be maintained during operation. Special servo valves require better cleanliness levels of at least 18/16/13. An ordinal number lower by one signifies one half of the number of particles, and thus a higher level of cleanliness. Lower numbers in cleanliness levels should always be striven for, and extend the service life of hydraulic components. The component with the highest cleanliness requirements determines the required cleanliness for the overall system. Please also note the information given in Table 1: "Cleanliness levels according to ISO 4406" and in the respective data sheets for the various hydraulic components.

As an option, SAE AS 4059 can be used instead of ISO 4406 if particles above the size of 14 µm are going to be identified. The specification of cleanliness levels using cumulative particle counts is indicated by way of a letter/numerical code, although usually the particle size with the highest code is specified.

Hydraulic fluids frequently fail to meet the cleanliness requirements on delivery (basic contamination in containers). Careful filtering is therefore required during operation and, in particular, during filling in order to ensure the required cleanliness levels in the system. Your lubricant manufacturer can tell you the cleanliness levels of hydraulic fluids as delivered. To maintain the required cleanliness level over the operating period, it is recommended that a tank breather filter be used.

#### Information


Note: the specifications of the lubricant manufacturer relating to cleanliness levels are based on the time at which the container concerned is filled and not on the conditions during transport and storage.

Further information about solid matter contamination and cleanliness levels can be found in the Bosch Rexroth oil cleanliness booklet R999000239.

Filter inspections and tests can be ordered at Bosch Rexroth as a service using the number R928037504 - Filter inspection - (inspection of used filter cartridges).

**Table 1: Cleanliness levels according to ISO 4406 (determination according to ISO 4407)**

Particles per 100 ml		Ordinal number
More than	Up to and including	
8,000,000	16,000,000	24
4,000,000	8,000,000	23
2,000,000	4,000,000	22
1,000,000	2,000,000	21
500,000	1,000,000	20
250,000	500,000	19
130,000	250,000	18
64000	130,000	17
32000	64000	16
16000	32000	15
8000	16000	14
4000	8000	13
2000	4000	12
1000	2000	11
500	1000	10
250	500	9
130	250	8
64	130	7
32	64	6



### 3 Selection of the hydraulic fluid

Fire-resistant, water-containing hydraulic fluids for Bosch Rexroth hydraulic components are assessed on the basis of their fulfillment of the minimum requirements according to ISO 12922.

Based on this, hydraulic fluids can be used that were assessed by Bosch Rexroth according to 90235 (fluid rating).

#### 3.1 Selection criteria for the hydraulic fluid

The specified limit values for all components employed in the hydraulic system, for example required viscosities and cleanliness levels, need to be complied with while observing the specified operating conditions with the hydraulic fluid used. Please refer to the data sheet for the respective Rexroth hydraulic component for the permissible viscosity range, the required cleanliness levels, and the approved operating data.

Hydraulic fluid suitability depends, among other things, on the following factors:

##### 3.1.1 Viscosity

Viscosity is a basic property of hydraulic fluids. The permissible viscosity range of complete systems needs to be determined taking account of the permissible viscosity of all components, and it is to be observed for each individual component.

The viscosity at operating temperature determines the response characteristics of closed control loops, stability and damping of systems, the efficiency factor, and the degree of wear.

We recommend that the optimum operating viscosity range of each component be kept within the permissible temperature range.

If the viscosity of a hydraulic fluid used is above the permitted operating viscosity, this will result in increased hydraulic-mechanical losses. However, internal leakage losses will be fewer. If the pressure level is lower, lubrication gaps may not be filled up, which can lead to increased wear. For hydraulic pumps, the permitted suction pressure may not be reached, which could lead to cavitation damage.


If the viscosity of a hydraulic fluid is below the permitted operating viscosity, increased leakage, wear, susceptibility to contamination, and a shorter life cycle in the components will result.

Please ensure that the permissible temperature and viscosity limits are observed for the respective components. This usually requires either cooling or heating, or both.

The viscosity is influenced by the water content. If water loss occurs during operation owing to temperatures > +40 °C, then the viscosity will increase firstly (mainly in

open systems). If the viscosity drops when the water content is reduced or if it remains the same, then the polymers in the water-glycol mixture are either damaged or sheared.

**Fig. 1: Example  $\nu$ - $T$ -diagram HFA, HFAS concentrated, HFC compared to HFDR, HFDU (ester based) and HLP (reference values, double-logarithmic presentation)**

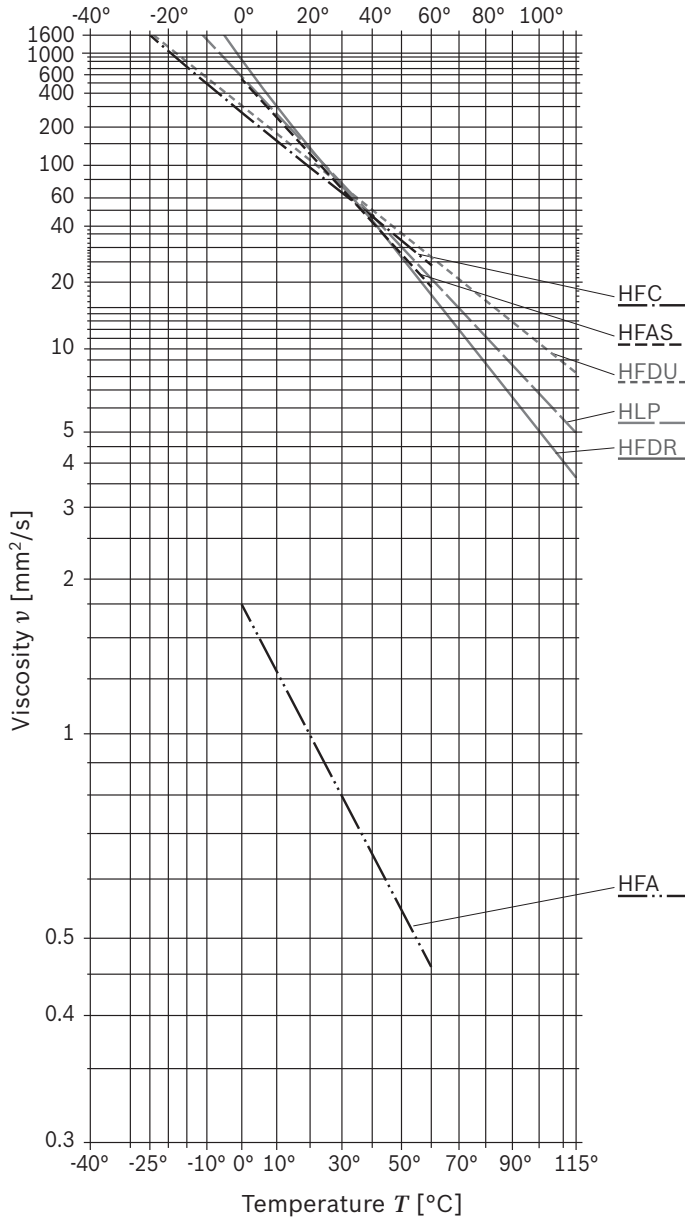

**Table 2: Examples of typical viscosity data [mm<sup>2</sup>/s] in different hydraulic fluids**

Temperature	-20 °C	0 °C	40 °C	60 °C	100 °C
HFA	- <sup>1)</sup>	1.75	0.65	0.47	- <sup>2)</sup>
HFAS concentrated	- <sup>1)</sup>	550	42	18.7	- <sup>2)</sup>
HFC	1183	295	46	24.3	- <sup>2)</sup>
compare HFDR (see 90222)	(14250) <sup>3)</sup>	956	43	17.1	(5) <sup>3)</sup>
compare HFDU (ester based) (see 90222)	1195	310	50	26.5	10.4
compare HLP (see 90220)	(4034) <sup>3)</sup>	547	46	20.8	(6.9) <sup>3)</sup>

- 1) Not applicable (see Pour point)
- 2) Not applicable (water loss in depressurized reservoir)
- 3) Observe permissible viscosity range for the respective hydraulic component.

### 3.1.2 Viscosity temperature behavior

In hydraulic fluids, it is primarily the viscosity temperature behavior ( $\nu$ - $T$ -behavior) that is of particular importance.

In hydraulic fluids, the viscosity is characterized in that it drops when the temperature increases and rises when the temperature drops. The interrelation between viscosity and temperature is described by the viscosity index (VI).

HFC hydraulic fluids have a better viscosity temperature behavior than HLP mineral oil.

In HFA hydraulic fluids, the dependency of the viscosity on the temperature is negligible.

The differing viscosity temperature behavior needs to be taken into consideration when selecting hydraulic fluid for the required temperature range.

Owing to a high vapor pressure in comparison to a similar HLP mineral oil, the maximum operating temperature when working with fire-resistant, water-containing hydraulic fluids must be limited. Reservoir temperatures above +50 °C must be prevented in open systems, because they can lead to serious water loss and accelerate the aging process in the hydraulic fluid. Furthermore, in HFC hydraulic fluids, water losses that are too high can lead to both an increase in viscosity and to a reduction in the fire-resistant properties.

#### Information

- ▶ The minimum operating temperature for HFA hydraulic fluids is +5 °C.
- ▶ HFC hydraulic fluids respond very well at low temperatures and have a lower pour point when compared to HLP mineral oils.

### 3.1.3 Wear protection capability

Wear protection capability describes the property of hydraulic fluids to prevent or minimize wear within the components.

This is described in ISO 12922 for HFC hydraulic fluids using the following test methods:

- ▶ Mechanical testing in the vane pump (ISO 20763), method B (reduced temperature and working pressure when compared to HLP mineral oil)
- ▶ Testing in the four-ball apparatus (ISO 20623)
- ▶ Testing in the FZG test machine for mechanical stress in the gears (ISO 14635-1), reduced test temperature when compared with HLP mineral oil: in accordance with the 7th Luxembourg Report or ISO 12922 for HFB and HFC at 60 °C.

These test methods cannot be applied for HFA hydraulic fluids.

The test methods and test conditions for fire-resistant, water-containing hydraulic fluids are not comparable to those used for HLP/HVLP mineral oils. This is why the operating data for Rexroth hydraulic components that were optimized for HLP/HVLP mineral oils are (in part) limited. To some extent, Rexroth hydraulic components specifically developed for fire-resistant, water-containing hydraulic fluids are available without the limitation of operating data (e.g. in 92053, the A4VSO axial piston variable pump for HFC hydraulic fluids).

### 3.1.4 Material compatibility

The hydraulic fluid must not negatively affect the materials used in the components. Compatibility with coatings, seals, hoses, metals, and plastics is to be observed in particular. The fluid classifications specified in the respective components data sheets are tested by the manufacturer with regard to material compatibility. Parts and components not supplied by us are to be checked by the user.

The material incompatibilities mentioned here do not automatically result in function problems. However the elements of the materials are found in the hydraulic fluid after use. Material incompatibilities may, where applicable, lead to an accelerated aging process in the hydraulic fluid and to increased wear and corrosion of the components.



**Table 3: Known incompatibilities of materials**

Classification	Incompatible with
Water-containing HF... general	<p><b>Seals/plastics/coatings</b> FKM elastomers are normally not resistant, NBR elastomers are recommended. Seals, plastics, coatings (of control cabinets, too), outer coatings of hydraulic components, and accessory components (connectors, wiring harnesses, control cabinets) are to be tested for stability. Note: hydraulic fluid vapors can also lead to incompatibility!</p> <p><b>Coatings on the inside of the reservoir</b> Single component lacquer (e.g. zinc dust paint) is unstable; the use of stainless steel reservoirs (rustproof steel) is recommended.</p> <p><b>Zinc</b> Zinc and zinc coatings exhibit in the static immersion test only a minimal amount of change in weight. If zinc (e.g. Zn die-cast housings for filters etc.) is attacked even to a minimal extent, then voluminous reaction products are formed (e.g. zinc soaps) that may block the filters, solenoids etc.</p> <p><b>Aluminum</b> Aluminum alloys are not stable in all cases (risk of corrosion with cast aluminum). Above all, it is the simpler properties that get attacked, especially if they come into contact with steel parts. The electrochemical reaction with steel (potential difference approx. 1.23 V) may cause a severe case of aluminum removal. Anodized aluminum is suitable for static loading. Aluminum wrought alloys offer improved stability.</p> <p><b>Cadmium/magnesium</b> Cadmium and magnesium alloys are not compatible.</p> <p><b>Lead</b> Pure lead is noticeably attacked already in the static compatibility test.</p>
HFB	<p><b>Seals</b> Polyurethane (AU) not stable</p>
HFC	<p><b>Seals</b> Polyurethane (AU) not stable</p> <p><b>Tin and zinc</b> Tin and zinc should be avoided in systems using HFC hydraulic fluids. Residual amounts of HLP mineral oils containing zinc and oils used for corrosion protection must be avoided.</p>

## 10 Fire-resistant hydraulic fluids - containing water

### Selection of the hydraulic fluid

#### 3.1.5 Aging resistance

Fire-resistant, water-containing hydraulic fluids are less subject to thermal load than HLP mineral oils, which is why they are substantially less subject to aging.

In HFAE hydraulic fluids, microbial contamination can cause undesirable aging in the hydraulic fluid. Fungal slime, cakes of fungus, and yeasts can clog filters and lines.

#### 3.1.6 Environmental compatibility

Fire-resistant, water-containing hydraulic fluids are hydraulic fluids that can also be environmentally acceptable at the same time. The main criterion for fire-resistant, water-containing hydraulic fluids is the leak-free, technically problem-free application with the necessary fire resistance. Environmental compatibility is merely a supplementary criterion. You can recognize the environmental compatibility in the technical data sheet for the hydraulic fluid using the reference to:

- ▶ DIN Technical Report CEN/TR 14489
- ▶ BGR 137
- ▶ 7th Luxembourg Report, Part IV “assessment of health hazards” and Part VI “assessment of environmental compatibility”
- ▶ Occupational Health and Safety Ordinance for Mines (GesBergV)

Please refer to the safety data sheet of the respective hydraulic fluids for more information on environmental compatibility.

Information on other environmentally acceptable hydraulic fluids can be found (without reference to fire resistance) in Document 90221.

#### 3.1.7 Air separation ability (ASA)

The air separation ability (ASA) describes the property of a hydraulic fluid to separate undissolved air. Hydraulic fluids always contain dissolved air. During operation, dissolved air may be transformed into undissolved air, leading to cavitation damage.

Furthermore, the system behavior can differ due to the higher proportion of undissolved air when compared with HLP mineral oil. According to ISO 12922, a specific value for the air separation ability is not required for the HFAE and HFAS classifications.

The air separation ability for the HFC classification depends

on the viscosity, the temperature, basic fluid, and aging. It cannot be improved by additives.

Fluid classification, fluid product, reservoir size and design must be coordinated to take into account the dwell time and ASA value of the hydraulic fluid.

According to ISO 12922 for instance, an ASA value of  $\leq 25$  minutes is required for HFC in viscosity class ISO VG 46, lower values are preferable.

### 3.2 Classification and fields of application

**Table 4: Classification and fields of application**

Classification	Features	Typical field of application	Information
HFAE according to ISO 12922	Oil-in-water emulsions	Mine support, hydrostatic drives, hydraulic strut extension below ground	Approved for all components that allow "HFAE according to ISO 12922" in the product data sheet for hydraulic fluids. Observe limitations in the operating data for the respective components.
Density at 15 °C typically 1.00 kg/dm <sup>3</sup>	Viscosity at 40 °C: max. 5 mm <sup>2</sup> /s		- Water-polluting (WGK 1 to 3) - Reservoir temperature +5 °C to +50 °C - Resistance to aging, see chapter 3.1.5
Normal water content ≥ 95% (m/m)	Appearance: milky to translucent emulsion		- Owing to the higher density by comparison to HLP, lower intake pressures are to be expected in pumps and, where applicable, the flow must be reduced and the intake conditions optimized (higher cavitation tendency)
HFAS according to ISO 12922	Chemical solutions in water	Mine support, foundry technology, press hydraulics (example: hydroforming)	Approved for all components that allow "HFAS according to ISO 12922" in the product data sheet for hydraulic fluids. Observe limitations in the operating data for the respective components.
Density at 15 °C typically 1.00 kg/dm <sup>3</sup>	Viscosity at 40 °C: max. 5 mm <sup>2</sup> /s or thickened variants up to ISO VG 68		- Mineral-oil free - Water-polluting (WGK 1 to 2) - Reservoir temperature +5 °C to +50 °C
Normal water content ≥ 95% (m/m)	Appearance: transparent		- Owing to the higher density by comparison to HLP, lower intake pressures are to be expected in pumps and, where applicable, the flow must be reduced and the intake conditions optimized (higher cavitation tendency)
HFB according to ISO 12922	Water-in-oil emulsions	Mostly in coal mining below ground, primarily in the U.K. (hydrostatic control systems and drives)	Practical requirements are frequently not fulfilled by hydraulic fluids in this classification. As a result of a high mineral oil content up to 60%, they do not meet the limit values for spray ignition characteristics (fire resistance) prescribed in Germany. Observe limitations in the operating data for the respective components.
Density at 15 °C typically 0.92 to 1.05 kg/dm <sup>3</sup>	Viscosity classes: ISO VG 46 up to 100		- Water-polluting (WGK 1 to 3) - Reservoir temperature +5 °C to +50 °C
Normal water content ≥ 40% (m/m)			- Owing to the higher density by comparison to HLP mineral oil, lower intake pressures are to be expected in pumps and, where applicable, the flow must be reduced and the intake conditions optimized (higher cavitation tendency)
HFC according to ISO 12922	Watery polymer solutions	All application areas where water-free hydraulic fluids are not permitted due to the risk of fire. For example: The steel industry, coking plants, foundries, hardening plants, forming presses, injection molding and pressure die casting machines, mining technology (exception: salt mining)	Approved for all components that allow "HFC according to ISO 12922" in the product data sheet for hydraulic fluids. Observe limitations in the operating data for the respective components.
Density at 15 °C typically 1.07 to 1.09 kg/dm <sup>3</sup>	Viscosity classes: ISO VG 22 up to 68 Usually ISO VG 46		- Categorized as non-/minimally water-polluting (NWG/WGK 1) - Reservoir temperatures -20 °C to +50 °C - Very good viscosity temperature behavior
VI: typically > 150			- Owing to the higher density by comparison to HLP mineral oil, lower intake pressures are to be expected in pumps and, where applicable, the flow must be reduced and the intake conditions optimized (higher cavitation tendency).
Normal water content ≥ 35% (m/m)			- A reservoir with an inspection port above the fill level is recommended in order to remove floating residual oil.
HFC-E not standardized according to ISO 12922	Watery polymer solutions	Mostly in coal mining below ground, primarily in Germany	- Like HFC, but improved protection against wear and extended temperature range up to 70 °C
Density at 15 °C typically 1.07 to 1.14 kg/dm <sup>3</sup>	Viscosity classes: ISO VG 46 up to 68 Normally ISO VG 68		
VI: typically > 135			
Normal water content 18 to 20% (m/m)			

## 4 Hydraulic fluids in operation

### 4.1 General

The properties of hydraulic fluids can change continually during storage and operation.

Please note that the fluid standard ISO 12922 merely describes minimum requirements for hydraulic fluids in new condition at the time of filling into the delivery containers. The operator of a hydraulic system must ensure that the hydraulic fluid remains fit for purpose throughout its entire period of use.

Deviations from the characteristic values are to be clarified with the lubricant manufacturer, the test labs, or Bosch Rexroth.

Bosch Rexroth will accept no liability for damage to its components within the framework of the applicable liability legislation insofar as the latter is due to non-observance of the following instructions.

Please note the following aspects in operation.

### 4.2 Storage and handling

Hydraulic fluids must be stored correctly in accordance with the instructions of the lubricant manufacturer. Avoid exposing the containers to lengthy periods of direct heat. A container is to be stored such that the risk of any foreign liquid or solid matter (e.g. water, foreign fluids, or dust) ingress into the inside of the container can be ruled out. After taking hydraulic fluids from the containers, these are to be properly resealed immediately. HFAE and HFAS hydraulic fluids are delivered in a concentrated form. Please observe the hardness (°dH) in order to produce the finished product, lower hardness values should be aimed at (°dH, calcium oxide CaO in ppm).

Recommendation:

- ▶ Store containers in a dry, roofed place
- ▶ Store HFA containers frost-protected
- ▶ Clean reservoir systems and machine reservoirs regularly

Please refer to the respective safety data sheet for the minimum storage duration and storage conditions.

### 4.3 Filling of new systems

Usually, the cleanliness levels of the hydraulic fluids as delivered do not meet the requirements of our hydraulic components at the company. When filling, hydraulic fluids must be filtered using an appropriate filter system to minimize solid particle contamination in the system.

As early as possible during test operation, new systems should be filled with the selected hydraulic fluid so as to reduce the risk of accidentally mixing the fluids (see chapter 4.5 “Mixing and compatibility of different hydraulic fluids”). Changing the hydraulic medium at a later point represents significant additional costs (see following section).

### 4.4 Hydraulic fluid changeover

Problems may be encountered in particular when changing over from fire-resistant, water-free hydraulic fluids or mineral oils to fire-resistant, water-containing hydraulic fluids (e.g. incompatibilities in the form of gelling, silting, stable foam, reduced filterability, or filter blockage). This may also happen when changing products within the same classification.

In the case of changeovers of the fluid in hydraulic systems, it is important to ensure compatibility and miscibility of the new hydraulic fluid with the remains of the previous hydraulic fluid from the system.

Bosch Rexroth recommends obtaining verification of compatibility and miscibility from the manufacturer or supplier of the new hydraulic fluid. The remainder quantities of the old fluid need to be minimized. Mixing hydraulic fluids should be avoided; see following section.

Information on changing over hydraulic fluids with different classifications can be found in VDMA 24314 and ISO 7745, among others. Beyond that, please observe chapter 3.1.4 “Material compatibility”.

Bosch Rexroth will not accept liability for any damage to its components resulting from inadequate hydraulic fluid changeovers!

#### 4.5 Mixing and compatibility of different hydraulic fluids

If hydraulic fluids from different manufacturers or different types from the same manufacturer are mixed, gelling, silt-ing, and deposits may occur. These, in turn, may cause foaming, impaired air separation ability, malfunctions, and damage to the hydraulic system.

If the fluid contains more than 2% of another fluid then it is considered to be a mixture.

Mixing with other hydraulic fluids is not generally permitted. This includes hydraulic fluids with the same classification. If individual lubricant manufacturers advertise miscibility and/or compatibility, this is entirely the responsibility of the lubricant manufacturer.

Bosch Rexroth customarily tests all components with HLP mineral oil.

Bosch Rexroth will not accept liability for any damage to its components resulting from mixing hydraulic fluids!

#### 4.6 Re-additivation

Additives added at a later point in time such as colors, wear reducers, VI enhancers or anti-foam additives, may negatively affect the performance properties of the hydraulic fluid and the compatibility with our components, and are not approved.

Bosch Rexroth will not accept liability for any damage to its components resulting from re-additivation!

#### 4.7 Foaming behavior

Foam is created by rising air bubbles at the surface of hydraulic fluids in the reservoir. Foam that develops should collapse as quickly as possible.

The foaming behavior of fire-resistant, water-containing hydraulic fluids is normally worse than in HLP mineral oil.

#### 4.8 Corrosion protection

Water generally has corrosive properties.

Corrosion protection is only possible to a limited extent due to the water content in fire-resistant, water-containing hydraulic fluids, despite the available corrosion protection additives.

Materials made of steel, copper, zinc, aluminum, bronze alloys and brass alloys, as well as combinations of these materials have a higher corrosion tendency.

#### 4.9 Dissolved and undissolved air

Under atmospheric conditions, the hydraulic fluid contains dissolved air. In the negative pressure range, for instance in the suction pipe of the pump or downstream of control edges, this dissolved air may transform into undissolved air. The undissolved air content represents a risk of cavitation.

The consequence of this is material erosion on components. With the correct measures, such as suction pipe and reservoir design, and an appropriate hydraulic fluid, air intake and separation can be positively influenced.

See also section 3.1.7 "Air separation ability (ASA)".

#### 4.10 Fluid servicing, fluid analysis, and filtration

To preserve the usage properties and ensure a long service life for hydraulic fluid and components, both the monitoring of the fluid condition and a filtration adapted to the application requirements are indispensable.

The application of hydraulic system filters with a filtration rate  $> 200$  for  $10\mu\text{m}$  particles ( $\beta_{10(c)} > 200$  according to ISO 16889) is not recommended for fire-resistant, water-containing hydraulic fluids, since finer filters can break down the chemical composition of the fluid. If finer filters are required despite that, then the fluid manufacturer needs to be consulted before they are used.

$\beta_{10(c)} > 75$  according to ISO 16889 is recommended. The effort is higher in the case of unfavorable usage conditions, increased stress on the hydraulic system or high expectations as to availability and service life, see chapter 2 "Solid particle contamination and cleanliness levels".

When commissioning a system, please note that the required minimum cleanliness level can frequently be attained only by flushing the system. Due to severe start-up contamination, it may be possible that a fluid and/or filter replacement becomes necessary after a short operating period ( $< 50$  operating hours).

**The hydraulic fluid must be replaced at regular intervals and tested by the lubricant manufacturer or recognized, accredited test labs. A reference inspection is recommended both for the unused hydraulic fluid (casks) and after commissioning.**

14 **Fire-resistant hydraulic fluids - containing water**  
Hydraulic fluids in operation

**Minimum information in analyses (recommended)**

Property or test conditions	Test method	HFAE	HFAS	HFB	HFC
Appearance		●	●	●	●
Water content	HFAE, HFB: ISO 3733 HFAS: ISO 6296; HFC: DIN 51777-1	●	●	●	●
Density at 15 °C	ISO 3675, DIN 51757 incl. supplementary sheet 1	–	–	●	●
pH value at 20 °C	ISO 20843	●	●	–	●
Viscosity at 20 °C, 40 °C, and 50 °C	ISO 3104, DIN 51562-1, ASTM D7042	●	●	●	●
Volume fraction of emulsified concentrate	DIN 51368 in conjunction with DIN 51423-2	●	–	●	–
Foreign oil proportion		●	●	●	●
Cleanliness level	ISO 4406	●	●	●	●
Content of foreign solid matter	ISO 4405	●	●	●	●
Microbial stability with details on bacteria, fungi, yeasts, and germ count		●	●	●	–
Elements	DIN 51399-1	●	●	●	●

**Optional information**

Property or test conditions	Test method	HFAE	HFAS	HFB	HFC
Reserve alkalinity compared with pH values 3.3 and 5.5		●	●	●	●
Testing in the four-ball apparatus	ISO 20623	–	–	–	●
Air separation ability at 50 °C	ISO 9120	–	–	–	●

**Information**

- ▶ If possible, compare the measurement results with the values of new oil or available trend analyses.
- ▶ The test report should include an evaluation / assessment pertaining to the further use of the hydraulic fluid.

When using fire-resistant, water-containing hydraulic fluids, the same servicing and maintenance requirements as applied for HLP/HVLP mineral oil are necessary. However, the scope of the analysis/analysis methods have to be adapted to the fluid properties.

After changing over hydraulic fluids, it is recommended that the filter be replaced again after 50 operating hours as fluid aging products may have detached themselves (“self-cleaning effect”).

Fire-resistant, water-containing hydraulic fluids contain alkaline additives. They are used both for the neutralization of contamination and for corrosion protection in the hydraulic system. If the reserve alkalinity drops significantly below the value for the unused hydraulic fluid, there is a chance that fully developed, acidic reaction products can no longer be fully neutralized. The risk of electrochemical corrosion in the system increases, which is why the proportion of corrosion protection inhibitors have to be checked during operation (reserve alkalinity compared with pH values 3.3 and 5.5).

If the water contained has noticeably vaporized, then distilled water or VE water needs to be replenished in order to set the initial viscosity; tap water must never be used. The addition of larger quantities of water should be done slowly and, if possible, in several positions during ongoing operation, so as to prevent the pump from occasionally sucking in pure water, and thus being damaged by that. It is recommended that the corresponding amount of water prior to the addition be mixed with approximately the same amount of HFC fluid, for example.

Ultimately, the evaluation by the test lab or lubricant manufacturers is authoritative. Their recommendation should be urgently observed.

In case of warranty, liability, or guarantee claims to Bosch Rexroth, service verification and/or the results of fluid analyses are to be provided.

## 5 Disposal and environmental protection

All fire-resistant, water-containing hydraulic fluids, are, like mineral oil-based hydraulic fluids, subject to special disposal obligations.

The respective lubricant manufacturers provide specifications on environmentally friendly handling and storage. Please ensure that spilled or splashed fluids are absorbed with appropriate adsorbents or by a technique that prevents it contaminating water courses, the ground, or sewerage systems.

It is also not permitted to mix fluids when disposing of hydraulic fluids. Regulations governing the handling of used oils stipulate that used oils are not to be mixed with other products. Non-compliance will increase disposal costs.

Both the national legal or regulatory provisions and the information given in the respective safety data sheets (e.g. waste codes) must be observed for the disposal of the relevant hydraulic fluid.

## 6 Standardization

The information pertaining to the standards listed in this document relates to the respective standard edition currently valid.

## 7 Glossary

### Additivation

Additives are chemical substances added to base fluids in small quantities to achieve or improve specific properties.

### Alkaline additives

Hydraulic fluids can produce acids as a result of various aging processes. The hydraulic fluid contains alkaline additives in order to cushion/remove the acidification. These additives bind the acid residue and then become particles that are (can be) filtered out. A statement in regard of alkaline additives still effective is provided, on the one hand, by pH value, but better still is the statement pertaining to the content of free acids. In the alkaline f value range, acidic corrosion is not possible, even if acids are present.

### Aging

The aging response in a hydraulic fluid describes the chronological sequence of the oxidative, thermal, and (sometimes) hydrolytic change in selected chemical and physical data under test conditions or in practice. (See chapter 3.1.5 "Aging resistance").

### Arrhenius equation

The quantitative relation between reaction rate and temperature is described by an exponential function, the Arrhenius equation. This function is usually visualized within the typical temperature range of the hydraulic system.

### ICP (optical emission spectrometry)

The ICP procedure can be used to determine various wear metals, contamination types, and additives. Practically all elements in the periodic system can be detected with this method.

### Karl Fischer method

Method for determining the proportion of water in water-containing hydraulic fluids: potentiometric method according to DIN 51777-1



**Cavitation**

Cavitation is the creation of vapor filled cavities (vapor bubbles) in fluids due to insufficient vapor pressure and subsequent implosion when the pressure increases. When the cavities implode, extremely high acceleration, temperatures, and pressures may occur temporarily, which may damage the component surfaces.

**Reserve alkalinity**

Determining the reserve alkalinity is used for the investigation of the corrosion protection still available. If the determined reserve alkalinity significantly drops below the initial value of the new oil, then acidic contamination can no longer be neutralized, this means that there is a potential threat to the system becoming damaged due to corrosion.

**pH value**

This is the measurement for the acidic or alkaline character of an aqueous solution or emulsion.

**Pour point**

This is the lowest temperature at which the fluid still just flows when cooled down under set conditions. The pour point is specified in the lubricant manufacturers' technical data sheets as a reference value for achieving this flow limit.

**RFA (energy dispersive or wavelength dispersive X-ray fluorescence analysis)**

Is a procedure to determine almost all elements in liquid and solid samples with nearly any composition. This analysis method is suitable for examining additives and contamination, delivering fast results.

**VE water**

Demineralized water, also known as deionized, fully desalinated water

**Viscosity**

Viscosity is the measure of the internal friction of a fluid to flow. It is defined as the property of a substance to flow under tension. Viscosity is the most important characteristic for describing the load-bearing capacity of a hydraulic fluid.

Kinematic viscosity is the ratio of the dynamic viscosity and the density of the fluid; the unit is mm<sup>2</sup>/s. Hydraulic fluids are categorized in ISO viscosity classes by kinematic viscosity. The reference temperature for this is 40 °C.

**Viscosity index (VI)**

Refers to the viscosity temperature behavior of a fluid. The lower the change of viscosity in relation the temperature, the higher the VI.

**Bosch Rexroth AG**  
Mobile Applications  
Glockeraustraße 4  
89275 Elchingen, Germany  
Tel. +49 7308 82-0  
info.brm@boschrexroth.de  
www.boschrexroth.com

**Bosch Rexroth AG**  
Mobile Applications  
An den Kelterwiesen 14  
72160 Horb, Germany  
Tel. +49 7451 92-0

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. No statements concerning the suitability of a hydraulic fluid for a specific purpose can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. Subject to change.



# Axial piston units for operation with fire-resistant hydraulic fluids - water-free and water-containing (HFDR, HFDU, HFA, HFB, HFC)


**RE 90225**

Edition: 07.2016

1



Application requirements and technical data for axial piston units

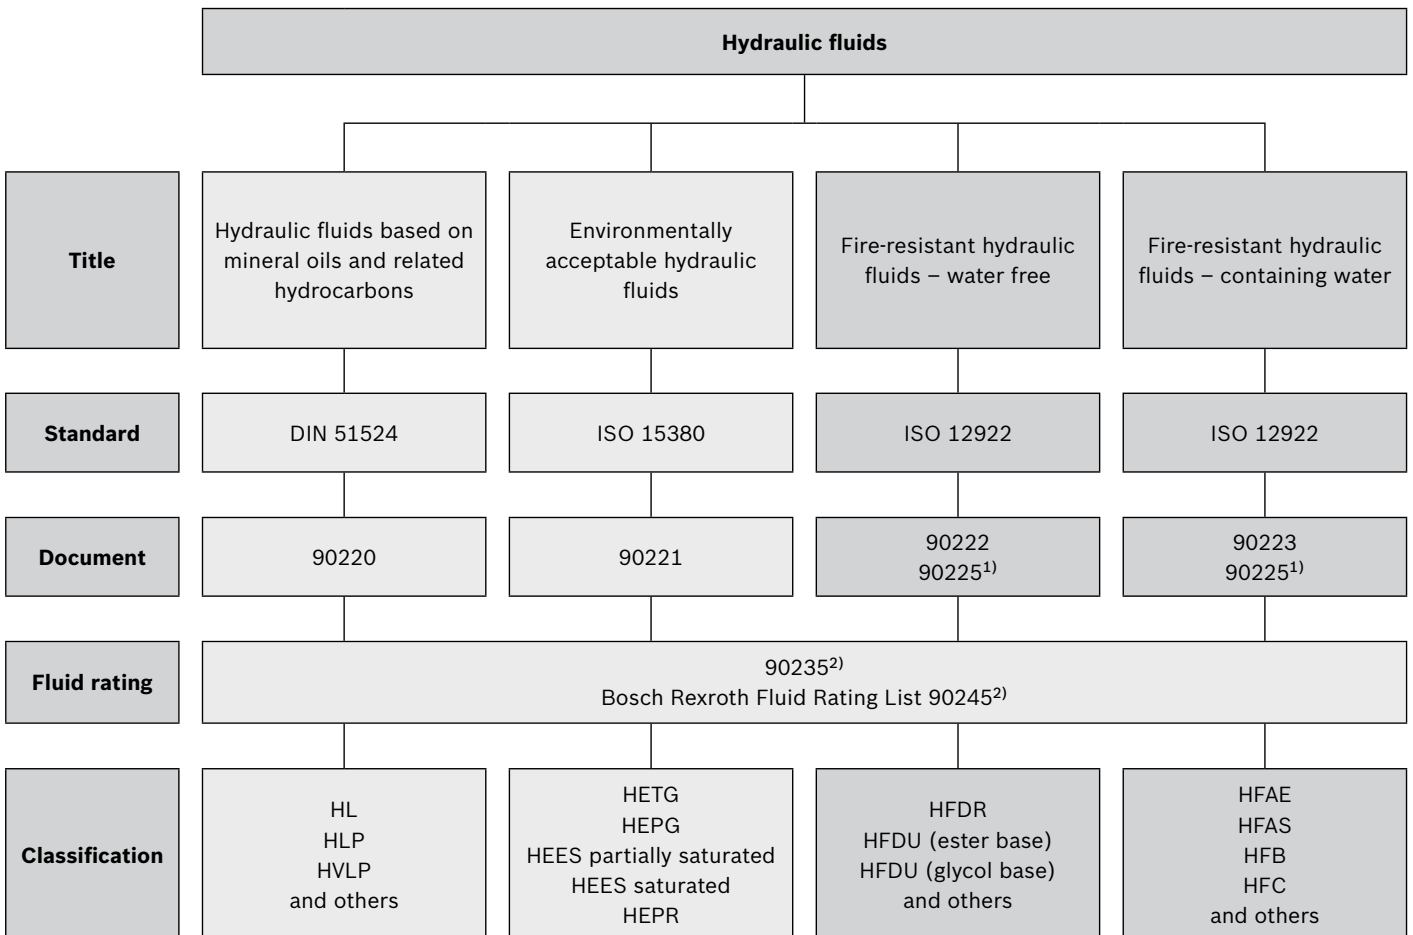

1) Valid for Bosch Rexroth axial piston units

2) Valid for Bosch Rexroth Business Unit "Mobile Applications" – pumps and motors

## **Contents**

1	Basic information	3
2	Classification of HF-hydraulic fluids	4
3	Technical data for axial piston units operating with HF-hydraulic fluids	5
3.1	Swashplate pumps for open circuit	5
3.2	Swashplate pumps for closed circuit	9
3.3	Bent-axis pumps for open circuit	11
3.4	Swashplate motor	13
3.5	Bent-axis motors	13

## 1 Basic information

In accordance with DIN 51502 and DIN EN ISO 6743-4, fire resistant fluids – hereinafter referred to as HF hydraulic fluids – are divided into four groups A, B, C, D and correspondingly designated HFA, HFB, HFC, HFD. In the designation “HF”, the “H” for “hydraulic fluid” and “F” is for “fire resistant”.

In general, fire-resistant hydraulic fluids are divided into water-free, fire-resistant hydraulic fluids and water-containing, fire-resistant hydraulic fluids. The water-free, fire-resistant hydraulic fluids are described in Rexroth data sheet 90222, the water-containing ones are described in Rexroth data sheet 90223.

Compared with hydraulic fluids based on mineral oils and related hydrocarbons, fire-resistant hydraulic fluids do have other, sometimes disadvantageous, properties. This document is intended to show how these special properties have to be considered in the selection and operation of axial piston units.

For axial piston units which may, in accordance with product data sheet, be operated with fire-resistant hydraulic fluids, note the following:

- ▶ The operation with HFA, HFB and HFC hydraulic fluids usually requires a reduction in the permissible pressures and rotational speeds. Depending on the product size or nominal size, a special version of the axial piston unit is needed (version **E**-...).  
However, Rexroth hydraulic components that have been specifically developed for water-containing, fire-resistant hydraulic fluids are available without limitation of operational data (e.g. 92053 axial piston variable pump A4VSO for HFC hydraulic fluids).
- ▶ When using hydraulic fluids of the category HFDR (ester base), there are permissible standard values for pressure and rotational speed for these axial piston units just as there are for hydraulic fluids based on mineral oils and related hydrocarbons. For operation with HFDR and HFDR (glycol base), for example, a reduction in the permissible rotational speeds results from the significantly higher density of the fluid.
- ▶ Note that for almost all HF hydraulic fluids, due to the higher density compared with hydraulic fluids based on mineral oils, the pressure will not fall below the minimum permissible suction pressure at the pump inlet.

- ▶ Additional technical data and required sealing materials for the axial piston units are listed in the table on page 4.

When ordering the axial piston unit, please state in plain text the hydraulic fluid that is to be used.

## 2 Classification of HF-hydraulic fluids

Classification	Containing water					Water-free		
	HFAE	HFAS	HFB	HFC	HFC-E <sup>3)</sup>	HFDR	HFDU <sup>4)</sup> (Glycol base)	HFDU (Ester base)
Features	Oil-in-water emulsions	Chemical solutions in water	Water-in-oil emulsions	Watery polymer solutions	Watery polymer solutions	Basic fluids	Basic fluids	Basic fluids
						Phosphoric acid ester	Glycols	Ester
Water content [% (m/m)]	≥ 95	≥ 95	≥ 40	≥ 35	≥ 20±2	–	–	–
Reservoir temperature $T$ [°C]	5 to 50	5 to 50	5 to 50	-20 to 50	-20 to 70	80	80	80
Optimal reservoir temperature $T_{opt}$ [°C]	40	40	40	40	40	70	70	70
Bearing service life <sup>1)</sup> [%]	10	10	20	100 <sup>2)</sup> 20	100 <sup>2)</sup> 20	100	100	100
Cleanliness level acc. to ISO 4406	– / 18 / 15	– / 18 / 15	– / 18 / 15	– / 18 / 15	– / 18 / 15	20 / 18 / 15	20 / 18 / 15	20 / 18 / 15
Filter material	Glass fiber, do not use cellulose (filter paper)					–	–	–
Sealing material	NBR	NBR	NBR	NBR	NBR	FKM	FKM	FKM
Minimum suction pressure Port <b>S</b> $p_{s min}$ [bar] (operation as a pump, open circuit)	1.0 (abs.)	1.0 (abs.)	1.0 (abs.)	1.0 (abs.)	1.0 (abs.)	1.0 (abs.)	1.0 (abs.)	1.0 (abs.)

### Notice

- ▶ Sealing material and filter grade is to be agreed upon with the manufacturer of the hydraulic fluid or with Bosch Rexroth Filtration System.  
Link: Bosch Rexroth Filtration System
- ▶ Compared to hydraulic fluids based on mineral oils, HFC hydraulic fluids have a very good low-temperature performance, a lower pour point and a lower viscosity-pressure coefficients.
- ▶ Bosch Rexroth offers the rating of hydraulic fluids for Rexroth hydraulic components as a service. You can find further information on this in the following data sheet:  
90235: Rating of hydraulic fluids for Rexroth hydraulic components

1) Attainable bearing service life based on operation with hydraulic fluids based on mineral oils, according to the specifications of the bearing manufacturer.  
Practical application cases show results that are much higher.

2) Axial piston variable pump A4VSO for HFC hydraulic fluids, see document 92053

3) Not standardized according to ISO 12922.

4) Can be water-soluble

### 3 Technical data for axial piston units operating with HF-hydraulic fluids

#### Notice

- ▶ Maximum permissible rotational speeds
- ▶ In the following tables, HFA includes HFAE and HFAS
- ▶ Nominal pressure/maximum pressure for HFD corresponds to the specifications for mineral oil; see product data sheet
- ▶ For HFDU (ester and glycol) as well as for HFDR, there is no pressure limitation
- ▶ For HFDR and HFDU (glycol), the maximum allowable rotational speed must be reduced due to the high density of the hydraulic fluid
- ▶ The manufacturer's specifications concerning the suction performance, the temperatures, the working pressures and the rotational speeds are to be strictly adhered to for a long service life of the axial piston unit

#### 3.1 Swashplate pumps for open circuit

##### Variable pump A4VSO series 1x and series 30

for open circuit (data sheet 92050)

Size		40	71	125	180	250	355	500	750	1000	
<b>HFA</b>	Nominal pressure $p_N = 140$ bar Maximum pressure $p_{max} = 160$ bar	rpm	1950 <sup>1)</sup>	1650	1350	1350	1120	1120	1000 <sup>1)</sup>	900	750
<b>HFB</b>	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	2100 <sup>1)</sup>	1760	1450	1450	1200	1200	1050 <sup>1)</sup>	960	800
<b>HFC</b>	Nominal pressure $p_N = 250$ bar Maximum pressure $p_{max} = 280$ bar	rpm	2100 <sup>1)</sup> 2)	2)	2)	2)	2)	2)	1050 <sup>1)</sup>	960	800
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	2100	1760	1450	1450	1200	1200	1050	960	800
	HFDU (ester base)	rpm	2600	2200	1800	1800	1500	1500	1320	1200	1000

##### Variable pump A4VSO series 1x and series 30 for HFC hydraulic fluids

for open circuit (data sheet 92053)

Size		71	125	180	250	355
<b>HFA</b>		See table above: Variable pump A4VSO series 1x and series 30 Please contact us.				
<b>HFB</b>		See table above, variable pump A4VSO series 1x and series 30 Please contact us.				
<b>HFC</b>	Nominal pressure $p_N = 350$ bar Maximum pressure $p_{max} = 400$ bar	rpm	2200 <sup>3)</sup>	1800 <sup>3)</sup>	1800 <sup>3)</sup>	1500 <sup>3)4)</sup> 1500 <sup>3)</sup>
<b>HFD</b>		See table above, variable pump A4VSO series 1x and series 30 Please contact us.				

1) Version E-A4VSO

2) See table below, variable pump A4VSO series 1x and series 30 for HFC hydraulic fluids

3) Version A4VSO-F

4) Version A4VSO-F2

**Fixed pump A4FO series 10, series 3x**

for open circuit (data sheet 91455)

Size			16	22	28	40	71	125	180	250	500
<b>HFA</b>	Nominal pressure $p_N = 140$ bar	rpm	–	–	–	–	1650 <sup>1)</sup>	1350 <sup>1)</sup>	1350 <sup>1)</sup>	1120 <sup>1)</sup>	1000 <sup>1)</sup>
	Maximum pressure $p_{max} = 160$ bar										
<b>HFB</b>	Nominal pressure $p_N = 160$ bar	rpm	–	–	–	–	1760 <sup>1)</sup>	1450 <sup>1)</sup>	1450 <sup>1)</sup>	1200 <sup>1)</sup>	1050 <sup>1)</sup>
	Maximum pressure $p_{max} = 210$ bar										
<b>HFC</b>	Nominal pressure $p_N = 250$ bar	rpm	–	–	–	–	1760 <sup>1)</sup>	1450 <sup>1)</sup>	1450 <sup>1)</sup>	1200 <sup>1)</sup>	1050 <sup>1)</sup>
	Maximum pressure $p_{max} = 280$ bar										
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	3200	2880	2400	2200	1760	1450	1450	1200	1050
	HFDU (ester base)	rpm	4000	3600	3000	2750	2200	1800	1800	1500	1320

**Variable pump A10VO series 31**

for open circuit (data sheet 92701)

Size			18 <sup>2)</sup>	28	45	71	100	140
<b>HFA</b>	not permissible		–	–	–	–	–	–
<b>HFB</b>	not permissible		–	–	–	–	–	–
<b>HFC</b>	not permissible		–	–	–	–	–	–
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	2650	2400	2100	1760	1600	1450
	HFDU (ester base)	rpm	3300	3000	2600	2200	2000	1800

**Variable pump A10VSO series 31**

for open circuit (data sheet 92711)

Size			18	28	45	71	100	140
<b>HFA</b>	Nominal pressure $p_N = 140$ bar	rpm	2450 <sup>3)</sup>	2250 <sup>3)</sup>	1950 <sup>3)</sup>	1650 <sup>3)</sup>	1500 <sup>3)</sup>	1350 <sup>3)</sup>
	Maximum pressure $p_{max} = 160$ bar							
<b>HFB</b>	Nominal pressure $p_N = 140$ bar	rpm	2650 <sup>3)</sup>	2400 <sup>3)</sup>	2100 <sup>3)</sup>	1760 <sup>3)</sup>	1600 <sup>3)</sup>	1450 <sup>3)</sup>
	Maximum pressure $p_{max} = 160$ bar							
<b>HFC</b>	Nominal pressure $p_N = 175$ bar	rpm	2650 <sup>3)</sup>	2400 <sup>3)</sup>	2100 <sup>3)</sup>	1760 <sup>3)</sup>	1600 <sup>3)</sup>	1450 <sup>3)</sup>
	Maximum pressure $p_{max} = 210$ bar							
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	2650	2400	2100	1760	1600	1450
	HFDU (ester base)	rpm	3300	3000	2600	2200	2000	1800

**Variable pump A10VO series 32**

for open circuit (data sheet 92705)

Size			45	71	100	140
<b>HFA</b>	not permissible		–	–	–	–
<b>HFB</b>	not permissible		–	–	–	–
<b>HFC</b>	not permissible		–	–	–	–
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	2100	1760	1600	1450
	HFDU (ester base)	rpm	2600	2200	2000	1800

1) Version E-A4FO

2) Version A10VSO

3) Version E-A10VSO

**Variable pump A10VSO series 32**

for open circuit (data sheet 92714)

Size			45	71	100	140	180	
<b>HFA</b>	not permissible		-	-	-	-	-	
<b>HFB</b>	not permissible		-	-	-	-	-	
<b>HFC</b>	not permissible		-	-	-	-	-	
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	2100	1760	1600	1450	On request	
	HFDU (ester base)	rpm	2600	2200	2000	1800	On request	

**Variable pump A11VO series 1x**

for open circuit (data sheet 92500)

Size			40	60	75	95	130	145	190	260
<b>HFA</b>	not permissible		-	-	-	-	-	-	-	-
<b>HFB</b>	not permissible		-	-	-	-	-	-	-	-
<b>HFC</b>	not permissible		-	-	-	-	-	-	-	-
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	2400	2200	2050	1900	1700	1700	1700	1450
	HFDU (ester base)	rpm	3000	2700	2550	2350	2100	2100	2100	1800

**Variable pump A11VLO series 1x**

for open circuit (data sheet 92500)

Size			130	145	190	260
<b>HFA</b>	not permissible		-	-	-	-
<b>HFB</b>	not permissible		-	-	-	-
<b>HFC</b>	not permissible		-	-	-	-
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	2000	2000	2000	1850
	HFDU (ester base)	rpm	2500	2500	2500	2300

**Variable pump A11VO series 41<sup>1)</sup>**

for open circuit (data sheet 92510)

Size			280
<b>HFA</b>	not permissible		-
<b>HFB</b>	not permissible		-
<b>HFC</b>	not permissible		-
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	1450
	HFDU (ester base)	rpm	1800

1) Version P

**VVariable pump A11VLO series 41<sup>1)</sup>**

for open circuit (data sheet 92510)

Size	280		
HFA	not permissible		–
HFB	not permissible		–
HFC	not permissible		–
HFD	HFDR, HFDU (glycol base)	rpm	1850
	HFDU (ester base)	rpm	2300

**Variable pump A15VO series 11<sup>1)</sup>**

for open circuit (data sheet 92800)

Size	280		
HFA	not permissible		–
HFB	not permissible		–
HFC	not permissible		–
HFD	HFDR, HFDU (glycol base)	rpm	1450
	HFDU (ester base)	rpm	1800

**Variable pump A15VLO series 11<sup>1)</sup>**

for open circuit (data sheet 92800)

Size	280		
HFA	not permissible		–
HFB	not permissible		–
HFC	not permissible		–
HFD	HFDR, HFDU (glycol base)	rpm	1850
	HFDU (ester base)	rpm	2300

**Variable pump A18VO series 11**

for open circuit (data sheet 92270)

Size	55	80	107
HFA	not permissible	–	–
HFB	not permissible	–	–
HFC	not permissible	–	–
HFD	For operation with HFD hydraulic fluids, limitations for the technical data and the sealing materials are to be observed. Please contact us.		

1) Version P



**Variable pump A18VLO series 11**  
for open circuit (data sheet 92280)

Size	80
HFA not permissible	–
HFB not permissible	–
HFC not permissible	–
HFD	For operation with HFD hydraulic fluids, limitations for the technical data and the sealing materials are to be observed. Please contact us.

**Variable double pump A20VO series 10**  
for open circuit (data sheet 93100)

Size		95	190	260	520	
HFA	Nominal pressure $p_N = 140$ bar Maximum pressure $p_{max} = 160$ bar	rpm	–	–	–	1000
HFB	Nominal pressure $p_N = 160(140^{1})$ bar Maximum pressure $p_{max} = 210(160^{1})$ bar	rpm	–	–	–	1000
HFC	Nominal pressure $p_N = 250(175^{1})$ bar Maximum pressure $p_{max} = 280(210^{1})$ bar	rpm	–	–	–	1000
HFD	HFDR, HFDU (glycol base)	rpm	1900	2000	1850	1000
	HFDU (ester base)	rpm	2350	2500	2300	1300

**3.2 Swashplate pumps for closed circuit**

**Variable pump A4VSG series 1x and series 30**  
for closed circuit (data sheet 92100)

Size		40	71	125	180	250	355	500	750	1000	
HFA	Nominal pressure $p_N = 140$ bar Maximum pressure $p_{max} = 160$ bar	rpm	2750 <sup>1)2)</sup>	2400 <sup>1)2)</sup>	1950 <sup>1)2)</sup>	1800 <sup>1)2)</sup>	1650 <sup>1)2)</sup>	1500 <sup>1)2)</sup>	1350 <sup>1)2)</sup>	1200 <sup>2)</sup>	1200 <sup>2)</sup>
HFB	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	3000 <sup>1)2)</sup>	2550 <sup>1)2)</sup>	2100 <sup>1)2)</sup>	1920 <sup>1)2)</sup>	1750 <sup>1)2)</sup>	1600 <sup>1)2)</sup>	1450 <sup>1)2)</sup>	1300 <sup>2)</sup>	1300 <sup>2)</sup>
HFC	Nominal pressure $p_N = 250$ bar Maximum pressure $p_{max} = 280$ bar	rpm	3000 <sup>1)2)</sup>	2550 <sup>1)2)</sup>	2100 <sup>1)2)</sup>	1920 <sup>1)2)</sup>	1750 <sup>1)2)</sup>	1600 <sup>1)2)</sup>	1450 <sup>1)2)</sup>	1300 <sup>2)</sup>	1300 <sup>2)</sup>
HFD		rpm	3700	3200	2600	2400	2200	2000	1800	1600	1600

**Variable pump A4VG series 32**  
for closed circuit (data sheet 92003)

Size		28	40	56	71	90	125	180	250
HFA not permissible		–	–	–	–	–	–	–	–
HFB not permissible		–	–	–	–	–	–	–	–
HFC not permissible		–	–	–	–	–	–	–	–
HFD	rpm	4250	4000	3600	3300	3050	2850	2500	2400

1) Bearing flushing at U port required!  
2) Version E-A4VSG

**Variable pump A4VG series 40**

for closed circuit (data sheet 92004)

Size	45	65	85	110	145	175	210	280
<b>HFA</b> not permissible	-	-	-	-	-	-	-	-
<b>HFB</b> not permissible	-	-	-	-	-	-	-	-
<b>HFC</b> not permissible	-	-	-	-	-	-	-	-
<b>HFD</b>	For operation with HFD hydraulic fluids, limitations for the technical data and the sealing materials are to be observed. Please contact us.							

**Variable pump A4VTG series 33**

for closed circuit (data sheet 92013)

Size	71	90
<b>HFA</b> not permissible	-	-
<b>HFB</b> not permissible	-	-
<b>HFC</b> not permissible	-	-
<b>HFD</b>	For operation with HFD hydraulic fluids, limitations for the technical data and the sealing materials are to be observed. Please contact us.	

**Variable pump A10VG series 10**

for closed circuit (data sheet 92750)

Size	18	28	45	63	
<b>HFA</b> not permissible	-	-	-	-	
<b>HFB</b> not permissible	-	-	-	-	
<b>HFC</b> not permissible	-	-	-	-	
<b>HFD</b>	rpm	5000	4250	3800	3500

**Variable double pump A20VG series 11 and A22VG series 11**

for closed circuit (data sheet 93220)

Size	45
<b>HFA</b> not permissible	-
<b>HFB</b> not permissible	-
<b>HFC</b> not permissible	-
<b>HFD</b>	For operation with HFD hydraulic fluids, limitations for the technical data and the sealing materials are to be observed. Please contact us.

**Variable double pump A22VG series 40**

for closed circuit (data sheet 93221)

Size	45
<b>HFA</b> not permissible	–
<b>HFB</b> not permissible	–
<b>HFC</b> not permissible	–
<b>HFD</b>	For operation with HFD hydraulic fluids, limitations for the technical data and the sealing materials are to be observed. Please contact us.

**Variable double pump A24VG series 10**

for closed circuit (data sheet 93240)

Size	45 - 45	65 - 45	65 - 65
<b>HFA</b> not permissible	–	–	–
<b>HFB</b> not permissible	–	–	–
<b>HFC</b> not permissible	–	–	–
<b>HFD</b>	For operation with HFD hydraulic fluids, limitations for the technical data and the sealing materials are to be observed. Please contact us.		

**Variable double pump A30VG series 10**

for closed circuit (data sheet 93430)

Size	28
<b>HFA</b> not permissible	–
<b>HFB</b> not permissible	–
<b>HFC</b> not permissible	–
<b>HFD</b>	For operation with HFD hydraulic fluids, limitations for the technical data and the sealing materials are to be observed. Please contact us.

### 3.3 Bent-axis pumps for open circuit

#### Fixed pump A2FO series 6

for open circuit (data sheet 91401)

Size			5	10	12	16	23	28	32	45	56	63	80
<b>HFA</b>	not permissible		-	-	-	-	-	-	-	-	-	-	-
<b>HFB</b>	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	4500	2520	2520	2520	2000	2000	2000	1800	1600	1600	1440
<b>HFC</b>	Nominal pressure $p_N = 200$ bar Maximum pressure $p_{max} = 250$ bar	rpm	4500	2520	2520	2520	2000	2000	2000	1800	1600	1600	1440
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	4500	2520	2520	2520	2000	2000	2000	1800	1600	1600	1440
	HFDU (ester base)	rpm	5600	3150	3150	3150	2500	2500	2500	2240	2000	2000	1800
Size			90	107	125	160	180	200	250	355	500	710	1000
<b>HFA</b>	not permissible		-	-	-	-	-	-	-	-	-	-	-
<b>HFB</b>	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	1440	1280	1280	1160	1160	1240	1200 <sup>1)</sup>	1060 <sup>1)</sup>	950 <sup>1)</sup>	950 <sup>1)</sup>	750 <sup>1)</sup>
<b>HFC</b>	Nominal pressure $p_N = 200$ bar Maximum pressure $p_{max} = 250$ bar	rpm	1440	1280	1280	1160	1160	1240	1200 <sup>1)</sup>	1060 <sup>1)</sup>	950 <sup>1)</sup>	950 <sup>1)</sup>	750 <sup>1)</sup>
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	1440	1280	1280	1160	1160	1240	1200 <sup>2)</sup>	1060 <sup>2)</sup>	950 <sup>2)</sup>	950 <sup>2)</sup>	750 <sup>2)</sup>
	HFDU (ester base)	rpm	1800	1600	1600	1450	1450	1550	1500 <sup>2)</sup>	1320 <sup>2)</sup>	1200 <sup>2)</sup>	1200 <sup>2)</sup>	950 <sup>2)</sup>

#### Variable pump A7VO series 63

for open circuit (data sheet 92202)

Size			55	80	107	160
<b>HFA</b>	not permissible		-	-	-	-
<b>HFB</b>	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	2000	1800	1600	1400
<b>HFC</b>	Nominal pressure $p_N = 200$ bar Maximum pressure $p_{max} = 250$ bar	rpm	2000	1800	1600	1400
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	2000	1800	1600	1400
	HFDU (ester base)	rpm	2500	2240	2150	1900

#### Variable pump A7VLO series 63

for open circuit (data sheet 92203)

Size			250	355	500
<b>HFA</b>	not permissible		-	-	-
<b>HFB</b>	not permissible		-	-	-
<b>HFC</b>	not permissible		-	-	-
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	1200	1060	950
	HFDU (ester base)	rpm	1500	1320	1200

1) Version E-A2FLO

2) Version A2FLO

**Variable double pump A8VO series 6x**

for open circuit (data sheet 93010)

Size		55	80	107	140	200	
<b>HFA</b>	not permissible	-	-	-	-	-	
<b>HFB</b>	not permissible	-	-	-	-	-	
<b>HFC</b>	not permissible	-	-	-	-	-	
<b>HFD</b>	HFDR, HFDU (glycol base)	rpm	2000	1800	1600	-	-
	HFDU (ester base)	rpm	2500	2240	2150	2100	1950

**Fixed pump A17FO series 10**

for open circuit (data sheet 91520)

Size		23	32	45	63	80	107
<b>HFA</b>	not permissible	-	-	-	-	-	-
<b>HFB</b>	not permissible	-	-	-	-	-	-
<b>HFC</b>	not permissible	-	-	-	-	-	-
<b>HFD</b>	For operation with HFD hydraulic fluids, limitations for the technical data and the sealing materials are to be observed. Please contact us.						

**Fixed pump A17FNO series 10**

for open circuit (data sheet 91510)

Size		125
<b>HFA</b>	not permissible	-
<b>HFB</b>	not permissible	-
<b>HFC</b>	not permissible	-
<b>HFD</b>	For operation with HFD hydraulic fluids, limitations for the technical data and the sealing materials are to be observed. Please contact us.	

**3.4 Swashplate motor**

**Fixed motor A4FM series 1x and series 3x**

for open and closed circuit (data sheet 91120)

Size		22	28	40	56	71	125	250	500	
<b>HFA</b>	Nominal pressure $p_N = 140$ bar	rpm	-	-	-	-	2400 <sup>1)</sup>	1950 <sup>1)</sup>	1650 <sup>1)</sup>	1350 <sup>1)</sup>
	Maximum pressure $p_{max} = 160$ bar									
<b>HFB</b>	Nominal pressure $p_N = 160$ bar	rpm	-	-	-	-	2550 <sup>1)</sup>	2100 <sup>1)</sup>	1750 <sup>1)</sup>	1450 <sup>1)</sup>
	Maximum pressure $p_{max} = 210$ bar									
<b>HFC</b>	Nominal pressure $p_N = 250$ bar	rpm	-	-	-	-	2550 <sup>1)</sup>	2100 <sup>1)</sup>	1750 <sup>1)</sup>	1450 <sup>1)</sup>
	Maximum pressure $p_{max} = 280$ bar									
<b>HFD</b>		rpm	4250	4250	4000	3600	3200	2600	2200	1800

1) Version E-A4FM

### 3.5 Bent-axis motors

#### Fixed motor A2FM series 6x

for open and closed circuit (data sheet 91001)

Size		10	12	16	23	28	32	45	56	63	80	90	
<b>HFA</b>	not permissible	-	-	-	-	-	-	-	-	-	-	-	
<b>HFB</b>	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	4800	4800	4800	3800	3800	3800	3400	3000	3000	2680	2680
<b>HFC</b>	Nominal pressure $p_N = 200$ bar Maximum pressure $p_{max} = 250$ bar	rpm	4800	4800	4800	3800	3800	3800	3400	3000	3000	2680	2680
<b>HFD</b>		rpm	8000	8000	8000	6300	6300	6300	5600	5000	5000	4500	4500
Size		107	125	160	180	200	250	355	500	710	1000		
<b>HFA</b>	not permissible	-	-	-	-	-	-	-	-	-	-	-	
<b>HFB</b>	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	2400	2400	2100	2100	2200	2150 <sup>1)</sup>	1800 <sup>1)</sup>	1600 <sup>1)</sup>	1280 <sup>1)</sup>	1280 <sup>1)</sup>	
<b>HFC</b>	Nominal pressure $p_N = 200$ bar Maximum pressure $p_{max} = 250$ bar	rpm	2400	2400	2100	2100	2200	2150 <sup>1)</sup>	1800 <sup>1)</sup>	1600 <sup>1)</sup>	1280 <sup>1)</sup>	1280 <sup>1)</sup>	
<b>HFD</b>		rpm	4000	4000	3600	3600	2750	2700 <sup>2)</sup>	2240 <sup>2)</sup>	2000 <sup>2)</sup>	1600 <sup>2)</sup>	1600 <sup>2)</sup>	

#### Fixed motor A2FE series 6x

for open and closed circuit (data sheet 91008)

Size		28	32	45	56	63	80	90	107	125	160	180	
<b>HFA</b>	not permissible	-	-	-	-	-	-	-	-	-	-	-	
<b>HFB</b>	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	3800	3800	3400	3000	3000	2680	2680	2400	2400	2100	2100
<b>HFC</b>	Nominal pressure $p_N = 200$ bar Maximum pressure $p_{max} = 250$ bar	rpm	3800	3800	3400	3000	3000	2680	2680	2400	2400	2100	2100
<b>HFD</b>		rpm	6300	6300	5600	5000	5000	4500	4500	4000	4000	3600	3600
Size		250	355										
<b>HFA</b>	not permissible	-	-										
<b>HFB</b>	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	2150 <sup>3)</sup>	1800 <sup>3)</sup>									
<b>HFC</b>	Nominal pressure $p_N = 200$ bar Maximum pressure $p_{max} = 250$ bar	rpm	2150 <sup>3)</sup>	1800 <sup>3)</sup>									
<b>HFD</b>		rpm	2700 <sup>4)</sup>	2240 <sup>4)</sup>									

1) Version E-A2FLM

2) Version A2FLM

3) Version E-A2FLE

4) Version A2FLE

### Variable motor A6VM series 63

for open and closed circuit (data sheet 91604)

Size		28	55	80	107	140	160	200	250	355	500	1000	
<b>HFA</b>	not permissible	-	-	-	-	-	-	-	-	-	-	-	
<b>HFB</b>	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	3700	3000	2600	2300	2200	2100	1900	2150 <sup>1)</sup>	1800 <sup>1)</sup>	1600 <sup>1)</sup>	1280 <sup>1)</sup>
<b>HFC</b>	Nominal pressure $p_N = 200$ bar Maximum pressure $p_{max} = 250$ bar	rpm	3700	3000	2600	2300	2200	2100	1900	2150 <sup>1)</sup>	1800 <sup>1)</sup>	1600 <sup>1)</sup>	1280 <sup>1)</sup>
<b>HFD</b>		rpm	5550	4450	3900	3550	3250	3100	2900	2700 <sup>2)</sup>	2240 <sup>2)</sup>	2000 <sup>2)</sup>	1600 <sup>2)</sup>

### Variable motor A6VE series 63

for open and closed circuit (data sheet 91606)

Size		28	55	80	107	160	250	
<b>HFA</b>	not permissible	-	-	-	-	-	-	
<b>HFB</b>	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	3700	3000	2600	2300	2100	2150 <sup>3)</sup>
<b>HFC</b>	Nominal pressure $p_N = 200$ bar Maximum pressure $p_{max} = 250$ bar	rpm	3700	3000	2600	2300	2100	2150 <sup>3)</sup>
<b>HFD</b>		rpm	5550	4450	3900	3550	3100	2700 <sup>4)</sup>

### Variable motor A6VM series 65

for open and closed circuit (data sheet 91607)

Size		55	80	107	140	160	200	
<b>HFA</b>	not permissible	-	-	-	-	-	-	
<b>HFB</b>	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	3000	2600	2300	2200	2100	1900
<b>HFC</b>	Nominal pressure $p_N = 200$ bar Maximum pressure $p_{max} = 250$ bar	rpm	3000	2600	2300	2200	2100	1900
<b>HFD</b>		rpm	4450	3900	3550	3250	3100	2900

### Variable motor A6VM series 71

for open and closed circuit (data sheet 91610)

Size		60	85	115	150	170	215	
<b>HFA</b>	not permissible	-	-	-	-	-	-	
<b>HFB</b>	Nominal pressure $p_N = 160$ bar Maximum pressure $p_{max} = 210$ bar	rpm	3000	2600	2300	2200	2100	1900
<b>HFC</b>	Nominal pressure $p_N = 200$ bar Maximum pressure $p_{max} = 250$ bar	rpm	3000	2600	2300	2200	2100	1900
<b>HFD</b>		rpm	4450	3900	3550	3250	3100	2900

1) Version E-A6VLM

2) Version A6VLM

3) Version E-A6VLE

4) Version A6VLE

**Bosch Rexroth AG**

Mobile Applications  
Glockeraustrasse 4  
89275 Elchingen, Germany  
Tel. +49 7308 82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

**Bosch Rexroth AG**

Mobile Applications  
An den Kelterwiesen 14  
72160 Horb, Germany  
Tel. +49 7451 92-0

© Bosch Rexroth AG 2016. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.



# Rating of hydraulic fluids for Rexroth hydraulic components (pumps and motors)


**RE 90235**

Edition: 02.2015

Replaces 01.2013



Bosch Rexroth offers the rating of hydraulic fluids as service – inclusive assistance and consulting of experienced engineers.

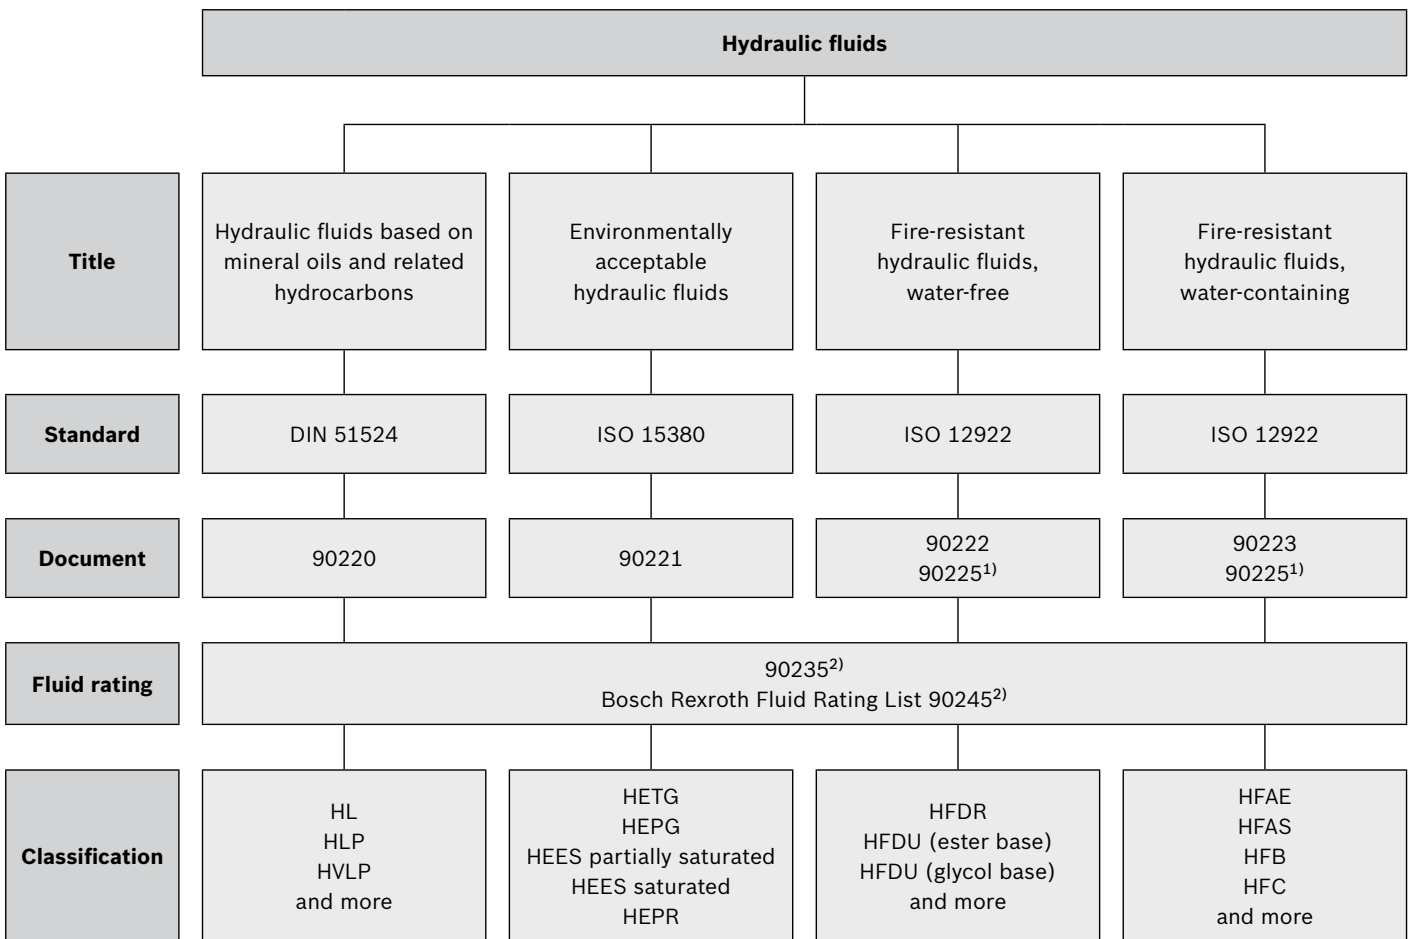

1) Valid for Bosch Rexroth axial piston units

2) Valid for Bosch Rexroth Business Unit "Mobile Applications" – pumps and motors

The safe and reliable operation of industrial and mobile equipment is only possible if the hydraulic fluid used is selected with respect to the application. The main tasks of the hydraulic fluid are e.g. transmission of power, lubrication of the components, reduction of friction, corrosion prevention and heat dissipation. Unfortunately the common element "hydraulic fluid" is often disregarded during conceptual design.

Increased requirements on machines and equipment constantly raise the quality requirements on the hydraulic fluid used. For using a suitable hydraulic fluid, adequate knowledge and experience of this are necessary.

Therefore Bosch Rexroth offers the rating of hydraulic fluids for Rexroth hydraulic components as service.

Bosch Rexroth defines hydraulic fluids on the basis of the illustration on page 1. Application notes and requirements for Rexroth hydraulic components can be taken out of the data sheets mentioned in this illustration on page 1.

## 1 Description

### Minimum requirements

At present the standards conformity for the minimum requirement on fluids is defined in our Bosch Rexroth component data sheets. The fluid manufacturers' technical data sheets have to include that the specific standards are met. The plausibility and correctness of the fluid data are not reviewed by Bosch Rexroth.

### Bosch Rexroth Fluid Rating

Fluid data of the manufacturer has to be according to ISO (selected characteristic values of standards) and Bosch Rexroth requirements (tightened values of standards and extended Bosch Rexroth requirements). Bosch Rexroth demands the data to be confirmed in writing. The plausibility and correctness of the fluid data is reviewed by Bosch Rexroth.

The extended Bosch Rexroth requirements are beneath others specific fluid tests, that show suitability of the hydraulic fluid with defined Rexroth components and which are constituents of the respective specification.

Depending on the utilized Rexroth hydraulic components and the oil type, the corresponding fluid test has to be passed prior to the assignment of the Bosch Rexroth fluid rating.

Retention samples (finished oil, base oil) are furthermore saved. The hydraulic fluids that fulfill the Bosch Rexroth Fluid Rating requirements will be listed on the following Bosch Rexroth document.

► 90245: Bosch Rexroth Fluid Rating List


### Note

The Bosch Rexroth Fluid Rating requirements cannot cover all machine and system-dependent conditions (see residual risk on rating scheme on page 3). Only single Rexroth components pumps/motors can be examined in the fluid tests. Bosch Rexroth Fluid Rating does not cover all systems and applications.

Releases for special applications are excluded from the Bosch Rexroth Fluid Rating.


The responsibility for selection of the hydraulic fluid remains with the equipment/machinery operator and the fluid manufacturer.

By means of the requirements contained in the Bosch Rexroth Fluid Rating the risk of using hydraulic fluid in combination with Rexroth hydraulic components can be considerably reduced and the reliability significantly increased.

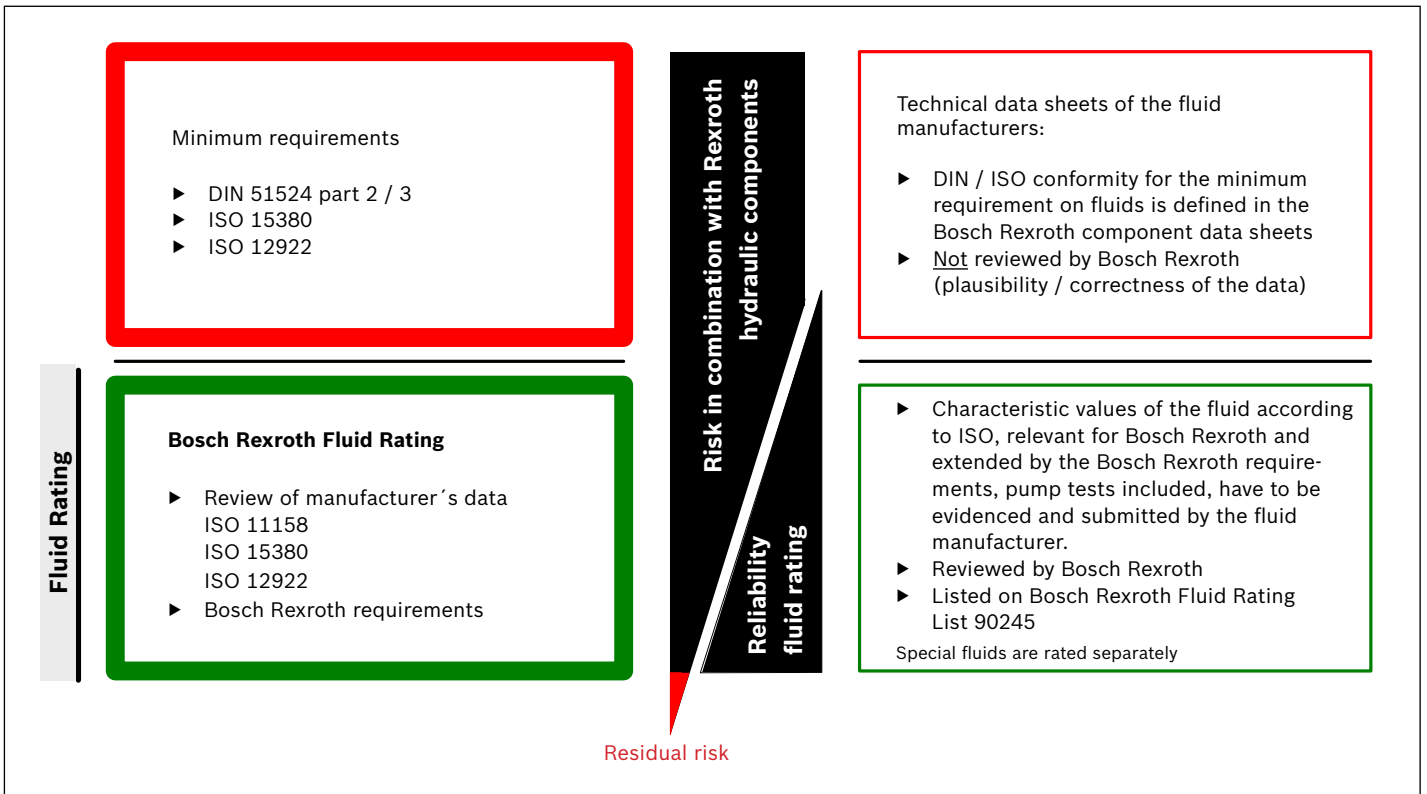

## 2 Process

The process of a Fluid Rating includes the following steps:

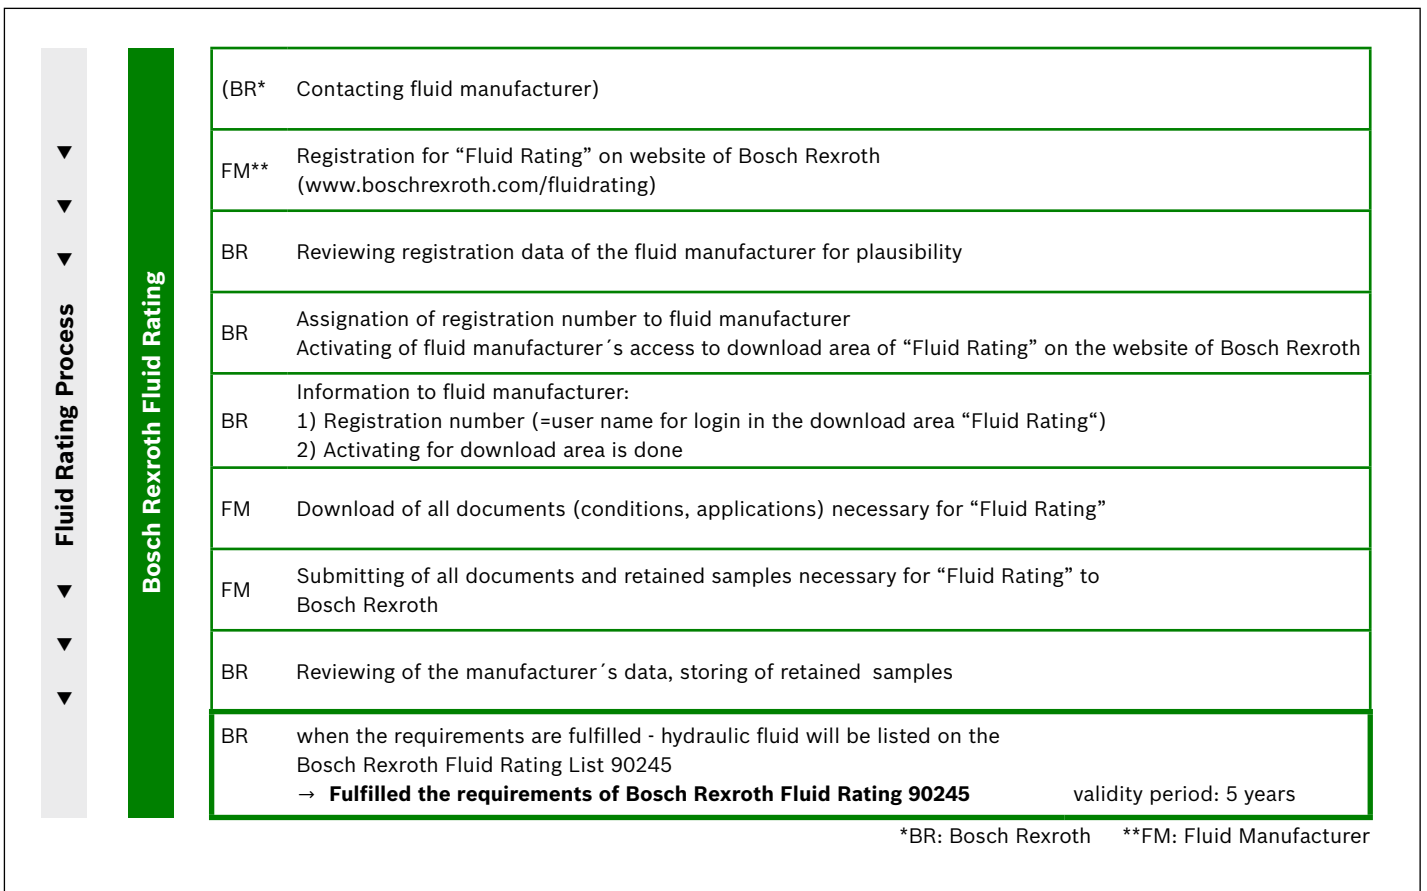

### 3 Fluid tests

#### 3.1 Requests for Fluid Tests

Two different fluid tests may presently be requested by Bosch Rexroth:

- ▶ RFT-APU-CL Rexroth Fluid Test Axial Piston Unit Closed Loop (see **3.2**)
- ▶ RFT-APU-OL-HFC Rexroth Fluid Test Axial Piston Unit Open Loop-HFC (see **3.3**)

These tests may be requested independent of the Bosch Rexroth Fluid Rating. They are, however, a permanent specification of the Bosch Rexroth Fluid Rating.

**Prior to the request for the Bosch Rexroth Fluid Rating the fluid test, required in the respective specification, has to be terminated positively.**

The process of the fluid test includes the following steps:

FM	Request for quotation for fluid test by Bosch Rexroth (fluidrating@boschrexroth.de)			
FM	Commissioning of fluid test, submission of further documents and supplying of the fluid for the test			
BR	Implementation of the requested fluid test using defined Rexroth components	<b>RFT-APU-CL</b> Rexroth Fluid Test - Axial Piston Unit Closed Loop	<b>RFT-APU-OL-HFC</b> Rexroth Fluid Test - Axial Piston Unit Open Loop-HFC	Further fluid tests in preparation

\*BR: Bosch Rexroth    \*\*FM: Fluid Manufacturer

**3.2 Rexroth fluid test RFT-APU-CL**  
(Rexroth Fluid Test Axial Piston Unit Closed Loop)

Fluid test for closed loop applications using a combination of units consisting of a hydraulic pump A4VG045EP and a hydraulic motor A6VM060EP. This fluid test represents the requirements on a hydrostatic transmission.

**Features of the fluid test**


The suitability of the hydraulic fluid is tested at high stress under laboratory conditions. The fluid test consists of a break-in test, swivel cycle test and a corner power test.

**Rating criteria**

- ▶ Examination of the interaction fluid / component
  - Measurement of the component weight change respectively dimensional change
  - Material compatibility
  - Visual inspection of components /component surfaces
  - Oil analysis (start of test (SOT), during test, end of test (EOT))
- ▶ Evidence of endurance performance
- ▶ Determination of efficiency (SOT, EOT)

**Test bench**

▼ Schematical hydraulic circuit diagram of the RFT-APU-CL

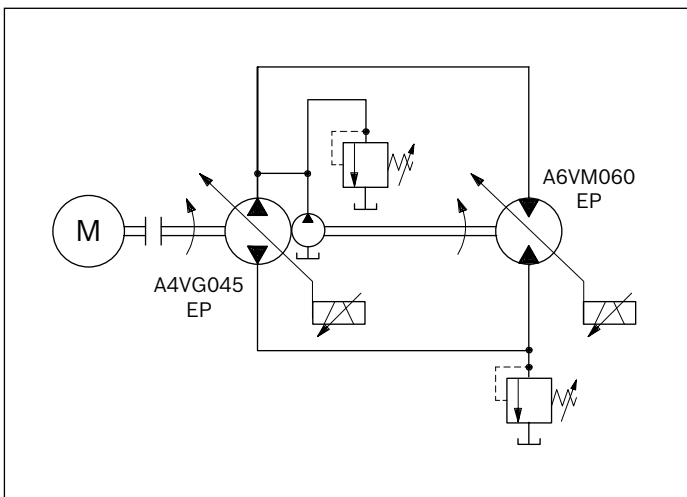

**Technical data of the test components**


Type	A4VG045 EP	A6VM060 EP
Data sheet	92004	91610
Operation mode	pump	motor
Nominal volume	45 cm <sup>3</sup>	62 cm <sup>3</sup>
Maximum speed (at V <sub>g max</sub> )	4300 min <sup>-1</sup>	4450 min <sup>-1</sup>
Maximum pressure	500 bar	500 bar
Control	electric (EP)	electric (EP)

**Operating data**

1. Break-in test	A4VG045 EP	A6VM060 EP
Speed	2000 min <sup>-1</sup>	2000 min <sup>-1</sup>
Operating pressure	250 bar	250 bar
Leakage temperature Hydraulic motor		60 °C at port T
Operating time	10 h	10 h

2. Swivel cycle test	A4VG045 EP	A6VM060 EP
Speed	4000 min <sup>-1</sup>	4000 min <sup>-1</sup>
Operating pressure	450 bar	450 bar
Leakage temperature Hydraulic motor		100 °C at port T
Operating time	300 h	300 h

▼ Swivel cycle (schematic diagram)

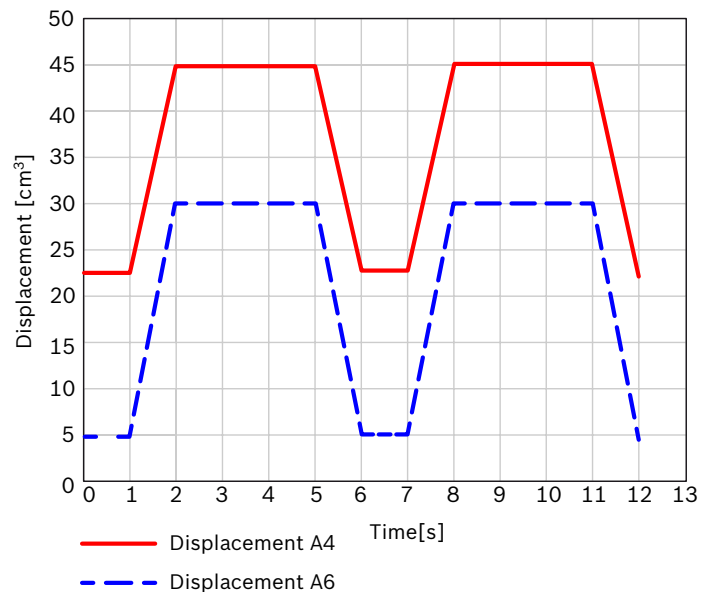

3. Corner power test	A4VG045 EP	A6VM060 EP
Speed	4000 min <sup>-1</sup>	4000 min <sup>-1</sup>
Operating pressure	500 bar	500 bar
Leakage temperature Hydraulic motor		100 °C at port T
Operating time	200 h	200 h

**3.3 Rexroth fluid test RFT-APU-OL-HFC**  
(Rexroth Fluid Test Axial Piston Unit Open Loop-HFC)

Fluid test for open loop applications using a combination of units consisting of a A4VSO swashplate axial piston combination unit (hydraulic pump and hydraulic motor) as well as an EA10VSO/31 hydraulic pump. This fluid test represents the requirements on applications demanding water-containing, fire-resistant hydraulic fluids of the HFC classification.

**Features of the fluid test**


The suitability of the hydraulic fluid is tested at high stress under laboratory conditions. The fluid test consists of a constant and swivel cycle test.

**Rating criteria**

- ▶ Examination of the interaction fluid / component
  - Wear and cavitation behaviour
  - Material compatibility
  - Visual inspection of components /component surfaces
  - Measuring records of functional relevant component surfaces
  - Oil analysis (SOT, during test, EOT)
- ▶ Evidence of endurance performance

**Test bench**

▼ **Schematical hydraulic circuit diagram of the RFT-APU-OL-HFC**

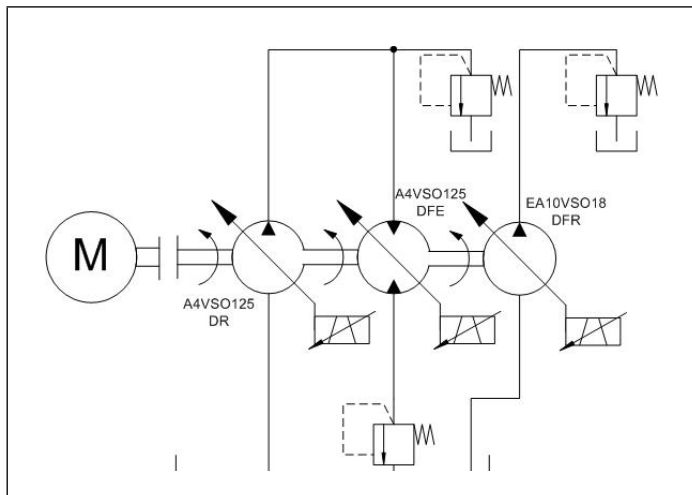

**Technical data of the test components**


Type	A4VSO125 DR	A4VSO125 DFE	EA10VSO18 DFR/31
Data sheet	92053	92053	92711
Operation mode	pump, self-priming	motor	pump, self-priming
Nominal volume	125 cm <sup>3</sup>	125 cm <sup>3</sup>	18 cm <sup>3</sup>
Maximum speed	2200 min <sup>-1</sup>	2200 min <sup>-1</sup>	3300 min <sup>-1</sup>
Maximum pressure	400 bar	400 bar	350 bar

**Operating data**

1. Constant test	A4VSO125 DR/DFE	EA10VSO18 DFR/31
Speed	1800 min <sup>-1</sup>	1800 min <sup>-1</sup>
Operating pressure	350 bar	175 bar
Displacement	$V_{g \max}/V_{g \min}$	$V_{g \max}/V_{g \min}$
Temperature	50 °C	50 °C
Operating time	100/100 h	100/100 h

2. Swivel cycle test	A4VSO125 DR/DFE	EA10VSO18 DFR/31
Speed	1800 min <sup>-1</sup>	1800 min <sup>-1</sup>
Operating pressure	350 bar	50 / 175 bar
Displacement	0,5 sec $V_{g \min}/$ 0,5 sec $V_{g \max}$	0,5 sec $V_{g \min}/$ 0,5 sec $V_{g \max}$
Temperature	50 °C	50 °C
Operating time	800 h	800 h

▼ **Swivel cycle (schematic diagram)**

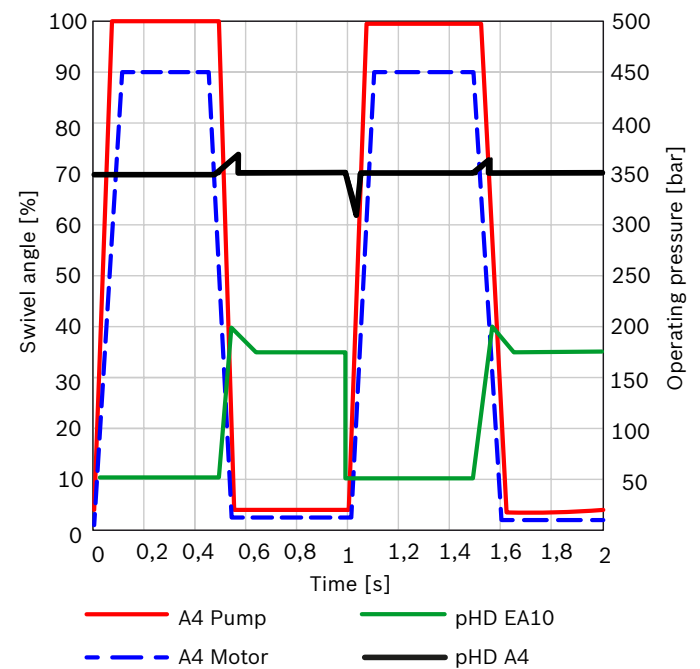



**Bosch Rexroth AG**

Mobile Applications  
Glockeraustraße 4  
89275 Elchingen, Germany  
Tel. +49 7308 82-0  
info.brm@boschrexroth.de  
www.boschrexroth.com

An den Kelterwiesen 14  
72160 Horb, Germany  
Tel. +49 7451 92-0

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. No statements concerning the suitability of a hydraulic fluid for a specific purpose can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. Subject to change.



## Axial piston pumps

### Fixed pumps, open circuits

<b>Designation</b>	<b>Type</b>	<b>Size</b>	<b>Series</b>	<b>Data sheet</b>	<b>Page</b>
Fixed pump	A2FO	5...1000	6x	91401	97
Fixed pump	A4FO	22...500	10/32	91455	131
Fixed pump	A17FO	23...107	10	91520	159
Fixed pump	A17FNO	125	10	91510	175



# Axial Piston Fixed Pump A2FO

RE 91401/06.2012  
Replaces: 03.08

1/34

2

## Data sheet

Series 6	
Size	Nominal pressure/Maximum pressure
5	315/350 bar
10 to 200	400/450 bar
250 to 1000	350/400 bar
Open circuit	



## Contents

Ordering code for standard program	2
Technical data	4
Dimensions size 5	11
Dimensions sizes 10, 12, 16	12
Dimensions sizes 23, 28, 32	14
Dimensions size 45	16
Dimensions sizes 56, 63	18
Dimensions sizes 80, 90	20
Dimensions sizes 107, 125	22
Dimensions sizes 160, 180	24
Dimensions size 200	26
Dimensions size 250	27
Dimensions size 355	28
Dimensions size 500	29
Dimensions size 710	30
Dimensions size 1000	31
Installation instructions	32
General instructions	34

## Features

- Fixed pump with axial tapered piston rotary group of bent-axis design, for hydrostatic drives in an open circuit
- For use in mobile and stationary applications
- The flow is proportional to the drive speed and displacement
- The drive shaft bearings are designed for the bearing service life requirements usually encountered in these areas
- High power density
- Small dimensions
- High total efficiency
- Economical design
- One-piece tapered piston with piston rings for sealing

# Ordering code for standard program

	<b>A2F</b>		<b>O</b>		<b>/</b>	<b>6</b>			<b>-</b>	<b>V</b>				
01	02	03	04	05		06	07	08		09	10	11	12	13

## Hydraulic fluid

01	Mineral oil and HFD. HFD for sizes 250 to 1000 only in combination with long-life bearings "L" (without code)													
	HFB, HFC hydraulic fluid													
	Sizes 5 to 200 (without code) Sizes 250 to 1000 (only in combination with long-life bearings "L")													<b>E-</b>

## Axial piston unit

02	Bent-axis design, fixed												<b>A2F</b>
----	-------------------------	--	--	--	--	--	--	--	--	--	--	--	------------

## Drive shaft bearing

03												<b>5 to 200</b>	<b>250 to 500</b>	<b>710 to 1000</b>	
	Standard bearing (without code)											●	●	-	
Long-life bearing											-	●	●	<b>L</b>	

## Operating mode

04	Pump, open circuit												<b>O</b>
----	--------------------	--	--	--	--	--	--	--	--	--	--	--	----------

## Sizes (NG)

05	Geometric displacement, see table of values on page 7																					
		<b>5</b>	<b>10</b>	<b>12</b>	<b>16</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>45</b>	<b>56</b>	<b>63</b>	<b>80</b>	<b>90</b>	<b>107</b>	<b>125</b>	<b>160</b>	<b>180</b>	<b>200</b>	<b>250</b>	<b>355</b>	<b>500</b>	<b>710</b>

## Series

06													<b>6</b>
----	--	--	--	--	--	--	--	--	--	--	--	--	----------

## Index

07												NG10 to 180	<b>1</b>
												NG200	<b>3</b>
												NG5 and 250 to 1000	<b>0</b>

## Directions of rotation

08	Viewed on drive shaft											clockwise	<b>R</b>
												counter-clockwise	<b>L</b>

## Seals

09	FKM (fluor-caoutchouc)												<b>V</b>
----	------------------------	--	--	--	--	--	--	--	--	--	--	--	----------

## Drive shafts

10												<b>5</b>	<b>10</b>	<b>12</b>	<b>16</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>45</b>	<b>56</b>	<b>63</b>	<b>80</b>	<b>90</b>	<b>107</b>	<b>125</b>	<b>160</b>	<b>180</b>	<b>200</b>	<b>250 to 1000</b>			
	Splined shaft DIN 5480											-	●	●	●	●	●	●	-	●	●	●	●	●	●	●	●	●	-	-	●	<b>A</b>
												-	●	●	-	●	●	-	●	●	-	●	-	●	-	●	-	-	-	●	<b>Z</b>	
	Parallel keyed shaft DIN 6885											●	●	●	●	●	●	-	●	●	●	●	●	●	●	●	●	●	-	-	●	<b>B</b>
												-	●	●	-	●	●	-	●	●	-	●	-	●	-	●	-	-	-	●	<b>P</b>	
Conical shaft <sup>1)</sup>											●	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	<b>C</b>	

## Mounting flanges

11	ISO 3019-2											<b>5 to 250</b>				<b>355 to 1000</b>				
	4-hole											●				-				<b>B</b>
											-				●				<b>H</b>	

● = Available      ○ = On request      - = Not available      ■ = Preferred program

1) Conical shaft with threaded pin and woodruff key (DIN 6888). The torque must be transmitted via the tapered press fit.

## Ordering code for standard program

	<b>A2F</b>		<b>O</b>		<b>/</b>	<b>6</b>			<b>-</b>	<b>V</b>				
01	02	03	04	05		06	07	08		09	10	11	12	13

### Port plates for service lines<sup>2)</sup>

		5	10 to 16	23 to 250	355 to 1000	
12	SAE flange port A/B at side and SAE flange port S at rear	-	-	●	-	05
	Threaded port A/B at side and threaded port S at rear	-	●	-	-	06
	SAE flange ports A/B and S at rear	-	-	-	●	11
	Threaded ports A/B and S at side	●	-	-	-	07

### Standard / special version

13	Standard version (without code)	
	Standard version with installation variants, e. g. T ports against standard open or closed	-Y
	Special version	-S

● = Available    ○ = On request    - = Not available    ■ = Preferred program

<sup>2)</sup> Fastening thread or threaded ports, metric


# Technical data

## Hydraulic fluid

Before starting project planning, please refer to our data sheets RE 90220 (mineral oil), RE 90221 (environmentally acceptable hydraulic fluids), RE 90222 (HFD hydraulic fluids) and RE 90223 (HFA, HFB, HFC hydraulic fluids) for detailed information regarding the choice of hydraulic fluid and application conditions.

The fixed pump A2FO is not suitable for operation with HFA hydraulic fluid. If HFB, HFC or HFD or environmentally acceptable hydraulic fluids are used, the limitations regarding technical data or other seals must be observed.

### Selection diagram

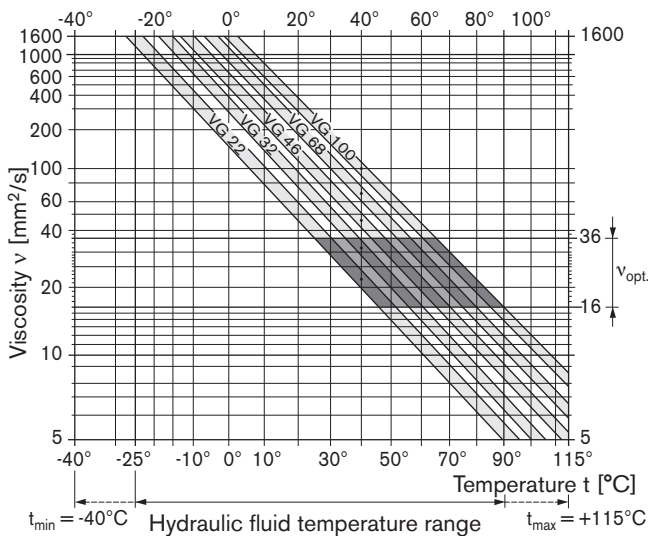

### Details regarding the choice of hydraulic fluid

The correct choice of hydraulic fluid requires knowledge of the operating temperature in relation to the ambient temperature: in an open circuit, the reservoir temperature.

The hydraulic fluid should be chosen so that the operating viscosity in the operating temperature range is within the optimum range ( $\nu_{opt}$  see shaded area of the selection diagram). We recommend that the higher viscosity class be selected in each case.

Example: At an ambient temperature of  $X$  °C, an operating temperature of 60 °C is set in the circuit. In the optimum operating viscosity range ( $\nu_{opt,1}$  shaded area), this corresponds to the viscosity classes VG 46 or VG 68; to be selected: VG 68.

### Note

The case drain temperature, which is affected by pressure and speed, can be higher than the reservoir temperature. At no point of the component may the temperature be higher than 115 °C. The temperature difference specified below is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, we recommend flushing the case at port U (sizes 250 to 1000).

### Viscosity and temperature of hydraulic fluid

	Viscosity [mm <sup>2</sup> /s]	Temperature	Comment
Transport and storage at ambient temperature		$T_{min} \geq -50$ °C $T_{opt} = +5$ °C to $+20$ °C	factory preservation: up to 12 months with standard, up to 24 months with long-term
(Cold) start-up <sup>1)</sup>	$\nu_{max} = 1600$	$T_{St} \geq -40$ °C	$t \leq 3$ min, without load ( $p \leq 50$ bar), $n \leq 1000$ rpm (for sizes 5 to 200), $n \leq 0.25 \cdot n_{nom}$ (for sizes 250 to 1000)
Permissible temperature difference		$\Delta T \leq 25$ K	between axial piston unit and hydraulic fluid
Warm-up phase	$\nu < 1600$ to 400	$T = -40$ °C to $-25$ °C	at $p \leq 0.7 \cdot p_{nom}$ , $n \leq 0.5 \cdot n_{nom}$ and $t \leq 15$ min
Operating phase			
Temperature difference		$\Delta T = \text{approx. } 12$ K	between hydraulic fluid in the bearing and at port T.
Maximum temperature		115 °C 103 °C	in the bearing measured at port T
Continuous operation	$\nu = 400$ to 10 $\nu_{opt} = 36$ to 16	$T = -25$ °C to $+90$ °C	measured at port T, no restriction within the permissible data
Short-term operation <sup>2)</sup>	$\nu_{min} \geq 7$	$T_{max} = +103$ °C	measured at port T, $t < 3$ min, $p < 0.3 \cdot p_{nom}$
FKM shaft seal <sup>1)</sup>		$T \leq +115$ °C	see page 5

1) At temperatures below  $-25$  °C, an NBR shaft seal is required (permissible temperature range:  $-40$  °C to  $+90$  °C).

2) Sizes 250 to 1000, please contact us.

# Technical data

## Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

To ensure the functional reliability of the axial piston unit, a gravimetric analysis of the hydraulic fluid is necessary to determine the amount of solid contaminant and to determine the cleanliness level according to ISO 4406. A cleanliness level of at least 20/18/15 is to be maintained.

At very high hydraulic fluid temperatures (90 °C to maximum 115 °C), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.

If the above classes cannot be achieved, please contact us.


## Shaft seal

### Permissible pressure loading


The service life of the shaft seal is influenced by the speed of the axial piston unit and the case drain pressure (case pressure). The mean differential pressure of 2 bar between the case and the ambient pressure may not be enduringly exceeded at normal operating temperature. For a higher differential pressure at reduced speed, see diagram. Momentary pressure spikes ( $t < 0.1$  s) of up to 10 bar are permitted. The service life of the shaft seal decreases with an increase in the frequency of pressure spikes.

The case pressure must be equal to or higher than the ambient pressure.

### Sizes 10 to 200

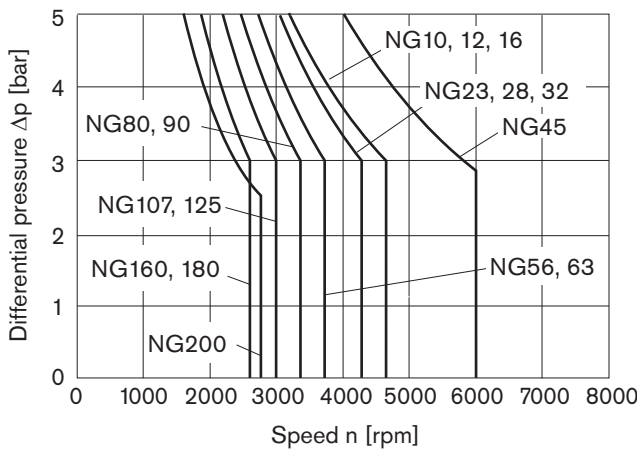

### Sizes 250 to 1000

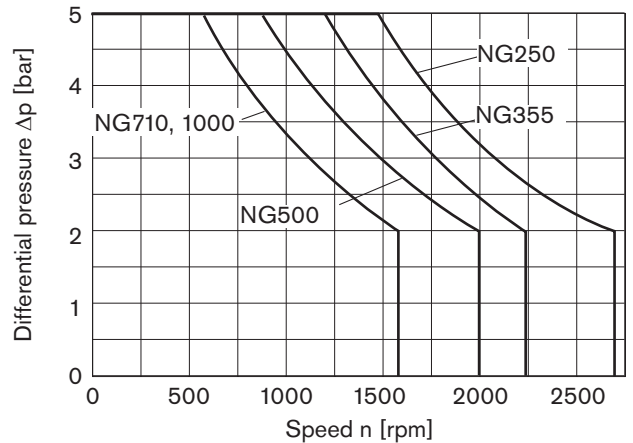

The values are valid for an ambient pressure  $p_{abs} = 1$  bar.

### Temperature range

The FKM shaft seal may be used for case drain temperatures from -25 °C to +115 °C.

### Note

For application cases below -25 °C, an NBR shaft seal is required (permissible temperature range: -40 °C to +90 °C). State NBR shaft seal in plain text when ordering. Please contact us.

### Direction of flow

#### Direction of rotation, viewed on drive shaft

clockwise

counter-clockwise

S to B

S to A

### Long-life bearing

#### Sizes 250 to 1000

For long service life and use with HF hydraulic fluids. Identical external dimensions as motor with standard bearings. Subsequent conversion to long-life bearings is possible. Bearing and case flushing via port U is recommended.

#### Flushing flow (recommended)

NG	250	355	500	710	1000
$Q_{v \text{ flush}}$ (L/min)	10	16	16	16	16

# Technical data

## Operating pressure range

(operating with mineral oil)

### Pressure at service line port A or B

Size 5

Nominal pressure  $p_{nom}$  \_\_\_\_\_ 315 bar absolute  
 Maximum pressure  $p_{max}$  \_\_\_\_\_ 350 bar absolute  
 Single operating period \_\_\_\_\_ 10 s  
 Total operating period \_\_\_\_\_ 300 h

Sizes 10 to 200

Nominal pressure  $p_{nom}$  \_\_\_\_\_ 400 bar absolute  
 Maximum pressure  $p_{max}$  \_\_\_\_\_ 450 bar absolute  
 Single operating period \_\_\_\_\_ 10 s  
 Total operating period \_\_\_\_\_ 300 h


Sizes 250 to 1000

Nominal pressure  $p_{nom}$  \_\_\_\_\_ 350 bar absolute  
 Maximum pressure  $p_{max}$  \_\_\_\_\_ 400 bar absolute  
 Single operating period \_\_\_\_\_ 10 s  
 Total operating period \_\_\_\_\_ 300 h

Minimum pressure (high-pressure side) \_\_\_\_\_ 25 bar absolute

### Rate of pressure change $R_{A \max}$

Without pressure-relief valve \_\_\_\_\_ 16000 bar/s

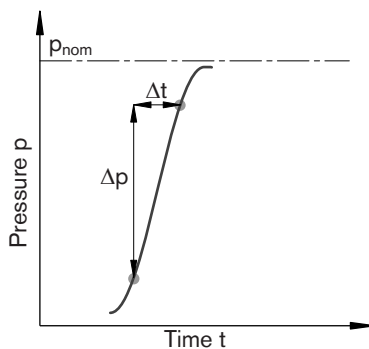

### Pressure at suction port S (inlet)

Minimum pressure  $p_{S \min}$  \_\_\_\_\_ 0.8 bar absolute

Maximum pressure  $p_{S \max}$  \_\_\_\_\_ 30 bar absolute

### Note

Values for other hydraulic fluids, please contact us.

## Definition

### Nominal pressure $p_{nom}$

The nominal pressure corresponds to the maximum design pressure.

### Maximum pressure $p_{max}$

The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.

### Minimum pressure (high-pressure side)


Minimum pressure at the high-pressure side (A or B) which is required in order to prevent damage to the axial piston unit.

### Minimum pressure (inlet)

Minimum pressure at suction port S (inlet) which is required in order to prevent damage to the axial piston unit. The minimum pressure is dependent on the speed of the axial piston unit (see diagram on page 7).

### Rate of pressure change $R_A$

Maximum permissible rate of pressure rise and reduction during a pressure change over the entire pressure range.

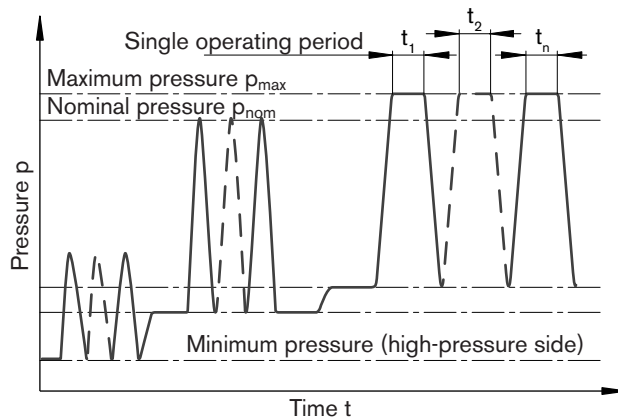

Total operating period =  $t_1 + t_2 + \dots + t_n$



# Technical data

**Table of values** (theoretical values, without efficiency and tolerances; values rounded)


Size	NG		5	10	12	16	23	28	32	45	56	63	80		
Displacement geometric, per revolution	$V_g$	cm <sup>3</sup>	4.93	10.3	12	16	22.9	28.1	32	45.6	56.1	63	80.4		
Speed maximum <sup>1)</sup>	$n_{nom}$	rpm	5600	3150	3150	3150	2500	2500	2500	2240	2000	2000	1800		
	$n_{max}^{2)}$	rpm	8000	6000	6000	6000	4750	4750	4750	4250	3750	3750	3350		
Flow at $n_{nom}$	$q_v$	L/min	27.6	32	38	50	57	70	80	102	112	126	145		
Power at	$\Delta p = 350$ bar	P	14.5 <sup>4)</sup>	19	22	29	33	41	47	60	65	74	84		
	$\Delta p = 400$ bar	P	–	22	25	34	38	47	53	68	75	84	96		
Torque <sup>3)</sup>	at $V_g$ and	$\Delta p = 350$ bar	T	Nm	24.7 <sup>4)</sup>	57	67	89	128	157	178	254	313	351	448
		$\Delta p = 400$ bar	T	Nm	–	66	76	102	146	179	204	290	357	401	512
Rotary stiffness	c	kNm/rad	0.63	0.92	1.25	1.59	2.56	2.93	3.12	4.18	5.94	6.25	8.73		
Moment of inertia for rotary group	$J_{GR}$	kgm <sup>2</sup>	0.00006	0.0004	0.0004	0.0004	0.0012	0.0012	0.0012	0.0024	0.0042	0.0042	0.0072		
Maximum angular acceleration	$\alpha$	rad/s <sup>2</sup>	5000	5000	5000	5000	6500	6500	6500	14600	7500	7500	6000		
Case volume	V	L		0.17	0.17	0.17	0.20	0.20	0.20	0.33	0.45	0.45	0.55		
Mass (approx.)	m	kg	2.5	6	6	6	9.5	9.5	9.5	13.5	18	18	23		

Size	NG		90	107	125	160	180	200	250	355	500	710	1000		
Displacement geometric, per revolution	$V_g$	cm <sup>3</sup>	90	106.7	125	160.4	180	200	250	355	500	710	1000		
Speed maximum <sup>1)</sup>	$n_{nom}$	rpm	1800	1600	1600	1450	1450	1550	1500	1320	1200	1200	950		
	$n_{max}^{2)}$	rpm	3350	3000	3000	2650	2650	2750	1800	1600	1500	1500	1200		
Flow at $n_{nom}$	$q_v$	L/min	162	171	200	233	261	310	375	469	600	852	950		
Power at	$\Delta p = 350$ bar	P	95	100	117	136	152	181	219	273	350	497	554		
	$\Delta p = 400$ bar	P	108	114	133	155	174	207	–	–	–	–	–		
Torque <sup>3)</sup>	at $V_g$ and	$\Delta p = 350$ bar	T	Nm	501	594	696	893	1003	1114	1393	1978	2785	3955	5570
		$\Delta p = 400$ bar	T	Nm	573	679	796	1021	1146	1273	–	–	–	–	
Rotary stiffness	c	kNm/rad	9.14	11.2	11.9	17.4	18.2	57.3	73.1	96.1	144	270	324		
Moment of inertia for rotary group	$J_{GR}$	kgm <sup>2</sup>	0.0072	0.0116	0.0116	0.0220	0.0220	0.0353	0.061	0.102	0.178	0.55	0.55		
Maximum angular acceleration	$\alpha$	rad/s <sup>2</sup>	6000	4500	4500	3500	3500	11000	10000	8300	5500	4300	4500		
Case volume	V	L	0.55	0.8	0.8	1.1	1.1	2.7	2.5	3.5	4.2	8	8		
Mass (approx.)	m	kg	23	32	32	45	45	66	73	110	155	325	336		

- The values are valid:
  - at an absolute pressure  $p_{abs} = 1$  bar at suction port S
  - for the optimum viscosity range from  $v_{opt} = 16$  to  $36$  mm<sup>2</sup>/s
  - with hydraulic fluid based on mineral oils
- Maximum speed (limiting speed) with increased inlet pressure  $p_{abs}$  at suction port S, see adjacent diagram.
- Torque without radial force, with radial force see page 8
- Torque at  $\Delta p = 315$  bar

### Note



Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Other permissible limit values, with respect to speed variation, reduced angular acceleration as a function of the frequency and the permissible start up angular acceleration (lower than the maximum angular acceleration) can be found in data sheet RE 90261.


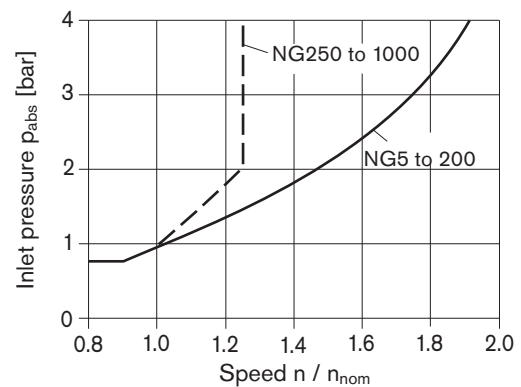




# Technical data



## Permissible radial and axial forces of the drive shafts

(splined shaft and parallel keyed shaft)

Size	NG		5	5 <sup>3)</sup>	10	10	12	12	16	23	23	
Drive shaft	∅	mm	12	12	20	25	20	25	25	25	30	
Maximum radial force <sup>1)</sup> at distance a (from shaft collar)		$F_{q \max}$	kN	1.6	1.6	3.0	3.2	3.0	3.2	3.2	5.7	5.4
		a	mm	12	12	16	16	16	16	16	16	16
with permissible torque	$T_{\max}$	Nm	24.7	24.7	66	66	76	76	102	146	146	
$\Delta p$ permissible pressure $\Delta p$	$\Delta p_{\text{perm}}$	bar	315	315	400	400	400	400	400	400	400	
Maximum axial force <sup>2)</sup>		$+F_{ax \max}$	N	180	180	320	320	320	320	500	500	
		$-F_{ax \max}$	N	0	0	0	0	0	0	0	0	
Permissible axial force per bar operating pressure	$\pm F_{ax \text{ perm}/\text{bar}}$	N/bar	1.5	1.5	3.0	3.0	3.0	3.0	3.0	5.2	5.2	

Size	NG		28	28	32	45	56	56 <sup>4)</sup>	56	63	80
Drive shaft	∅	mm	25	30	30	30	30	30	35	35	35
Maximum radial force <sup>1)</sup> at distance a (from shaft collar)		$F_{q \max}$	kN	5.7	5.4	5.4	7.6	9.5	7.8	9.1	11.6
		a	mm	16	16	16	18	18	18	18	18
with permissible torque	$T_{\max}$	Nm	179	179	204	290	357	294	357	401	512
$\Delta p$ permissible pressure $\Delta p$	$\Delta p_{\text{perm}}$	bar	400	400	400	400	400	330	400	400	400
Maximum axial force <sup>2)</sup>		$+F_{ax \max}$	N	500	500	500	630	800	800	800	1000
		$-F_{ax \max}$	N	0	0	0	0	0	0	0	0
Permissible axial force per bar operating pressure	$\pm F_{ax \text{ perm}/\text{bar}}$	N/bar	5.2	5.2	5.2	7.0	8.7	8.7	8.7	8.7	10.6

Size	NG		80 <sup>4)</sup>	80	90	107	107	125	160	160	180	
Drive shaft	∅	mm	35	40	40	40	45	45	45	50	50	
Maximum radial force <sup>1)</sup> at distance a (from shaft collar)		$F_{q \max}$	kN	11.1	11.4	11.4	13.6	14.1	14.1	18.1	18.3	18.3
		a	mm	20	20	20	20	20	20	25	25	25
with permissible torque	$T_{\max}$	Nm	488	512	573	679	679	796	1021	1021	1146	
$\Delta p$ permissible pressure $\Delta p$	$\Delta p_{\text{perm}}$	bar	380	400	400	400	400	400	400	400	400	
Maximum axial force <sup>2)</sup>		$+F_{ax \max}$	N	1000	1000	1000	1250	1250	1250	1600	1600	1600
		$-F_{ax \max}$	N	0	0	0	0	0	0	0	0	0
Permissible axial force per bar operating pressure	$\pm F_{ax \text{ perm}/\text{bar}}$	N/bar	10.6	10.6	10.6	12.9	12.9	12.9	16.7	16.7	16.7	

Size	NG		200	250	355	500	710	1000	
Drive shaft	∅	mm	50	50	60	70	90	90	
Maximum radial force <sup>1)</sup> at distance a (from shaft collar)		$F_{q \max}$	kN	20.3	1.2 <sup>6)</sup>	1.5 <sup>6)</sup>	1.9 <sup>6)</sup>	3.0 <sup>6)</sup>	2.6 <sup>6)</sup>
		a	mm	25	41	52.5	52.5	67.5	67.5
with permissible torque	$T_{\max}$	Nm	1273	<sup>5)</sup>	<sup>5)</sup>	<sup>5)</sup>	<sup>5)</sup>	<sup>5)</sup>	
$\Delta p$ permissible pressure $\Delta p$	$\Delta p_{\text{perm}}$	bar	400	<sup>5)</sup>	<sup>5)</sup>	<sup>5)</sup>	<sup>5)</sup>	<sup>5)</sup>	
Maximum axial force <sup>2)</sup>		$+F_{ax \max}$	N	1600	2000	2500	3000	4400	4400
		$-F_{ax \max}$	N	0	0	0	0	0	0
Permissible axial force per bar operating pressure	$\pm F_{ax \text{ perm}/\text{bar}}$	N/bar	16.7	<sup>5)</sup>	<sup>5)</sup>	<sup>5)</sup>	<sup>5)</sup>	<sup>5)</sup>	

1) With intermittent operation

2) Maximum permissible axial force during standstill or when the axial piston unit is operating in non-pressurized condition.

3) Conical shaft with threaded pin and woodruff key (DIN 6888)

4) Restricted technical data only for splined shaft

5) Please contact us.

6) When at a standstill or when axial piston unit operating in non-pressurized conditions. Higher forces are permissible when under pressure, please contact us.

### Note

Influence of the direction of the permissible axial force:

$+F_{ax \max}$  = Increase in service life of bearings


$-F_{ax \max}$  = Reduction in service life of bearings (avoid)

# Technical data

## Effect of radial force $F_q$ on the service life of bearings

By selecting a suitable direction of radial force  $F_q$ , the load on the bearings, caused by the internal rotary group forces can be reduced, thus optimizing the service life of the bearings. Recommended position of mating gear is dependent on direction of rotation. Examples:

NG	Toothed gear drive	V-belt output
	$\Phi_{opt}$	$\Phi_{opt}$
5 to 180	$\pm 70^\circ$	$\pm 45^\circ$
200 to 1000	$\pm 45^\circ$	$\pm 70^\circ$

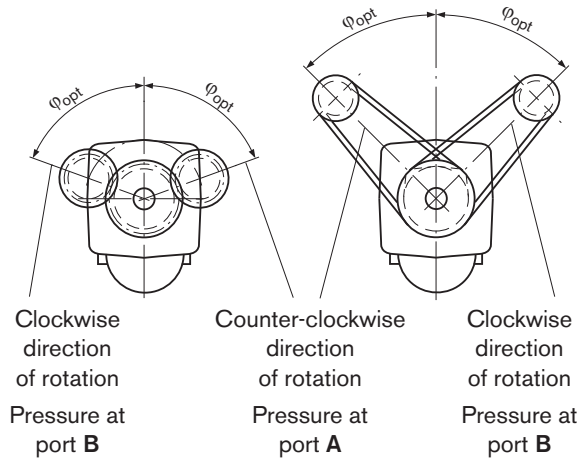

## Determining the operating characteristics

Flow  $q_v = \frac{V_g \cdot n \cdot \eta_v}{1000}$  [L/min]

Torque  $T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{mh}}$  [Nm]

Power  $P = \frac{2 \pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t}$  [kW]

$V_g$  = Displacement per revolution in  $cm^3$

$\Delta p$  = Differential pressure in bar

$n$  = Speed in rpm

$\eta_v$  = Volumetric efficiency

$\eta_{mh}$  = Mechanical-hydraulic efficiency

$\eta_t$  = Total efficiency ( $\eta_t = \eta_v \cdot \eta_{mh}$ )




# Dimensions size 5

Before finalizing your design, request a binding installation drawing. Dimensions in mm.


## Port plate 07 – Threaded ports A/B and S at side

Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

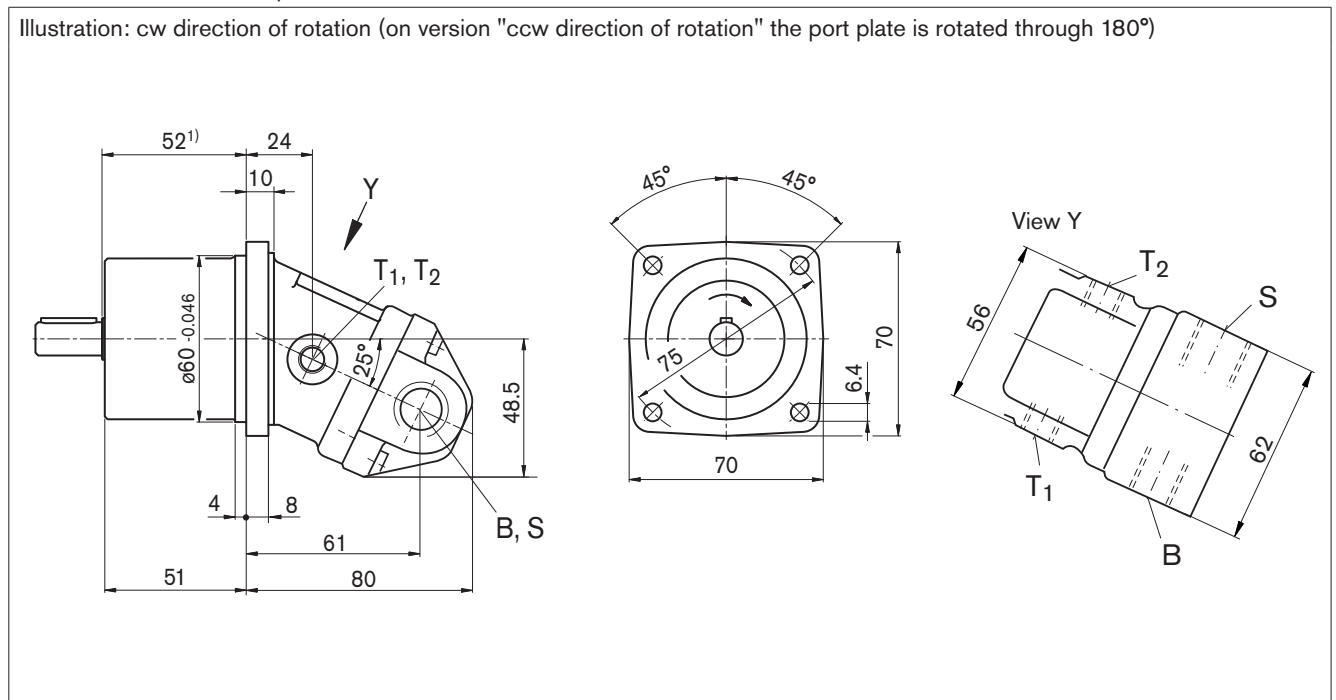


## Drive shafts

**B** Parallel keyed shaft  
DIN 6885, A4x4x20



**C** Conical shaft with threaded pin and woodruff key, 3x5  
(DIN 6888), (tapering 1:10)

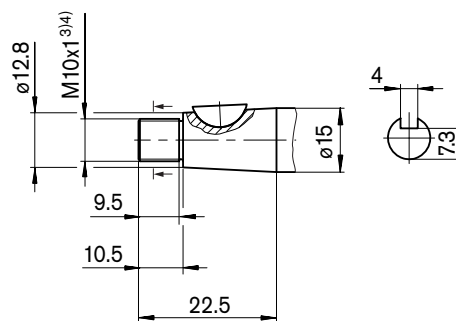

## Ports

Designation	Port for	Standard <sup>6)</sup>	Size <sup>3)</sup>	Maximum pressure [bar] <sup>5)</sup>	State <sup>7)</sup>
B (A)	Service line	DIN 3852	M18 x 1.5; 12 deep	350	O
S	Suction line	DIN 3852	M22 x 1.5; 14 deep	30	O
T <sub>1</sub>	Drain line	DIN 3852	M10 x 1; 8 deep	3	O
T <sub>2</sub>	Drain line	DIN 3852	M10 x 1; 8 deep	3	O

1) To shaft collar

2) Center bore according to DIN 332 (thread according to DIN 13)

3) Observe the general instructions on page 34 for the maximum tightening torques.

4) Thread according to DIN 3852, maximum tightening torque: 30 Nm

5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

6) The spot face can be deeper than specified in the appropriate standard.


7) O = Must be connected (plugged on delivery)

# Dimensions sizes 10, 12, 16


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

**Port plate 06** – Threaded port A/B at side and threaded port S at rear


Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

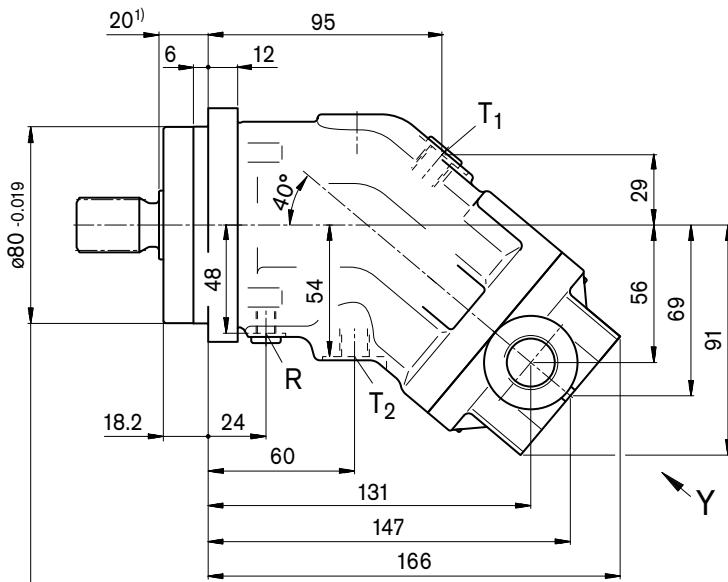

Flange  
similar to ISO 3019-2

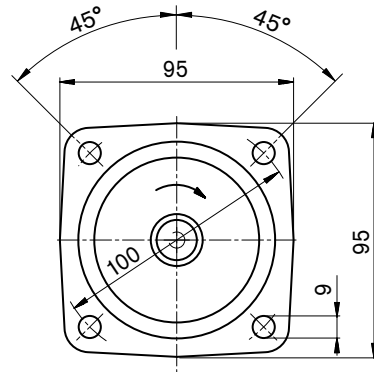

View Y

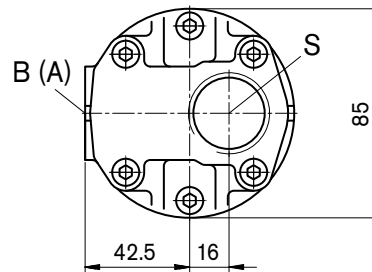


1) To shaft collar

# Dimensions sizes 10, 12, 16


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shafts


### Sizes 10, 12, 16

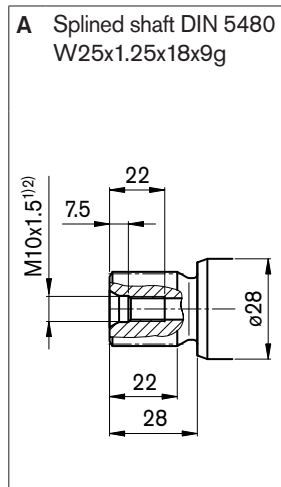


### NG10, 12

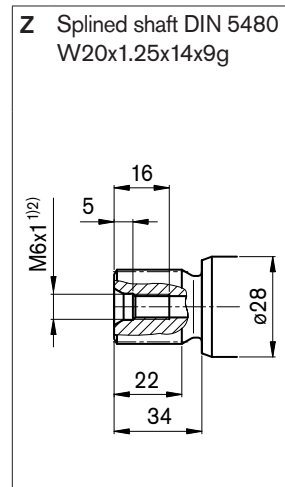

### Sizes 10, 12, 16

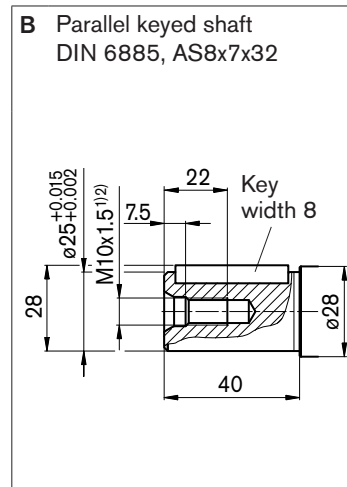

### NG10, 12

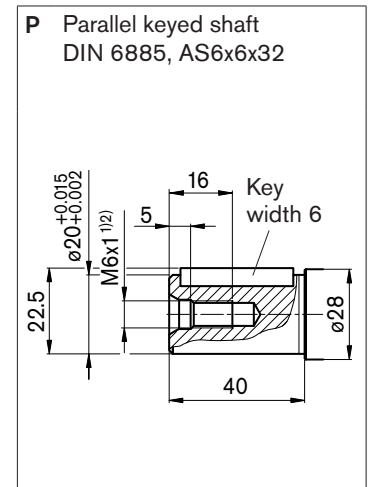

## Ports

Designation	Port for	Standard <sup>5)</sup>	Size <sup>2)</sup>	Maximum pressure [bar] <sup>3)</sup>	State <sup>6)</sup>
B (A)	Service line	DIN 3852	M22 x 1.5; 14 deep	450	O
S	Suction line	DIN 3852	M33 x 2; 18 deep	30	O
T <sub>1</sub>	Drain line	DIN 3852	M12 x 1.5; 12 deep	3	X <sup>4)</sup>
T <sub>2</sub>	Drain line	DIN 3852	M12 x 1.5; 12 deep	3	O <sup>4)</sup>
R	Air bleed	DIN 3852	M8 x 1; 8 deep	3	X

1) Center bore according to DIN 332 (thread according to DIN 13)

2) Observe the general instructions on page 34 for the maximum tightening torques.

3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 32 and 33).

5) The spot face can be deeper than specified in the appropriate standard.

6) O = Must be connected (plugged on delivery)



X = Plugged (in normal operation)

# Dimensions sizes 23, 28, 32


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear

Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

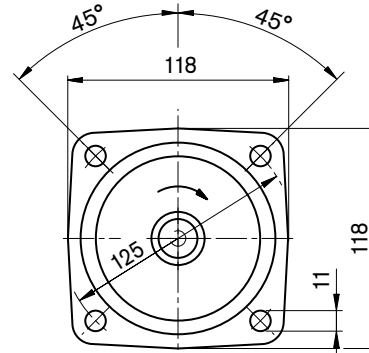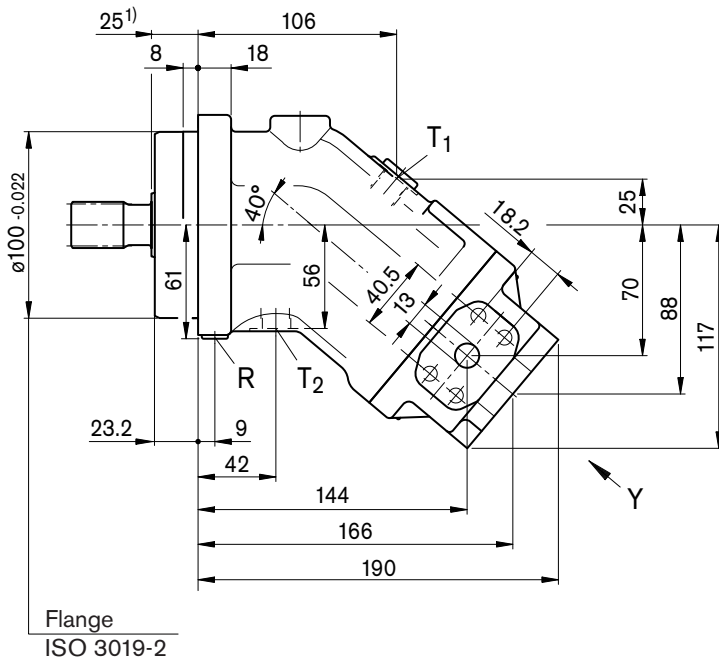

View Y

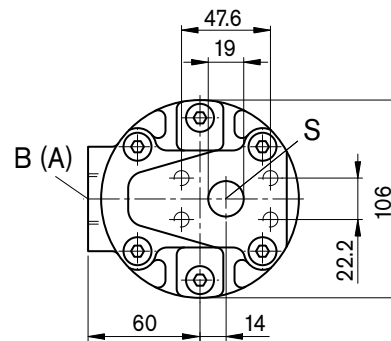

1) To shaft collar




# Dimensions sizes 23, 28, 32


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shafts


### Sizes 23, 28, 32

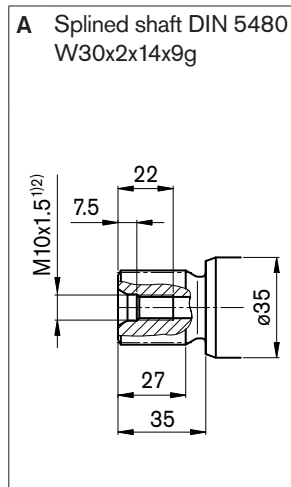


### NG23, 28

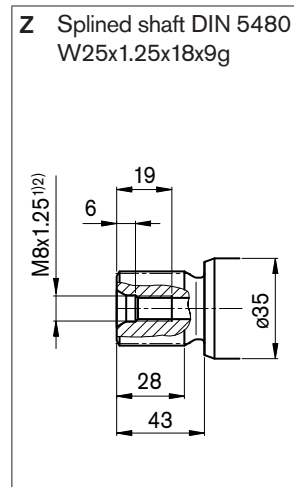

### Sizes 23, 28, 32

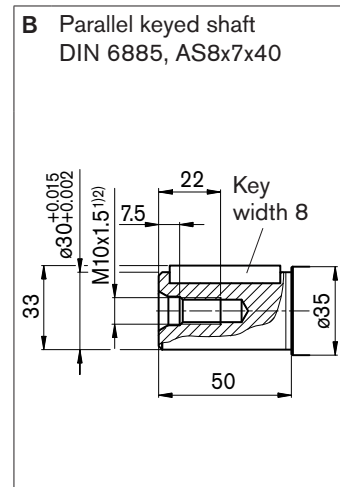

### NG23, 28

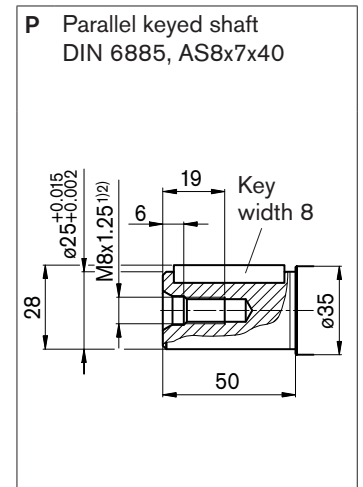

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Maximum pressure [bar] <sup>3)</sup>	State <sup>7)</sup>
B (A)	Service line Fastening thread B/A	SAE J518 <sup>5)</sup> DIN 13	1/2 in M8 x 1.25; 15 deep	450	O
S	Suction line Fastening thread	SAE J518 <sup>5)</sup> DIN 13	3/4 in M10 x 1.5; 17 deep	30	O
T <sub>1</sub>	Drain line	DIN 3852 <sup>6)</sup>	M16 x 1.5; 12 deep	3	X <sup>4)</sup>
T <sub>2</sub>	Drain line	DIN 3852 <sup>6)</sup>	M16 x 1.5; 12 deep	3	O <sup>4)</sup>
R	Air bleed	DIN 3852 <sup>6)</sup>	M10 x 1; 12 deep	3	X

1) Center bore according to DIN 332 (thread according to DIN 13)

2) Observe the general instructions on page 34 for the maximum tightening torques.

3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 32 and 33).

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

6) The spot face can be deeper than specified in the appropriate standard.

7) O = Must be connected (plugged on delivery)


X = Plugged (in normal operation)

# Dimensions size 45


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear


Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

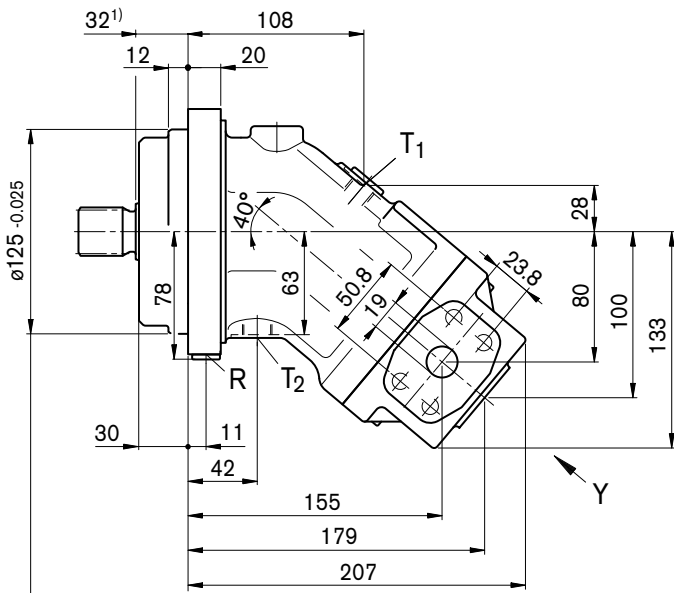

Flange  
ISO 3019-2

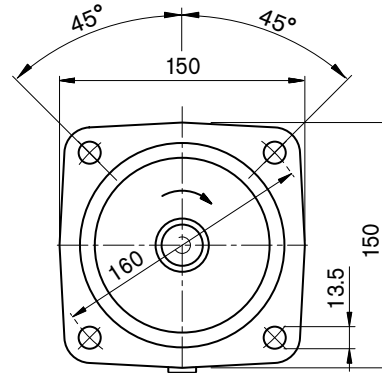

View Y

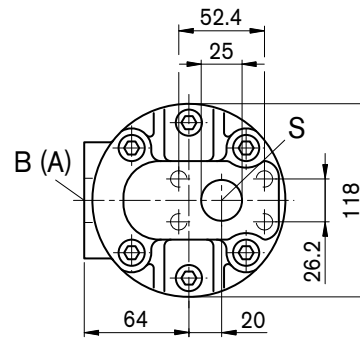


1) To shaft collar

# Dimensions size 45

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shafts

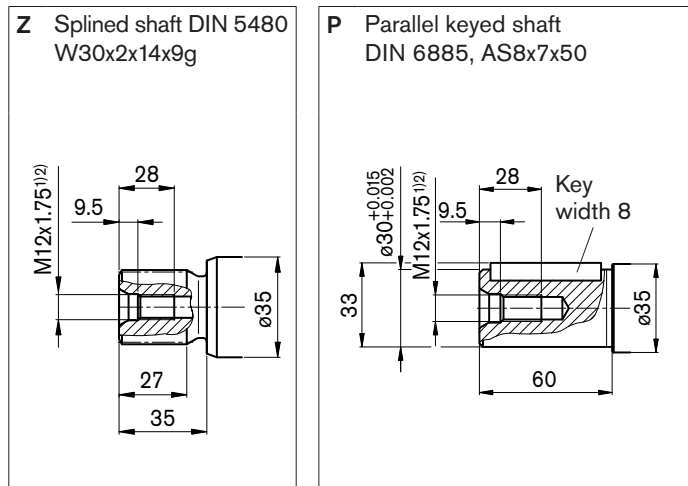

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Maximum pressure [bar] <sup>3)</sup>	State <sup>7)</sup>
B (A)	Service line Fastening thread B/A	SAE J518 <sup>5)</sup> DIN 13	3/4 in M10 x 1.5; 17 deep	450	O
S	Suction line Fastening thread	SAE J518 <sup>5)</sup> DIN 13	1 in M10 x 1.5; 17 deep	30	O
T <sub>1</sub>	Drain line	DIN 3852 <sup>6)</sup>	M18 x 1.5; 12 deep	3	X <sup>4)</sup>
T <sub>2</sub>	Drain line	DIN 3852 <sup>6)</sup>	M18 x 1.5; 12 deep	3	O <sup>4)</sup>
R	Air bleed	DIN 3852 <sup>6)</sup>	M12 x 1.5; 12 deep	3	X

1) Center bore according to DIN 332 (thread according to DIN 13)

2) Observe the general instructions on page 34 for the maximum tightening torques.

3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 32 and 33).

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

6) The spot face can be deeper than specified in the appropriate standard.

7) O = Must be connected (plugged on delivery)



X = Plugged (in normal operation)

# Dimensions sizes 56, 63


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear

Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

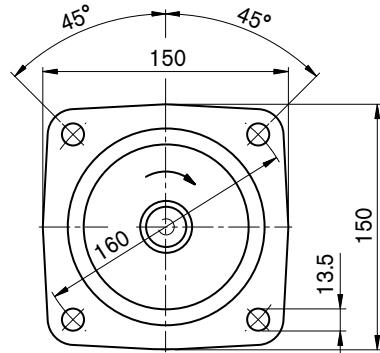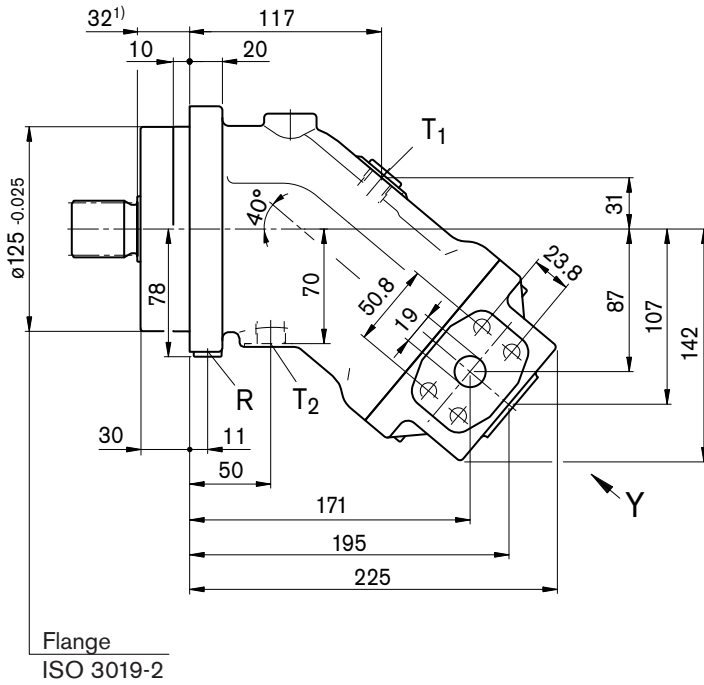

View Y

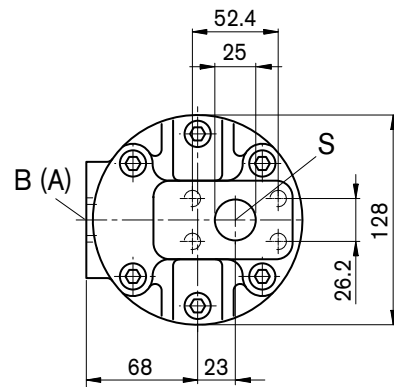


1) To shaft collar

# Dimensions sizes 56, 63


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shafts


### NG56, 63

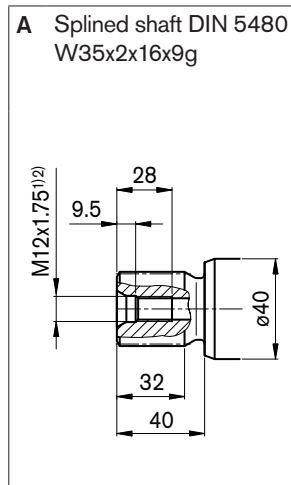


### NG56

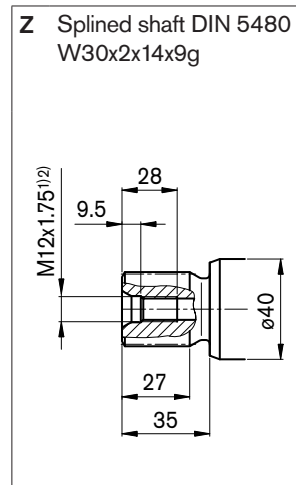

### NG56, 63

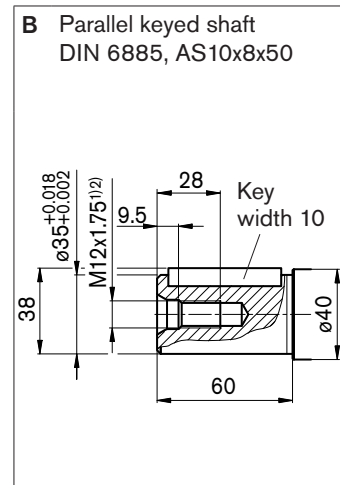

### NG56

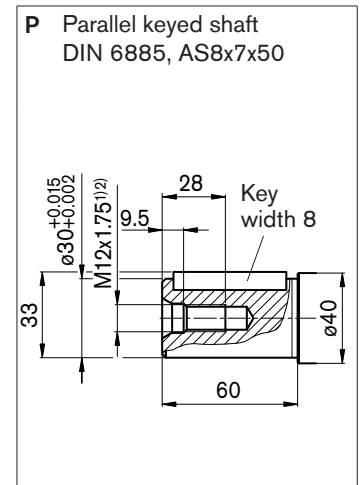

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Maximum pressure [bar] <sup>3)</sup>	State <sup>7)</sup>
B (A)	Service line Fastening thread B/A	SAE J518 <sup>5)</sup> DIN 13	3/4 in M10 x 1.5; 17 deep	450	O
S	Suction line Fastening thread	SAE J518 <sup>5)</sup> DIN 13	1 in M10 x 1.5; 17 deep	30	O
T <sub>1</sub>	Drain line	DIN 3852 <sup>6)</sup>	M18 x 1.5; 12 deep	3	X <sup>4)</sup>
T <sub>2</sub>	Drain line	DIN 3852 <sup>6)</sup>	M18 x 1.5; 12 deep	3	O <sup>4)</sup>
R	Air bleed	DIN 3852 <sup>6)</sup>	M12 x 1.5; 12 deep	3	X

1) Center bore according to DIN 332 (thread according to DIN 13)

2) Observe the general instructions on page 34 for the maximum tightening torques.

3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 32 and 33).

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

6) The spot face can be deeper than specified in the appropriate standard.

7) O = Must be connected (plugged on delivery)



X = Plugged (in normal operation)

# Dimensions sizes 80, 90


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear

Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

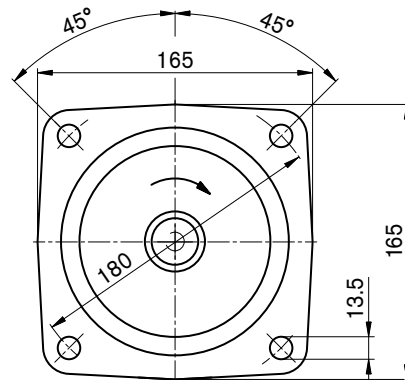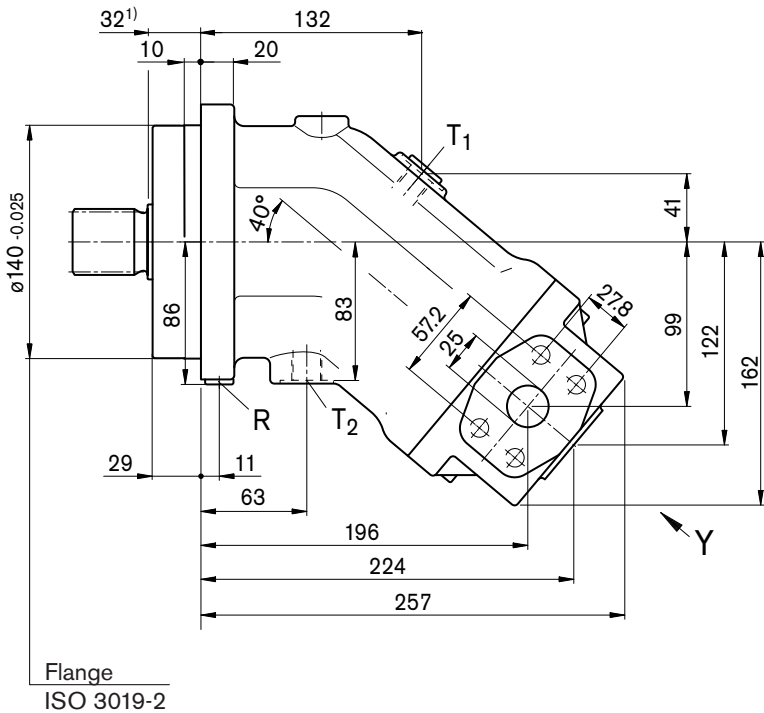

View Y

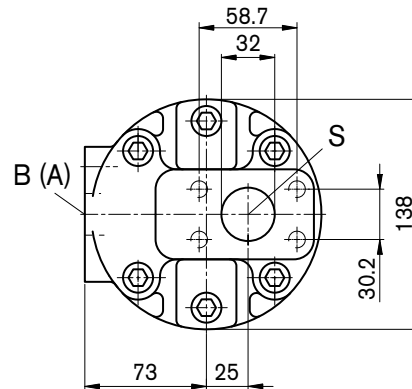


1) To shaft collar

# Dimensions sizes 80, 90


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shafts


### NG80, 90

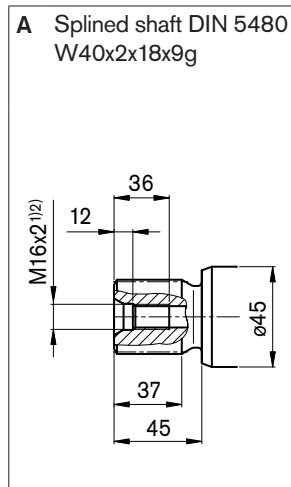


### NG80

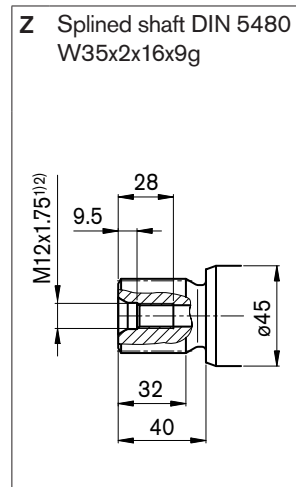

### NG80, 90

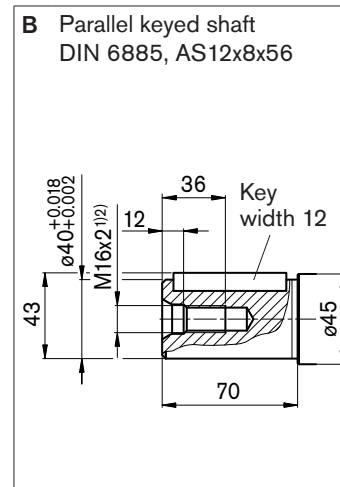

### NG80

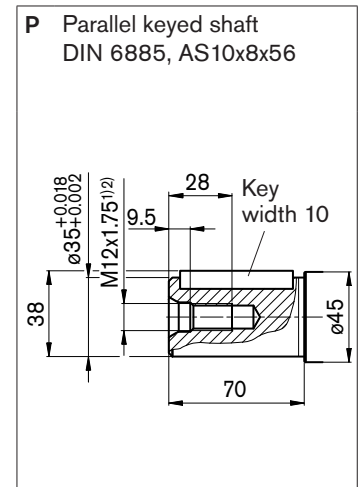

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Maximum pressure [bar] <sup>3)</sup>	State <sup>7)</sup>
B (A)	Service line Fastening thread B/A	SAE J518 <sup>5)</sup> DIN 13	1 in M12 x 1.5; 17 deep	450	O
S	Suction line Fastening thread	SAE J518 <sup>5)</sup> DIN 13	1 1/4 in M10 x 1.5; 17 deep	30	O
T <sub>1</sub>	Drain line	DIN 3852 <sup>6)</sup>	M18 x 1.5; 12 deep	3	X <sup>4)</sup>
T <sub>2</sub>	Drain line	DIN 3852 <sup>6)</sup>	M18 x 1.5; 12 deep	3	O <sup>4)</sup>
R	Air bleed	DIN 3852 <sup>6)</sup>	M12 x 1.5; 12 deep	3	X

1) Center bore according to DIN 332 (thread according to DIN 13)

2) Observe the general instructions on page 34 for the maximum tightening torques.

3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 32 and 33).

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

6) The spot face can be deeper than specified in the appropriate standard.

7) O = Must be connected (plugged on delivery)



X = Plugged (in normal operation)

# Dimensions sizes 107, 125

Before finalizing your design, request a binding installation drawing. Dimensions in mm.



Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear

Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

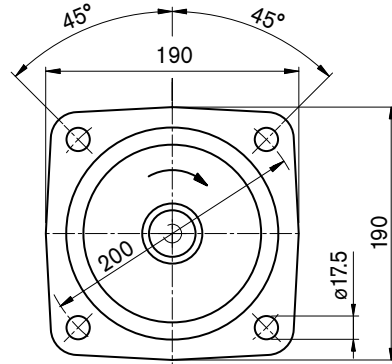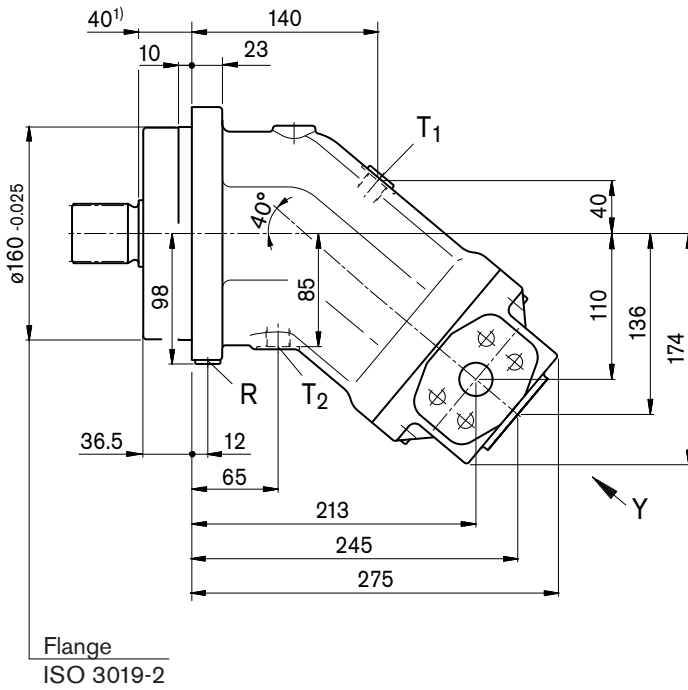

View Y

Detail: port A/B  
(dimensions in brackets for size 107)

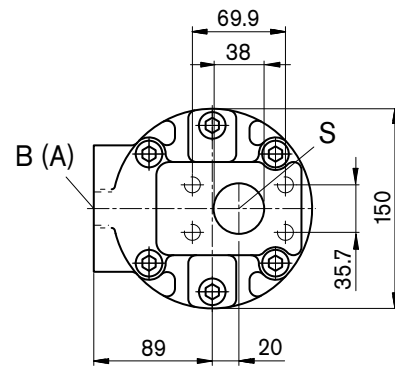

1) To shaft collar




# Dimensions sizes 107, 125


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shafts


### NG107, 125

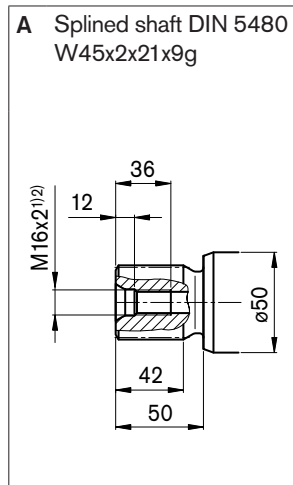


### NG107

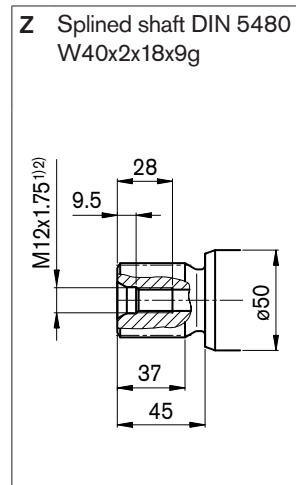

### NG107, 125

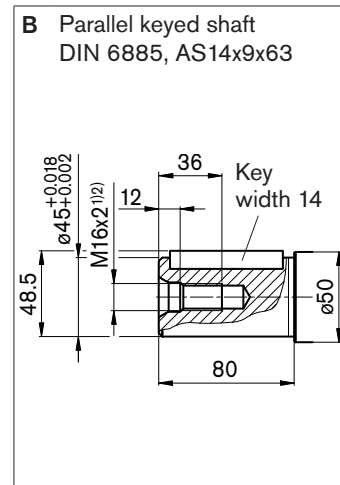

### NG107

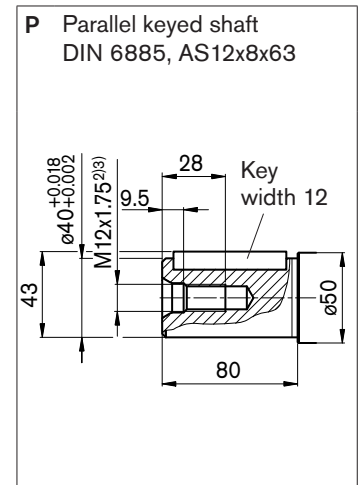

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Maximum pressure [bar] <sup>3)</sup>	State <sup>7)</sup>
B (A)	Service line	SAE J518 <sup>5)</sup>	1 in (size 107) 1 1/4 in (size 125)	450	O
	Fastening thread B/A	DIN 13	M12 x 1.75; 17 deep (size 107) M14 x 2; 19 deep (size 125)		
S	Suction line	SAE J518 <sup>5)</sup>	1 1/2 in	30	O
	Fastening thread	DIN 13	M12 x 1.75; 20 deep		
T <sub>1</sub>	Drain line	DIN 3852 <sup>6)</sup>	M18 x 1.5; 12 deep	3	X <sup>4)</sup>
T <sub>2</sub>	Drain line	DIN 3852 <sup>6)</sup>	M18 x 1.5; 12 deep	3	O <sup>4)</sup>
R	Air bleed	DIN 3852 <sup>6)</sup>	M14 x 1.5; 12 deep	3	X

1) Center bore according to DIN 332 (thread according to DIN 13)

2) Observe the general instructions on page 34 for the maximum tightening torques.

3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 32 and 33).

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

6) The spot face can be deeper than specified in the appropriate standard.

7) O = Must be connected (plugged on delivery)



X = Plugged (in normal operation)

# Dimensions sizes 160, 180


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear

Illustration: cw direction of rotation (on version "ccw direction of rotation" the port plate is rotated through 180°)

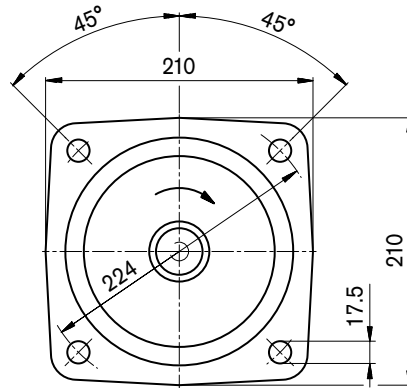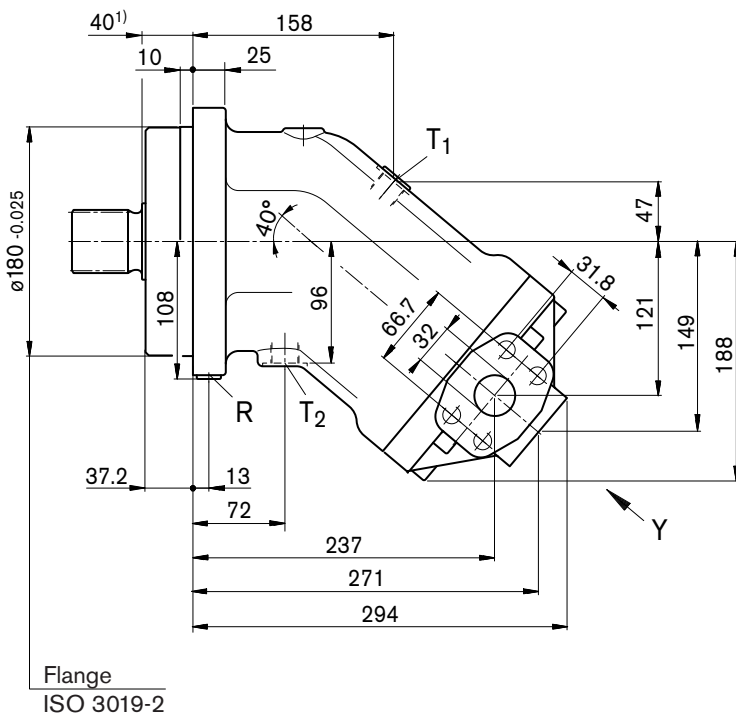

View Y

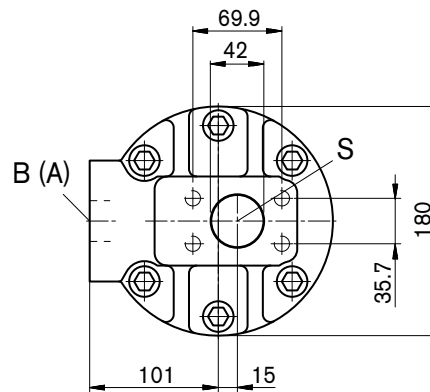


1) To shaft collar

# Dimensions sizes 160, 180


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shafts


### NG160, 180

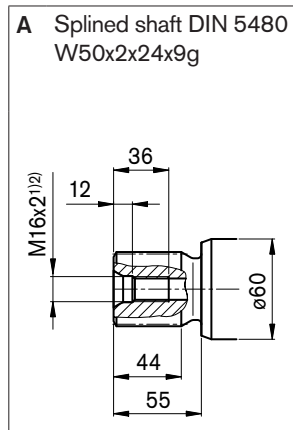


### NG160

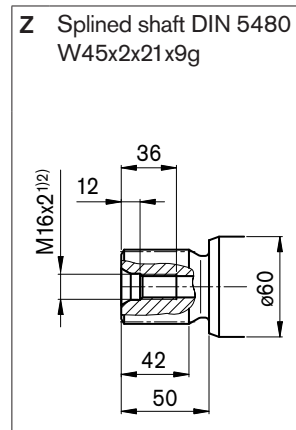

### NG160, 180

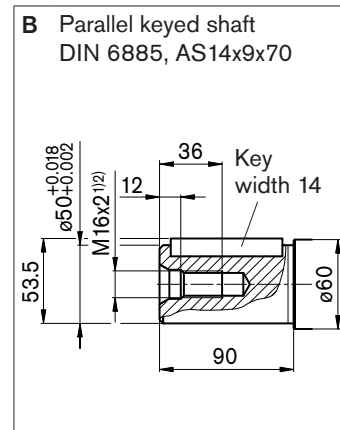

### NG160

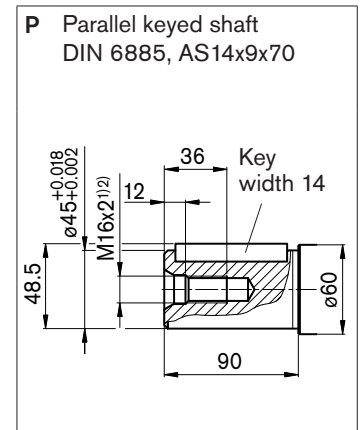

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Maximum pressure [bar] <sup>3)</sup>	State <sup>7)</sup>
B (A)	Service line Fastening thread B/A	SAE J518 <sup>5)</sup> DIN 13	1 1/4 in M14 x 2; 19 deep	450	O
S	Suction line Fastening thread	SAE J518 <sup>5)</sup> DIN 13	1 1/2 in M12 x 1.75; 20 deep	30	O
T <sub>1</sub>	Drain line	DIN 3852 <sup>6)</sup>	M22 x 1.5; 14 deep	3	X <sup>4)</sup>
T <sub>2</sub>	Drain line	DIN 3852 <sup>6)</sup>	M22 x 1.5; 14 deep	3	O <sup>4)</sup>
R	Air bleed	DIN 3852 <sup>6)</sup>	M14 x 1.5; 12 deep	3	X

1) Center bore according to DIN 332 (thread according to DIN 13)

2) Observe the general instructions on page 34 for the maximum tightening torques.

3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 32 and 33).

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

6) The spot face can be deeper than specified in the appropriate standard.


7) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)




# Dimensions size 200

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Port plate 05 – SAE flange port A/B at side and SAE flange port S at rear

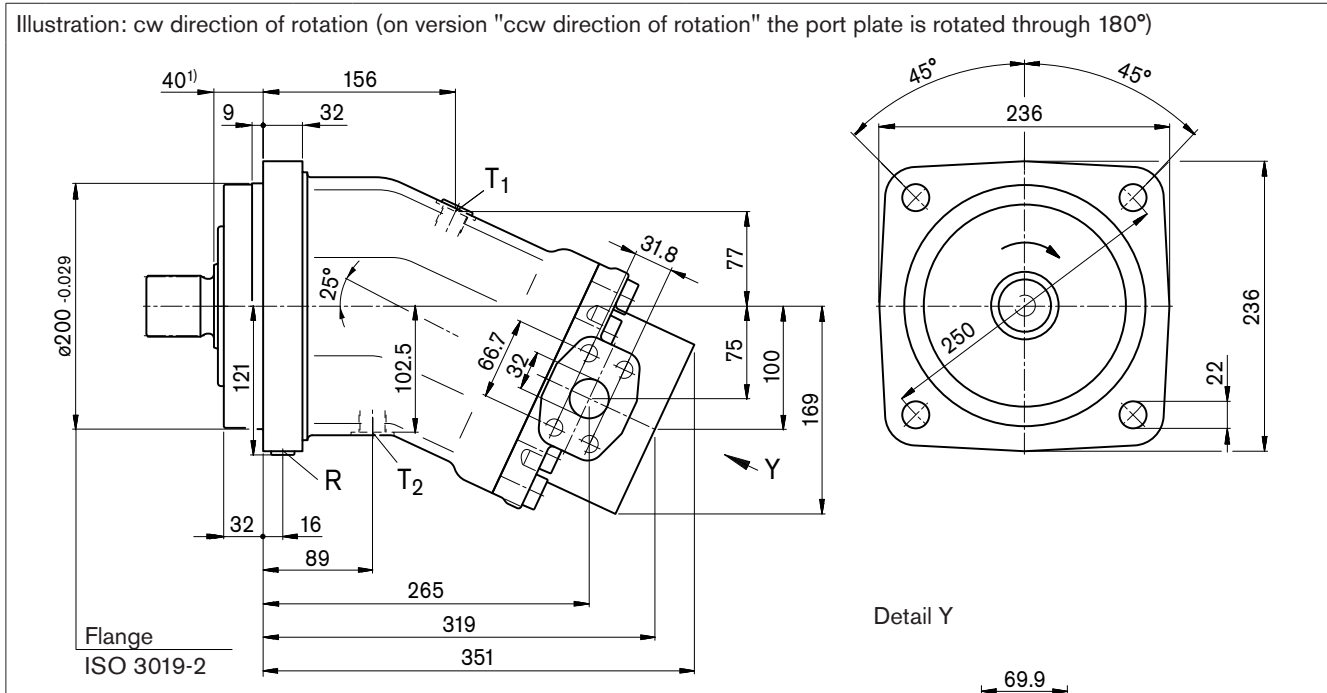

### Drive shafts

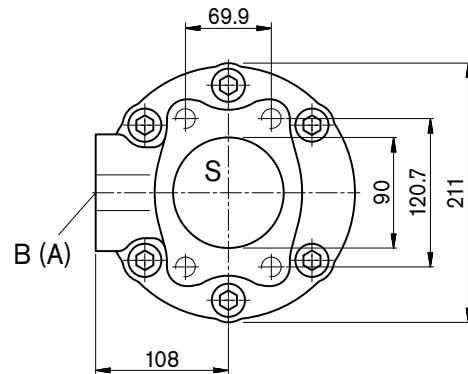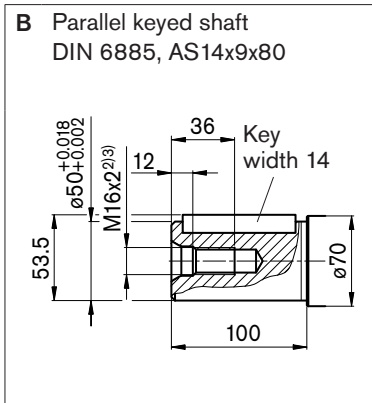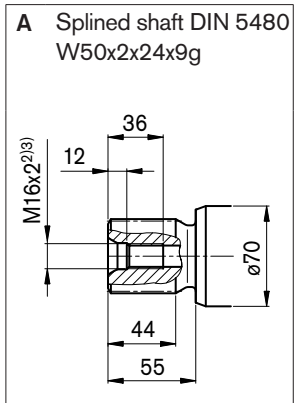

### Ports

Designation	Port for	Standard	Size <sup>(3)</sup>	Maximum pressure [bar] <sup>(4)</sup>	State <sup>(8)</sup>
B (A)	Service line Fastening thread B/A	SAE J518 <sup>(6)</sup> DIN 13	1 1/4 in M14 x 2; 19 deep	450	O
S	Suction line Fastening thread	SAE J518 <sup>(6)</sup> DIN 13	3 1/2 in M16 x 2; 24 deep	30	O
T <sub>1</sub>	Drain line	DIN 3852 <sup>(7)</sup>	M22 x 1.5; 14 deep	3	X <sup>(5)</sup>
T <sub>2</sub>	Drain line	DIN 3852 <sup>(7)</sup>	M22 x 1.5; 14 deep	3	O <sup>(5)</sup>
R	Air bleed	DIN 3852 <sup>(7)</sup>	M14 x 1.5; 12 deep	3	X


- 1) To shaft collar
- 2) Center bore according to DIN 332 (thread according to DIN 13)
- 3) Observe the general instructions on page 34 for the maximum tightening torques.
- 4) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 5) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 32 and 33).
- 6) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.
- 7) The spot face can be deeper than specified in the appropriate standard.
- 8) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)






# Dimensions size 355

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Port plate 11 – SAE flange ports A/B and S at rear

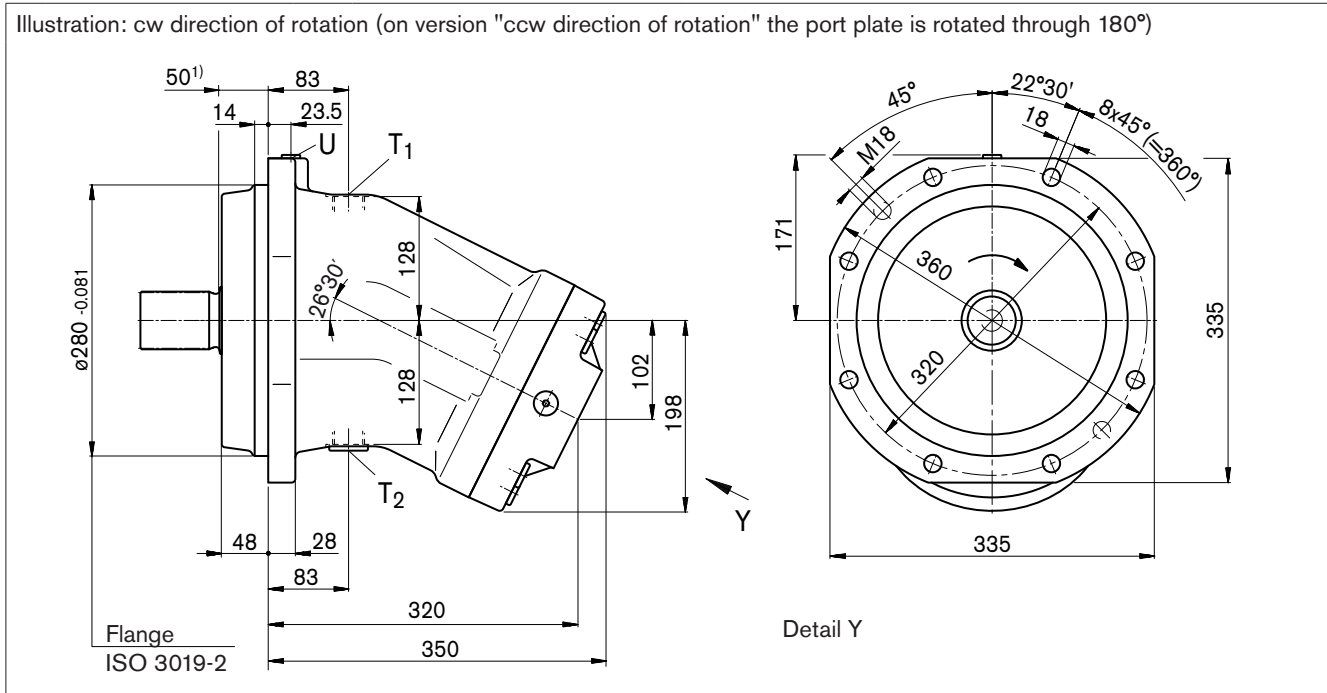

### Drive shafts

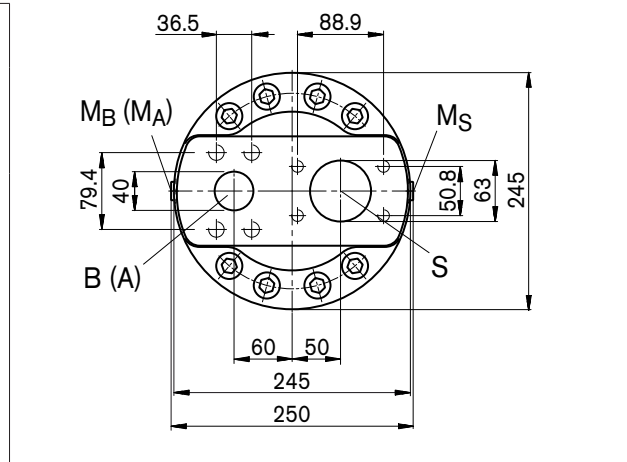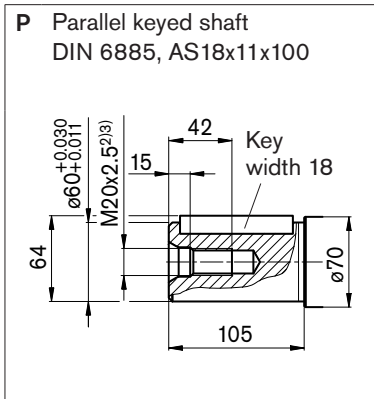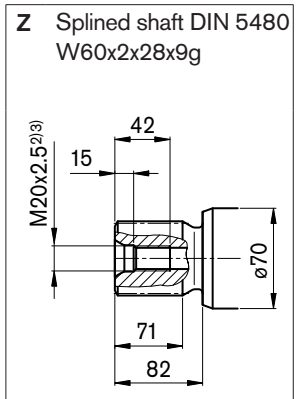

### Ports


Designation	Port for	Standard	Size <sup>(3)</sup>	Maximum pressure [bar] <sup>(4)</sup>	State <sup>(8)</sup>
B (A)	Service line Fastening thread B/A	SAE J518 <sup>(6)</sup> DIN 13	1 1/2 in M16 x 2; 21 deep	400	O
S	Suction line Fastening thread	SAE J518 <sup>(6)</sup> DIN 13	2 1/2 in M12 x 1.75; 17 deep	30	O
T <sub>1</sub>	Drain line	DIN 3852 <sup>(7)</sup>	M33 x 2; 18 deep	3	O <sup>(5)</sup>
T <sub>2</sub>	Drain line	DIN 3852 <sup>(7)</sup>	M33 x 2; 18 deep	3	X <sup>(5)</sup>
U	Bearing flushing	DIN 3852 <sup>(7)</sup>	M14 x 1.5; 12 deep	3	X
M <sub>A</sub> , M <sub>B</sub>	Measuring operating pressure	DIN 3852 <sup>(7)</sup>	M14 x 1.5; 12 deep	400	X
M <sub>S</sub>	Measuring suction pressure	DIN 3852 <sup>(7)</sup>	M14 x 1.5; 12 deep	30	X

- 1) To shaft collar
- 2) Center bore according to DIN 332 (thread according to DIN 13)
- 3) Observe the general instructions on page 34 for the maximum tightening torques.
- 4) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 5) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 32 and 33).
- 6) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.
- 7) The spot face can be deeper than specified in the appropriate standard.
- 8) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)



# Dimensions size 500

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Port plate 11 – SAE flange ports A/B and S at rear

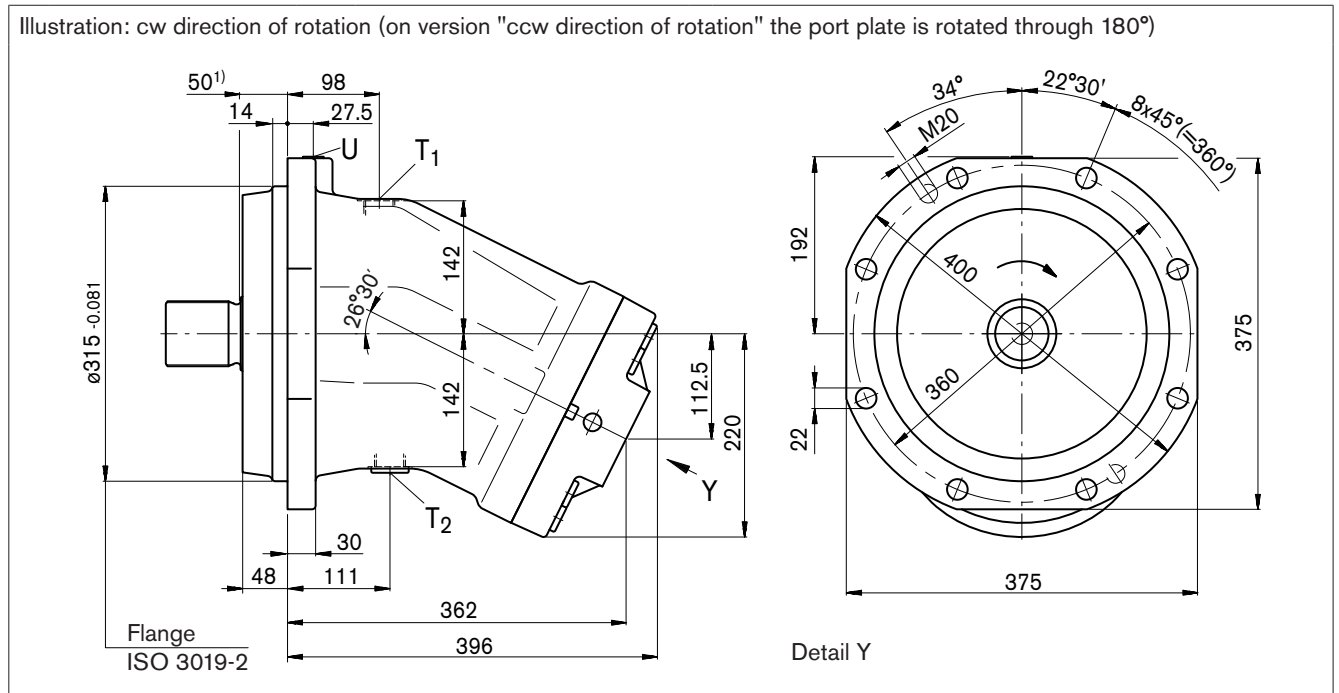

## Drive shafts

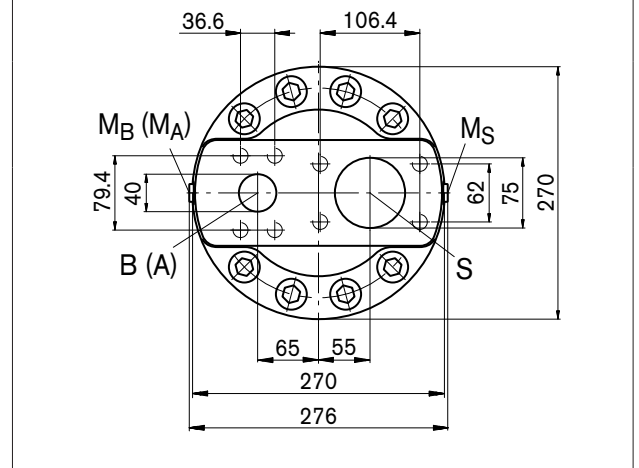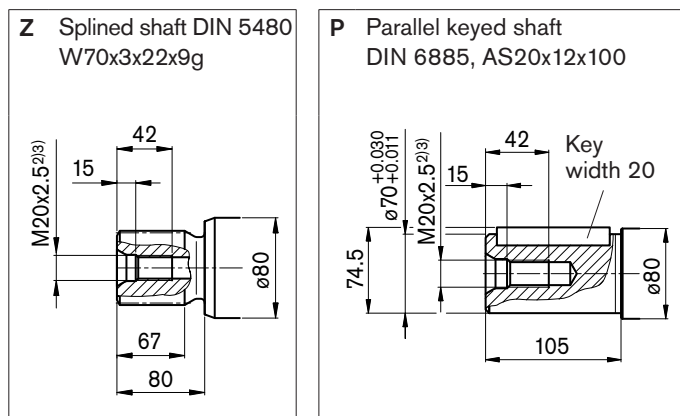

## Ports

Designation	Port for	Standard	Size <sup>3)</sup>	Maximum pressure [bar] <sup>4)</sup>	State <sup>8)</sup>
B (A)	Service line fastening thread B/A	SAE J518 <sup>6)</sup> DIN 13	1 1/2 in M16 x 2; 21 deep	400	O
S	Suction line fastening thread	SAE J518 <sup>6)</sup> DIN 13	3 in M16 x 2; 24 deep	30	O
T <sub>1</sub>	Drain line	DIN 3852 <sup>7)</sup>	M33 x 2; 18 deep	3	O <sup>5)</sup>
T <sub>2</sub>	Drain line	DIN 3852 <sup>7)</sup>	M33 x 2; 18 deep	3	X <sup>5)</sup>
U	Bearing flushing	DIN 3852 <sup>7)</sup>	M18 x 1.5; 12 deep	3	X
M <sub>A</sub> , M <sub>B</sub>	Operating pressure measurement	DIN 3852 <sup>7)</sup>	M14 x 1.5; 12 deep	400	X
M <sub>S</sub>	Suction pressure measurement	DIN 3852 <sup>7)</sup>	M14 x 1.5; 12 deep	30	X

1) To shaft collar

2) Center bore according to DIN 332 (thread according to DIN 13)

3) Observe the general instructions on page 34 for the maximum tightening torques.

4) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

5) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 32 and 33).

6) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

7) The spot face can be deeper than specified in the appropriate standard.


8) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)




# Dimensions size 710

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Port plate 11 – SAE flange ports A/B and S at rear

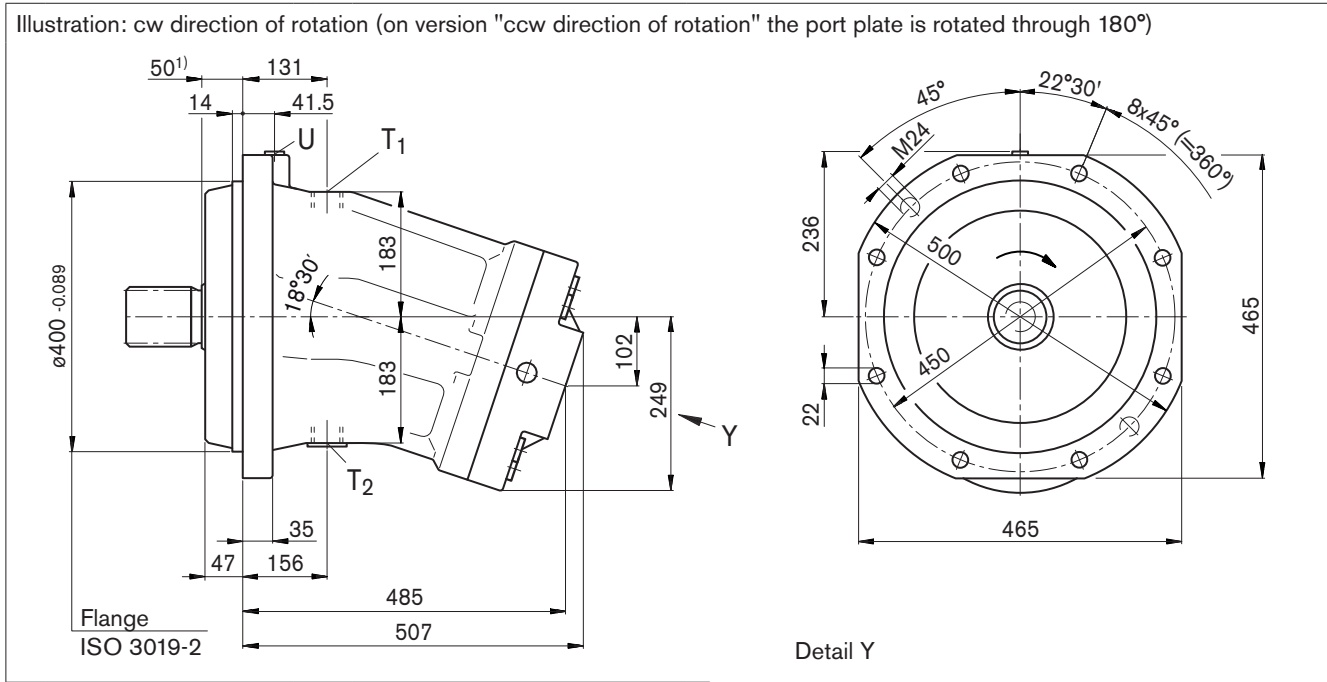

## Drive shafts

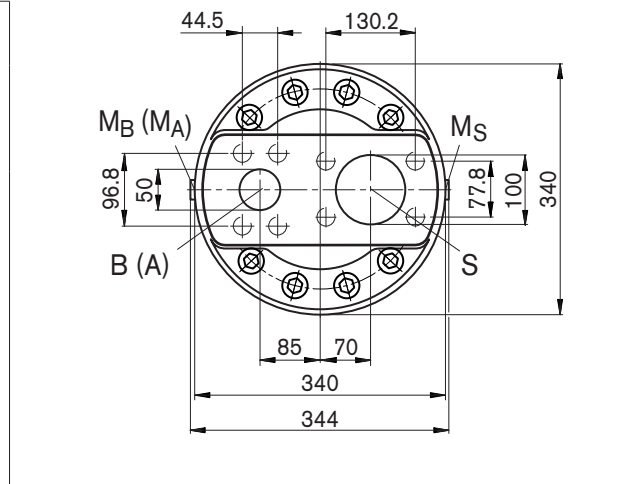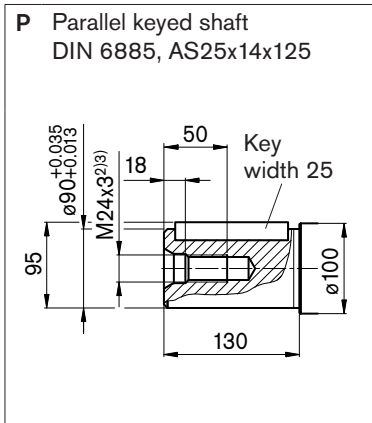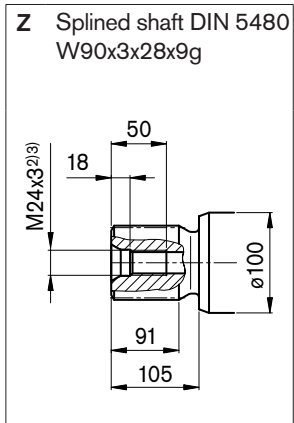

## Ports

Designation	Port for	Standard	Size <sup>3)</sup>	Maximum pressure [bar] <sup>4)</sup>	State <sup>8)</sup>
B (A)	Service line Fastening thread B/A	SAE J518 <sup>6)</sup> DIN 13	2 in M20 x 2.5; 30 deep	400	
S	Suction line Fastening thread	SAE J518 <sup>6)</sup> DIN 13	4 in M16 x 2; 24 deep	30	O
T <sub>1</sub>	Drain line	DIN 3852 <sup>7)</sup>	M42 x 2; 20 deep	3	O <sup>5)</sup>
T <sub>2</sub>	Drain line	DIN 3852 <sup>7)</sup>	M42 x 2; 20 deep	3	X <sup>5)</sup>
U	Bearing flushing	DIN 3852 <sup>7)</sup>	M18 x 1.5; 12 deep	3	X
M <sub>A</sub> , M <sub>B</sub>	Measuring operating pressure	DIN 3852 <sup>7)</sup>	M14 x 1.5; 12 deep	400	X
M <sub>S</sub>	Measuring suction pressure	DIN 3852 <sup>7)</sup>	M14 x 1.5; 12 deep	30	X


- To shaft collar
- Center bore according to DIN 332 (thread according to DIN 13)
- Observe the general instructions on page 34 for the maximum tightening torques.
- Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 32 and 33).
- Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.
- The spot face can be deeper than specified in the appropriate standard.
- O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)



# Dimensions size 1000


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Port plate 11 – SAE flange ports A/B and S at rear

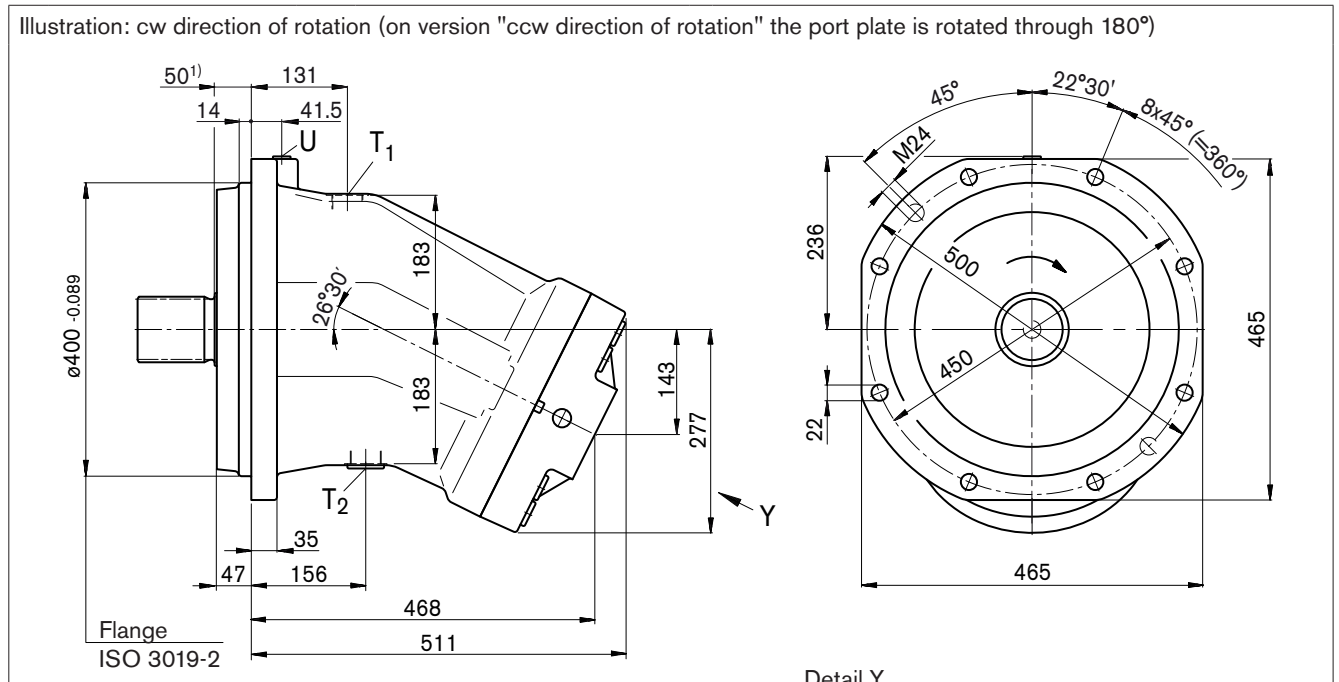


## Drive shafts

**Z** Splined shaft DIN 5480  
W90x3x28x9g



**P** Parallel keyed shaft  
DIN 6885, AS25x14x125



## Ports

Designation	Port for	Standard	Size <sup>(3)</sup>	Maximum pressure [bar] <sup>(4)</sup>	State <sup>(8)</sup>
B (A)	Service line fastening thread B/A	SAE J518 <sup>(6)</sup> DIN 13	2 in M20 x 2.5; 30 deep	400	
S	Suction line fastening thread	SAE J518 <sup>(6)</sup> DIN 13	4 in M16 x 2; 24 deep	30	O
T <sub>1</sub>	Drain line	DIN 3852 <sup>(7)</sup>	M42 x 2; 20 deep	3	O <sup>(5)</sup>
T <sub>2</sub>	Drain line	DIN 3852 <sup>(7)</sup>	M42 x 2; 20 deep	3	X <sup>(5)</sup>
U	Bearing flushing	DIN 3852 <sup>(7)</sup>	M18 x 1.5; 12 deep	3	X
M <sub>A</sub> , M <sub>B</sub>	Measuring operating pressure	DIN 3852 <sup>(7)</sup>	M14 x 1.5; 12 deep	400	X
M <sub>S</sub>	Measuring suction pressure	DIN 3852 <sup>(7)</sup>	M14 x 1.5; 12 deep	30	X

1) To shaft collar

2) Center bore according to DIN 332 (thread according to DIN 13)

3) Observe the general instructions on page 34 for the maximum tightening torques.

4) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

5) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 32 and 33).

6) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

7) The spot face can be deeper than specified in the appropriate standard.

8) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)

# Installation instructions

## General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This must also be observed following a relatively long standstill as the axial piston unit may drain back to the reservoir via the hydraulic lines.

Particularly in the installation position "drive shaft upwards" filling and air bleeding must be carried out completely as there is, for example, a danger of dry running.

The case drain fluid in the motor housing must be directed to the reservoir via the highest available drain port ( $T_1, T_2$ ).

For combinations of multiple units, make sure that the respective case pressure in each unit is not exceeded. In the event of pressure differences at the drain ports of the units, the shared drain line must be changed so that the minimum permissible case pressure of all connected units is not exceeded in any situation. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction and drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure; it must not, however, be higher than  $h_{s\ max} = 800\ \text{mm}$ . The minimum suction pressure at port S must also not fall below 0.8 bar absolute during operation and during cold start.


## Installation position

See the following examples 1 to 8. Further installation positions are possible upon request.

Recommended installation positions: 1 and 2.

### Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.

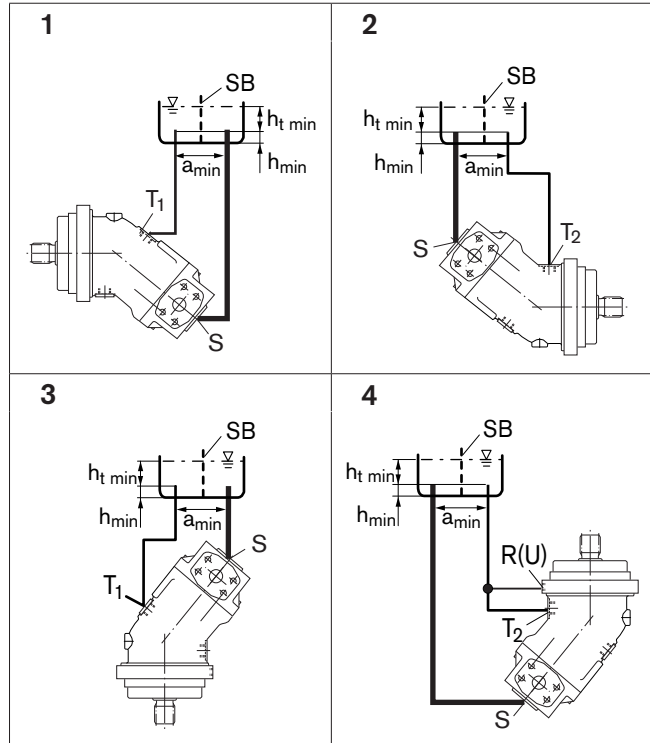


Installation position	Air bleed	Filling
1	-	$T_1$
2	-	$T_2$
3	-	$T_1$
4	R (U)	$T_2$

# Installation instructions

## Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.

Recommendation for installation position 8 (drive shaft upward): A check valve in the drain line (cracking pressure 0.5 bar) can prevent draining of the pump housing.

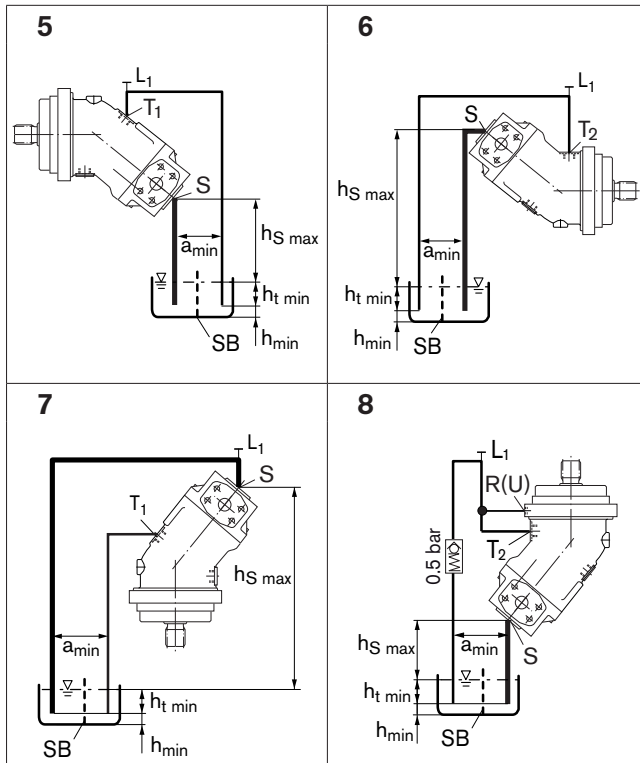

Installation position	Air bleed	Filling
5	L <sub>1</sub>	T <sub>1</sub> (L <sub>1</sub> )
6	L <sub>1</sub>	T <sub>2</sub> (L <sub>1</sub> )
7	L <sub>1</sub>	T <sub>1</sub> (L <sub>1</sub> )
8	R (U)	T <sub>2</sub> (L <sub>1</sub> )

- L<sub>1</sub>** Filling / air bleed
- R** Air bleed port
- U** Bearing flushing / air bleed port
- S** Suction port
- T<sub>1</sub>, T<sub>2</sub>** Drain port
- h<sub>t min</sub>** Minimum required immersion depth (200 mm)
- h<sub>min</sub>** Minimum required spacing to reservoir bottom (100 mm)
- SB** Baffle (baffle plate)
- h<sub>S max</sub>** Maximum permissible suction height (800 mm)
- a<sub>min</sub>** When designing the reservoir, ensure adequate space between the suction line and the drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

## General instructions

- The pump A2FO is designed to be used in open circuits.
- The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified personnel.
- Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
- During and shortly after operation, there is a risk of burns on the axial piston unit. Take appropriate safety measures (e. g. by wearing protective clothing).
- Depending on the operating conditions of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- Service line ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The service line ports and function ports can only be used to accommodate hydraulic lines.
- The data and notes contained herein must be adhered to.
- The product is not approved as a component for the safety concept of a general machine according to ISO 13849.
- A pressure-relief valve is to be fitted in the hydraulic system.
- The following tightening torques apply:
  - Fittings:
    - Observe the manufacturer's instructions regarding tightening torques of the fittings used.
  - Mounting bolts:
    - For mounting bolts with metric ISO thread according to DIN 13 or with thread according to ASME B1.1, we recommend checking the tightening torque in individual cases in accordance with VDI 2230.
  - Female threads in the axial piston unit:
    - The maximum permissible tightening torques  $M_{G \max}$  are maximum values for the female threads and must not be exceeded. For values, see the following table.
  - Threaded plugs:
    - For the metallic threaded plugs supplied with the axial piston unit, the required tightening torques of threaded plugs  $M_V$  apply. For values, see the following table.

Ports		Maximum permissible tightening torque of the female threads $M_{G \max}$	Required tightening torque of the threaded plugs $M_V$ <sup>1)</sup>	WAF hexagon socket in the threaded plugs
Standard	Size of thread			
DIN 3852	M8 x 1	10 Nm	7 Nm	3 mm
	M10 x 1	30 Nm	15 Nm <sup>2)</sup>	5 mm
	M12 x 1.5	50 Nm	25 Nm <sup>2)</sup>	6 mm
	M14 x 1.5	80 Nm	35 Nm	6 mm
	M16 x 1.5	100 Nm	50 Nm	8 mm
	M18 x 1.5	140 Nm	60 Nm	8 mm
	M22 x 1.5	210 Nm	80 Nm	10 mm
	M33 x 2	540 Nm	225 Nm	17 mm
	M42 x 2	720 Nm	360 Nm	22 mm

- 1) The tightening torques apply for screws in the "dry" state as received on delivery and in the "lightly oiled" state for installation.  
 2) In the "lightly oiled" state, the  $M_V$  is reduced to 10 Nm for M10 x 1 and 17 Nm for M12 x 1.5.

Bosch Rexroth AG  
 Mobile Applications  
 Glockeraustrasse 4  
 89275 Elchingen, Germany  
 Tel.: +49-7308-82-0  
 Fax: +49-7308-72-74  
 info.brm@boschrexroth.de  
 www.boschrexroth.com/axial-piston-pumps

An den Kelterwiesen 14  
 72160 Horb, Germany  
 Tel.: +49-7451-92-0  
 Fax: +49-7451-82-21

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.


Subject to change.

# Axial piston fixed pump A4FO

**RE 91455**

Edition: 03.2015

Replaces: 04.2000

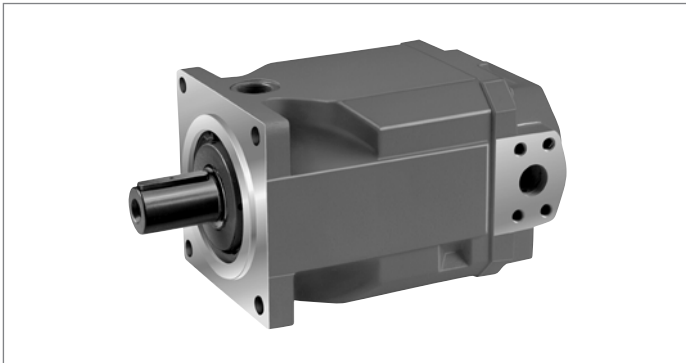

- ▶ Sizes 22 and 28
  - Nominal pressure 400 bar
  - Maximum pressure 450 bar
- ▶ Sizes 71 to 500
  - Nominal pressure 350 bar
  - Maximum pressure 400 bar

**Features**

- ▶ Fixed pump in axial piston swashplate design for hydrostatic drives in an open circuit
- ▶ For use in mobile and stationary applications
- ▶ Flow is proportional to the drive speed and displacement.
- ▶ High power density
- ▶ High total efficiency
- ▶ Optimized dimensions for special installation situations
- ▶ Excellent suction characteristics
- ▶ Low noise level
- ▶ Long service life
- ▶ Economical design
- ▶ Through drive for combining additional pumps

**Contents**

Type code	2
Hydraulic fluids	4
Shaft seal	6
Flow direction	6
Working pressure range	7
Technical data	8
Dimensions sizes 22, 28	12
Dimensions size 71	14
Dimensions size 125	16
Dimensions size 180	18
Dimensions size 250	20
Dimensions size 500	22
Through drives dimensions	24
Overview of attachment options	25
Installation instructions	26
Project planning notes	28
Safety instructions	28

## Type code

01	02	03	04	05	06	07	08	09	10	11
	<b>A4F</b>	<b>O</b>	/			-				

### Hydraulic fluid

		022	028	071	125	180	250	500	
01	Mineral oil, HFD hydraulic fluid (no code)	●	●	●	●	●	●	●	
	HFA, HFB, HFC hydraulic fluid	-	-	●	●	●	●	●	E-
	High-speed version	-	-	-	-	-	●	●	H-

### Axial piston unit

02	Swashplate design, fixed displacement	<b>A4F</b>
----	---------------------------------------	------------

### Operating mode

03	Pump, open circuit	<b>O</b>
----	--------------------	----------

### Size (NG)

04	Geometric displacement, see „Technical data“ on page 8	<b>022</b>	<b>028</b>	<b>071</b>	<b>125</b>	<b>180</b>	<b>250</b>	<b>500</b>
----	--	------------	------------	------------	------------	------------	------------	------------

### Series

		022, 028	071	125 to 500	
05	Series 1, index 0	-	●	-	<b>10</b>
	Series 3, index 0	-	-	●	<b>30</b>
	Series 3, index 2	●	-	-	<b>32</b>

### Direction of rotation

06	Viewed on drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

### Sealing material

		022, 028	071 to 500	
07	NBR (nitrile rubber), shaft seal in FKM (fluoroelastomer)	●	-	<b>N</b>
		-	●	<b>P</b>
	FKM (fluoroelastomer)	-	●	<b>V</b>

### Drive shaft (permissible input torque, see page 10)

		022	028	071	125	180	250	500	
08	Splined shaft ANSI B92.1a	●	●	-	-	-	-	-	<b>S</b>
	Splined shaft DIN 5480	-	-	●	●	●	●	●	<b>Z</b>
	Parallel keyed shaft DIN 6885	-	-	●	●	●	●	●	<b>P</b>

### Mounting flange

		022	028	071	125	180	250	500	
09	SAE J744, 2-hole	●	●	-	-	-	-	-	<b>C</b>
	ISO 3019, 4-hole	-	-	●	●	●	●	-	<b>B</b>
	ISO 3019, 8-hole	-	-	-	-	-	-	●	<b>H</b>

### Working port<sup>1)</sup>

		022, 028	071 to 500	
10	SAE pressure and suction port, at side, opposite	●	-	<b>12</b>
	SAE pressure and suction port, at side, offset by 90° 2nd pressure port B1 opposite B (plugged with flange plate on delivery)	-	●	<b>25</b>

● = Available    - = Not available

<sup>1)</sup> Fastening thread, metric

01	02	03	04	05	06	07	08	09	10	11
	<b>A4F</b>	<b>O</b>		/		-				

**Through drive** (for attachment options, see page 25)

		022	028	071	125	180	250	500		
11	Without through drive	●	●	●	●	●	●	●	<b>N00</b>	
	With through drive for mounting an axial piston unit or gear pump	●	●	●	-	-	-	●	<b>K...</b>	
	Universal through drive (can be modified)	-	-	-	●	●	●	-	<b>U...</b>	
	Flange SAE J744	Hub for splined shaft SAE J744								
	82-2 (A)	5/8 in (16-4)	●	●	●	●	●	●	●	<b>...01</b>
	101-2 (B)	7/8 in (22-4)	●	●	-	-	-	-	-	<b>...02</b>
	101-2 (B)	7/8 in (22-4)	-	-	●	●	●	●	○	<b>...68</b>
	Flange ISO 3019-2 (metric)	Hub for splined shaft SAE J744								
	80, 2-hole	3/4 in (19-4)	-	-	●	●	●	●	○	<b>...B2</b>
	100, 2-hole	7/8 in (22-4)	-	-	●	●	●	●	○	<b>...B3</b>
	100, 2-hole	1 in (25-4)	-	-	●	●	●	●	○	<b>...B4</b>
	125, 2-hole	1 1/4 in (32-4)	-	-	●	●	●	●	○	<b>...B5</b>
	125, 2-hole	1 1/2 in (38-4)	-	-	-	●	●	●	○	<b>...B6</b>
	180, 4-hole	1 3/4 in (44-4)	-	-	-	-	●	●	●	<b>...B7</b>
	Flange ISO 3019-2 (metric)	Hub for splined shaft DIN 5480								
	125, 4-hole	W32×2×14×9g	-	-	●	●	●	●	○	<b>...31</b>
	140, 4-hole	W40×2×18×9g	-	-	●	●	●	●	○	<b>...33</b>
	160, 4-hole	W50×2×24×9g	-	-	-	●	●	●	●	<b>...34</b>
	224, 4-hole	W60×2×28×9g	-	-	-	-	-	●	●	<b>...35</b>
	315, 8-hole	W80×3×25×9g	-	-	-	-	-	-	●	<b>...43</b>
With through-drive shaft, without hub, without intermediate flange, closed with cover		-	-	●	●	●	●	●	<b>...99</b>	

● = Available    ○ = On request    - = Not available

**Notes**

- ▶ Note the project planning notes on page 28.
- ▶ Preservation:
  - Up to 12 months as standard
  - Up to 24 months long-term (state in plain text when ordering)

## Hydraulic fluids

The A4FO fixed pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)
- ▶ 90223: Fire-resistant, water-containing hydraulic fluids (HFC, HFB, HFAE, HFAS)  
Sizes 22 and 28 are not suitable for operation with HFA, HFB and HFC.

### Details regarding the choice of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $\nu_{opt}$ , see selection diagram).

### Note

At no point of the component may the temperature be higher than 115 °C (sizes 22 and 28) and 90 °C (sizes 71 to 500). The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing. If the above conditions cannot be maintained due to extreme operating parameters, please contact the responsible member of staff at Bosch Rexroth.

## Viscosity and temperature of hydraulic fluids

### ▼ Sizes 22 and 28


	Viscosity	Temperature	Comment
Cold start	$\nu_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ °C}$	$t \leq 3 \text{ min}$ , $n \leq 1000 \text{ rpm}$ , without load $p \leq 50 \text{ bar}$
	Permissible temperature difference	$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid in the system
Warm-up phase	$\nu_{max} < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ °C to } -25 \text{ °C}$	at $p \leq 0,7 \times p_{nom}$ , $n \leq 0,5 \times n_{nom}$ and $t \leq 15 \text{ min}$
Continuous operation	$\nu = 400 \text{ to } 10 \text{ mm}^2/\text{s}$	$\theta = -25 \text{ °C to } +110 \text{ °C}$	measured at port <b>T</b> <sub>1</sub> or <b>T</b> <sub>2</sub> Note the permissible temperature range of the shaft seal ( $\Delta T = \text{approx. } 5 \text{ K}$ between the bearing/shaft seal and port <b>T</b> <sub>1</sub> / <b>T</b> <sub>2</sub> )
	$\nu_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		Range of optimum operating viscosity and efficiency
Short-term operation	$\nu_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 3 \text{ min}$ , $p < 0,3 \times p_{nom}$

### ▼ Sizes 71 to 500

	Viscosity	Temperature	Comment
Cold start	$\nu_{max} \leq 1000 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ °C}$	$t \leq 3 \text{ min}$ , $n \leq 1000 \text{ rpm}$ , without load $p \leq 50 \text{ bar}$
	Permissible temperature difference	$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid in the system
Warm-up phase	$\nu_{max} < 1000 \text{ to } 100 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ °C to } -25 \text{ °C}$	at $p \leq 0,7 \times p_{nom}$ , $n \leq 0,5 \times n_{nom}$ and $t \leq 15 \text{ min}$
Continuous operation	$\nu = 100 \text{ to } 16 \text{ mm}^2/\text{s}$	$\theta = -25 \text{ °C to } +90 \text{ °C}$	measured at port <b>T</b> Note the permissible temperature range of the shaft seal
	$\nu_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		Range of optimum operating viscosity and efficiency
Short-term operation	$\nu_{min} \geq 10 \text{ mm}^2/\text{s}$		$t < 3 \text{ min}$ , $p < 0,3 \times p_{nom}$



▼ Selection diagram

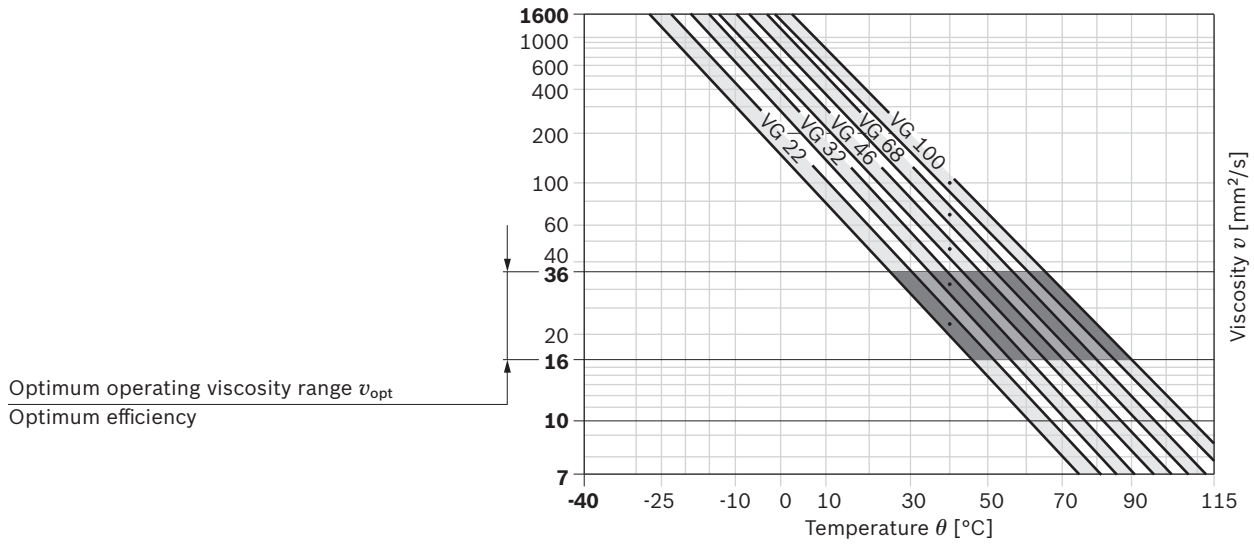

**Filtration of the hydraulic fluid**

Finer filtration improves the cleanliness level of the hydraulic fluid, which in turn increases the service life of the axial piston unit.


A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

At very high hydraulic fluid temperatures (90 °C to maximum 110 °C, measured at port **T**, not permitted for sizes 71 to 500), a cleanliness level of at least 19/17/14 in accordance with ISO 4406 is necessary.

## Shaft seal

### Permissible pressure loading

The service life of the shaft seal is influenced by the speed of the axial piston unit and the leakage pressure in the housing (case pressure). Momentary ( $t < 0,1$  s) pressure peaks of up to 10 bar are allowed. The service life of the shaft seal decreases with increasing frequency of pressure peaks and increasing mean differential pressure. The case pressure must be equal to or higher than the ambient pressure.

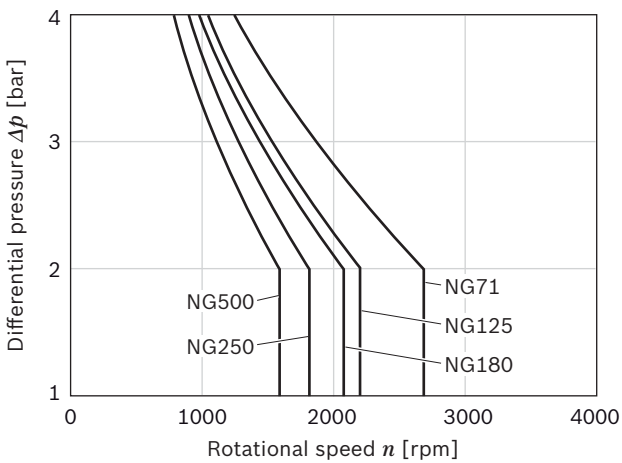

The FKM shaft seal may be used for leakage temperatures from  $-25$  °C to  $+115$  °C.


**Sizes 22 and 28:** For application cases below  $-25$  °C, an NBR shaft seal is required (permissible temperature range:  $-40$  °C to  $+90$  °C).

## Flow direction

### Direction of rotation, viewed on drive shaft, sizes 22 and 28

clockwise	counter-clockwise
<b>S to B</b>	<b>S to A</b>

#### ▼ Schematic, sizes 22 and 28




#### Ports

- A, B** Working port
- S** Suction port
- T<sub>1</sub>, T<sub>2</sub>** Drain port
- X<sub>3</sub>** Measuring pressure B (A)

### Direction of rotation, viewed on drive shaft, sizes 71 to 500

clockwise	counter-clockwise
<b>S to B</b>	<b>S to B</b>

#### ▼ Schematic, sizes 71 to 500



#### Ports

- B, B<sub>1</sub>** Working port
- S** Suction port
- T** Drain port
- R (L)** Filling / air bleeding
- M<sub>B</sub>** Measuring port working pressure
- M<sub>S</sub>** Measuring port suction pressure
- U** Flushing port


### Bearing flushing (sizes 71 to 500)

Please refer to the data sheet 92050 (A4VSO) for operating conditions, flushing quantities and notes on bearing flushing.


## Working pressure range

Pressure at working ports A or B and B <sub>1</sub>	Sizes 22 and 28	Sizes 71 to 500	Definition
Nominal pressure $p_{nom}$	400 bar absolute	350 bar absolute	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	450 bar absolute	400 bar absolute	The maximum pressure corresponds the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	1 s	1 s	
Total operating period	300 h	300 h	
Minimum pressure (high-pressure side)	25 bar absolute	–	Minimum pressure on high-pressure side (A or B and B <sub>1</sub> ) required to prevent damage to the axial piston unit.
Rate of pressure change $R_{A\ max}$	16000 bar/s	16000 bar/s	Maximum permissible rate of pressure build-up and reduction during a pressure change over the entire pressure range.
Pressure at suction port S (inlet)			
Minimum pressure $p_{S\ min}$	0,8 bar absolute	0,8 bar absolute	Minimum pressure at suction port S (inlet) that is required in order to avoid damage to the axial piston unit. The minimum pressure depends on the speed of the axial piston unit.
Maximum pressure $p_{S\ max}$	2 bar absolute	30 bar absolute	

### ▼ Rate of pressure change $R_{A\ max}$

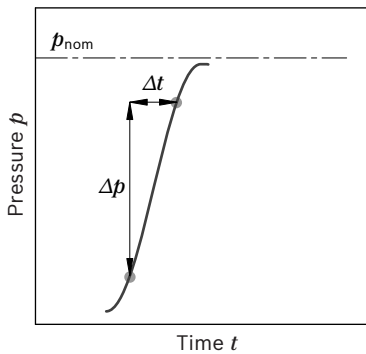

### ▼ Pressure definition

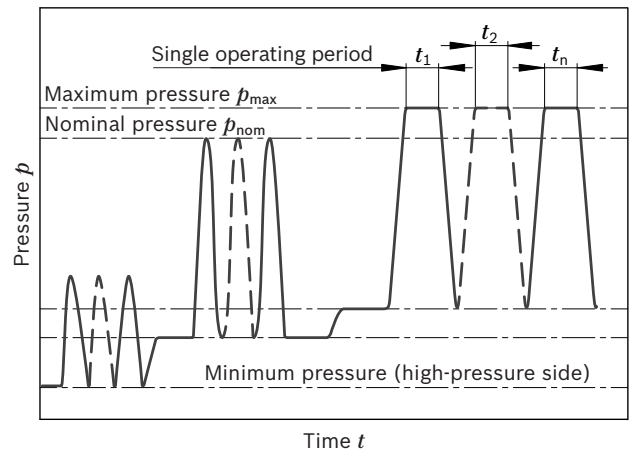

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$


#### Note

Working pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.

## Technical data

Size	NG		22	28	71	125	180	250/H <sup>1)</sup>	500/H <sup>1)</sup>
Displacement, geometric, per revolution	$V_g$	cm <sup>3</sup>	22	28	71	125	180	250	500
Maximum rotational speed <sup>2)</sup>	$n_{nom}$	rpm	3600	3000	2200	1800	1800	1500 / 1900	1320 / 1500
Maximum rotational speed <sup>3)</sup>	$n_{max}$	rpm	4500	3750	2700	2200	2100	1800 / 2100	1600 / 1800
Flow at $V_g$ and $n_{nom}$	$q_v$	l/min	79	84	156	225	324	375 / 475	660 / 750
Power at $V_g$ , $n_{nom}$ and $\Delta p = 400$ bar	$P$	kW	53	56	91 <sup>4)</sup>	131 <sup>4)</sup>	189 <sup>4)</sup>	219 / 277 <sup>4)</sup>	385 / 438 <sup>4)</sup>
Torque at $V_g$ and $\Delta p = 400$ bar	$T$	Nm	140	178	396 <sup>4)</sup>	696 <sup>4)</sup>	1003 <sup>4)</sup>	1393 <sup>4)</sup>	2785 <sup>4)</sup>
Rotary stiffness drive shaft	Shaft end <b>S</b>	$c$	kNm/rad	29,9	29,9	–	–	–	–
	Shaft end <b>P</b>	$c$	kNm/rad	–	–	146	260	328	527
	Shaft end <b>Z</b>	$c$	kNm/rad	–	–	146	263	332	543
Moment of inertia for rotary group	$J_{GR}$	kgm <sup>2</sup>	0,0017	0,0017	0,0121	0,0300	0,055	0,0959	0,3325
Maximum angular acceleration	$a$	rad/s <sup>2</sup>	38000	38000	20000	13000	10000	8000	4800
Case volume	$V$	l	0,3	0,3	2,0	3,0	4,0	7,0	11,0
Weight (approx.)	$m$	kg	13,5	13,5	34	61	76	120	220

### ▼ Maximum permissible speed (speed limit)

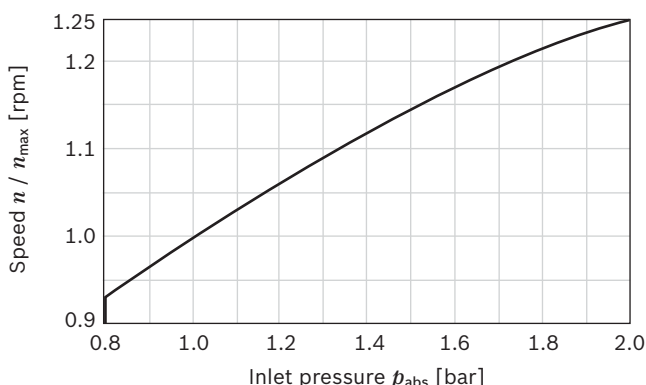

#### Notes

- ▶ Theoretical values, without efficiency and tolerances; values rounded
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or the destruction of the axial piston unit. Bosch Rexroth recommend testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.

### Determining operating characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{mh}}$	[Nm]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]
Key		
$V_g$	=	Displacement per revolution [cm <sup>3</sup> ]
$\Delta p$	=	Differential pressure [bar]
$n$	=	Rotational speed [rpm]
$\eta_v$	=	Volumetric efficiency
$\eta_{mh}$	=	Mechanical-hydraulic efficiency
$\eta_t$	=	Total efficiency ( $\eta_t = \eta_v \times \eta_{mh}$ )

1) H = High-speed version

2) The values are valid:



- At absolute pressure  $p_{abs} = 1$  bar at suction port **S**
- For the optimal viscosity range of  $\nu_{opt} = 36$  to  $16$  mm<sup>2</sup>/s
- For hydraulic fluid based on mineral oils.

3) Maximum speed (speed limit) with increased inlet pressure  $p_{abs}$  at suction port **S**, see diagram.



4) At  $\Delta p = 350$  bar

**Permissible radial and axial forces of the drive shaft**

Size	NG		22	28
Drive shaft <b>S</b> according to ANSI B92.1a		in	7/8	7/8
Maximum radial force at distance a (from shaft collar)	$F_{q \max}$	N	2550	2150
	a	mm	16,5	16,5
Maximum axial force	$+ F_{ax \max}$	N	1557	1557
	$- F_{ax \max}$	N	417	417

Size	NG		71	71	125	125	180	180	250	250	500	500
Drive shaft <b>Z</b> according to DIN 5480				W40		W50		W50		W60		W80
Drive shaft <b>P</b> according to DIN 6885		mm	Ø40		Ø50		Ø50		Ø60		Ø80	
Maximum radial force at distance a (from shaft collar)	$F_{q \max}$	N	1200	1200	1600	1600	2000	2000	2000	2000	2500	2500
	a	mm	35	22,5	41	27	41	27	52,5	35	65	45
Maximum axial force	$+ F_{ax \max}$	N	800	800	1000	1000	1400	1400	1800	1800	2000	2000
	$- F_{ax \max}$	N	800	800	1000	1000	1400	1400	1800	1800	2000	2000

**Note**


Special requirements apply in the case of belt drive and cardan shaft. Please contact us.

**Permissible input and through-drive torques**

Size	NG		22	28
Torque at $V_g$ and $\Delta p = 400 \text{ bar}^{1)}$	$T$	Nm	140	178
Input torque at drive shaft, maximum <sup>2)</sup>				
ANSI B92.1a	S	$T_{E \text{ max}}$	Nm	192
			7/8 in	7/8 in
Maximum through-drive torque	$T_{D \text{ max}}$	Nm	192	192

Size	NG		71	125	180	250	500
Torque at $V_g$ and $\Delta p = 350 \text{ bar}^{1)}$	T	Nm	396	696	1003	1393	2785
Input torque at drive shaft, maximum <sup>2)</sup>							
DIN 5480	Z	$T_{E \text{ max}}$	Nm	790	1392	2004	2782
				W40	W50	W50	W60
DIN 6885	P	$T_{E \text{ max}}$	Nm	700	1392	1400	2300
				Ø40	Ø50	Ø50	Ø60
Maximum through-drive torque	$T_{D \text{ max}}$	Nm	395	696	1002	1391	2783

▼ **Torque distribution**

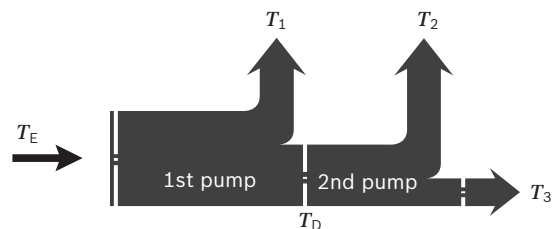


Torque at 1st pump	$T_1$
Torque at 2nd pump	$T_2$
Torque at 3rd pump	$T_3$
Input torque	$T_E = T_1 + T_2 + T_3$
	$T_E < T_{E \text{ max}}$
Through-drive torque	$T_D = T_2 + T_3$
	$T_D < T_{D \text{ max}}$


1) Efficiency not considered  
 2) For drive shafts free of radial force

**Flow and power**


▼ **Size 71**

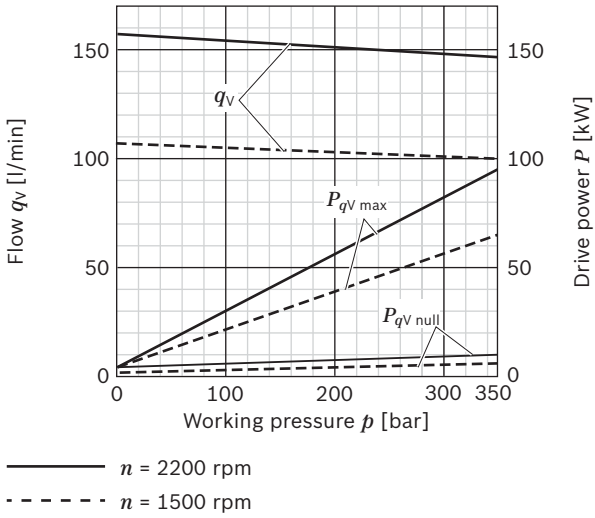


▼ **Size 250**

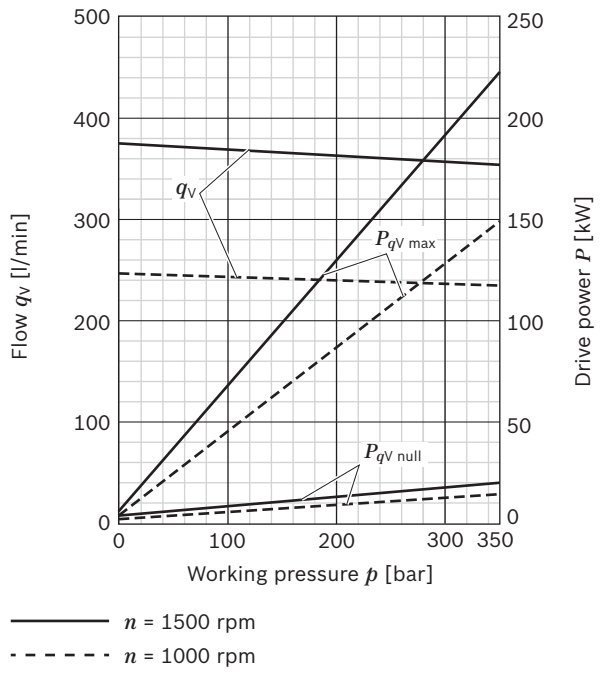


▼ **Size 125**

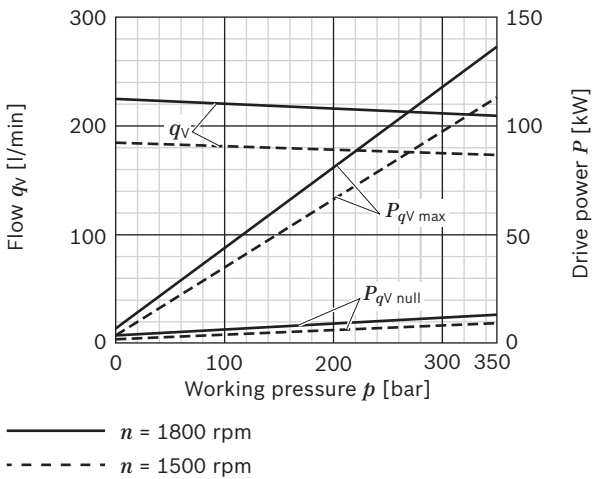

▼ **Size 500**

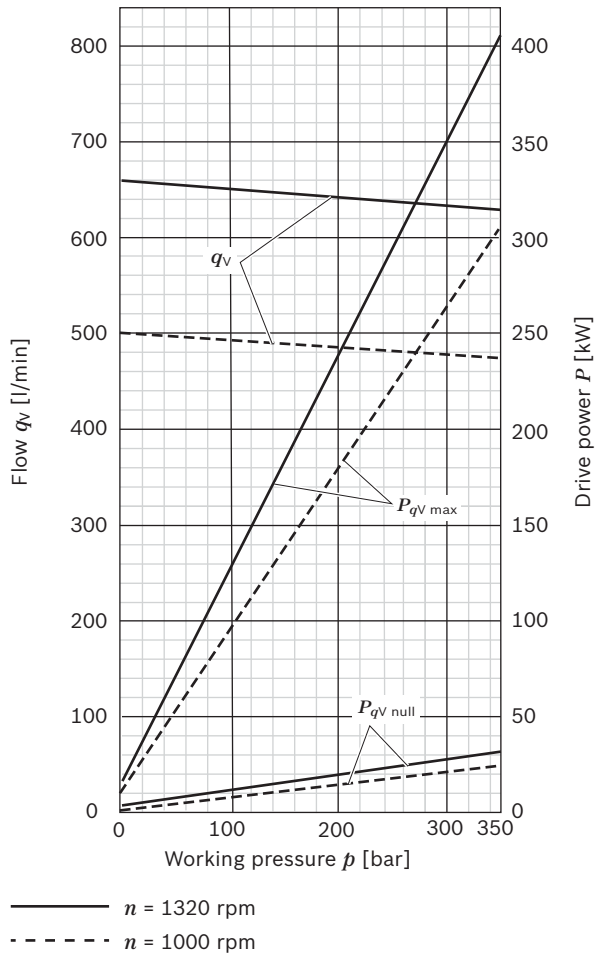


▼ **Size 180**

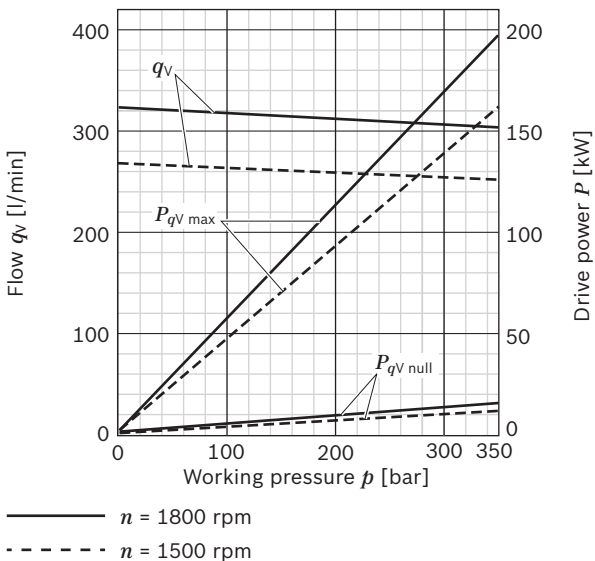

**Dimensions sizes 22, 28**


**Representation with clockwise direction of rotation**

Counter-clockwise drive rotation: Port plate rotated 180°

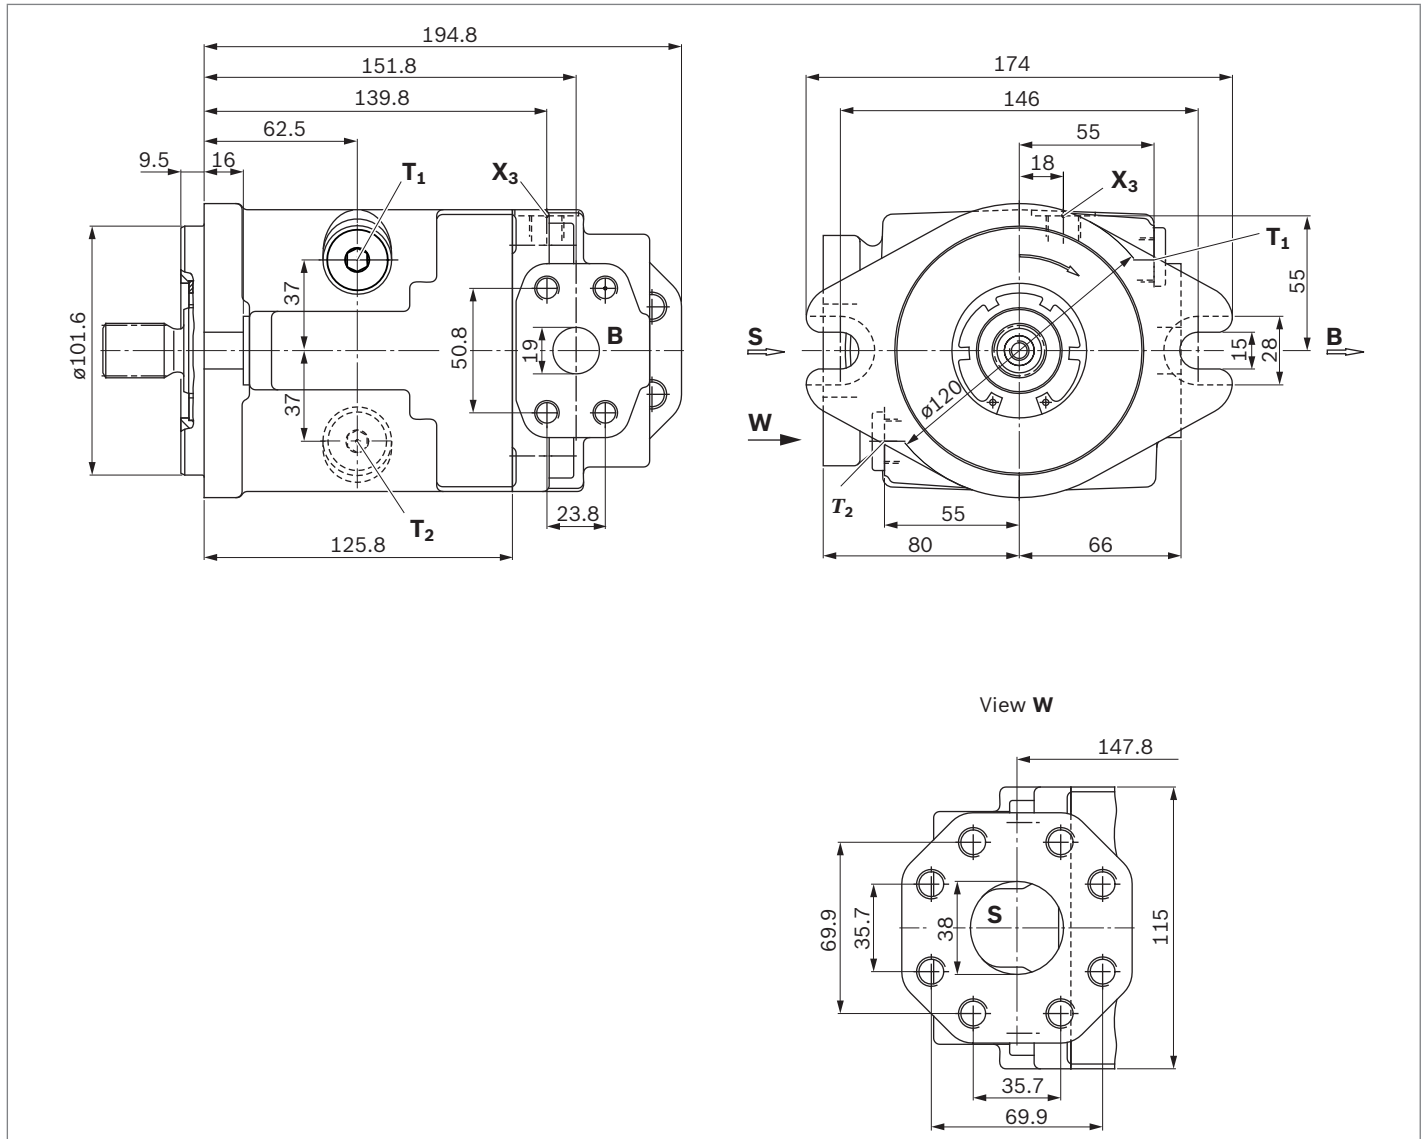



## ▼ Splined shaft SAE J744

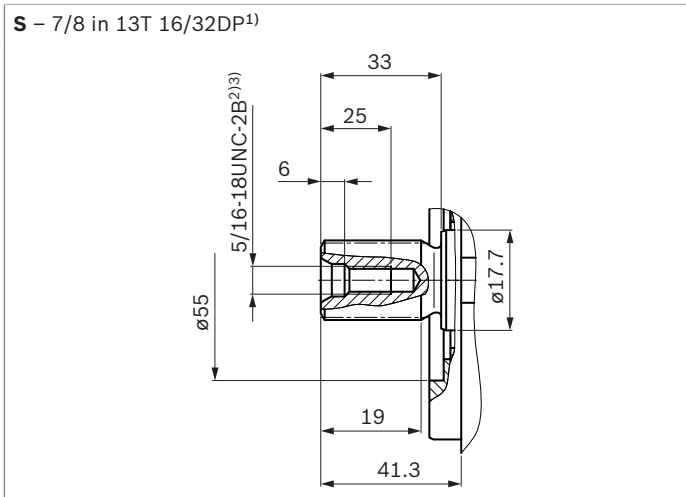

Ports		Standard	Size <sup>3)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>4)</sup>	Status
<b>B (A)</b>	Working port (high-pressure series) fastening thread	SAE J518 <sup>5)</sup> DIN 13	3/4 in M10 × 1,5; 17 deep	450	O
<b>S</b>	Suction port (standard series) fastening thread	SAE J518 <sup>5)</sup> DIN 13	1 1/2 in M12 × 1,75; 18 deep	35	O
<b>T<sub>1</sub></b>	Drain port	DIN 3852 <sup>6)</sup>	M18 × 1,5; 12 deep	2	X
<b>T<sub>2</sub></b>	Drain port	DIN 3852 <sup>6)</sup>	M18 × 1,5; 12 deep	2	X
<b>X<sub>3</sub></b>	Measuring pressure B (A)	DIN 3852 <sup>6)</sup>	M14 × 1,5; 12 deep	450	X

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) For notes on tightening torques, see instruction manual

4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard


6) The spot face can be deeper than as specified in the standard

O = Must be connected (plugged on delivery)


X = Plugged (in normal operation)

**Dimensions size 71**


Representation with clockwise and counter-clockwise direction of rotation

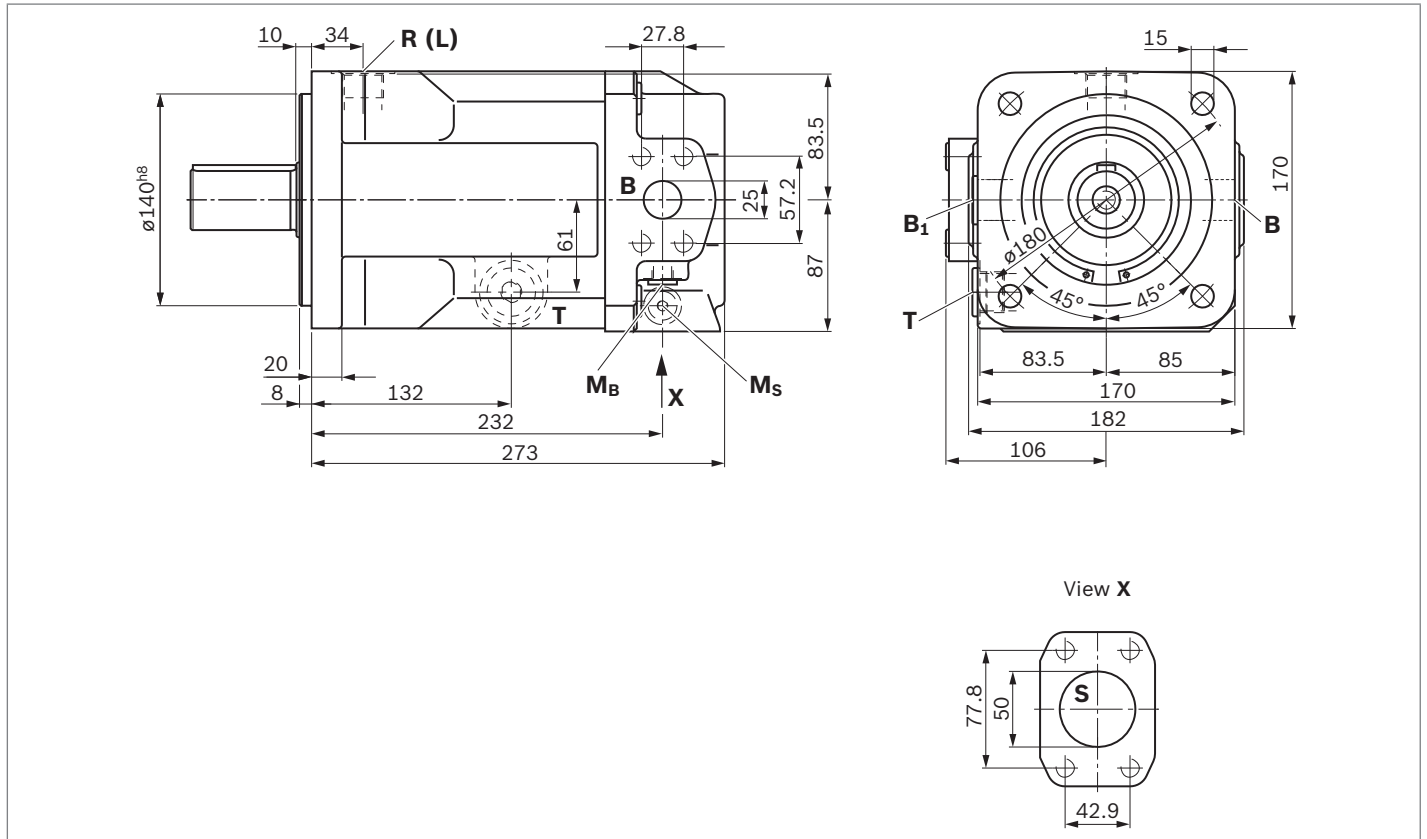

▼ **Splined shaft DIN 5480**

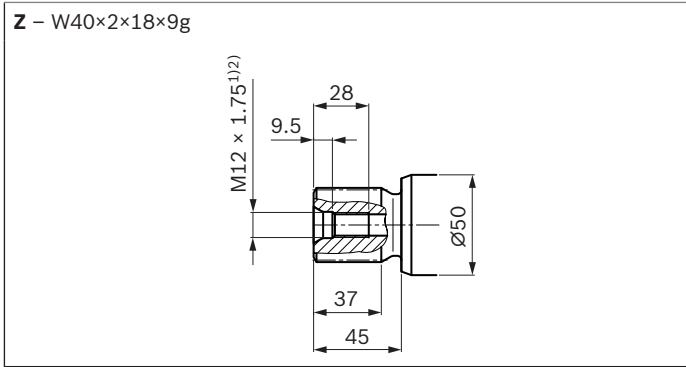

▼ **Parallel keyed shaft DIN 6885**

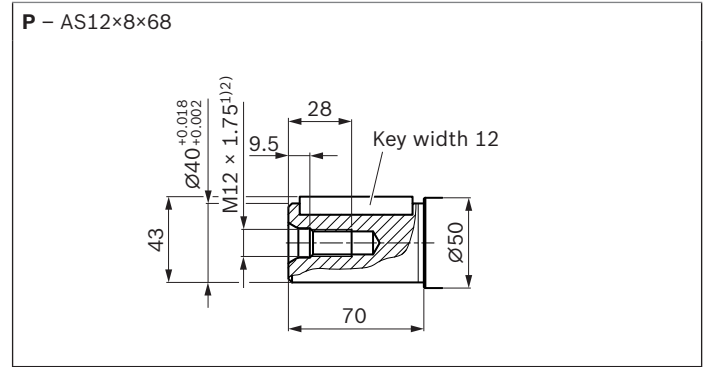


Ports		Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>3)</sup>	Status
<b>B</b>	Working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 in M12 × 1,75; 17 deep	400	O
<b>B<sub>1</sub></b>	2nd working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 in M12 × 1,75; 17 deep	400	X
<b>S</b>	Suction port (standard series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	2 in M12 × 1,75; 20 deep	30	O
<b>T</b>	Drain port	DIN 3852 <sup>5)</sup>	M27 × 2; 16 deep	4	X
<b>R (L)</b>	Filling / air bleeding (drain port)	DIN 3852 <sup>5)</sup>	M27 × 2; 16 deep	4	O
<b>M<sub>B</sub></b>	Measuring pressure B	DIN 3852 <sup>5)</sup>	M14 × 1,5; 12 deep	400	X
<b>M<sub>S</sub></b>	Measuring pressure S	DIN 3852 <sup>5)</sup>	M14 × 1,5; 12 deep	30	X

1) Center bore according to DIN 332 (thread according to DIN 13)  
 2) For notes on tightening torques, see instruction manual  
 3) Depending on the application, momentary pressure peaks can occur.  
 Keep this in mind when selecting measuring devices and fittings.


4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.  
 5) The spot face can be deeper than as specified in the appropriate standard.  
 O = Must be connected (plugged on delivery)  
 X = Plugged (in normal operation)

**Dimensions size 125**


**Representation with clockwise and counter-clockwise direction of rotation**

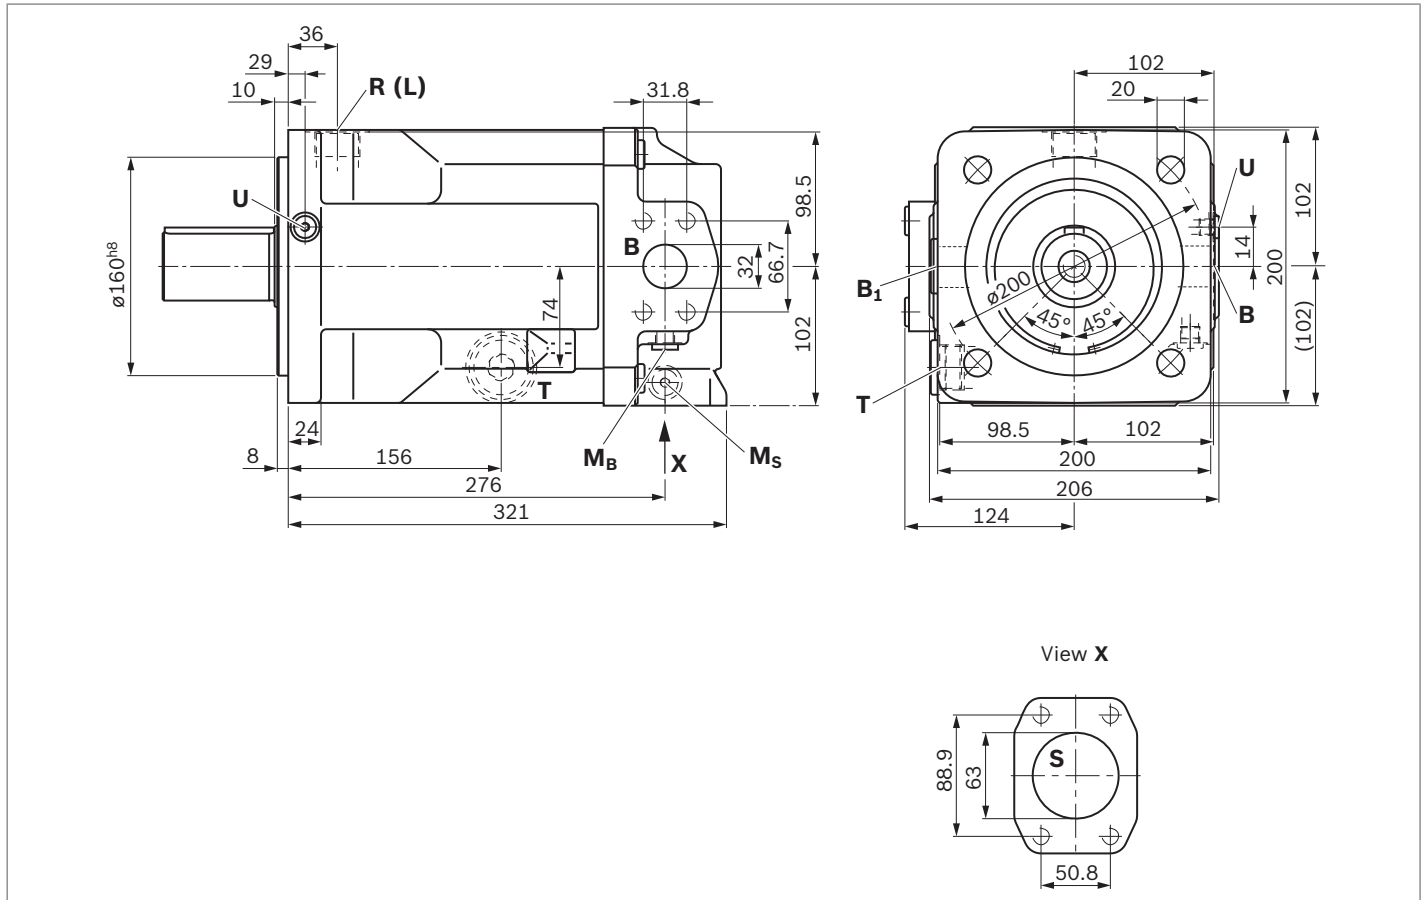

▼ Splined shaft DIN 5480

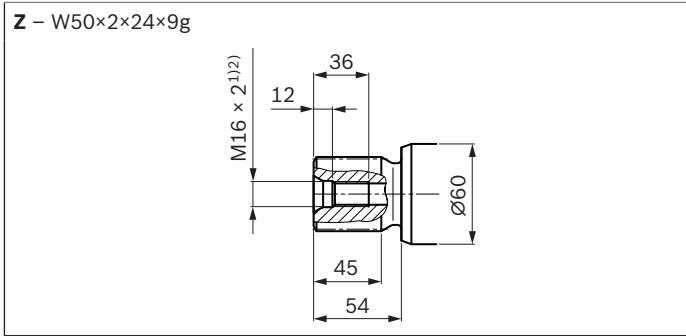

▼ Parallel keyed shaft DIN 6885

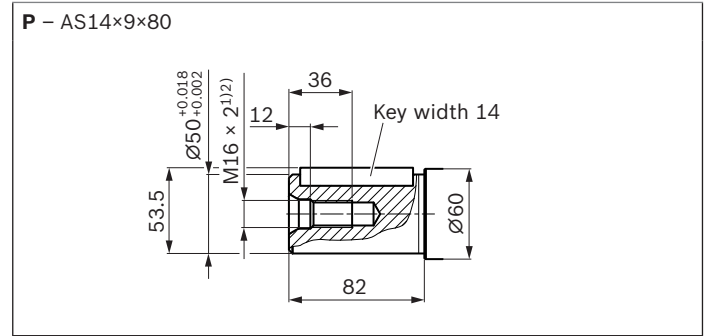


Ports		Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>3)</sup>	Status
<b>B</b>	Working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 1/4 in M14 × 2; 19 deep	400	O
<b>B<sub>1</sub></b>	2nd working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 1/4 in M14 × 2; 19 deep	400	X
<b>S</b>	Suction port (standard series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	2 1/2 in M12 × 1,75; 17 deep	30	O
<b>T</b>	Drain port	DIN 3852 <sup>5)</sup>	M33 × 2; 18 deep	4	X
<b>R (L)</b>	Filling / air bleeding (drain port)	DIN 3852 <sup>5)</sup>	M33 × 2; 18 deep	4	O
<b>M<sub>B</sub></b>	Measuring pressure B	DIN 3852 <sup>5)</sup>	M14 × 1,5; 12 deep	400	X
<b>M<sub>S</sub></b>	Measuring pressure S	DIN 3852 <sup>5)</sup>	M14 × 1,5; 12 deep	30	X
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M14 × 1,5; 12 deep	10	X

1) Center bore according to DIN 332 (thread according to DIN 13)  
 2) For notes on tightening torques, see instruction manual  
 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.


4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.  
 5) The spot face can be deeper than as specified in the appropriate standard.  
 O = Must be connected (plugged on delivery)  
 X = Plugged (in normal operation)

**Dimensions size 180**


**Representation with clockwise and counter-clockwise direction of rotation**

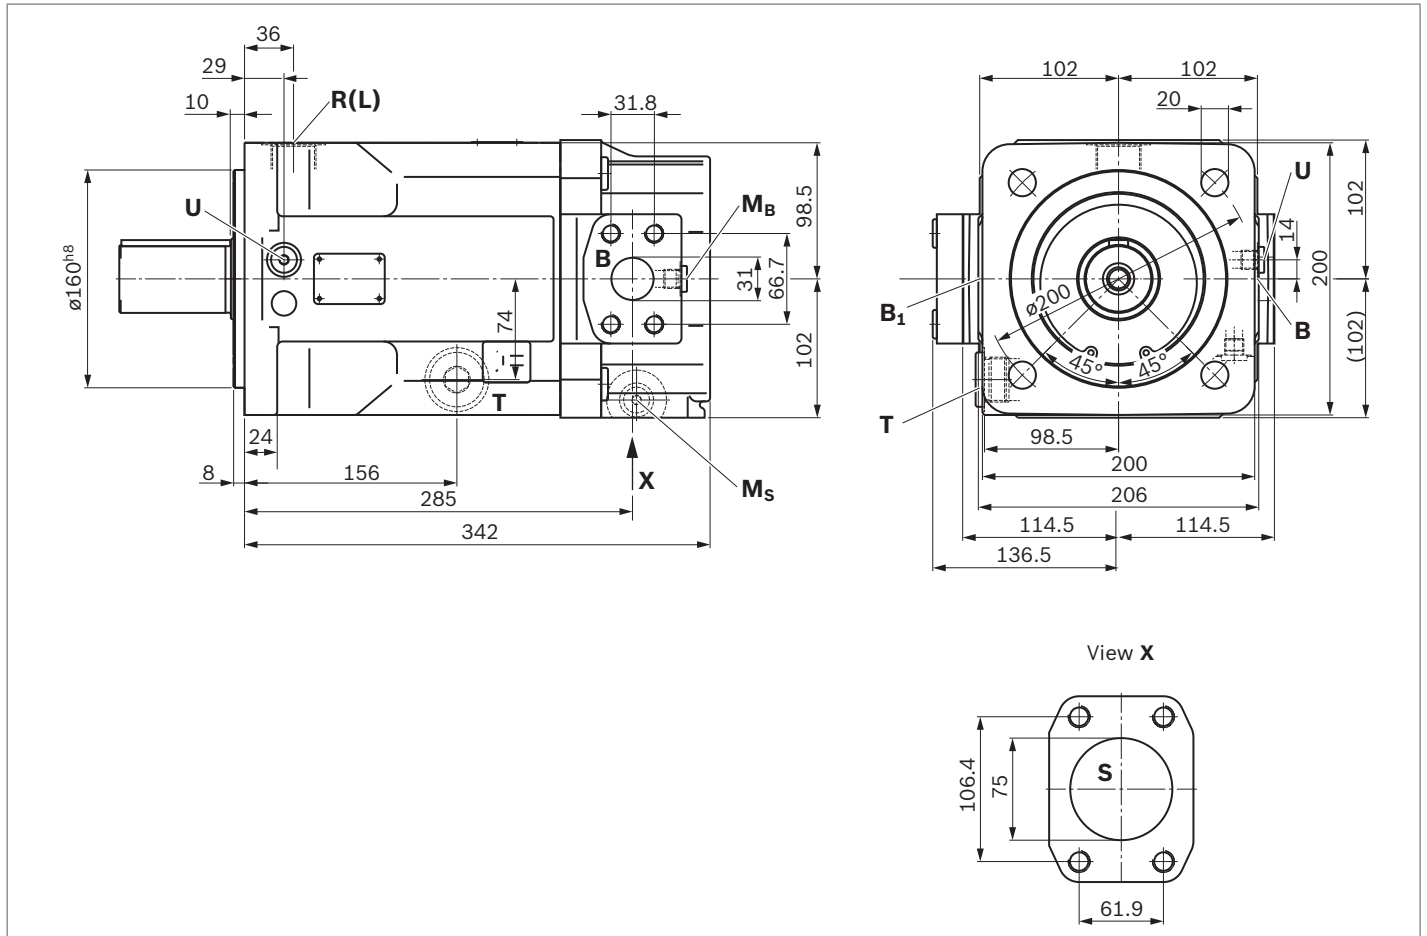

▼ Splined shaft DIN 5480

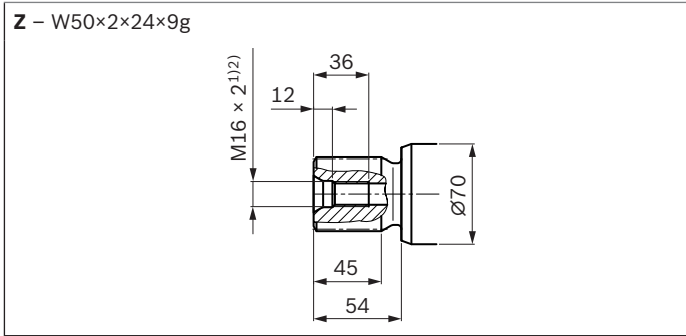

▼ Parallel keyed shaft DIN 6885

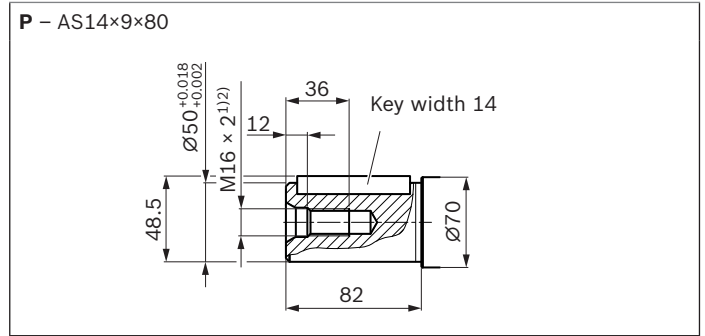


Ports		Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>3)</sup>	Status
<b>B</b>	Working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 1/4 in M14 × 2; 19 deep	400	O
<b>B<sub>1</sub></b>	2nd working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 1/4 in M14 × 2; 19 deep	400	X
<b>S</b>	Suction port (standard series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	3 in M16 × 2; 24 deep	30	O
<b>T</b>	Drain port	DIN 3852 <sup>5)</sup>	M33 × 2; 18 deep	4	X
<b>R (L)</b>	Filling / air bleeding (drain port)	DIN 3852 <sup>5)</sup>	M33 × 2; 18 deep	4	O
<b>M<sub>B</sub></b>	Measuring pressure B	DIN 3852 <sup>5)</sup>	M14 × 1,5; 12 deep	400	X
<b>M<sub>S</sub></b>	Measuring pressure S	DIN 3852 <sup>5)</sup>	M14 × 1,5; 12 deep	30	X
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M14 × 1,5; 12 deep	10	X

1) Center bore according to DIN 332 (thread according to DIN 13)  
 2) For notes on tightening torques, see instruction manual  
 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.  
 5) The spot face can be deeper than as specified in the appropriate standard.  
 O = Must be connected (plugged on delivery)  
 X = Plugged (in normal operation)


**Dimensions size 250**

Representation with clockwise and counter-clockwise direction of rotation

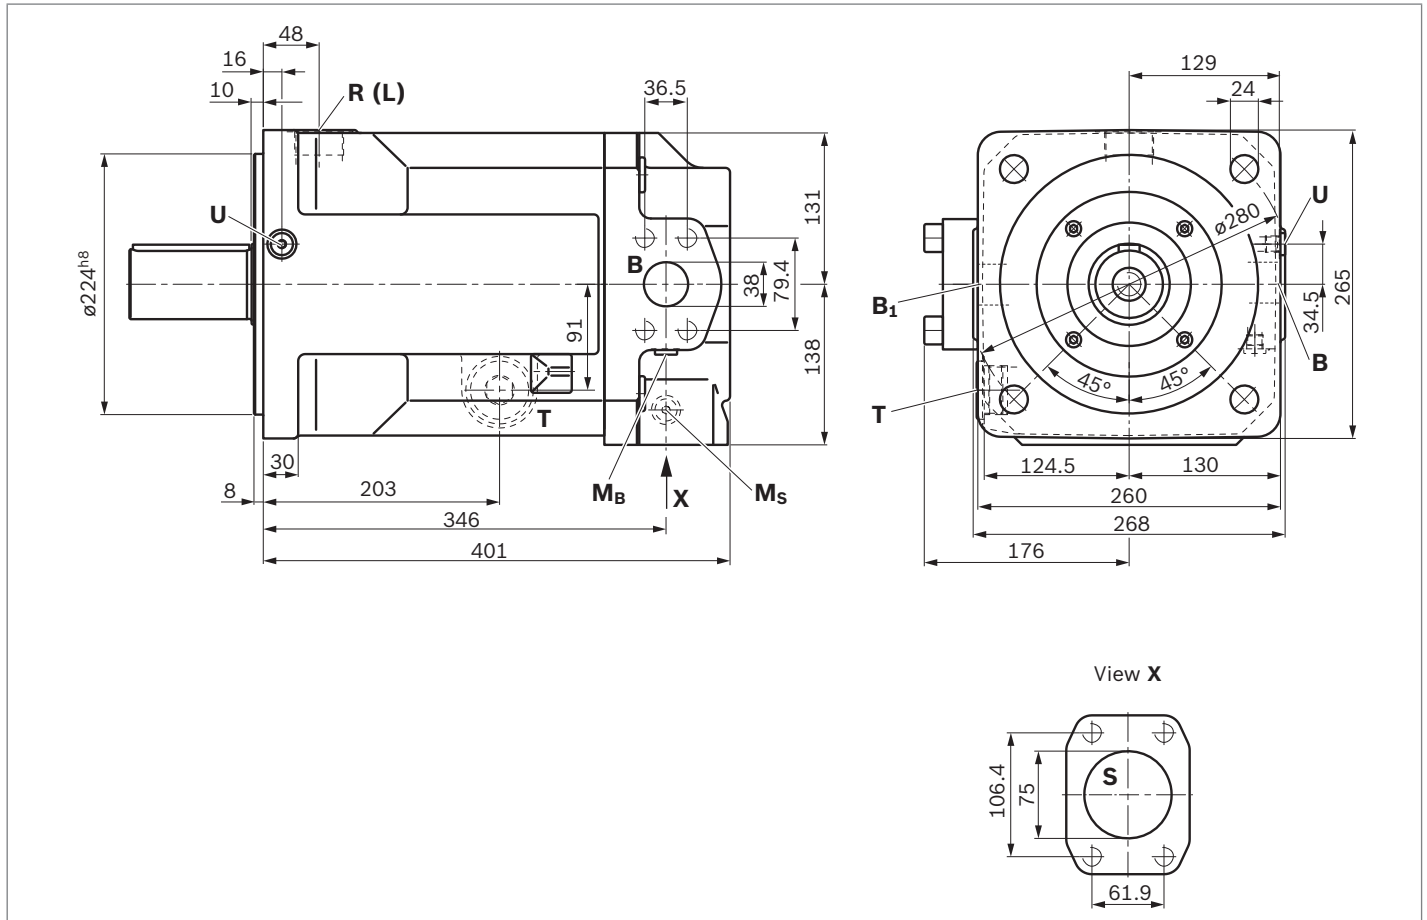




## ▼ Splined shaft DIN 5480

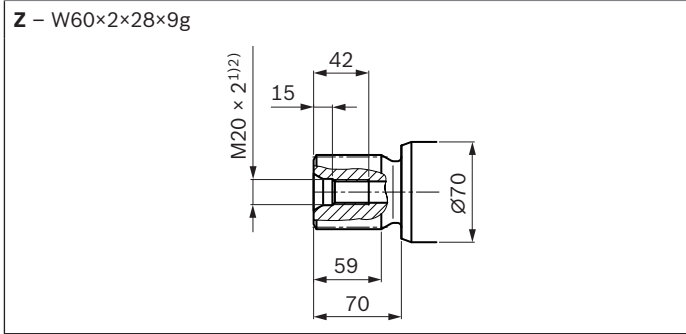

## ▼ Parallel keyed shaft DIN 6885

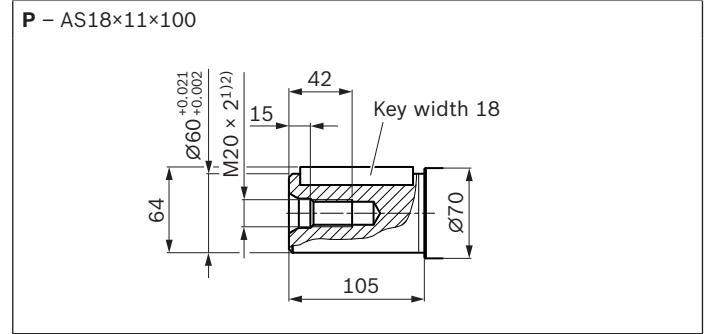


Ports	Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>3)</sup>	Status
<b>B</b>	Working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 1/2 in M16 × 2; 24 deep	400 O
<b>B<sub>1</sub></b>	2nd working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 1/2 in M16 × 2; 24 deep	400 X
<b>S</b>	Suction port (standard series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	3 in M16 × 2; 24 deep	30 O
<b>T</b>	Drain port	DIN 3852 <sup>5)</sup>	M42 × 2; 20 deep	4 X
<b>R (L)</b>	Filling / air bleeding (drain port)	DIN 3852 <sup>5)</sup>	M42 × 2; 20 deep	4 O
<b>M<sub>B</sub></b>	Measuring pressure B	DIN 3852 <sup>5)</sup>	M14 × 1,5; 12 deep	400 X
<b>M<sub>S</sub></b>	Measuring pressure S	DIN 3852 <sup>5)</sup>	M14 × 1,5; 12 deep	30 X
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M14 × 1,5; 12 deep	10 X

- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) For notes on tightening torques, see instruction manual
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.


- 4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.
  - 5) The spot face can be deeper than as specified in the appropriate standard.
- O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)

### Dimensions size 500


Representation with clockwise and counter-clockwise direction of rotation

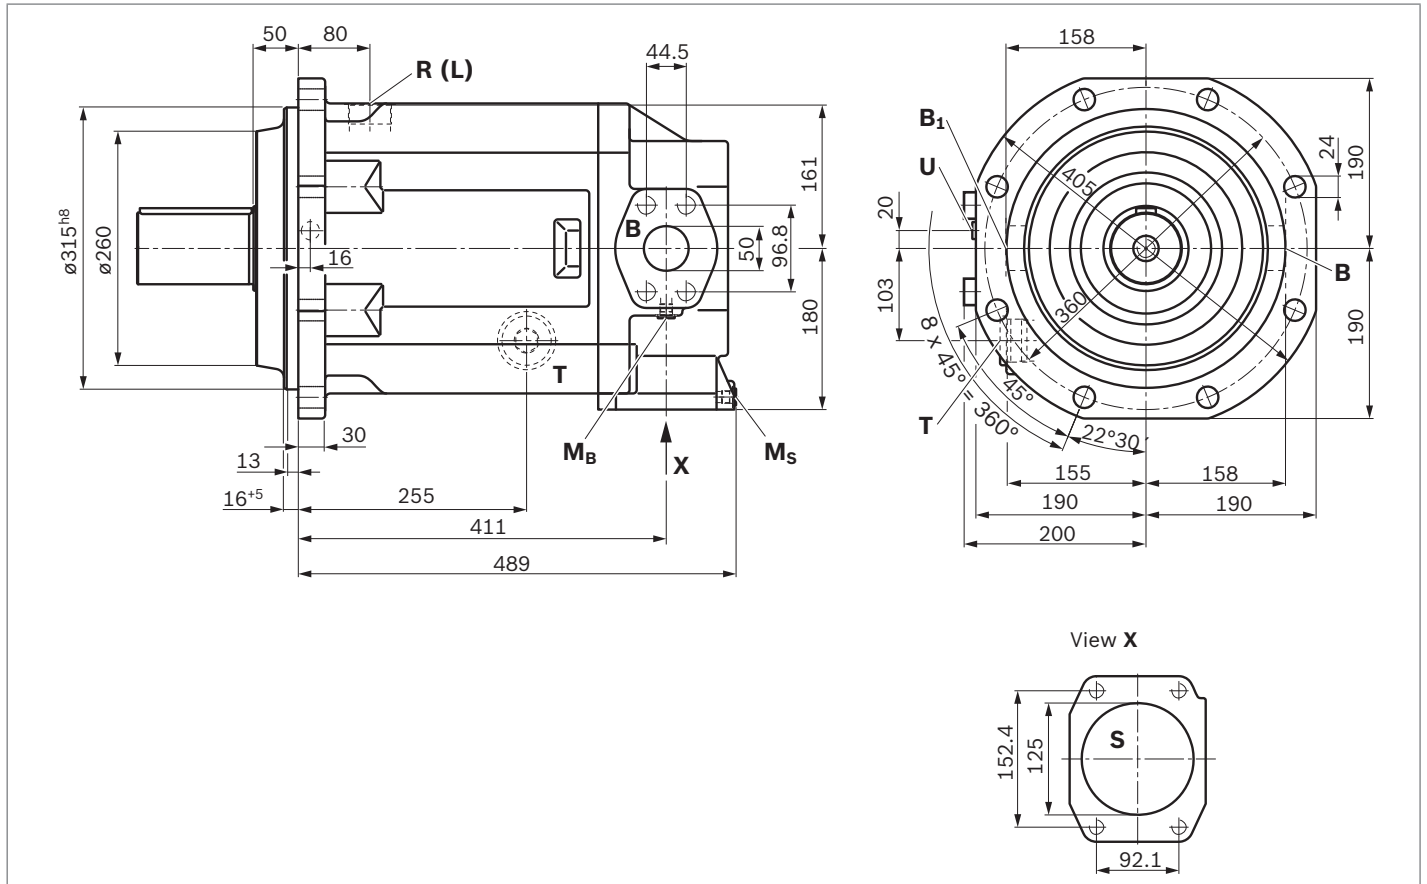

## ▼ Splined shaft DIN 5480

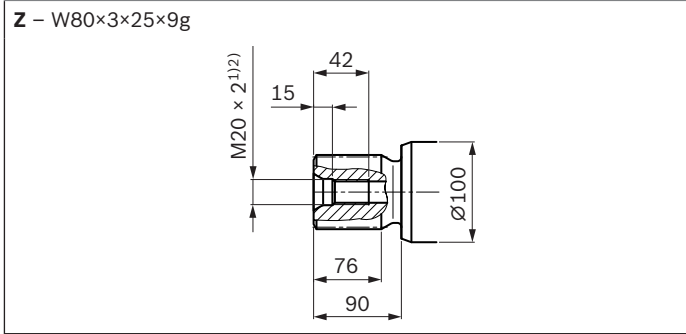

## ▼ Parallel keyed shaft DIN 6885

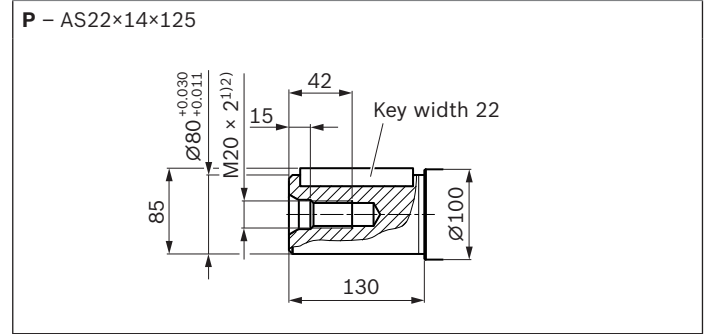

Ports	Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>3)</sup>	Status
<b>B</b>	Working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	2 in M20 × 2,5; 24 deep	400 O
<b>B<sub>1</sub></b>	2nd working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	2 in M20 × 2,5; 24 deep	400 X
<b>S</b>	Suction port (standard series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	5 in M16 × 2; 23 deep	30 O
<b>T</b>	Drain port	DIN 3852 <sup>5)</sup>	M48 × 2; 22 deep	4 X
<b>R (L)</b>	Filling / air bleeding (drain port)	DIN 3852 <sup>5)</sup>	M48 × 2; 22 deep	4 O
<b>M<sub>B</sub></b>	Measuring pressure B	DIN 3852 <sup>5)</sup>	M18 × 1,5; 12 deep	400 X
<b>M<sub>S</sub></b>	Measuring pressure S	DIN 3852 <sup>5)</sup>	M18 × 1,5; 12 deep	30 X
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M18 × 1,5; 12 deep	10 X


- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) For notes on tightening torques, see instruction manual
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.
  - 5) The spot face can be deeper than as specified in the appropriate standard.
- O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)

## Through drives dimensions


### Sizes 22 and 28

▼ **K01: Flange 82-2 (A), hub for splined shaft 5/8 in (16-4)**

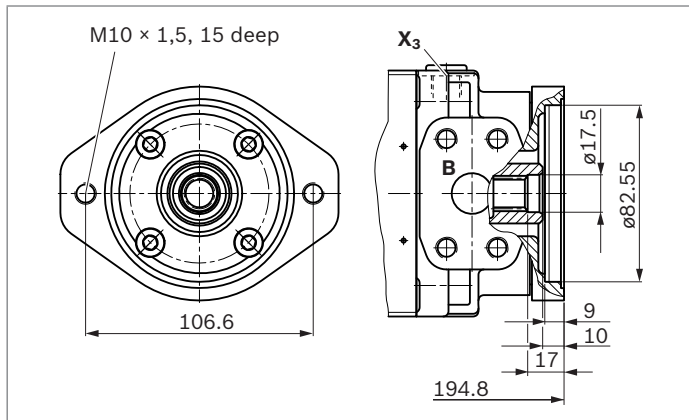


### Sizes 71 to 500

▼ **For through drives see data sheet 92050 (A4VSO)**

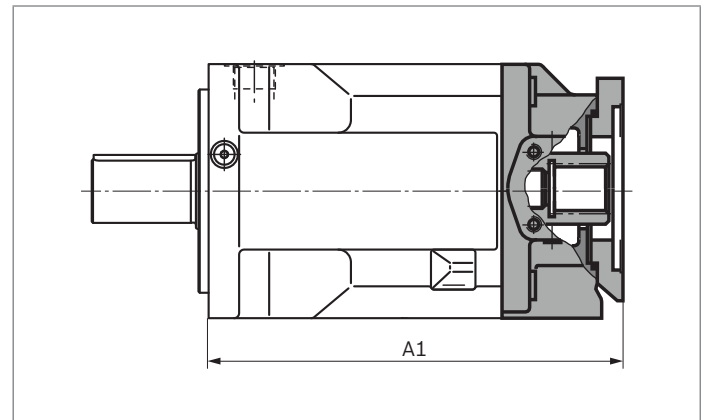

▼ **K02: Flange 101-2 (B), hub for splined shaft 7/8 in (22-4)**

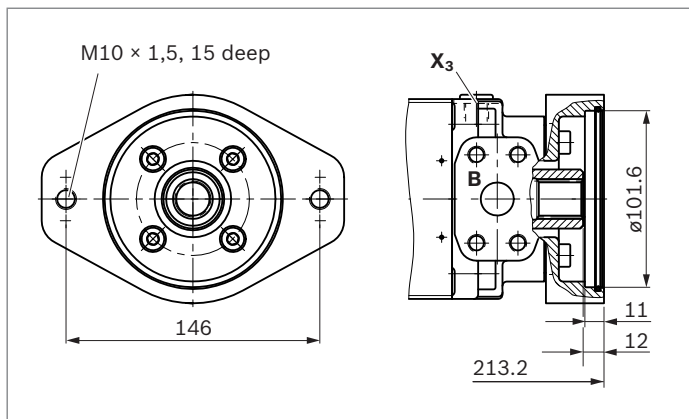

▼ **Dimensions for A1**

Code	71	125	180	250	500
K/U01	269	335	360	419	o
K/U68	300	335	360	419	o
K/UB2	269	335	360	419	o
K/UB3	269	335	360	419	o
K/UB4	294	335	360	419	o
K/UB5	299	335	360	419	o
K/UB6	-	335	360	419	o
K/UB7	-	-	373	419	500
K/U31	294	335	360	419	o
K/U33	294	335	360	419	o
K/U34	-	335	360	419	475
K/U35	-	-	-	435	511
K/U43	-	-	-	-	560
K/U99	286,5	334	359	419	497

o = on request

## Overview of attachment options

Through drive A4FO <sup>1)</sup>			Attachment of 2nd pump				
Flange	Hub for splined shaft	Code	A4VSO/G NG (shaft)	A4CSG NG (shaft)	A10V(S)O/ 31(2) NG (shaft)	A10V(S)O/52(3) NG (shaft)	External gear pump <sup>2)</sup>
<b>SAE J744</b>							
82-2 (A)	5/8 in	<b>K01</b>	–	–	–	–	AZPF
101-2 (B)	7/8 in	<b>K02, K/U68</b>	–	–	28 (S)/31	28 (S)	AZPN
<b>ISO 3019-2 (metric)</b>							
80, 2-hole	3/4 in	<b>K/UB2</b>	–	–	18 (S)/31	10 (S)	–
100, 2-hole	7/8 in	<b>K/UB3</b>	–	–	28 (S)/31	–	–
	1 in	<b>K/UB4</b>	–	–	45 (S)/31	–	–
125, 2-hole	1 1/4 in	<b>K/UB5</b>	–	–	71 (S)/31	–	–
	1 1/2 in	<b>K/UB6</b>	–	–	100 (S)/31	–	–
125, 4-hole	W32×2×14×9g	<b>K/U31</b>	40 (Z)	–	–	–	–
140, 4-hole	W40×2×18×9g	<b>K/U33</b>	71 (Z)	–	–	–	–
160, 4-hole	W50×2×24×9g	<b>K/U34</b>	125 (Z)	–	–	–	–
180, 4-hole	1 3/4 in	<b>K/UB7</b>	–	–	140 (S)/31/32	–	–
224, 4-hole	W60×2×28×9g	<b>K/U35</b>	250 (Z)	250 (Z)	–	–	–
315, 8-hole	W80×3×25×9g	<b>K/U43</b>	500 (Z)	500 (Z)	–	–	–

1) Additional through drives are available on request

2) Bosch Rexroth recommends special versions of the external gear pumps. Please contact us.

## Installation instructions

### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines.

Particularly in the installation position „drive shaft upwards“, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running.

For sizes 22 and 28, the pump housing is internally connected to the suction chamber. A separate drain line from the housing to the reservoir is not needed. A drain line is required for sizes 71 to 500.

If a shared drain line is used for several units, make sure that the relevant case pressure is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operational circumstances, particularly at cold start. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction lines and the drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{s\ max} = 800\ \text{mm}$ . The minimum suction pressure at port **S** must not fall below 0,8 bar absolute during operation either.

When designing the reservoir, ensure that there is adequate spacing between the suction line and the drain line. This minimizes oil turbulence and carries out degassing, which prevents the heated hydraulic fluid from being sucked directly back in again.

### Installation position


See the following examples **1** to **8**.

Additional installation positions are available upon request.


### Below-reservoir installation (standard)

Below-reservoir installation is when the axial piston unit is installed outside of the reservoir below the minimum fluid level.


Installation position	Air bleeding	Filling
<b>1</b> Sizes 22, 28	Above the highest drain port <b>T</b> <sub>1</sub> or <b>T</b> <sub>2</sub>	<b>S</b>



<b>2</b> Sizes 71 to 500	<b>R (L)</b>	<b>S + R (L)</b>
--------------------------	--------------	------------------



<b>3</b> Sizes 125 to 500	<b>R (L), U</b>	<b>S + R (L)</b>
---------------------------	-----------------	------------------

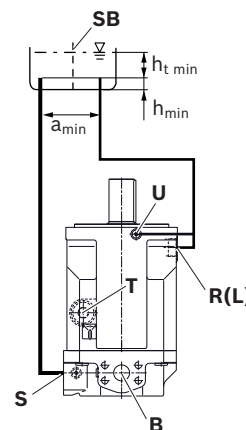


Key, see page 27.


**Inside-reservoir installation**

Inside-reservoir installation is when the axial piston unit is installed in the reservoir below the minimum fluid level. The axial piston unit is completely below the hydraulic fluid.


Installation position	Air bleeding	Filling
4 Sizes 22, 28	Above the highest drain port <sup>1)</sup> <b>T<sub>1</sub></b> or <b>T<sub>2</sub></b>	



5 Sizes 71 to 500	via the highest open drain port <sup>1)</sup> <b>R (L)</b>	
-------------------	---	--



6 Sizes 125 to 500	via the highest open drain port <sup>1)</sup> <b>R (L)</b> and the bearing flushing <b>U</b>	
--------------------	---	--

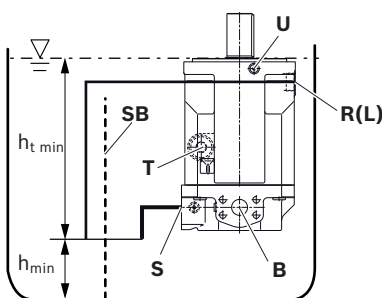


**Above-reservoir installation**


Above-reservoir installation means the axial piston unit is installed above the minimum fluid level of the reservoir.

Observe the maximum permissible suction height  $h_{S \max} = 800 \text{ mm}$ .

Installation position	Air bleeding	Filling
7 Sizes 71 to 500	<b>F (R (L))</b>	<b>F (R (L))</b>

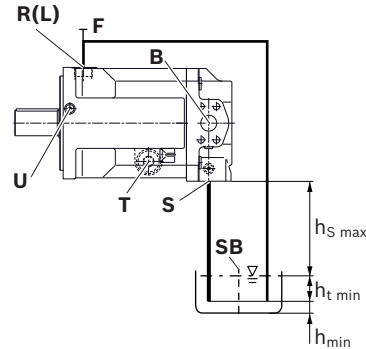

8 Sizes 125 to 500	<b>F (U)</b>	<b>F (R (L))</b>
--------------------	--------------	------------------

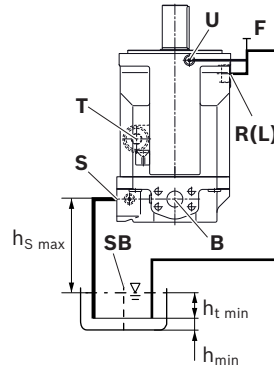

Key	
<b>T, T<sub>1</sub>, T<sub>2</sub></b>	Drain port
<b>R (L)</b>	Filling / air bleeding
<b>F</b>	Filling / air bleeding Note: F is part of the external piping
<b>S</b>	Suction port
<b>SB</b>	Baffle (baffle plate)
<b>U</b>	Flushing port
$h_{t \min}$	Minimum required immersion depth (200 mm)
$h_{\min}$	Minimum required spacing to reservoir bottom (100 mm)
$h_{S \max}$	Maximum permissible suction height (800 mm)

<sup>1)</sup> With piping: The axial piston unit must be filled before the piping is attached. Without piping: Automatically via all open ports, by position below hydraulic fluid level

## Project planning notes

- ▶ The A4FO pump is designed to be used in open circuits.
- ▶ Project planning, installation and commissioning of the axial piston units requires the involvement of skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual thoroughly and completely. If necessary, request them from Bosch Rexroth.
- ▶ Before finalizing your design, request a binding installation drawing.
- ▶ The specified data and notes must be observed.
- ▶ Depending on the operating condition of the axial piston unit (working pressure, fluid temperature), the characteristic may shift.
- ▶ Not all versions of the product are approved for use in a safety function pursuant to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports can only be used to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit. Take appropriate safety measures (e.g. by wearing protective clothing).

**Bosch Rexroth AG**  
Mobile Applications  
Glockeraustraße 4  
89275 Elchingen, Germany  
Tel. +49 7308 82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from this information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.



# Axial piston fixed pump A17FO Series 10

**RE 91520**

Issue: 11.2015

Replaces: 10.2014



- ▶ High-pressure pump for use in commercial vehicles
- ▶ Sizes 23 to 107
- ▶ Nominal pressure/maximum pressure 350/400 bar
- ▶ Bent-axis design
- ▶ Open circuit

2

**Features**

- ▶ Flange and shaft designed for direct mounting on the power take-off of commercial vehicles
- ▶ Weight-optimized thanks to diecast aluminum housing.
- ▶ No case drain line necessary
- ▶ Reduced noise
- ▶ Straightforward adjustment of direction of drive
- ▶ Excellent suction performance
- ▶ High total efficiency
- ▶ Long service life

**Contents**

Ordering code	2
Hydraulic fluid	3
Operating pressure range	4
Technical Data	5
Direction of rotation	7
Dimensions, sizes 23, 32	8
Dimensions, size 45	9
Dimensions, size 63	10
Dimensions, size 80	11
Dimensions, size 107	12
Accessories	13
Installation instructions	15
Other related documents	15
Project planning notes	16
Safety instructions	16

## Ordering code

01	02	03	04	05	06	07	08	09	10	11	
<b>A17F</b>	<b>O</b>		<b>/</b>	<b>10</b>	<b>N</b>	<b>L</b>	<b>W</b>	<b>K0</b>	<b>E8</b>	<b>1</b>	<b>-</b>

### Axial piston unit

01	Bent-axis design, fixed, nominal pressure 350 bar, maximum pressure 400 bar, for commercial vehicles (truck)	<b>A17F</b>
----	--	-------------

### Operating mode

02	Pump, open circuit	<b>O</b>
----	--------------------	----------

### Sizes (NG)

03	Geometric displacement, see table of values on page 5	<b>023</b>	<b>032</b>	<b>045</b>	<b>063</b>	<b>080</b>	<b>107</b>
----	---	------------	------------	------------	------------	------------	------------

### Series

04	Series 1, index 0	<b>10</b>
----	-------------------	-----------

### Configuration of port and fastening threads

05	Metric, port threads with profiled sealing ring according to DIN 3852	<b>N</b>
----	---	----------

### Direction of rotation<sup>1)</sup>

06	Viewed on drive shaft	counter-clockwise	<b>L</b>
----	-----------------------	-------------------	----------

### Sealing material

07	FKM (fluor-caoutchouc) including the 2 shaft seal rings in FKM	<b>W</b>
----	--	----------

### Mounting flange

08	Special flange ISO 7653-1985 (for trucks)	<b>K0</b>
----	---	-----------

### Drive shaft

09	Splined shaft similar to DIN ISO 14 (for trucks)	<b>E8</b>
----	--	-----------

### Service line port

10	Threaded ports <b>A</b> and <b>S</b> at rear	<b>1</b>
----	--	----------

### Standard / special version

11	Standard version	<b>0</b>
	Special version	<b>S</b>

### Note

Note the project planning notes on page 16.

<sup>1)</sup> Changing the direction of rotation see instruction manual 91520-01-B, chapter 6.4.2

## Hydraulic fluid

The fixed pump A17FO is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)

The axial piston unit is not suitable for operation with water-containing HF hydraulic fluid.

### Notes on selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$  see selection diagram).

#### Note


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

Please contact us if the above conditions cannot be met due to extreme operating parameters.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -25 \text{ °C}^{1)}$	$t \leq 3 \text{ min}$ , without load ( $p \leq 50 \text{ bar}$ ), $n \leq 1000 \text{ rpm}$
	Permissible temperature difference	$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid in the system
Warm-up phase	$v < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$		at $p \leq 0.7 \times p_{nom}$ , $n \leq 0.5 \times n_{nom}$ and $t \leq 15 \text{ min}$
Continuous operation	$v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$		this corresponds, for VG 46 for example, to a temperature range of +5 °C to +85 °C (see selection diagram)
		$\theta = -25 \text{ °C to } +103 \text{ °C}$	measured at air bleed port <b>R</b> observe permissible temperature range of the shaft seal ring <sup>1)</sup> ( $\Delta T = \text{approx. } 12 \text{ K}$ between bearing/shaft seal and port <b>R</b> )
	$v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		range of optimum operating viscosity and efficiency
Short-term operation	$v_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 3 \text{ min}$ , $p < 0.3 \times p_{nom}$

#### ▼ Selection diagram

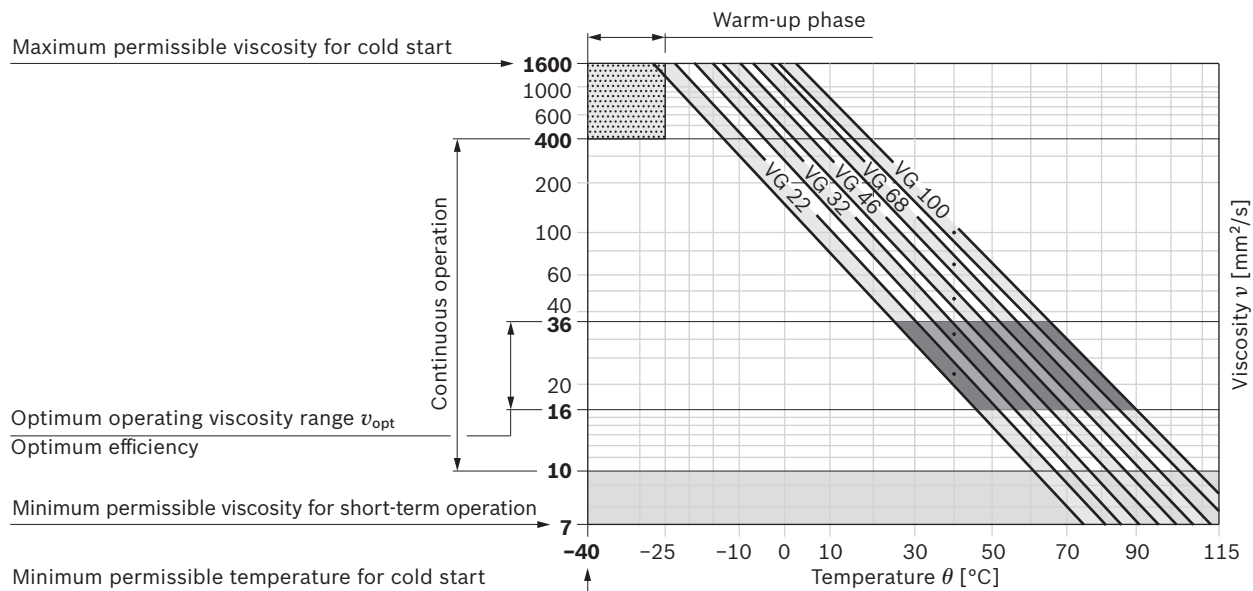

1) The FKM shaft seal is permissible for temperatures of -25 °C to +115 °C, please contact us for temperatures below -25 °C.

### Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.


A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

At very high hydraulic fluid temperatures (90 °C to maximum 103 °C, measured at air bleed port **R**), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.


## Operating pressure range

Pressure at service line port A (high-pressure side)		Definition
Nominal pressure $p_{nom}$	350 bar absolute	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	400 bar absolute	The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	5 s	
Total operating period	50 h	
Minimum pressure (high-pressure side)	10 bar absolute	Minimum pressure at the high-pressure side ( <b>A</b> ) which is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{A\ max}$	9000 bar/s	Maximum permissible rate of pressure rise and reduction during a pressure change over the entire pressure range.
Pressure at suction port S (inlet)		
Minimum pressure $p_{S\ min}$	0.8 bar absolute	Minimum pressure at suction port <b>S</b> (inlet) which is required in order to prevent damage to the axial piston unit. The minimum pressure is dependent on the speed of the axial piston unit.
Maximum pressure $p_{S\ max}$	2 bar absolute	

### ▼ Rate of pressure change $R_{A\ max}$

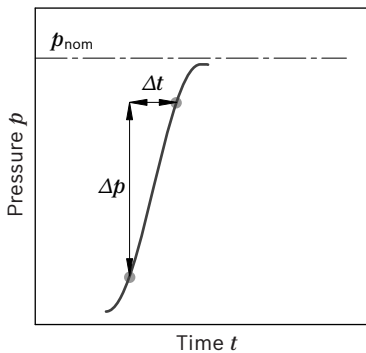

### ▼ Pressure definition

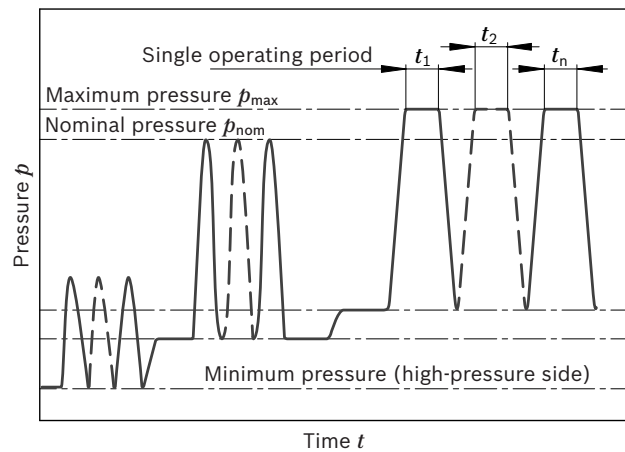

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$


### Note

Operating pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.

## Technical Data

Size	NG		23	32	45	63	80	107
Displacement, geometric, per revolution	$V_g$	cm <sup>3</sup>	22.9	32	45.6	63	80.4	106.7
Speed maximum <sup>1)</sup>	$n_{nom}$ <sup>2)</sup>	rpm	3050	2750	2650	2200	2150	2000
	$n_{max}$ <sup>3)</sup>	rpm	4300	3900	3800	3200	3100	2800
Flow	at $n_{nom}$	$q_v$	l/min	70	88	121	139	213
Power	at $n_{nom}$ and $\Delta p = 350$ bar	$P$	kW	41	51	71	81	124
Torque	at $\Delta p = 350$ bar	$T$	Nm	127	178	254	351	594
Rotary stiffness	$c$	kNm/rad	2.56	3.12	4.18	6.25	8.73	11.2
Moment of inertia for rotary group	$J_{TW}$	kgm <sup>2</sup>	0.0012	0.0012	0.003	0.0042	0.0072	0.0116
Maximum angular acceleration	$\alpha$	rad/s <sup>2</sup>	6500	6500	14600	7500	6000	4500
Case volume	$V$	l	0.25	0.29	0.4	0.5	0.6	0.75
Mass moment	$T_G$	Nm	4.7	4.7	8.6	9.9	15.3	20
Mass (approx.)	$m$	kg	5.9	5.9	8.4	9.3	12.3	15.0

### ▼ Maximum speed (limiting speed)

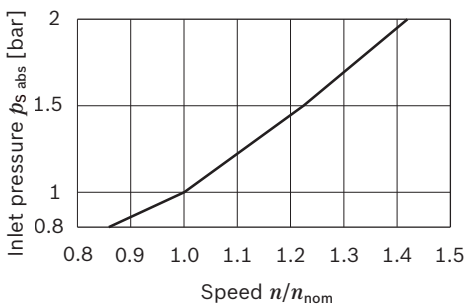

### Determining the operating characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$	[Nm]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

### Key

$V_g$	Displacement per revolution [cm <sup>3</sup> ]
$\Delta p$	Differential pressure [bar]
$n$	Speed [rpm]
$\eta_v$	Volumetric efficiency
$\eta_{hm}$	Hydraulic-mechanical efficiency
$\eta_t$	Total efficiency ( $\eta_t = \eta_v \times \eta_{hm}$ )

### Note

- Theoretical values, without efficiency and tolerances; values rounded.
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Other permissible limit values, such as speed variation, reduced angular acceleration as a function of the frequency and the permissible angular acceleration at start (lower than the maximum angular acceleration) can be found in data sheet 90261.

1) The values are applicable:


- for the optimum viscosity range from  $\nu_{opt} = 36$  bis  $16$  mm<sup>2</sup>/s
- for hydraulic fluids based on mineral oils.

2) The values apply at absolute pressure  $p_{abs} = 1$  bar at suction port **S**

3) Maximum speed (speed limit) with increased inlet pressure  $p_{abs}$  at suction port **S** (see diagram).

**Permissible axial forces of the drive shaft**

Size	NG	23	32	45	63	80	107
Maximum axial force, at standstill or pressure-free operation	+ $F_{ax\ max}$	N	0	0	0	0	0
	- $F_{ax\ max}$	N	24	33	43	53	60



**Note**

- ▶ The values given are maximum values and do not apply to continuous operation.
- ▶ The permissible axial force in direction  $-F_{ax}$  is to be avoided as the lifetime of the bearing is reduced.
- ▶ Radial forces are not permissible.

## Direction of rotation

The direction of rotation of the axial piston unit is defined by means of a pressure connection screwed into the service line port and can easily be changed.


By changing the pressure connection, the service line port and the suction port are exchanged. As a result, the permissible drive direction is changed. This is necessary when mounting on a power take-off with counter-clockwise rotation, for example. The procedure for conversion of the pressure nipple can be found in the instruction manual (91520-01-B, chapter 6.4.2 “Direction of rotation and change of direction of rotation”).

### Direction of rotation on delivery


On delivery, the pressure connection (1) is pre-assembled in the right-hand service line port of the axial piston unit. The permissible drive direction of the pump looking at the drive shaft: counter-clockwise. The power take-off turns clockwise.

#### Note

The pressure connection is pre-installed upon delivery and must be tightened with the torque stipulated for the appropriate thread size prior to installation (see instruction manual).

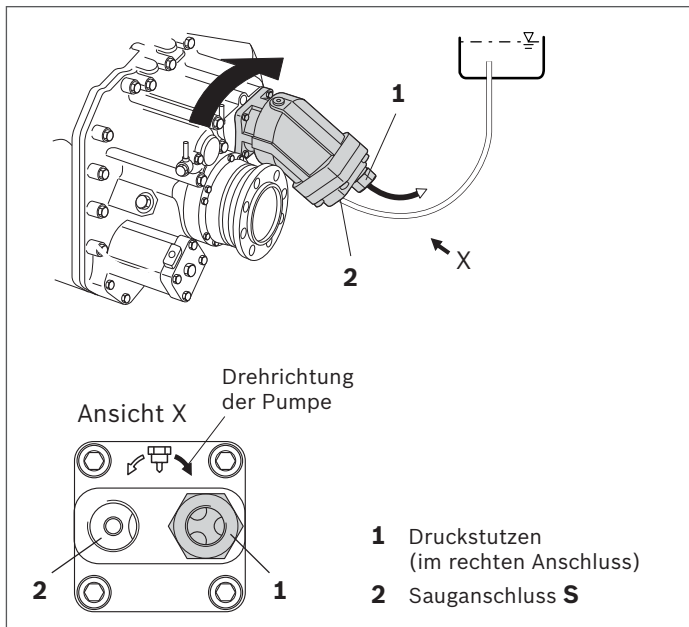

**Dimensions, sizes 23, 32**

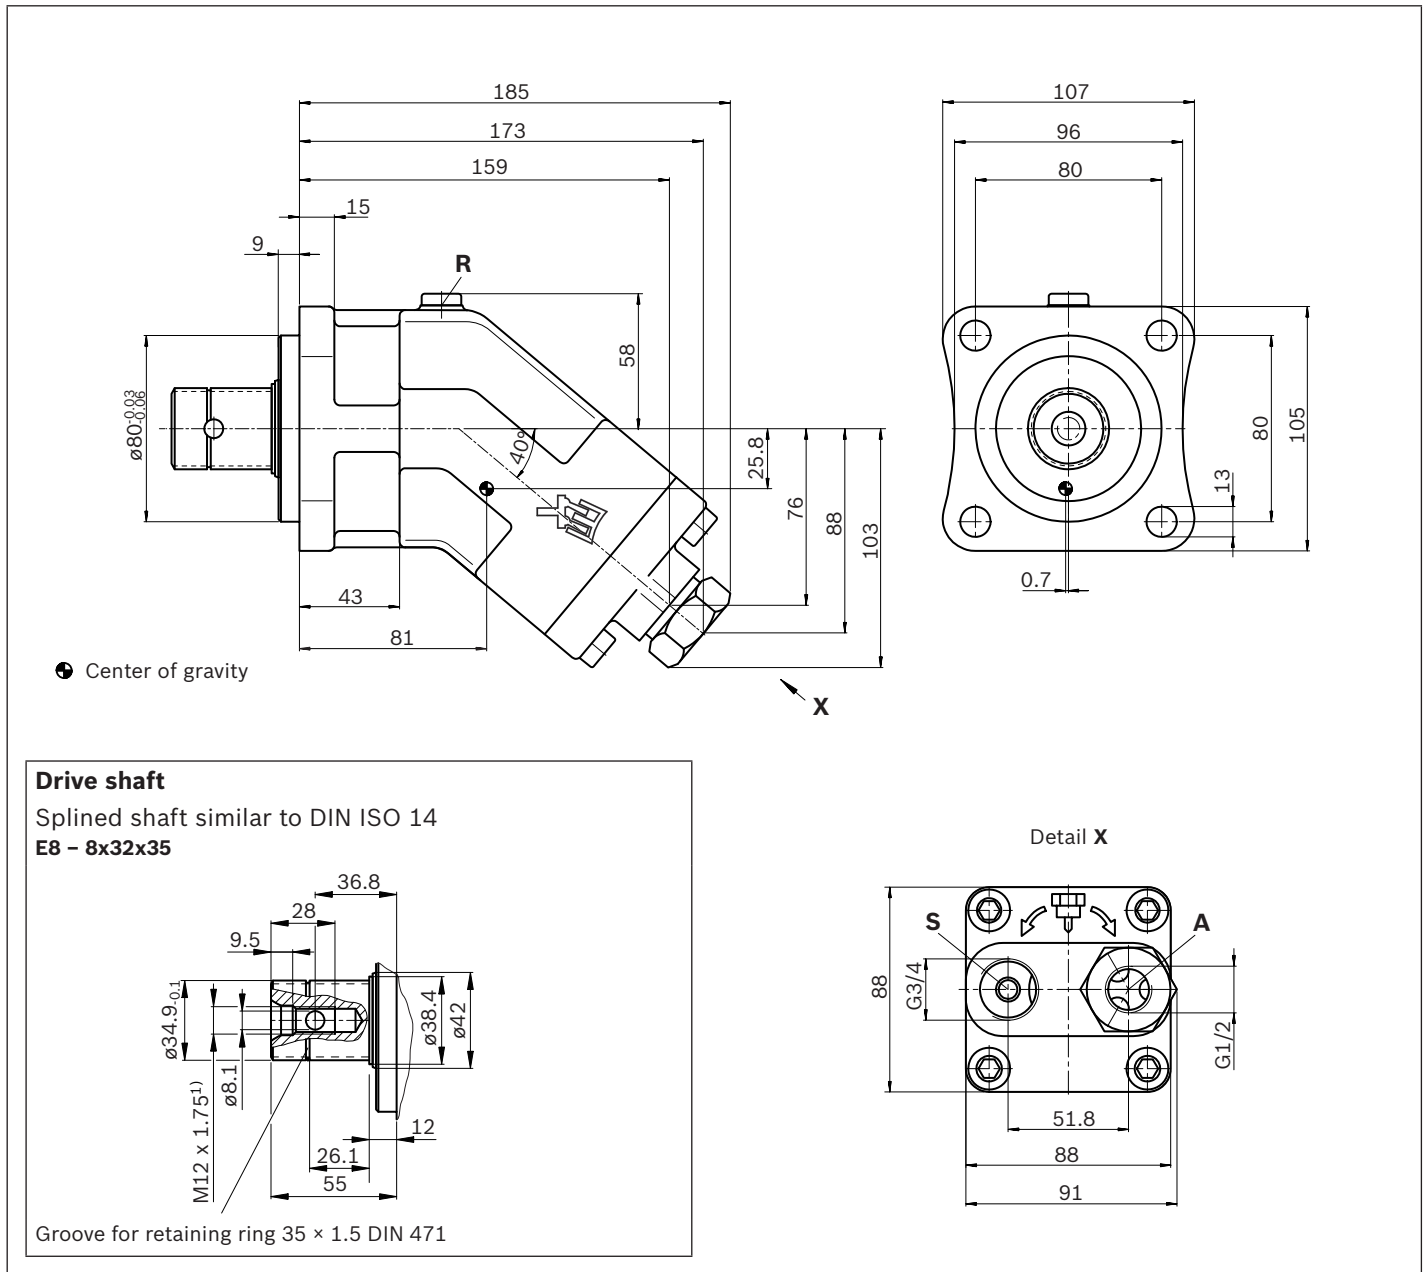


Ports	Standard	Size	$p_{max\ abs}$ [bar] <sup>2)</sup>	State <sup>5)</sup>
<b>A</b>	DIN ISO 228	G1/2; 14 deep	400	O
<b>S</b>	DIN ISO 228	G3/4; 16 deep	2	O
<b>R</b>	DIN 3852 <sup>4)</sup>	M10 x 1, 8 deep	2	X <sup>3)</sup>

- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 3) Only open port **R** for filling and air bleeding.
- 4) The spot face can be deeper than as specified in the appropriate standard.
- 5) O = Must be connected (plugged on delivery)  
 X = Plugged (in normal operation)






**Dimensions, size 63**

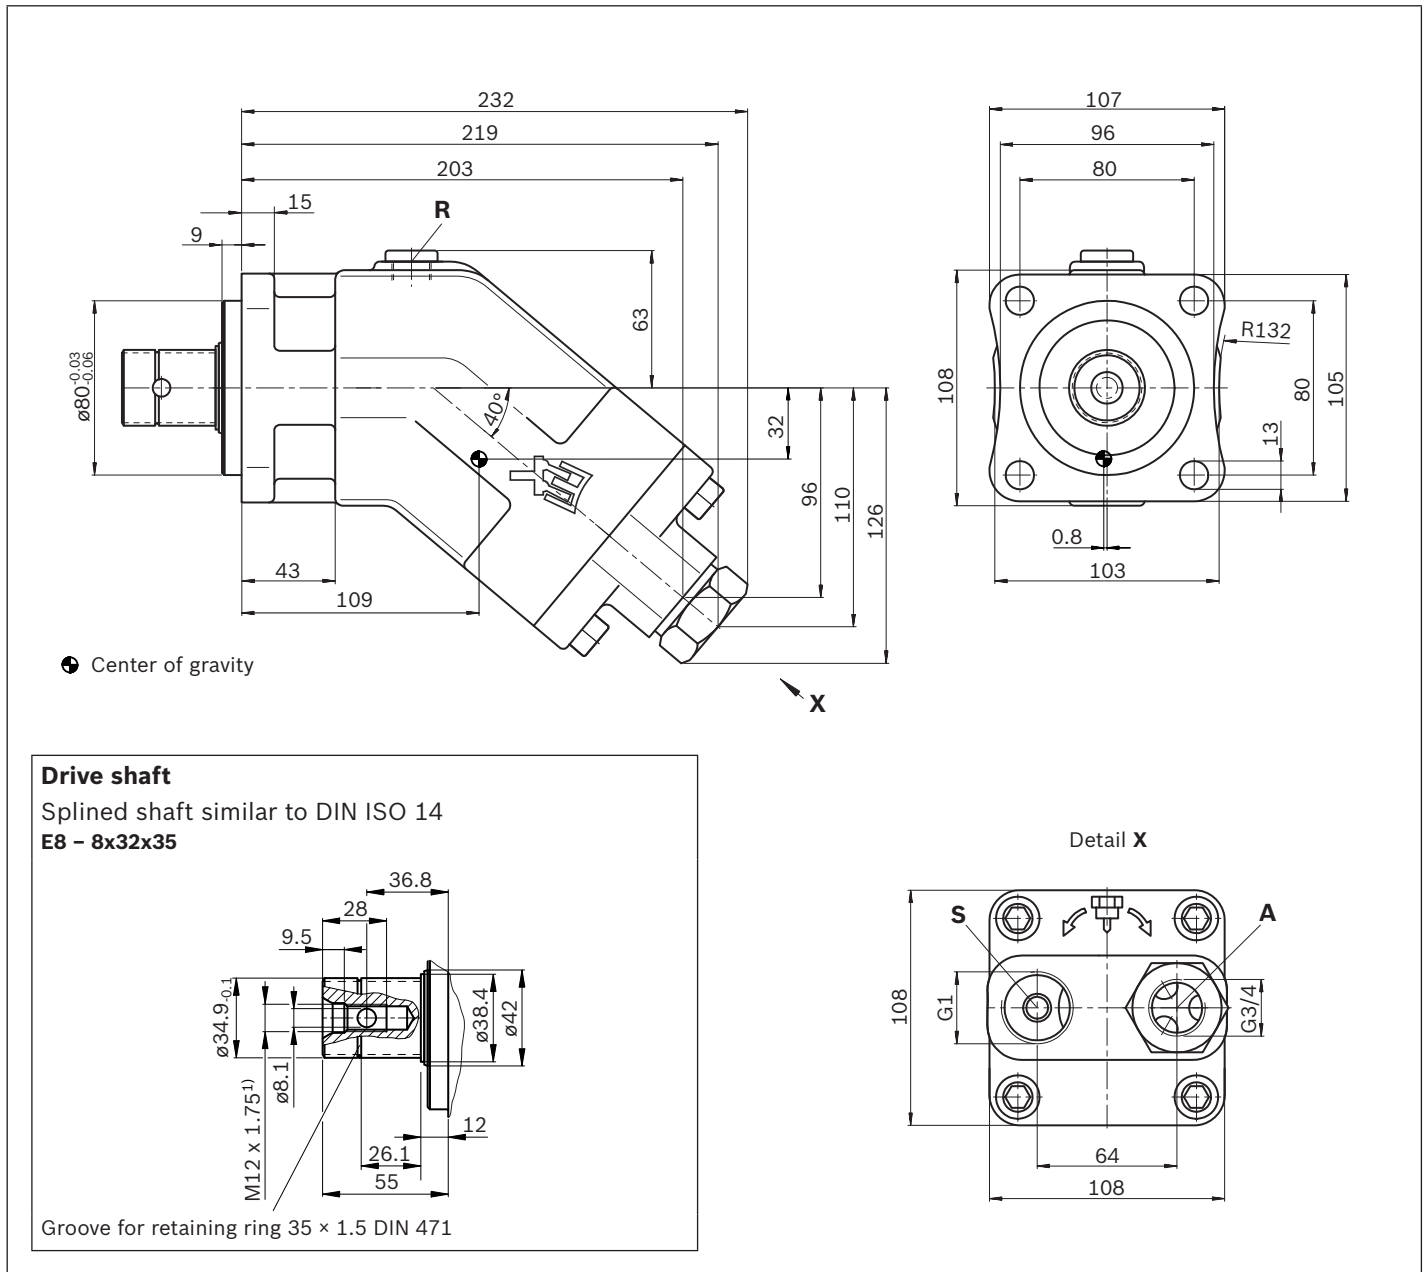

Ports	Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>2)</sup>	State <sup>5)</sup>
<b>A</b>	DIN ISO 228	G3/4; 16 deep	400	O
<b>S</b>	DIN ISO 228	G1; 18 deep	2	O
<b>R</b>	DIN 3852 <sup>4)</sup>	M10 x 1, 8 deep	2	X <sup>3)</sup>

- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 3) Only open port **R** for filling and air bleeding.
- 4) The spot face can be deeper than as specified in the appropriate standard.
- 5) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)


**Dimensions, size 80**

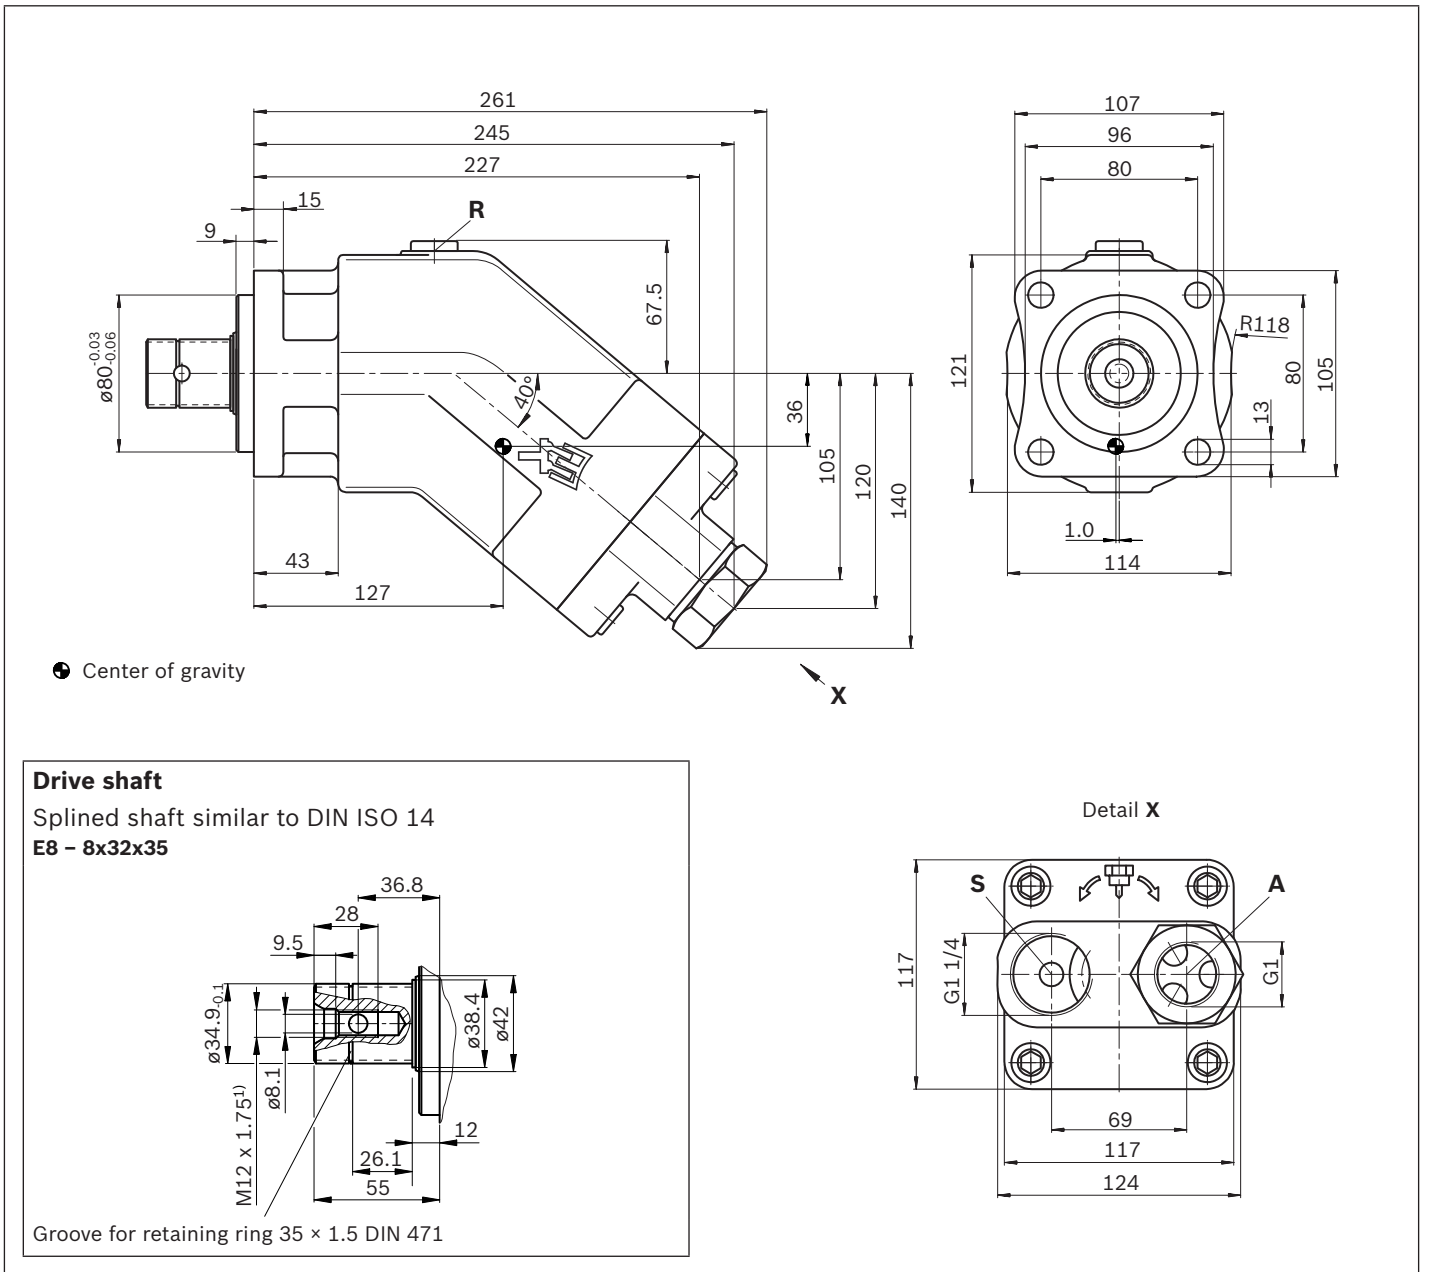

Ports	Standard	Size	$p_{max\ abs}$ [bar] <sup>2)</sup>	State <sup>5)</sup>
<b>A</b>	Service line port	DIN ISO 228	G1; 18 deep	O
<b>S</b>	Suction port	DIN ISO 228	G1 1/4; 20 deep	O
<b>R</b>	Air bleed port	DIN 3852 <sup>4)</sup>	M10 x 1, 8 deep	X <sup>3)</sup>

- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 3) Only open port **R** for filling and air bleeding.
- 4) The spot face can be deeper than as specified in the appropriate standard.
- 5) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)

**Dimensions, size 107**

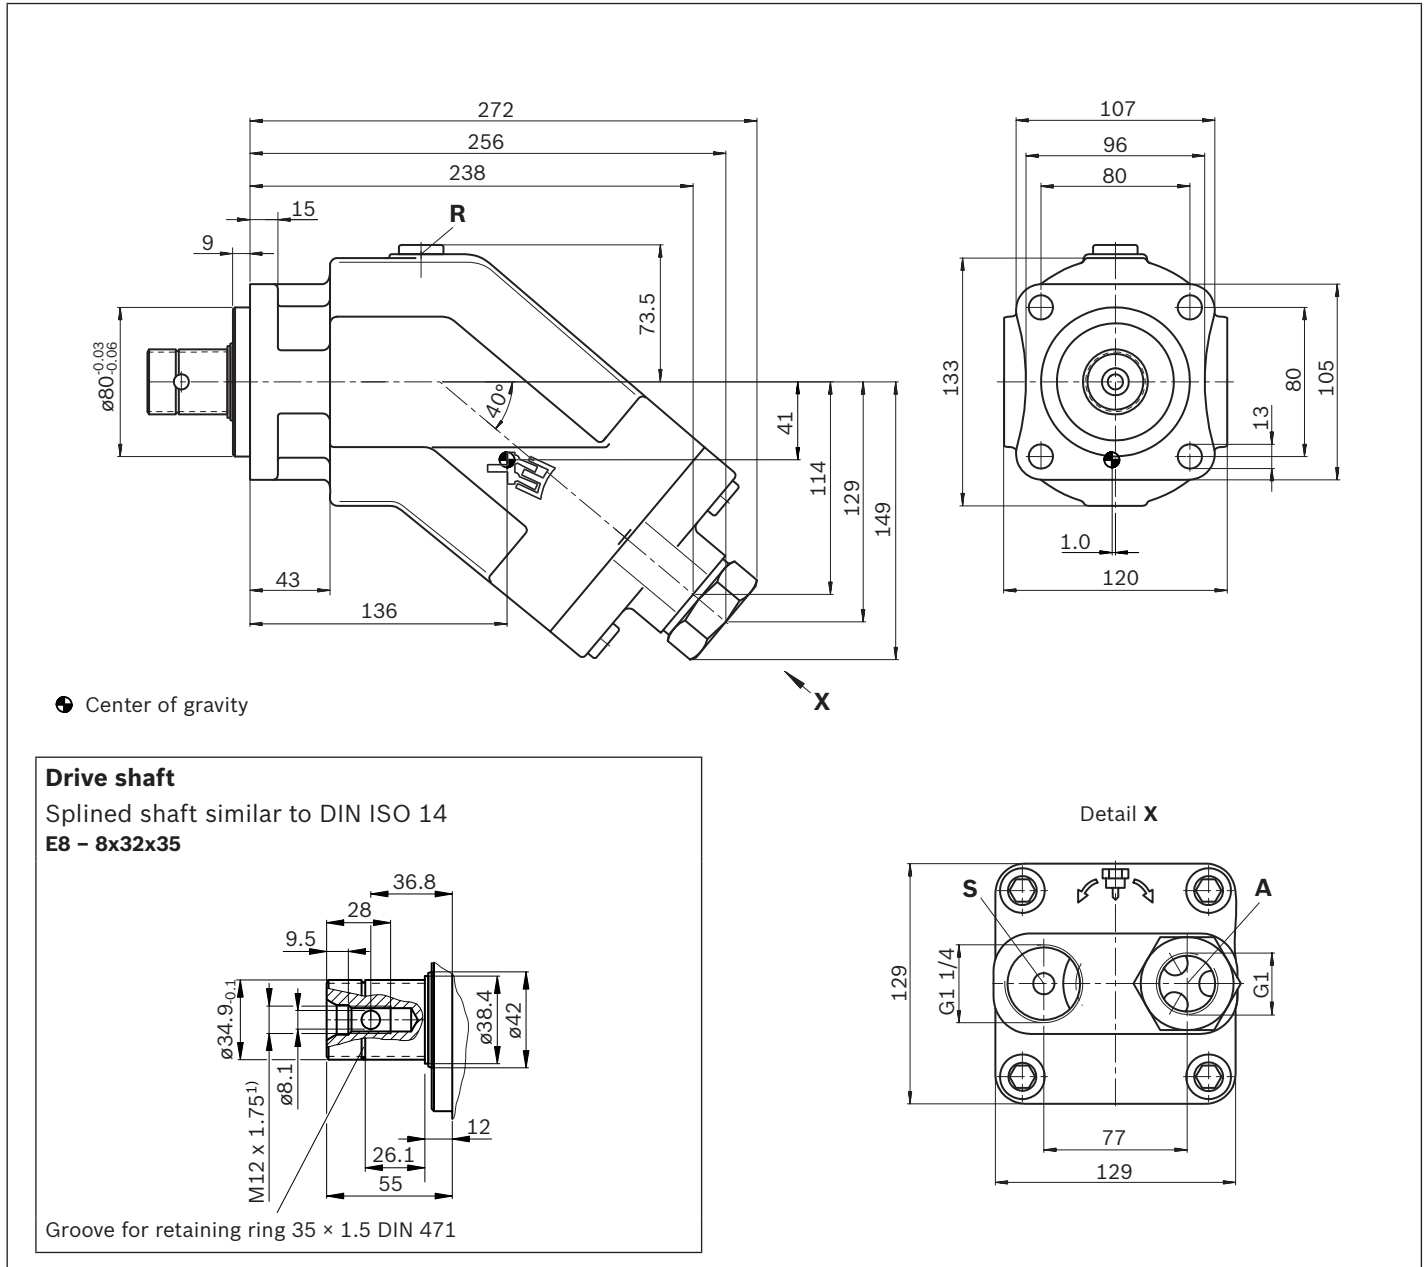


Ports	Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>2)</sup>	State <sup>5)</sup>
<b>A</b>	DIN ISO 228	G1; 18 deep	400	O
<b>S</b>	DIN ISO 228	G1 1/4; 20 deep	2	O
<b>R</b>	DIN 3852 <sup>4)</sup>	M10 x 1, 8 deep	2	X <sup>3)</sup>

- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 3) Only open port **R** for filling and air bleeding.
- 4) The spot face can be deeper than as specified in the appropriate standard.
- 5) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)

**Accessories**

**Suction stud**

▼ **Dimensions**

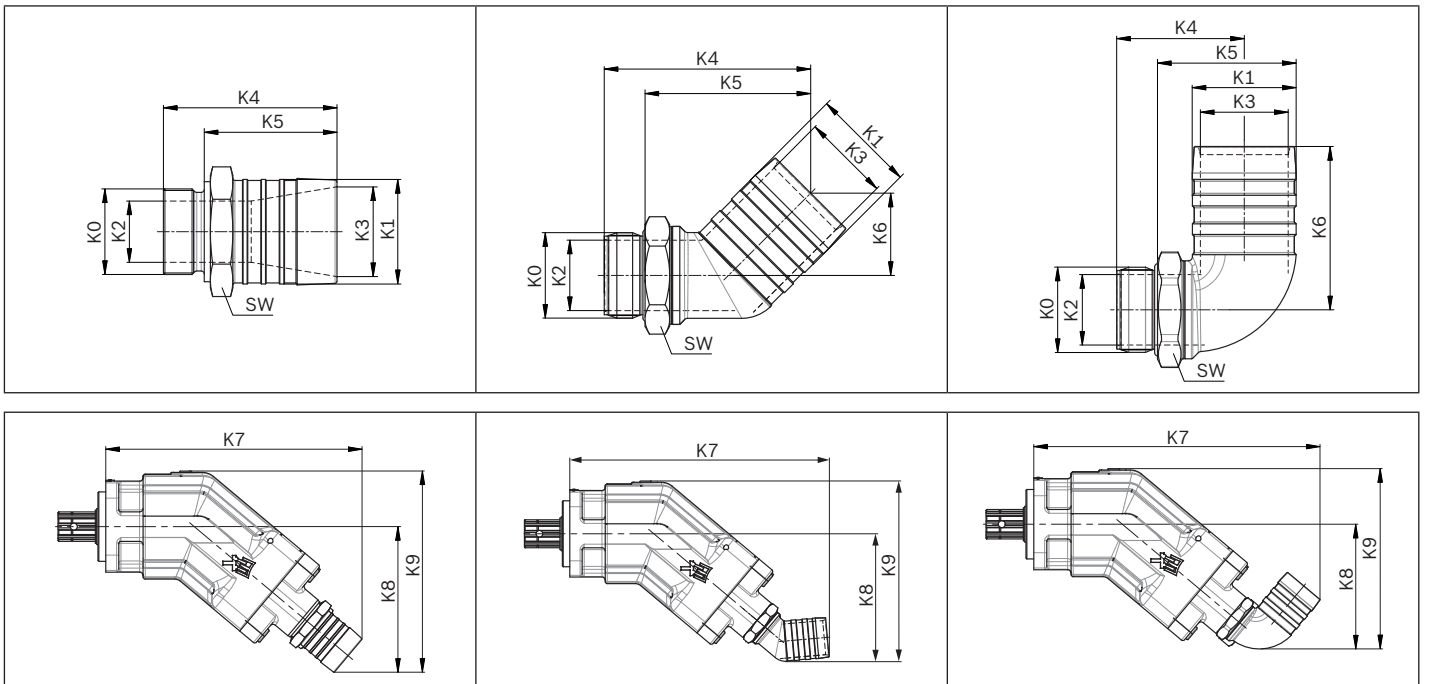

Version	Pump size	Hose nominal width	Material number	Thread K0	K1	K2	K3	K4	K5	K6	K7	K8	K9	SW
Straight	23, 32	1 1/2"	R909831856	G3/4	39	18	33.5	70	54	-	221	132	186	41
	45	1 1/2"	R902600251	G1	39	23.5	33.5	72	54	-	248	139	197	41
	63	1 1/2"		G1	39	23.5	33.5	72	54	-	257	146	204	41
	63	2"	R902602028	G1	51	26	44	82	64	-	268	157	215	55
	80	2"	R902600252	G1 1/4	51	30	44	85	65	-	295	168	232	55
	107	2"		G1 1/4	51	30	44	85	65	-	306	177	245	55
	107	2 1/2"	R902601630	G1 1/4	63	31	54	82	64	-	308	180	248	65
45°	23, 32	1 1/2"	R909831601	G3/4	39	20	31	101	82	43	259	126	180	36
	45	1 1/2"	R909831600	G1	39	26	31	101	82	45	287	132	190	41
	63	1 1/2"		G1	39	26	31	101	82	45	296	139	197	41
	63	2"	R902602029	G1	51	26	43	100	81	44	295	145	203	41
	80	2"	R909831597	G1 1/4	51	34	43	101	81	40	317	156	220	50
	107	2"		G1 1/4	51	34	43	101	81	40	328	165	234	50
	107	2 1/2"	R902601631	G1 1/4	63	35	54	100	81	44	331	169	237	50
90°	23, 32	1 1/2"	R909831602	G3/4	39	20	31	62	43	81	265	117	171	36
	45	1 1/2"	R909831599	G1	39	26	31	64	44	85	296	127	185	41
	63	1 1/2"		G1	39	26	31	64	44	85	305	134	192	41
	63	2"	R902602030	G1	51	26	43	62	42	81	305	138	196	41
	80	2"	R909831598	G1 1/4	51	35	43	63	43	80	330	144	208	50
	107	2"		G1 1/4	51	35	43	63	43	80	341	153	221	50

The suction stud is not included in the scope of delivery and must be ordered separately.

### Notes on suction line

- ▶ Keep as short and straight as possible, without sharp bend
- ▶ Use a supporting ring for plastic hoses
- ▶ Use two hose clamps to protect the suction hose against air suction
- ▶ Note pressure resistance of suction hose compared to ambient pressure

### Replacing seals

The O-rings used as seals to prevent air from entering the suction line are to be replaced after every removal and new installation in order to guarantee complete sealing.

Material number for O-rings:

- ▶ R909083796: O-ring for suction stud G3/4
- ▶ R909083802: O-ring for suction stud G1
- ▶ R909083808: O-ring for suction stud G1 1/4


### Coupling flange

There are special, modified coupling flanges in 4-hole and 6-hole design for the cardan shaft drive.

The coupling flange is not included in the scope of delivery and must be ordered separately.


#### ▼ 4-hole coupling flange, complete – ø 90

Material number: R902060152

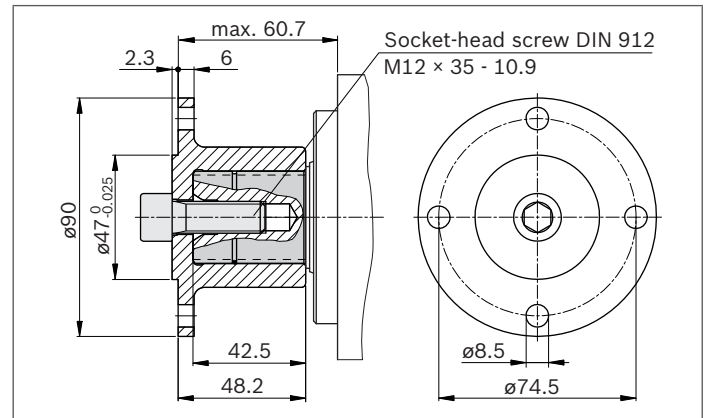

#### ▼ 6-hole coupling flange, complete – ø 100

Material number: R902060153

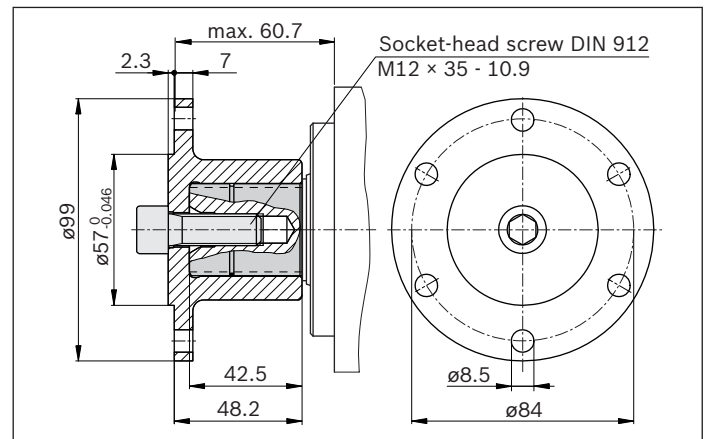

### Note

- ▶ Assembly of the coupling flange is carried out by pulling onto the drive shaft with the aid of the threaded bore in the drive shaft end.
- ▶ The coupling flange must be clamped on the drive shaft using a socket-head screw. In addition, permanent lubrication should be applied between the drive shaft and the coupling flange.
- ▶ The socket-head screw should be secured in a suitable manner (e.g. gluing with Loctite 276) and tightened with a tightening torque of 130 Nm.
- ▶ Sudden axial impact upon the drive shaft will lead to rotary group damage and therefore must be avoided.

## Installation instructions

### General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This must also be observed following a long standstill as the axial piston unit can empty via the hydraulic lines.

The pump housing is internally connected to the suction chamber. A separate drain line from the housing to the reservoir is not needed.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction line must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{s \max} = 800$  mm. The minimum suction pressure at port **S** must also not fall below 0.8 bar absolute during operation and during cold start.



### Installation position

See the following examples **1** to **4**.

Further installation positions are available upon request.  
Recommended installation position: **1** and **2**.

### Below-reservoir installation (standard)



Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.

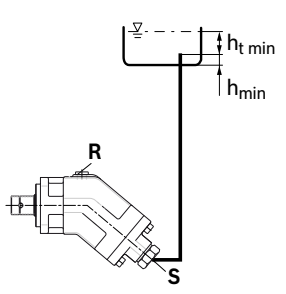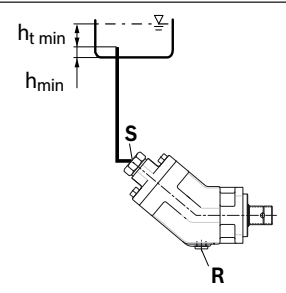Installation position	Air bleed	Filling
<p><b>1</b></p> 	R	S
<p><b>2</b></p> 	-	S

### Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir. Observe the maximum permissible suction height

$h_{s \max} = 800$  mm.

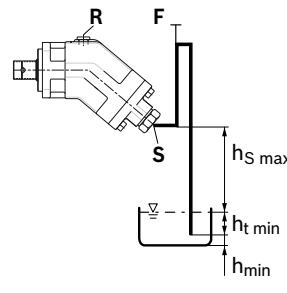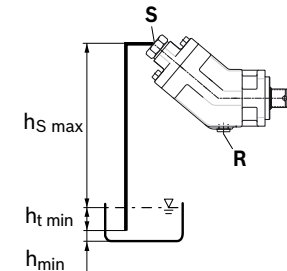Installation position	Air bleed	Filling
<p><b>3</b></p> 	R	F
<p><b>4</b></p> 	S	S

### Key

<b>F</b>	Filling/air bleed
<b>R</b>	Air bleed port
<b>S</b>	Suction port
$h_{t \min}$	Minimum required immersion depth (200 mm)
$h_{\min}$	Minimum required distance to reservoir bottom (100 mm)
$h_{s \max}$	Maximum permissible suction height (800 mm)

### Note

Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

### Other related documents

Other pumps with special characteristics and dimensions for use in commercial vehicles can be found in the following data sheets:

- ▶ 91510: Fixed pump A17FNO, 250/300 bar
- ▶ 92270: Variable pump, A18VO 350/400 bar
- ▶ 92280: Variable pump, A18VLO 350/400 bar

## Project planning notes

- ▶ The A17FO pump is designed to be used in open circuits.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with protection to preserve for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all variants of the product are approved for use in safety functions according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g. MTTF<sub>d</sub>) for functional safety.
- ▶ Be sure to add a pressure relief valve to the hydraulic system.
- ▶ Please note the details regarding the tightening torques of port threads and other threaded joints.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The service line ports and function ports can only be used to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).

**Bosch Rexroth AG**  
Mobile Applications  
Glockeraustraße 4  
89275 Elchingen, Germany  
Tel. +49 7308 82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that our products are subject to a natural process of wear and aging.



# Axial piston fixed pump A17FNO Series 10

**RE 91510**

Issue: 11.2015

Replaces: 06.2012



- ▶ Designed for use in commercial vehicles with standard pressure requirements
- ▶ Size 125
- ▶ Nominal pressure/maximum pressure 250/300 bar
- ▶ Bent-axis design
- ▶ Open circuit

2

**Features**

- ▶ Flange and shaft designed for direct mounting on the power take-off of commercial vehicles
- ▶ Weight-optimized thanks to diecast aluminum housing.
- ▶ No case drain line necessary
- ▶ Reduced noise
- ▶ Straightforward adjustment of direction of drive
- ▶ Excellent suction performance
- ▶ High total efficiency
- ▶ Long service life

**Contents**

Ordering code	2
Hydraulic fluid	3
Operating pressure range	4
Technical Data	5
Direction of rotation	7
Dimensions, size 125	8
Accessories	9
Installation instructions	11
Other related documents	11
Project planning notes	12
Safety instructions	12

## Ordering code

01	02	03	04	05	06	07	08	09	10	11	
<b>A17FN</b>	<b>O</b>		<b>/</b>	<b>10</b>	<b>N</b>	<b>L</b>	<b>W</b>	<b>K0</b>	<b>E8</b>	<b>1</b>	<b>-</b>

### Axial piston unit

01	Bent-axis design, fixed, nominal pressure 250 bar, maximum pressure 300 bar, for commercial vehicles (truck)	<b>A17FN</b>
----	--	--------------

### Operating mode

02	Pump, open circuit	<b>O</b>
----	--------------------	----------

### Sizes (NG)

03	Geometric displacement, see table of values on page 5	<b>125</b>
----	---	------------

### Series

04	Series 1, index 0	<b>10</b>
----	-------------------	-----------

### Configuration of port and fastening threads

05	Metric, port threads with profiled sealing ring according to DIN 3852	<b>N</b>
----	---	----------

### Direction of rotation<sup>1)</sup>

06	Viewed on drive shaft	counter-clockwise	<b>L</b>
----	-----------------------	-------------------	----------

### Sealing material

07	FKM (fluor-caoutchouc) including the 2 shaft seal rings in FKM	<b>W</b>
----	--	----------

### Mounting flange

08	Special flange ISO 7653-1985 (for trucks)	<b>K0</b>
----	---	-----------

### Drive shaft

09	Splined shaft similar to DIN ISO 14 (for trucks)	<b>E8</b>
----	--	-----------

### Service line port

10	Threaded ports <b>A</b> and <b>S</b> at rear	<b>1</b>
----	--	----------

### Standard / special version

11	Standard version	<b>0</b>
	Special version	<b>S</b>

### Note

Note the project planning notes on page 12.

<sup>1)</sup> Changing the direction of rotation see instruction manual 91520-01-B, chapter 6.4.2

## Hydraulic fluid

The A17FNO fixed pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)

The axial piston unit is not suitable for operation with water-containing HF hydraulic fluid.

### Notes on selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$  see selection diagram).

#### Note


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

Please contact us if the above conditions cannot be met due to extreme operating parameters.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -25^\circ\text{C}^{1)}$	$t \leq 3 \text{ min}$ , without load ( $p \leq 50 \text{ bar}$ ), $n \leq 1000 \text{ rpm}$
	Permissible temperature difference	$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid in the system
Warm-up phase	$v < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$		at $p \leq 0.7 \times p_{nom}$ , $n \leq 0.5 \times n_{nom}$ and $t \leq 15 \text{ min}$
Continuous operation	$v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$		this corresponds, for VG 46 for example, to a temperature range of +5 °C to +85 °C (see selection diagram)
		$\theta = -25^\circ\text{C to } +103^\circ\text{C}$	measured at air bleed port <b>R</b> observe permissible temperature range of the shaft seal ring <sup>1)</sup> ( $\Delta T = \text{approx. } 12 \text{ K}$ between bearing/shaft seal and port <b>R</b> )
	$v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		range of optimum operating viscosity and efficiency
Short-term operation	$v_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 3 \text{ min}$ , $p < 0.3 \times p_{nom}$

#### ▼ Selection diagram

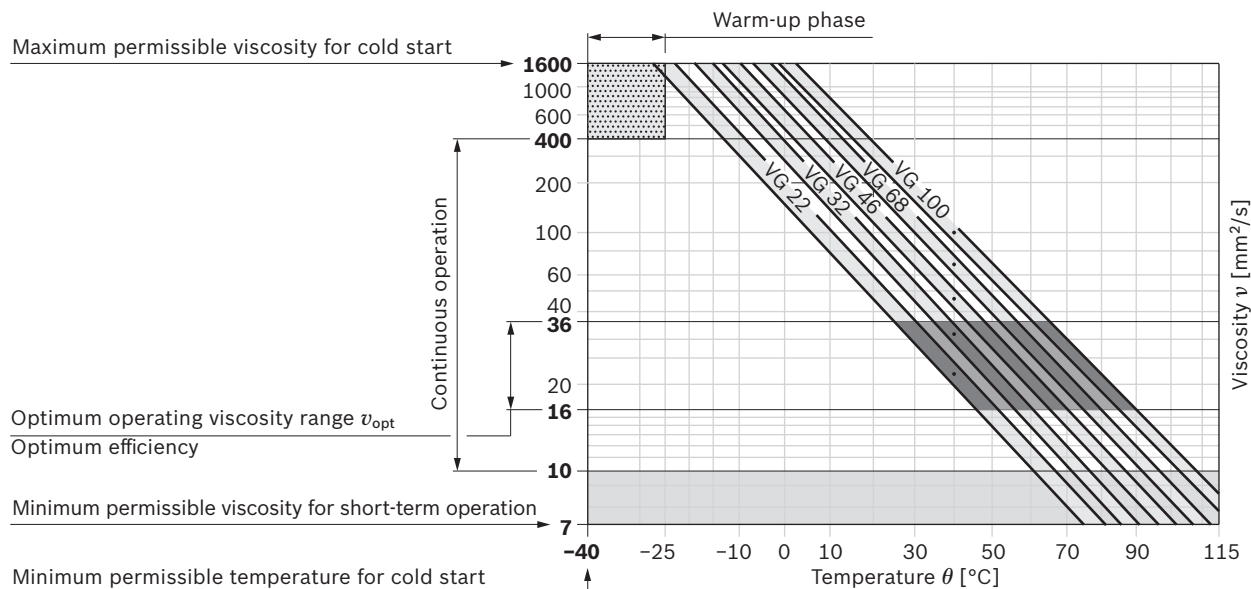

1) The FKM shaft seal is permissible for temperatures of -25 °C to +115 °C, please contact us for temperatures below -25 °C.

### Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.


A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

At very high hydraulic fluid temperatures (90 °C to maximum 103 °C, measured at air bleed port **R**), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.


### Operating pressure range

Pressure at service line port A (high-pressure side)		Definition
Nominal pressure $p_{nom}$	250 bar absolute	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	300 bar absolute	The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	5 s	
Total operating period	50 h	
Minimum pressure (high-pressure side)	10 bar absolute	Minimum pressure at the high-pressure side ( <b>A</b> ) which is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{A\ max}$	9000 bar/s	Maximum permissible rate of pressure rise and reduction during a pressure change over the entire pressure range.
Pressure at suction port S (inlet)		Definition
Minimum pressure $p_{S\ min}$	0.8 bar absolute	Minimum pressure at suction port <b>S</b> (inlet) which is required in order to prevent damage to the axial piston unit. The minimum pressure is dependent on the speed of the axial piston unit.
Maximum pressure $p_{S\ max}$	2 bar absolute	

#### ▼ Rate of pressure change $R_{A\ max}$

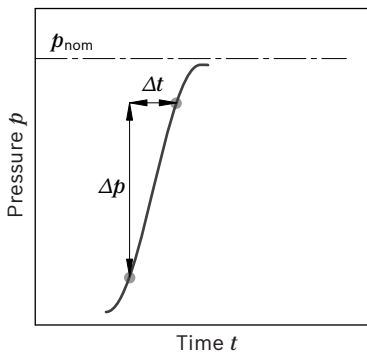

#### ▼ Pressure definition

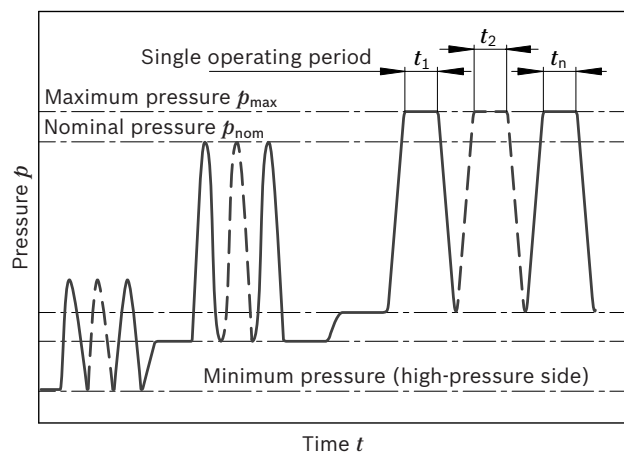

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$


#### Note

Operating pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.

## Technical Data

Size		NG	125
Displacement, geometric, per revolution		$V_g$	cm <sup>3</sup> 125
Speed maximum <sup>1)</sup>		$n_{nom}$ <sup>2)</sup>	rpm 1750
		$n_{max}$ <sup>3)</sup>	rpm 2500
Flow	at $n_{nom}$	$q_v$	l/min 219
Power	at $n_{nom}$ and $\Delta p = 350$ bar	$P$	kW 91
Torque	at $\Delta p = 350$ bar	$T$	Nm 497
Rotary stiffness		$c$	kNm/rad 11.9
Moment of inertia for rotary group		$J_{TW}$	kgm <sup>2</sup> 0.0016
Maximum angular acceleration		$\alpha$	rad/s <sup>2</sup> 4500
Case volume		$V$	l 0.83
Mass moment		$T_G$	Nm 20
Mass (approx.)		$m$	kg 15.0

### ▼ Maximum speed (limiting speed)

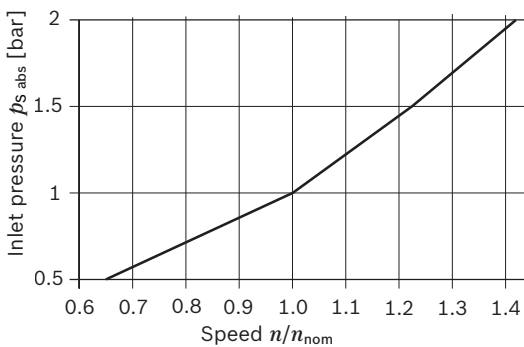

### Determining the operating characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$	[Nm]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

### Key


$V_g$	Displacement per revolution [cm <sup>3</sup> ]
$\Delta p$	Differential pressure [bar]
$n$	Speed [rpm]
$\eta_v$	Volumetric efficiency
$\eta_{hm}$	Hydraulic-mechanical efficiency
$\eta_t$	Total efficiency ( $\eta_t = \eta_v \times \eta_{hm}$ )

### Note

- Theoretical values, without efficiency and tolerances; values rounded.
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Other permissible limit values, such as speed variation, reduced angular acceleration as a function of the frequency and the permissible angular acceleration at start (lower than the maximum angular acceleration) can be found in data sheet 90261.

- The values are applicable:
  - for the optimum viscosity range from  $\nu_{opt} = 36$  bis  $16$  mm<sup>2</sup>/s
  - for hydraulic fluids based on mineral oils.
- The values apply at absolute pressure  $p_{abs} = 1$  bar at suction port **S**
- Maximum speed (speed limit) with increased inlet pressure  $p_{abs}$  at suction port **S** (see diagram).

**Permissible axial forces of the drive shaft**

Size		NG	125
Maximum axial force, at standstill or pressure-free operation		+ $F_{ax\ max}$	0
		- $F_{ax\ max}$	77

**Note**

- ▶ The values given are maximum values and do not apply to continuous operation.
- ▶ The permissible axial force in direction  $-F_{ax}$  is to be avoided as the lifetime of the bearing is reduced.
- ▶ Radial forces are not permissible.

## Direction of rotation

The direction of rotation of the axial piston unit is defined by means of a pressure connection screwed into the service line port and can easily be changed.


By changing the pressure connection, the service line port and the suction port are exchanged. As a result, the permissible drive direction is changed. This is necessary when mounting on a power take-off with counter-clockwise rotation, for example. The procedure for conversion of the pressure nipple can be found in the instruction manual (91520-01-B, chapter 6.4.2 “Direction of rotation and change of direction of rotation”).

### Direction of rotation on delivery


On delivery, the pressure connection (1) is pre-assembled in the right-hand service line port of the axial piston unit. The permissible drive direction of the pump looking at the drive shaft: counter-clockwise. The power take-off turns clockwise.

#### Note

The pressure connection is pre-installed upon delivery and must be tightened with the torque stipulated for the appropriate thread size prior to installation (see instruction manual).

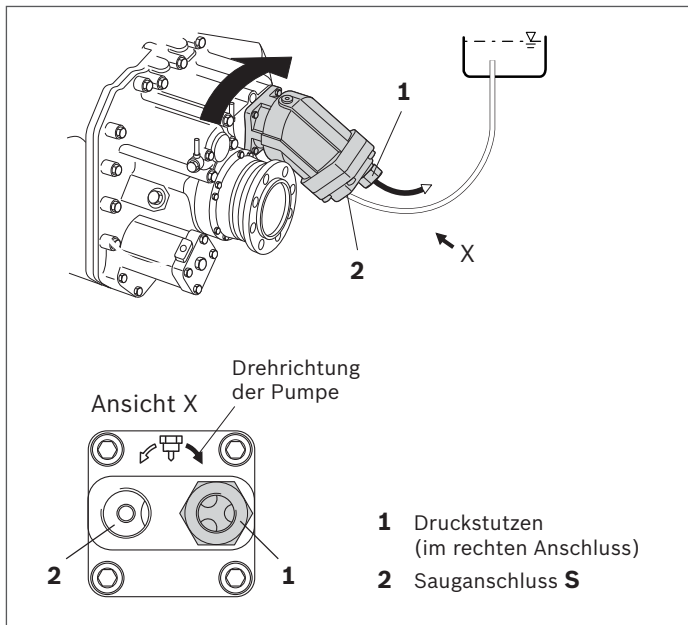

**Dimensions, size 125**

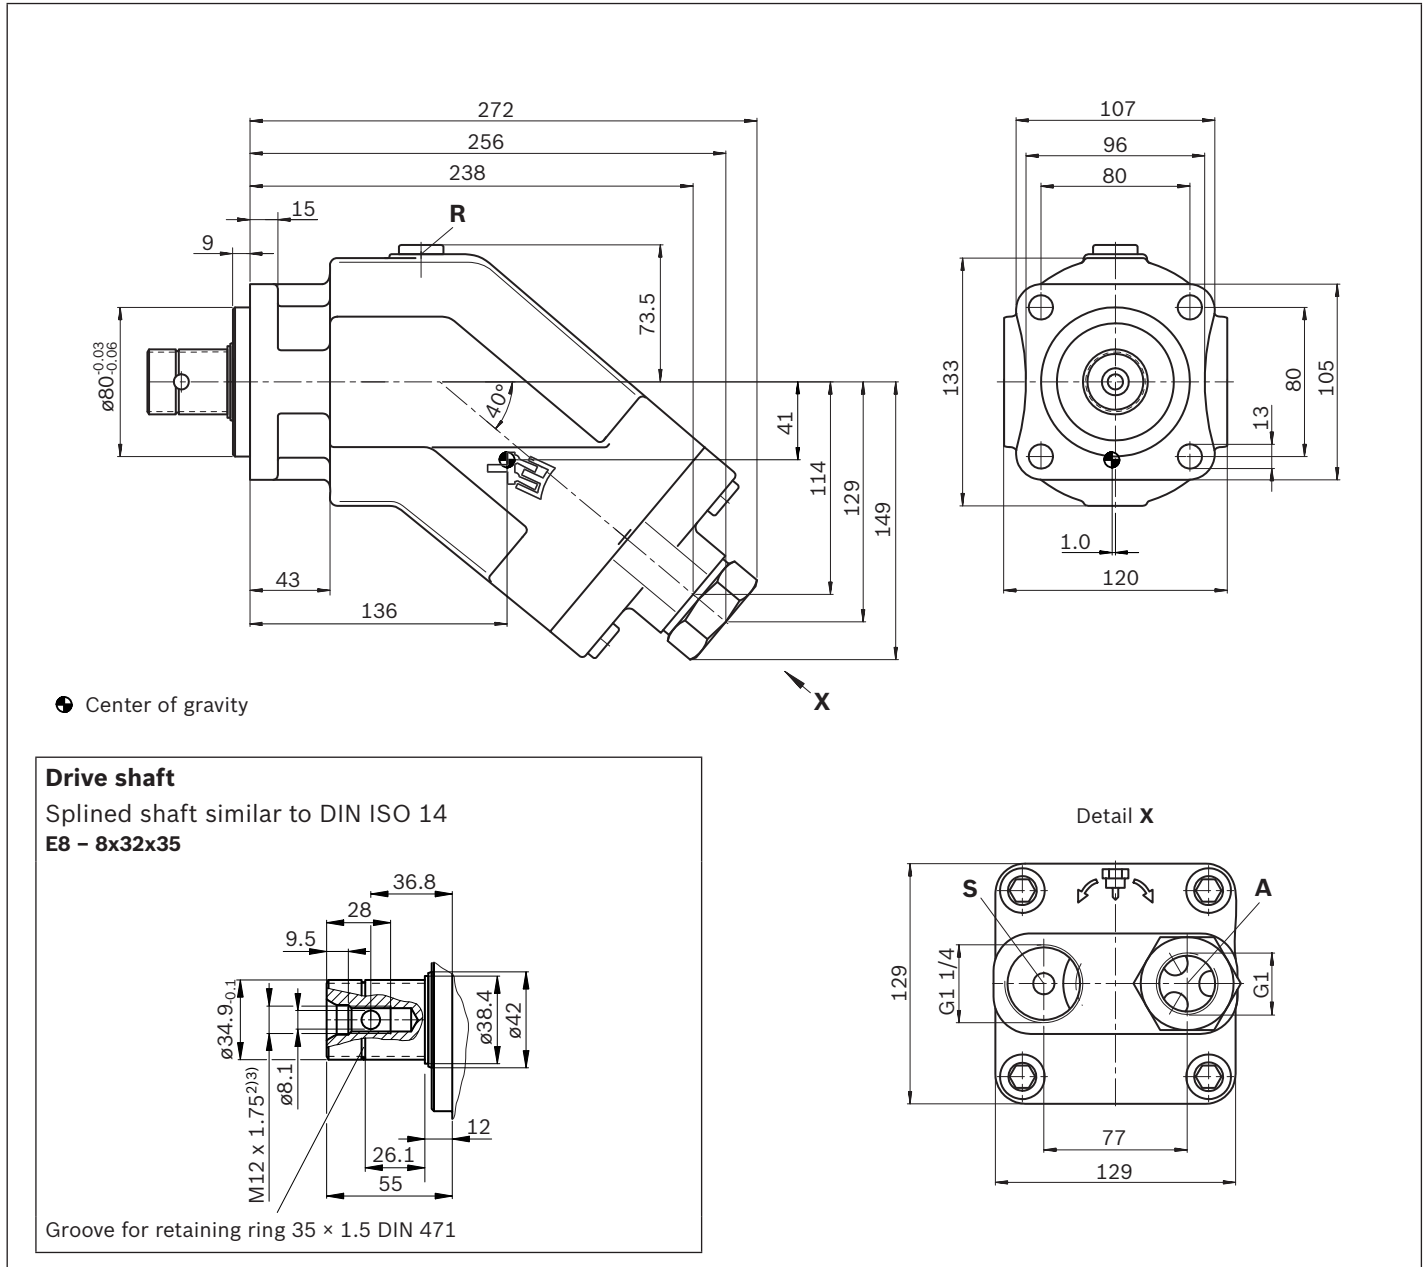

Ports	Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>2)</sup>	State <sup>5)</sup>
<b>A</b>	DIN ISO 228	G1; 18 deep	300	O
<b>S</b>	DIN ISO 228	G1 1/4; 20 deep	2	O
<b>R</b>	DIN 3852 <sup>4)</sup>	M10 × 1; 8 deep	2	X <sup>3)</sup>


- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 3) Only open port **R** for filling and air bleeding.
- 4) The spot face can be deeper than as specified in the appropriate standard.
- 5) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)



## Accessories

### Suction stud

▼ Dimensions

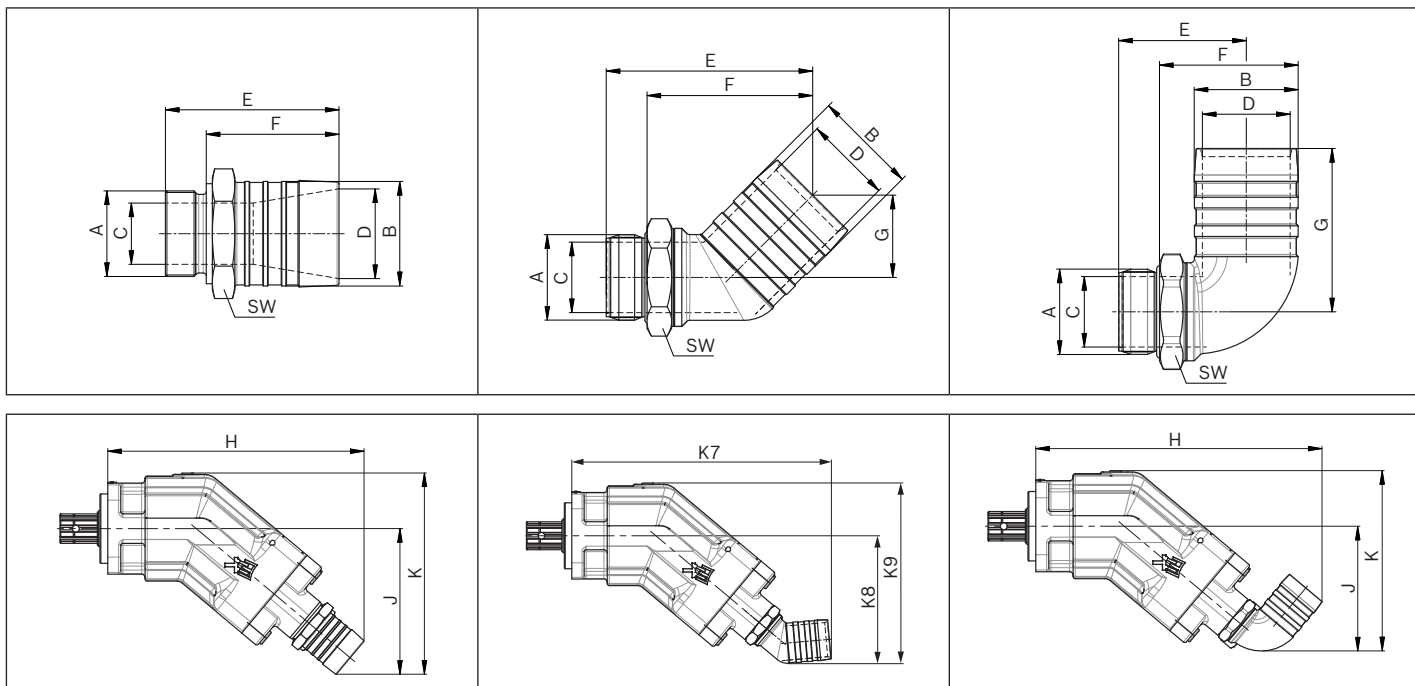

2

Version	Pump size	Hose nominal width	Material number	Thread K0	K1	K2	K3	K4	K5	K6	K7	K8	K9	SW
Straight	125	2"	R902600252	G1 1/4	51	30	44	85	65	–	306	177	245	55
		2 1/2"	R902601630	G1 1/4	63	31	54	82	64	–	308	180	248	65
45°	125	2"	R909831597	G1 1/4	51	34	43	101	81	40	328	165	234	50
		2 1/2"	R902601631	G1 1/4	63	35	54	100	81	44	331	169	237	50
90°	125	2"	R909831598	G1 1/4	51	35	43	63	43	80	341	153	221	50

The suction stud is not included in the scope of delivery and must be ordered separately.

### Notes on suction line

- ▶ Keep as short and straight as possible, without sharp bend
- ▶ Use a supporting ring for plastic hoses
- ▶ Use two hose clamps to protect the suction hose against air suction
- ▶ Note pressure resistance of suction hose compared to ambient pressure

### Replacing seals

The O-rings used as seals to prevent air from entering the suction line are to be replaced after every removal and new installation in order to guarantee complete sealing.

Material number for O-rings:

- ▶ R909083808: O-ring for suction stud G1 1/4


### Coupling flange

There are special, modified coupling flanges in 4-hole and 6-hole design for the cardan shaft drive.

The coupling flange is not included in the scope of delivery and must be ordered separately.


#### ▼ 4-hole coupling flange, complete – ø 90

Material number: R902060152

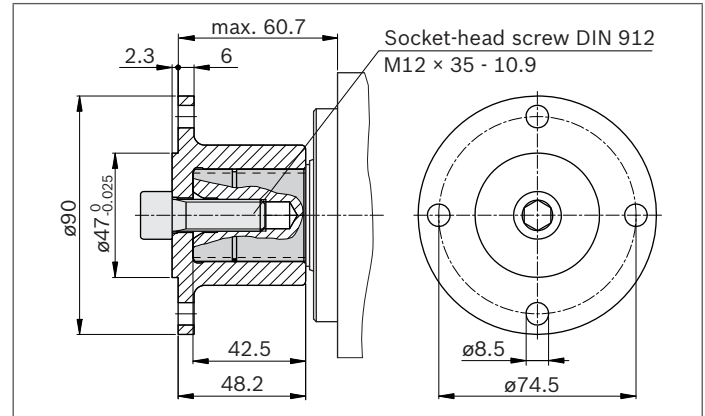

#### ▼ 6-hole coupling flange, complete – ø 100

Material number: R902060153

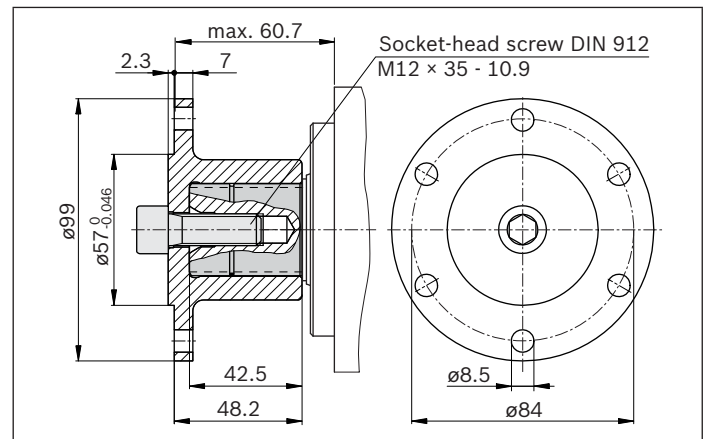

### Note

- ▶ Assembly of the coupling flange is carried out by pulling onto the drive shaft with the aid of the threaded bore in the drive shaft end.
- ▶ The coupling flange must be clamped on the drive shaft using a socket-head screw. In addition, permanent lubrication should be applied between the drive shaft and the coupling flange.
- ▶ The socket-head screw should be secured in a suitable manner (e.g. gluing with Loctite 276) and tightened with a tightening torque of 130 Nm.
- ▶ Sudden axial impact upon the drive shaft will lead to rotary group damage and therefore must be avoided.

## Installation instructions

### General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This must also be observed following a long standstill as the axial piston unit can empty via the hydraulic lines.

The pump housing is internally connected to the suction chamber. A separate drain line from the housing to the reservoir is not needed.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction line must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_S$  results from the overall loss of pressure.

However, it must not be higher than  $h_{S \max} = 800$  mm.

The minimum suction pressure at port **S** must not fall below 0.8 bar absolute during operation and during cold start.

### Installation position


See the following examples **1** to **4**.

Further installation positions are available upon request.

Recommended installation position: **1** and **2**.

### Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.

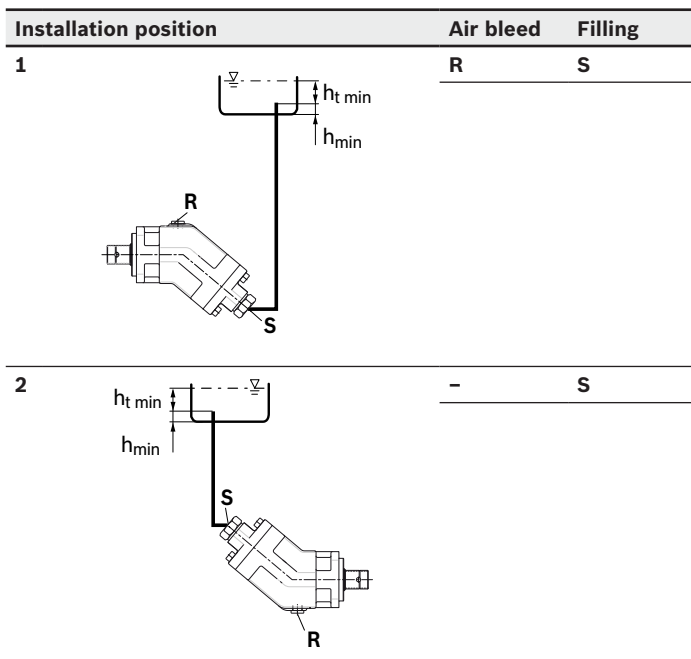


### Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.

Observe the maximum permissible suction height

$h_{S \max} = 800$  mm.

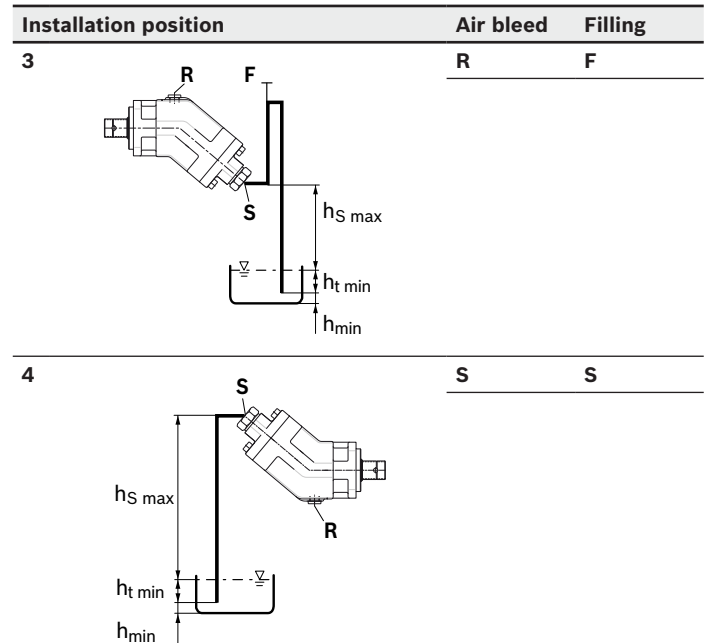

### Key

**F** Filling/air bleed

**R** Air bleed port

**S** Suction port

$h_{t \min}$  Minimum required immersion depth (200 mm)

$h_{\min}$  Minimum required distance to reservoir bottom (100 mm)

$h_{S \max}$  Maximum permissible suction height (800 mm)

### Note

Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

### Other related documents

Other pumps with special characteristics and dimensions for use in commercial vehicles can be found in the following data sheets:

- ▶ 91520: Fixed pump A17FO, 350/400 bar
- ▶ 92270: Variable pump, A18VO 350/400 bar
- ▶ 92280: Variable pump, A18VLO 350/400 bar

## Project planning notes

- ▶ The A17FNO pump is designed to be used in open circuits.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with protection to preserve for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all variants of the product are approved for use in safety functions according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Be sure to add a pressure relief valve to the hydraulic system.
- ▶ Please note the details regarding the tightening torques of port threads and other threaded joints.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The service line ports and function ports can only be used to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).

**Bosch Rexroth AG**  
Mobile Applications  
Glockeraustraße 4  
89275 Elchingen, Germany  
Tel. +49 7308 82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that our products are subject to a natural process of wear and aging.

## Axial piston pumps

### Variable pumps, open circuits

Designation	Type	Size	Series	Data sheet	Page
Variable pump	A4VSO	40...1000	10/11/30	92050	189
Variable pump	A11V(L)O	40...260	10/11	92500	257
Variable pump	A11V(L)O	110...280	40	92510	321
Variable pump	A1VO	18...35	10	92650	389
Variable pump	A10V(S)O	18...140	31	92701	413
Variable pump	A10VO	45...180	32	92705	473
Variable pump	A10VO/5	10...100	52/53	92703	529
Variable pump	A10VNO	28...85	52/53	92735	597
Variable pump A10V(S)O with electro-proportional EF differential pressure control	for A10V(S)O	18...140	3x/5x	92709	633
Variable pump	A7VO	28...160	63	92202	645
Variable pump	A7VO	250...500	63	92203	689
Variable pump	A18VO	55...107	11	92270	741
Variable pump	A18VLO	80	11	92280	765
Variable double pump	A8VO	55...200	6x	93010	781
Variable double pump	A8VO	225	72	93013	821
Variable double pump	A20VO	60...520	10	93100	837
Variable double pump	A28VO	280	10	93110	853

For the latest information on axial piston pumps, please visit our website:

[www.boschrexroth.com/axial-piston-pumps](http://www.boschrexroth.com/axial-piston-pumps)

RE 90010-01/07.2016, Bosch Rexroth AG



# Axial piston variable pump A4VSO

**RE 92050/04.09** 1/68  
Replaces: 03.09

## Data sheet

Series 10, 11 and 30  
Size 40...1000  
Nominal pressure 350 bar  
Peak pressure 400 bar  
Open circuit



3

## Contents

Type code for Standard program	2
Technical data	5
Characteristics	10
Summary of controls	13
Dimensions, size 40	18
Dimensions, size 71	20
Dimensions, size 125	22
Dimensions, size 180	24
Dimensions, size 250	26
Dimensions, size 355	28
Dimensions, size 500	30
Dimensions, size 750	32
Dimensions, size 1000	36
Through drive	38
Summary mounting options on A4VSO	39
Permissible mass bending moment	40
Dimensions combination pumps	41
Dimensions through drive	43
Installation notes	66
General information	68

## Features

- Axial piston pump in swash plate design for hydrostatic drives in open circuit operation
- The flow is proportional to the input drive speed and displacement. By adjusting the swash plate angle it is possible to infinitely vary the output flow.
- Excellent suction characteristics
- Low noise level
- Long service life
- Modular design
- Short response times
- Variable through drive options
- Visual swivel angle indicator
- Optional mounting position
- Operation on HF-fluids under reduced operational data possible
  - A special version is available for operation with HFC-fluid see data sheet RE 92053

For the descriptions of the control devices see the separate RE data sheets

RE 92056, RE 92060, RE 92064,  
RE 92072, RE 92076, RE 92080, RE 92088

# Type code for Standard program

	<b>A4VS</b>		<b>O</b>			<b>/</b>			<b>-</b>						
01	02	03	04	05	06		07	08		09	10	11	12	13	14

## Hydraulic fluid / Version

		40	71	125	180	250	355	500	750	1000	
01	Mineral oil and HFD-fluids (no code)	●	●	●	●	●	●	●	●	●	
	HFA-, HFB- and HFC-Fluids	●	●	-	-	-	-	●	-	-	E
	For operation on HFC-special performance version see RE 92053 (HFA and HFB see RE 90223)			●	●	●	●				
	High-Speed-Version	-	-	-	-	●	●	●	-	-	H

## Axial piston unit

02	Swash plate design, variable															A4VS
----	------------------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	------

## Boost pump (Impeller)

		40	71	125	180	250	355	500	750	1000	
03	without boost pump (no coden)	●	●	●	●	●	●	●	●	●	
	with boost pump (Impeller) only with port plate 25 (service port connections)	-	-	-	-	-	-	-	●	-	L

## Type of operation

04	Pump, open circuit															O
----	--------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	---

## Size

		40	71	125	180	250	355	500	750	1000
05	Displacement $V_{g \max}$ [cm <sup>3</sup> ]	40	71	125	180	250	355	500	750	1000

## Control devices

		40	71	125	180	250	355	500	750	1000	
06	Pressure control	DR	●	●	●	●	●	●	●	●	DR..
	Pressure control for parallel operation	DP	●	●	●	●	●	●	●	●	DP..
	Flow control	FR	●	●	●	●	●	-	-	-	FR..
	Pressure and flow control	DFR	●	●	●	●	●	-	-	-	DFR..
	Power control with hyperbolic curve	LR	●	●	●	●	●	●	●	●	LR.. <sup>1)</sup>
	Manual control	MA	●	●	●	●	●	●	-	-	MA..
	Electric motor control	EM	●	●	●	●	●	●	-	-	EM..
	Hydraulic control, control volume dependent	HM	●	●	●	●	●	●	●	●	HM..
	Hydr. control, with servo/proportional valve	HS	●	●	●	●	●	●	●	●	HS.. <sup>1)</sup>
	Electronic control	EO	●	●	●	●	●	●	●	●	EO.. <sup>1)</sup>
	Hydraulic control, pilot pressure dependent	HD	● <sup>2)</sup>	● <sup>2)</sup>	●	●	●	●	●	●	HD.. <sup>1)</sup>
	Secondary speed control	DS1	●	●	●	●	●	●	●	○	DS1.. <sup>1)</sup>
	Electro-hydraulic control system DFE1 System solution SYHDFEE		●	●	●	●	●	-	-	-	DFE1.. <sup>1)</sup>

## Series

		40	71	125	180	250	355	500	750	1000	
07		●	●	-	-	-	-	-	-	-	10(11) <sup>2)</sup>
		-	-	●	●	●	●	●	●	●	30

● available    ○ in preparation    - not available

= preferred program

<sup>1)</sup> when operating on HF-fluids, observe the limitations as shown in the relevant data sheets of the control devices and the mounted valves

<sup>2)</sup> Versions with HD-controls only in series 11



## Type code for Standard program

	<b>A4VS</b>		<b>O</b>			/			-						
01	02	03	04	05	06		07	08		09	10	11	12	13	14

### Direction of rotation

08	with view on shaft end	right hand	<b>R</b>
		left hand	<b>L</b>

### Seals

		40	71	125	180	250	355	500	750	1000	
09	NBR (Nitrile-rubber), Shaft seal FKM (Fluoro-rubber)	●	●	●	●	●	●	●	●	●	<b>P</b>
	FKM (Fluoro-rubber) / for operation on HFD	●	●	●	●	●	●	●	●	●	<b>V</b>
	HFC-special performance version see RE 92053	-	-	●	●	●	●	-	-	-	<b>F</b>

### Shaft end

10	Keyed parallel shaft to DIN 6885	<b>P</b>
	Splined shaft to DIN 5480	<b>Z</b>

### Mounting flange

		40	71	125	180	250	355	500	750	1000	
11	similar to ISO 3019-2 metric	●	●	●	●	●	●	-	-	-	<b>B</b>
	4-hole										
	8-hole	-	-	-	-	-	-	●	●	●	<b>H</b>

### Service line connections

12	Port B and S: SAE flange on side, 90° offset, metric fixing screws	●	●	●	●	●	●	-	-	-	13 <sup>1)</sup>
	Port B and S: SAE flange on side, 90° offset, metric fixing screws 2. pressure port B <sub>1</sub> opposite B – closed with blanking plate on delivery	●	●	●	●	●	●	●	●	●	25

● available    ○ in preparation     = preferred program

<sup>1)</sup> only with through drive code N00 and K..

continuation of type code see page 4

## Type code for Standard program

	<b>A4VS</b>		<b>O</b>			/			-						
01	02	03	04	05	06		07	08		09	10	11	12	13	14

Through drive			40	71	125	180	250	355	500	750	1000	
without auxiliary pump, without through drive			●	●	●	●	●	●	●	●	●	N00
with through drive for mounting an axial piston unit, gear or radial piston pump			●	●	-	-	-	-	●	●	●	K...
Universal through drive, can be adapted			-	-	●	●	●	●	-	-	-	U...
Flange splined shaft coupler <sup>1)</sup> to mount												
125, 4-hole (ISO <sup>2)</sup> )	32x2x14x9g	A4VSO/G 40	●	●	●	●	●	●	●	○	○	31
140, 4-hole (ISO <sup>2)</sup> )	40x2x18x9g	A4VSO/G 71	-	●	●	●	●	●	●	●	○	33
160, 4-hole (ISO <sup>2)</sup> )	50x2x24x9g	A4VSO/G 125	-	-	●	●	●	●	●	●	○	34
160, 4-hole (ISO <sup>2)</sup> )	50x2x24x9g	A4VSO/G 180	-	-	-	●	●	●	●	●	○	34
224, 4-hole (ISO <sup>2)</sup> )	60x2x28x9g	A4VSO/G, A4CSG 250	-	-	-	-	●	●	●	●	○	35
224, 4-hole (ISO <sup>2)</sup> )	70x3x22x9g	A4VSO/G, A4CSG 355	-	-	-	-	-	●	●	○	○	77
315, 8-hole (ISO <sup>2)</sup> )	80x3x25x9g	A4VSO/G, A4CSG 500	-	-	-	-	-	-	●	●	○	43
400, 8-hole (ISO <sup>2)</sup> )	90x3x28x9g	A4VSO/G, A4CSG 750	-	-	-	-	-	-	-	●	○	76
400, 8-hole (ISO <sup>2)</sup> )	100x3x32x9g	A4VSO/G 1000	-	-	-	-	-	-	-	-	●	88
80, 2-hole (ISO <sup>2)</sup> )	3/4in 19-4 (SAE A-B)	A10VSO 10/52, 18/31	○	●	○	○	○	○	○	○	○	B2
100, 2-hole (ISO <sup>2)</sup> )	7/8in 22-4 (SAE B)	A10VSO 28/31	●	●	●	●	○	○	○	○	○	B3
100, 2-hole (ISO <sup>2)</sup> )	1in 25-4 (SAE B-B)	A10VSO 45/31	●	●	●	●	●	●	●	○	○	B4
125, 2-hole (ISO <sup>2)</sup> )	1 1/4in 32-4 (SAE C)	A10VSO 71/31	-	●	●	●	●	●	○	○	○	B5
160, 4-hole (ISO <sup>2)</sup> )	1 1/4in 32-4 (SAE C)	A10VSO 71/32	-	○	○	○	●	○	○	○	○	B8
125, 2-hole (ISO <sup>2)</sup> )	1 1/2in 38-4 (SAE C-C)	A10VSO 100/31	-	-	○	○	○	○	○	○	○	B6
180, 4-hole (ISO <sup>2)</sup> )	1 1/2in 38-4 (SAE C-C)	A10VSO 100/32	-	-	○	○	○	○	○	○	○	B9
180, 4-hole (ISO <sup>2)</sup> )	1 3/4in 44-4 (SAE D)	A10VSO 140/31/32	-	-	-	●	●	●	●	○	○	B7
82-2 (SAE A)	5/8in 16-4 (SAE A)	AZ-PF-1X-004...022	●	●	●	●	●	●	●	●	○	01
82-2 (SAE A)	3/4in 19-4 (SAE A-B)	A10VSO 10, 18/31/52(3)	●	●	○	○	○	○	○	○	○	52
101-2 (SAE B)	7/8in 22-4 (SAE B)	AZ-PN-1X-020...032, A10VO 28/31/52(3)	●	●	●	●	●	●	●	○	○	68
101-2 (SAE B)	1in 25-4 (SAE B-B)	PGH4, A10VO45/31	●	●	●	●	●	●	●	○	○	04
127-2 (SAE C)	1 1/4in 32-4 (SAE C)	A10VO 71/31	-	●	●	●	●	●	●	○	○	07
127-2 (SAE C)	1 1/2in 38-4 (SAE C-C)	PGH5, A10VO100/31	-	-	●	●	●	●	●	○	○	24
152-4 (SAE D)	1 3/4in 44-4 (SAE D)	A10VO 140/31	-	-	-	●	●	●	●	○	○	17
Ø 63, metr.4-hole	for keyed shaft Ø 25	R4	●	●	○	○	○	○	○	○	○	57
with through drive shaft, without coupler, without adapter flange, closed with cover plate			●	●	●	●	●	●	●	●	●	99

### Filtration (only with HS- and DS-control)

14	without filter	N
	Sandwich plate filter (with HS- and DS-control see RE 92076 and RE 92056)	Z

<sup>1)</sup> Keyed shaft coupler on K/U 57 through drive <sup>2)</sup> to ISO 3019-2 metric

### Combination pumps

- Combination pumps consisting of axial piston units – ordering example see page 38; overview mounting options see page 39
- if delivery with mounted gear or radial piston pump is desired, please consult us.

● available    ○ in preparation    - not available     = preferred program

# Technical data

## Hydraulic fluid

For extensive information on the selection of hydraulic fluids and application conditions please consult our data sheets RE 90220 (mineral oils), RE 90221 (ecologically acceptable fluids) and RE 90223 (HF-fluids).

The variable pump A4VSO is suitable for operation on HF-fluids. (HFA, HFB, and HFC: **EA4VSO** or **A4VSO...F**  
HFD: standard version A4VSO with FKM seals)

However, limitations to the technical data, according to RE 90223 must be observed.

**On certain selected HFC-fluids**, pump sizes **125...355**, executed in accordance to RE 92053 can be operated with the **same pressures and speeds** as on mineral oil.

On operation with HFA and HFB-fluids, limitations of the technical data must be observed according to RE 90223.

On operation with rolling oil please consult us.

When ordering, please state the fluid to be used.

## Operating viscosity range

Within the operating viscosity range between 16...100 mm<sup>2</sup>/s the units can be operated without limitations of the technical data.

In order to obtain optimum efficiency and service life, we recommend that the operating viscosity (at operating temperature) be selected in the range

$$v_{opt} = \text{opt. viscosity range } 16...36 \text{ mm}^2/\text{s}$$

referred to tank temperature (open circuit).

## Limit of viscosity range


For critical operating conditions the following values apply:

$$v_{min} = 10 \text{ mm}^2/\text{s} \\ \text{for short periods (} t < 3 \text{ min)} \\ \text{at max. permissible case drain temperature} \\ t_{max} = +90^\circ\text{C.}$$

$$v_{max} = 1000 \text{ mm}^2/\text{s} \\ \text{for short periods (on cold start, operating viscosity} \\ \text{should be below } 100 \text{ mm}^2/\text{sec within 15 minutes)} \\ t_{min} = -25^\circ\text{C}$$

For detailed information on operation with low temperatures see RE 90300-03-B.

## Selection diagram

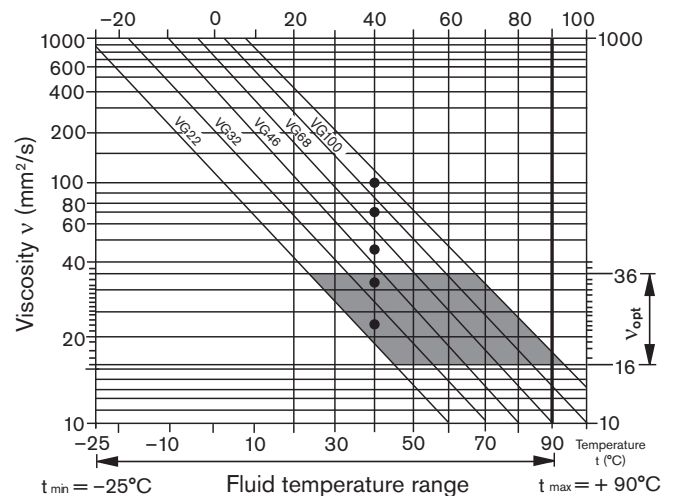

## Notes on the selection of hydraulic fluid

In order to select the correct fluid, it is necessary to know the operating temperature in the tank (open circuit) in relation to the ambient temperature.

The hydraulic fluid should be selected so that within the operating temperature range, the viscosity lies within the optimum range ( $v_{opt}$ ); see shaded section in the selection diagram. We recommend, that the higher viscosity grade is selected in each case.

## Temperature range (see selection diagram)

$$t_{min} = -25^\circ\text{C} \\ t_{max} = +90^\circ\text{C}$$

Example: at an ambient temperature of  $X^\circ\text{C}$  the operating temperature in the tank is  $60^\circ\text{C}$ . In the optimum viscosity range ( $v_{opt}$ ; shaded area), this corresponds to grades VG 46 or VG 68; select: VG 68.

**Important:** The case drain temperature is influenced by pressure and speed and is always higher than the tank temperature. However the max. temperature at any point in the system may not exceed  $90^\circ\text{C}$ .

## Technical data

### Bearing flushing

For the following operating conditions bearing flushing is required for a safe, continuous operation:

- Applications with special fluids (non mineral oils) due to limited lubricity and narrow operating temperature range
- Operation at critical conditions of temperature and viscosity with mineral oil

Flushing is recommended with vertical mounting (drive shaft facing upwards) in order to ensure lubrication of the front bearing and shaft seal.

Flushing is carried out via port „U“, located in the front flange area of the pump. The flushing fluid flows through the front bearing and leaves the pump together with the case drain flow.

Depending on pump size, the following flushing flows are recommended:

Size	40	71	125	180	250
<b>recommended flushing flow</b> $q_{Sp}$ L/min	3	4	5	7	10

Size	355	500	750	1000
<b>recommended flushing flow</b> $q_{Sp}$ L/min	15	20	30	40

These recommended flushing flows will cause a pressure drop of approx. 2 bar (series 1) and 3 bar (series 3) between the entrance to port „U“ and the pump case (including the pipe fittings).

### Notes regarding series 30

When using external bearing flushing the throttle screw at port U must be turned in to the end stop.

### Filtration of the fluid (Axial piston unit)


The finer the filtration, the better the achieved cleanliness of the fluid and the longer the life of the axial piston pump.

To ensure a reliable functioning of the axial piston unit, a minimum cleanliness class of

20/18/15 acc. to ISO 4406 is necessary.

### Case drain pressure

The permissible case drain pressure (housing pressure) is dependent on the drive speed (see diagram).

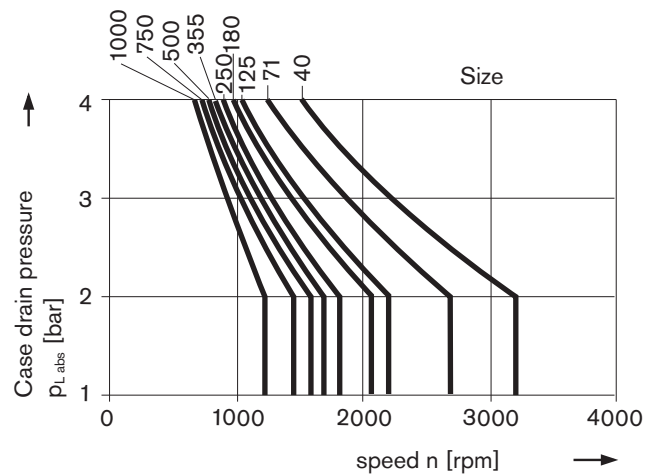

Max. case drain pressure (housing pressure)

$P_{L, abs max}$  \_\_\_\_\_ 4 bar absolute

These are approximate values; under certain operating conditions a reduction in these values may be necessary.

### Direction of flow

S to B.

# Technical data

## Operating pressure range

### Pressure at service line port (pressure port) B

Nominal pressure  $p_{nom}$  \_\_\_\_\_ 350 bar absolute


Peak pressure  $p_{max}$  \_\_\_\_\_ 400 bar absolute

Total operating period \_\_\_\_\_ 300 h

Single operating period \_\_\_\_\_ 1 s

Minimum pressure (high-pressure side) \_\_\_\_\_ 15 bar  
For lower pressures please consult us.

Rate of pressure change  $R_A$  \_\_\_\_\_ 16000 bar/s

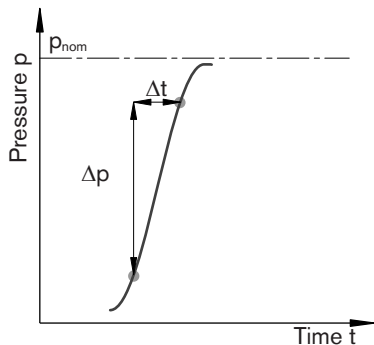


### Pressure at suction port S (inlet)

Minimum suction pressure  $p_{S min}$  \_\_\_\_\_ 0.8 bar absolute

Maximum suction pressure  $p_{S max}$  \_\_\_\_\_ 30 bar absolute

### Minimum pressure (inlet)

In order to avoid damage to the axial piston unit, a minimum pressure must be ensured at the suction port S (inlet). The minimum pressure is dependent on the speed and displacement of the axial piston unit.

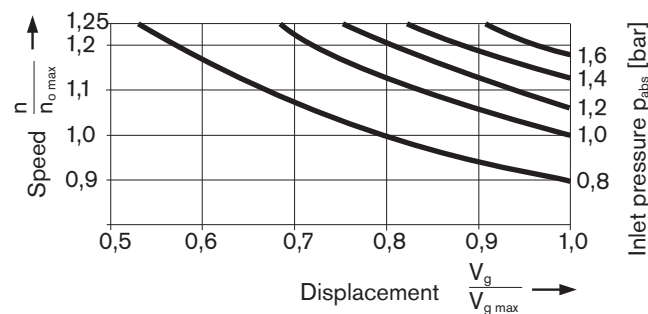

The inlet pressure is the static feed pressure or the minimum dynamic value of the boost pressure.

Please note:

Max. permissible drive speed  $n_{0 max perm.}$  (speed limit) see page 8

Please contact us if these conditions cannot be satisfied.

## Definition

### Nominal pressure $p_{nom}$

The nominal pressure corresponds to the maximum design pressure.

### Peak pressure $p_{max}$


The peak pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.

### Minimum pressure (high-pressure side)

Minimum pressure on the high-pressure side (B) that is required in order to prevent damage to the axial piston unit.

### Rate of pressure change $R_A$

Maximum permissible rate of pressure build-up and pressure reduction during a pressure change over the entire pressure range.

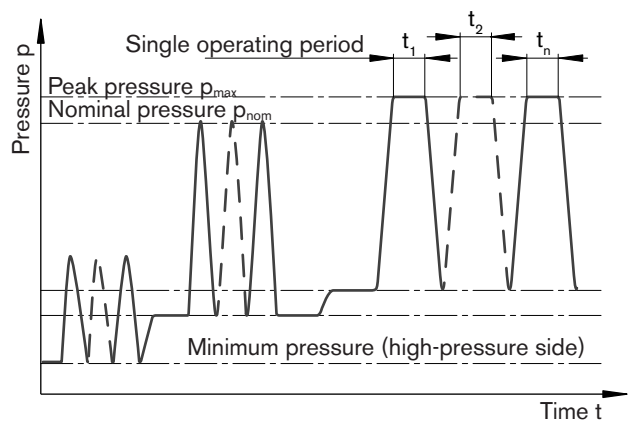

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

# Technical data

**Table of values** (theoretical values, without considering efficiencies and tolerances; values rounded off)

Size		40	71	125	180	250/ H <sup>1)</sup>	355/ H <sup>1)</sup>	500/ H <sup>1)</sup>	750	750 with Impeller	1000
Displacement	$V_{g \max}$ cm <sup>3</sup>	40	71	125	180	250/ 250	355/ 355	500/ 500	750	750	1000
Speed <sup>2)</sup>											
max. at $V_{g \max}$	$n_{o \max}$ rpm	2600	2200	1800	1800	1500/ 1900	1500/ 1700	1320/ 1500	1200	1500	1000
max. at $V_g \leq V_{g \max}$ (speed limit)	$n_{o \max \text{ zul.}}$ rpm	3200	2700	2200	2100	1800/ 2100	1700/ 1900	1600/ 1800	1500	1500	1200
Flow											
at $n_{o \max}$	$q_{vo \max}$ L/min	104	156	225	324	375/ 475	533/ 604	660/ 750	900	1125	1000
at $n_E = 1500$ rpm	$q_{VE \max}$ L/min	60	107	186	270	375	533	581 <sup>3)</sup>	770 <sup>3)</sup>	1125	–
Power $\Delta p = 350$ bar											
at $n_{o \max}$	$P_{o \max}$ kW	61	91	131	189	219/ 277	311/ 352	385/ 437	525	656	583
at $n_E = 1500$ rpm	$P_{E \max}$ kW	35	62	109	158	219	311	339 <sup>3)</sup>	449 <sup>3)</sup>	656	–
Torque											
at $V_{g \max}$ $\Delta p = 350$ bar	$T_{\max}$ Nm	223	395	696	1002	1391	1976	2783	4174	4174	5565
$\Delta p = 100$ bar	$T$ Nm	64	113	199	286	398	564	795	1193	1193	1590
Rotary stiffness											
Shaft end P	$c$ kNm/rad	80	146	260	328	527	800	1145	1860	1860	2730
Shaft end Z	$c$ kNm/rad	77	146	263	332	543	770	1136	1812	1812	2845
Moment of inertia rotary group	$J_{TW}$ kgm <sup>2</sup>	0,0049	0,0121	0,03	0,055	0,0959	0,19	0,3325	0,66	0,66	1,20
Angular acceleration max. <sup>4)</sup>	$\alpha$ rad/s <sup>2</sup>	17000	11000	8000	6800	4800	3600	2800	2000	2000	1450
Case volume	$V$ L	2	2,5	5	4	10	8	14	19	22	27
Weight (with press. contr.) approx.	$m$ kg	39	53	88	102	184	207	320	460	490	605

1) High-Speed-Version

2) Values are valid with inlet pressure  $p_{\text{abs}}$  1 bar at inlet port S, with increased speed up to speed limit please observe diagram, page 7

3)  $V_g < V_{g \max}$

4) – The range of validity lies between zero and the maximum permissible drive speeds.

Valid for external excitation (eg. diesel engine 2- to 8-fold rotary frequency, cardan shaft 2-fold rotary frequency).

– The limiting value is only valid for a single pump.

– The loading capacity of the connecting parts must be considered.

## Notes

Exceeding the maximum or falling below the minimum permissible values can lead to a loss of function, a reduction in operational service life or total destruction of the axial piston unit.

The permissible values can be determined through calculation.

## Determination of pump size

$$\text{Flow } q_v = \frac{V_g \cdot n \cdot \eta_v}{1000} \quad [\text{L/min}]$$

$V_g$  = geometr. displacement per rev. in cm<sup>3</sup>

$\Delta p$  = pressure difference in bar

$$\text{Drive torque } T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{mh}} \quad [\text{Nm}]$$

$n$  = speed in rpm

$\eta_v$  = volumetric efficiency



$$\text{Power } P = \frac{2\pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t} \quad [\text{kW}]$$

$\eta_{mh}$  = mechanical-hydraulic efficiency

$\eta_t$  = overall efficiency ( $\eta_t = \eta_v \cdot \eta_{mh}$ )

# Technical data

## Permissible radial and axial forces on the drive shaft

Size	40	71	125	180	250	355	500	750*	1000
Radial force, max.  at X/2 $F_{q\ max}$ N	1000	1200	1600	2000	2000	2200	2500	3000	3500
Axial force, max.  $\pm F_{ax\ max}$ N	600	800	1000	1400	1800	2000	2000	2200	2200

\* also valid for versions with boost pump

# Characteristics


## Drive power and flow

(Fluid: Hydraulic oil ISO VG 46 DIN 51519,  $t = 50^\circ\text{C}$ )


Overall efficiency:  $\eta_t = \frac{q_v \cdot p}{P_{q_v \max} \cdot 600}$

Volumetric efficiency:  $\eta_v = \frac{q_v}{q_{v \text{ theor}}}$


### Size 40

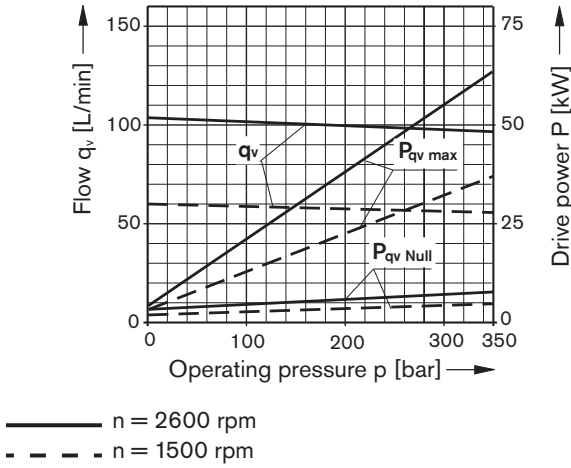


### Size 180

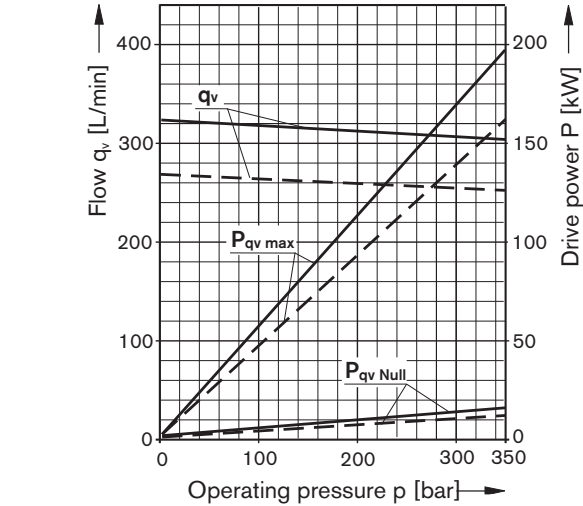


### Size 71

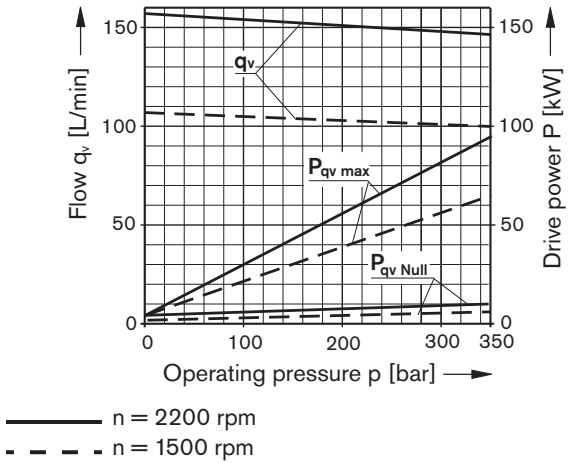

### Size 250

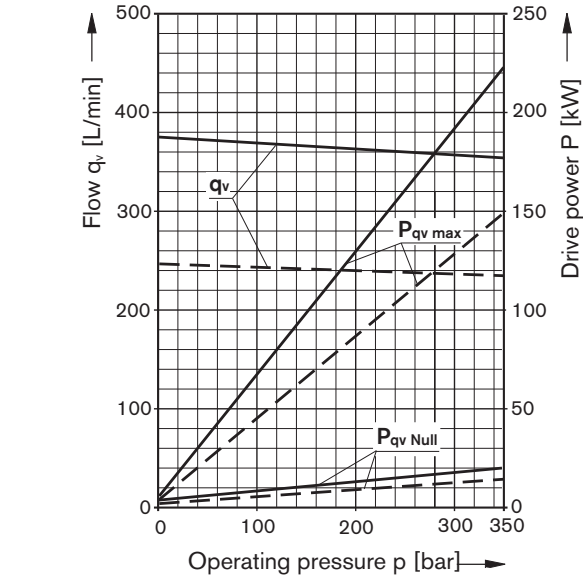

### Size 125

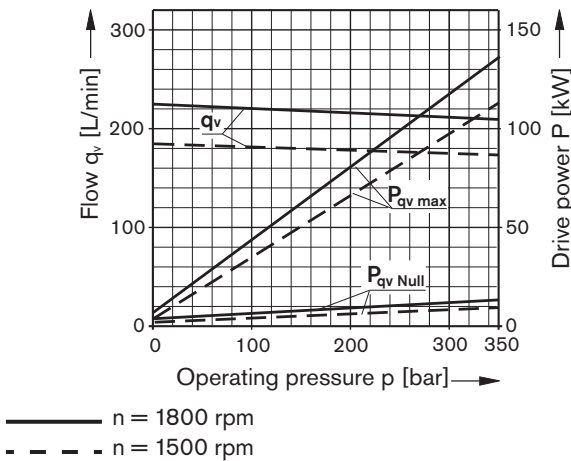



# Characteristics


## Drive power and flow

(Fluid: Hydraulic oil ISO VG 46 DIN 51519,  $t = 50^{\circ}\text{C}$ )


Overall efficiency:  $\eta_t = \frac{q_v \cdot P}{P_{q_v \max} \cdot 600}$

Volumetric efficiency:  $\eta_v = \frac{q_v}{q_{v \text{ theor}}}$

**Size 355**

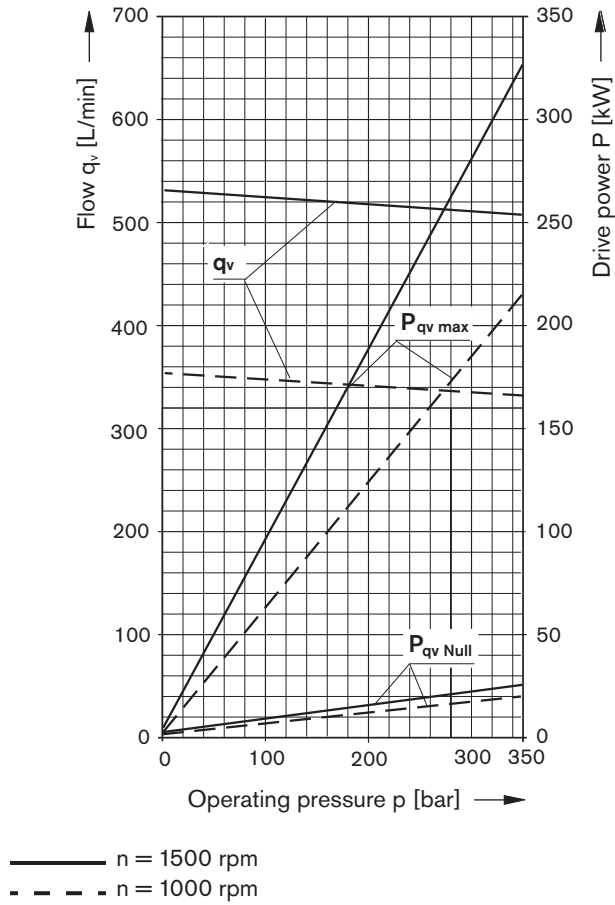

**Size 500**

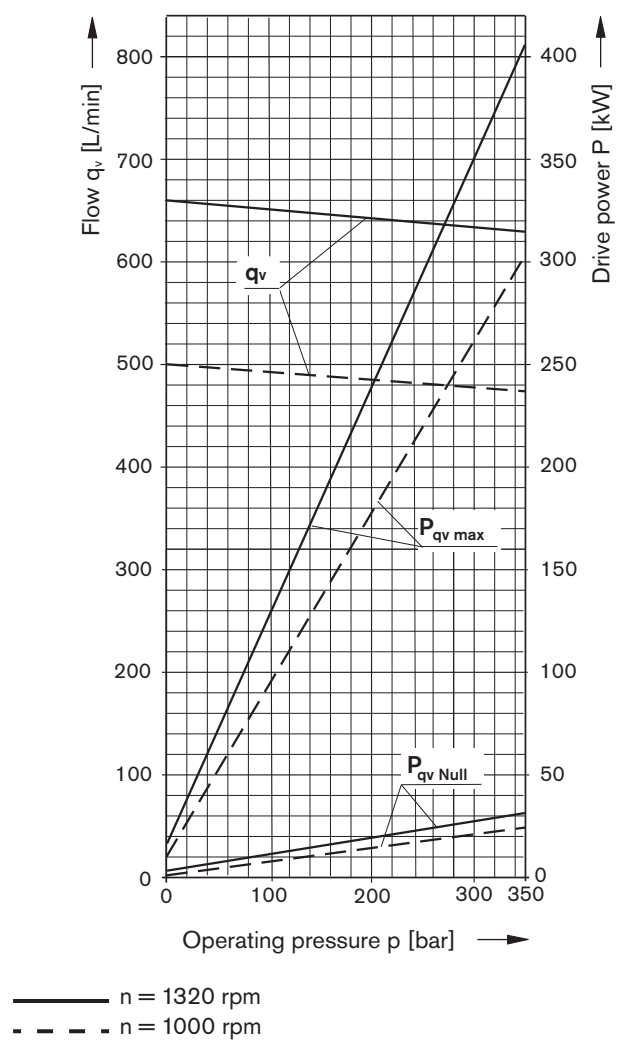

3

# Characteristics

## Drive power and flow



(Fluid: Hydraulic oil ISO VG 46 DIN 51519,  $t = 50^{\circ}\text{C}$ )

Overall efficiency:  $\eta_t = \frac{q_v \cdot p}{P_{q_v \max} \cdot 600}$

Volumetric efficiency:  $\eta_v = \frac{q_v}{q_{v \text{ theor}}}$

### Size 750

### Size 1000

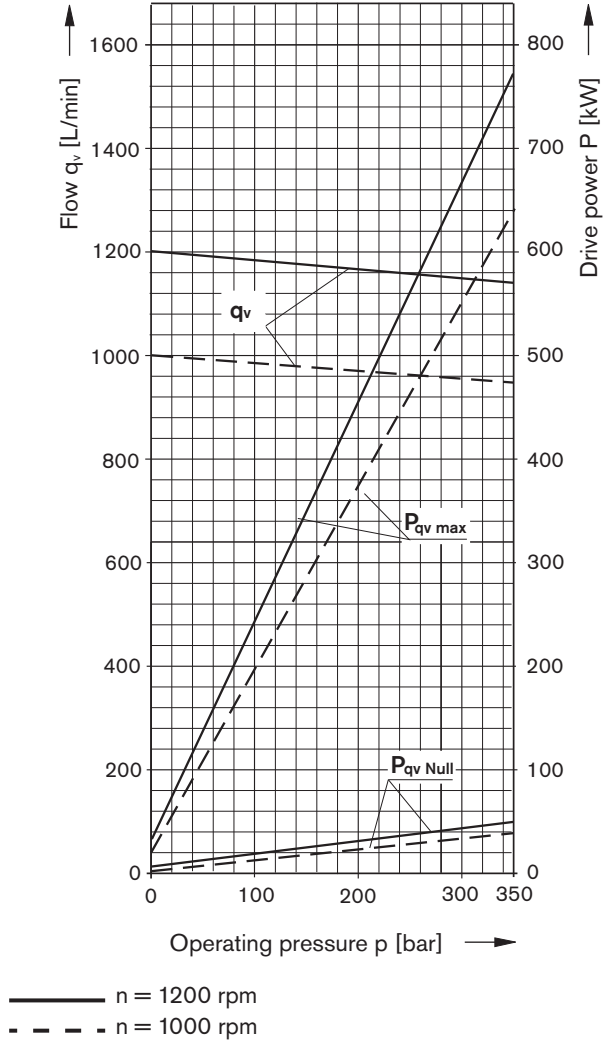
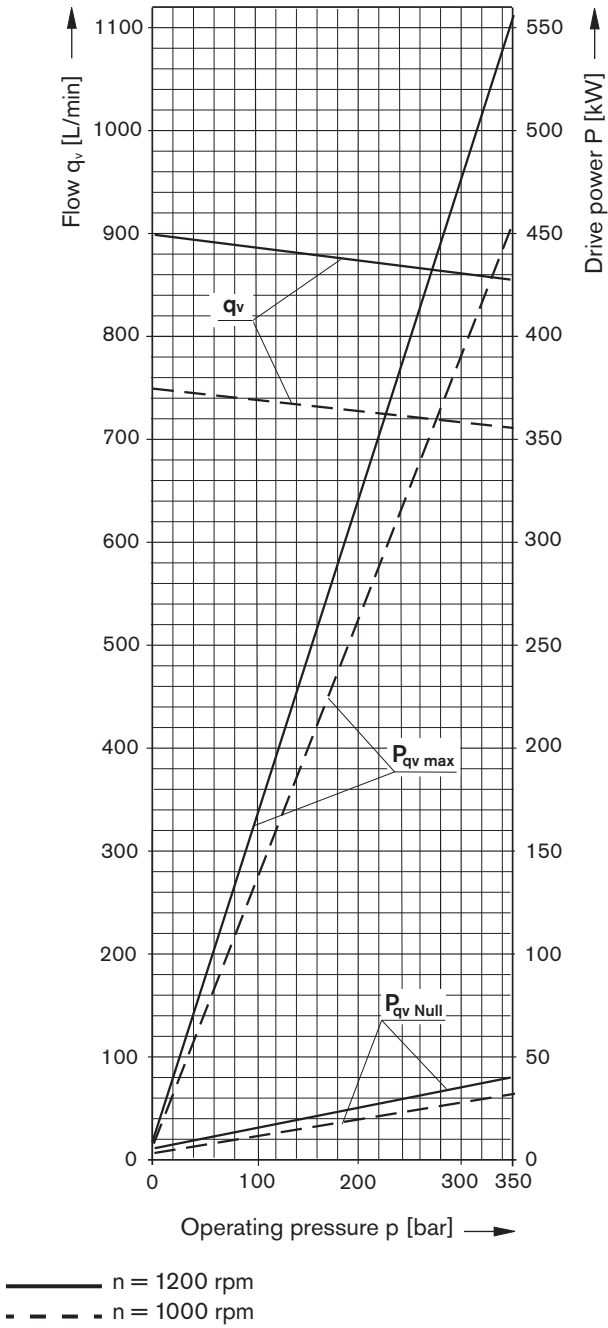


# Summary of controls

## Pressure control DR (see RE 92060)

The DR- pressure control limits the maximum pressure at the pump outlet within the pump's control range. This max. pressure level can be steplessly set at the control valve.  
Setting range 20...350 bar



Optional:  
Remote control (DRG)

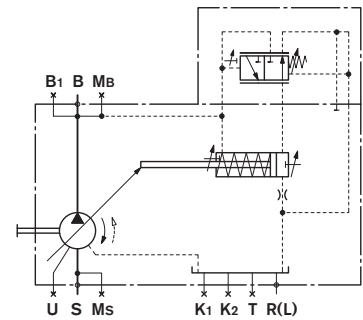

## Pressure control for parallel operation DP (see RE 92060)

Suitable for pressure control with multiple A4VSO axial piston pumps in parallel operation.



Optional:  
Flow control (DPF)

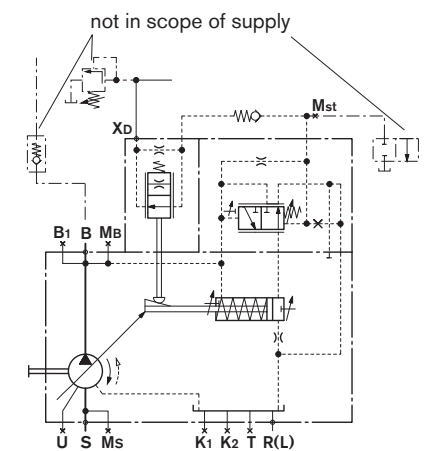

## Flow control FR (see RE 92060)

Maintains a constant flow in a hydraulic system.



Optional:  
Remote pressure control (FRG)  
connection between  $X_F$  and tank closed (FR1, FRG1)

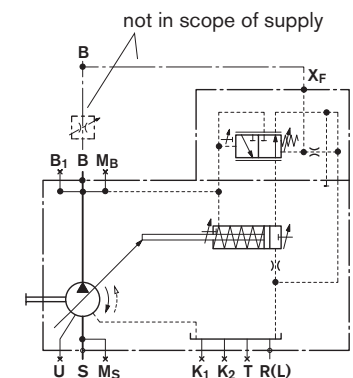

## Pressure and flow control DFR (see RE 92060)

This control maintains a constant flow from the pump even under varying operating conditions. Overriding this control is a mechanically adjustable pressure control.

Optional:  
connection between  $X_F$  and tank closed (DFR1)

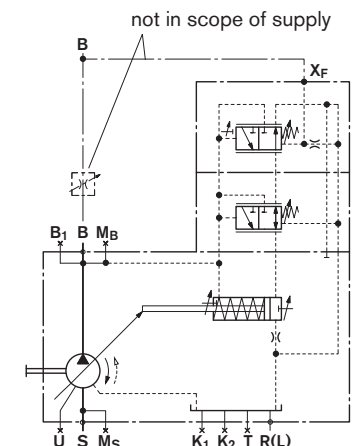



# Summary of controls

## Power control LR2 with hyperbolic characteristic (see RE 92064)

The hyperbolic power control maintains a constant preset drive power at the same input speed.

Optional:

- Pressure control (LR2D), remotely controlled (LR2G);
- Flow control (LR2F, LR2S);
- Hydraulic stroke limiter (LR2H);
- Mechanical stroke limiter (LR2M);
- Hydraulic two-point control (LR2Z);
- with electric unloading valve for easy start (LR2Y).

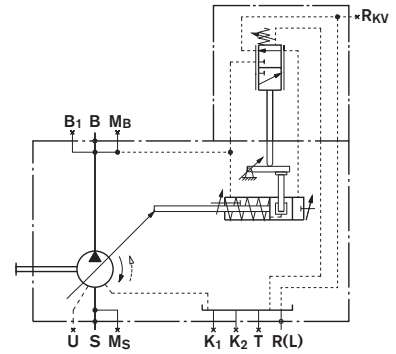



## Power control LR3 with remote control of power characteristics (see RE 92064)

This power control maintains a constant preset drive power, with remote control of the power characteristics.

Optional:

- Pressure control (LR3D), remotely controlled (LR3G);
- Flow control (LR3F, LR3S);
- Hydraulic stroke control (LR3H);
- Mechanical stroke control (LR3M);
- Hydraulic two-point control (LR3Z).
- with electric unloading valve for easy start (LR3Y)

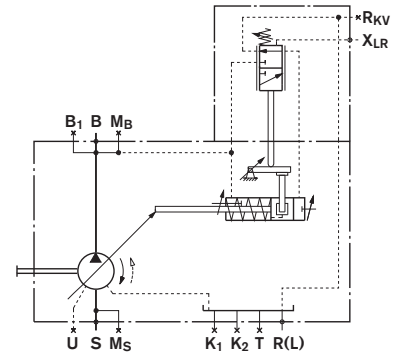



## Hydraulic control LR2N and LR3N pilot pressure dependent, initial position $V_{g \min}$ (see RE 92064)

With overriding power control.


The pump displacement is proportional to a pilot pressure signal in  $P_{St}$ . The additional hyperbolic power control overrides the pilot pressure signal and holds the preset drive power constant.

Optional:

- Remote control of power characteristics (LR3N)
- Pressure control (LR.DN),
- Remote pressure control (LR.GN)
- Electric control of pilot pressure signal (LR.NT)





shown in shifted position  
i.e. P pressurized

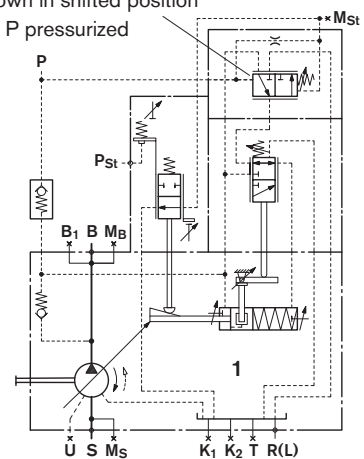

# Summary of controls

## Manual control MA (see RE 92072)



Stepless adjustment of displacement by means of a handwheel.

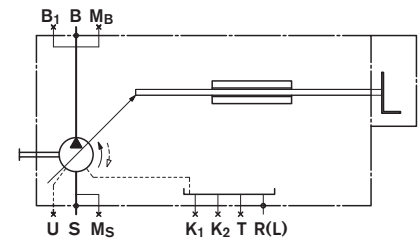

## Electric motor control EM (see RE 92072)

Stepless adjustment of displacement via an electric motor.

Various intermediate displacement values can be selected with a programmed sequence control, by means of built on limit switches and an optional potentiometer for feedback signal.

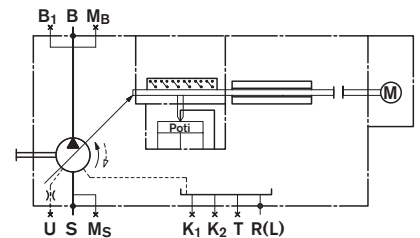

3

## Hydraulic control HD pilot pressure dependent (see RE 92080)

Stepless adjustment of displacement proportional to a pilot pressure signal. The displacement is proportional to the applied pilot pressure (Difference between pilot pressure level and pump case pressure).

Optional:



Pilot pressure curves (HD1, HD2, HD3)

Pressure control (HD.B),

Remote pressure control (HD.GB)

Power control (HD1P)

with electric control of pilot pressure (HD1T)

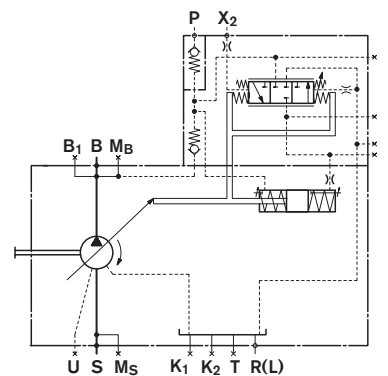


# Summary of controls

## Hydraulic control HM 1/2, control volume dependent (see RE 92076)

The pump displacement is infinitely variable in relation to the control oil volume in ports X<sub>1</sub> and X<sub>2</sub>.

Application:


- 2-point control
- basic control device for servo or proportional valve control



## Control system HS, HS4, with servo or proportional valve (see RE 92076)


The stepless displacement control is accomplished by means of servo or proportional valve with electrical feedback of the swivel angle.

The HS4P-control system is fitted with a built on pressure transducer so that it can be utilized for electrical pressure and power control.



Optional:


- Servo valve (HS);
- Proportional valve (HS4);
- Short circuit valve (HSK, HS4K, HS4KP);
- Without valves (HSE, HS4E).
- For oil-immersed use (HS4M)

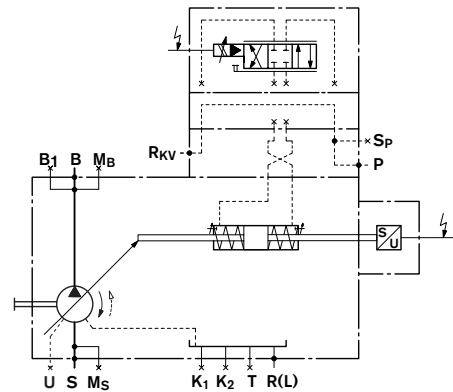

## Control system EO1/2 (see RE 92076)


The stepless adjustment of the displacement is accomplished by means of a proportional valve with electrical feedback of the swivel angle.

This control can be utilized as an electric control of displacement.



Optional:



- Control pressure range (EO1, EO2)
- Short circuit valve (EO1K, EO2K)
- Without valves (EO1E, EO2E)

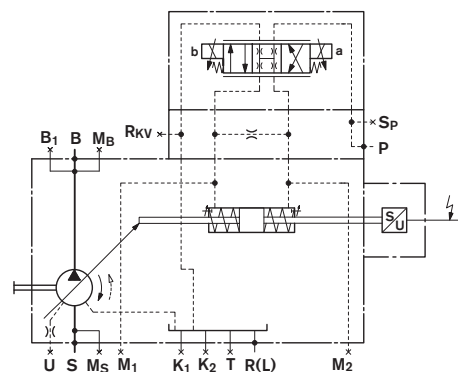

# Summary of controls



## Speed control DS1, secondary controlled (see RE 92056)

The speed control DS1 controls the secondary unit (motor) in such a manner, that this motor delivers sufficient torque to maintain the required output speed. When connected to a constant pressure system, this torque is proportional to motor displacement and thus also proportional to the swivel angle.

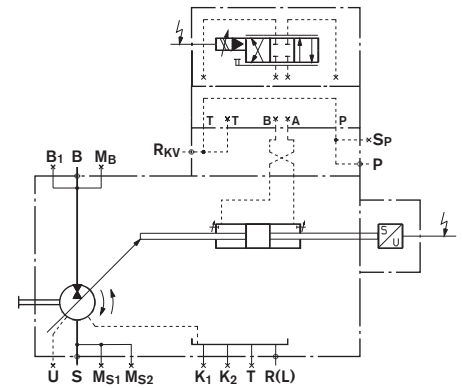

## Electro hydraulic control system DFE1 (see RE 92088)

The power, pressure and swivel angle control of the variable pump A4VSO...DFE1 is accomplished by means of an electrically controlled proportional valve. A current signal to the proportional valve moves the control piston and determines via an integrated positional transducer the cradle's swivel angle and thus the pump flow. When the electric drive motor is switched off and the system is pressureless, the bias spring in the control chamber will swivel the pump to max. displacement ( $V_{g\ max}$ ).

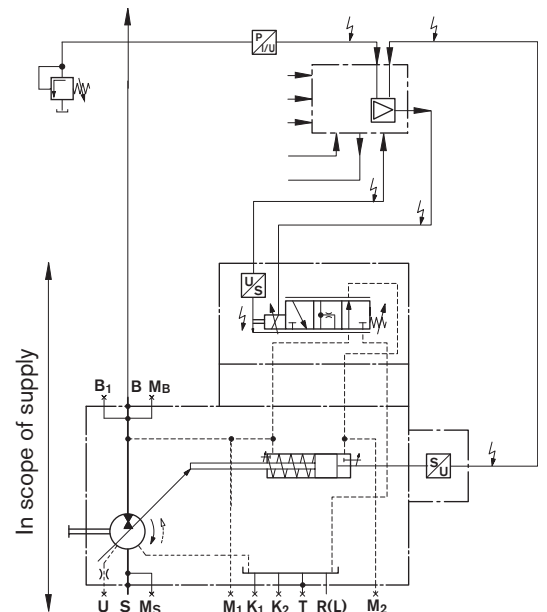


# Dimensions, size 40

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Series 1

(Example: pressure control; for exact dimensions of the control devices see separate data sheets)

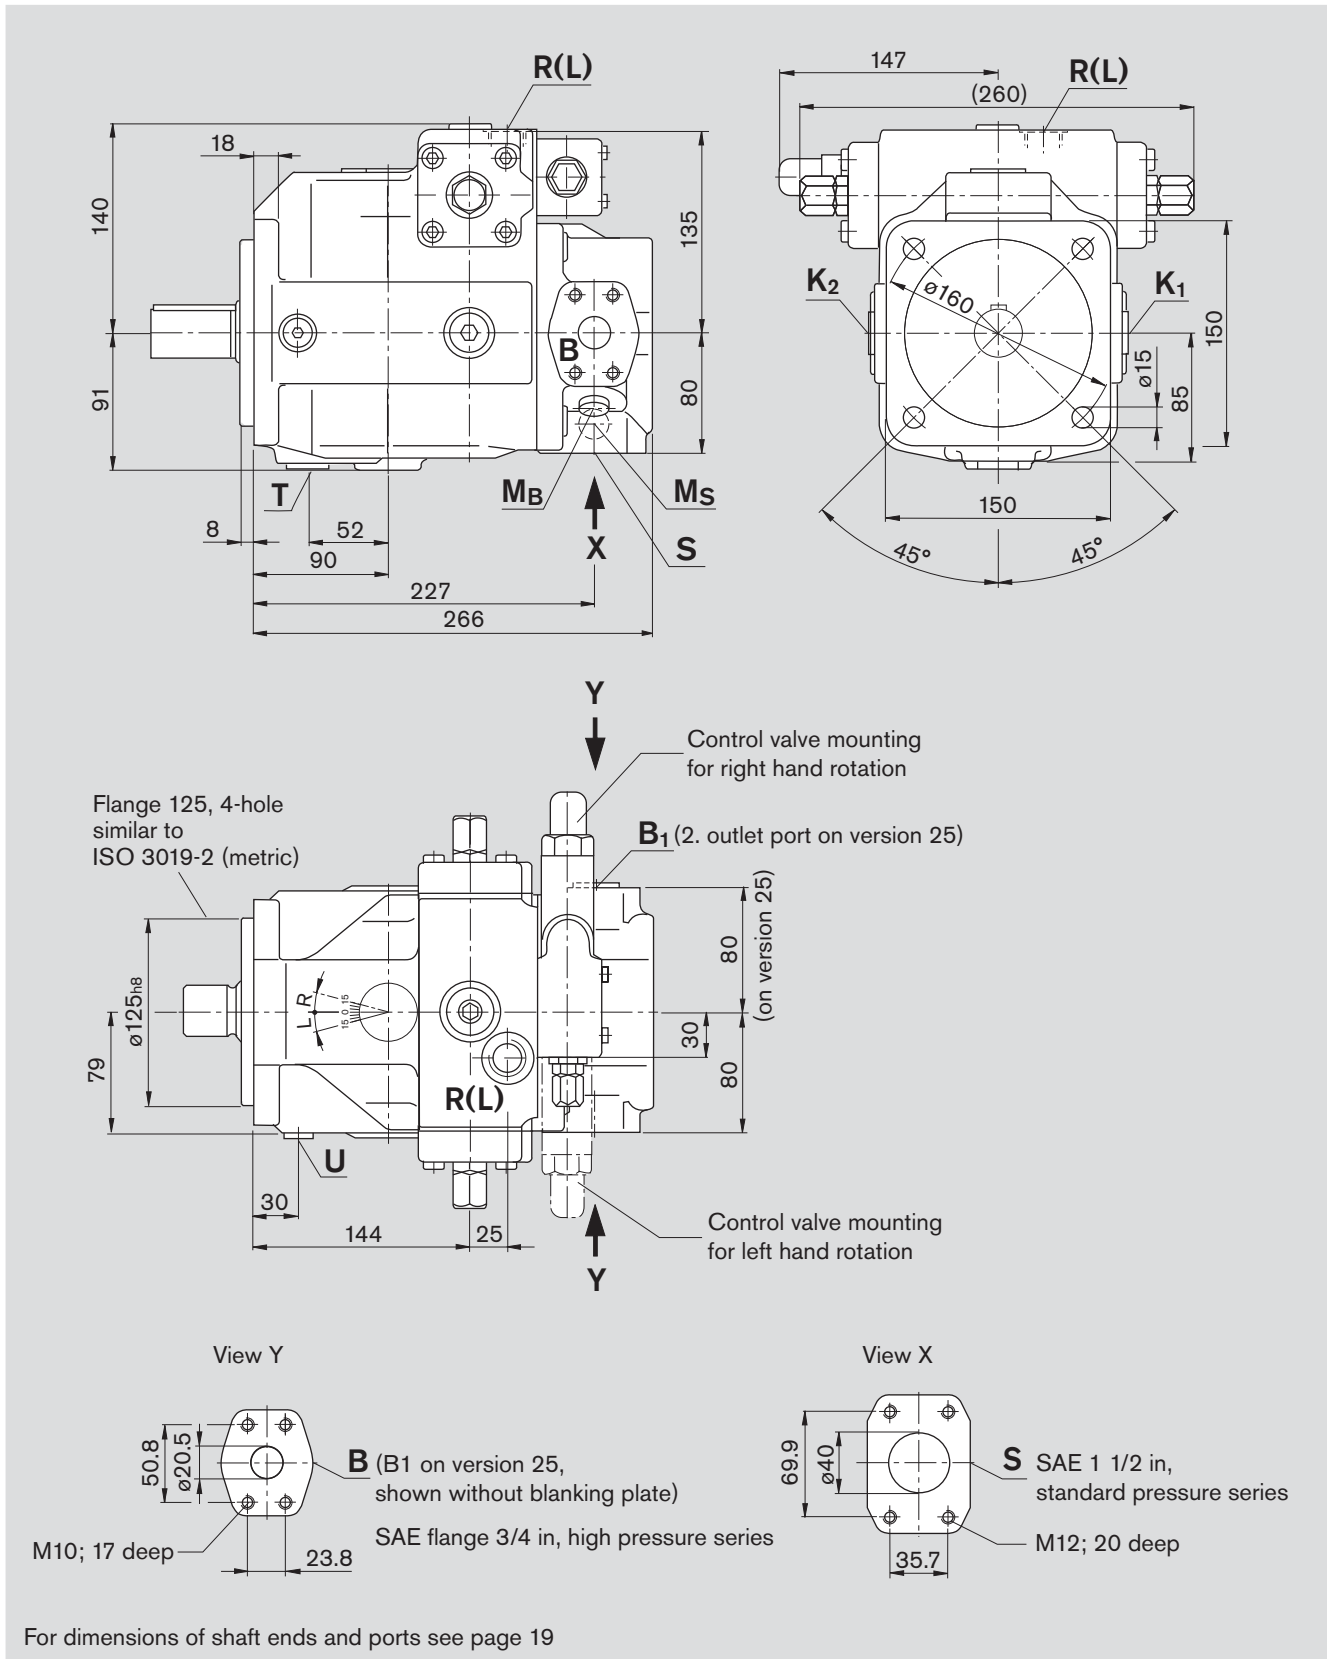




# Dimensions, size 40

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Shaft ends

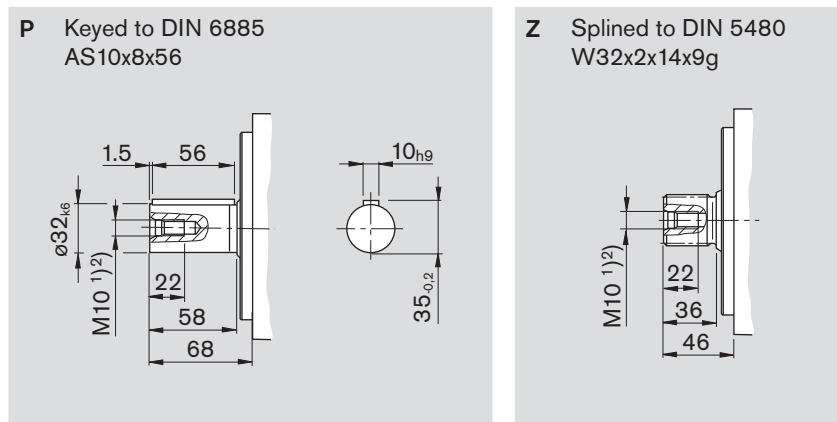

## Ports

			max. tightening torque <sup>2)</sup>
S	Suction port (standard pressure series) Fixing thread	SAE J518 <sup>3)</sup> 1 1/2 in DIN 13 M12x1,75; 20 deep <sup>2)</sup>	
K <sub>1</sub> , K <sub>2</sub>	Flushing port	DIN 3852 M22x1,5;14 deep (plugged)	210 Nm
T	Drain	DIN 3852 M22x1,5;14 deep (plugged)	210 Nm
M <sub>B</sub>	Measuring port outlet pressure	DIN 3852 M14x1,5;12 deep (plugged)	80 Nm
M <sub>S</sub>	Measuring port suction pressure	DIN 3852 M14x1,5;12 deep (plugged)	80 Nm
R(L)	Fill and bleed (case drain port)	DIN 3852 M22x1,5; 14 deep	210 Nm
U	Flushing port	DIN 3852 M14x1,5;12 deep (plugged)	80 Nm
<b>on version 13</b>			
B	Pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 3/4 in DIN 13 M10x1,5; 17 deep <sup>2)</sup>	
B <sub>1</sub>	Additional port	DIN 3852 M22x1,5;14 deep (plugged)	210 Nm
<b>on version 25</b>			
B	Pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 3/4 in DIN 13 M10x1,5; 17 deep <sup>2)</sup>	
B <sub>1</sub>	2. press. port (high pressre series) Fixing thread	SAE J518 <sup>3)</sup> 3/4 in (closed with blanking plate) DIN 13 M10x1,5; 17 deep <sup>2)</sup>	

<sup>1)</sup> Center bore to DIN 332 (threaded to DIN 13)

<sup>2)</sup> for the max. tightening torques please observe the manufacturer's information on the used fittings and the general information on page 68


<sup>3)</sup> Caution: metric thread deviates from standard

# Dimensions, size 71

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Series 1


(Example: pressure control; for exact dimensions of control devices see separate data sheets)

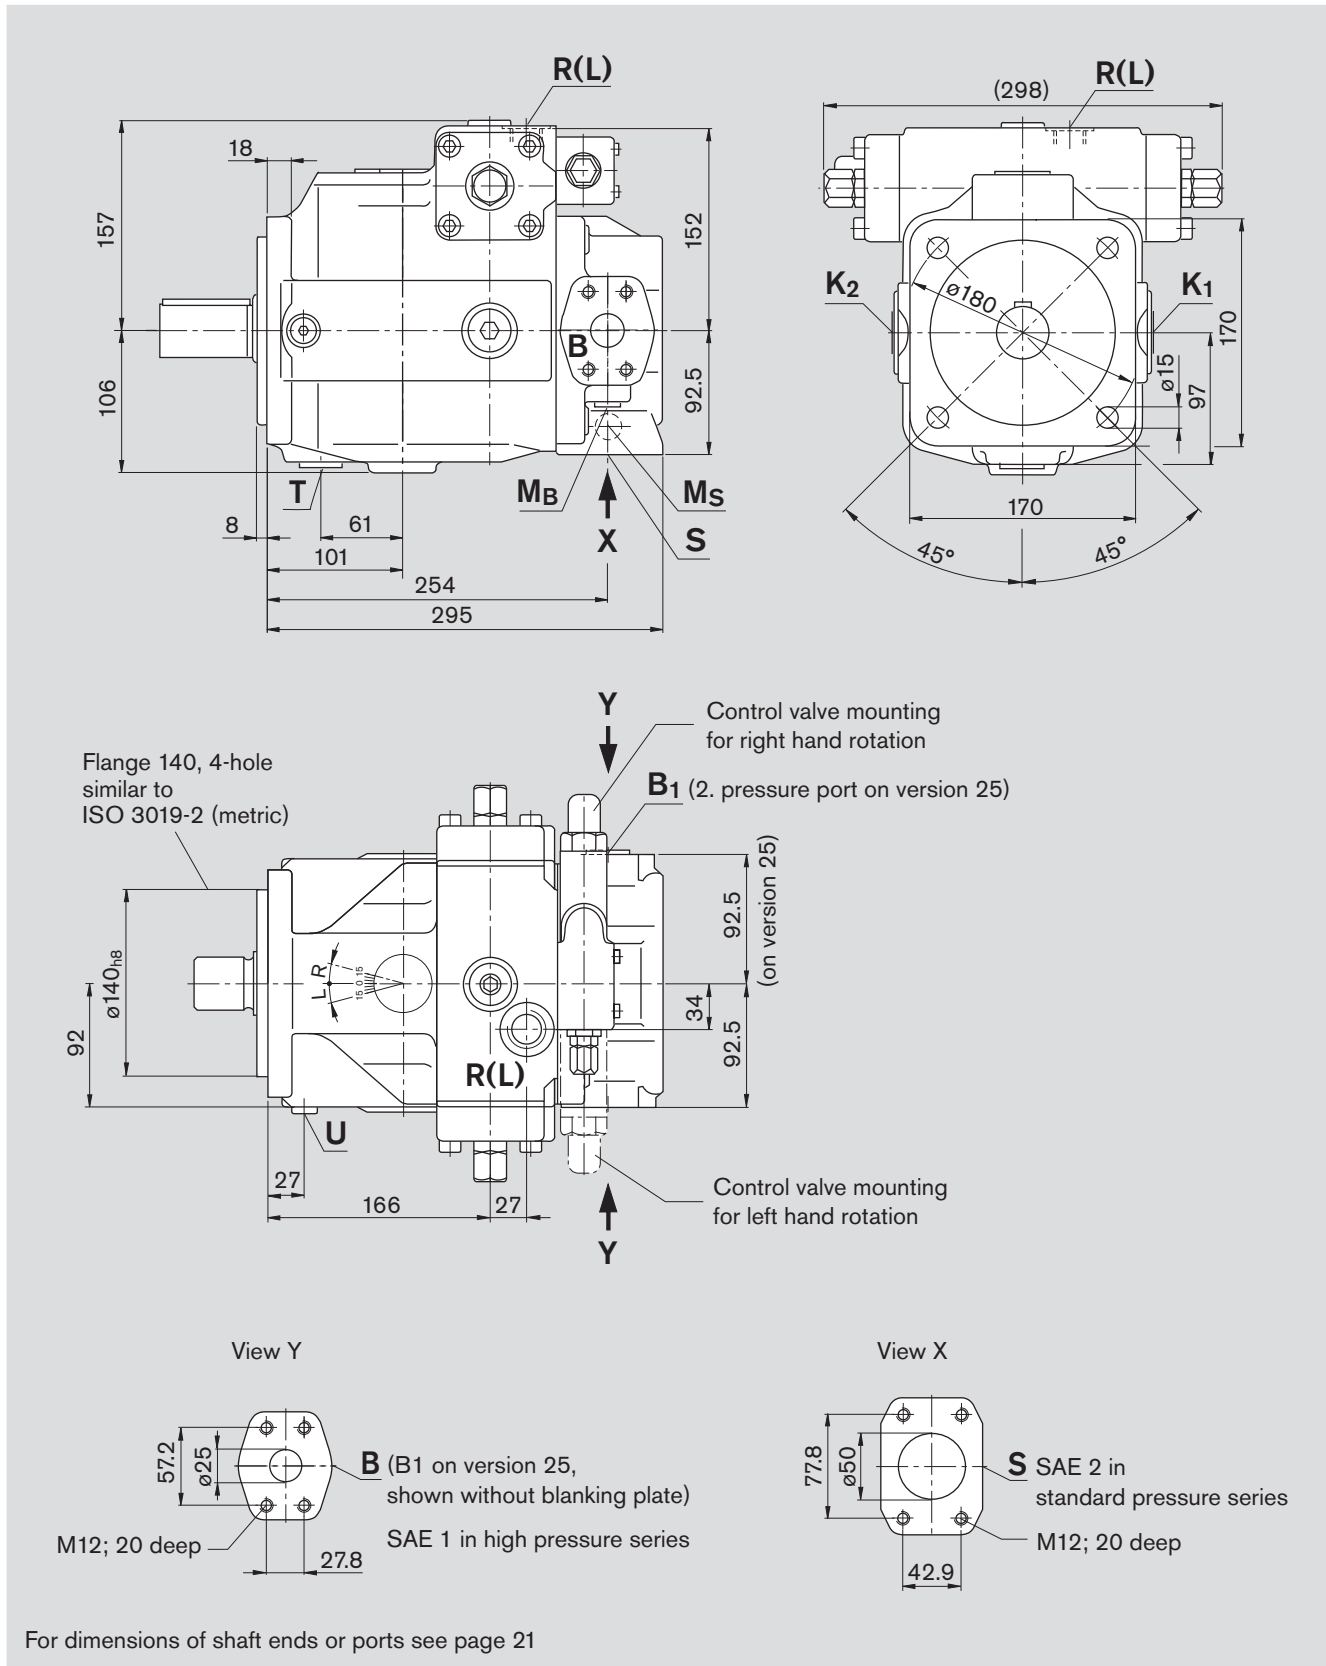

# Dimensions, size 71

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Shaft ends

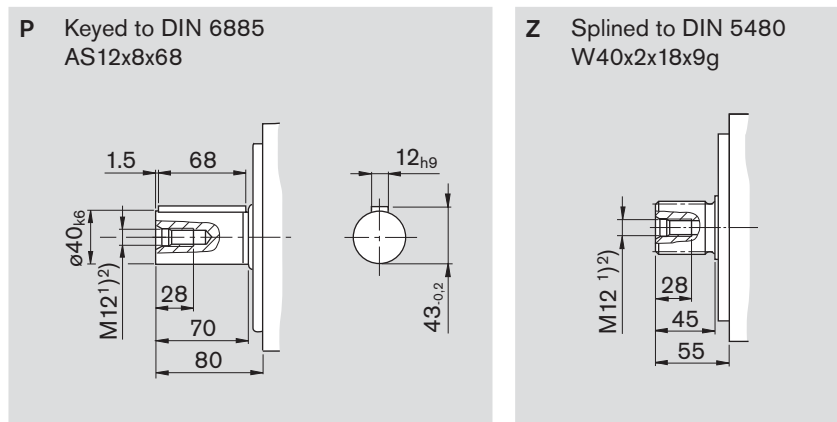

## Ports

max. tightening torque <sup>2)</sup>

S	Suction port (standard pressure series)	SAE J518 <sup>3)</sup>	2 in	
	Fixing thread	DIN 13	M12x1,75; 20 deep <sup>2)</sup>	
K <sub>1</sub> , K <sub>2</sub>	Flushing port	DIN 3852	M27x2;16 deep (plugged)	330 Nm
T	Drain	DIN 3852	M27x2;16 deep (plugged)	330 Nm
M <sub>B</sub>	Measuring port outlet pressure	DIN 3852	M14x1,5;12 deep (plugged)	80 Nm
M <sub>S</sub>	Measuring port suction pressure	DIN 3852	M14x1,5;12 deep (plugged)	80 Nm
R(L)	Fill + air bleed (case drain port)	DIN 3852	M27x2; 16 deep	330 Nm
U	Flushing port	DIN 3852	M14x1,5;12 deep (plugged)	80 Nm

### on version 13

B	Pressure port (high pressure series)	SAE J518 <sup>3)</sup>	1 in	
	Fixing thread	DIN 13	M12x1,75; 20 deep <sup>2)</sup>	
B <sub>1</sub>	Additional port	DIN 3852	M27x2;16 deep (plugged)	330 Nm

### on version 25

B	Pressure port (high pressure series)	SAE J518 <sup>3)</sup>	1 in	
	Fixing thread	DIN 13	M12x1,75; 20 deep <sup>2)</sup>	
B <sub>1</sub>	2. pressure port (high pressure series)	SAE J518 <sup>3)</sup>	1 in (closed with blanking plate)	
	Fixing thread	DIN 13	M12x1,75; 20 deep <sup>2)</sup>	

<sup>1)</sup> Center bore to DIN 332 (thread to DIN 13)

<sup>2)</sup> for the max. tightening torques please observe the manufacturer's information on the used fittings and the general information on page 68


<sup>3)</sup> Caution: metric thread deviates from standard

# Dimensions, size 125

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Series 3

(Example: pressure control; for exact dimensions of control devices see separate data sheets)

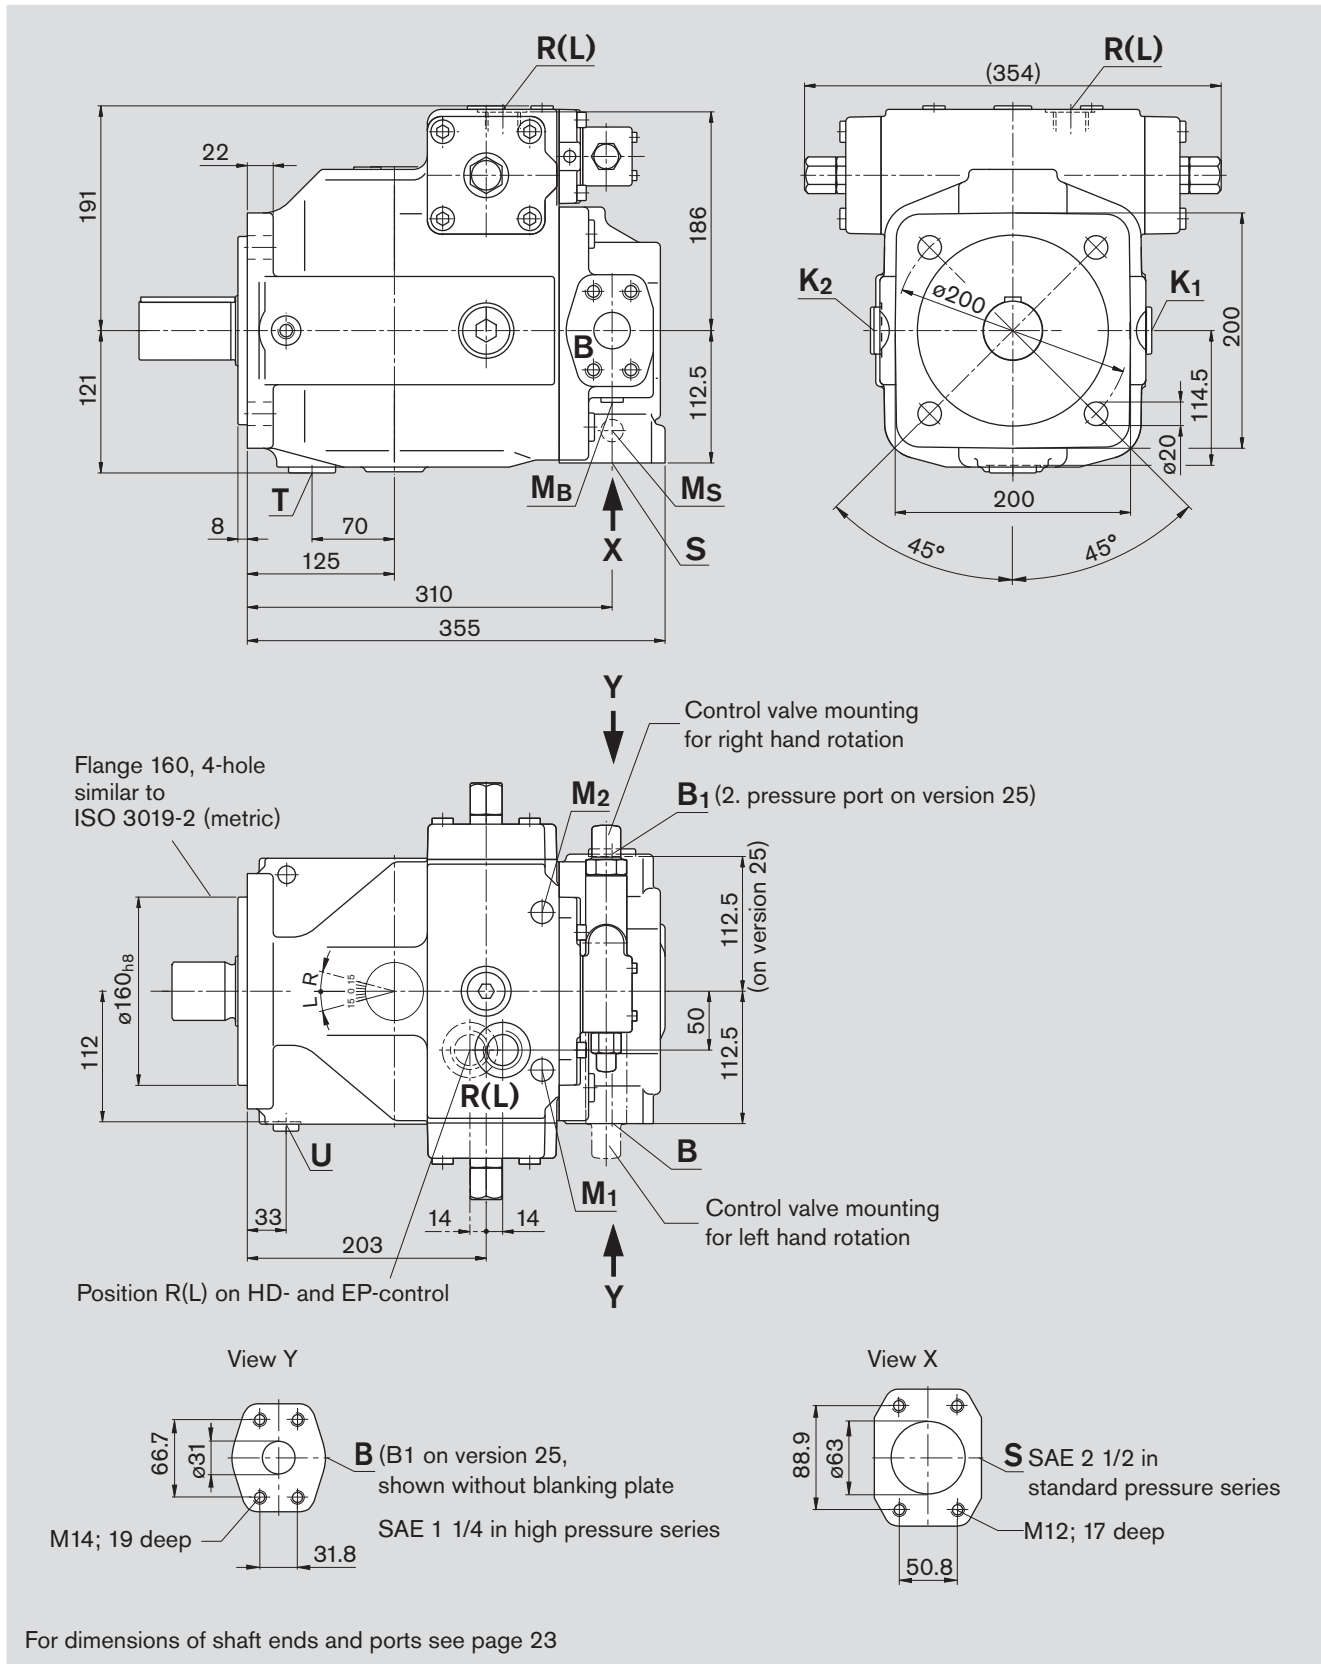


For dimensions of shaft ends and ports see page 23

# Dimensions, size 125

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Shaft ends

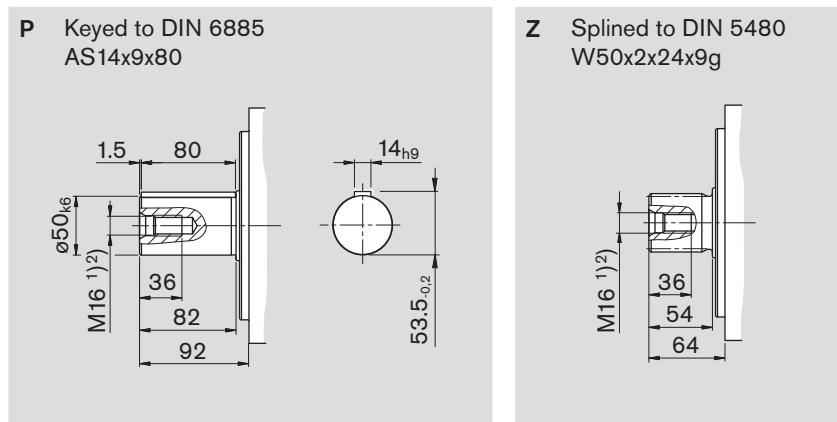

## Ports

			max. tightening torque <sup>2)</sup>
S	Suction port (standard pressure series) Fixing thread	SAE J518 <sup>3)</sup> 2 1/2 in DIN 13 M12x1,75; 17 deep <sup>2)</sup>	
K <sub>1</sub> , K <sub>2</sub>	Flushing port	DIN 3852 M33x2; 18 deep (plugged)	540 Nm
T	Drain	DIN 3852 M33x2; 18 deep (plugged)	540 Nm
M <sub>B</sub>	Measuring port outlet pressure	DIN 3852 M14x1,5; 12 deep (plugged)	80 Nm
M <sub>S</sub>	Measuring port suction pressure	DIN 3852 M14x1,5; 12 deep (plugged)	80 Nm
R(L)	Fill + air bleed (case drain port)	DIN 3852 M33x2; 18 deep	540 Nm
U	Flushing port	DIN 3852 M14x1,5; 12 deep (plugged)	80 Nm
M <sub>1</sub> , M <sub>2</sub>	Measuring port control chamber press.	DIN 3852 M14x1,5; 12 deep (plugged)	80 Nm

### on version 13

B	Pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 1 1/4 in DIN 13 M14x2; 19 deep <sup>2)</sup>	
B <sub>1</sub>	Additional port	DIN 3852 M33x2; 18 deep (plugged)	540 Nm

### on version 25

B	Pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 1 1/4 in DIN 13 M14x2; 19 deep <sup>2)</sup>	
B <sub>1</sub>	2. pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 1 1/4 in (closed with blanking plate) DIN 13 M14x2; 19 deep <sup>2)</sup>	

<sup>1)</sup> Center bore to DIN 332 (thread to DIN 13)

<sup>2)</sup> for the max. tightening torques please observe the manufacturer's information on the used fittings and the general information on page 68


<sup>3)</sup> Caution: metric thread deviates from standard



# Dimensions, size 180

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Shaft ends

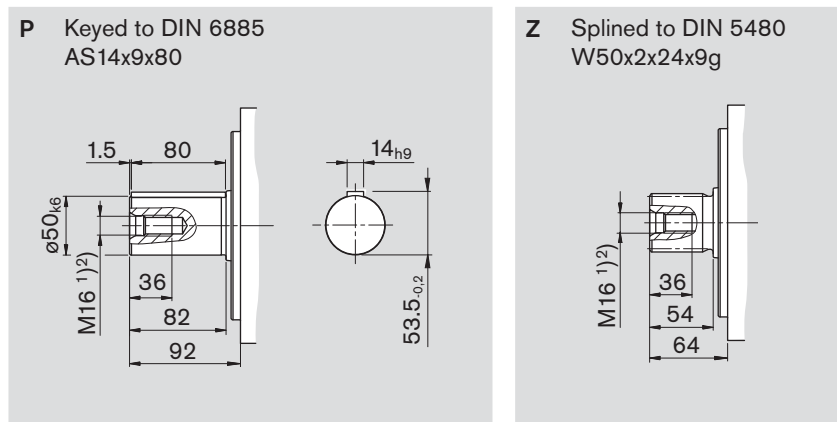

## Ports

				max. tightening torque <sup>2)</sup>
S	Suction port (standard pressure series) Fixing thread	SAE J518 <sup>3)</sup> 3 in DIN 13 M16x2; 24 deep <sup>2)</sup>		
K <sub>1</sub> , K <sub>2</sub>	Flushing port	DIN 3852 M33x2; 18 deep (plugged)		540 Nm
T	Drain	DIN 3852 M33x2; 18 deep (plugged)		540 Nm
M <sub>B</sub>	Measuring port outlet pressure	DIN 3852 M14x1,5; 12 deep (plugged)		80 Nm
M <sub>S</sub>	Measuring port suction pressure	DIN 3852 M14x1,5; 12 deep (plugged)		80 Nm
R(L)	Fill + air bleed (case drain port)	DIN 3852 M33x2; 18 deep		540 Nm
U	Flushing port	DIN 3852 M14x1,5; 12 deep (plugged)		80 Nm
M <sub>1</sub> , M <sub>2</sub>	Measuring port control chamber pressure	DIN 3852 M14x1,5; 12 deep (plugged)		80 Nm

### on version 13

B	Pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 1 1/4 in deep <sup>2)</sup> DIN 13 M14x2; 19 deep <sup>2)</sup>		
B <sub>1</sub>	Additional port	DIN 3852 M33x2; 18 deep (plugged)		540 Nm

### on version 25

B	Pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 1 1/4 in DIN 13 M14x2; 19 deep <sup>2)</sup>		
B <sub>1</sub>	2. pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 1 1/4 in (closed with blanking plate) DIN 13 M14x2; 19 deep <sup>2)</sup>		

<sup>1)</sup> Center bore to DIN 332 (thread to DIN 13)

<sup>2)</sup> for the max. tightening torques please observe the manufacturer's information on the used fittings and the general information on page 68


<sup>3)</sup> Caution: metric thread deviates from standard

# Dimensions, size 250

Before finalising your design please request a certified installation drawing. Dimension in mm.

## Series 3

(Example: pressure control; for exact dimensions of control devices see separate data sheets)

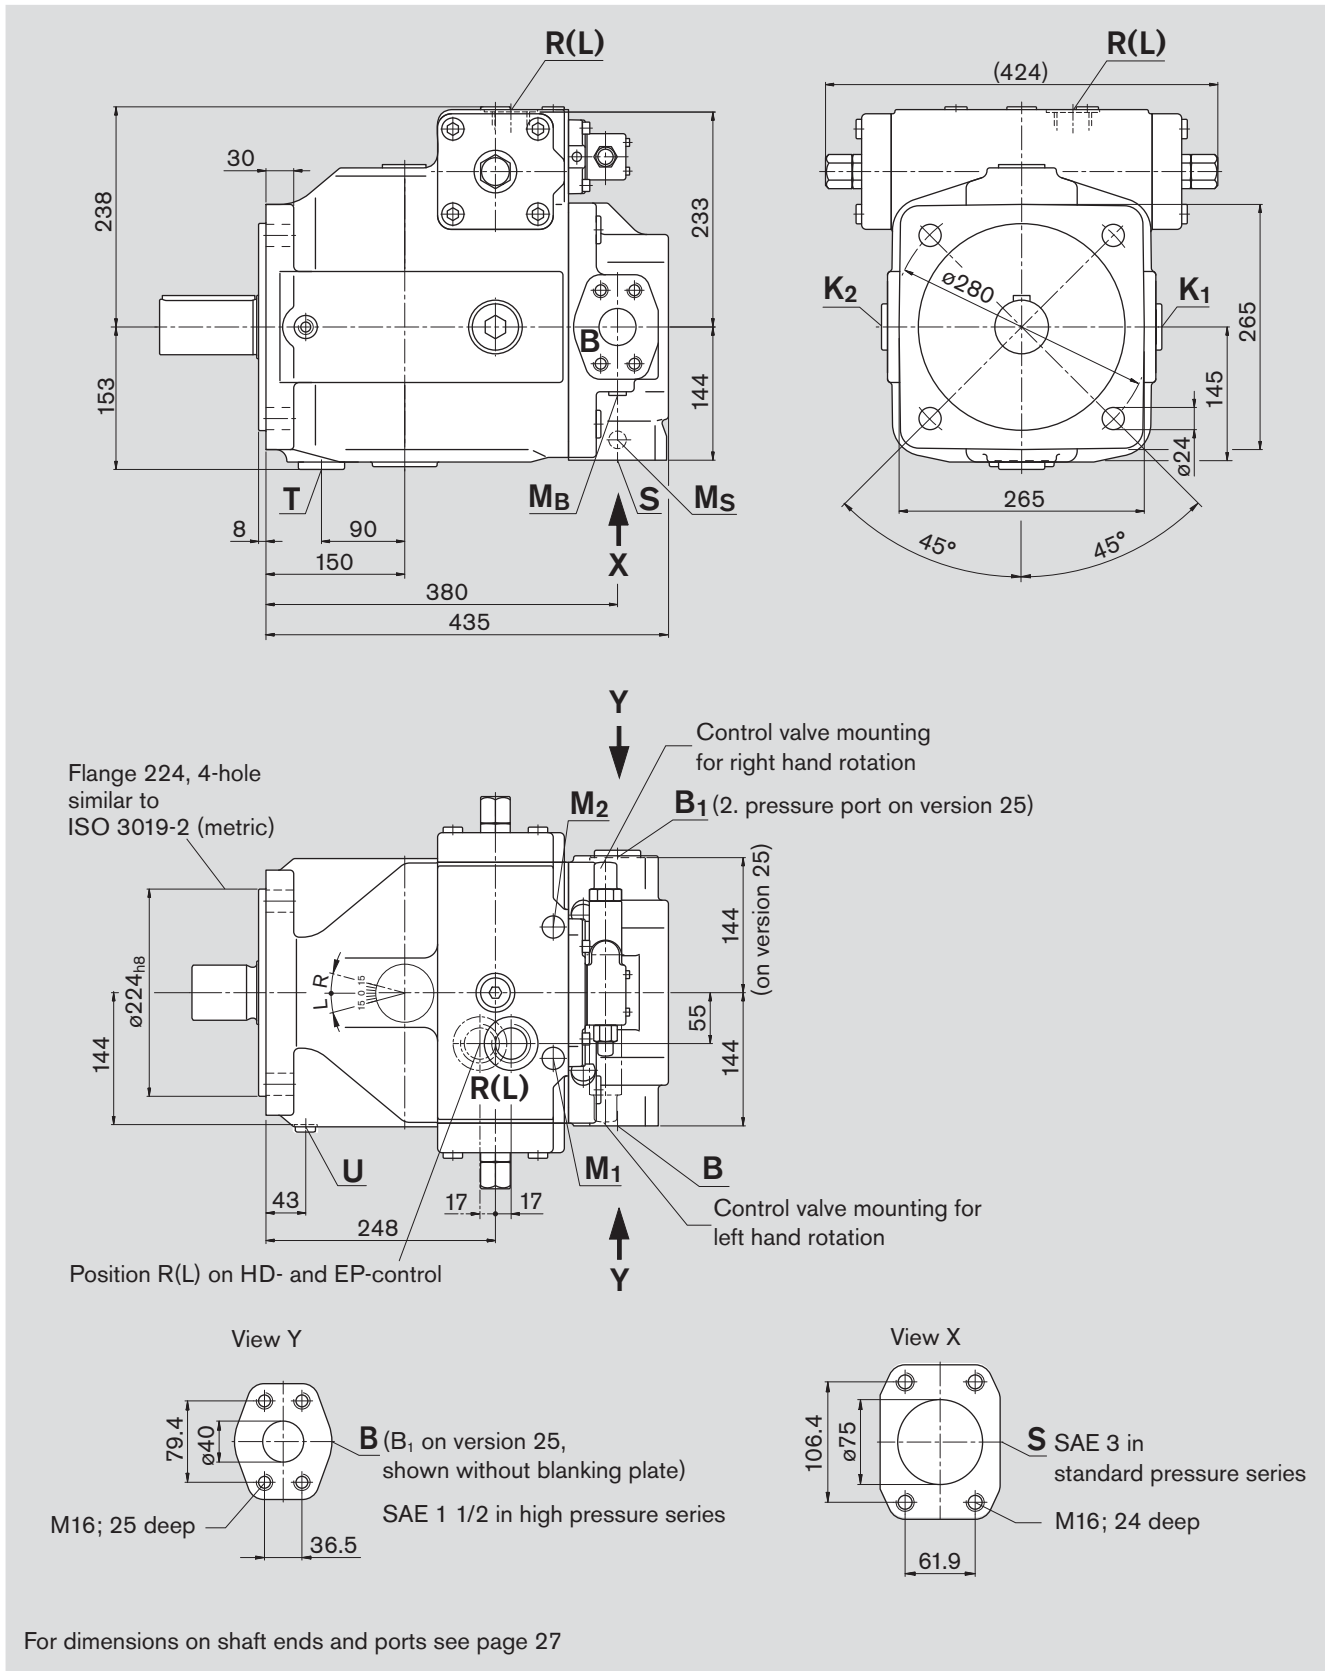




# Dimensions, size 250

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Shaft ends

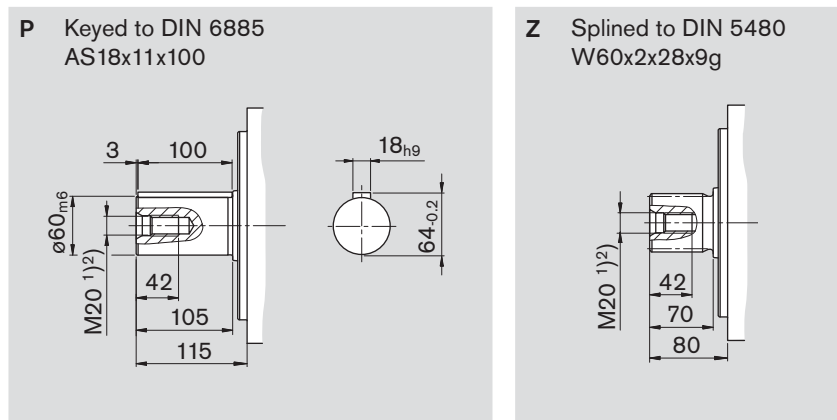

## Ports

				max. tightening torque <sup>2)</sup>
S	Suction port (standard pressure series) Fixing thread	SAE J518 <sup>3)</sup> DIN 13	3 in M16x2; 24 deep <sup>2)</sup>	
K <sub>1</sub> , K <sub>2</sub>	Flushing port	DIN 3852	M42x2; 20 deep (plugged)	720 Nm
T	Drain	DIN 3852	M42x2; 20 deep (plugged)	720 Nm
M <sub>B</sub>	Measuring port outlet pressure	DIN 3852	M14x1,5; 12 deep (plugged)	80 Nm
M <sub>S</sub>	Measuring port suction pressure	DIN 3852	M14x1,5; 12 deep (plugged)	80 Nm
R(L)	Fill + air bleed (case drain port)	DIN 3852	M42x2; 20 deep	720 Nm
U	Flushing port	DIN 3852	M14x1,5; 12 deep (plugged)	80 Nm
M <sub>1</sub> , M <sub>2</sub>	Measuring port control chamber pressure	DIN 3852	M18x1,5; 12 deep (plugged)	140 Nm

### on version 13

B	Pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> DIN 13	1 1/2 in M16x2; 25 deep <sup>2)</sup>	
B <sub>1</sub>	Additional port	DIN 3852	M42x2; 20 deep (plugged)	720 Nm

### on version 25

B	Pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> DIN 13	1 1/2 in M16x2; 25 deep <sup>2)</sup>	
B <sub>1</sub>	2. pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> DIN 13	1 1/2 in (closed with blanking plate) M16x2; 25 deep <sup>2)</sup>	

<sup>1)</sup> Center bore to DIN 332 (thread to DIN 13)

<sup>2)</sup> for the max. tightening torques please observe the manufacturer's information on the used fittings and the general information on page 68


<sup>3)</sup> Caution: thread deviates from standard

# Dimensions, size 355

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Series 3


(Example: pressure control; for exact dimensions of control devices see separate data sheets)

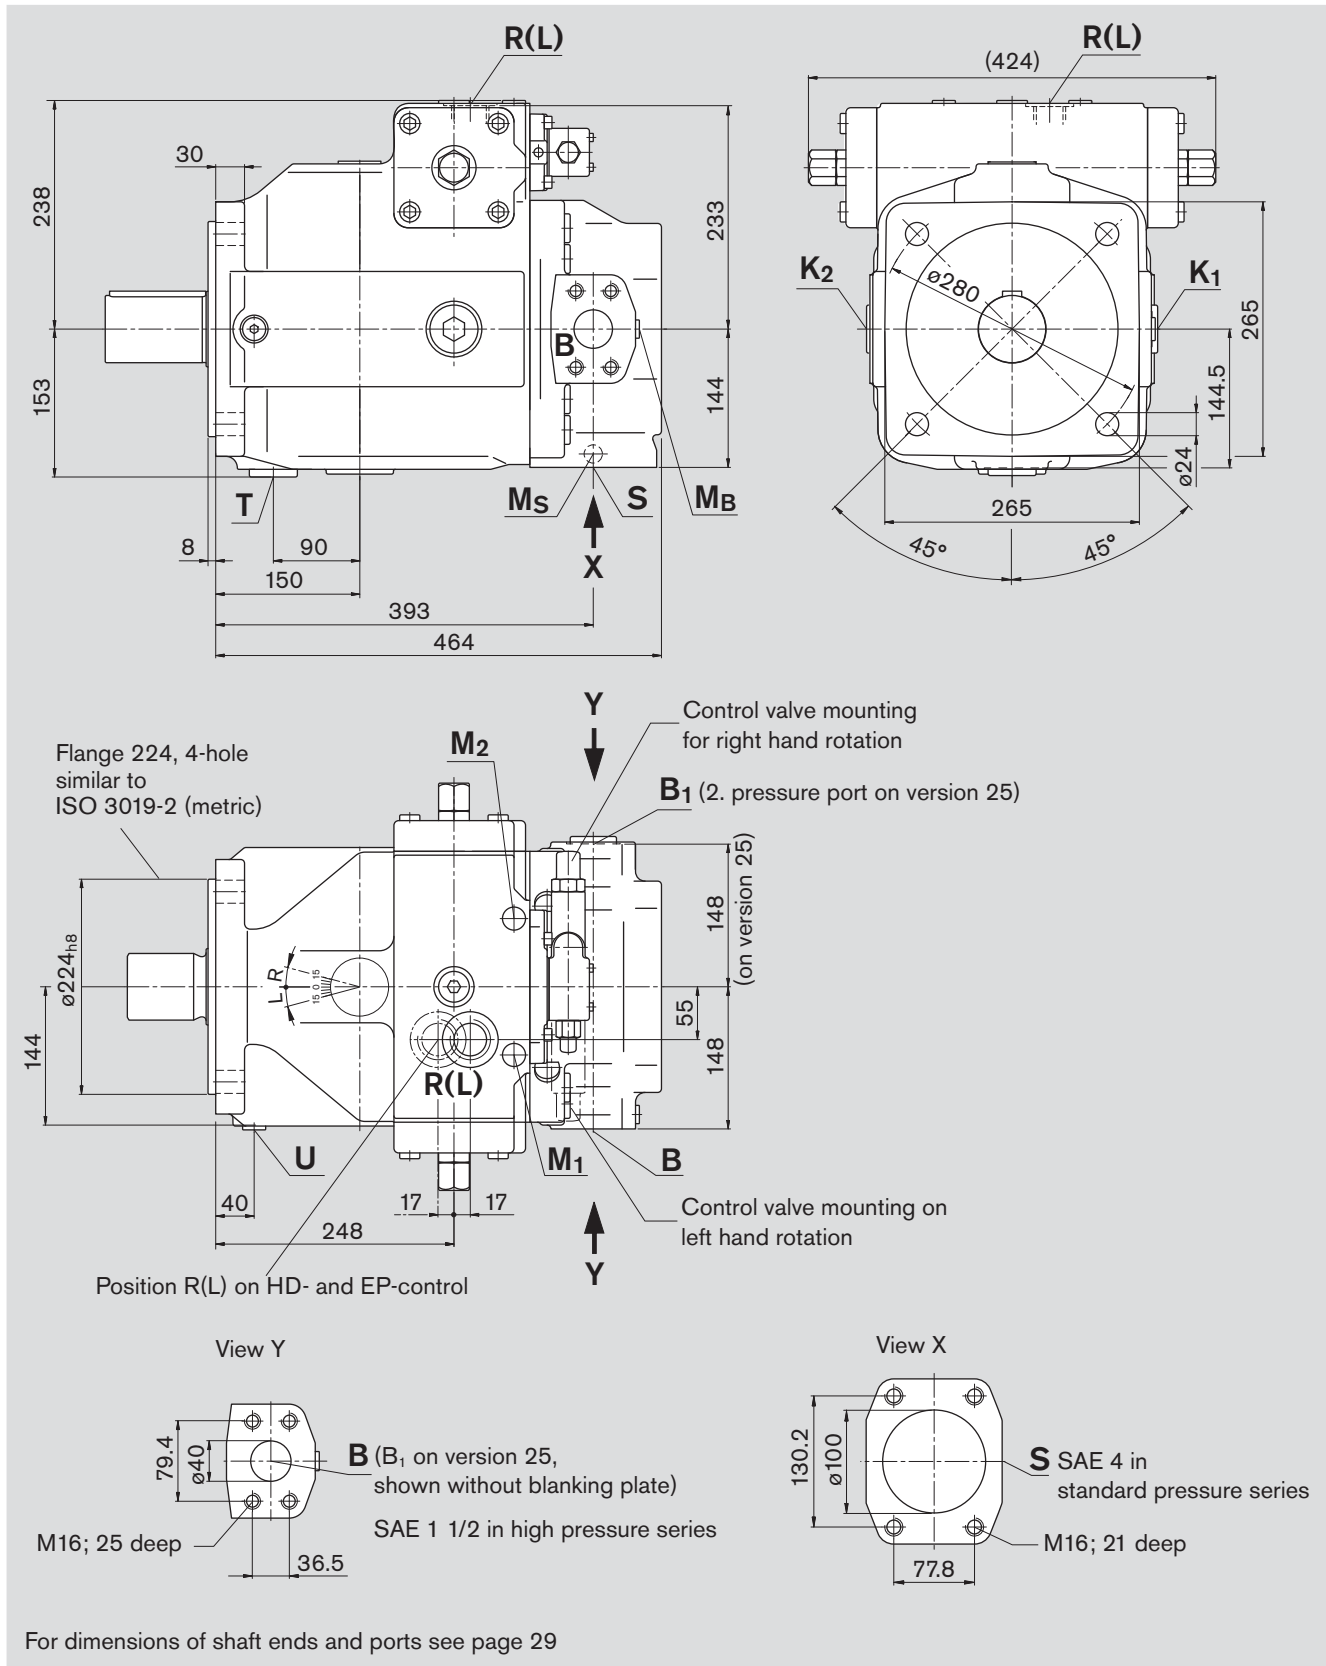

# Dimensions, size 355

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Shaft ends

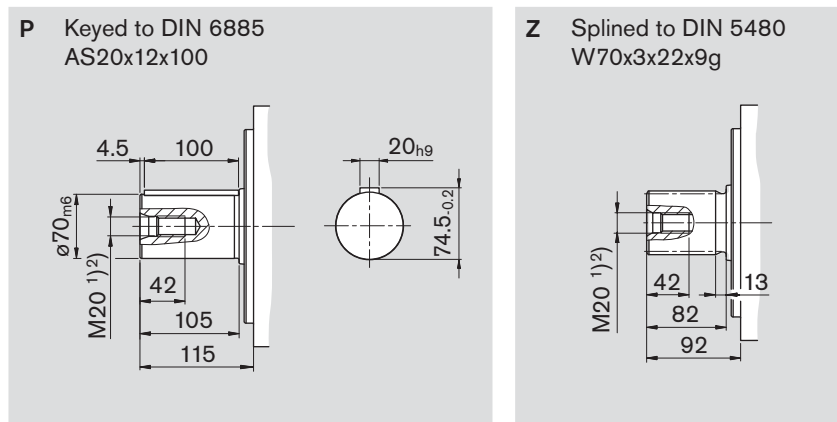

## Ports

				max. tightening torque <sup>2)</sup>
S	Suction port (standard pressure series)	SAE J518 <sup>3)</sup>	4 in	
	Fixing thread	DIN 13	M16x2; 21 deep <sup>2)</sup>	
K <sub>1</sub> , K <sub>2</sub>	Flushing port	DIN 3852	M42x2; 20 deep (plugged)	720 Nm
T	Drain	DIN 3852	M42x2; 20 deep (plugged)	720 Nm
M <sub>B</sub>	Measuring port outlet pressure	DIN 3852	M14x1,5; 12 deep (plugged)	80 Nm
M <sub>S</sub>	Measuring port suction pressure	DIN 3852	M14x1,5; 12 deep (plugged)	80 Nm
R(L)	Fill + air bleed (case drain port)	DIN 3852	M42x2; 20 deep	720 Nm
U	Flushing port	DIN 3852	M18x1,5; 12 deep (plugged)	140 Nm
M <sub>1</sub> , M <sub>2</sub>	Measuring port control chamber pressure	DIN 3852	M18x1,5; 12 deep (plugged)	140 Nm

### on version 13

B	Pressure port (high pressure series)	SAE J518 <sup>3)</sup>	1 1/2 in	
	Fixing thread	DIN 13	M16x2; 25 deep <sup>2)</sup>	
B <sub>1</sub>	Additional port	DIN 3852	M42x2; 20 deep (plugged)	720 Nm

### on version 25

B	Pressure port (high pressure series)	SAE J518 <sup>3)</sup>	1 1/2 in	
	Fixing thread	DIN 13	M16x2; 25 deep <sup>2)</sup>	
B <sub>1</sub>	2. pressure port (high pressure series)	SAE J518 <sup>3)</sup>	1 1/2 in (closed with blanking plate)	
	Fixing thread	DIN 13	M16x2; 25 deep <sup>2)</sup>	

<sup>1)</sup> Center bore to DIN 332 (thread to DIN 13)

<sup>2)</sup> for the max. tightening torques please observe the manufacturer's information on the used fittings and the general information on page 68


<sup>3)</sup> Caution: metric thread deviates from standard



# Dimensions, size 500

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Shaft ends

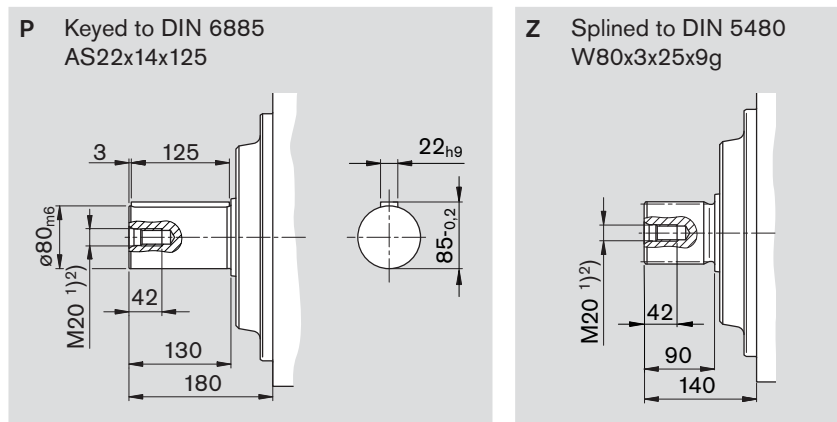

## Ports

				max. tightening torque <sup>2)</sup>
S	Suction port (standard pressure series) Fixing thread	SAE J518 <sup>3)</sup> 5 in DIN 13	M16x2; 24 deep <sup>2)</sup>	
K <sub>1</sub> , K <sub>2</sub>	Flushing port	DIN 3852	M48x2; 22 deep (plugged)	960 Nm
T	Drain	DIN 3852	M48x2; 22 deep (plugged)	960 Nm
M <sub>B</sub>	Measuring port outlet pressure	DIN 3852	M18x1,5; 12 deep (plugged)	140 Nm
M <sub>S</sub>	Measuring port suction pressure	DIN 3852	M18x1,5; 12 deep (plugged)	140 Nm
R(L)	Fill + air bleed (case drain port)	DIN 3852	M48x2; 22 deep	960 Nm
U	Flushing port	DIN 3852	M18x1,5; 12 deep (plugged)	140 Nm
M <sub>1</sub> , M <sub>2</sub>	Measuring port control chamber pressure or dependent on control device	DIN 3852 DIN 3852	M18x1,5; 12 deep (plugged) M14x1,5; 12 deep (plugged)	140 Nm 80 Nm
B	Pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 2 in DIN 13	M20x2,5; 24 deep <sup>2)</sup>	
B <sub>1</sub>	2. pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 2 in (closed with blanking plate) DIN 13	M20x2,5; 24 deep <sup>2)</sup>	

<sup>1)</sup> Center bore to DIN 332 (thread to DIN 13)

<sup>2)</sup> for the max. tightening torques please observe the manufacturer's information on the used fittings and the general information on page 68


<sup>3)</sup> Caution: metric thread deviates from standard

# Dimensions, size 750

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Series 3


(Example: pressure control; for exact dimensions of control devices see separate dData sheets)

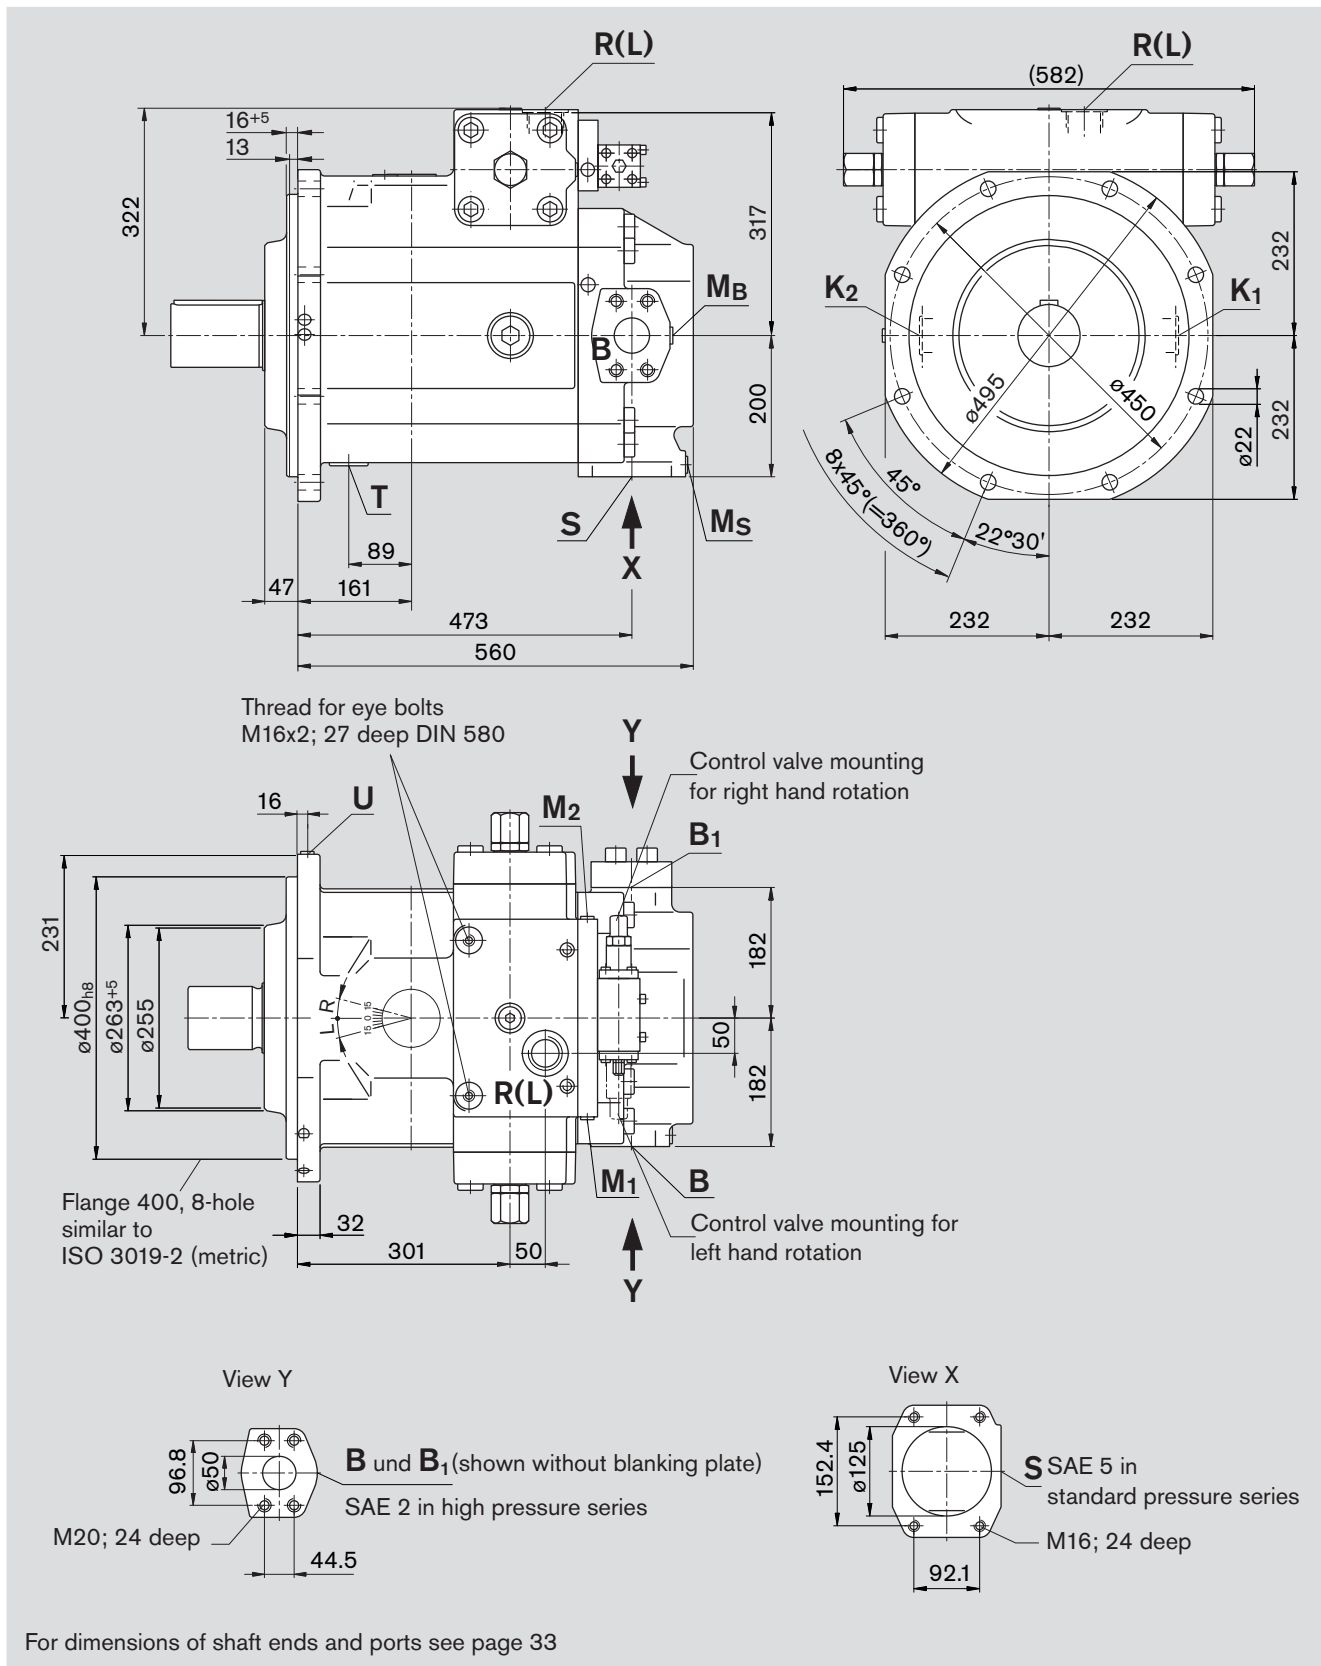

# Dimensions , size 750

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Shaft ends

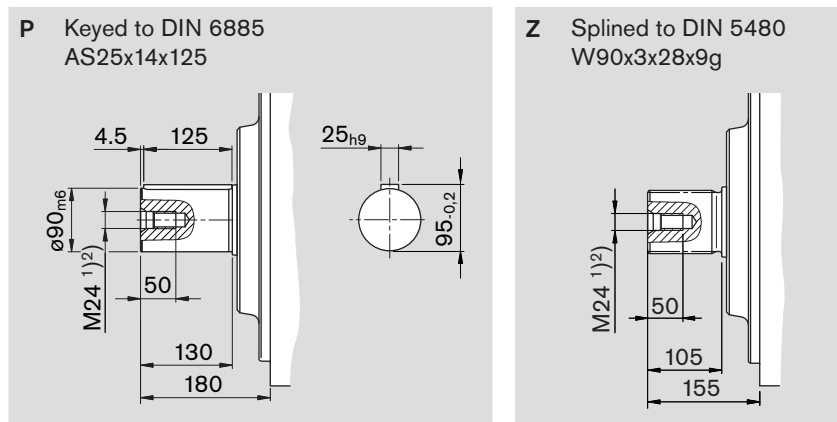

## Ports

			max. tightening torques
S	Suction port (standard pressure series) Fixing thread	SAE J518 <sup>3)</sup> 5 in DIN 13 M16x2; 24 deep <sup>2)</sup>	
K <sub>1</sub> , K <sub>2</sub>	Flushing port	DIN 3852 M48x2; 20 deep (plugged)	960 Nm
T	Drain	DIN 3852 M48x2; 20 deep (plugged)	960 Nm
M <sub>B</sub>	Measuring port outlet pressure	DIN 3852 M18x1,5; 12 deep (plugged)	140 Nm
M <sub>S</sub>	Measuring port suction pressure	DIN 3852 M18x1,5; 12 deep (plugged)	140 Nm
R(L)	Fill + air bleed (case drain port)	DIN 3852 M48x2; 20 deep	960 Nm
U	Flushing port	DIN 3852 M18x1,5; 12 deep (plugged)	140 Nm
M <sub>1</sub> , M <sub>2</sub>	Measuring port control chamber press. or dependent on control device	DIN 3852 M18x1,5; 12 deep (plugged) DIN 3852 M14x1,5; 12 deep (plugged)	140 Nm 80 Nm
B	Pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 2 in DIN 13 M20x2,5; 24 deep <sup>2)</sup>	
B <sub>1</sub>	2. pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 2 in (closed with blanking plate) DIN 13 M20x2,5; 24 deep <sup>2)</sup>	

<sup>1)</sup> Center bore to DIN 332 (thread to DIN 13)

<sup>2)</sup> for the max. tightening torques please observe the manufacturer's information on the used fittings and the general information on page 68

<sup>3)</sup> Caution: metric thread deviates from standard


# Dimensions, size 750

Before finalising your design please request a certified installation drawing. Dimensions in mm.

with boost pump (Impeller)

Series 3

(Example: pressure control; for exact dimensions of control devices see separate data sheets)

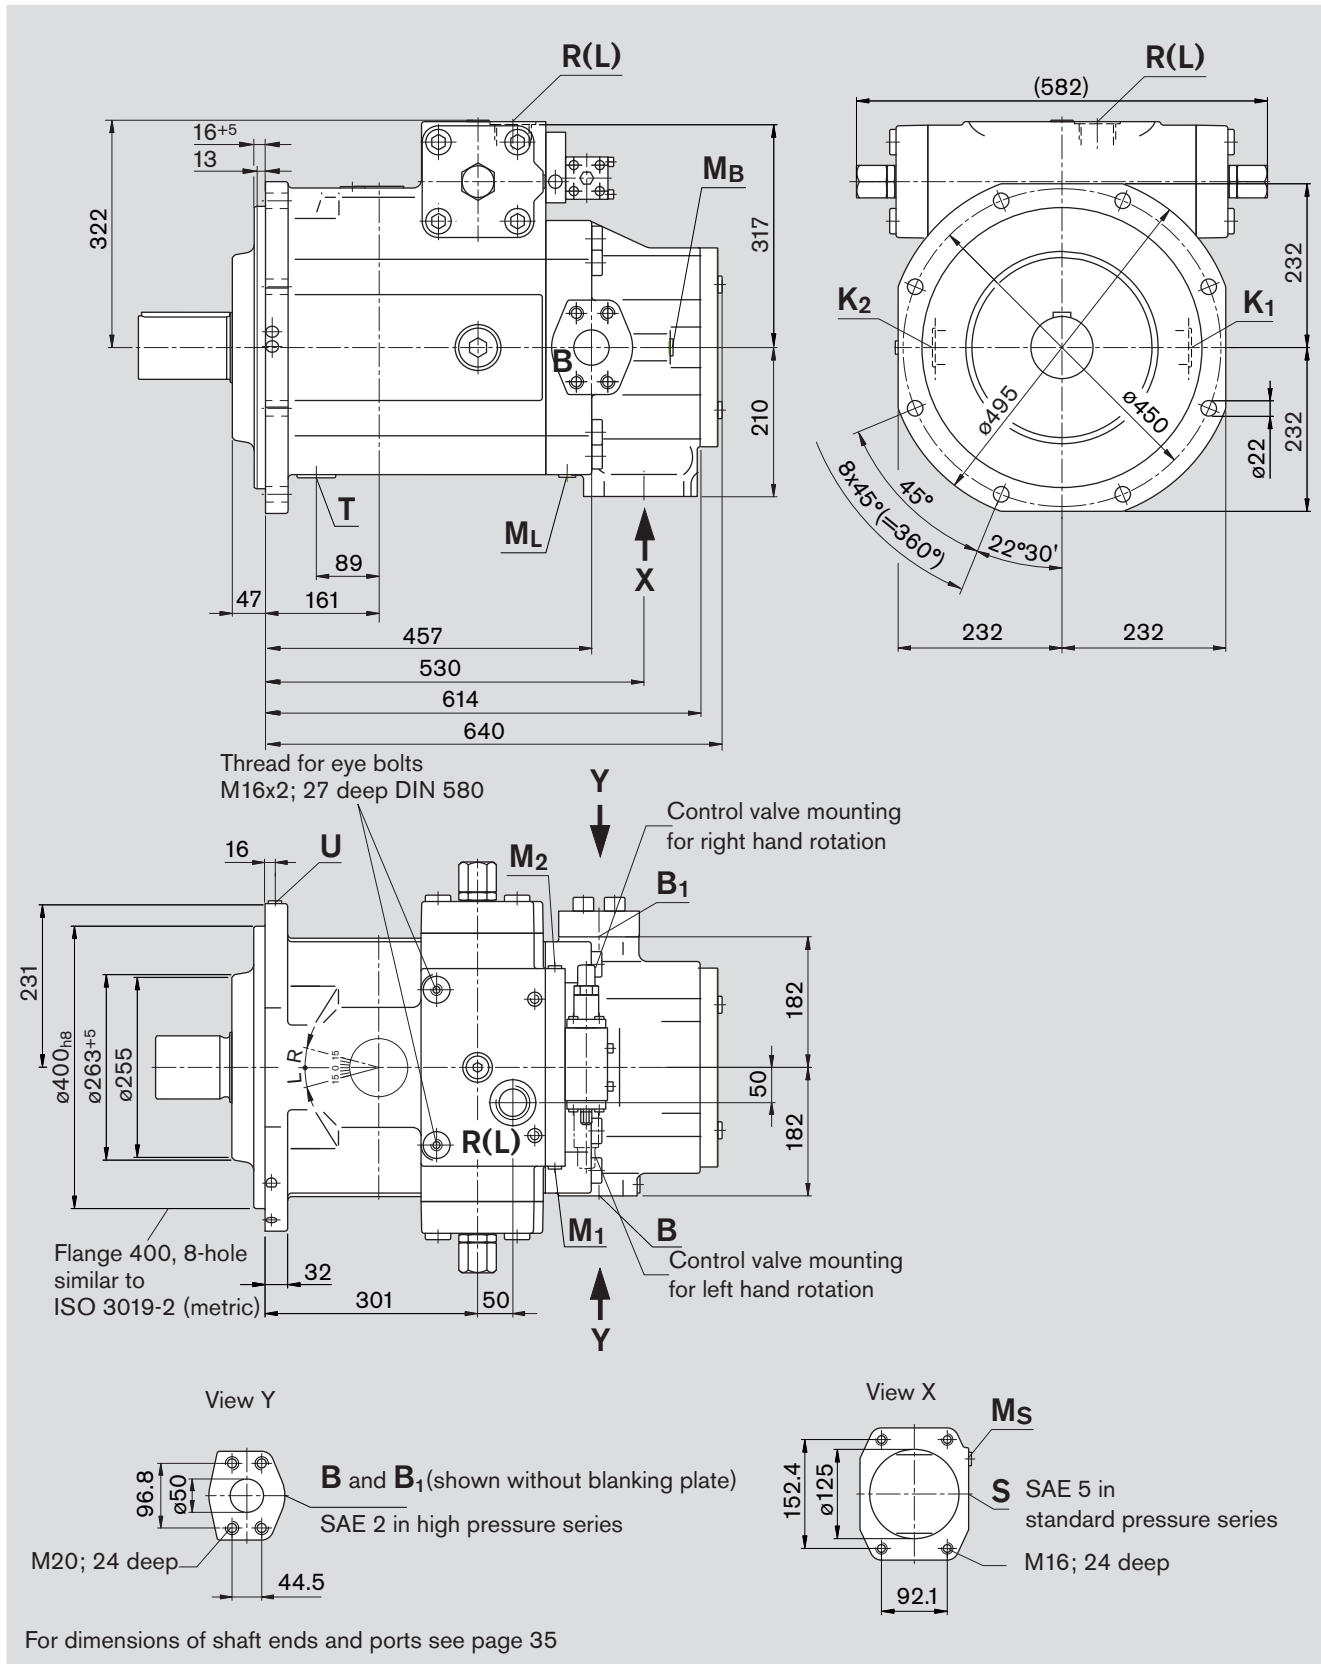




# Dimensions, size 750

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## with boost pump (Impeller)

### Shaft ends

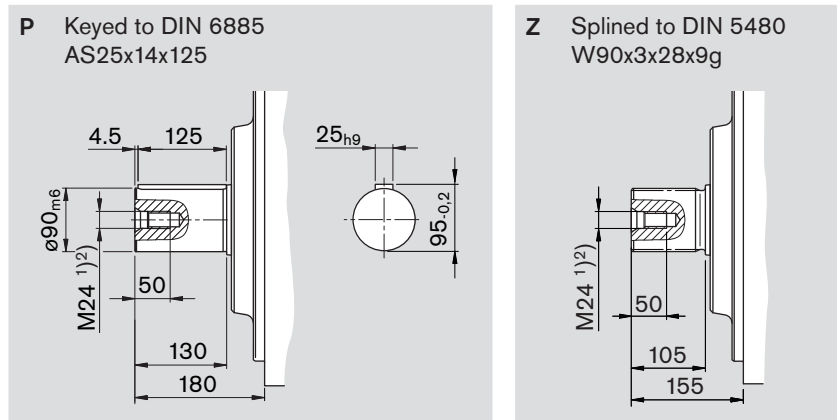

### Ports

			max. tightening torque <sup>2)</sup>
S	Suction port (standard pressure series) Fixing thread	SAE J518 <sup>3)</sup> 5 in DIN 13 M16x2; 24 deep <sup>2)</sup>	
K <sub>1</sub> , K <sub>2</sub>	Flushing port	DIN 3852 M48x2; 20 deep (plugged)	960 Nm
T	Drain	DIN 3852 M48x2; 20 deep (plugged)	960 Nm
M <sub>B</sub>	Measuring port outlet pressure	DIN 3852 M18x1,5; 12 deep (plugged)	140 Nm
M <sub>S</sub>	Measuring port suction pressure	DIN 3852 M18x1,5; 12 deep (plugged)	140 Nm
M <sub>L</sub>	Measuring port boost pressure	DIN 3852 M18x1,5; 12 deep (plugged)	140 Nm
R(L)	Fill + air bleed (case drain port)	DIN 3852 M48x2; 20 deep	960 Nm
U	Flushing port	DIN 3852 M18x1,5; 12 deep (plugged)	140 Nm
M <sub>1</sub> , M <sub>2</sub>	Measuring port control chamber press. or dependent on control device	DIN 3852 M18x1,5; 12 deep (plugged) DIN 3852 M14x1,5; 12 deep (plugged)	140 Nm 80 Nm
B	Pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 2 in DIN 13 M20x2,5; 24 deep <sup>2)</sup>	
B <sub>1</sub>	2. pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 2 in (closed with blanking plate) DIN 13 M20x2,5; 24 deep <sup>2)</sup>	

<sup>1)</sup> Center bore to DIN 332 (thread to DIN 13)

<sup>2)</sup> for the max. tightening torques please observe the manufacturer's information on the used fittings and the general information on page 68


<sup>3)</sup> Caution: metric thread deviates from standard

# Dimensions, size 1000

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Series 3

(Example: pressure control; for exact dimensions of control devices see separate data sheets)

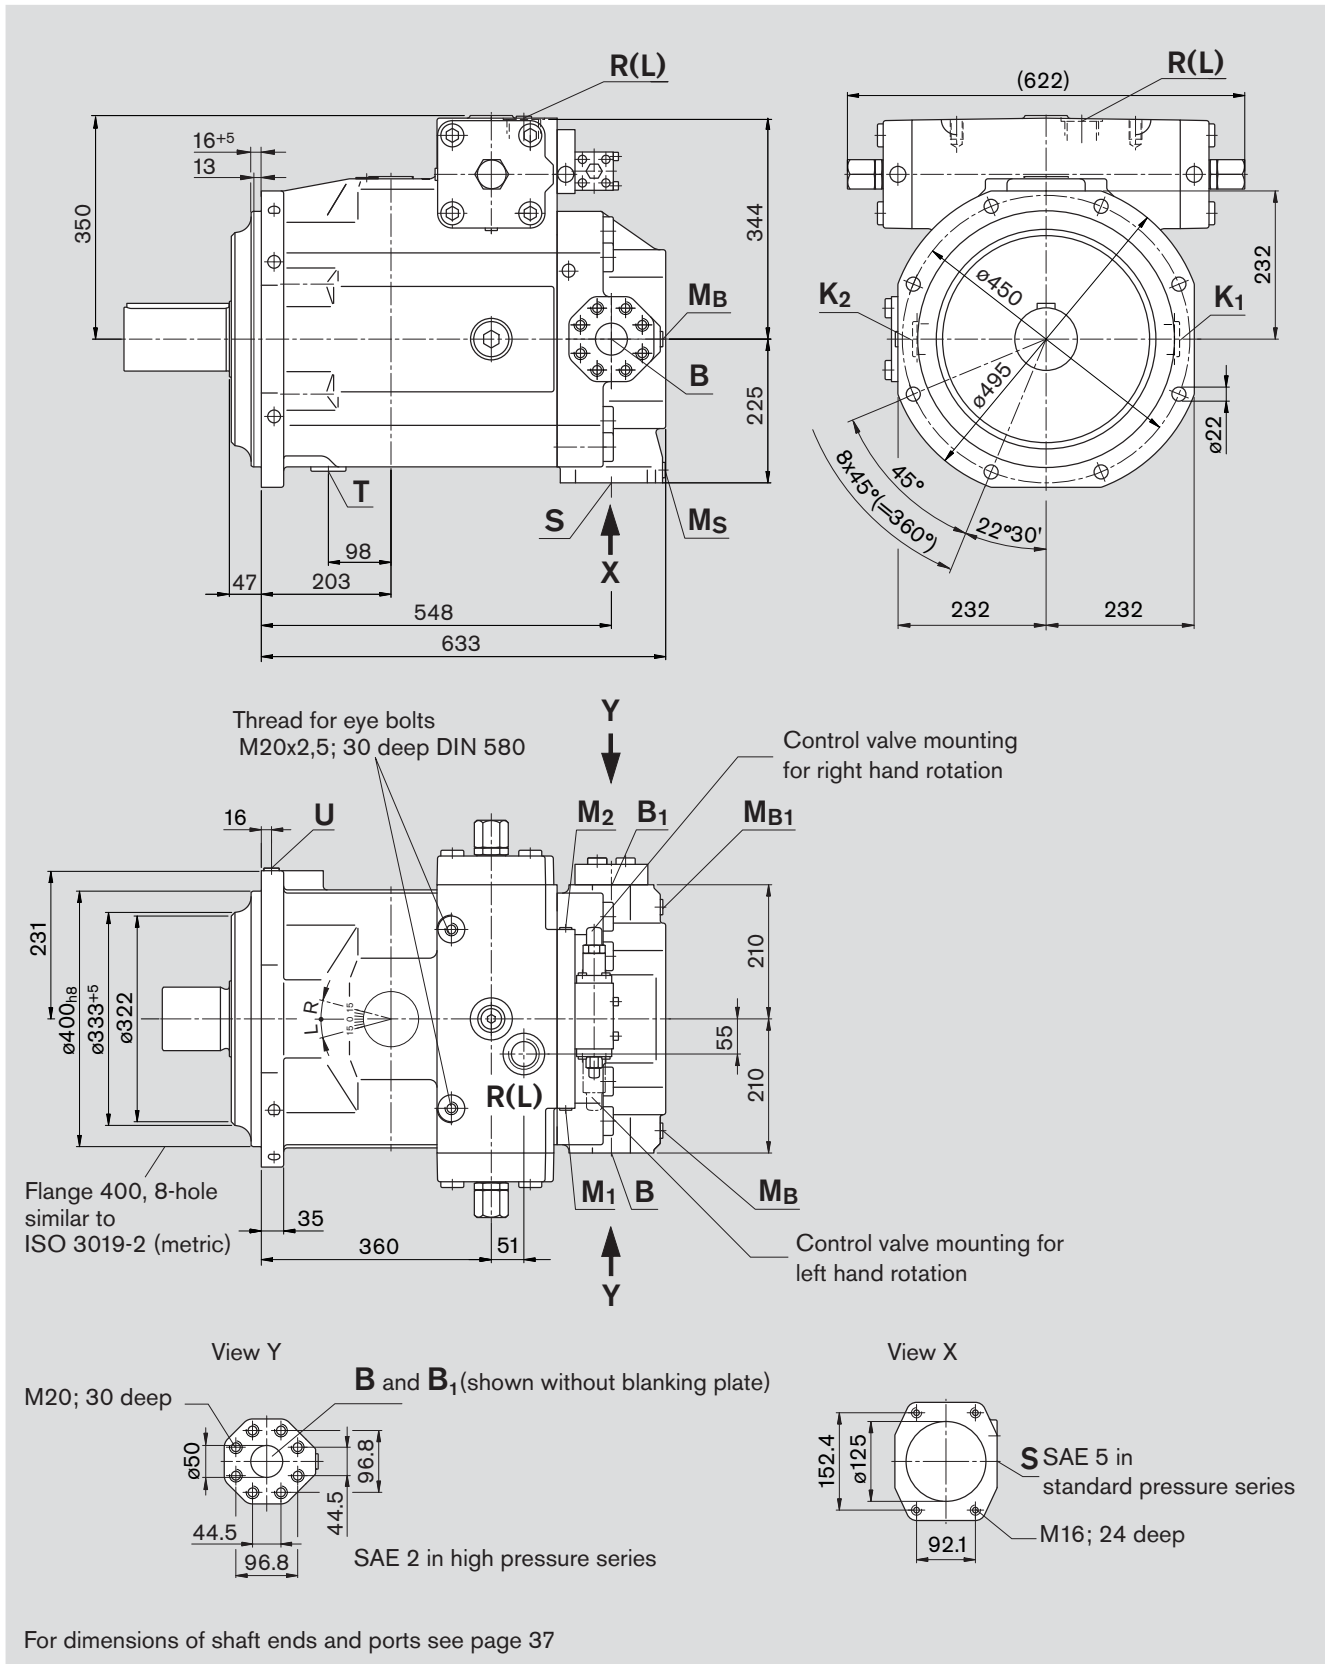


For dimensions of shaft ends and ports see page 37

# Dimensions, size 1000

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## Shaft ends

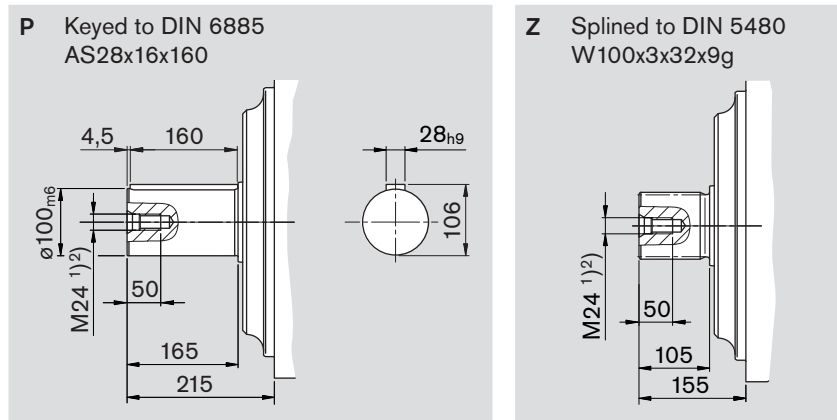

## Ports

			max. tightening torque
S	Suction port (standard pressure series) Fixing thread	SAE J518 <sup>3)</sup> 5 in DIN 13 M16x2; 24 deep <sup>2)</sup>	
K <sub>1</sub> , K <sub>2</sub>	Flushing port	DIN 3852 M48x2; 20 deep (plugged)	960 Nm
T	Drain	DIN 3852 M48x2; 20 deep (plugged)	960 Nm
M <sub>B</sub> , M <sub>B1</sub>	Measuring port outlet pressure	DIN 3852 M18x1,5; 12 deep (plugged)	140 Nm
M <sub>S</sub>	Measuring port suction pressure	DIN 3852 M18x1,5; 12 deep (plugged)	140 Nm
R(L)	Fill + air bleed (case drain port)	DIN 3852 M48x2; 20 deep	960 Nm
U	Flushing port	DIN 3852 M18x1,5; 12 deep (plugged)	140 Nm
M <sub>1</sub> , M <sub>2</sub>	Measuring port control chamber press.or dependent on control device	DIN 3852 M18x1,5; 12 deep (plugged) DIN 3852 M14x1,5; 12 deep (plugged)	140 Nm 80 Nm
B	Pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 2 in DIN 13 M20x2,5; 30 deep <sup>2)</sup>	
B <sub>1</sub>	2. pressure port (high pressure series) Fixing thread	SAE J518 <sup>3)</sup> 2 in (closed with blanking plate) DIN 13 M20x2,5; 30 deep <sup>2)</sup>	

<sup>1)</sup> Center bore to DIN 332 (thread to DIN 13)

<sup>2)</sup> for the max. tightening torques please observe the manufacturer's information on the used fittings and the general information on page 68

<sup>3)</sup> Caution: metric thread deviates from standard

## Through drive

The axial piston unit A4VSO can be equipped with a through drive, as shown in the type code on page 4. The through drive execution is designated by the code K/U 31...99.

We recommend, that no more than three pumps be coupled together.

### Permissible input and through drive torques

Size		40	71	125	180	250	355	500	750	1000		
<b>Splined shaft</b>												
Max. perm. total input torque at shaft of pump 1 (Pump 1 + pump 2)		$T_{tot\ max}$	Nm	446	790	1392	2004	2782	3952	5566	8348	11130
<b>A</b>	Perm. through drive torque	$T_{D1\ max}$	Nm	223	395	696	1002	1391	1976	2783	4174	5565
		$T_{D2\ max}$	Nm	223	395	696	1002	1391	1976	2783	4174	5565
<b>B</b>	Perm. through drive torque	$T_{D1\ max}$	Nm	223	395	696	1002	1391	1976	2783	4174	5565
		$T_{D2\ max}$	Nm	223	395	696	1002	1391	1976	2783	4174	5565
<b>Keyed shaft</b>												
Max. perm. total input torque at shaft of pump 1 (Pump 1 + pump 2)		$T_{tot\ max}$	Nm	380	700	1392	1400	2300	3557	5200	7513	9444
<b>A</b>	Perm. through drive torque	$T_{D1\ max}$	Nm	223	395	696	1002	1391	1976	2783	4174	5565
		$T_{D2\ max}$	Nm	157	305	696	398	909	1581	2417	3339	3879
<b>B</b>	Perm. through drive torque	$T_{D1\ max}$	Nm	157	305	696	398	909	1581	2417	3339	3879
		$T_{D2\ max}$	Nm	223	395	696	1002	1391	1976	2783	4174	5565

### Distribution of torques



### Single pump with through drive

If no further pumps are factory-mounted the simple type code is sufficient.

#### included in this case are:

on all through drives except K/U 99

shaft coupler, mounting screws, seal and if required an adapter flange

on K/U 99

with through drive shaft, without shaft coupler, without adapter flange; unit is closed with pressure tight cover.

#### Universal through drive

On pump sizes 125...355 all through drives are supplied as universal through drives „U“.

These have the advantage, that they can be adapted later on.

Simply by exchanging the adapter flange and the shaft coupler it is possible to convert the through drive option.

The conversion sets must be ordered separately, see RE 95581.

### Combination pumps

Independent circuits are available for the user when further pumps are built on.

1. If the combination consists of **2 Rexroth axial piston pumps**, and if this must be **factory mounted**, the two individual type codes must be joined by a „+“.

Ordering example:

A4VSO 125 DR / 30 R – PPB13K33 + A4VSO 71 DR / 10 R – PZB13N00

2. If a **gear** or a radial piston pump must be **factory mounted** as the second pump please consult us.

## Overview of A4VSO through drive options

Through drive - A4VSO			Mounting option 2. pump					Through drive
Flange	Coupler for splined shaft <sup>6)</sup>	Code	A4VSO/G size (shaft)	A4CSG size (shaft)	A10V(S)O/31(2) <sup>5)</sup> size (shaft)	A10V(S)O/52(3) size (shaft)	External/internal gear pump	available for size
<b>Flange ISO 3019-2 (metric)</b>								
80, 2-hole	19-4 (3/4in, 11T) <sup>3)</sup>	<b>K/UB2</b>	–	–	18 (S)/31	10 (S)	–	71
100, 2-hole	22-4 (7/8in, 13T) <sup>3)</sup>	<b>K/UB3</b>	–	–	28 (S)/31	–	–	40...180
	25-4 (1in, 15T) <sup>3)</sup>	<b>K/UB4</b>	–	–	45 (S)/31	–	–	40...500
125, 2-hole	32-4 (1 1/4in, 14T) <sup>3)</sup>	<b>K/UB5</b>	–	–	71 (S)/31	–	–	71...355
	38-4 (1 1/2in, 17T) <sup>3)</sup>	<b>UB6</b>	–	–	100 (S)/31	–	–	in preparation
125, 4-hole	W 32x2x14x9g <sup>2)</sup>	<b>K/U31</b>	40 (Z)	–	–	–	–	40...500
140, 4-hole	W 40x2x18x9g <sup>2)</sup>	<b>K/U33</b>	71 (Z)	–	–	–	–	71...750
160, 4-hole	W 50x2x24x9g <sup>2)</sup>	<b>K/U34</b>	125 (Z)	–	–	–	–	125...750
			180 (Z)	–	–	–	–	180...750
	32-4 (1 1/4in, 14T) <sup>3)</sup>	<b>UB8</b>	–	–	71 (S)/32	–	–	250
180, 4-hole	44-4 (1 3/4in, 13T) <sup>3)</sup>	<b>K/UB7</b>	–	–	140 (S)/31/32	–	–	180... 500
	38-4 (1 1/2in, 17T) <sup>3)</sup>	<b>UB9</b>	–	–	100 (S)/32	–	–	in preparation
224, 4-hole	W 60x2x28x9g <sup>2)</sup>	<b>K/U35</b>	250 (Z)	250 (Z)	–	–	–	250...750
	W 70x3x22x9g <sup>2)</sup>	<b>K/U77</b>	355 (Z)	355 (Z)	–	–	–	355, 500
315, 8-hole	W 80x3x25x9g <sup>2)</sup>	<b>K43</b>	500 (Z)	500 (Z)	–	–	–	500, 750
400, 8-hole	W 90x3x28x9g <sup>2)</sup>	<b>K76</b>	750 (Z)	750 (Z)	–	–	–	750
	W 100x3x32x9g <sup>2)</sup>	<b>K88</b>	1000 (Z)	–	–	–	–	1000
<b>Flange SAE J 744 (ISO 3019-1)</b>								
82-2 (A) <sup>1)</sup>	16-4 (5/8in, 9T) <sup>3)</sup>	<b>K/U01</b>	–	–	–	–	AZ-PF-1X-004...022 <sup>4)</sup>	40...750
	19-4 (3/4in, 11T) <sup>3)</sup>	<b>K/U52</b>	–	–	18 (S)/31	10, 18 (S)	–	40 u. 71
101-2 (B) <sup>1)</sup>	22-4 (7/8in, 13T) <sup>3)</sup>	<b>K/U68</b>	–	–	28 (S)/31	28 (S)	AZ-PN-1X-020...032 <sup>4)</sup>	40...500
	25-4 (1in, 15T) <sup>3)</sup>	<b>K/U04</b>	–	–	45 (S)/31	45 (S)	PGH4	40...500
127-2 (C) <sup>1)</sup>	32-4 (1 1/4in, 14T) <sup>3)</sup>	<b>K/U07</b>	–	–	71 (S)/31	–	–	71...500
	38-4 (1 1/2in, 17T) <sup>3)</sup>	<b>K/U24</b>	–	–	100 (S)/31	85 (S)	PGH5	125...500
152-4 (D) <sup>1)</sup>	44-4 (1 3/4in, 13T) <sup>3)</sup>	<b>K/U17</b>	–	–	140 (S)/31	–	–	180...500
Dia 63-4, metr.	Keyed dia 25	<b>K/U57</b>	–	–	–	–	R4	40 u. 71

<sup>1)</sup> 2 = 2-hole, 4 = 4-hole

<sup>2)</sup> to DIN 5480

<sup>3)</sup> Splined shafts acc. to SAEJ744 OCT83


<sup>4)</sup> Rexroth recommends special executions of the gear pumps. Please consult us.

<sup>5)</sup> If a through drive for an A10V(S)O with R-shaft is desired, please consult us.

<sup>6)</sup> Keyed shaft on through drive code K/U57

# Permissible mass moment of inertia

referred to the mounting flange of the main pump

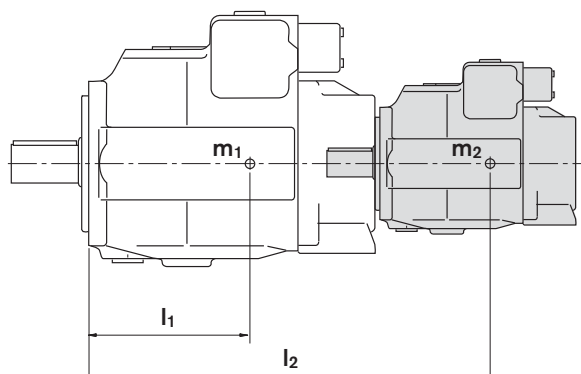

$m_1, m_2$  [kg] Weight of pump


$l_1, l_2$  [mm] Distance center of gravity

$$T_m = m_1 \cdot l_1 \cdot \frac{1}{102} + m_2 \cdot l_2 \cdot \frac{1}{102} \text{ [Nm]}$$

Size		40	71	125	180	250	355	500	750	1000
Perm. mass moment of inertia	$T_{m \text{ perm.}}$ Nm	1800	2000	4200	4200	9300	9300	15600	19500	19500
Perm. mass moment at dynam. acceleration of $10 \text{ g} \hat{=} 98,1 \text{ m/sec}^2$	$T_{m \text{ perm.}}$ Nm	180	200	420	420	930	930	1560	1950	1950
Weight (A4VSO...DR)	$m$ kg	39	53	88	102	184	207	320	460	605
Distance center of gravity	$l_1$ mm	120	140	170	180	210	220	230	260	290

# Dimensions combination pumps

Before finalising your design please request a certified installation drawing. Dimensions in mm.

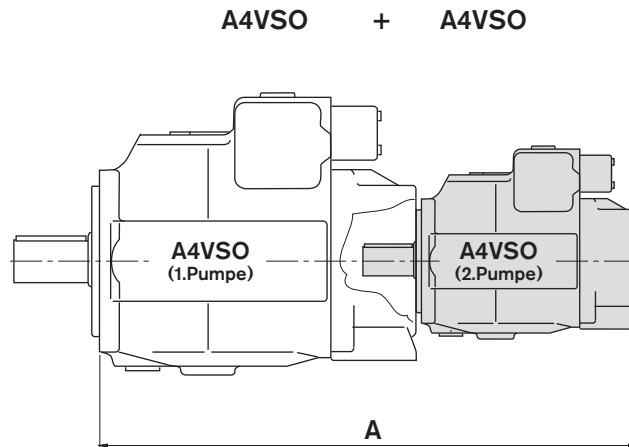

## Overall length A


A4VSO (1. pump)	A4VSO..DR..N00 (2. pump)								
	Size 40	Size 71	Size 125	Size 180	Size 250	Size 355	Size 500	size 750	Size 1000
Size 40	554	–	–	–	–	–	–	–	–
Size 71	582	611	–	–	–	–	–	–	–
Size 125	635	664	724	–	–	–	–	–	–
Size 180	659	688	748	768	–	–	–	–	–
Size 250	719	748	808	828	904	–	–	–	–
Size 355	748	777	837	857	933	962	–	–	–
Size 500	771	800	860	880	976	1005	1110	–	–
Size 750	821	850	910	930	1026	1055	1160	1214	–
Size 1000	*	*	*	*	*	*	*	*	1368

\* on request

# Dimensions combination pumps

Before finalising your design please request a certified installation drawing. Dimensions in mm.

A4VSO + A10VSO

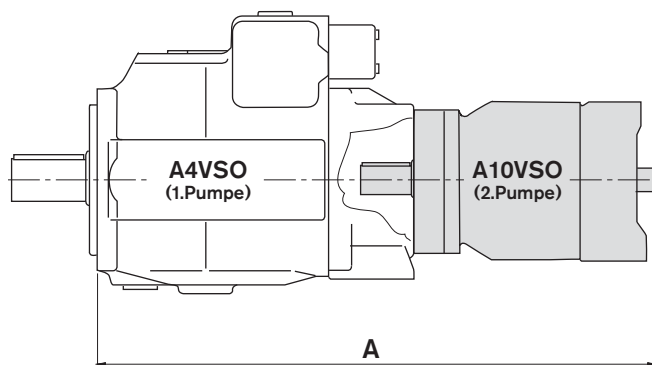

## Overall length A

A4VSO (1. pump)	A10VSO.../31 (2. pump)					
	Size 18	Size 28	Size 45	Size 71	Size 100	Size 140
Size 40	458	496	514	–	–	–
Size 71	486	497	540	580	–	–
Size 125	564	575	593	628	698	–
Size 180	588	599	617	652	722	744
Size 250	648	659	677	712	782	791
Size 355	*	*	706	741	*	820
Size 500	700	711	729	764	857	868
Size 750	750	761	779	812	907	917
Size 1000	*	*	*	*	*	*


\* on request



# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.


**K31** Flange ISO 3019-2 125, 4-hole  
 Shaft coupler to DIN 5480 N32x2x14x8H  
 for mounting an A4VSO/G 40 splined shaft

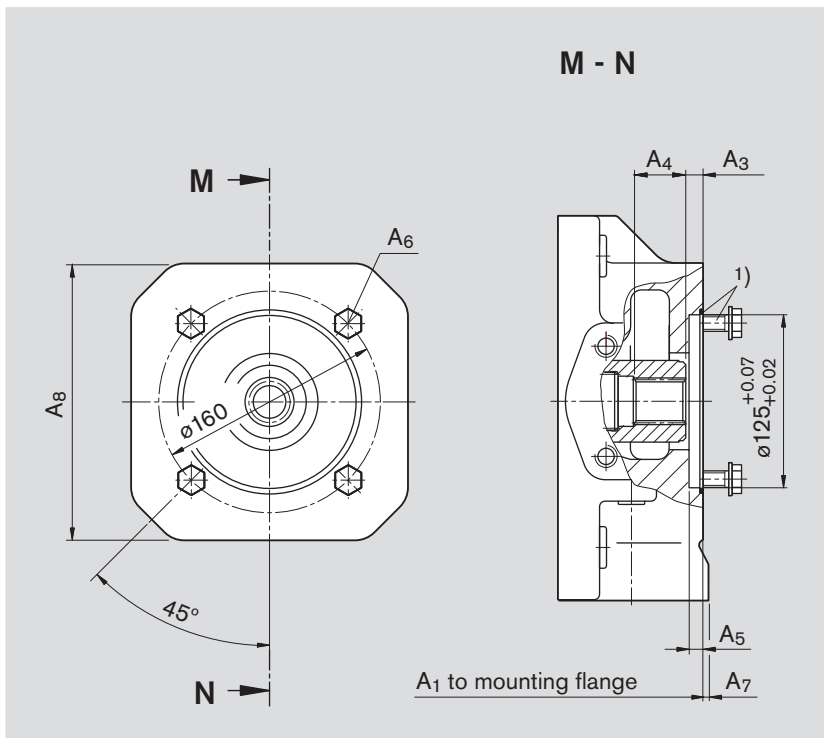

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
40	288	12,5	40	9	M12
71	316	12,5	33,6	9	M12
500	505	12,5	38,5	9	M12
750	in preparation				
1000	in preparation				

Size	A <sub>7</sub>	A <sub>8</sub>
40	-	-
71	-	-
500	15	240
750	in preparation	
1000	in preparation	

**U31** Flange ISO 3019-2 125, 4-hole  
 Shaft coupler to DIN 5480 N32x2x14x8H  
 for mounting an A4VSO/G 40 splined shaft

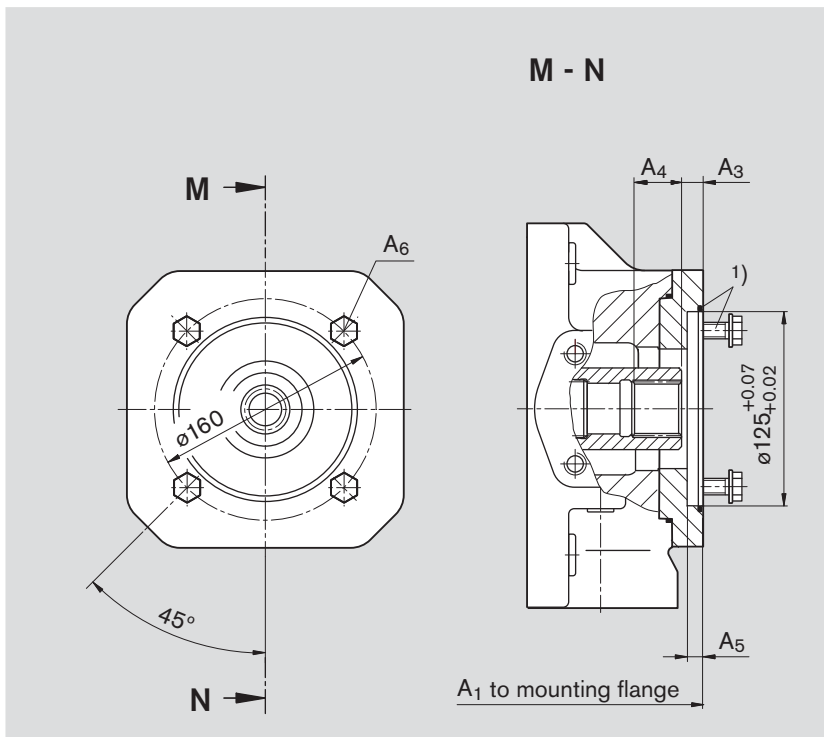


Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
125	369	12,5	35,6	9	M12
180	393	12,5	35,6	9	M12
250	453	12,5	38	9	M12
355	482	12,5	38	9	M12

1) Mounting screws and O-ring seal are included with supply  
 2) Thread to DIN 13, for the max. tightening torques observe the general information on page 68

# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.

**K33** Flange ISO 3019-2 140, 4-hole  
 Shaft coupler to DIN 5480 N40x2x18x8H  
 for mounting an A4VSO/G 71 splined shaft

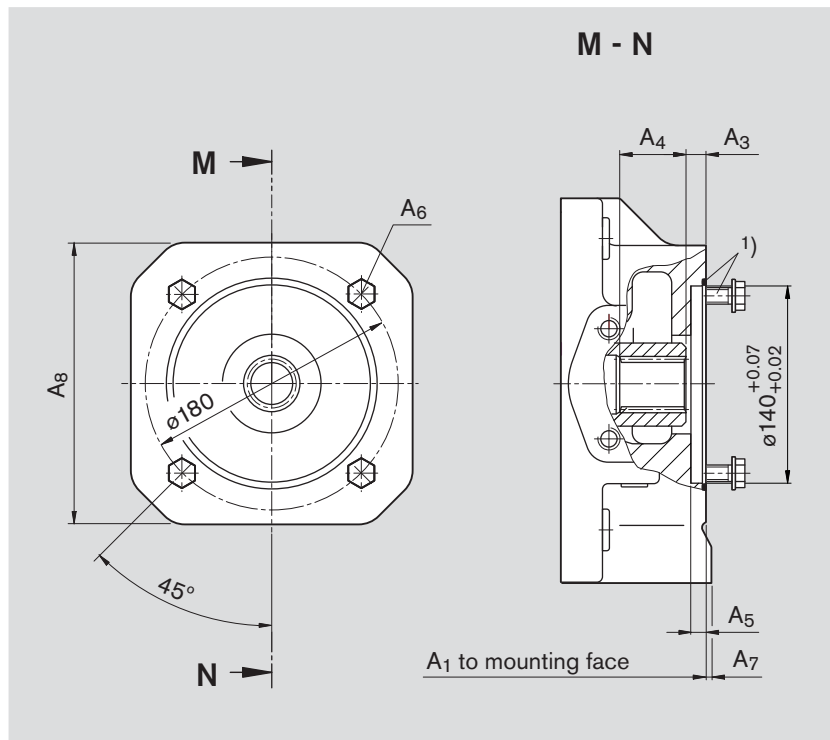


Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
71	316	11,5	42,8	9	M12
500	505	12,5	57	9	M12
750	555	12,5	44,5	9	M12
750 *	in preparation				
1000	in preparation				

Size	A <sub>7</sub>	A <sub>8</sub>
71	-	-
500	15	240
750	-	-
750 *	in preparation	
1000	in preparation	

\* with boost pump

**U33** Flange ISO 3019-2 140, 4-hole  
 Shaft coupler to DIN 5480 N40x2x18x8H  
 for mounting an A4VSO/G 71 splined shaft

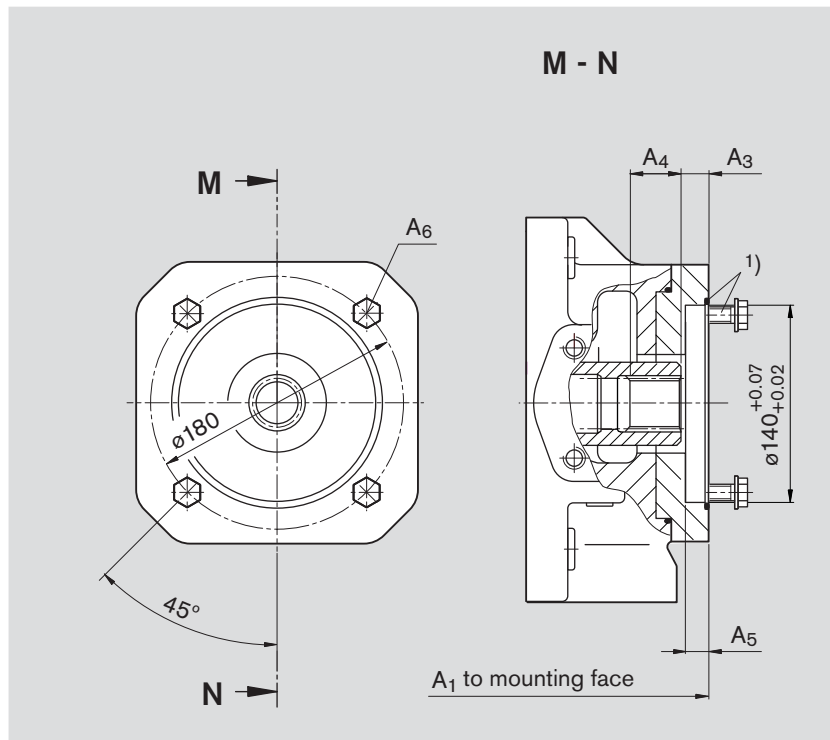

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
125	369	12,5	43,8	9	M12
180	393	12,5	43,8	9	M12
250	453	12,5	48,9	9	M12
355	482	12,5	48	9	M12


<sup>1)</sup> Mounting screws and O-ring seal are included with supply

<sup>2)</sup> Thread to DIN 13, for the max. tightening torques observe the general information on page 68

# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.


**K34** Flange ISO 3019-2 160, 4-hole  
**Shaft coupler** to DIN 5480 N50x2x24x8H  
 for mounting an A4VSO/G 125 or 180 splined shaft

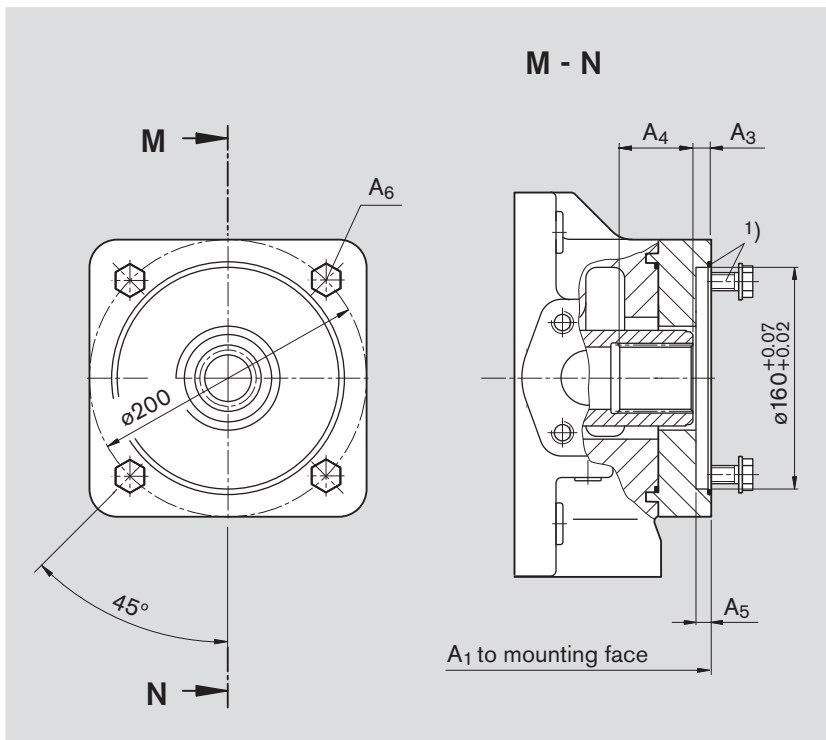

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
500	505	13,5	54,5	9	M16
750	555	12,5	55,5	9	M16
750 *	in preparation				
1000	in preparation				

\* with boost pump

**U34** Flange ISO 3019-2 160, 4-hole  
**Shaft coupler** to DIN 5480 N50x2x24x8H  
 for mounting an A4VSO/G 125 or 180 splined shaft

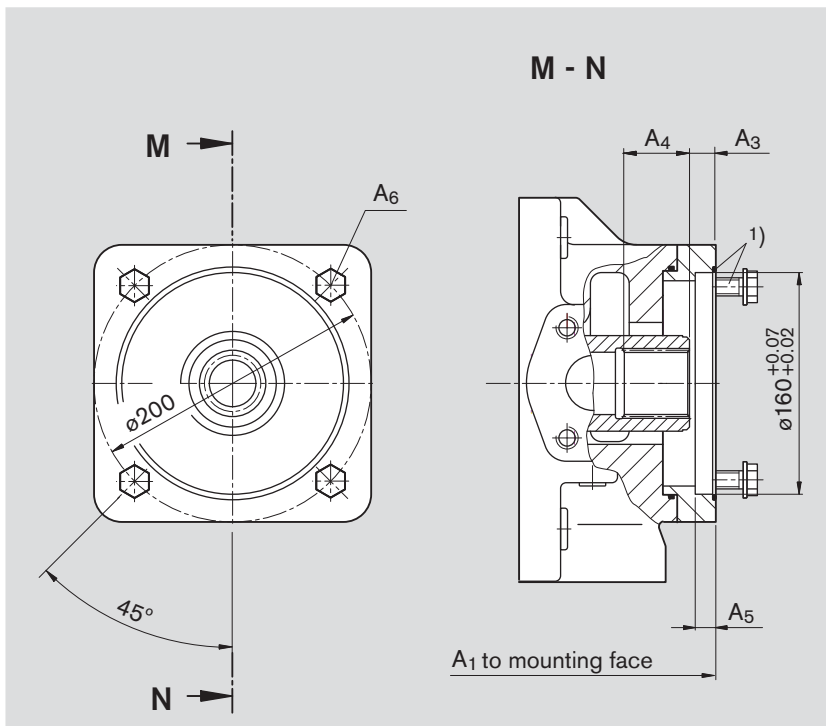

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
125	369	12,5	51,6	9	M16
180	393	12,5	51,6	9	M16
250	453	12,5	54	9	M16
355	482	12,5	54	9	M16


1) Mounting screws and O-ring seal are included with supply

2) Thread to DIN 13, for the max. tightening torques observe the general information on page 68

# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.


**K35** Flange ISO 3019-2 224, 4-hole  
 Shaft coupler to DIN 5480 N60x2x28x8H  
 for mounting an A4VSO/G or A4CSG 250 splined shaft

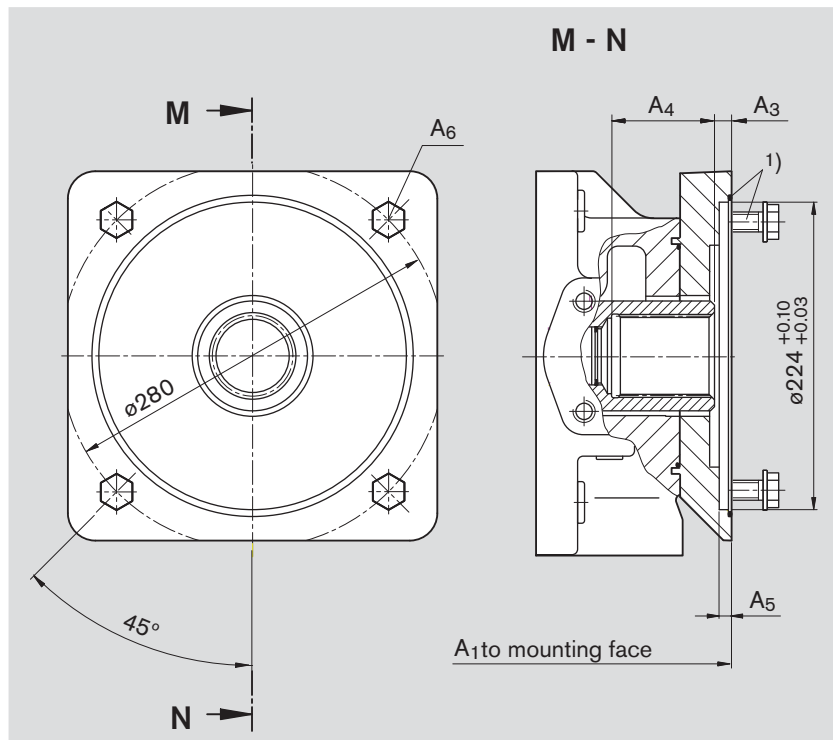

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
500	541	12,5	74	9	M20
750	591	12,5	74	9	M20
750*	in preparation				
1000	in preparation				

\* with boost pump

**U35** Flange ISO 3019-2 224, 4-hole  
 Shaft coupler to DIN 5480 N60x2x28x8H  
 for mounting an A4VSO/G or A4CSG 250 splined shaft

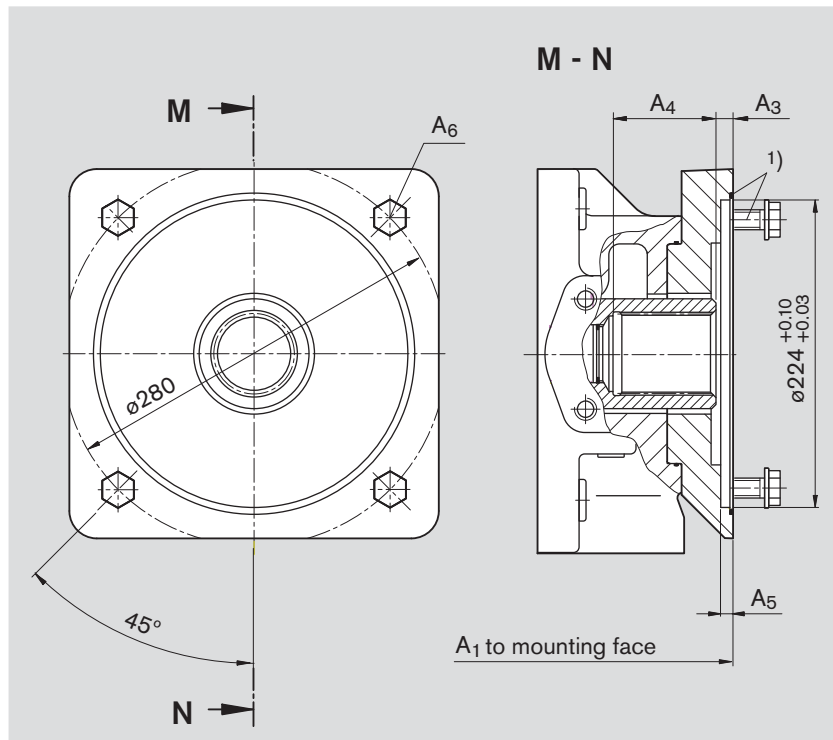

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
250	469	12,5	75	9	M20
355	498	12,5	75	9	M20


1) Mounting screws and O-ring seal are included with supply

2) Thread to DIN 13, for the max. tightening torques observe the general information on page 68

# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.


**K77** Flange ISO 3019-2 224, 4-hole  
**Shaft coupler** to DIN 5480 N70x3x22x8H  
 for mounting an A4VSO/G or A4CSG 355 splined shaft

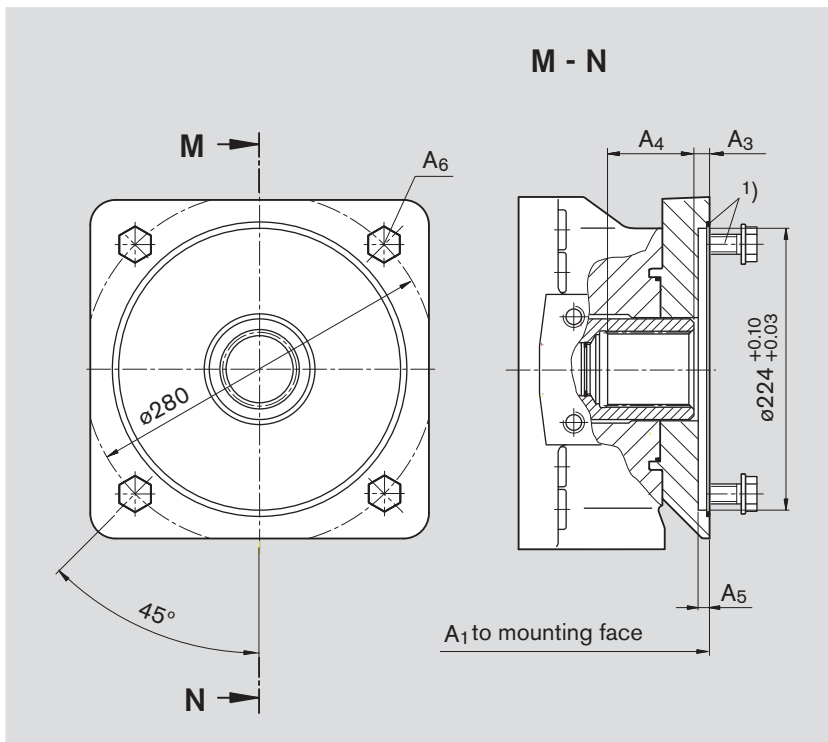

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
500	541	12,5	76	9	M20
750	in preparation				
1000	in preparation				

**U77** Flange ISO 3019-2 224, 4-hole  
**Shaft coupler** to DIN 5480 N70x3x22x8H  
 for mounting an A4VSO/G or A4CSG 355 splined shaft

Size 355

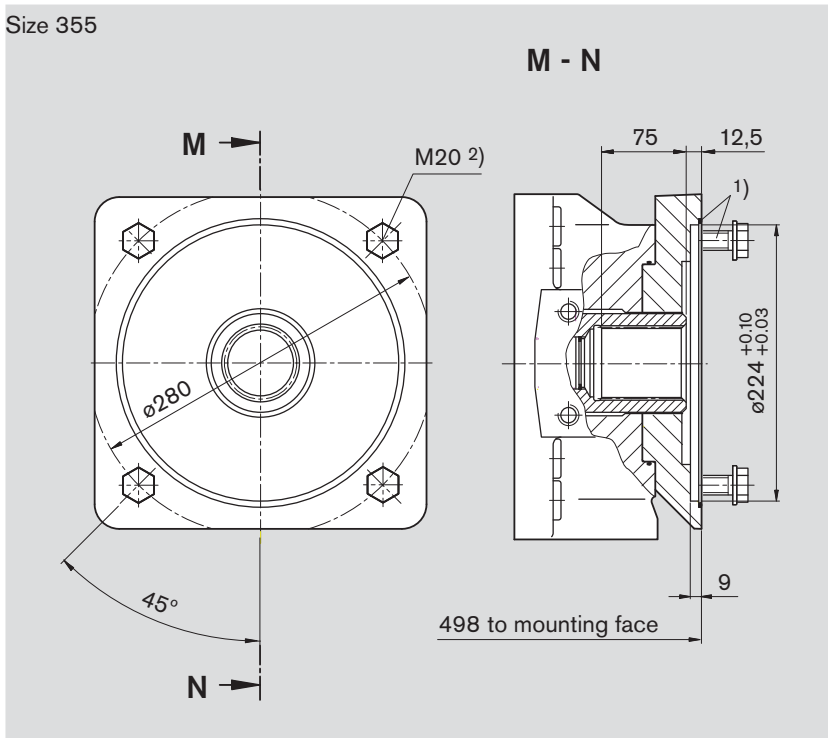


1) Mounting screws and O-ring seal are included with supply

2) Thread to DIN 13, for the max. tightening torques observe the general information on page 68

## Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.


**K43** Flange ISO 3019-2 315, 8-hole  
Shaft coupler to DIN 5480 N80x3x25x8H  
for mounting an A4VSO/G or A4CSG 500 splined shaft

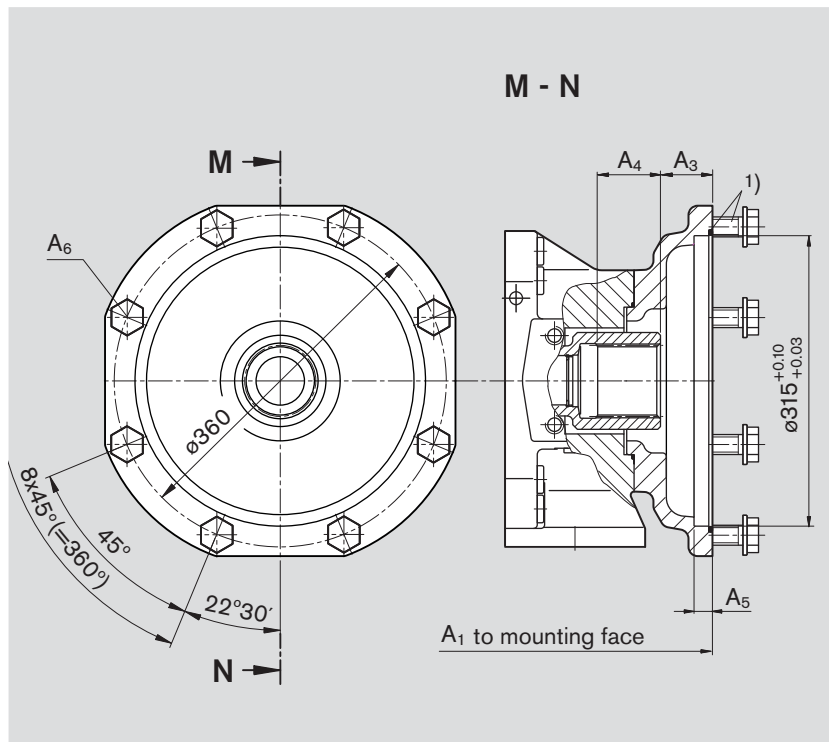

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
500	590	53,5	71,9	19	M20
750	640	53,5	71,9	19	M20
750*	in preparation				
1000	in preparation				

\* with boost pump

**K76** Flange ISO 3019-2 400, 8-hole  
Shaft coupler to DIN 5480 N90x3x28x8H  
for mounting an A4VSO/G or A4CSG 750 splined shaft

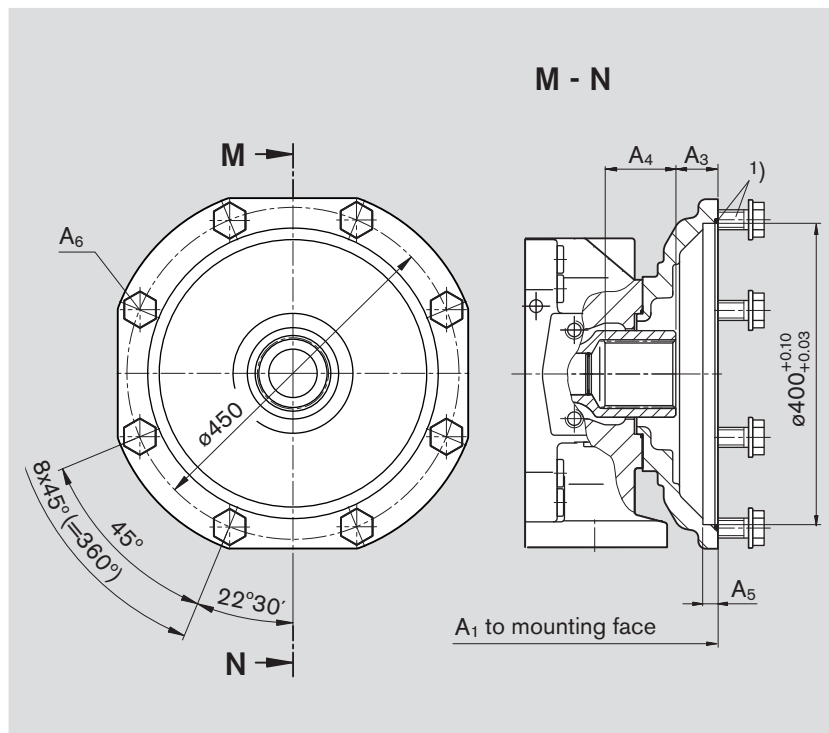

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
750	655	104	53	19	M20
750*	in preparation				
1000	in preparation				

\* with boost pump


<sup>1)</sup> Mounting screws and O-ring seal are included with supply

<sup>2)</sup> Thread to DIN 13, for the max. tightening torques observe the general information on page 68


# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.

**K88** Flange ISO 3019-2 400, 8-hole  
**Shaft coupler** to DIN 5480 N100x3x32x8H  
 for mounting an A4VSO/G 1000 splined shaft

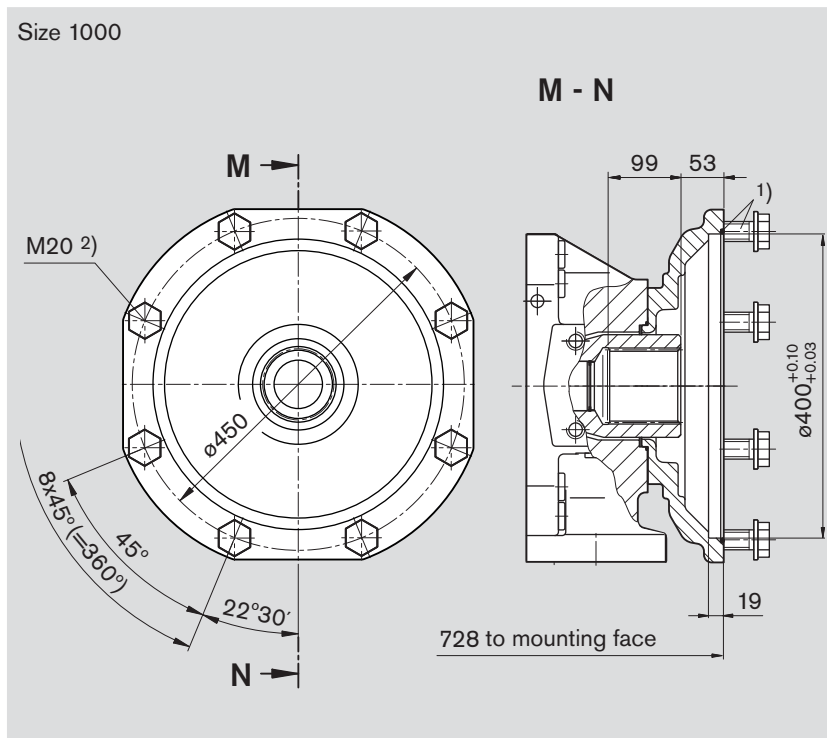

**KB2** Flange ISO 3019-2 80, 2-hole  
**Shaft coupler** for splined shaft, 19-4 SAE A-B, 3/4 in, 16/32 DP; 11T<sup>3)</sup>  
 for mounting an A10VSO 18/31 shaft S – see RE 92712 or an  
 A10VSO 10/52 shaft S – see RE 92703

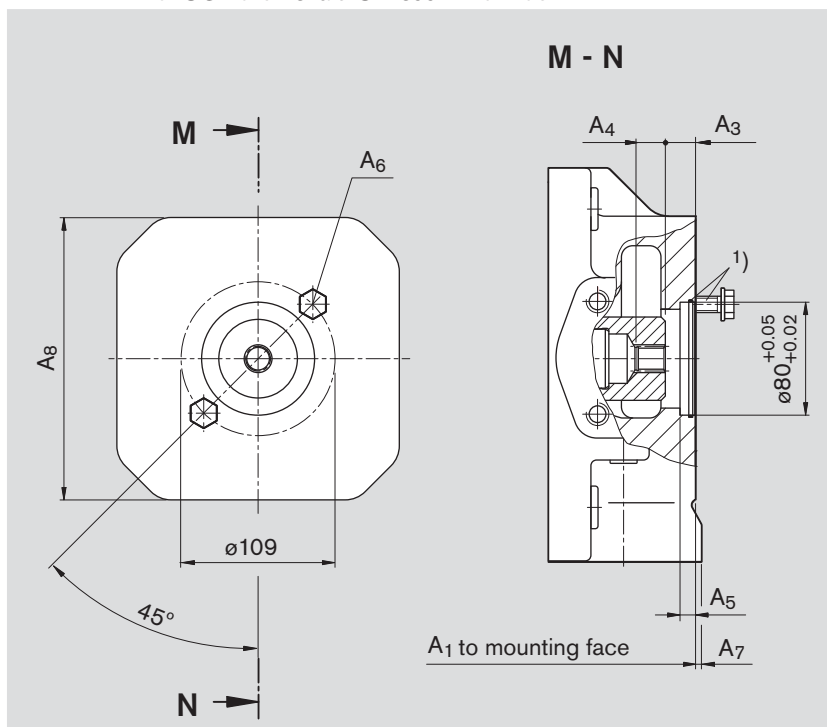

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
40	in preparation				
71	291	21,5	19	10	M10
500	in preparation				
750	in preparation				
1000	in preparation				

Size	A <sub>7</sub>	A <sub>8</sub>
40	in preparation	
71	2	140
500	in preparation	
750	in preparation	
1000	in preparation	


Sizes 125...355 with U-through drive in preparation

<sup>1)</sup> Mounting screws and O-ring seal are included with supply  
<sup>2)</sup> Thread to DIN 13, for the max. tightening torques observe the general information on page 68  
<sup>3)</sup> To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5

# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.


**KB3** Flange ISO 3019-2 100, 2-hole  
**Shaft coupler** for splined shaft, 22-4 SAE B, 7/8 in, 16/32 DP; 13T<sup>3)</sup>  
 for mounting an A10VSO 28/31 splined shaft S (see RE 92711)

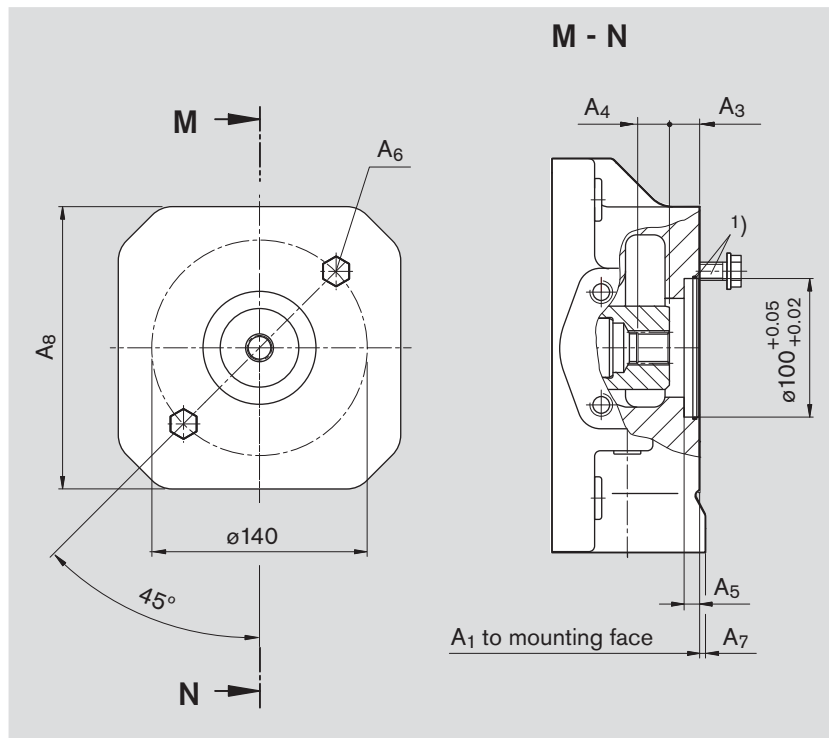

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
40	290	20,3	23	10	M12
71	291	20,4	23	10	M12
500	in preparation				
750	in preparation				
1000	in preparation				

Size	A <sub>7</sub>	A <sub>8</sub>
40	-	-
71	2	140
500	in preparation	
750	in preparation	
1000	in preparation	

**UB3** Flange ISO 3019-2 100, 2-hole  
**Shaft coupler** for splined shaft, 22-4 SAE B, 7/8 in, 16/32 DP; 13T<sup>3)</sup>  
 for mounting an A10VSO 28/31 splined shaft S (see RE 92711)

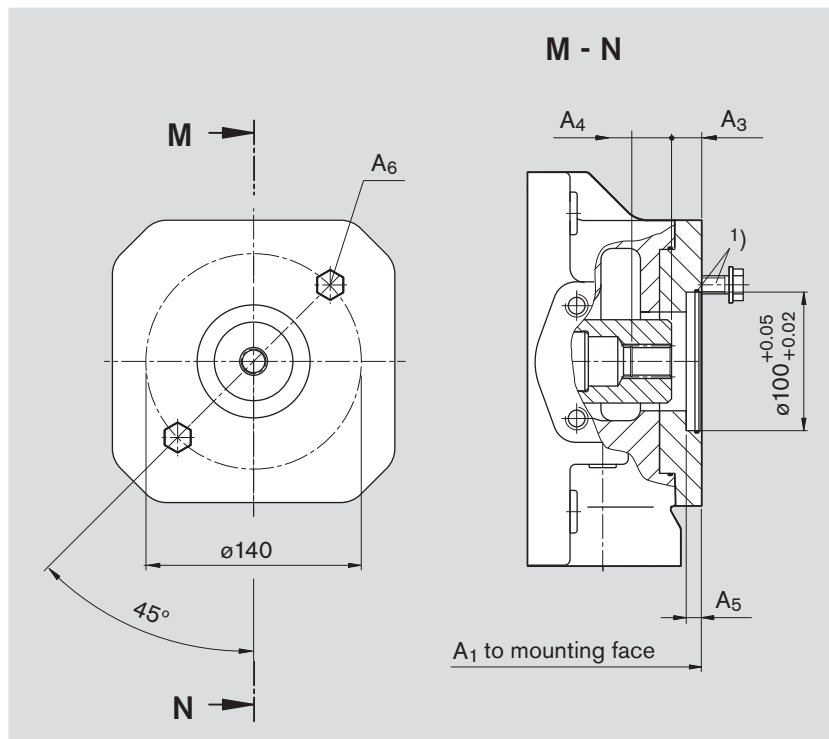

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
125	369	20,5	24,9	10	M12
180	393	20,5	24,9	10	M12
250	in preparation				
355	in preparation				

<sup>1)</sup> 2 mounting screws and O-ring seal are included with supply

<sup>2)</sup> Thread to DIN 13, for the max. tightening torques observe the general information on page 68


<sup>3)</sup> To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5



# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.


**KB4** Flange ISO 3019-2 100, 2-hole  
**Shaft coupler** for splined shaft, 25-4 SAE B-B, 1 in, 16/32 DP; 15T<sup>3)</sup>  
 for mounting an A10VSO 45/31 splined shaft S – see RE 92711

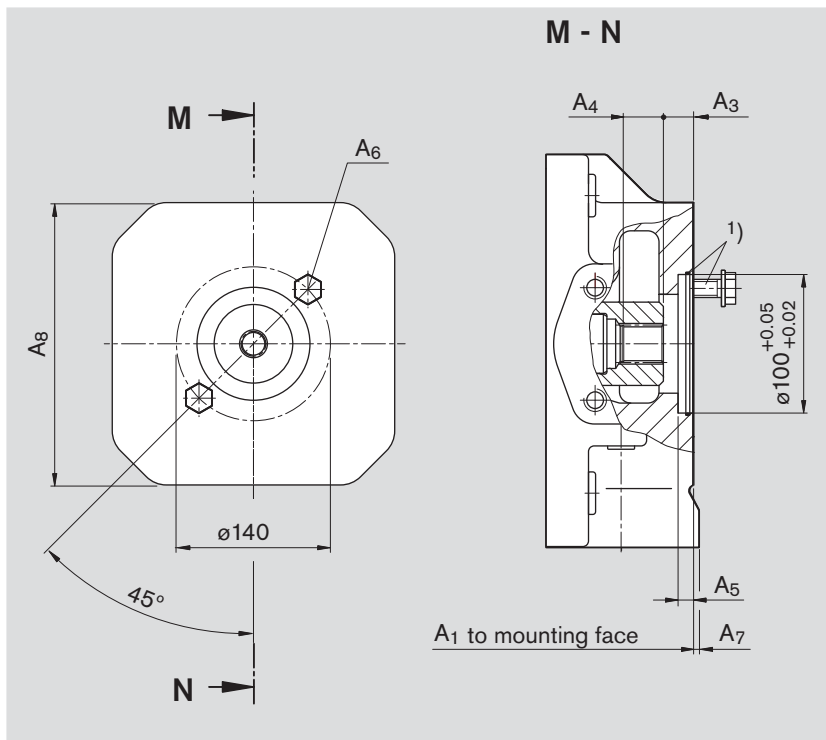

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
40	290	20,8	27,5	10	M12
71	316	20,8	27,5	8	M12
500	505	20,4	28,9	10	M12
750	in preparation				
1000	in preparation				

Size	A <sub>7</sub>	A <sub>8</sub>
40	-	-
71	-	-
500	15	240
750	in preparation	
1000	in preparation	

**UB4** Flange ISO 3019-2 100, 2-hole  
**Shaft coupler** for splined shaft, 25-4 SAE B-B, 1 in, 16/32 DP; 15T<sup>3)</sup>  
 for mounting an A10VSO 45/31 splined shaft S – see RE 92711

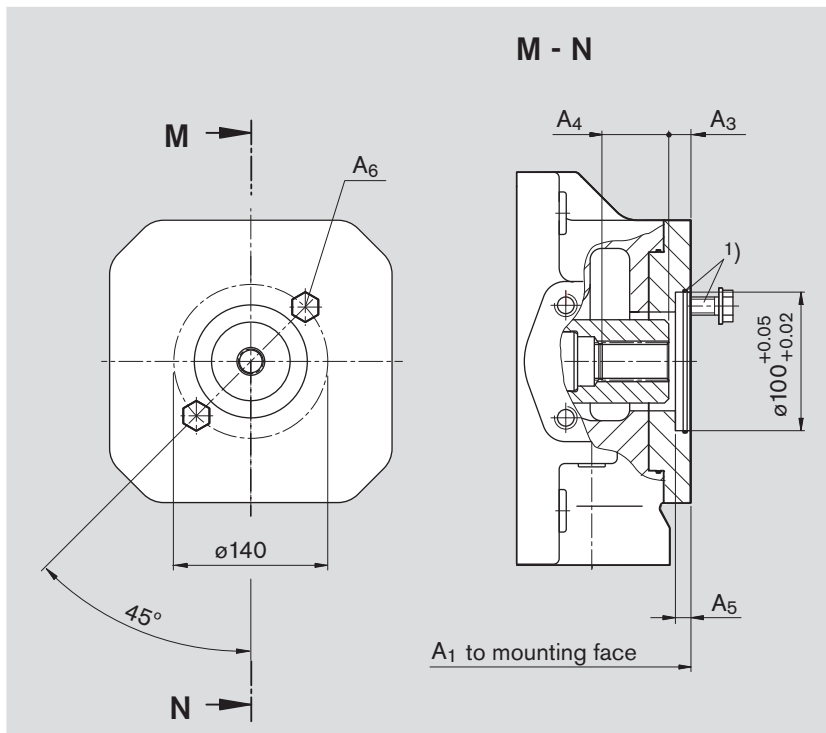


Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
125	369	18,9	29,5	10	M12
180	393	18,9	29,5	10	M12
250	453	20,9	29,5	10	M12
355	482	20,9	29,5	10	M12

1) 2 mounting screws and O-ring seal are included with supply  
 2) Thread to DIN 13, for the max. tightening torques observe the general information on page 68  
 3) To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5

# Dimensions through drives


Before finalising your design please request a certified installation drawing. Dimensions in mm.

**KB5** Flange ISO 3019-2 125, 2-hole  
**Shaft coupler** for splined shaft, 32-4 SAE C, 1 1/4 in, 12/24 DP; 14T<sup>3)</sup>  
 for mounting an A10VSO 71/31 splined shaft S (see RE 92711)

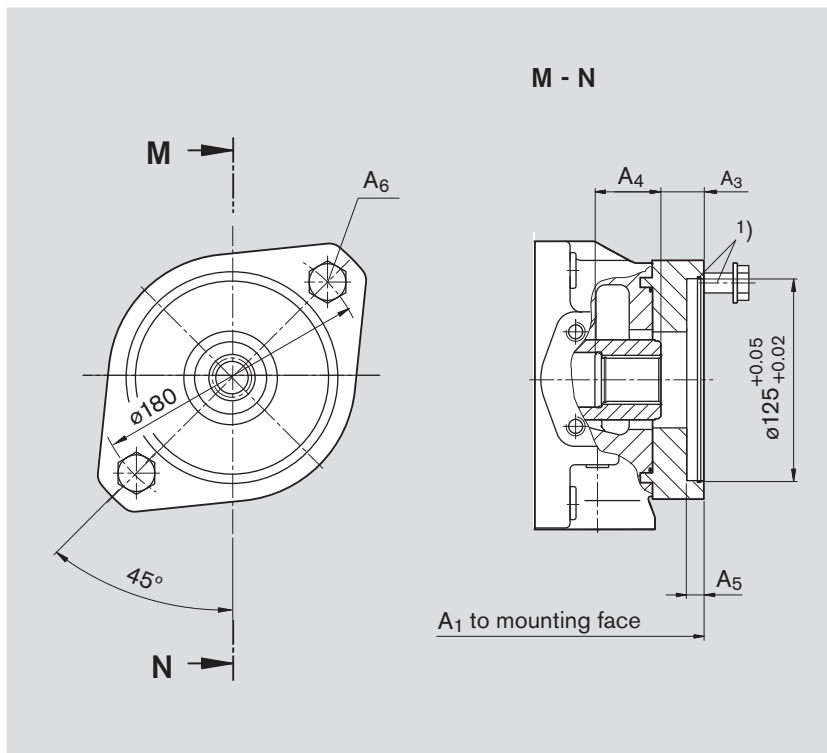

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
71	321	23	38	10	M20
500	in preparation				
750	in preparation				
1000	in preparation				

**UB5** Flange ISO 3019-2 125, 2-hole  
**Shaft coupler** for splined shaft, 32-4 SAE C, 1 1/4 in, 12/24 DP; 14T<sup>3)</sup>  
 for mounting an A10VSO 71/31 splined shaft S (see RE 92711)

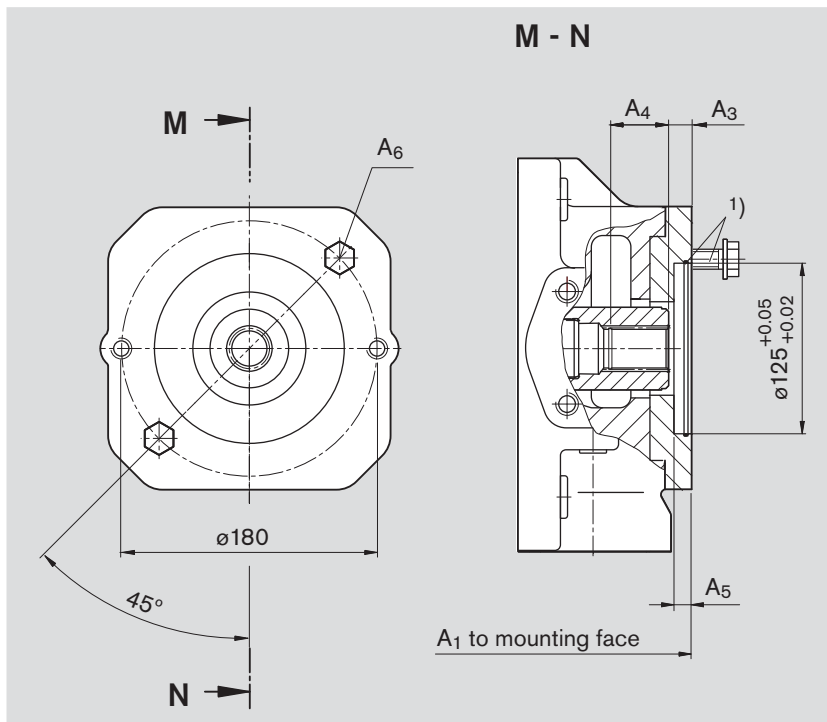

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
125	369	20	38	9	M16
180	393	20	38	9	M16
250	453	20,9	37,9	9	M16
355	482	20,9	37,9	9	M16

<sup>1)</sup> 2 mounting screws and O-ring seal are included with supply


<sup>2)</sup> Thread to DIN 13, for the max. tightening torques observe the general information on page 68

<sup>3)</sup> To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5

## Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.

**UB8** Flange ISO 3019-2 160, 4-hole  
 Shaft coupler for splined shaft, 32-4 SAE C, 1 1/4 in, 12/24 DP; 14T<sup>3)</sup>  
 for mounting an A10VSO 71/32 splined shaft S (see RE 92714)

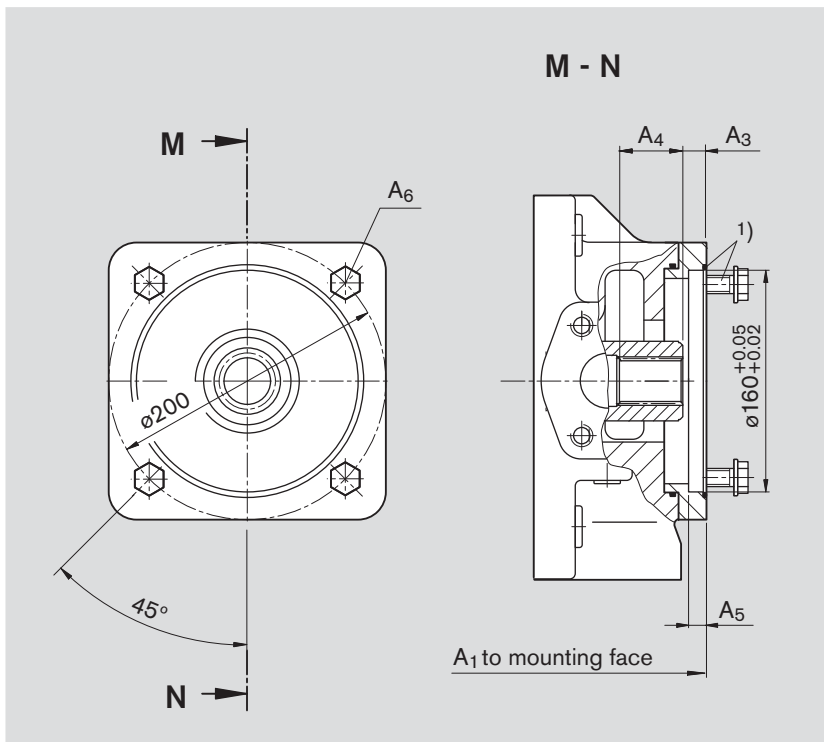

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
125	in preparation				
180	in preparation				
250	453	20,9	38	9	M16
355	in preparation				

<sup>1)</sup> Mounting screws and O-ring seal are included with supply


<sup>2)</sup> Thread to DIN 13, for the max. tightening torques observe the general information on page 68

<sup>3)</sup> To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5

# Dimensions through drives


Before finalising your design please request a certified installation drawing. Dimensions in mm.

**KB7** Flange ISO 3019-2 180, 4-hole  
**Shaft coupler** for splined shaft, 44-4 SAE D, 1 3/4 in, 8/16 DP; 13T<sup>3)</sup>  
 for mounting an A10VSO 140/31(32) splined shaft S – see RE 92711 (RE 92714)

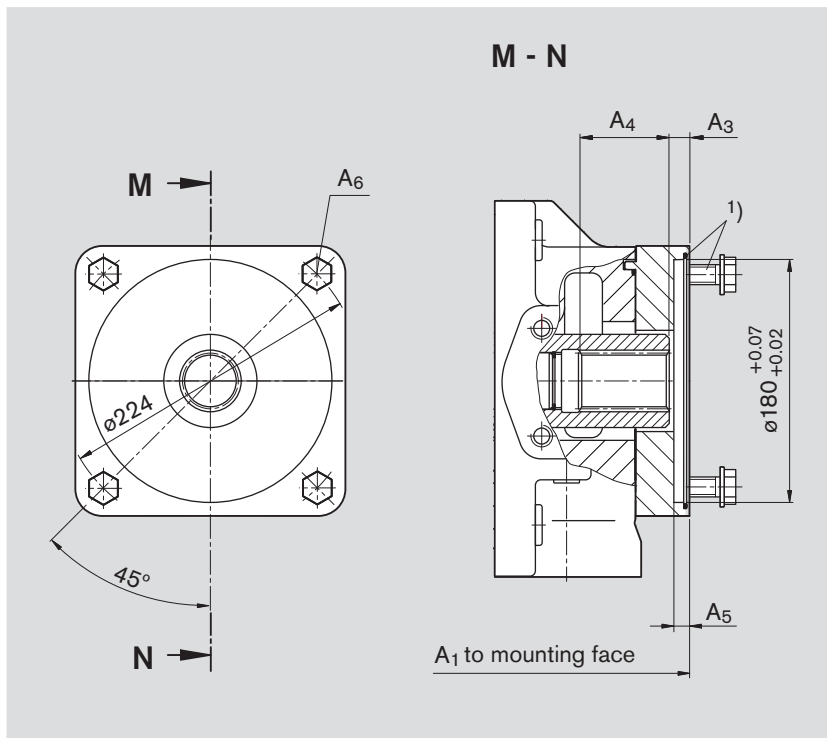

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
500	530	10,4	63,6	10	M16
750	in preparation				
1000	in preparation				

**UB7** Flange ISO 3019-2 180, 4-hole  
**Shaft coupler** for splined shaft, 44-4 SAE D, 1 3/4 in, 8/16 DP; 13T<sup>3)</sup>  
 for mounting an A10VSO 140/31(32) splined shaft S – see RE 92711 (RE 92714)

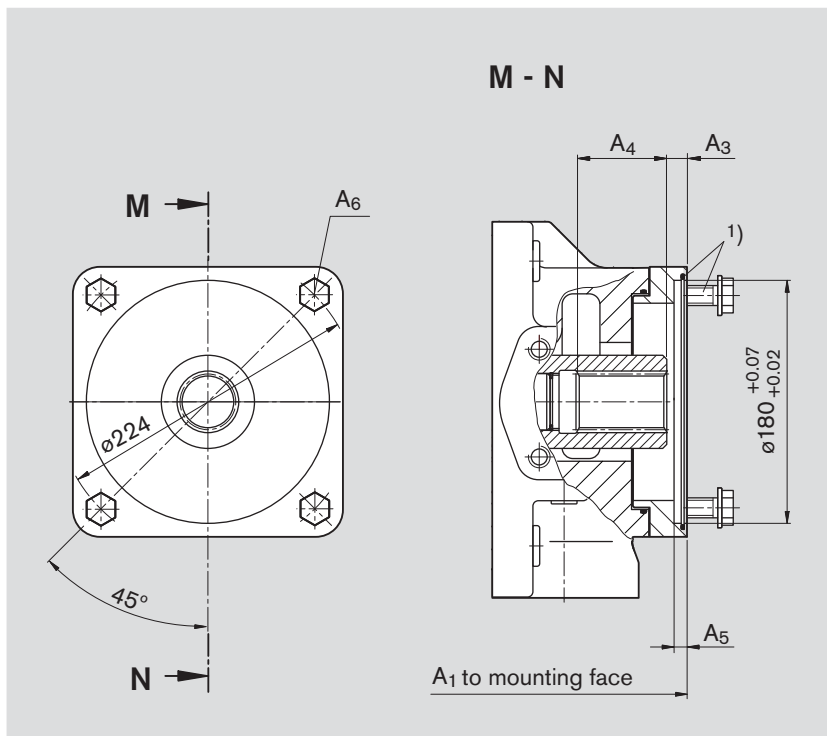

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
180	406	10,6	62	9	M16
250	453	10,6	64	9	M16
355	482	10,6	64	9	M16

<sup>1)</sup> Mounting screws and O-ring seal are included with supply

<sup>2)</sup> Thread to DIN 13, for the max. tightening torques observe the general information on page 68


<sup>3)</sup> To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5

# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.

**K01** Flange ISO 3019-1 82-2 (SAE A)  
**Shaft coupler** for splined shaft, 16-4 SAE A, 5/8 in, 16/32 DP; 9T<sup>3)</sup>

for mounting an external gear pump AZ-PF-1X-004 ... 022 (see RE 10089)  
 Rexroth recommends a special execution of the gear pump, please consult us

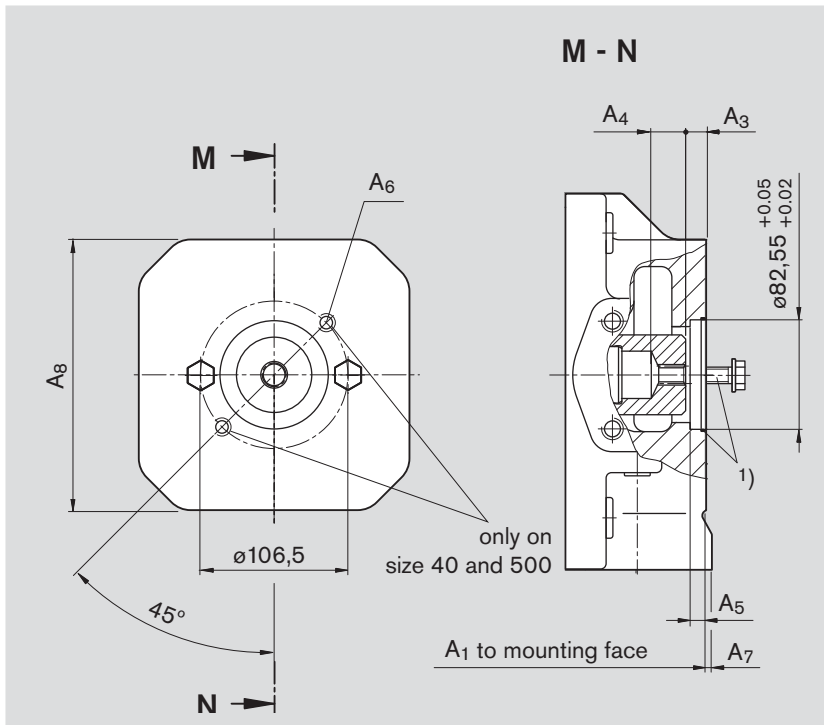


Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
40	263	10,3	25,9	10	M10
71	291	10,3	24,6	10	M10
500	505	10,3	32,7	10	M10
750	555	10,3	32,7	10	M10
750*	in preparation				
1000	in preparation				

NG	A <sub>7</sub>	A <sub>8</sub>
40	-	-
71	2	140
500	15	240
750	-	-
750*	in preparation	
1000	in preparation	

\* with boost pump

**U01** Flange ISO 3019-1 82-2 (SAE A)  
**Shaft coupler** for splined shaft, 16-4 SAE A, 5/8 in, 16/32 DP; 9T<sup>3)</sup>

for mounting an external gear pump AZ-PF-1X-004 ... 022 (see RE 10089)  
 Rexroth recommends a special execution of the gear pump, please consult us

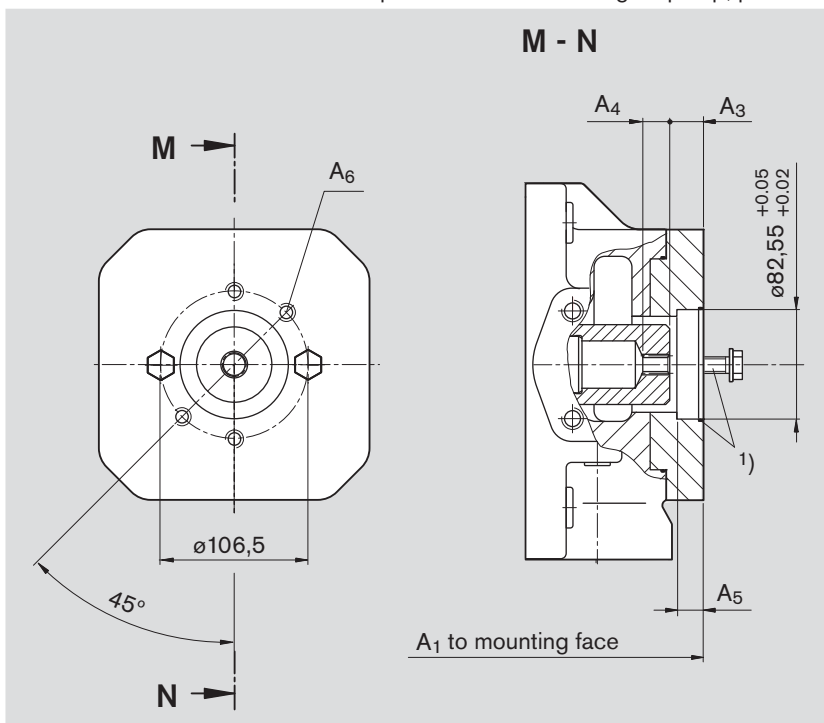

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
125	369	16	19,4	13	M10
180	393	16	19,4	13	M10
250	453	16	19,4	13	M10
355	482	16	19,4	13	M10

1) 2 mounting screws and O-ring seal are included with supply


2) Thread to DIN 13, for the max. tightening torques observe the general information on page 68

3) To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5

# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.

**K52** Flange ISO 3019-1 82-2 (SAE A)  
**Shaft coupler** for splined shaft, 19-4 SAE A-B, 3/4 in, 16/32 DP; 11T<sup>3)</sup>  
 for mounting an A10VSO 18/31 splined shaft S (see RE 92711) or  
 A10VSO10 or 18/52 splined shaft S (see RE 92703)

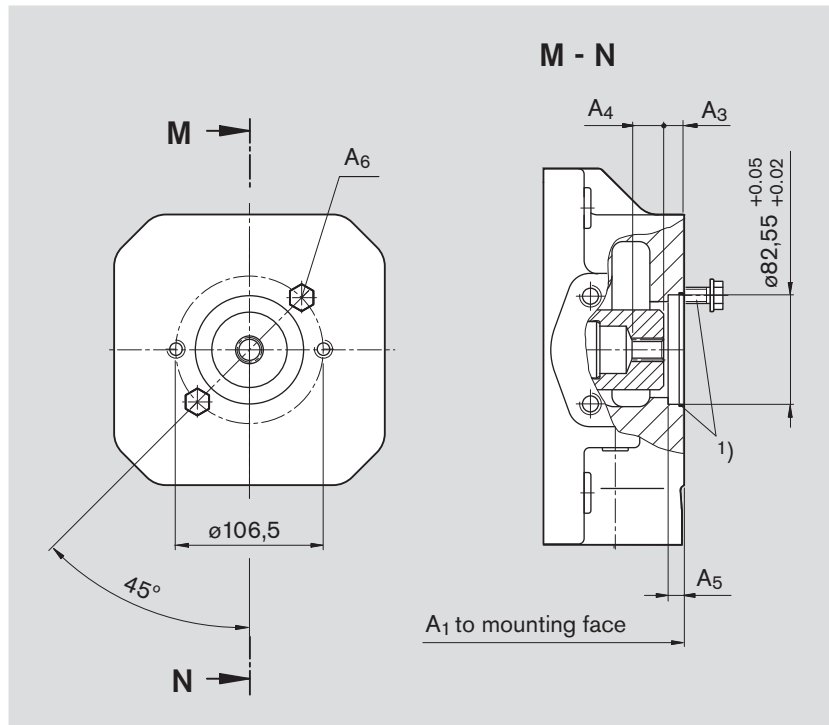

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
40	263	10,5	33,8	10	M10
71	315	10,5	30	10	M10
500	in preparation				
750	in preparation				
1000	in preparation				

Sizes 125...355 with U-through drive in preparation

<sup>1)</sup> 2 mounting screws and O-ring seal are included with supply

<sup>2)</sup> Thread to DIN 13, for the max. tightening torques observe the general information on page 68


<sup>3)</sup> To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5

# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensionse in mm.

**K68** Flange ISO 3019-1 101-2 (SAE B)  
**Shaft coupler** for splined shaft 22-4 SAE B, 7/8 in, 16/32 DP; 13T<sup>3)</sup>

for mounting an external gear pump AZ-PN-1X020...032 (see RE 10091 or an A10VO 28/31 and 52(53) splined shaft S (see RE 92701 and 92703)  
 Rexroth recommends a special excution of the gear pump, please consult us

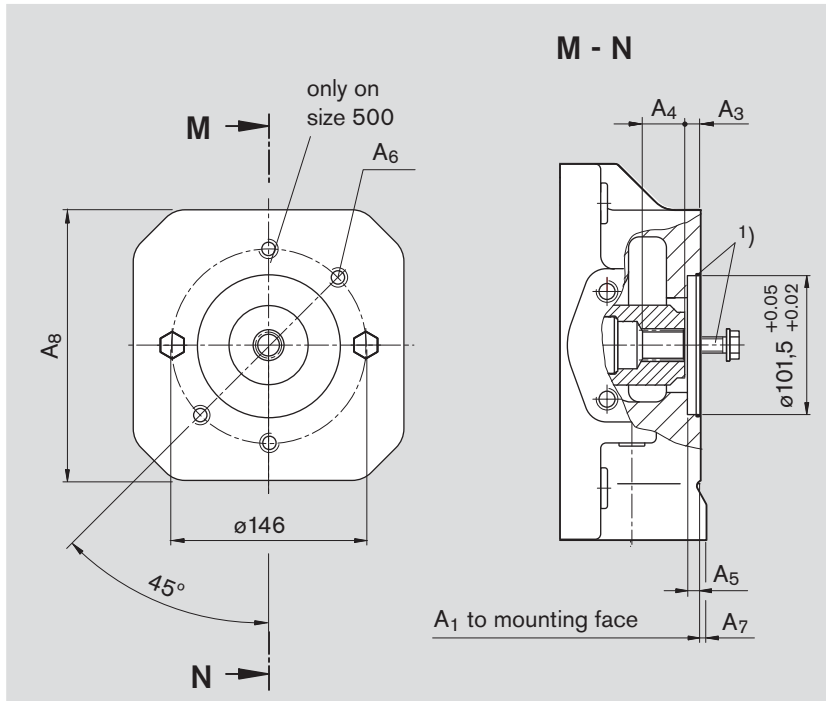


Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
40	290	20,4	23,1	10	M12
71	322	10,4	35,1	10	M12
500	505	19,5	25	10	M12
750	in preparation				
1000	in preparation				

Size	A <sub>7</sub>	A <sub>8</sub>
40	-	-
71	-	-
500	15	240
750	in preparation	
1000	in preparation	

**U68** Flange ISO 3019-1 101-2 (SAE B)  
**Shaft coupler** for splined shaft 22-4 SAE B, 7/8 in, 16/32 DP; 13T<sup>3)</sup>

for mounting an external gear pump AZ-PN-1X020...032 (see RE 10091 or an A10VO 28/31 and 52(53) splined shaft S (see RE 92701 and 92703)  
 Rexroth recommends a special excution of the gear pump, please consult us

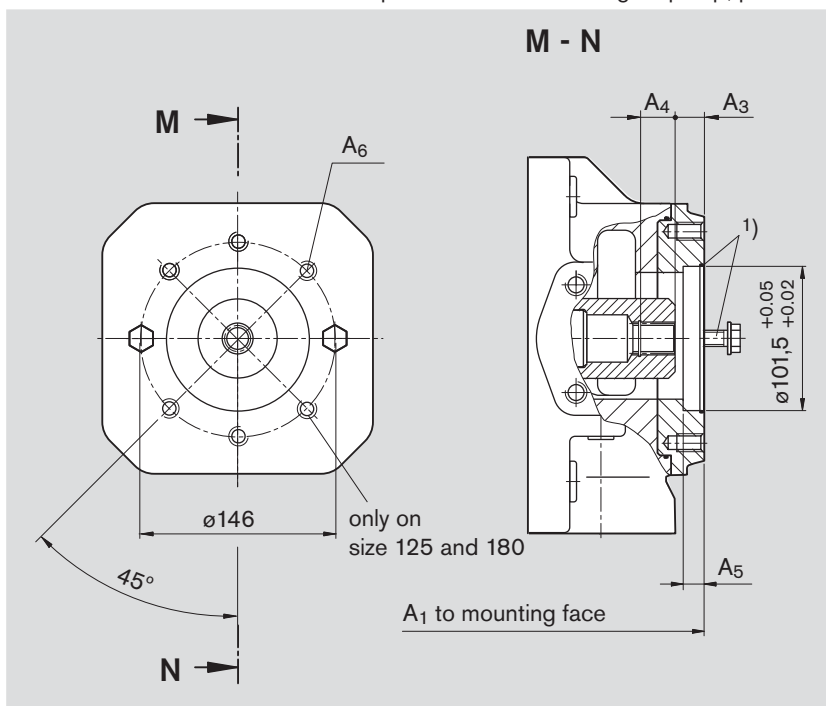


Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
125	369	28	25	13	M12
180	393	28	25	13	M12
250	453	19,5	23,1	13	M12
355	482	19,5	23,1	13	M12

1) 2 mounting screws and O-ring seal are included with supply  
 2) Thread to DIN 13, for the max. tightening torques observe the general information on page 68  
 3) To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5

## Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.


**K04** Flange ISO 3019-1 101-2 (SAE B)  
**Shaft coupler** for splined shaft 25-4 SAE B-B, 1 in, 16/32 DP; 15T<sup>3)</sup>  
 for mounting an A10VO 45/31 and 52 (53) splined shaft S (see RE 92701 and 92703) or an internal gear pump PGH4 (see RE 10223)

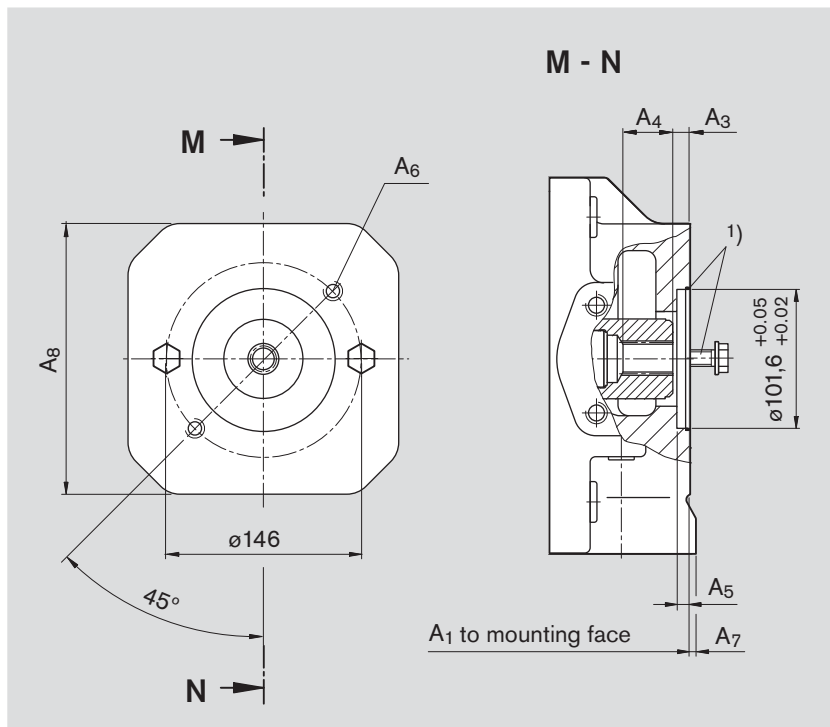

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
40	290	10,4	37,9	10	M12
71	322	10,3	35,7	10	M12
500	505	10,3	28,9	10	M12
750	in preparation				
1000	in preparation				

Size	A <sub>7</sub>	A <sub>8</sub>
40	-	-
71	-	-
500	15	240
750	in preparation	
1000	in preparation	

**U04** Flange ISO 3019-1 101-2 (SAE B)  
**Shaft coupler** for splined shaft 25-4 SAE B-B, 1 in, 16/32 DP; 15T<sup>3)</sup>  
 for mounting an A10VO 45/31 and 52 (53) splined shaft S (see RE 92701 and 92703) or an internal gear pump PGH4 (see RE 10223)

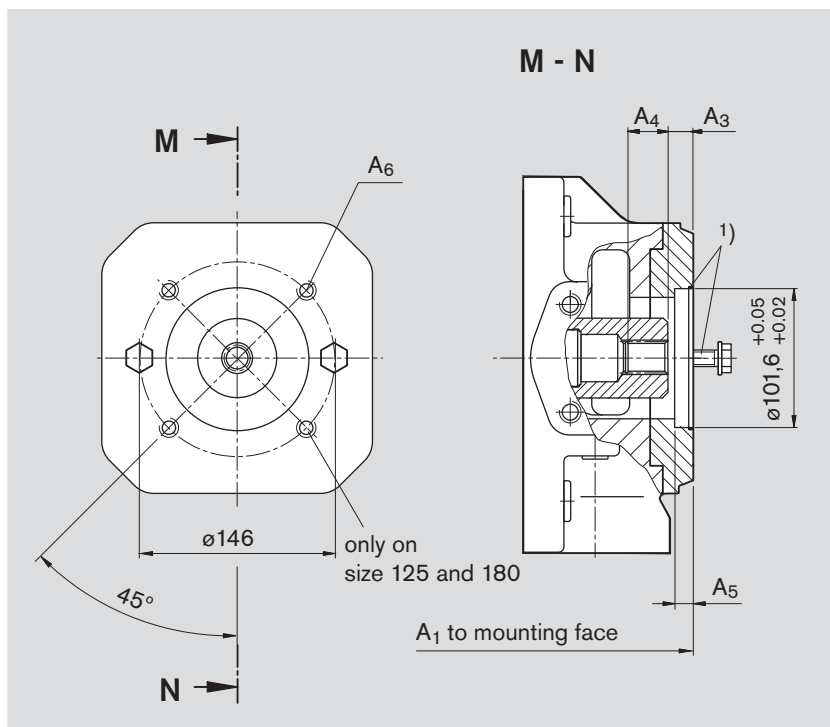

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
125	369	18,9	29,4	13	M12
180	393	18,9	29,4	13	M12
250	453	18,9	29,4	13	M12
355	482	18,9	29,4	13	M12

<sup>1)</sup> 2 mounting screws and O-ring seal are included with supply

<sup>2)</sup> Thread to DIN 13, for the max. tightening torques observe the general information on page 68


<sup>3)</sup> To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5



# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.


**K07** Flange ISO 3019-1 127-2 (SAE C)  
**Shaft coupler** for splined shaft 32-4 SAE C, 1 1/4 in, 12/24 DP; 14T<sup>3)</sup>  
 for mounting an A10VO 71/31 splined shaft S (see RE 92701)

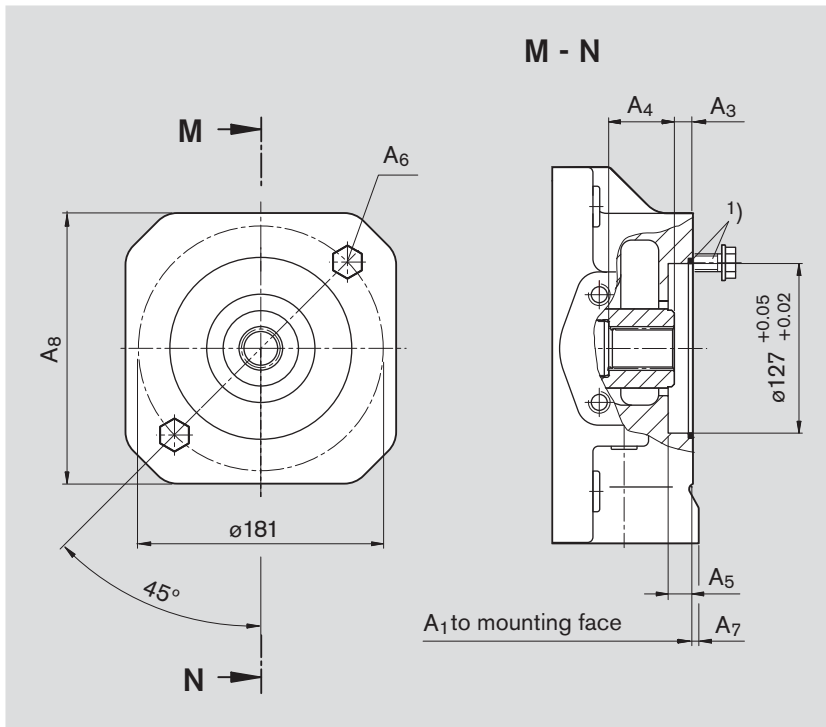

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
71	321	10,4	47,6	13	M16
500	505	11,3	40,2	13	M16
750	in preparation				
1000	in preparation				

Size	A <sub>7</sub>	A <sub>8</sub>
71	-	-
500	15	240
750	in preparation	
1000	in preparation	

**U07** Flange ISO 3019-1 127-2 (SAE C)  
**Shaft coupler** for splined shaft 32-4 SAE C, 1 1/4 in, 12/24 DP; 14T<sup>3)</sup>  
 for mounting an A10VO 71/31 splined shaft S (see RE 92701)

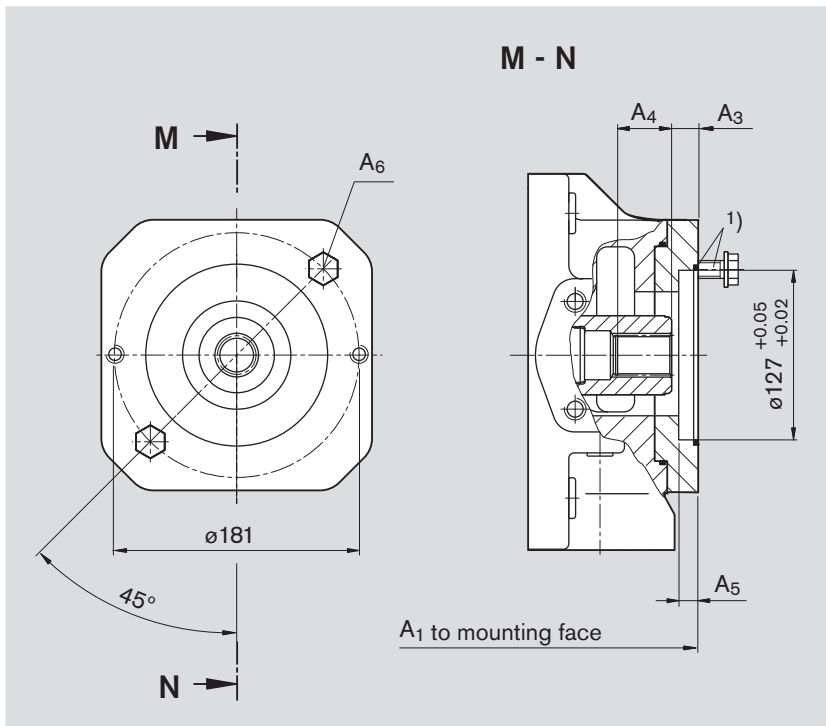

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
125	369	20,9	37,9	13	M16
180	393	20,9	37,9	13	M16
250	453	20,9	37,9	13	M16
355	482	20,9	37,9	13	M16


1) 2 mounting screws and O-ring seal are included with supply  
 2) Thread to DIN 13, for the max. tightening torques observe the general information on page 68  
 3) To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5

## Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.

### K24 Flange ISO 3019-1 127-2 (SAE C) Shaft coupler for splined shaft 38-4 SAE C-C, 1 1/2 in, 12/24 DP; 17T<sup>3)</sup>


for mounting an A10VO 100/31 splined shaft S (see RE 92701) or an A10VO 85/52(53) splined shaft S (see RE 92703) or an internal gear pump PGH5 (see RE 10223)

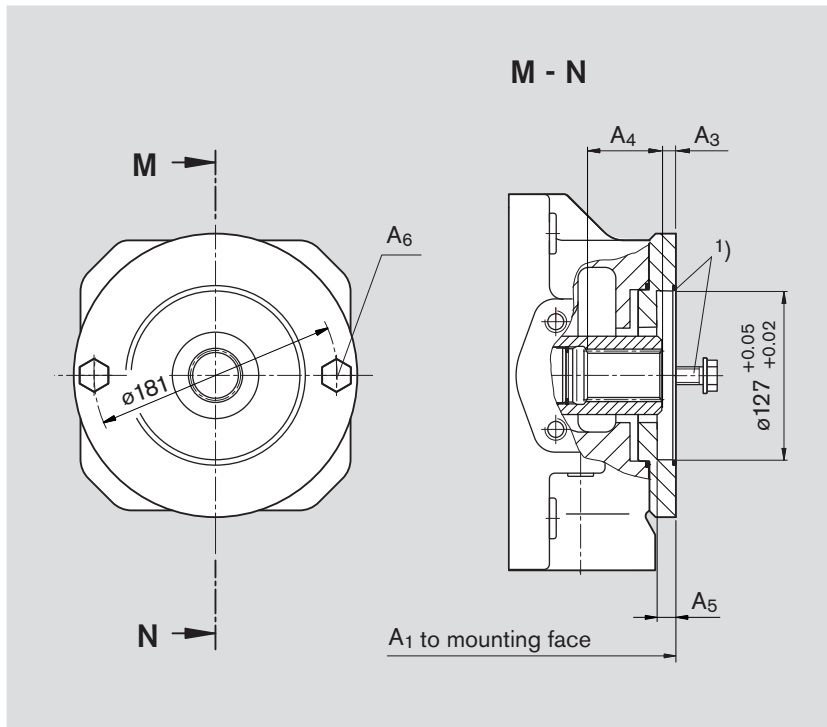

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
500	505	10,3	56,7	13	M16
750	in preparation				
1000	in preparation				

### U24 Flange ISO 3019-1 127-2 (SAE C) Shaft coupler for splined shaft 38-4 SAE C-C, 1 1/2 in, 12/24 DP; 17T<sup>3)</sup>

for mounting an A10VO 100/31 splined shaft S (see RE 92701) or an A10VO 85/52(53) splined shaft S (see RE 92703) or an internal gear pump PGH5 (see RE 10223)

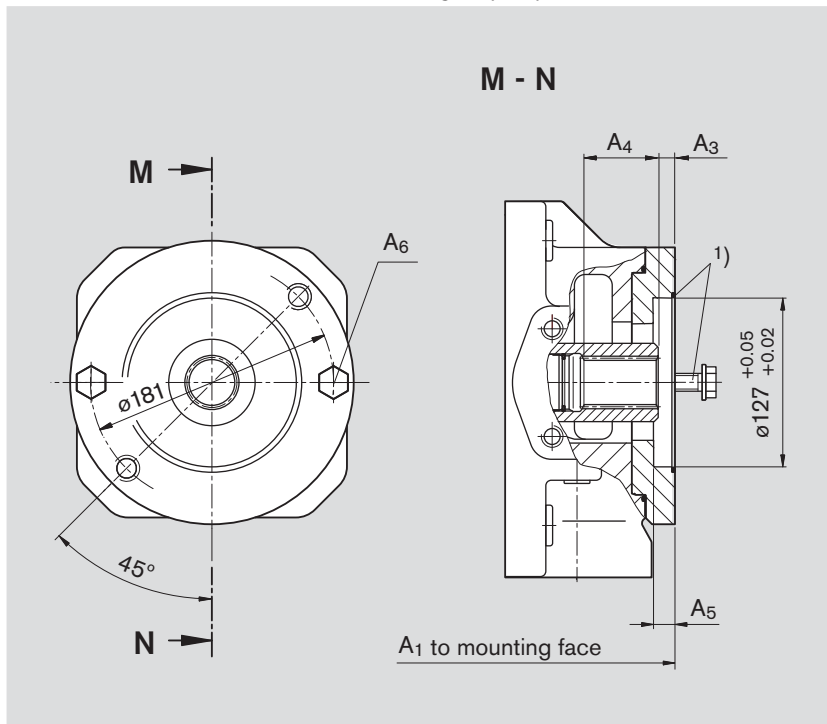

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
125	369	10,4	50	13	M16
180	393	10,4	50	13	M16
250	453	12,4	55	13	M16
355	482	12,4	55	13	M16

<sup>1)</sup> 2 mounting screws and O-ring seal are included with supply


<sup>2)</sup> Thread to DIN 13, for the max. tightening torques observe the general information on page 68

<sup>3)</sup> To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5

## Dimensions through drives


Before finalising your design please request a certified installation drawing. Dimensions in mm.

- K17** Flange ISO 3019-1 152-4 (SAE D)  
**Shaft coupler** for splined shaft 44-4 SAE D, 1 3/4 in, 8/16 DP; 13T<sup>3)</sup>  
 for mounting an A10VO 140/31 splined shaft S (see RE 92701)

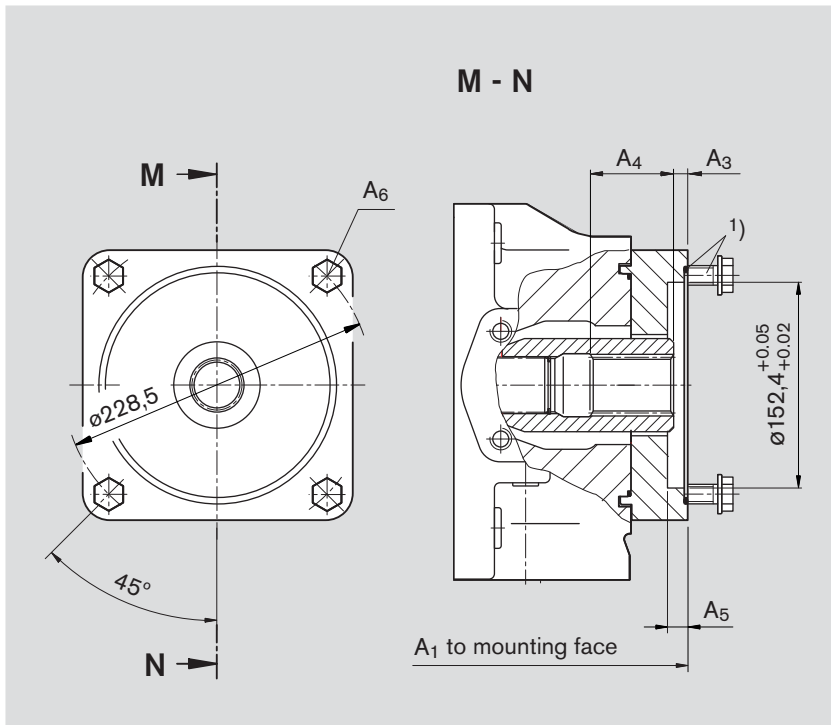

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
500	505	10,4	59,6	13	M16
750	in preparation				
1000	in preparation				

- U17** Flange ISO 3019-1 152-4 (SAE D)  
**Shaft coupler** for splined shaft 44-4 SAE D, 1 3/4 in, 8/16 DP; 13T<sup>3)</sup>  
 for mounting an A10VO 140/31 splined shaft S (see RE 92701)

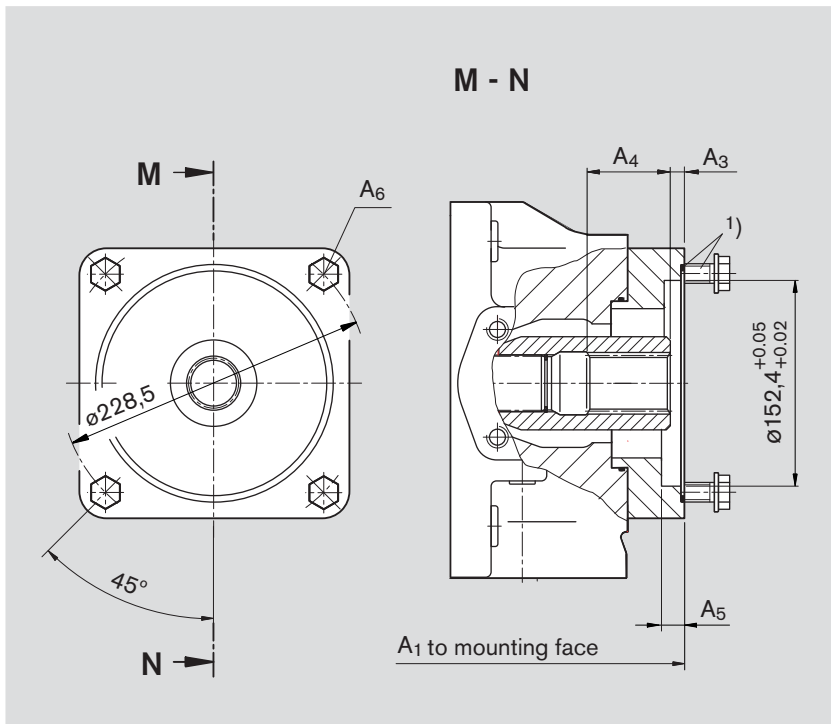

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>
180	406	10,4	62	13	M16
250	453	10,6	62	13	M16
355	482	10,6	62	13	M16

<sup>1)</sup> 2 mounting screws and O-ring seal are included with supply


<sup>2)</sup> Thread to DIN 13, for the max. tightening torques observe the general information on page 68

<sup>3)</sup> To ANSI B92.1a-1976, 30° pressure angle, flat base, flank centering, fit class 5

# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.

**K57** dia. 63 metric, 4-hole  
**Shaft coupler** for keyed shaft dia. 25  
 for mounting a radial piston pump R4 (see RE 11263)

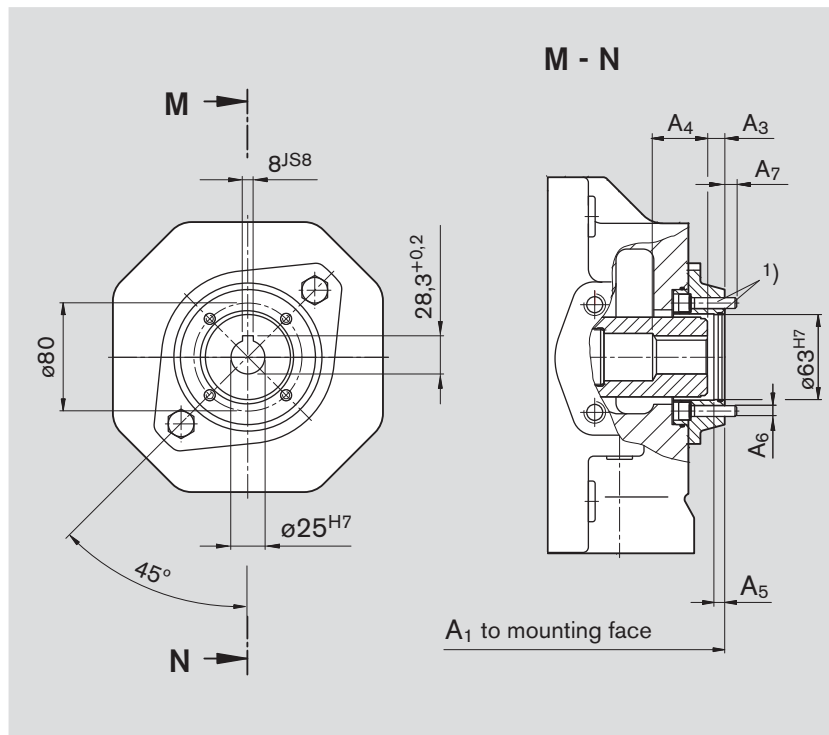

Size	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub> <sup>2)</sup>	A <sub>7</sub>
40	288	11	56	8	M8	9
71	319	10,9	42	8	M8	9
500	in preparation					
750	in preparation					

Sizes 125...355 with U-through drive in preparation

<sup>1)</sup> Mounting screws and O-ring seal are included with supply


<sup>2)</sup> Thread to DIN 13, for the max. tightening torques observe the general information on page 68

# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## K99 Sizes 40 and 71

with through drive shaft, without shaft coupler, without adapter flange, closed with pressure tight cover

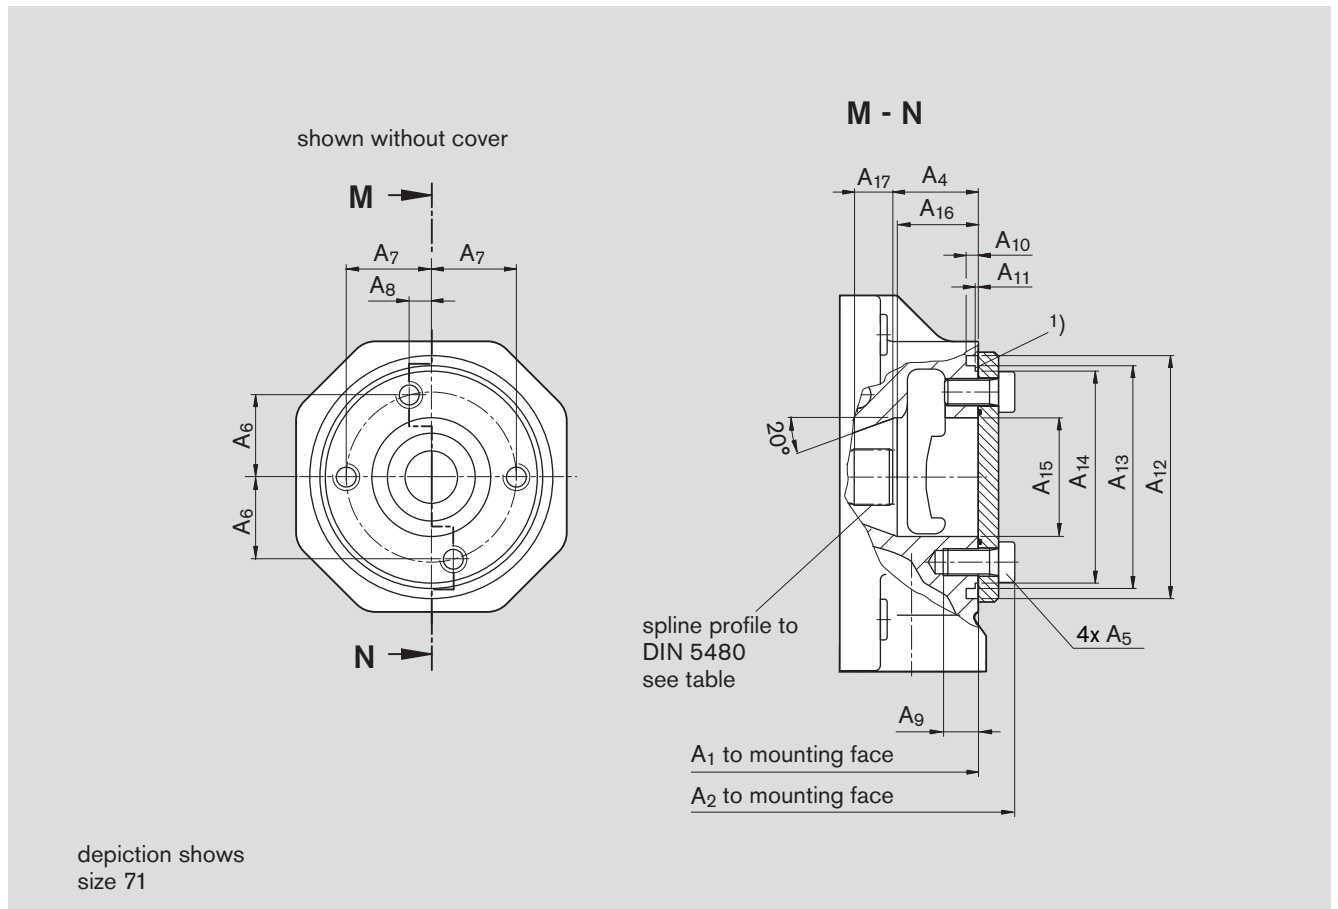

Size Main pump	A <sub>1</sub>	A <sub>2</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub>	A <sub>7</sub>	A <sub>8</sub>	A <sub>9</sub>	A <sub>10</sub>	A <sub>11</sub>	A <sub>12</sub>	A <sub>13</sub>
40	263	280	51.3±1	M12x25	37±0.2	37±0.2	0	18	9	2.3 <sup>+0.1</sup>	∅118	∅105 <sub>g6</sub>
71	291	310	48±1	M12x25	42,3 ±0,15	45 ±0,15	15,4±0,15	18	9	2.7 <sup>+0.1</sup>	∅130	∅116 <sub>g6</sub>

Size Main pump	A <sub>14</sub>	A <sub>15</sub>	A <sub>16</sub>	A <sub>17</sub>	Spline profile to DIN 5480	<sup>1)</sup> O-Ring for retrofitting (not in supply)
40	∅97.6 <sub>-0.4</sub>	∅52	44	14	W25x1,25x18x9g	99 x 3
71	∅106.4 <sub>-0.4</sub>	∅63	38	16	W30x1,25x22x9g	110,72 x 3,53


Sizes 125...1000 see pages 65 and 66

# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## U99 Sizes 125...355

with through drive shaft, without shaft coupler, without adapter flange, closed with pressure tight cover

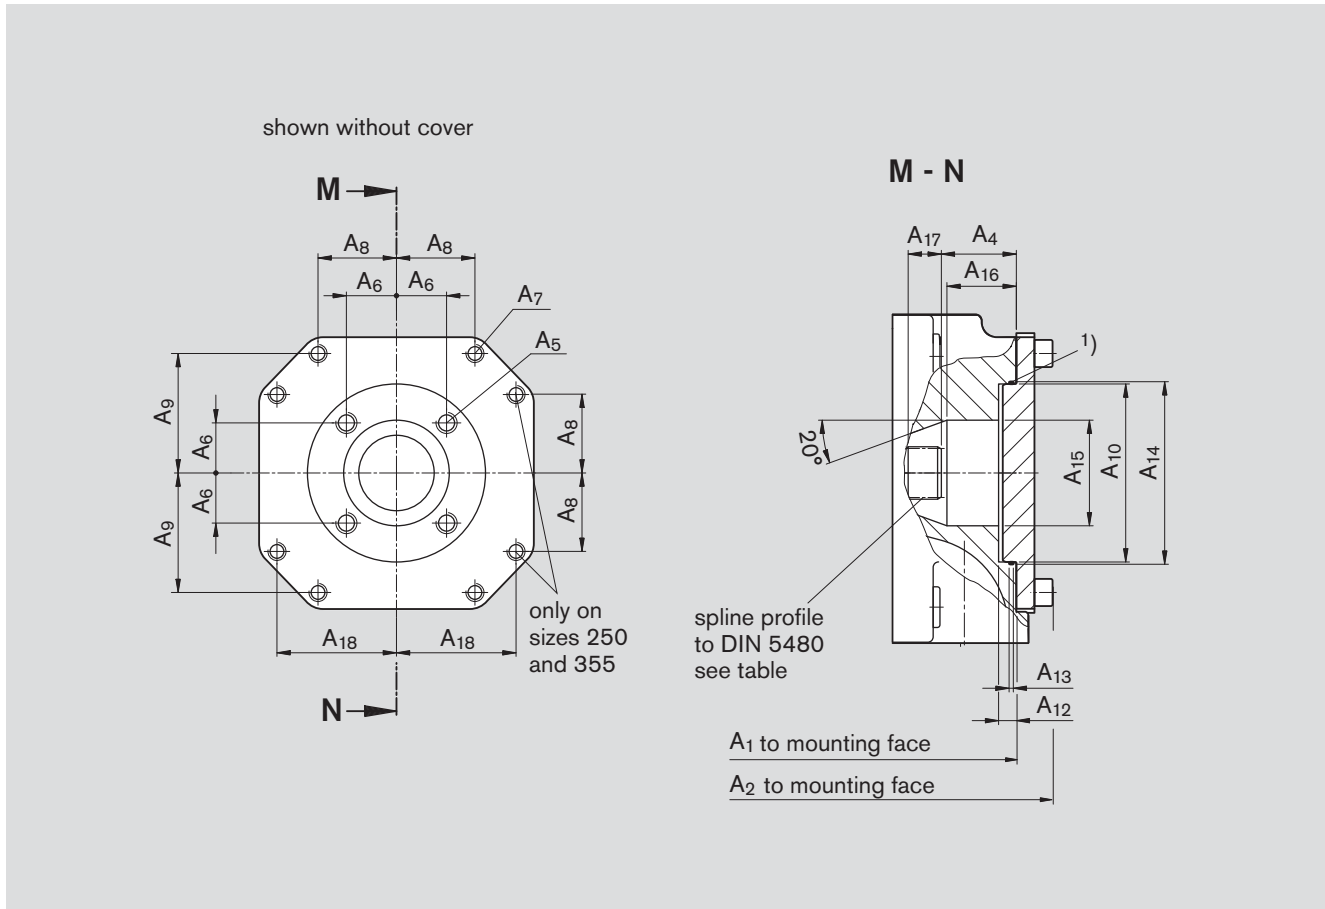

Size Main pump	A <sub>1</sub>	A <sub>2</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub>	A <sub>7</sub>	A <sub>8</sub>	A <sub>9</sub>	A <sub>10</sub>	A <sub>12</sub>	A <sub>13</sub>
125	347	368	49.7±1	M14; 15 deep	33,2 <sup>+0.15</sup>	M12; 18 deep	–	79,2 <sup>+0.15</sup>	∅118 <sup>H7</sup>	9	2,8 <sup>+0.2</sup>
180	371	392	49.7±1	M14; 15 deep	33,2 <sup>+0.15</sup>	M12; 18 deep	–	79,2 <sup>+0.15</sup>	∅118 <sup>H7</sup>	9	2,8 <sup>+0.2</sup>
250	431	455	61.4±1	M20; 22 deep	44,5 <sup>+0.15</sup>	M10; 15 deep	58,15 <sup>+0.15</sup>	86,2 <sup>+0.15</sup>	∅160 <sup>H7</sup>	9	2,8 <sup>+0.2</sup>
355	460	487	61.4±1	M20; 22 deep	44,5 <sup>+0.15</sup>	M10; 15 deep	58,15 <sup>+0.15</sup>	86,2 <sup>+0.15</sup>	∅160 <sup>H7</sup>	9	2,8 <sup>+0.2</sup>

Size Main pump	A <sub>14</sub>	A <sub>15</sub>	A <sub>16</sub>	A <sub>17</sub>	A <sub>18</sub>	Spline profile to DIN 5480	<sup>1)</sup> O-Ring for retrofitting (included in supply)
125	∅121 <sup>+0.1</sup>	∅70	46	22	–	W35x1,25x26x9g	118 x 2
180	∅121 <sup>+0.1</sup>	∅70	46	25	–	W35x1,25x26x9g	118 x 2
250	∅163 <sup>+0.1</sup>	∅87	64	30,5	86,2 <sup>+0.15</sup>	W42x1,25x32x9g	160 x 2
355	∅163 <sup>+0.1</sup>	∅87	64	34	86,2 <sup>+0.15</sup>	W42x1,25x32x9g	160 x 2


Sizes 500...1000 see page 66

# Dimensions through drives

Before finalising your design please request a certified installation drawing. Dimensions in mm.

## K99 Sizes 500...1000

with through drive shaft, without shaft coupler, without adapter flange, closed with pressure tight cover

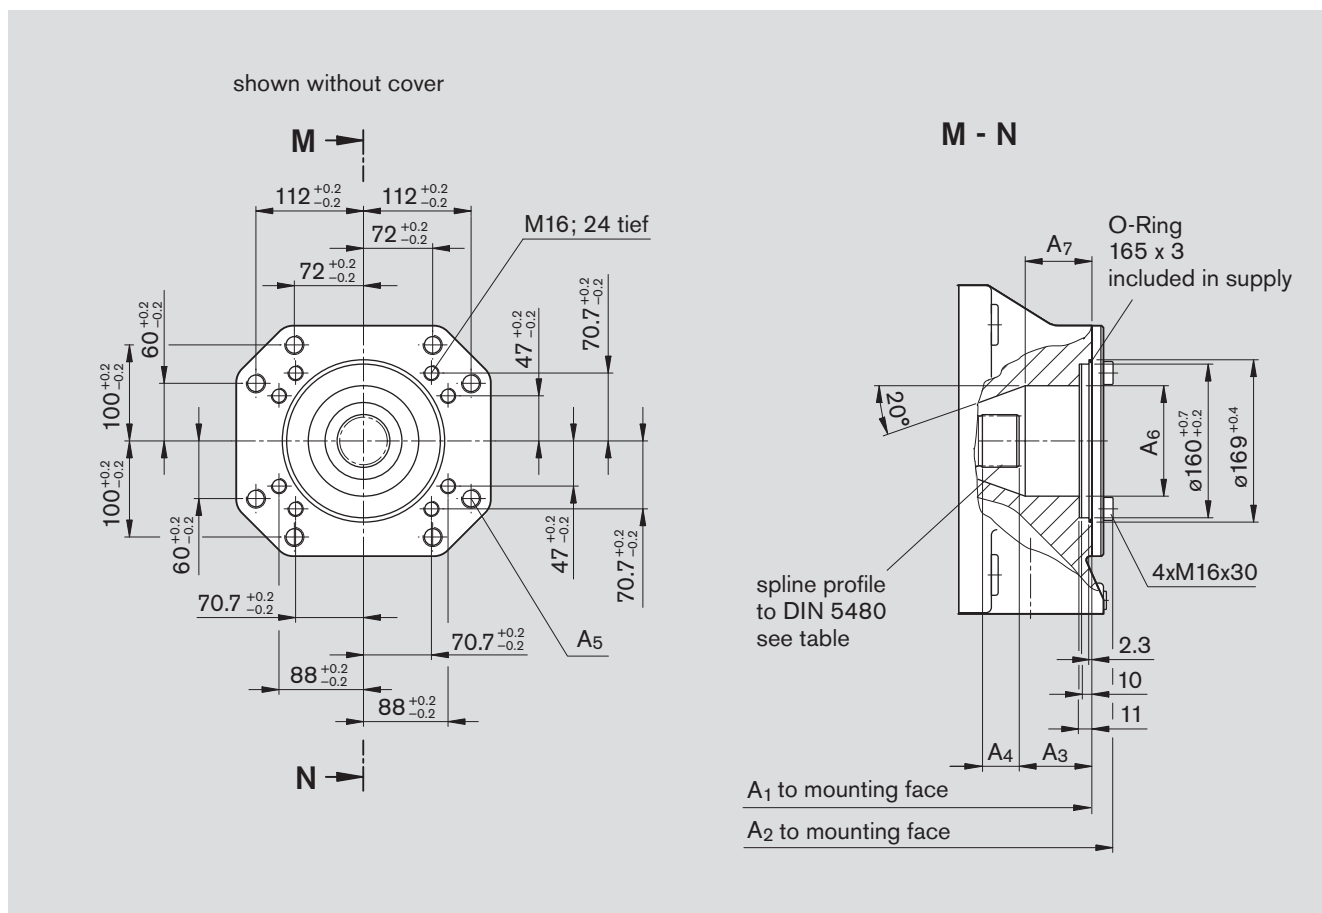

Size Main pump	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub>	A <sub>7</sub>	Spline profile to DIN 5480
500	505	527	73	41	M20; 24 deep	ø115	75	W55x1,25x42x9g
750	555	577	73	41	M20; 24 deep	ø115	75	W55x1,25x42x9g
750*	in preparation							
1000	628	650	77	66,5	M20; 30 deep	ø138	65	W65x1,25x50x9g

\* with boost pump

Sizes 40 and 71 see page 64 and sizes 125...355 see page 65

# Installation notes

## Mounting position:

Optional. The pump case must be filled with fluid during commissioning and remain full when operating. In order to reduce the operating noise level, all connecting lines (suction, pressure and case drain lines) must be de-coupled from the tank, using flexible elements. The use of check valves in the case drain line must be avoided. The case drain line must be returned directly to tank without a reduction in cross section. Exceptions maybe possible, please consult us first.

**1. Vertical installation** (shaft end pointing upwards)  
 With a vertical installation, bearing flushing is recommended to provide lubrication for the front bearing, see page 6.

The following installation conditions must be taken into account:

### 1.1 Installation into the reservoir

a) When the minimum fluid level is equal to or above the pump mounting flange area: ports »R/L«, »T« and »S« open (see fig. 1).




Fig. 1

b) When the minimum fluid level is below the mounting flange area: ports »R/L«, »T« and possibly »S« must be piped as shown in fig. 2. Also observe the conditions as shown in point 1.2.

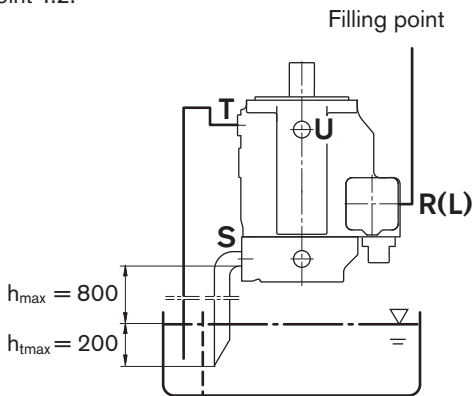


Fig. 2

### 1.2 Installation outside the reservoir

Before installation, fill the pump housing with the pump in a horizontal position.

Pipe port »T« to tank, »R/L« plugged.

Filling in mounted condition: fill via »R« and bleed via »T«, afterwards plug port »R«.

**Conditions:** A minimum pump inlet pressure (suction pressure) of 0,8 bar abs. is necessary. Avoid mounting above the reservoir in order to reduce the noise level.

## 2. Horizontal installation

The highest situated of the ports »T«, »K<sub>1</sub>«, »K<sub>2</sub>« or »R/L« must be used for filling/bleeding and subsequently to connect the case drain line.

### 2.1 Installation inside the reservoir

a) When the minimum fluid level is equal to or lies above the upper edge of the pump: case drain port and suction port »S« open (see fig. 3).




Fig. 3

b) When the minimum fluid level lies below the upper edge of the pump: case drain port and possibly port »S« must be piped, see fig. 4. Observe conditions as shown in point 1.2.

Fill pump housing prior to commissioning.

### 2.2 Installation outside the reservoir

Fill the pump housing before commissioning.

a) Mounting above the reservoir see fig. 4.

Observe conditions as shown in point 1.2.

b) Mounting below the reservoir

Case drain port and port »S« must be piped (see fig. 5).

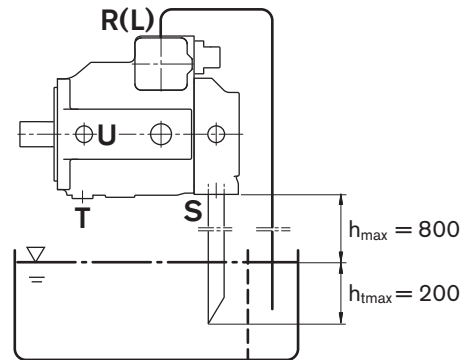


Fig. 4




Fig. 5



# Notes

## General information

- The pump A4VSO was designed for operation in open loop circuits.
- Systems design, installation and commissioning requires trained technicians or tradesmen.
- All hydraulic ports can only be used for the fastening of hydraulic service lines.
- Tightening torques:
  - All tightening torques mentioned in this data sheet are maximum values and may not be exceeded (Maximum values for the female threads in the castings).  
Please comply with the manufacturer's information regarding the max. permissible tightening torques for the used fittings.
  - For fastening screws to DIN 13 we recommend to check the permissible tightening torque in each individual case acc. to VDI 2230 issue 2003.
- During and shortly after operation of a pump the housing and especially a solenoid can be extremely hot. Take suitable safety measures (e.g. wear protective clothing).
- All given data and information has to be adhered to.

Bosch Rexroth AG  
Hydraulics  
Axial Piston Units  
An den Kelterwiesen 14  
72160 Horb a.N., Germany  
Telefon +49 (0) 74 51 - 92 0  
Telefax +49 (0) 74 51 - 82 21  
info.brm-ak@boschrexroth.de  
www.boschrexroth.com/axial-piston-pumps

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.


Subject to change.

# Axial Piston Variable Pump A11VO

**RE 92500/10.09 1/64**  
Replaces: 06.09

## Data sheet

Series 1  
Size NG40 to 260  
Nominal pressure 350 bar  
Maximum pressure 400 bar  
Open circuit

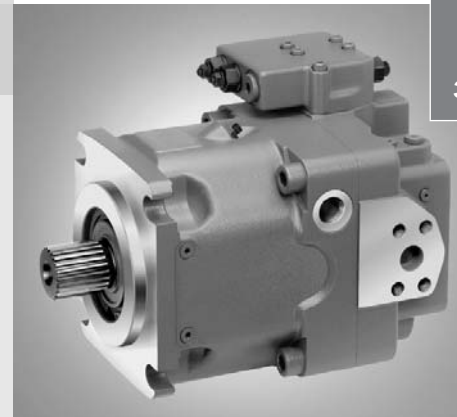

3

## Contents

Ordering Code / Standard Program	2
Technical Data	5
LR – Power Control	9
DR – Pressure Control	20
HD – Hydraulic Control, Pilot-Pressure Related	24
EP – Electric Control with Proportional Solenoid	26
Dimensions, Size 40	28
Dimensions, Size 60	32
Dimensions, Size 75	36
Dimensions, Size 95	40
Dimensions, Size 130/145	44
Dimensions, Size 190	48
Dimensions, Size 260	52
Through Drive Dimensions	56
Overview of Attachments for A11V(L)O	58
Combination Pumps A11VO + A11VO	58
Swivel Angle Indicator	59
Connector for Solenoids	60
Installation Notes	61
General Notes	64

## Features

- Variable axial piston pump of swashplate design for hydrostatic drives in open circuit hydraulic system.
- Designed primarily for use in mobile applications.
- The pump operates under self-priming conditions, with tank pressurization, or with an optional built-in charge pump (impeller).
- A comprehensive range of control options is available matching any application requirement.
- Power control option is externally adjustable, even when the pump is running.
- The through drive is suitable for adding gear pumps and axial piston pumps up to the same, i.e. 100% through drive.
- The output flow is proportional to the drive speed and infinitely variable between  $q_{V \max}$  and  $q_{V \min} = 0$ .

# Ordering Code / Standard Program

<b>A11V</b>		<b>O</b>			<b>/</b>	<b>1</b>			<b>-</b>	<b>N</b>							
01	02	03	04	05		06	07	08		09	10	11	12	13	14	15	16

### Axial piston unit

01	Swashplate design, variable, nominal pressure 350 bar, maximum pressure 400 bar															<b>A11V</b>
----	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	-------------

### Charge pump (impeller)

						<b>40</b>	<b>60</b>	<b>75</b>	<b>95</b>	<b>130</b>	<b>145</b>	<b>190</b>	<b>260</b>	
02	without charge pump (no code)					●	●	●	●	●	●	●	●	
	with charge pump					-	-	-	-	●	●	●	●	<b>L</b>

### Operation

03	Pump, open circuit															<b>O</b>
----	--------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----------

### Size

04	≈ Displacement $V_{g\ max}$ in $cm^3$	<b>40</b>	<b>60</b>	<b>75</b>	<b>95</b>	<b>130</b>	<b>145</b>	<b>190</b>	<b>260</b>
----	---------------------------------------	-----------	-----------	-----------	-----------	------------	------------	------------	------------

### Control unit

05	Power control		LR				●	●	●	●	●	●	●	●	●	●	LR		
	with override	cross sensing	negative	LR		C		●	●	●	●	●	●	●	●	●	●	LR.C	
		high-pressure related	negative	LR3				●	●	●	●	●	●	●	●	●	●	LR3	
		pilot-pressure related	negative	LG1					●	●	●	●	●	●	●	●	●	●	LG1
			positive	LG2					●	●	●	●	●	●	●	●	●	●	LG2
	electric	U = 12 V	negative	LE1				○	○	○	●	●	●	●	●	●	●	LE1	
			U = 24 V	negative	LE2				○	●	●	●	●	●	●	●	●	LE2	
	with pressure cut-off			D				●	●	●	●	●	●	●	●	●	●	L.D..	
		hydraulic, 2-stage		E				●	●	●	●	●	●	●	●	●	●	L.E..	
		hydraulic, remote controlled				G		●	●	●	●	●	●	●	●	●	●	L..G.	
	with load sensing					S		●	●	●	●	●	●	●	●	●	●	L...S	
		electric, prop. override, 24 V				S2		○	○	○	●	●	●	●	●	●	●	L...S2	
		hydraulic, prop. override				S5		○	○	○	●	●	●	●	●	●	●	L...S5	
	with stroke limiter	negative characteristic	$\Delta p = 25\ bar$			H1		●	●	●	●	●	●	●	●	●	●	L...H1	
			$\Delta p = 10\ bar$			H5		●	●	●	●	●	●	●	●	●	●	L...H5	
		positive characteristic	$\Delta p = 25\ bar$				H2		●	●	●	●	●	●	●	●	●	●	L...H2
			$\Delta p = 10\ bar$				H6		●	●	●	●	●	●	●	●	●	●	L...H6
		U = 12 V				U1		●	●	●	●	●	●	●	●	●	●	●	L...U1
			U = 24 V				U2		●	●	●	●	●	●	●	●	●	●	L...U2
	Pressure control			DR				●	●	●	●	●	●	●	●	●	●	DR	
		with load sensing		DRS				●	●	●	●	●	●	●	●	●	●	DRS	
		remote controlled		DRG				●	●	●	●	●	●	●	●	●	●	DRG	
		for parallel operation		DRL				●	●	●	●	●	●	●	●	●	●	DRL	
	Hydraulic control, pilot-pressure related	(positive characteristic)	$\Delta p = 10\ bar$	HD1				●	●	●	●	●	●	●	●	●	●	HD1	
			$\Delta p = 25\ bar$	HD2				●	●	●	●	●	●	●	●	●	●	HD2	
with pressure cut-off			D				●	●	●	●	●	●	●	●	●	●	HD.D		
with pressure cut-off, remote controlled			G				○	●	○	○	○	○	○	○	○	○	HD.G		
Electric control with proportional solenoid	(positive characteristic)	U = 12 V	EP1				●	●	●	●	●	●	●	●	●	●	EP1		
		U = 24 V	EP2				●	●	●	●	●	●	●	●	●	●	EP2		
	with pressure cut-off		D				●	●	●	●	●	●	●	●	●	●	EP.D		
	with pressure cut-off, remote control		G				●	●	●	●	●	●	●	●	●	●	EP.G		

In case of controls with several additional functions, observe the order of the columns, only one option per column is possible (e.g. LRDCH2). The following combinations are not available for the power control: LRDS2, LRDS5, L...GS, L...GS2, L...GS5, L...EC and the combination L...DG in conjunction with the stroke limiters H1, H2, H5, H6, U1 and U2.

## Ordering Code / Standard Program

<b>A11V</b>		<b>O</b>			<b>/</b>	<b>1</b>			<b>-</b>	<b>N</b>							
01	02	03	04	05		06	07	08		09	10	11	12	13	14	15	16

## Series

06																		<b>1</b>
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----------

## Index

07																			<b>0</b>
																			<b>1</b>

## Direction of rotation

08	Viewed from shaft end																		<b>R</b>
																			<b>L</b>

## Seals

09	NBR (nitrile-caoutchouc), shaft seal ring in FKM (fluor-caoutchouc)																		<b>N</b>
----	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----------

## Shaft end (see page 8 for permissible input and through drive torques)

		40	60	75	95	130	145	190	260		
10	Splined shaft DIN 5480 for single and combination pump	●	●	●	●	●	●	●	●	<b>Z</b>	
	Parallel keyed shaft DIN 6885	●	●	●	●	●	●	●	●	<b>P</b>	
	Splined shaft ANSI B92.1a-1976	for single pump	●	●	●	●	●	●	●	●	<b>S</b>
		for combination pump	●	●	●	-1)	-1)	-1)	●	●	<b>T</b>

## Mounting flange

		40	60	75	95	130	145	190	260	
11	SAE J744 - 2-hole	●	●	-	-	-	-	-	-	<b>C</b>
	SAE J744 - 4-hole	-	-	●	●	●	●	●	●	<b>D</b>
	SAE J617 <sup>2)</sup> (SAE 3)	-	-	-	●	●	●	●	-	<b>G</b>

## Service line ports

		40	60	75	95	130	145	190	260	
12	Pressure and suction port SAE, at side, opposite side (with metric fastening threads)	●	●	●	●	●	●	●	●	<b>12</b>

## Through drive (see page 58 for attachments)

		40	60	75	95	130	145	190	260		
13	Flange SAE J744 <sup>3)</sup> Coupler for splined shaft										
	-	●	●	●	●	●	●	●	●	<b>N00</b>	
	82-2 (A)	5/8in 9T 16/32DP (A)	●	●	●	●	●	●	●	●	<b>K01</b>
		3/4in 11T 16/32DP (A-B)	○	●	○	●	●	●	○	○	<b>K52</b>
	101-2 (B)	7/8in 13T 16/32DP (B)	●	●	●	●	●	●	●	●	<b>K02</b>
		1 in 15T 16/32DP (B-B)	●	●	●	●	●	●	●	●	<b>K04</b>
		W35 2x30x16x9g	●	●	●	●	●	●	●	●	<b>K79</b>
	127-2 (C) <sup>4)</sup>	1 1/4in 14T 12/24DP (C)	-	●	●	●	●	●	●	●	<b>K07</b>
		1 1/2in 17T 12/24DP (C-C)	-	-	-	●	●	●	●	●	<b>K24</b>
		W30 2x30x14x9g	-	●	●	●	●	●	●	●	<b>K80</b>
	152-4 (D)	W35 2x30x16x9g	-	●	●	●	●	●	●	●	<b>K61</b>
		1 1/4in 14T 12/24DP (C)	-	-	●	●	●	●	●	●	<b>K86</b>
		1 3/4in 13T 8/16DP (D)	-	-	-	-	●	●	●	●	<b>K17</b>
		W40 2x30x18x9g	-	-	●	●	●	●	●	●	<b>K81</b>
		W45 2x30x21x9g	-	-	-	●	●	●	●	●	<b>K82</b>
	165-4 (E)	W50 2x30x24x9g	-	-	-	-	●	●	●	●	<b>K83</b>
		1 3/4in 13T 8/16DP (D)	-	-	-	-	-	-	●	●	<b>K72</b>
		W50 2x30x24x9g	-	-	-	-	-	-	●	●	<b>K84</b>
		W60 2x30x28x9g	-	-	-	-	-	-	-	●	<b>K67</b>

# Ordering Code / Standard Program

<b>A11V</b>		<b>O</b>			<b>/</b>	<b>1</b>			<b>-</b>	<b>N</b>							
01	02	03	04	05		06	07	08		09	10	11	12	13	14	15	16

**Swivel angle indicator** (page 59)

		40	60	75	95	130	145	190	260	
14	without swivel angle indicator (no symbol)	●	●	●	●	●	●	●	●	
	with optical swivel angle indicator	●	-	●	●	●	●	●	●	V
	with electric swivel angle sensor	●	-	●	●	●	●	●	●	R

**Connector for solenoids** (page 60)

		40	60	75	95	130	145	190	260	
15	DEUTSCH connector molded, 2-pin – without suppressor diode	●	●	●	●	●	●	●	●	P

**Standard / special version**

16	Standard version	without symbol	
		combined with attachment part or attachment pump	-K
	Special version		-S
		combined with attachment part or attachment pump	-SK

- 1) S-shaft suitable for combination pump!
- 2) To fit the flywheel case of the combustion engine
- 3) 2  $\triangle$  2-hole; 4  $\triangle$  4-hole
- 4) Size 190 and 260 with 2 + 4-hole flange

● = available      ○ = on request      - = not available      □ = preferred program

# Technical Data

## Hydraulic fluid

Before starting project planning, please refer to our data sheets RE 90220 (mineral oil), RE 90221 (environmentally acceptable hydraulic fluids) and RE 90223 (HF hydraulic fluids) for detailed information regarding the choice of hydraulic fluid and operating conditions.

The variable pump A11VO is not suitable for operating with HFA, HFB and HFC. If HFD or environmentally acceptable hydraulic fluids are being used, the limitations regarding technical data and seals mentioned in RE 90221 and RE 90223 must be observed.

When ordering, please indicate the used hydraulic fluid.

### Operating viscosity range

For optimum efficiency and service life, select an operating viscosity (at operating temperature) within the optimum range of

$$v_{\text{opt}} = \text{optimum operating viscosity } 16 \text{ to } 36 \text{ mm}^2/\text{s}$$

depending on the tank temperature (open circuit).

### Limits of viscosity range

The limiting values for viscosity are as follows:


- $v_{\text{min}} = 5 \text{ mm}^2/\text{s}$   
 Short-term ( $t < 3 \text{ min}$ )  
 At max. perm. temperature of  $t_{\text{max}} = +115^\circ\text{C}$ .
- $v_{\text{max}} = 1600 \text{ mm}^2/\text{s}$   
 Short-term ( $t < 3 \text{ min}$ )  
 At cold start ( $p \leq 30 \text{ bar}$ ,  $n \leq 1000 \text{ rpm}$ ,  $t_{\text{min}} = -40^\circ\text{C}$ ).  
 Only for starting up without load. Optimum operating viscosity must be reached within approx. 15 minutes.

Note that the maximum hydraulic fluid temperature of  $115^\circ\text{C}$  must not be exceeded locally either (e.g. in the bearing area). The temperature in the bearing area is – depending on pressure and speed – up to 5 K higher than the average case drain temperature.

Special measures are necessary in the temperature range from  $-40^\circ\text{C}$  and  $-25^\circ\text{C}$  (cold start phase), please contact us.

For detailed information about use at low temperatures, see RE 90300-03-B.

### Selection diagram

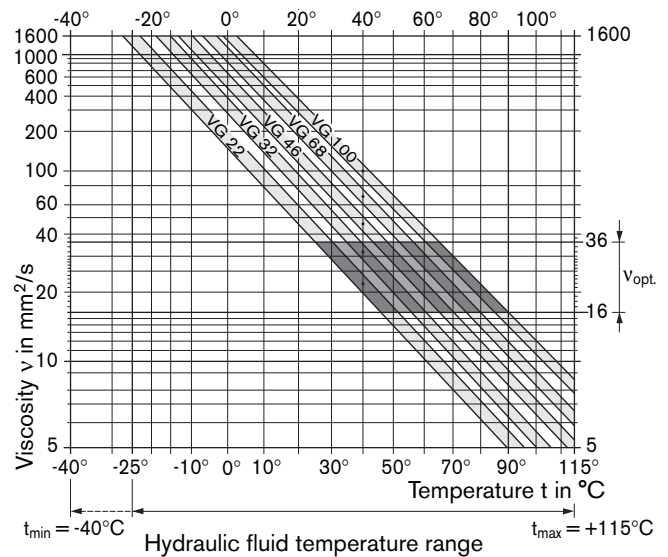

### Details regarding the choice of hydraulic fluid

The correct choice of hydraulic fluid requires knowledge of the operating temperature in relation to the ambient temperature: in an open circuit the tank temperature.

The hydraulic fluid should be chosen so that the operating viscosity in the operating temperature range is within the optimum range ( $V_{\text{opt}}$ ) – see the shaded area of the selection diagram. We recommend that the higher viscosity class be selected in each case.

Example: At an ambient temperature of  $X^\circ\text{C}$  an operating temperature of  $60^\circ\text{C}$  is set. In the optimum operating viscosity range ( $V_{\text{opt}}$ ; shaded area) this corresponds to the viscosity classes VG 46 and VG 68; to be selected: VG 68.

### Please note:

The case drain temperature, which is affected by pressure and speed, is always higher than the tank temperature. At no point in the system may the temperature be higher than  $115^\circ\text{C}$ .

If the above conditions cannot be maintained due to extreme operating parameters, please contact us.

### Filtration

The finer the filtration, the higher the cleanliness level of the hydraulic fluid and the longer the service life of the axial piston unit.

To ensure functional reliability of the axial piston unit, the hydraulic fluid must have a cleanliness level of at least

20/18/15 according to ISO 4406.

At very high hydraulic fluid temperatures ( $90^\circ\text{C}$  to max.  $115^\circ\text{C}$ , not permitted for sizes 250 to 1000) at least cleanliness level

19/17/14 according to ISO 4406 is required.

If the above classes cannot be observed, please contact us.

# Technical Data

## Operating pressure range

### Inlet

Absolute pressure at port S (suction port)  
Version *without* charge pump

$p_{abs \text{ min}}$  \_\_\_\_\_ 0.8 bar  
 $p_{abs \text{ max}}$  \_\_\_\_\_ 30 bar


If the pressure is > 5 bar, please ask.

Version *with* charge pump

$p_{abs \text{ min}}$  \_\_\_\_\_ 0.6 bar  
 $p_{abs \text{ max}}$  \_\_\_\_\_ 2 bar

### Maximum permissible speed (speed limit)

Permissible speed by increasing the inlet pressure  $p_{abs}$  at the suction port S or at  $V_g \leq V_{g \text{ max}}$

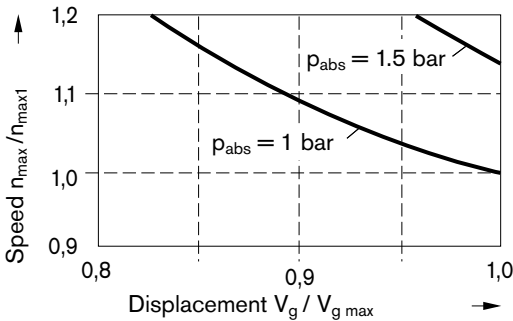

### Outlet

Pressure at port A or B


Nominal pressure  $p_N$  \_\_\_\_\_ 350 bar  
Maximum pressure  $p_{max}$  \_\_\_\_\_ 400 bar

Nominal pressure: Max. design pressure at which fatigue strength is ensured.

Maximum pressure: Max. operating pressure which is permissible for short-term ( $t < 1s$ ).

### Minimum operating pressure

A minimum operating pressure  $p_{B \text{ min}}$  is required in the pump service line depending on the speed, the swivel angle and the displacement (see diagram).

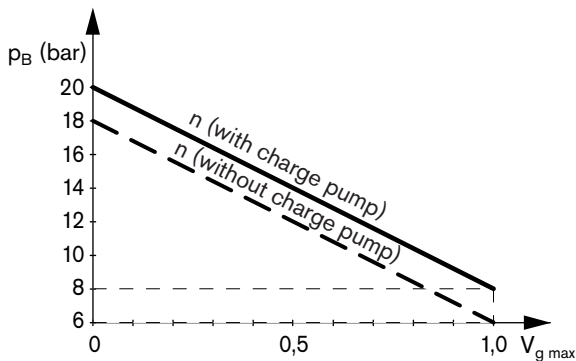

## Case drain pressure

The case drain pressure at the ports  $T_1$  and  $T_2$  may be a maximum of 1.2 bar higher than the inlet pressure at the port S but not higher than

$p_{L \text{ abs. max}}$  \_\_\_\_\_ 2 bar.

An unrestricted, full size case drain line directly to tank is required.

## Temperature range of the shaft seal ring

The FKM shaft seal ring is permissible for case drain temperatures of  $-25^\circ\text{C}$  to  $+115^\circ\text{C}$ .

Note:

For applications below  $-25^\circ\text{C}$ , an NBR shaft seal ring is necessary (permissible temperature range:  $-40^\circ\text{C}$  to  $+90^\circ\text{C}$ ). State NBR shaft seal ring in clear text in the order.

## Flushing the case


If a variable pump with control unit **EP, HD, DR** or stroke limiter (**H., U.,**) is operated over a long period ( $t > 10 \text{ min}$ ) with flow zero or operating pressure  $< 15 \text{ bar}$ , flushing of the case via ports " $T_1$ ", " $T_2$ " or " $R$ " is necessary.

Size	40	60	75	95	130	145	190	260
$q_{V \text{ flush}}$ (l/min)	2	3	3	4	4	4	5	6

Flushing the case is unnecessary in versions with charge pump (A11VLO), since a part of the charge flow is directed to the case.

## Charge pump (impeller)

The charge pump is a circulating pump with which the A11VLO (size 130...260) is filled and therefore can be operated at higher speeds. This also simplifies cold starting at low temperatures and high viscosity of the hydraulic fluid. Tank charging is therefore unnecessary in most cases. A tank pressure of a max. 2 bar is permissible with charge pump.

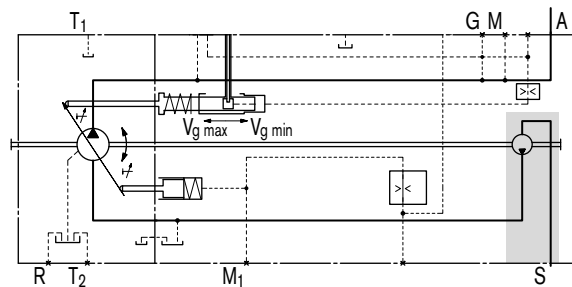



# Technical Data

**Table of values** (theoretical values, without efficiency and tolerances; values rounded)

Size	A11VO		40	60	75	95	130	145	190	260	
Displacement	$V_{g \max}$	cm <sup>3</sup>	42	58.5	74	93.5	130	145	193	260	
	$V_{g \min}$	cm <sup>3</sup>	0	0	0	0	0	0	0	0	
Speed	maximum at $V_{g \max}$ <sup>1)</sup>	$n_{\max}$	rpm	3000	2700	2550	2350	2100	2200	2100	1800
	maximum at $V_g \leq V_{g \max}$ <sup>3)</sup>	$n_{\max 1}$	rpm	3500	3250	3000	2780	2500	2500	2100	2300
Flow at $n_{\max}$ and $V_{g \max}$	$q_{v \max}$	l/min	126	158	189	220	273	319	405	468	
Power at $q_{v \max}$ and $\Delta p = 350$ bar	$P_{\max}$	kW	74	92	110	128	159	186	236	273	
Torque at $V_{g \max}$ and $\Delta p = 350$ bar	$T_{\max}$	Nm	234	326	412	521	724	808	1075	1448	
Rotary stiffness	Z shaft	Nm/rad	88894	102440	145836	199601	302495	302495	346190	686465	
	P shaft	Nm/rad	87467	107888	143104	196435	312403	312403	383292	653835	
	S shaft	Nm/rad	58347	86308	101921	173704	236861	236861	259773	352009	
	T shaft	Nm/rad	74476	102440	125603	–	–	–	301928	567115	
Moment of inertia for rotary group	$J_{TW}$	kgm <sup>2</sup>	0.0048	0.0082	0.0115	0.0173	0.0318	0.0341	0.055	0.0878	
	Angular acceleration, max. <sup>4)</sup>	$\alpha$	rad/s <sup>2</sup>	22000	17500	15000	13000	10500	9000	6800	4800
Filling capacity	V	l	1.1	1.35	1.85	2.1	2.9	2.9	3.8	4.6	
Mass (approx.)	m	kg	32	40	45	53	66	76	95	125	
Size	A11VLO (with charge pump)		130	145	190	260					
Displacement	$V_{g \max}$	cm <sup>3</sup>	130	145	193	260					
	$V_{g \min}$	cm <sup>3</sup>	0	0	0	0					
Speed	maximum at $V_{g \max}$ <sup>2)</sup>	$n_{\max}$	rpm	2500	2500	2500	2300				
	maximum at $V_g \leq V_{g \max}$ <sup>3)</sup>	$n_{\max 1}$	rpm	2500	2500	2500	2300				
Flow at $n_{\max}$ and $V_{g \max}$	$q_{v \max}$	l/min	325	363	483	598					
Power at $q_{v \max}$ and $\Delta p = 350$ bar	$P_{\max}$	kW	190	211	281	349					
Torque at $V_{g \max}$ and $\Delta p = 350$ bar	$T_{\max}$	Nm	724	808	1075	1448					
Rotary stiffness	Z shaft	Nm/rad	302495	302495	346190	686465					
	P shaft	Nm/rad	312403	312403	383292	653835					
	S shaft	Nm/rad	236861	236861	259773	352009					
	T shaft	Nm/rad	–	–	301928	567115					
Moment of inertia for rotary group	$J_{TR}$	kgm <sup>2</sup>	0.0337	0.036	0.0577	0.0895					
	Angular acceleration, max. <sup>4)</sup>	$\alpha$	rad/s <sup>2</sup>	10500	9000	6800	4800				
Filling capacity	V	l	2.9	2.9	3.8	4.6					
Mass (approx.)	m	kg	72	73	104	138					

1) The values apply at absolute pressure ( $p_{\text{abs}}$ ) 1 bar at the suction port S and mineral hydraulic fluid.

2) The values apply at absolute pressure ( $p_{\text{abs}}$ ) of at least 0.8 bar at the suction port S and mineral hydraulic fluid.

3) The values apply at  $V_g \leq V_{g \max}$  or in case of an increase in the inlet pressure  $p_{\text{abs}}$  at the suction port S (see diagram page 6)

4) – The area of validity is situated between 0 and the maximum permissible speed.

It applies for external stimuli (e.g. engine 2-8 times rotary frequency, cardan shaft twice the rotary frequency).

- The limit value applies for a single pump only.
- The loading on the connection parts has to be considered.

**Caution:**

Exceeding the permissible limit values could cause a loss of function, reduced service life or the destruction of the axial piston unit. The permissible values can be determined by calculation.

# Technical Data

## Permissible radial and axial loading on drive shaft

The values stated are maximum data and not permissible for continuous operation

Size	Size	40	60	75	95	130	145	190	260	
Radial force, max. at distance a, b, c (from shaft collar)	$F_{q \max}$	N	3600	5000	6300	8000	11000	11000	16925	22000
	a	mm	17.5	17.5	20	20	22.5	22.5	26	29
	$F_{q \max}$	N	2891	4046	4950	6334	8594	8594	13225	16809
	B	mm	30	30	35	35	40	40	46	50
	c	mm	42.5	42.5	50	50	57.5	57.5	66	71
Axial force, max.	$\pm F_{ax \max}$	N	1500	2200	2750	3500	4800	4800	6000	4150

## Permissible input and through drive torques


Size	Size	40	60	75	95	130	145	190	260	
Torque (at $V_{g \max}$ and $\Delta p = 350 \text{ bar}^1$ )	$T_{\max}$	Nm	234	326	412	521	724	808	1075	1448
Input torque, max. <sup>2)</sup>										
at shaft end P Shaft key DIN 6885	$T_{E \text{ perm.}}$	Nm	468 ø32	648 ø35	824 ø40	1044 ø45	1448 ø50	1448 ø50	2226 ø55	2787 ø60
at Z shaft end DIN 5480	$T_{E \text{ perm.}}$	Nm	912 W35	912 W35	1460 W40	2190 W45	3140 W50	3140 W50	3140 W50	5780 W60
at S shaft end ANSI B92.1 a-1976 (SAE J744)	$T_{E \text{ perm.}}$	Nm	314 1 in	602 1 1/4 in	602 1 1/4 in	1640 1 3/4 in	1640 1 3/4 in	1640 1 3/4 in	1640 1 3/4 in	1640 1 3/4 in
at T shaft end ANSI B92.1 a-1976 (SAE J744)	$T_{E \text{ perm.}}$	Nm	602 1 1/4 in	970 1 3/8 in	970 1 3/8 in	– –	– –	– –	2670 2 in	4070 2 1/4 in
Through drive torque, max. <sup>3)</sup>	$T_{D \text{ perm.}}$	Nm	314	521	660	822	1110	1110	1760	2065

<sup>1)</sup> Efficiency not considered

<sup>2)</sup> For drive shafts with no radial force

<sup>3)</sup> Observe max. input torque for shaft **S**!

### Torque distribution

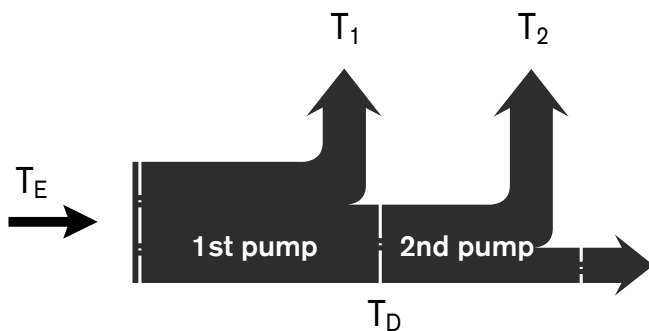

### Determining the nominal value

$$\text{Flow} \quad q_v = \frac{V_g \cdot n \cdot \eta_v}{1000} \quad \text{l/min}$$

$$\text{Torque} \quad T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{mh}} \quad \text{Nm}$$

$$\text{Power} \quad P = \frac{2 \pi \cdot T \cdot n}{60,000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t} \quad \text{kW}$$

$V_g$  = Displacement per revolution in  $\text{cm}^3$

$\Delta p$  = Differential pressure in bar

$n$  = Speed in rpm

$\eta_v$  = Volumetric efficiency

$\eta_{mh}$  = Mechanical-hydraulic efficiency

$\eta_t$  = Overall efficiency ( $\eta_t = \eta_v \cdot \eta_{mh}$ )

## LR – Power Control

The power control regulates the displacement of the pump depending on the operating pressure so that a given drive power is not exceeded at constant drive speed.

$$p_B \cdot V_g = \text{constant}$$

$p_B$  = operating pressure  
 $V_g$  = displacement

The precise control with a hyperbolic control characteristic, provides an optimum utilization of available power.

The operating pressure acts on a rocker via a measuring piston. An externally adjustable spring force counteracts this, it determines the power setting.

If the operating pressure exceeds the set spring force, the control valve is actuated by the rocker, the pump swivels back (direction  $V_{g \min}$ ). The lever length at the rocker is shortened and the operating pressure can increase at the same rate as the displacement decreases without the drive powers being exceeded ( $p_B \cdot V_g = \text{constant}$ ).


The hydraulic output power (characteristic LR) is influenced by the efficiency of the pump.

State in clear text in the order:

- drive power  $P$  in kW
- drive speed  $n$  in rpm
- max. flow  $q_{V \max}$  in l/min


After clarifying the details a power diagram can be created by our computer.

### Characteristic LR

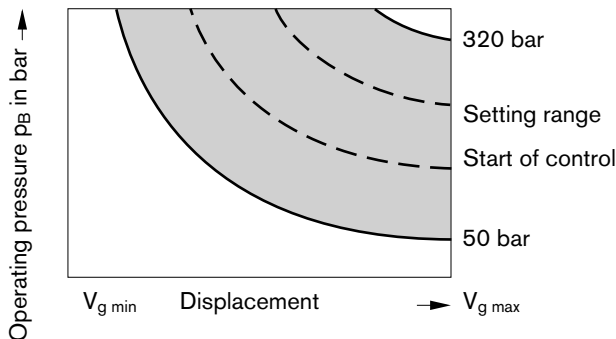


### Circuit diagram LR

Size 40 ... 145

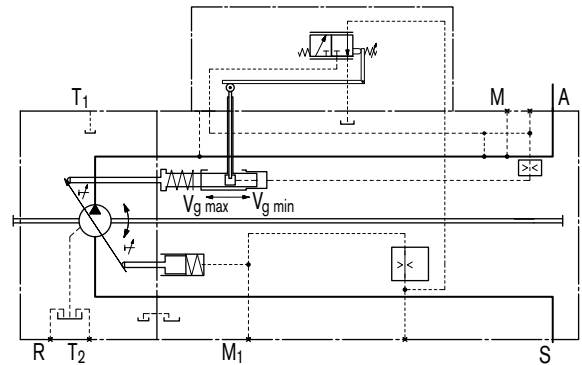

Size 190 ... 260

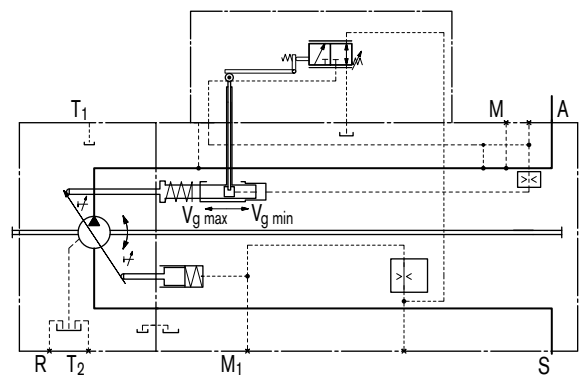

# LR – Power Control

## LRC Override with cross sensing

Cross sensing control is a summation power control system, whereby the total power, of both the A11VO and of a same size A11VO power controlled pump mounted onto the through drive, are kept constant.

If a pump is operating at pressures below the start of the control curve setting, then the surplus power not required, in a critical case up to 100%, becomes available to the other pump. Total power is thus divided between two systems as demand requires.

Any power being limited by means of pressure cut-off or other override functions is not taken into account.


### Half side cross sensing function

When using the LRC control on the 1st pump (A11VO) and a power-controlled pump without cross sensing attached to the through drive, the power required for the 2nd pump is deducted from the setting of the 1st pump. The 2nd pump has priority in the total power setting.


The size and start of control of the power control of the 2nd pump must be specified for rating the control of the 1st pump.

### Circuit diagram LRC

Size 40 ... 145

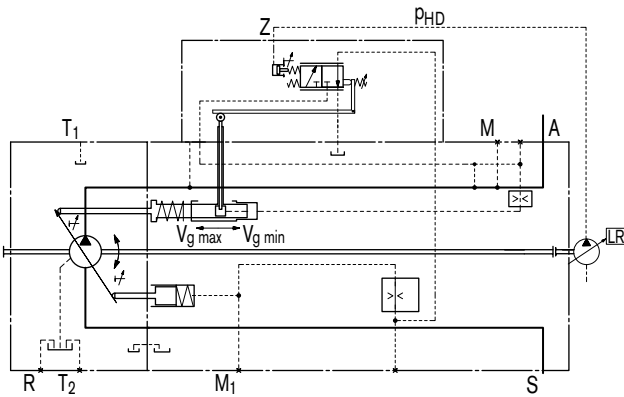

Size 190 ... 260

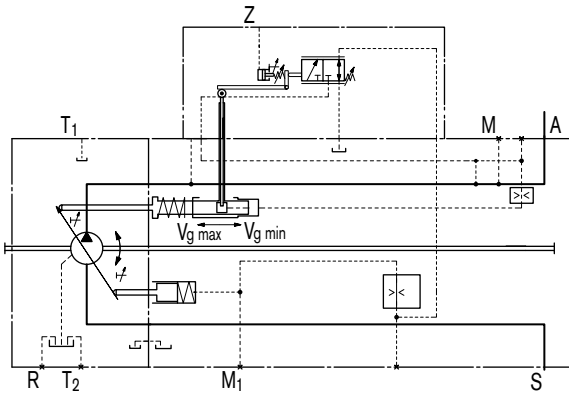

## LR3 High-pressure related override


The high-pressure related power override is a total power control in which the power control setting is piloted by the load pressure of an attached fixed pump (port Z).

As a result the A11VO can be set to 100% of the total drive power. The power setting of the A11VO is reduced proportional to the load-dependent rise in operating pressure of the fixed pump. The fixed pump has priority in the total power setting.


The measuring area of the power reduction pilot piston is designed as a function of the size of the fixed pump.

### Circuit diagram LR3

Size 40 ... 145

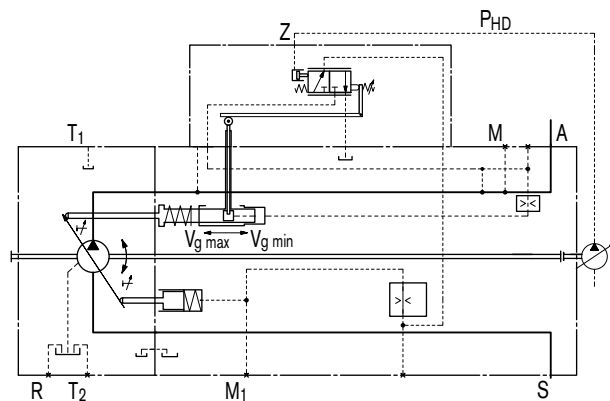

Size 190 ... 260

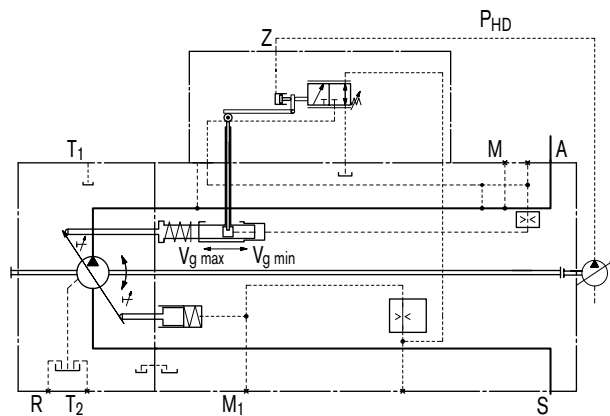

# LR – Power Control

## LG1/2 Pilot-pressure related override

This power control works by overriding the control setting with an external pilot pressure signal. This pilot pressure acts on the adjustment spring of the power regulator via port Z.

The mechanically adjusted basic setting can be hydraulically adjusted by means of different pilot pressure settings, enabling different power mode settings.

If the pilot pressure signal is then adjusted by means of an external power limiting control, the total hydraulic power consumption of all users can be adapted to the available drive power from the engine.

The pilot pressure used for power control is generated by an external control element that is not a component part of the A11VO (e.g. see also data sheet RE 95310, Electronic Load Limiting Control, LLC).


### LG1 Negative power override

Power control with negative override, LG1: the force resulting from the pilot pressure is acting against the mechanical adjustment spring of the power control.


Increasing the pilot pressure reduces the power setting.

#### Circuit diagram LG1

Size 40 ... 145

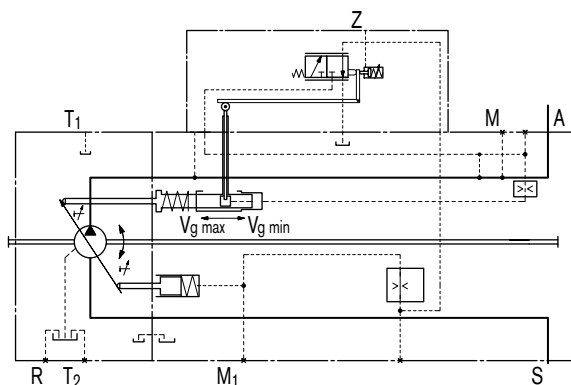

Size 190 ... 260

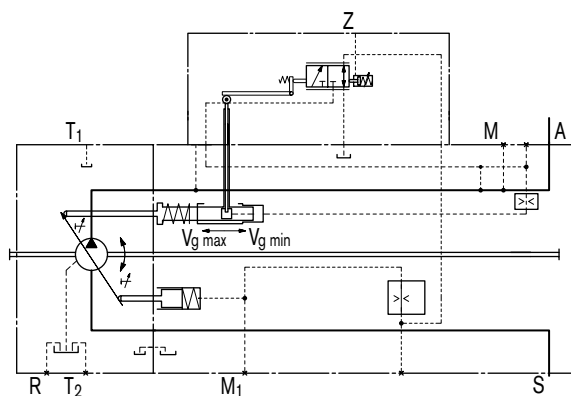


### LG2 Positive power override

Power control with positive override, LG2: the force resulting from the pilot pressure is additive to the mechanical adjustment spring of the power control.


An increase in pilot pressure increases the power output.

#### Circuit diagram LG2

Size 40 ... 145

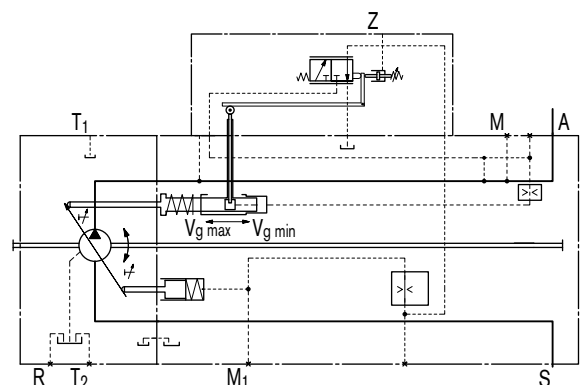

Size 190 ... 260

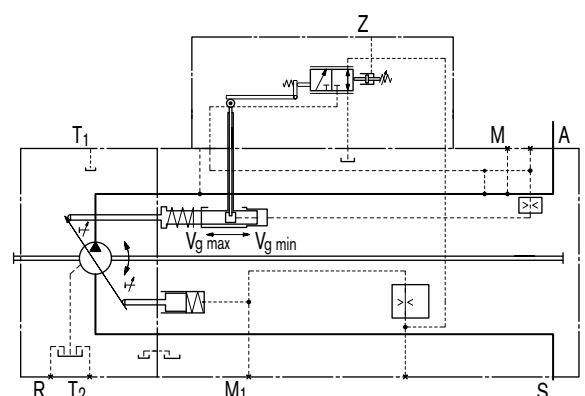

# LR – Power Control

## LE1/2 Electric override (negative)

Contrary to hydraulic power control override, the basic power setting is reduced by an electric pilot current applied to a proportional solenoid. The resulting force is acting against the mechanical power control adjustment spring.

The mechanically adjusted basic power setting can be varied by means of different control current settings.

Increase in current = decrease in power

If the pilot current signal is adjusted by a load limiting control the power consumption of all actuators will be reduced to match the available power from the diesel engine.


A 12V (LE1) or 24V (LE2) supply is required for the control of the proportion solenoid.

### Technical data - Solenoids


	LE1	LE2
Voltage	12 V (±20 %)	24 V (±20 %)
Control current		
Start of control	400 mA	200 mA
End of control	1200 mA	600 mA
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20°C)	5.5 Ω	22.7 Ω
Dither frequency	100 Hz	100 Hz
Actuated time	100 %	100 %
Type of protection	see connector version, page 60	

### Circuit diagram LE1/2

Size 40 ... 145

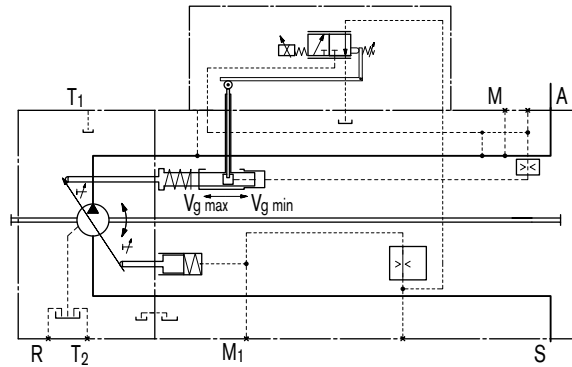


Size 190 ... 260

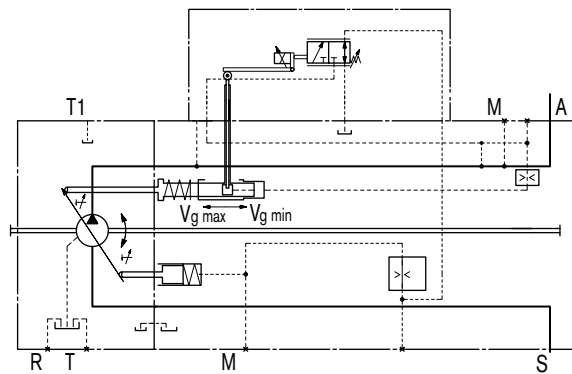

### Overview of power overrides

Effect of power overrides at rising pressure or current

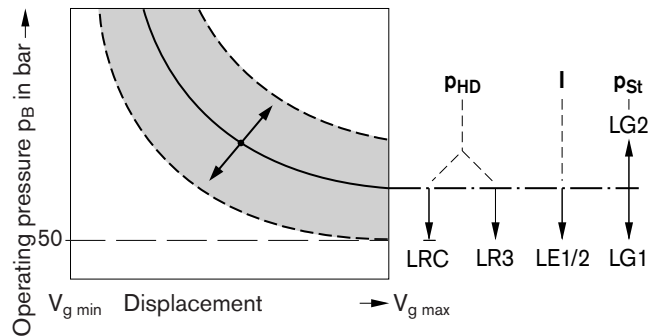

# LR – Power Control

## LRD Power control with pressure cut-off


The pressure cut-off corresponds to a pressure control which adjusts the pump displacement back to  $V_{g\ min}$ , when the pressure setting is reached.

This function overrides the power control, i.e. below the preset pressure value, the power function is effective.

The pressure cut-off function is integrated into the pump control module and is preset to a specified value at the factory.


Setting range from 50 to 350 bar

### Characteristic LRD

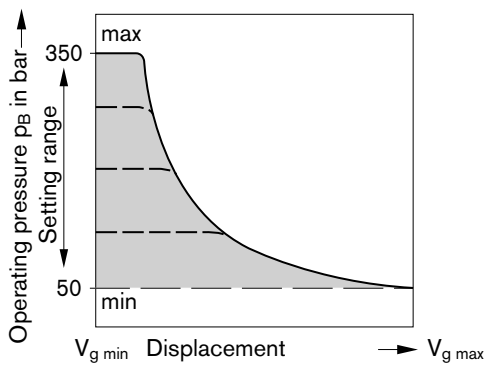


### Circuit diagram LRD

Size 40...145

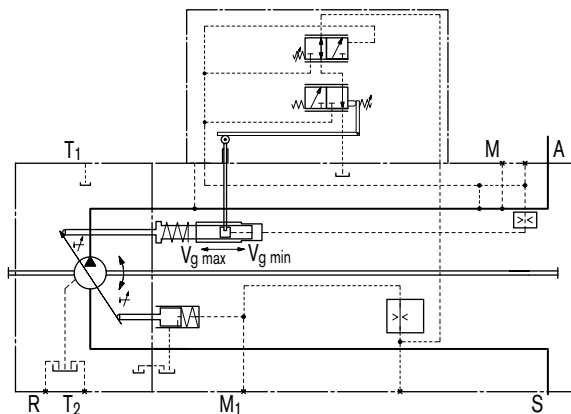

Size 190...260




## LRE Power control with pressure cut-off, 2-stage

By connecting an external pilot pressure to port Y, the basic value of the pressure cut-off can be increased by  $50^{+20}$  bar and a 2nd pressure setting implemented.

This value is usually above the primary pressure relief valve setting and therefore disables the pressure cut-off function.


The pressure signal at port Y must be between 20 and 50 bar.

### Characteristic LRE

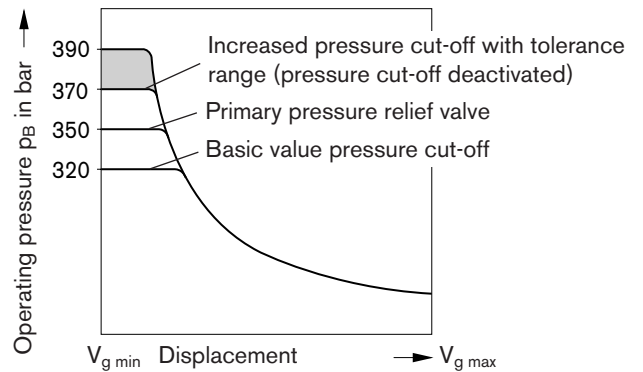


### Circuit diagram LRE

Size 40...145

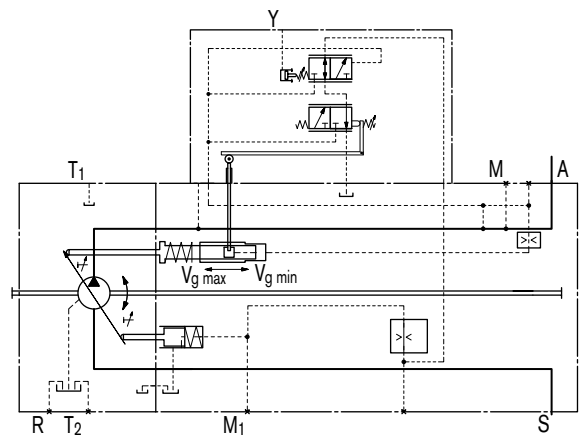

Size 190...260



## LRG Power control with pressure cut-off, hydraulically remote controlled

See page 21 for description and characteristic (pressure control remote controlled, DRG)

# LR – Power Control

## LRDS Power control with pressure cut-off and load sensing

The load sensing control is a flow control option that operates as a function of the load pressure to regulate the pump displacement to match the actuator flow requirement.

The flow depends here on the cross section of the external sensing orifice (1) fitted between the pump outlet and the actuator. The flow is independent of the load pressure below the power curve and the pressure cut-off setting and within the control range of the pump.

The sensing orifice is usually a separately arranged load sensing directional valve (control block). The position of the directional valve piston determines the opening cross section of the sensing orifice and thus the flow of the pump.

The load sensing control compares pressure before and after the sensing orifice and maintains the pressure drop across the orifice (differential pressure  $\Delta p$ ) and with it the pump flow constant.

If the differential pressure  $\Delta p$  increases at the sensing orifice, the pump is swivelled back (towards  $V_{g \text{ min}}$ ), and, if the differential pressure  $\Delta p$  decreases, the pump is swivelled out (towards  $V_{g \text{ max}}$ ) until the pressure drop across the sensing orifice in the valve is restored.

$$\Delta p_{\text{orifice}} = p_{\text{pump}} - p_{\text{actuator}}$$

The setting range for  $\Delta p$  is between 14 bar and 25 bar.

The standard differential pressure setting is 18 bar. (Please state in clear text when ordering).


The stand-by pressure in zero stroke operation (sensing orifice plugged) is slightly above the  $\Delta p$  setting.

In a standard LS system the pressure cut-off is integrated in the pump control. In a LUDV (flow sharing) system the pressure cut-off is integrated in the LUDV control block.


(1) The sensing orifice (control block) is not included in the pump supply.

### Circuit diagram LRDS


Size 40 ... 145

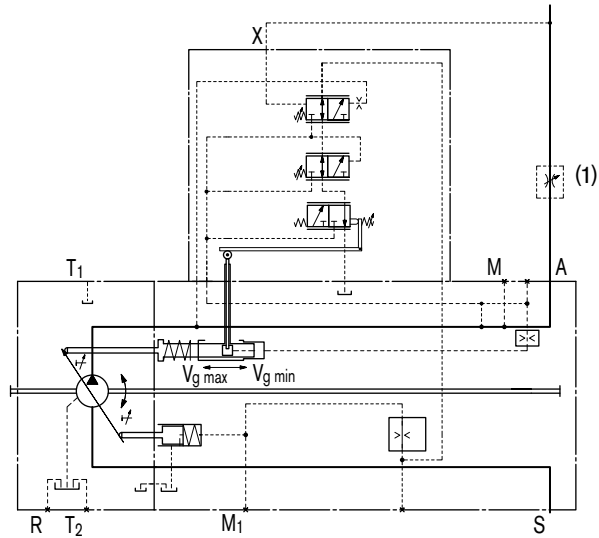

Size 190 ... 260

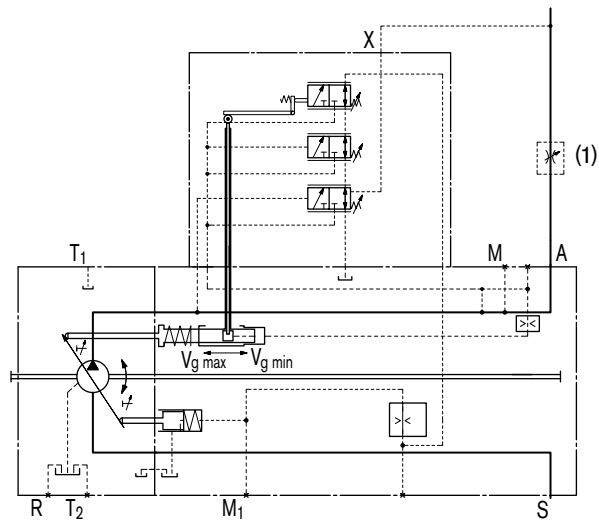

### Characteristic LRDS

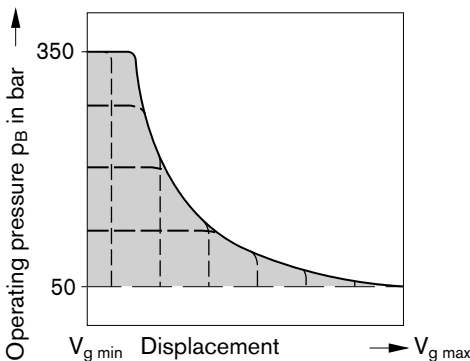



# LR – Power Control


## LRS2 Power control with load sensing, electric override

This control option adds a proportional solenoid to override to the mechanically set load sensing pressure. The pressure differential change is proportional to the solenoid current.

Increasing current = smaller  $\Delta p$ -setting


See following characteristic for details (example). Please consult us during the project planning phase.  
For solenoid specification, see page 12 (LE2)

Characteristic LRS2

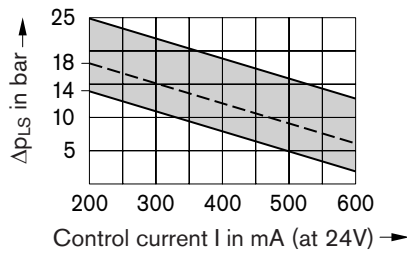


Circuit diagram LRS2

Size 40 ... 145

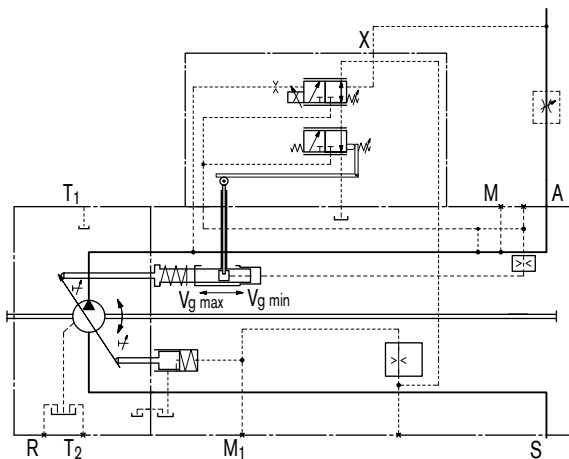

Size 190 ... 260

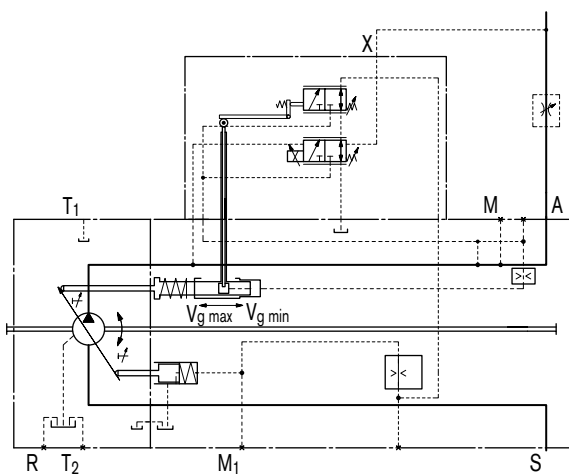


## LRS5 Power control with load sensing, hydraulic override

This control option adds an external proportional pilot pressure signal (to port Z) to override the mechanically set load sensing pressure.

Increasing pilot pressure = smaller  $\Delta p$ -setting


See following characteristic for details (example). Please consult us during the project planning phase.

Characteristic LRS5

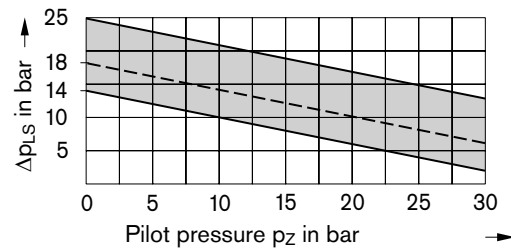


Circuit diagram LRS5

Size 40 ... 145

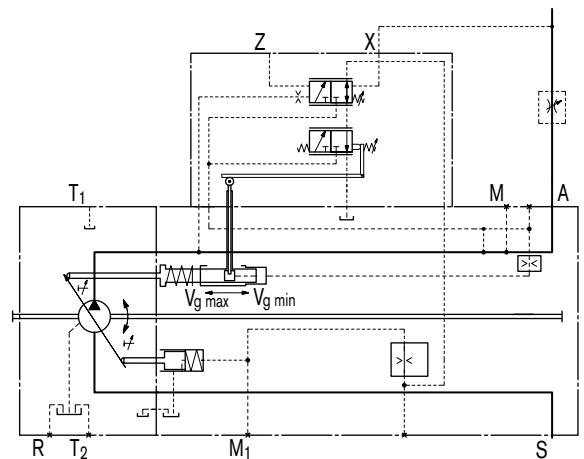

Size 190 ... 260

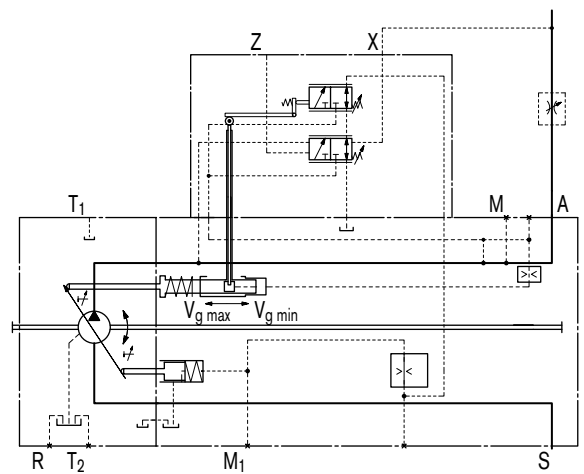

# LR – Power Control

## LR... Power control with stroke limiter

The stroke limiter can be used to vary or limit the displacement of the pump continuously over the whole control range. The displacement is set in LRH with the pilot pressure  $p_{St}$  (max. 40 bar) applied to port Y or in LRU by the control current applied to the proportional solenoid. A DC current of 12V (U1) or 24V (U2) is required to control the proportional solenoid.

The power control overrides the stroke limiter control, i.e. below the hyperbolic power characteristic, the displacement is controlled by the control current or pilot pressure. When exceeding the power characteristic with a set flow or load pressure, the power control overrides and reduces the displacement following the hyperbolic characteristic.

To permit operation of the pump displacement control from its starting position  $V_{g,max}$  to  $V_{g,min}$ , a minimum control pressure of 30 bar is required for the electric stroke limiter LRU1/2 and the hydraulic stroke limiter LRH2/6.

The required control pressure is taken either from the load pressure, or from the externally applied control pressure at the G port.

To ensure functioning of the stroke limiter even at low operating pressure, port G must be supplied with external control pressure of approx. 30 bar.

### Note:

If no external control pressure is connected at G, the shuttle valve must be removed.

### Note

**The spring return feature in the controller is not a safety device**

The spool valve inside the controller can get stuck in an undefined position by internal contamination (contaminated hydraulic fluid, abrasion or residual contamination from system components). As a result, the axial piston unit can no longer supply the flow specified by the operator.

Check whether your application requires that remedial measures be taken on your machine in order to bring the driven consumer into a safe position (e.g. immediate stop).

# LR – Power Control

## LRH1/5 Hydraulic stroke limiter (negative characteristic)

Control from  $V_{g \max}$  to  $V_{g \min}$

With increasing pilot pressure the pump swivels to a smaller displacement.


Start of control (at  $V_{g \max}$ ), can be set \_\_\_\_\_ from 4 – 10 bar

State start of control in clear text in the order.

Starting position without control signal (pilot pressure):  $V_{g \max}$


### Characteristic H1

Increase in pilot pressure ( $V_{g \max} - V_{g \min}$ ) \_\_\_\_\_  $\Delta p = 25$  bar

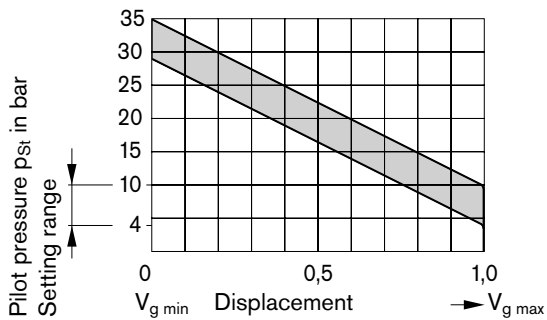


### Characteristic H5

Increase in pilot pressure ( $V_{g \max} - V_{g \min}$ ) \_\_\_\_\_  $\Delta p = 10$  bar

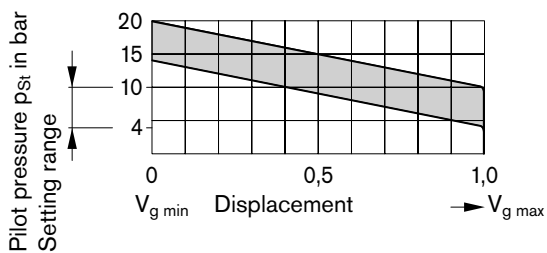


### Circuit diagram LRH1/5

Size 40 ... 145

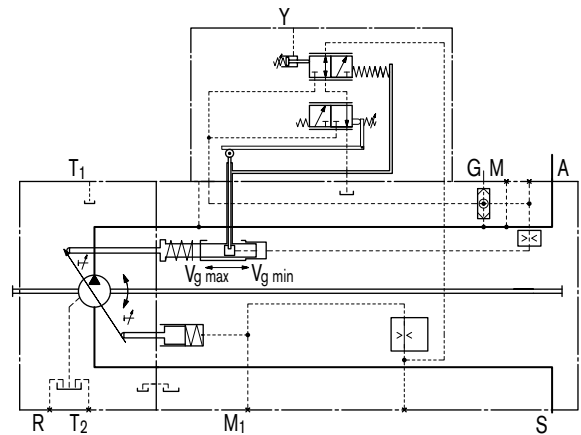

Size 190 ... 260

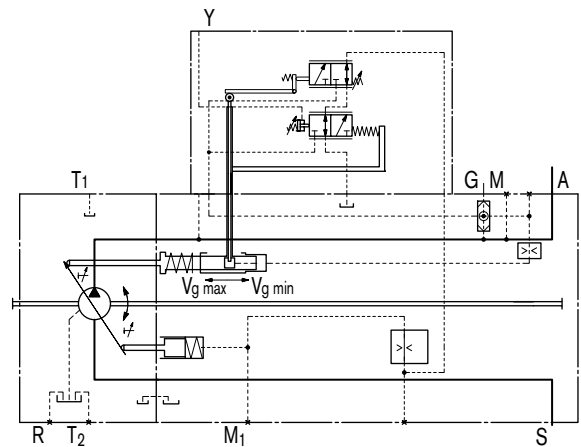

# LR – Power Control

## LRH2/6 Hydraulic stroke limiter (positive characteristic)

Control from  $V_{g \min}$  to  $V_{g \max}$

With increasing pilot pressure the pump swivels to a higher displacement.

Start of control (at  $V_{g \min}$ ), can be set \_\_\_\_\_ from 4–10 bar


State start of control in clear text in the order.

Starting position without control signal (pilot pressure):

- at operating pressure and external control pressure < 30 bar:  $V_{g \max}$
- at operating pressure or external control pressure > 30 bar:  $V_{g \min}$


### Characteristic H2

Increase in pilot pressure ( $V_{g \min} - V_{g \max}$ ) \_\_\_\_\_  $\Delta p = 25$  bar

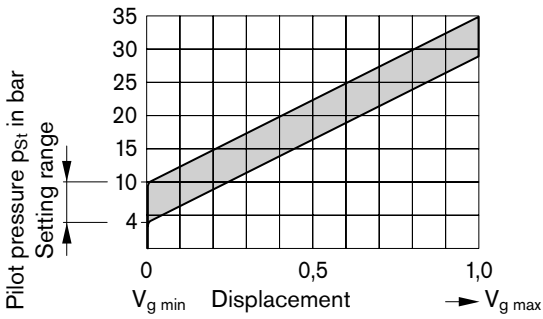


### Characteristic H6

Increase in pilot pressure ( $V_{g \min} - V_{g \max}$ ) \_\_\_\_\_  $\Delta p = 10$  bar

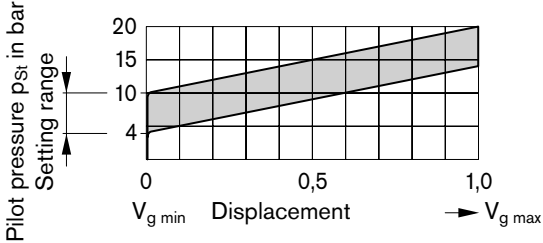


## Circuit diagram LRH2/6

Size 40 ... 145

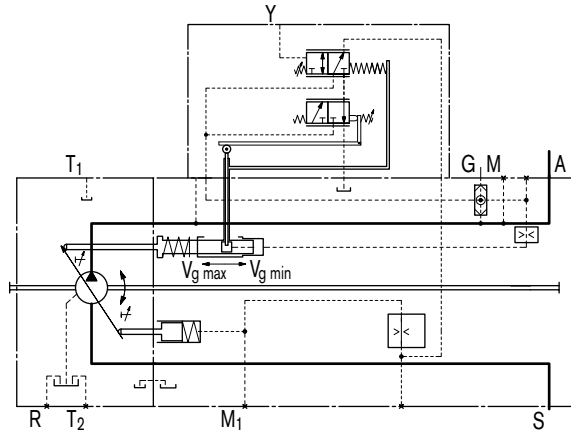

Size 190 ... 260

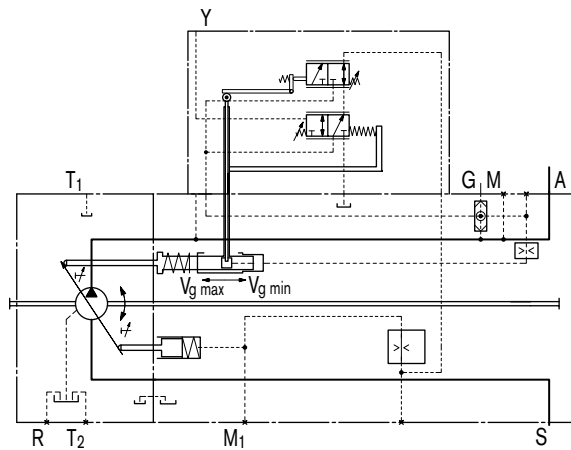

# LR – Power Control

## LRU1/2 Electric stroke limiter (positive characteristic)

Control from  $V_{g \min}$  to  $V_{g \max}$

With increasing control current the pump swivels to a higher displacement.

### Technical data - solenoids

	LRU1	LRU2
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Control current		
Start of control at $V_{g \max}$	400 mA	200 mA
End of control at $V_{g \min}$	1200 mA	600 mA
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20°C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 Hz	100 Hz
Actuated time	100 %	100 %
Type of protection	see connector version, page 60	

Starting position without control signal (control current):

- at operating pressure and external control pressure < 30 bar:  $V_{g \max}$
- at operating pressure or external control pressure > 30 bar:  $V_{g \min}$


The following electronic controllers and amplifiers are available for actuating the proportional solenoids (see also [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics)):

- BODAS controller RC
 

Series 20 _____	RE 95200
Series 21 _____	RE 95201
Series 22 _____	RE 95202
Series 30 _____	RE 95203


 and application software
- Analog amplifier RA \_\_\_\_\_ RE 95230

### Characteristic LRU1/2

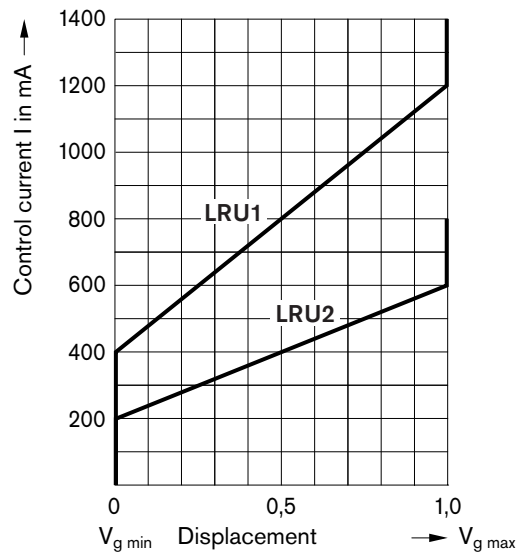


### Circuit diagram LRU1/2

Size 40 ... 145

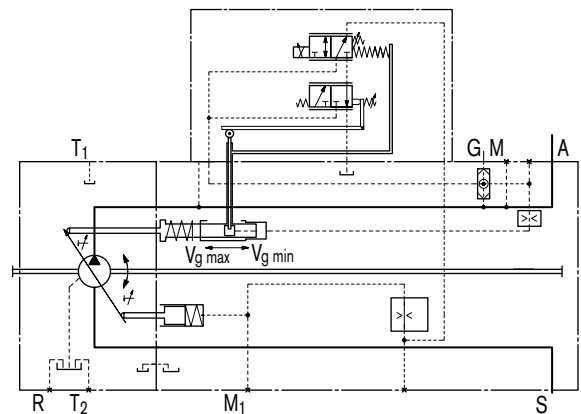

Size 190 ... 260

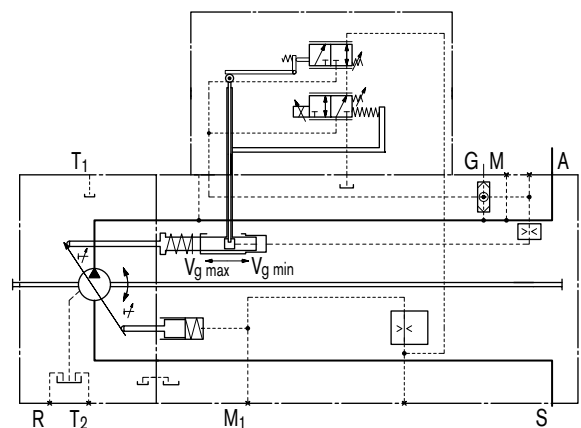

# DR – Pressure Control


## DR Pressure control

The pressure control keeps the pressure in a hydraulic system constant within its control range even under varying flow conditions. The variable pump only moves as much hydraulic fluid as is required by the actuators. If the operating pressure exceeds the setpoint set at the integral pressure control valve, the pump displacement is automatically swivelled back until the pressure deviation is corrected.

Starting position in depressurized state:  $V_{g \max}$


Setting range from 50 to 350 bar.

### Characteristic: DR

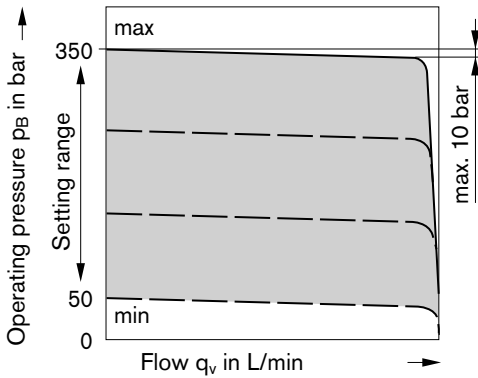


### Circuit diagram DR

Size 40 ... 145

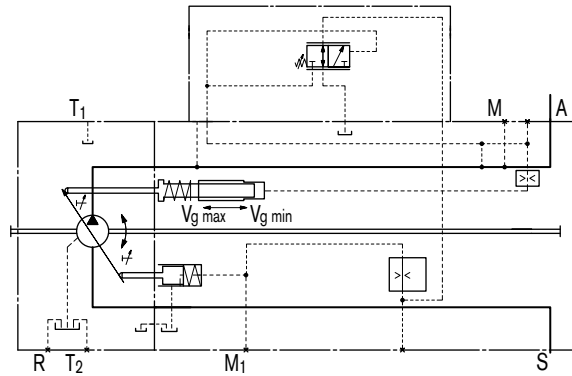

Size 190 ... 260

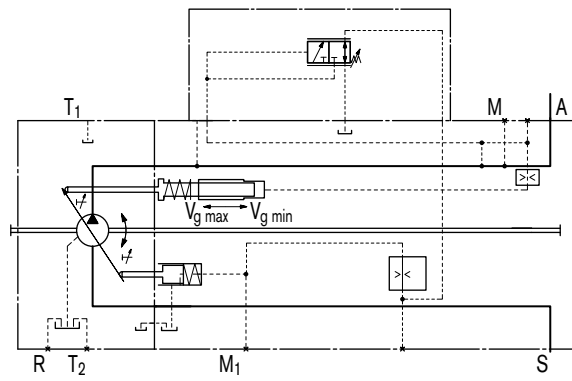

# DR – Pressure Control

## DRS Pressure control with load sensing

The load sensing control is a flow control option that operates as a function of the load pressure to regulate the pump displacement to match the actuator flow requirement.

The flow depends here on the cross section of the external sensing orifice (1) fitted between the pump outlet and the actuator. The flow is independent of the load pressure below the pressure cut-off setting and within the control range of the pump.

The sensing orifice is usually a separately arranged load sensing directional valve (control block). The position of the directional valve piston determines the opening cross section of the sensing orifice and thus the flow of the pump.

The load sensing control compares pressure before and after the sensing orifice and maintains the pressure drop across the orifice (differential pressure  $\Delta p$ ) and with it the pump flow constant.

If the differential pressure  $\Delta p$  increases at the sensing orifice, the pump is swivelled back (towards  $V_{g \text{ min}}$ ), and, if the differential pressure  $\Delta p$  decreases, the pump is swivelled out (towards  $V_{g \text{ max}}$ ) until the pressure drop across the sensing orifice in the valve is restored.

$$\Delta p_{\text{orifice}} = p_{\text{pump}} - p_{\text{actuator}}$$


The setting range for  $\Delta p$  is between 14 bar and 25 bar.

The standard differential pressure setting is 18 bar. (Please state in clear text when ordering).

The stand-by pressure in zero stroke operation (sensing orifice plugged) is slightly above the  $\Delta p$  setting.


(1) The sensing orifice (control block) is not included in the pump supply.

### Characteristic: DRS

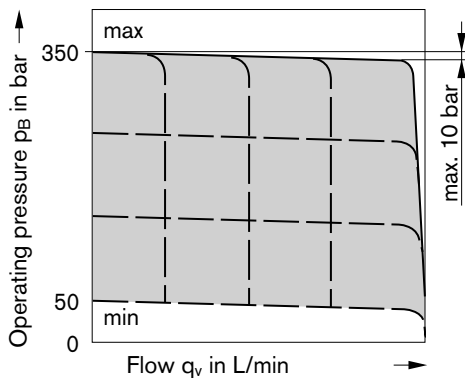


### Circuit diagram DRS

Size 40 ... 145

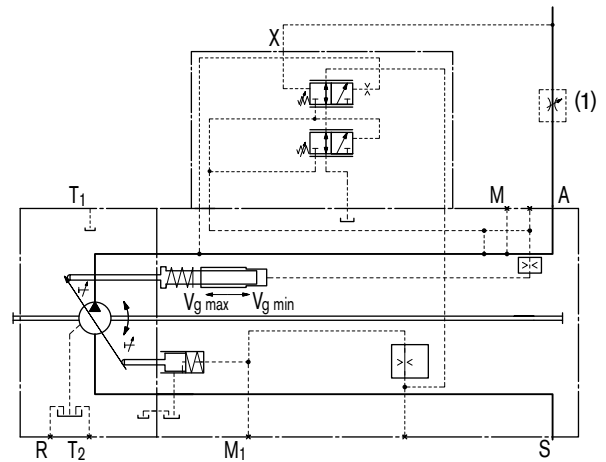

Size 190 ... 260

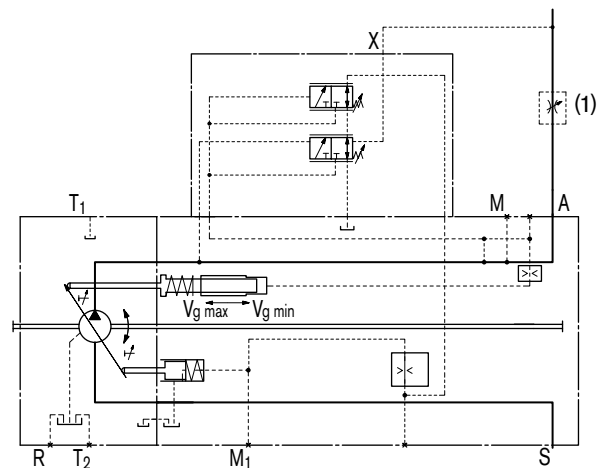

# DR – Pressure Control

## DRG Pressure control, remote controlled

The remote control pressure cut-off regulator permits the adjustment of the pressure setting by a remotely installed pressure relief valve (1). Pilot flow for this valve is provided by a fixed orifice in the control module.

Setting range from 50 to 350 bar.

In addition the pump can be unloaded into a standby pressure condition by an externally installed 2/2-way directional valve (2).


Both functions can be used individually or in combination (see circuit diagram).

The external valves are not included in the pump supply.

As a separate pressure relief valve (1) we recommend:

DBDH 6 (manual control), see RE 25402


### Characteristic: DRG

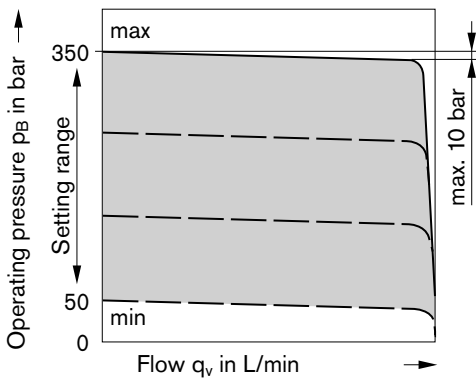


**Note:** The remote controlled pressure cut-off is also possible in combination with LR, HD and EP.

### Circuit diagram DRG

Size 40 ... 145

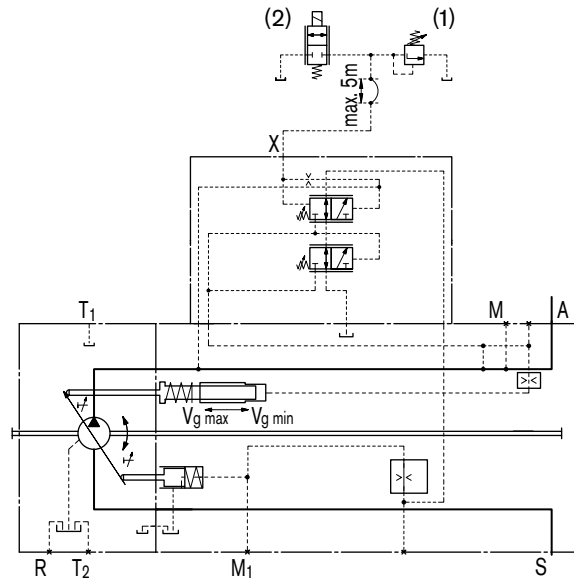

Size 190 ... 260

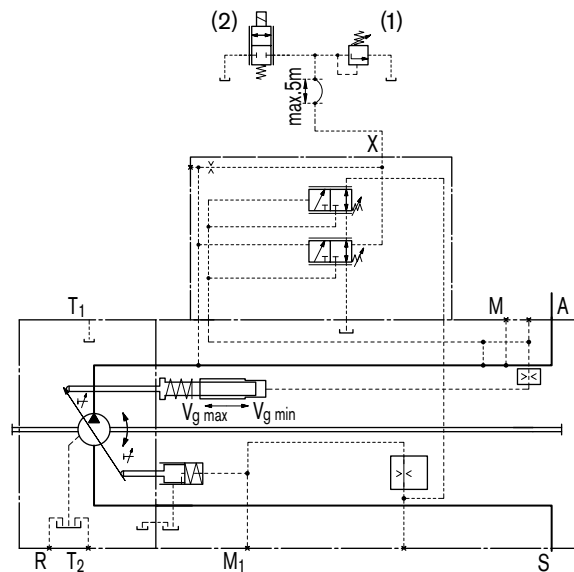



# DR – Pressure Control

## DRL Pressure control for parallel operation

The pressure control DRL is suitable for pressure control of several axial piston pumps A11VO in parallel operation pumping into a common pressure header.

The parallel pressure control has a pressure rise characteristic of approx. 15 bar from  $q_{v\ max}$  to  $q_{v\ min}$ . The pump regulates therefore to a pressure dependent swive angle. This results in stable control behavior, without the need of "staging" the individual pump compensators.

With the externally installed pressure relief valve (1) the nominal pressure setting of all pumps connected to the system is adjusted to the same value.

Setting range from 50 to 350 bar.

Each pump can be individually unloaded from the system by a separately installed 3/2-way directional valve (2).


The check valves (3) in the service line (port A) or control line (port X) must be provided generally.

The external valves are not included in the pump supply.

As a separate pressure relief valve (1) we recommend:


DBDH 6 (manual control), see RE 25402

### Characteristic DRL

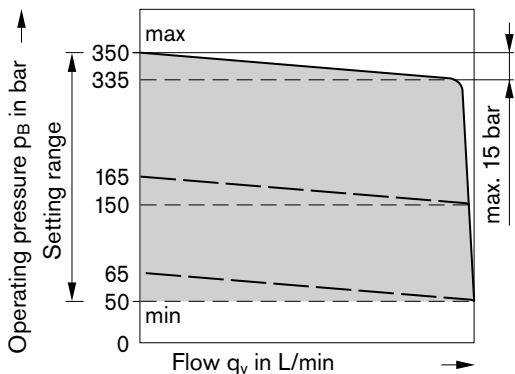


### Circuit diagram DRL

Size 40 ... 145

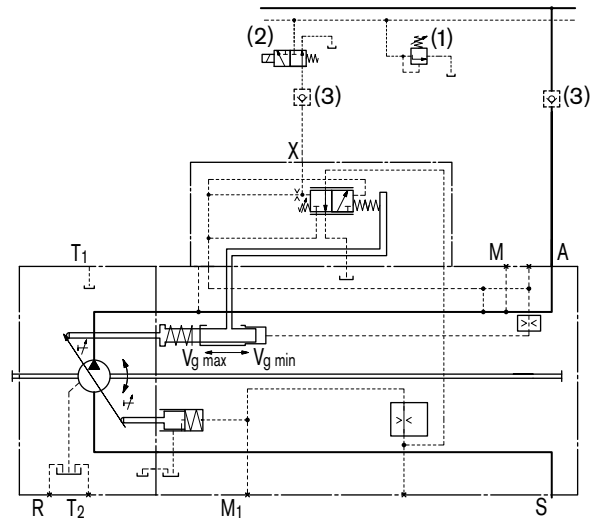

Size 190 ... 260

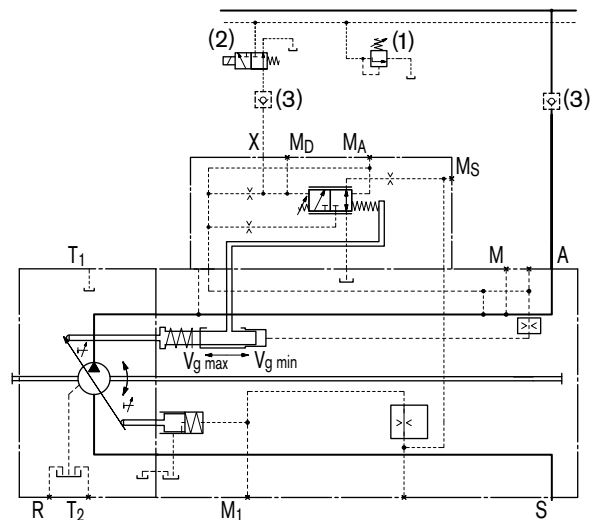

# HD – Hydraulic Control, Pilot-Pressure Related

With the pilot-pressure related control the pump displacement is adjusted in proportion to the pilot pressure applied to port Y. Maximum permissible pilot pressure  $p_{St\ max} = 40\ bar$

Control from  $V_{g\ min}$  to  $V_{g\ max}$ .

With increasing pilot pressure the pump swivels to a higher displacement.

Start of control (at  $V_{g\ min}$ ), can be set \_\_\_\_\_ from 4–10 bar

State start of control in clear text in the order.

Starting position without control signal (pilot pressure):

- at operating pressure and external control pressure < 30 bar:  $V_{g\ max}$
- at operating pressure or external control pressure > 30 bar:  $V_{g\ min}$

A control pressure of 30 bar is required to swivel the pump from its starting position  $V_{g\ max}$  to  $V_{g\ min}$ .

The required control pressure is taken either from the load pressure, or from the externally applied control pressure at the G port.

To ensure the control even at low operating pressure < 30 bar the port G must be supplied with an external control pressure of approx. 30 bar.

**Note:**

If no external control pressure is connected at G, the shuttle valve must be removed.

**Note**


**The spring return feature in the controller is not a safety device**

The spool valve inside the controller can get stuck in an undefined position by internal contamination (contaminated hydraulic fluid, abrasion or residual contamination from system components). As a result, the axial piston unit can no longer supply the flow specified by the operator.

Check whether your application requires that remedial measures be taken on your machine in order to bring the driven consumer into a safe position (e.g. immediate stop).


**Characteristic HD1**

Increase in pilot pressure  $V_{g\ min}$  to  $V_{g\ max}$  \_\_\_\_\_  $\Delta p = 10\ bar$

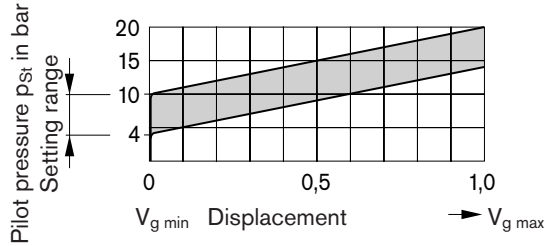


**Characteristic HD2**

Increase in pilot pressure  $V_{g\ min}$  to  $V_{g\ max}$  \_\_\_\_\_  $\Delta p = 25\ bar$

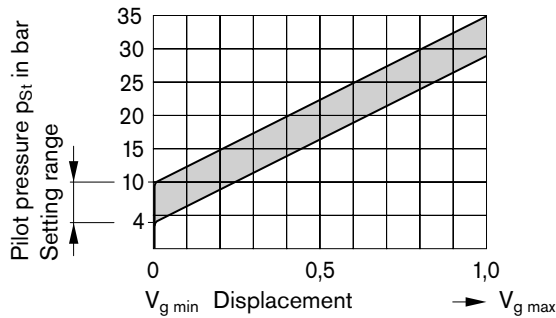

**Circuit diagram HD**

Size 40 ... 260

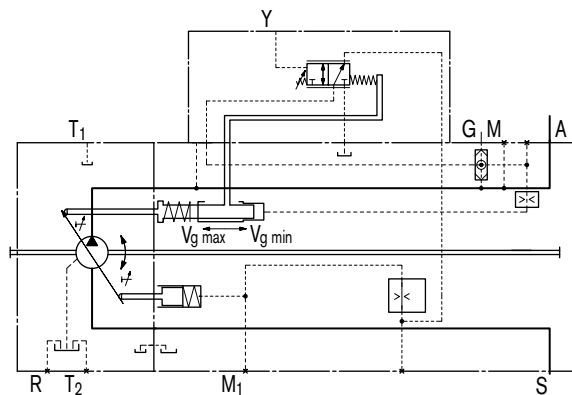

# HD – Hydraulic Control, Pilot-Pressure Related

## HD.D Hydraulic control with pressure cut-off


The pressure cut-off corresponds to a pressure control which adjusts the pump displacement back to  $V_{g\ min}$  when the pressure setting is reached.

This function overrides the HD control, i.e. the pilot-pressure related displacement control is functional below the pressure setting.

The pressure cut-off function is integrated into the pump control module and is preset to a specified value at the factory.


Setting range from 50 to 350 bar.

### Pressure cut-off characteristic D

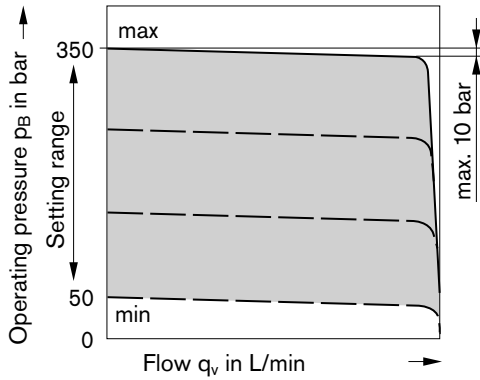


### Circuit diagram HD.D

Size 40 ... 145

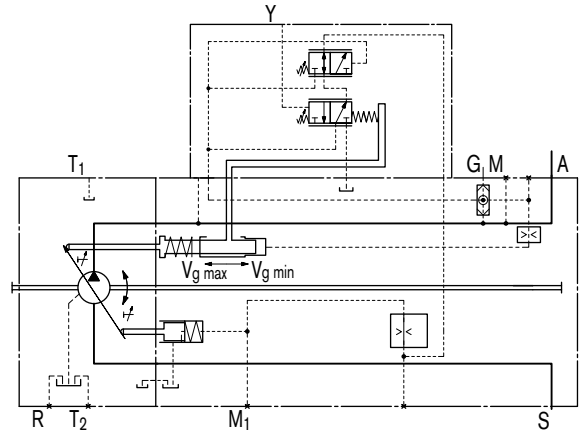

Size 190 ... 260

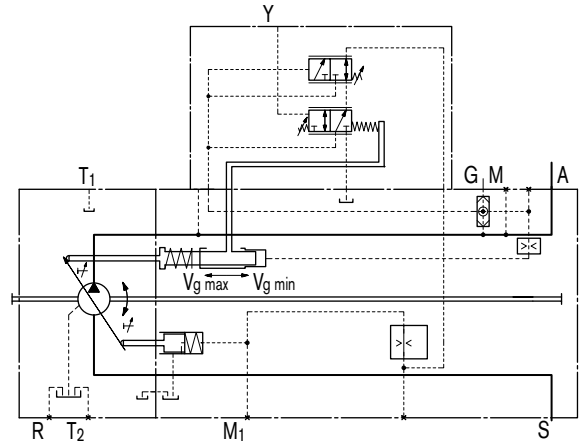

# EP – Electric Control with Proportional Solenoid

With the electric control with proportional solenoid, the pump displacement is adjusted proportionally to the solenoid current, resulting in a magnetic control force, acting directly onto the control spool that pilots the pump control piston.

Control from  $V_{g \min}$  to  $V_{g \max}$

With increasing control current the pump swivels to a higher displacement.

Starting position without control signal (control current):

- at operating pressure and external control pressure < 30 bar:  $V_{g \max}$
- at operating pressure or external control pressure > 30 bar:  $V_{g \min}$

A control pressure of 30 bar is required to swivel the pump from its starting position  $V_{g \max}$  to  $V_{g \min}$ .

The required control pressure is taken either from the load pressure, or from the externally applied control pressure at port G.

To ensure the control even at low operating pressure < 30 bar the port G must be supplied with an external control pressure of approx. 30 bar.

**Note:**

If no external control pressure is connected at G, the shuttle valve must be removed.

**Note:**

Install pump with EP control in the oil tank only when using mineral hydraulic oils and an oil temperature in the tank of max. 80°C.

The following electronic control units and amplifiers are available for actuating the proportional solenoids (see also [www.boschrexroth.com/mobilelektronik](http://www.boschrexroth.com/mobilelektronik)):

- BODAS controller RC
  - Series 20 \_\_\_\_\_ RD 95200
  - Series 21 \_\_\_\_\_ RD 95201
  - Series 22 \_\_\_\_\_ RD 95202
  - Series 30 \_\_\_\_\_ RD 95203
 and application software
- Analog amplifier RA \_\_\_\_\_ RE 95230

**Technical data, solenoid at EP1, EP2**

	EP1	EP2
Voltage	12 V (±20 %)	24 V (±20 %)
Control current		
Start of control at $V_{g \min}$	400 mA	200 mA
End of control at $V_{g \max}$	1200 mA	600 mA
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20°C)	5.5 Ω	22.7 Ω
Dither frequency	100 Hz	100 Hz
Actuated time	100 %	100 %
Type of protection	see connector version, page 60	


**Note**

**The spring return feature in the controller is not a safety device**

The spool valve inside the controller can get stuck in an undefined position by internal contamination (contaminated hydraulic fluid, abrasion or residual contamination from system components). As a result, the axial piston unit can no longer supply the flow specified by the operator.


Check whether your application requires that remedial measures be taken on your machine in order to bring the driven consumer into a safe position (e.g. immediate stop).

**Characteristic EP1/2**

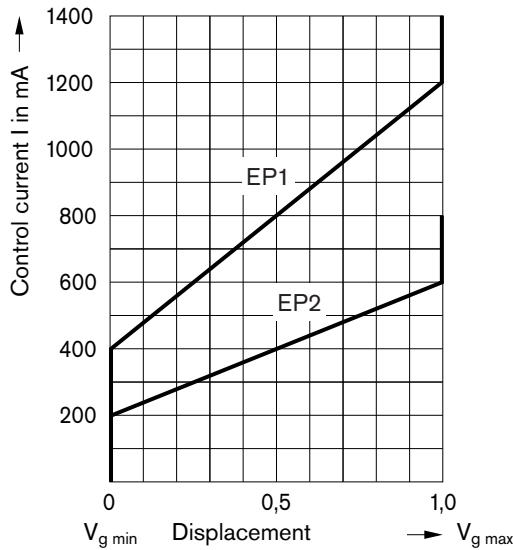

**Circuit diagram EP1/2**

Size 40 ... 260

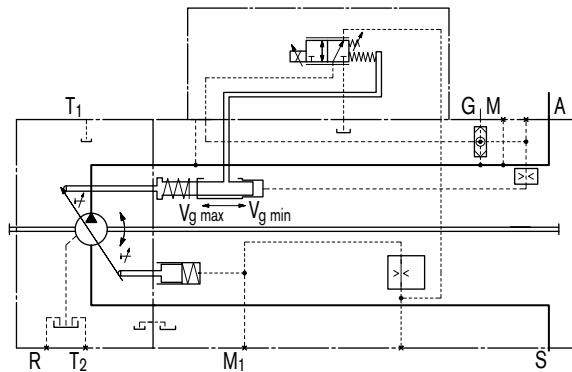

# EP – Electric Control with Proportional Solenoid

## EP.D Electric control with pressure cut-off


The pressure cut-off corresponds to a pressure control which adjusts the pump displacement back to  $V_{g\ min}$  when the pressure setting is reached.

This function overrides the EP control, i.e. the control current related displacement control is functional below the pressure setting.

The valve for the pressure cut-off is integrated in the control case and is set to a fixed specified pressure value at the factory.


Setting range from 50 to 350 bar

### Pressure cut-off characteristic D

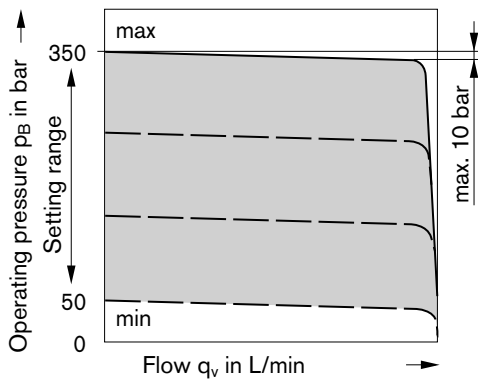


### Circuit diagram EP.D

Size 40 ... 145

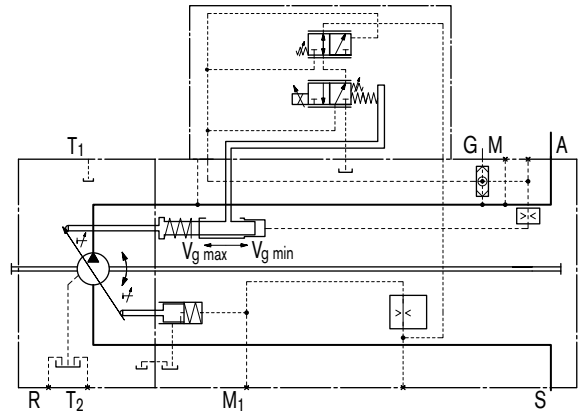

Size 190 ... 260

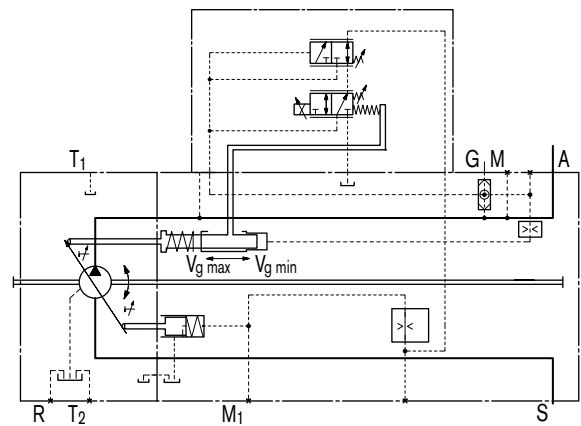


# Dimensions, Size 40

Before finalizing your design, please request a certified drawing. Dimensions in mm.

## LRDCS


Power control LR with pressure cut-off D, cross sensing control C and load sensing control S

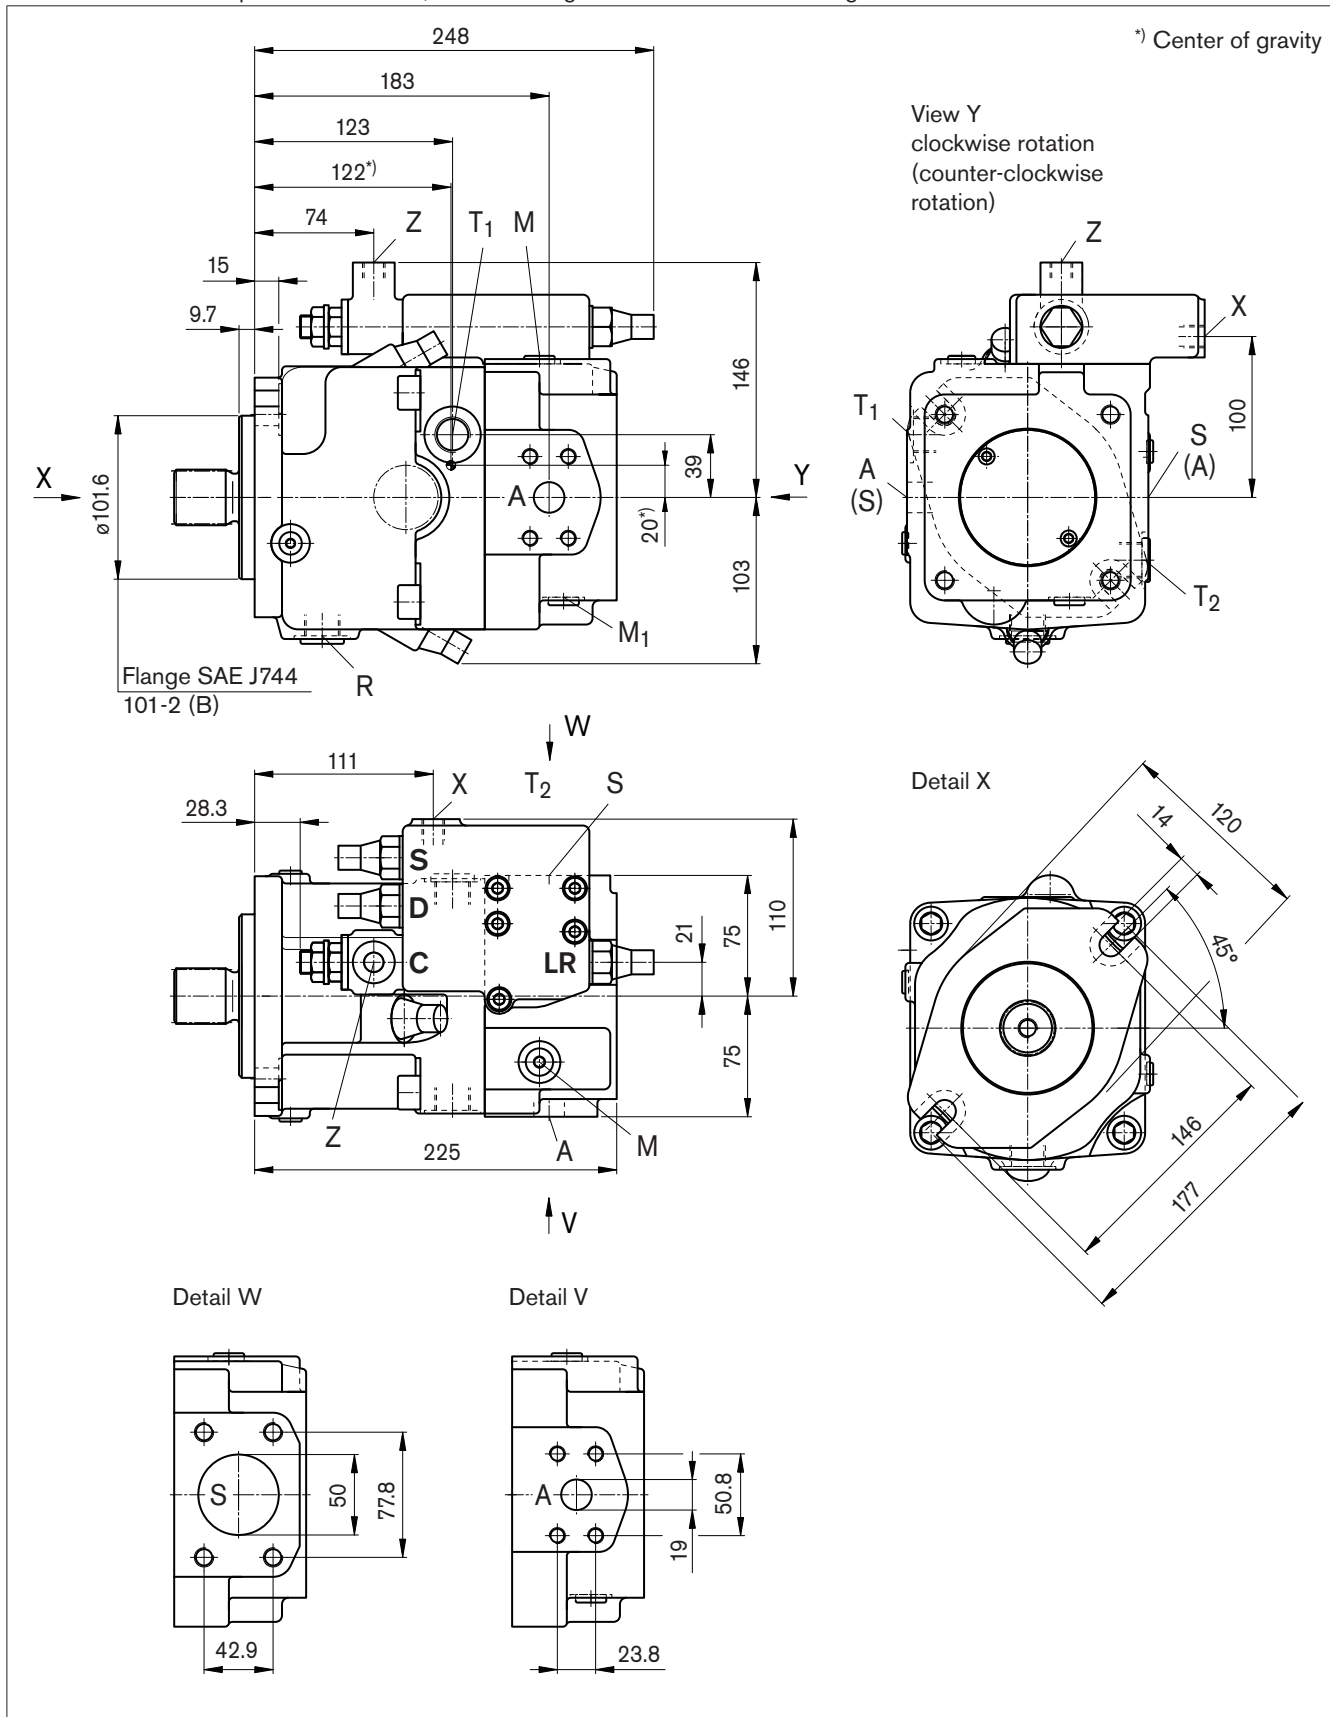

# Dimensions, Size 40

Before finalizing your design, please request a certified drawing. Dimensions in mm.

## Shaft ends

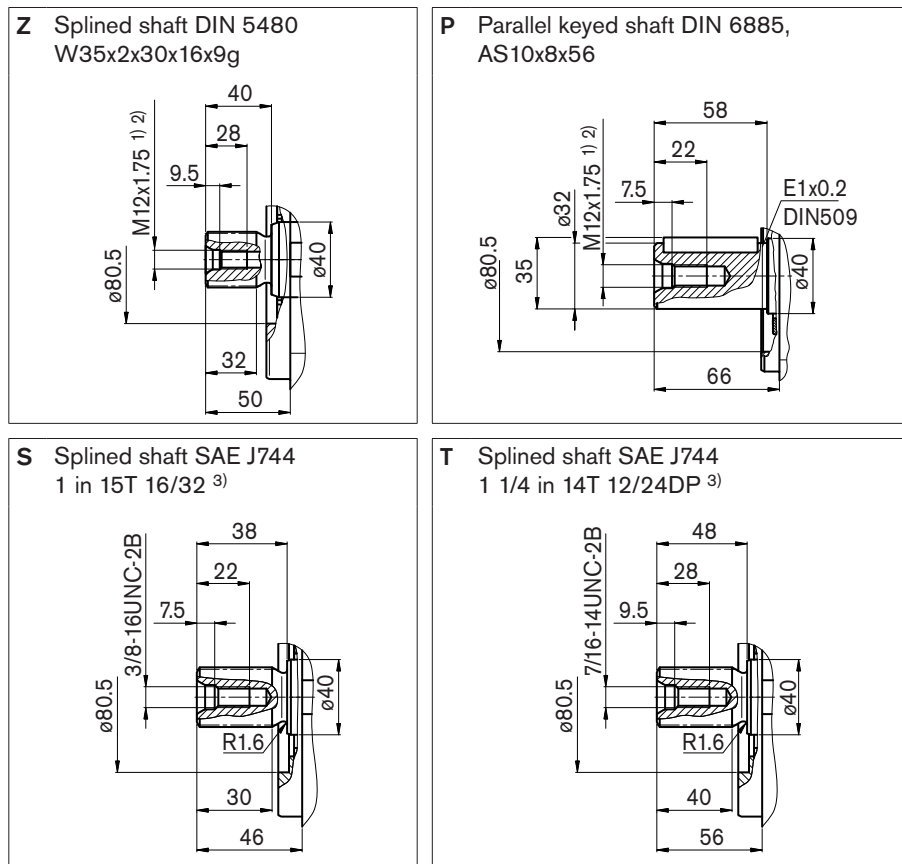

## Ports

Designation	Function	Standard	Size <sup>2)</sup>	Max. pressure (bar) <sup>4)</sup>	State
A	Service line port Fixing thread	SAE J518 DIN 13	3/4 in M10x1.5; 16 deep	400	O
S	Suction port Fixing thread	SAE J518 DIN 13	2 in M12x1.75; 17 deep	30	O
T <sub>1</sub> , T <sub>2</sub>	Tank port	DIN 3852	M22x1.5; 14 deep	10	5)
R	Air bleed	DIN 3852	M22x1.5; 14 deep	10	X
M <sub>1</sub>	Measurement point, positioning chamber	DIN 3852	M12x1.5; 12 deep	400	X
M	Measurement point, service line port	DIN 3852	M12x1.5; 12 deep	400	X
X	Pilot pressure port in version with load sensing (S) and remote controlled pressure cut-off (G)	DIN 3852	M14x1.5 12 deep	400	O
Y	Pilot pressure port in version with stroke limiter (H...), 2-stage pressure cut-off (E) and HD	DIN 3852	M14x1.5; 12 deep	40	O
Z	Pilot pressure port in version with cross sensing (C) and power override (LR3) power override (LG1)	DIN 3852	M14x1.5; 12 deep	400 40	O
G	Port for control pressure (controller) in version with stroke limiter (H..., U2), HD and EP with screw union GE10 - PLM (otherwise closed)	DIN 3852	M14x1.5; 12 deep	40	O

<sup>1)</sup> Center bore according to DIN 332 (thread acc. to DIN 13)

<sup>2)</sup> For max. tightening torque, please refer to general notes on page 64

<sup>3)</sup> ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

<sup>4)</sup> Depending on adjustment data and operating pressure

<sup>5)</sup> Depending on installation position, T1 or T2 must be connected (see also page 61)

O = Open, must be connected (closed on delivery)


X = Closed (in normal operation)

# Dimensions, Size 40

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## LRDH1/LRDH5

Power control with pressure cut-off and hydraulic stroke limiter (negative characteristic)

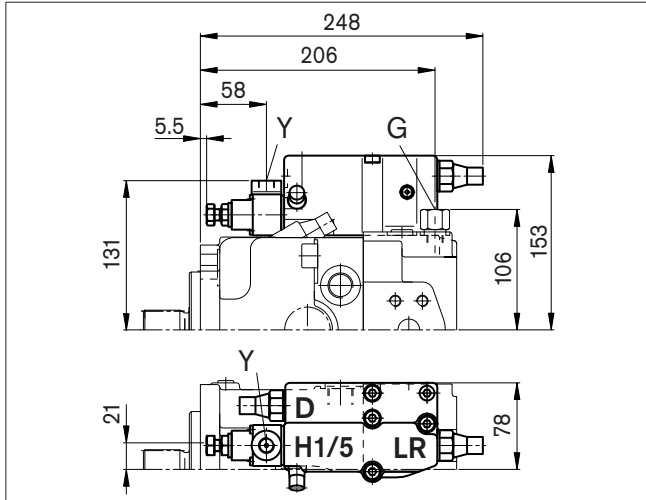


## LRDH2/LRDH6

Power control with pressure cut-off and hydraulic stroke limiter (positive characteristic)

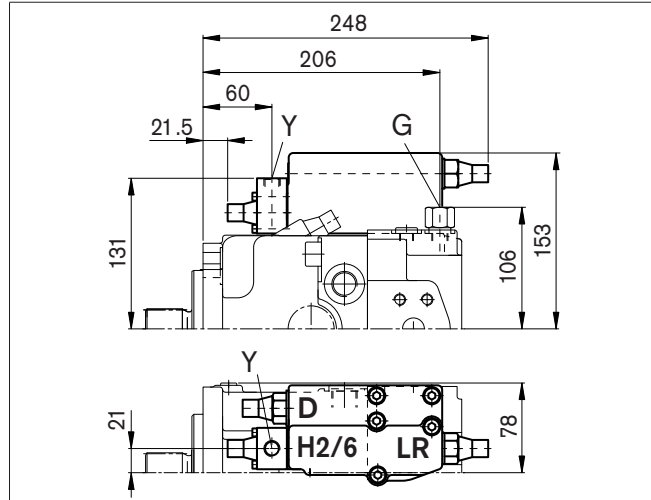


## LRDU1/LRDU2

Power control with pressure cut-off and electric stroke limiter (positive characteristic)

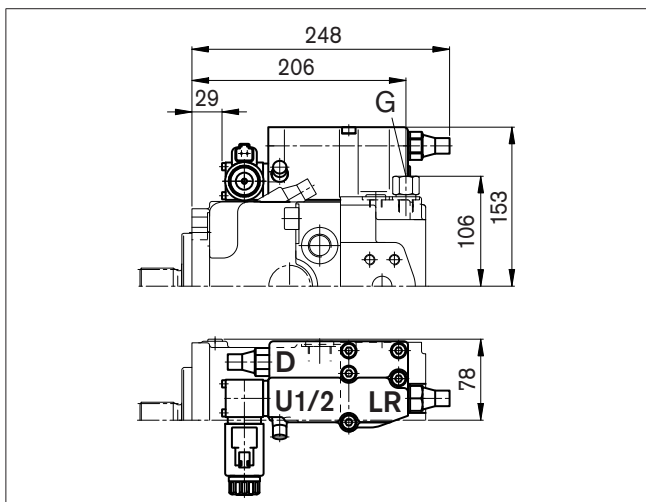


## LR3DS

Power control with high-pressure related override, pressure cut-off and load sensing control

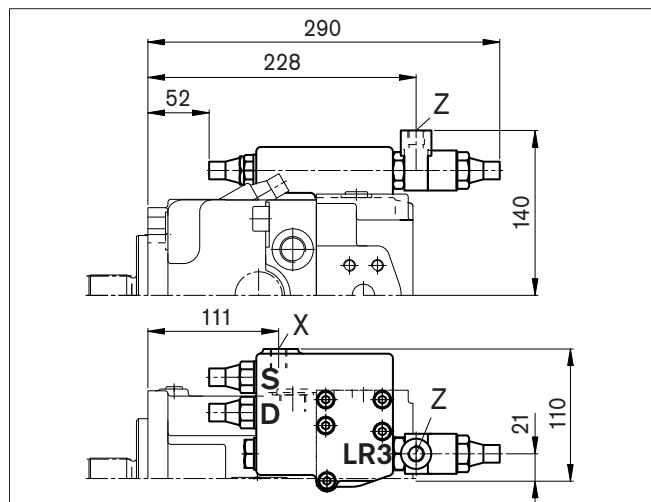


## LG1E

Power control with pilot-pressure related override (negative) and 2-stage pressure cut-off

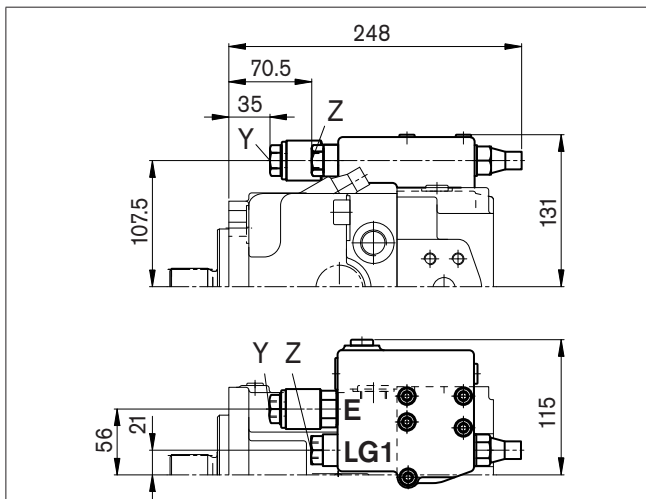

## LG2E

Power control with pilot-pressure related override (positive) and 2-stage pressure cut-off






# Dimensions, Size 40

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## HD1D/HD2D

Hydraulic control, pilot-pressure related with pressure cut-off

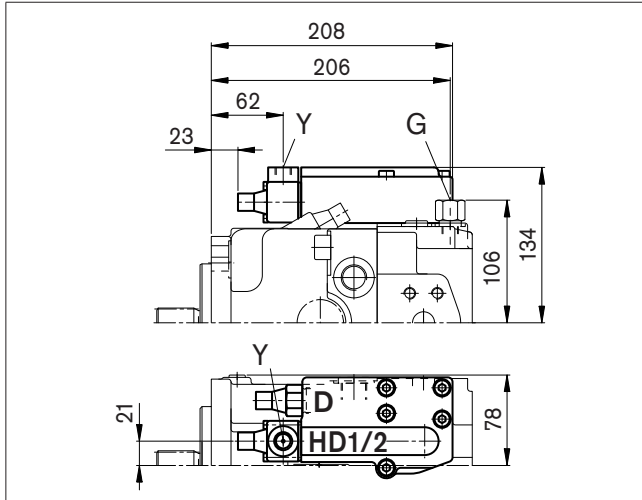


## EP1D/EP2D

Electric control with proportional solenoid and pressure cut-off

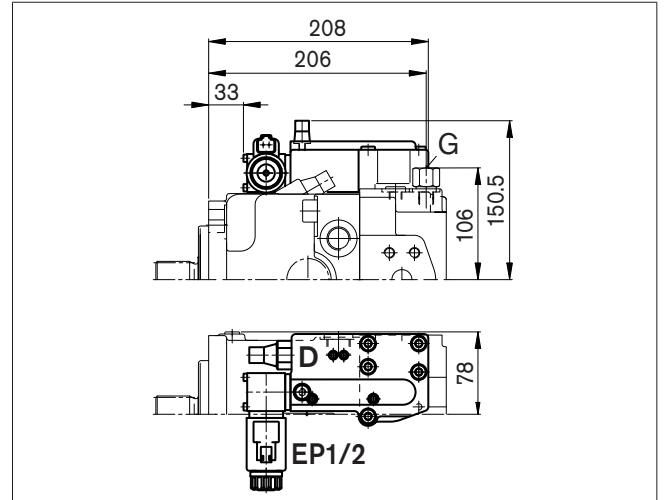


## DRS/DRG

Pressure control with load sensing control  
Pressure control remote controlled

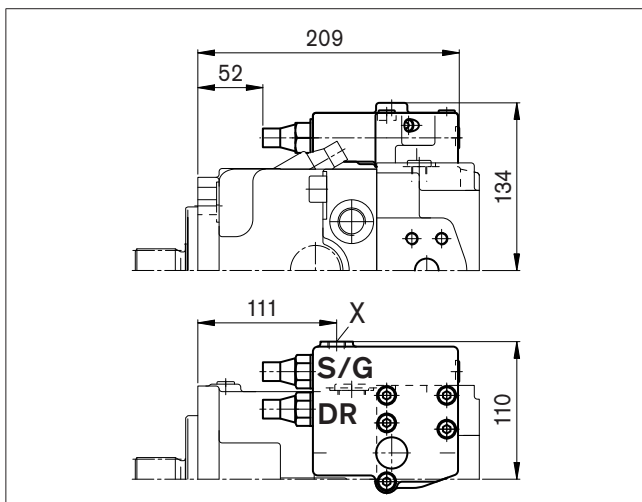


## DRL

Pressure control for parallel operation

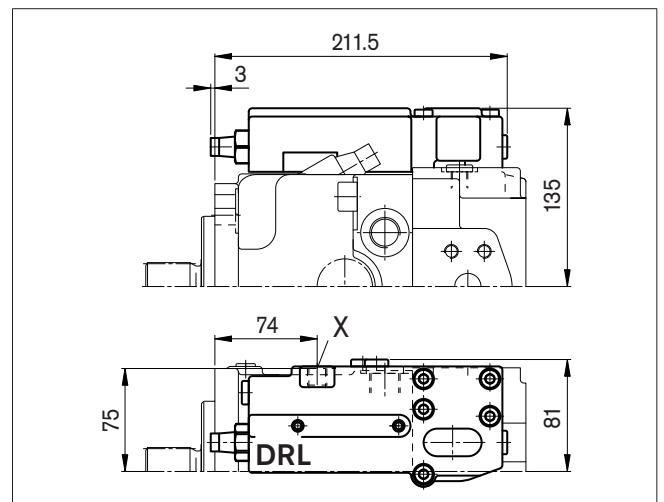


## LE1S/LE2S

Power control with electric override (negative) and load sensing control

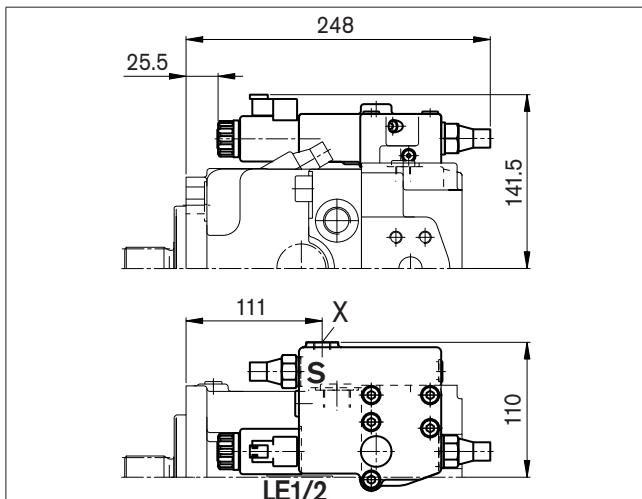

## LE2S2/LE1S5/LE2S5

Power control with electric override (negative) and load sensing control, override






# Dimensions, Size 60

Before finalizing your design, please request a certified drawing. Dimensions in mm.

## Shaft ends

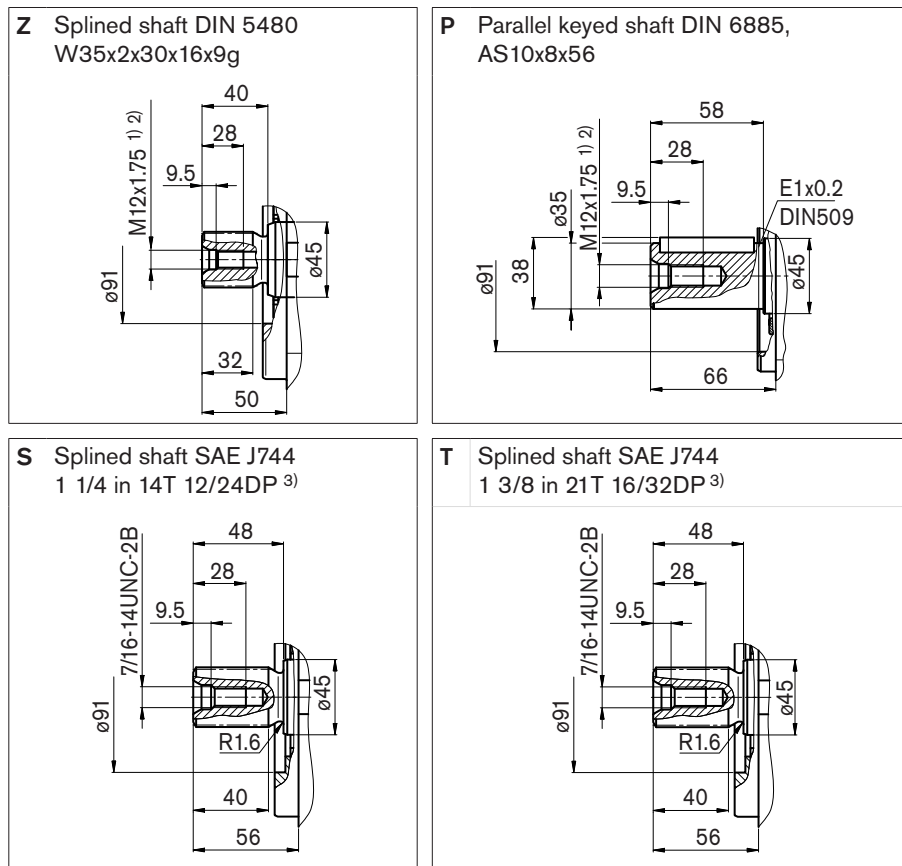

## Ports

Designation	Function	Standard	Size <sup>2)</sup>	Max. pressure (bar) <sup>4)</sup>	State
A	Service line port Fixing thread	SAE J518 DIN 13	3/4 in M10x1.5; 17 deep	400	O
S	Suction port Fixing thread	SAE J518 DIN 13	2 in M12x1.75; 20 deep	30	O
T <sub>1</sub> , T <sub>2</sub>	Tank port	DIN 3852	M22x1.5; 14 deep	10	5)
R	Air bleed	DIN 3852	M22x1.5; 14 deep	10	X
M <sub>1</sub>	Measurement point, positioning chamber	DIN 3852	M12x1.5; 12 deep	400	X
M	Measurement point, service line port	DIN 3852	M12x1.5; 12 deep	400	X
X	Pilot pressure port in version with load sensing (S) and remote controlled pressure cut-off (G)	DIN 3852	M14x1.5 12 deep	400	O
Y	Pilot pressure port in version with stroke limiter (H...), 2-stage pressure cut-off (E) and HD	DIN 3852	M14x1.5; 12 deep	40	O
Z	Pilot pressure port in version with cross sensing (C) and power override (LR3) power override (LG1)	DIN 3852	M14x1.5; 12 deep	400 40	O
G	Port for control pressure (controller) in version with stroke limiter (H., U2), HD and EP with screw union GE10 - PLM (otherwise closed)	DIN 3852	M14x1.5; 12 deep	40	O

<sup>1)</sup> Center bore according to DIN 332 (thread acc. to DIN 13)

<sup>2)</sup> For max. tightening torque, please refer to general notes on page 64

<sup>3)</sup> ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

<sup>4)</sup> Depending on adjustment data and operating pressure

<sup>5)</sup> Depending on installation position, T1 or T2 must be connected (see also page 61)

O = Open, must be connected (closed on delivery)


X = Closed (in normal operation)

# Dimensions, Size 60

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## LRDH1/LRDH5

Power control with pressure cut-off and hydraulic stroke limiter (negative characteristic)

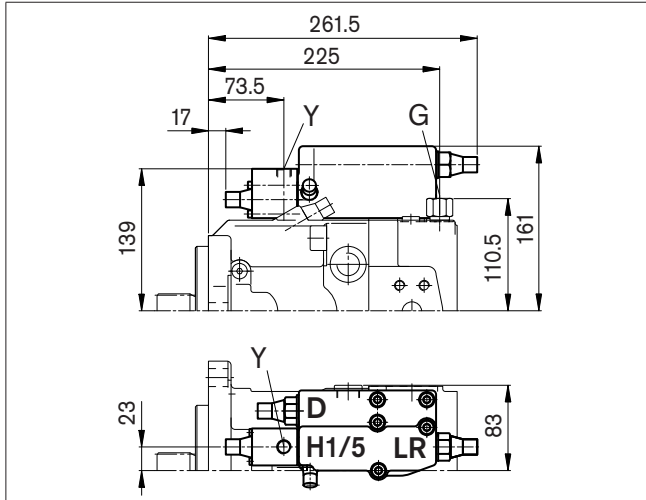


## LRDH2/LRDH6

Power control with pressure cut-off and hydraulic stroke limiter (positive characteristic)

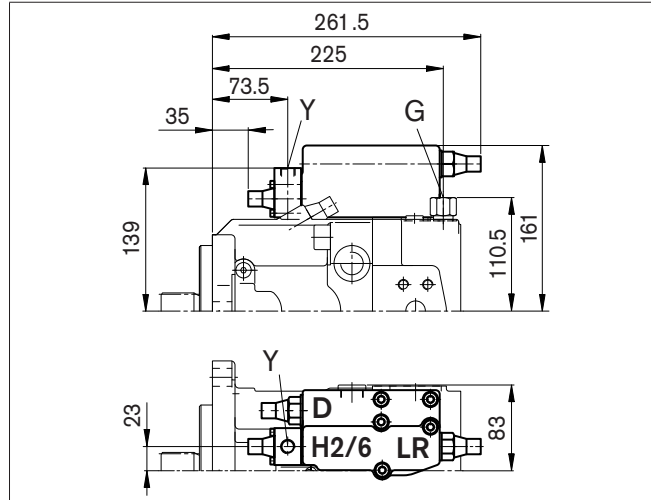


## LRDU1/LRDU2

Power control with pressure cut-off and electric stroke limiter (positive characteristic)

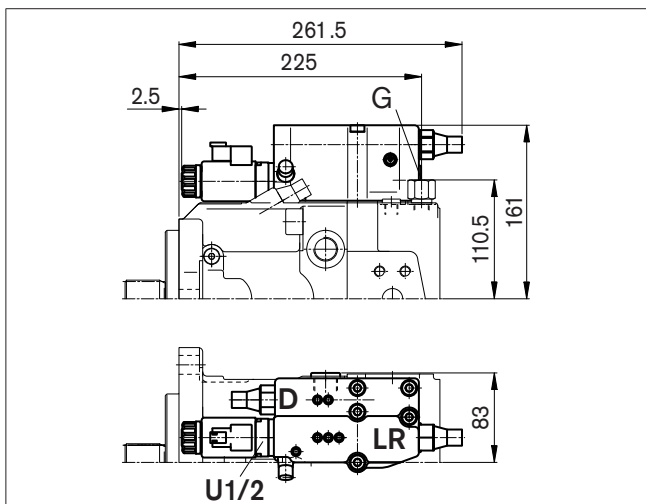


## LR3DS

Power control with high-pressure related override, pressure cut-off and load sensing control

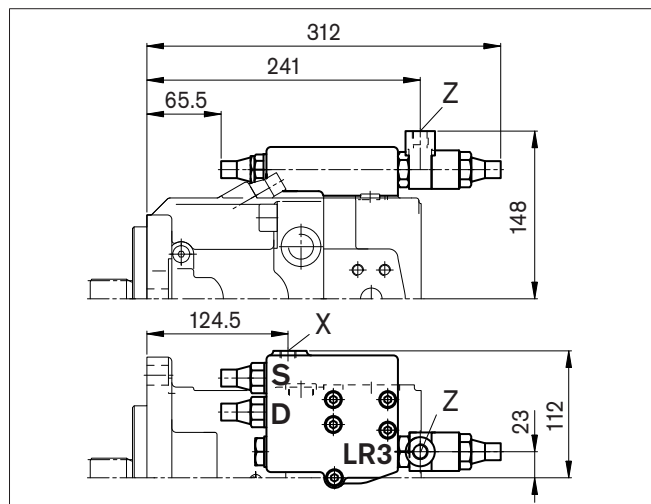


## LG1E

Power control with pilot-pressure related override (negative) and 2-stage pressure cut-off

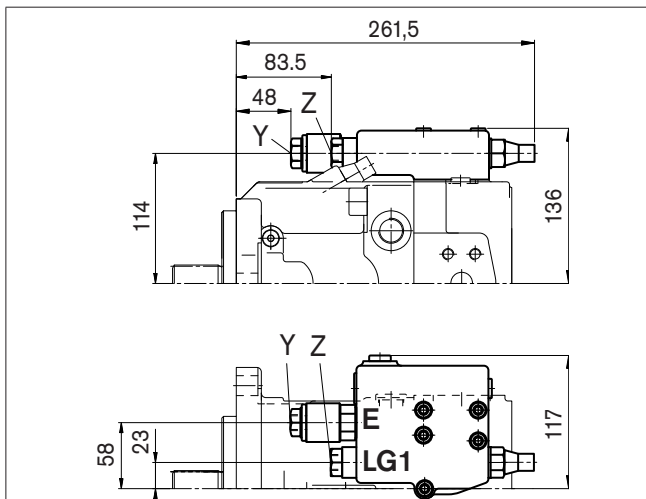

## LG2E

Power control with pilot-pressure related override (positive) and 2-stage pressure cut-off




# Dimensions, Size 60

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## HD1D/HD2D

Hydraulic control, pilot-pressure related with pressure cut-off

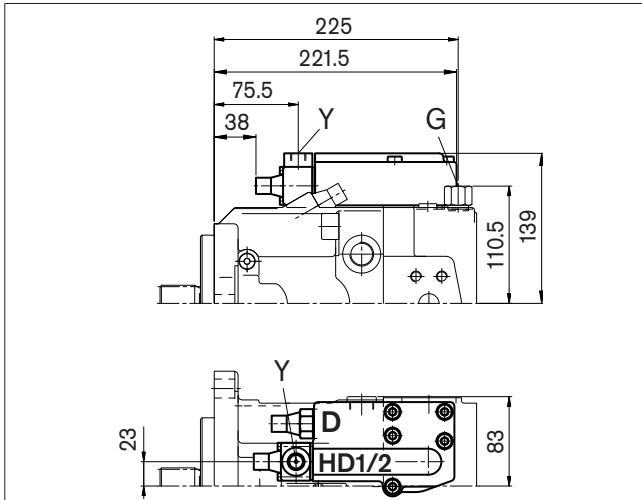


## EP1D/EP2D

Electric control with proportional solenoid and pressure cut-off

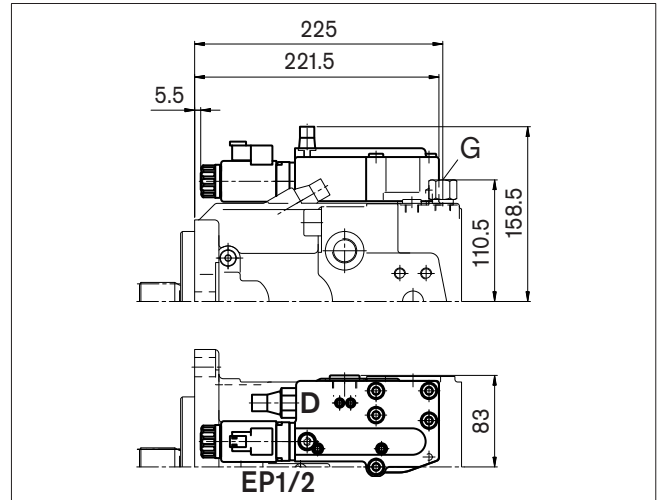


## DRS/DRG

Pressure control with load sensing control  
Pressure control remote controlled

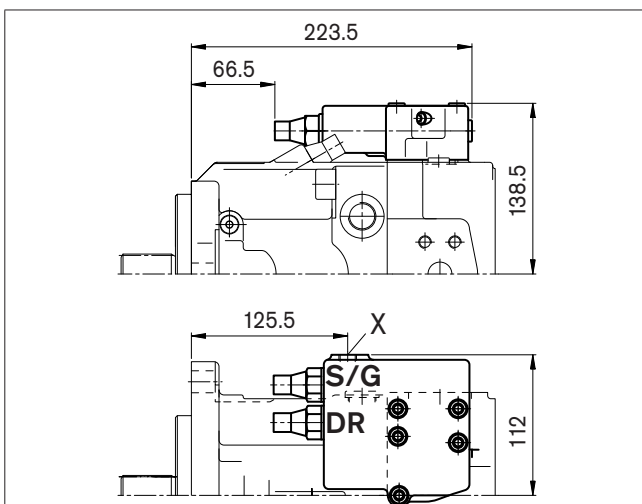


## DRL

Pressure control for parallel operation

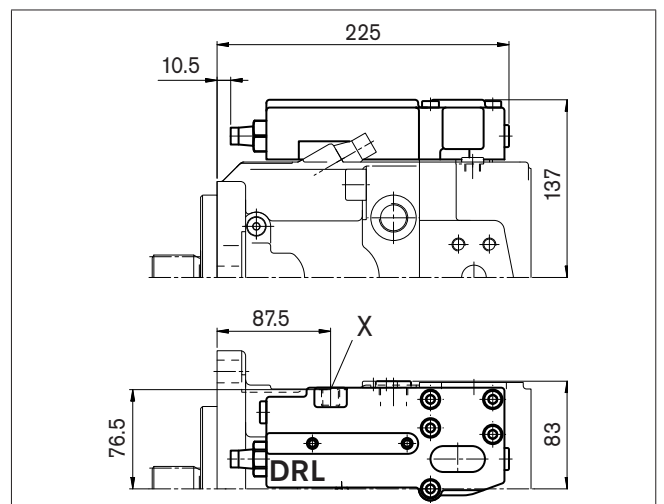


## LE1S/LE2S

Power control with electric override (negative) and load sensing control

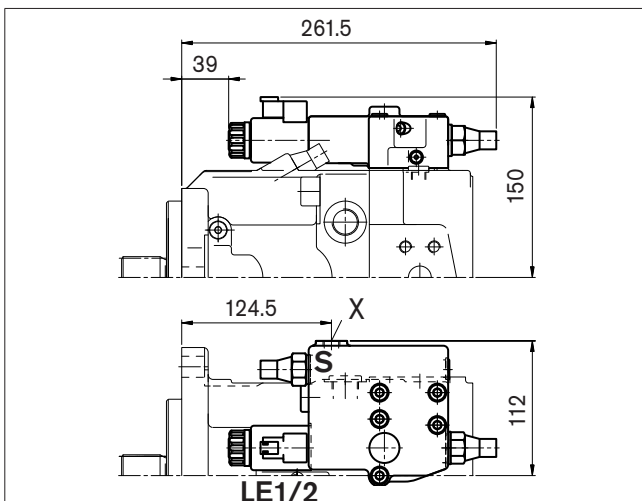

## LE2S2/LE1S5/LE2S5

Power control with electric override (negative) and load sensing control, override






# Dimensions, Size 75

Before finalizing your design, please request a certified drawing. Dimensions in mm.

## Shaft ends

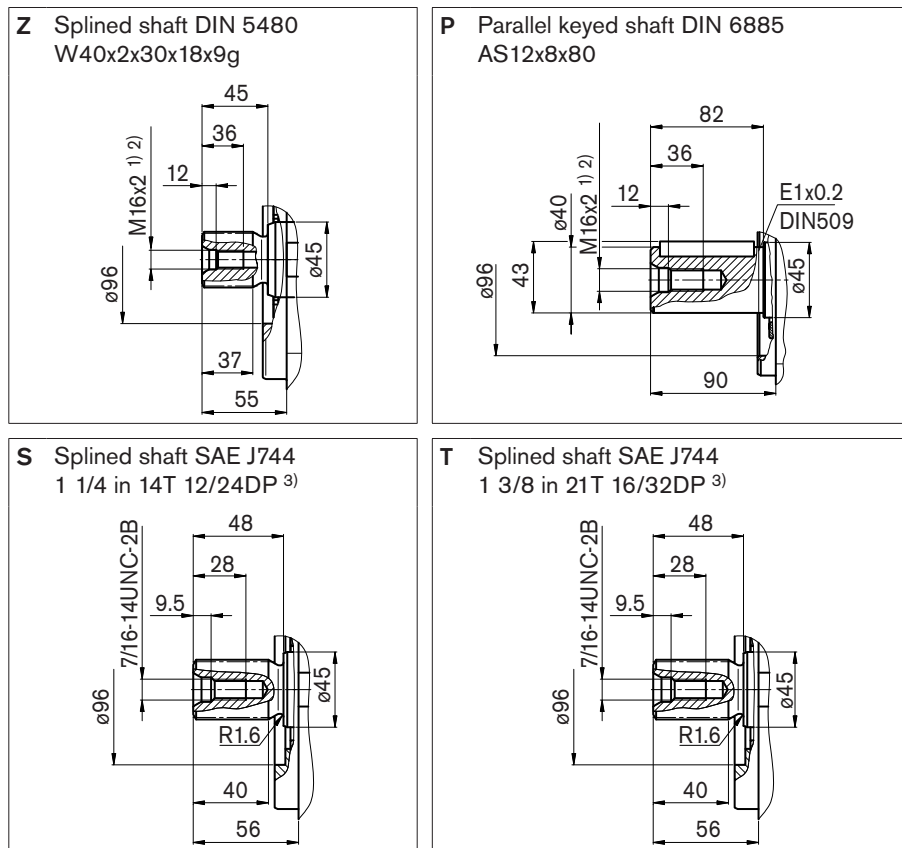

## Ports

Designation	Function	Standard	Size <sup>2)</sup>	Max. pressure (bar) <sup>4)</sup>	State
A	Service line port Fixing thread	SAE J518 DIN 13	1 in M12x1.75; 17 deep	400	O
S	Suction port Fixing thread	SAE J518 DIN 13	2 1/2 in M12x1.75; 17 deep	30	O
T <sub>1</sub> , T <sub>2</sub>	Tank port	DIN 3852	M22x1.5; 14 deep	10	<sup>5)</sup>
R	Air bleed	DIN 3852	M22x1.5; 14 deep	10	X
M <sub>1</sub>	Measurement point, positioning chamber	DIN 3852	M12x1.5; 12 deep	400	X
M	Measurement point, service line port	DIN 3852	M12x1.5; 12 deep	400	X
X	Pilot pressure port in version with load sensing (S) and remote controlled pressure cut-off (G)	DIN 3852	M14x1.5; 12 deep	400	O
Y	Pilot pressure port in version with stroke limiter (H...), 2-stage pressure cut-off (E) and HD	DIN 3852	M14x1.5; 12 deep	40	O
Z	Pilot pressure port in version with cross sensing (C) and power override (LR3) power override (LG1)	DIN 3852	M14x1.5; 12 deep	400 40	O
G	Port for control pressure (controller) in version with stroke limiter (H..., U2), HD and EP with screw union GE10 - PLM (otherwise closed)	DIN 3852	M14x1.5; 12 deep	40	O

<sup>1)</sup> Center bore according to DIN 332 (thread acc. to DIN 13)

<sup>2)</sup> For max. tightening torque, please refer to general notes on page 64

<sup>3)</sup> ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

<sup>4)</sup> Depending on adjustment data and operating pressure

<sup>5)</sup> Depending on installation position, T1 or T2 must be connected (see also page 61)

O = Open, must be connected (closed on delivery)


X = Closed (in normal operation)

# Dimensions, Size 75

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## LRDH1/LRDH5

Power control with pressure cut-off and hydraulic stroke limiter (negative characteristic)

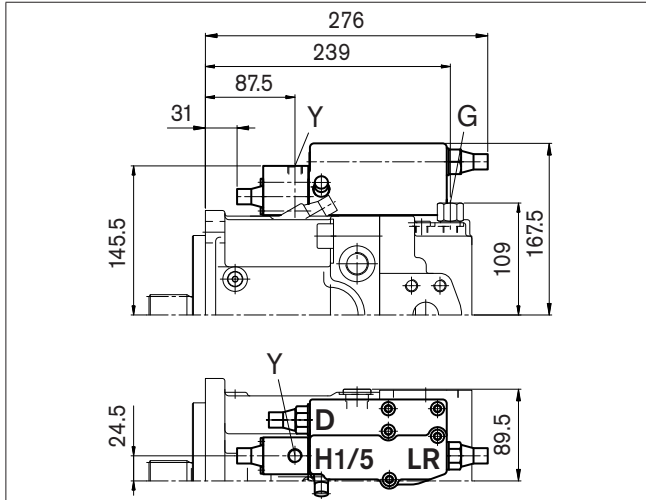


## LRDH2/LRDH6

Power control with pressure cut-off and hydraulic stroke limiter (positive characteristic)

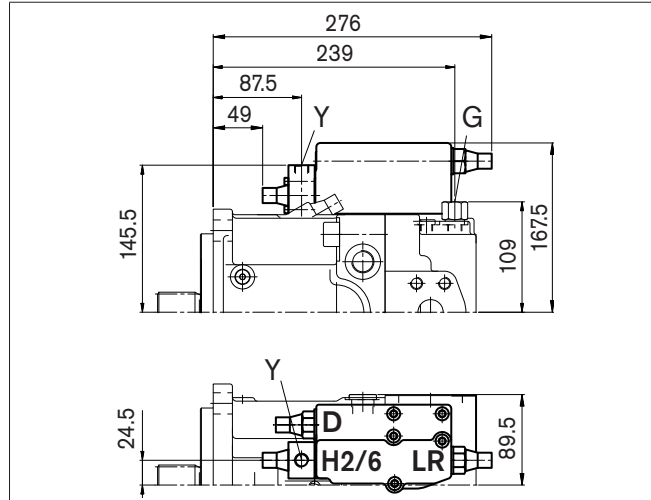


## LRDU1/LRDU2

Power control with pressure cut-off and electric stroke limiter (positive characteristic)

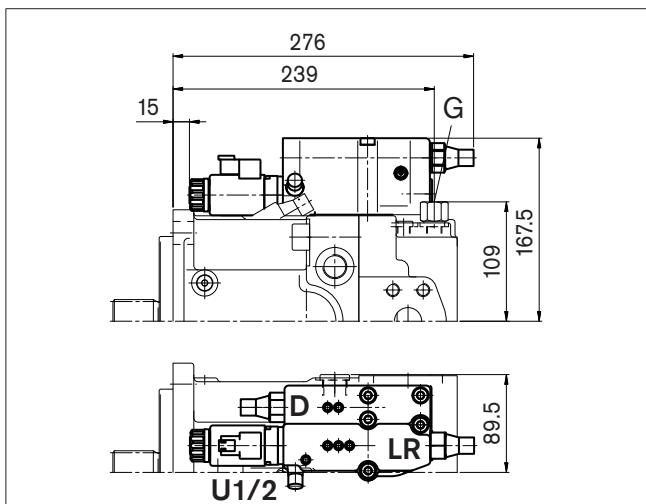


## LR3DS

Power control with high-pressure related override, pressure cut-off and load sensing control

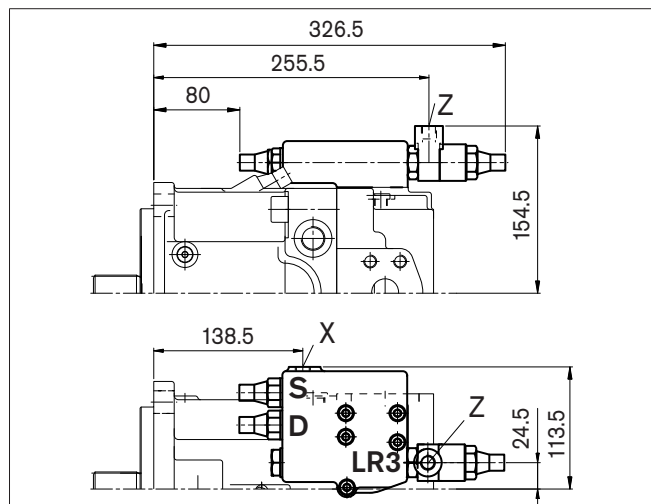


## LG1E

Power control with pilot-pressure related override (negative) and 2-stage pressure cut-off

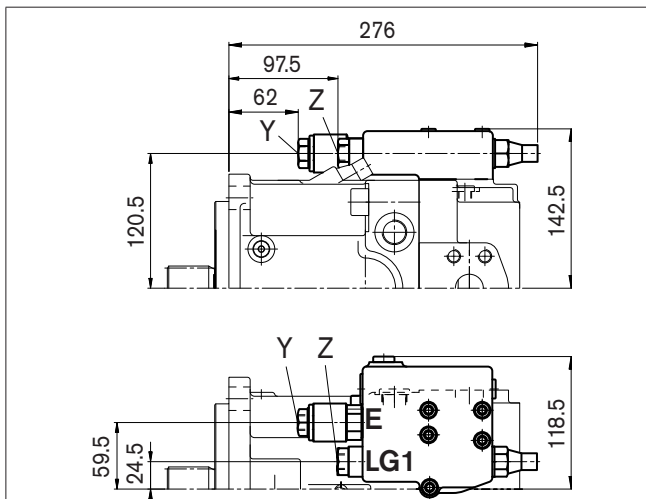

## LG2E

Power control with pilot-pressure related override (positive) and 2-stage pressure cut-off






# Dimensions, Size 75

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## HD1D/HD2D

Hydraulic control, pilot-pressure related with pressure cut-off

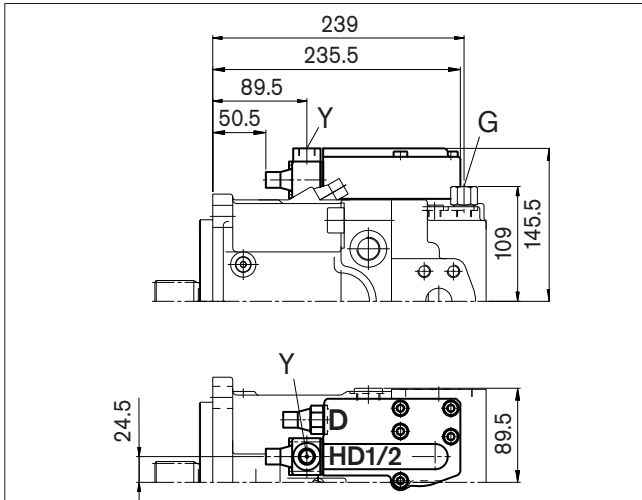


## EP1D/EP2D

Electric control with proportional solenoid and pressure cut-off

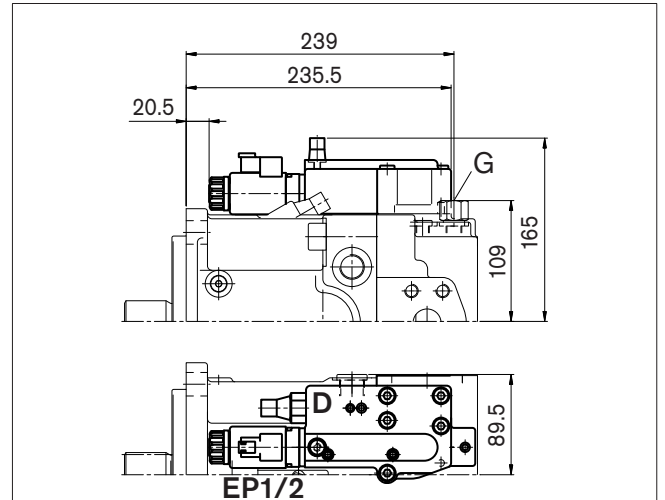


## DRS/DRG

Pressure control with load sensing control  
Pressure control remote controlled

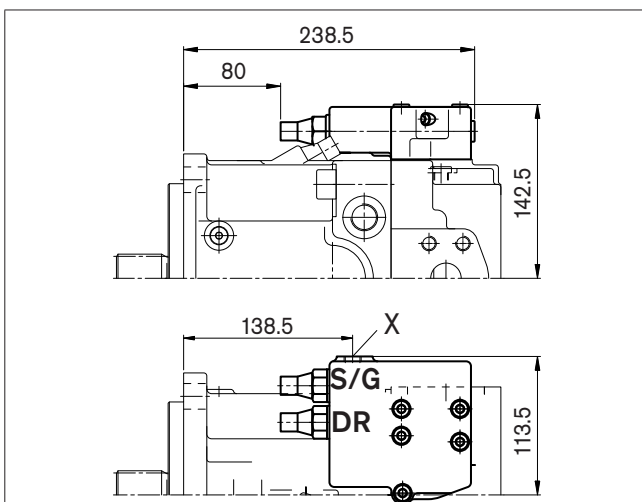


## DRL

Pressure control for parallel operation

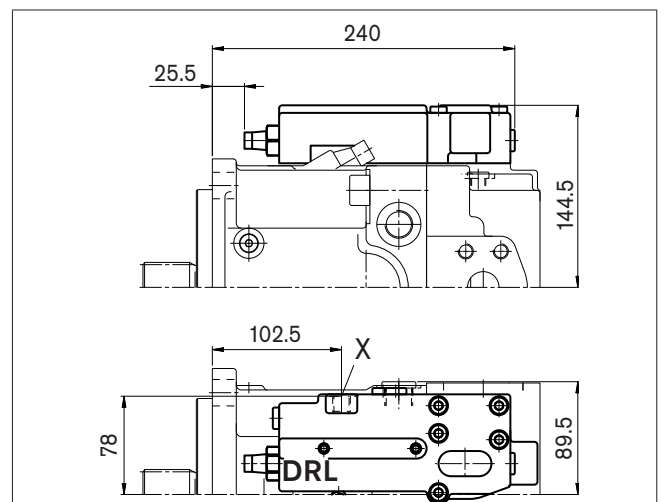


## LE1S/LE2S

Power control with electric override (negative) and load sensing control

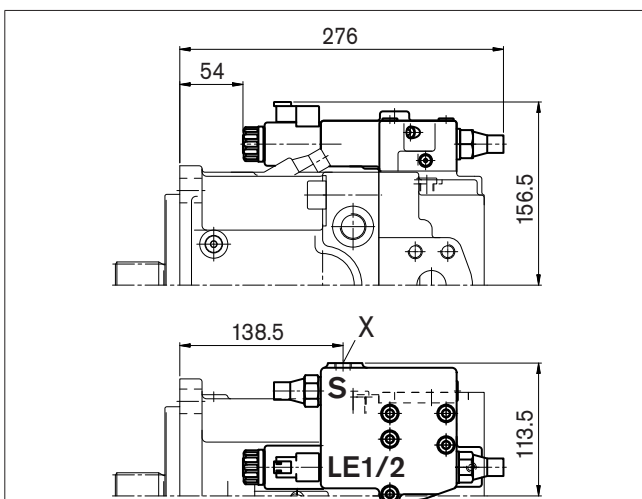

## LE2S2/LE1S5/LE2S5

Power control with electric override (negative) and load sensing control, override




# Dimensions, Size 95

Before finalizing your design, please request a certified drawing. Dimensions in mm.

## LRDCS




Power control LR with pressure cut-off D, cross sensing control C and load sensing control S

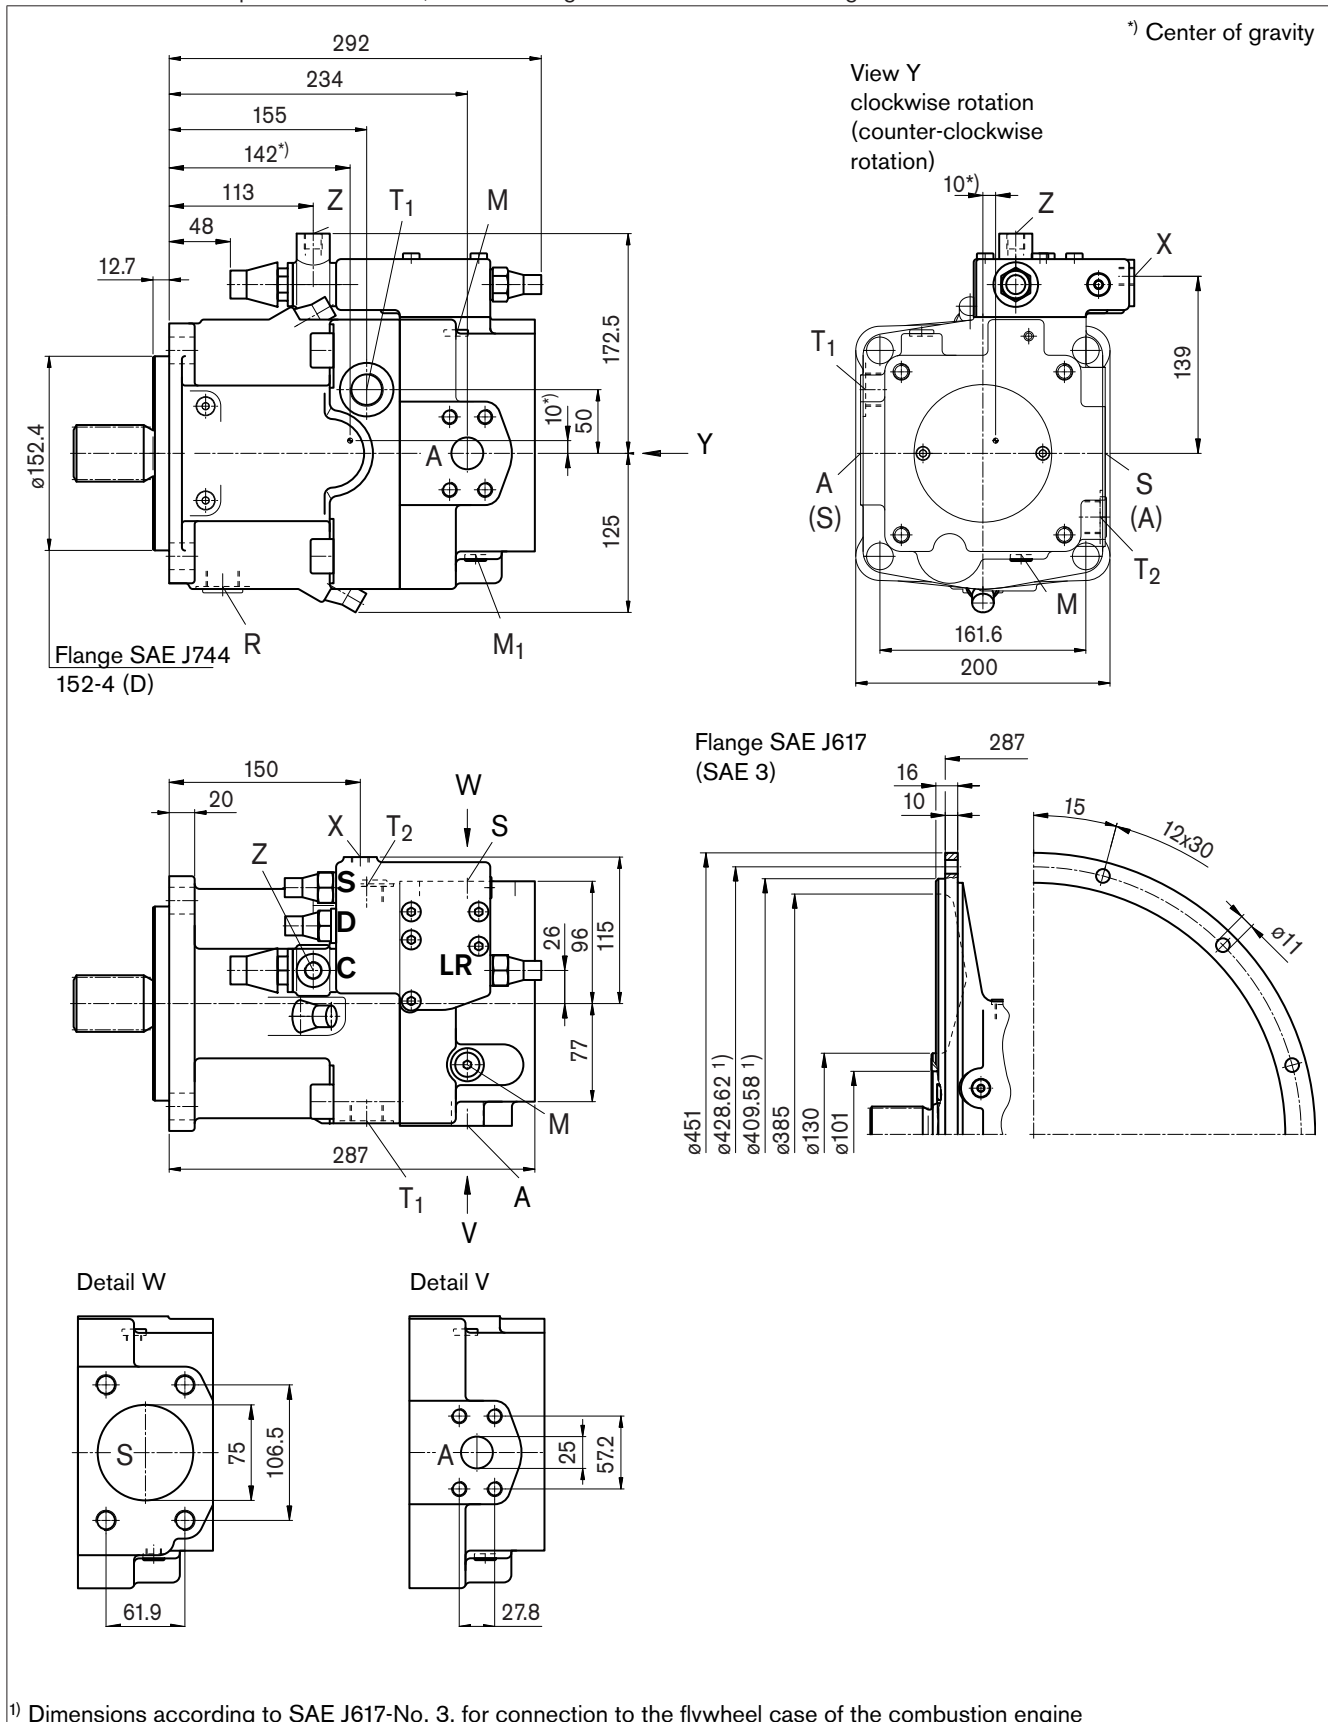

# Dimensions, Size 95

Before finalizing your design, please request a certified drawing. Dimensions in mm.

## Shaft ends

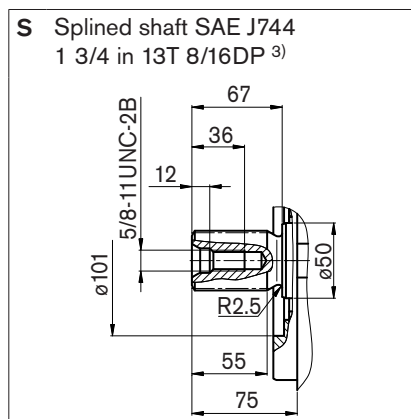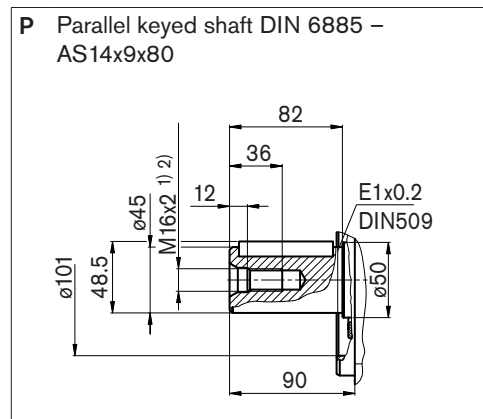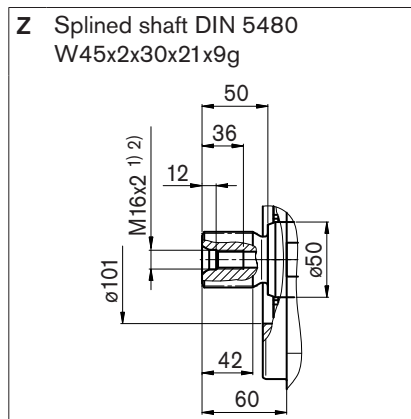

## Ports

Designation	Function	Standard	Size <sup>2)</sup>	Max. pressure (bar) <sup>4)</sup>	State
A	Service line port Fixing thread	SAE J518 DIN 13	1 in M12x1.75; 17 deep	400	O
S	Suction port Fixing thread	SAE J518 DIN 13	3 in M16x2; 24 deep	30	O
T <sub>1</sub> , T <sub>2</sub>	Tank port	DIN 3852	M26x1.5; 16 deep	10	<sup>5)</sup>
R	Air bleed	DIN 3852	M26x1.5; 16 deep	10	X
M <sub>1</sub>	Measurement point, positioning chamber	DIN 3852	M12x1.5; 12 deep	400	X
M	Measurement point, service line port	DIN 3852	M12x1.5; 12 deep	400	X
X	Pilot pressure port in version with load sensing (S) and remote controlled pressure cut-off (G)	DIN 3852	M14x1.5; 12 deep	400	O
Y	Pilot pressure port in version with stroke limiter (H...), 2-stage pressure cut-off (E) and HD	DIN 3852	M14x1.5; 12 deep	40	O
Z	Pilot pressure port in version with cross sensing (C) and power override (LR3) power override (LG1)	DIN 3852	M14x1.5; 12 deep	400 40	O
G	Port for control pressure (controller) in version with stroke limiter (H..., U2), HD and EP with screw union GE10 - PLM (otherwise closed)	DIN 3852	M14x1.5; 12 deep	40	O

<sup>1)</sup> Center bore according to DIN 332 (thread acc. to DIN 13)

<sup>2)</sup> For max. tightening torque, please refer to general notes on page 64

<sup>3)</sup> ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

<sup>4)</sup> Depending on adjustment data and operating pressure

<sup>5)</sup> Depending on installation position, T1 or T2 must be connected (see also page 61)

O = Open, must be connected (closed on delivery)


X = Closed (in normal operation)

# Dimensions, Size 95

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## LRDH1/LRDH5

Power control with pressure cut-off and hydraulic stroke limiter (negative characteristic)

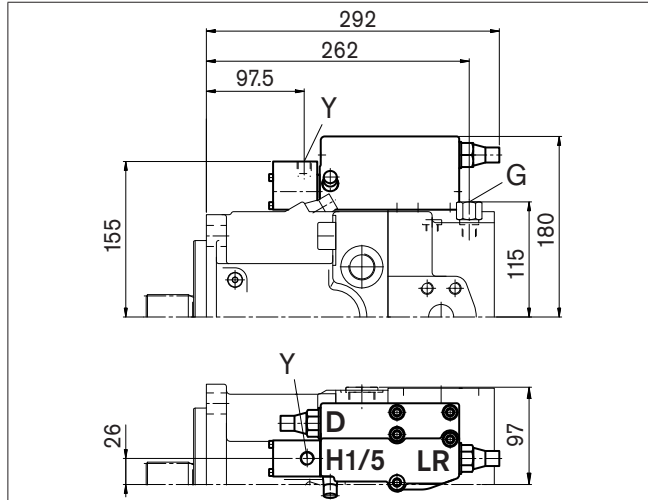


## LRDH2/LRDH6

Power control with pressure cut-off and hydraulic stroke limiter (positive characteristic)

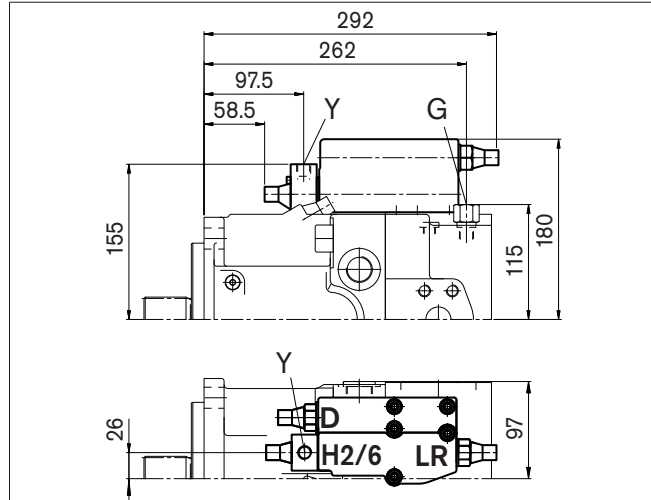


## LRDU1/LRDU2

Power control with pressure cut-off and electric stroke limiter (positive characteristic)

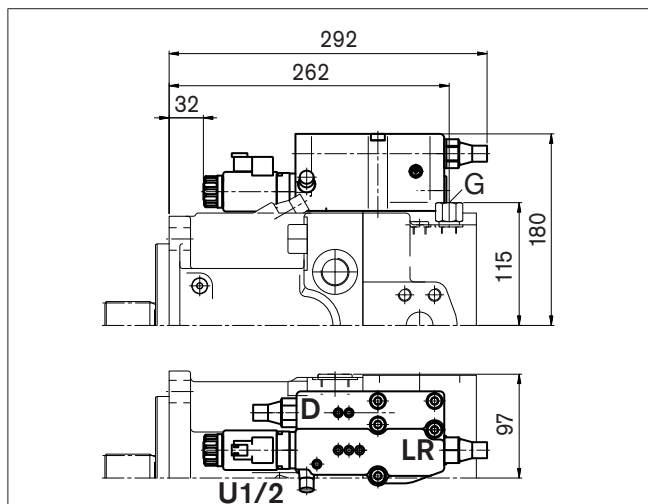


## LR3DS

Power control with high-pressure related override, pressure cut-off and load sensing control

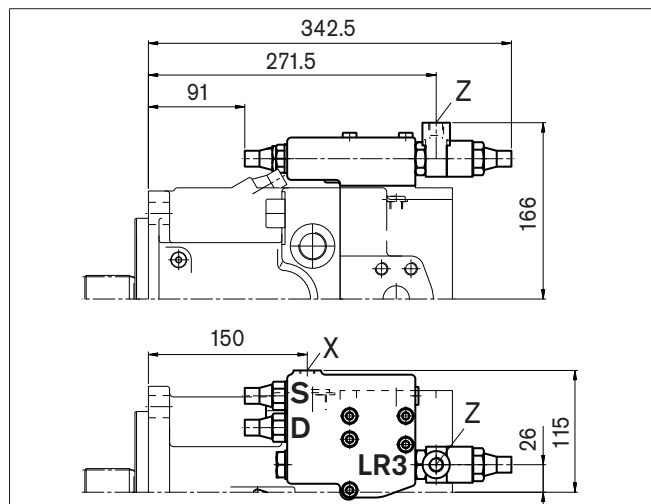


## LG1E

Power control with pilot-pressure related override (negative) and 2-stage pressure cut-off

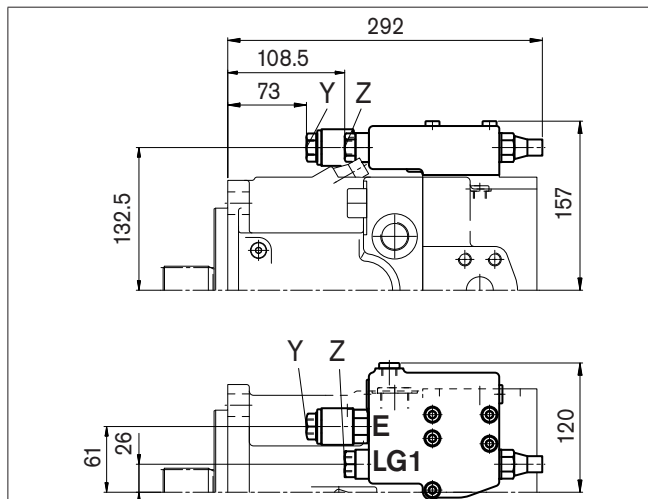

## LG2E

Power control with pilot-pressure related override (positive) and 2-stage pressure cut-off




# Dimensions, Size 95

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## HD1D/HD2D

Hydraulic control, pilot-pressure related with pressure cut-off

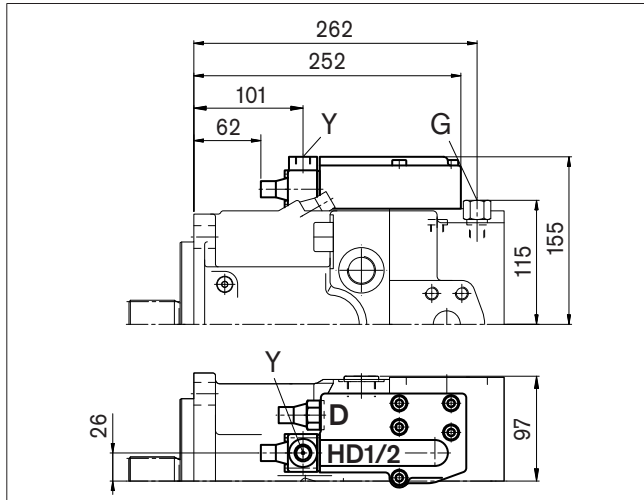


## EP1D/EP2D

Electric control with proportional solenoid and pressure cut-off

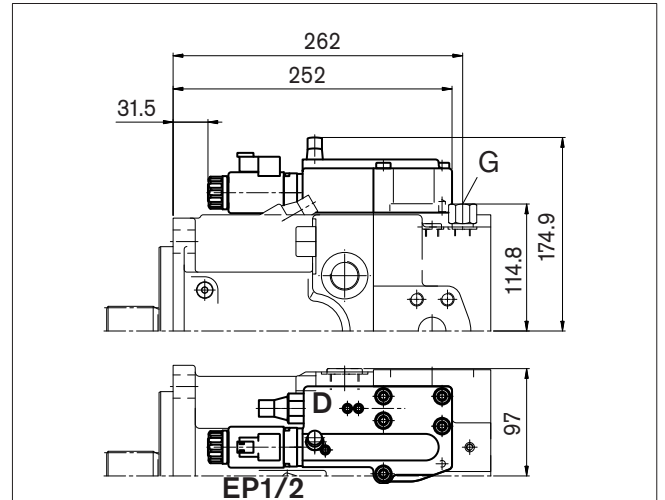


## DRS/DRG

Pressure control with load sensing control  
Pressure control remote controlled

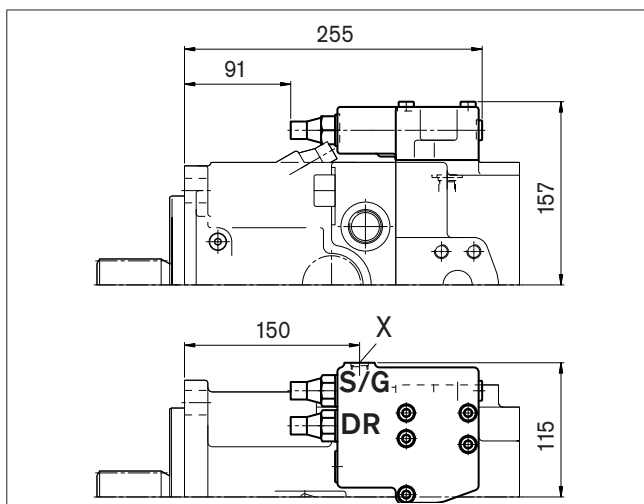


## DRL

Pressure control for parallel operation

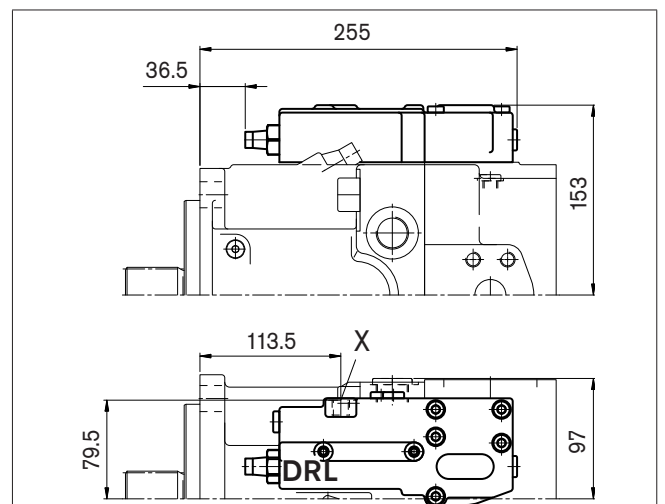


## LE1S/LE2S

Power control with electric override (negative) and load sensing control

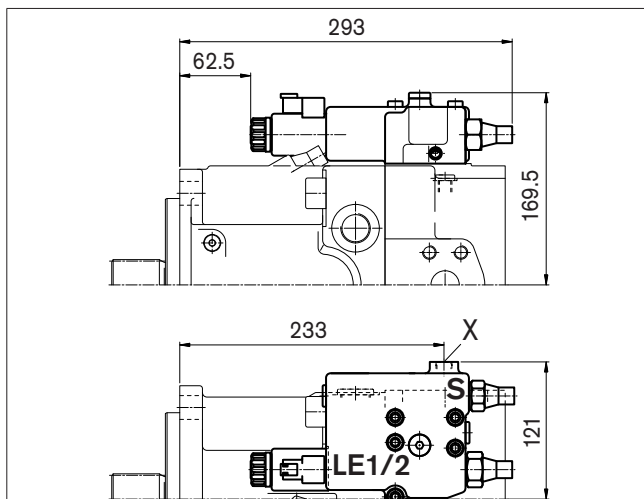

## LE2S2/LE1S5/LE2S5

Power control with electric override (negative) and load sensing control, override

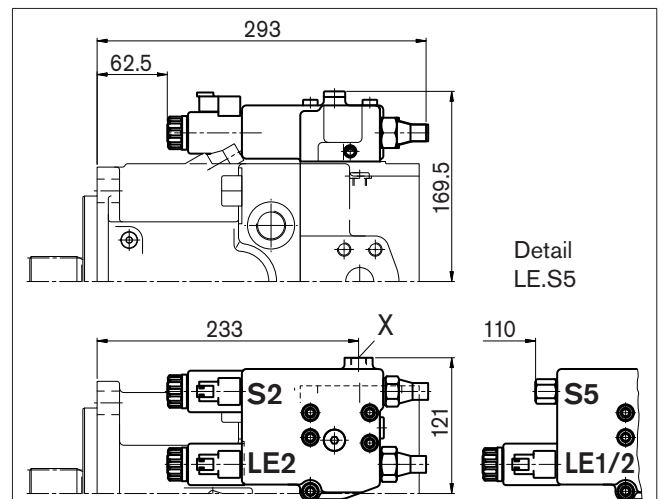


# Dimensions, Size 130/145

Before finalizing your design, please request a certified drawing. Dimensions in mm.

## LRDCS




Power control LR with pressure cut-off D, cross sensing control C and load sensing control S

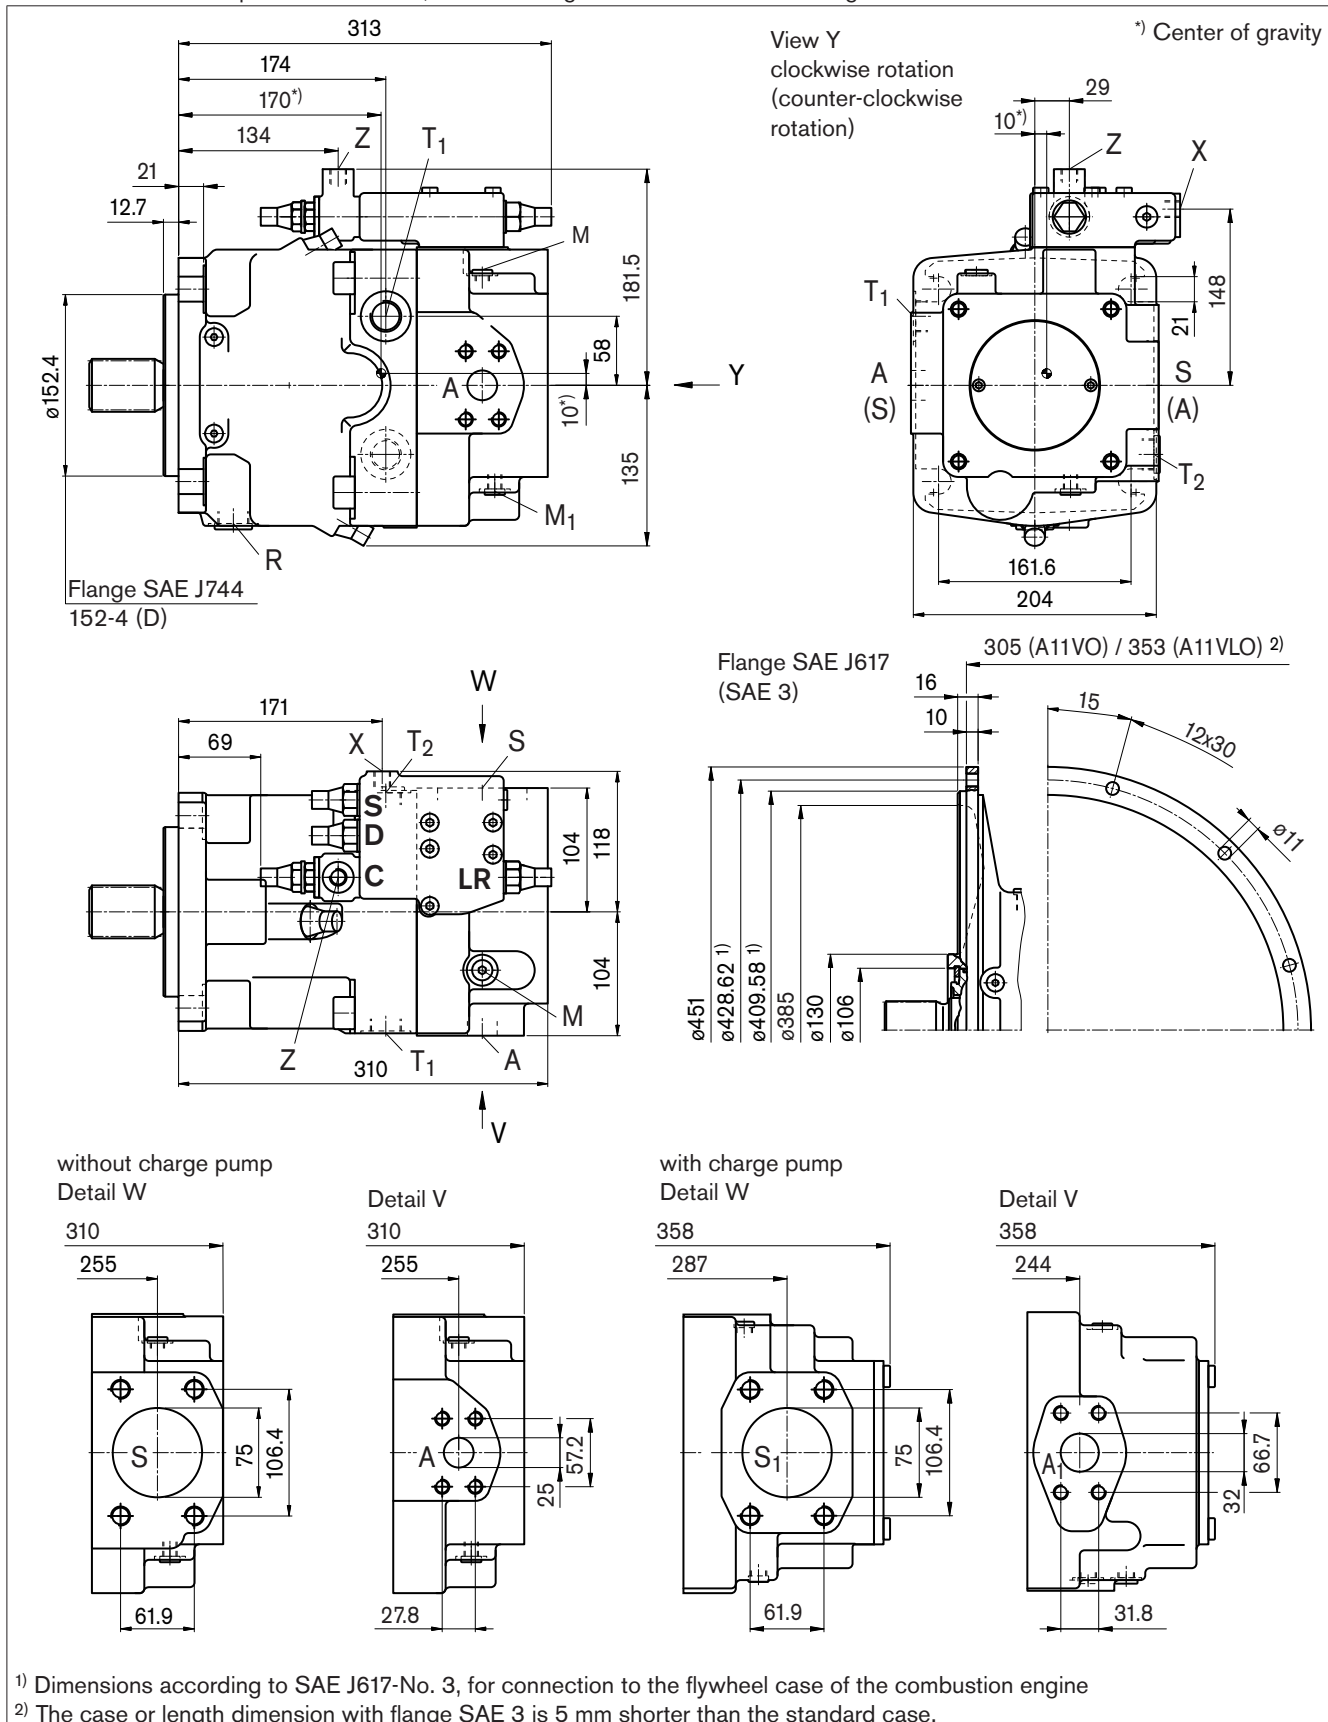

# Dimensions, Size 130/145

Before finalizing your design, please request a certified drawing. Dimensions in mm.

## Shaft ends

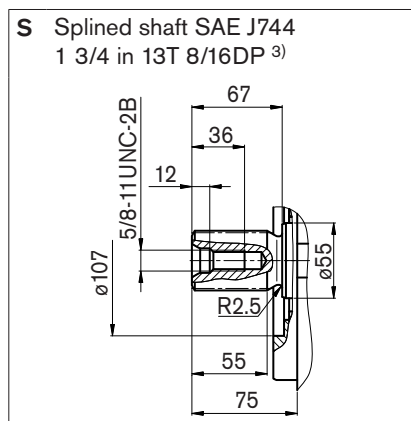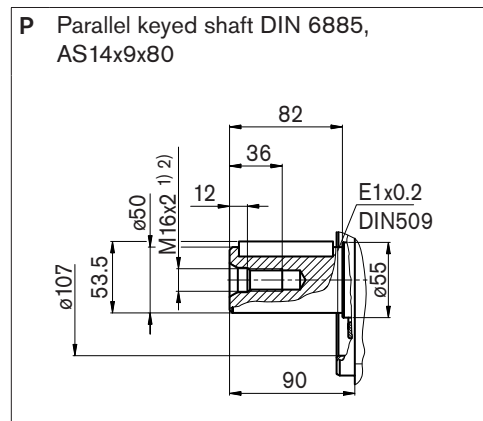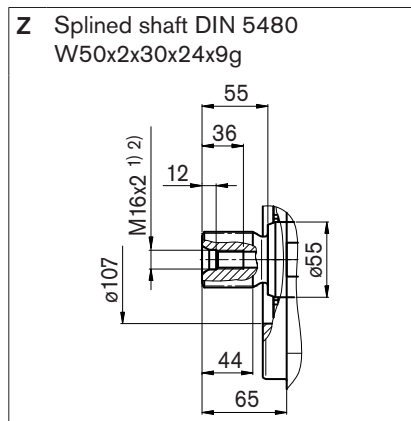

## Ports

Designation	Function	Standard	Size <sup>2)</sup>	Max. pressure (bar) <sup>4)</sup>	State
A	Service line port Fixing thread	SAE J518 DIN 13	1 in M12x1.75; 17 deep	400	O
A <sub>1</sub>	Service line port Fixing thread	SAE J518 DIN 13	1 1/4 in M14x2; 19 deep	400	O
S, S <sub>1</sub>	Suction port Fixing thread	SAE J518 DIN 13	3 in M16x2; 24 deep	30 2 <sup>6)</sup>	O
T <sub>1</sub> , T <sub>2</sub>	Tank port	DIN 3852	M26x1.5; 16 deep	10	<sup>5)</sup>
R	Air bleed	DIN 3852	M26x1.5; 16 deep	10	X
M <sub>1</sub>	Measurement point, positioning chamber	DIN 3852	M12x1.5; 12 deep	400	X
M	Measurement point, service line port	DIN 3852	M12x1.5; 12 deep	400	X
X	Pilot pressure port in version with load sensing (S) and remote controlled pressure cut-off (G)	DIN 3852	M14x1.5 12 deep	400	O
Y	Pilot pressure port in version with stroke limiter (H...), 2-stage pressure cut-off (E) and HD	DIN 3852	M14x1.5; 12 deep	40	O
Z	Pilot pressure port in version with cross sensing (C) and power override (LR3) power override (LG1)	DIN 3852	M14x1.5; 12 deep	400 40	O
G	Port for control pressure (controller) in version with stroke limiter (H., U2), HD and EP with screw union GE10 - PLM (otherwise closed)	DIN 3852	M14x1.5; 12 deep	40	O

<sup>1)</sup> Center bore according to DIN 332 (thread acc. to DIN 13)

<sup>2)</sup> For max. tightening torque, please refer to general notes on page 64

<sup>3)</sup> ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

<sup>4)</sup> Depending on adjustment data and operating pressure

<sup>5)</sup> Depending on installation position, T1 or T2 must be connected (see also page 61)

<sup>6)</sup> with charge pump

O = Open, must be connected (closed on delivery)


X = Closed (in normal operation)

# Dimensions, Size 130/145

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## LRDH1/LRDH5

Power control with pressure cut-off and hydraulic stroke limiter (negative characteristic)

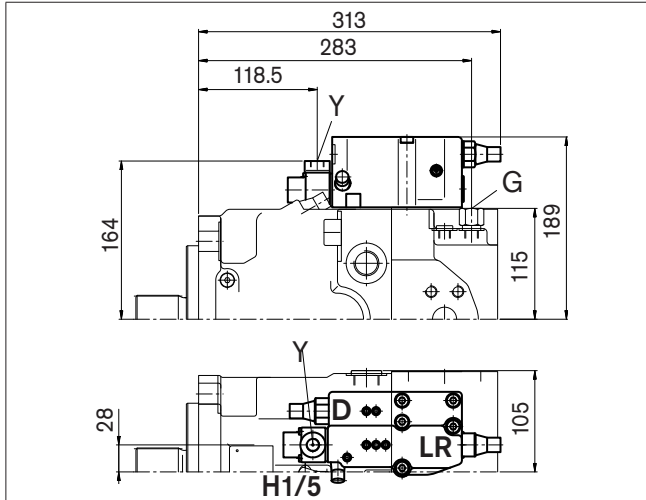


## LRDH2/LRDH6

Power control with pressure cut-off and hydraulic stroke limiter (positive characteristic)

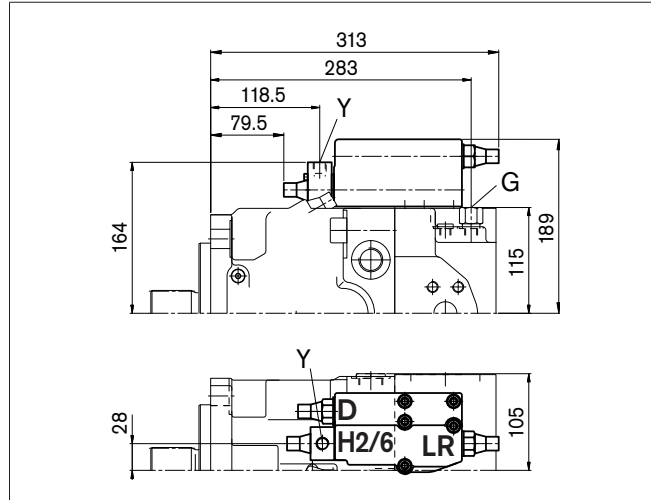


## LRDU1/LRDU2

Power control with pressure cut-off and electric stroke limiter (positive characteristic)

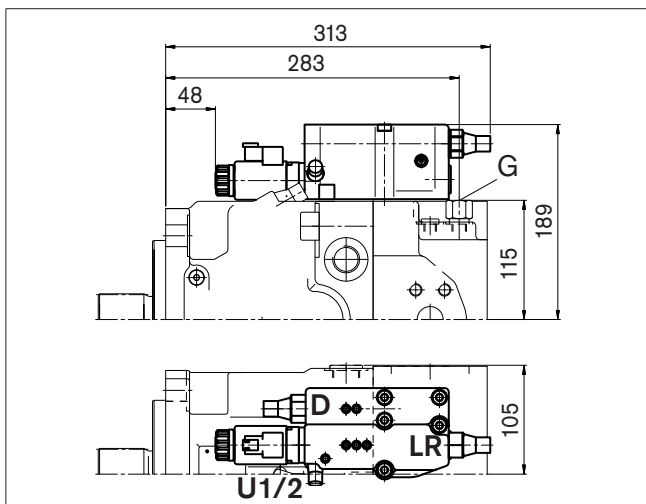


## LR3DS

Power control with high-pressure related override, pressure cut-off and load sensing control

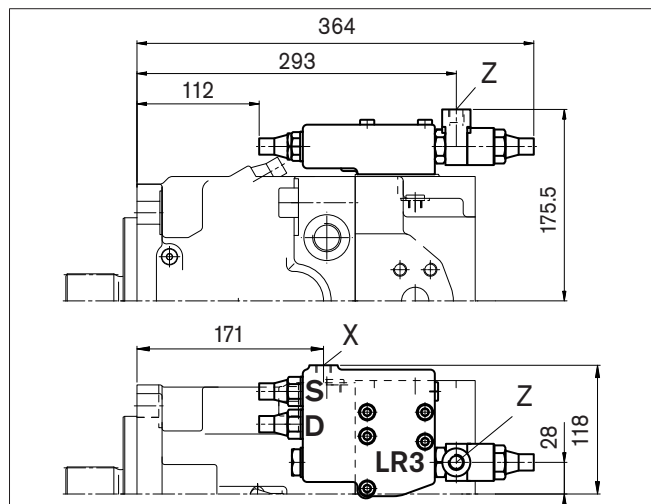


## LG1E

Power control with pilot-pressure related override (negative) and 2-stage pressure cut-off

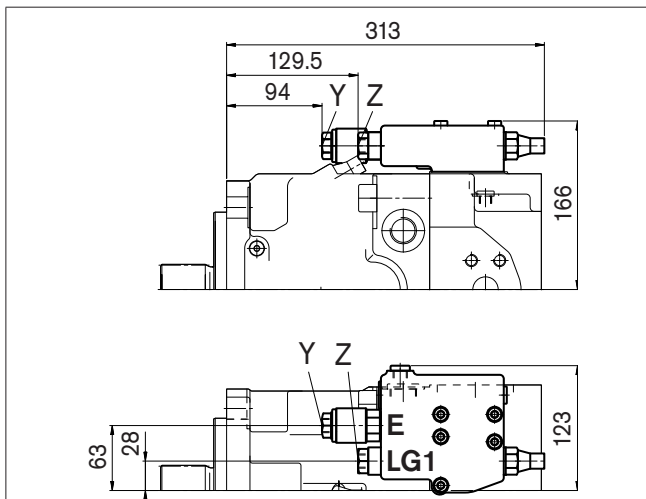

## LG2E

Power control with pilot-pressure related override (positive) and 2-stage pressure cut-off






# Dimensions, Size 130/145

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## HD1D/HD2D

Hydraulic control, pilot-pressure related with pressure cut-off

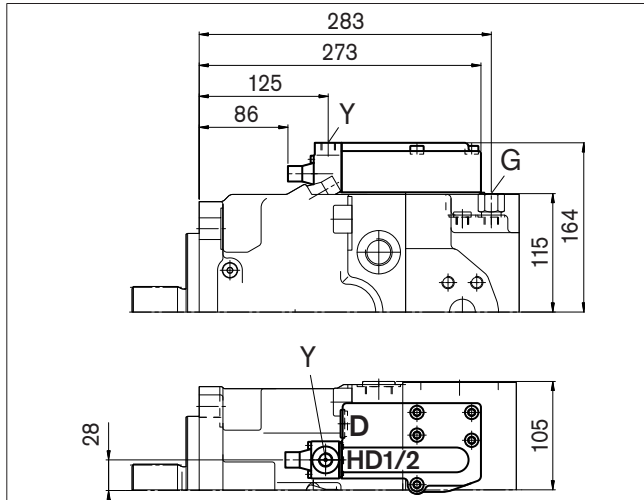


## EP1D/EP2D

Electric control with proportional solenoid and pressure cut-off

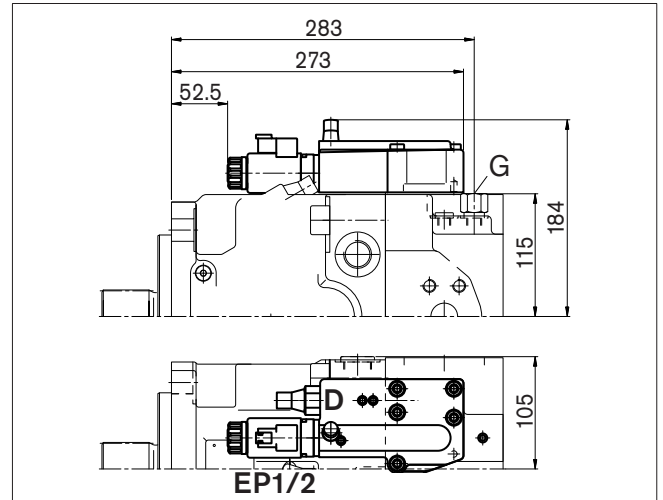


## DRS/DRG

Pressure control with load sensing control  
Pressure control remote controlled

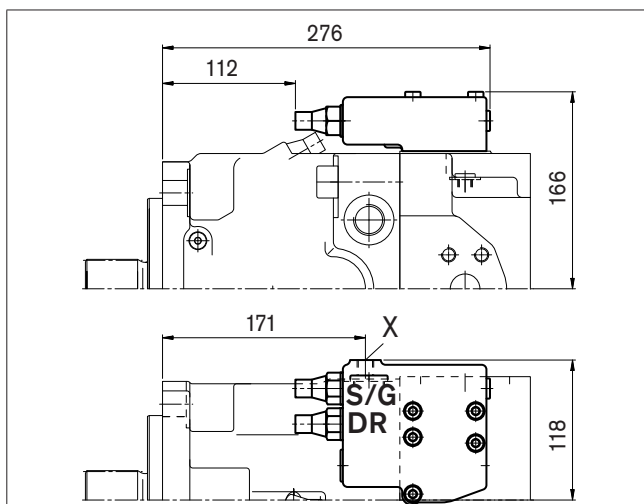


## DRL

Pressure control for parallel operation

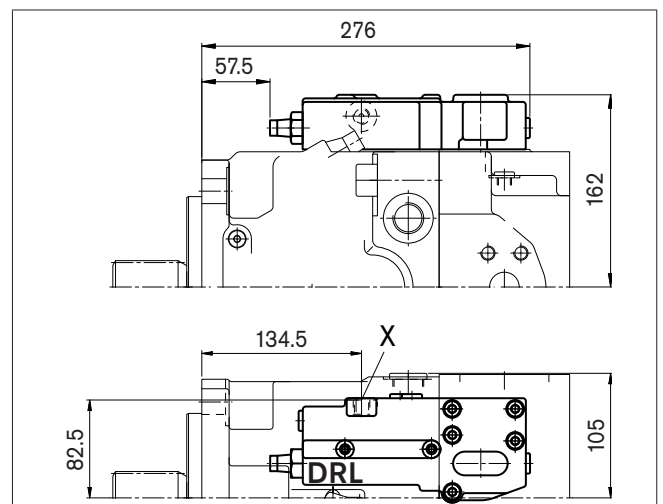


## LE1S/LE2S

Power control with electric override (negative) and load sensing control

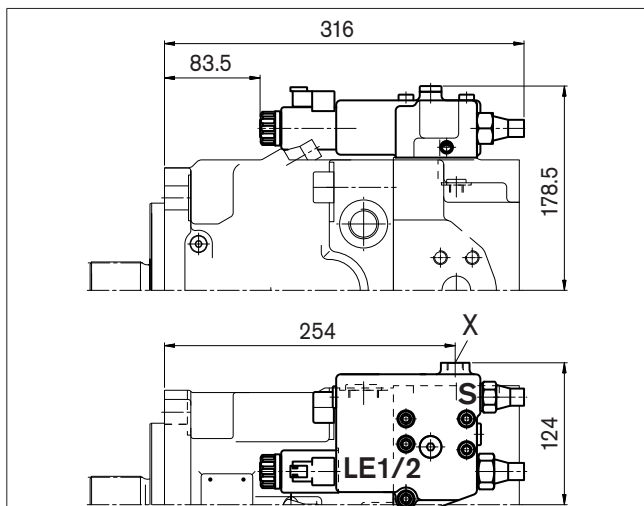

## LE2S2/LE1S5/LE2S5

Power control with electric override (negative) and load sensing control, override

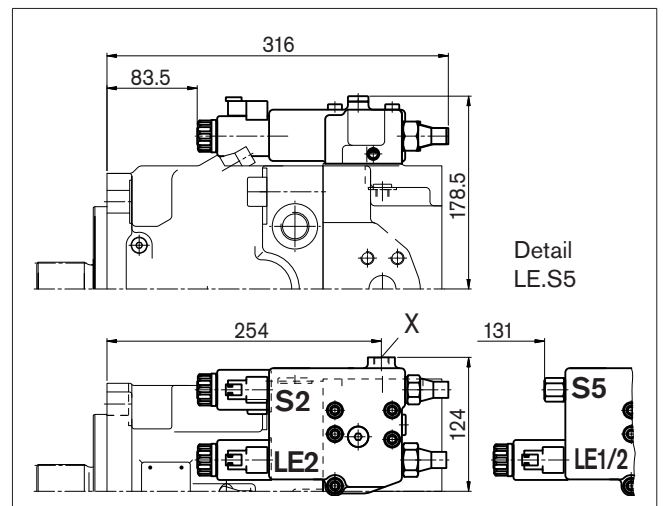


# Dimensions, Size 190

Before finalizing your design, please request a certified drawing. Dimensions in mm.

## LRDCS


Power control LR with pressure cut-off D, cross sensing control C and load sensing control S

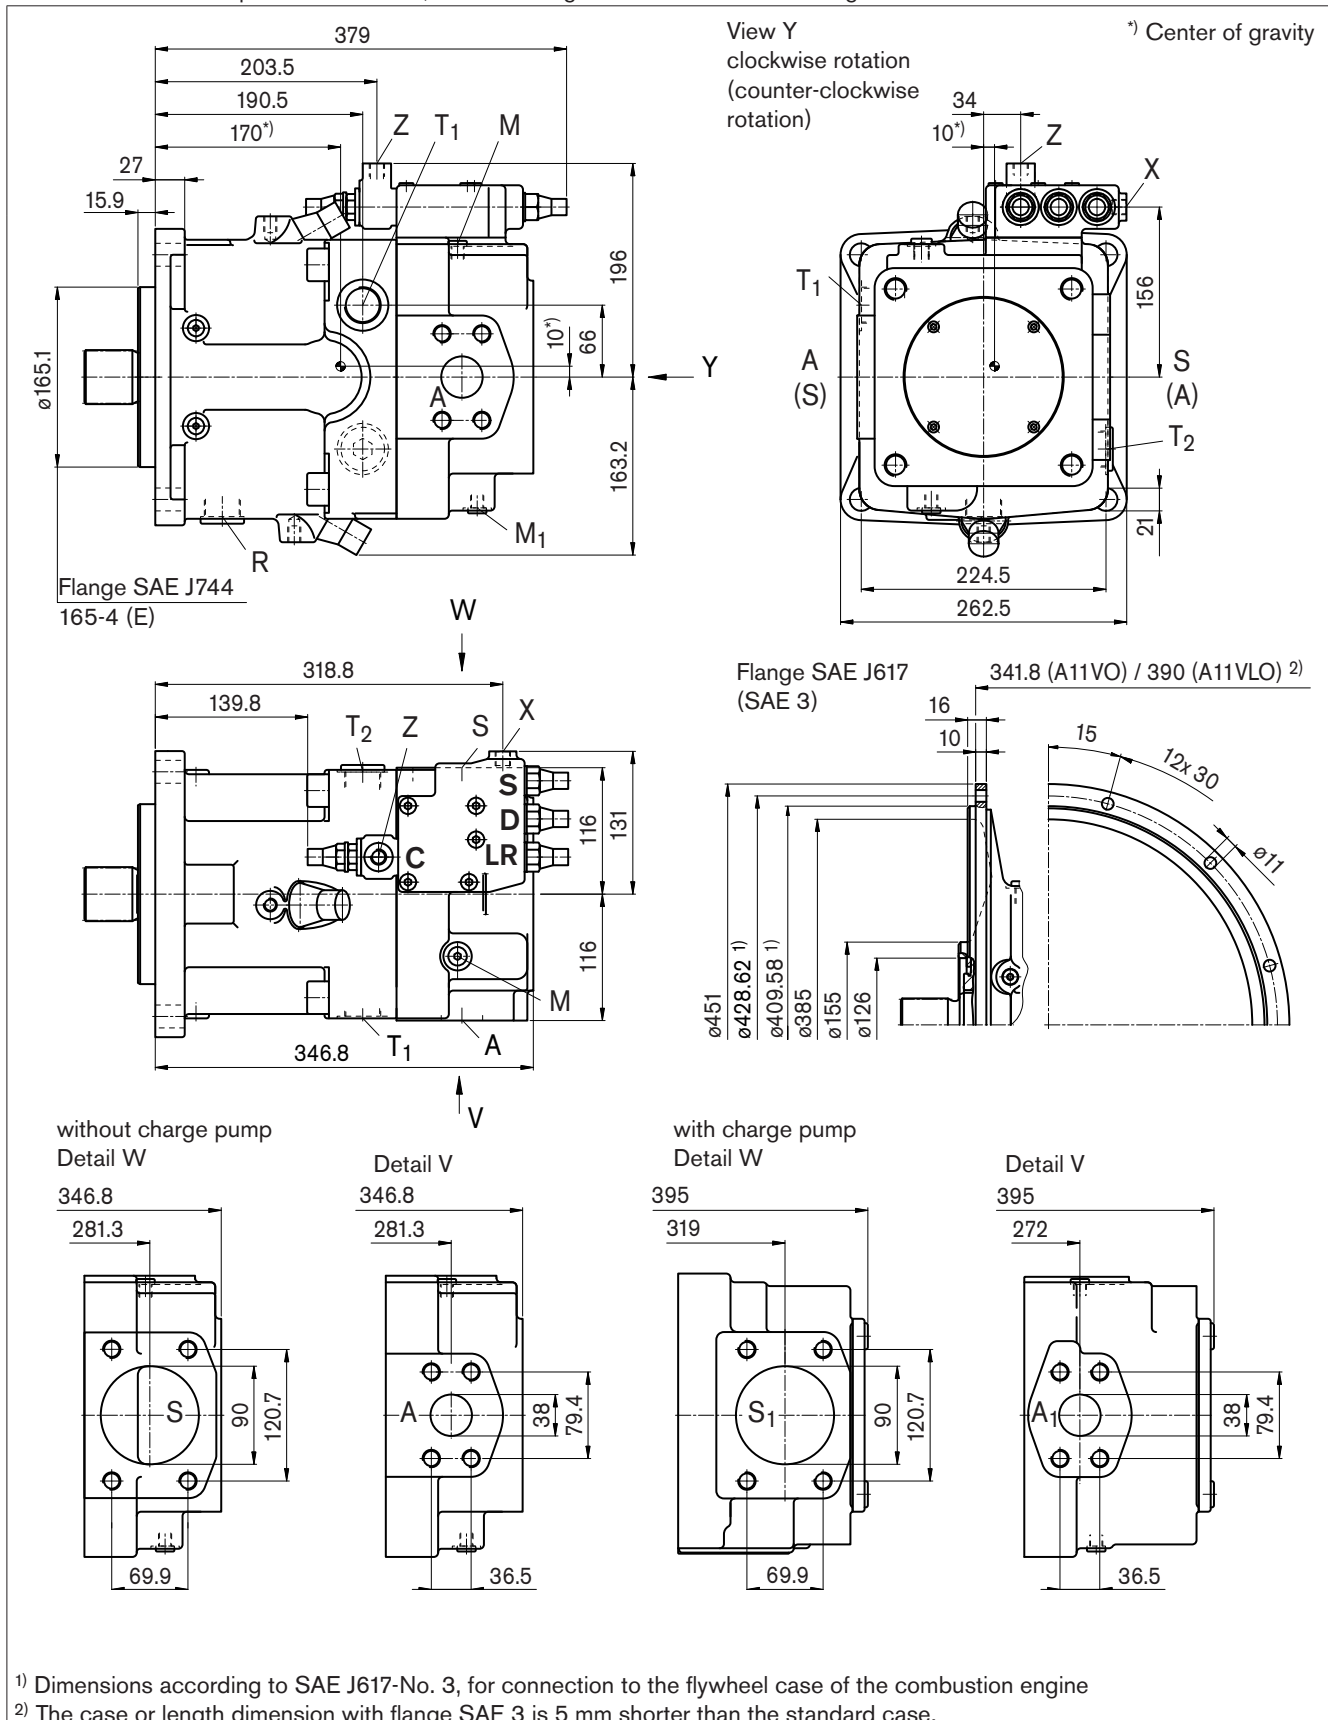

# Dimensions, Size 190

Before finalizing your design, please request a certified drawing. Dimensions in mm.

## Shaft ends

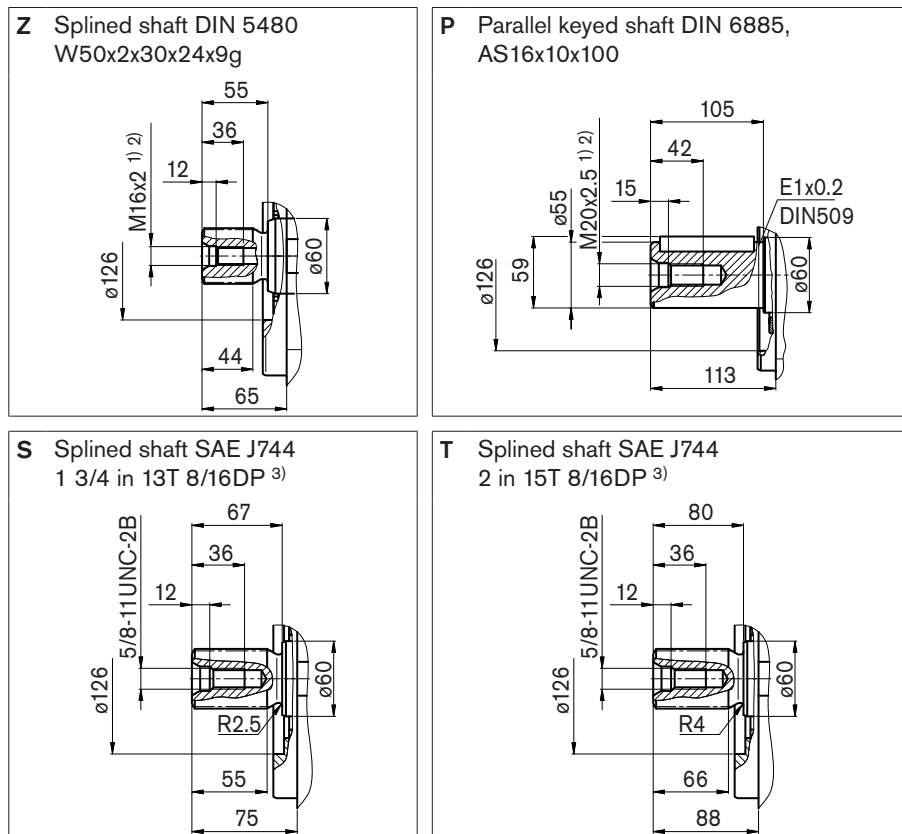

## Ports

Designation	Function	Standard	Size <sup>2)</sup>	Max. pressure (bar) <sup>4)</sup>	State
A, A <sub>1</sub>	Service line port Fixing thread	SAE J518 DIN 13	1 1/2 in M16x2; 21 deep	400	O
S, S <sub>1</sub>	Suction port Fixing thread	SAE J518 DIN 13	3 1/2 in M16x2; 24 deep	30 2 <sup>6)</sup>	O
T <sub>1</sub> , T <sub>2</sub>	Tank port	DIN 3852	M33x2; 18 deep	10	<sup>5)</sup>
R	Air bleed	DIN 3852	M33x2; 18 deep	10	X
M <sub>1</sub>	Measurement point, positioning chamber	DIN 3852	M12x1.5; 12 deep	400	X
M	Measurement point, service line port	DIN 3852	M12x1.5; 12 deep	400	X
X	Pilot pressure port in version with load sensing (S) and remote controlled pressure cut-off (G)	DIN 3852	M14x1.5 12 deep	400	O
Y	Pilot pressure port in version with stroke limiter (H...), 2-stage pressure cut-off (E) and HD	DIN 3852	M14x1.5; 12 deep	40	O
Z	Pilot pressure port in version with cross sensing (C) and power override (LR3) power override (LG1)	DIN 3852	M14x1.5; 12 deep	400 40	O
G	Port for control pressure (controller) in version with stroke limiter (H..., U2), HD and EP with screw union GE10 - PLM (otherwise closed)	DIN 3852	M14x1.5; 12 deep	40	O

<sup>1)</sup> Center bore according to DIN 332 (thread acc. to DIN 13)

<sup>2)</sup> For max. tightening torque, please refer to general notes on page 64

<sup>3)</sup> ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

<sup>4)</sup> Depending on adjustment data and operating pressure

<sup>5)</sup> Depending on installation position, T1 or T2 must be connected (see also page 61)

<sup>6)</sup> with charge pump

O = Open, must be connected (closed on delivery)


X = Closed (in normal operation)

# Dimensions, Size 190

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## LRDH1/LRDH5

Power control with pressure cut-off and hydraulic stroke limiter (negative characteristic)

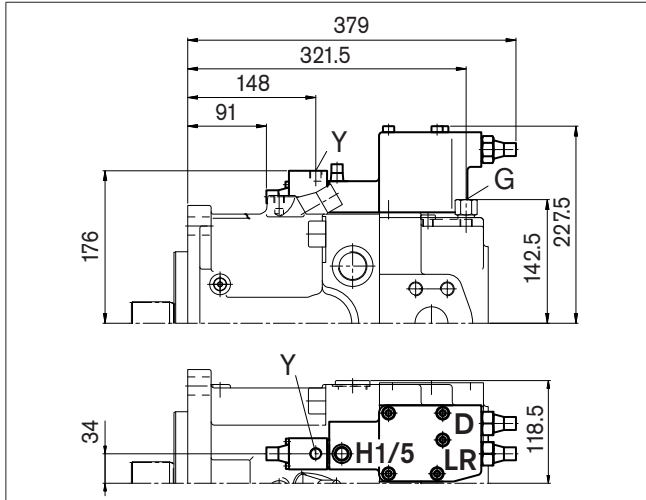


## LRDH2/LRDH6

Power control with pressure cut-off and hydraulic stroke limiter (positive characteristic)

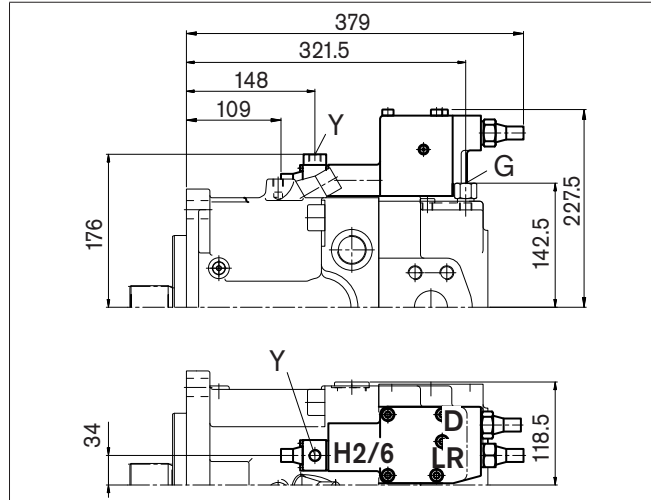


## LRDU1/LRDU2

Power control with pressure cut-off and electric stroke limiter (positive characteristic)

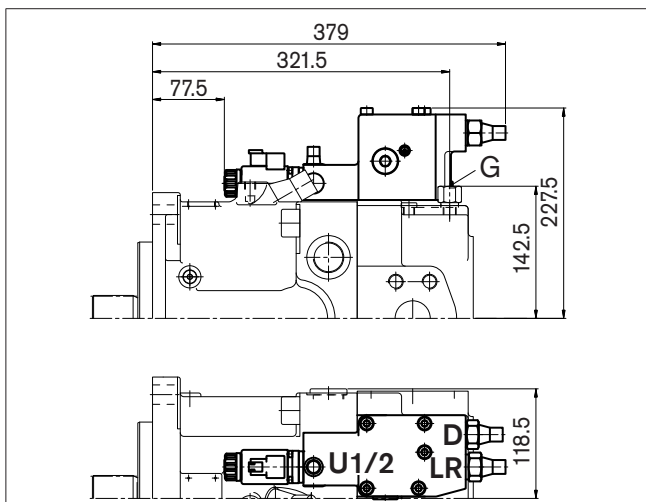


## LR3DS

Power control with high-pressure related override, pressure cut-off and load sensing control

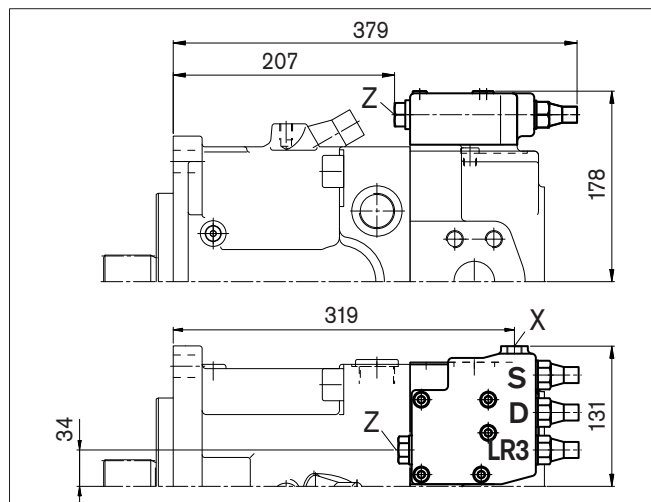


## LG1EH

Power control with pilot-pressure related override (neg.), 2-stage pressure cut-off and hydr. stroke limiter

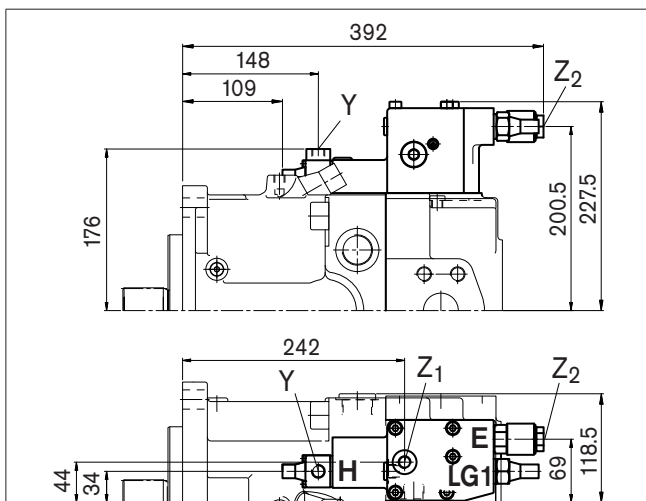

## LG2EH

Power control with pilot-pressure related override (pos.), 2-stage pressure cut-off and hydr. stroke limiter

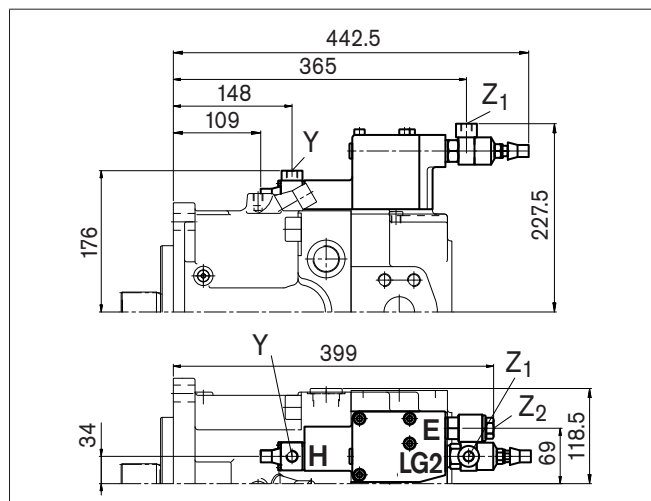


# Dimensions, Size 190

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## HD1D/HD2D

Hydraulic control, pilot-pressure related with pressure cut-off

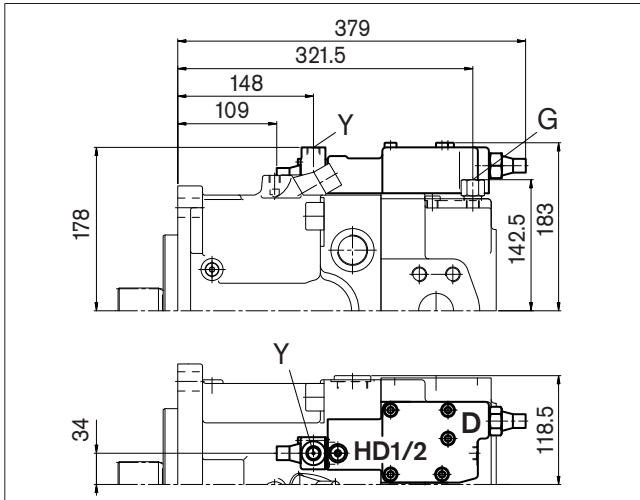


## EP1D/EP2D

Electric control with proportional solenoid and pressure cut-off

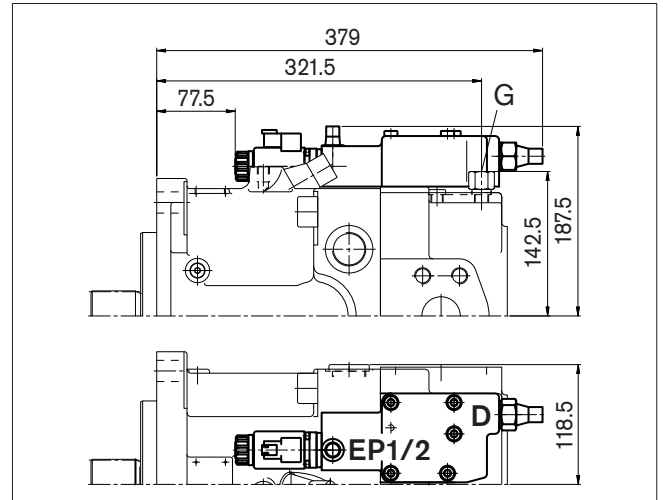


## DRS/DRG

Pressure control with load sensing control  
Pressure control remote controlled

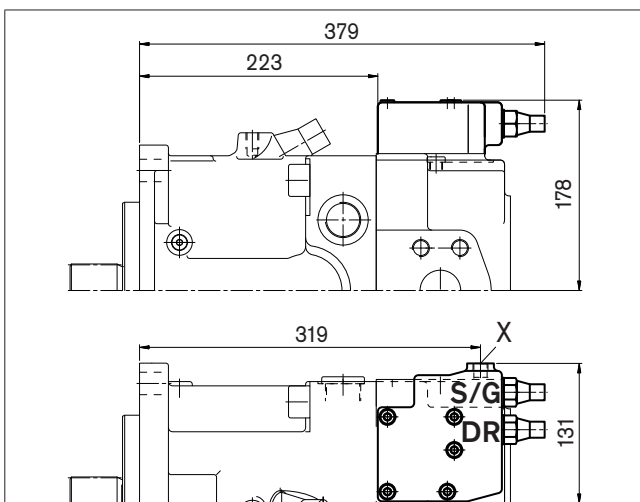


## DRL

Pressure control for parallel operation

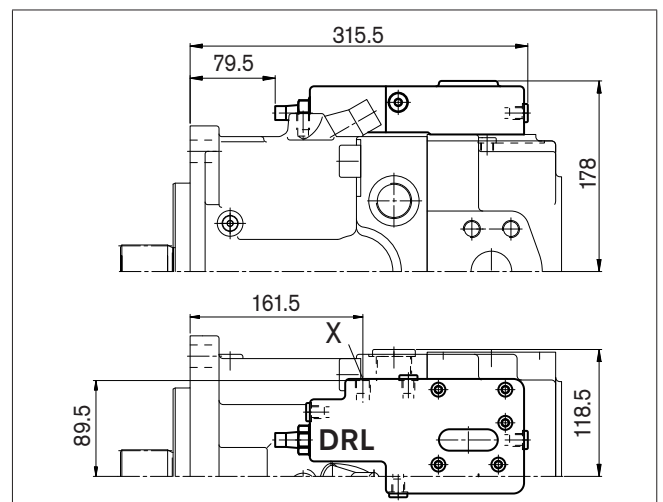


## LE1S/LE2S

Power control with electric override (negative) and load sensing control

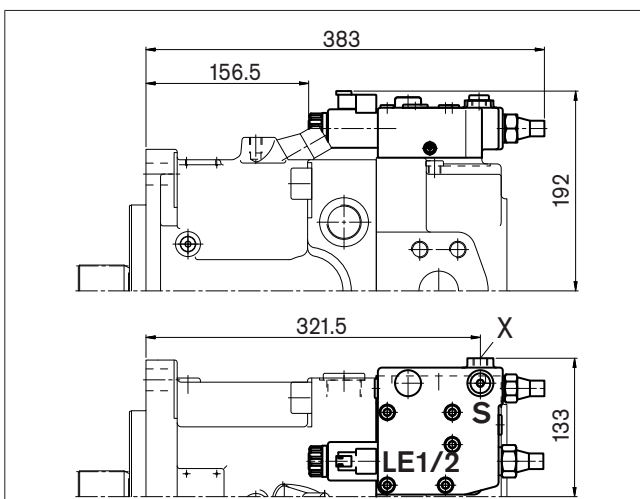

## LE2S2/LE1S5/LE2S5

Power control with electric override (negative) and load sensing control, override

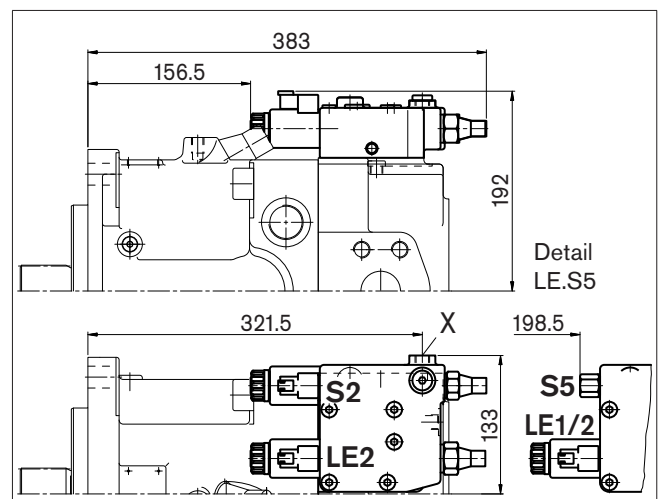


# Dimensions, Size 260

Before finalizing your design, please request a certified drawing. Dimensions in mm.

## LRDCS


Power control LR with pressure cut-off D, cross sensing control C and load sensing control S

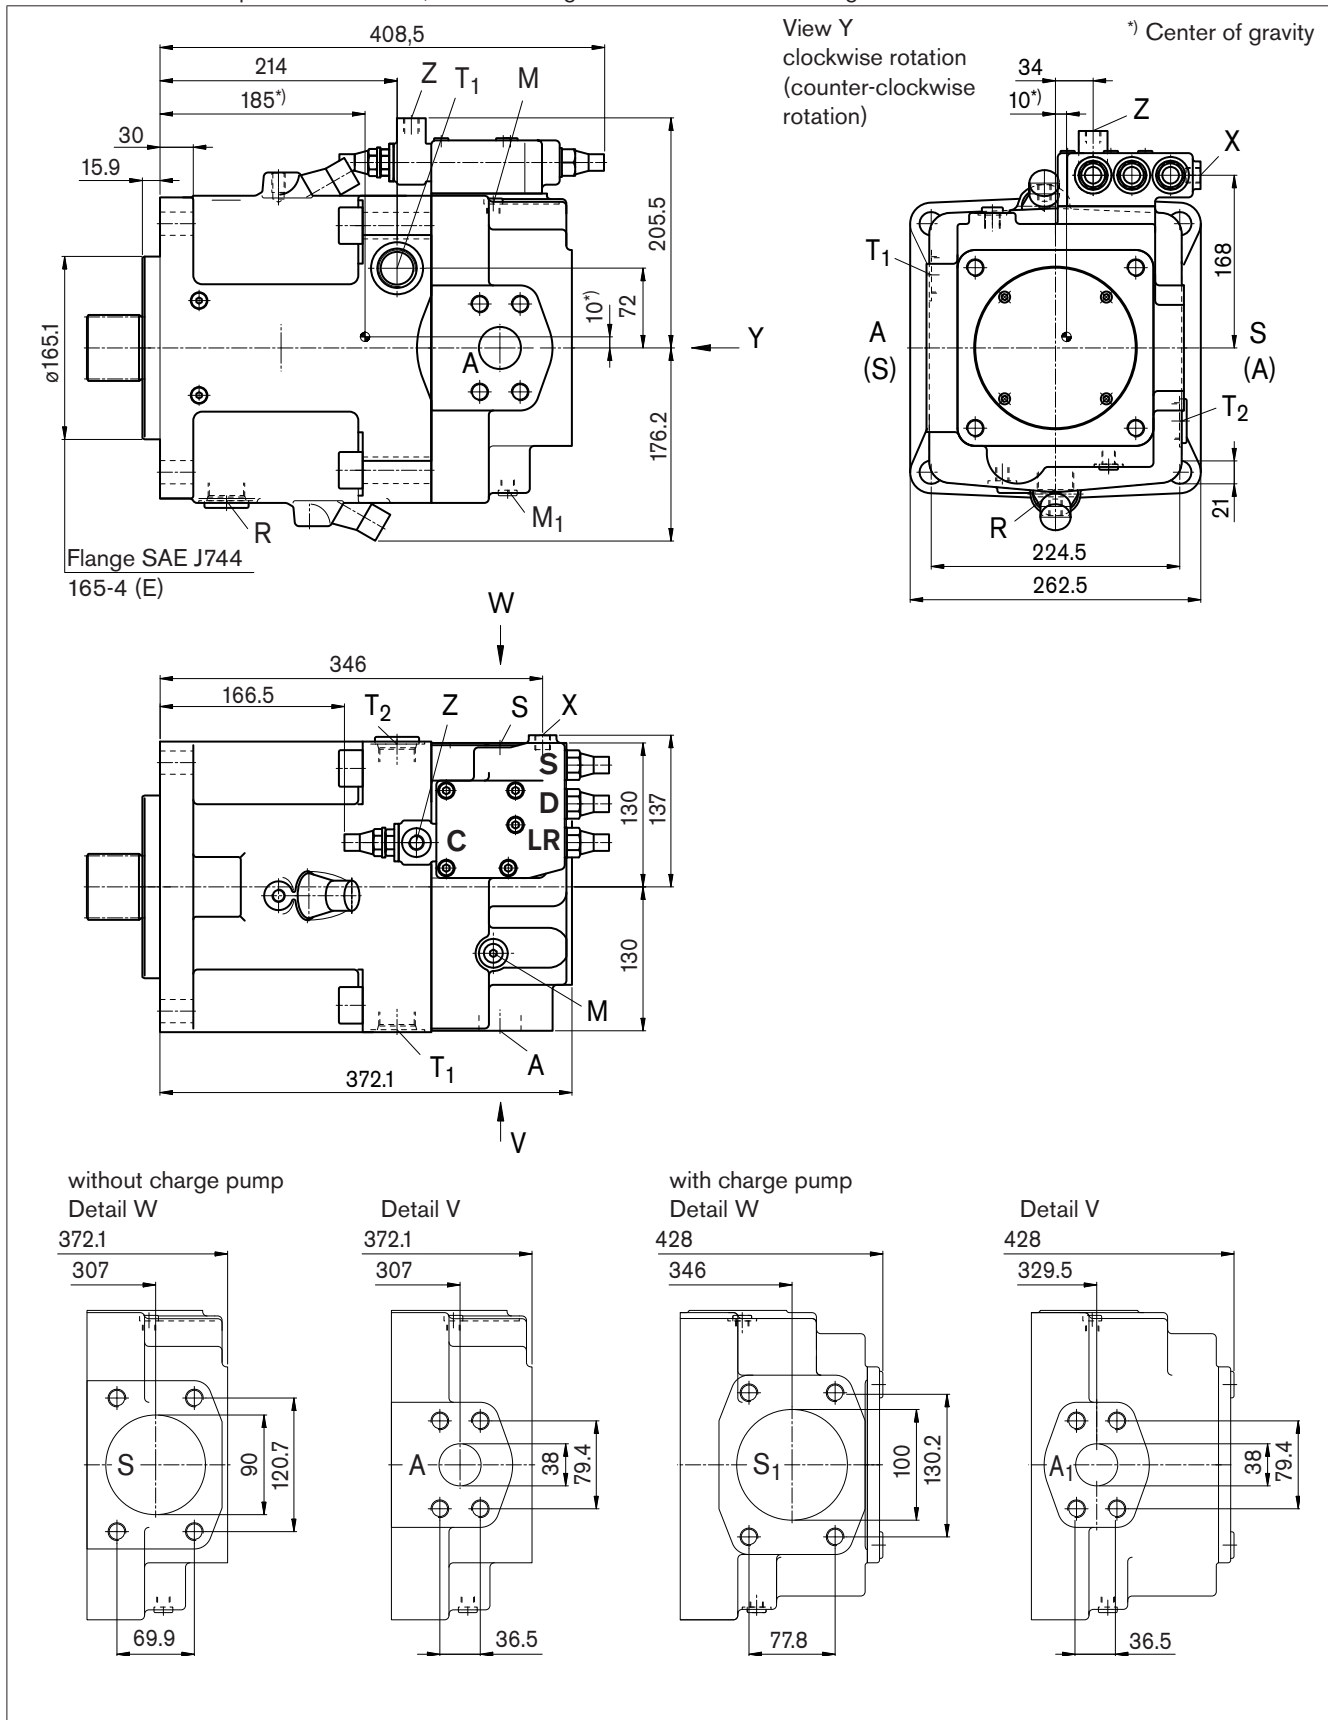

# Dimensions, Size 260

Before finalizing your design, please request a certified drawing. Dimensions in mm.

## Shaft ends

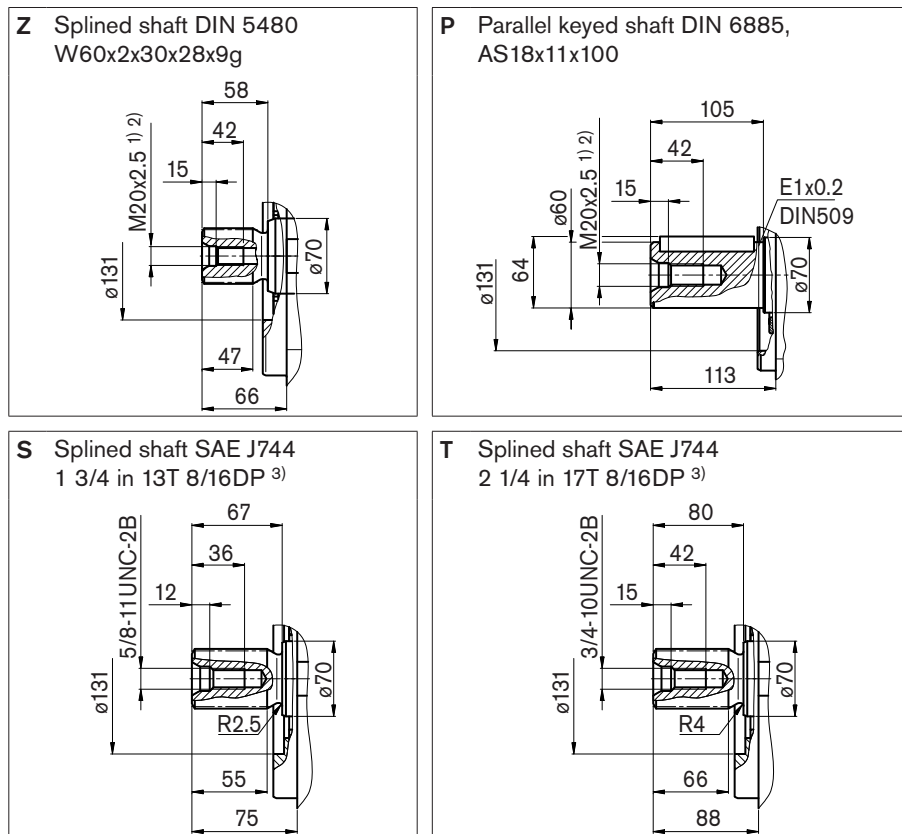

## Ports

Designation	Function	Standard	Size <sup>2)</sup>	Max. pressure (bar) <sup>4)</sup>	State
A, A <sub>1</sub>	Service line port Fixing thread	SAE J518 DIN 13	1 1/2 in M16x2; 21 deep	400	O
S	Suction port Fixing thread	SAE J518 DIN 13	3 1/2 in M16x2; 24 deep	30	O
S <sub>1</sub>	Suction port Fixing thread	SAE J518 DIN 13	4 in M16x2; 21 deep	2 <sup>6)</sup>	O
T <sub>1</sub> , T <sub>2</sub>	Tank port	DIN 3852	M33x2; 16 deep	10	<sup>5)</sup>
R	Air bleed	DIN 3852	M33x2; 16 deep	10	X
M <sub>1</sub>	Measurement point, positioning chamber	DIN 3852	M12x1.5; 12 deep	400	X
M	Measurement point, service line port	DIN 3852	M12x1.5; 12 deep	400	X
X	Pilot pressure port in version with load sensing (S) and remote controlled pressure cut-off (G)	DIN 3852	M14x1.5 12 deep	400	O
Y	Pilot pressure port in version with stroke limiter (H...), 2-stage pressure cut-off (E) and HD	DIN 3852	M14x1.5; 12 deep	40	O
Z	Pilot pressure port in version with cross sensing (C) and power override (LR3) power override (LG1)	DIN 3852	M14x1.5; 12 deep	400 40	O
G	Port for control pressure (controller) in version with stroke limiter (H..., U2), HD and EP with screw union GE10 - PLM (otherwise closed)	DIN 3852	M14x1.5; 12 deep	40	O

<sup>1)</sup> Center bore according to DIN 332 (thread acc. to DIN 13)

<sup>2)</sup> For max. tightening torque, please refer to general notes on page 64

<sup>3)</sup> ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

<sup>4)</sup> Depending on adjustment data and operating pressure

<sup>5)</sup> Depending on installation position, T1 or T2 must be connected (see also page 61)

<sup>6)</sup> with charge pump

O = Open, must be connected (closed on delivery)


X = Closed (in normal operation)

# Dimensions, Size 260

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## LRDH1/LRDH5

Power control with pressure cut-off and hydraulic stroke limiter (negative characteristic)

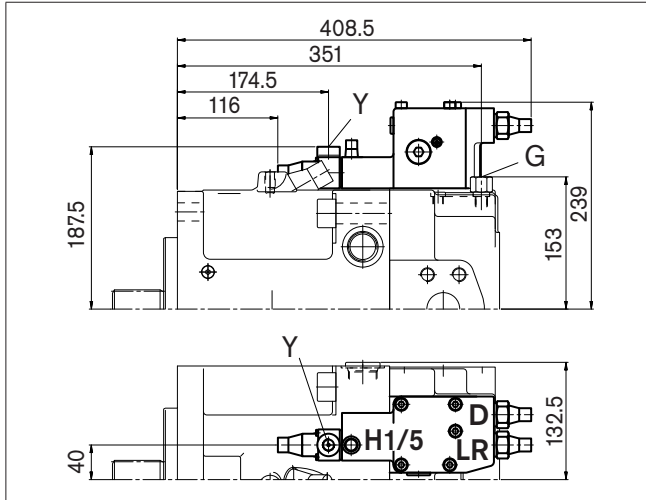


## LRDH2/LRDH6

Power control with pressure cut-off and hydraulic stroke limiter (positive characteristic)

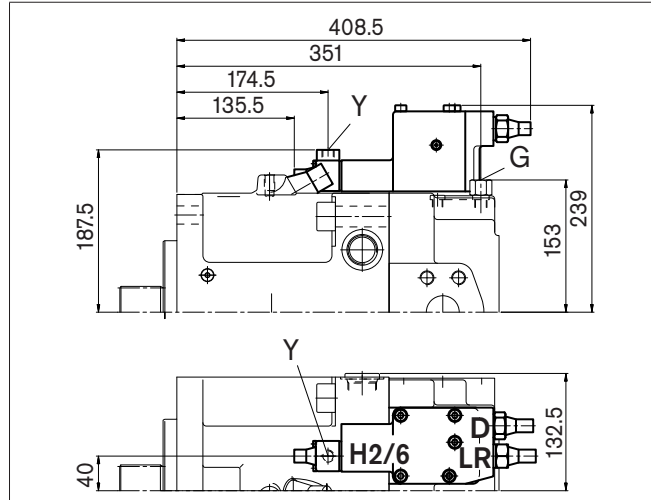


## LRDU1/LRDU2

Power control with pressure cut-off and electric stroke limiter (positive characteristic)

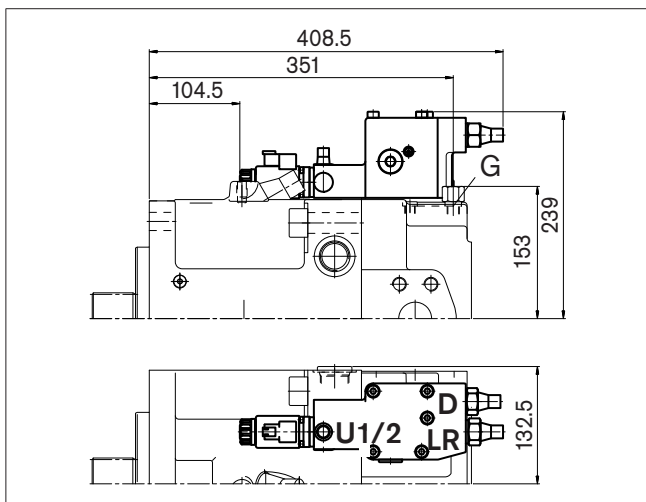


## LR3DS

Power control with high-pressure related override, pressure cut-off and load sensing control

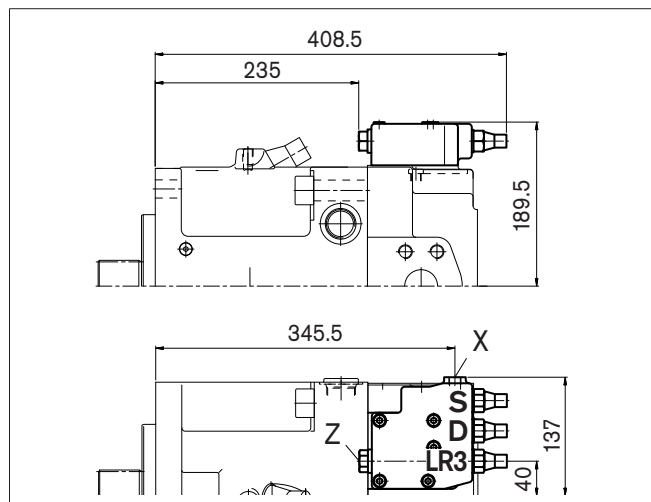


## LG1EH

Power control with pilot-pressure related override (neg.), 2-stage pressure cut-off and hydr. stroke limiter

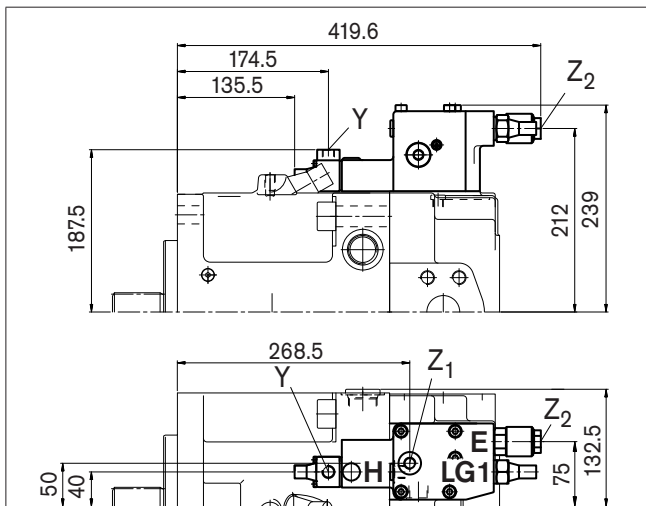

## LG2EH

Power control with pilot-pressure related override (pos.), 2-stage pressure cut-off and hydr. stroke limiter

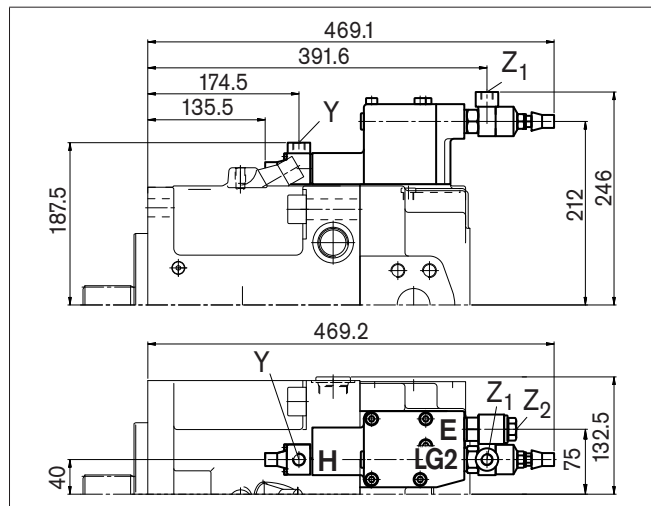




# Dimensions, Size 260

Before finalizing your design, please request a certified drawing. Dimensions in mm.


## HD1D/HD2D

Hydraulic control, pilot-pressure related with pressure cut-off

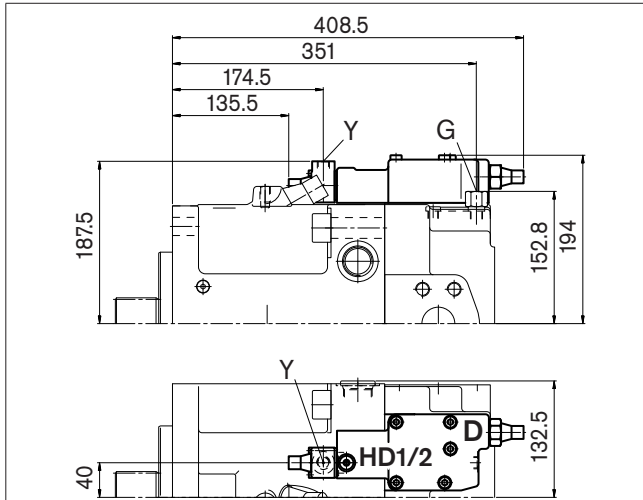


## EP1D/EP2D

Electric control with proportional solenoid and pressure cut-off

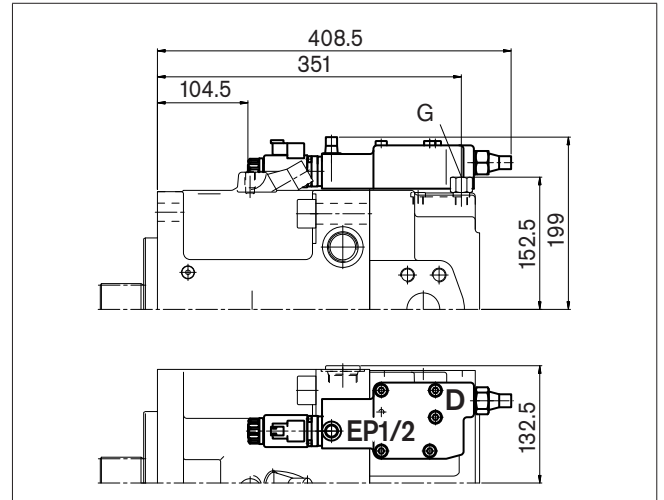


## DRS/DRG

Pressure control with load sensing control  
Pressure control remote controlled

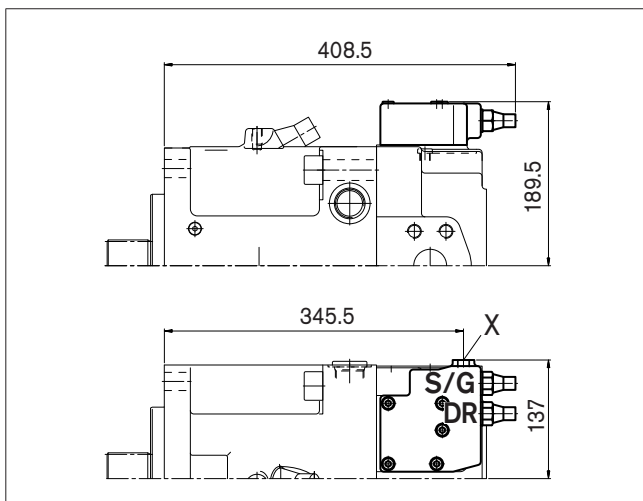


## DRL

Pressure control for parallel operation

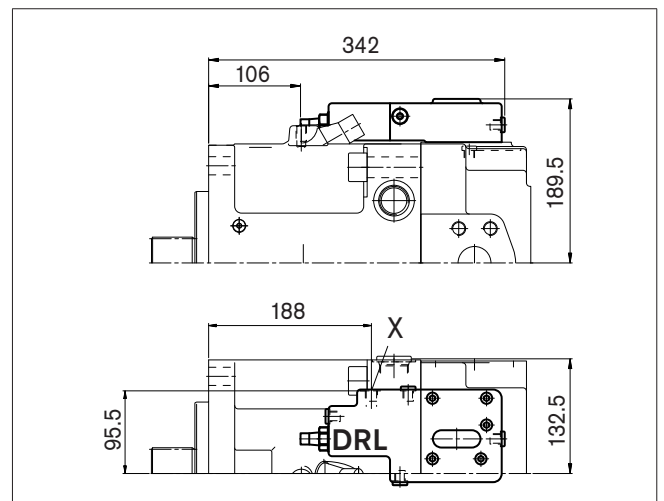


## LE1S/LE2S

Power control with electric override (negative) and load sensing control

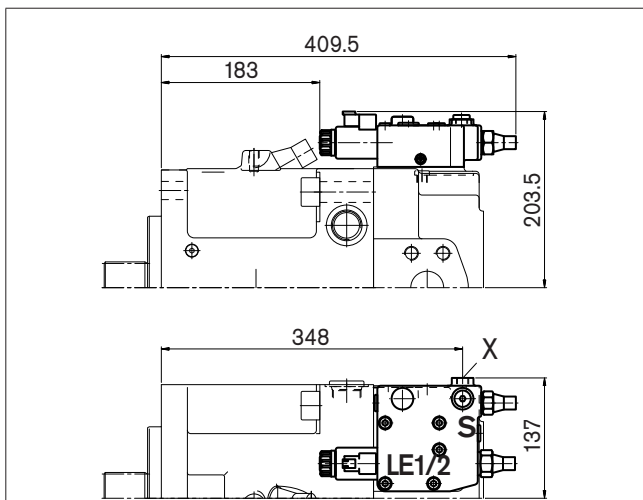


## LE2S2/LE1S5/LE2S5

Power control with electric override (negative) and load sensing control, override

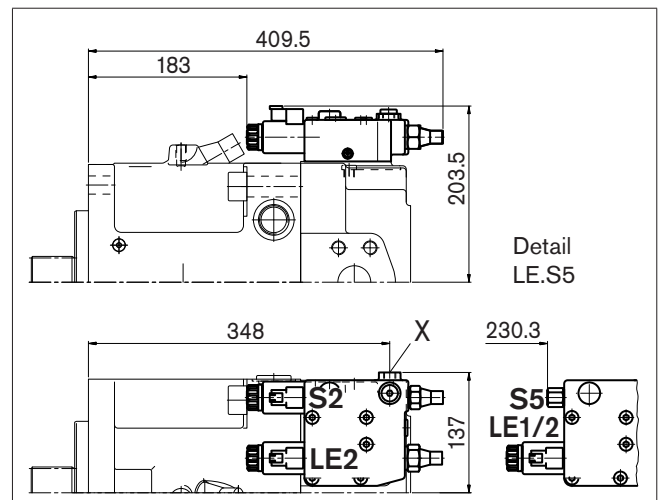

# Through Drive Dimensions


**Flange SAE J744 – 82-2 (A) Coupler** for splined shaft acc. to ANSI B92.1a-1976 5/8 in 9T 16/32 DP<sup>1)</sup> (SAE J744 – 16-4 (A) **K01**  
3/4 in 11T 16/32 DP<sup>1)</sup> (SAE J744 – 19-4 (A-B)) **K52**

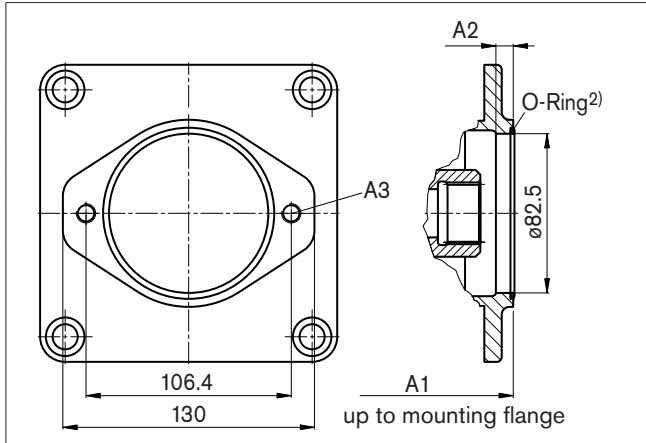

Size	A1		A2	A3 <sup>3)</sup>
	K01	K52		
40	240	240	8	M10x1.5; 15 deep
60	257	257	–	M10x1.5; 15 deep
75	275	275	–	M10x1.5; 15 deep
95	306	306	–	M10x1.5; 12.5 deep
130/145	329	329	–	M10x1.5; 12.5 deep
130/145*	363	363	–	M10x1.5; 12.5 deep
190	359.8	359.8	–	M10x1.5; 13 deep
190*	394	394	–	M10x1.5; 13 deep
260	385	385	–	M10x1.5; 13 deep
260*	427.3	427.3	–	M10x1.5; 13 deep

<sup>\*)</sup> Version with charge pump


**Flange SAE J744 – 101-2 (B) Coupler** for splined shaft acc. to ANSI B92.1a-1976 7/8 in 13T 16/32 DP<sup>1)</sup> (SAE J744 – 22-4 (B)) **K02**  
1 in 15T 16/32 DP<sup>1)</sup> (SAE J744 – 25-4 (B-B)) **K04**  
**Coupler** for splined shaft acc. to DIN 5480 W35x2x30x16x9g **K79**

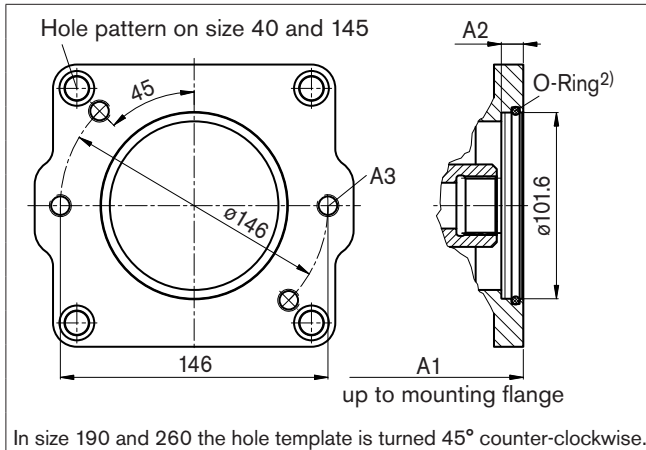

Size	A1			A2	A3 <sup>3)</sup>
	K02	K04	K79		
40	244	244	–	10	M12x1.75; 19 deep
60	261	261	261	10	M12x1.75; 19 deep
75	279	279	–	10	M12x1.75; 19 deep
95	303	303	303	10	M12x1.75; 16 deep
130/145	326	326	326	10	M12x1.75; 16 deep
130/145*	360	360	360	10	M12x1.75; 16 deep
190	371.8	369.8	361.8	–	M12x1.75; 15 deep
190*	404	404	394	–	M12x1.75; 15 deep
260	395	395	395	–	M12x1.75; 15 deep
260*	437.5	437.5	437.5	–	M12x1.75; 15 deep

<sup>\*)</sup> Version with charge pump

**Flange SAE J744 – 127-2 (C) Coupler** for splined shaft acc. to ANSI B92.1a-1976 1 1/4 in 14T 12/24 DP<sup>1)</sup> (SAE J744 – 32-4 (C)) **K07**  
1 1/2 in 17T 12/24 DP<sup>1)</sup> (SAE J744 – 38-4 (C-C)) **K24**  
**Coupler** for splined shaft acc. to DIN 5480 W30x2x30x14x9g **K80**  
W35x2x30x16x9g **K61**

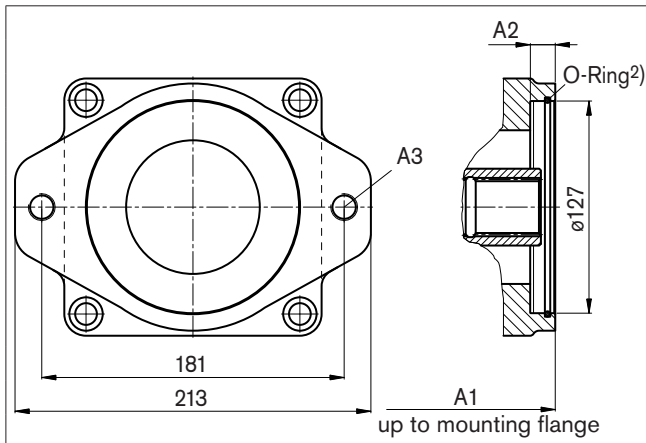

Size	A1		A2		A3 <sup>3)</sup>
	K07	K24	K80	K61	
60	272	–	265	265	13 M16x2; 20 deep
75	290	–	283	283	13 M16x2; 20 deep
95	318	318	318	318	13 M16x2; 16 deep
130/145	330	330	330	330	13 M16x2; 20 deep
130/145*	364	364	364	364	13 M16x2; 20 deep

<sup>\*)</sup> Version with charge pump


**Note:**

The mounting flange may be turned through 90°. Standard position as illustrated. Please state in clear text if required.

- <sup>1)</sup> 30° pressure angle, flat root, side fit, tolerance class 5
- <sup>2)</sup> O-ring included in the delivery contents
- <sup>3)</sup> DIN 13, for max. tightening torque, please refer to general notes on page 64

# Through Drive Dimensions


**Flange SAE J744-127-2+4 (A) Coupler** for splined shaft acc. to ANSI B92.1a-1976 1 1/4 in 14T 12/24 DP<sup>1)</sup> (SAE J744 - 32-4 (C)) **K07**  
 1 1/2 in 17T 12/24 DP<sup>1)</sup> (SAE J744 - 38-4 (C-C)) **K24**  
**Coupler** for splined shaft acc. to DIN 5480 W30x2x30x14x9g **K80**  
 W35x2x30x16x9g **K61**

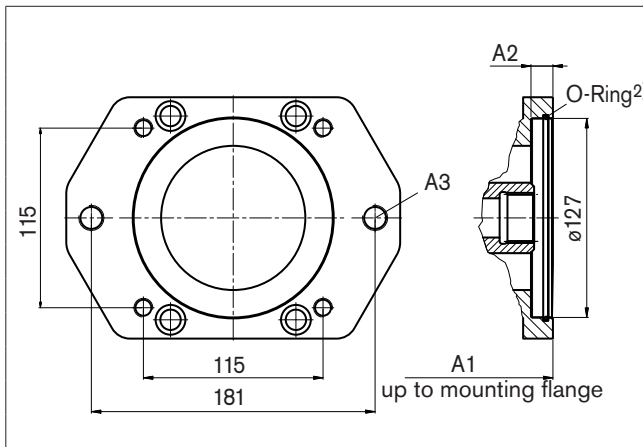

Size	A1				A2	A3 <sup>3)</sup>
	K07	K24	K80	K61		
190	367.8	367.8	367.8	367.8	13	M16x2; 19 deep
190*	400	400	400	400	13	M16x2; 19 deep
260	391.5	391.5	391.5	391.5	13	M16x2; 19 deep
260*	433.5	433.5	433.5	433.5	13	M16x2; 19 deep

<sup>1)</sup> Version with charge pump


**Flange SAE J744 - 152-4 (D) Coupler** for splined shaft acc. to ANSI B92.1a-1976 1 1/4 in 14T 12/24 DP<sup>1)</sup> (SAE J744 - 32-4 (C)) **K86**  
 1 3/4 in 13T 8/16 DP<sup>1)</sup> (SAE J744 - 44-4 (D)) **K17**  
**Coupler** for splined shaft acc. to DIN 5480 W40x2x30x18x9g **K81**  
 W45x2x30x21x9g **K82**  
 W50x2x30x24x9g **K83**

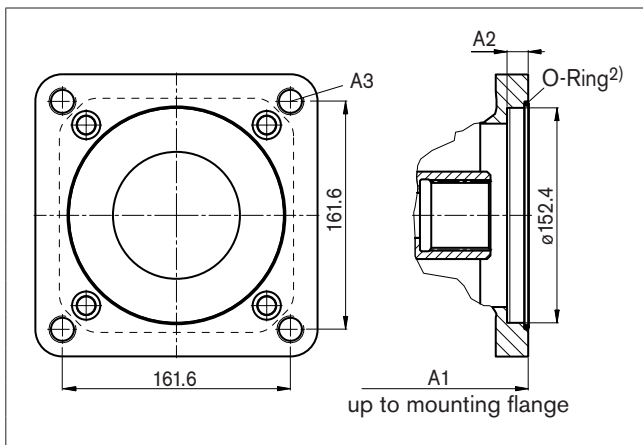

Size	A1					A2	A3 <sup>3)</sup>
	K86	K17	K81	K82	K83		
75	290	-	290	-	-	13	M20x2.5; 28 deep
95	317	327	317	317	-	30	M20x2.5; 25 deep
130/145	340	350	340	340	340	30	M20x2.5; 25 deep
130/145*	374	384	374	374	374	30	M20x2.5; 25 deep
190	392	392	392	392	392	13	M20x2.5; 22 deep
190*	424	424	424	424	424	13	M20x2.5; 22 deep
260	417	417	417	417	417	13	M20x2.5; 22 deep
260*	459	459	459	459	459	13	M20x2.5; 22 deep

<sup>1)</sup> Version with charge pump

**Flange SAE J744 - 101-2 (E) Coupler** for splined shaft acc. to ANSI B92.1a-1976 1 3/4 in 13T 16/32 DP<sup>1)</sup> (SAE J744 - 32-4 (C)) **K72**  
**Coupler** for splined shaft acc. to DIN 5480 W50x2x30x24x9g **K84**  
 W60x2x30x28x9g **K67**

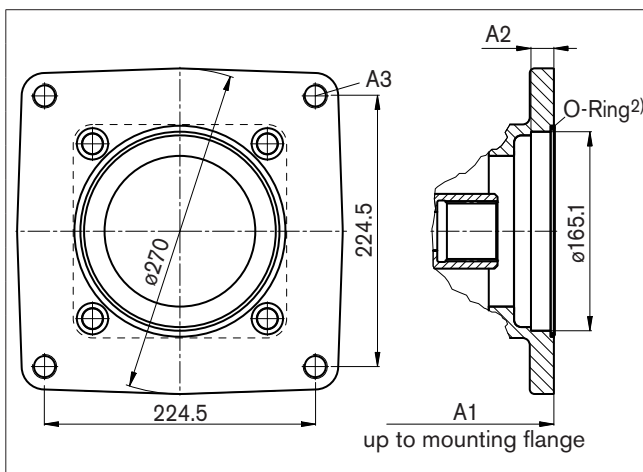

Size	A1			A2	A3 <sup>3)</sup>
	K72	K84	K67		
190	376.8	376.8	-	19	M20x2.5; 20 deep
190*	409	409	-	19	M20x2.5; 20 deep
260	417	400	400	19	M20x2.5; 20 deep
260*	459	442.5	442.5	19	M20x2.5; 20 deep

<sup>1)</sup> Version with charge pump

**Note:**

The mounting flange may be turned through 90°. Standard position as illustrated. Please state in clear text if required.

<sup>1)</sup> 30° pressure angle, flat root, side fit, tolerance class 5

<sup>2)</sup> O-ring included in the delivery contents

<sup>3)</sup> DIN 13, for max. tightening torque, please refer to general notes on page 64

## Overview of Attachments for A11V(L)O

Through drive Flange	A11VO		Attachment – 2nd pump							Through drive available for size
	Coupler for splined shaft	Code	A11VO Size (shaft)	A10V(S)O/31 Size (shaft)	A10V(S) O/53 Size (shaft)	A4FO Size (shaft)	A4VG Size (shaft)	A10VG Size (shaft)	External gear pump	
82-2 (A)	5/8 in	K01	–	18 (U)	10 (U)	–	–	–	Frame size F Size 4-22 <sup>1)</sup>	40...260
	3/4 in	K52	–	18 (S)	10 (S)	–	–	–	–	40...260
101-2 (B)	7/8 in	K02	–	28 (S, R) 45 (U)	28 (S, R) 45 (U, W)	16, 22, 28 (S)	–	18 (S)	Frame size N Size 20-32 <sup>1)</sup> Frame size G Size 38-45 <sup>1)</sup>	40...260
	1 in	K04	40 (S)	45 (S, R)	45 (S, R) 60 (U, W)	–	28 (S)	28, 45 (S)	–	40...260
	W35	K79	40 (Z)	–	–	–	–	–	–	40...260
127-2 (C)	1 1/4 in	K07	60 (S)	71 (S, R) 100 (U)	60 (S) <sup>2)</sup> 85 (U)	–	40, 56, 71 (S)	63 (S)	–	60...260
	1 1/2 in	K24	–	100 (S)	85 (S)	–	–	–	–	95...260
	W30	K80	–	–	–	–	40, 56 (Z)	–	–	60...260
	W35	K61	60 (Z)	–	–	–	40, 56 (A) 71 (Z)	–	–	60...260
152-4 (D)	1 1/4 in	K86	75 (S)	–	–	–	–	–	–	75...260
	1 3/4 in	K17	95, 130, 145 (S)	140 (S)	–	–	90, 125 (S)	–	–	130...260
	W40	K81	75 (Z)	–	–	–	125 (Z)	–	–	75...260
	W45	K82	95 (Z)	–	–	–	90, 125 (A)	–	–	95...260
	W50	K83	130, 145 (Z)	–	–	–	–	–	–	130...260
165-4 (E)	1 3/4 in	K72	190, 260 (S)	–	–	–	180, 250 (S)	–	–	190...260
	W50	K84	190 (Z)	–	–	–	180 (Z)	–	–	190...260
	W60	K67	260 (Z)	–	–	–	–	–	–	260

<sup>1)</sup> Rexroth recommends special versions of the gear pumps. Please ask.

<sup>2)</sup> Only A10VO with 4-hole mounting flange can be mounted to A11V(L)O 190 and 260.

## Combination Pumps A11VO + A11VO

### Total length A <sup>1)</sup>

A11VO	2nd pump									
1st pump	Size 40	Size 60	Size 75	Size 95	Size 130/145	Size 130/145 <sup>2)</sup>	Size 190	Size 190 <sup>2)</sup>	Size 260	Size 260 <sup>2)</sup>
Size 40	–	–	–	–	–	–	–	–	–	–
Size 60	490	507	–	–	–	–	–	–	–	–
Size 75	–	525	550	–	–	–	–	–	–	–
Size 95	528	560	577	604	–	–	–	–	–	–
Size 130/145	551	572	600	627	650	698	–	–	–	–
Size 130/145 <sup>2)</sup>	585	606	634	661	684	732	–	–	–	–
Size 190	586.8	609.8	652	679	702	750	723.6	772.3	–	–
Size 190 <sup>2)</sup>	619	642	684	711	734	782	755.8	804.5	–	–
Size 260	620	633.5	677	704	727	775	746.8	795.5	772	828
Size 260 <sup>2)</sup>	662.5	675.5	719	746	769	817	789.3	838	814.5	870.5

<sup>1)</sup> When using the Z shaft (splined shaft DIN 5480) for the attached pump (2nd pump)


<sup>2)</sup> Version with charge pump

When ordering combination pumps, the type designations of the 1st and 2nd pumps must be connected by a "+".

Ordering code 1st pump + Ordering code 2nd pump

Ordering example:



A11VO130LRDS/10R-NZD12K61 + A11VO60LRDS/10R-NZC12N00

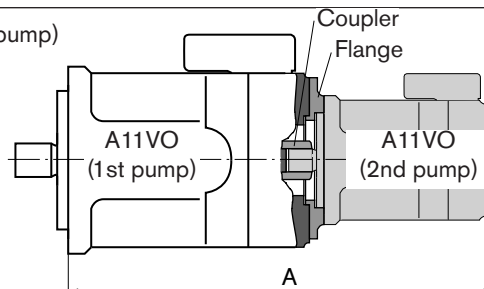

# Swivel Angle Indicator

## Optical swivel angle indicator, V

With the optical swivel angle indicator, a mechanical pointer on the side of the pump case displays the position of the swivel angle of the pump.

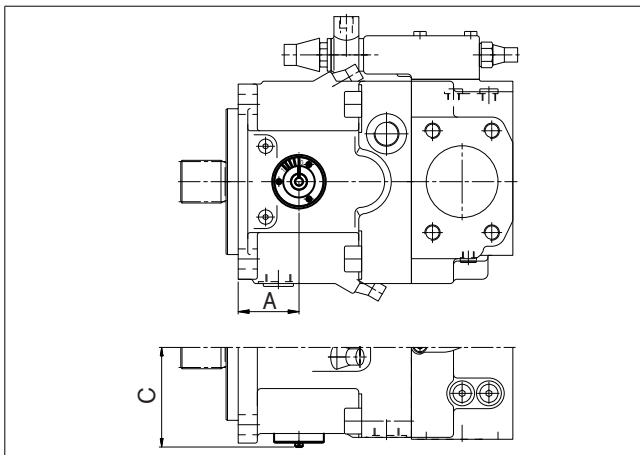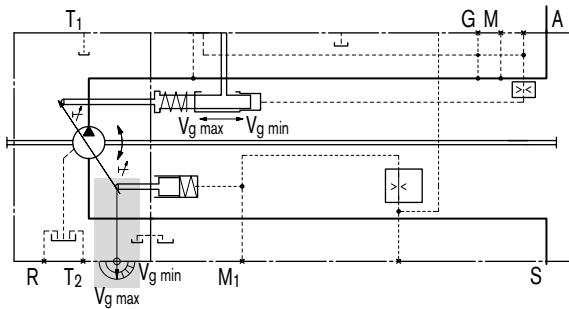


Size	A	C
40	50.5	84.0
60	not available	
75	60.7	97.0
95	63,5	104.0
130	70.9	112.0
190	87.6	123.5
260	87.6	137.0

## Electric swivel angle sensor, R

With the electric swivel angle indicator the swivel position of the pump is measured by an electric swivel angle sensor. It has a robust, sealed case and integrated electronics designed for automotive applications.

As an output the Hall effect swivel angle sensor supplies a voltage signal proportional to the swivel angle (see technical parameters).

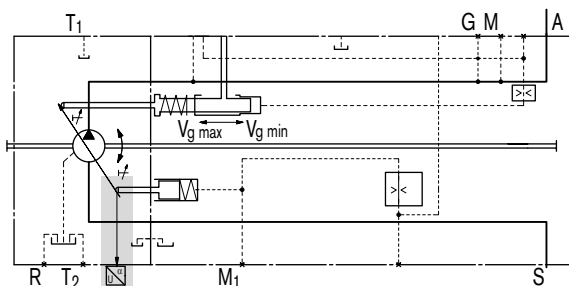

### Parameters

Supply voltage $U_b$	10...30 V DC	
Output voltage $U_a$	2.5 V ( $V_{g \min}$ )	4.5 V ( $V_{g \max}$ )
Reverse-connect protection	Short-circuit-proof	
EMC stability	Details on request	
Operating temperature range	-40°C...+125°C	
Vibration resistance		
Sinusoidal vibration	10 g / 5...2000 Hz	
EN 60068-2-6		
Shock resistance:		
Continuous shock	25 g	
IEC 68-2-29		
Resistance to salt spray	96 h	
DIN 50021-SS		
Type of protection DIN/EN 60529	IP67 and IP69K	
Case material	synthetic material	

### Mating connector


AMP Superseal 1.5; 3-pin,  
Rexroth mat. no. R902602132

Consisting of:

AMP no.

- 1 female connector case, 3-pin \_\_\_\_\_ 282087-1
- 3 single wire seals, yellow \_\_\_\_\_ 281934-2
- 3 female connector contacts 1.8–3.3 mm \_\_\_\_\_ 283025-1

The mating connector is not included in the delivery contents. This can be delivered by Rexroth on request.

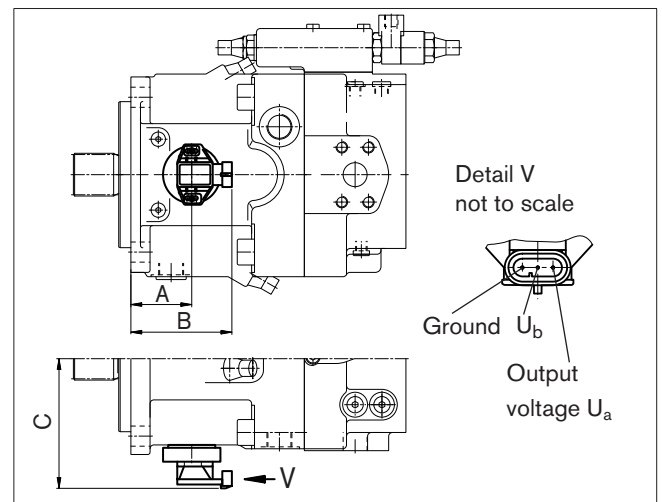

Size	A	B	C
40	50.5	88.5	118.3
60	not available		
75	60.7	98.7	131.3
95	63.5	101.5	138.3
130	70.9	108.9	146.3
190	87.6	125.6	157.8
260	87.6	125.6	171.3

# Connector for Solenoids


## DEUTSCH DT04-2P-EP04, 2-pin

molded, without bidirectional suppressor diode  
(standard) \_\_\_\_\_ P

Type of protection according to DIN/EN 60529:  
IP67 and IP69K

### Circuit diagram symbol

**without** bidirectional  
suppressor diode




### Mating connector

DEUTSCH DT06-2S-EP04  
Rexroth mat. no. R902601804

Consisting of: \_\_\_\_\_ DT designation  
 – 1 case \_\_\_\_\_ DT06-2S-EP04  
 – 1 wedge \_\_\_\_\_ W2S  
 – 2 female connectors \_\_\_\_\_ 0462-201-16141

The mating connector is not included in the delivery contents.  
This can be delivered by Rexroth on request.

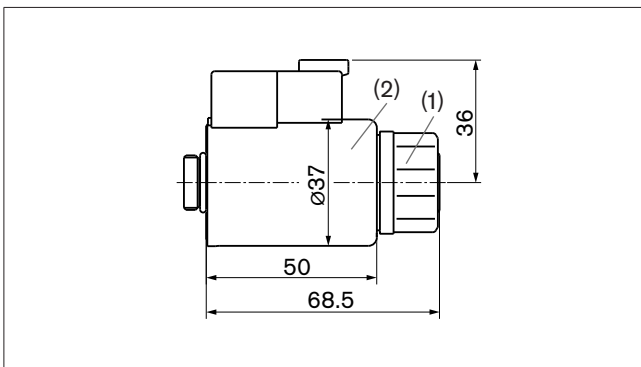

### Note for round solenoids:

The position of the connector can be changed by turning the solenoid body.

Proceed as follows:

- 1. Loosen fixing nut (1)
- 2. Turn the solenoid body (2) to the desired position.
- 3. Tighten the fixing nut  
Tightening torque of fixing nut:  $5^{+1}$  Nm  
(width across the flats WAF 26, 12kt DIN 3124)

# Installation Notes

## General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This is also to be observed following a relatively long standstill as the system may empty via the hydraulic lines.

The case drain in the case interior must be directed to the tank via the highest tank port ( $T_1$ ,  $T_2$ ). The minimum suction pressure at port S must not fall below 0.8 bar absolute (without charge pump) or 0.6 bar (with charge pump).

In all operational conditions, the suction line and case drain line must flow into the tank below the minimum fluid level.

## Installation position

See examples below. Additional installation positions are available upon request.

### Below-tank installation (standard)

Pump below the minimum fluid level of the tank.

Recommended installation positions: 1 and 2.

### Above-tank installation


Pump above the minimum fluid level of the tank.

Observe the maximum permissible suction height  $h_{s \max} = 800$  mm.

The version A11VLO (with charge pump) is not designed for installation above the tank.

Recommendation for installation position 7 (shaft up): A check valve in the case drain line (opening pressure 0.5 bar) can prevent the case interior from draining.

For control options with pressure control, displacement limiters, HD and EP control, the minimum displacement setting must be  $V_g \geq 5\% V_{g \max}$ .

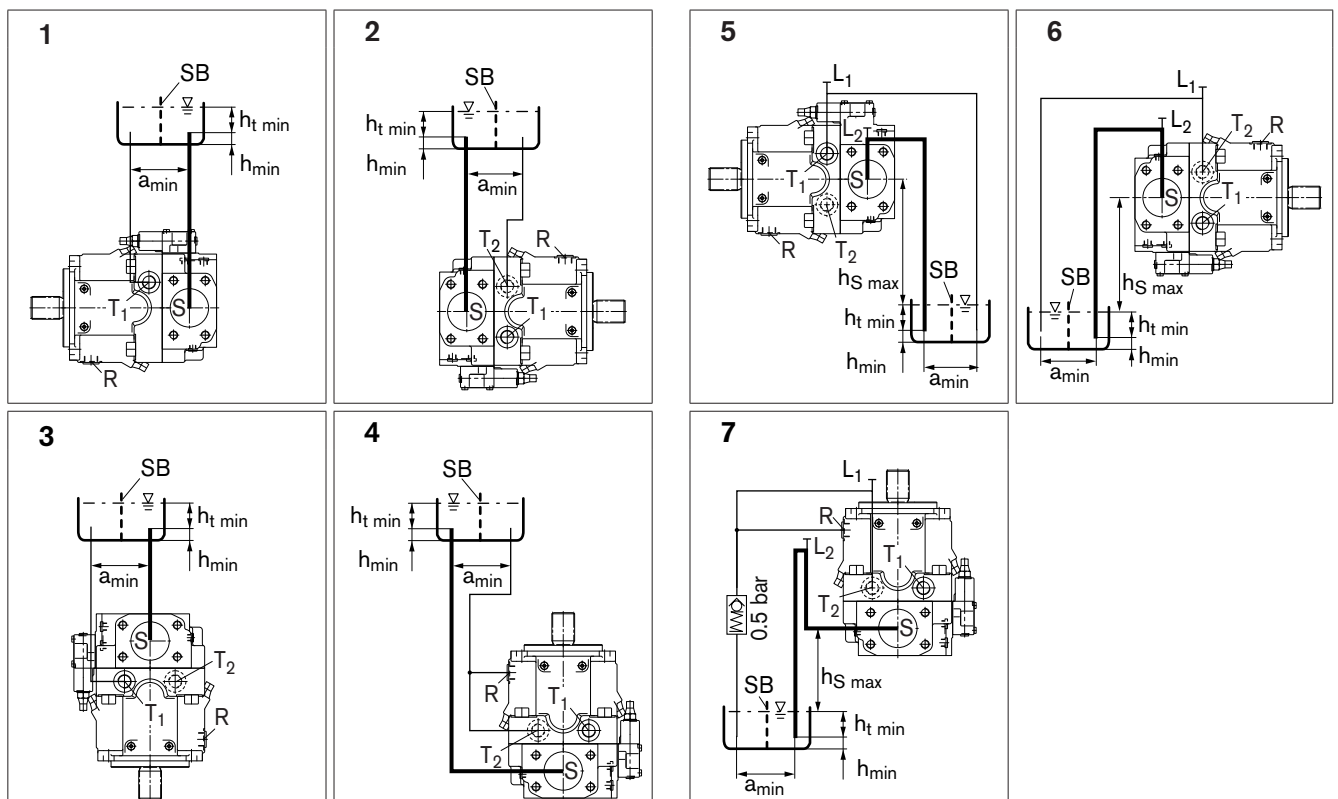

$h_{s \max} = 800$  mm,  $h_{t \min} = 200$  mm,  $h_{\min} = 100$  mm, SB = Silencer plate (baffle plate)

When designing the tank, ensure adequate space  $a_{\min}$  between the suction line and the case drain line to prevent the heated, returned fluid from being directly drawn back out.


Installation position	Air bleeding	Filling
1	$T_1$	$S + T_1$
2	R	$S + T_2$
3	$T_1/T_2$	$S + T_1/T_2$
4	R	$S + T_1/T_2$

Installation position	Air bleeding	Filling
5	$L_1 + L_2$	$L_2 (S) + L_1 (T_1)$
6	$R + L_2$	$L_2 (S) + L_1 (T_2)$
7	$L_1 + L_2$	$L_2 (S) + L_1 (T_1/T_2)$

# Installation Notes

## Tank installation

Pump below the minimum fluid level in the tank.

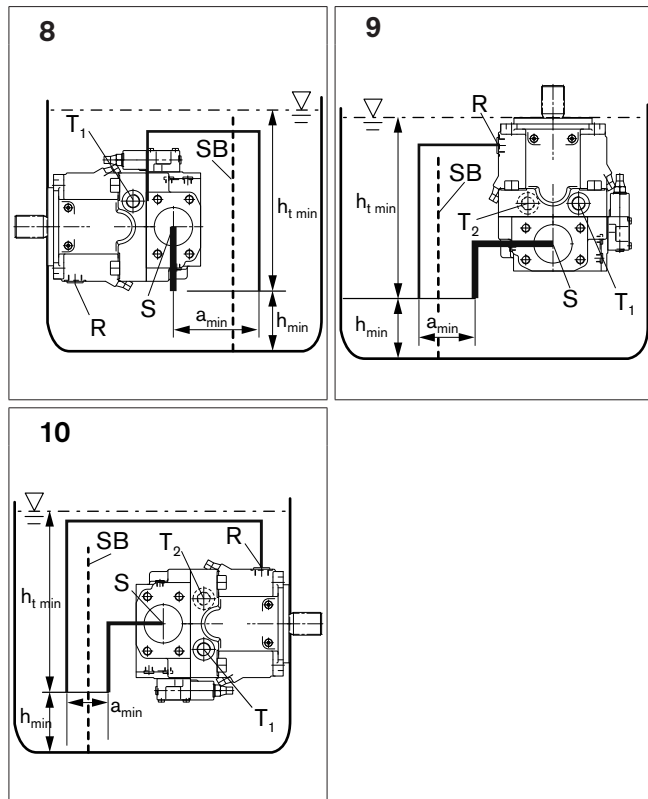

$h_{s \max} = 800 \text{ mm}$ ,  $h_{t \min} = 200 \text{ mm}$ ,  $h_{\min} = 100 \text{ mm}$ ,  
SB = Silencer plate (baffle plate)

When designing the tank, ensure adequate space  $a_{\min}$  between the suction line and the case drain line to prevent the heated, returned fluid from being directly drawn back out.

Installation position	Air bleeding	Filling
8	T <sub>1</sub>	automatically via all open T <sub>1</sub> , T <sub>2</sub> , R and S
9	R	ports, though position below the hydraulic fluid level
10	R	level



# Notice

## General Notes

- The A11VO pump is designed to be used in open circuits.
- Project planning, assembly and commissioning of the axial piston unit require the involvement of qualified personnel.
- The service line ports and function ports are only designed to accommodate hydraulic lines.
- During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e. g. by wearing protective clothing).
- Depending on the operational state of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- Pressure ports:  
The ports and fixing threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
- The data and notes contained herein must be adhered to.
- The following tightening torques apply:
  - Threaded hole for axial piston unit:  
The maximum permissible tightening torques  $M_{G \max}$  are maximum values for the threaded holes and must not be exceeded. For values, see the following table.
  - Fittings:  
Observe the manufacturer's instruction regarding the tightening torques of the used fittings.
  - Fixing screws:  
For fixing screws according to DIN 13, we recommend checking the tightening torque individually according to VDI 2230.
  - Locking screws:  
For the metal locking screws supplied with the axial piston unit, the required tightening torques of locking screws  $M_V$  apply. For values, see the following table.
- The product is not approved as a component for the safety concept of a general machine according to DIN EN ISO 13849.

Thread size		Max. permissible tightening torque of the screw thread $M_{G \max}$	Required tightening torque for locking screws $M_V$	WAF Hexagon socket
M12x1.5	DIN 3852	50 Nm	25 Nm	6 mm
M14x1.5	DIN 3852	80 Nm	35 Nm	6 mm
M22x1.5	DIN 3852	210 Nm	80 Nm	10 mm
M26x1.5	DIN 3852	230 Nm	120 Nm	12 mm
M33x2	DIN 3852	540 Nm	310 Nm	17 mm

Bosch Rexroth AG  
Hydraulics  
Axial Piston Unit  
Glockeraustraße 2  
89275 Elchingen, Germany  
Tel.: +49 (0) 73 08 82-0  
Fax: +49 (0) 73 08 72 74  
info.brm-ak@boschrexroth.de  
www.boschrexroth.com/brm

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. Without their consent it may not be reproduced or given to third parties.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The given information does not release the user from the obligation of own judgement and verification. It must be remembered that our products are subject to a natural process of wear and aging.


Subject to change.

# Axial piston variable pump A11V(L)O Series 40

**RE 92510**

Edition: 05.2016

Replaces: 10.2014

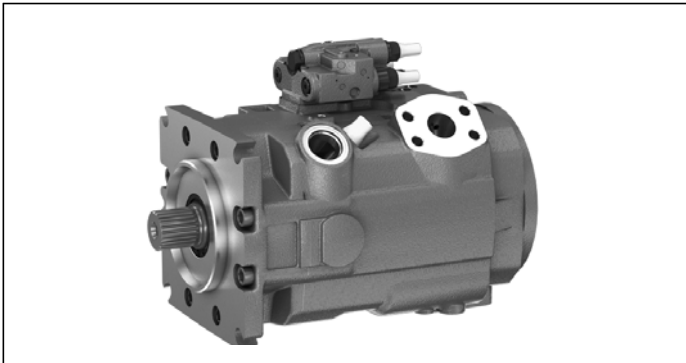

- ▶ Sizes 110 to 280
- ▶ Nominal pressure 350 bar (5100 psi)
- ▶ Maximum pressure 420 bar (6100 psi)
- ▶ Open circuit

3

## Features

- ▶ Variable pump with axial piston rotary group in swash-plate design for hydrostatic drives in open circuit.
- ▶ For use preferably in mobile applications
- ▶ Flow is proportional to the drive speed and displacement.
- ▶ The flow can be infinitely varied by adjusting the swash-plate angle.
- ▶ The pump can work either self-priming or with a charge pump.
- ▶ Special control devices program for mobile applications, with different control and regulation functions.
- ▶ The universal through drive is suitable for adding gear pumps and axial piston pumps up to the same size, i.e. 100% through drive.
- ▶ Compact design
- ▶ High efficiency
- ▶ High power density
- ▶ Low noise level

## Content

Ordering code	2
Hydraulic fluids	5
Charge pump (impeller)	6
Operating pressure range	7
Technical data	8
Power controller	12
Stroke control	18
Pressure control	22
Dimensions size 110	25
Dimensions size 145	30
Dimensions size 175	37
Dimensions size 210	44
Dimensions size 280	51
Dimensions, through drives	57
Overview of mounting options	60
Combination pumps A11V(L)O + A11V(L)O	61
Connector for solenoids	62
Installation instructions	63
Project planning notes	65
Safety instructions	65

## Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	
<b>A11V</b>									/	<b>40</b>						<b>1</b>			<b>0</b>	-	

### Axial piston unit

01	Variable swashplate design, nominal pressure 350 bar (5100 psi), maximum pressure 420 bar (6100 psi)	<b>A11V</b>
----	--	-------------

### Operating mode

		110	145	175	210	280		
02	Pump, open circuit	without charge pump	•	•	•	•	•	<b>O</b>
		with charge pump	-	•	•	•	•	<b>LO</b>

### Size (NG)

		110	145	175	210	280	
03	Geometric displacement	cm <sup>3</sup>	<b>110</b>	<b>145</b>	<b>175</b>	<b>210</b>	<b>280</b>
	See the table of values, page 8	in <sup>3</sup>	<b>6.71</b>	<b>8.85</b>	<b>10.68</b>	<b>12.81</b>	<b>17.09</b>

### Control devices: basic controller<sup>1)</sup>

		110	145	175	210	280			
04	Power controller	fixed setting	•	•	•	•	•	<b>LR</b>	
		override electric-proportional	negative control	$U = 12 V$	•	•	•	•	<b>L3</b>
				$U = 24 V$	•	•	•	<b>L4</b>	
	hydraulic-proportional,	negative control		•	•	•	•	•	<b>L5</b>
			positive control	•	•	•	•	•	<b>L6</b>
	Summation power controller	override hydraulic proportional, high pressure	negative control	with stop	•	•	•	•	<b>CR</b>
			without stop	•	•	•	•	<b>PR</b>	
Stroke control <sup>2)</sup>	electric-proportional	positive control	$U = 12 V$	•	•	•	•	<b>E1</b>	
			$U = 24 V$	•	•	•	•	<b>E2</b>	
	hydraulic-proportional, control pressure	negative control	$\Delta p = 25 \text{ bar}$ (365 psi)		•	•	•	•	<b>H3</b>
				positive control	•	•	•	•	<b>H4</b>
Pressure control with one-side swiveling	fixed setting		•	•	•	•	•	<b>DR</b>	
	remote controlled hydraulically	positive control	•	•	•	•	•	<b>DG</b>	
	electric-proportional with integrated pilot valve for external pilot pressure supply	positive control	$U = 24 V$	○	○	○	○	<b>D2<sup>3)</sup></b>	
Pressure control with two-side swiveling	electric-proportional with integrated pilot valve for external pilot pressure supply	positive control	$U = 24 V$	○	○	○	○	<b>M2<sup>3)</sup></b>	

### Additional control: Pressure control

		110	145	175	210	280		
05	Without additional control (without symbol)		•	•	•	•	•	
	Pressure control with one-side swiveling	fixed setting	•	•	•	•	•	<b>DR</b>
		remote controlled hydraulically	positive control	•	•	•	•	•

### Additional control: stroke control or unloading

		110	145	175	210	280			
06	Without additional control (without symbol)		•	•	•	•	•		
	Stroke control <sup>4)</sup>	electric-proportional	positive control	$U = 12 V$	•	•	•	•	<b>E1</b>
				$U = 24 V$	•	•	•	•	<b>E2</b>
	hydraulic-proportional, control pressure	negative control	$\Delta p = 25 \text{ bar}$ (365 psi)		•	•	•	•	<b>H3</b>
				positive control	•	•	•	•	<b>H4</b>

### Additional control: load sensing

		110	145	175	210	280		
07	Without additional control (without symbol)		•	•	•	•	•	
	Load sensing, internal pump pressure, fixed setting		•	•	•	•	•	<b>S0</b>

• = Available    ○ = On request    - = Not available

<sup>1)</sup> The basic controller (04) can be combined with at most two additional controllers (05, 06, 07)

<sup>2)</sup> The stroke control systems can be combined with either pressure controllers or load sensing controllers. A combination of all three controllers is not possible.

<sup>3)</sup> Not combinable with other controllers

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	
<b>A11V</b>									/	<b>40</b>						<b>1</b>			<b>0</b>	-	

**Depressurized basic position and external control pressure supply** **110 145 175 210 280**

08	Maximum swivel angle ( $V_{g \max}$ )															
	Without external control pressure supply (standard for power and pressure controllers)										●	●	●	●	●	A
	With external control pressure supply (integrated shuttle valve, standard for negative stroke control)										●	●	●	●	●	B
	Minimum swivel angle ( $V_{g \min}$ )															
	With external control pressure supply (integrated shuttle valve, standard for positive stroke control)										●	●	●	●	●	C

**Connectors for solenoids<sup>4)</sup>** **110 145 175 210 280**

09	Without connector (without solenoid, only for hydraulic control)										●	●	●	●	●	0
	DEUTSCH - molded connector, 2-pin, without suppressor diode										●	●	●	●	●	P
	AMP connector (Junior-Timer), 2-pin (only for D2/M2 controller)										○	○	○	○	○	S

**Swivel angle sensor** **110 145 175 210 280**

10	Without swivel angle sensor										●	●	●	●	●	0
	With electric swivel angle sensor <sup>5)</sup> as per data sheet 95150															
						Power supply 5 V DC					●	●	●	●	●	B
						Power supply 8 V – 32 V DC					●	●	●	●	●	K

**Series**

11	Series 4, index 0										40
----	-------------------	--	--	--	--	--	--	--	--	--	----

**Configuration of port and fastening threads**

12	Metric, all fastening threads according to DIN 13, all port threads with O-ring seal according to ISO 6149										M
	ANSI, all fastening threads according to ASME B1.1, all port threads with O-ring seal according to ISO 11926										A

**Direction of rotation** **110 145 175 210 280**

13	Viewed on drive shaft										clockwise					●	●	●	●	●	R
											counter-clockwise					●	●	●	●	●	L

**Sealing material** **110 145 175 210 280**

14	FKM (fluor-caoutchouc)										●	●	●	●	●	V
----	------------------------	--	--	--	--	--	--	--	--	--	---	---	---	---	---	---

**Mounting flange** **110 145 175 210 280**

15	SAE J744		152-4		●	●	-	-	-	D4
			165-4		-	-	●	●	●	E4
	SAE J617		409-12		○	●	●	●	-	G3

**Drive shaft** (permissible input torque, see page 11) **110 145 175 210 280**

16	Splined shaft ANSI B92.1a		1 3/4 in 13T 8/16 DP		●	●	●	●	-	T1
			2 in 15T 8/16 DP		-	●	●	●	-	T2
			2 1/4 in 17T 8/16 DP		-	-	-	-	●	T3
	Splined shaft DIN 5480		W45x2x21x9g		●	-	-	-	-	A1
			W50x2x24x9g		-	●	●	●	-	A2
			W60x2x28x9g		-	-	-	-	●	A4

**Working port**

17	SAE flange port A, at side (45° right), SAE flange port S at bottom										1
----	---	--	--	--	--	--	--	--	--	--	---

**Rotary group version** **110 145 175 210 280**

18	Noise-optimized for $n = 1500/1800$ rpm, version without charge pump										●	●	●	●	●	E
	Version with charge pump										-	●	●	●	●	S

● = Available    ○ = On request    - = Not available

<sup>4)</sup> Connectors for other electric components may deviate  
<sup>5)</sup> Please contact us if the swivel angle sensor is used for control

4 **A11V(L)O Series 40** | Axial piston variable pump  
Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21		
<b>A11V</b>										/	<b>40</b>						<b>1</b>			<b>0</b>	-	

**Through drives** (for attachment options, see page 61)

19	Flange SAE J744			Hub for splined shaft <sup>1)</sup>			110	145	175	210	280	
	Diameter	Attachment <sup>2)</sup>	Designation	Diameter		Designation						
82-2 (A)	☼	A3	5/8 in	9T 16/32DP	S2	●	●	●	●	●	<b>A3S2</b>	
			3/4 in	11T 16/32DP	S3	○	○	●	●	●	<b>A3S3</b>	
101-2 (B)	☼	B3	7/8 in	13T 16/32DP	S4	●	●	●	●	●	<b>B3S4</b>	
			1 in	15T 16/32DP	S5	●	●	●	●	●	<b>B3S5</b>	
	♂	B5	7/8 in	13T 16/32DP	S4	●	●	●	●	●	<b>B5S4</b>	
			1 in	15T 16/32DP	S5	○	○	●	●	○	<b>B5S5</b>	
127-2 (C)	☼	C3	1 1/4 in	14T 12/24DP	S7	○	○	●	●	●	<b>C3S7</b>	
			1 1/2 in	17T 12/24DP	S9	○	○	●	●	●	<b>C3S9</b>	
	♂	C5	1 1/4 in	14T 12/24DP	S7	○	-	●	●	●	<b>C5S7</b>	
127-4 (C)	☼☼	C4	1 1/4 in	14T 12/24DP	S7	●	●	●	●	○	<b>C4S7</b>	
			1 3/8 in	21T 16/32 DP	V8	○	○	○	○	○	<b>C4V8</b>	
152-4 (D)	☼☼	D4	1 1/4 in	14T 12/24DP	S7	○	○	○	○	○	<b>D4S7</b>	
			1 3/8 in	21T 16/32 DP	V8	○	○	○	○	○	<b>D4V8</b>	
			1 3/4 in	13T 8/16DP	T1	●	●	●	●	●	<b>D4T1</b>	
165-4 (E)	☼☼	E4	1 3/4 in	13T 8/16DP	T1	-	-	●	●	●	<b>E4T1</b>	
			2 in	15T 8/16DP	T2	-	-	●	●	●	<b>E4T2</b>	
			2 1/4 in	17T 8/16DP	T3	-	-	-	-	●	<b>E4T3</b>	
			W60x2x28x9g <sup>3)</sup>	A4	-	-	-	-	●	<b>E4A4</b>		
Prepared for through drive, with pressure-proof plugged cover (also see data sheet 95581)						●	●	●	●	●	<b>U000</b>	

**Pressure sensors and other sensors**

20	Without sensor	<b>0</b>
----	----------------	----------

**Standard/special version**

21	Standard version	<b>0</b>
	Special version	<b>S</b>

● = Available    ○ = On request    - = Not available

**Note**

- ▶ Note the project planning notes on page 66.
- ▶ In addition to the ordering code, please specify the relevant technical data when placing your order.

1) According to ANSI B92.1a

2) Mounting bores pattern viewed from through drive with control at top

3) Hub N60x2x28x8H according to DIN 5480

## Hydraulic fluids

The A11V(L)O variable pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)

### Notes on selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$  see selection diagram).


#### Notice

At no point of the component may the temperature be higher than 115 °C (240 °F). The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing. If the above conditions cannot be maintained due to extreme operating parameters, please contact the responsible member of staff at Bosch Rexroth.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start/ Warm-up phase	$v = 1600$ to $400$ mm <sup>2</sup> /s ( $v < 7400$ to $1850$ SUS)	$\theta = -40$ °C to $-25$ °C ( $\theta = -40$ °F to $-13$ °F)	At low load ( $20 \text{ bar} \leq p < 50 \text{ bar}$ ) $n \leq 1000$ rpm
Permissible temperature difference		$\Delta T \leq 25$ K (45 °F)	between axial piston unit and hydraulic fluid
Standard operating conditions and continuous operation at $v_{opt}$	$v = 400$ to $10$ mm <sup>2</sup> /s ( $v = 1850$ to $60$ SUS)	$\theta = -25$ °C to $+110$ °C ( $\theta = -13$ °F to $+230$ °F)	This corresponds, for example on the VG 46, to a temperature range of $+5$ °C (41 °F) to $+85$ °C (185 °F) (see selection diagram) measured at port <b>T</b> observe the permissible temperature range of the shaft seal ring ( $\Delta T =$ about 5 K (9 °F) between bearing/shaft seal ring and port <b>T</b> )
	$v_{opt} = 36$ to $16$ mm <sup>2</sup> /s ( $v_{opt} = 170$ to $74$ SUS)	$\theta = -25$ °C to $+110$ °C ( $\theta = -13$ °F to $+230$ °F)	optimal operating viscosity and efficiency measured at port <b>T</b>
Short-term operation	$v_{min} \geq 7$ mm <sup>2</sup> /s (50 SUS)		$t < 3$ min, $p < 0.3 \times p_{nom}$

### ▼ Selection diagram

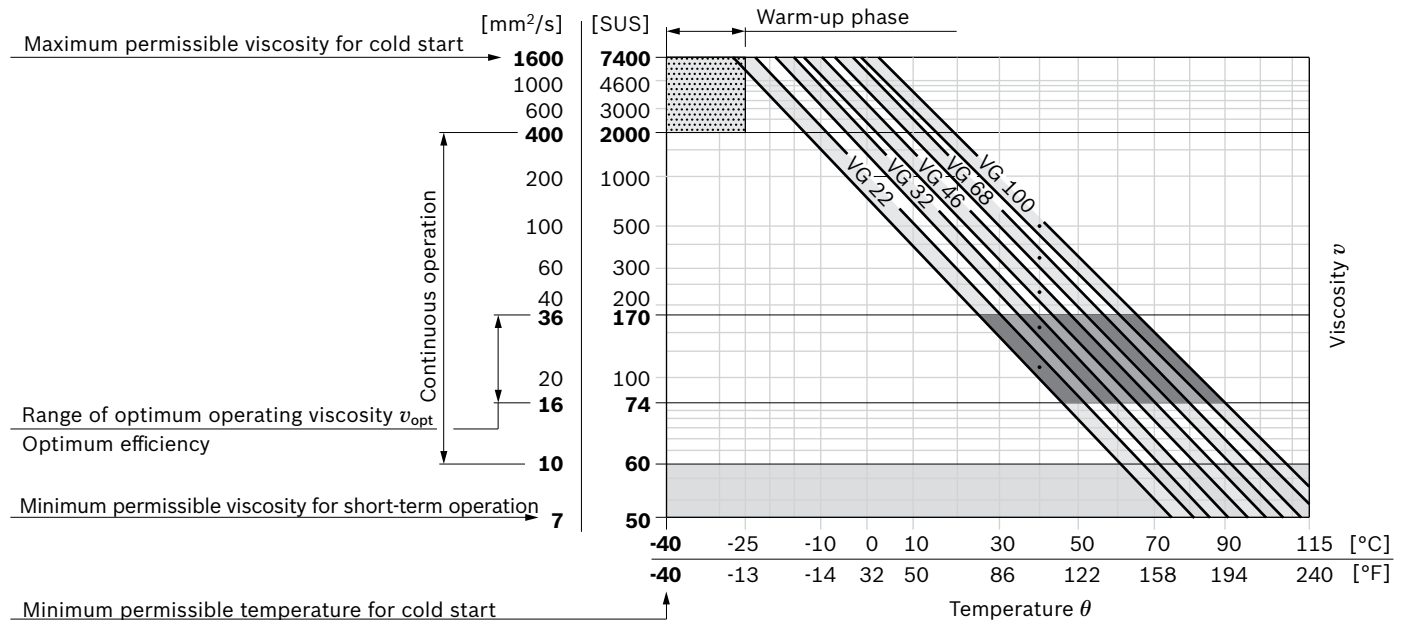

- 1) At temperatures below  $-25$  °C ( $-13$  °F) an NBR shaft seal is required (permissible temperature range  $-40$  °C to  $+90$  °C ( $-40$  °F to  $+195$  °F)), please contact us (ordering code 14, letter K).

### Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.


A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

At very high hydraulic fluid temperatures (90 °C (195 °F) to maximum 115 °C (240 °F)), a cleanliness class of at least 19/17/14 according to ISO 4406 is necessary.

Please contact us if the above classes cannot be observed.

### Charge pump (impeller)

The charge pump is a circulating pump with which the A11VLO is filled and therefore can be operated at higher speeds. This also simplifies cold starting at low temperatures and high viscosity of the hydraulic fluid. Externally increasing the inlet pressure is therefore unnecessary in most cases. Charging the reservoir with compressed air is not permissible.

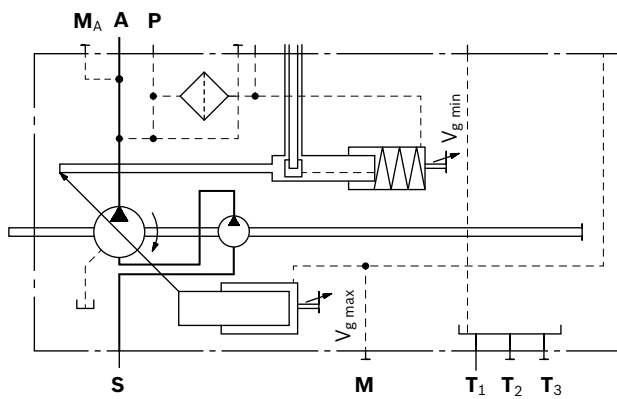





## Operating pressure range

Pressure at working line port A		Definition
Nominal pressure $p_{nom}$	350 bar (5100 psi)	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	420 bar (6100 psi)	The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	10 s	
Total operating period	300 h	
Minimum pressure $p_{A abs}$ (High-pressure side)		Minimum pressure at the high-pressure side (A) which is required in order to prevent damage to the axial piston unit. The minimum pressure depends on the rotational speed and the swivel angle (see diagram).
Rate of pressure change $R_{A max}$	16000 bar/s (232000 psi/s)	Maximum permissible rate of pressure build-up and reduction during a pressure change across the entire pressure range.
Pressure at suction port S (inlet)		
Version without charge pump		Minimum pressure at suction port S (inlet) that is required in order to avoid damage to the axial piston unit. The minimum pressure depends on the speed and displacement of the axial piston unit.
Minimum pressure $p_{S min}$	$\geq 0.8$ bar (12 psi) absolute	
Maximum pressure $p_{S max}$	$\leq 30$ bar (435 psi)	
Version with charge pump		
Minimum pressure $p_{S min}$	$\geq 0.7$ bar (10.5 psi) absolute	
Maximum pressure $p_{S max}$	$\leq 2$ bar (30 psi) absolute	
Case pressure at port T <sub>1</sub> , T <sub>2</sub> , T <sub>3</sub>		
Maximum static pressure $p_{L max}$	3 bar (45 psi)	Maximum 1.2 bar (18 psi) higher than inlet pressure at port S, but not higher than $p_{L max}$ . A case drain line to the reservoir is required.
Pressure peaks $p_{L peak}$	6 bar (90 psi)	$t < 0.1s$

### ▼ Rate of pressure change $R_{A max}$

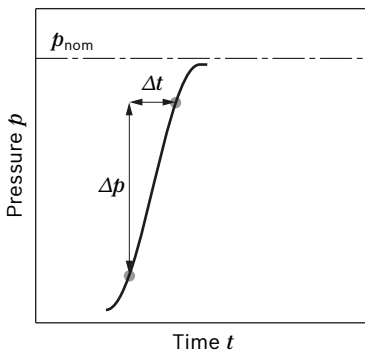


### ▼ Pressure definition

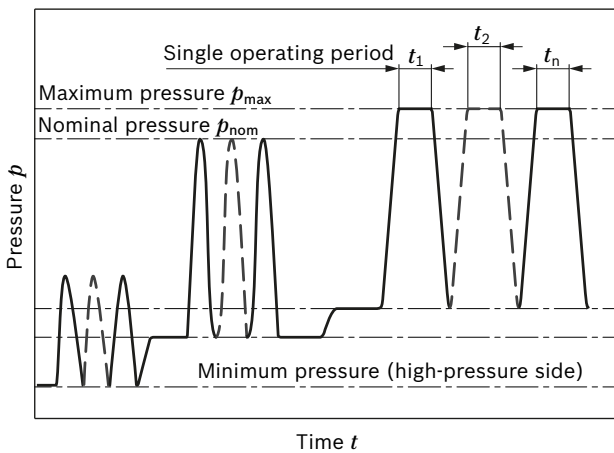

Total operating period =  $t_1 + t_2 + \dots + t_n$

### ▼ Minimum pressure (high-pressure side)

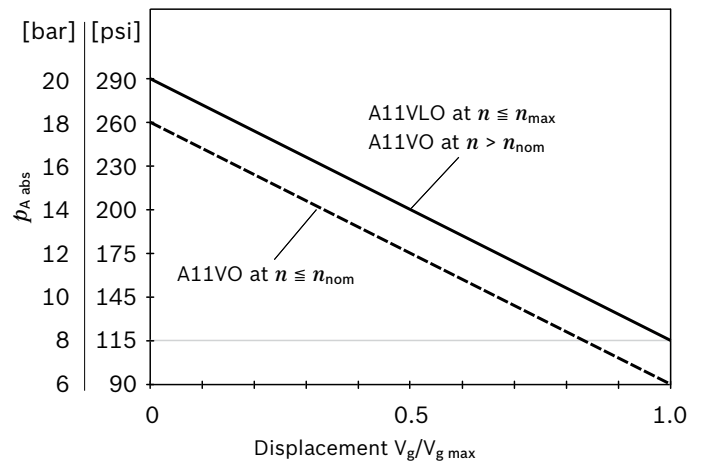

### Notice

Operating pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.

## Technical data

### Without charge pump (A11VO)

Size	NG		110	145	175	210	280		
Displacement, geometric, per revolution	$V_{g \max}$	cm <sup>3</sup>	110.0	145.0	175.0	210.0	280.0		
		in <sup>3</sup>	6.71	8.85	10.68	12.81	17.09		
	$V_{g \min}$	cm <sup>3</sup>	0	0	0	0	0		
		in <sup>3</sup>	0	0	0	0	0		
Speed maximum <sup>1)</sup>	at $V_{g \max}$ <sup>2)</sup>	$n_{\text{nom}}$	rpm	2400	2300	2150	2100	1800	
	at $V_g \leq V_{g \max}$ <sup>3)</sup>	$n_{\text{max}}$	rpm	2800	2600	2500	2500	2300	
Flow	at $n_{\text{nom}}$ and $V_{g \max}$	$q_v$	l/min	264	334	376	441	504	
			gpm	70	88	99	117	133	
Power	at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 350$ bar (5100 psi)	$P$	kW	154	195	219	257	294	
			hp	207	261	294	345	394	
Torque	at $V_{g \max}$ and $\Delta p = 350$ bar (5100 psi) <sup>2)</sup>	$T$	Nm	613	808	975	1170	1560	
			lb-ft	452	596	719	863	1151	
Rotary stiffness of drive shaft	1 3/4 in 13T 8/16 DP	T1	$c$	kNm/rad	–	235	243	254	–
				lb-ft/rad	–	173327	179227	187340	–
	2 in 15T 8/16 DP	T2	$c$	kNm/rad	–	286	298	314	–
				lb-ft/rad	–	210942	219794	231595	–
	2 1/4 in 17T 8/16 DP	T3	$c$	kNm/rad	–	–	–	–	519
				lb-ft/rad	–	–	–	–	382795
	W45x2x21x9g	A1	$c$	kNm/rad	242	–	–	–	–
				lb-ft/rad	178489	–	–	–	–
	W50x2x24x9g	A2	$c$	kNm/rad	–	334	357	381	–
				lb-ft/rad	–	246345	263309	281011	–
	W60x2x28x9g	A4	$c$	kNm/rad	–	–	–	–	645
				lb-ft/rad	–	–	–	–	475727
Moment of inertia for rotary group		$J_{\text{TW}}$	kgm <sup>2</sup>	0.022	0.035	0.045	0.06	0.097	
			lb-ft <sup>2</sup>	0.5221	0.8306	1.0679	1.4238	2.3019	
Maximum angular acceleration <sup>4)</sup>		$\alpha$	rad/s <sup>2</sup>	7465	6298	5609	5014	4200	
Case volume		$V$	l	2.2	2.7	3.6	4	6.5	
			gal	0.58	0.71	0.95	1.06	1.72	
Weight (without through drive) about		$m$	kg	64	79	97	111	143	
			lbs	141	174	214	245	315	

- 1) The values are applicable:
- for the optimum viscosity range from  $\nu_{\text{opt}} = 36$  to  $16$  mm<sup>2</sup>/s (170 to 74 SUS)
  - with hydraulic fluid based on mineral oils
- 2) The values apply at absolute pressure  $p_{\text{abs}} = 1$  bar (15 psi) at suction port **S**.
- 3) Maximum rotational speed (rotational speed limit) in the case of increasing the inlet pressure  $p_{\text{abs}}$  at suction port **S** and  $V_g < V_{g \max}$ , see diagram on page 10.

- 4) The data are valid for values between the minimum required and maximum permissible rotational speed. Valid for external excitation (e.g. diesel engine 2 to 8 times rotary frequency; cardan shaft twice the rotary frequency). The limit value is only valid for a single pump. The load capacity of the connecting parts must be considered.


**With charge pump (A11VLO)**

Size	NG		145	175	210	280		
Displacement, geometric, per revolution	$V_{g \max}$	cm <sup>3</sup>	145.0	175.0	210.0	280.0		
		in <sup>3</sup>	8.85	10.68	12.81	17.09		
	$V_{g \min}$	cm <sup>3</sup>	0	0	0	0		
		in <sup>3</sup>	0	0	0	0		
Speed maximum <sup>1)</sup>	at $V_{g \max}$ <sup>2)</sup>	$n_{\text{nom}}$	rpm	2600	2500	2500	2300	
	at $V_g \leq V_{g \max}$ <sup>3)</sup>	$n_{\text{max}}$	rpm	2600	2500	2500	2300	
Flow	at $n_{\text{nom}}$ and $V_{g \max}$	$q_v$	l/min	377	438	525	644	
			gpm	100	116	139	170	
Power	at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 350$ bar (5100 psi)	$P$	kW	220	255	306	376	
			hp	295	342	410	504	
Torque	at $V_{g \max}$ and $\Delta p = 350$ bar (5100 psi) <sup>2)</sup>	$T$	Nm	808	975	1170	1560	
			lb-ft	596	719	863	1151	
Rotary stiffness of drive shaft	1 3/4 in 13T 8/16 DP T1	T1	$c$	kNm/rad	235	243	254	–
				lb-ft/rad	173327	179227	187340	–
	2 in 15T 8/16 DP T2	T2	$c$	kNm/rad	286	298	314	–
				lb-ft/rad	210942	219794	231595	–
	2 1/4 in 17T 8/16 DP T3	T3	$c$	kNm/rad	–	–	–	519
				lb-ft/rad	–	–	–	382795
	W50x2x24x9g A2	A2	$c$	kNm/rad	334	357	381	–
				lb-ft/rad	246345	263309	281011	–
	W60x2x28x9g A4	A4	$c$	kNm/rad	–	–	–	645
				lb-ft/rad	–	–	–	475727
	Moment of inertia for rotary group		$J_{\text{TW}}$	kgm <sup>2</sup>	0.035	0.047	0.063	0.097
				lb-ft <sup>2</sup>	0.8306	1.0679	1.4238	2.3019
Maximum angular acceleration <sup>4)</sup>		$\alpha$	rad/s <sup>2</sup>	6298	5609	5014	4200	
Case volume		$V$	l	2.9	3.6	3.7	5.6	
			gpm	0.77	0.95	0.98	1.48	
Weight (without through drive) about		$m$	kg	92	110	125	148	
			lbs	203	243	276	326	

- 1) The values are applicable:
  - for the optimum viscosity range from  $\nu_{\text{opt}} = 36$  to  $16$  mm<sup>2</sup>/s (170 to 74 SUS)
  - with hydraulic fluid based on mineral oils
- 2) The values apply at absolute pressure  $p_{\text{abs}} = 1$  bar (15 psi) at suction port **S**.
- 3) Maximum rotational speed (rotational speed limit) in the case of increasing the inlet pressure  $p_{\text{abs}}$  at suction port **S** and  $V_g < V_{g \max}$ , see diagram on page 10.

- 4) The data are valid for values between the minimum required and maximum permissible rotational speed. Valid for external excitation (e.g. diesel engine 2 to 8 times rotary frequency; cardan shaft twice the rotary frequency). The limit value is only valid for a single pump. The load capacity of the connecting parts must be considered.

▼ **Maximum permissible rotational speed (rotational speed limit)**  
 ( $p_{s\ abs}$  = inlet pressure [bar (psi)])

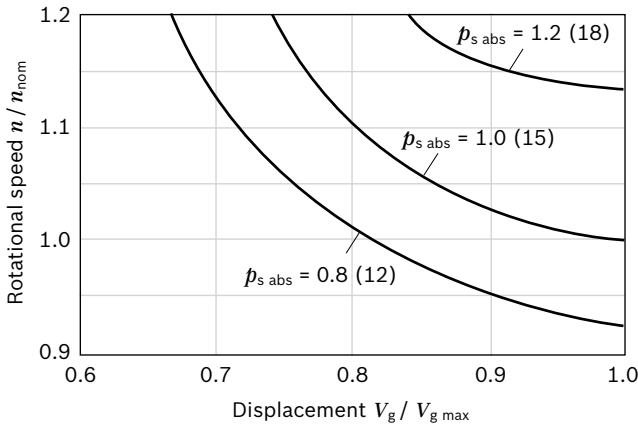

**Determining the operating characteristics**

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
	$q_v = \frac{V_g \times n \times \eta_v}{231}$	[gpm]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$	[Nm]
	$T = \frac{V_g \times \Delta p}{24 \times \pi \times \eta_{hm}}$	[lb-ft]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]
	$P = \frac{2 \pi \times T \times n}{33000} = \frac{q_v \times \Delta p}{1714 \times \eta_t}$	[hp]

Key

$V_g$	=	Displacement per revolution [cm <sup>3</sup> (in <sup>3</sup> )]
$\Delta p$	=	Differential pressure [bar (psi)]
$n$	=	Rotational speed [rpm]
$\eta_v$	=	Volumetric efficiency
$\eta_{hm}$	=	Hydraulic-mechanical efficiency
$\eta_t$	=	Total efficiency ( $\eta_t = \eta_v \times \eta_{hm}$ )

**Permissible radial and axial forces of the drive shafts**


Size	NG	110	110	145	145	145	175	175	175	210	210	210	280	280	
Drive shaft		1 3/4 in	W45	1 3/4 in	2 in	W50	1 3/4 in	2 in	W50	1 3/4 in	2 in	W50	2 1/4 in	W60	
Maximum radial force at distance a (from shaft collar)	$F_{q\ max}$	N	8000	8000	11000	11000	11000	12300	12300	14000	16925	16925	17000	18000	23600
		lb	1798	1798	2473	2473	2473	2765	2765	3147	3805	3805	3822	4046	5305
	a	mm	33.5	25	33.5	40	27.5	33.5	40	27	33.5	40	27	40	29
		in	1.32	0.98	1.32	1.57	1.08	1.32	1.57	1.06	1.32	1.57	1.06	1.57	1.14
Maximum axial force	$+ F_{ax\ max}$	N	1200	1200	1350	1350	1350	1400	1400	1400	1450	1450	1450	1800	1800
		lb	270	270	304	304	304	315	315	315	326	326	326	405	405
$F_{ax}$	$- F_{ax\ max}$	N	500	500	600	600	600	650	650	650	700	700	700	850	850
		lb	112	112	135	135	135	146	146	146	157	157	157	191	191

**Note**

- ▶ Theoretical values, without efficiency and tolerances; values rounded
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. We recommend testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.
- ▶ Special requirements apply in the case of belt drives. Please contact us.

**Permissible input and through-drive torques**

Size	NG		110	145	175	210	280	
Torque at $V_{g \max}$ and $\Delta p = 350 \text{ bar}$ (5100 psi) <sup>1)</sup>	$T_{\max}$	Nm	610	808	975	1170	1560	
		lb-ft	452	596	719	863	1151	
Input torque at drive shaft, maximum <sup>2)</sup>								
T1	1 3/4 in	$T_{E \max}$	Nm	1640	1640	1640	1640	–
			lb-ft	1210	1210	1210	1210	–
T2	2 in	$T_{E \max}$	Nm	–	2670	2670	2670	–
			lb-ft	–	1969	1969	1969	–
T3	2 1/4 in	$T_{E \max}$	Nm	–	–	–	–	4380
			lb-ft	–	–	–	–	3231
A1	W45	$T_{E \max}$	Nm	2190	–	–	–	–
			lb-ft	–	–	–	–	–
A2	W50	$T_{E \max}$	Nm	–	3140	3140	3140	–
			lb-ft	–	2316	2316	2316	–
A4	W60	$T_{E \max}$	Nm	–	–	–	–	5780
			lb-ft	–	–	–	–	4263
Maximum through-drive torque	$T_{D \max}$	Nm	960	1110	1340	1915	2225	
		lb-ft	708	819	988	1412	1641	

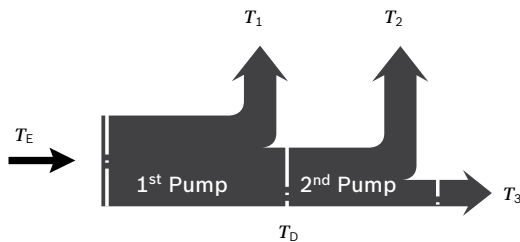**▼ Distribution of the torques**


Torque at 1 <sup>st</sup> pump	$T_1$
Torque at 2 <sup>nd</sup> pump	$T_2$
Torque at 3 <sup>rd</sup> pump	$T_3$
Input torque	$T_E = T_1 + T_2 + T_3$
	$T_E < T_{E \max}$
Through-drive torque	$T_D = T_2 + T_3$
	$T_D < T_{D \max}$

**External control pressure supply  
(ordering code digit 08 B and C)**

Control systems with external control pressure supply need a flow appropriate to the adjustment time and size.

Size	Maximum flow [l/min (gpm)]
110	10 (2.64)
145	13 (3.43)
175	14 (3.70)
210	17 (4.49)
280	22 (5.81)

- 1) Efficiency not considered
- 2) For drive shafts free of radial force

## Power controller

### LR – Power controller, fixed setting


The power controller regulates the displacement of the pump depending on the operating pressure so that a given drive power is not exceeded at constant drive speed. The precise control with a hyperbolic control characteristic, provides an optimum utilization of available power. The operating pressure acts on a rocker via a measuring piston moved together with the control. An externally adjustable spring force counteracts this, it determines the power setting. The depressurized basic position is  $V_{g \max}$ . If the operating pressure exceeds the set spring force, the control valve will be actuated by the rocker and the pump will swivel back from the basic setting  $V_{g \max}$  toward  $V_{g \min}$ . Here, the leverage at the rocker may be shortened and the operating pressure may rise in the same relation as the displacement is reduced ( $p_B \times V_g = \text{constant}$ ;  $p_B = \text{operating pressure}$ ;  $V_g = \text{displacement}$ ). The hydraulic output power (characteristic LR) is influenced by the efficiency of the pump. Setting range for beginning of control 50 bar (725 psi) to 350 bar (5100 psi).

When ordering, state in plain text:


- ▶ Drive power  $P$  [kW]
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{V \max}$  [l/min]

Please contact us if you need a power diagram.

### ▼ Characteristic LR

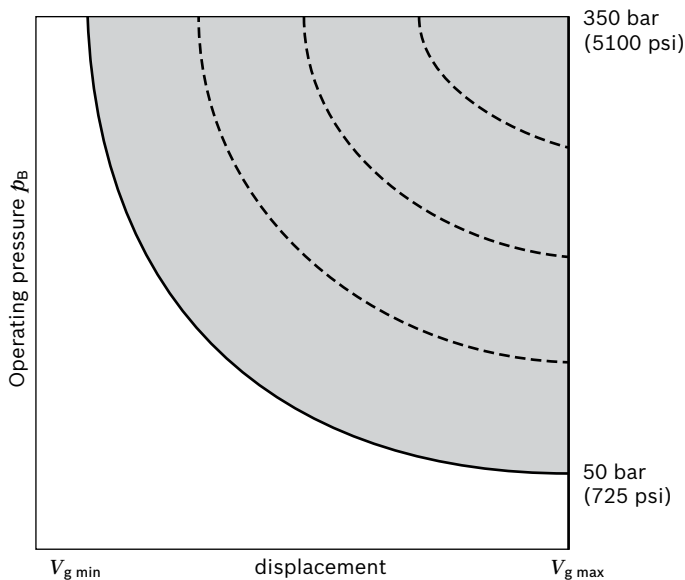

### ▼ Circuit diagram LR

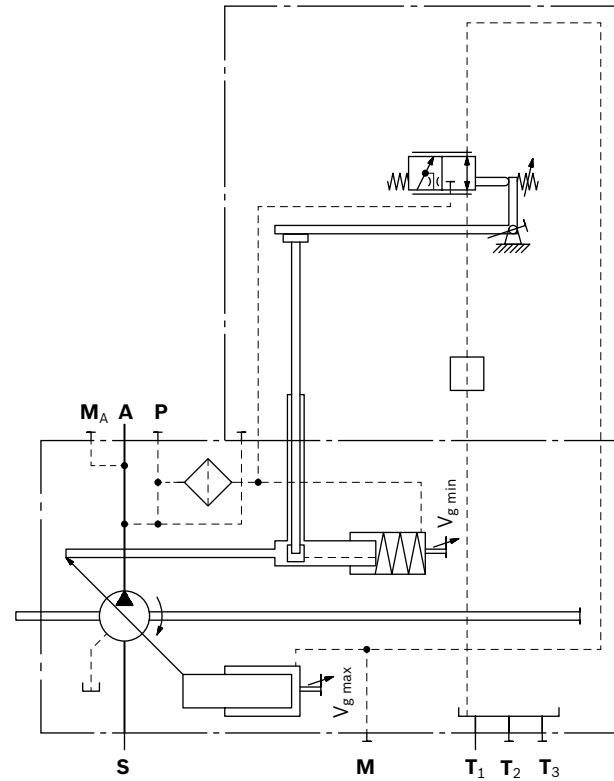

**L3/L4 – Power controller, electric-proportional override (negative control)**

A control current acts against the adjustment spring of the power controller via a proportional solenoid.

The mechanically adjusted basic power setting can be reduced by means of different control current settings.

Increasing control current = reduced power.


If the pilot control signal is variably controlled via a load limiting control, the power draw of all consumers is adjusted to the power draw possible for the diesel engine (e.g. electronic load limiting control LLC (data sheet 95310) in BODAS controller RC2-2).

Technical data, solenoid	L3	L4
Voltage	12 V (±20%)	24 V (±20%)
Control current		
Beginning of control	400 mA	200 mA
End of control	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C (68 °F))	5.5 Ω	22.7 Ω
Dither frequency	100 Hz	100 Hz
Duty cycle	100%	100%
Type of protection: see connector version page 63		

When ordering, state in plain text:

- ▶ Drive power  $P$  [kW (hp)] at beginning of control
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{V \max}$  [l/min (gpm)]

▼ **Effect of power override through current increase or de-energized operating condition**

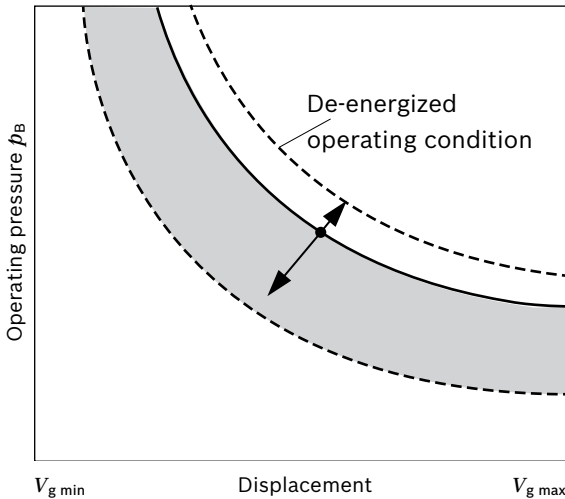


**Notice**

In operating condition **L3** de-energized (jump 400 to 0 mA): Power increase by a factor of 2 of the table values.

In operating condition **L4** de-energized (jump 200 to 0 mA): Power increase by a factor of 1 of the table values.

▼ **Circuit diagram L3/L4**

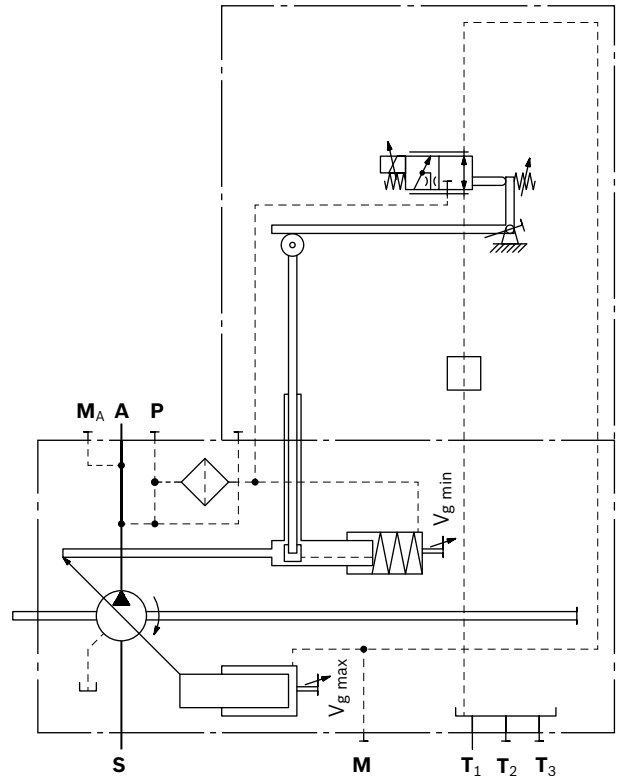

Reduction of power by control current to the proportional solenoids with **L3**<sup>1)</sup>

**Power reduction/control current [kW (hp)/100 mA]**

Size	Speed [rpm]		
	1000	1500	1800
<b>110</b>	6.1 (8.2)	9.2 (12.3)	11.0 (14.7)
<b>145</b>	7.4 (9.9)	11.1 (14.9)	13.3 (17.8)
<b>175</b>	8.4 (11.3)	12.6 (16.9)	15.1 (20.2)
<b>210</b>	9.4 (12.6)	14.1 (18.9)	16.9 (22.7)
<b>280</b>	11.4 (15.3)	17.1 (22.9)	20.5 (27.5)

Reduction of power by control current to the proportional solenoids with **L4**<sup>1)</sup>

**Power reduction/control current [kW (hp)/100 mA]**

Size	Speed [rpm]		
	1000	1500	1800
<b>110</b>	12.3 (16.5)	18.5 (24.8)	22.1 (29.6)
<b>145</b>	14.8 (19.8)	22.2 (29.8)	26.6 (35.7)
<b>175</b>	16.8 (22.5)	25.2 (33.8)	30.2 (40.5)
<b>210</b>	18.9 (25.3)	28.4 (38.1)	34.0 (45.6)
<b>280</b>	22.9 (30.7)	34.4 (46.1)	41.2 (55.3)

<sup>1)</sup> Values in the tables are reference points. Determination of the exact power override on request.

**L5 – Power controller, hydraulic-proportional override (negative control)**

A pilot pressure acts against the adjustment spring of the power controller via a valve.

The mechanically adjusted basic power setting can be reduced by means of different pilot pressure settings.

Increasing pilot pressure = reduced power.

- ▶ Maximum permissible pilot pressure

$$p_{St \max} = 100 \text{ bar (1450 psi)}$$

If the pilot pressure signal is adjusted by a load limiting control, the power reduction of all consumers is reduced to match the available power from the diesel engine.

Reduction of power by pilot pressure at port **L5**

**Power reduction/control current [kW (hp)/bar (psi)]**


Size	Speed [rpm]		
	1000	1500	1800
<b>110</b>	2.3 (3.1)	3.5 (4.7)	4.1 (5.5)
<b>145</b>	2.8 (3.8)	4.2 (5.6)	5.0 (6.7)
<b>175</b>	3.2 (4.3)	4.8 (6.4)	5.8 (7.8)
<b>210</b>	3.6 (4.8)	5.4 (5.9)	6.5 (8.7)
<b>280</b>	4.4 (5.9)	6.6 (8.9)	7.9 (10.6)

Values in the tables are reference points. Determination of the exact power override on request.


When ordering, state in plain text:

- ▶ Drive power  $P$  [kW (hp)] at a pilot pressure of  $p_{st}$  in **L5** of 5 bar (75 psi)
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{V \max}$  [l/min (gpm)]

▼ **Effect of power override through pilot pressure increase**

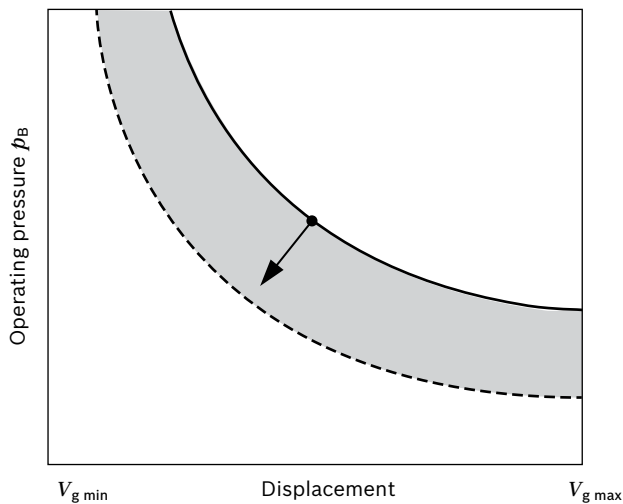

▼ **Circuit diagram L5**

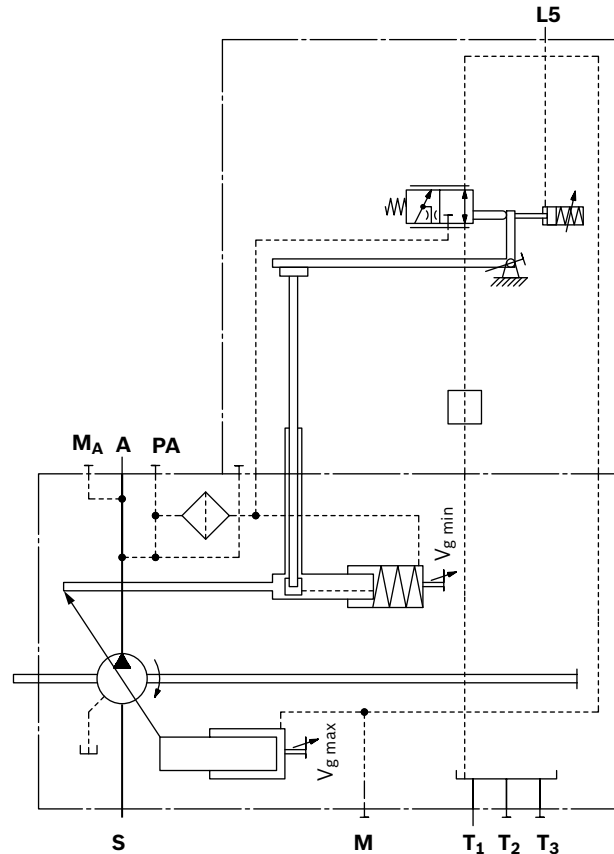



**L6 – Power controller, hydraulic-proportional override (positive control)**

A pilot pressure acts together with the adjustment spring of the power controller via a valve.

The mechanically adjusted basic power setting can be increased by means of different pilot pressure settings.

Increasing pilot pressure = increased power.

- ▶ Maximum permissible pilot pressure

$$p_{St \max} = 100 \text{ bar (1450 psi)}$$

If the pilot pressure signal is adjusted by a load limiting control, the power increase of all consumers is increased to match the available power from the diesel engine.

Power increase by pilot pressure at port **L6**

**Power increase/pilot pressure [kW (hp)/bar (psi)]**


Size	Speed [rpm]		
	1000	1500	1800
<b>110</b>	2.4 (3.2)	3.6 (4.8)	4.3 (5.8)
<b>145</b>	2.9 (3.9)	4.3 (5.8)	5.2 (7.0)
<b>175</b>	3.3 (4.4)	4.9 (6.6)	5.9 (7.9)
<b>210</b>	3.7 (5.0)	5.6 (7.5)	6.7 (9.0)
<b>280</b>	4.5 (6.0)	6.8 (9.1)	8.1 (10.9)

Values in the tables are reference points. Determination of the exact power override on request.


When ordering, state in plain text:

- ▶ Drive power  $P$  [kW (hp)] at a pilot pressure of  $p_{st}$  in **L6** of 5 bar (75 psi)
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{V \max}$  [l/min (gpm)]

**▼ Effect of power override through pilot pressure increase**

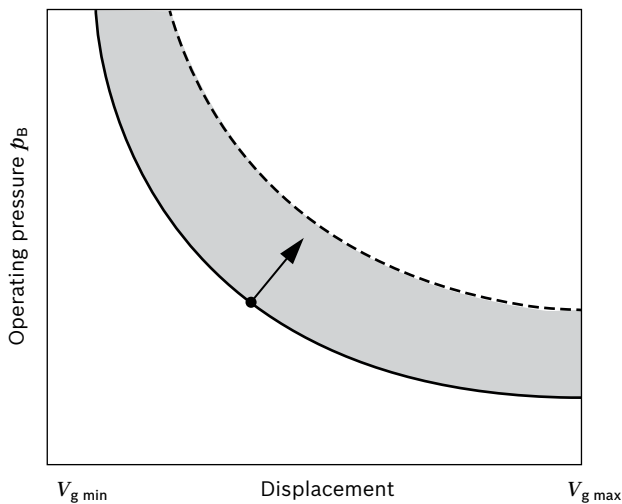

**▼ Circuit diagram L6**

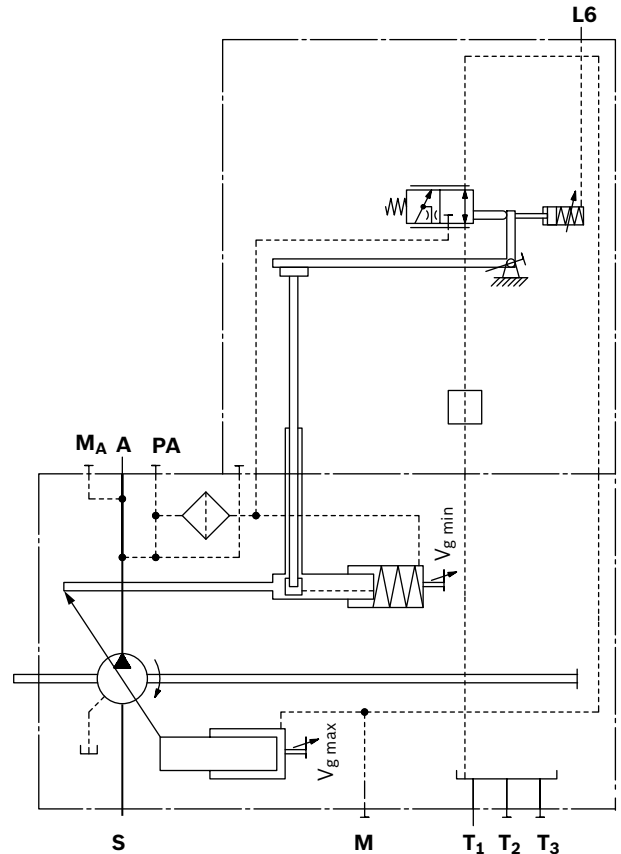

**CR – Summation hp-control of two power-controlled pumps, high-pressure-related override (with stop)**

With two pumps of the same size working in different circuits, the CR controller limits the overall power. The CR works like the normal LR with a fixed maximum power setting along the power hyperbola. The high-pressure-related override reduces the power setpoint in dependence on the operating pressure of the other pump. That happens proportionally below the beginning of control and is blocked by a stop when the minimum power is reached. Here, the **CR** port of the one pump has to be connected to the **M<sub>A</sub>** port of the other pump.

The maximum power of the first pump is reached when the second pump is working at idle when depressurized. When defining the maximum power, the idle power of the second pump has to be taken into account. The minimum power of each pump is reached when both pumps are working at high pressure. The minimum power usually equates to 50% of the total power.


Power that is released by the pressure control or other overrides remains unconsidered.

Setting range for beginning of control 50 bar (725 psi) to 300 bar (4350 psi).


When ordering, please specify separately for each pump:

- ▶ Maximum drive power  $P_{max}$  [kW (hp)]
- ▶ Minimum drive power  $P_{min}$  [kW (hp)]
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{V max}$  [l/min (gpm)]


▼ **Characteristic CR**

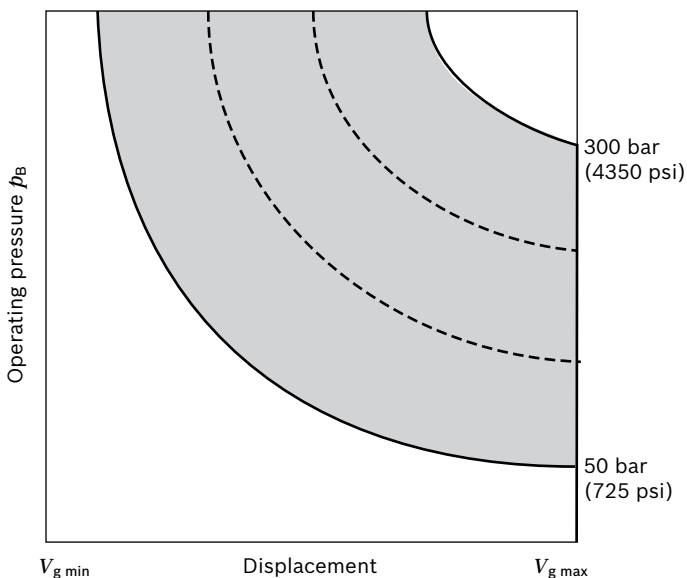

▼ **Circuit diagram CR**

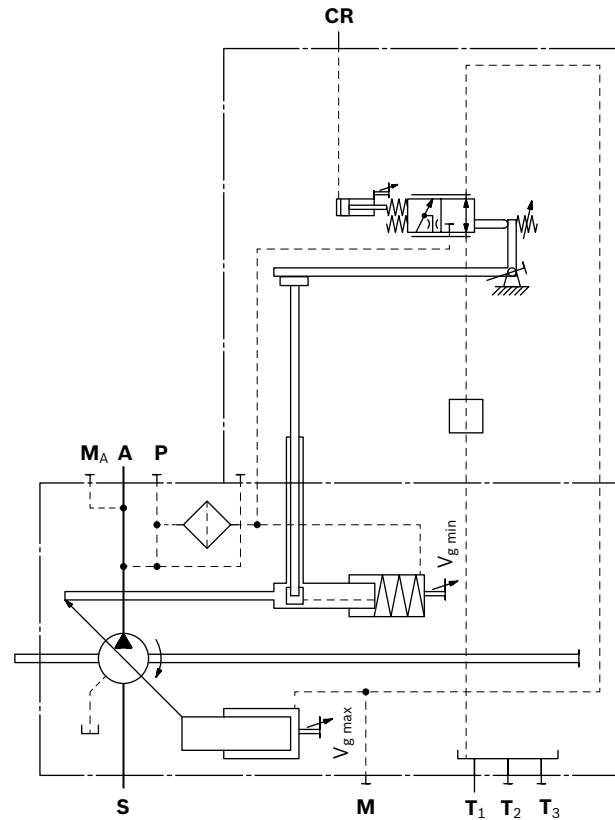

▼ **Effect of power override of a pump with increasing pressure in the 2<sup>nd</sup> pump**

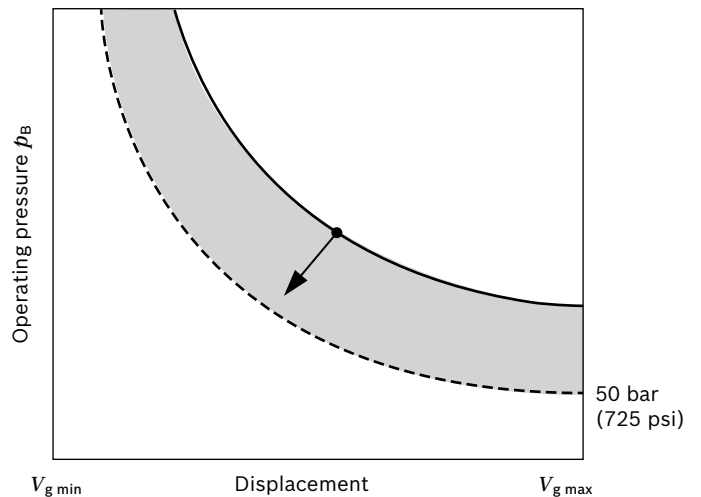

**PR – Summation hp-control of two power-controlled pump and a constant pump**


Together with the mounted fixed pump, the PR controller on an A11V(L)O effects a limitation of the overall power. The PR works like the normal LR with a fixed maximum power setting along the power hyperbola. The high-pressure-dependent override reduces the power specification in proportion to the operating pressure of the fixed pump. Here, port **PR** of the A11V(L)O must be connected to the operating pressure of the fixed pump. The power of the controlled pump can then be reduced to zero in a borderline case. The maximum power of the controlled pump is reached when the fixed pump works at idle when depressurized. When defining the maximum power, the idle power of the fixed pump has to be taken into account. Power that is released by the pressure control or other overrides remains unconsidered.

Setting range for beginning of control 50 bar (725 psi) to 350 bar (5100 psi).


When ordering, state in plain text:

- ▶ Maximum drive power  $P_{max}$  [kW (hp)]
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{v max}$  [l/min (gpm)]
- ▶ Size of the fixed pump


**▼ Characteristic PR**

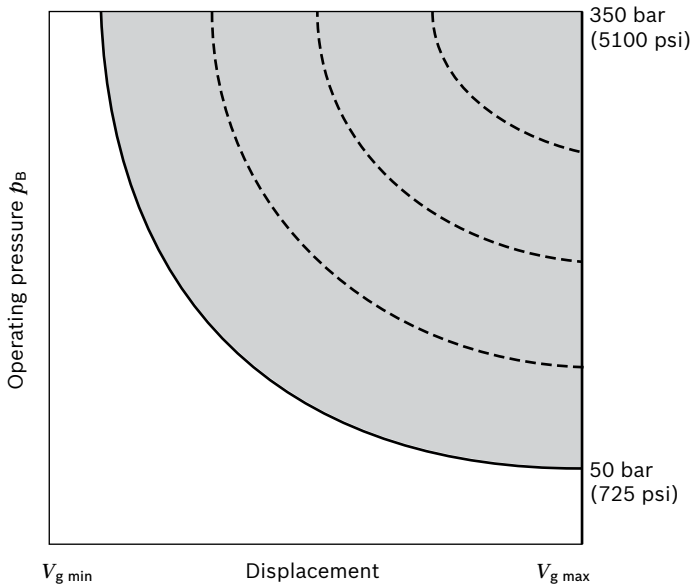

**▼ Circuit diagram PR**

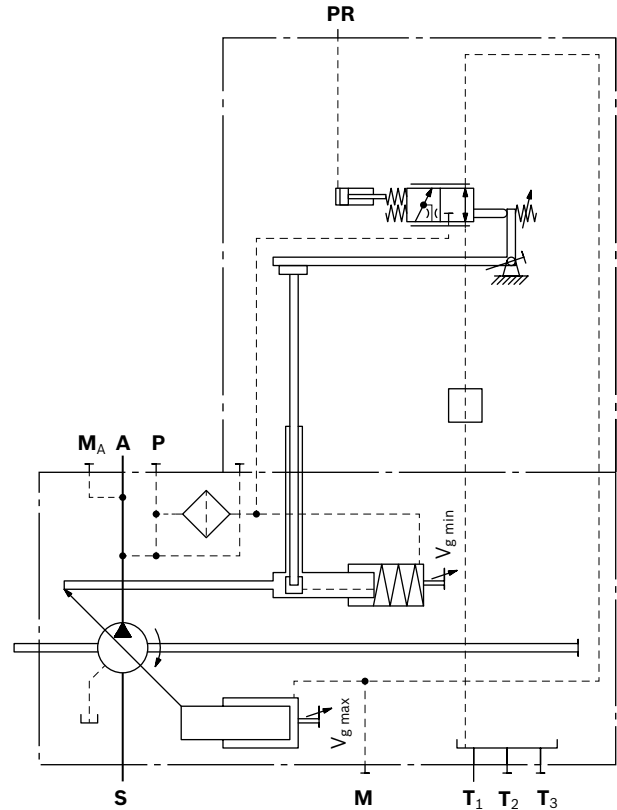

**▼ Effect of power override of a pump with increasing pressure in the 2<sup>nd</sup> pump**

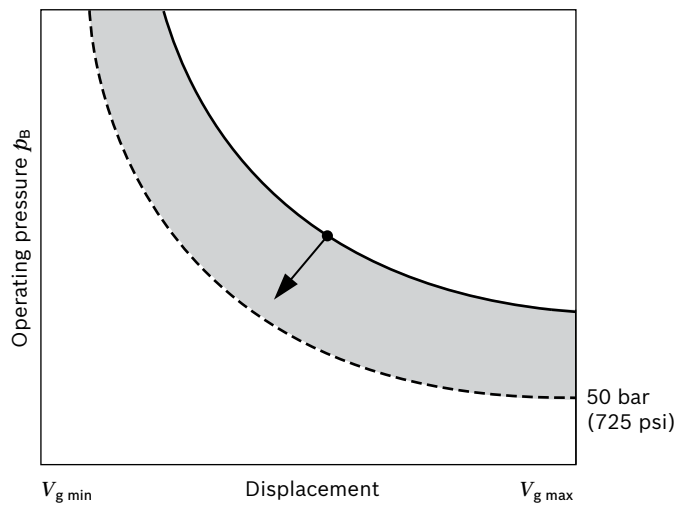

## Stroke control

### E1/E2 – Stroke control, electric, proportional (positive control)

With the electrical stroke limiter with proportional solenoid, the pump displacement is steplessly adjusted in proportion to the current via the magnetic force.

Basic position without pilot signal is  $V_{g \min}$ . Mechanically depressurized basic position is  $V_{g \min}$  (see ordering code position 08, letter C).


With increasing control current the pump swivels to a higher displacement (from  $V_{g \min}$  to  $V_{g \max}$ ).

The necessary control fluid is taken from the operating pressure or the external control pressure applied to port **P**. If the pump is to be adjusted from the basic position  $V_{g \min}$  or from a low operating pressure, port **P** must be supplied with an external control pressure of at least 30 bar (435 psi), maximum 50 bar (725 psi).

#### Notice

If there is no external control pressure applied to **P**, the version “Maximum swivel angle ( $V_{g \max}$ ), without external control pressure supply” must be ordered (see ordering code position 08, A).

#### ▼ Characteristic E1/E2

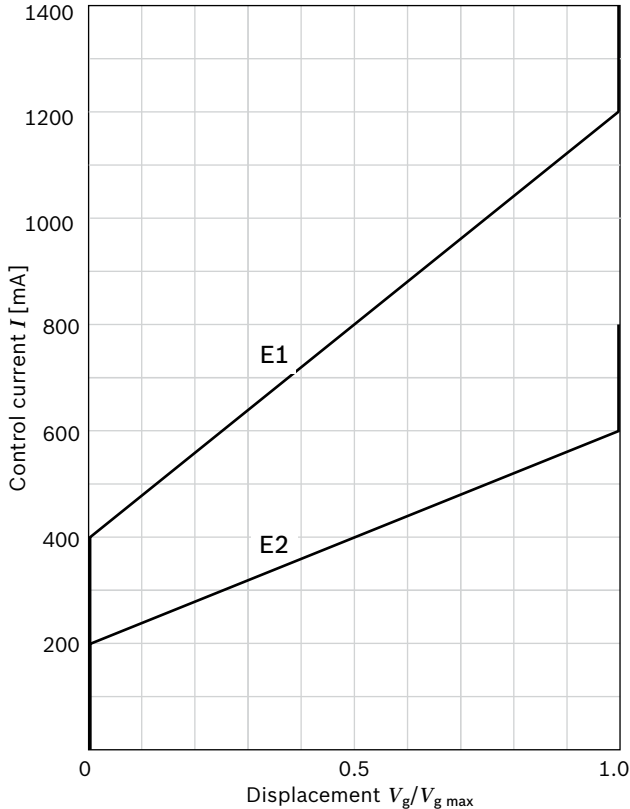

Various BODAS controllers with application software and amplifiers are available for controlling the proportional solenoids.

- ▶ RC series 30, data sheet 95204
- ▶ RC series 30, data sheet 95205

Further information can also be found on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics).

Technical data, solenoid	E1	E2
Voltage	12 V (±20%)	24 V (±20%)
Control current		
Start of control at $V_{g \min}$	400 mA	200 mA
End of control at $V_{g \max}$	1200 mA <sup>1)</sup>	600 mA <sup>2)</sup>
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C (68 °F))	5.5 Ω	22.7 Ω
Dither frequency	100 Hz	100 Hz
Duty cycle	100%	100%
Type of protection: see connector version page 63		

When ordering, state in plain text:

- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{V \max}$  [l/min (gpm)]
- ▶ Minimum flow  $q_{V \min}$  [l/min (gpm)]


See circuit diagram on page 19

#### Notice!

The spring feedback in the controller is not a security device. The controller can stick in an undefined position due to internal contamination (contaminated hydraulic fluid, abrasion or residual contamination from system components). As a result, the flow of the axial piston unit will no longer respond correctly to the operator's commands. Check whether the application on your machine requires additional safety measures, in order to bring the driven consumer into a safe position (immediate stop). If necessary, make sure that these are properly implemented.

- 1) Because of the control hysteresis, a control current of up to 1300 mA may be required for the  $V_{g \max}$  position.
- 2) Because of the control hysteresis, a control current of up to 650 mA may be required for the  $V_{g \max}$  position.

▼ **Circuit diagram E1/E2**

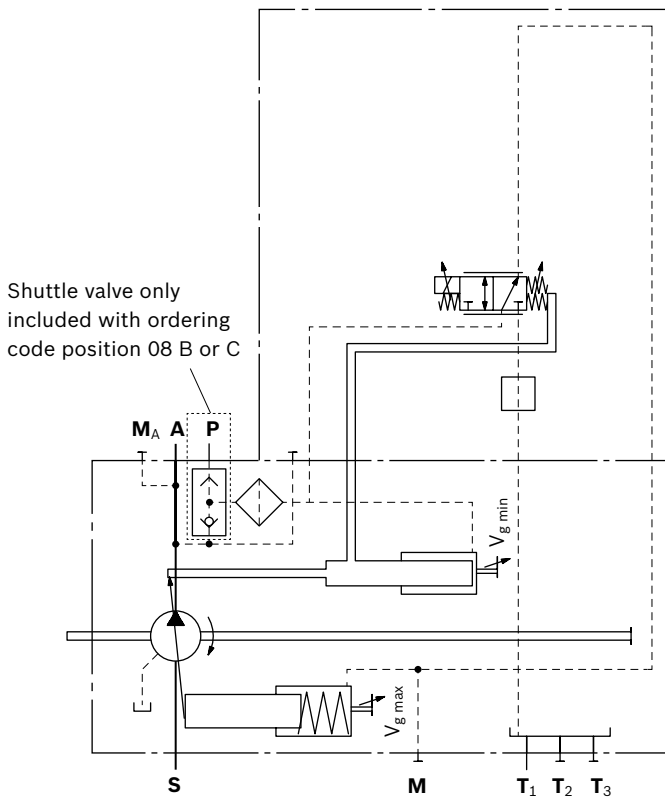

**H3 – Stroke control, hydraulic-proportional, pilot pressure (negative control)**

With pilot-pressure-related control, the pump displacement is adjusted in proportion to the pilot pressure applied at port **H3**.


Basic position without pilot signal is  $V_{g \max}$ . Mechanically depressurized basic position is  $V_{g \max}$  (see ordering code position 08, letter B).

- ▶ Adjustment from  $V_{g \max}$  to  $V_{g \min}$ ; with increasing pilot pressure, the pump swivels to a smaller displacement.
- ▶ Setting range for beginning of control (at  $V_{g \max}$ ) 5 bar (75 psi) to 10 bar (145 psi), standard is 10 bar (145 psi). State beginning of control in plain text in the order.
- ▶ Maximum permissible pilot pressure  $p_{St \max} = 100$  bar (1450 psi)


The necessary control fluid is taken from the operating pressure or the external control pressure applied to port **P**. If the pump is to be adjusted from the basic position  $V_{g \min}$  or from a low operating pressure, port **P** must be supplied with an external control pressure of at least 30 bar (435 psi), maximum 50 bar (725 psi).

**Notice**  
If no external control pressure is applied to **P**, the version “Maximum swivel angle ( $V_{g \max}$ ), without external control pressure supply” is to be ordered (see ordering code position 08, letter A).

▼ **Circuit diagram H3**

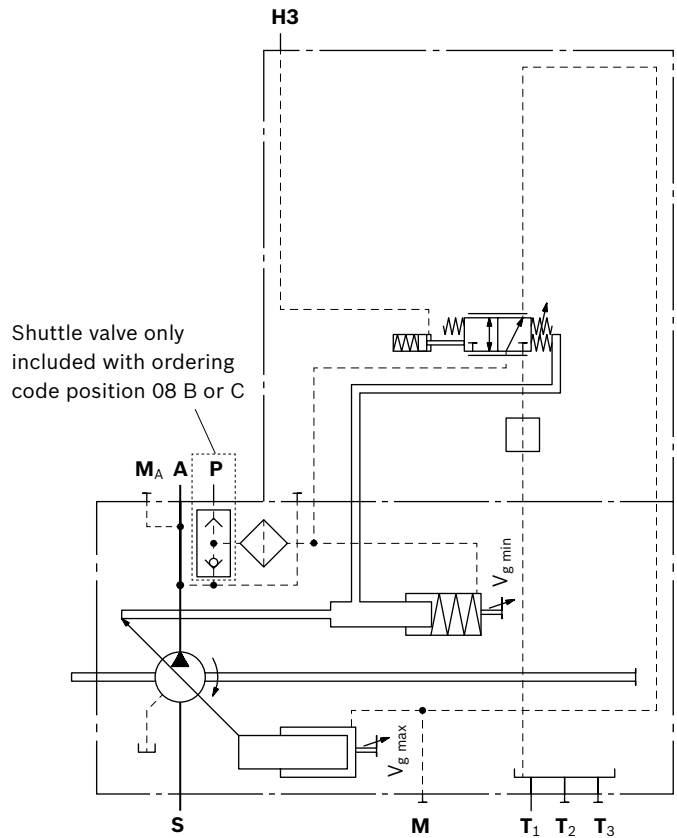

▼ **Characteristic H3 (negative)**

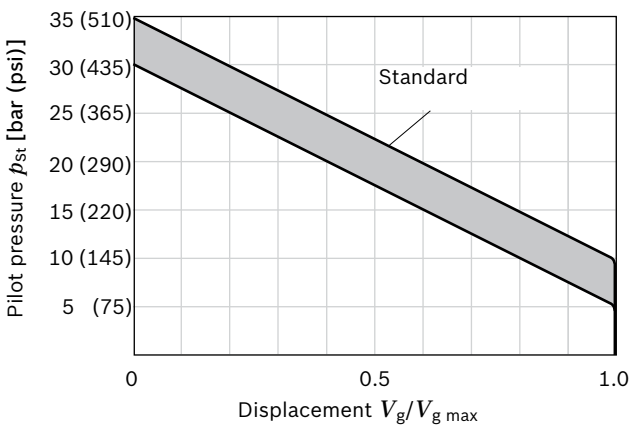

Increase in pilot pressure  $V_{g \max}$  to  $V_{g \min}$ :  $\Delta p = 25$  bar (365 psi)  
When ordering, state in plain text:

- ▶ Beginning of control [bar (psi)] at  $V_{g \max}$

**H4 – Stroke control, hydraulic-proportional, pilot pressure (positive control)**

With pilot-pressure-related control, the pump displacement is adjusted in proportion to the pilot pressure applied at port **H4**.

Basic position without pilot signal is  $V_{g\ min}$ . Mechanically depressurized basic position is  $V_{g\ min}$  (see ordering code position 08, letter C).


- ▶ Adjustment from  $V_{g\ min}$  to  $V_{g\ max}$ ; with increasing pilot pressure the pump swivels to a larger displacement.
- ▶ Setting range for beginning of control (at  $V_{g\ min}$ ) 5 bar (75 psi) to 10 bar (145 psi), standard is 10 bar (145 psi). State beginning of control in plain text in the order.
- ▶ Maximum permissible pilot pressure  $p_{St\ max} = 100$  bar (1450 psi)

The necessary control fluid is taken from the operating pressure or the external control pressure applied to port **P**. If the pump is to be adjusted from the basic position  $V_{g\ min}$  or from a low operating pressure, port **P** must be supplied with an external control pressure of at least 30 bar (435 psi), maximum 50 bar (725 psi).

**Notice**

If no external control pressure is applied to **P**, the version “Maximum swivel angle ( $V_{g\ max}$ ), without external control pressure supply” is to be ordered (see ordering code position 08, letter A).

▼ **Characteristic H4 (positive)**

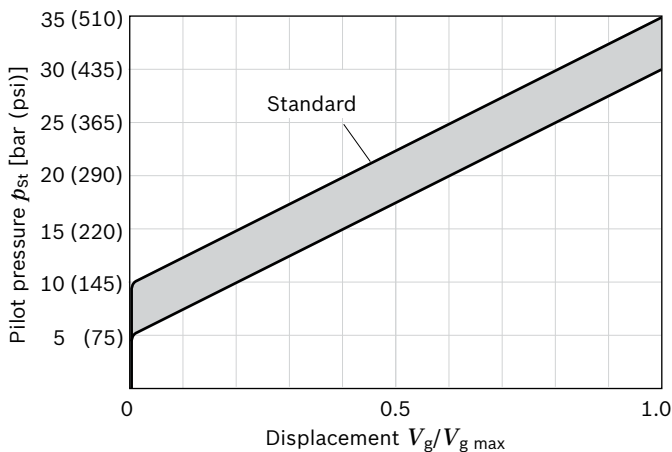


Increase in pilot pressure  $V_{g\ min}$  to  $V_{g\ max}$ :  $\Delta p = 25$  bar (365 psi)

When ordering, state in plain text:

- ▶ Beginning of control [bar (psi)] at  $V_{g\ min}$

▼ **Circuit diagram H4**

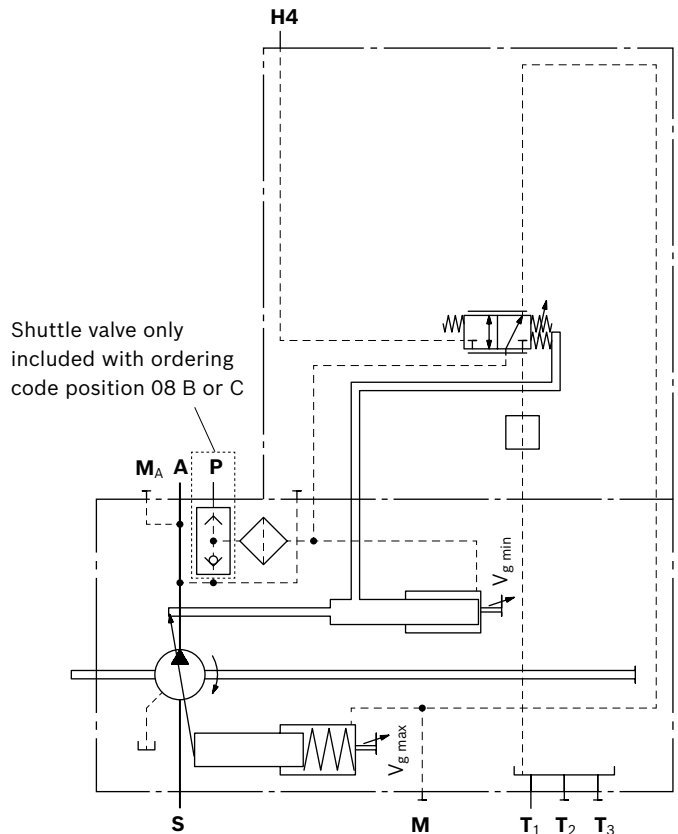

**Notice!**

The spring feedback in the controller is not a security device. The controller can stick in an undefined position due to internal contamination (contaminated hydraulic fluid, abrasion or residual contamination from system components). As a result, the flow of the axial piston unit will no longer respond correctly to the operator's commands. Check whether the application on your machine requires additional safety measures, in order to bring the driven consumer into a safe position (immediate stop). If necessary, make sure that these are properly implemented.


## Pressure control

### DR – Pressure controller with one-sided swiveling, fixed setting

The pressure controller limits the maximum pressure at the pump outlet within the control range of the variable pump. The variable pump only supplies as much hydraulic fluid as is required by the consumers. If the operating pressure exceeds the pressure setting at the pressure valve, the pump will regulate to a smaller displacement to reduce the control differential.

- ▶ Initial position in depressurized state:  $V_{g \max}$
- ▶ Setting range for beginning of control 50 bar (725 psi) to 350 bar (5100 psi), 350 bar (5100 psi) is standard.

### ▼ Characteristic curve DR

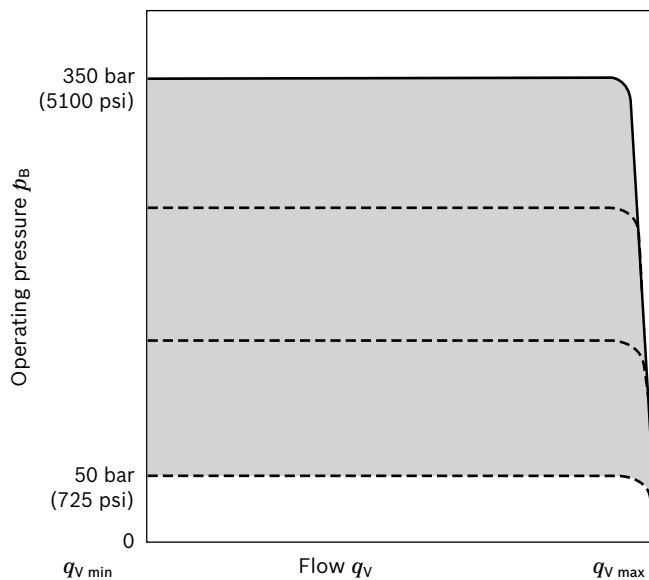


### Hydraulic $V_{g \min}$ stop

The hydraulic  $V_{g \min}$  stop opens the valve outlet to the case drain chamber when a minimum position is reached, damping the controller and reducing overshoot. This can cause a connection from high pressure or external control pressure via the controller and the hydraulic  $V_{g \min}$  stop to the case drain chamber.

When ordering, state in plain text:

- ▶ Pressure setting  $p$  [bar (psi)] at pressure controller DR

### ▼ Circuit diagram DR

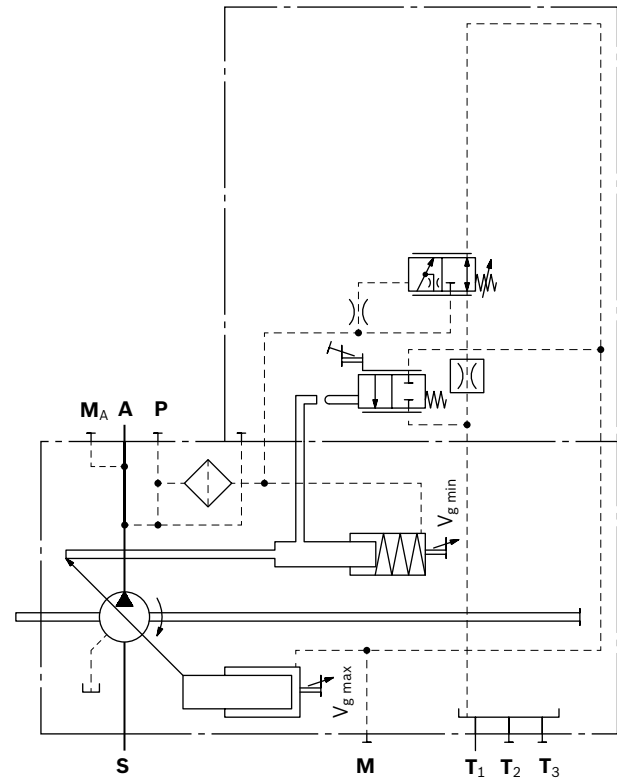



**DRS0 – Pressure control with load sensing**

The load sensing controller works as a load-pressure controlled flow controller and adjusts the displacement of the pump to the volume required by the consumer.

The flow of the pump is then dependent on the cross section of the external metering orifice (1), which is located between the pump and the consumer. Below the setting of the pressure controller and within the control range of the pump, the flow is not dependent on the load pressure.

The metering orifice is usually a separately located load sensing directional valve (control block). The position of the directional valve spool determines the opening cross-section of the metering orifice and thus the flow of the pump.

The load sensing controller compares pressure before and after the sensing orifice and keeps the pressure drop (differential pressure  $\Delta p$ ) across the orifice – and therefore the flow – constant.


If the differential pressure  $\Delta p$  at the measuring orifice rises, the pump is swiveled back (toward  $V_{g \min}$ ). If the differential pressure  $\Delta p$  drops, the pump is swiveled out (toward  $V_{g \max}$ ) until equilibrium at the measuring orifice is restored.

$$\Delta p_{\text{measuring orifice}} = p_{\text{pump}} - p_{\text{consumer}}$$

- ▶ Setting range for  $\Delta p$  14 bar (200 psi) to 30 bar (435 psi) (please state in plain text)
- ▶ Standard adjustment 14 bar (200 psi)

The stand-by pressure in zero stroke operation (metering orifice closed) is slightly higher than the  $\Delta p$  setting.

▼ **Characteristic DRS0**

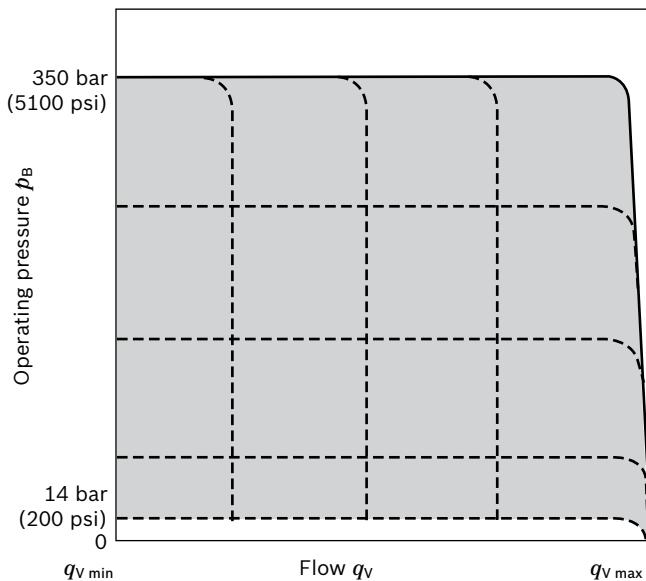


**Hydraulic  $V_{g \min}$  stop**

The hydraulic  $V_{g \min}$  stop opens the valve outlet to the case drain chamber when a minimum position is reached, damping the controller and reducing overshoot. This can cause a connection from high pressure or external control pressure via the controller and the hydraulic  $V_{g \min}$  stop to the case drain chamber.

When ordering, state in plain text:

- ▶ Pressure setting  $p$  [bar (psi)] at pressure controller DR
- ▶ Differential pressure  $\Delta p$  [bar (psi)] at load sensing controller S0

▼ **Circuit diagram DRS0**

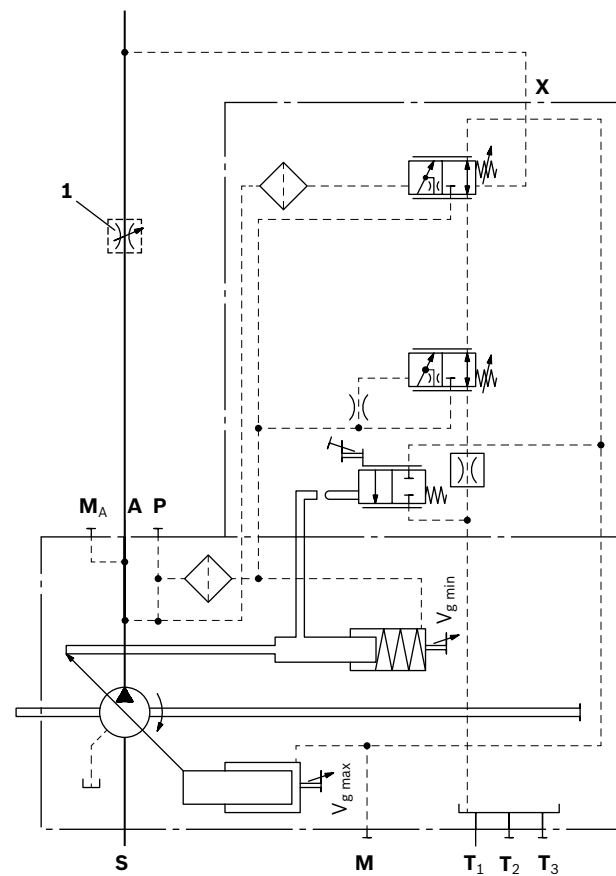

1 The metering orifice (control block) is not included in the scope of delivery.

**DG – Pressure control with one-sided deflection, hydraulically remote controlled (positive control)**

The remote controlled pressure control has a fixed-setting  $\Delta p$  value. A separately connected pressure relief valve at port **X (1)** enables the pressure control to be remotely controlled.

- ▶ Setting range  $\Delta p$  14 bar (200 psi) to 25 bar (365 psi)
- ▶ Recommended value 20 bar (290 psi) (standard)
- ▶ Control volume at **X**: about 1.6 l/min (0.42 gpm) (static) at  $\Delta p$  20 bar (290 psi)

In addition a separately configured 2/2 directional valve (**2**) can be operated to start the pump with low operating pressure (standby pressure).

Both functions can be used individually or in combination (see circuit diagram).

The external valves are not included in the scope of supply.

As a separate pressure relief valve (**1**) we recommend:

- ▶ For DBD.6, see data sheet 25402

**Hydraulic  $V_{g \min}$  stop**

The hydraulic  $V_{g \min}$  stop opens the valve outlet to the case drain chamber when a minimum position is reached, damping the controller and reducing overshoot. This can cause a connection from high pressure or external control pressure via the controller and the hydraulic  $V_{g \min}$  stop to the case drain chamber.


- ▶ Operating pressure  $p$  in bar (psi) (test pressure for DG)
- ▶ Differential pressure  $\Delta p$  in bar (psi)
- ▶ Drive speed  $n$  in rpm
- ▶ Maximum flow  $qV_{\max}$  in l/min (gpm)

Note about setting of the remote control pressure control: The setting value for the external pressure relief valve plus the differential pressure value at the pressure control valve determines the level of pressure control.

**Example:**


- ▶ external pressure relief valve 330 bar (4800 psi)
- ▶ Differential pressure at pressure control valve 20 bar (290 psi)
- ▶ resulting pressure control with 330 + 20 = 350 bar (4810 + 290 = 5100 psi)

▼ **Characteristic DG**

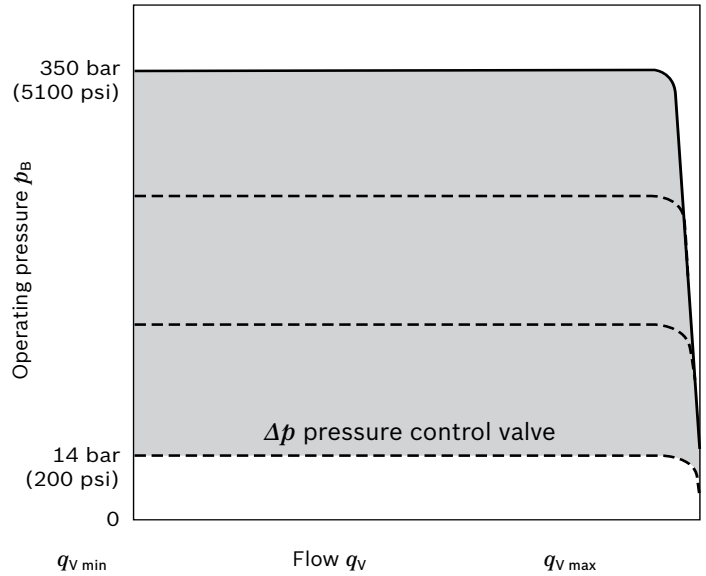

For function and description of pressure control DR, see page 22

▼ **Circuit diagram DG**

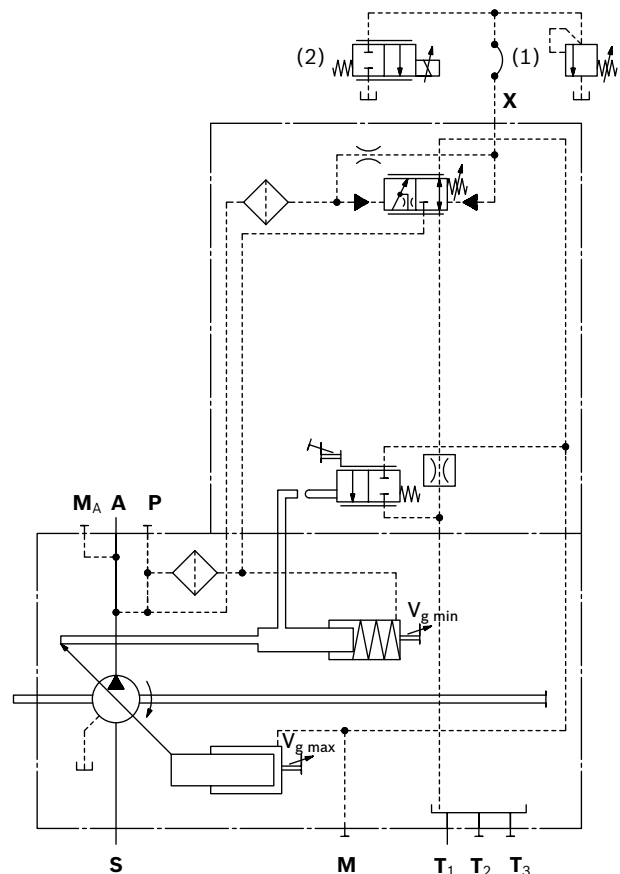

- 1 Pressure-relief valve (not included in the scope of supply)
- 2 2/2 directional valve (not included in the scope of supply)

**D2 – Proportional pressure control with one-side swiveling, electric override (M2 with two-side swiveling) (positive control)**

The pressure controller keeps the pressure in a hydraulic system constant within its control range even under varying flow conditions. The variable pump only supplies as much hydraulic fluid as is required by the consumers.

If the operating pressure exceeds the setting at the integrated pressure control valve, the pump is automatically swiveled back to reduce the control differential.

- ▶ Initial position in depressurized state:  $V_{g \max}$
- ▶ Pressure controller basic setting: 32 bar (470 psi)/300 mA


The basic setting of the pressure controller can be overridden. The pressure control value is proportional to the electrical current acting on the solenoids of the pressure reducing valve.

- ▶ Pressure setting overridden:  
32 bar (470 psi)/300 mA to 350 bar (5100 psi)/750 mA
- ▶ Auxiliary pressure for controlling D2 at port **Y**:  
 $p_{\min} = 40$  bar;  $p_{\max} = 50$  bar.  
Port **X** acts solely as a measuring port ( $p_{\max} 50$  bar).  
Pressurization leads to an impermissible increase in pressure.

**Notice**

Applying current above the limit of 750 mA to the proportional solenoid results in an impermissible increase in pressure.  
Make sure that currents above the permissible limit are not applied to the proportional solenoid.

▼ **Characteristic D2**

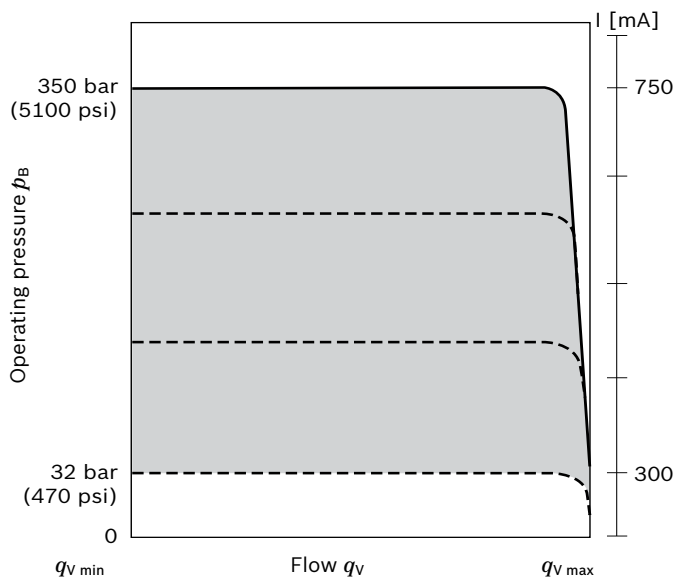


Technical data, solenoid	D2	D2
Voltage	24 V	24 V
Control current		
Beginning of control at $V_{g \min}$		300 mA
End of control at $V_{g \max}$		750 mA
Current limit	750 mA	750 mA
Nominal resistance (at 20 °C (68 °F))	12 Ω	12 Ω
Dither frequency	200 Hz	200 Hz
Duty cycle	100%	100 %
Type of protection: see connector version page 63		

The following electronic controllers and amplifiers are available for controlling the proportional solenoids:

BODAS RC controllers Series	Data sheet
20	95200
21	95201
22	95202
30	95203
and application software	95230
Analog amplifier RA	95230


▼ **Circuit diagram D2**

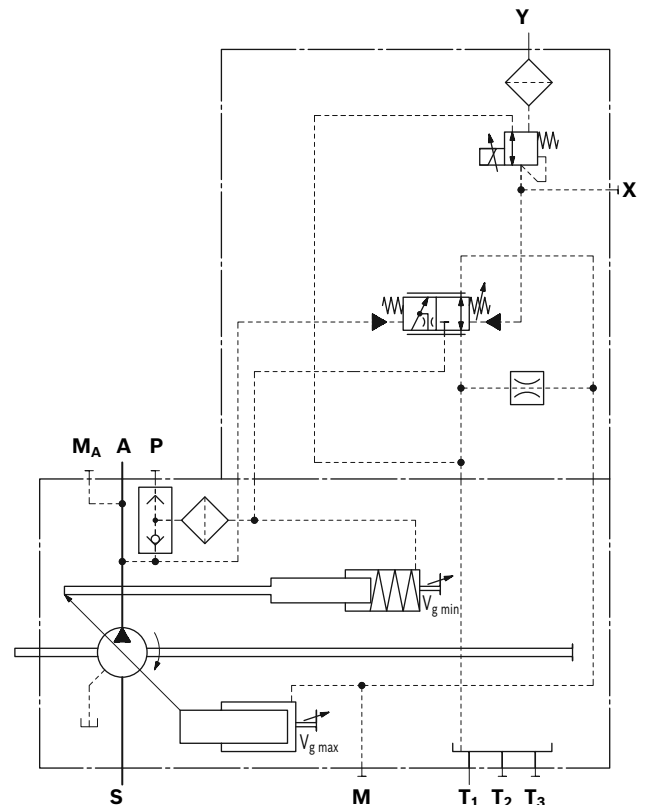


**Dimensions size 110**

**LRDRS0 – Power controller with pressure controller, load sensing and with electric swivel angle sensor**

Without charge pump, clockwise rotation

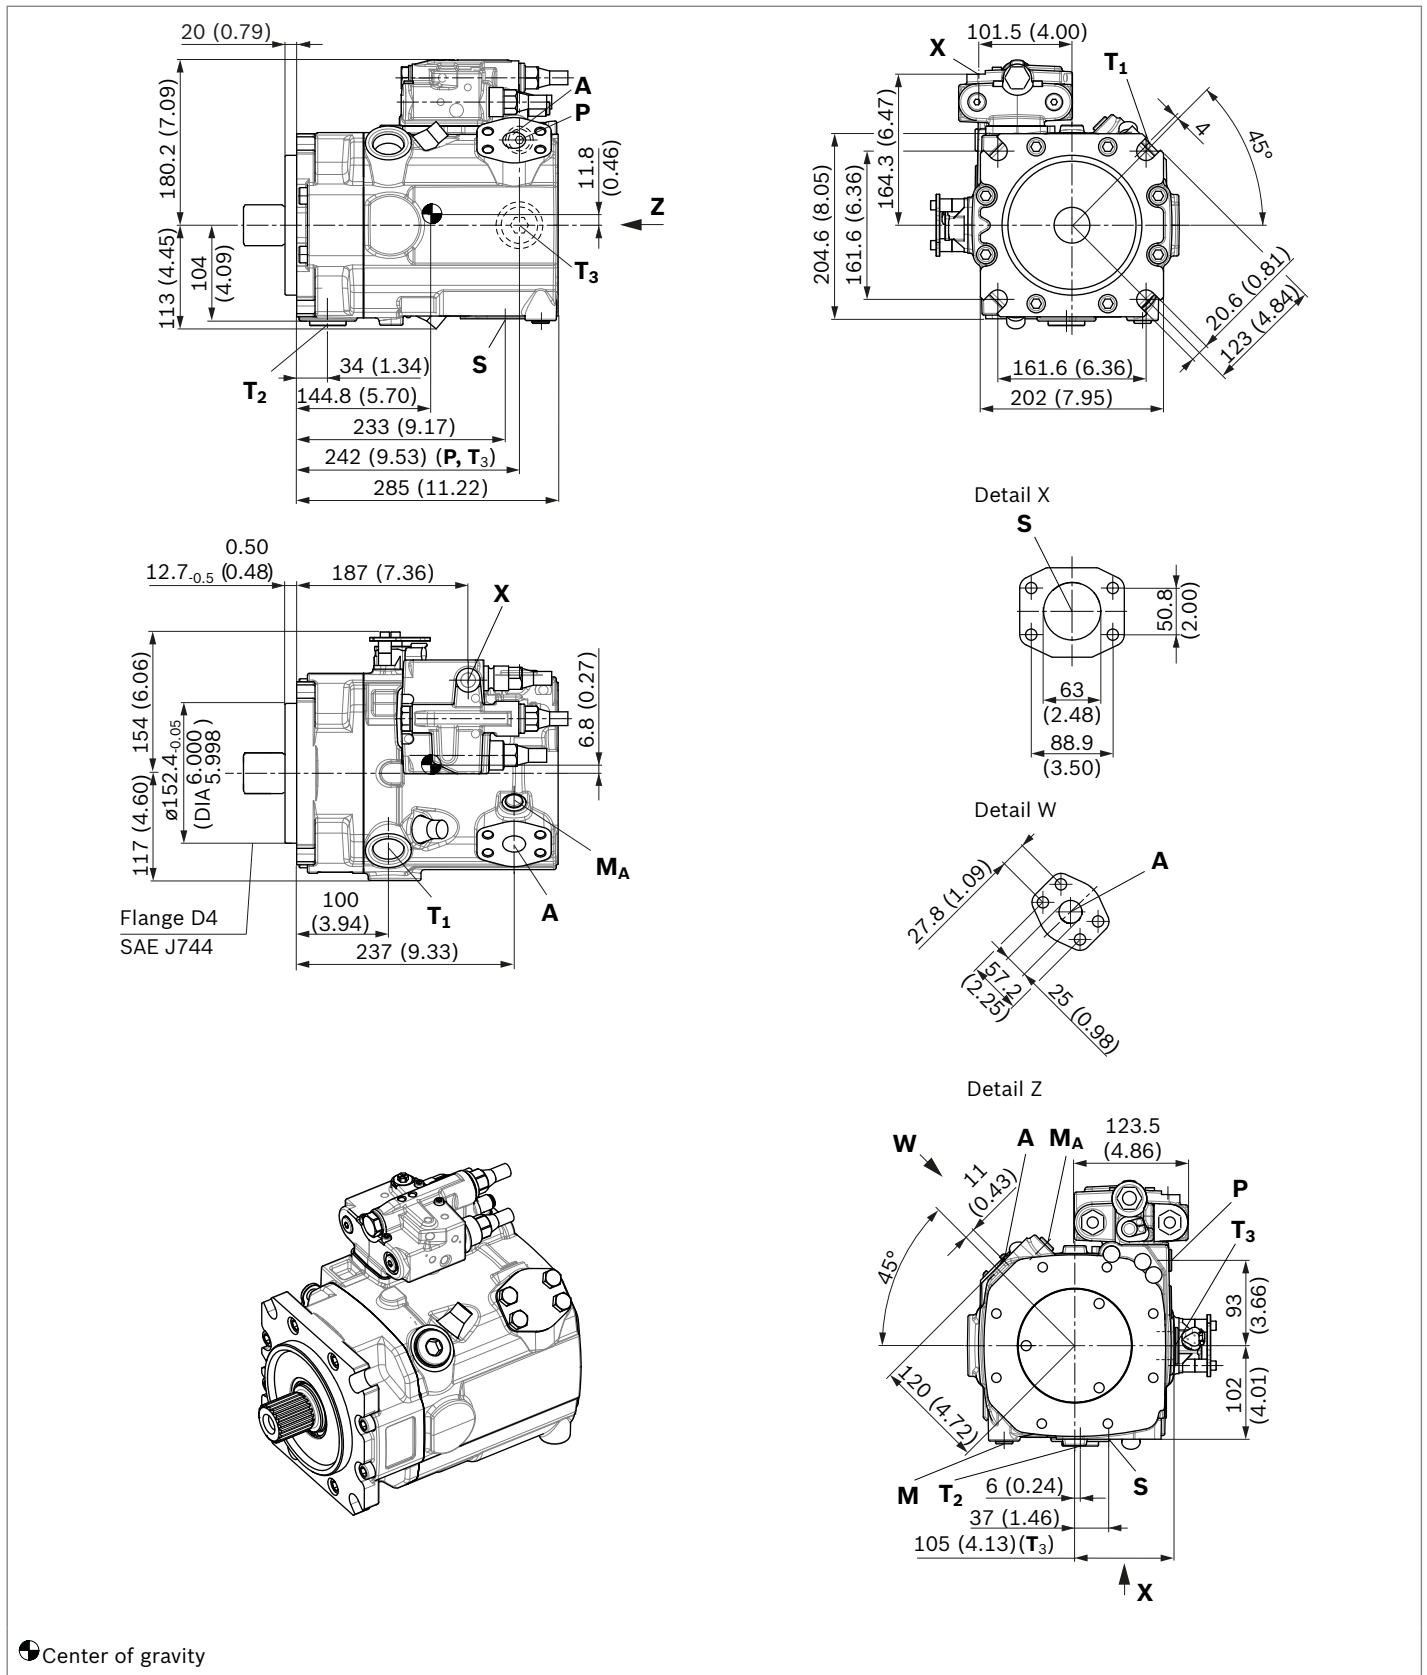

## ▼ Splined shaft DIN 5480

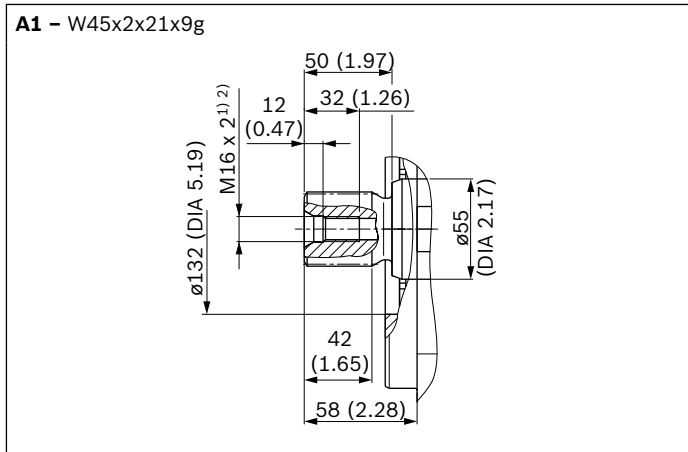


Ports – version “M” metric		Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar (psi)] <sup>3)</sup>	State <sup>7)</sup>
<b>A</b>	Service line Fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 in M12 × 1.75; 18 deep	420 (6100)	O
<b>S</b>	Suction port (without charge pump) Fastening thread	SAE J518 <sup>4)</sup> DIN 13	2 1/2 in M12 × 1.75; 18 deep	30 (435)	O
<b>T<sub>1</sub></b>	Drain port	ISO 6149 <sup>5)</sup>	M33 × 2; 19 deep	10 (145)	O <sup>6)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 6149 <sup>5)</sup>	M33 × 2; 19 deep	10 (145)	X <sup>6)</sup>
<b>T<sub>3</sub></b>	Drain port	ISO 6149 <sup>5)</sup>	M33 × 2; 19 deep	10 (145)	X <sup>6)</sup>
<b>CR</b>	Pilot signal (CR only)	ISO 6149	M14 × 1.5; 11.5 deep	420 (6100)	O
<b>PR</b>	Pilot signal (PR only)	ISO 6149	M14 × 1.5; 11.5 deep	420 (6100)	O
<b>H3, H4</b>	Pilot signal (H3 and H4 only)	ISO 6149	M14 × 1.5; 11.5 deep	100 (1450)	O
<b>L5, L6</b>	Override power controller (only with L5 and L6)	ISO 6149	M14 × 1.5; 11.5 deep	100 (1450)	O
<b>X</b>	Pilot signal (S0 and DG only)	ISO 6149 <sup>5)</sup>	M14 × 1.5; 11.5 deep	420 (6100)	O
<b>M</b>	Measuring, control pressure	ISO 6149 <sup>5)</sup>	M14 × 1.5; 12 deep	420 (6100)	X
<b>M<sub>A</sub></b>	Measuring, pressure A	ISO 6149 <sup>5)</sup>	M14 × 1.5; 12 deep	420 (6100)	X
<b>P</b>	External control pressure (Ordering code position 8 version B or C = with external control pressure supply)	ISO 6149 <sup>5)</sup>	M14 × 1.5; 11.5 deep	50 (725)	O
	Port <b>P</b> is without function (Ordering code position 8 version A = without external control pressure supply)	ISO 6149 <sup>5)</sup>	M18 × 1.5; 14.5 deep	420 (6100)	X

- Center bore according to DIN 332 (thread according to DIN 13)
- Observe the instructions in the operating instructions concerning the maximum tightening torques.
- Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- Metric fastening thread is a deviation from standard.

- The countersink can be deeper than as specified in the standard.
- Depending on installation position, T<sub>1</sub>, T<sub>2</sub> or T<sub>3</sub> must be connected (see also Installation instructions on pages 64 and 65).
- O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)

▼ **Splined shaft SAE J744**

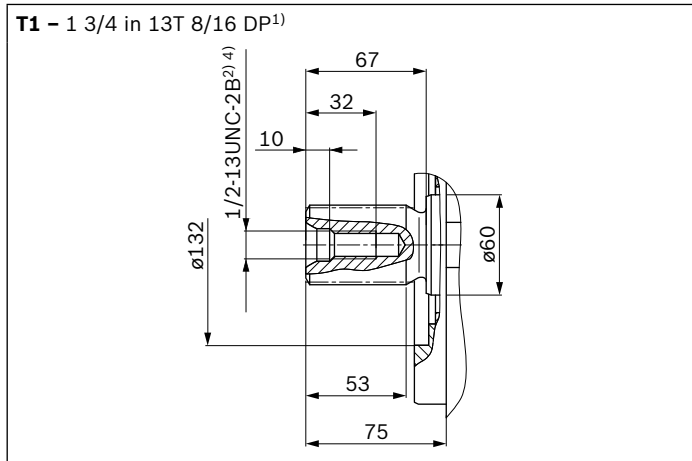


Ports – version “A” SAE		Standard	Size <sup>3)</sup>	$p_{\max \text{ abs}}$ [bar (psi)] <sup>4)</sup>	State <sup>7)</sup>
<b>A</b>	Service line Fastening thread	SAE J518 ASME B1.1	1 in 7/16-14UNC-2B; 19 (0.75) deep	420 (6100)	O
<b>S</b>	Suction port (without charge pump) Fastening thread	SAE J518 ASME B1.1	2 1/2 in 1/2-13UNC-2B; 19 (0.75) deep	30 (435)	O
<b>T<sub>1</sub></b>	Drain port	ISO 11926 <sup>5)</sup>	1 5/16UNF-2B; 20 (0.79) deep	10 (145)	O <sup>6)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 11926 <sup>5)</sup>	1 5/16UNF-2B; 20 (0.79) deep	10 (145)	X <sup>6)</sup>
<b>T<sub>3</sub></b>	Drain port	ISO 11926 <sup>5)</sup>	1 5/16UNF-2B; 20 (0.79) deep	10 (145)	X <sup>6)</sup>
<b>CR</b>	Pilot signal (CR only)	ISO 11926	9/16-18 UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>PR</b>	Pilot signal (PR only)	ISO 11926	9/16-18 UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>H3, H4</b>	Pilot signal (H3 and H4 only)	ISO 11926	9/16-18 UNF-2B; 13 (0.51) deep	100 (1450)	O
<b>L5, L6</b>	Override power controller (only with L5 and L6)	ISO 11926	9/16-18 UNF-2B; 13 (0.51) deep	100 (1450)	O
<b>X</b>	Pilot signal (S0 and DG only)	ISO 11926 <sup>5)</sup>	9/16-18 UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>M</b>	Measuring, control pressure	ISO 11926 <sup>5)</sup>	9/16-18 UNF-2B; 13 (0.51) deep	420 (6100)	X
<b>M<sub>A</sub></b>	Measuring, pressure A	ISO 11926 <sup>5)</sup>	9/16-18 UNF-2B; 13 (0.51) deep	420 (6100)	X
<b>P</b>	External control pressure (Ordering code position 8 version B or C = with external control pressure supply)	ISO 11926 <sup>5)</sup>	9/16-18 UNF-2B; 13 (0.51) deep	50 (725)	O
	Port <b>P</b> is without function (Ordering code position 8 version A = without external control pressure supply)	ISO 11926 <sup>5)</sup>	3/4-16 UNF-2B; 12.6 (0.50) deep	420 (6100)	X


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Centering bore according to ASME B1.1  
3) Observe the instructions in the operating instructions concerning the maximum tightening torques.  
4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) The countersink can be deeper than as specified in the standard.  
6) Depending on installation position, T<sub>1</sub>, T<sub>2</sub> or T<sub>3</sub> must be connected (see also Installation instructions on pages 64 and 65).  
7) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)


▼ **LR** – Power controller, fixed setting

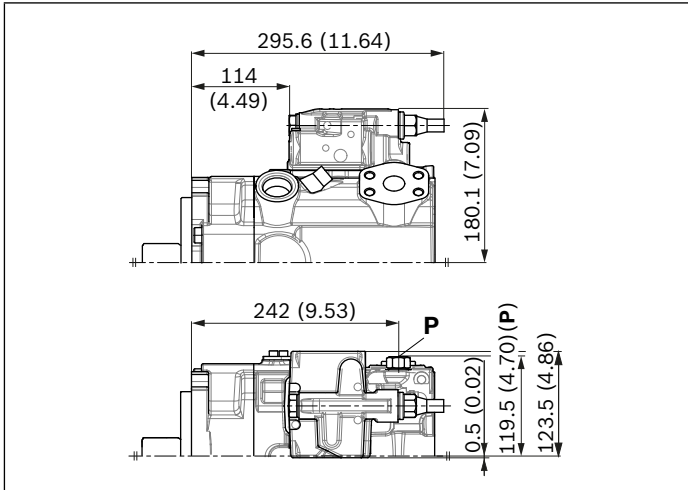


▼ **L3/L4** – Power controller, electric-proportional override

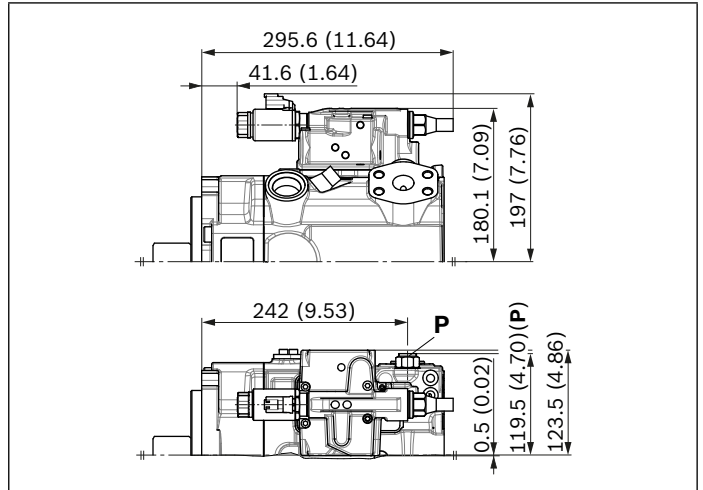


▼ **L5/L6** – Power controller, hydraulic-proportional override

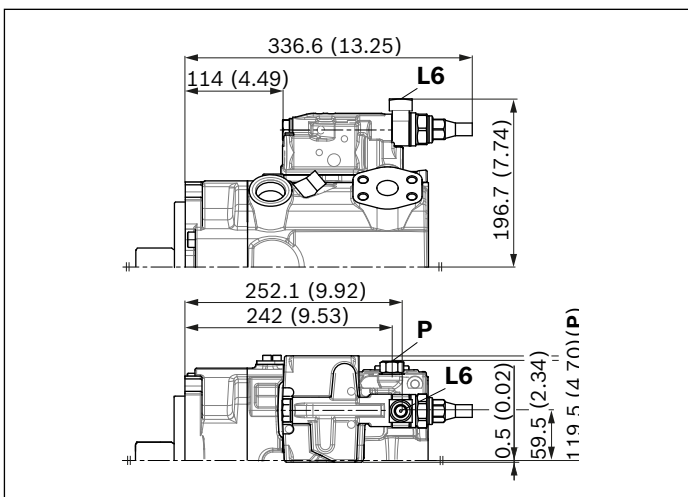


▼ **CR** – Power controller, hydraulic-proportional override, high pressure, with stop

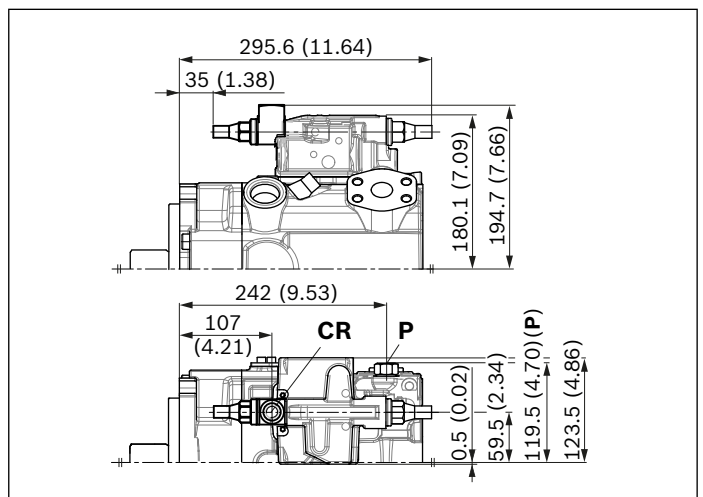

▼ **PR** – Power controller, hydraulic-proportional override, high pressure, without stop

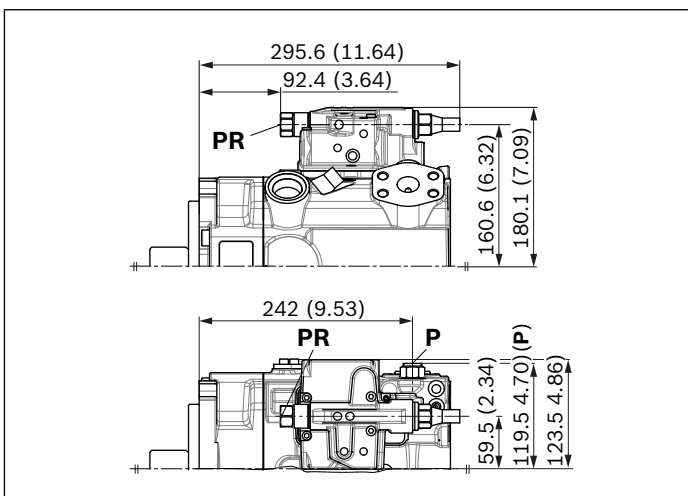


▼ **E1/E2** – Stroke control electric-proportional

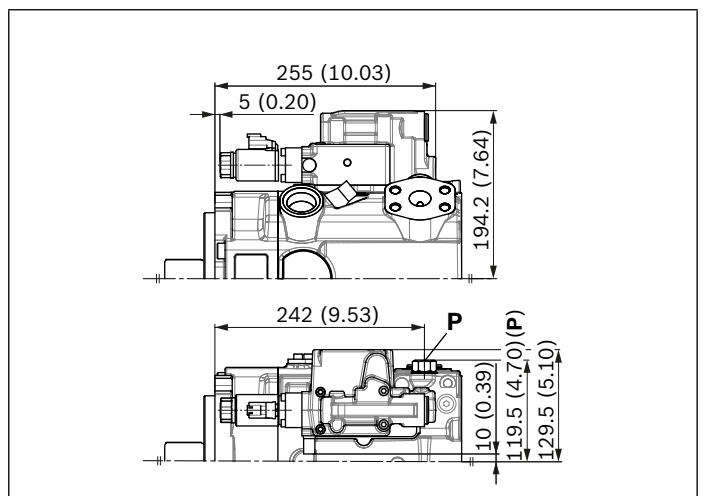


**Notice**

All controllers described with shuttle valve in **P** (some contrary to standard according to ordering code position 08)


▼ **H3/H4** – Stroke control, hydraulic-proportional, pilot pressure

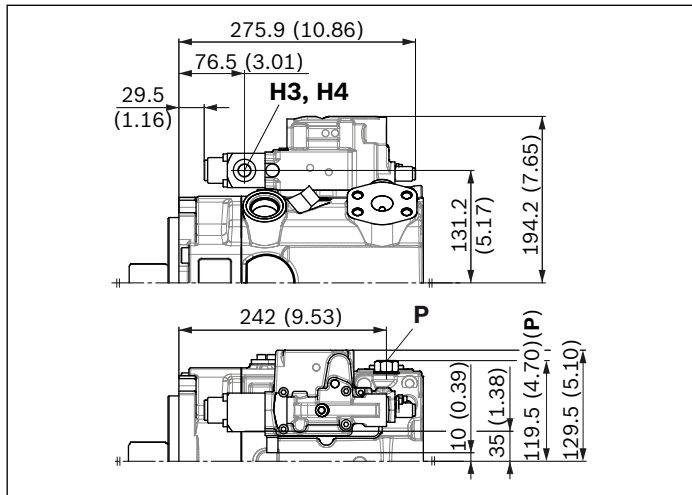


▼ **DR** – Pressure controller, fixed setting

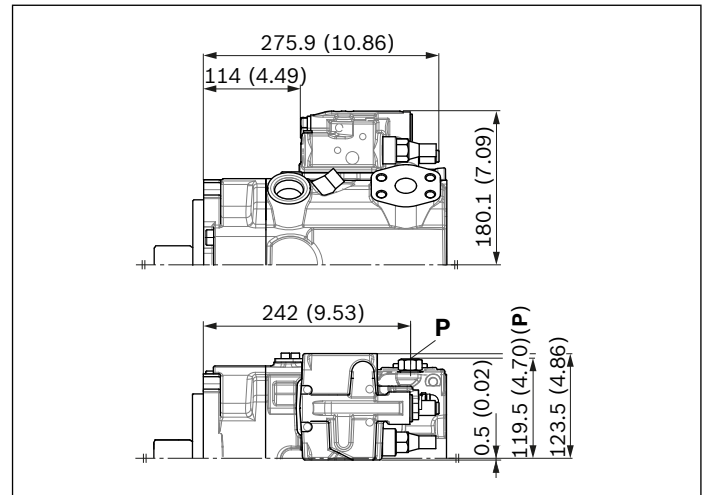

▼ **LRDRS0** – Power controller with pressure controller and load sensing, fixed setting

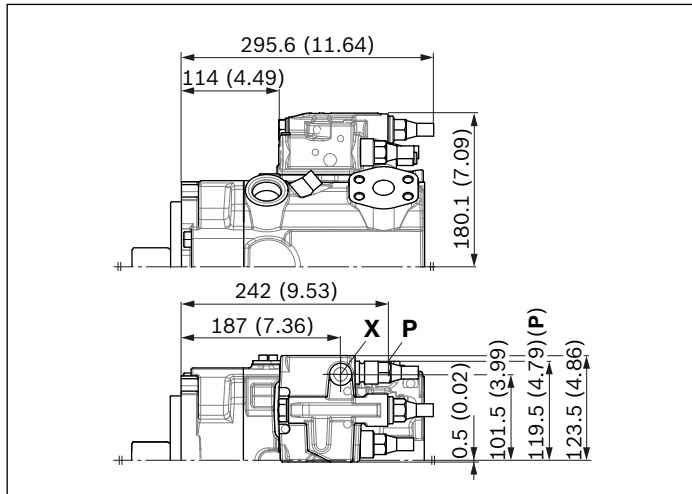

▼ **DG** – Pressure controller, hydraulic, remote controlled

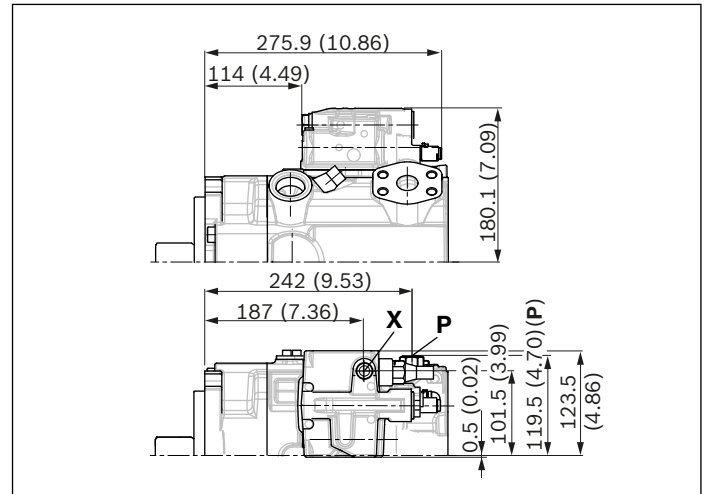


**Notice**

All controllers described with shuttle valve in **P** (some contrary to standard as per ordering code position 08)




**Dimensions size 145**

**LRDRS0 – Power controller with pressure controller, load sensing and with electric swivel angle sensor**  
 Without charge pump, clockwise rotation

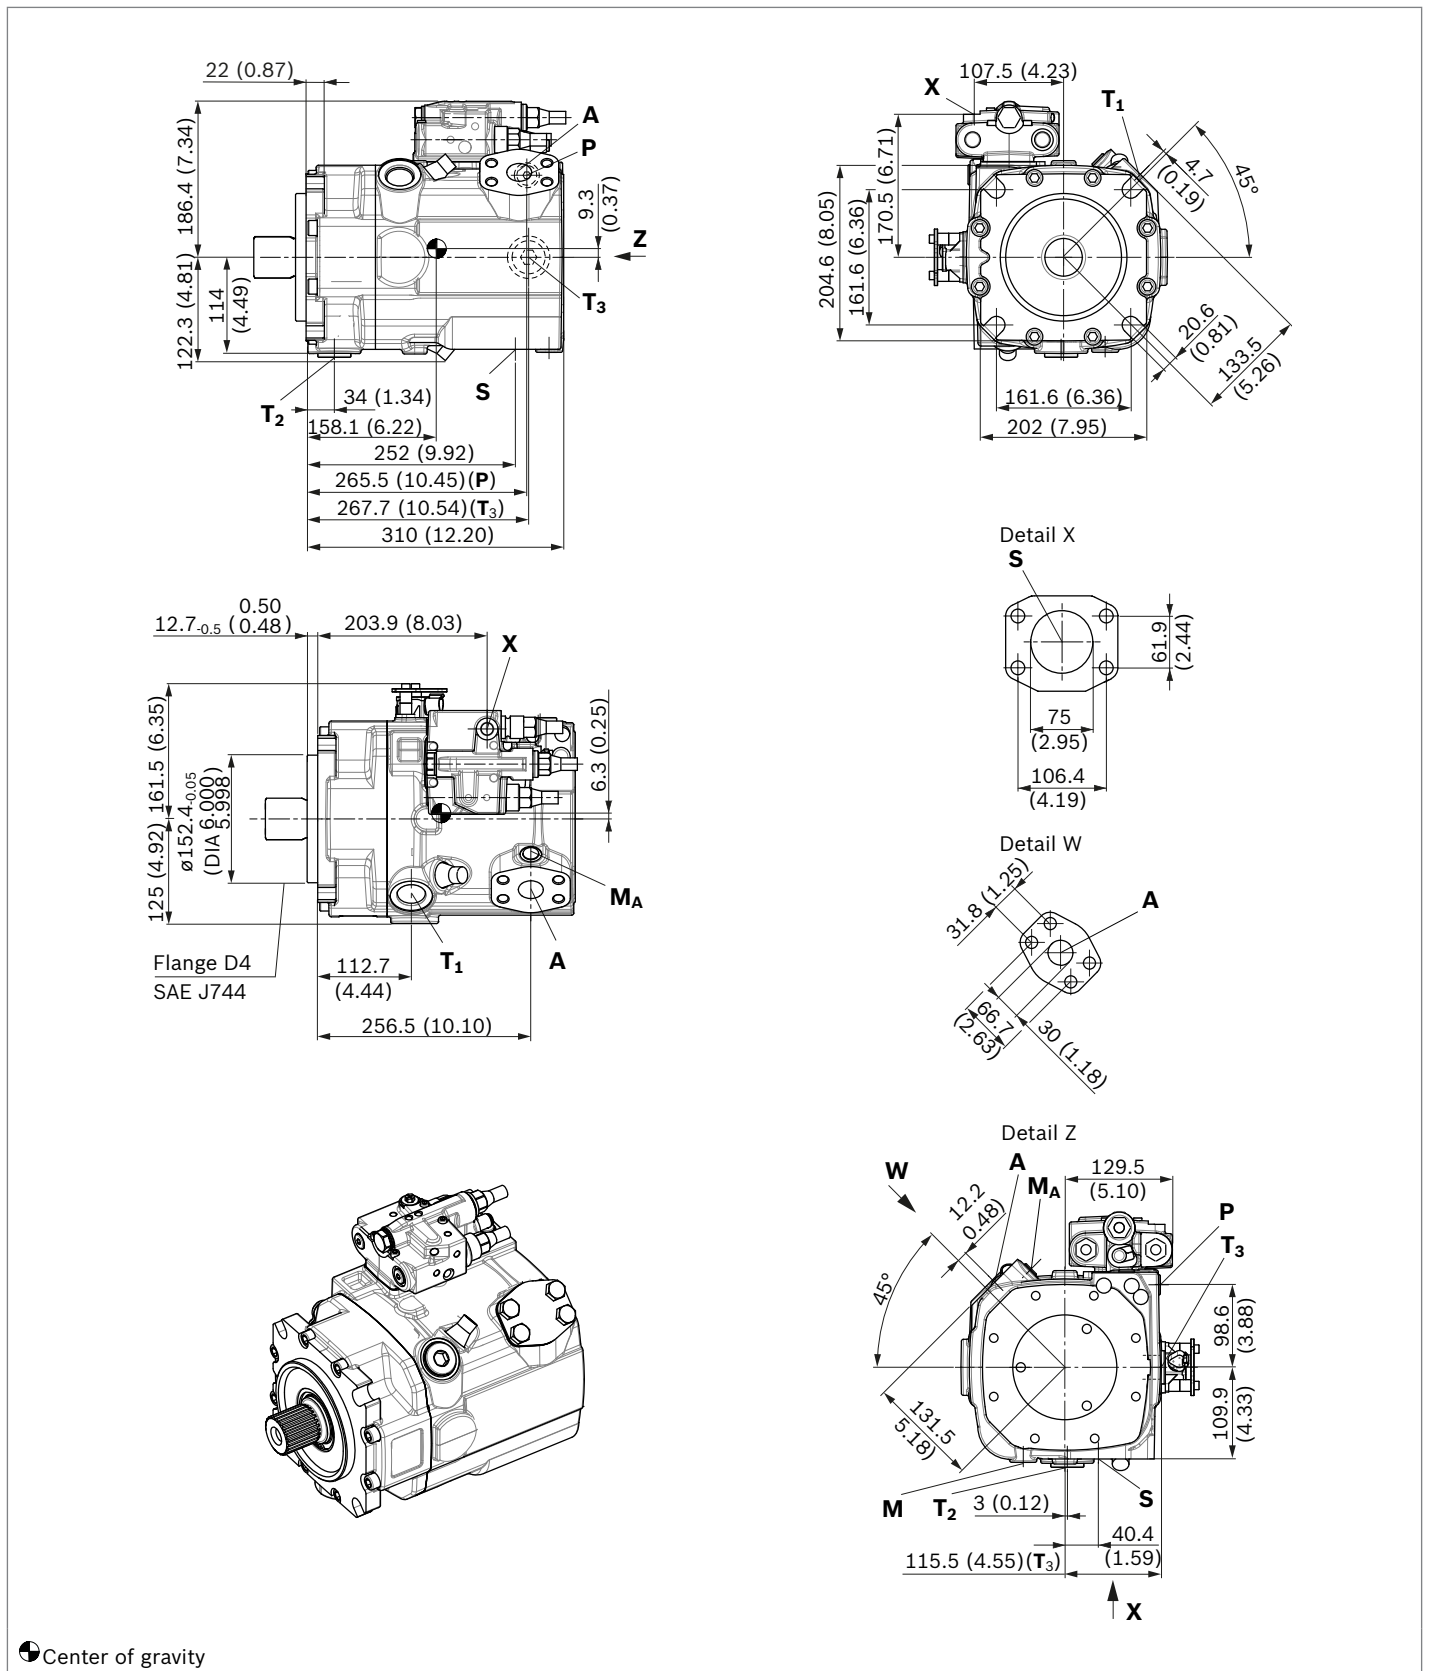


**LRDRS0 – Power controller with pressure controller, load sensing and with electric swivel angle sensor**

With charge pump, clockwise rotation

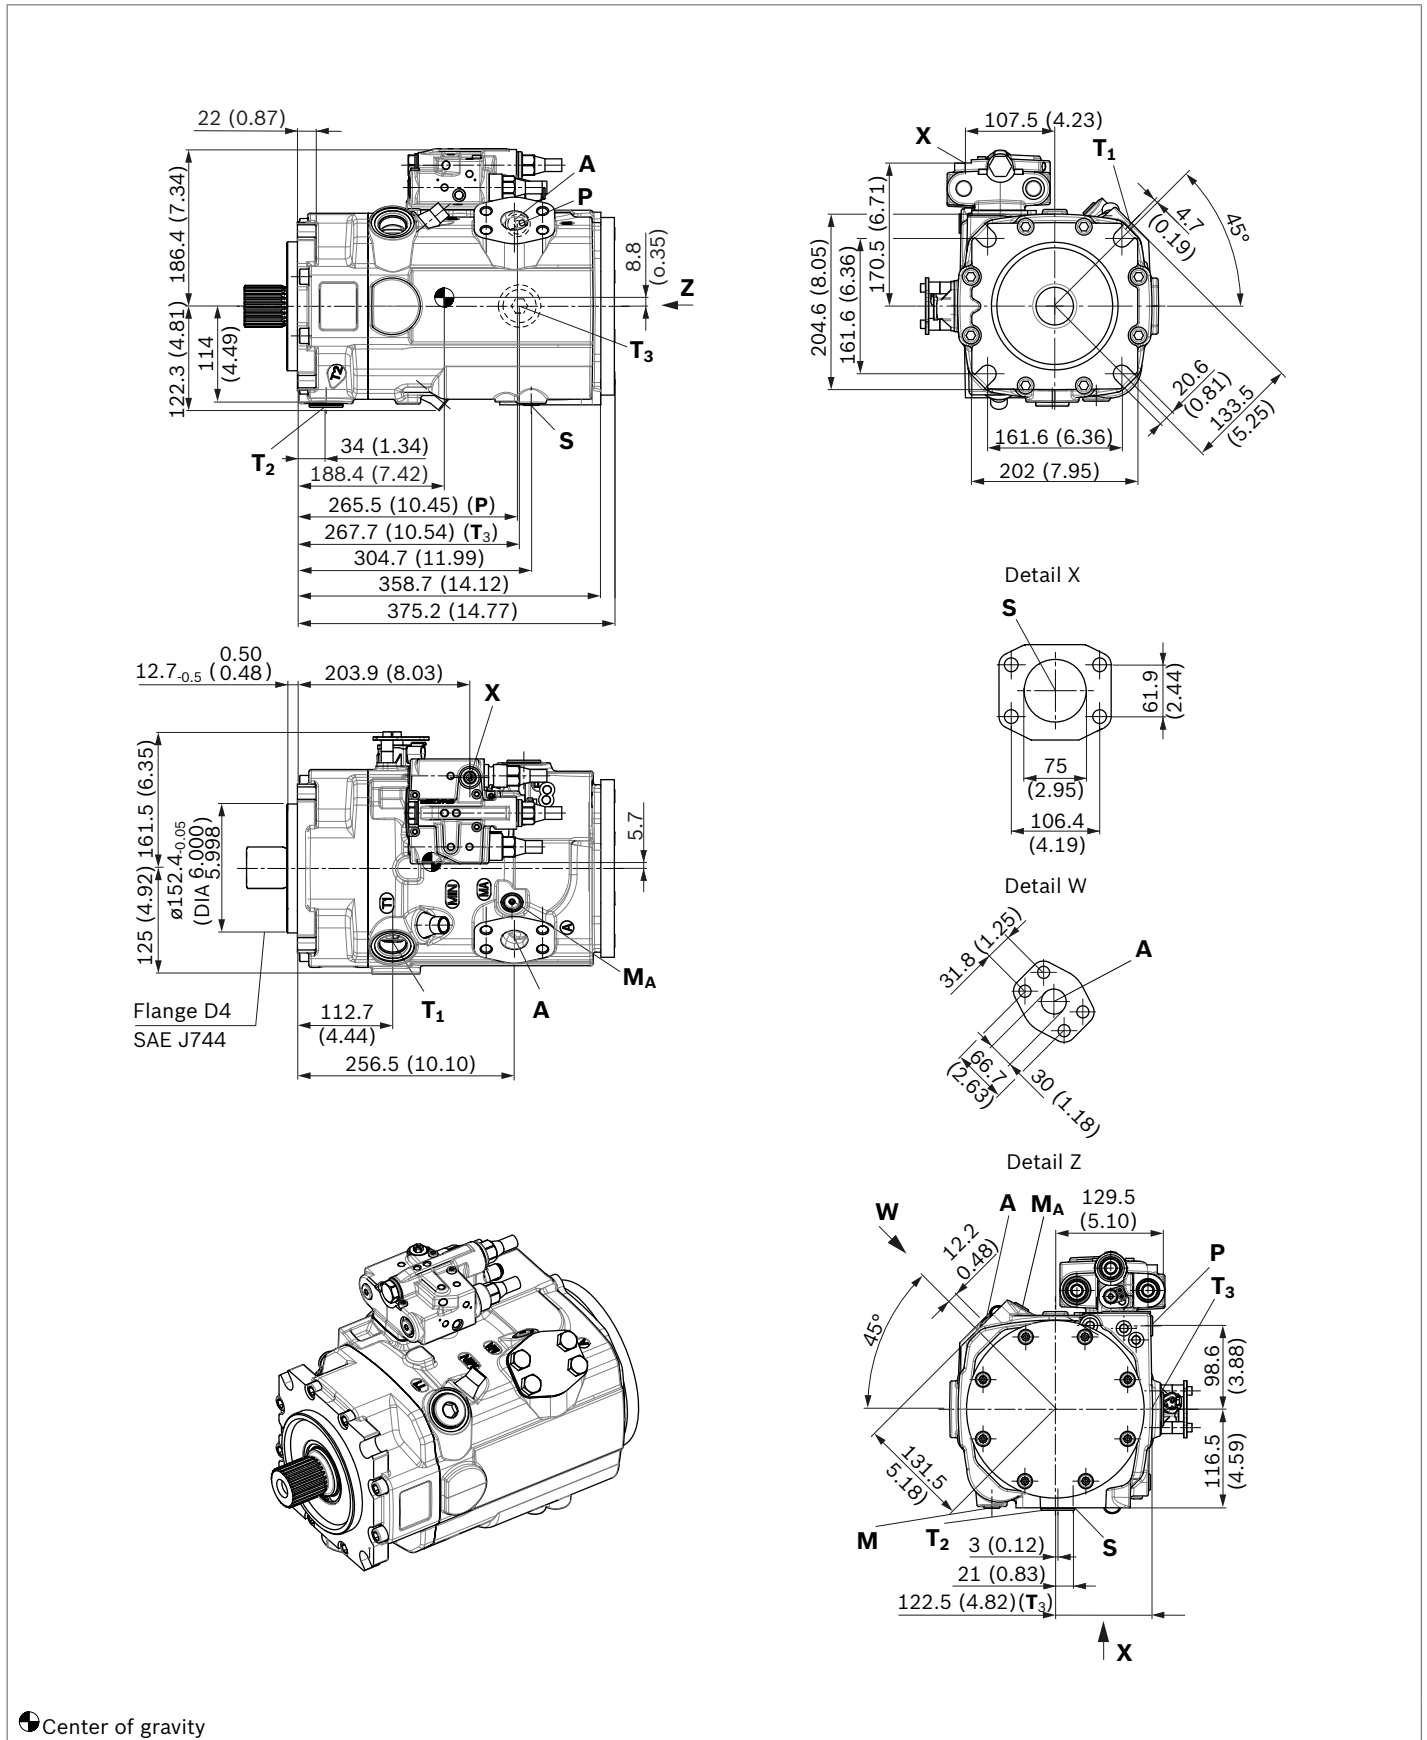


**L4S0 - Power controller electrically proportional, load sensing and with electric swivel angle sensor**


Mounting flange G3 according to SAE J617; 409-12; without charge pump

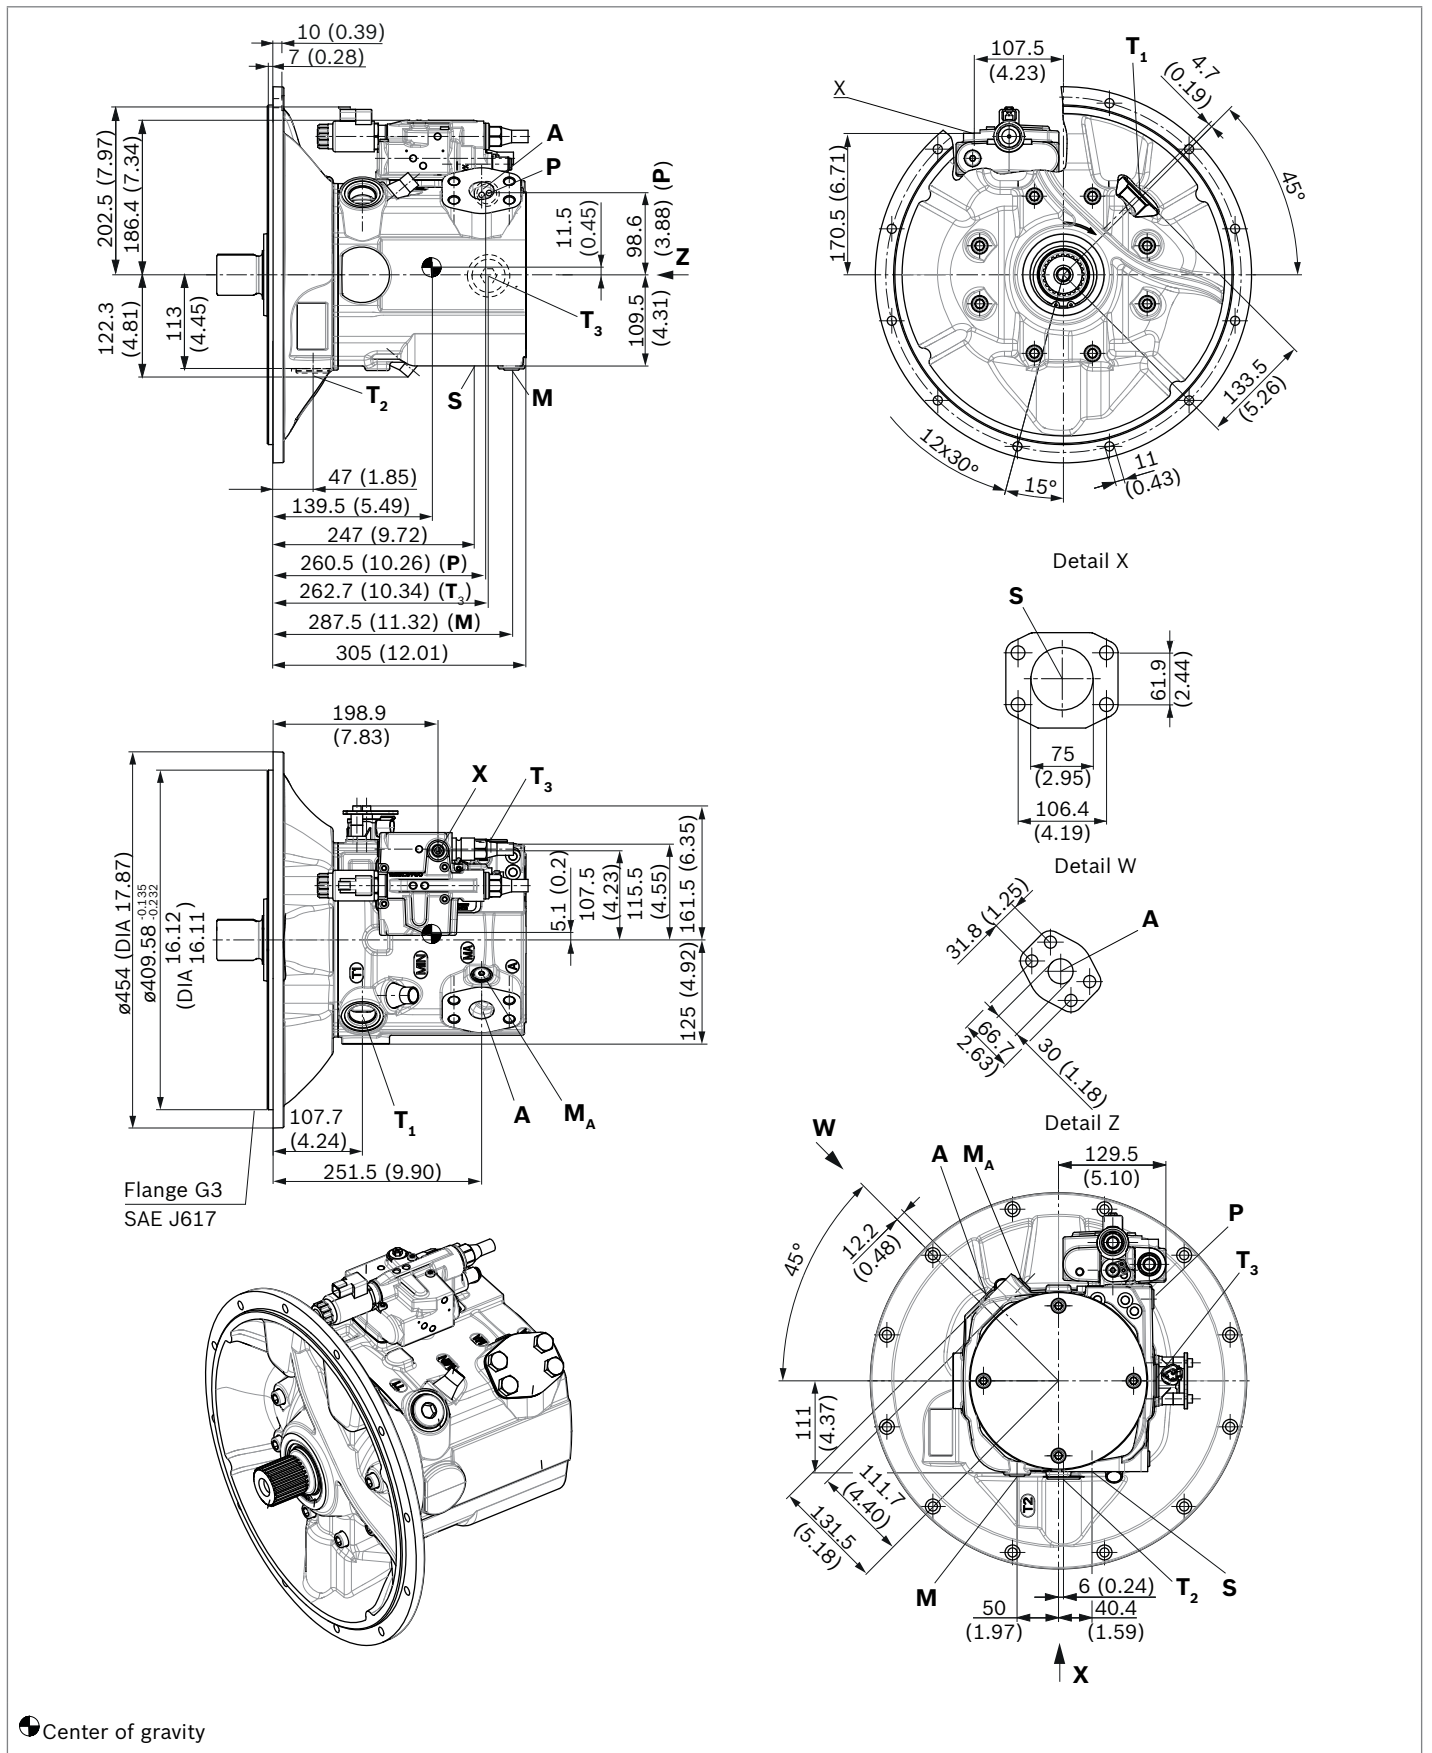

▼ **Splined shaft SAE J744**

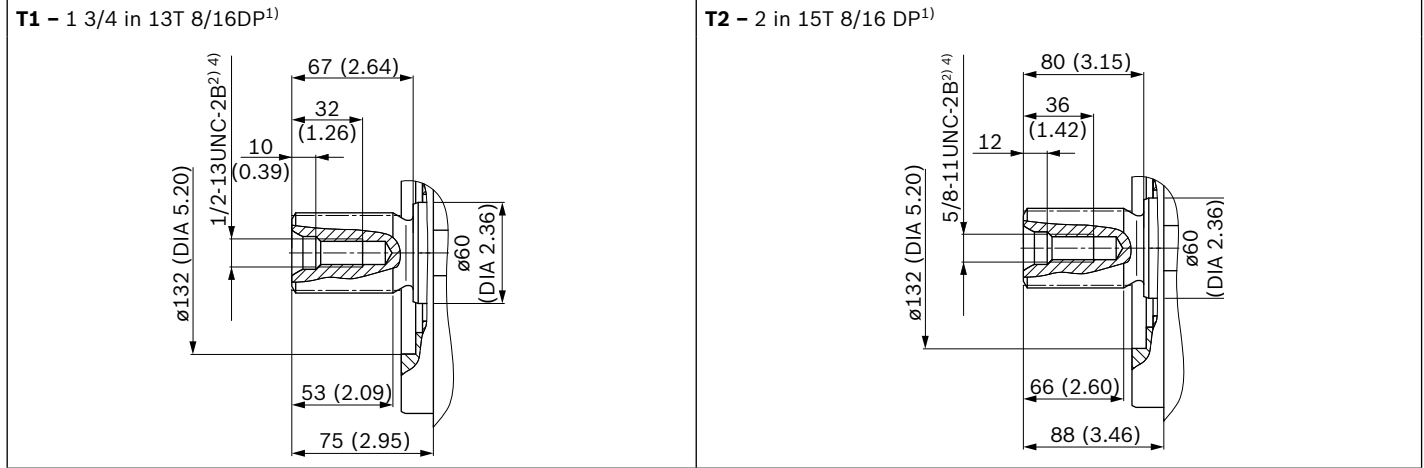

▼ **Splined shaft DIN 5480**

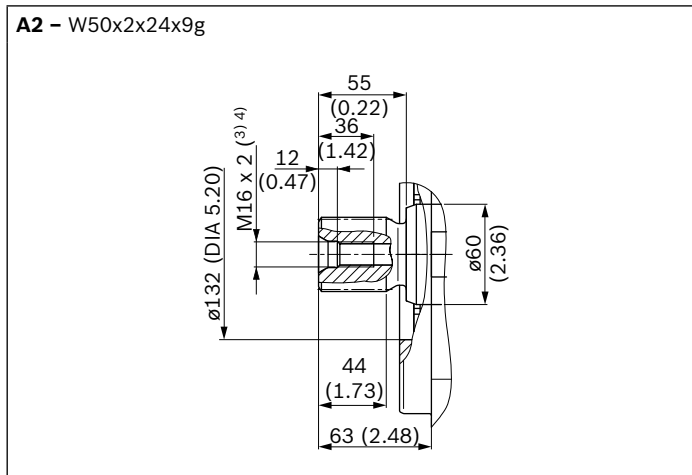

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) Center bore according to DIN 332 (thread according to DIN 13)
- 4) Observe the instructions in the operating instructions concerning the maximum tightening torques.

Ports – version “M” metric		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar (psi)] <sup>5)</sup>	State <sup>9)</sup>
<b>A</b>	Service line	SAE J518 <sup>6)</sup>	1 1/4 in	420 (6100)	O
	Fastening thread	DIN 13	M14 × 2; 22 (0.87) deep		
<b>S</b>	Suction port (without charge pump)	SAE J518 <sup>6)</sup>	3 in	30 (435)	O
	Fastening thread	DIN 13	M16 × 2; 24 (0.94) deep		
<b>S</b>	Suction port (with charge pump)	SAE J518 <sup>6)</sup>	3 in	2 (30)	O
	Fastening thread	DIN 13	M16 × 2; 24 (0.94) deep		
<b>T<sub>1</sub></b>	Drain port	ISO 6149 <sup>7)</sup>	M33 × 2; 19 (0.75) deep	10 (145)	O <sup>8)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 6149 <sup>7)</sup>	M33 × 2; 19 (0.75) deep	10 (145)	X <sup>8)</sup>
<b>T<sub>3</sub></b>	Drain port	ISO 6149 <sup>7)</sup>	M33 × 2; 19 (0.75) deep	10 (145)	X <sup>8)</sup>
<b>CR</b>	Pilot signal (CR only)	ISO 6149	M14 × 1.5; 11.5 (0.45) deep	420 (6100)	O
<b>PR</b>	Pilot signal (PR only)	ISO 6149	M14 × 1.5; 11.5 (0.45) deep	420 (6100)	O
<b>H3, H4</b>	Pilot signal (H3 and H4 only)	ISO 6149	M14 × 1.5; 11.5 (0.45) deep	100 (1450)	O
<b>L5, L6</b>	Override power controller (only with L5 and L6)	ISO 6149	M14 × 1.5; 11.5 (0.45) deep	100 (1450)	O
<b>X</b>	Pilot signal (S0 and DG only)	ISO 6149 <sup>7)</sup>	M14 × 1.5; 11.5 (0.45) deep	420 (6100)	O
<b>M</b>	Measuring, control pressure	ISO 6149 <sup>7)</sup>	M14 × 1.5; 12 (0.47) deep	420 (6100)	X
<b>M<sub>A</sub></b>	Measuring, pressure A	ISO 6149 <sup>7)</sup>	M14 × 1.5; 12 (0.47) deep	420 (6100)	X
<b>P</b>	External control pressure (Ordering code position 8 version B or C = with external control pressure supply)	ISO 6149 <sup>7)</sup>	M14 × 1.5; 11.5 (0.45) deep	50 (725)	O
	Port <b>P</b> is without function (Ordering code position 8 version A = without external control pressure supply)	ISO 6149 <sup>7)</sup>	M18 × 1.5; 14.5 (0.57) deep	420 (6100)	X

Ports – version “A” SAE		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar (psi)] <sup>5)</sup>	State <sup>9)</sup>
<b>A</b>	Service line	SAE J518	1 1/4 in	420 (6100)	O
	Fastening thread	ASME B1.1	1/2-13 UNC-2B; 19 (0.75) deep		
<b>S</b>	Suction port (without charge pump)	SAE J518	3 in	30 (435)	O
	Fastening thread	ASME B1.1	5/8-11 UNC-2B; 24 (0.94) deep		
<b>S</b>	Suction port (with charge pump)	SAE J518	3 in	2 (30)	O
	Fastening thread	ASME B1.1	5/8-11 UNC-2B; 24 (0.94) deep		
<b>T<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 5/16 UNF-2B; 20 (0.79) deep	10 (145)	O <sup>8)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 5/16 UNF-2B; 20 (0.79) deep	10 (145)	X <sup>8)</sup>
<b>T<sub>3</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 5/16 UNF-2B; 20 (0.79) deep	10 (145)	X <sup>8)</sup>
<b>CR</b>	Pilot signal (CR only)	ISO 11926	9/16-18 UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>PR</b>	Pilot signal (PR only)	ISO 11926	9/16-18 UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>H3, H4</b>	Pilot signal (H3 and H4 only)	ISO 11926	9/16-18 UNF-2B; 13 (0.51) deep	100 (1450)	O
<b>L5, L6</b>	Override power controller (only with L5 and L6)	ISO 11926	9/16-18 UNF-2B; 13 (0.51) deep	100 (1450)	O
<b>X</b>	Pilot signal (S0 and DG only)	ISO 11926 <sup>7)</sup>	9/16-18 UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>M</b>	Measuring, control pressure	ISO 11926 <sup>7)</sup>	9/16-18 UNF-2B; 13 (0.51) deep	420 (6100)	X
<b>M<sub>A</sub></b>	Measuring, pressure A	ISO 11926 <sup>7)</sup>	9/16-18 UNF-2B; 13 (0.51) deep	420 (6100)	X
<b>P</b>	External control pressure (Ordering code position 8 version B or C = with external control pressure supply)	ISO 11926 <sup>7)</sup>	9/16-18 UNF-2B; 13 (0.51) deep	50 (725)	O
	Port <b>P</b> is without function (Ordering code position 8 version A = without external control pressure supply)	ISO 11926 <sup>7)</sup>	3/4-16 UNF-2B; 12.6 (0.50) deep	420 (6100)	X

5) Depending on the application, momentary pressure peaks can occur.  
Keep this in mind when selecting measuring devices and fittings.

6) Metric fastening thread is a deviation from standard.


7) The countersink can be deeper than as specified in the standard.

8) Depending on installation position, T<sub>1</sub>, T<sub>2</sub> or T<sub>3</sub> must be connected  
(see also Installation instructions on pages 64 and 65).


9) O = Must be connected (plugged when delivered)

X = Plugged (in normal operation)


▼ **LR** – Power controller, fixed setting

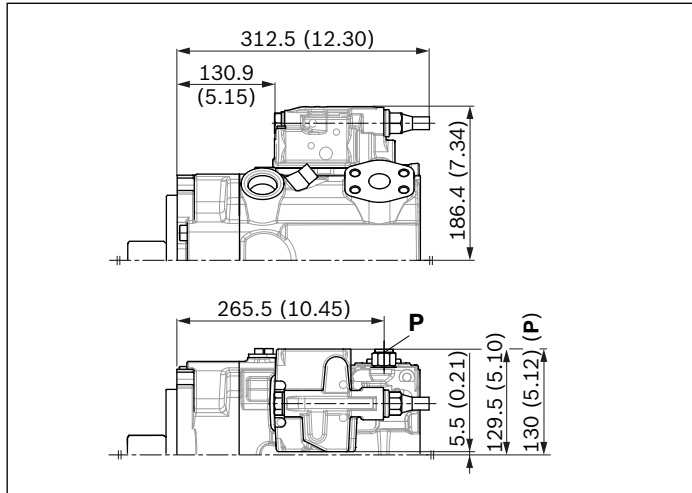


▼ **L3/L4** – Power controller, electric-proportional override

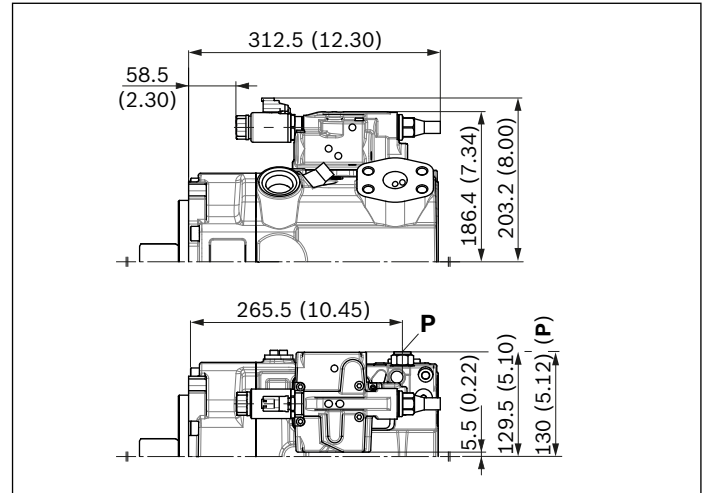


▼ **L5/L6** – Power controller, hydraulic override

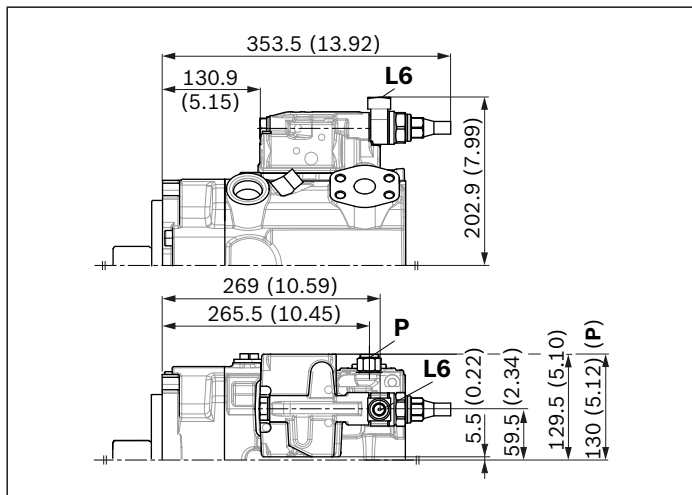


▼ **CR** – Power controller, hydraulic-proportional override, high pressure, with stop

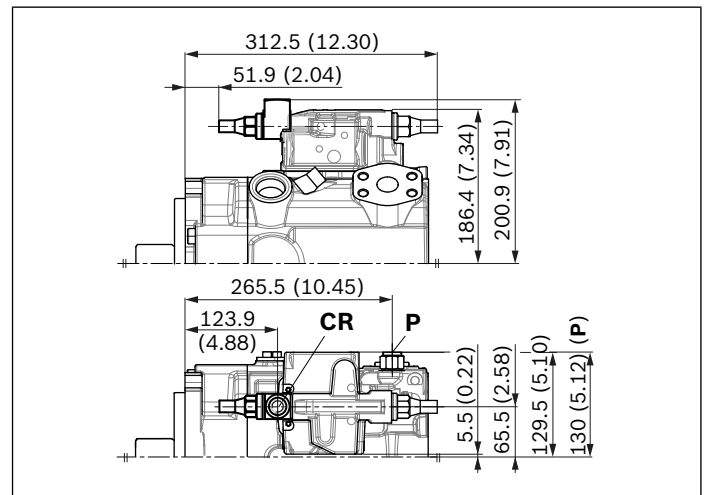

▼ **PR** – Power controller, hydraulic-proportional override, high pressure, without stop

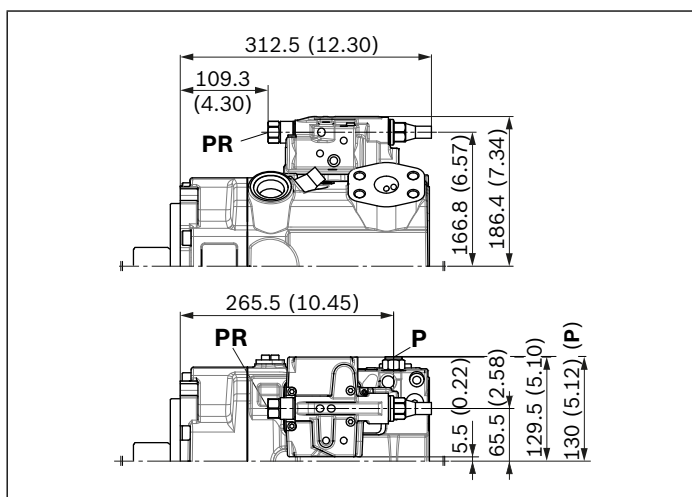


▼ **E1/E2** – Stroke control electric-proportional

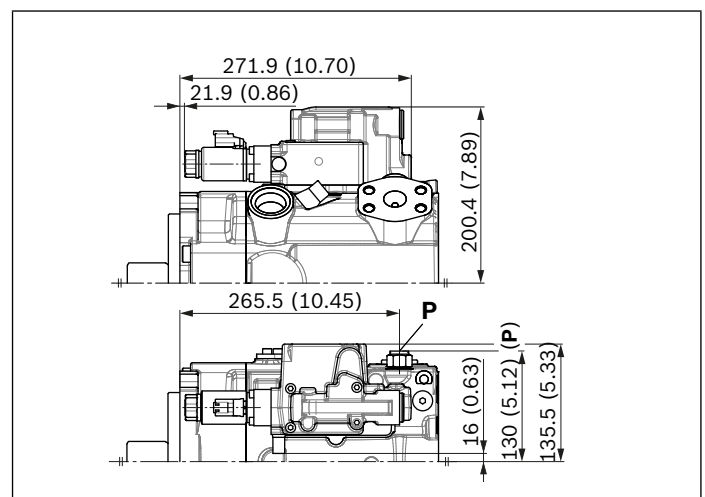


**Notice**

All controllers described with shuttle valve in **P** (some contrary to standard as per ordering code position 08)


▼ **H3/H4** – Stroke control, hydraulic-proportional, pilot pressure

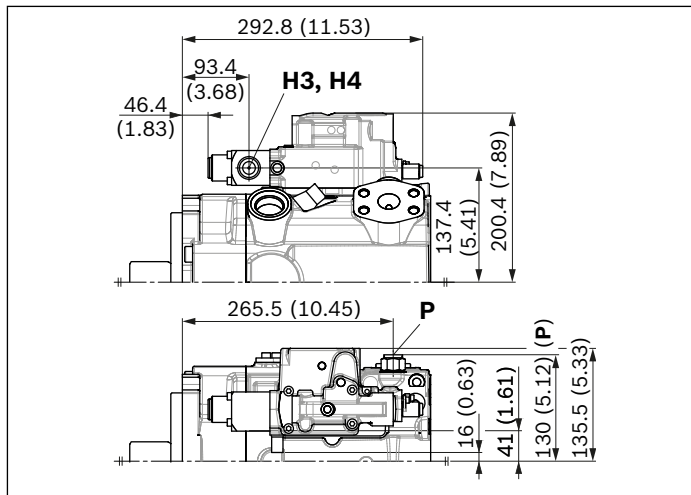


▼ **DR** – Pressure controller, fixed setting

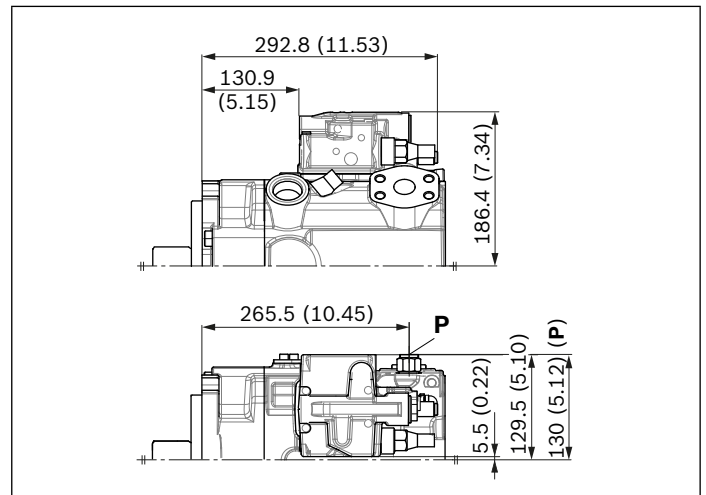

▼ **LRDRSO** – Power controller with pressure controller and load sensing, fixed setting

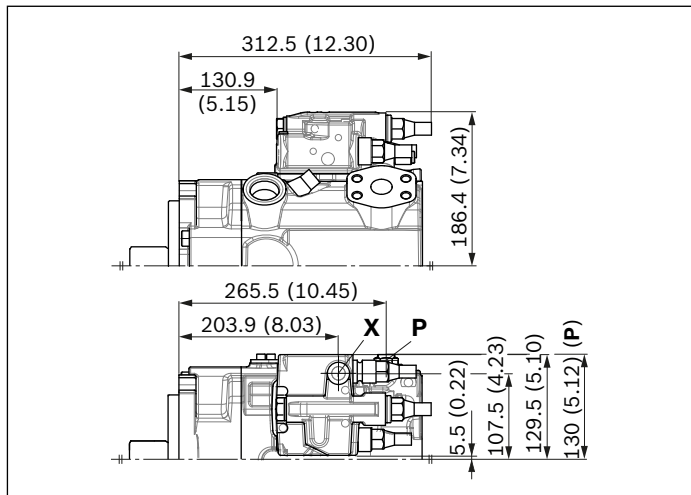

▼ **DG** – Pressure controller, hydraulic, remote controlled

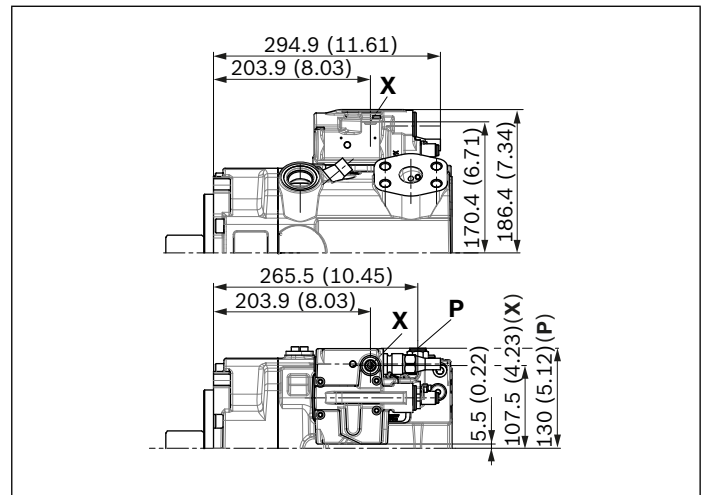

**Notice**


All controllers described with shuttle valve in **P** (some contrary to standard as per ordering code position 08)



**Dimensions size 175**


**LRDRS0 – Power controller with pressure controller, load sensing and with electric swivel angle sensor**

Without charge pump, clockwise rotation

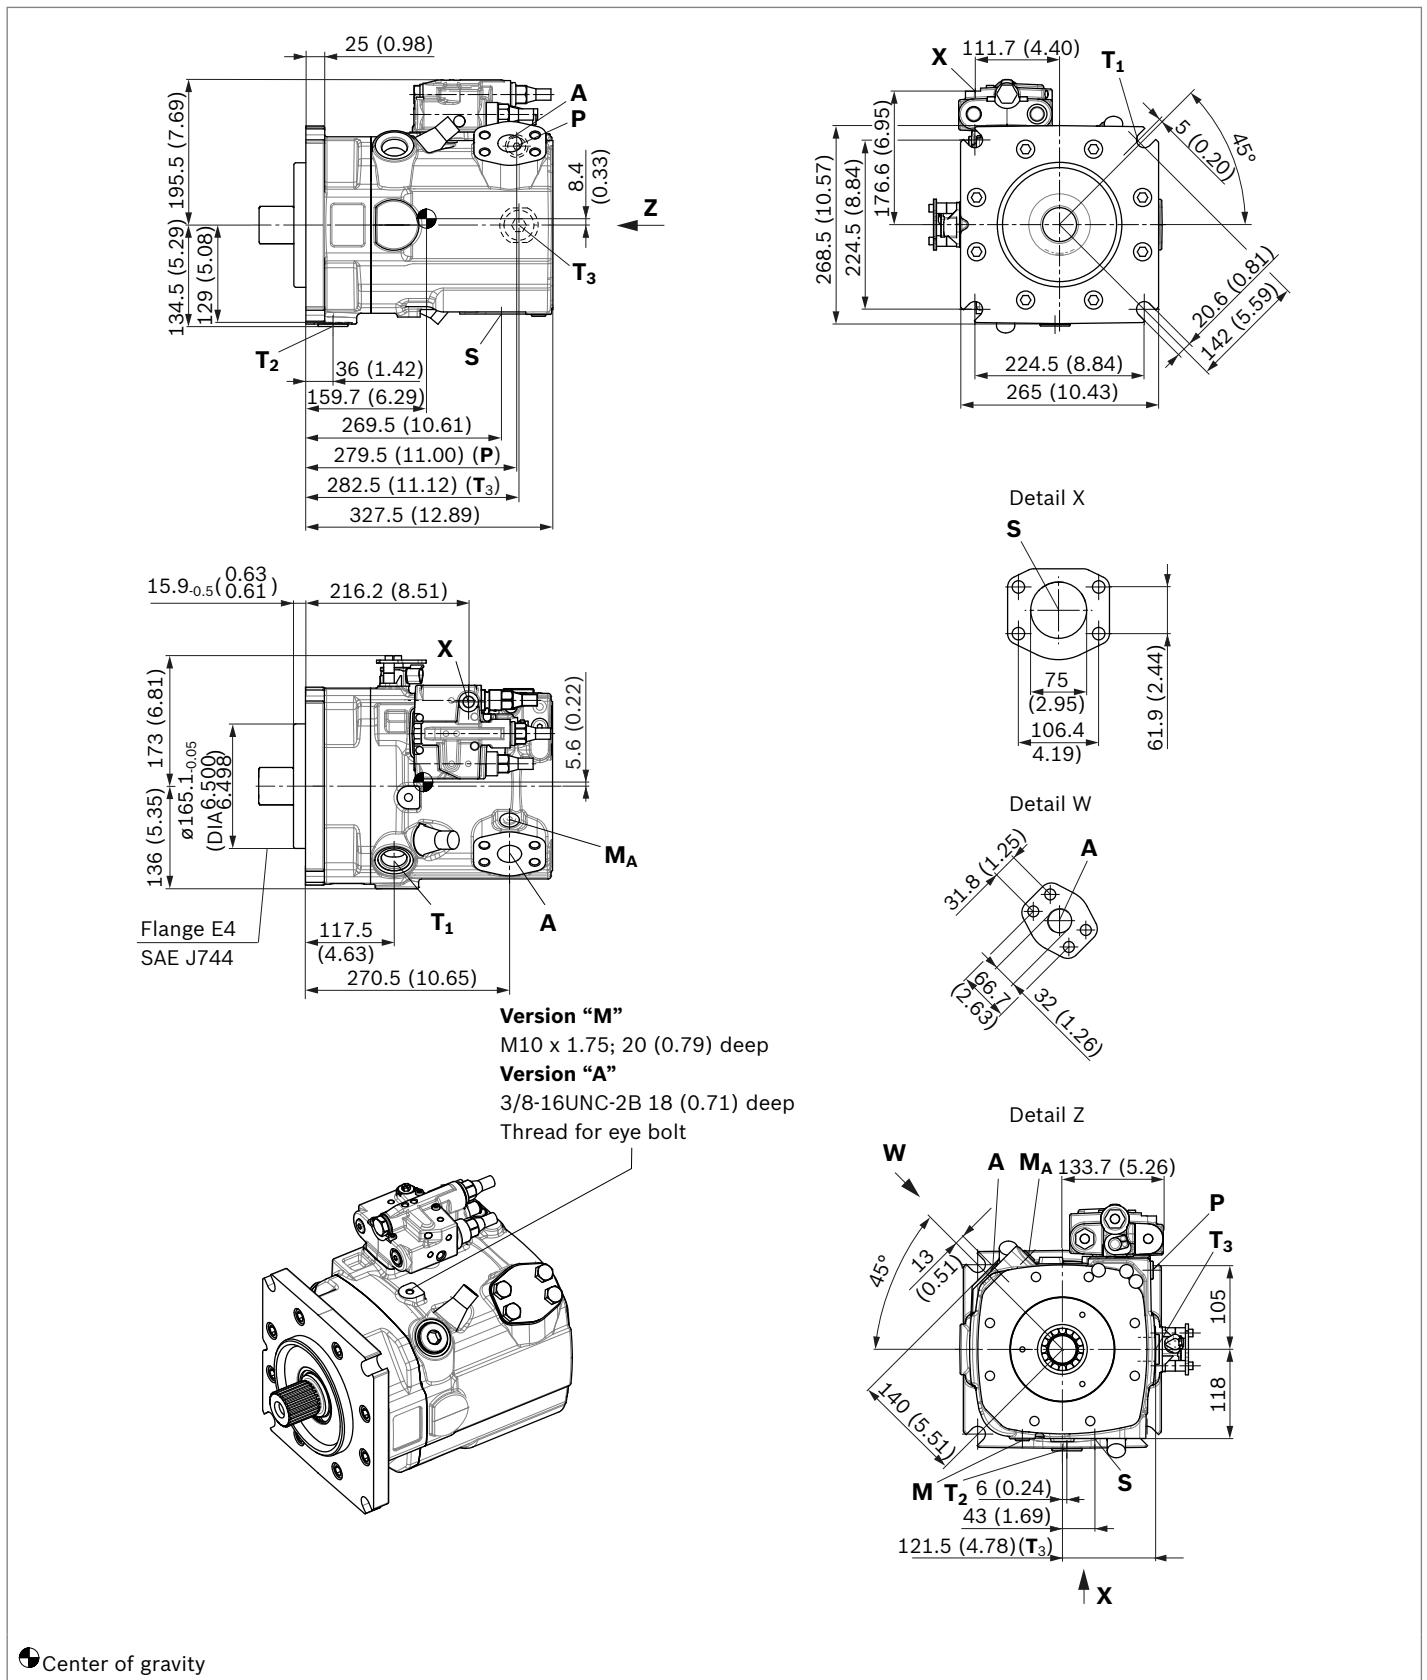




**LRDRS0 – Power controller with pressure controller, load sensing and with electric swivel angle sensor**  
 With charge pump, clockwise rotation

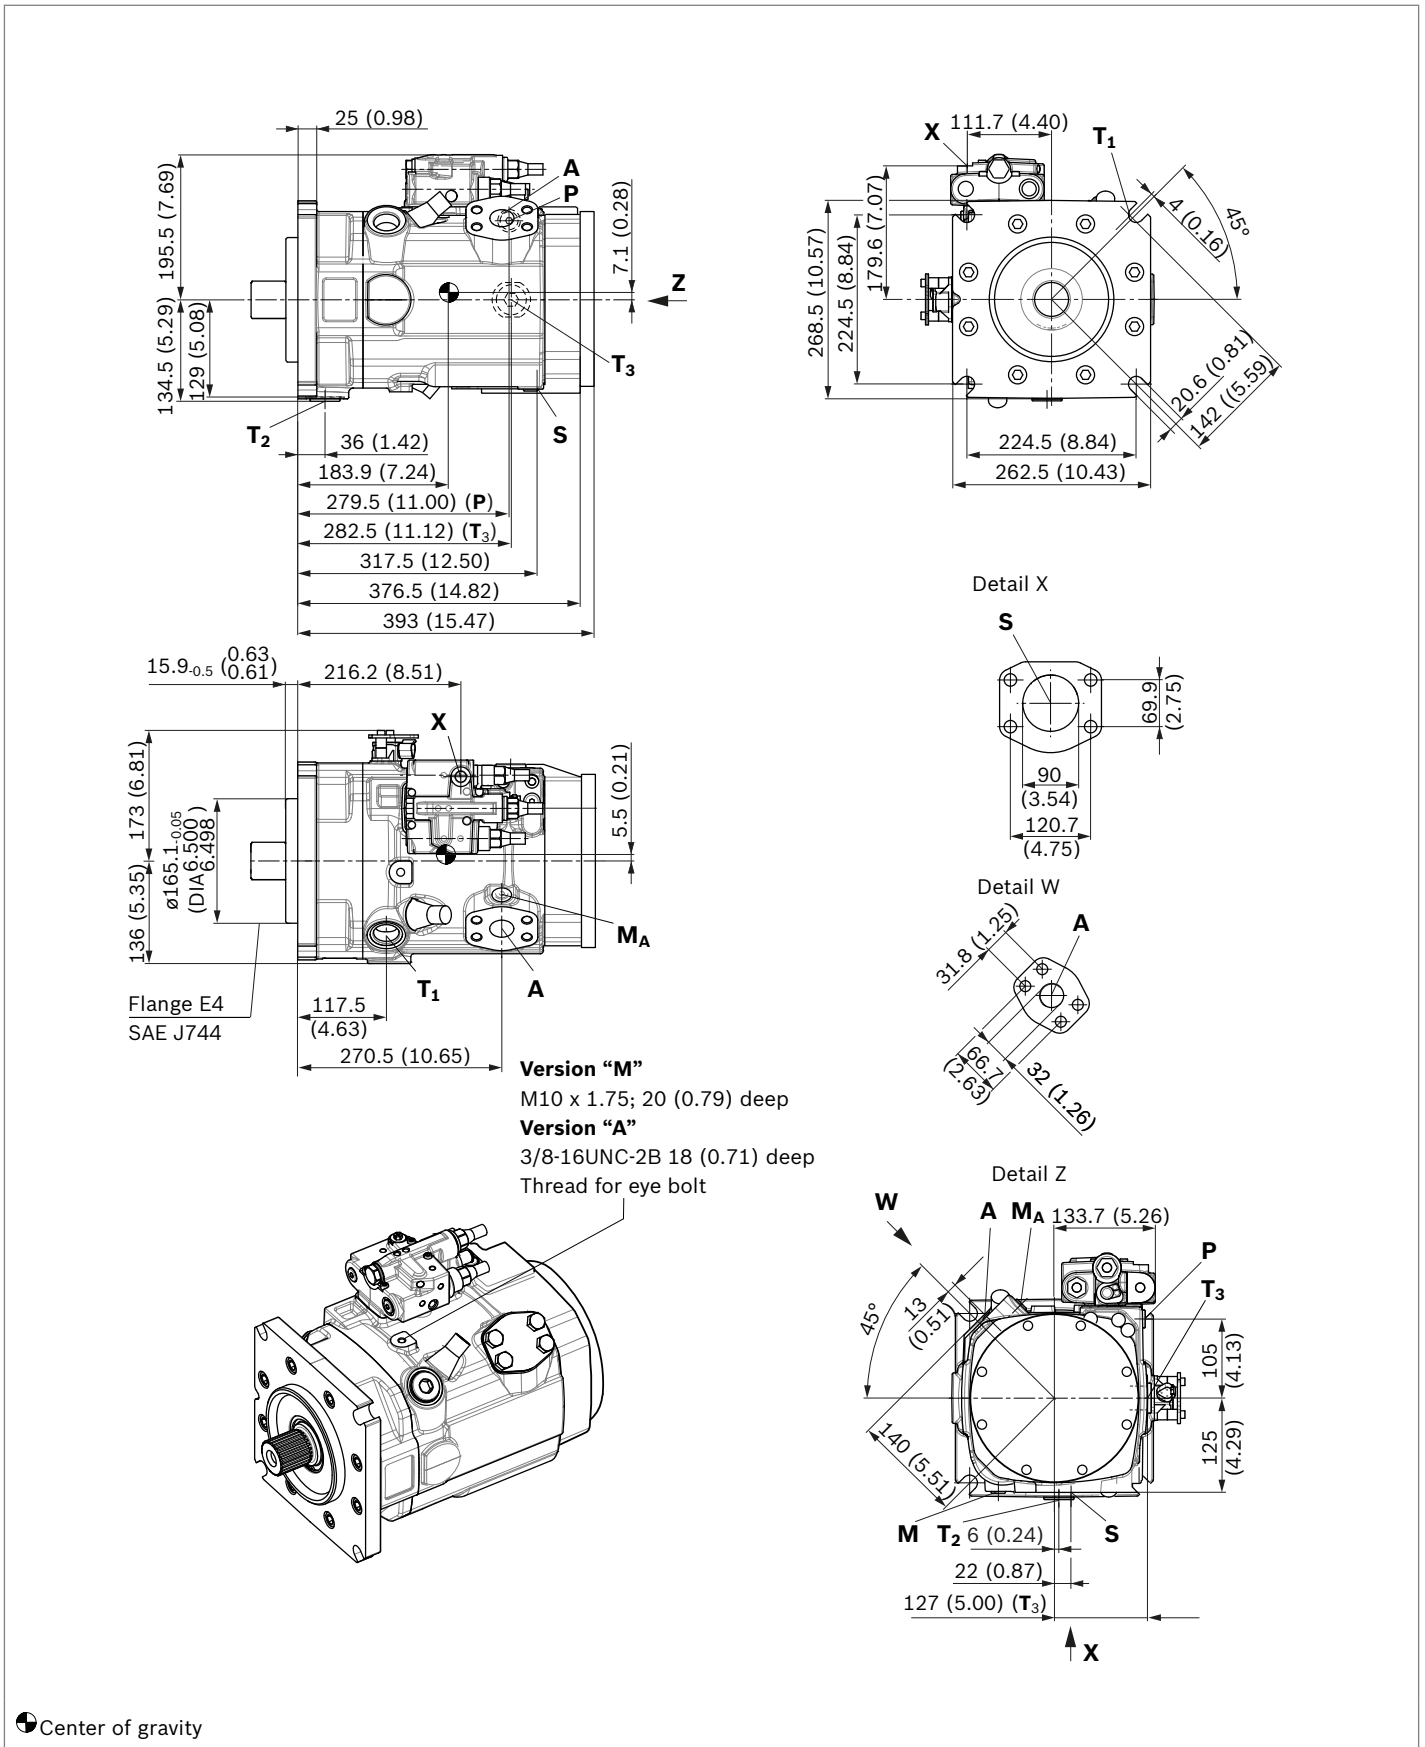


**LRDRS0 – Power controller with pressure controller, load sensing and without electric swivel angle sensor**


Mounting flange G3 according to SAE J617; 409-12; without charge pump

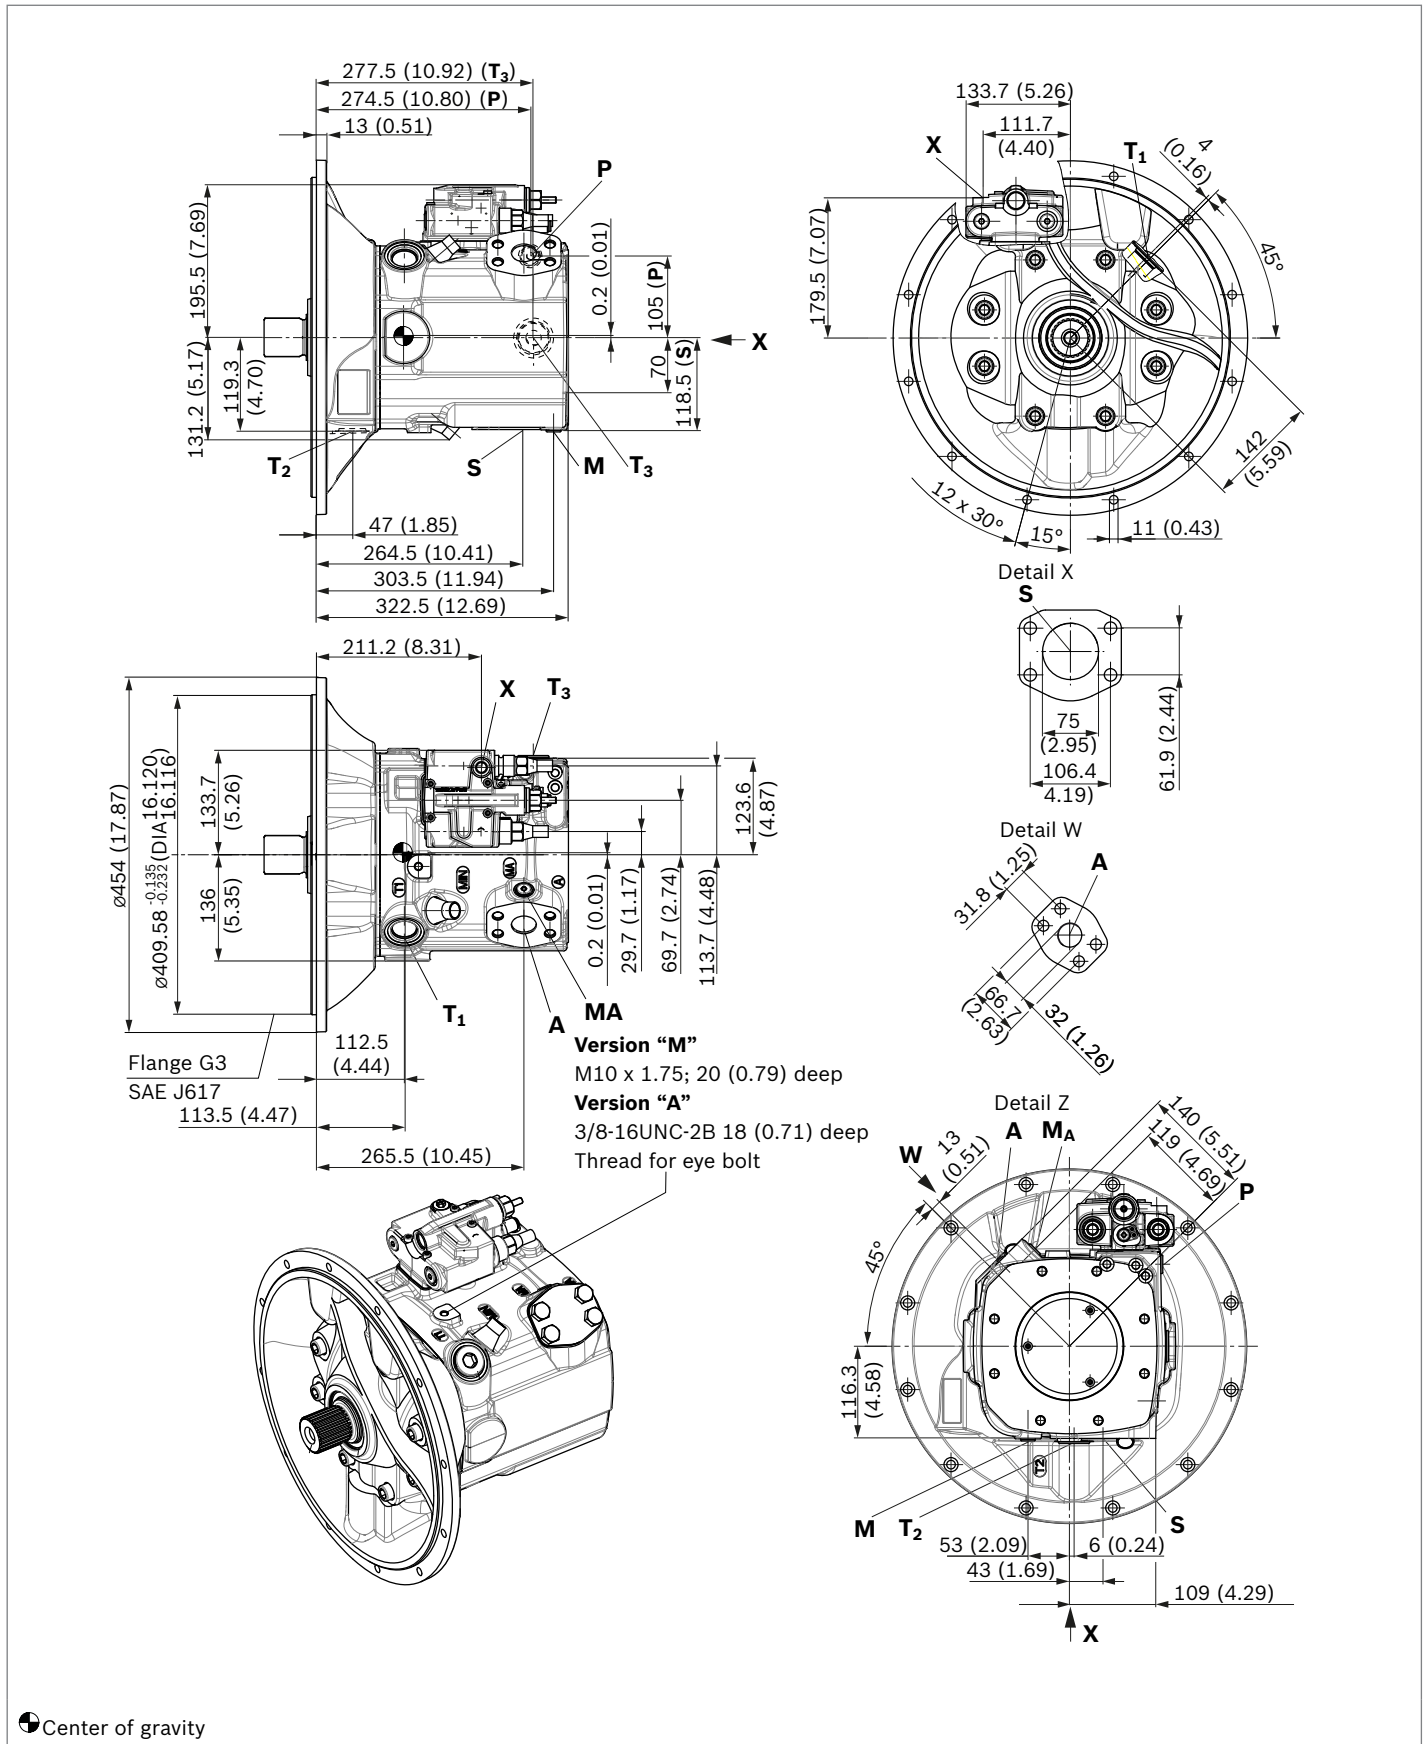

▼ **Splined shaft SAE J744**

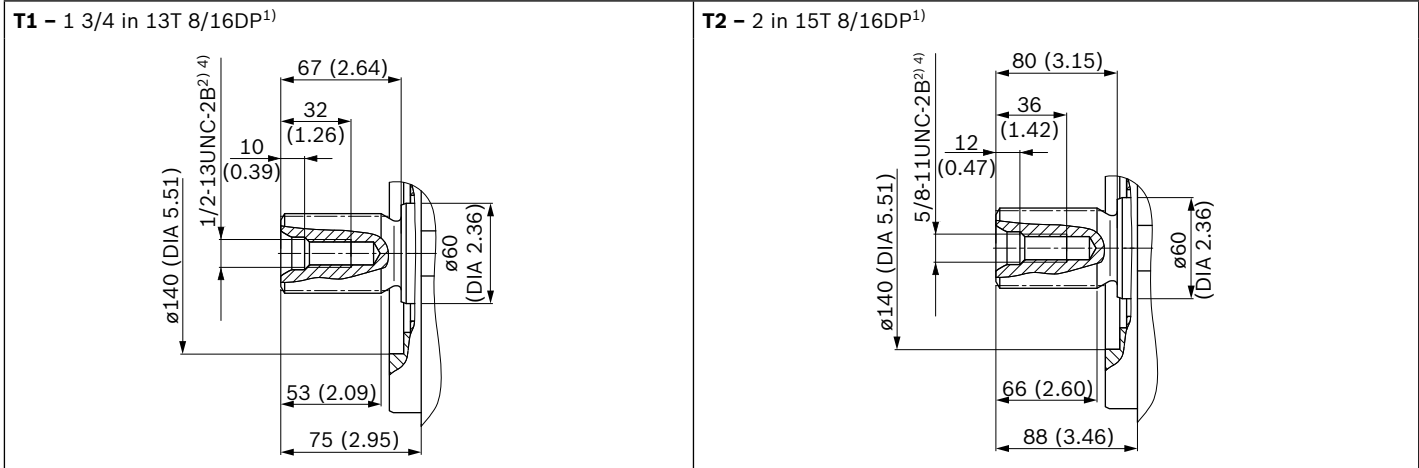

▼ **Splined shaft DIN 5480**

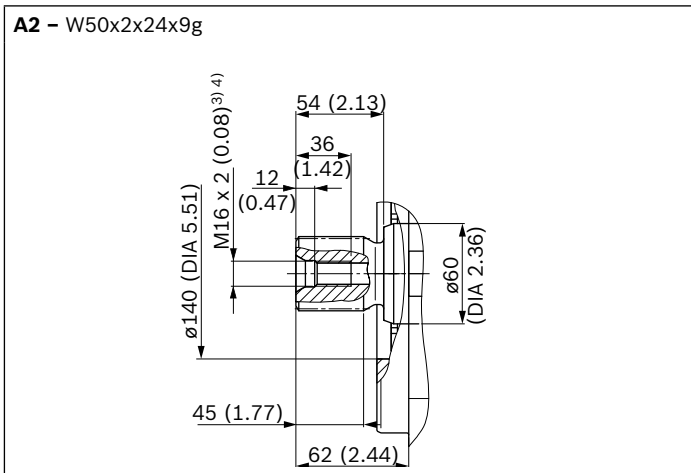

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) Center bore according to DIN 332 (thread according to DIN 13)
- 4) Observe the instructions in the operating instructions concerning the maximum tightening torques.

Ports – version “M” metric		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar (psi)] <sup>5)</sup>	State <sup>9)</sup>
<b>A</b>	Service line	SAE J518 <sup>6)</sup>	1 1/4 in	420 (6100)	O
	Fastening thread	DIN 13	M14 × 2; 22 (0.87) deep		
<b>S</b>	Suction port (without charge pump)	SAE J518 <sup>6)</sup>	3 in	30 (435)	O
	Fastening thread	DIN 13	M16 × 2; 24 (0.94) deep		
<b>S</b>	Suction port (with charge pump)	SAE J518 <sup>6)</sup>	3 1/2 in	2 (30)	O
	Fastening thread	DIN 13	M16 × 2; 24 (0.94) deep		
<b>T<sub>1</sub></b>	Drain port	ISO 6149 <sup>7)</sup>	M33 × 2; 19 (0.75) deep	10 (145)	O <sup>8)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 6149 <sup>7)</sup>	M33 × 2; 19 (0.75) deep	10 (145)	X <sup>8)</sup>
<b>T<sub>3</sub></b>	Drain port	ISO 6149 <sup>7)</sup>	M33 × 2; 19 (0.75) deep	420 (6100)	X <sup>8)</sup>
<b>CR</b>	Pilot signal (CR only)	ISO 6149	M14 × 1.5; 11.5 (0.45) deep	100 (1450)	O
<b>PR</b>	Pilot signal (PR only)	ISO 6149	M14 × 1.5; 11.5 (0.45) deep	100 (1450)	O
<b>H3, H4</b>	Pilot signal (H3 and H4 only)	ISO 6149	M14 × 1.5; 11.5 (0.45) deep	100 (1450)	O
<b>L5, L6</b>	Override power controller (only with L5 and L6)	ISO 6149	M14 × 1.5; 11.5 (0.45) deep	100 (1450)	O
<b>X</b>	Pilot signal (SO and DG only)	ISO 6149 <sup>7)</sup>	M14 × 1.5; 11.5 (0.45) deep	420 (6100)	O
<b>M</b>	Measuring, control pressure	ISO 6149 <sup>7)</sup>	M14 × 1.5; 12 (0.47) deep	420 (6100)	X
<b>M<sub>A</sub></b>	Measuring, pressure A	ISO 6149 <sup>7)</sup>	M14 × 1.5; 12 (0.47) deep	420 (6100)	X
<b>P</b>	External control pressure (ordering code position 8 version B or C = with external control pressure supply)	ISO 6149 <sup>7)</sup>	M14 × 1.5; 11.5 (0.45) deep	50 (725)	O
	Port <b>P</b> is without function (Ordering code position 8 version A = without external control pressure supply)	ISO 6149 <sup>7)</sup>	M18 × 1.5; 14.5 (0.57) deep	420 (6100)	X

Ports – version “A” SAE		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar (psi)] <sup>5)</sup>	State <sup>9)</sup>
<b>A</b>	Service line	SAE J518	1 1/4 in	420 (6100)	O
	Fastening thread	ASME B1.1	1/2-13UNC-2B; 19 (0.75) deep		
<b>S</b>	Suction port (without charge pump)	SAE J518	3 in	30 (435)	O
	Fastening thread	ASME B1.1	5/8-11UNC-2B; 24 (0.94) deep		
<b>S</b>	Suction port (with charge pump)	SAE J518	3 1/2 in	2 (30)	O
	Fastening thread	ASME B1.1	5/8-11UNC-2B; 24 (0.94) deep		
<b>T<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 5/16UNF-2B; 20 (0.79) deep	10 (145)	O <sup>8)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 5/16UNF-2B; 20 (0.79) deep	10 (145)	X <sup>8)</sup>
<b>T<sub>3</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 5/16UNF-2B; 20 (0.79) deep	420 (6100)	X <sup>8)</sup>
<b>CR</b>	Pilot signal (CR only)	ISO 11926	9/16-18UNF-2B; 13 (0.51) deep	100 (1450)	O
<b>PR</b>	Pilot signal (PR only)	ISO 11926	9/16-18UNF-2B; 13 (0.51) deep	100 (1450)	O
<b>H3, H4</b>	Pilot signal (H3 and H4 only)	ISO 11926	9/16-18UNF-2B; 13 (0.51) deep	100 (1450)	O
<b>L5, L6</b>	Override power controller (only with L5 and L6)	ISO 11926	9/16-18UNF-2B; 13 (0.51) deep	100 (1450)	O
<b>X</b>	Pilot signal (SO and DG only)	ISO 11926 <sup>7)</sup>	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>M</b>	Measuring, control pressure	ISO 11926 <sup>7)</sup>	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	X
<b>M<sub>A</sub></b>	Measuring, pressure A	ISO 11926 <sup>7)</sup>	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	X
<b>P</b>	External control pressure (Ordering code position 8 version B or C = with external control pressure supply)	ISO 11926 <sup>7)</sup>	9/16-18UNF-2B; 13 (0.51) deep	50 (725)	O
	Port <b>P</b> is without function (Ordering code position 8 version A = without external control pressure supply)	ISO 11926 <sup>7)</sup>	3/4-16UNF-2B; 12.6 (0.50) deep	420 (6100)	X

5) Depending on the application, momentary pressure peaks can occur.  
Keep this in mind when selecting measuring devices and fittings.

6) Metric fastening thread is a deviation from standard.


7) The countersink can be deeper than as specified in the standard.

8) Depending on installation position, T<sub>1</sub>, T<sub>2</sub> or T<sub>3</sub> must be connected  
(see also Installation instructions on pages 64 and 65).


9) O = Must be connected (plugged when delivered)

X = Plugged (in normal operation)


▼ **LR** – Power controller, fixed setting

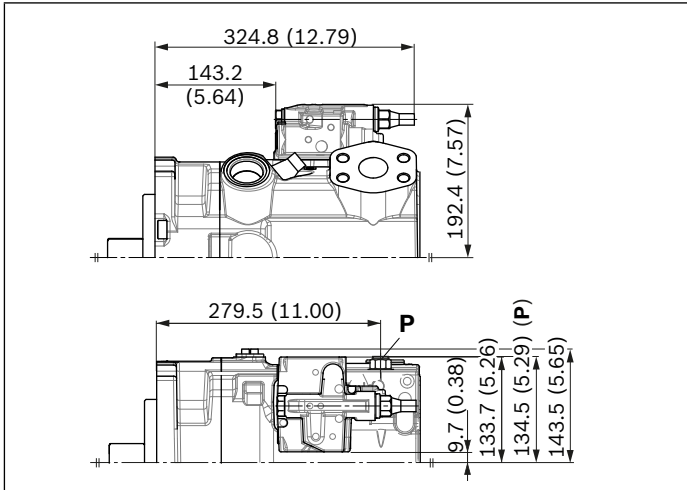


▼ **L3/L4** – Power controller, electric-proportional override

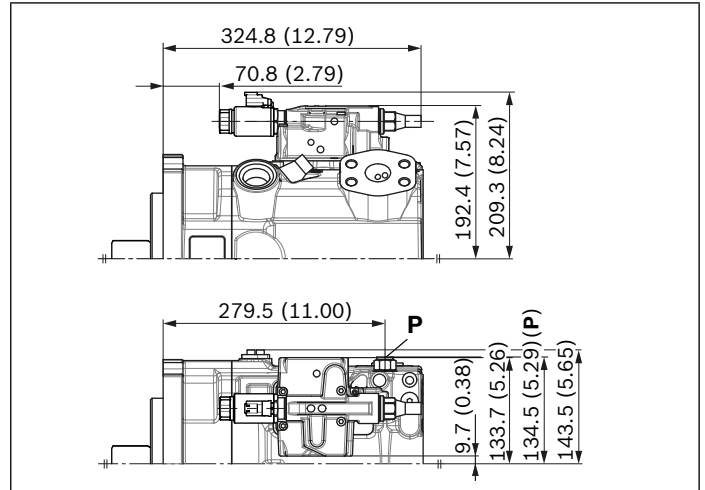


▼ **L5/L6** – Power controller, hydraulic override

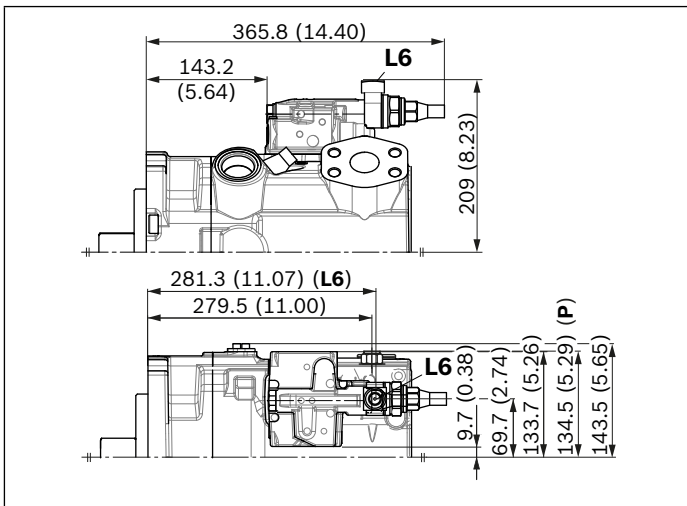


▼ **CR** – Power controller, hydraulic-proportional override, high pressure, with stop

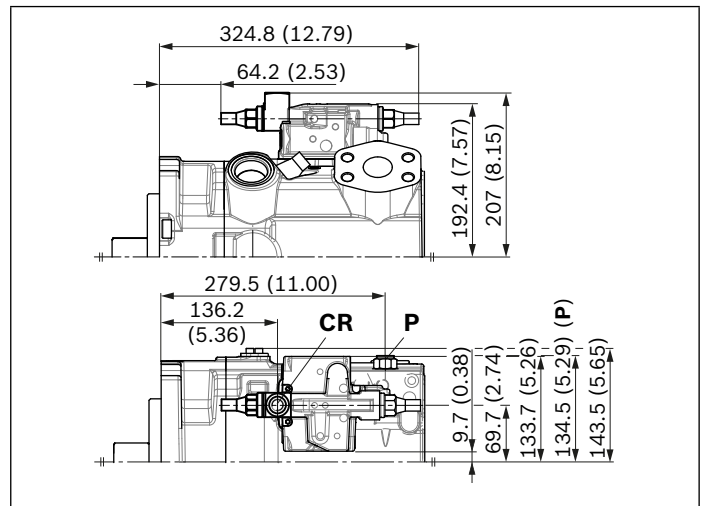

▼ **PR** – Power controller, hydraulic-proportional override, high pressure, without stop

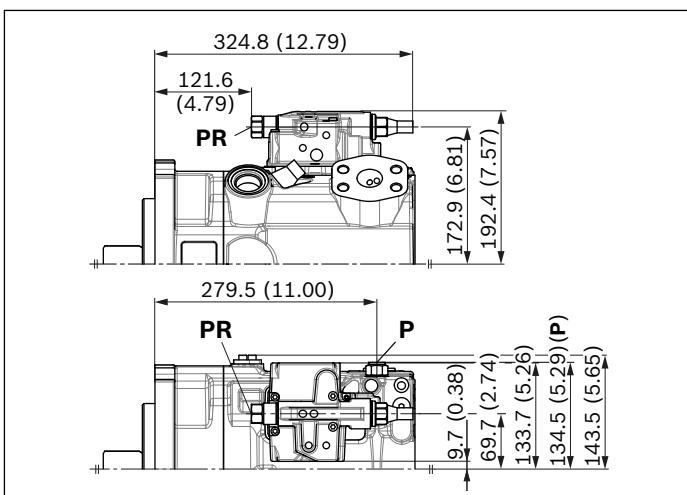


▼ **E1/E2** – Stroke control electric-proportional

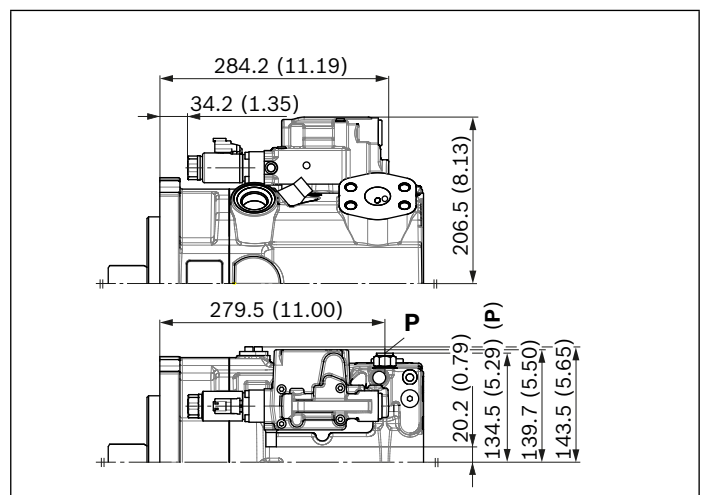


**Notice**

All controllers described with shuttle valve in **P** (some contrary to standard as per ordering code position 08)


▼ **H3/H4** – Stroke control, hydraulic-proportional, pilot pressure

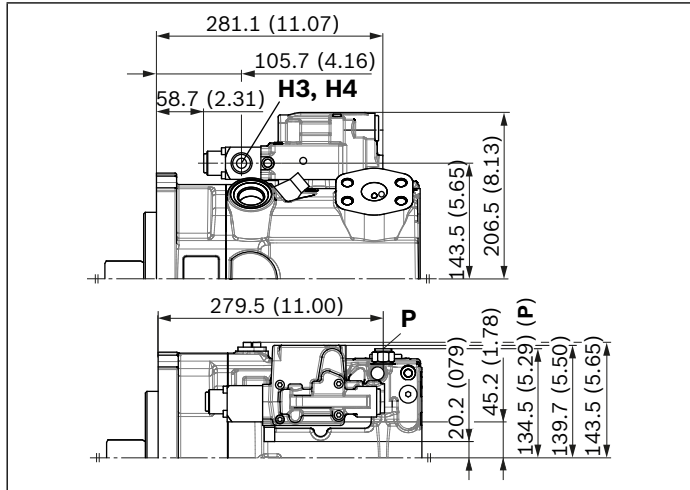


▼ **DR** – Pressure controller, fixed setting

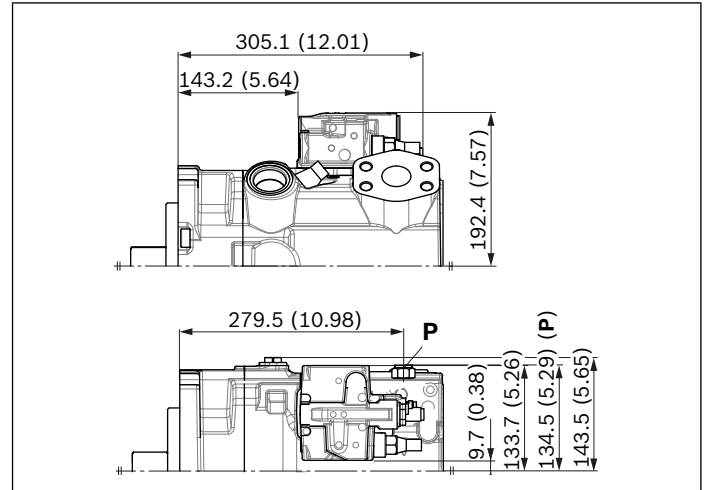

▼ **LRDRS0** – Power controller with pressure controller and load sensing, fixed setting

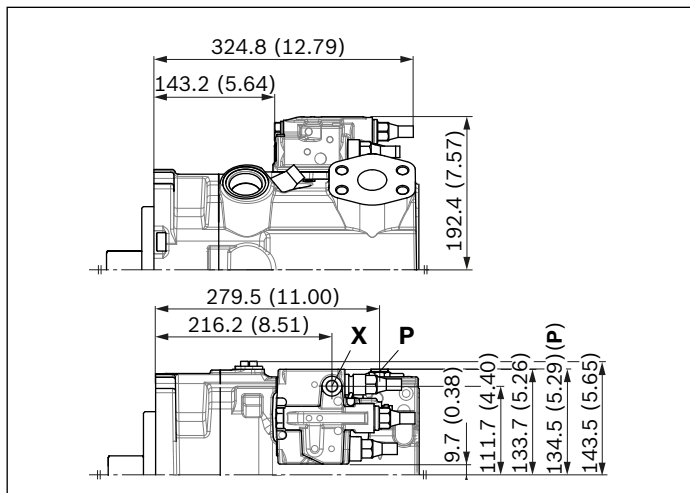

▼ **DG** – Pressure controller, hydraulic, remote controlled

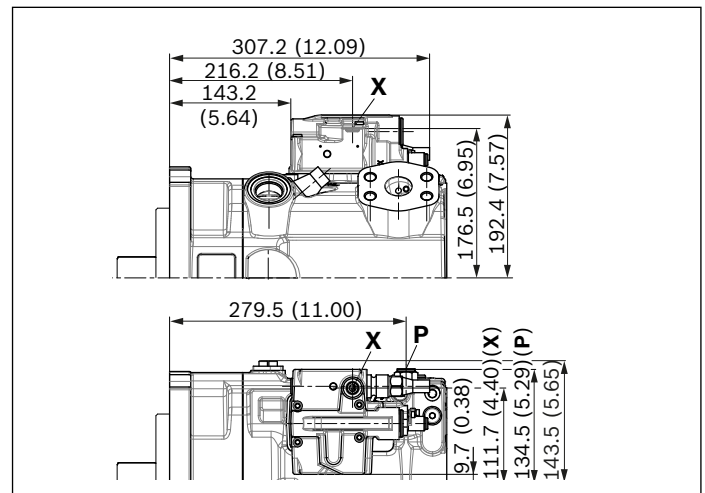


**Notice**

All controllers described with shuttle valve in **P** (some contrary to standard as per ordering code position 08)

**Dimensions size 210**

**LRDRS0 – Power controller with pressure controller, load sensing and with electric swivel angle sensor**


Without charge pump, clockwise rotation

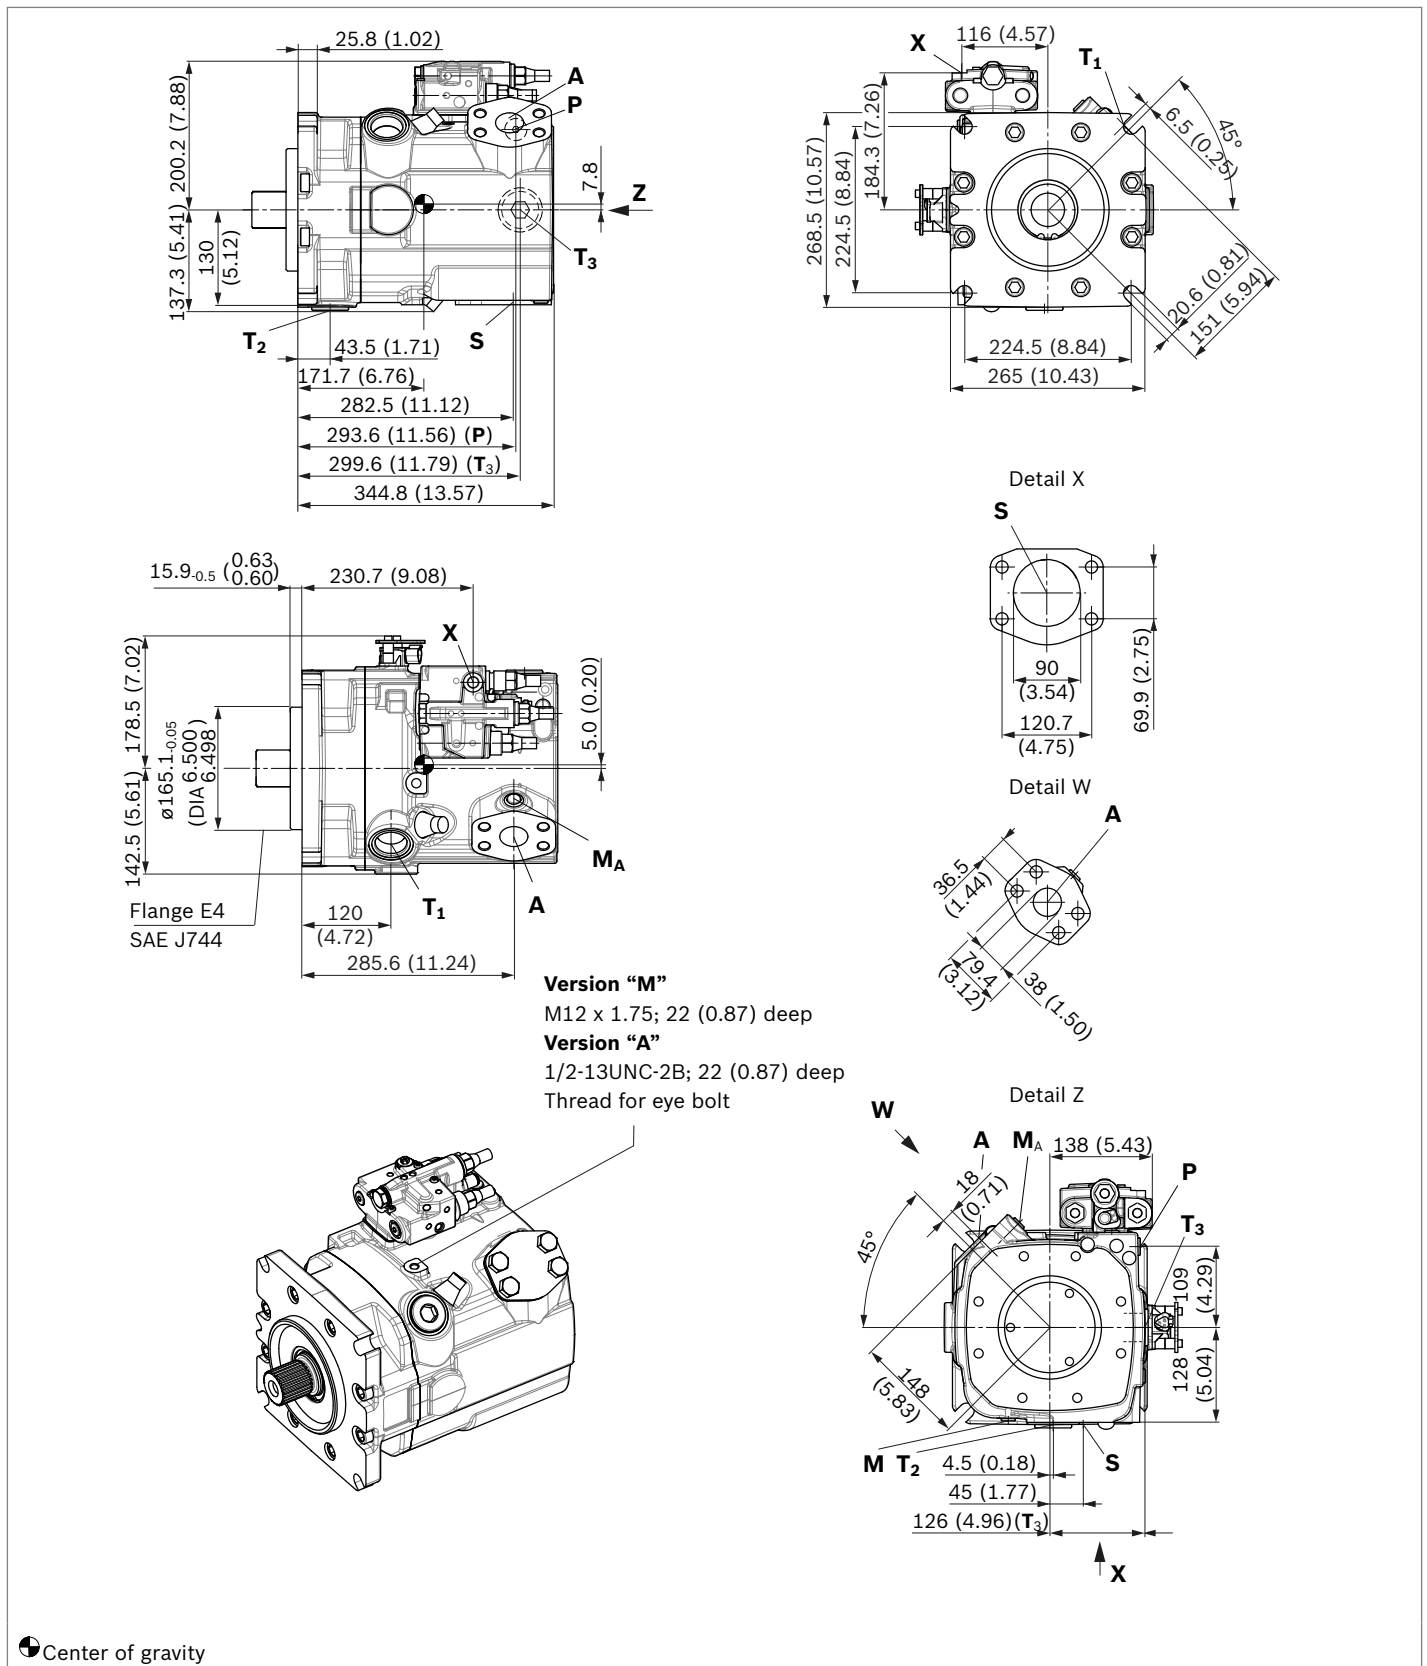



**LRDRS0 – Power controller with pressure controller, load sensing and with electric swivel angle sensor**


With charge pump, clockwise rotation

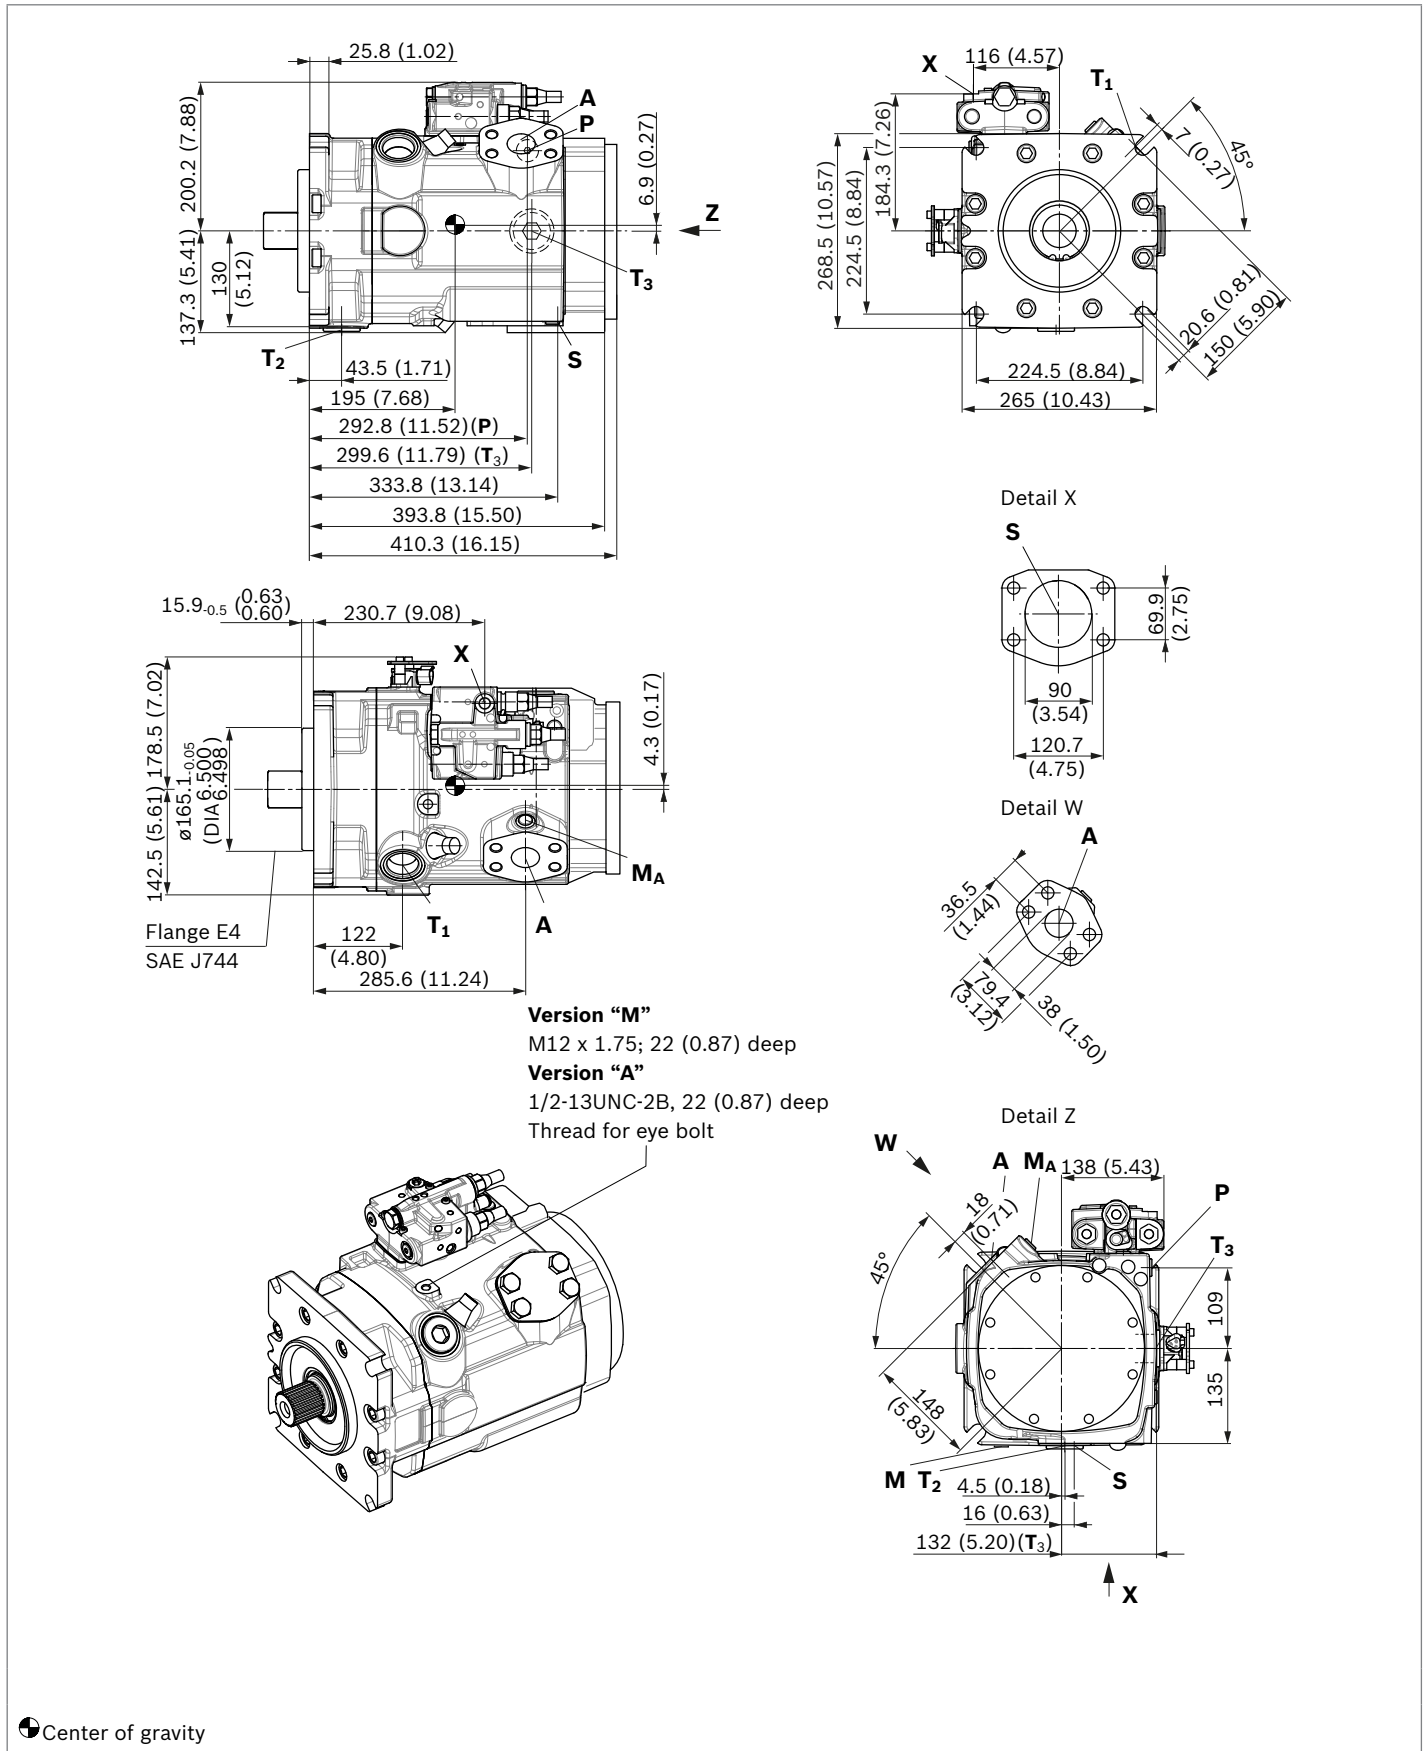




**L5E2 – Power controller with pressure controller, load sensing and with electric swivel angle sensor**


Mounting flange G3 according to SAE J617; 409-12; without charge pump

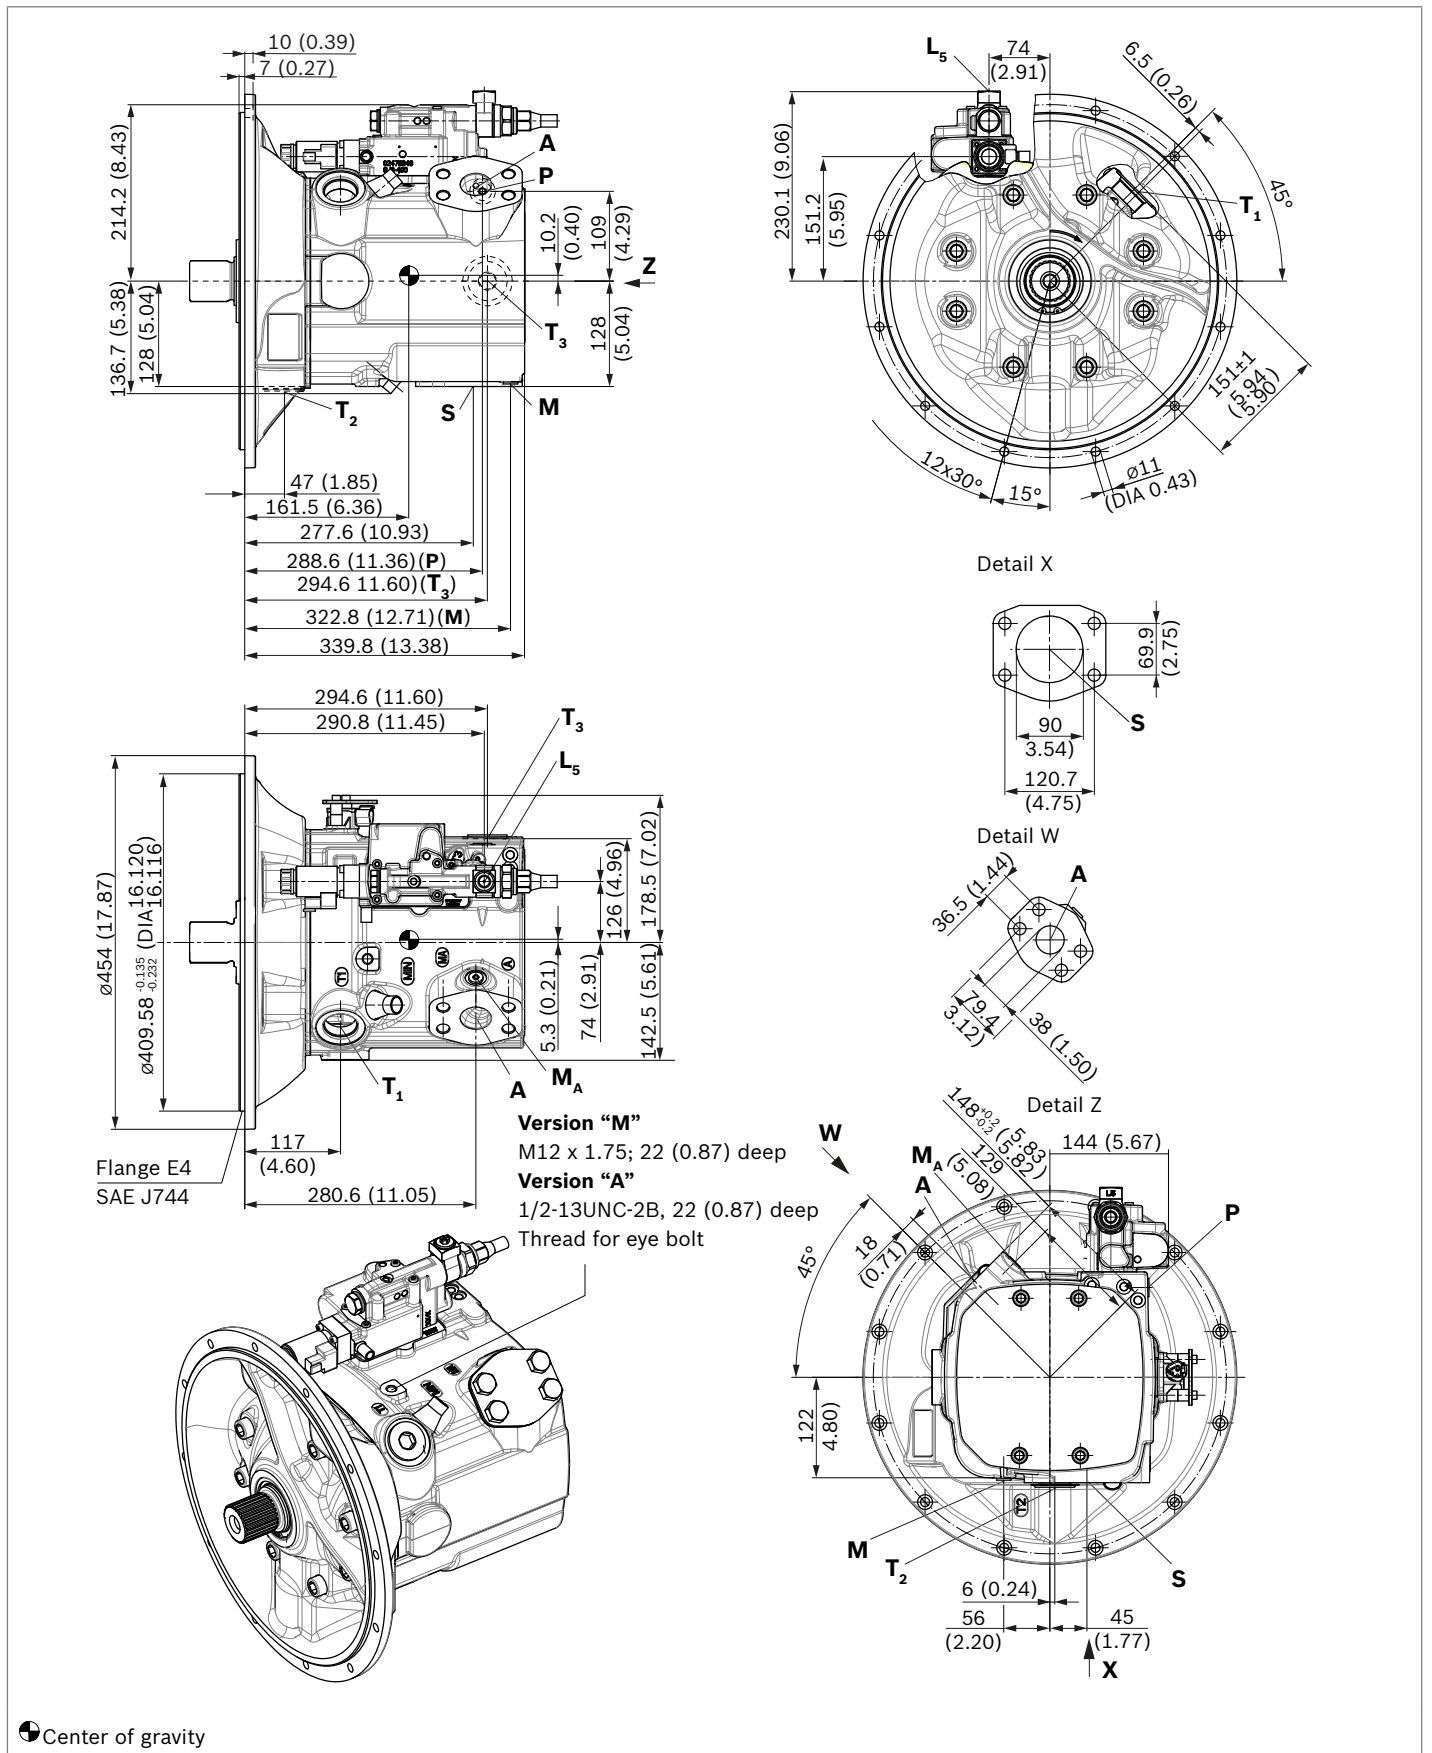

▼ **Splined shaft SAE J744**

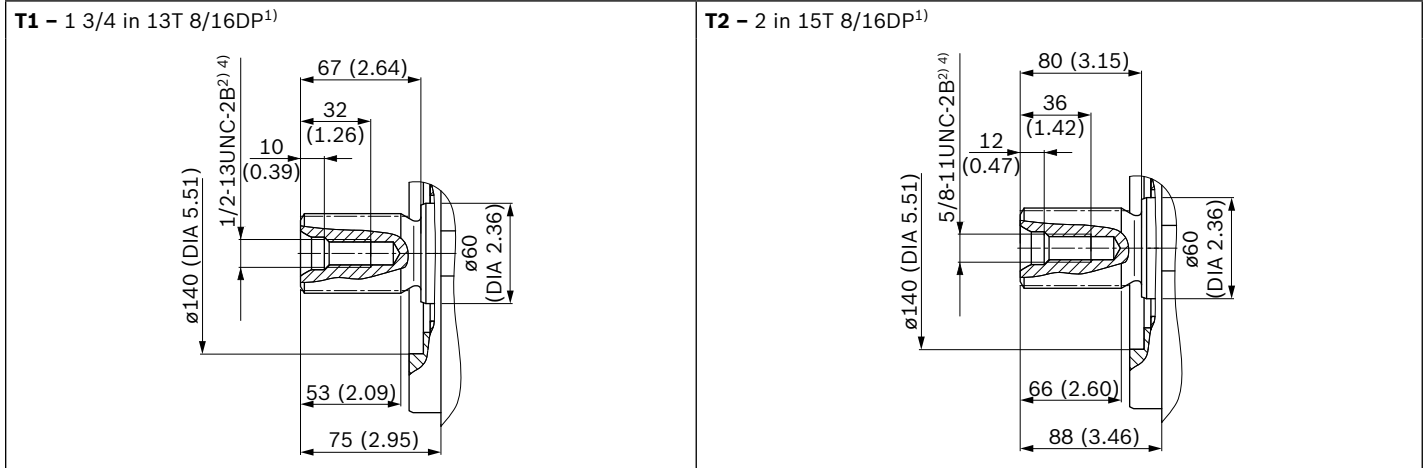

▼ **Splined shaft DIN 5480**

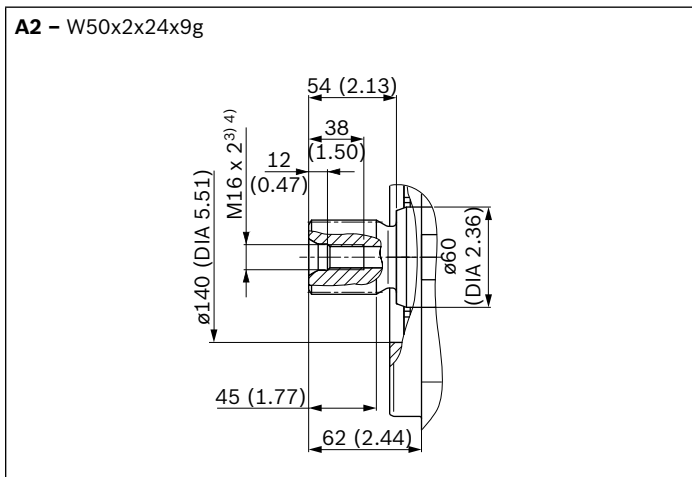

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) Center bore according to DIN 332 (thread according to DIN 13)
- 4) Observe the instructions in the operating instructions concerning the maximum tightening torques.

Ports – version “M” metric		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar (psi)] <sup>5)</sup>	State <sup>9)</sup>
<b>A</b>	Service line	SAE J518 <sup>6)</sup>	1 1/2 in	420 (6100)	O
	Fastening thread	DIN 13	M16 x 2; 24 (0.94) deep		
<b>S</b>	Suction port (without charge pump)	SAE J518 <sup>6)</sup>	3 1/2 in	30 (435)	O
	Fastening thread	DIN 13	M16 x 2; 24 (0.94) deep		
<b>S</b>	Suction port (with charge pump)	SAE J518 <sup>6)</sup>	3 1/2 in	2 (30)	O
	Fastening thread	DIN 13	M16 x 2; 24 (0.94) deep		
<b>T<sub>1</sub></b>	Drain port	ISO 6149 <sup>7)</sup>	M42 x 2; 19.5 (0.77) deep	10 (145)	O <sup>8)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 6149 <sup>7)</sup>	M42 x 2; 19.5 (0.77) deep	10 (145)	X <sup>8)</sup>
<b>T<sub>3</sub></b>	Drain port	ISO 6149 <sup>7)</sup>	M42 x 2; 19.5 (0.77) deep	10 (145)	X <sup>8)</sup>
<b>CR</b>	Pilot signal (CR only)	ISO 6149	M14 x 1.5; 11.5 (0.45) deep	420 (6100)	O
<b>PR</b>	Pilot signal (PR only)	ISO 6149	M14 x 1.5; 11.5 (0.45) deep	420 (6100)	O
<b>H3, H4</b>	Pilot signal (H3 and H4 only)	ISO 6149	M14 x 1.5; 11.5 (0.45) deep	100 (1450)	O
<b>L5, L6</b>	Override power controller (only with L5 and L6)	ISO 6149	M14 x 1.5; 11.5 (0.45) deep	100 (1450)	O
<b>X</b>	Pilot signal (S0 and DG only)	ISO 6149 <sup>7)</sup>	M14 x 1.5; 11.5 (0.45) deep	420 (6100)	O
<b>M</b>	Measuring, control pressure	ISO 6149 <sup>7)</sup>	M14 x 1.5; 12 (0.47) deep	420 (6100)	X
<b>M<sub>A</sub></b>	Measuring, pressure A	ISO 6149 <sup>7)</sup>	M14 x 1.5; 12 (0.47) deep	420 (6100)	X
<b>P</b>	External control pressure (Ordering code position 8 version B or C = with external control pressure supply)	ISO 6149 <sup>7)</sup>	M14 x 1.5; 11.5 (0.45) deep	50 (725)	O
	Port <b>P</b> is without function (Ordering code position 8 version A = without external control pressure supply)	ISO 6149 <sup>7)</sup>	M18 x 1.5; 14.5 deep	420 (6100)	X

Ports – version “A” SAE		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar (psi)] <sup>5)</sup>	State <sup>9)</sup>
<b>A</b>	Service line	SAE J518	1 1/2 in	420 (6100)	O
	Fastening thread	ASME B1.1	5/8-11UNC-2B; 30 (1.18) deep		
<b>S</b>	Suction port (without charge pump)	SAE J518	3 1/2 in	30 (435)	O
	Fastening thread	ASME B1.1	5/8-11UNC-2B; 30 (1.18) deep		
<b>S</b>	Suction port (with charge pump)	SAE J518 <sup>4)</sup>	3 1/2 in	2 (30)	O
	Fastening thread	ASME B1.1	5/8-11UNC-2B; 30 (1.18) deep		
<b>T<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 5/8-12UNF-2B; 20 (0.79) deep	10 (145)	O <sup>8)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 5/8-12UNF-2B; 20 (0.79) deep	10 (145)	X <sup>8)</sup>
<b>T<sub>3</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 5/8-12UNF-2B; 20 (0.79) deep	10 (145)	X <sup>8)</sup>
<b>CR</b>	Pilot signal (CR only)	ISO 11926	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>PR</b>	Pilot signal (PR only)	ISO 11926	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>H3, H4</b>	Pilot signal (H3 and H4 only)	ISO 11926	9/16-18UNF-2B; 13 (0.51) deep	100 (1450)	O
<b>L5, L6</b>	Override power controller (only with L5 and L6)	ISO 11926	9/16-18UNF-2B; 13 (0.51) deep	100 (1450)	O
<b>X</b>	Pilot signal (S0 and DG only)	ISO 11926 <sup>7)</sup>	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>M</b>	Measuring, control pressure	ISO 11926 <sup>7)</sup>	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	X
<b>M<sub>A</sub></b>	Measuring, pressure A	ISO 11926 <sup>7)</sup>	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	X
<b>P</b>	External control pressure (Ordering code position 8 version B or C = with external control pressure supply)	ISO 11926 <sup>7)</sup>	9/16-18UNF-2B; 13 (0.51) deep	50 (725)	O
	Port <b>P</b> is without function (Ordering code position 8 version A = without external control pressure supply)	ISO 11926 <sup>7)</sup>	3/4-16UNF-2B; 12.6 (0.50) deep	420 (6100)	X

5) Depending on the application, momentary pressure peaks can occur.  
Keep this in mind when selecting measuring devices and fittings.

6) Metric fastening thread is a deviation from standard.


7) The countersink can be deeper than as specified in the standard.

8) Depending on installation position, T<sub>1</sub>, T<sub>2</sub> or T<sub>3</sub> must be connected  
(see also Installation instructions on pages 64 and 65).


9) O = Must be connected (plugged when delivered)

X = Plugged (in normal operation)


▼ **LR** – Power controller, fixed setting

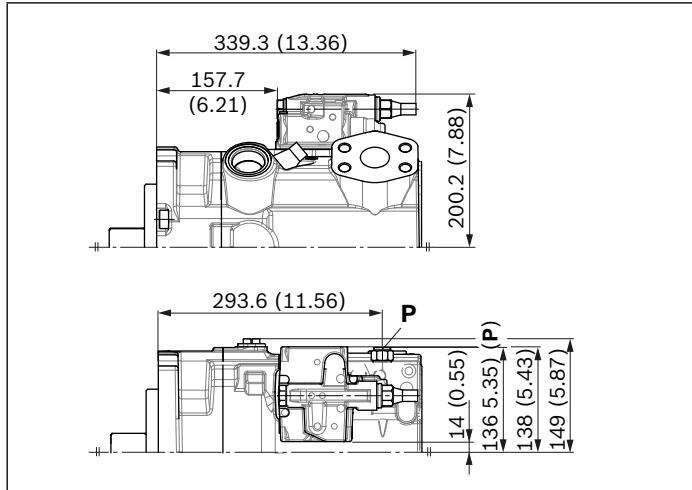


▼ **L3/L4** – Power controller, electric-proportional override

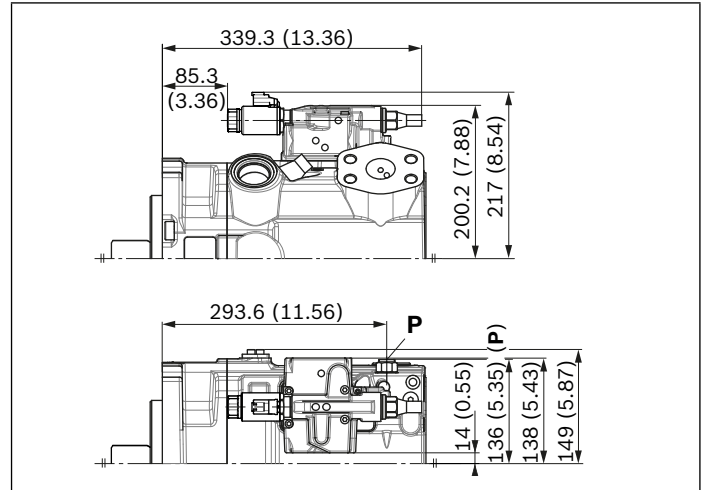


▼ **L5/L6** – Power controller, hydraulic override

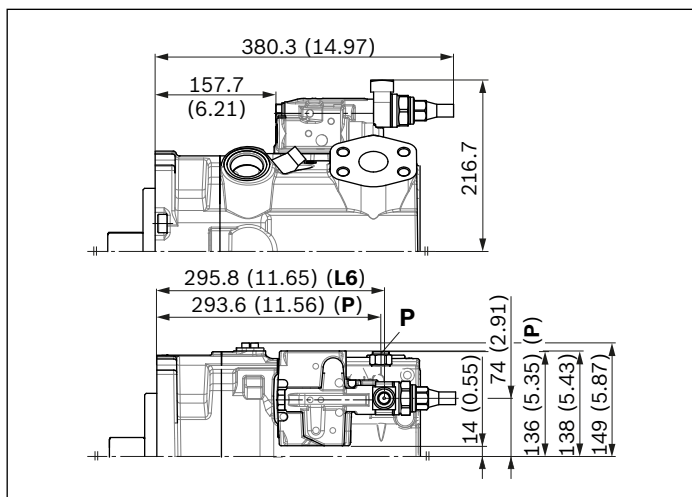


▼ **CR** – Power controller, hydraulic-proportional override, high pressure, with stop

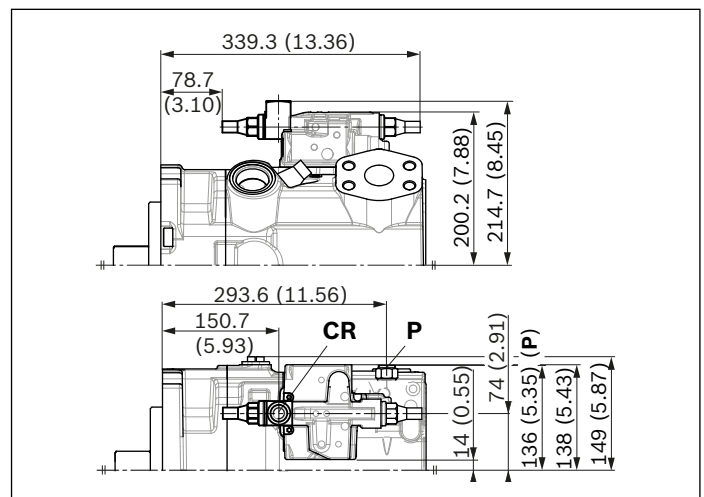

▼ **PR** – Power controller, hydraulic-proportional override, high pressure, without stop

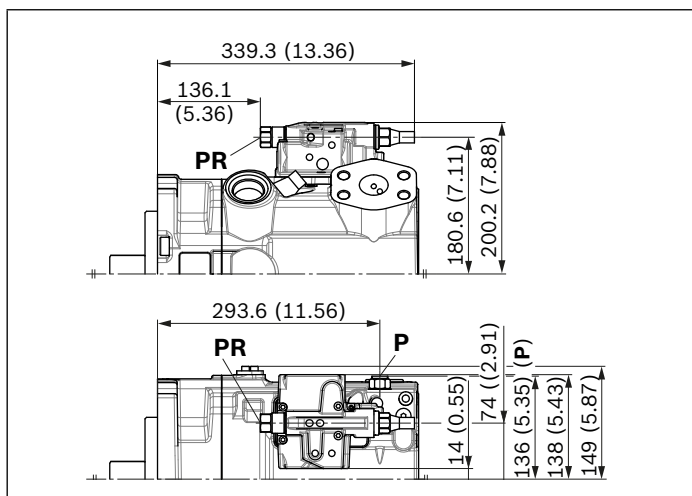

▼ **E1/E2** – Stroke control electric-proportional


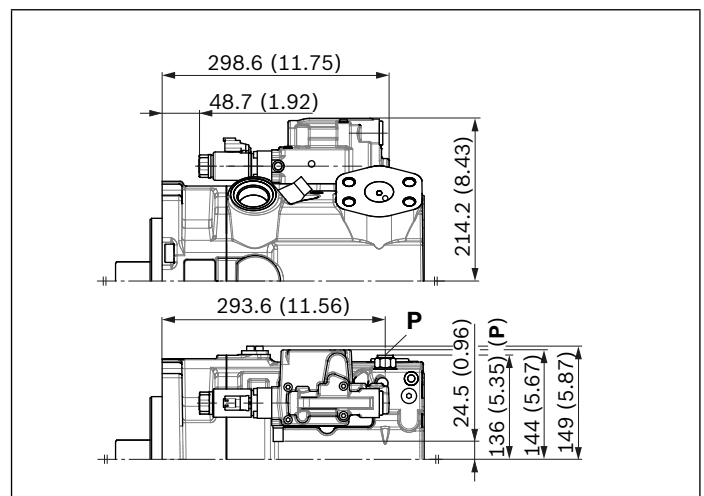


**Notice**

All controllers described with shuttle valve in **P** (some contrary to standard as per ordering code position 08)



▼ **H3/H4** – Stroke control, hydraulic-proportional, pilot pressure

▼ **DR** – Pressure controller, fixed setting

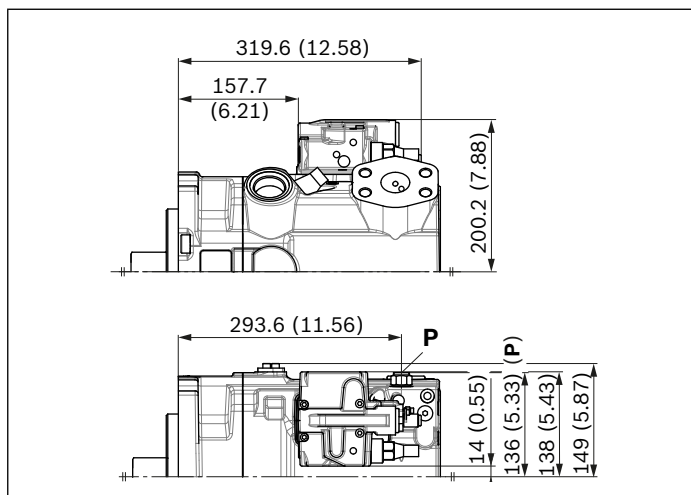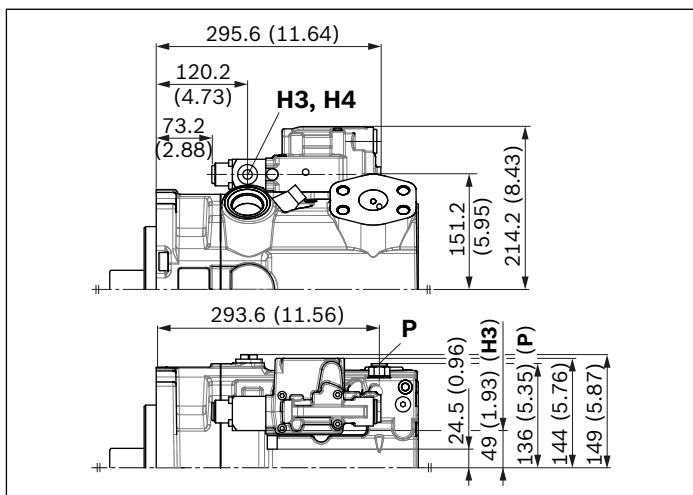

▼ **LRDRSO** – Power controller with pressure controller and load sensing, fixed setting

▼ **DG** – Pressure controller, hydraulic, remote controlled

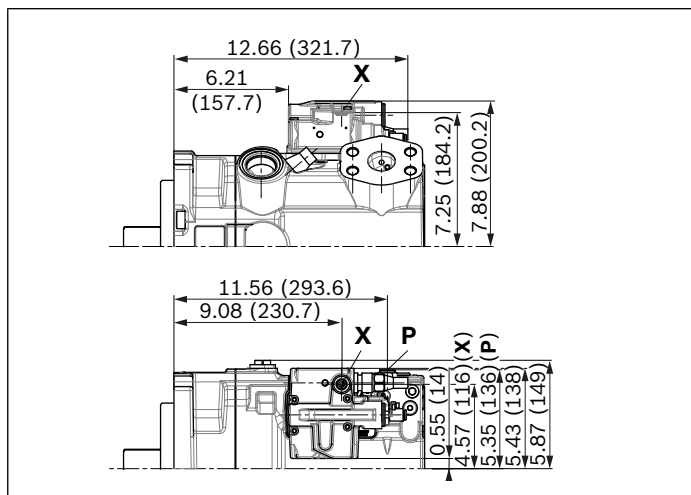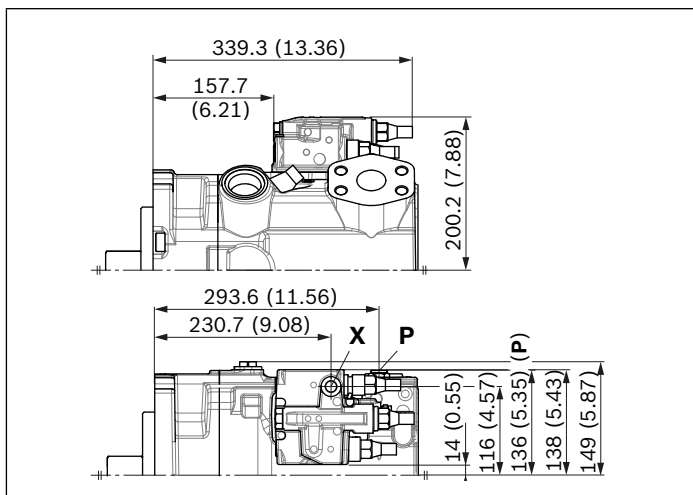

**Notice**


All controllers described with shuttle valve in **P** (some contrary to standard as per ordering code position 08)

3

**Dimensions size 280**


**LRDRS0 – Power controller with pressure controller, load sensing and with electric swivel angle sensor**

Without charge pump, clockwise rotation

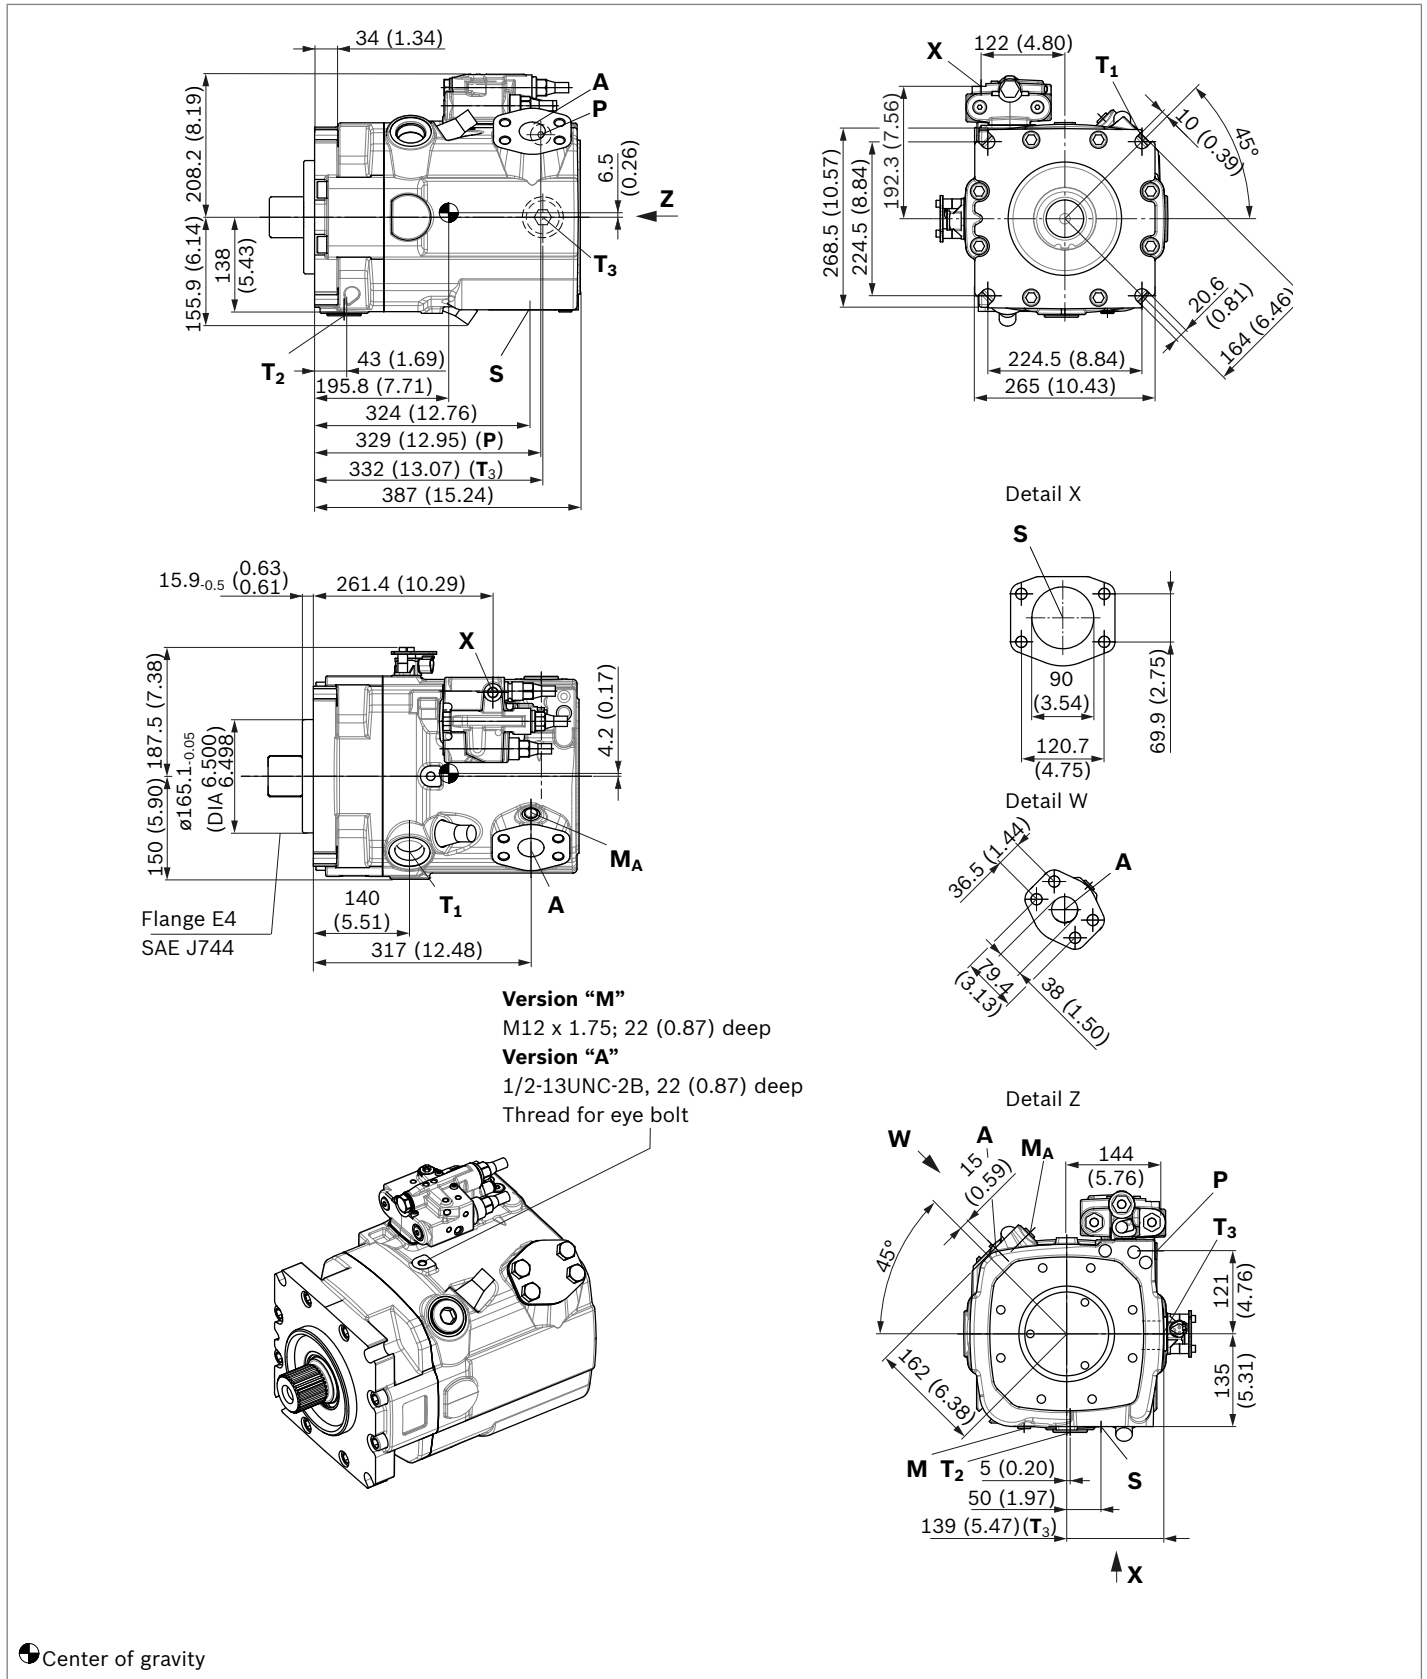


**LRDRS0 – Power controller with pressure controller, load sensing and with electric swivel angle sensor**


With charge pump, clockwise rotation

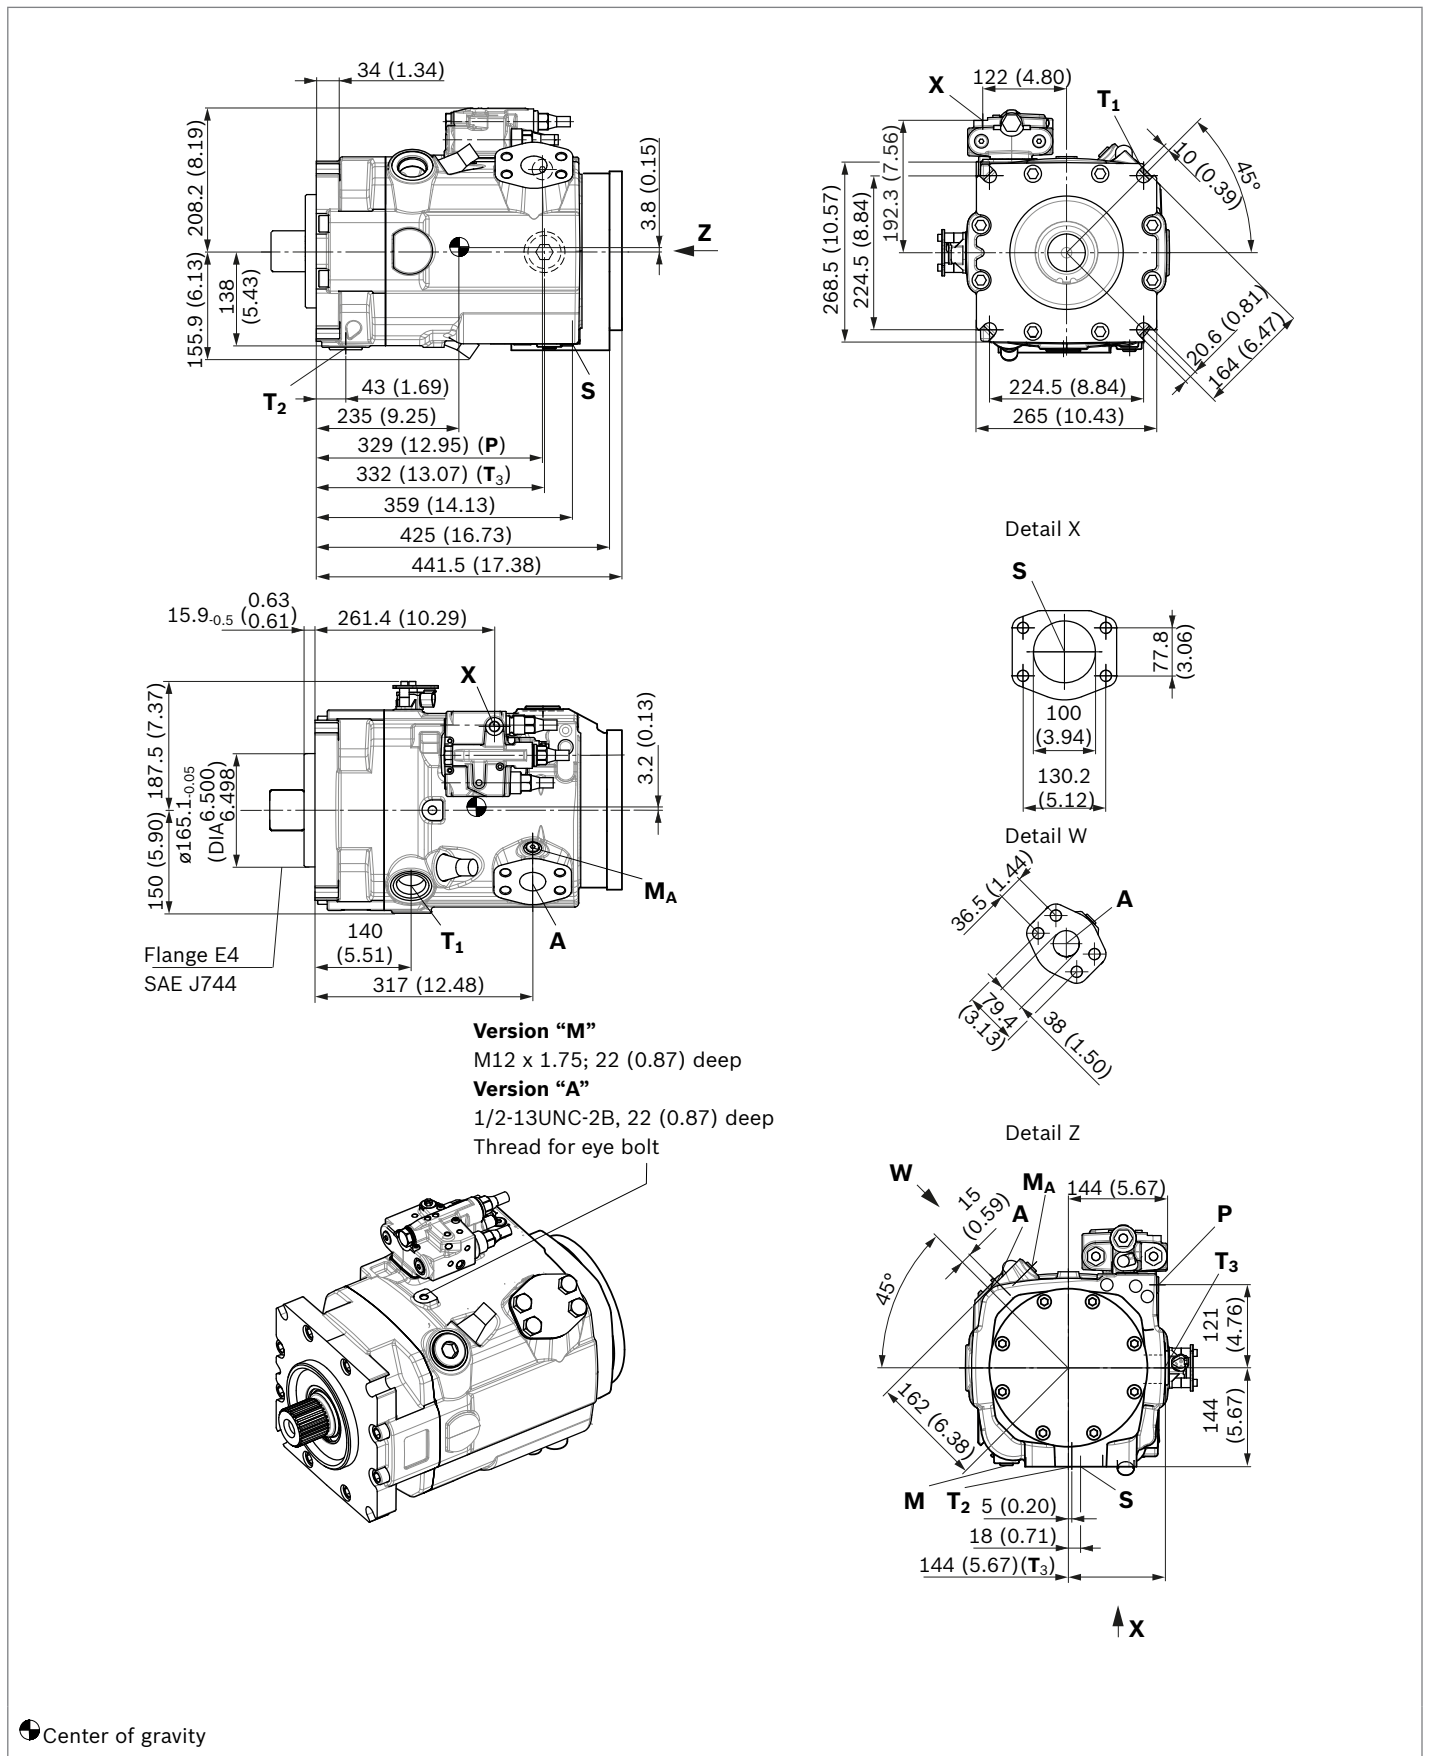

▼ **Splined shaft SAE J744**

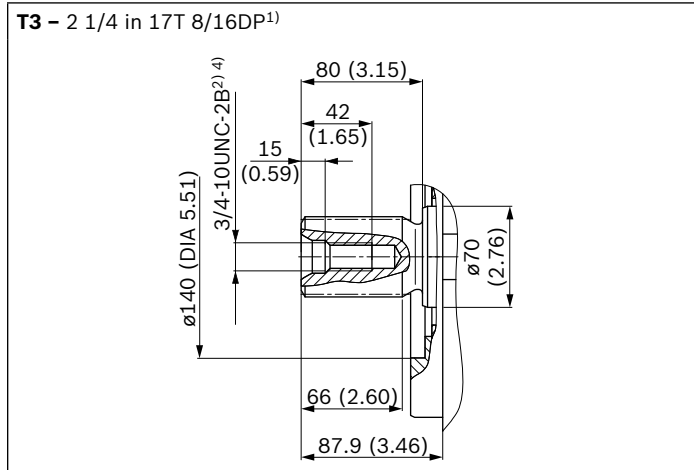

▼ **Splined shaft DIN 5480**

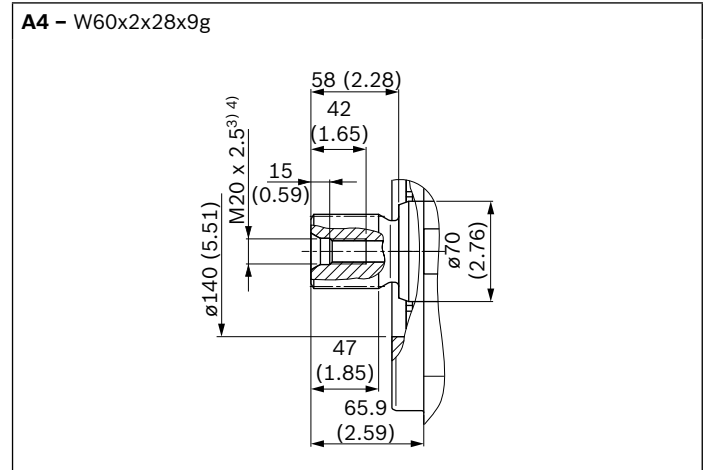

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) Center bore according to DIN 332 (thread according to DIN 13)
- 4) Observe the instructions in the operating instructions concerning the maximum tightening torques.




Ports – version “M” metric		Standard	Size <sup>1)</sup>	$p_{\max \text{ abs}}$ [bar (psi)] <sup>2)</sup>	State <sup>6)</sup>
<b>A</b>	Service line	SAE J518 <sup>3)</sup>	1 1/2 in	420 (6100)	O
	Fastening thread	DIN 13	M16 x 2; 24 (0.94) deep		
<b>S</b>	Suction port (without charge pump)	SAE J518 <sup>3)</sup>	3 1/2 in	30 (435)	O
	Fastening thread	DIN 13	M16 x 2; 24 (0.94) deep		
<b>S</b>	Suction port (with charge pump)	SAE J518 <sup>3)</sup>	4 in	2 (30)	O
	Fastening thread	DIN 13	M16 x 2; 24 (0.94) deep		
<b>T<sub>1</sub></b>	Drain port	ISO 6149 <sup>4)</sup>	M42 x 2; 19.5 (0.77) deep	10 (145)	O <sup>5)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 6149 <sup>4)</sup>	M42 x 2; 19.5 (0.77) deep	10 (145)	X <sup>5)</sup>
<b>T<sub>3</sub></b>	Drain port	ISO 6149 <sup>4)</sup>	M42 x 2; 19.5 (0.77) deep	10 (145)	X <sup>5)</sup>
<b>CR</b>	Pilot signal (CR only)	ISO 6149	M14 x 1.5; 11.5 (0.45) deep	420 (6100)	O
<b>PR</b>	Pilot signal (PR only)	ISO 6149	M14 x 1.5; 11.5 (0.45) deep	420 (6100)	O
<b>H3, H4</b>	Pilot signal (H3 and H4 only)	ISO 6149	M14 x 1.5; 11.5 (0.45) deep	100 (1450)	O
<b>L5, L6</b>	Override power controller (only with L5 and L6)	ISO 6149	M14 x 1.5; 11.5 (0.45) deep	100 (1450)	O
<b>X</b>	Pilot signal (S0 and DG only)	ISO 6149 <sup>4)</sup>	M14 x 1.5; 11.5 (0.45) deep	420 (6100)	O
<b>M</b>	Measuring, control pressure	ISO 6149 <sup>4)</sup>	M14 x 1.5; 12 (0.47) deep	420 (6100)	X
<b>M<sub>A</sub></b>	Measuring, pressure A	ISO 6149 <sup>4)</sup>	M14 x 1.5; 12 (0.47) deep	420 (6100)	X
<b>P</b>	External control pressure (ordering code position 8 version B or C = with external control pressure supply)	ISO 6149 <sup>4)</sup>	M14 x 1.5; 11.5 (0.45) deep	50 (725)	O
	Port <b>P</b> is without function (Ordering code position 8 version A = without external control pressure supply)	ISO 6149 <sup>4)</sup>	M18 x 1.5; 14.5 (0.57) deep	420 (6100)	X

Ports – version “A” SAE		Standard	Size <sup>1)</sup>	$p_{\max \text{ abs}}$ [bar (psi)] <sup>2)</sup>	State <sup>6)</sup>
<b>A</b>	Service line	SAE J518	1 1/2 in	420 (6100)	O
	Fastening thread	ASME B1.1	5/8-11UNC-2B; 35 <sup>7)</sup> (1.38) deep		
<b>S</b>	Suction port (without charge pump)	SAE J518	3 1/2 in	30 (435)	O
	Fastening thread	ASME B1.1	5/8-11UNC-2B; 35 <sup>7)</sup> (1.38) deep		
<b>S</b>	Suction port (with charge pump)	SAE J518	3 1/2 in	2 (30)	O
	Fastening thread	ASME B1.1	5/8-11UNC-2B; 35 <sup>7)</sup> (1.38) deep		
<b>T<sub>1</sub></b>	Drain port	ISO 11926 <sup>4)</sup>	1 5/8UN-2B; 20 (0.79) deep	10 (145)	O <sup>5)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 11926 <sup>4)</sup>	1 5/8UN-2B; 20 (0.79) deep	10 (145)	X <sup>5)</sup>
<b>T<sub>3</sub></b>	Drain port	ISO 11926 <sup>4)</sup>	1 5/8UN-2B; 20 (0.79) deep	10 (145)	X <sup>5)</sup>
<b>CR</b>	Pilot signal (CR only)	ISO 11926	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>PR</b>	Pilot signal (PR only)	ISO 11926	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>H3, H4</b>	Pilot signal (H3 and H4 only)	ISO 11926	9/16-18UNF-2B; 13 (0.51) deep	100 (1450)	O
<b>L5, L6</b>	Override power controller (only with L5 and L6)	ISO 11926	9/16-18UNF-2B; 13 (0.51) deep	100 (1450)	O
<b>X</b>	Pilot signal (S0 and DG only)	ISO 11926 <sup>4)</sup>	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	O
<b>M</b>	Measuring, control pressure	ISO 11926 <sup>4)</sup>	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	X
<b>M<sub>A</sub></b>	Measuring, pressure A	ISO 11926 <sup>4)</sup>	9/16-18UNF-2B; 13 (0.51) deep	420 (6100)	X
<b>P</b>	External control pressure (Ordering code position 8 version B or C = with external control pressure supply)	ISO 11926 <sup>4)</sup>	9/16-18UNF-2B; 13 (0.51) deep	50 (725)	O
	Port <b>P</b> is without function (Ordering code position 8 version A = without external control pressure supply)	ISO 11926 <sup>4)</sup>	3/4-16UNF-2B; 12.6 (0.50) deep	420 (6100)	X


- 1) Observe the instructions in the operating instructions concerning the maximum tightening torques.
- 2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 3) Metric fastening thread is a deviation from standard.
- 4) The countersink can be deeper than as specified in the standard.

- 5) Depending on installation position, T<sub>1</sub>, T<sub>2</sub> or T<sub>3</sub> must be connected (see also Installation instructions on pages 64 and 65).
- 6) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)
- 7) The thread depth is 30 mm (1.18 in) for the left pump direction of rotation


▼ **LR** – Power controller, fixed setting

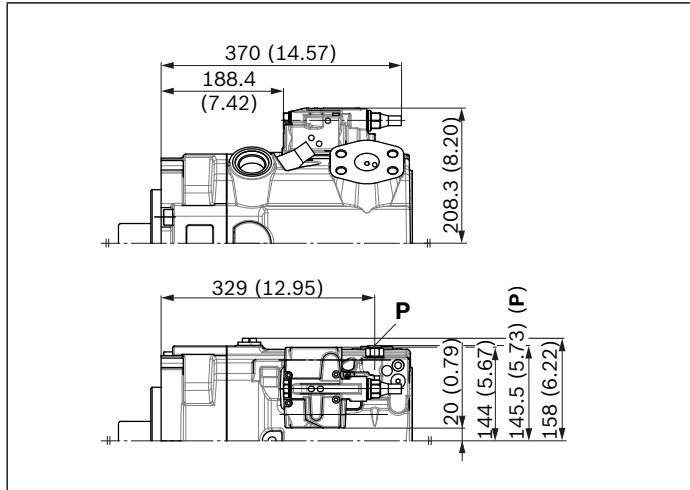


▼ **L3/L4** – Power controller, electric-proportional override

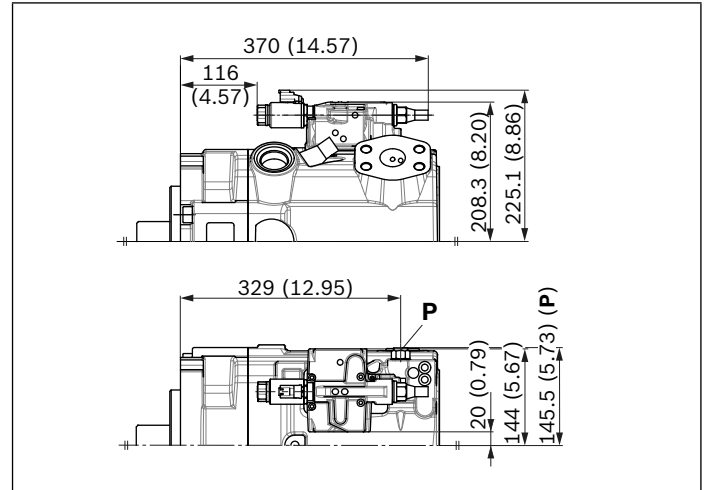


▼ **L5/L6** – Power controller, hydraulic override

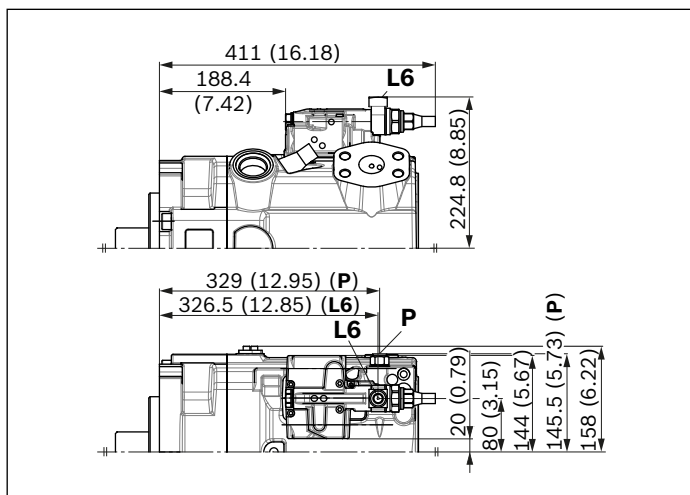


▼ **CR** – Power controller, hydraulic-proportional override, high pressure, with stop

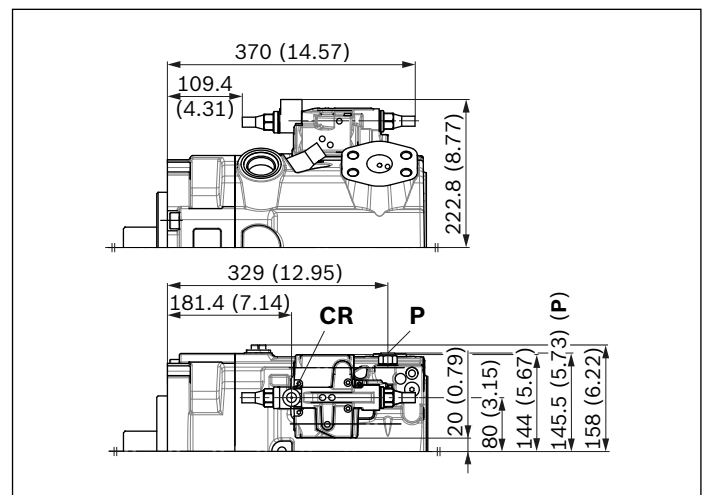

▼ **PR** – Power controller, hydraulic-proportional override, high pressure, without stop

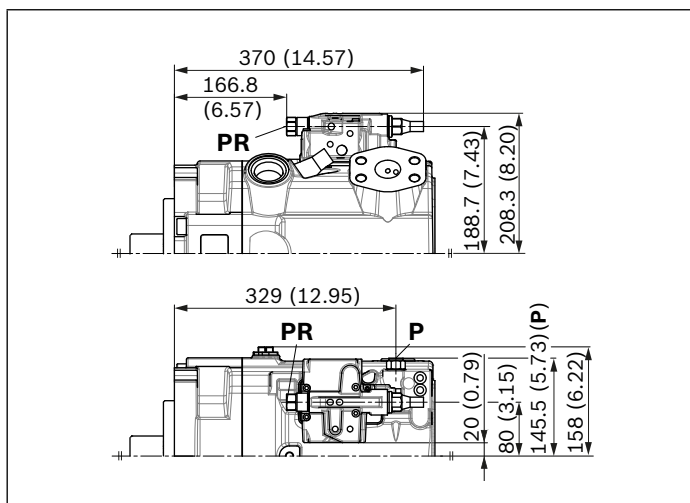


▼ **E1/E2** – Stroke control electric-proportional

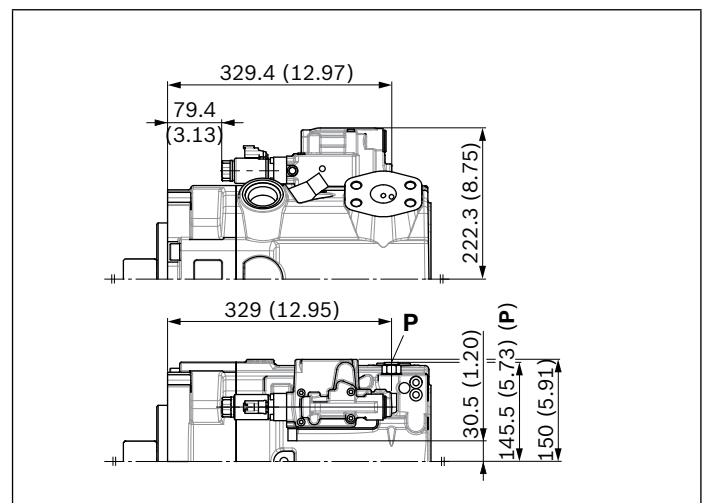


**Notice**

All controllers described with shuttle valve in **P** (some contrary to standard as per ordering code position 08)


▼ **H3/H4** – Stroke control, hydraulic-proportional, pilot pressure

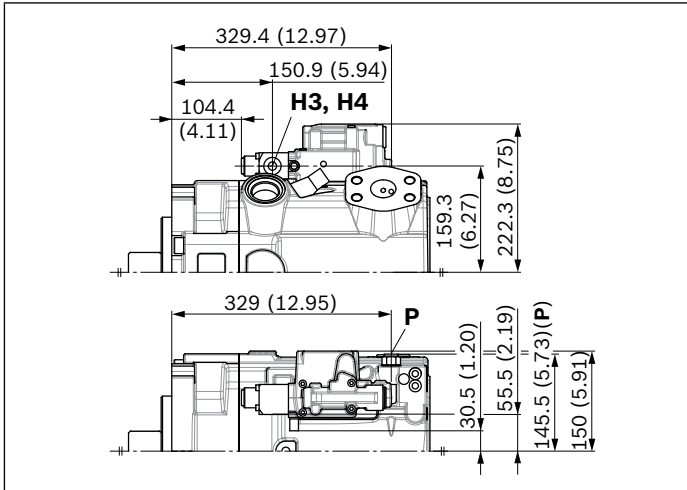


▼ **DR** – Pressure controller, fixed setting

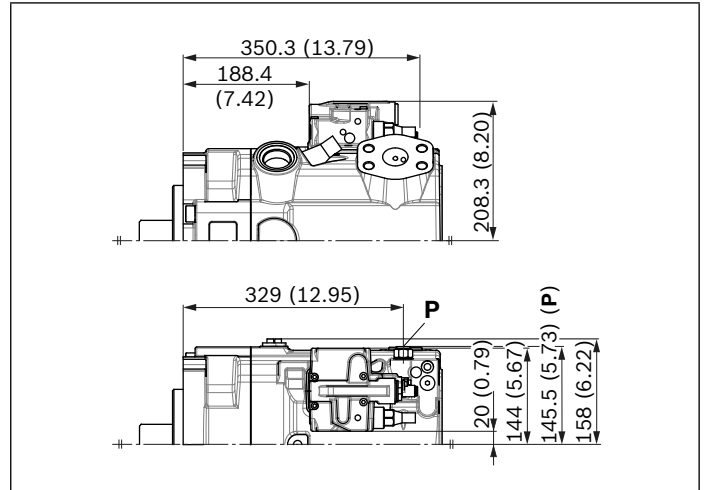

▼ **LRDRS0** – Power controller with pressure controller and load sensing, fixed setting

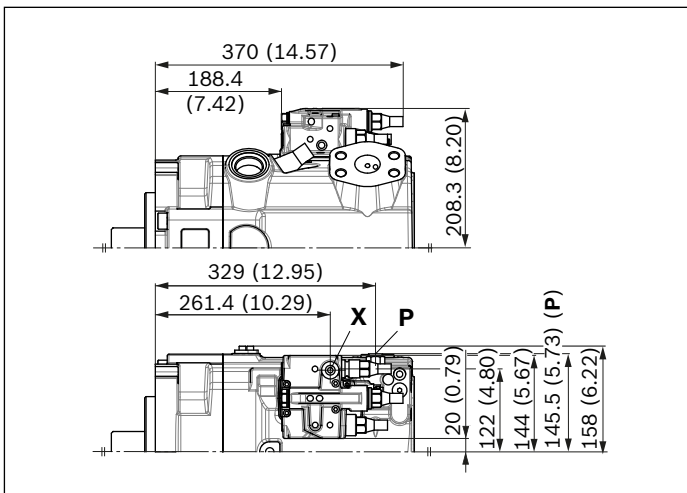

▼ **DG** – Pressure controller, hydraulic, remote controlled

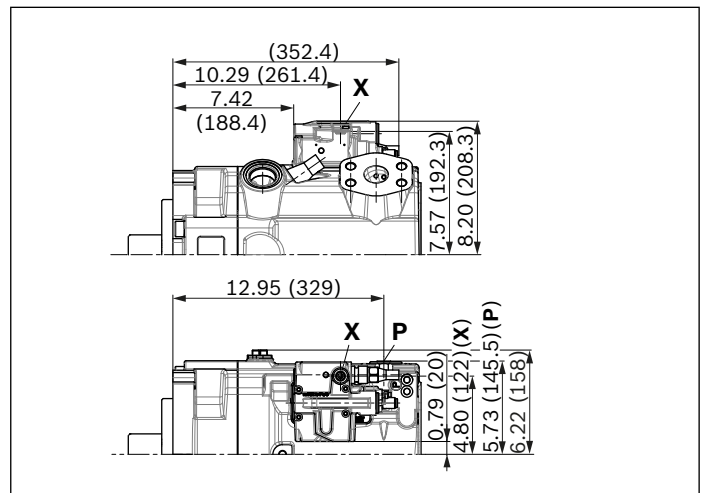

**Notice**


All controllers described with shuttle valve in **P** (some contrary to standard as per ordering code position 08)

### Dimensions, through drives

Flange SAE J744			Hub for splined shaft <sup>1)</sup>			Availability over sizes					Code
Diameter	Attachment <sup>2)</sup>	Designation	Diameter	Designation		110	145	175	210	280	
82-2 (A)	☉	A3	5/8 in	9T 16/32DP	S2	●	●	●	●	●	A3S2
			3/4 in	11T 16/32DP	S3	○	○	●	●	●	A3S3
101-2 (B)	☉	B3	7/8 in	13T 16/32DP	S4	●	●	●	●	●	B3S4
			1 in	15T 16/32DP	S5	●	●	●	●	●	B3S5
	☉	B5	7/8 in	13T 16/32DP	S4	●	●	●	●	●	B5S4
			1 in	15T 16/32DP	S5	○	○	●	●	○	B5S5

● = Available    ○ = On request

#### ▼ 82-2 (A)

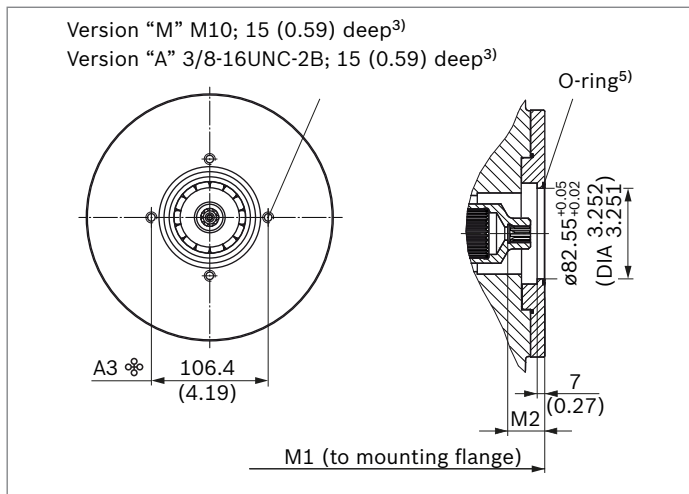


A3S2	NG	M1	M2
without charge pump	110	301 (11.85)	34 (1.39)
	145	326 (12.83)	40 (1.57)
	175	340.5 (13.41)	33.8 (1.33)
	210	357.8 (14.09)	33.8 (1.33)
	280	400 (15.75)	33.8 (1.33)
with charge pump	145	374.7 (14.75)	40 (1.57)
	175	389.5 (15.33)	33.8 (1.33)
	210	406.8 (16.02)	33.8 (1.33)
	280	438 (17.24)	33.8 (1.33)

A3S3	NG	M1	M2
without charge pump	175	340.5 (13.41)	40 (1.57)
	210	357.8 (14.09)	40 (1.57)
	280	400 (15.75)	40 (1.57)
with charge pump	175	389.5 (15.33)	40 (1.57)
	210	406.8 (16.02)	40 (1.57)
	280	438 (17.24)	40 (1.57)

- 1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Mounting bores pattern viewed from through drive with control at top
- 3) Thread according to DIN 13, observe the general instructions on page 66 for the maximum tightening torques.

#### ▼ 101-2 (B)

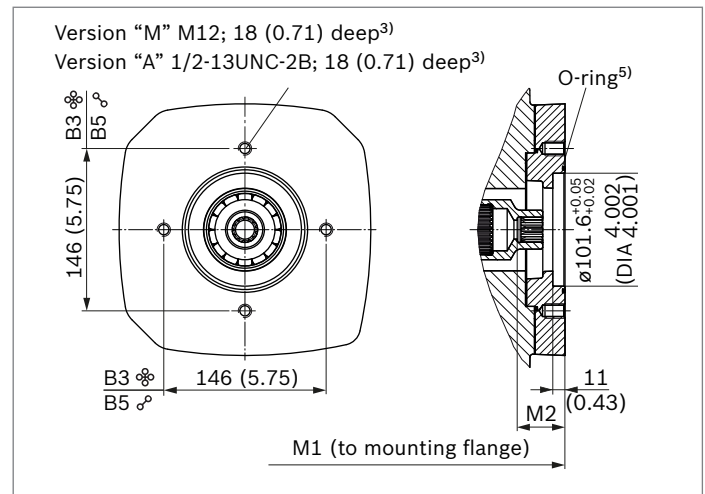

B3S4, B5S4	NG	M1	M2
without charge pump	110	312 (12.28)	43 (1.69)
	145	337 (13.27)	43 (1.69)
	175	355 (13.97)	43 (1.69)
	210	372.3 (14.65)	43 (1.69)
	280	414.5 (16.31)	43 (1.69)
with charge pump	145	385.7 (15.19)	43 (1.69)
	175	404 (15.90)	43 (1.69)
	210	421.3 (16.58)	43 (1.69)
	280	452.5 (17.81)	43 (1.69)


B3S4, B3S5	NG	M1	M2
without charge pump	110	312 (12.28)	48 (1.89)
	145	337 (13.27)	48 (1.89)
	175	355 (13.97)	48 (1.89)
	210	372.3 (14.65)	48 (1.89)
	280	414.5 (16.31)	48 (1.89)
with charge pump	145	385.7 (15.18)	48 (1.89)
	175	404 (15.90)	48 (1.89)
	210	421.3 (16.58)	48 (1.89)
	280	452.5 (17.81)	48 (1.89)

- 4) Thread according to ASME B1.1, observe the general instructions on page 66 for the maximum tightening torques.
- 5) O-ring included in the scope of delivery

Flange SAE J744			Hub for splined shaft <sup>1)</sup>			Availability over sizes					Code
Diameter	Attachment <sup>2)</sup>	Designation	Diameter	Designation		110	145	175	210	280	
127-2 (C)	☼	C3	1 1/4 in 14T 12/24DP	S7		●	●	●	●	●	C3S7
			1 1/2 in 17T 12/24DP	S9	○	○	●	●	●	C3S9	
	∅	C5	1 1/4 in 14 12/24DP	S7		○	-	●	●	●	C5S7
127-4 (C)	☼☼	C4	1 1/4 in 14T 12/24DP	S7		●	●	●	●	○	C4S7

● = Available    ○ = On request

▼ 127-2 (C)

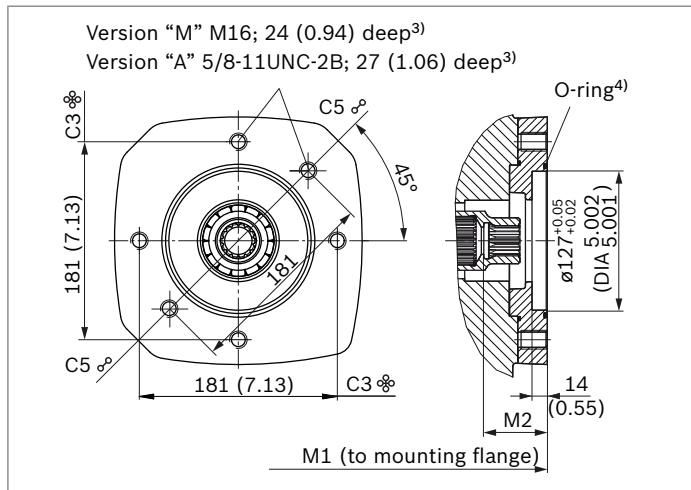


C3S7	NG	M1	M2
without charge pump	110	323 (12.72)	58 (2.28)
	145	348 (13.70)	58 (2.28)
	175	354.5 (13.96)	58.1 (2.29)
	210	371.8 (14.64)	58.1 (2.29)
	280	414 (16.30)	58.1 (2.29)
with charge pump	145	396.7 (15.62)	58 (2.28)
	175	403.5 (15.89)	58.1 (2.29)
	210	420.8 (16.57)	58.1 (2.29)
	280	452 (17.80)	58.1 (2.29)

C3S9	NG	M1	M2
without charge pump	175	359.5 (14.15)	64 (2.52)
	210	376.8 (14.83)	64 (2.52)
	280	414 (16.30)	63.8 (2.51)
with charge pump	175	408.5 (16.08)	64 (2.52)
	210	425.8 (16.76)	64 (2.52)
	280	452 (17.80)	63.8 (2.51)

C5S7	NG	M1	M2
without charge pump	175	354.5 (13.96)	58 (2.28)
	210	371.8 (14.64)	58 (2.28)
	280	414 (16.30)	58 (2.28)
with charge pump	175	403.5 (15.89)	58 (2.28)
	210	420.8 (16.57)	58 (2.28)
	280	452 (17.80)	58 (2.28)

▼ 127-4 (C)

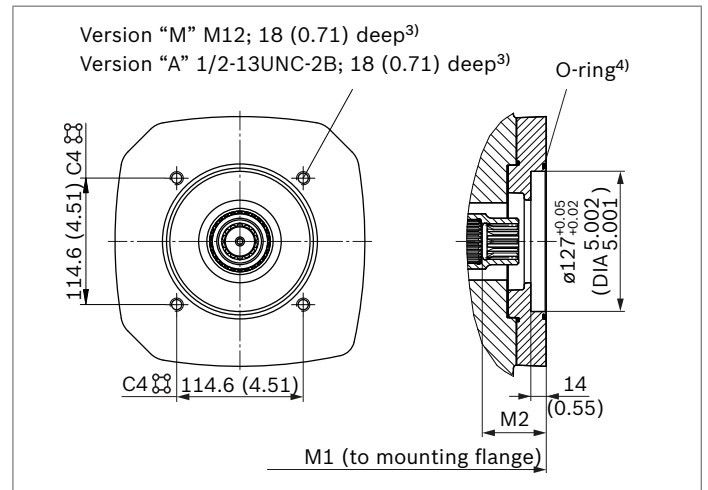


C4S7	NG	M1	M2
without charge pump	110	323 (12.72)	58 (2.28)
	145	348 (13.70)	58 (2.28)
	175	354.5 (13.96)	58 (2.28)
	210	371.8 (14.64)	58 (2.28)
	280	414 (16.30)	58 (2.28)
with charge pump	145	396.7 (15.62)	58 (2.28)
	175	403.5 (15.89)	58 (2.28)
	210	420.8 (16.57)	58 (2.28)

- 1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Mounting bores pattern viewed from through drive with control at top
- 3) Thread according to DIN 13, observe the general instructions on page 66 for the maximum tightening torques.
- 4) O-ring included in the scope of delivery

Flange SAE J744			Hub for splined shaft <sup>1)</sup>			Availability over sizes					Code
Diameter	Attachment <sup>2)</sup>	Designation	Diameter		Designation	110	145	175	210	280	
152-4 (D)		D4	1 3/4 in	13T 8/16DP	T1	●	●	●	●	●	D4T1
165-4 (E)		E4	1 3/4 in	13T 8/16DP	T1	-	-	●	●	●	E4T1
			2 in	15T 8/16DP	T2	-	-	●	●	●	E4T2
			2 1/4 in	17T 8/16DP	T3	-	-	-	-	●	E4T3
			W60x2x28x9g <sup>5)</sup>		A4	-	-	-	-	●	E4A4


● = Available    ○ = On request

▼ **152-4 (D)**

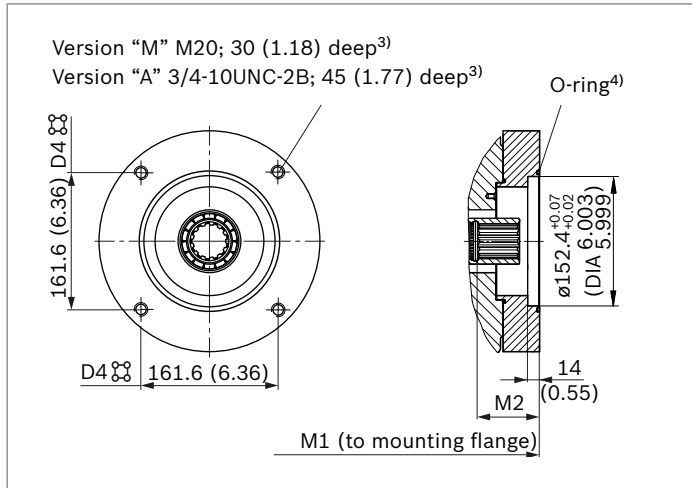

D4T1	NG	M1	M2
without charge pump	110	336 (13.23)	77 (3.03)
	145	361 (14.21)	76.8 (3.02)
	175	372.5 (14.67)	76.8 (3.02)
	210	389.8 (15.35)	76.8 (3.02)
	280	432 (17.01)	77 (3.03)
with charge pump	145	409.7 (16.13)	76.8 (3.02)
	175	421.5 (16.59)	76.8 (3.02)
	210	438.8 (17.28)	76.8 (3.02)
	280	470 (18.50)	77 (3.03)

▼ **165-4 (E)**

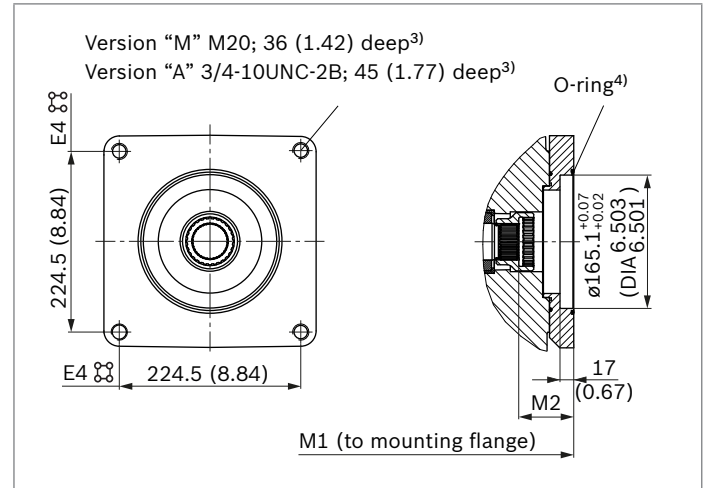

E4T1	NG	M1	M2
without charge pump	175	355 (13.98)	77 (3.03)
	210	389.8 (15.35)	77 (3.03)
	280	432 (17.00)	77 (3.03)
	175	421.5 (16.59)	77 (3.03)
	210	438.8 (17.27)	77 (3.03)
with charge pump	280	470 (18.50)	77 (3.03)
	280	470 (18.50)	77 (3.03)
E4T2	NG	M1	M2
without charge pump	175	385.5 (15.18)	90 (3.54)
	210	402.8 (15.86)	90 (3.54)
	280	445 (17.52)	90 (3.54)
with charge pump	175	434.5 (17.11)	90 (3.54)
	210	451.8 (17.79)	90 (3.54)
	280	483 (19.02)	90 (3.54)
E4T3	NG	M1	M2
without charge pump	280	445 (17.52)	90 (3.54)
with charge pump	280	483 (19.02)	90 (3.54)
E4A4	NG	M1	M2
without charge pump	280	423 (16.65)	68 (2.68)
with charge pump	280	461 (18.15)	68 (2.68)

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Mounting bores pattern viewed from through drive with control at top

3) Thread according to DIN 13, observe the general instructions on page 66 for the maximum tightening torques.  
4) O-ring included in the scope of delivery  
5) Hub N60x2x28x8H according to DIN 5480

**Overview of mounting options**

Through drive <sup>1)</sup>		Attachment options – 2 <sup>nd</sup> pump							
Flange	Hub for splined shaft	Code	A11VO/40 NG (shaft)	A10VO/31 NG (shaft)	A10VO/32 NG (shaft)	A4VG/32 NG (shaft)	A4VG/40 NG (shaft)	A10VO/52 and 53 NG (shaft)	External gear
82-2 (A)	5/8 in	A3S2	–	18 (U)	–	–	–	10, 18 (U)	Series F <sup>2)</sup>
	3/4 in	A3S3	–	18 (S, R)	–	–	–	10 (S), 18 (S, R)	
101-2 (B)	7/8 in	B_S4	–	28 (S, R); 45 (U, W)	–	–	–	28 (R, S); 45 (U, W)	Series N <sup>2)</sup>
	1 in	B_S5	–	45 (R, S)	–	28 (S)	–	45 (R, S); 60, 63 (U, W)	
127-2 (C)	1 1/4 in	C_S7	–	71 (R, S); 100 (U, W)	71 (R) (S)	40, 56, 71 (S)	45, 65 (S7)	85, 100 (U, W)	–
	1 1/2 in	C3S9	–	100 (S)	100 (S)	–	45, 65 (S9)	85, 100 (S)	PGH5
	1 1/4 in	C5S7	–	71 (S, R) 100 (U, W)	71 (S, R) 100 (U, W)	–	–	85, 100 (U, W)	–
127-4 (C)	1 1/4 in	C4S7	–	–	71 (R) (S)	–	65 (S7)	60, 63 (R, S) 85 (U, W)	–
	1 3/8 in	C4V8	–	–	–	–	85, 110 (V8)	–	–
152-4 (D)	1 1/4 in	D4S7	–	–	100 (U,W)	90 (U)	–	–	–
	1 3/8 in	D4V8	–	–	–	–	85, 110 (V8)	–	–
	1 3/4 in	D4T1	110, 145 (T1)	140 (S)	140 (S)	90, 125 (S)	145 (T1)	–	–
165-4 (E)	1 3/4 in	E4T1	–	–	–	180, 250 (S)	145, 175 (T1)	–	–
	2 in	E4T2	175, 210 (T2)	–	–	–	145 (T2)	–	–
	2 1/4 in	E4T3	280 (T3)	–	–	180, 250 (T)	175 (T3)	–	–
	W60	E4A4	280 (A4)	–	–	–	–	–	–

1) Additional through drives are available on request

2) Bosch Rexroth recommends special versions of the external gear pumps. Please contact us.

## Combination pumps A11V(L)O + A11V(L)O

### Total length A

A11VO (1 <sup>st</sup> pump)	A11VO (2 <sup>nd</sup> pump)						A11VLO (2 <sup>nd</sup> pump)					
	NG110	NG145	NG175	NG210	NG280	NG280	NG145	NG175	NG210	NG280	NG280	
	D4T1	D4T1	E4T2	E4T2	E4A4	E4T3	D4T1	E4T2	E4T2	E4A4	E4T3	
NG110	621 (24.45)	-	-	-	-	-	-	-	-	-	-	-
NG145	646 (25.43)	671 (26.42)	-	-	-	-	736.2 (28.98)	-	-	-	-	-
NG175	657.5 (25.89)	682.5 (26.87)	713 (28.07)	-	-	-	747.7 (29.44)	780 (30.71)	-	-	-	-
NG210	674.8 (26.57)	699.8 (27.55)	730.3 (28.75)	747.6 (29.43)	-	-	765 (30.12)	797.3 (31.00)	814.6 (32.07)	-	-	-
NG280	717 (28.23)	742 (29.21)	772.5 (30.41)	789.8 (31.09)	810 (31.90)	832 (32.76)	807.2 (31.78)	839.5 (33.05)	856.8 (33.73)	866 (34.09)	888 (34.96)	-

A11VLO (1 <sup>st</sup> pump)	A11VO (2 <sup>nd</sup> pump)						A11VLO (2 <sup>nd</sup> pump)					
	NG110	NG145	NG175	NG210	NG280	NG280	NG145	NG175	NG210	NG280	NG280	
	D4T1	D4T1	E4T2	E4T2	E4A4	E4T3	D4T1	E4T2	E4T2	E4A4	E4T3	
NG 145	694.7 (27.35)	719.7 (28.33)	-	-	-	-	784.9 (30.90)	-	-	-	-	-
NG175	706.5 (27.81)	731.5 (28.80)	762 (30.00)	-	-	-	796.7 (31.37)	829 (32.64)	-	-	-	-
NG210	723.8 (28.50)	748.8 (29.48)	779.3 (30.68)	796.6 (31.36)	-	-	814 (32.05)	846.3 (33.32)	863.6 (34.00)	-	-	-
NG280	755 (29.72)	780 (30.71)	810.5 (31.91)	827.8 (32.59)	848 (33.39)	870 (34.25)	845.2 (33.28)	877.5 (34.55)	894.8 (35.23)	904 (35.59)	926 (36.46)	-


By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes. When ordering combination pumps, the type designations of the 1<sup>st</sup> and 2<sup>nd</sup> pumps must be linked by a “+”.

#### Order example:

**A11VO280LRDRA00/40M(A)RVE4A41SE4A40-0+**

**A11VO280LRDRA00/40M(A)RVE4A41SU0000-0**

A tandem pump consisting of two equal sizes is permissible without additional supports assuming that the dynamic mass acceleration does not exceed maximum 10 g (= 98.1 m/s<sup>2</sup>). For combination pumps consisting of more than two pumps, the mounting flange must be rated for the permissible mass torque.

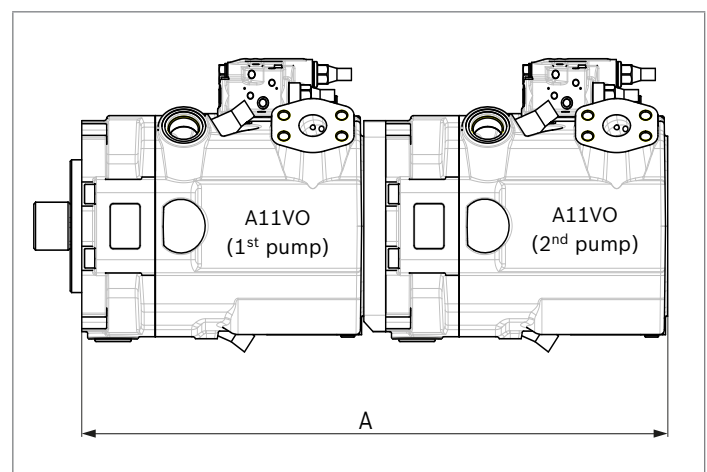




## Connector for solenoids

### DEUTSCH DT04-2P-EP04

Molded, 2-pin, without bidirectional suppressor diode, with mating connector mounted, results in the following type of protection:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

#### ▼ Switching symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

#### Notice

If necessary, you can change the position of the connector by turning the solenoid.  
The procedure is defined in the instruction manual.

### AMP Junior-Timer, 2-pin

Type of protection:


- ▶ IP69K (DIN 40050-9)

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R901022127); see also data sheet 08006.

- ▶ Outer diameter of conductor 2.2 mm (0.09 in) to 3.0 mm (0.12 in)

#### Manual override

When power supply to the vehicle is interrupted, maximum operating pressure can be established by means of a manual override so that the vehicle can be driven under its own power from a danger zone.

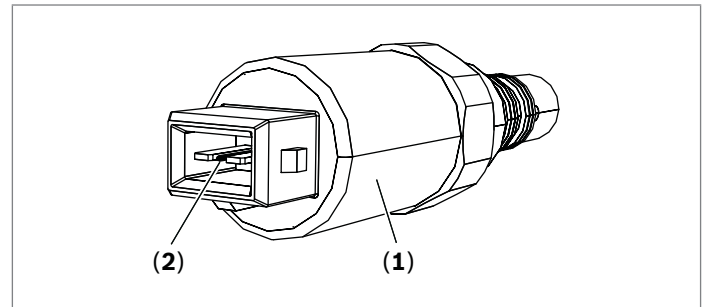

To activate the manual override:

- ▶ Unplug the electrical connector from the pressure reducing valve (1).
- ▶ Using a pointed tool, press both PINs (2) in up to the stop.  
Both PINs must remain in the depressed position!

## Installation instructions

### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines.

Particularly in the installation position “drive shaft upwards”, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running.

The case drain fluid in the pump housing must be directed to the reservoir via the highest available drain port (**T**<sub>1</sub>, **T**<sub>2</sub>, **T**<sub>3</sub>).

For combination pumps, the leakage must be drained off at each pump.

If a shared drain line is used for several units, make sure that the respective case pressure is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operating conditions, specifically on cold start. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction line and drain line must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{S \max} = 800 \text{ mm}$  (31.50 in). The minimum suction pressure at port **S** must also not fall below 0.8 bar (12 psi) absolute (without charge pump) or 0.7 bar (11 psi) absolute (with charge pump) during operation and during a cold start. When designing the reservoir, ensure adequate distance between the suction line and the case drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

### Notice

In certain installation positions, an influence on the control characteristic can be expected. Gravity, dead weight and case pressure can cause minor shifts in control characteristic curves and changes in response time.

### Installation position

See the following examples **1** to **9**.


Further installation positions are available upon request.

Recommended installation position: **1** and **2**


### Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir and below the minimum fluid level of the reservoir.


Installation position	Air bleed	Filling
<b>1</b>	<b>T</b> <sub>1</sub>	<b>S</b> + <b>T</b> <sub>1</sub>



<b>2</b>	<b>T</b> <sub>2</sub>	<b>S</b> + <b>T</b> <sub>2</sub>
----------	-----------------------	----------------------------------



<b>3</b>	<b>T</b> <sub>2</sub>	<b>S</b> + <b>T</b> <sub>2</sub>
----------	-----------------------	----------------------------------



Key	
<b>L</b>	Filling / air bleeding
<b>S</b>	Suction port
<b>T</b>	Drain port
<b>SB</b>	Baffle (baffle plate)
$h_{t \min}$	Minimum required immersion depth (200 mm (7.87 in))
$h_{\min}$	Minimum required distance to reservoir bottom (100 mm (3.94 in))
$h_{ES \min}$	Minimum necessary height required to protect the axial piston unit from draining (25 mm (1 in))
$h_{S \max}$	Maximum permissible suction height (800 mm (31.50 in))

**Above-reservoir installation**

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir. To prevent the axial piston unit from draining, a height difference  $h_{ES\ min}$  of at least 25 mm (1 in) at port **T**<sub>2</sub> is required in position 6. Observe the maximum permissible suction height  $h_{S\ max} = 800\ mm\ (31.50\ in)$ . The above-reservoir installation is not permitted for units with charge pump (A11VLO).

Installation position	Air bleed	Filling
<p><b>4</b></p>	<b>F</b>	<b>T</b> <sub>1</sub> (F)
<p><b>5</b></p>	<b>F</b>	<b>T</b> <sub>2</sub> (F)
<p><b>6</b></p>	<b>F</b>	<b>T</b> <sub>2</sub> (F)

**Inside-reservoir installation**

Inside-reservoir installation is when the axial piston unit is installed in the reservoir below the minimum fluid level. The axial piston unit is completely below the hydraulic fluid. If the minimum fluid level is equal to or below the upper edge of the pump, see chapter “**Above-reservoir installation**”. Axial piston units with electric components (e.g. electric controls, sensors) must not be installed in a reservoir below the fluid level.

Installation position	Air bleed	Filling
<p><b>7</b></p>	Via the highest available port <b>T</b> <sub>1</sub>	Automatically via the open port <b>T</b> <sub>1</sub> due to the position under the hydraulic fluid level
<p><b>8</b></p>	Via the highest available port <b>T</b> <sub>2</sub>	Automatically via the open port <b>T</b> <sub>2</sub> due to the position under the hydraulic fluid level
<p><b>9</b></p>	Via the highest available port <b>T</b> <sub>2</sub>	Automatically via the open port <b>T</b> <sub>2</sub> due to the position under the hydraulic fluid level

**Notice**  
Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

## Project planning notes

- ▶ The A11V(L)O axial piston variable pump is designed to be used in open circuits.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (operating pressure, fluid temperature), the characteristic curve may shift.
- ▶ The characteristic curve may also shift due to the dither frequency or control electronics.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all versions of the product are approved for use in a safety function pursuant to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference.  
Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.

- ▶ Pressure controllers are not safeguards against pressure overload. Be sure to add a pressure relief valve to the hydraulic system.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports are only intended to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of getting burnt on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve pistons) can, under certain circumstances get blocked in position as a result of contamination (e.g. impure hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filter) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to set the consumer being driven to a safe position (e.g. safe stop) and if necessary to ensure it is properly implemented.



**Bosch Rexroth AG**

Mobile Applications  
An den Kelterwiesen 14  
72160 Horb a.N., Germany  
Phone +49 7451 92-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© Bosch Rexroth AG 2016. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# Axial piston variable pump

## A1VO Series 10

**RE 92650**

Edition: 06.2016

Replaces: 08.2015



- ▶ For load-sensing-systems in smaller working machines
- ▶ Sizes 18, 28, 35
- ▶ Nominal pressure 250 bar
- ▶ Maximum pressure 280 bar
- ▶ Open circuit

3

**Characteristics**

- ▶ Variable pump with axial piston rotary group of swash-plate design for hydrostatic drives in open circuit
- ▶ Flow is proportional to the drive speed and displacement.
- ▶ The flow can be infinitely varied by controlling the swashplate angle.
- ▶ Significant fuel savings of up to 15% compared to fixed systems
- ▶ Optimized efficiency, though same power at less fuel consumption
- ▶ Increased service life compared to gear pumps
- ▶ Compact design by integrated controller
- ▶ A wide range of highly adaptable control devices for all important applications
- ▶ Low noise
- ▶ High power density
- ▶ Excellent suction characteristics
- ▶ High flexibility due to interchangeable through drive adapter

**Contents**

Ordering code	2
Hydraulic fluids	4
Shaft seal	5
Working pressure range	6
Technical data	7
DR/DN pressure controller	9
D3/D4 – Pressure controller with override	10
DRS0/DNSO – Pressure controller with load sensing	11
Dimensions size 18 and size 28	12
Dimensions, size 35	15
Through drives dimensions	18
Overview of attachment options	19
Combination pumps A1VO + A1VO	20
Connector for solenoids	21
Installation instructions	22
Project planning notes	24
Safety instructions	24

## Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	
A1V	O				2		0	/	10			V				00	-	0

### Axial piston unit

01	Variable swashplate design, nominal pressure 250 bar, maximum pressure 280 bar	A1V
----	--	-----

### Operating mode

02	Pump, open circuit	O
----	--------------------	---

### Size (NG)

03	Geometric displacement, see "Technical data" on page 7	018	028	035
----	--	-----	-----	-----

### Control device

		018	028	035	
04	Pressure controller	•	•	•	DR
	with load sensing	•	•	•	DRS0
	Setting range 20 to 100 bar	•	•	•	DN
	with load sensing	•	•	•	DNS0
	with override, electric-proportional, negative control	•	•	•	D3
		•	•	•	D4
					$U = 12\text{ V}$
					$U = 24\text{ V}$

### Controller design and mounting

05	Built-on (only possible at control valve D3 and D4)	•	•	•	A
	Cartridge (only possible at control valve DR, DRS0, DN and DNS0)	•	•	•	C

### Setting

06	Adjustable	2
----	------------	---

### Connector for solenoids<sup>1)</sup> (see page 21)

07	Without connector (without solenoid, only for hydraulic control)	•	•	•	0
	DEUTSCH - molded connector, 2-pin, without suppressor diode	•	•	•	P

### Additional function

08	Without additional function	0
----	-----------------------------	---

### Series

09	Series 1, index 0	10
----	-------------------	----

### Design of ports and fastening threads

10	ANSI, port threads with O-ring seal according to ISO 11926, metric fastening thread on through drive version	•	•	•	B
	ISO, port threads with O-ring seal according to ISO 6149, metric fastening thread on through drive version	•	•	•	M

### Direction of rotation

11	Viewed on drive shaft	clockwise	•	•	•	R
		counter-clockwise	•	•	•	L

### Sealing material

12	FKM (fluoroelastomer)	V
----	-----------------------	---

### Mounting flanges

13	SAE J744	82-2	•	•	-	A2
		101-2	•	•	•	B2

<sup>1)</sup> Connectors for other electric components may differ



01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	
<b>A1V</b>	<b>O</b>				<b>2</b>		<b>0</b>	<b>/</b>	<b>10</b>			<b>V</b>				<b>00</b>	<b>-</b>	<b>0</b>

**Drive shaft** (permissible input torque, see page 8)

			018	028	035	
14	Splined shaft ANSI B92.1a (Bosch Rexroth recomendet in case of through drive to use the next biggest drive shaft)	3/4 in 11T 16/32DP	●	●	-	<b>S3</b>
		7/8 in 13T 16/32 DP <sup>2)</sup>	●	●	●	<b>S4</b>
		1 in 15T 16/32DP	-	-	●	<b>S5</b>

**Service line port**

		018	028	035	
15	Threaded ports B and S on opposite sides	●	●	●	<b>1</b>
	Threaded ports B and S at rear; not for through drive	●	●	○	<b>9</b>

**Through drives** (for attachment options, see page 19)

	Flange SAE J744			Hub for splined shaft <sup>3)</sup>						
	Diameter	Attachment <sup>4)</sup>	Designation	Diameter	Designation	Designation	018	028	035	
16	Without through drive						●	●	●	<b>0000</b>
	82-2 (A)	○-○	A2	5/8 in	9T 16/32 DP	S2	●	●	●	<b>A2S2</b>
				3/4 in	11T 16/32 DP	S3	●	●	●	<b>A2S3</b>
				7/8 in	13T 16/32 DP	S4	●	●	●	<b>A2S4</b>
	101-2 (B)	○-○	B2	7/8 in	13T 16/32 DP	S4	●	●	●	<b>B2S4</b>
				1 in	15T 16/32 DP	S5	-	-	●	<b>B2S5</b>

**Reduction of geometric displacement**

17	Without reduction	00
----	-------------------	----

**Standard / special version**

18	Standard version	0
----	------------------	---

● = Available    ○ = On request    - = Not available

**Notes**

Note the project planning notes on page 24.

2) For size 35, not for through drive

3) According to ANSI B92.1a

4) Mounting drillings pattern viewed on through drive, with service line port B on right.

## Hydraulic fluids

The A1VO variable pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons

### Details regarding the selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$ , see selection diagram).

#### Note

At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.


If the above conditions cannot be maintained due to extreme operating parameters, please contact the responsible member of staff at Bosch Rexroth.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -25 \text{ }^\circ\text{C}$	$t \leq 3 \text{ min}$ , without load ( $20 \text{ bar} \leq p \leq 50 \text{ bar}$ ), $n \leq 1000 \text{ RPM}$
	Permissible temperature difference	$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid
Warm-up phase	$v < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -25 \text{ }^\circ\text{C}$	at $p \leq 0.7 \cdot p_{nom}$ , $n \leq 0.5 \cdot n_{nom}$ and $t \leq 15 \text{ min}$
Continuous operation	$v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$		This corresponds, for example on the VG 46, to a temperature range of +5 °C to +85 °C (see selection diagram)
		$\theta = -25 \text{ }^\circ\text{C to } +90 \text{ }^\circ\text{C}$	Note the permissible temperature range of the shaft seal measured at port <b>L</b> ( $\Delta T = \text{approx. } 5 \text{ K}$ between the bearing/shaft seal and port <b>L</b> )
	$v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		Range of optimum operating viscosity and efficiency
Short-term operation	$v_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 1 \text{ min}$ , $p < 0.3 \cdot p_{nom}$

#### ▼ Selection diagram

Maximum permissible viscosity for cold start

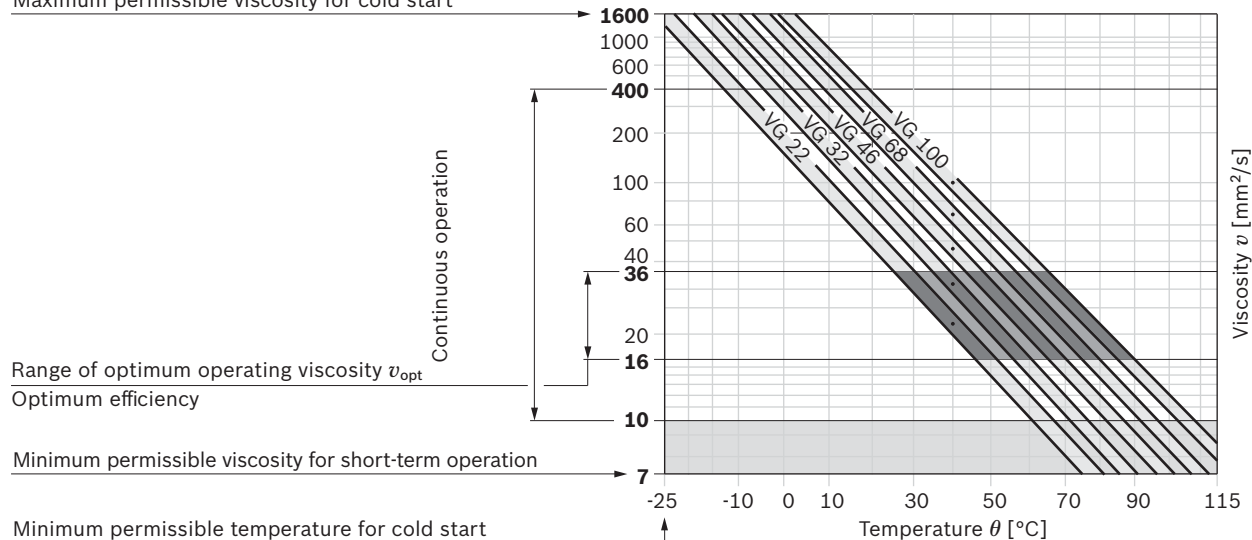

### **Filtration of the hydraulic fluid**

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit. In order to guarantee the functional reliability of the axial piston unit it is necessary to carry out a gravimetric evaluation of the hydraulic fluid to determine the particle contamination and the cleanliness level according to ISO 4406. A cleanliness level of at least 20/18/15 must be maintained. At very high hydraulic fluid temperatures (90 °C to maximum 115 °C), at least cleanliness level 19/17/14 according to ISO 4406 is necessary. Please contact us if the above classes cannot be observed.

### **Shaft seal**

The FKM shaft seal ring may be used for leakage temperatures from -25 °C to +115 °C.


#### **Note**

For the temperature range below -25 °C, the values in the table on page 4 are to be observed.

## Working pressure range

Pressure at service line port B		Definition
Nominal pressure $p_{nom}$	250 bar	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	280 bar	The maximum pressure corresponds the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period (maximum number of cycles: approx. 1 million).
Single operating period	0.05 s	
Total operating period	14 h	
Minimum pressure $p_{B abs}$ (high-pressure side)	14 bar <sup>1)</sup>	Minimum pressure on the high-pressure side (B) which is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{A max}$	16000 bar/s	Maximum permissible rate of pressure build-up and reduction during a pressure change over the entire pressure range.
Pressure at suction port S (inlet)		
Minimum pressure $p_{S min}$	0.8 bar absolute	Minimum pressure at suction port S (inlet) that is required in order to avoid damage to the axial piston unit. The minimum pressure depends on the speed and displacement of the axial piston unit.
Maximum pressure $p_{S max}$	5 bar absolute	
Leakage pressure at port L <sub>1</sub> , L <sub>2</sub>		
Maximum pressure $p_{L max}$	2 bar absolute	Maximum 0.5 bar higher than inlet pressure at port S, but not higher than $p_{L max}$ .


### ▼ Rate of pressure change $R_{A max}$

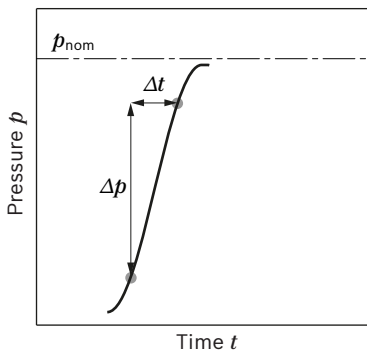

### Note

Working pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.

### ▼ Pressure definition

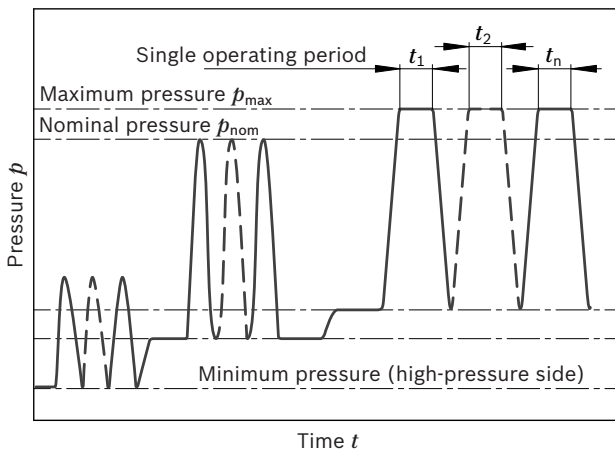

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

1) Please contact us about lower pressures

## Technical data

Size		NG	018	028	035	
Displacement, geometric, per revolution		$V_{g \max}$	cm <sup>3</sup>	18	28	35
		$V_{g \min}$	cm <sup>3</sup>	0	0	0
Maximum rotational speed <sup>1)2)</sup>	at $V_{g \max}$	$n_{\text{nom}}$	rpm	3300	3200	3000
Flow	at $n_{\text{nom}}$ and $V_{g \max}$	$q_v$	l/min	59	89	105
Power	at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 250$ bar	$P$	kW	25	37	44
Torque	at $V_{g \max}$ and $\Delta p = 250$ bar	$T$	Nm	72	111	139
Rotary stiffness of drive shaft	3/4 in 11T 16/32DP S3	$c$	kNm/rad	9.78	9.78	–
	7/8 in 13T 16/32 DP S4	$c$	kNm/rad	12.88	12.88	18.6
	1 in 15T 16/32DP S5	$c$	kNm/rad	–	–	22.9
Moment of inertia for rotary group		$J_{\text{TW}}$	kgm <sup>2</sup>	0.000686	0.00737	0.00159
Maximum angular acceleration <sup>5)</sup>		$a$	rad/s <sup>2</sup>	6800	5500	5000
Case volume		$V$	l	0.5	0.5	0.6
Weight ( <b>without</b> through drive) approx.		$m$	kg	12.3	12.3	18.4
Weight ( <b>with</b> through drive) approx.		$m$	kg	13.5	13.5	19.8

Determining operating characteristics			
Flow	$q_v$	$= \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T$	$= \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{\text{hm}}}$	[Nm]
Power	$P$	$= \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

### Key

$V_g$	Displacement per revolution [cm <sup>3</sup> ]
$\Delta p$	Differential pressure [bar]
$n$	Rotational speed [rpm]
$\eta_v$	Volumetric efficiency
$\eta_{\text{hm}}$	Hydraulic mechanical efficiency
$\eta_t$	Total efficiency ( $\eta_t = \eta_v \cdot \eta_{\text{hm}}$ )

### Note

- ▶ Theoretical values, without efficiency and tolerances; values rounded.
- ▶ Exceeding the maximum or falling below the minimum permissible values can lead to a loss of function, a reduction in operational service life or total destruction of the axial piston unit. Bosch Rexroth recommend testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.


- 1) The values are valid:
- For the optimum viscosity range from  $\nu_{\text{opt}} = 36$  to 16 mm<sup>2</sup>/s
  - For hydraulic fluid based on mineral oils
  - For a pressure  $p_{\text{suction}} \geq 1$  bar absolute at suction port **S**.
- 2) For a pressure  $p_{\text{suction}} < 1$  bar at suction port **S**, please contact us.

- 3) The data are valid at values between the minimum required and maximum permissible speed. Valid for external excitation (e.g., diesel engine 2 to 8 times rotary frequency; cardan shaft twice the rotary frequency). The limit value is only valid for a single pump. The load capacity of the connection parts must be considered.

**Permissible input and through-drive torques**

Size				018	028	035	
Torque at $V_{g \max}$ and $\Delta p = 250 \text{ bar}^{1)}$		$T_{\max}$	Nm	72	111	139	
Input torque at drive shaft, maximum <sup>2)</sup>							
	S3	3/4 in	$T_{E \max}$	Nm	143	143	–
	S4	7/8 in	$T_{E \max}$	Nm	198	198	198
	S5	1 in	$T_{E \max}$	Nm	–	–	319
Through-drive torque, maximum <sup>1)</sup>			$T_{D \max}$	Nm			
	S3	3/4 in	$T_{D \max}$	Nm	87	87	–
	S4	7/8 in	$T_{D \max}$	Nm	87	87	139
	S5	1 in	$T_{D \max}$	Nm	–	–	139

▼ **Torque distribution**

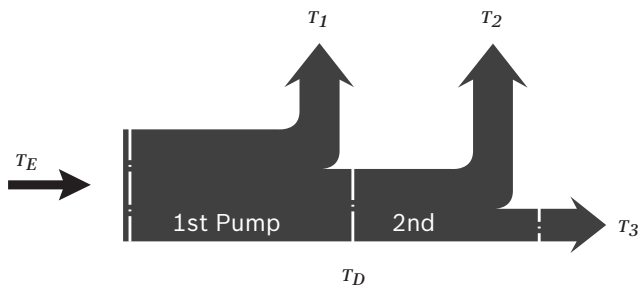

Torque at 1st Pump	$T_1$
Torque at 2nd Pump	$T_2$
Torque at 3rd Pump	$T_3$
Input torque	$T_E = T_1 + T_2 + T_3$
	$T_E < T_{E \max}$
Through-drive torque	$T_D = T_2 + T_3$
	$T_D < T_{D \max}$

**Note**

For axial and/or radial loading (pinion, v-belt), please contact us!

1) Efficiency not considered  
2) For drive shafts free of radial force

## DR/DN pressure controller

The pressure controller limits the maximum pressure at the pump outlet within the control range of the variable pump. The variable pump only supplies as much hydraulic fluid as is required by the consumers. If the operating pressure exceeds the pressure setting at the pressure valve, the pump will regulate to a smaller displacement to reduce the control differential.

► Basic position in depressurized state:  $V_{g \max}$ .


► **DR**

Setting range<sup>1)</sup> for pressure control 100 to 250 bar.  
 Standard 250 bar


**DN**

Setting range<sup>1)</sup> for pressure control 20 to 100 bar.  
 Standard is 100 bar

▼ **Characteristic curve DR**

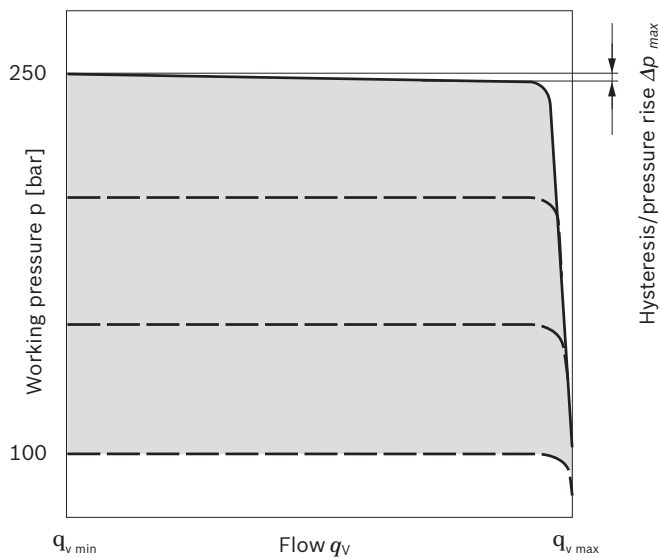

▼ **Schematic DR**

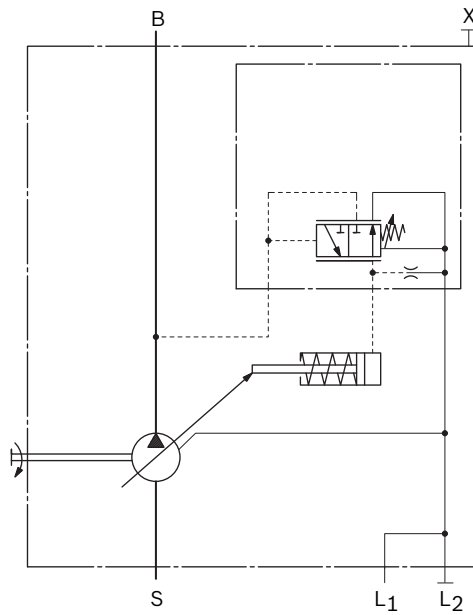

**Controller data**


NG	18	28	35
Hysteresis and repeat precision $\Delta p$	Maximum 5 bar		
Pilot fluid consumption	Approx. 3 l/min max.		

1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. Lower values on request

## D3/D4 – Pressure controller with override

With electric pressure adjustment using a proportional solenoid, the high pressure can be freely adjusted depending on the solenoid current. When the load pressure is changed at the consumer, the pump flow volume is adjusted so that the specified pressure is achieved again. If the solenoid current drops below the beginning of control, the unit will go to the set maximum pressure. The same thing applies if the pilot signal is lost.

### ▼ Current-pressure characteristic curve (negative characteristic curve)

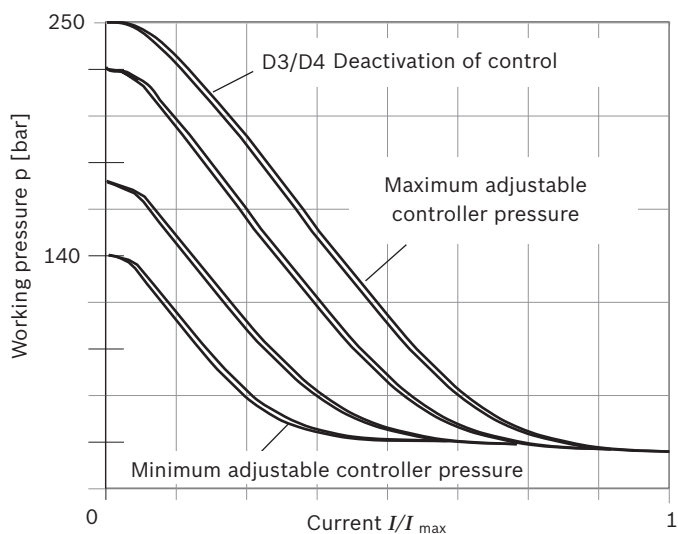

Characteristic curve measured with pump in zero stroke.  
Further information on request.



## DRS0/DNSO – Pressure controller with load sensing

In addition to the pressure controller function (DR), the load-sensing controller works as a flow controller that operates as a function of the load pressure to regulate the pump displacement to match the consumer flow requirement. The load sensing controller compares pressure before and after the metering orifice and keeps the pressure drop (differential pressure  $\Delta p$ ) across the orifice – and therefore the flow – constant. The swiveling in due to the pressure or flow controller will always take priority.

### ► DRS0

Setting range <sup>1)</sup> for pressure control 100 to 250 bar.


### ► DNS0

Setting range <sup>1)</sup> for pressure control 20 to 100 bar.


### Note

The DRS0/DNS0 version has no connection from **X** to the reservoir, which means that the LS relief has to be incorporated into the system.


### ▼ Characteristic curve DRS0

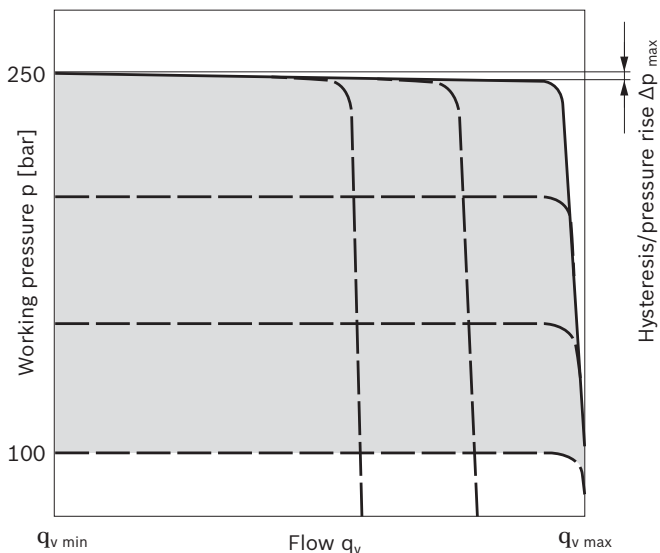

### ▼ Characteristic curve at variable speed

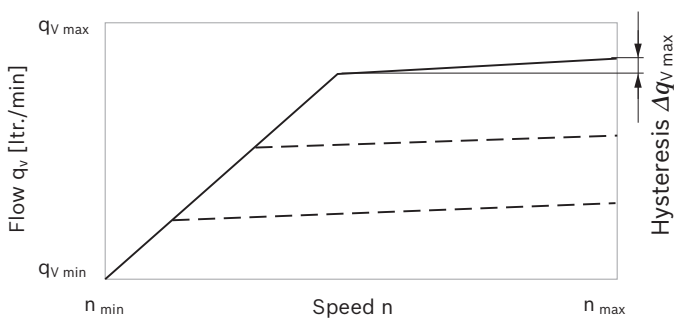

### ▼ Schematic DRS0

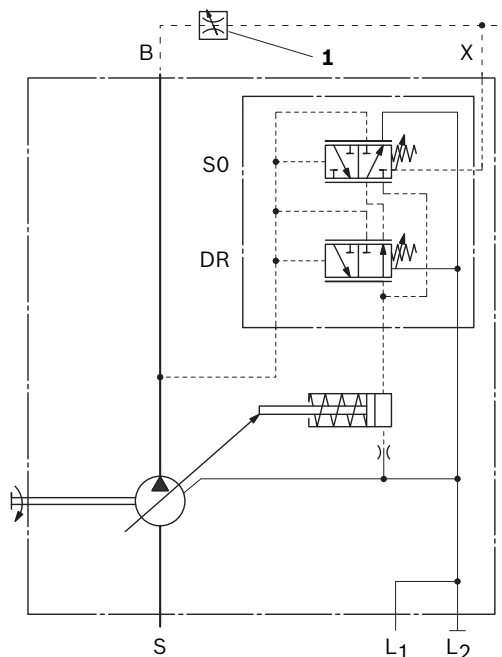

**1** The metering orifice (control block) is not included in the scope of delivery.

### Differential pressure $\Delta p$

Standard setting: 14 bar. If another setting is required, please state in clear text.

### Control data


For data for the pressure controller DR, please refer to page 9. Maximum flow differential (hysteresis and increase) measured at drive speed  $n = 1500$  rpm and  $t_{fluid} = 50$  °C

NG	18	28	35
Volume flow difference $\Delta q_{V \max}$		3 l/min	
Maximum control fluid consumption approx.		4 l/min	

<sup>1)</sup> In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. Lower values on request

**Dimensions size 18 and size 28**


**DR, DN – Pressure controller / DRS0, DNS0 – Pressure control with load sensing, clockwise rotation**

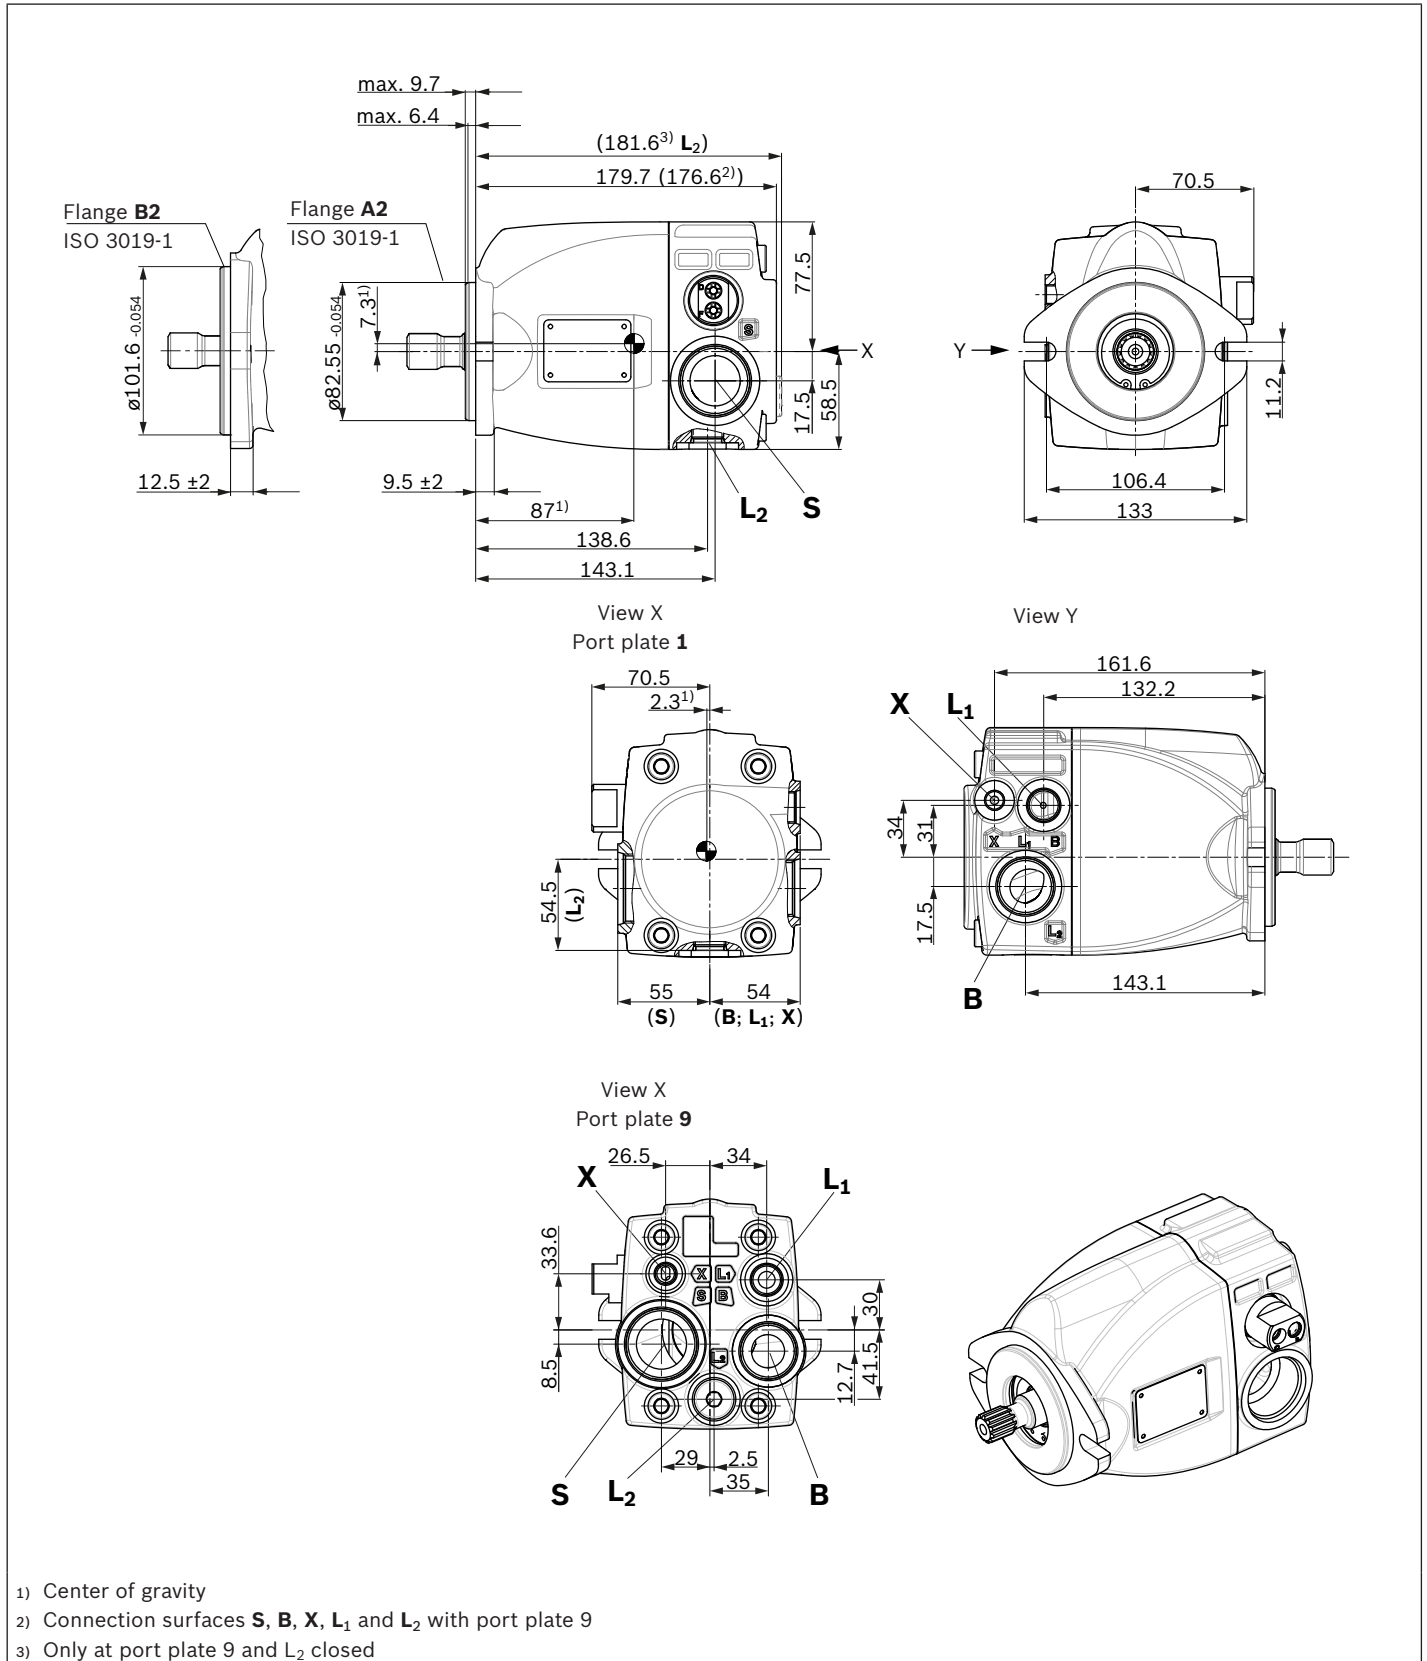

- 1) Center of gravity
- 2) Connection surfaces **S**, **B**, **X**, **L1** and **L2** with port plate 9
- 3) Only at port plate 9 and **L2** closed


**Dimensions size 18 and size 28**

**DR, DN – Pressure controller / DRS0, DNS0 – Pressure control with load sensing, counter clockwise rotation**

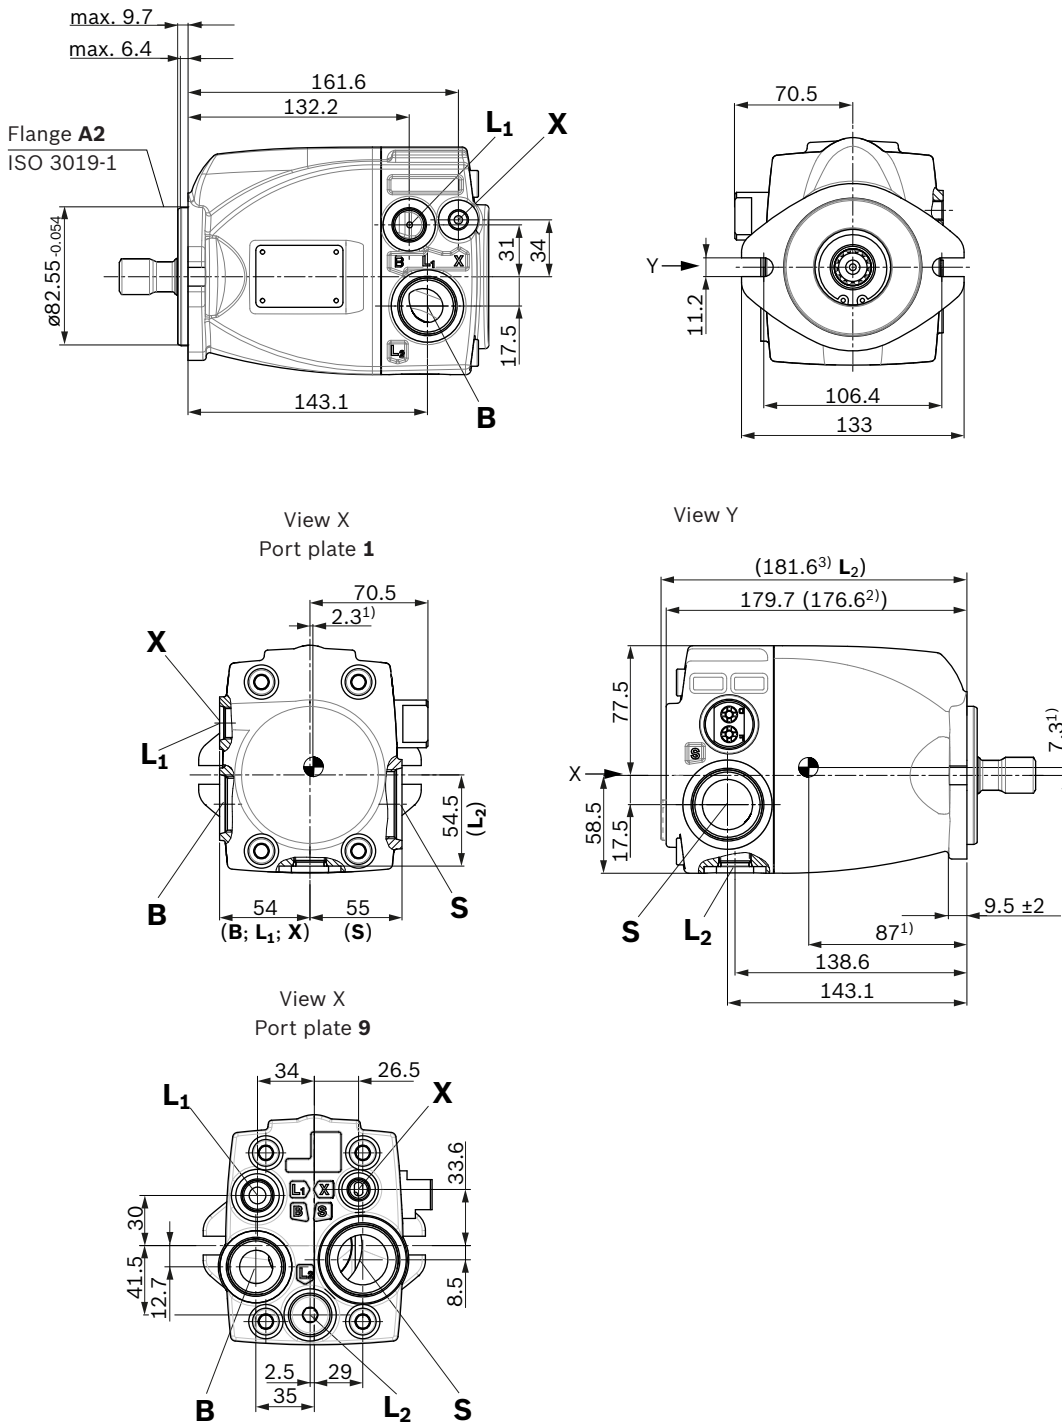


- 1) Center of gravity
- 2) Connection surfaces S, B, X, L<sub>1</sub> and L<sub>2</sub> with port plate 9
- 3) Only at port plate 9 and L<sub>2</sub> closed

▼ **D3/D4 Pressure controller with override, electric-proportional, negative control; cw**

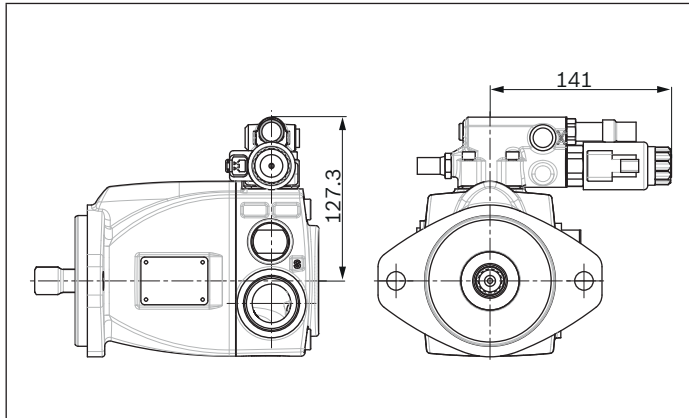


▼ **D3/D4 Pressure controller with override, electric-proportional, negative control; ccw**

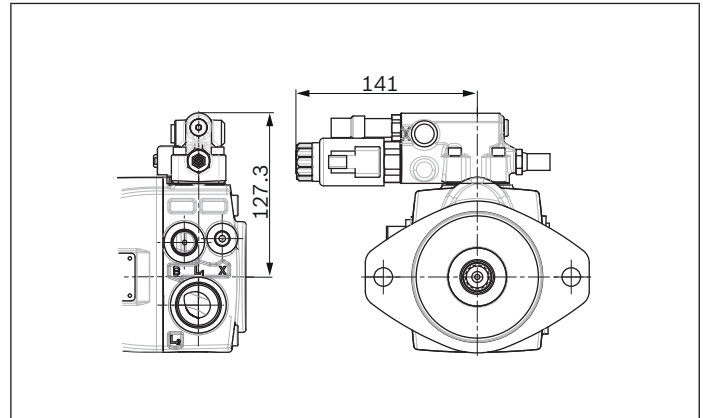


▼ **Spline shaft SAE J744**

**S3** – 3/4 in 11T 16/32DP<sup>1)</sup>

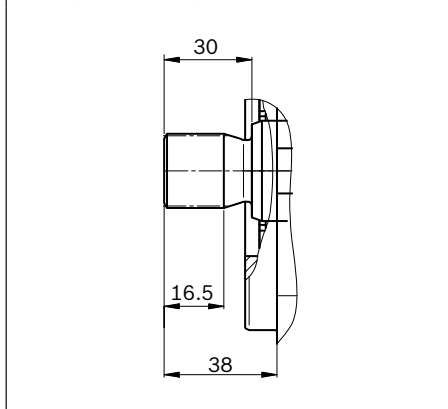

▼ **Spline shaft SAE J744**

**S4** – 7/8 in 13T 16/32DP<sup>1)</sup>

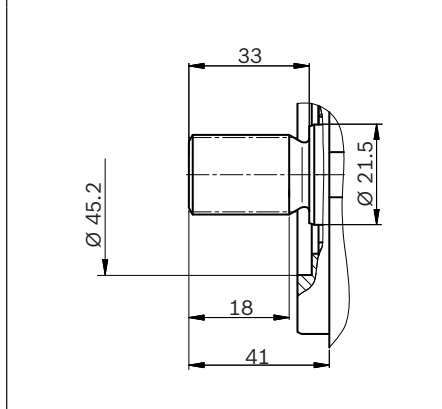

**Ports and fastening threads version “B”**

Ports		Standard <sup>4)</sup>	Size <sup>3)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>8)</sup>
<b>B</b>	Service line port	ISO 11926	1 5/16-12UN-2B; 20 tief	280	O
<b>S</b>	Suction port	ISO 11926	1 5/8-12UN-2B; 20 tief	5	O
<b>L<sub>1</sub></b>	Case drain port	ISO 11926	3/4-16UNF-2B; 15 tief	10	O <sup>6)</sup>
<b>L<sub>2</sub></b>	Case drain port	ISO 11926	3/4-16UNF-2B; 15 tief	10	X <sup>6)</sup>
<b>X</b>	Pilot signal	ISO 11926	7/16-20UNF-2B; 12 tief	280	O <sup>7)</sup>

**Ports and fastening threads version “M”**


Ports		Standard <sup>4)</sup>	Size <sup>3)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>8)</sup>
<b>B</b>	Service line port	ISO 6149	M33 × 2; 20 deep	280	O
<b>S</b>	Suction port	ISO 6149	M42 × 2; 20 deep	5	O
<b>L<sub>1</sub></b>	Case drain port	ISO 6149	M18 × 1.5; 13 deep	10	O <sup>6)</sup>
<b>L<sub>2</sub></b>	Case drain port	ISO 6149	M18 × 1.5; 13 deep	10	X <sup>6)</sup>
<b>X</b>	Pilot signal	ISO 6149	M12 × 1.5; 12 deep	280	O <sup>7)</sup>

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) Observe the instructions in the operating instructions concerning the maximum tightening torques.
- 4) The spot face can be deeper than specified in the standard.

- 5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 6) Depending on the installation position, **L<sub>1</sub>** or **L<sub>2</sub>** must be connected (see also the installation instructions on page 22).
- 7) Only if an S0 controller is present.
- 8) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)

**Dimensions, size 35**


**DR, DN – Pressure controller / DRS0, DNS0 – Pressure control with load sensing, clockwise rotation**

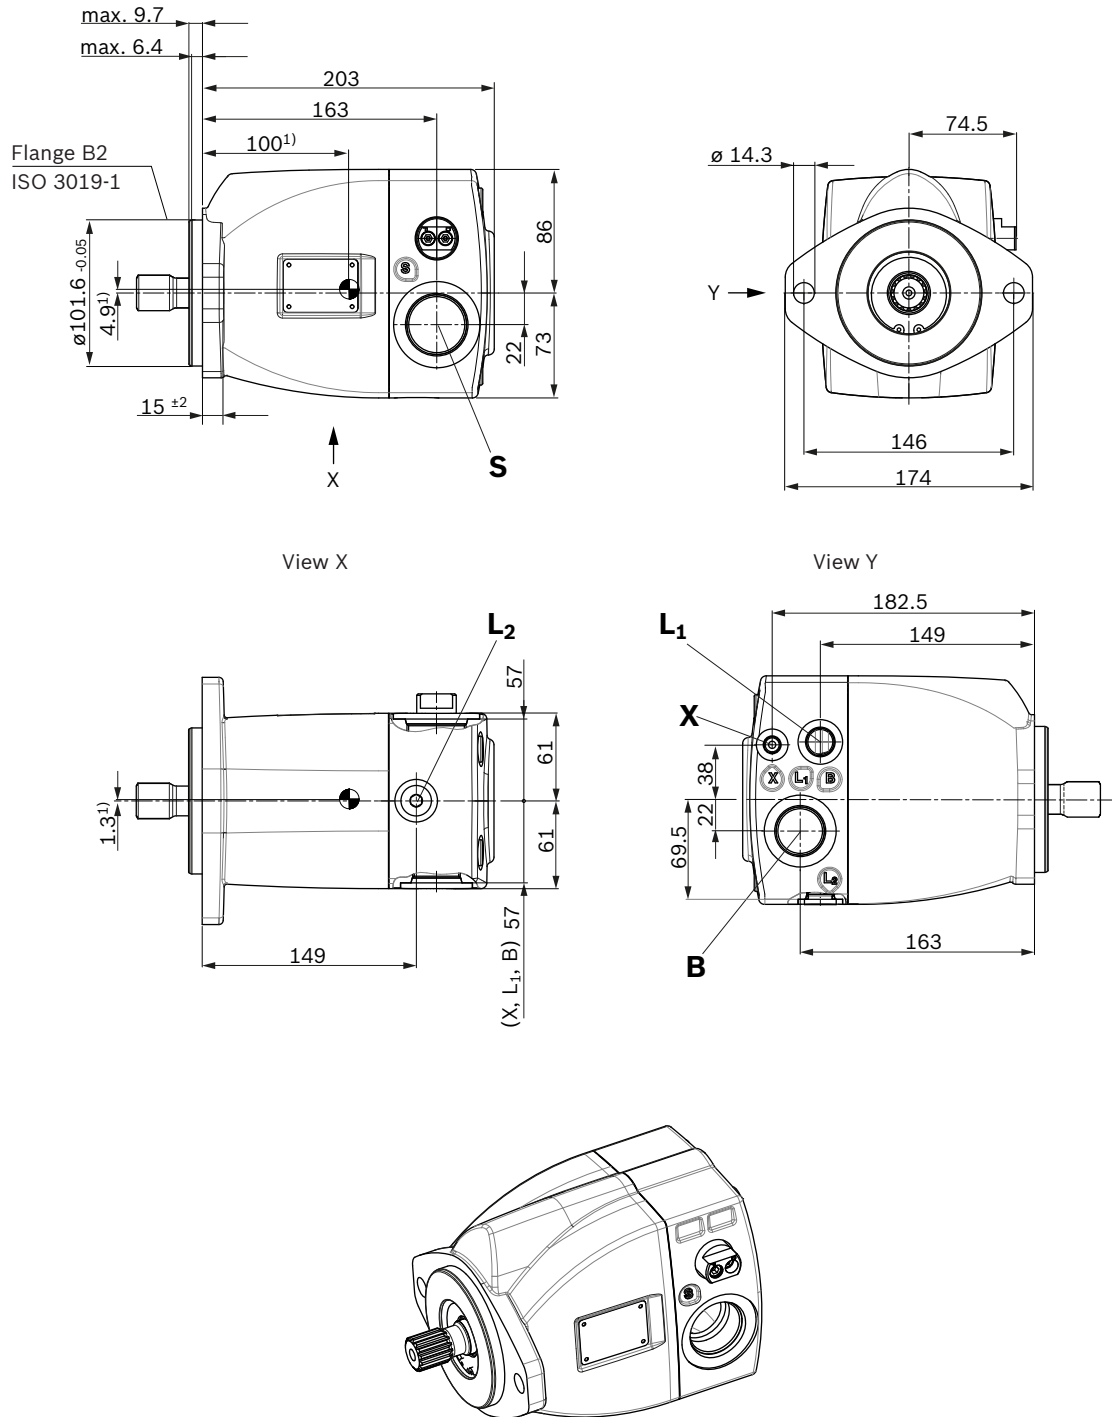

1) Center of gravity


**Dimensions, size 35**

**DR, DN – Pressure controller / DRS0, DNS0 – Pressure control with load sensing**, counter clockwise rotation

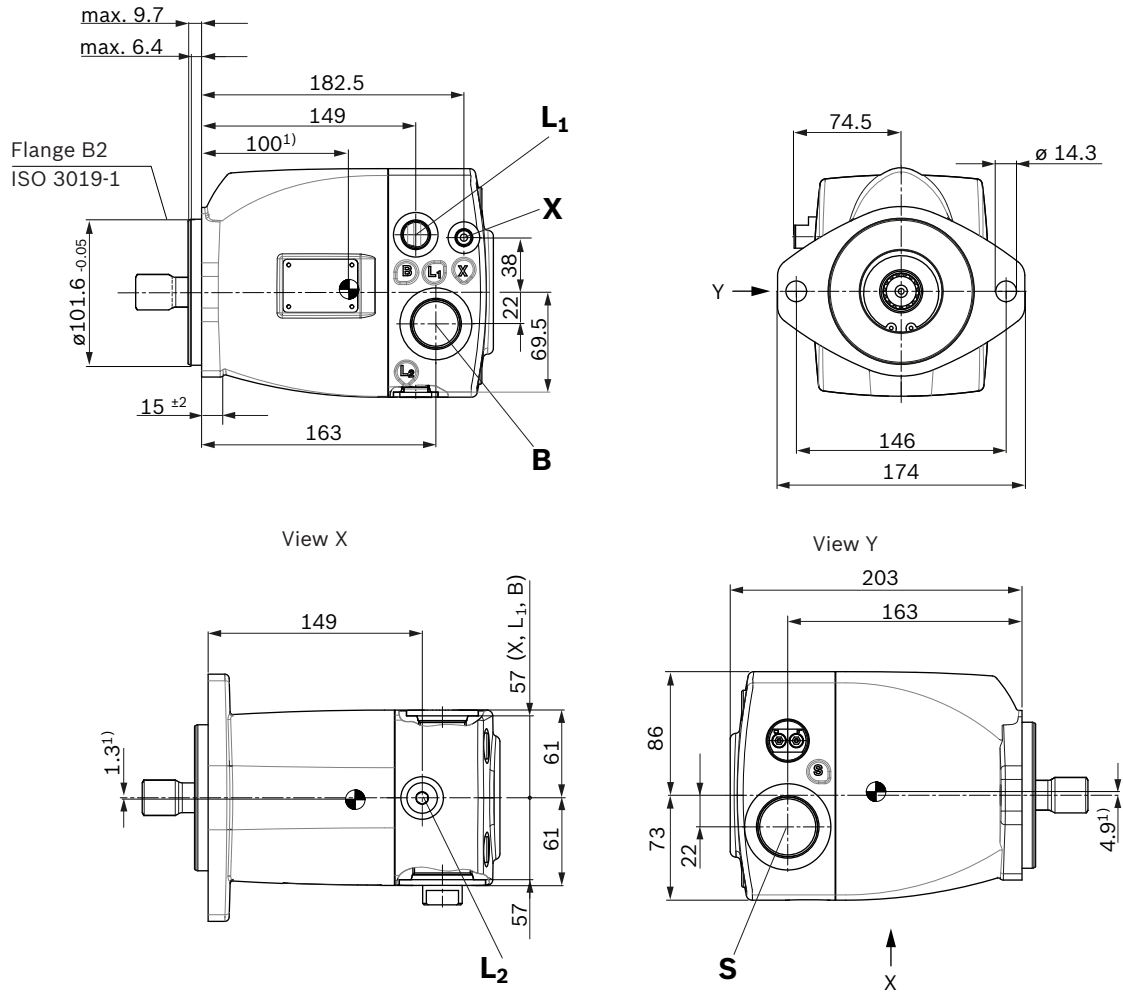


1) Center of gravity

▼ **D3/D4 Pressure controller with override, electric-proportional, negative control; ccw**

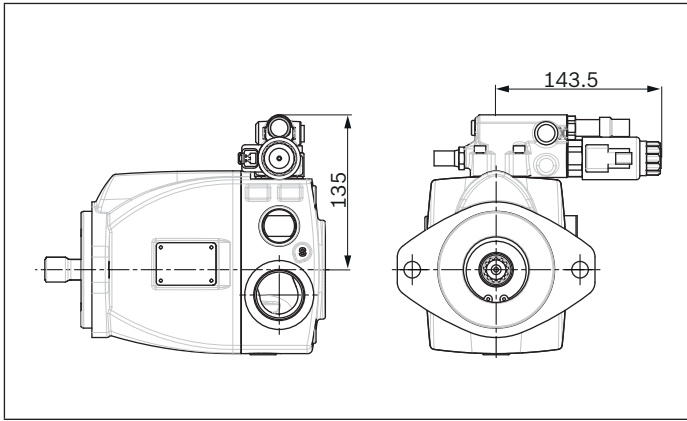


▼ **D3/D4 Pressure controller with override, electric-proportional, negative control; ccw**

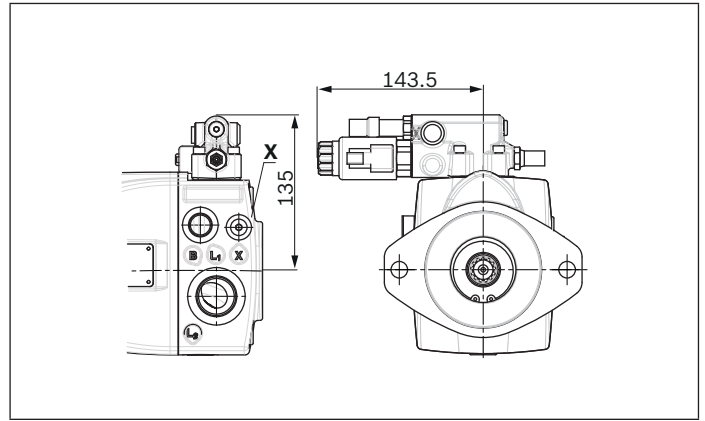


▼ **Splined shaft SAE J744**

**S4** – 7/8 in 13T 16/32DP<sup>1)</sup>

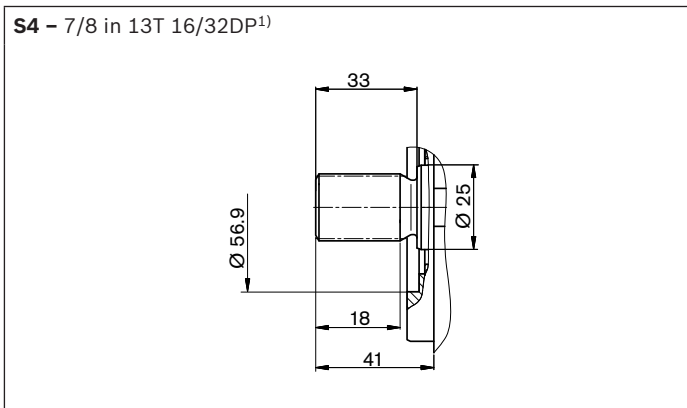

**S5** – 1 in 15T 16/32DP<sup>1)</sup>

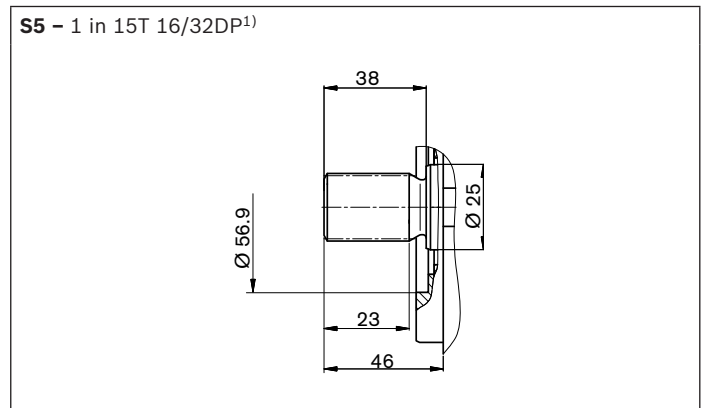

**Ports and fastening threads version “B”**

Ports	Standard <sup>4)</sup>	Size <sup>3)</sup>	$p_{max\ abs}$ [bar] <sup>5)</sup>	State <sup>8)</sup>	
<b>B</b>	Service line port	ISO 11926	1 5/16-12UN-2B; 20 deep	280	O
<b>S</b>	Suction port	ISO 11926	1 5/8-12UN-2B; 20 deep	5	O
<b>L<sub>1</sub></b>	Case drain port	ISO 11926	3/4-16UNF-2B; 15 deep	10	O <sup>6)</sup>
<b>L<sub>2</sub></b>	Case drain port	ISO 11926	3/4-16UNF-2B; 15 deep	10	X <sup>6)</sup>
<b>X</b>	Pilot signal	ISO 11926	7/16-20UNF-2B; 12 deep	280	O <sup>7)</sup>

**Ports and fastening threads version “M”**

Ports	Standard <sup>4)</sup>	Size <sup>3)</sup>	$p_{max\ abs}$ [bar] <sup>5)</sup>	State <sup>8)</sup>	
<b>B</b>	Service line port	ISO 6149	M33 × 2; 20 deep	280	O
<b>S</b>	Suction port	ISO 6149	M42 × 2; 20 deep	5	O
<b>L<sub>1</sub></b>	Case drain port	ISO 6149	M18 × 1.5; 13 deep	10	O <sup>6)</sup>
<b>L<sub>2</sub></b>	Case drain port	ISO 6149	M18 × 1.5; 13 deep	10	X <sup>6)</sup>
<b>X</b>	Pilot signal	ISO 6149	M12 × 1.5; 12 deep	280	O <sup>7)</sup>

**Note**

With all the ports – in particular when connecting port **S** – use the stud ends provided for the standard with the corresponding width across flats. Please contact us about larger widths across flats.

- 3) Observe the instructions in the operating instructions concerning the maximum tightening torques.
- 4) The spot face can be deeper than specified in the standard.
- 5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 6) Depending on the installation position, **L<sub>1</sub>** or **L<sub>2</sub>** must be connected (see also the installation instructions on page 22).
- 7) Only if an S0 controller is present.
- 8) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Thread according to ASME B1.1

## Through drives dimensions

Flange SAE J744			Hub for splined shaft <sup>1)</sup>			Availability NG			Code
Diameter	Attachment <sup>2)</sup>	Designation	Diameter	Designation		018	028	035	
82-2 (A)	⊘	A2	5/8 in 9T 16/32 DP	S2		●	○	●	A2S2
			3/4 in 11T 16/32 DP	S3		●	○	●	A2S3
			7/8 in 13T 16/32 DP	S4		●	○	●	A2S4
101-2 (B)	⊘	B2	7/8 in 13T 16/32 DP	S4		●	○	●	B2S4
			1 in 15T 16/32 DP	S5		-	-	●	B2S5


● = Available    ○ = On request    - = Not available

### ▼ 82-2 (A)

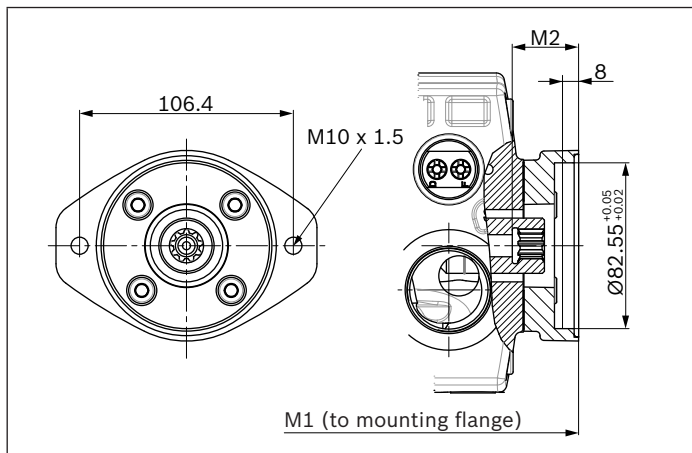

Short code	NG	M1	M2
<b>A2S2</b>	018	203.2	32
	028	203.2	32
	035	227.6	32
<b>A2S3</b>	018	203.2	38
	028	203.2	38
	035	227.6	38
<b>A2S4</b>	018	203.2	41
	028	203.2	41
	035	227.6	41

### ▼ 101-2 (B)

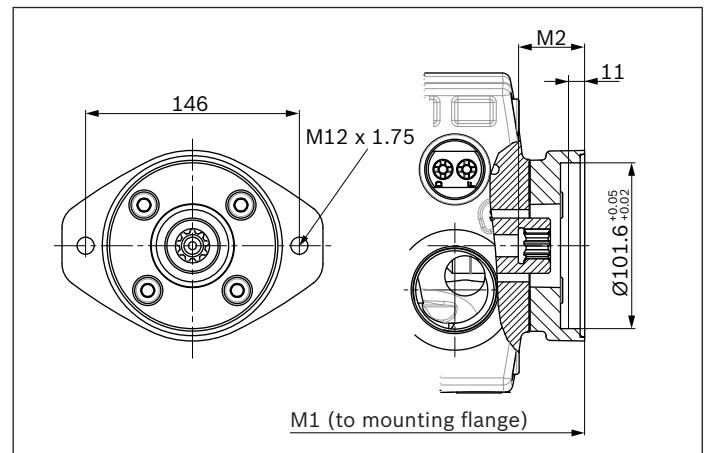

Short code	NG	M1	M2
<b>B2S4</b>	018	203.2	41
	028	203.2	41
	035	227.6	41
<b>B2S5</b>	035	227.6	46

- 1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Mounting drillings pattern viewed on through drive, with service line port B on right.
- 3) Continuous thread according to DIN 13; observe the instructions in the operating instructions concerning the maximum tightening torques.



**Overview of attachment options**

Through drive <sup>1)</sup>		Fitting options – 2nd pump							
Flange	Hub for splined shaft	Short code	A1VO/10 NG (shaft)	A4VG/32 NG (shaft)	A10VG/10 NG (shaft)	A10VO/52/53 NG (shaft)	A10VNO/52/53 NG (shaft)	A10V(S)O/31 NG (shaft)	External gear pump
82-2 (A)	3/4 in	A2S3	18, 28 (S3)	–	–	10 (S), 18 (S, R)	28 (R)	18 (S, R)	–
	7/8 in	A2S4	18, 28 (S4)	–	–	–	–	–	–
101-2 (B)	7/8 in	B2S4	18, 28 (S4) 35 (S4)	–	18 (S)	28 (S, R)	–	28 (S, R)	Series N Series G
	1 in	B2S5	35 (S5)	28 (S)	28 (S)	–	–	–	–

<sup>1)</sup> Additional through drives are available on request

## Combination pumps A1VO + A1VO

### Total length A

A1VO (1st pump)	A1VO (2nd pump)		
	NG18	NG28	NG35
NG18	383	–	–
NG28	383	383	–
NG35	410	410	431

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes. When ordering combination pumps, the type designations of the 1st and 2nd pump must be linked by a “+”.

#### Order example:

**A1VO035DRS0C200/10BRVB2S51B2S500-0+**


**A1VO035DRS0C200/10BRVB2S51000000-0**

It is permissible to use a combination of two single pumps of the same size (tandem pump), considering a dynamic mass acceleration of maximum 10 g (= 98.1 m/s<sup>2</sup>) without additional support brackets.

For combination pumps consisting of more than two pumps, the mounting flange must be rated for the permissible mass torque.

### Permissible mass moment of inertia

Size			18	28	35
static	$T_m$	Nm	500	500	890
dynamic at 10 g (98.1 m/s <sup>2</sup> )	$T_m$	Nm	50	50	89
Weight <b>without</b> through-drive	$m$	kg	12.3	12.3	18.4
Weight <b>with</b> through-drive			13.5	13.5	19.8
Distance, center of gravity <b>without</b> through drive	$l_1$	mm	87	87	100
Distance, center of gravity <b>with</b> through drive	$l_1$	mm	97	97	108

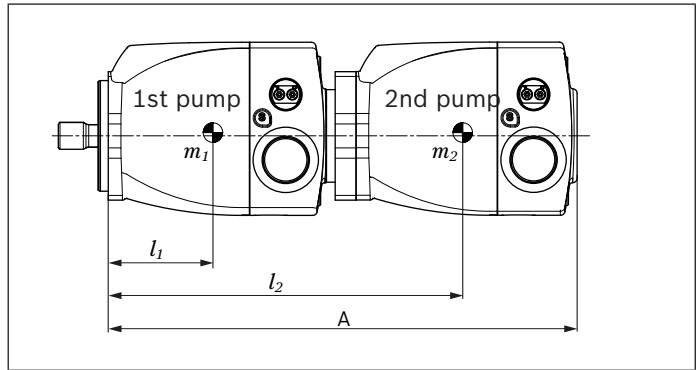

$m_1, m_2$	Weight of pump	[kg]
$l_1, l_2$	Distance, center of gravity	[mm]
$T_m = (m_1 \times l_1 + m_2 \times l_2) \times \frac{1}{102} \text{ [Nm]}$		

## Connector for solenoids


### DEUTSCH DT04-2P

Molded connector, 2-pin, without bidirectional suppressor diode

There is the following type of protection with mounted mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

#### ▼ Circuit symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

#### Notice

If necessary, you can change the position of the connector by turning the solenoid.

The procedure is defined in the instruction manual.

## Installation instructions

### General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This must also be observed following a relatively long standstill as the axial piston unit may drain back to the reservoir via the hydraulic lines.

Particularly with the “drive shaft up/down” installation position, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running. The leakage in the pump housing must be discharged to the reservoir via the highest available drain port (**L<sub>1</sub>**, **L<sub>2</sub>**).

For combinations of multiple units, the case drain fluid must be drained off at each pump.

If a shared drain line is used for several units, make sure that the respective case pressure is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operational circumstances, particularly at cold start. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction lines and the drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{s\ max} = 800\text{ mm}$ . The minimum suction pressure at port **S** must also not fall below 0.8 bar absolute during operation and during cold start.

When designing the reservoir, ensure adequate distance between the suction line and the case drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

### Note

In certain installation positions, an influence on the control characteristic curves can be expected. Gravity, dead weight and case pressure can cause minor shifts in characteristics and changes in response time.

For key, see page Page 23

1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.





### Installation position

See examples **1** to **11** below.

Additional installation positions are available upon request.  
Recommended installation position: **1** and **2**

### Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.

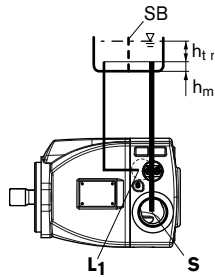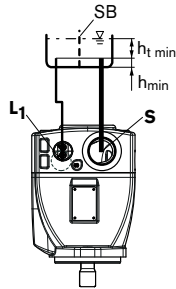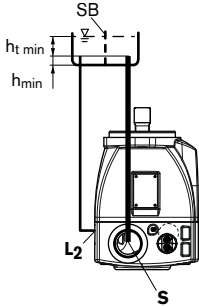Installation position	Air bleeding	Filling
<b>1</b> 	<b>L<sub>1</sub></b>	<b>L<sub>1</sub></b>
<b>2</b> 	<b>L<sub>2</sub></b>	<b>L<sub>2</sub></b>
<b>3</b> 	<b>L<sub>1</sub> or L<sub>2</sub></b>	<b>L<sub>1</sub> or L<sub>2</sub></b>
<b>4<sup>1)</sup></b> 	<b>L<sub>1</sub> or L<sub>2</sub></b>	<b>L<sub>1</sub> or L<sub>2</sub></b>





**Above-reservoir installation**

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.

To prevent the axial piston unit from draining in position 8, the height difference  $h_{ES\ min}$  must be at least 25 mm.

Observe the maximum permissible suction height

$h_{S\ max} = 800\ mm$ .


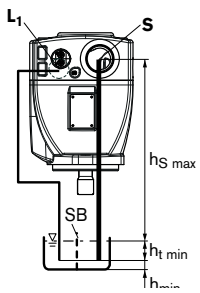
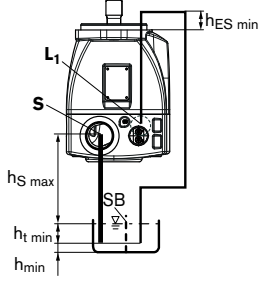
Installation position	Air bleeding	Filling
<p>5</p> 	<b>L<sub>1</sub></b>	<b>L<sub>1</sub></b>
<p>6</p> 	<b>L<sub>2</sub></b>	<b>L<sub>2</sub></b>
<p>7</p> 	<b>L<sub>1</sub></b>	<b>L<sub>1</sub></b>
<p>8<sup>1)</sup></p> 	<b>L<sub>1</sub></b>	<b>L<sub>1</sub></b>

**Inside-reservoir installation**

Inside-reservoir installation is when the axial piston unit is installed in the reservoir below the minimum fluid level.

The axial piston unit is completely below the hydraulic fluid. If the minimum fluid level is equal to or below the upper edge of the pump, see chapter “Above-reservoir installation”.

Axial piston units with electrical components (e.g., electric control, sensors) may not be installed in a reservoir below the fluid level.

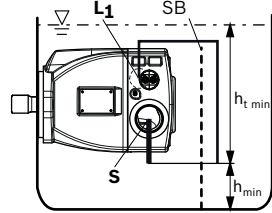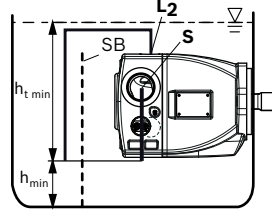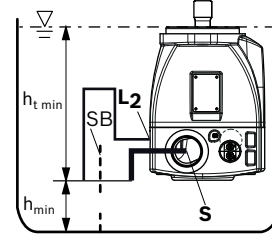Installation position	Air bleeding	Filling
<p>9</p> 	Via the highest available port <b>L<sub>1</sub></b>	Automatically via the open port <b>L<sub>1</sub></b> due to the position under the hydraulic fluid level
<p>10</p> 	Via the highest available port <b>L<sub>2</sub></b>	Automatically via the open port <b>L<sub>2</sub></b> due to the position below the hydraulic fluid level
<p>11<sup>1)</sup></p> 		

Key	
<b>L<sub>1</sub>, L<sub>2</sub></b>	Filling / air bleeding
<b>S</b>	Suction port
<b>SB</b>	Baffle (baffle plate)
$h_{t\ min}$	Minimum required immersion depth (200 mm)
$h_{min}$	Minimum required spacing to reservoir bottom (100 mm)
$h_{ES\ min}$	Minimum necessary height needed to protect the axial piston unit from draining (25 mm).
$h_{S\ max}$	Maximum permissible suction height (800 mm)

1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

## Project planning notes

- ▶ The A1VO variable pump is designed to be used in an open circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit require the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, request it from Bosch Rexroth.
- ▶ Before finalizing your design, request a binding installation drawing.
- ▶ The specified data and notes must be observed.
- ▶ Depending on the operating condition of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation times apply under optimal storage conditions, details of these conditions can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all variants of the product are approved for use in safety functions according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference. Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.

- ▶ Pressure controllers is no safeguard from pressure overload. A pressure relief valve must be provided in the hydraulic system.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports can only be used to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control and regulation systems (e.g. valve spools) may in certain circumstances become stuck in an undefined position due to contamination (e.g. contaminated hydraulic fluid, abrasion or residual dirt from components). As a result, the hydraulic fluid flow or build-up of torque of the axial piston unit will no longer respond correctly to the operator's commands. Even the use of different filter cartridges (external or internal inlet filter) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to set the consumer being driven to a safe position (e.g. safe stop) and if necessary to ensure it is properly implemented.

**Bosch Rexroth AG**  
Mobile Applications  
An den Kelterwiesen 14  
72160 Horb a.N., Germany  
Tel. +49 7451 92-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# Axial piston variable pump A10V(S)O Series 31

**RE 92701**

Edition: 06.2016

Replaces: 01.2012



- ▶ Size 18 (A10VSO)
- ▶ Sizes 28 to 140 (A10VO)
- ▶ Nominal pressure 280 bar
- ▶ Maximum pressure 350 bar
- ▶ Open circuit

## Features

- ▶ Variable pump with axial piston rotary group in swash-plate design for hydrostatic drives in open circuit.
- ▶ The flow is proportional to the drive speed and displacement.
- ▶ The flow can be infinitely varied by adjusting the swash-plate angle.
- ▶ 2 drain ports
- ▶ Excellent suction performance
- ▶ Low noise level
- ▶ Long service life
- ▶ Favorable power/weight ratio
- ▶ Versatile controller range
- ▶ Short control time
- ▶ The through drive is suitable for adding gear pumps and axial piston pumps up to the same size, i.e., 100% through drive.

## Contents

Type code	2
Hydraulic fluids	4
Working pressure range	6
Technical data, standard unit	7
Technical data, high-speed version	8
DG – Two-point control, direct operated	10
DR – Pressure controller	11
DRG – Pressure controller, remote controlled	12
DFR / DFR1 / DRSC – Pressure and flow controller	13
DFLR – Pressure, flow and power control	15
ED – Electro-hydraulic pressure control	16
ER – Electro-hydraulic pressure control	17
Dimensions, size 18 to 140	18
Dimensions, through drive	49
Overview of mounting options	53
Combination pumps A10VO + A10VO	54
Connector for solenoids	55
Electronic controls	55
Installation instructions	56
Project planning notes	59
Safety instructions	60

## Type code

01	02	03	04	05	06	07	08	09	10	11	12	13
	<b>A10V(S)</b>	<b>O</b>			<b>/</b>	<b>31</b>	<b>-</b>	<b>V</b>				

Version		18	28	45	71	88	100	140	
01	Standard version (without code)	●	●	●	●	●	●	●	
	High-speed version (external dimensions are the same as the standard version)	-	-	●	●	-	●	●	<b>H</b>

Axial piston unit		18	28	45	71	88	100	140	
02	Swashplate design, variable, nominal pressure 280 bar, maximum pressure 350 bar	●	-	-	-	-	-	-	<b>A10VS</b>
		-	●	●	●	●	●	●	<b>A10V</b>

Operating mode		
03	Pump, open circuit	<b>O</b>

Size (NG)		18	28	45	71	88	100	140
04	Geometric displacement, see table of values on pages 6 and 7							

Control device		18	28	45	71	88	100	140	
05	Two-point control, direct operated	●	●	●	●	●	●	●	<b>DG</b>
	Pressure controller hydraulic	●	●	●	●	●	●	●	<b>DR</b>
	with flow controller hydraulic X-T open	●	●	●	●	●	●	●	<b>DFR</b>
	X-T plugged with flushing function	●	●	●	●	●	●	●	<b>DFR1</b>
	X-T plugged without flushing function	●	●	●	●	●	●	●	<b>DRSC</b>
	with flow and differential pressure control, electrically variable	●	●	●	●	●	●	●	<b>EF<sup>1)</sup></b>
	with pressure cut-off hydraulic remote controlled	●	●	●	●	●	●	●	<b>DRG</b>
	electrical negative control $U = 12\text{ V}$	●	●	●	●	●	●	●	<b>ED71</b>
	$U = 24\text{ V}$	●	●	●	●	●	●	●	<b>ED72</b>
	electrical positive control $U = 12\text{ V}$	●	●	●	●	●	●	●	<b>ER71</b>
	$U = 24\text{ V}$	●	●	●	●	●	●	●	<b>ER72</b>
	Pressure-flow power control	-	●	●	●	●	●	●	<b>DFLR</b>

Series		
06	Series 3, index 1	<b>31</b>

Direction of rotation		
07	Viewed on drive shaft clockwise	<b>R</b>
	counter-clockwise	<b>L</b>

Sealing material		
08	FKM (fluoroelastomer)	<b>V</b>

Drive shaft		18	28	45	71	88	100	140	
09	Splined shaft ANSI B92.1a standard shaft	●	●	●	●	●	●	●	<b>S</b>
	similar to shaft "S" however for higher input torque	●	●	●	●	●	-	-	<b>R</b>
	reduced diameter, limited suitability for through drive (see table of values, page 9)	●	●	●	●	●	●	○	<b>U</b>
	same as "U", higher torque; limited suitability for through drive (see table of values, page 9)	-	●	●	●	●	●	●	<b>W</b>

Mounting flange		
10	ISO 3019-1 (SAE) 2-hole	<b>C</b>
	4-hole	<b>D</b>

1) See data sheet 92709



01	02	03	04	05	06	07	08	09	10	11	12	13
	<b>A10V(S)</b>	<b>O</b>			<b>/</b>	<b>31</b>	<b>-</b>	<b>V</b>				

Working port			18	28	45	71	88	100	140	
11	SAE flange ports according to J518 Working ports <b>metric</b>	Fastening thread not for through drive	-	●	●	-	-	●	●	<b>11</b>
		<b>metric</b> ; rear	-	-	-	●	●	-	-	<b>41</b>
	Fastening thread for through drive	<b>metric</b> ; lateral top bottom	●	●	●	-	-	●	●	<b>12</b>
			-	-	-	●	●	-	-	<b>42</b>
11	SAE flange ports according to J518 Working ports <b>UNF</b>	Fastening thread not for through drive	-	●	●	-	-	●	●	<b>61</b>
		<b>UNF</b> ; rear	-	-	-	●	●	-	-	<b>91</b>
	Fastening thread for through drive	<b>UNF</b> ; lateral top bottom	●	●	●	-	-	●	●	<b>62</b>
			-	-	-	●	●	-	-	<b>92</b>

**Through drive** (for mounting options, see page 53)

12	Flange ISO 3019-1		Hub for splined shaft <sup>2)</sup>		18	28	45	71	88	100	140	
	Diameter	Diameter	Diameter	Diameter								
	without through drive				●	●	●	●	●	●	●	<b>N00</b>
	82-2 (A)	5/8 in	9T 16/32DP		●	●	●	●	●	●	●	<b>K01</b>
		3/4 in	11T 16/32DP		●	●	●	●	●	●	●	<b>K52</b>
	101-2 (B)	7/8 in	13T 16/32DP		-	●	●	●	●	●	●	<b>K68</b>
		1 in	15T 16/32DP		-	-	●	●	●	●	●	<b>K04</b>
	127-2 (C)	1 1/4 in	14T 12/24DP		-	-	-	●	●	●	●	<b>K07</b>
		1 1/2 in	17T 12/24DP		-	-	-	-	-	●	●	<b>K24</b>
	152-4 (D)	1 3/4 in	13T 8/16DP		-	-	-	-	-	-	●	<b>K17<sup>4)</sup></b>

**Connectors for solenoids<sup>3)</sup>**

13	Without connector (without solenoid, with hydraulic control only, without code)	●	●	●	●	●	●	●	●	
	DEUTSCH - molded connector, 2-pin, without suppressor diode	●	●	●	●	●	●	●	●	<b>P</b>

● = Available    ○ = On request    - = Not available

**Notice**

- ▶ Note the project planning notes on page 59.
- ▶ In addition to the type code, please specify the relevant technical data when placing your order.

<sup>2)</sup> Hub for splined shaft according to ANSI B92.1a  
<sup>3)</sup> Connectors for other electric components can deviate.  
<sup>4)</sup> Only with mounting flange D

## Hydraulic fluids

The A10V(S)O variable pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: HFD hydraulic fluids (for permissible technical data, see data sheet 90225)

### Notes on selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $\nu_{opt}$  see selection diagram).

### Notice


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact the responsible member of staff at Bosch Rexroth.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$\nu_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ °C}$	$t \leq 1 \text{ min}$ , without load ( $p \leq 30 \text{ bar}$ ), $n \leq 1000 \text{ rpm}$
	Permissible temperature difference	$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid
Warm-up phase	$\nu < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ °C to } -25 \text{ °C}$	Note the detailed information on operation with low temperatures, see data sheet 90300-03-B
Continuous operation	$\nu = 400 \text{ to } 10 \text{ mm}^2/\text{s}$	$\theta = -25 \text{ °C to } +110 \text{ °C}$	this corresponds, for VG 46 for example, to a temperature range of +5 °C to +85 °C (see selection diagram) measured at port <b>L</b> , <b>L<sub>1</sub></b> observe the permissible temperature range of the shaft seal ( $\Delta T = \text{approx. } 5 \text{ K}$ between the bearing/shaft seal and port <b>L</b> , <b>L<sub>1</sub></b> )
	$\nu_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		Range of optimum operating viscosity and efficiency
Short-term operation	$\nu_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 1 \text{ min}$ , $p < 0.3 \cdot p_{nom}$

### ▼ Selection diagram

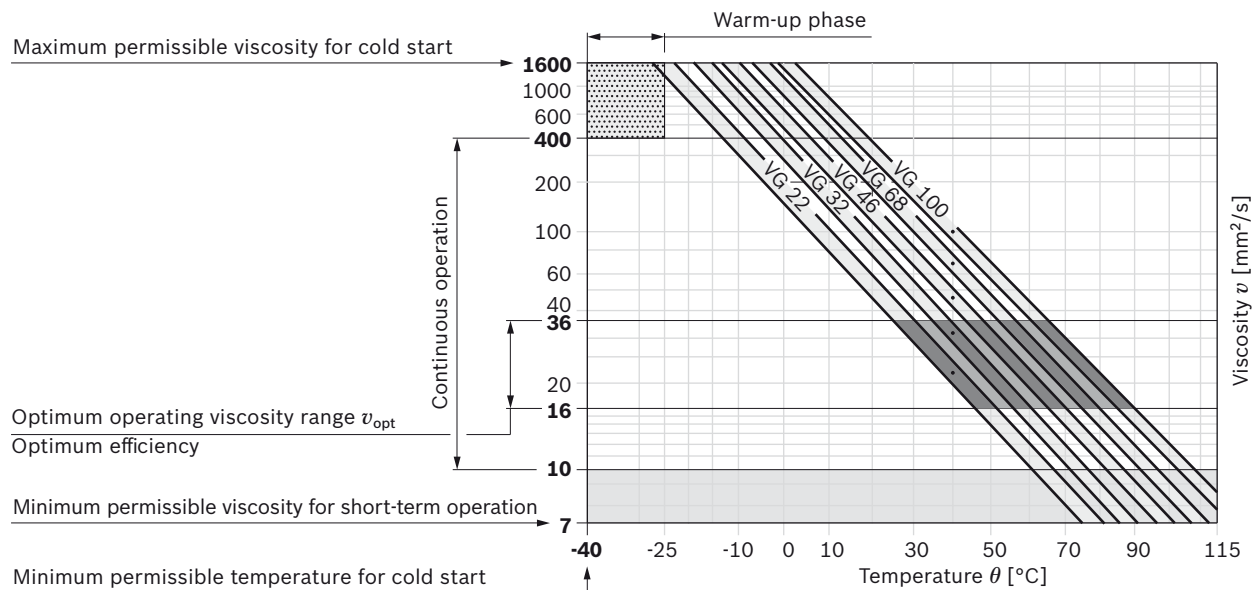

### **Filtration of the hydraulic fluid**

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.


At very high hydraulic fluid temperatures (90 °C to maximum 115 °C), cleanliness level 19/17/14 according to at least ISO 4406 is necessary.

Please contact us if the above classes cannot be observed.

## Working pressure range


Pressure at working port B		Definition
Nominal pressure $p_{nom}$	280 bar	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	350 bar	The maximum pressure corresponds to the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	2 ms	
Total operating period	300 h	
Minimum pressure $p_{B abs}$ (high-pressure side)	10 bar <sup>1)</sup>	Minimum pressure on the high-pressure side ( <b>B</b> ) which is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{A max}$	16000 bar/s	Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
Pressure at suction port S (inlet)		
Minimum pressure $p_{S min}$ Standard	0.8 bar absolute	Minimum pressure at suction port <b>S</b> (inlet) that is required in order to avoid damage to the axial piston unit. The minimum pressure depends on the rotational speed and displacement of the axial piston unit.
Maximum pressure $p_{S max}$	10 bar absolute <sup>2)</sup>	
Leakage pressure at port L, L <sub>1</sub>		
Maximum pressure $p_{L max}$	2 bar absolute <sup>2)</sup>	Maximum 0.5 bar higher than inlet pressure at port <b>S</b> , but not higher than $p_{L max}$ . A case drain line to the reservoir is required.

### ▼ Rate of pressure change $R_{A max}$

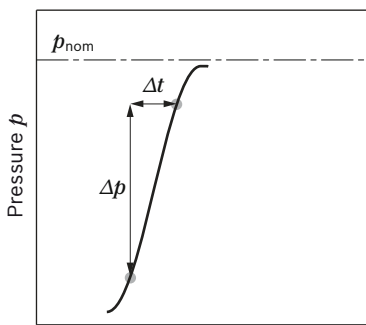

Time  $t$

### ▼ Pressure definition

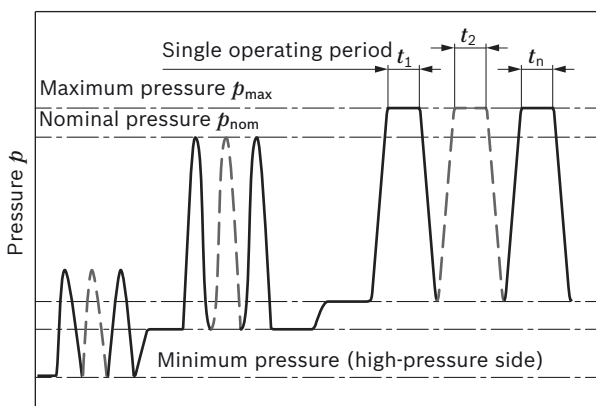

Time  $t$


Total operating period =  $t_1 + t_2 + \dots + t_n$

### Notice

Working pressure range valid when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.

### Minimum permissible inlet pressure at suction port S with speed increase

In order to avoid damage to the pump (cavitation), a minimum inlet pressure must be guaranteed at suction port **S**. The minimum inlet pressure level depends on the rotational speed and the displacement of the variable pump.

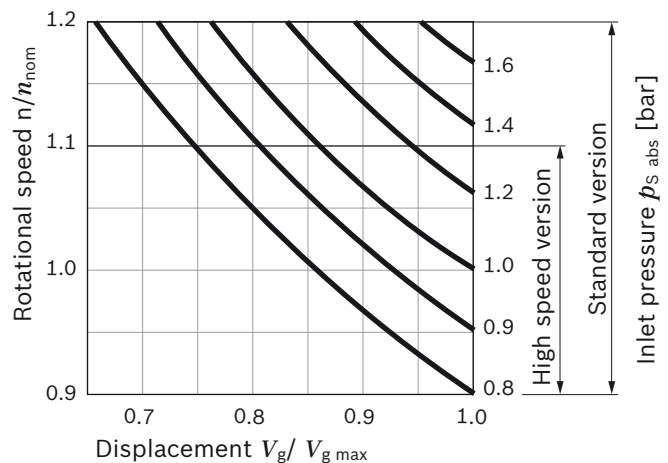

During continuous operation in overspeed over  $n_{nom}$ , a reduction in operational service life is to be expected due to cavitation erosion.

1) Lower pressure is time-dependent, please contact us  
2) Other values on request

## Technical data, standard unit

Size	NG	18	28	45	71	88	100	140	
Displacement, geometric, per revolution	$V_{g \max}$ cm <sup>3</sup>	18	28	45	71	88	100	140	
Rotational speed maximum <sup>1)</sup>	at $V_{g \max}$	$n_{\text{nom}}$ rpm	3300	3000	2600	2200	2100	2000	1800
	at $V_g < V_{g \max}$ <sup>2)</sup>	$n_{\text{max perm}}$ rpm	3900	3600	3100	2600	2500	2400	2100
Flow	at $n_{\text{nom}}$ and $V_{g \max}$	$q_{v \max}$ l/min	59	84	117	156	185	200	252
	at $n_E = 1500$ rpm and $V_{g \max}$	$q_{vE \max}$ l/min	27	42	68	107	132	150	210
Power at $\Delta p = 280$ bar	at $n_{\text{nom}}, V_{g \max}$	$P_{\text{max}}$ kW	28	39	55	73	86	93	118
	at $n_E = 1500$ rpm and $V_{g \max}$	$P_{E \max}$ kW	12.6	20	32	50	62	70	98
Torque at $V_{g \max}$ and	$\Delta p = 280$ bar	$T_{\text{max}}$ Nm	80	125	200	316	392	445	623
	$\Delta p = 100$ bar	$T$ Nm	30	45	72	113	140	159	223
Rotary stiffness of drive shaft	S	$c$ Nm/rad	11087	22317	37500	71884	71884	121142	169437
	R	$c$ Nm/rad	14850	26360	41025	76545	76545	–	–
	U	$c$ Nm/rad	8090	16695	30077	52779	52779	91093	–
	W	$c$ Nm/rad	–	19898	34463	57460	57460	101847	165594
Moment of inertia for rotary group	$J_{TW}$ kgm <sup>2</sup>	0.00093	0.0017	0.0033	0.0083	0.0083	0.0167	0.0242	
Maximum angular acceleration <sup>3)</sup>	$\alpha$ rad/s <sup>2</sup>	6800	5500	4000	2900	2600	2400	2000	
Case volume	$V$ l	0.4	0.7	1.0	1.6	1.6	2.2	3.0	
Weight <b>without</b> through drive (approx.)	$m$ kg	12.9	18	23.5	35.2	35.2	49.5	65.4	
Weight <b>with</b> through drive (approx.)		13.8	19.3	25.1	38	38	55.4	74.4	

3

### Determining the operating characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{mh}}$	[Nm]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

#### Key

$V_g$  Displacement per revolution [cm<sup>3</sup>]

$\Delta p$  Differential pressure [bar]

$n$  Rotational speed [rpm]

$\eta_v$  Volumetric efficiency

$\eta_{hm}$  Hydraulic-mechanical efficiency

$\eta_t$  Total efficiency ( $\eta_t = \eta_v \times \eta_{hm}$ )

### Notice

- ▶ Theoretical values, without efficiency and tolerances; values rounded
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends checking the load by means of test or calculation / simulation and comparison with the permissible values.

1) The values are applicable:

- At absolute pressure  $p_{\text{abs}} = 1$  bar at suction port **S**
- For the optimal viscosity range of  $\nu_{\text{opt}} = 36$  to  $16$  mm<sup>2</sup>/s
- For hydraulic fluid based on mineral oils

2) For a speed increase up to  $n_{\text{max perm}}$ , please observe the diagram on page 6.

3) The data are valid for values between the minimum required and maximum permissible rotational speed. It applies for external stimuli (e. g. diesel engine 2 to 8 times rotary frequency, Cardan shaft twice the rotary frequency). The limit value is only valid for a single pump. The load capacity of the connecting parts must be considered.

## Technical data, high-speed version

Size		NG	45	71	100	140	
Displacement, geometric, per revolution		$V_{g \max}$	cm <sup>3</sup>	45	71	100	140
Rotational speed maximum <sup>1)</sup>	at $V_{g \max}$	$n_{\text{nom}}$	rpm	3000	2550	2300	2050
	at $V_g < V_{g \max}$ <sup>2)</sup>	$n_{\text{max perm}}$	rpm	3300	2800	2500	2200
Flow	at $n_{\text{nom}}$ and $V_{g \max}$	$q_{v \max}$	l/min	135	178	230	287
Power	at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 280$ bar	$P_{\max}$	kW	63	83	107	134
Torque	$\Delta p = 280$ bar	$T_{\max}$	Nm	200	316	445	623
	at $V_{g \max}$ and $\Delta p = 100$ bar	$T$	Nm	72	113	159	223
Rotary stiffness of drive shaft	S	$c$	Nm/rad	37500	71884	121142	169537
	R	$c$	Nm/rad	41025	76545	–	–
	U	$c$	Nm/rad	30077	52779	91093	–
	W	$c$	Nm/rad	34463	57460	101847	165594
Moment of inertia for rotary group		$J_{\text{TW}}$	kgm <sup>2</sup>	0.0033	0.0083	0.0167	0.0242
Maximum angular acceleration <sup>3)</sup>		$\alpha$	rad/s <sup>2</sup>	4000	2900	2400	2000
Case volume		$V$	l	1.0	1.6	2.2	3.0
Weight <b>without</b> through drive (approx.)		$m$	kg	23.5	35.2	49.5	65.4
Weight <b>with</b> through drive (approx.)				25.1	38	55.4	74.4

### Notice

- ▶ Theoretical values, without efficiency and tolerances; values rounded
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends checking the load by means of test or calculation / simulation and comparison with the permissible values.



1) The values are applicable:

- At absolute pressure  $p_{\text{abs}} = 1$  bar at suction port **S**
- For the optimal viscosity range of  $\nu_{\text{opt}} = 36$  to  $16$  mm<sup>2</sup>/s
- For hydraulic fluid based on mineral oils

2) For a speed increase up to  $n_{\text{max perm}}$ , please observe the diagram on page 6.

3) The data are valid for values between the minimum required and maximum permissible rotational speed. It applies for external stimuli (e. g. diesel engine 2 to 8 times rotary frequency, Cardan shaft twice the rotary frequency). The limit value is only valid for a single pump. The load capacity of the connecting parts must be considered.

**Permissible radial and axial forces of the drive shafts**

Size		NG	18	28	45	71	88	100	140	
Maximum radial force at a/2		$F_{q \max}$	N	350	1200	1500	1900	1900	2300	2800
Maximum axial force		$\pm F_{ax \max}$	N	700	1000	1500	2400	2400	4000	4800


**Notice**

► The values given are maximum values and do not apply to continuous operation.  
 For drives with radial loading (pinion, V-belt drives), please contact us!

**Permissible input and through-drive torques**

Size			18	28	45	71	88	100	140
Torque at $V_{g \max}$ and $\Delta p = 280 \text{ bar}^1$	$T_{max}$	Nm	80	125	200	316	392	445	623
Maximum input torque at drive shaft <sup>2)</sup>									
S	$T_{E \max}$	Nm	124	198	319	626	626	1104	1620
	$\varnothing$	in	3/4	7/8	1	1 1/4	1 1/4	1 1/2	1 3/4
R	$T_{E \max}$	Nm	160	250	400	644	644	-	-
	$\varnothing$	in	3/4	7/8	1	1 1/4	1 1/4	-	-
U	$T_{E \max}$	Nm	59	105	188	300	300	595	-
	$\varnothing$	in	5/8	3/4	7/8	1	1	1 1/4	-
W	$T_{E \max}$	Nm	-	140	220	394	394	636	1220
	$\varnothing$	in	-	3/4	7/8	1	1	1 1/4	1 1/2
Maximum through-drive torque									
S	$T_{D \max}$	Nm	108	160	319	492	492	778	1266
R	$T_{D \max}$	Nm	120	176	365	548	548	-	-
U	$T_{D \max}$	Nm	59	105	188	300	300	595	-
W	$T_{D \max}$	Nm	-	140	220	394	394	636	1220

▼ **Distribution of torques**

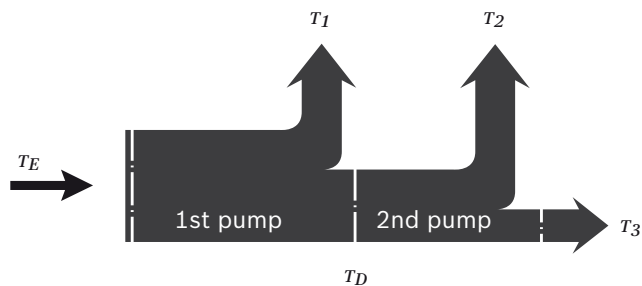

Torque at 1st pump	$T_1$
Torque at 2nd pump	$T_2$
Torque at 3rd pump	$T_3$
Input torque	$T_E = T_1 + T_2 + T_3$
	$T_E < T_{E \max}$
Through-drive torque	$T_D = T_2 + T_3$
	$T_D < T_{D \max}$

- 1) Efficiency not considered
- 2) For drive shafts with no radial force

## DG – Two-point control, direct operated

The variable pump can be set to a minimum swivel angle by connecting an external control pressure to port **X**.

This will supply control fluid directly to the stroking piston; a minimum control pressure of  $p_{st} \geq 50$  bar is required.

The variable pump can only be switched between  $V_{g\ max}$  or  $V_{g\ min}$ .


Please note that the required control pressure at port **X** is directly dependent on the actual working pressure  $p_B$  in port **B**. (See control pressure characteristic).

The maximum permissible control pressure is 280 bar.


Control pressure  $p_{st}$  in **X** = 0 bar  $\triangleq V_{g\ max}$

Control pressure  $p_{st}$  in **X**  $\geq 50$  bar  $\triangleq V_{g\ min}$

### Control pressure characteristic curve

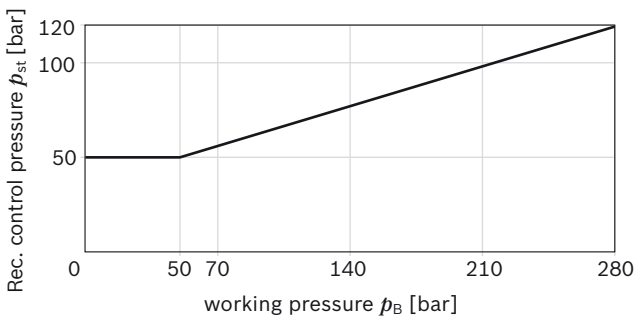

### Circuit diagram

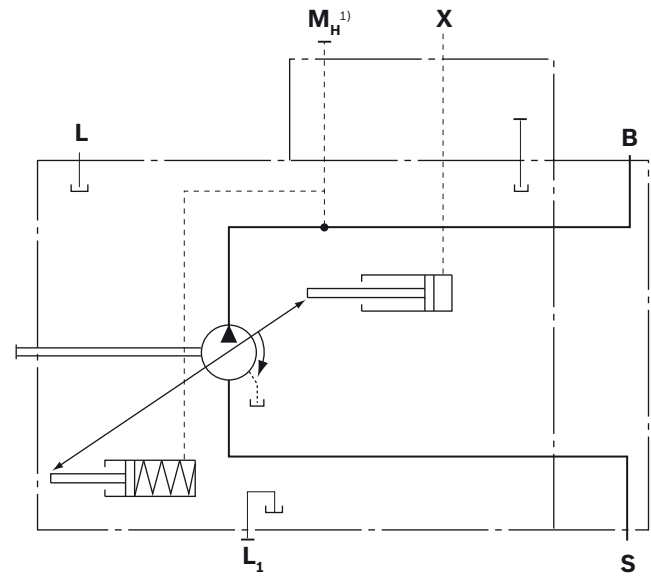

1) Only size 140




## DR – Pressure controller

The pressure controller limits the maximum pressure at the pump outlet within the control range of the variable pump. The variable pump only supplies as much hydraulic fluid as is required by the consumers. If the working pressure exceeds the pressure command value at the pressure valve, the pump will regulate to a smaller displacement to reduce the control differential.


- ▶ Initial position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range<sup>1)</sup> for pressure control 20 to 280 bar. Standard is 280 bar.

### ▼ Characteristic curve

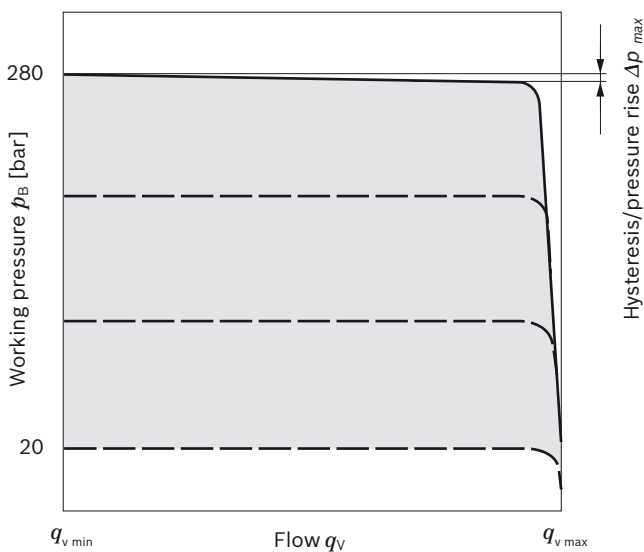


Characteristic curve valid at  $n_1 = 1500$  rpm and  $\theta_{\text{fluid}} = 50$  °C.

### ▼ Circuit diagram, sizes 18 to 100

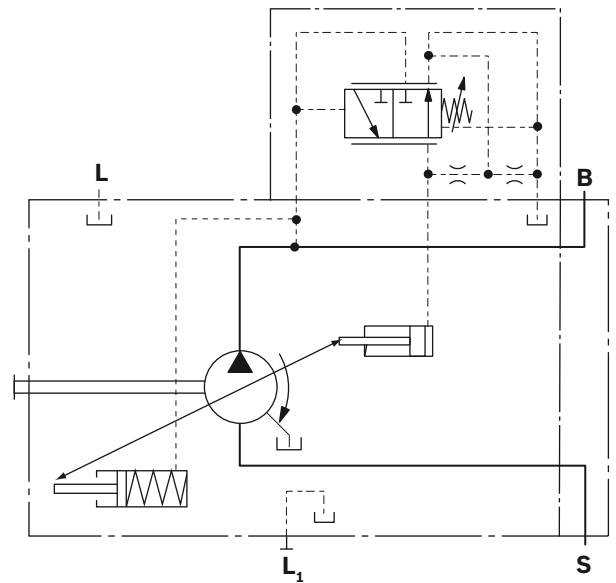

### ▼ Circuit diagram, size 140



### Controller data

NG		18	28	45	71	88	100	140
Pressure increase	$\Delta p$ [bar]	4	4	6	8	9	10	12
Hysteresis and repeatability	$\Delta p$ [bar]	maximum 3						
Control fluid consumption	[l/min]	maximum approx. 3						

<sup>1)</sup> In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.

## DRG – Pressure controller, remote controlled

For the remote controlled pressure controller, the LS pressure limitation is performed using a separately arranged pressure relief valve. Therefore any pressure control value under the pressure set on the pressure controller can be regulated. Pressure controller DR see page 11.

A pressure relief valve is externally piped up to port **X** for remote control. This relief valve is not included in the scope of delivery of the DRG control.


When there is differential pressure  $\Delta p$  at the control valve and with the standard setting on the remote controlled pressure cut-off of 20 bar, the amount of control fluid at the port is **X** approx. 1.5 l/min. If a different setting (range 10 to 22 bar) is required, please state in plain text.

As a separate pressure relief valve **(1)** we recommend:

- ▶ a direct operated hydraulic or electric proportional one, suitable for the control fluid mentioned above.
- The max. length of piping should not exceed 2 m.
- ▶ Basic position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range<sup>1)</sup> for pressure control 20 to 280 bar **(3)**. Standard is 280 bar.
- ▶ Setting range for differential pressure 10 - 22 bar **(2)**. Standard is 20 bar.

Unloading port **X** to the reservoir results in a zero stroke (standby) pressure which is approx. 1 to 2 bar higher than the defined differential pressure  $\Delta p$ , however system influences are not taken into account.


### ▼ Characteristic curve DRG

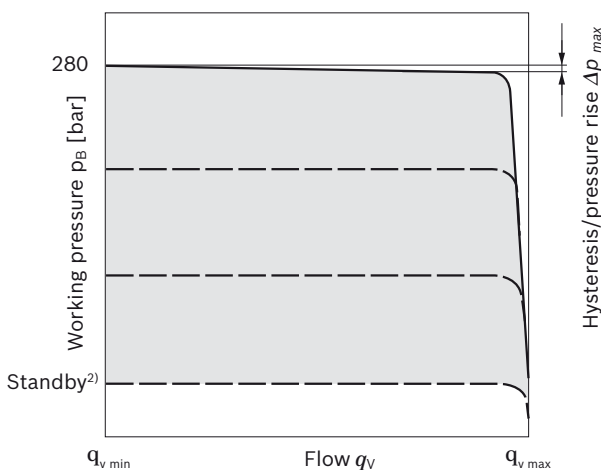

Characteristic curve valid for  $n_1 = 1500$  rpm and  $t_{\text{fluid}} = 50$  °C.


- 1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.
- 2) Zero stroke from pressure setting  $\Delta p$  on controller **(2)**

### ▼ Circuit diagram DRG nominal size 18 to 100

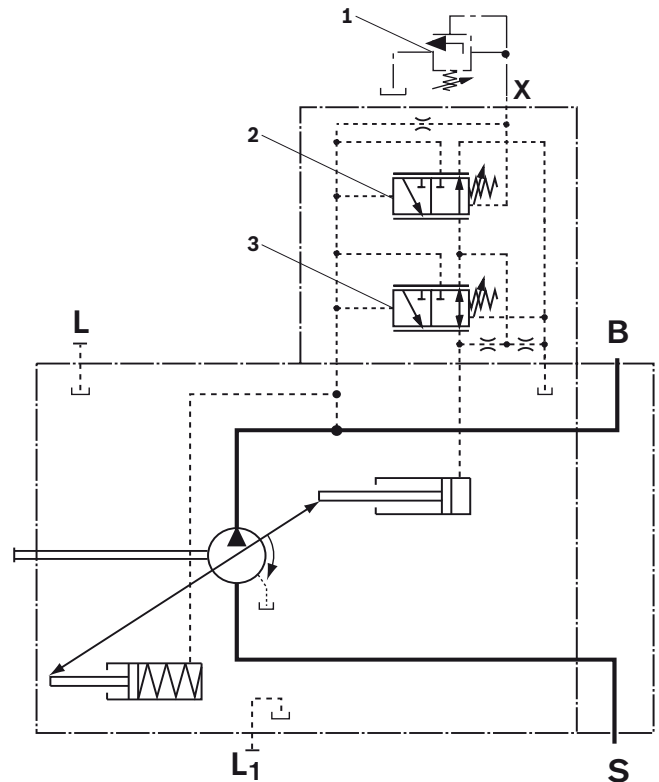

- 1** The separate pressure relief valve and the line are not included in the scope of delivery.
- 2** Remote controlled pressure cut-off **(G)**.
- 3** Pressure controller **(DR)**

### ▼ Circuit diagram, size 140



### Controller data

NG		18	28	45	71	88	100	140
Pressure increase	$\Delta p$ [bar]	4	4	6	8	9	10	12
Hysteresis and repeatability	$\Delta p$ [bar]	maximum 3						
Control fluid consumption	[l/min]	maximum approx. 4.5						

## DFR / DFR1 / DRSC – Pressure and flow controller


In addition to the pressure controller function (see page 11), a variable orifice (e.g. directional valve) is used to adjust the differential pressure upstream and downstream of the orifice. This is used to control the pump flow. The pump flow is equal to the actual hydraulic fluid quantity required by the consumer. With all controller combinations, the  $V_g$  reduction has priority.

- ▶ Basic position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range<sup>1)</sup> to 280 bar standard is 280 bar.
- ▶ DR pressure controller data see page 11


### Notice

- ▶ The DFR1 and DRSC versions have no unloading between **X** and the reservoir. Unloading the LS-pilot line must be possible in the valve system. Because of the flushing function of the flow controller in the DRS control valve, sufficient unloading of the **X**-line must also be provided. If this unloading of the **X** line does not have to be guaranteed, the DRSC control valve must be used.

### ▼ Characteristic curve

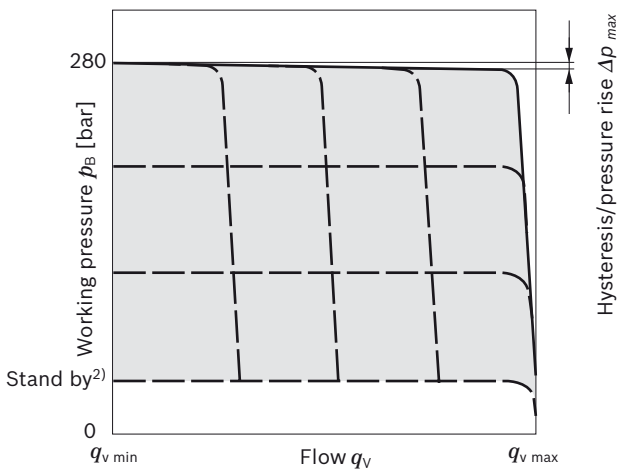


### ▼ Characteristic curve at variable rotational speed

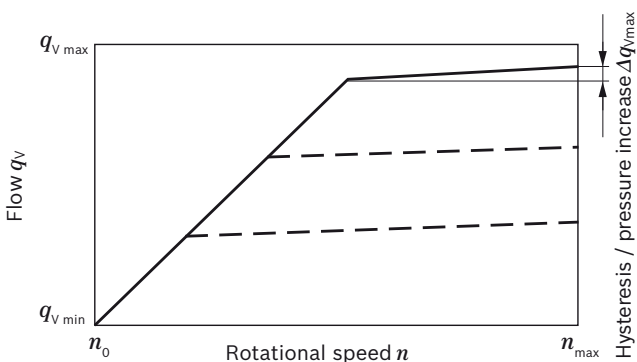


Characteristic curve valid at  $n_1 = 1500 \text{ rpm}$  and  $\theta_{\text{fluid}} = 50 \text{ °C}$ .

### ▼ Circuit diagram DFR size 18 to 100

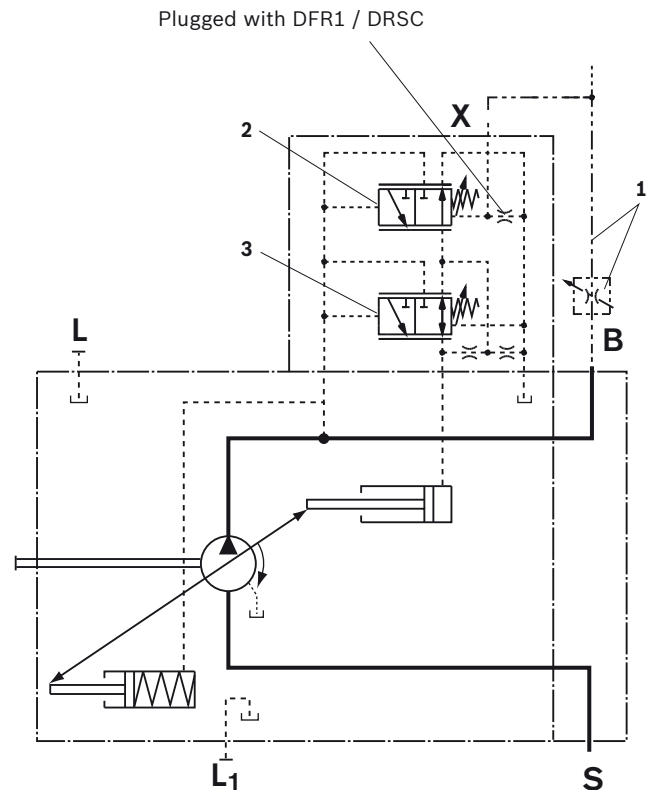

### ▼ Circuit diagram, size 140

Plugged with DFR1 / DRSC

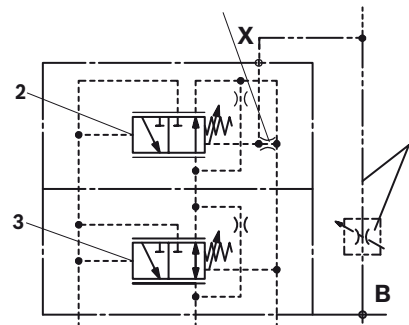

- 1 The metering orifice (control block) and the line is not included in the scope of delivery.
- 2 Pressure and flow controller (**FR**).
- 3 Pressure controller (**DR**)

For further information see page 14

- 1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.
- 2) Zero stroke from pressure setting  $\Delta p$  on controller (2)

**Differential pressure  $\Delta p$ :**

- ▶ Standard setting: 14 bar  
 If another setting is required, please state in plain text.
- ▶ Setting range: 14 bar to 22 bar

Unloading port **X** to the reservoir results in a zero stroke (standby) pressure which is approx. 1 to 2 bar higher than the defined differential pressure  $\Delta p$ , however, system influences are not taken into account.

**Controller data**

DR pressure controller data see page 11.

Maximum flow deviation measured at drive speed


$n = 1500$  rpm.

<b>NG</b>		<b>18</b>	<b>28</b>	<b>45</b>	<b>71</b>	<b>88</b>	<b>100</b>	<b>140</b>
Flow deviation	$\Delta q_{Vmax}$ [l/min]	0.9	1.0	1.8	2.8	3.4	4.0	6.0
Hysteresis and repeatability	$\Delta p$ [bar]	maximum 4						
Control fluid consumption	[l/min]	maximum approx. 3 to 4.5 (DFR) maximum approx. 3 (DFR1/DRSC)						

## DFLR – Pressure, flow and power control

Pressure controller equipped like DR(G), see page 11 (12).  
Flow controller equipped like DFR, DFR1, see page 13.  
In order to achieve a constant drive torque with varying working pressures, the swivel angle and with it the output flow from the axial piston pump is varied so that the product of flow and pressure remains constant.  
Flow controller is possible below the power control curve.


### ▼ Characteristic curve and torque characteristic

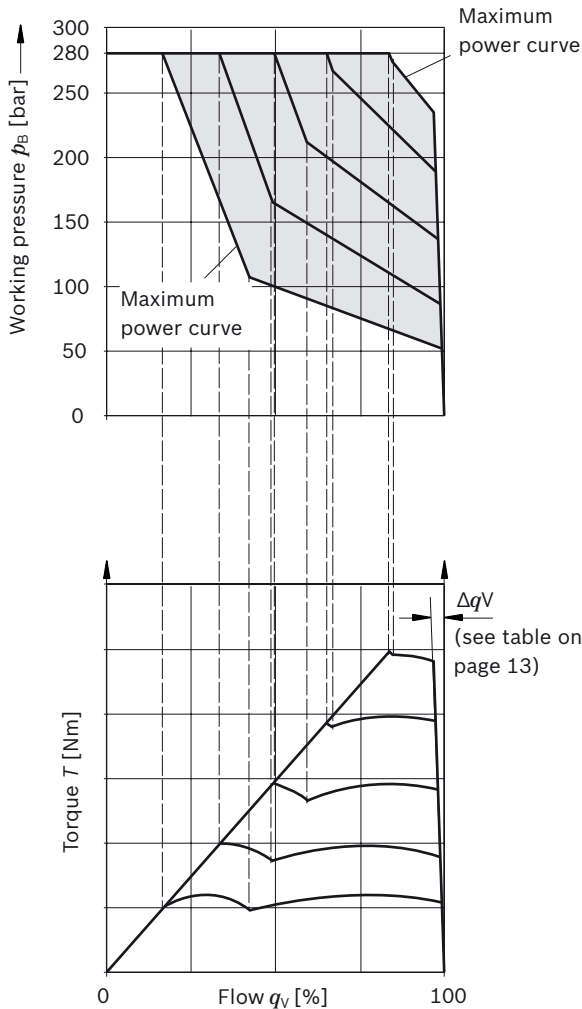


Beginning of control 50 bar

When ordering please state the power characteristics to be set at the factory in plain text, e.g. 20 kW at 1500 rpm.

### ▼ Circuit diagram, sizes 28 to 100

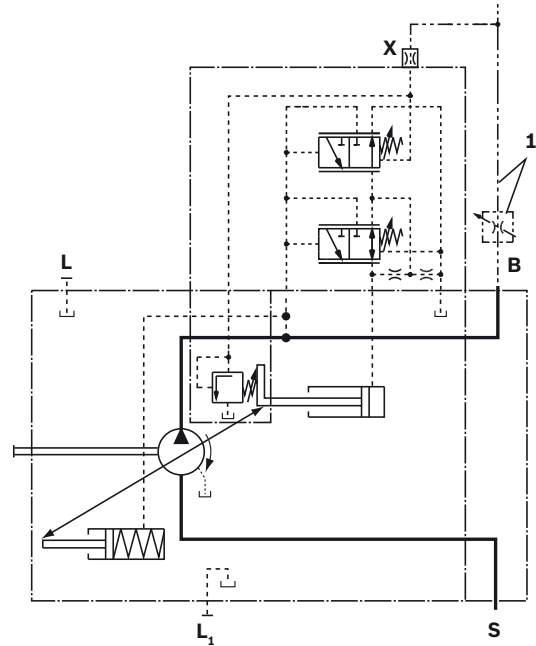

### ▼ Circuit diagram, size 140

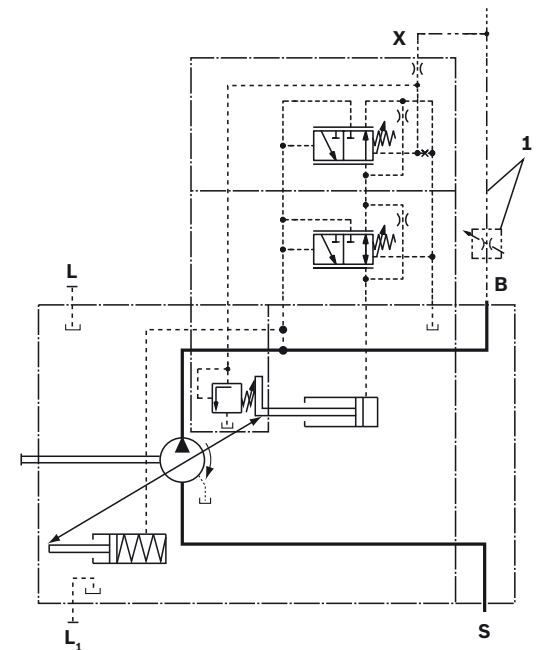

**1** The metering orifice (control block) and the line is not included in the scope of delivery.

### Controller data

- ▶ For technical data of pressure controller DR see page 11.
- ▶ For technical data of flow controller FR see page 14.
- ▶ Control fluid consumption approx. 5.5 l/min max.

## ED – Electro-hydraulic pressure control

The ED valve is set to a certain pressure by a specified variable solenoid current.

With changes on the consumer (load pressure), this causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level.


The pump thus only delivers as much hydraulic fluid as the consumers can take. The desired pressure level can be set steplessly by varying the solenoid current.

As the solenoid current signal drops towards zero, the pressure will be limited to  $p_{max}$  by an adjustable hydraulic pressure cut-off (secure fail safe function in case of power failure, e.g. for fan speed control). The response time characteristic curve of the ED control was optimized for the use as a fan drive system.

When ordering, specify the type of application in plain text.


### ▼ Static current-pressure characteristic curve ED

(negative characteristic curve measured with pump in zero stroke)

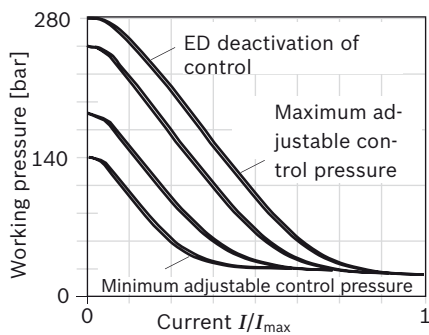

Hysteresis static < 3 bar.

### ▼ Flow-pressure characteristic curve

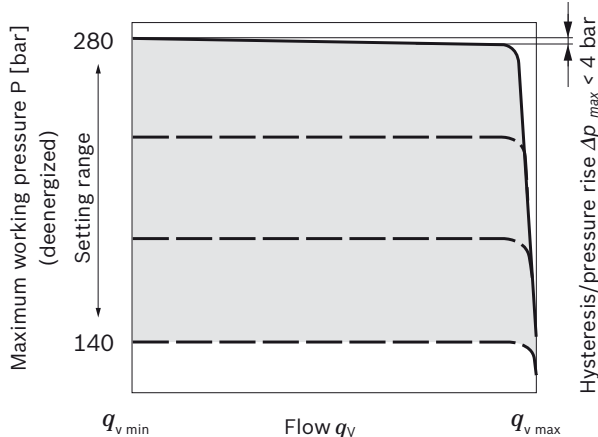


Characteristic curves valid at  $n_1 = 1500$  rpm and  $t_{fluid} = 50$  °C.


Control fluid consumption: 3 to 4.5 l/min.

For standby standard setting, see diagram on right, other values on request.

### ▼ Influence of the pressure setting on standby (maximally energized)

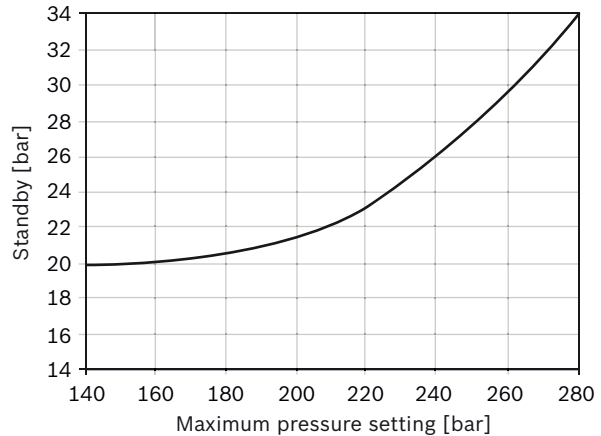

### ▼ Circuit diagram ED71/ED72

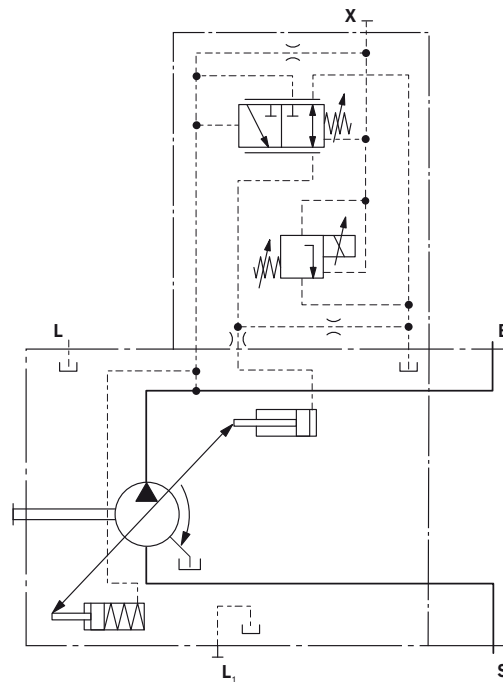

Technical data, solenoid	ED71	ED72
Voltage	12 V (±20%)	24 V (±20%)
Control current		
Start of control at $p_{max}$	100 mA	50 mA
Start of control at $p_{min}$	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	22.7 Ω
Dither frequency	100 to 200 Hz	100 to 200 Hz
Duty cycle	100%	100%
Electronic controls and type of protection, see page 55		
Operating temperature range at valve -20 °C to +115 °C		

## ER – Electro-hydraulic pressure control

The ER valve is set to a certain pressure by a specified variable solenoid current.

When a change is made at the consumer (load pressure), the position of the control spool will shift.


This causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level.

The pump thus only delivers as much hydraulic fluid as the consumers can take. The desired pressure level can be set steplessly by varying the solenoid current.

As the solenoid current signal drops towards zero, the pressure will be limited to  $p_{\min}$  (stand by).


### ▼ Current-pressure characteristic curve

(positive characteristic curve measured with pump in zero stroke)

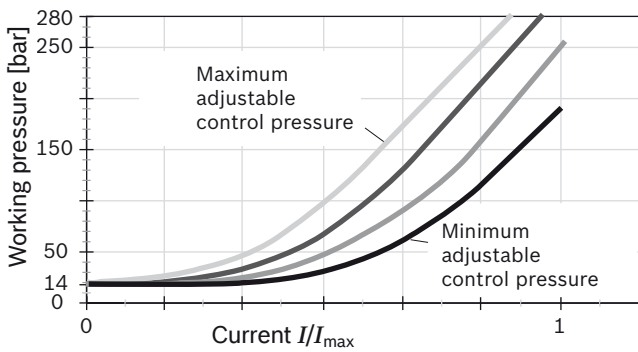

Hysteresis static < 3 bar.


### ▼ Flow-pressure characteristic curve

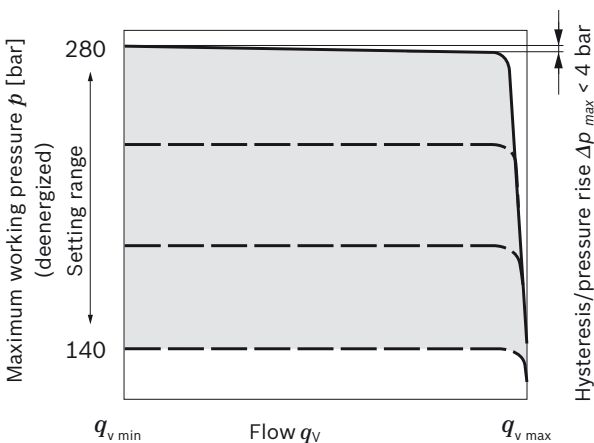

Characteristic curve valid at  $n_1 = 1500$  rpm and  $\theta_{\text{fluid}} = 50$  °C.

- ▶ Control fluid consumption: 3 to 4.5 l/min.
- ▶ Standby standard setting 14 bar. Other values on request.
- ▶ Influence of pressure setting on stand-by  $\pm 2$  bar.

### ▼ Circuit diagram

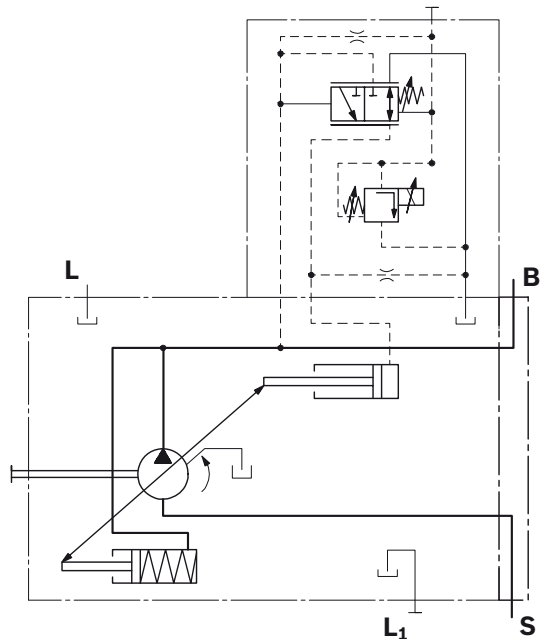

Technical data, solenoid	ER71	ER72
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Control current		
Start of control at $p_{\min}$	100 mA	50 mA
End of control at $p_{\max}$	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 to 200 Hz	100 to 200 Hz
Duty cycle	100%	100%
Electronic controls and type of protection, see page 55		
Operating temperature range at valve -20 °C to +115 °C		


### Project planning note!

Excessive current levels ( $I > 1200$  mA at 12 V or  $I > 600$  mA at 24 V) to the ER solenoid can result in undesired pressure increases which can lead to pump or system damage. Therefore:

- ▶ Use  $I_{\max}$  current limiter solenoids.
  - ▶ An intermediate plate pressure controller can be used to protect the pump in the event of overflow.
- An accessory kit with intermediate plate pressure controller can be ordered from Bosch Rexroth under part number R902490825.

**Dimensions, size 18**


**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic; clockwise rotation, version: Ports metric**

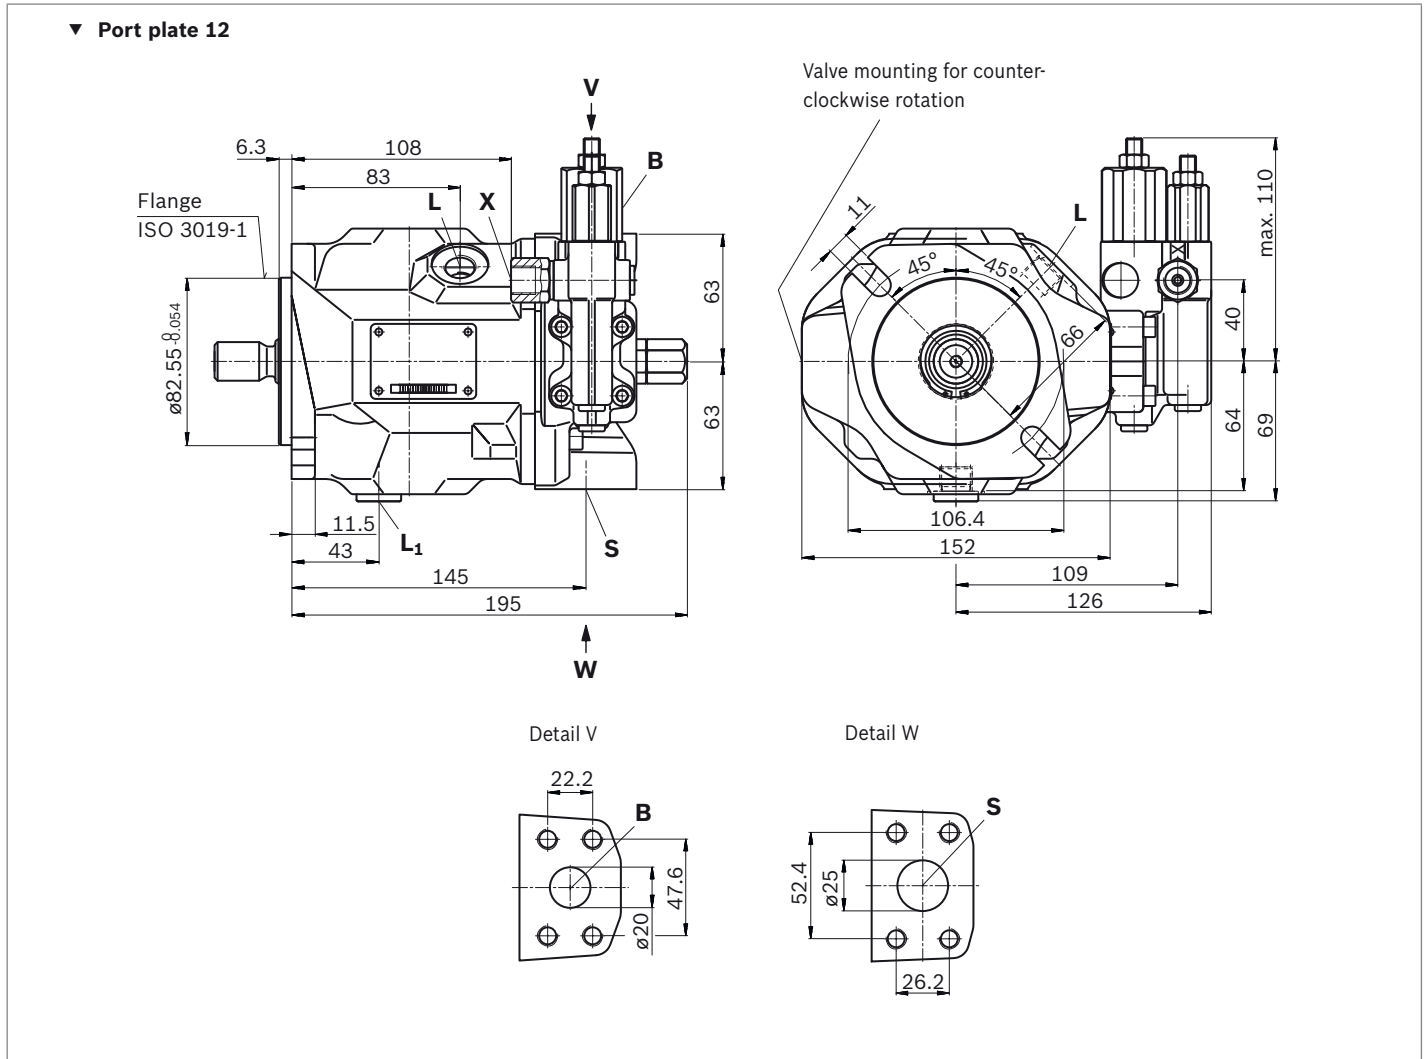




**Dimensions, size 18**


**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic; clockwise rotation, version: SAE ports**

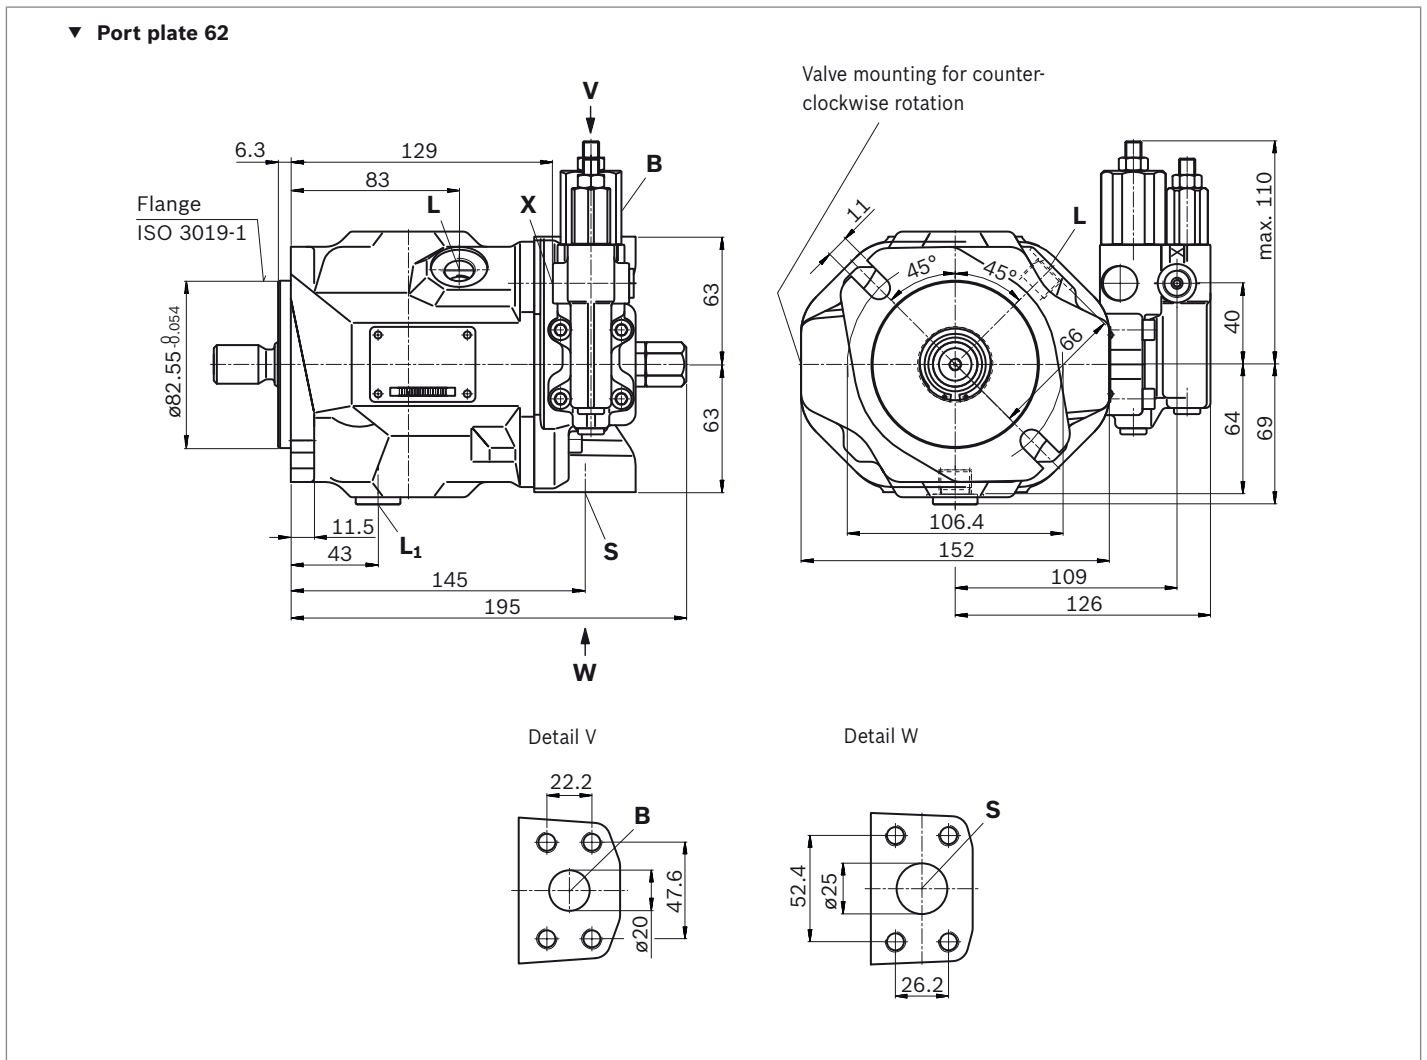


▼ **Splined shaft 3/4 in (SAE J744)**

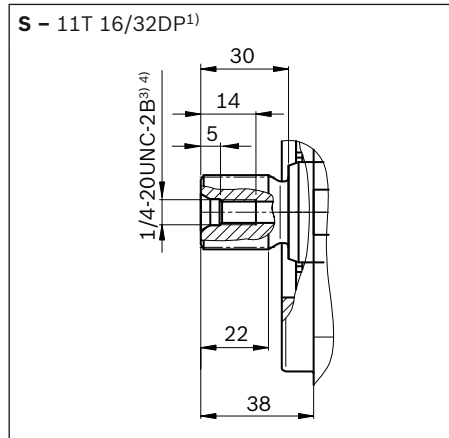

▼ **Splined shaft 3/4 in (SAE J744)**

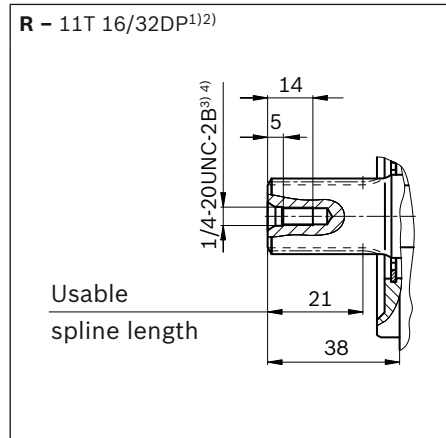

▼ **Splined shaft 5/8 in (SAE J744)**

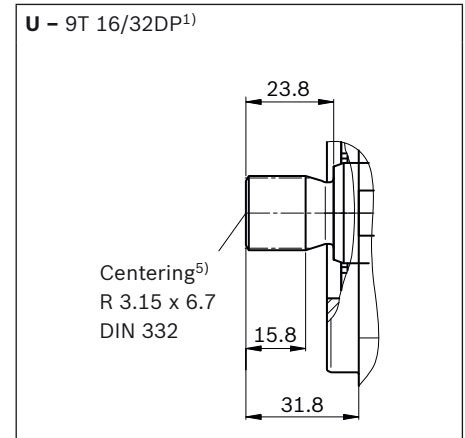


Ports - version metric port plate 12		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>6)</sup>	State <sup>10)</sup>
<b>B</b>	Working port (standard pressure series) Fastening thread	SAE J518 <sup>7)</sup> DIN 13	3/4 in M10 × 1.5; 17 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>7)</sup> DIN 13	1 in M10 × 1.5; 17 deep	10	O
<b>L</b>	Drain port	DIN 3852 <sup>8)</sup>	M16 × 1.5; 12 deep	2	O <sup>9)</sup>
<b>L<sub>1</sub></b>	Drain port	DIN 3852 <sup>8)</sup>	M16 × 1.5; 12 deep	2	X <sup>9)</sup>
<b>X</b>	Pilot pressure	DIN 3852	M14 × 1.5; 12 deep	350	O
<b>X</b>	Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 12 deep	350	O

Ports - version SAE port plate 62		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>6)</sup>	State <sup>10)</sup>
<b>B</b>	Working port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	3/4 in 3/8-16 UNC-2B; 20 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	1 in 3/8-16 UNC-2B; 20 deep	10	O
<b>L</b>	Drain port	ISO 11926 <sup>8)</sup>	9/16-18 UNF-2B; 12 deep	2	O <sup>9)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>8)</sup>	9/16-18 UNF-2B; 12 deep	2	X <sup>9)</sup>
<b>X</b>	Pilot pressure	ISO 11926	7/16-20 UNF-2B; 11.5 deep	350	O
<b>X</b>	Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 12 deep	350	O


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Thread according to ASME B1.1  
 4) For notes on tightening torques, see the instruction manual  
 5) Coupling axially secured, e.g. with a clamp coupling or radially mounted clamping screw

6) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.  
 7) Metric fastening thread is a deviation from standard.  
 8) The countersink can be deeper than as specified in the standard.  
 9) Depending on the installation position, L or L<sub>1</sub> must be connected (also see installation instructions starting on page 56).  
 10) O = Must be connected (plugged when delivered)  
 X = Plugged (in normal operation)


▼ **DG – Two-point control, direct operated**

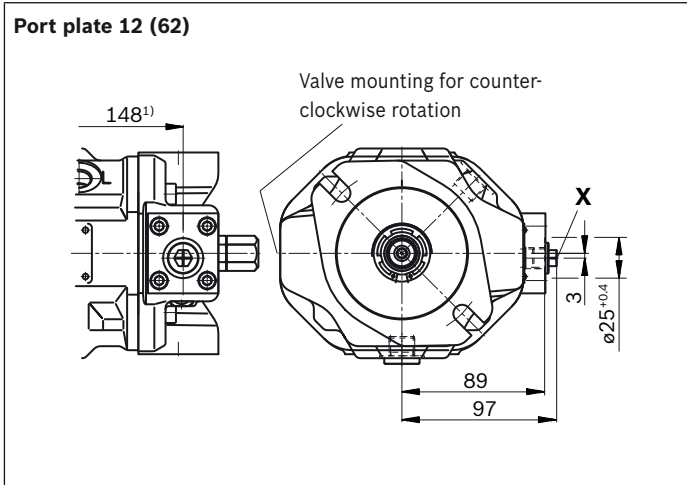


▼ **DR – Pressure controller**

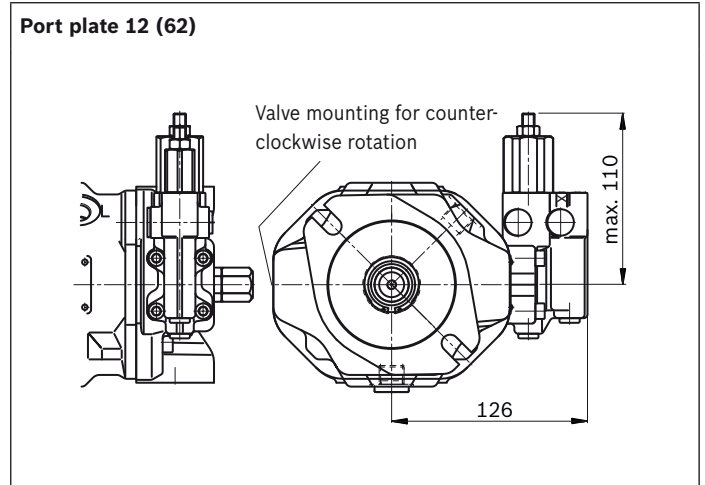

▼ **DRG – Pressure controller, remote controlled**

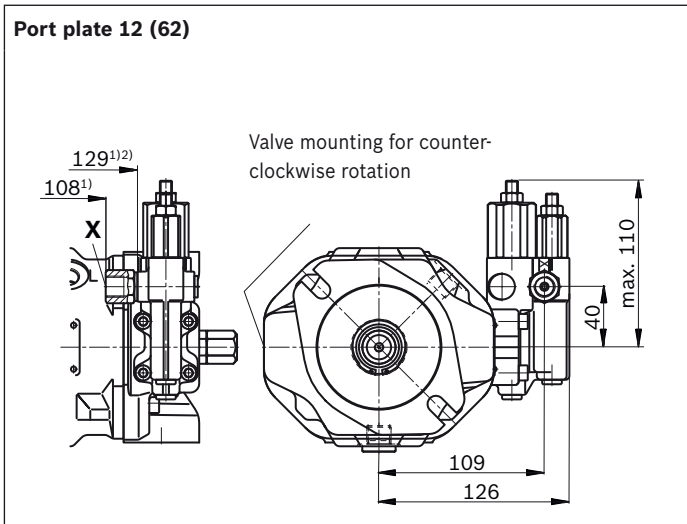


▼ **ED7.,ER7. – Electro-hydraulic pressure control**

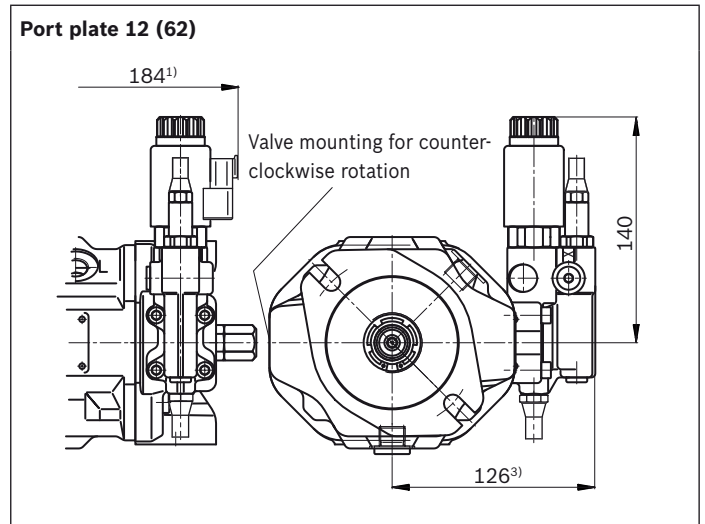

1) To flange surface  
 2) For version port plates 62  
 3) ER7.: 161 mm if using an intermediate plate pressure controller

**Dimensions, size 28**


**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic; clockwise rotation, version: Ports metric**

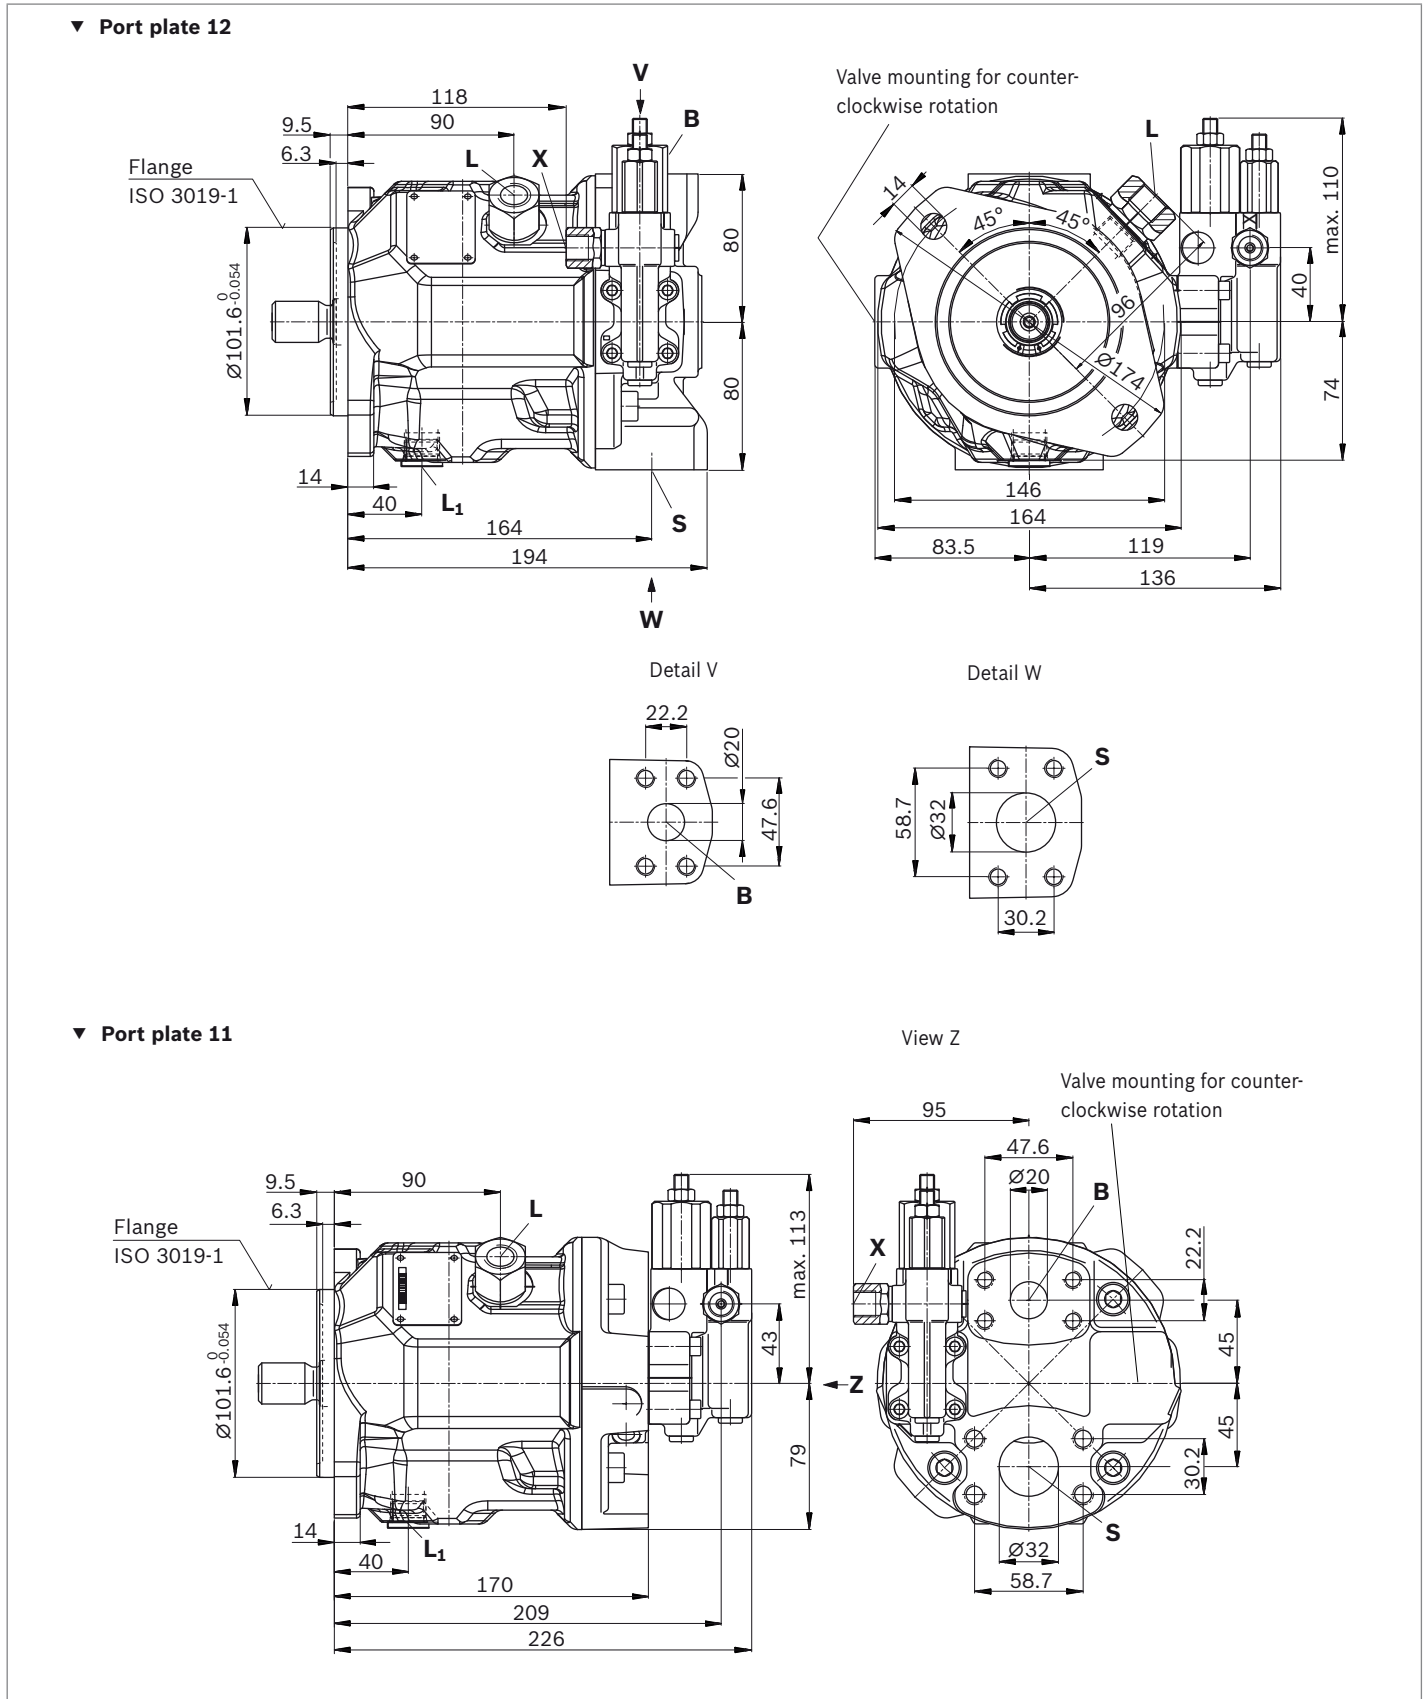

**Dimensions, size 28**



**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic; clockwise rotation, version: SAE ports**

▼ **Port plate 62**

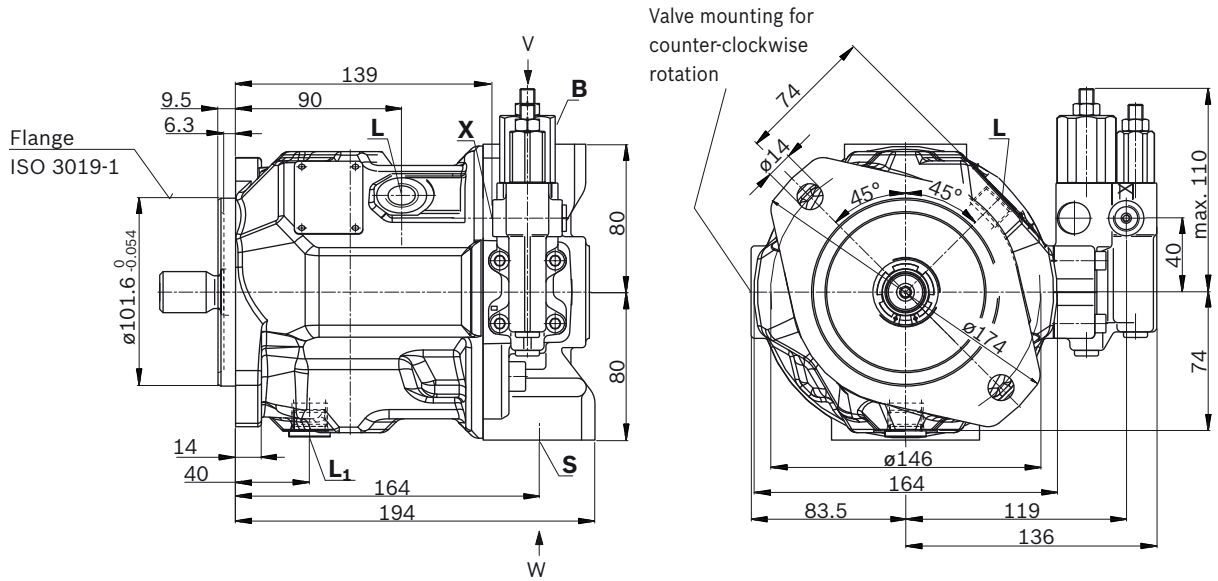


Detail V

Detail W




▼ **Port plate 61**

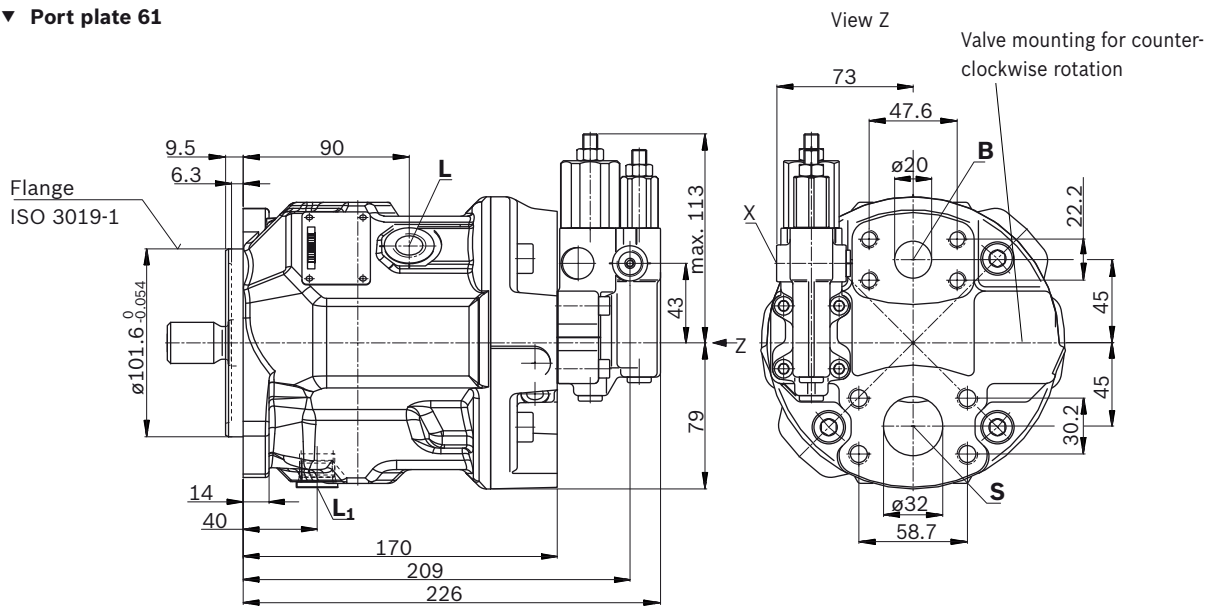


View Z

Valve mounting for counter-clockwise rotation


▼ **Splined shaft 7/8 in (SAE J744)**

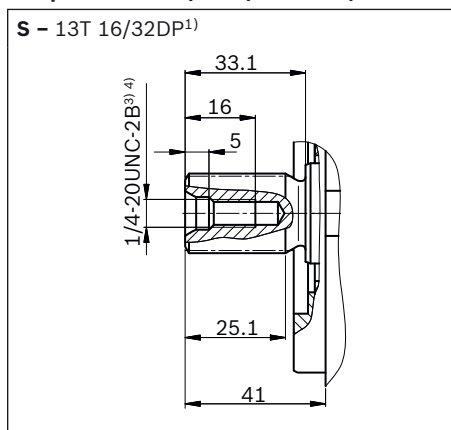


▼ **Splined shaft 7/8 in (SAE J744)**

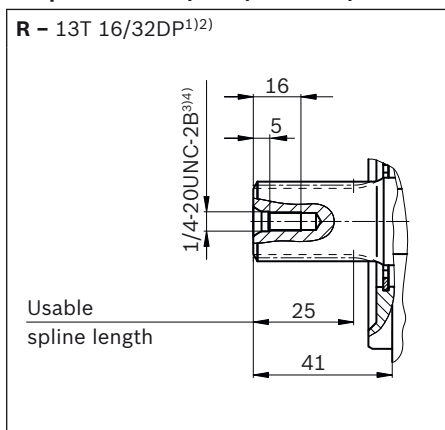

▼ **Splined shaft 3/4 in (SAE J744)**

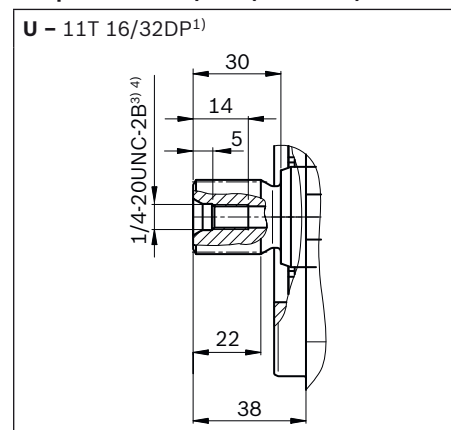

▼ **Splined shaft 3/4 in (SAE J744)**

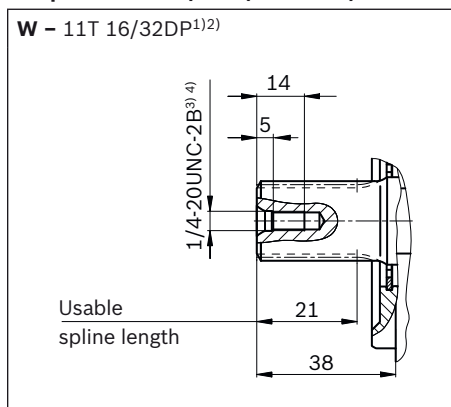


Ports - version metric port plate 11/12		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	3/4 in M10 × 1.5; 17 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/4 in M10 × 1.5; 17 deep	10	O
<b>L</b>	Drain port	DIN 3852 <sup>7)</sup>	M18 × 1.5; 12 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	3/4-16 UNF-2B; 14 deep	2	X <sup>8)</sup>
<b>X</b>	Pilot pressure	DIN 3852	M14 × 1.5; 12 deep	350	O
<b>X</b>	Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 12 deep	350	O

Ports - version SAE port plate 61/62		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	3/4 in 3/8-16 UNC-2B; 20 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	1 1/4 in 7/16-14 UNC-2B; 24 deep	10	O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	3/4-16 UNF-2B; 14 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	3/4-16 UNF-2B; 14 deep	2	X <sup>8)</sup>
<b>X</b>	Pilot pressure	ISO 11926	7/16-20 UNC-2B; 11.5 deep	350	O
<b>X</b>	Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 12 deep	350	O


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Thread according to ASME B1.1  
 4) For notes on tightening torques, see the instruction manual  
 5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

6) Metric fastening thread is a deviation from standard.  
 7) The countersink can be deeper than as specified in the standard.  
 8) Depending on the installation position, L or L<sub>1</sub> must be connected (also see installation instructions starting on page 56).  
 9) O = Must be connected (plugged when delivered)  
 X = Plugged (in normal operation)


▼ **DG – Two-point control, direct operated**

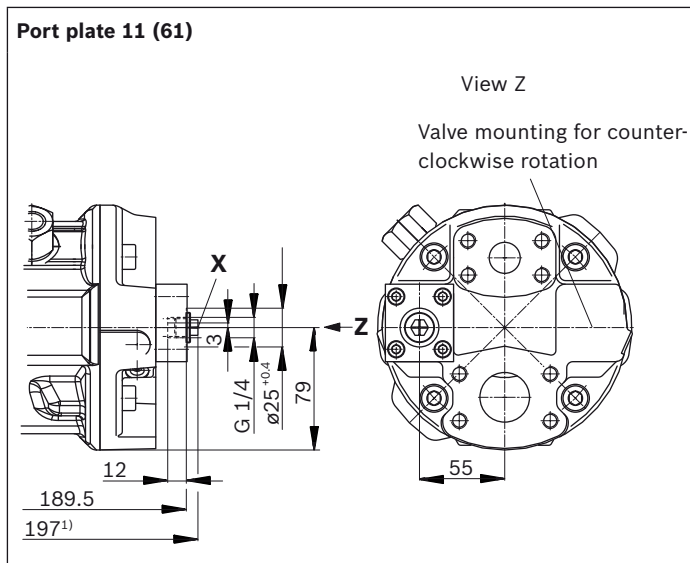


▼ **DG – Two-point control, direct operated**

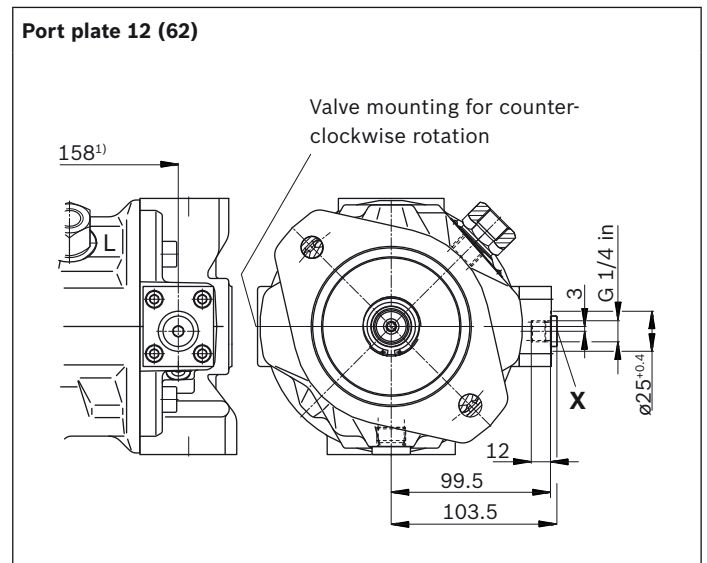


▼ **DR – Pressure controller**

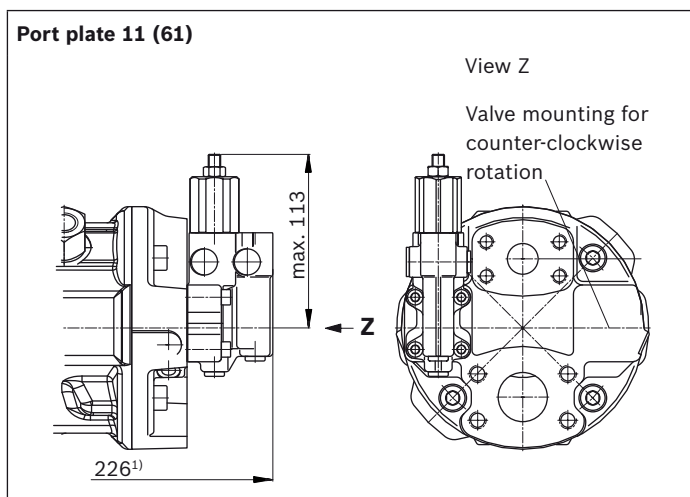


▼ **DR – Pressure controller**

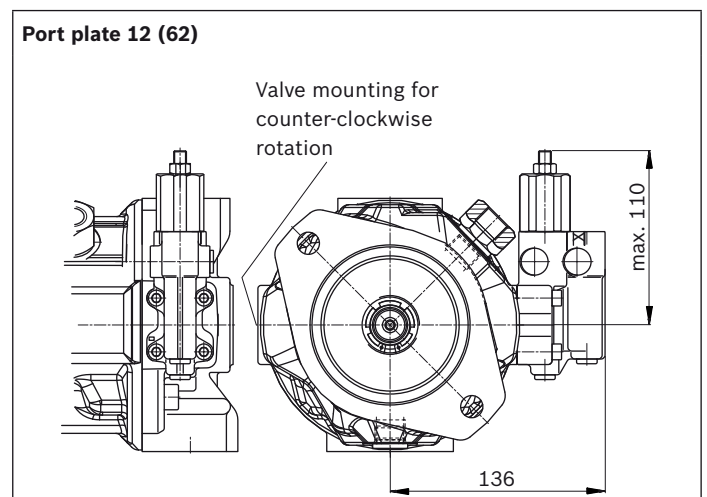

▼ **DRG – Pressure controller, remote controlled**

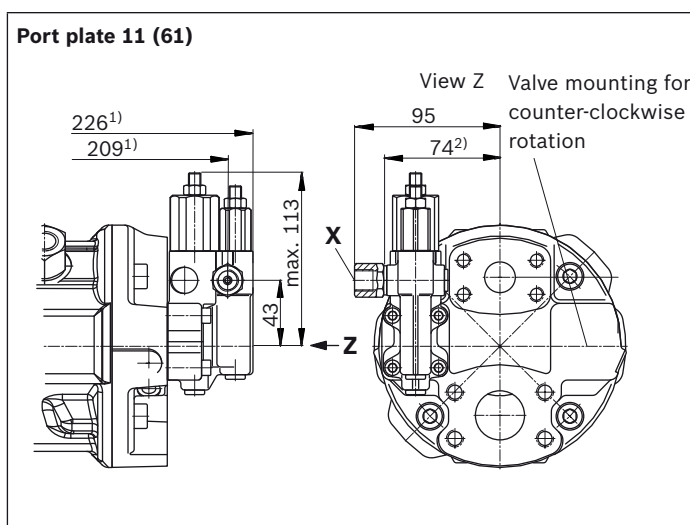


▼ **DRG – Pressure controller, remote controlled**

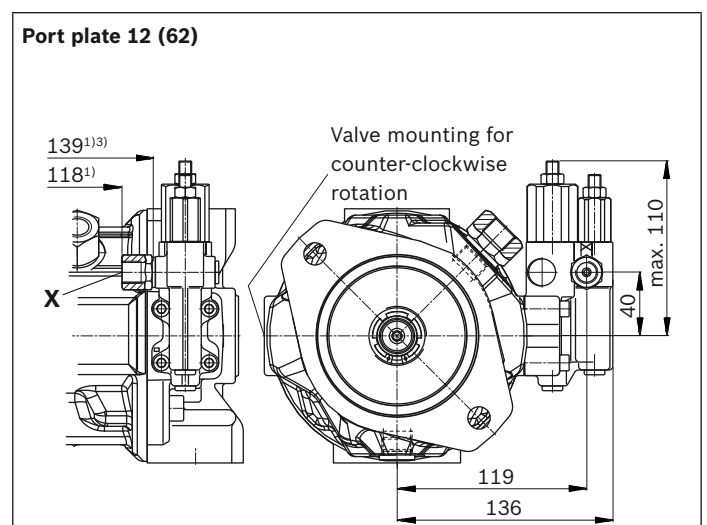


1) To flange surface  
2) For version port plate 61

3) For version port plate 62


▼ **DFLR – Pressure, flow and power controller**

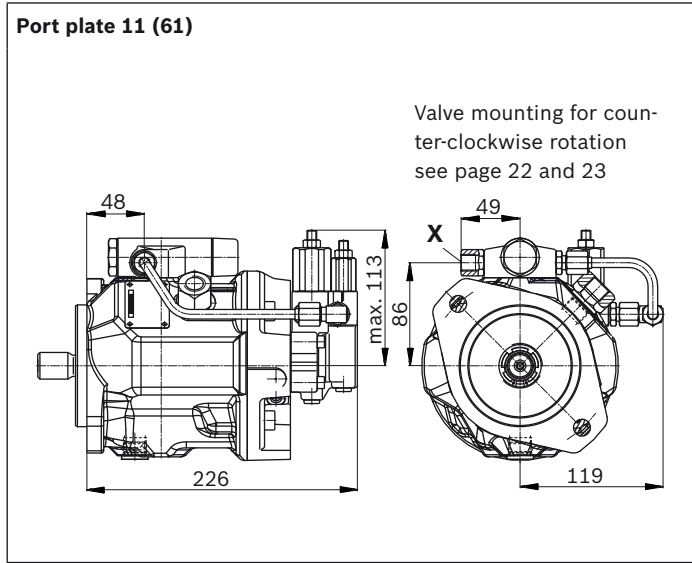


▼ **DFLR – Pressure, flow and power controller**

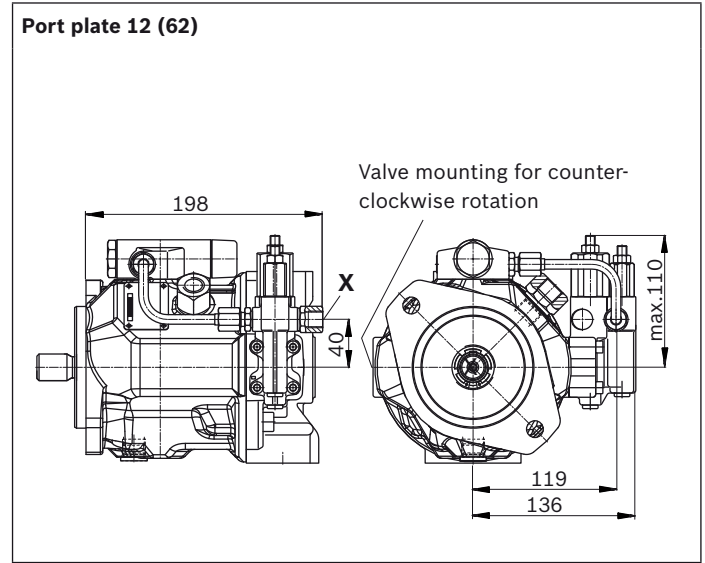

▼ **ED7. / ER7. – Electro-hydraulic pressure control**

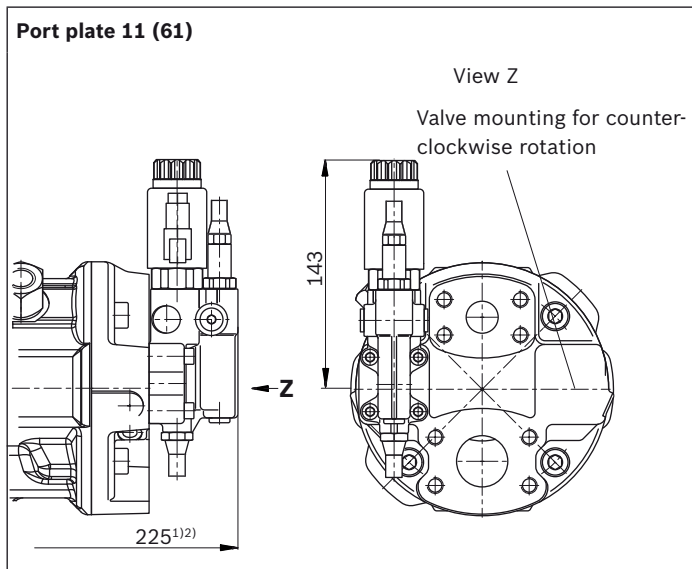

▼ **ED7. / ER7. – Electro-hydraulic pressure control**

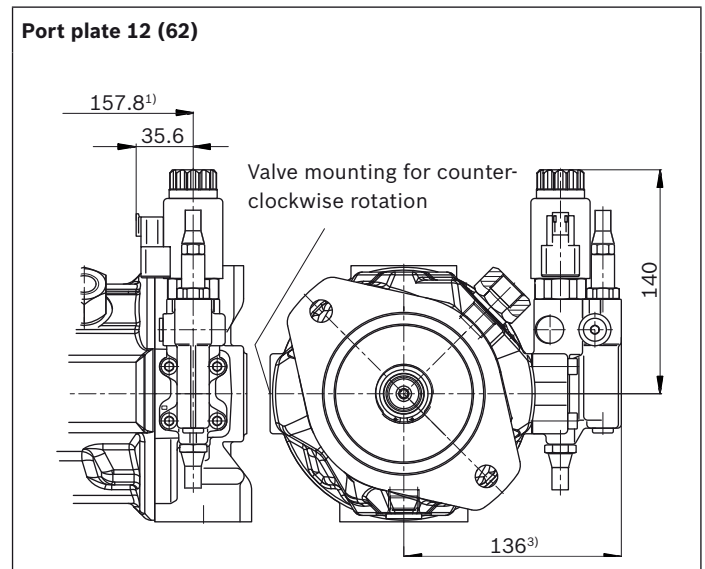

1) To flange surface


2) ER7.: 260 mm if using an intermediate plate pressure controller

3) ER7.: 171 mm if using an intermediate plate pressure controller




**Dimensions, size 45**

**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic; clockwise rotation, version: Ports metric**

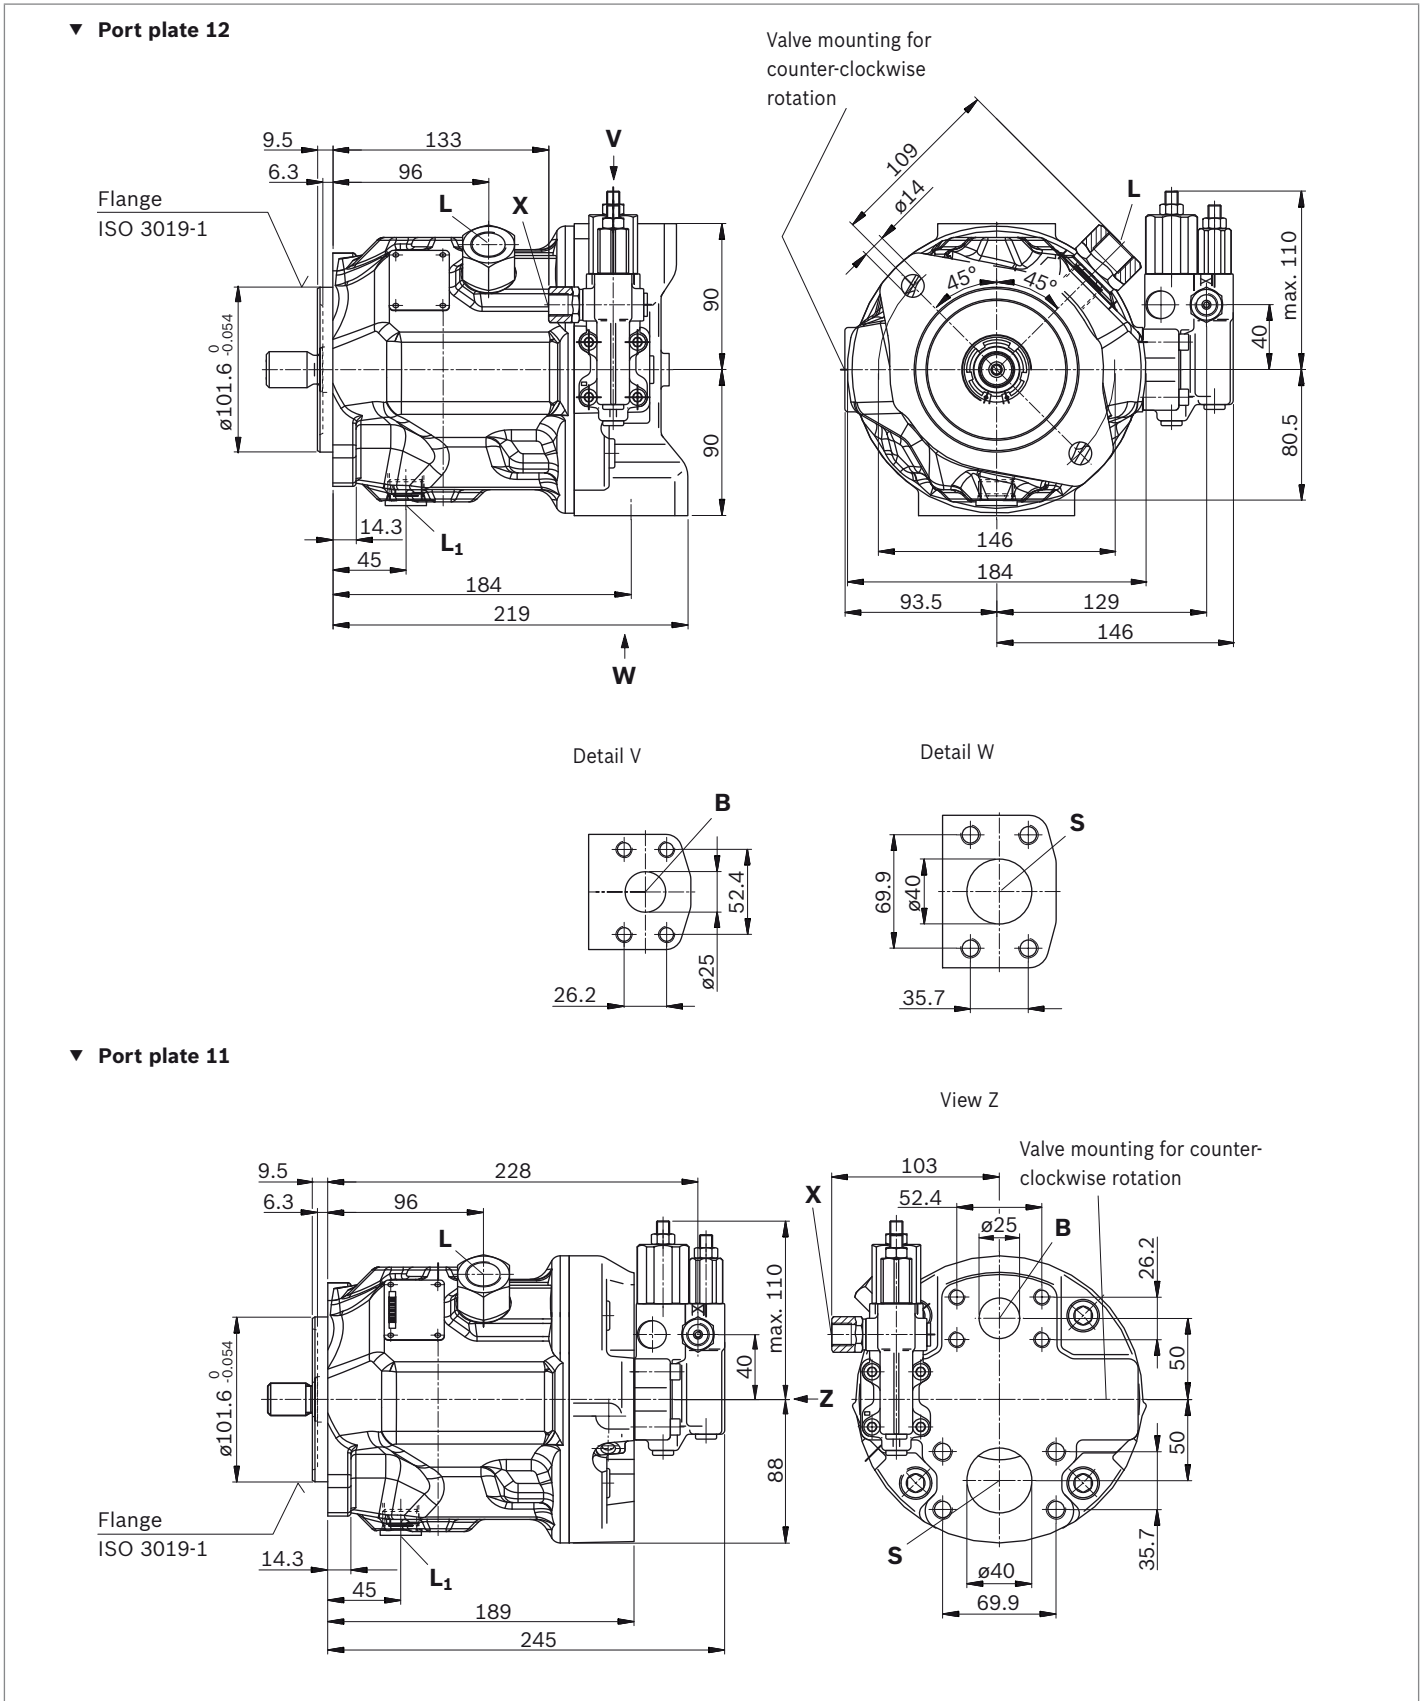


**Dimensions, size 45**


**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic; clockwise rotation, version: SAE ports**

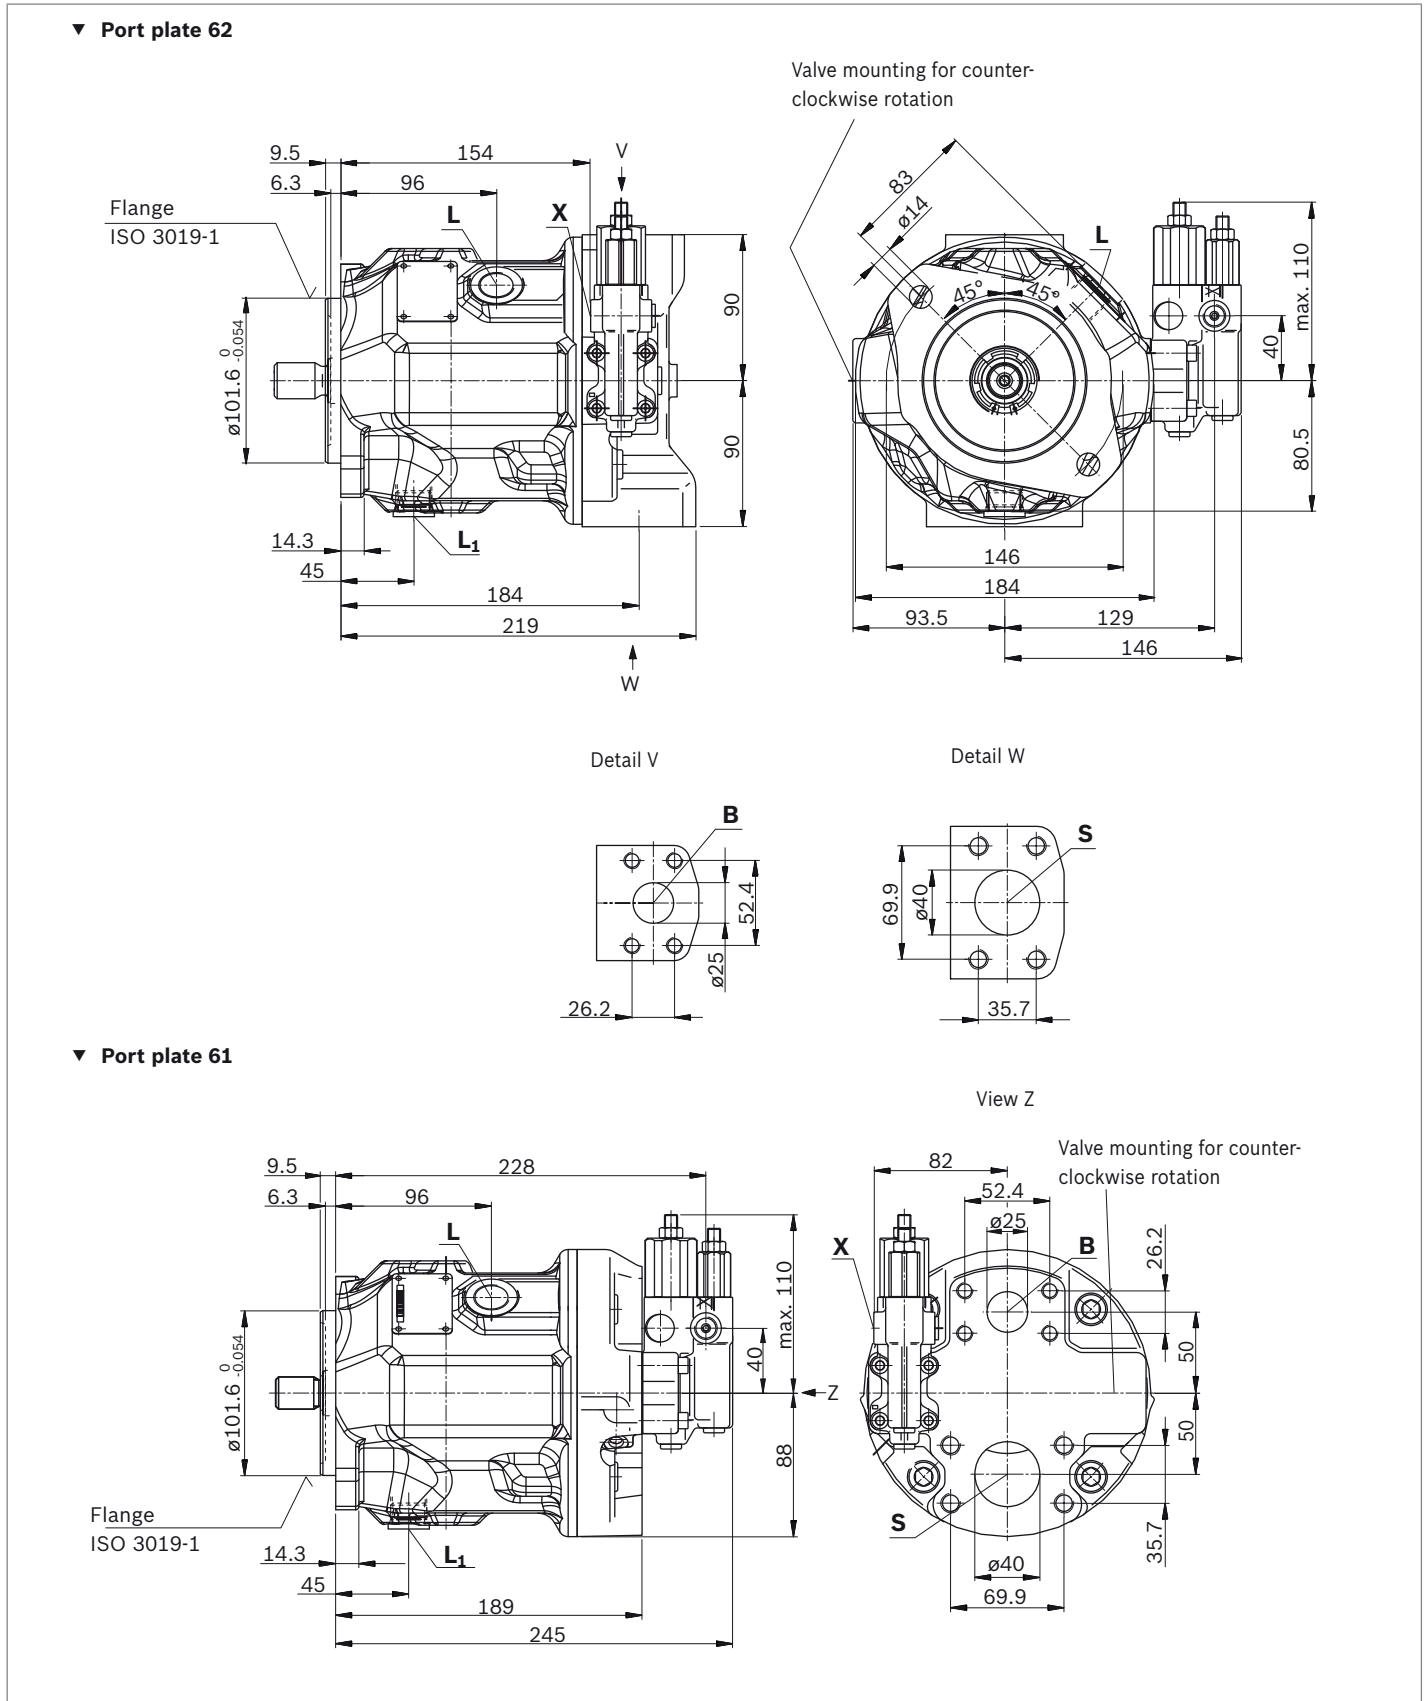


▼ **Splined shaft 1 in (SAE J744)**

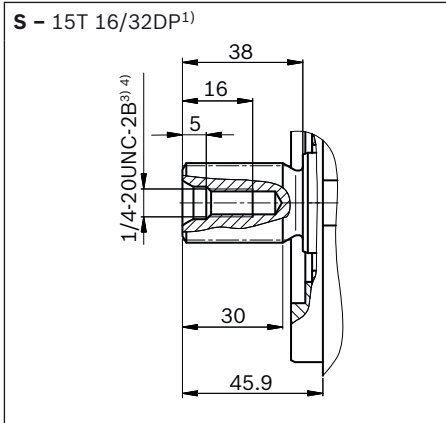


▼ **Splined shaft 1 in (SAE J744)**

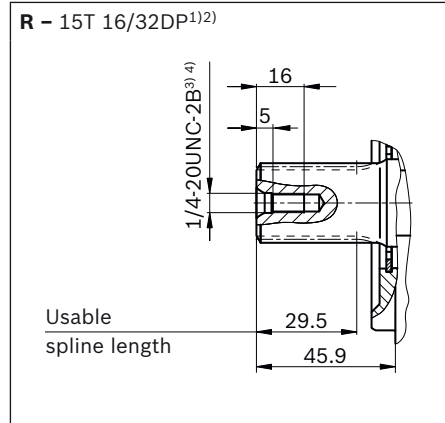

▼ **Splined shaft 7/8 in (SAE J744)**

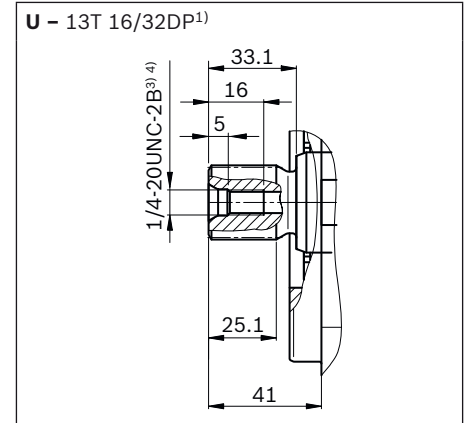

▼ **Splined shaft 7/8 in (SAE J744)**

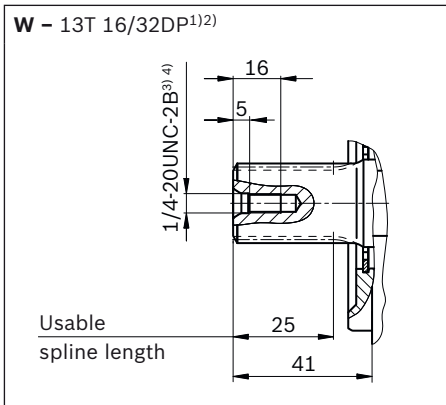

Ports - version metric port plate 11/12		Standard	Size <sup>4)</sup>	$p_{max abs}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 in M10 × 1.5; 17 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/2 in M12 × 1.75; 20 deep	10	O
<b>L</b>	Drain port	DIN 3852 <sup>7)</sup>	M22 × 1.5; 14 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14 UNF-2B; 16 deep	2	X <sup>8)</sup>
<b>X</b>	Pilot pressure	DIN 3852	M14 × 1.5; 12 deep	350	O
<b>X</b>	Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 12 deep	350	O


  

Ports - version SAE port plate 61/62		Standard	Size <sup>4)</sup>	$p_{max abs}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	1 in 3/8-16 UNC-2B; 17 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	1 1/2 in 1/2-13 UNC-2B; 20 deep	10	O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14 UNF-2B; 16 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14 UNF-2B; 16 deep	2	X <sup>8)</sup>
<b>X</b>	Pilot pressure	ISO 11926	7/16-20 UNF-2B; 11.5 deep	350	O
<b>X</b>	Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 12 deep	350	O


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Thread according to ASME B1.1  
 4) For notes on tightening torques, see the instruction manual  
 5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

6) Metric fastening thread is a deviation from standard.  
 7) The countersink can be deeper than as specified in the standard.  
 8) Depending on the installation position, L or L<sub>1</sub> must be connected (also see installation instructions starting on page 56).  
 9) O = Must be connected (plugged when delivered)  
 X = Plugged (in normal operation)


▼ **DG – Two-point control, direct operated**

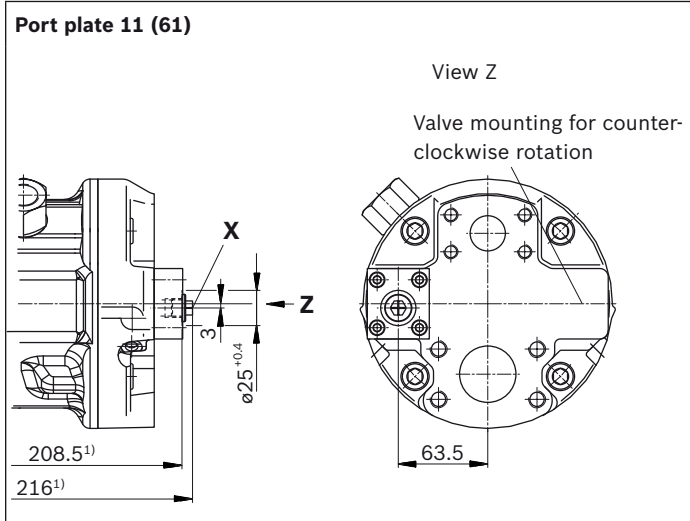


▼ **DG – Two-point control, direct operated**

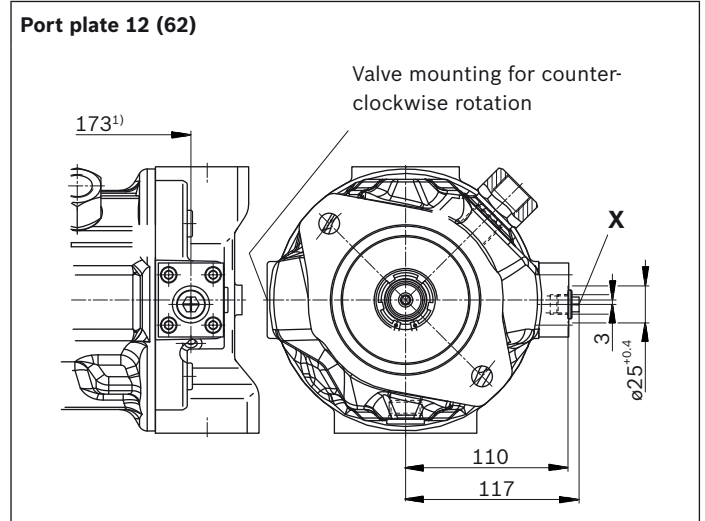


▼ **DR – Pressure controller**

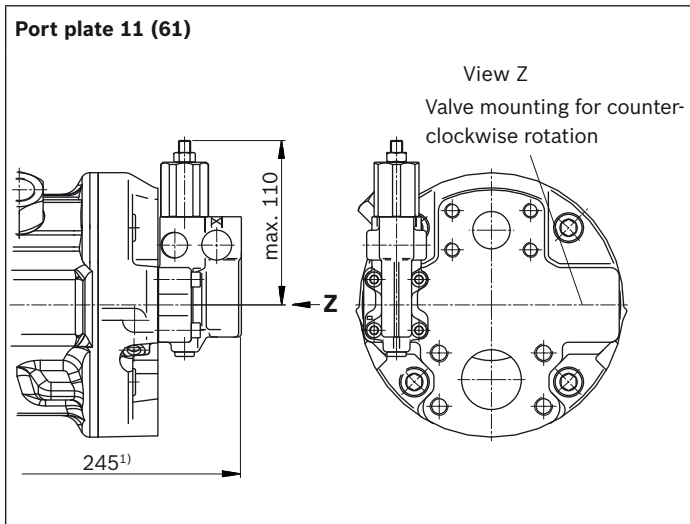


▼ **DR – Pressure controller**

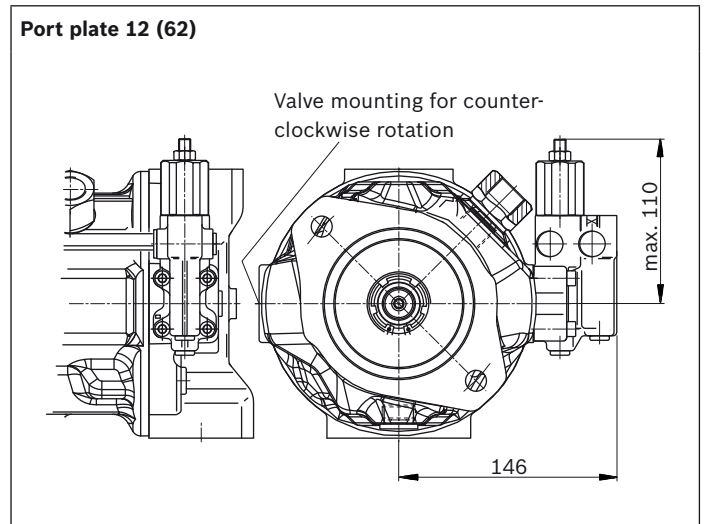

▼ **DRG – Pressure controller, remote controlled**

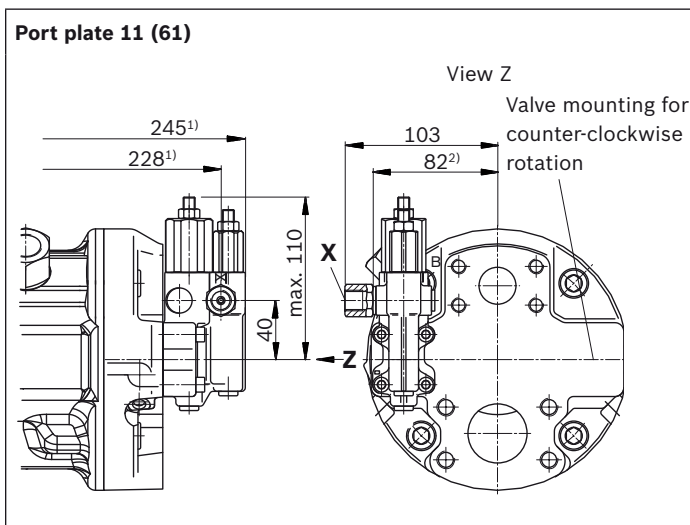


▼ **DRG – Pressure controller, remote controlled**

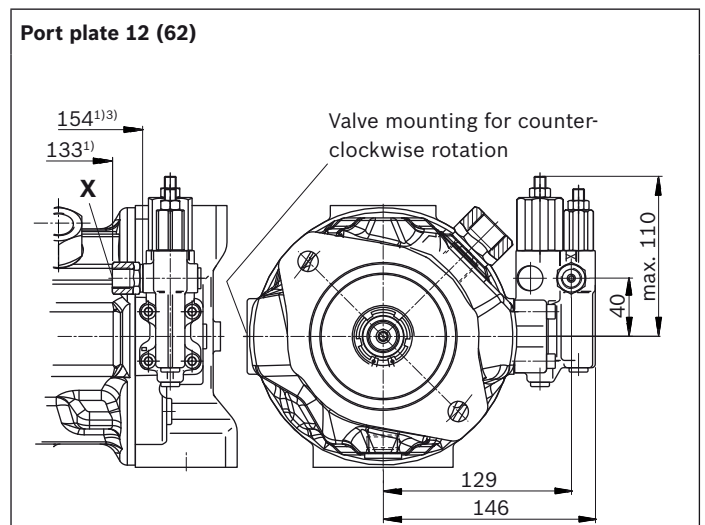


1) To flange surface  
2) For version port plate 61

3) For version port plate 62


▼ DFLR – Pressure, flow and power controller

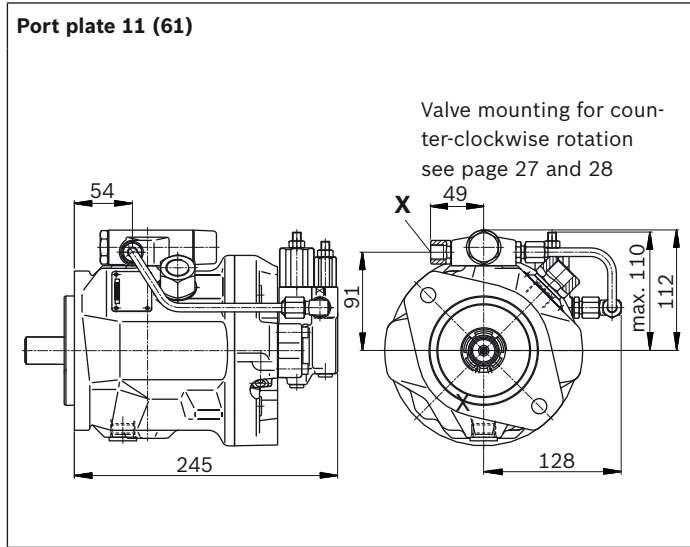


▼ DFLR – Pressure, flow and power controller

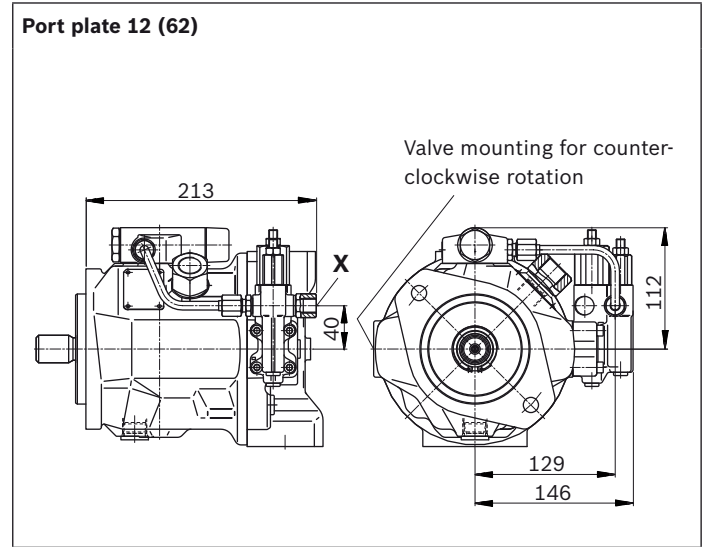

▼ ED7. / ER7. – Electro-hydraulic pressure control

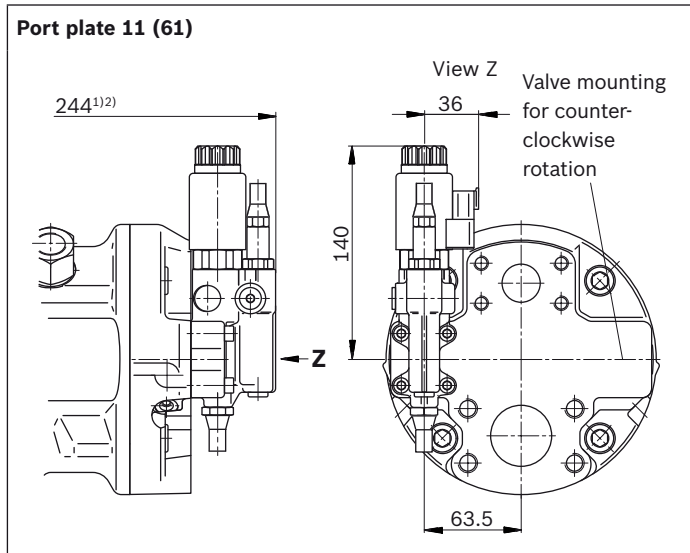


▼ ED7. / ER7. – Electro-hydraulic pressure control

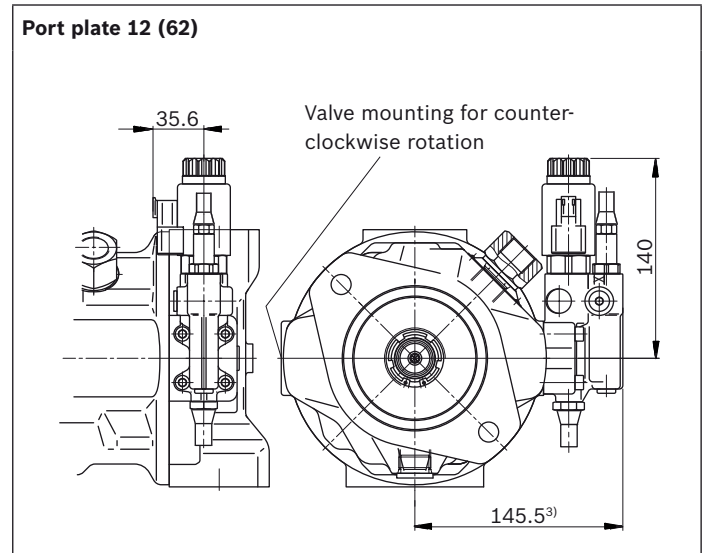

1) To flange surface  
 2) ER7.: 279 mm if using an intermediate plate pressure controller  
 3) ER7.: 180.9 mm if using an intermediate plate pressure controller


**Dimensions sizes 71 and 88**

**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic; clockwise rotation, version: Ports metric**

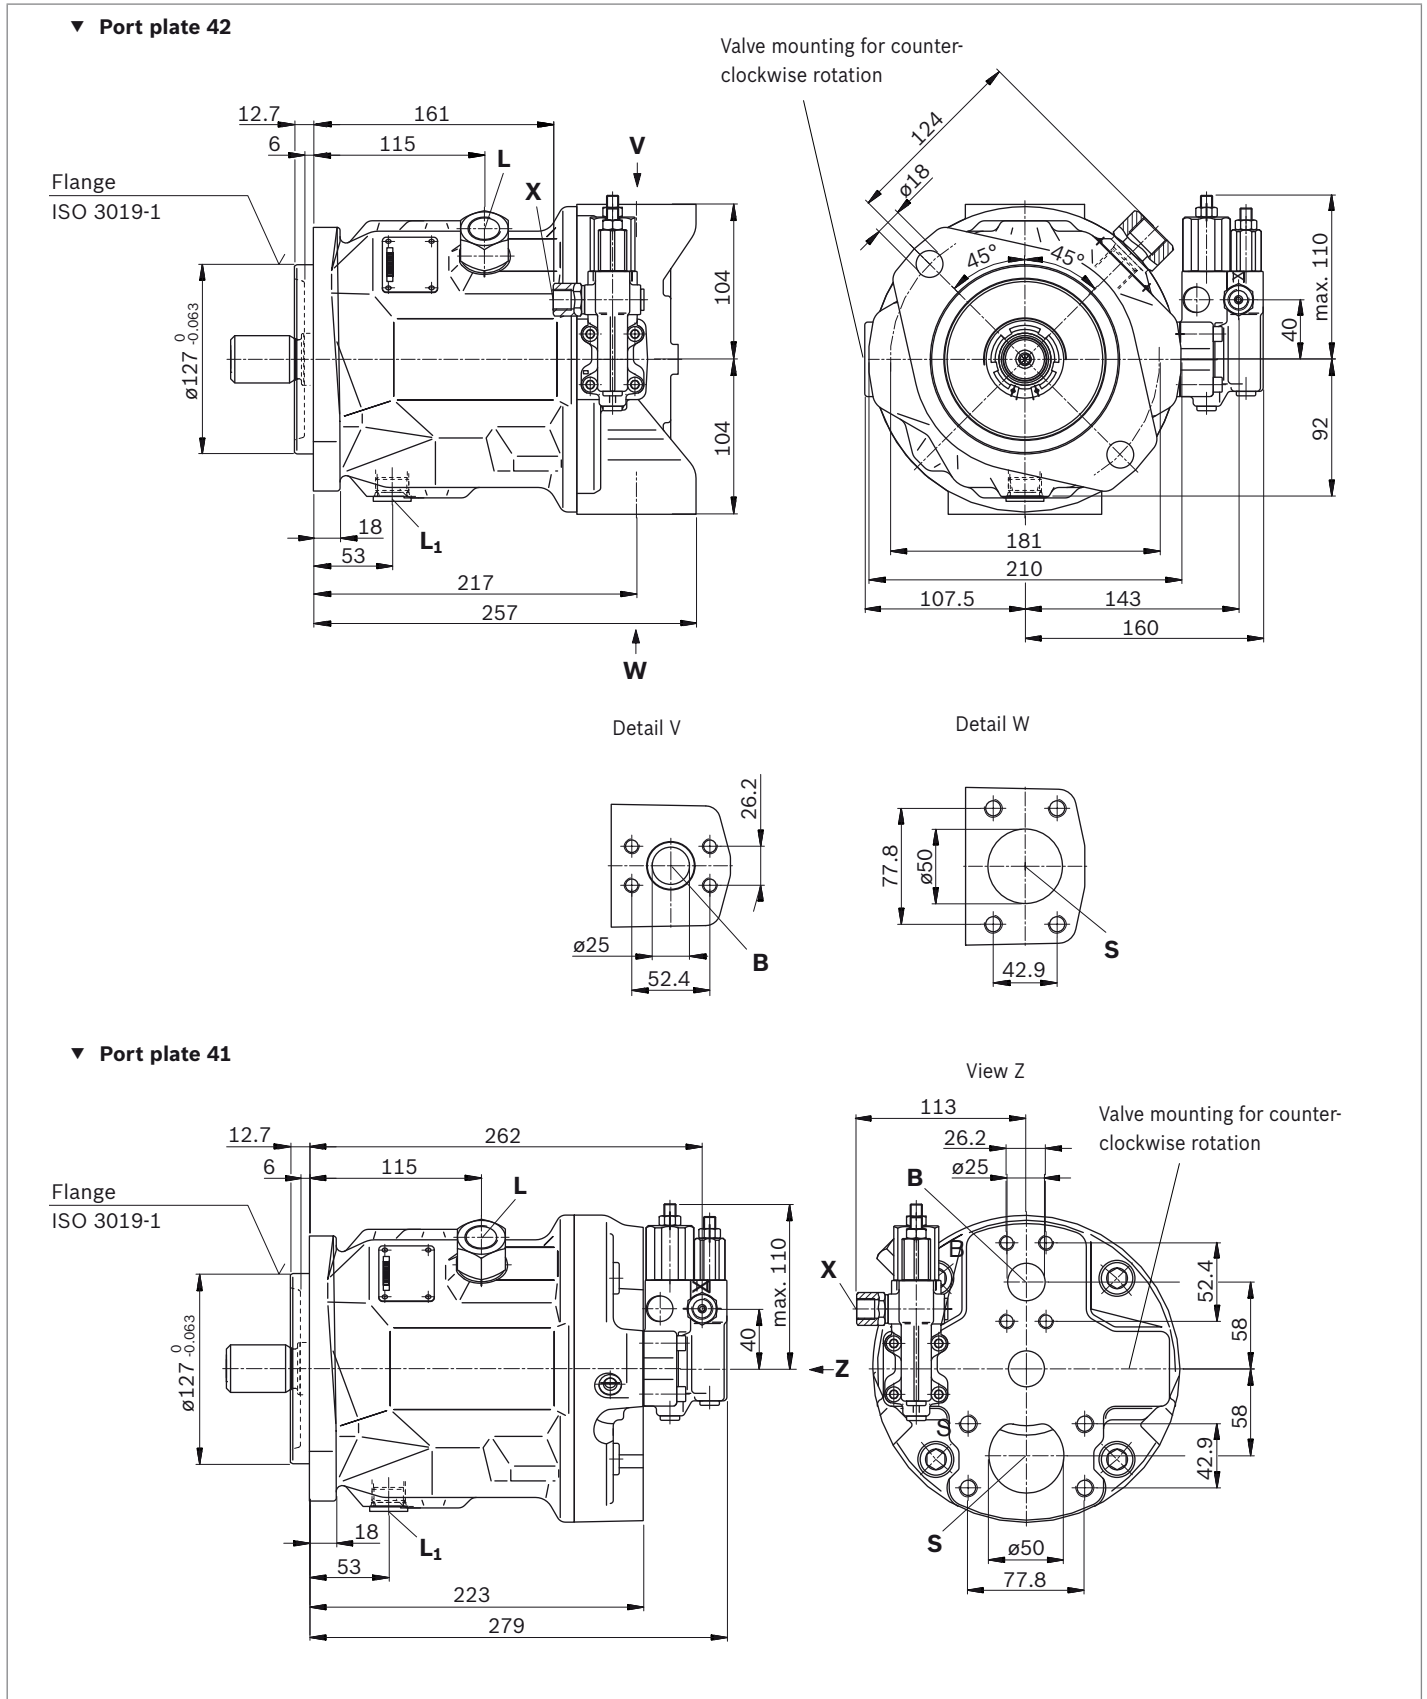


**Dimensions sizes 71 and 88**


**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic; clockwise rotation, version: SAE ports**

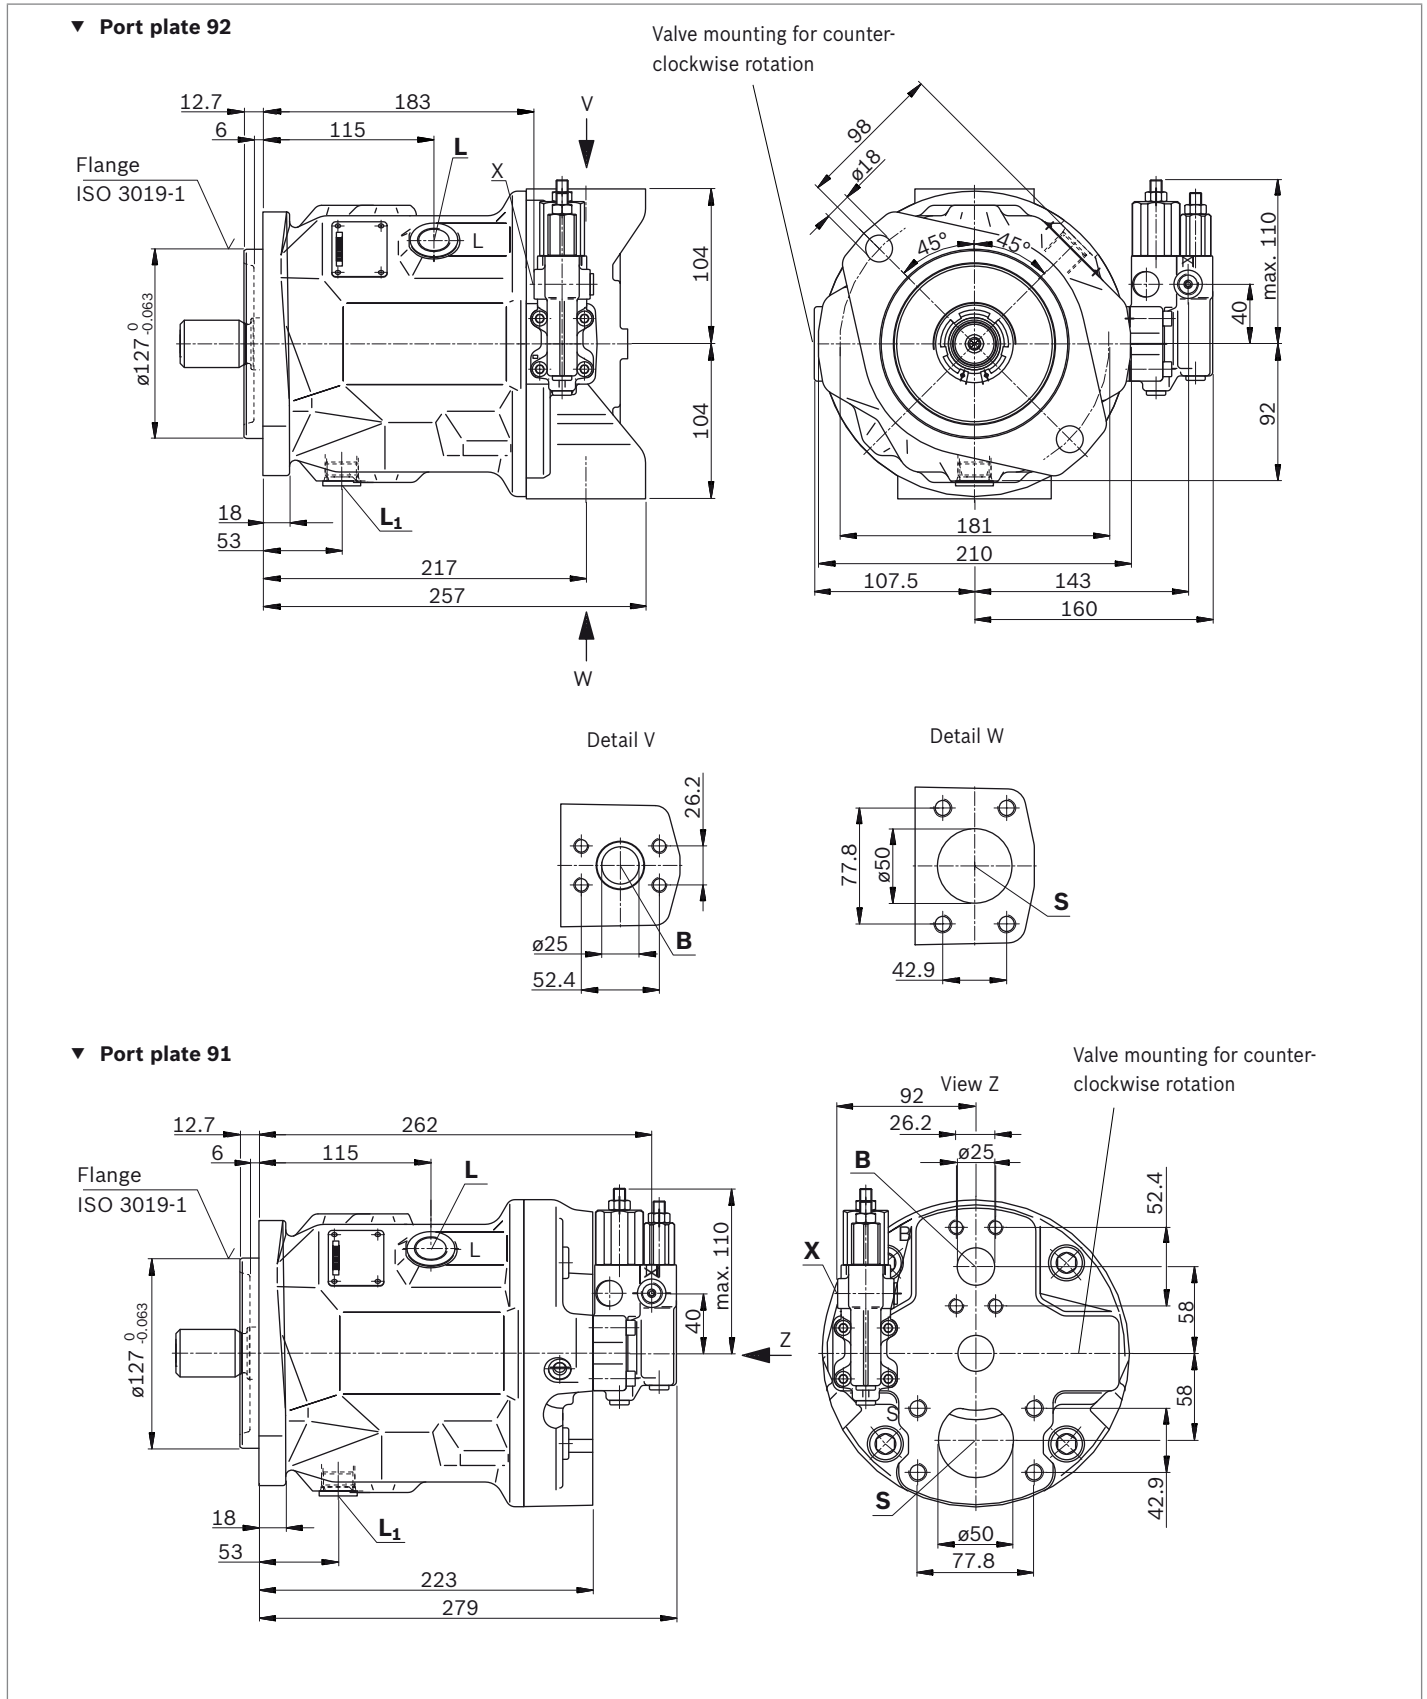


▼ **Splined shaft 1 1/4 in (SAE J744)**

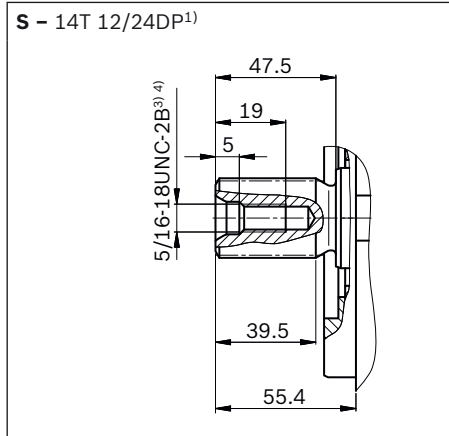


▼ **Splined shaft 1 1/4 in (SAE J744)**

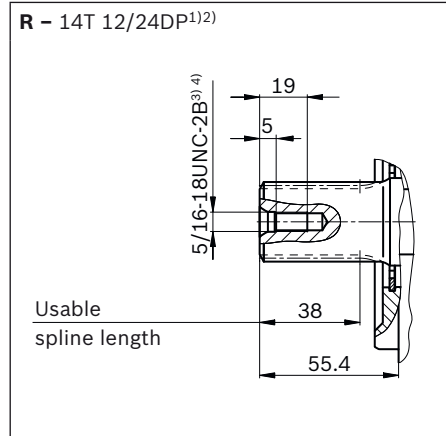

▼ **Splined shaft 1 in (SAE J744)**

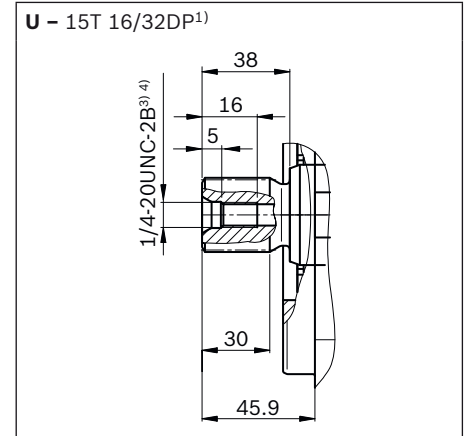

▼ **Splined shaft 1 in (SAE J744)**

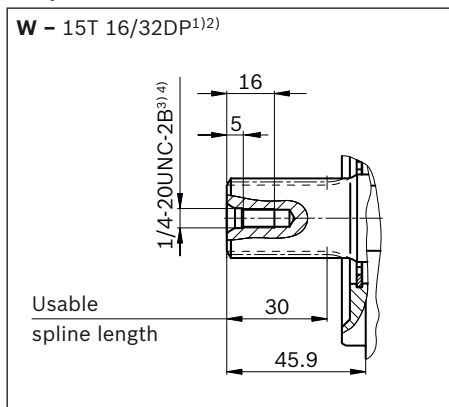

Ports - version metric port plate 41/42		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 in M10 × 1.5; 17 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	2 in M12 × 1.75; 20 deep	10	O
<b>L</b>	Drain port	DIN 3852 <sup>7)</sup>	M22 × 1.5; 14 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14 UNF-2B; 16 deep	2	X <sup>8)</sup>
<b>X</b>	Pilot pressure	DIN 3852	M14 × 1.5; 12 deep	350	O
<b>X</b>	Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 12 deep	350	O


Ports - version SAE port plate 91/92		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	1 in 3/8-16 UNC-2B; 18 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	2 in 1/2-13UNC-2B; 22 deep	10	O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14 UNF-2B; 16 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14 UNF-2B; 16 deep	2	X <sup>8)</sup>
<b>X</b>	Pilot pressure	ISO 11926	7/16-20 UNF-2B; 11.5 deep	350	O
<b>X</b>	Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 12 deep	350	O

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.
- 3) Thread according to ASME B1.1
- 4) For notes on tightening torques, see the instruction manual
- 5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.


- 6) Metric fastening thread is a deviation from standard.
- 7) The countersink can be deeper than as specified in the standard.
- 8) Depending on the installation position, L or L<sub>1</sub> must be connected (also see installation instructions starting on page 56).
- 9) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)




▼ **DG – Two-point control, direct operated**

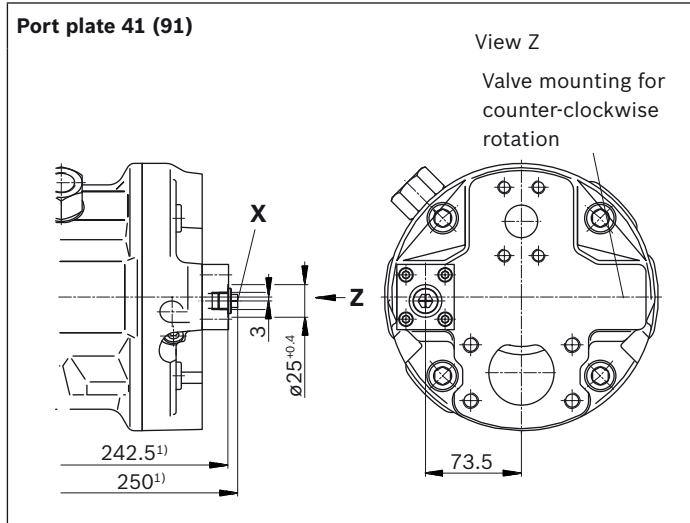


▼ **DG – Two-point control, direct operated**

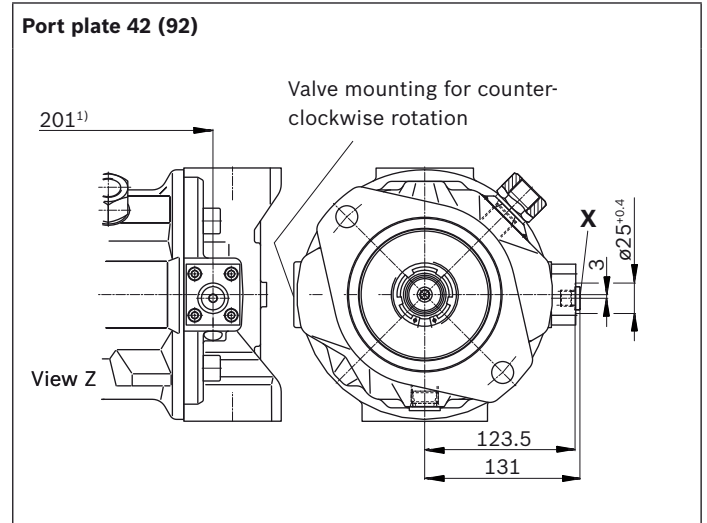


▼ **DR – Pressure controller**

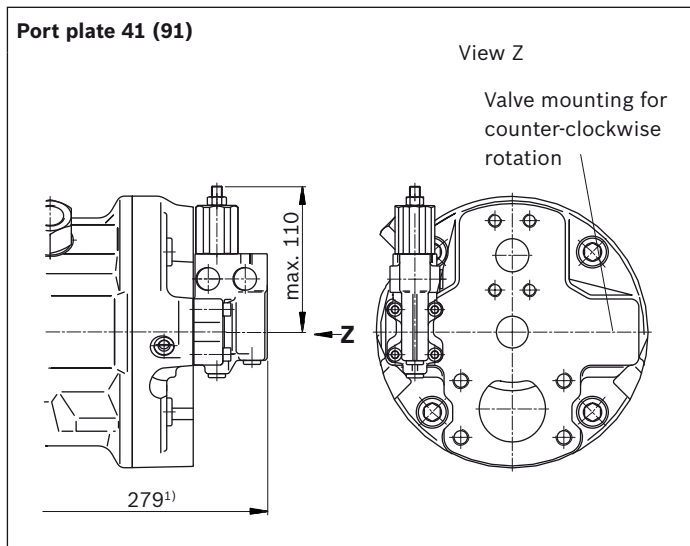


▼ **DR – Pressure controller**

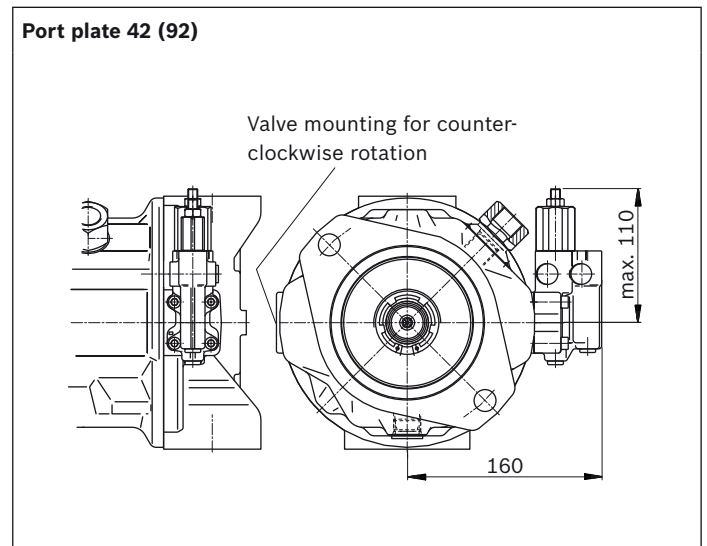

▼ **DRG – Pressure controller, remote controlled**

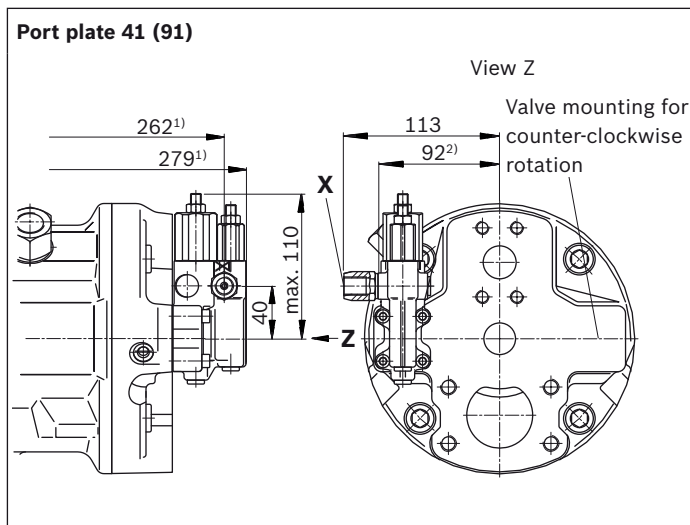


▼ **DRG – Pressure controller, remote controlled**

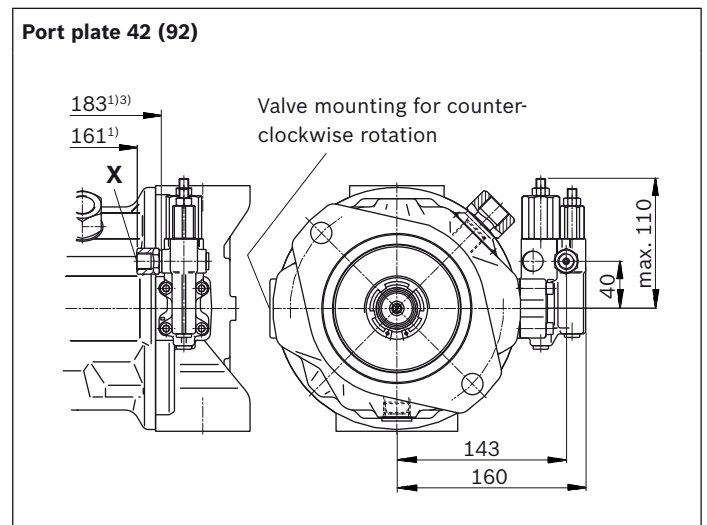


1) To flange surface  
 2) For version port plate 91

3) For version port plate 92


▼ **DFLR – Pressure, flow and power controller**

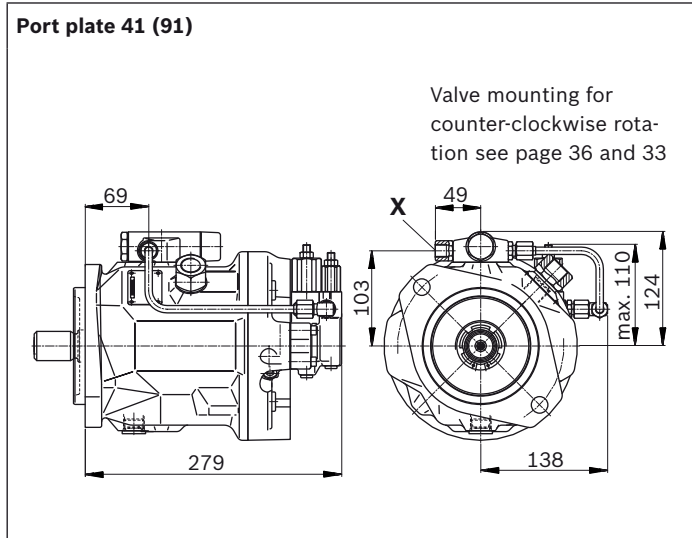


▼ **DFLR – Pressure, flow and power controller**

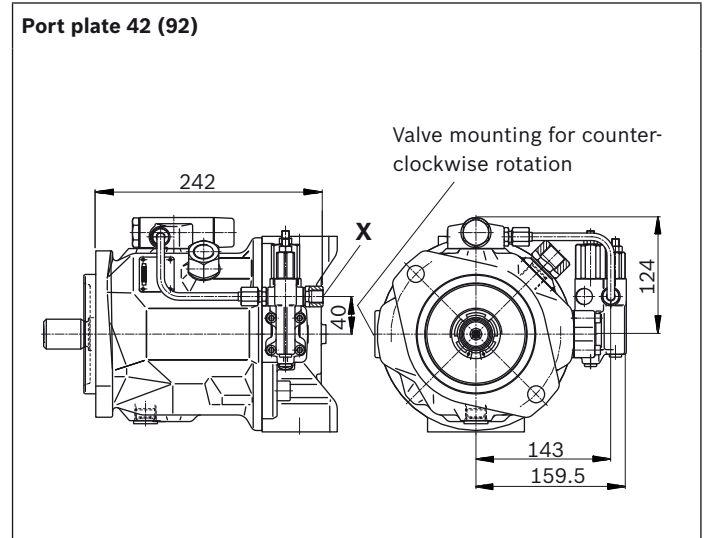

▼ **ED7. / ER7. – Electro-hydraulic pressure control**

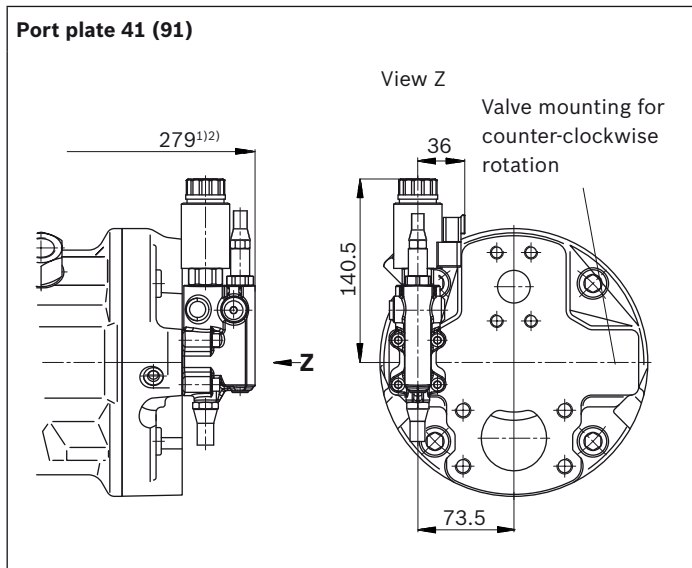

▼ **ED7. / ER7. – Electro-hydraulic pressure control**

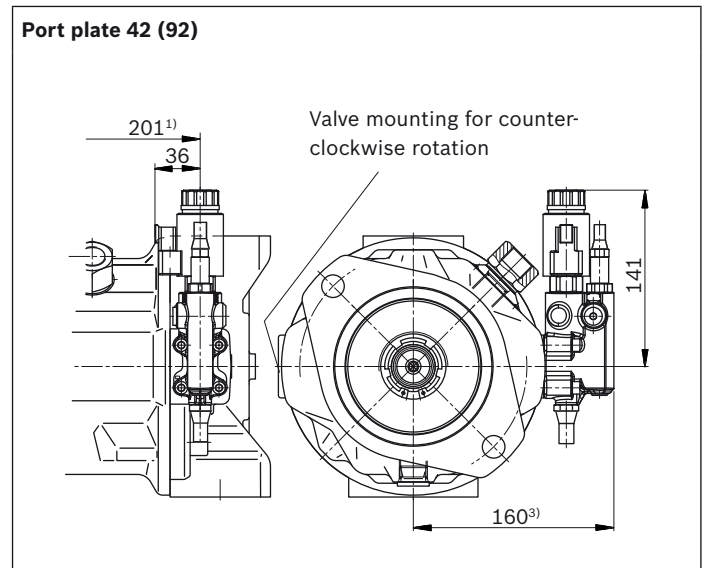

1) To flange surface

2) ER7.: 314 mm if using an intermediate plate pressure controller


3) ER7.: 195 mm if using an intermediate plate pressure controller

**Dimensions, size 100**


**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic; clockwise rotation, version: Ports metric**

3

▼ **Port plate 12**

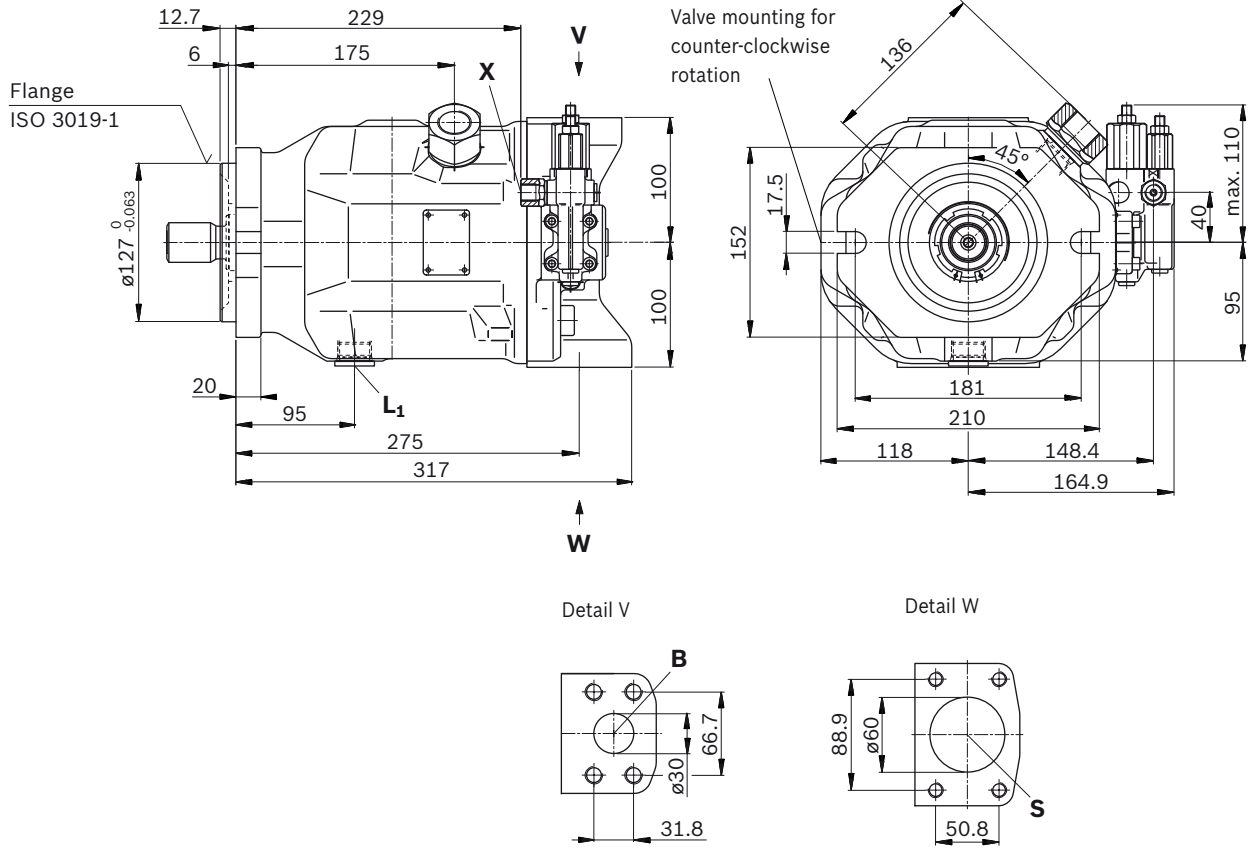


▼ **Port plate 11**

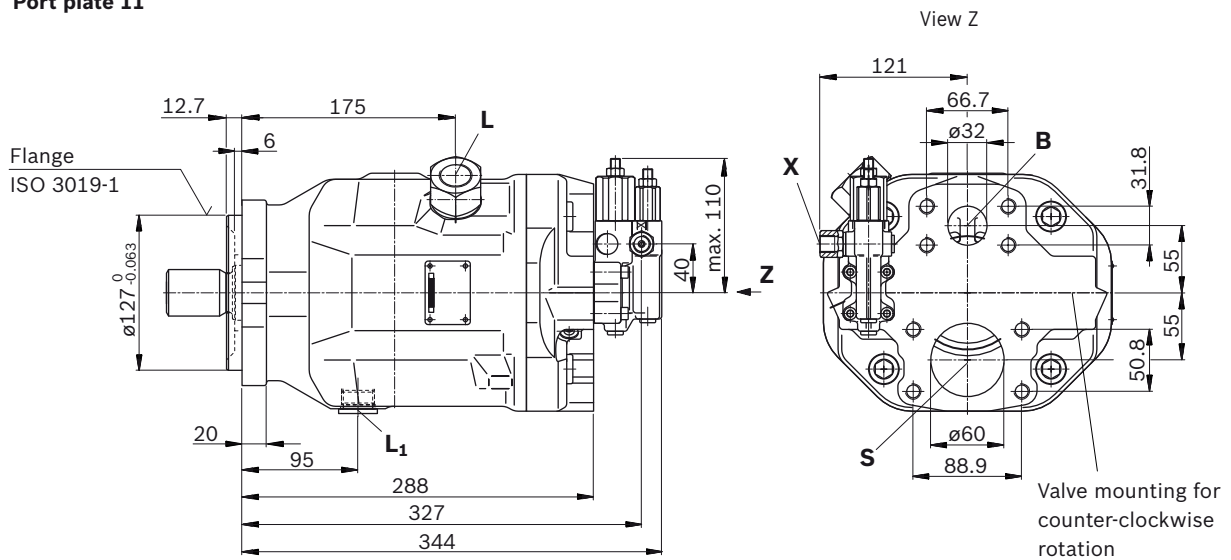


**Dimensions, size 100**


**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic; clockwise rotation, version: SAE ports**

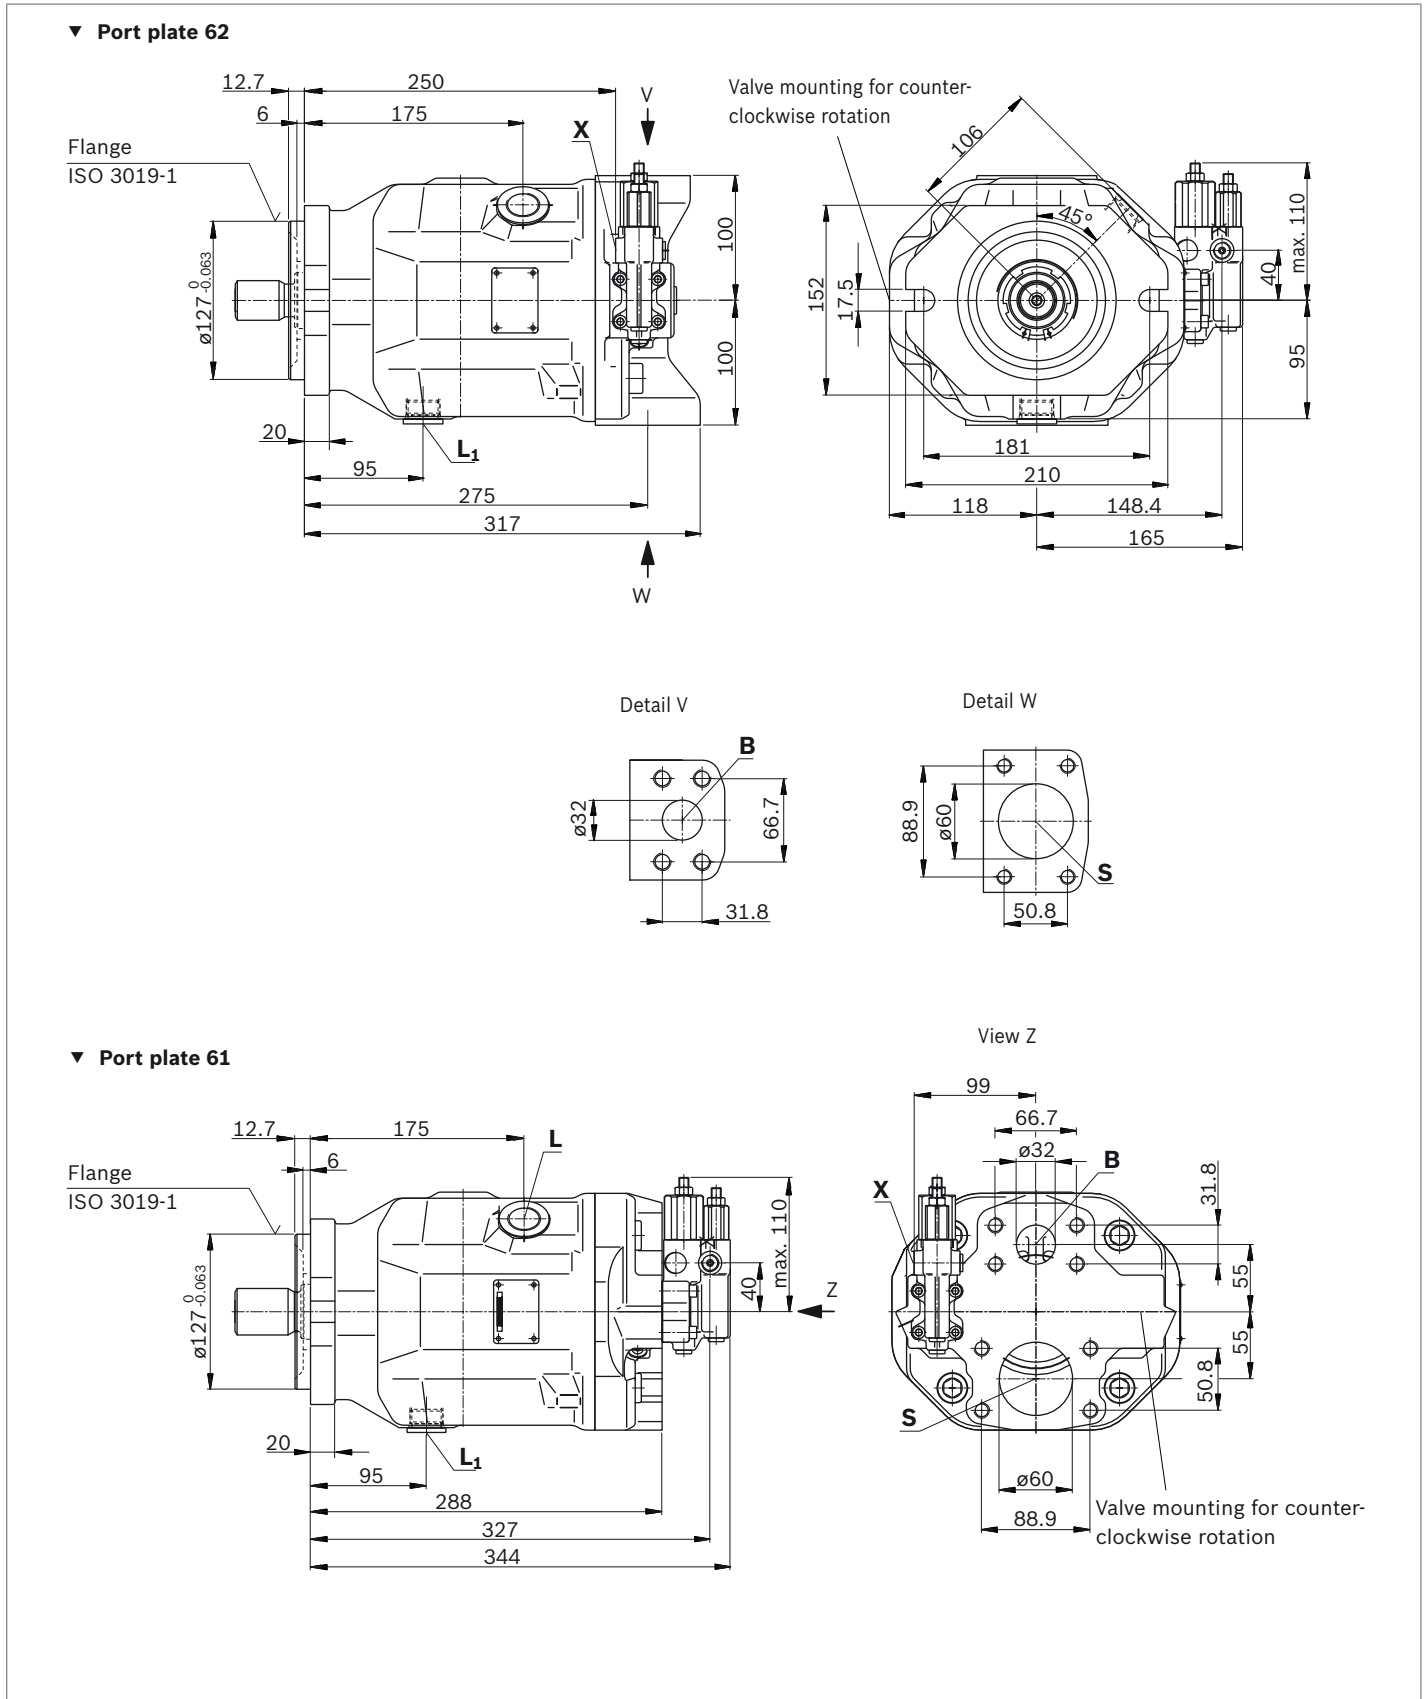


## ▼ Splined shaft 1 1/2 in (SAE J744)

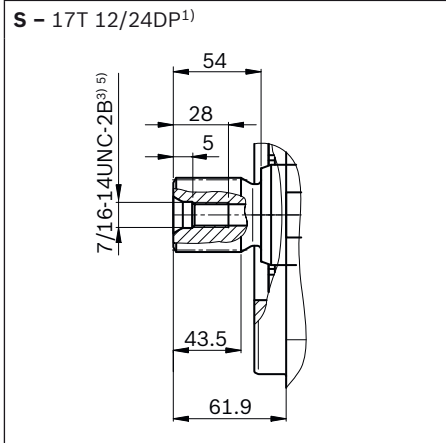

## ▼ Splined shaft 1 1/4 in (SAE J744)

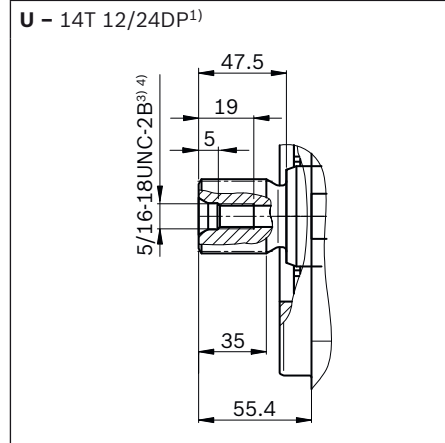

## ▼ Splined shaft 1 1/4 in (SAE J744)

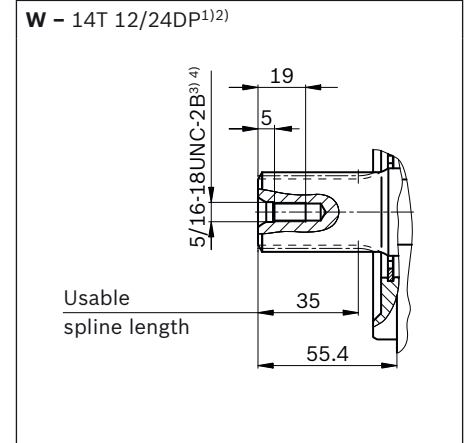


Ports - version metric port plate 11/12		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (high-pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/4 in M14 × 2; 19 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	2 1/2 in M12 × 1.75; 17 deep	10	O
<b>L</b>	Drain port	DIN 3852 <sup>7)</sup>	M27 × 2; 16 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 1/16-12 UNF-2B; 18 deep	2	X <sup>8)</sup>
<b>X</b>	Pilot pressure	DIN 3852	M14 × 1.5; 12 deep	350	O
<b>X</b>	Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 12 deep	350	O
Ports - version SAE port plate 61/62		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (high-pressure series) Fastening thread	SAE J518 ASME B1.1	1 1/4 in 1/2-13 UNC-2B; 19 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	2 1/2 in 1/2-13 UNC-2B; 22 deep	10	O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	1 1/16-12 UNF-2B; 18 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 1/16-12 UNF-2B; 18 deep	2	X <sup>8)</sup>
<b>X</b>	Pilot pressure	ISO 11926	7/16-20 UNF-2B; 11.5 deep	350	O
<b>X</b>	Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 12 deep	350	O


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.
- 3) Thread according to ASME B1.1
- 4) For notes on tightening torques, see the instruction manual
- 5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 6) Metric fastening thread is a deviation from standard.
- 7) The countersink can be deeper than as specified in the standard.
- 8) Depending on the installation position, L or L<sub>1</sub> must be connected (also see installation instructions starting on page 56).
- 9) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)


▼ **DG – Two-point control, direct operated**

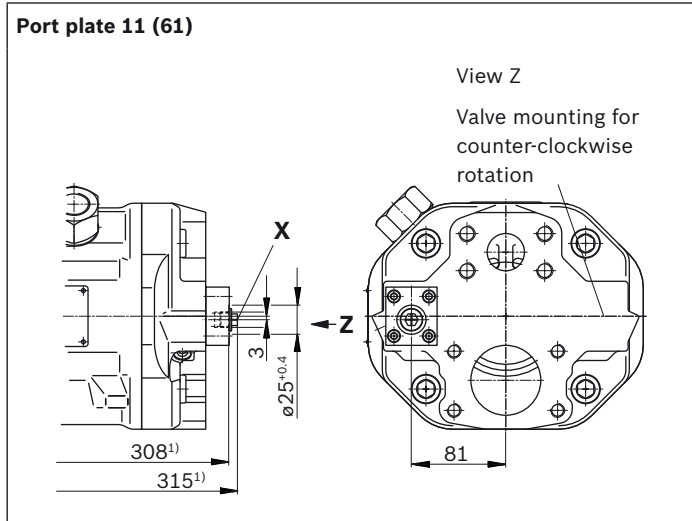


▼ **DG – Two-point control, direct operated**

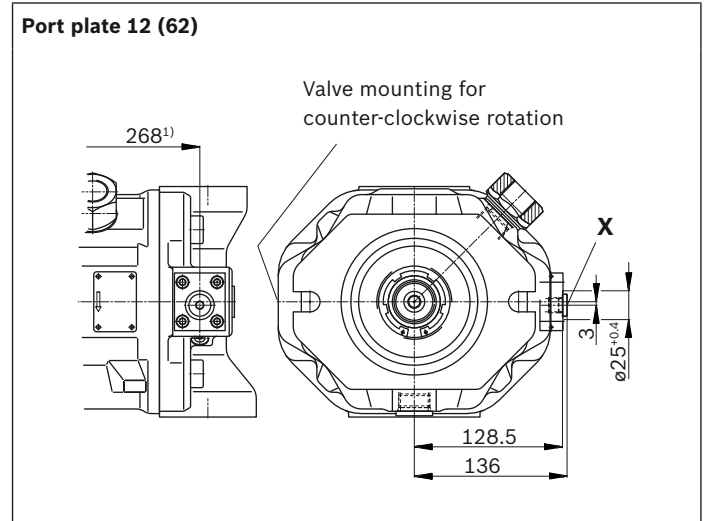


▼ **DR – Pressure controller**

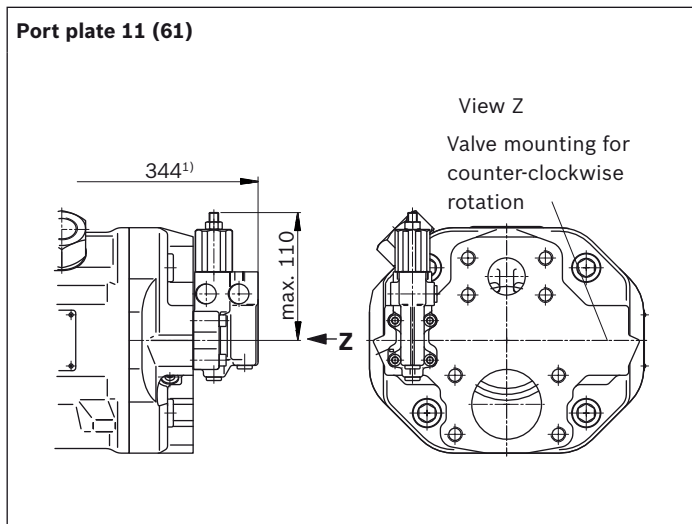


▼ **DR – Pressure controller**

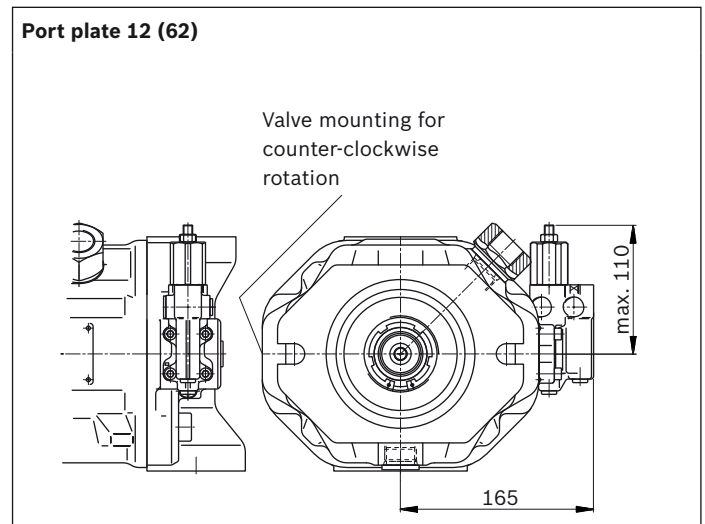

▼ **DRG – Pressure controller, remote controlled**

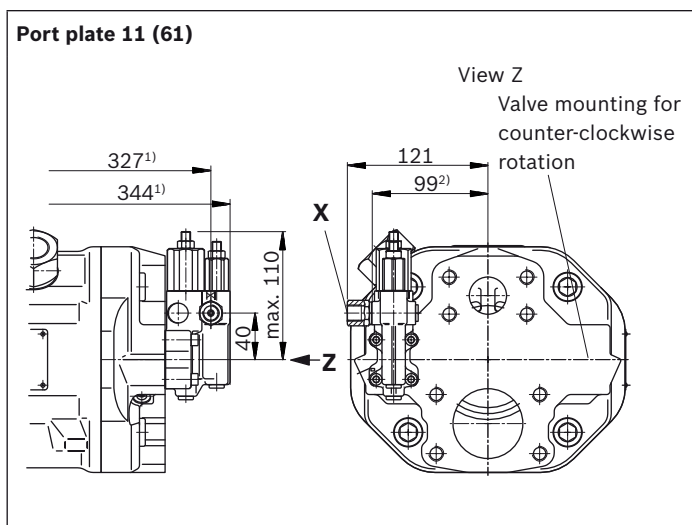


▼ **DRG – Pressure controller, remote controlled**

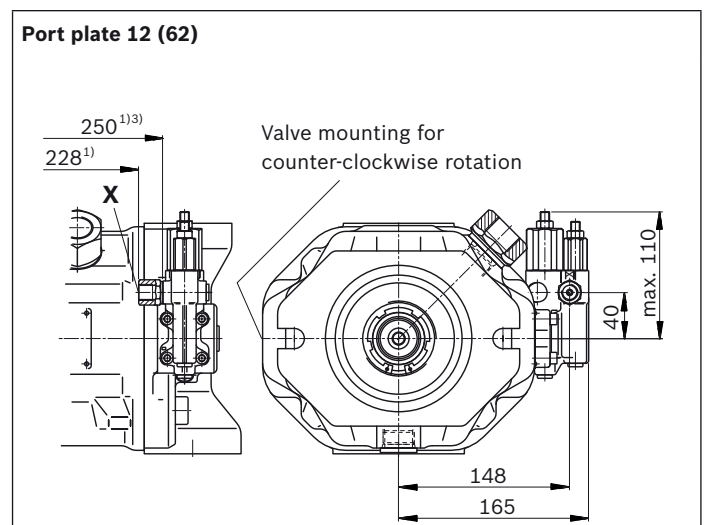


- 1) To flange surface
- 2) For version port plate 61

- 3) For version port plate 62


▼ DFLR – Pressure, flow and power controller

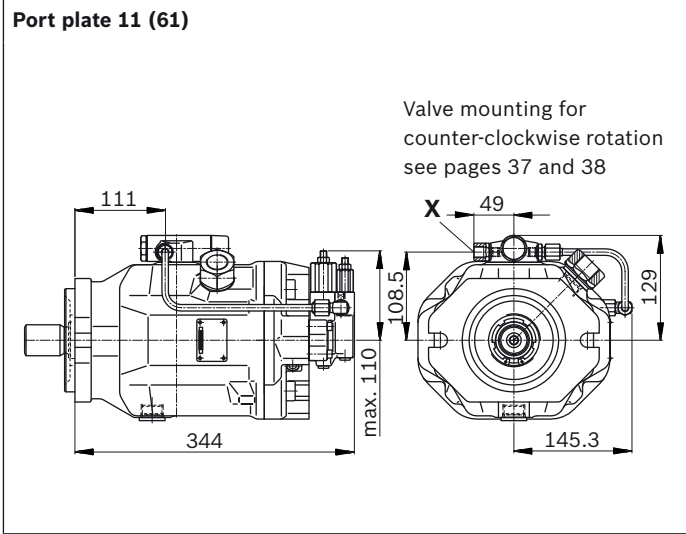


▼ DFLR – Pressure, flow and power controller

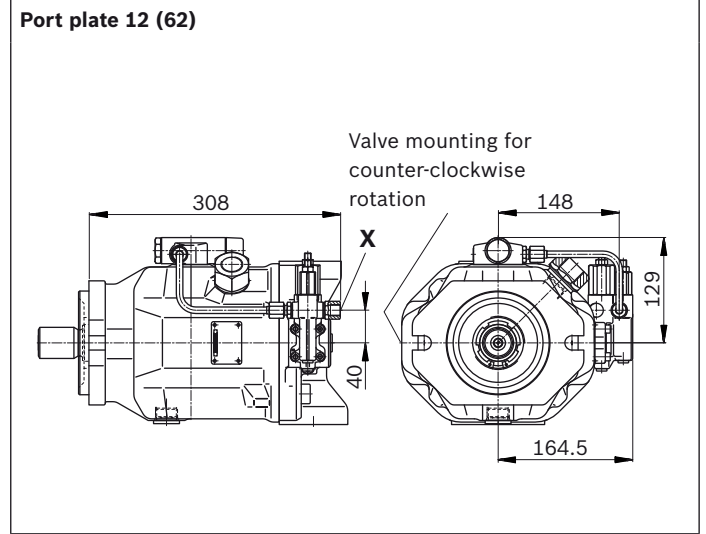

▼ ED7. / ER7. – Electro-hydraulic pressure control

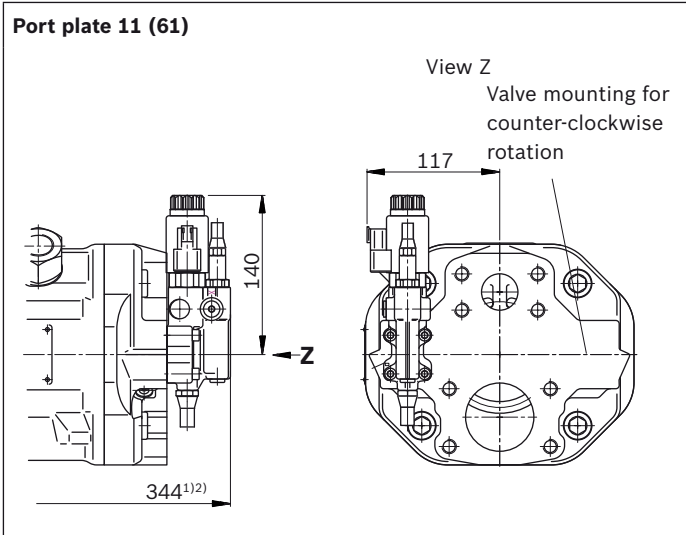


▼ ED7. / ER7. – Electro-hydraulic pressure control

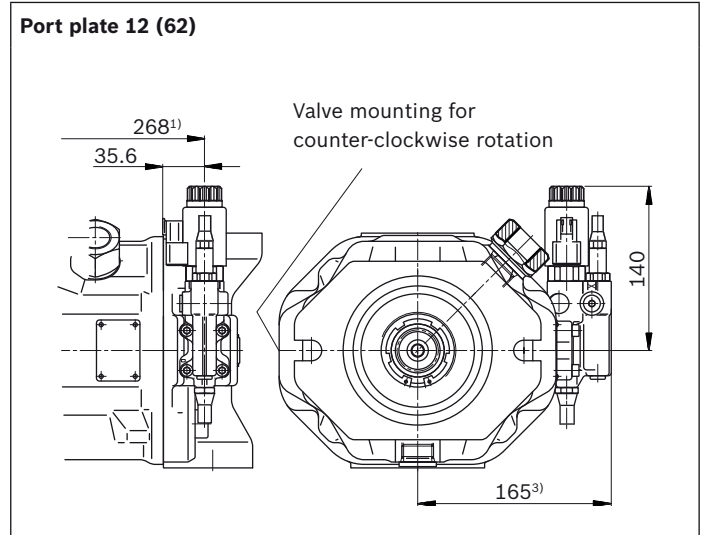

1) To flange surface  
 2) ER7.: 379 mm if using an intermediate plate pressure controller  
 3) ER7.: 200 mm if using an intermediate plate pressure controller

**Dimensions, size 140**


**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic, clockwise rotation, mounting flange D, version metric**

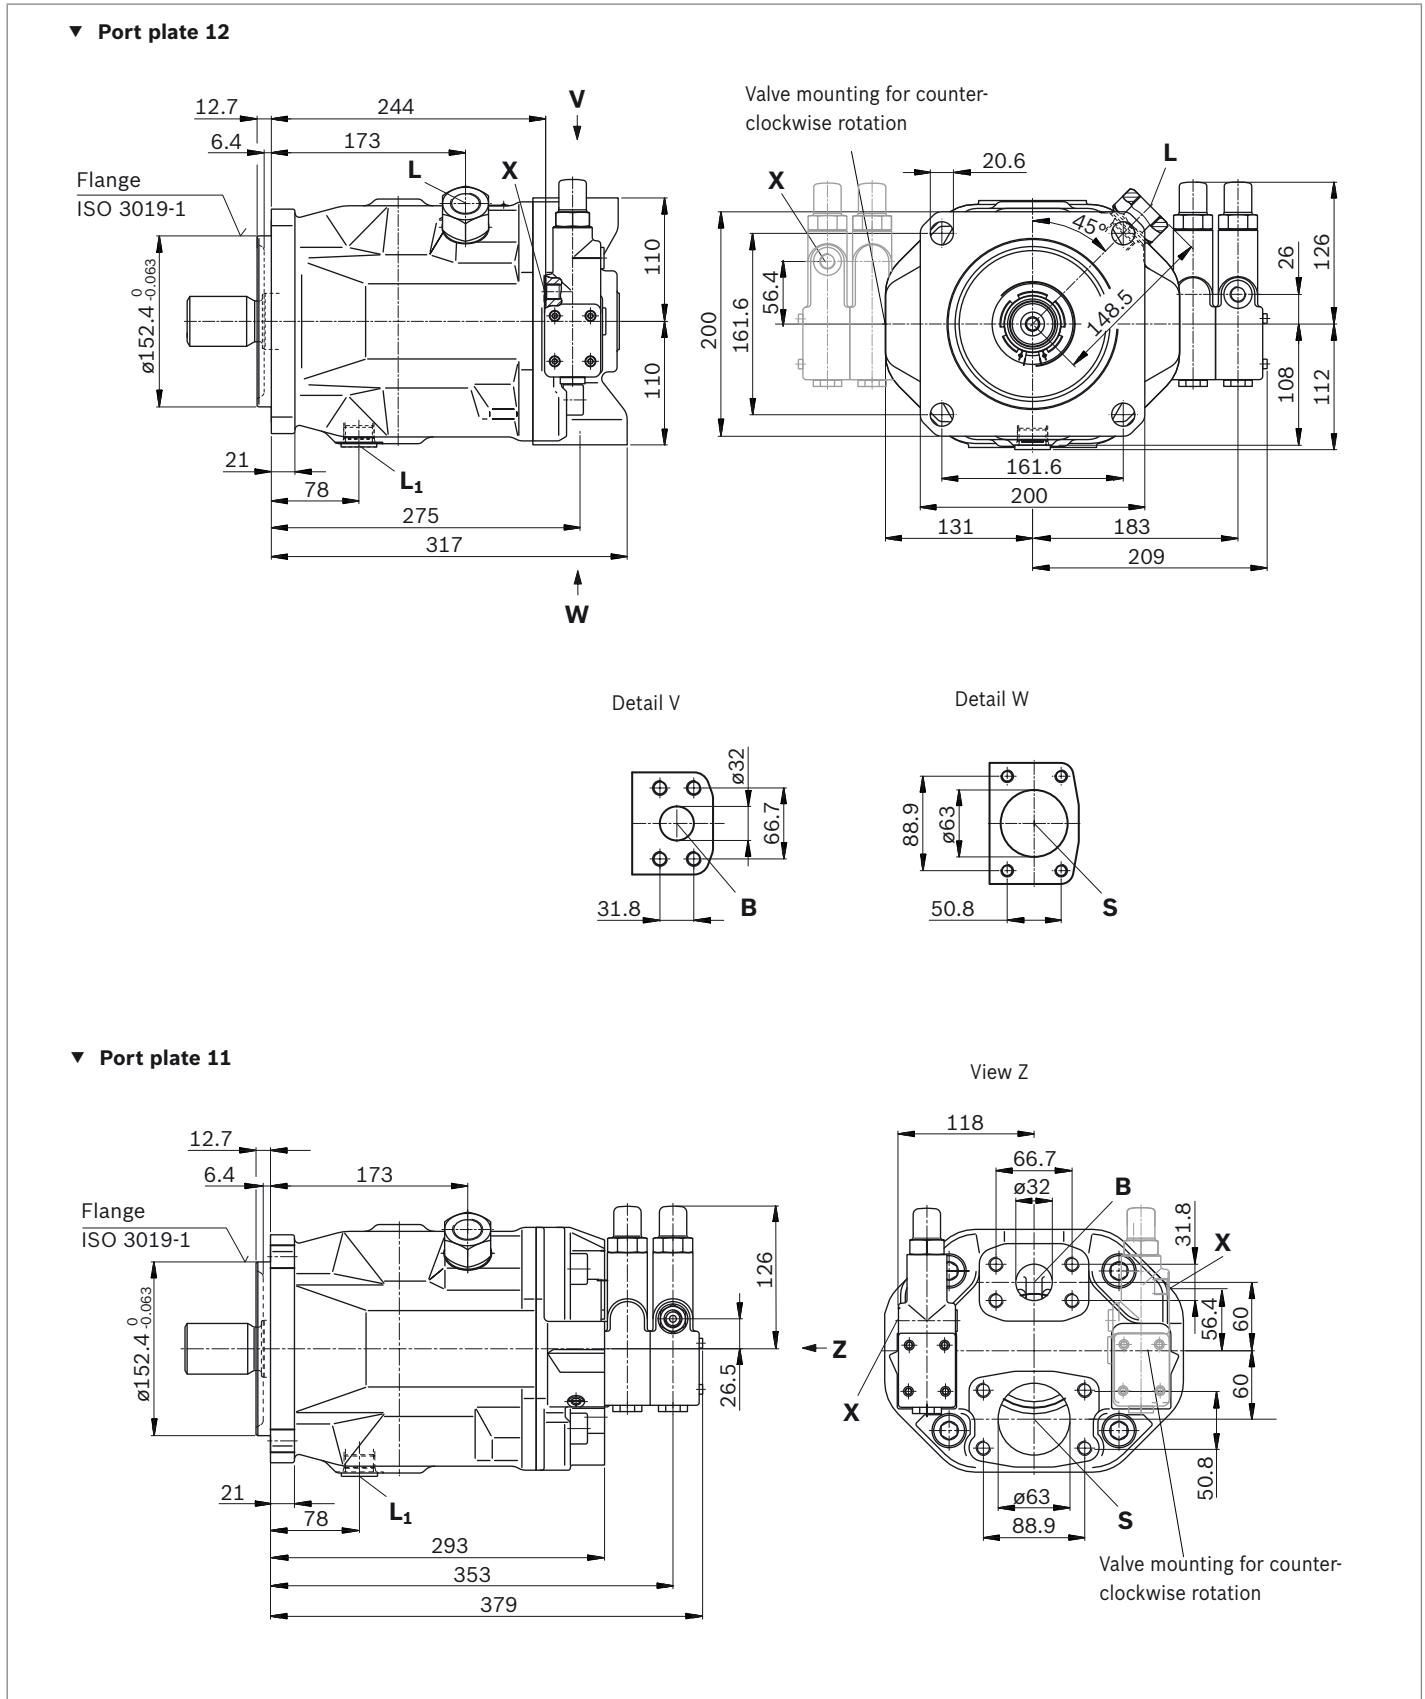




**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic, clockwise rotation, mounting flange D, version SAE**


▼ **Port plate 62**

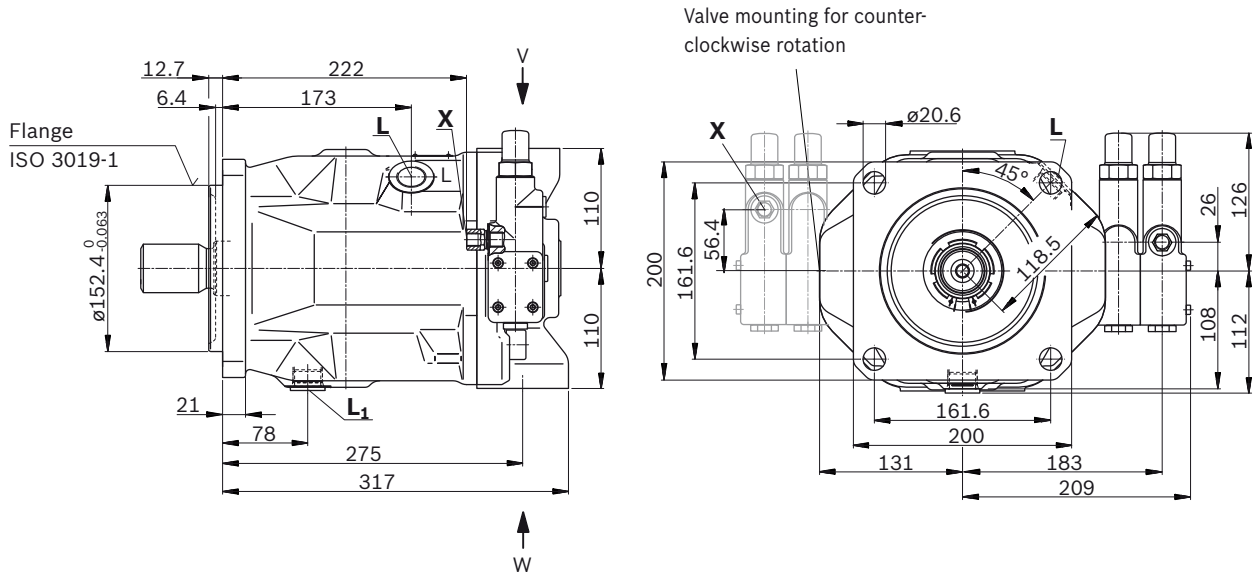


Detail V



Detail W




▼ **Port plate 61**

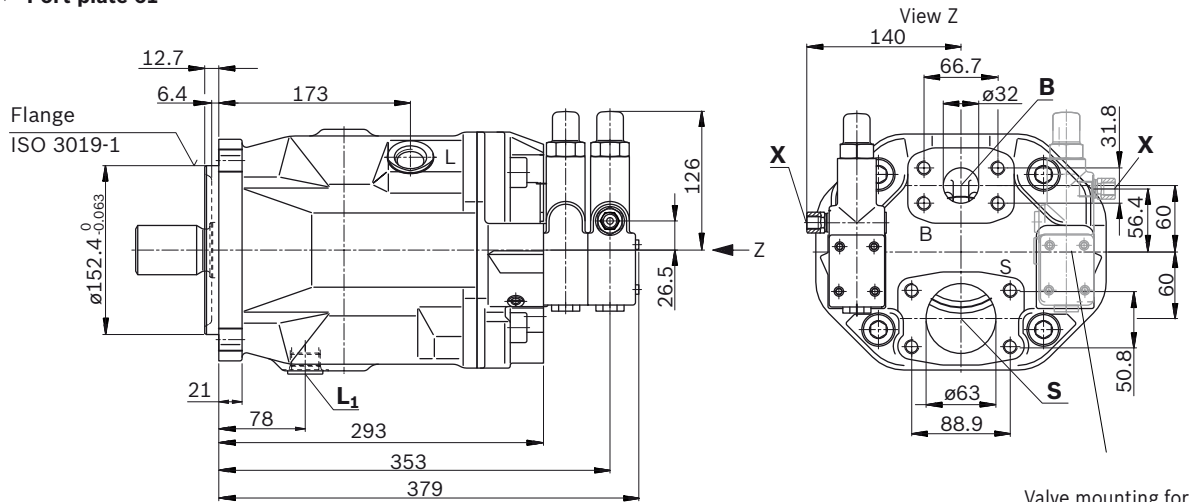


Valve mounting for counter-clockwise rotation

**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic, clockwise rotation, mounting flange C, version metric**

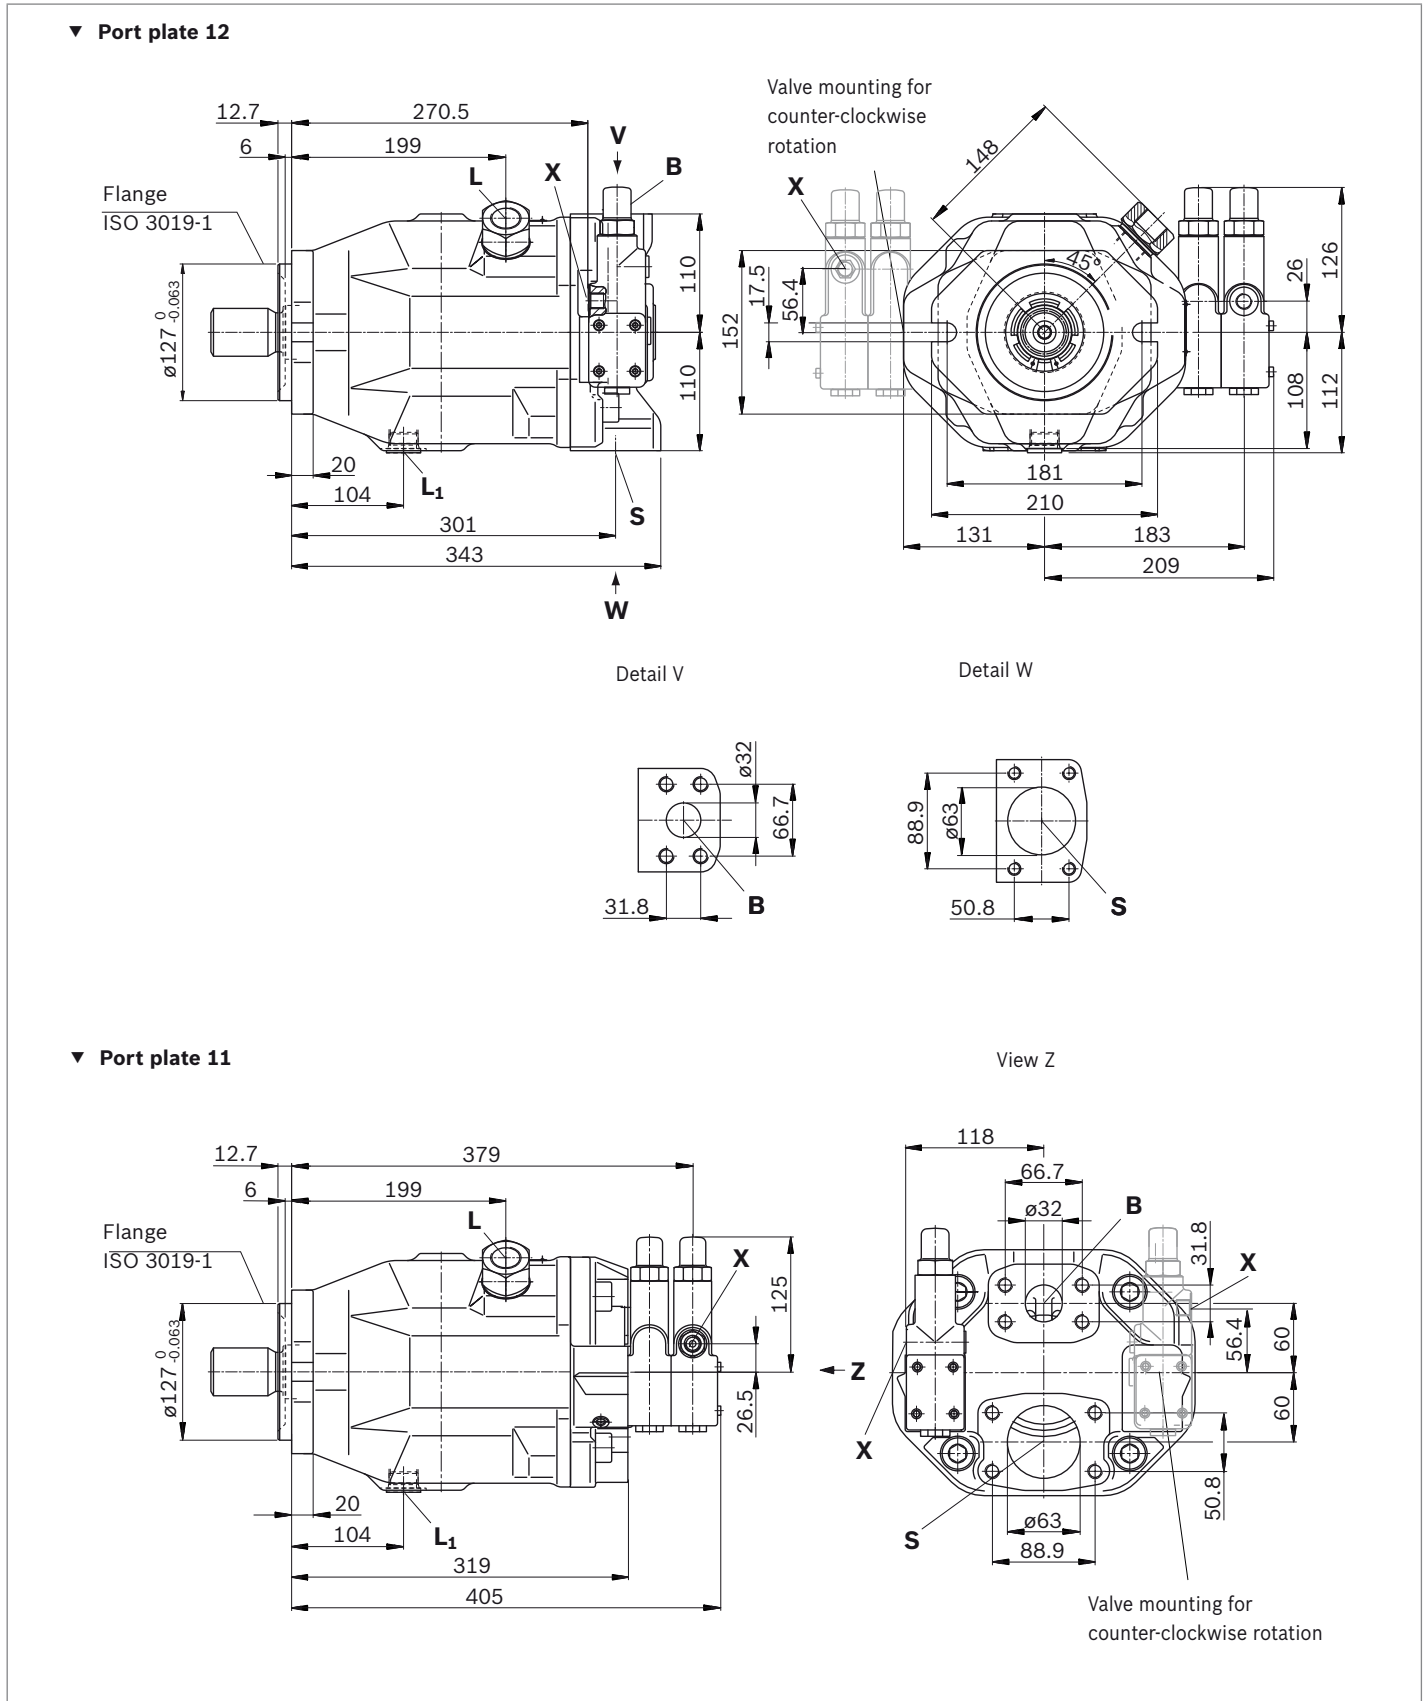



**DFR / DFR1 / DRSC – Pressure and flow control, hydraulic, clockwise rotation, mounting flange C, version SAE**

▼ **Port plate 62**

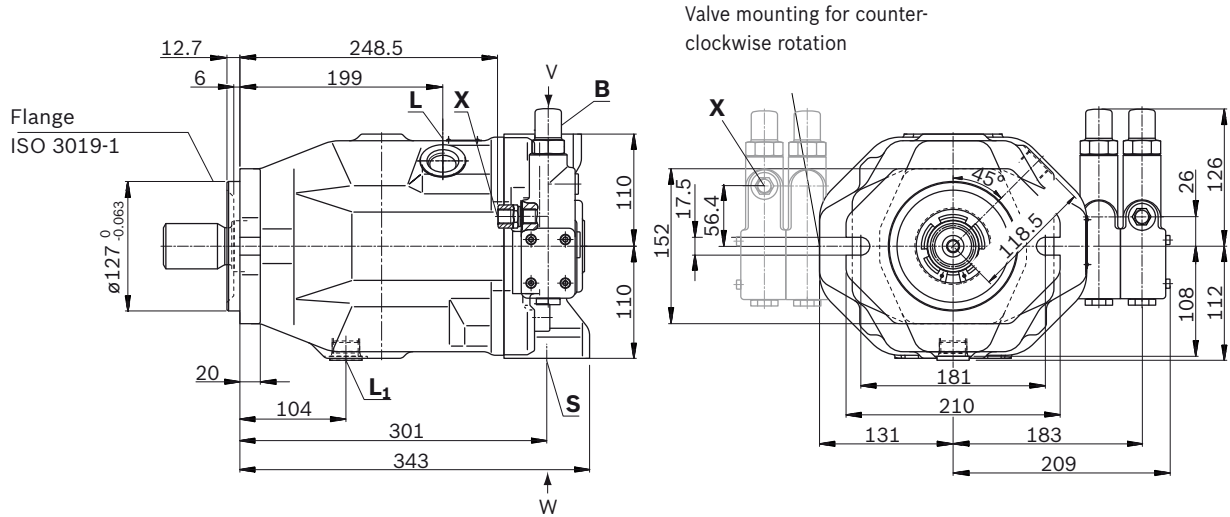


Detail V


Detail W




▼ **Port plate 61**

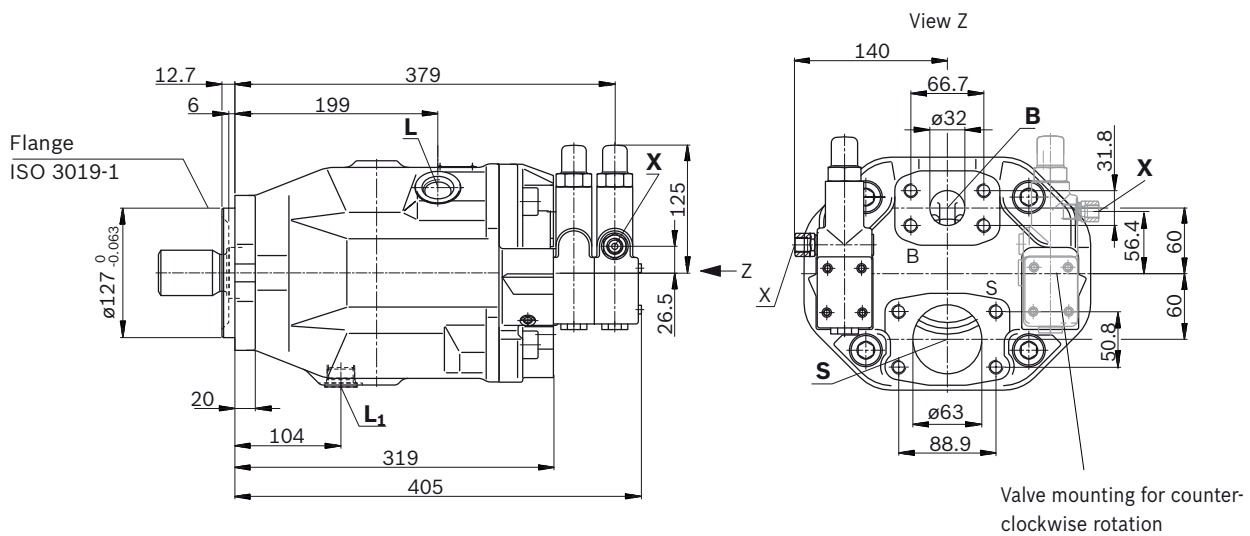

▼ **Splined shaft 1 3/4 in (SAE J744)**

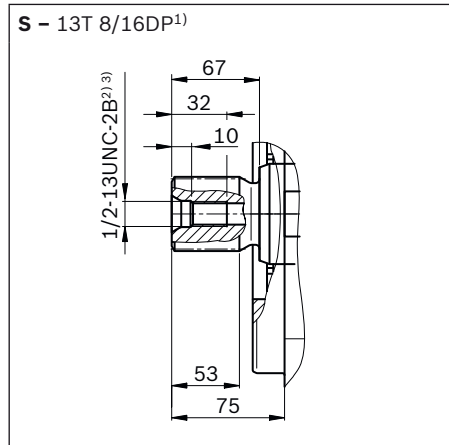

▼ **Splined shaft 1 1/2 in (SAE J744)**

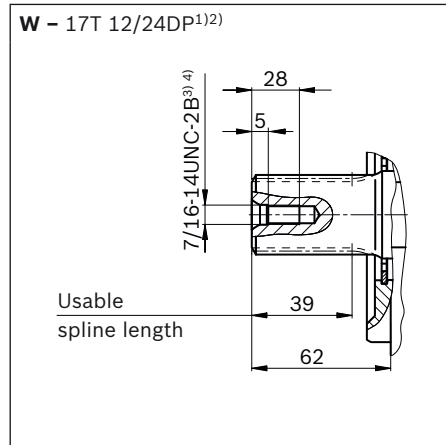

Ports - version metric port plate 11/12		Standard	Size <sup>3)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>4)</sup>	State <sup>8)</sup>
<b>B</b>	Working port (high-pressure series) Fastening thread	SAE J518 <sup>5)</sup> DIN 13	1 1/4 in M14 × 2; 19 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>5)</sup> DIN 13	2 1/2 in M12 × 1.75; 17 deep	10	O
<b>L</b>	Drain port	DIN 3852 <sup>6)</sup>	M27 × 2; 16 deep	2	O <sup>7)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>6)</sup>	1 1/16-12 UNF-2B; 18 deep	2	X <sup>7)</sup>
<b>X</b>	Pilot pressure	DIN 3852 <sup>6)</sup>	M14 × 1.5; 12 deep	350	O
<b>X</b>	Pilot pressure with DG-control	DIN 3852	M14 × 1.5; 12 deep	350	O
<b>M<sub>H</sub></b>	High pressure measurement (only with control DG)	DIN 3852	M14 × 1.5; 12 deep	350	X


  

Ports - version SAE port plate 61/62		Standard	Size <sup>3)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>4)</sup>	State <sup>8)</sup>
<b>B</b>	Working port (high-pressure series) Fastening thread	SAE J518 ASME B1.1	1 1/4 in 1/2-13 UNC-2B; 24 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	2 1/2 in 1/2-13 UNC-2B; 24 deep	10	O
<b>L</b>	Drain port	ISO 11926 <sup>6)</sup>	1 1/16-12 UNF-2B; 18 deep	2	O <sup>7)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>6)</sup>	1 1/16-12 UNF-2B; 18 deep	2	X <sup>7)</sup>
<b>X</b>	Pilot pressure	ISO 11926	9/16-18 UNF-2B; 13 deep	350	O
<b>X</b>	Pilot pressure with DG-control	DIN 3852	M14 × 1.5; 12 deep	350	O
<b>M<sub>H</sub></b>	High pressure measurement (only with control DG)	DIN 3852	M14 × 1.5; 12 deep	350	X


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Thread according to ASME B1.1  
 3) For notes on tightening torques, see the instruction manual  
 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) Metric fastening thread is a deviation from standard.  
 6) The countersink can be deeper than as specified in the standard.  
 7) Depending on the installation position, L or L<sub>1</sub> must be connected (also see installation instructions starting on page 56).  
 8) O = Must be connected (plugged when delivered)  
 X = Plugged (in normal operation)


▼ **DG – Two-point control, direct operated**

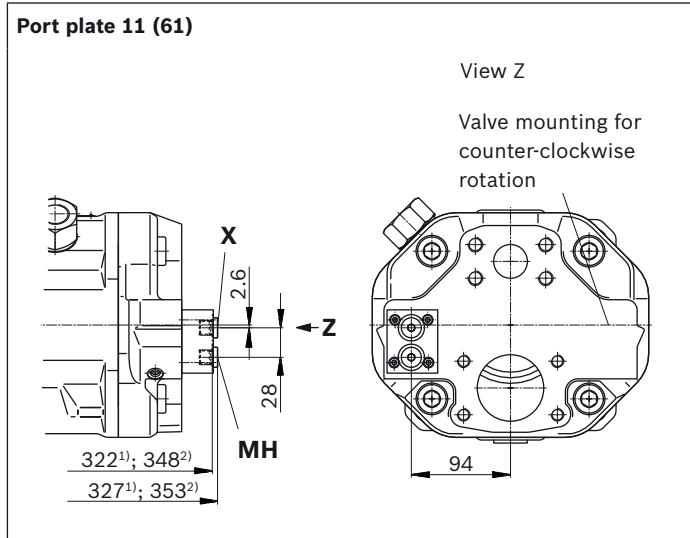


▼ **DG – Two-point control, direct operated**

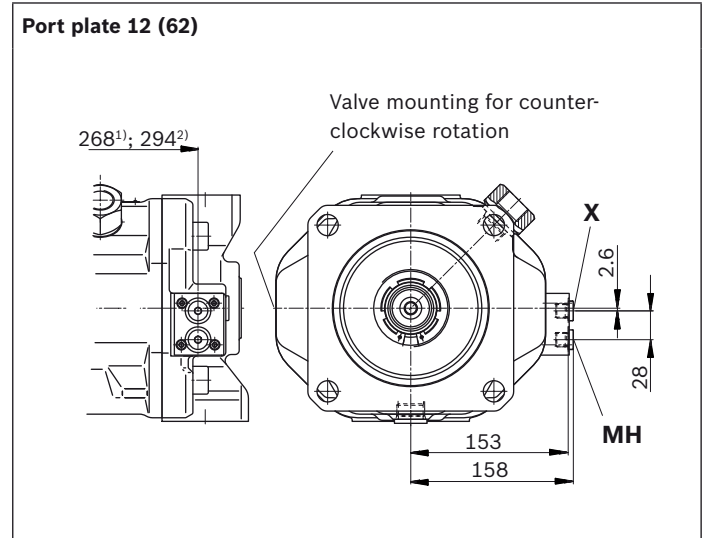


▼ **DR – Pressure controller**

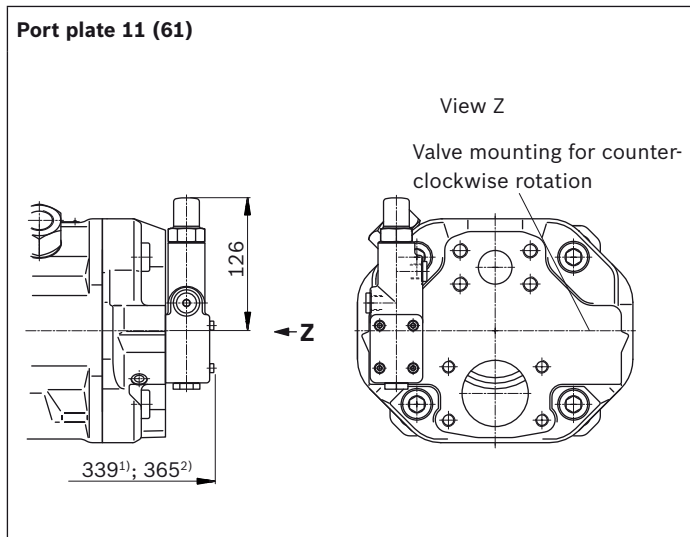


▼ **DR – Pressure controller**

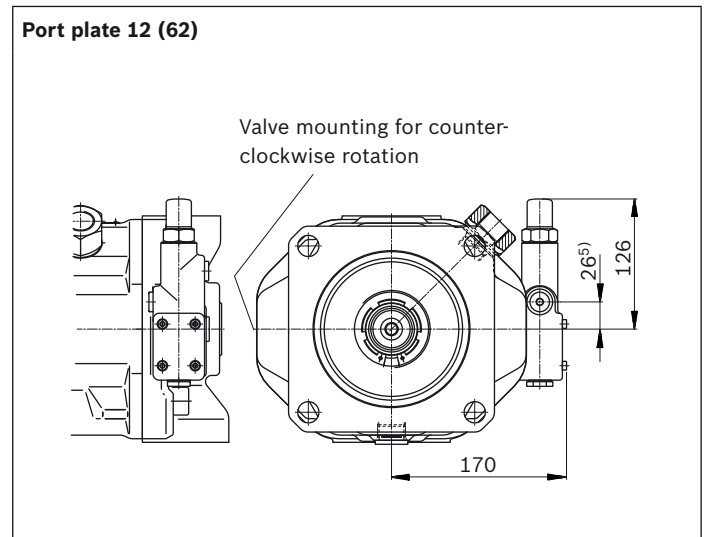

▼ **DRG – Pressure controller, remote controlled**

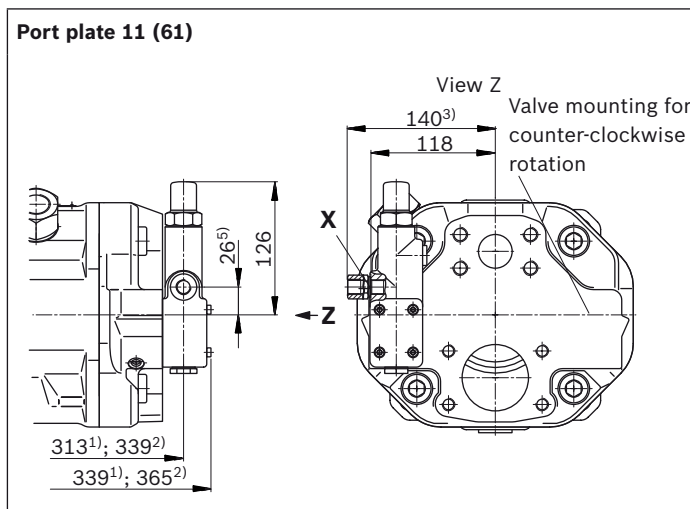


▼ **DRG – Pressure controller, remote controlled**

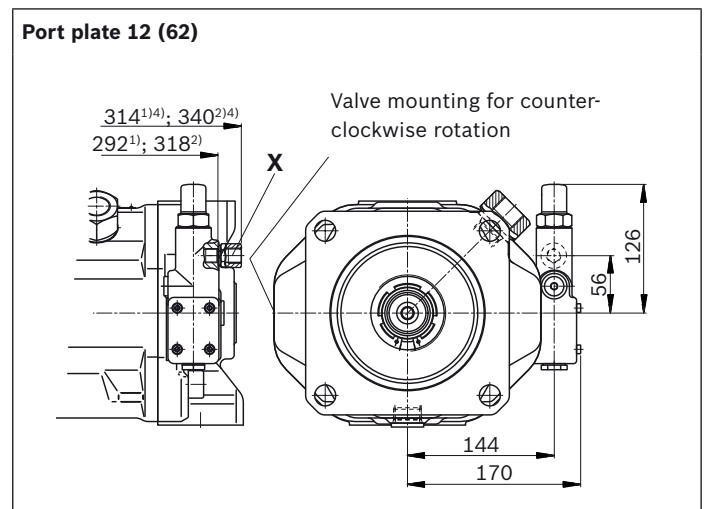


1) To flange surface and housing with D flange  
 2) To flange surface and housing with C flange  
 3) For version port plate 61

4) For version port plate 62  
 5) 56 mm with counter-clockwise rotation


▼ **DFLR – Pressure, flow and power controller**

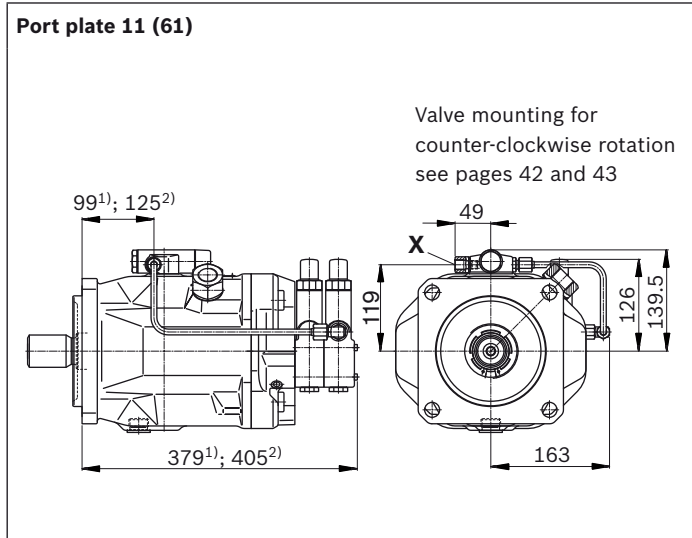


▼ **DFLR – Pressure, flow and power controller**

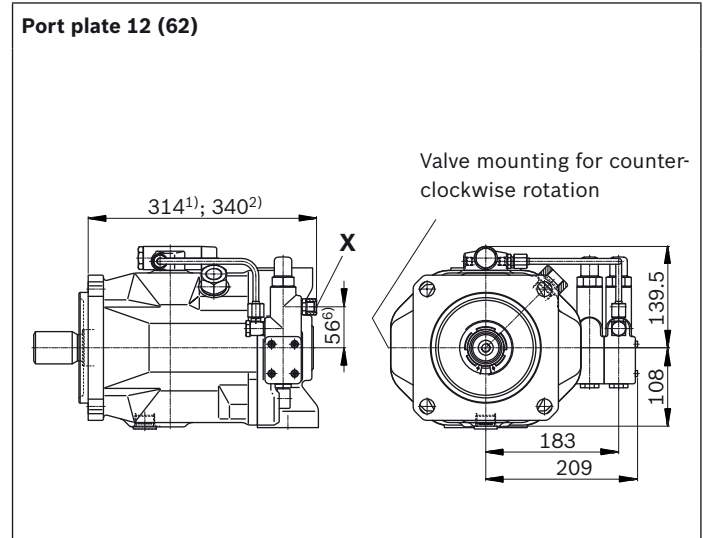

▼ **ED7. / ER7. – Electro-hydraulic pressure control**

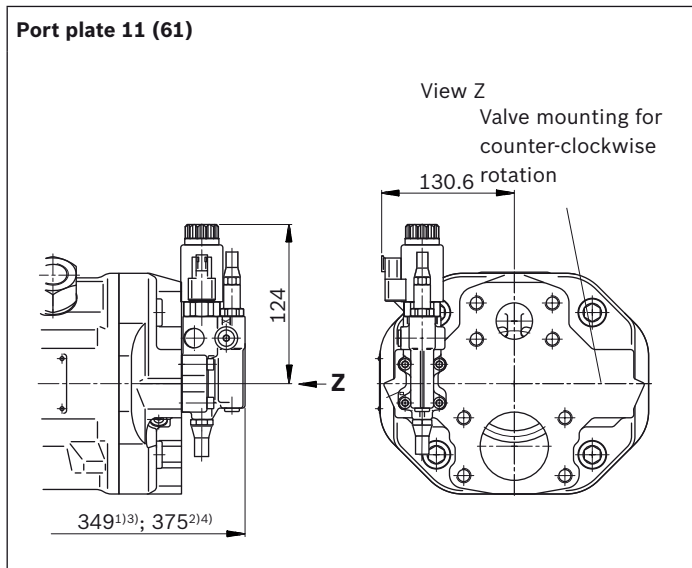

▼ **ED7. / ER7. – Electro-hydraulic pressure control**

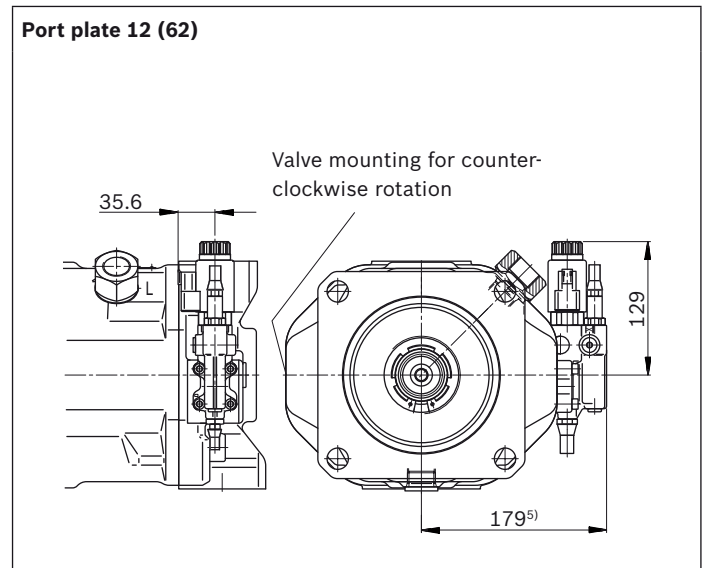

1) To flange surface and housing with D flange  
2) To flange surface and housing with C flange  
3) ER7.: 384 mm if using an intermediate plate pressure controller  
4) ER7.: 410 mm if using an intermediate plate pressure controller



5) ER7.: 214 mm if using an intermediate plate pressure controller  
6) 26 mm with counter-clockwise rotation

**Dimensions, through drive**

Flange ISO 3019-1 (SAE)		Hub for splined shaft <sup>1)</sup>		Availability over sizes							Code
Diameter	Symbol	Diameter		18	28	45	71	88	100	140	
82-2 (A)	⌀, ♂, ∞	5/8 in	9T 16/32DP	•	•	•	•	•	•	•	K01
		3/4 in	11T 16/32DP	•	•	•	•	•	•	•	K52

• = Available    - = Not available

▼ **82-2**

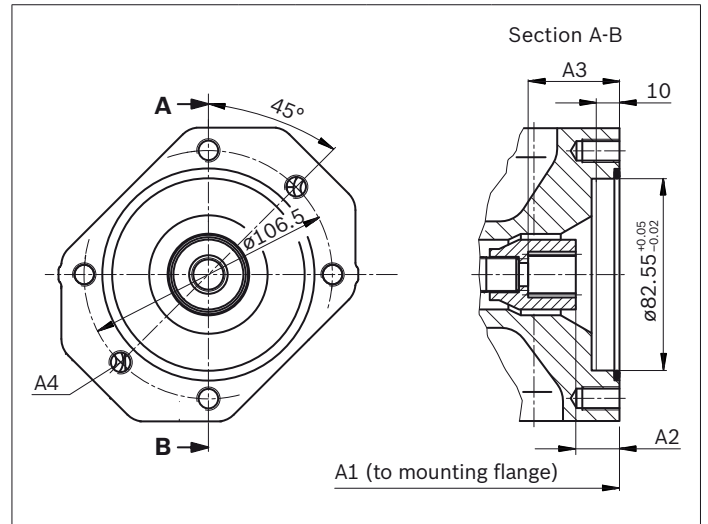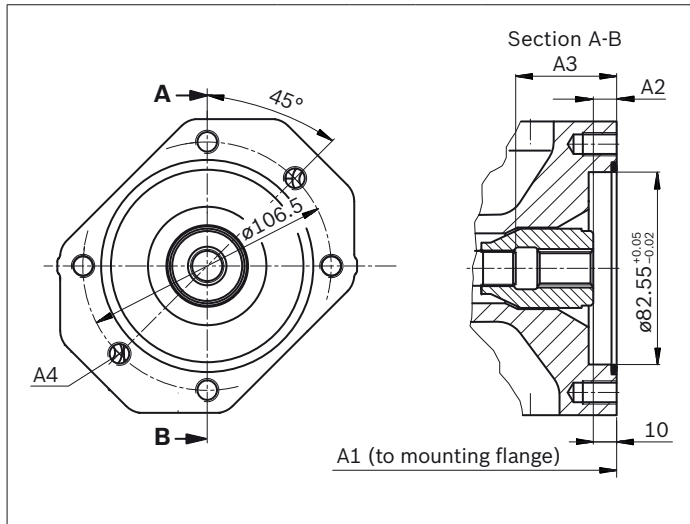

<b>K01</b> (SAE J744 16-4 (A))	NG	A1	A2	A3	A4 <sup>2)</sup>
18	182	10	43.3	M10×1.5; 14.5 deep	
28	204	10	33.7	M10×1.5; 16 deep	
45	229	10.7	53.4	M10×1.5; 16 deep	
71	267	11.8	61.3	M10×1.5; 20 deep	
88	267	11.8	61.3	M10×1.5; 20 deep	
100	338	10.5	65	M10×1.5; 16 deep	
140	350 <sup>3)</sup> 376 <sup>4)</sup>	10.8	77.3	M10×1.5; 16 deep	

<b>K52</b> (SAE J744 19-4 (A-B))	NG	A1	A2	A3	A4 <sup>2)</sup>
18	182	18.8	38.7	M10×1.5; 14.5 deep	
28	204	18.8	38.7	M10×1.5; 16 deep	
45	229	18.9	38.7	M10×1.5; 16 deep	
71	267	21.3	41.4	M10×1.5; 20 deep	
88	267	21.3	41.4	M10×1.5; 20 deep	
100	338	19	38.9	M10×1.5; 16 deep	
140	350 <sup>3)</sup> 376 <sup>4)</sup>	18.9	38.6	M10×1.5; 16 deep	



1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Thread according to DIN 13, see instruction manual for maximum tightening torques.

3) Housing with D flange  
4) Housing with C flange

Flange ISO 3019-1 (SAE)		Hub for splined shaft <sup>1)</sup>		Availability over sizes							Code
Diameter	Symbol	Diameter		18	28	45	71	88	100	140	
101-2 (B)	⌀, ⌀, ∞	7/8 in	13T 16/32DP	-	●	●	●	●	●	●	K68
		1 in	15T 16/32DP	-	-	●	●	●	●	●	K04

● = Available    - = Not available

▼ **101-2**

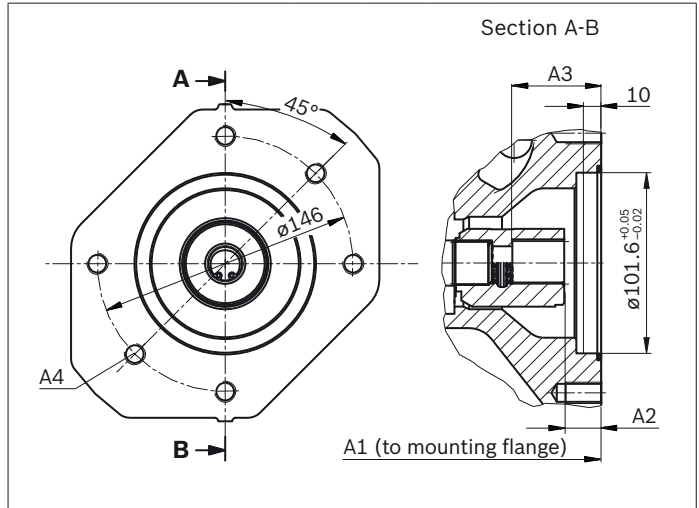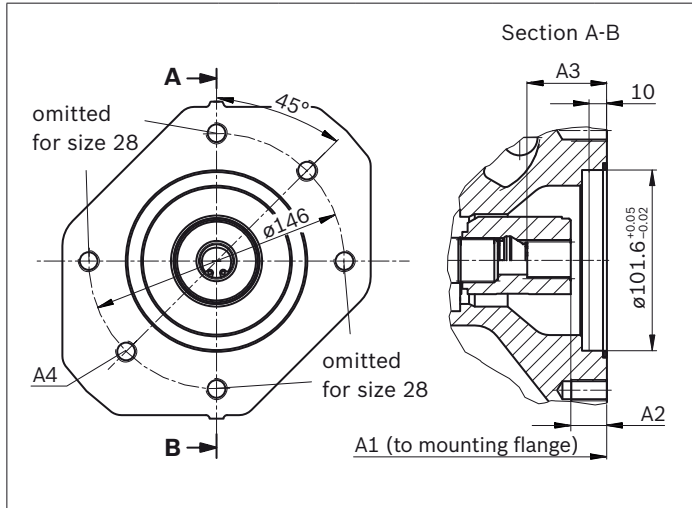

<b>K68</b> (SAE J744 22-4 (B))	NG	A1	A2	A3	A4 <sup>2)</sup>
	28	204	17.8	41.7	M12×1.75; <sup>3)</sup>
	45	229	17.9	41.7	M12×1.75; 18 deep
	71	267	20.3	44.7	M12×1.75; 20 deep
	88	267	20.3	44.7	M12×1.75; 20 deep
	100	338	18	41.9	M12×1.75; 20 deep
	140	350 <sup>4)</sup> 376 <sup>5)</sup>	17.8	41.6	M12×1.75; 20 deep

<b>K04</b> (SAE J744 25-4 (B-B))	NG	A1	A2	A3	A4 <sup>2)</sup>
	45	229	18.4	46.7	M12×1.75; 18 deep
	71	267	20.8	49.1	M12×1.75; 20 deep
	88	267	20.8	49.1	M12×1.75; 20 deep
	100	338	18.2	46.6	M12×1.75; 20 deep
	140	350 <sup>4)</sup> 376 <sup>5)</sup>	18.3	45.9	M12×1.75; 20 deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Thread according to DIN 13, see instruction manual for maximum tightening torques.  
3) Continuous



4) Housing with D flange  
5) Housing with C flange



Flange ISO 3019-1 (SAE)		Hub for splined shaft <sup>1)</sup>		Availability over sizes							Code
Diameter	Symbol	Diameter		18	28	45	71	88	100	140	
127-2 (C)	⌀, ∞	1 1/4 in	14T 12/24DP	-	-	-	•	•	•	•	K07
		1 1/2 in	17T 12/24DP	-	-	-	-	-	•	•	K24

• = Available    - = Not available

▼ 127-2

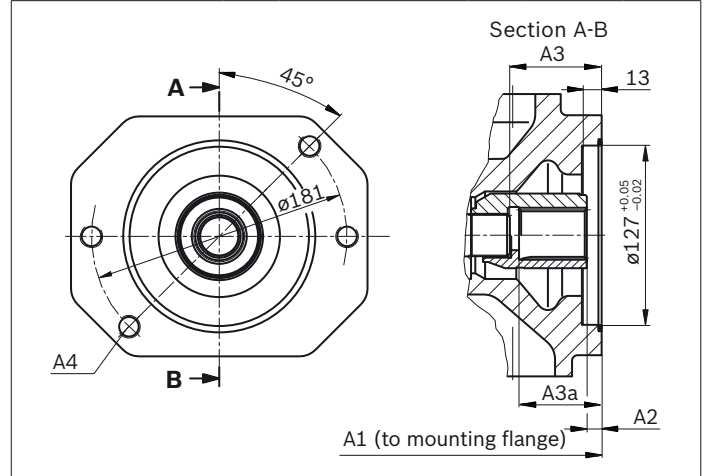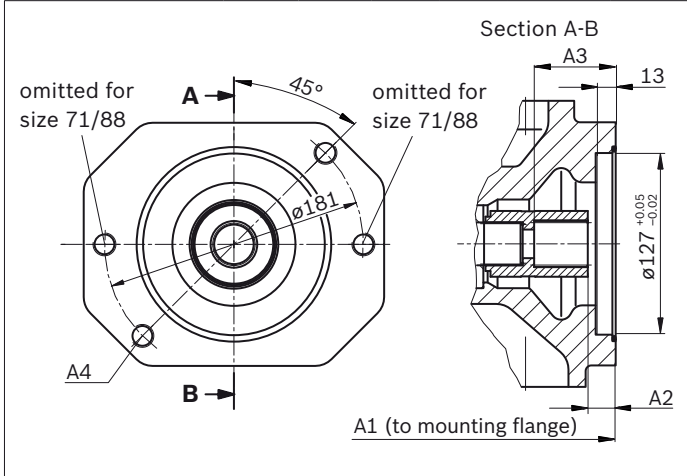


K07 (SAE J744 32-4 (C))	NG	A1	A2	A3	A4 <sup>2)</sup>
71	267	21.8	58.6	M16×2; <sup>3)</sup>	
88	267	21.8	58.6	M16×2; <sup>3)</sup>	
100	338	19.5	56.4	M16×2; <sup>3)</sup>	
140	350 <sup>4)</sup> 376 <sup>5)</sup>	19.3	56.1	M16×2; 24 deep	

K24 (SAE J744 38-4 (C-C))	NG	A1	A2	A3	A3a	A4 <sup>2)</sup>
100	338	9.9	65	-	M16×2; <sup>3)</sup>	
140	350 <sup>4)</sup> 376 <sup>5)</sup>	9.7	-	69.1	M16×2; 24 deep	


1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Thread according to DIN 13, see instruction manual for maximum tightening torques.

3) Continuous  
4) Housing with D flange  
5) Housing with C flange

Flange ISO 3019-1 (SAE)		Hub for splined shaft <sup>1)</sup>	Availability over sizes						Code
Diameter	Symbol	Diameter	18	28	45	71 /88	100	140	
152-4 (D)		1 3/4 in 13T 8/16DP	-	-	-	-	-	●	K17

● = Available    - = Not available

▼ **152-4**

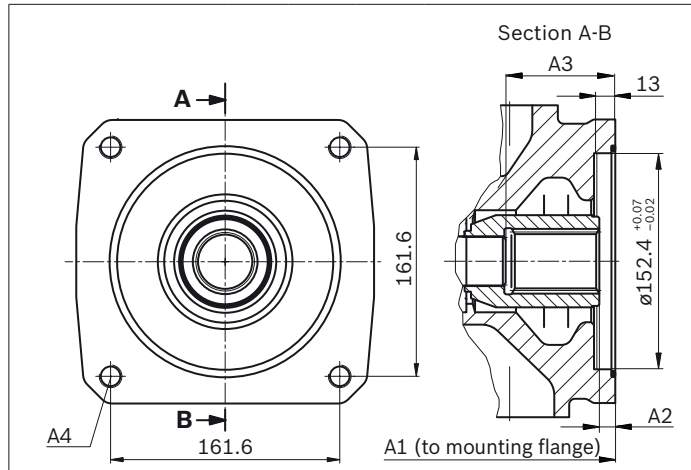

K17	NG	A1	A2	A3	A4 <sup>2)</sup>
(SAE J744 44-4 (D))					
	140	350	11	77.3	M16×2; <sup>3)</sup>

Only available with housing with mounting flange D.

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Thread according to DIN 13, see instruction manual for maximum tightening torques.  
 3) Continuous

## Overview of mounting options

### SAE – mounting flange

Through drive <sup>1)</sup>		Mounting options – 2nd pump				
Flange ISO 3019-1	Hub for splined shaft	Code	A10V(S)O/31 NG (shaft)	A10V(S)O/5x NG (shaft)	External gear pump design (size)	Through drive available for size
82-2 (A)	5/8 in	K01	18 (U)	10 (U), 18 (U)	Series F	18 to 140
	3/4 in	K52	18 (S, R)	10 (S) 18 (S, R)	–	18 to 140
101-2 (B)	7/8 in	K68	28 (S, R) 45 (U, W) <sup>1)</sup>	28 (S, R) 45 (U, W) <sup>1)</sup>	Series N/G	28 to 140
	1 in	K04	45 (S, R) –	45 (S, R) 60, 63, 72 (U, W) <sup>2)</sup>	–	45 to 140
127-2 (C)	1 1/4 in	K07	71 (S, R) 88 (S, R) 100 (U, W) <sup>3)</sup>	85 (U, W) <sup>3)</sup> 100 (U, W)	–	71 to 140
	1 1/2 in	K24	100 (S)	85 (S) 100 (S)	–	100 to 140
152-4 (4-hole D)	1 3/4 in	K17	140 (S)	–	–	140

1) Not for main pump NG28 with K68

2) Not for main pump NG45 with K04

3) Not for main pump NG71 and NG88 with K07

## Combination pumps A10VO + A10VO

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes. When ordering combination pumps, the type designations of the 1st and 2nd pumps must be linked by a “+”.

**Order example:**

**A10VO100DFR1/31R-VSC12K04+**


**A10VO45DFR/31R-VSC12N00**

If no further pumps are to be mounted at the factory, the simple type designation is sufficient.

It is permissible to use a combination of two single pumps of the same nominal size (tandem pump) considering a dynamic mass acceleration of maximum 10 g (= 98.1 m/s<sup>2</sup>) without additional support brackets.

Each through drive is plugged with a **non-pressure-resistant** cover. Before commissioning the units, they must therefore be equipped with a pressure-resistant cover. Through drives can also be ordered with pressure-resistant covers. Please specify in plain text.

For combination pumps consisting of more than two pumps, the mounting flange must be rated for the permissible mass torque (please contact us).

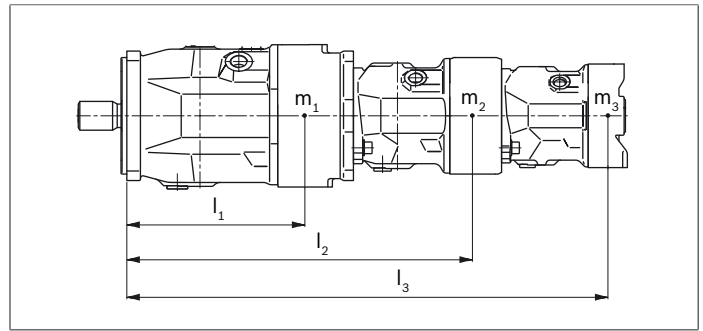

$m_1, m_2, m_3$	Weight of pump	[kg]
$l_1, l_2, l_3$	Distance, center of gravity	[mm]
$T_m = (m_1 \times l_1 + m_2 \times l_2 + m_3 \times l_3) \times \frac{1}{102} \text{ [Nm]}$		

### Permissible mass moment of inertia

Size			18	28	45	71	88	100	140
static	$T_m$	Nm	500	880	1370	2160	2160	3000	4500 <sup>1)</sup> 3000 <sup>2)</sup>
dynamic at 10 g (98.1 m/s <sup>2</sup> )	$T_m$	Nm	50	88	137	216	216	300	450 <sup>1)</sup> 300 <sup>2)</sup>
Weight <b>without</b> through drive and N00	$m$	kg	12.9	18	23.5	35.2	35.2	49.5	65.4
Weight <b>with</b> through drive and K..			13.8	19.3	25.1	38	38	55.4	74.4
Distance, center of gravity <b>without</b> through drive N00	$l_1$	mm	92	100	113	127	127	161	159
Distance, center of gravity <b>with</b> through drive K..	$l_1$	mm	98	107	120	137	137	178	180

1) 4-hole flange (D)

2) 2-hole flange (C)

## Connector for solenoids


### DEUTSCH DT04-2P

Molded connector, 2-pin, without bidirectional suppressor diode **P**

There is the following type of protection with mounted mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

#### ▼ Switching symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04


Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery.

This can be supplied by Bosch Rexroth on request (material number R902601804).

## Electronic controls

Control	Electronics function	Electronics		Further information
Electric pressure control	Controlled power outlet	RA	analog	95230
		RC4-5/30	digital	95205

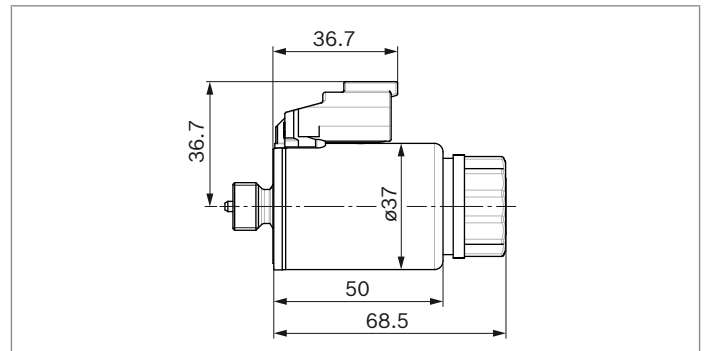

#### Notice

- ▶ If necessary, you can change the position of the connector by turning the solenoid.
- ▶ The procedure is defined in the instruction manual.

## Installation instructions

### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines.

Particularly with the “drive shaft up/down” installation position, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running. The leakage in the housing area must be discharged to the reservoir via the highest available tank port (**L**, **L<sub>1</sub>**).

If a shared drain line is used for several units, make sure that the respective case pressure is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operating conditions, specifically on cold start. If this is not possible, separate reservoir lines must be laid as required.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction lines and the drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{s\ max} = 800\ \text{mm}$ . The minimum suction pressure at port **S** must also not fall below 0.8 bar absolute during operation and during cold start.

When designing the reservoir, ensure adequate distance between the suction line and the drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

### Notice

In certain installation positions, an influence on the control or closed loop control can be expected. Gravity, dead weight and case pressure can cause minor characteristic shifts and changes in response time.

Key, see page 58.

1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

### Installation position





See the following examples **1** to **12**.

Further installation positions are available upon request.

Recommended installation position: **1** and **3**

### Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir and below the minimum fluid level of the reservoir.

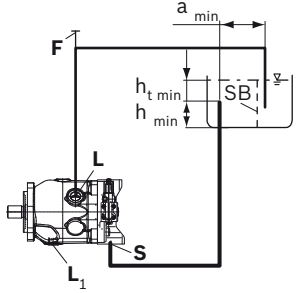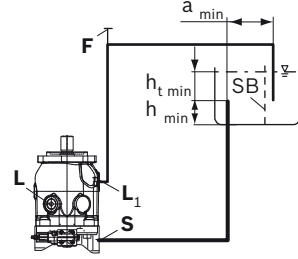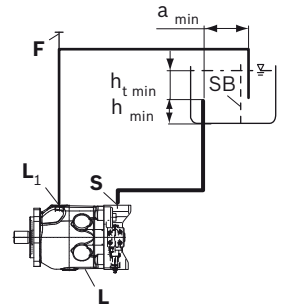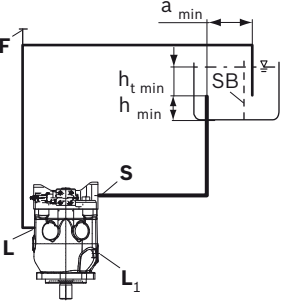Installation position	Air bleed	Filling
<b>1</b> 	<b>F</b>	<b>L (F)</b>
<b>2<sup>1)</sup></b> 	<b>F</b>	<b>L<sub>1</sub> (F)</b>
<b>3</b> 	<b>F</b>	<b>L<sub>1</sub> (F)</b>
<b>4<sup>1)</sup></b> 	<b>F</b>	<b>L (F)</b>

**Above-reservoir installation**

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir. To prevent the axial piston unit from draining in position 6, the height difference  $h_{ES\ min}$  must be at least 25 mm.

Observe the maximum permissible suction height  $h_{s\ max} = 800\ mm$ . A check valve in the drain line is only permissible in individual cases. Consult us for approval.

Installation position	Air bleed	Filling
<p><b>5</b></p>	<b>F</b>	<b>L (F)</b>
<p><b>6<sup>1)</sup></b></p>	<b>F</b>	<b>L<sub>1</sub> (F)</b>
<p><b>7</b></p>	<b>F</b>	<b>L<sub>1</sub> (F)</b>
<p><b>8<sup>1)</sup></b></p>	<b>F</b>	<b>L (F)</b>

Key, see page 58.

**Inside-reservoir installation**

Inside-reservoir installation is when the axial piston unit is installed in the reservoir below the minimum fluid level. The axial piston unit is completely below the hydraulic fluid.

If the minimum fluid level is equal to or below the upper edge of the pump, see chapter "Above-reservoir installation".

Axial piston units with electrical components (e.g., electric control, sensors) may not be installed in a reservoir below the fluid level.

Installation position	Air bleed	Filling
<p><b>9</b></p>	Via the highest available port <b>L</b>	Automatically via the open port <b>L</b> or <b>L<sub>1</sub></b> due to the position under the hydraulic fluid level
<p><b>10</b></p>	Via the highest available port <b>L<sub>1</sub></b>	Automatically via the open port <b>L, L<sub>1</sub></b> due to the position under the hydraulic fluid level
<p><b>11</b></p>	Via the highest available port <b>L<sub>1</sub></b>	Automatically via the open port <b>S, L</b> or <b>L<sub>1</sub></b> due to the position under the hydraulic fluid level
<p><b>12</b></p>	Via the highest available port <b>L</b>	Automatically via the open port <b>S, L</b> or <b>L<sub>1</sub></b> due to the position under the hydraulic fluid level

1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

Key	
<b>F</b>	Filling / air bleeding
<b>S</b>	Suction port
<b>L; L<sub>1</sub></b>	Drain port
SB	Baffle (baffle plate)
$h_{t\ min}$	Minimum required immersion depth (200 mm)
$h_{min}$	Minimum required distance to reservoir bottom (100 mm)
$h_{ES\ min}$	Minimum necessary height required to protect the axial piston unit from draining (25 mm)
$h_{S\ max}$	Maximum permissible suction height (800 mm)
$a_{min}$	When designing the reservoir, ensure adequate distance between the suction line and the case drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

#### Notice

Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.



## Project planning notes

- ▶ The A10V(S)O axial piston variable pump is designed to be used in open circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all versions of the product are approved for use in a safety function pursuant to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference.  
Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.
- ▶ Pressure controllers are not protection against overpressure. A pressure relief valve is to be provided for the hydraulic system.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports are only intended to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of getting burnt on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve pistons) can, under certain circumstances get stuck in position as a result of contamination (e.g. impure hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filter) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to set the consumer being driven to a safe position (e.g. safe stop) and if necessary to ensure it is properly implemented.

**Bosch Rexroth AG**

Mobile Applications  
An den Kelterwiesen 14  
72160 Horb a.N., Germany  
Phone +49 7451 92-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© Bosch Rexroth AG 2016. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# Axial piston variable pump A10VO Series 32

**RE 92705**

Edition: 06.2016

Replaces: 01.2012



- ▶ Optimized medium pressure pump for powerful machines
- ▶ Sizes 45 to 180
- ▶ Nominal pressure 280 bar
- ▶ Maximum pressure 350 bar
- ▶ Open circuit

3

**Features**

- ▶ Variable pump with axial piston rotary group of swash-plate design for hydrostatic drives in open circuit
- ▶ Flow is proportional to the drive speed and displacement.
- ▶ The flow can be infinitely varied by adjusting the swash-plate angle.
- ▶ Hydrostatic unloading of the cradle bearings
- ▶ Port for measurement sensor on high pressure port for size 180 or port plate 22 and 32
- ▶ Low noise level
- ▶ Increased functional reliability
- ▶ High efficiency
- ▶ Favorable power/weight ratio
- ▶ Universal through drive for Only size 180
- ▶ Optional pulsation damping

**Contents**

Ordering code	2
Hydraulic fluids	4
Working pressure range	6
Technical data	7
DR – Pressure controller	9
DRG – Pressure controller, remotely controlled	10
DRF/DRS/DRSC – Pressure and flow control	11
LA... – Pressure, flow and power controller	13
LA... – Variations	14
ED – Electro-hydraulic pressure control	15
ER – Electro-hydraulic pressure control	16
Dimensions size 45	17
Dimensions size 71	22
Dimensions size 100	27
Dimensions size 140	31
Dimensions size 180	36
Dimensions, through drives	40
Overview of mounting options	48
Combination pumps A10VO + A10VO	49
Connector for solenoids	50
Installation instructions	51
Project planning notes	54
Safety instructions	54

## Ordering code

01	02	03	04	05	06	07	08	09	10	11	12
<b>A10V</b>	<b>O</b>			<b>/</b>	<b>32</b>		<b>-</b>	<b>V</b>			

### Axial piston unit

01	Swashplate design, variable, nominal pressure 280 bar, maximum pressure 350 bar	<b>A10V</b>
----	---	-------------

### Operating mode

02	Pump, open circuit	<b>O</b>
----	--------------------	----------

### Sizes (NG)

03	Geometric displacement, see "Technical data" on page 7	<b>045</b>	<b>071</b>	<b>100</b>	<b>140</b>	<b>180</b>
----	--	------------	------------	------------	------------	------------

### Control devices

04	Pressure controller	Hydraulic				●	●	●	●	●	<b>DR</b>		
	with flow controller	Hydraulic	X-T open			●	●	●	●	●	<b>DRF</b>		
			X-T plugged	with flushing function			●	●	●	●	●	<b>DRS</b>	
			X-T plugged	without flushing function			●	●	●	●	●	<b>DRSC</b>	
	Pressure cut-off	Hydraulic	remotely controlled				●	●	●	●	●	<b>DRG</b>	
			electrical	negative control	$U = 12\text{ V}$			●	●	●	●	●	<b>ED71</b>
					$U = 24\text{ V}$			●	●	●	●	●	<b>ED72</b>
			electrical	positive control	$U = 12\text{ V}$			●	●	●	●	●	<b>ER71<sup>1)</sup></b>
	$U = 24\text{ V}$					●	●	●	●	●	<b>ER72<sup>1)</sup></b>		
	Differential pressure control	electrical	negative control	see data sheet 92709			●	●	●	○	<b>EF.</b>		
	Power controller with												
	Pressure cut-off	Hydraulic	Beginning of control	to 50 bar			●	●	●	●	●	<b>LA5D</b>	
				from 51 to 90 bar			●	●	●	●	●	<b>LA6D</b>	
				91 to 160 bar			●	●	●	●	●	<b>LA7D</b>	
161 to 240 bar						●	●	●	●	●	<b>LA8D</b>		
above 240 bar						●	●	●	●	●	●	<b>LA9D</b>	
Pressure cut-off and flow control	Hydraulic	Beginning of control	see LA.D			●	●	●	●	<b>LA.DS</b>			
Remote-controlled pressure cut-off	Hydraulic	Beginning of control	see LA.D			●	●	●	●	<b>LA.DG</b>			
Separate flow control	Hydraulic	Beginning of control	see LA.D			●	●	●	●	<b>LA.S</b>			

### Series

05	Series 3, index 2	<b>32</b>
----	-------------------	-----------

### Directions of rotation

06	Viewed on drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

### Seal

07	FKM (fluoroelastomer)	<b>V</b>
----	-----------------------	----------

### Drive shaft

08	Splined shaft ANSI B92.1a	standard shaft				●	●	●	●	●	<b>S</b>
		similar to shaft "S" however for higher input torque				●	●	-	-	-	<b>R</b>
		reduced diameter, limited suitability for through drive (see table of values, page 8)				●	●	●	●	-	<b>U</b>
		same as shaft "U", but for higher torque, limited suitability for through drive (see table of values, page 8)				○	○	●	●	●	<b>W</b>

<sup>1)</sup> Comply with project planning notes on page 16

01	02	03	04	05	06	07	08	09	10	11	12
<b>A10V</b>	<b>O</b>		/	<b>32</b>		-	<b>V</b>				

**Mounting flange**

			045	071	100	140	180	
09	ISO 3019-1 (SAE)	SAE C; 2-hole	●	●	●	●	-	<b>C</b>
		SAE C; 4-hole	●	●	●	●	●	<b>D</b>
		SAE D; 4-hole	-	●	-	-	-	<b>U</b>

**Working port**

			045	071	100	140	180	
10	SAE flange port (Port plates and through drive assignment, see position 11)	rear, metric fastening thread (not for through drive)	●	●	●	●	●	<b>11</b>
		at top, at bottom, on opposite side, metric fastening thread	●	●	●	●	-	<b>12</b>
		at top, at bottom, on opposite side, metric fastening thread with universal through drive U.; <b>without</b> pulsation damping	○	○	○	○	●	<b>22<sup>1)</sup></b>
		at top, at bottom, on opposite side, metric fastening thread with universal through drive U.; <b>with</b> pulsation damping	○	○	○	○	●	<b>32<sup>1)</sup></b>

**Through drive** (for mounting options, see page 48)

				045	071	100	140	180		
11	Flange ISO 3019-1	Attach-ment <sup>4)</sup>	Hub for splined shaft <sup>2)</sup>							
	Diameter		Diameter							
	without through drive	<b>(Only for port plates 11 and 12)</b>			●	●	●	●	●	<b>N00</b>
	82-2 (A)	⌀ <sub>∞</sub>	5/8 in	9T 16/32DP	●	●	●	●	-	<b>K01</b>
			3/4 in	11T 16/32DP	●	●	●	●	-	<b>K52</b>
	101-2 (B)	⌀ <sub>∞</sub>	7/8 in	13T 16/32DP	●	●	●	●	-	<b>K68</b>
			1 in	15T 16/32DP	●	●	●	●	-	<b>K04</b>
	127-2 (C)	∅ <sub>∞</sub>	1 1/4 in	14T 12/24DP	-	●	●	●	-	<b>K07</b>
			1 1/2 in	17T12/24DP	-	-	●	●	-	<b>K24</b>
	127-4 (C)	⌀ <sub>∞</sub>	1 1/4 in	14T 12/24DP	-	○	●	●	-	<b>K15</b>
	152-4 (D)	⌀ <sub>∞</sub>	1 3/4 in	13T 8/16DP	-	-	-	●	-	<b>K17</b>
	without through drive	<b>(Only possible with port plates 22 and 32)<sup>3)</sup></b>			○	○	○	○	●	<b>U00</b>
	82-2 (A)	⌀ <sub>∞</sub>	5/8 in	9T 16/32DP	○	○	○	○	●	<b>U01</b>
			3/4 in	11T 16/32DP	○	○	○	○	●	<b>U52</b>
	101-2 (B)	⌀ <sub>∞</sub>	7/8 in	13T 16/32DP	○	○	○	○	●	<b>U68</b>
			1 in	15T 16/32DP	○	○	○	○	●	<b>U04</b>
	127-2 (C)	⌀ <sub>∞</sub>	1 1/4 in	14T 12/24DP	-	○	○	○	●	<b>U07</b>
			1 1/2 in	17T 12/24DP	-	-	○	○	●	<b>U24</b>
	127-4 (C)	⌀ <sub>∞</sub>	1 in	15T 16/32DP	○	○	○	○	○	<b>UE2</b>
			1 1/4 in	14T 12/24DP	-	-	○	○	●	<b>U15</b>
152-4 (D)	⌀ <sub>∞</sub>	1 3/4 in	13T 8/16DP	-	-	-	○	●	<b>U17</b>	

**Connectors for solenoids<sup>5)</sup>**

12	Without connector (without solenoid, with hydraulic control only, without code)	
	DEUTSCH molded connector, 2-pin – without suppressor diode	<b>P</b>

● = Available    ○ = On request    - = Not available

**Notes**

- ▶ Note the project planning notes on page 54!
- ▶ In addition to the type code, please specify the relevant technical data when placing your order.

- 1) Only with mounting flange (ordering code position 09) D or U
- 2) According to ANSI B92.1a (splined shafts according to SAE J744)
- 3) With through-drive shaft, without hub, without intermediate flange, closed on a functionally reliable basis with cover. For mounting kits, see data sheet 95581.
- 4) Mounting through bores pattern viewed from through drive with control at top.
- 5) Connectors for other electric components may deviate.

## Hydraulic fluids

The A10VO variable pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: HFD hydraulic fluids (for permissible technical data, see data sheet 90225.)

### Notes on selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$  see selection diagram).

### Notice


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact the responsible member of staff at Bosch Rexroth.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ °C}$	$t \leq 1 \text{ min}$ , without load ( $p \leq 30 \text{ bar}$ ), $n \leq 1000 \text{ rpm}$
	Permissible temperature difference	$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid
Warm-up phase	$v < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ °C to } -25 \text{ °C}$	Note the detailed information on operation with low temperatures, see data sheet 90300-03-B.
Continuous operation	$v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$		this corresponds, for VG 46 for example, to a temperature range of +5 °C to +85 °C (see selection diagram)
		$\theta = -25 \text{ °C to } +110 \text{ °C}$	measured at port <b>L, L<sub>1</sub></b> Observe the permissible temperature range of the shaft seal ( $\Delta T = \text{approx. } 5 \text{ K}$ between the bearing/shaft seal and port <b>L, L<sub>1</sub></b> )
	$v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		Range of optimum operating viscosity and efficiency
Short-term operation	$v_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 1 \text{ min}$ , $p < 0.3 \cdot p_{nom}$

### ▼ Selection diagram

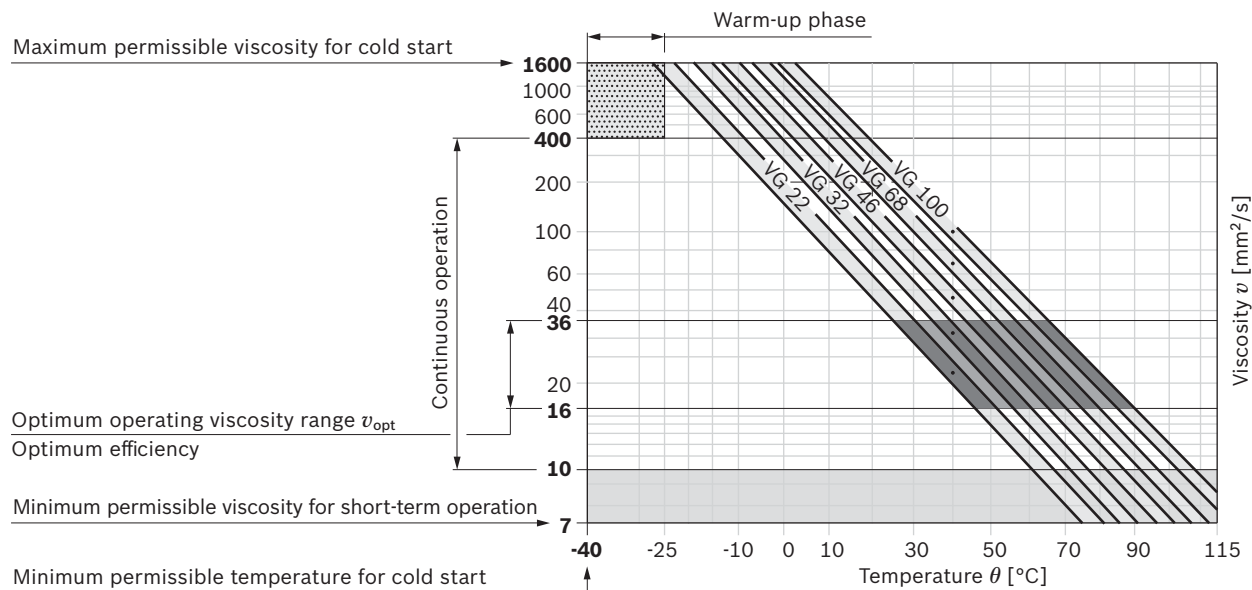

### **Filtration of the hydraulic fluid**

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.


At very high hydraulic fluid temperatures (90 °C to maximum 115 °C), cleanliness level 19/17/14 according to at least ISO 4406 is necessary.

Please contact us if the above classes cannot be observed.


## Working pressure range

Pressure at working port B		Definition	
Nominal pressure $p_{nom}$	280 bar	The nominal pressure corresponds to the maximum design pressure.	
Maximum pressure $p_{max}$	350 bar	The maximum pressure corresponds to the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.	
Single operating period	2 ms		
Total operating period	300 h		
Minimum pressure (high-pressure side)	10 bar <sup>1)</sup>	Minimum pressure on the high-pressure side ( <b>B</b> ) which is required in order to prevent damage to the axial piston unit.	
Rate of pressure change $R_{A\ max}$	16000 bar/s	Maximum permissible pressure build-up and reduction speed during a pressure change across the entire pressure range.	
Pressure at suction port S (inlet)			
Minimum pressure $p_{S\ min}$	NG 45 to 100 at 1800 rpm	0.8 bar absolute	Minimum pressure at suction port <b>S</b> (inlet) that is required in order to avoid damage to the axial piston unit. The minimum pressure depends on the rotational speed and displacement of the axial piston unit.
	NG 140 to 180 at 1800 rpm	1.0 bar absolute	
Maximum pressure $p_{S\ max}$	10 bar <sup>2)</sup>		
Case pressure at port L <sub>1</sub> , L <sub>2</sub>			
Maximum pressure $p_{L\ max}$	2 bar <sup>2)</sup> absolute	Maximum 0.5 bar higher than inlet pressure at port <b>S</b> , but not higher than $p_{L\ max}$ . A case drain line to the reservoir is required.	

### ▼ Rate of pressure change $R_{A\ max}$

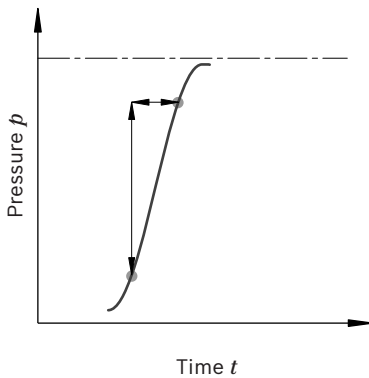

### ▼ Pressure definition

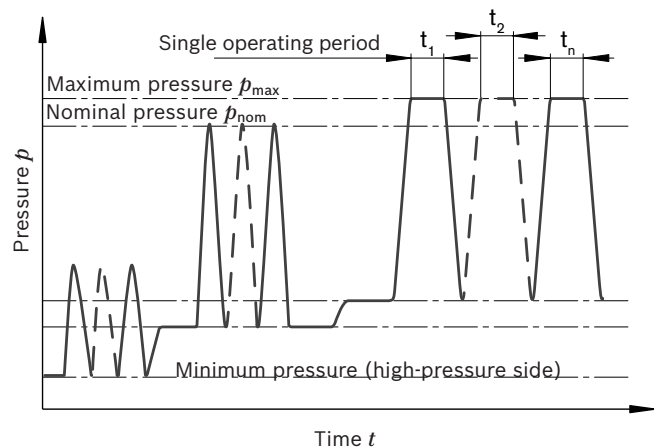

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

#### Notice

Working pressure range valid when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.

1) Lower pressure is time-dependent, please contact us  
2) Other values on request



## Technical data

Size		NG		045	071	100	140	180
Displacement, geometric, per revolution		$V_{g \max}$	cm <sup>3</sup>	45	71.1	100	140	180
Maximum rotational speed <sup>1)2)</sup>	at $V_{g \max}$	$n_{\text{nom}}$	rpm	3000	2550	2300	2200	1800
Flow	at $n_{\text{nom}}$ and $V_{g \max}$	$q_v$	l/min	135	181	230	308	324
Power	at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 280$ bar	$P$	kW	63	85	107	144	151
Torque	at $V_{g \max}$ and $\Delta p = 280$ bar	$T$	Nm	200	317	446	624	802
	at $V_{g \max}$ and $\Delta p = 100$ bar	$T$	Nm	72	113	159	223	286
Rotary stiffness of drive shaft	S	$c$	Nm/rad	37500	71884	121142	169537	171107
	R	$c$	Nm/rad	41025	76545	–	–	–
	U	$c$	Nm/rad	30077	52779	91093	on request	–
	W	$c$	Nm/rad	34463	57460	101847	165594	–
Moment of inertia for rotary group		$J_{\text{TW}}$	kgm <sup>2</sup>	0.0035	0.0087	0.0167	0.0242	0,033
Maximum angular acceleration <sup>3)</sup>		$\alpha$	rad/s <sup>2</sup>	4000	2900	2400	2000	2000
Case volume		$V$	L	1.0	1.6	2.2	3.0	2.7
Weight (11N00 and 12N00 without through drive) approx.		$m$	kg	25.8	40.4	56.4	70.5	75.2
Weight (12Kxx) approx.		$m$	kg	27.4	43.3	62.6	79.5	–
Weight (22Uxx/32Uxx) approx.		$m$	kg	32.6	51.8	76	90.2	89.4

### Determining the operating characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{\text{hm}}}$	[Nm]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

### Key

$V_g$	Displacement per revolution [cm <sup>3</sup> ]
$\Delta p$	Differential pressure [bar]
$n$	Rotational speed [rpm]
$\eta_v$	Volumetric efficiency
$\eta_{\text{hm}}$	Hydraulic-mechanical efficiency
$\eta_t$	Total efficiency ( $\eta_t = \eta_v \times \eta_{\text{hm}}$ )



### Notice

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommend testing the load by means of experiment or calculation/simulation and comparison with the permissible values.

- The values are applicable:
  - to the optimum viscosity range from  $\nu_{\text{opt}} = 36$  to 16 mm<sup>2</sup>/s
  - to hydraulic fluid based on mineral oils
- The values apply at absolute pressure  $p_{\text{abs}} = 1.0$  bar at suction port **S**.

- The data are valid for values between the minimum required and maximum permissible rotational speed. Valid for external excitation (e.g. diesel engine 2 to 8 times rotary frequency, cardan shaft twice the rotary frequency). The limit value is only valid for a single pump. The load capacity of the connecting parts must be considered.

**Permissible radial and axial forces on the drive shaft**

Size	NG	45	71	100	140	180		
Maximum radial force at a/2		$F_{q \max}$	N	1500	1900	2300	2800	2300
Maximum axial force		$\pm F_{ax \max}$	N	1500	2400	4000	4800	800

**Notice**


► For drives with radial loading (pinion, V-belt), please contact us!

► The values given are maximum values and do not apply to continuous operation.

**Permissible input and through-drive torques**

Size		45	71	100	140	180
Torque at $V_{g \max}$ and $\Delta p = 280 \text{ bar}^1$	$T_{max}$ Nm	200	316	446	624	802
Input torque at drive shaft, maximum <sup>2)</sup>						
S	$T_{E \max}$ Nm	319	626	1104	1620	1834
	$\varnothing$ in	1	1 1/4	1 1/2	1 3/4	1 3/4
R	$T_{E \max}$ Nm	400	644	–	–	–
	$\varnothing$ in	1	1 1/4	–	–	–
U	$T_{E \max}$ Nm	188	300	595	on request	–
	$\varnothing$ in	7/8	1	1 1/4	1 1/2	–
W	$T_{E \max}$ Nm	–	394	636	1220	1488
	$\varnothing$ in	–	1	1 1/4	1 1/2	1 1/2
Maximum through-drive torque						
S	$T_{D \max}$ Nm	319	492	778	1266	1266
R	$T_{D \max}$ Nm	365	548	–	–	–
U	$T_{D \max}$ Nm	188	–	595	on request	–
W	$T_{D \max}$ Nm	–	–	636	1220	1266

▼ **Distribution of torques**

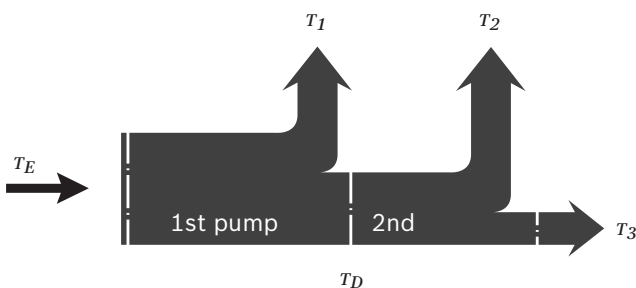

Torque at 1st pump	$T_1$
Torque at 2nd pump	$T_2$
Torque at 3rd pump	$T_3$
Input torque	$T_E = T_1 + T_2 + T_3$
	$T_E < T_{E \max}$
Through-drive torque	$T_D = T_2 + T_3$
	$T_D < T_{D \max}$

1) Efficiency not considered


2) For drive shafts with no radial force

## DR – Pressure controller

The pressure controller limits the maximum pressure at the pump outlet within the control range of the variable pump. The variable pump only supplies as much hydraulic fluid as is required by the consumers. If the working pressure exceeds the pressure command value at the pressure valve, the pump will regulate to a smaller displacement to reduce the control differential.


- ▶ Basic position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range<sup>1)</sup> for pressure control 20 to 280 bar. Standard is 280 bar.

### ▼ Characteristic curve DR

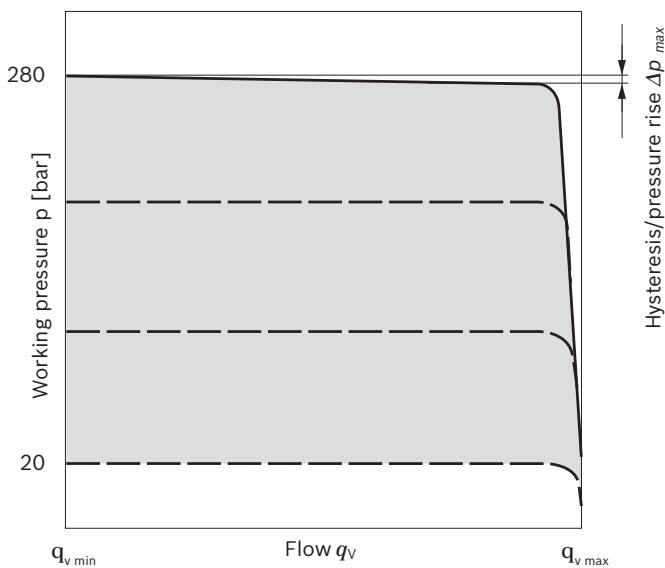

Characteristic curve valid at  $n_1 = 1500 \text{ rpm}$  and  $\theta_{\text{fluid}} = 50 \text{ }^\circ\text{C}$ .

### ▼ Circuit diagram DR

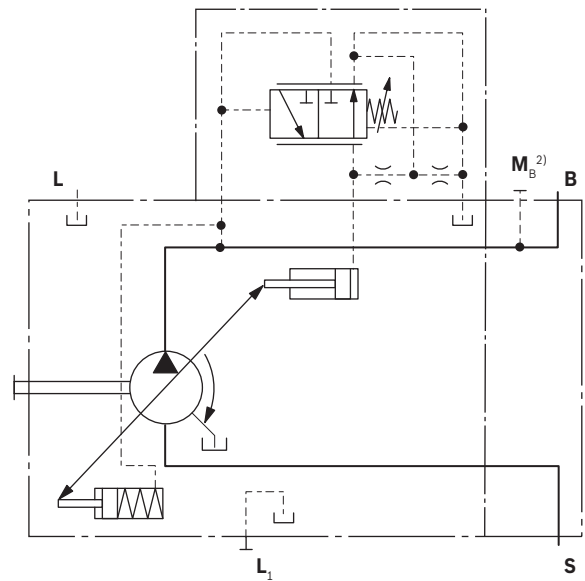

### Controller data

Size	45	71	100	140	180	
Pressure rise, maximum	$\Delta p$ [bar]	6	8	10	12	14
Hysteresis and repeatability	$\Delta p$ [bar]	maximum 3				
Control fluid consumption	[l/min]	maximum approx. 3				

1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.

2) Only with port plates 22 and 32

## DRG – Pressure controller, remotely controlled

For the remote-controlled pressure controller, the LS pressure limitation is performed using a separately arranged pressure relief valve. Therefore any pressure control value under the pressure set on the pressure controller can be regulated. Pressure controller DR see page 9.

A pressure relief valve is externally piped to port **X** for remote control. This relief valve is not included in the scope of delivery of the DRG control.


When there is differential pressure  $\Delta p$  at the control valve and with the standard setting on the remote-controlled pressure cut-off of 20 bar, the amount of control fluid at the port is **X** approx. 1.5 l/min. If a different setting (range 10 to 22 bar) is required, please state in plain text.

As a separate pressure relief valve **(1)** we recommend:

- ▶ A directly controlled, hydraulic or electric proportional one, suitable for the control fluid mentioned above. The max. length of piping should not exceed 2 m.
- ▶ Basic position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range<sup>1)</sup> for pressure control 20 to 280 bar **(3)**. Standard is 280 bar.
- ▶ Setting range for differential pressure 10 - 22 bar **(2)**. Standard is 20 bar.


Unloading port **X** to the reservoir results in a zero stroke (standby) pressure which is approx. 1 to 2 bar higher than the defined differential pressure  $\Delta p$ , however system influences are not taken into account.

### ▼ Characteristic curve DRG

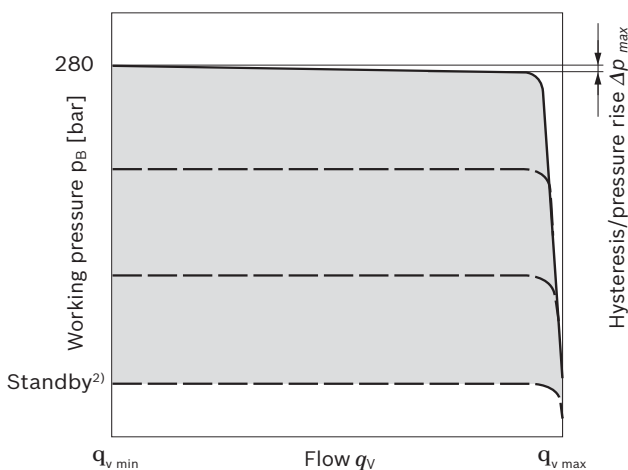

Characteristic curve valid for  $n_1 = 1500$  rpm and  $\theta_{\text{fluid}} = 50$  °C.

### ▼ Circuit diagram DRG

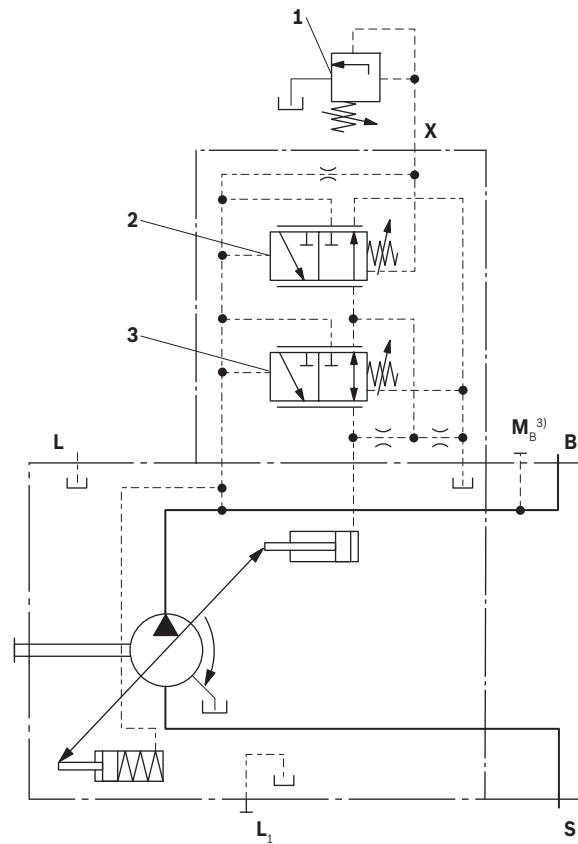

**1** The separate pressure relief valve and the line are not included in the scope of delivery.

**2** Remote-controlled pressure cut-off **(G)**.

**3** Pressure controller **(DR)**

#### Controller data

Size		45	71	100	140	180
Pressure rise, maximum	$\Delta p$ [bar]	6	8	10	12	14
Hysteresis and repeatability	$\Delta p$ [bar]	maximum 3				
Control fluid consumption	[l/min]	maximum approx. 4.5				

1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.

2) Zero stroke from pressure setting  $\Delta p$  on controller **(2)**


3) Only with port plates 22 and 32

## DRF/DRS/DRSC – Pressure and flow control


In addition to the pressure controller function (see page 9), an adjustable orifice (e.g. directional valve) is used to adjust the differential pressure upstream and downstream of the orifice. This is used to control the pump flow. The pump flow is equal to the actual hydraulic fluid quantity required by the consumer. With all controller combinations, the  $V_g$  reduction has priority.

- ▶ Basic position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range<sup>1)</sup> to 280 bar.  
Standard is 280 bar
- ▶ DR pressure controller data see page 9

### ▼ Characteristic curve DRF/DRS/DRSC

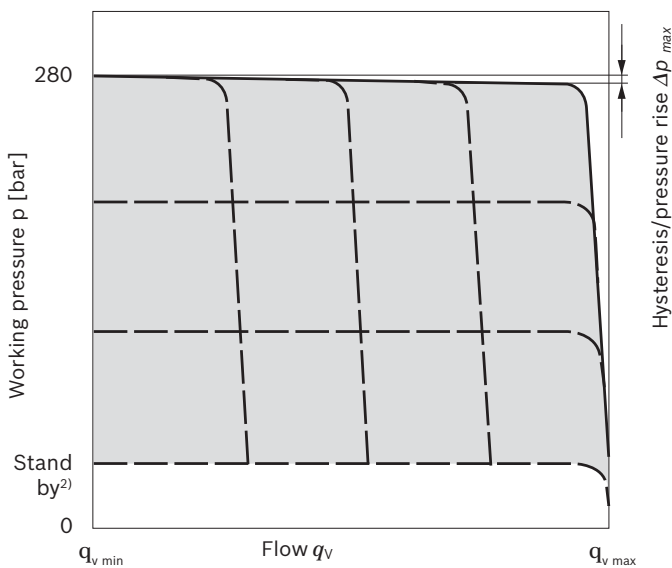


### ▼ Characteristic curve at variable rotational speed

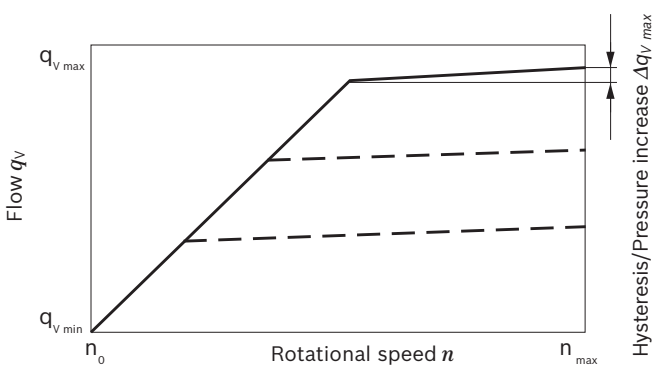

Characteristic curves valid at  $n_1 = 1500 \text{ rpm}$  and  $\theta_{\text{fluid}} = 50 \text{ }^\circ\text{C}$ .

### ▼ Circuit diagram DRF

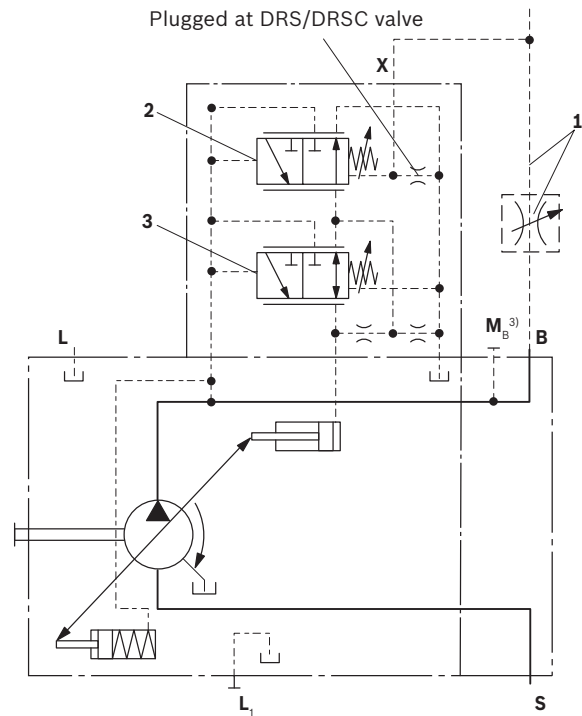

- 1 The metering orifice (control block) and the line are not included in the scope of delivery.
- 2 Pressure and flow controller (FR).
- 3 Pressure controller (DR)

#### Note

The DRS and DRSC valve versions have no pilot line between **X** and the reservoir. Unloading the LS-pilot line must be possible in the valve system. Because of the flushing function sufficient unloading of the flow controller in DRS control valve **X**-line must also be provided. If this pilot line of the **X** line does not have to be guaranteed, the DRSC control valve must be used.

For further information see page 12

- 1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.
- 2) Zero stroke from differential pressure setting  $\Delta p$  on controller (2)
- 3) Only with port plates 22 and 32

### Differential pressure $\Delta p$

- ▶ Standard setting: 14 bar  
If another setting is required, please state in clear text.
- ▶ Setting range: 14 to 22 bar

Unloading port **X** to the reservoir results in a zero stroke (standby) pressure which is approx. 1 to 2 bar higher than the defined differential pressure  $\Delta p$ , however system influences are not taken into account.

### Controller data

DR pressure controller data see page 9.

Maximum flow deviation measured at drive speed  $n = 1500$  rpm.

NG		45	71	100	140	180
Flow deviation	$\Delta q_{Vmax}$ [l/min]	1.8	2.8	4.0	6.0	8.0
Hysteresis and repeatability	$\Delta p$ [bar]	maximum 3				
Control fluid consumption	l/min	maximum approx. 3 to 4.5 (DRF) maximum approx. 3 (DRS/DRSC)				

## LA... – Pressure, flow and power controller

Pressure controller equipped as DR(G), see page 9 (10).  
 Equipment of the flow controller like DRS, see page 11.  
 In order to achieve a constant drive torque with varying working pressures, the swivel angle and with it the output flow from the axial piston pump is varied so that the product of flow and pressure remains constant. Flow controller is possible below the power control curve.

When ordering please state the power characteristics to be set at the factory in plain text, e.g. 20 kW at 1500 rpm.

### Controller data


- ▶ For technical data of pressure controller DR see page 9.
- ▶ For technical data of flow controller FR see page 11.
- ▶ Control fluid consumption max. approx. 5.5 l/min

Beginning of control	Torque T [Nm] for size					Ordering code
	45	71	100	140	180	
up to 50 bar	up to 42.0	up to 67.0	up to 94.0	up to 132.0	up to 167.0	<b>LA5</b>
51 to 90 bar	42.1 × 76.0	67.1 × 121.0	94.1 × 169.0	132.1 × 237.0	167.1 × 302.0	<b>LA6</b>
91 to 160 bar	76.1 × 134.0	121.1 × 213.0	169.1 × 299.0	237.1 × 418.0	302.1 × 540.0	<b>LA7</b>
161 to 240 bar	134.1 × 202.0	213.1 × 319.0	299.1 × 449.0	418.1 × 629.0	540.1 × 810.0	<b>LA8</b>
over 240 bar	over 202.1	over 319.1	over 449.1	over 629.1	over 810.1	<b>LA9</b>


Conversion of the torque values in power [kW]

$$P = \frac{T}{6.4} \text{ [kW]} \quad (\text{at 1500 rpm}) \quad \text{or} \quad P = \frac{2\pi \times T \times n}{60000} \text{ [kW]} \quad (\text{For rotational speeds, see table on page 7})$$

### ▼ Characteristic curve LA

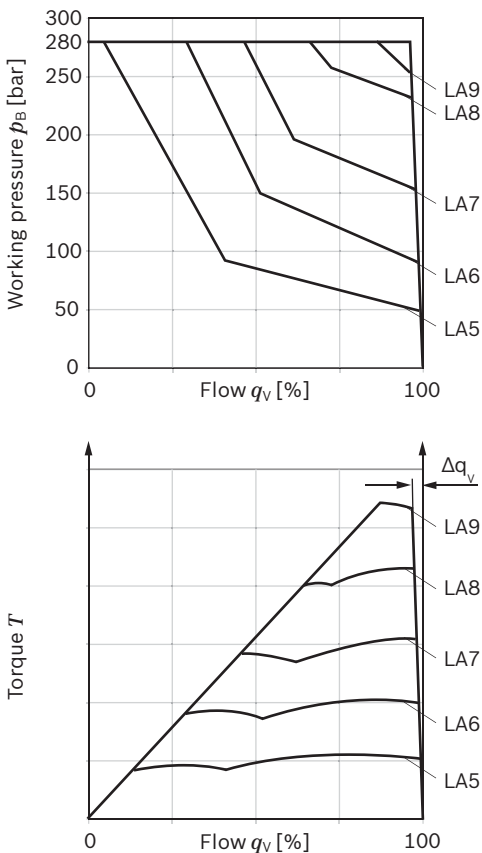


### ▼ Circuit diagram LA.D with pressure cut-off (for further combination options with LA.. see page 14)

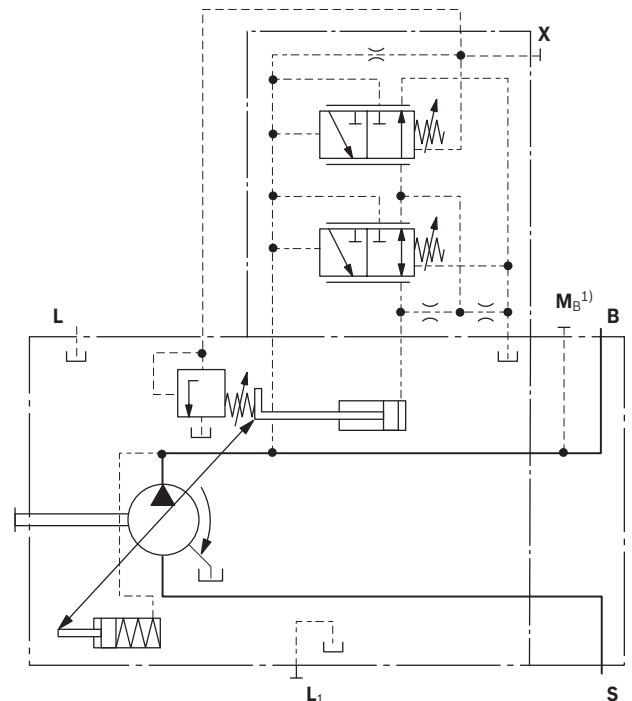


## LA... – Variations

▼ **Circuit diagram LA.DG** with pressure cut-off, remotely controlled

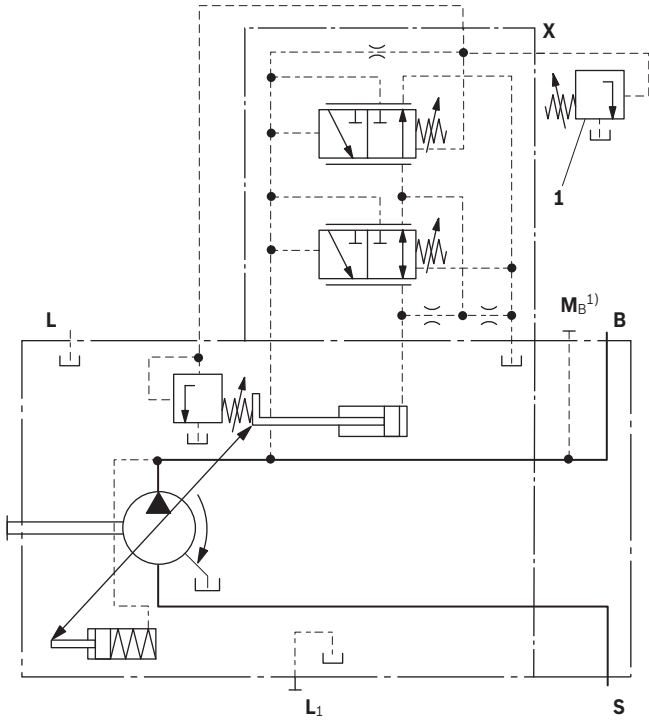


▼ **Circuit diagram LA.DS**

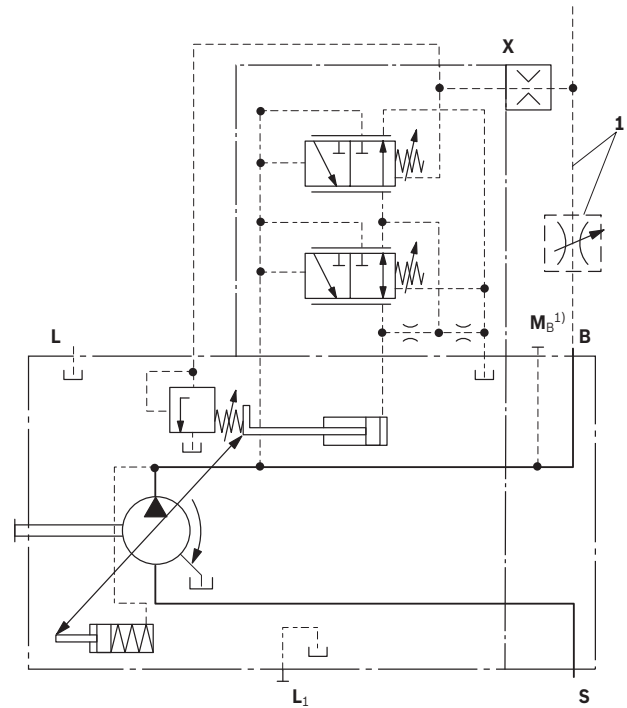

**1** The metering orifice and the pressure relief valve and line are not included in the scope of delivery.

▼ **Circuit diagram LA.S** with separate flow control

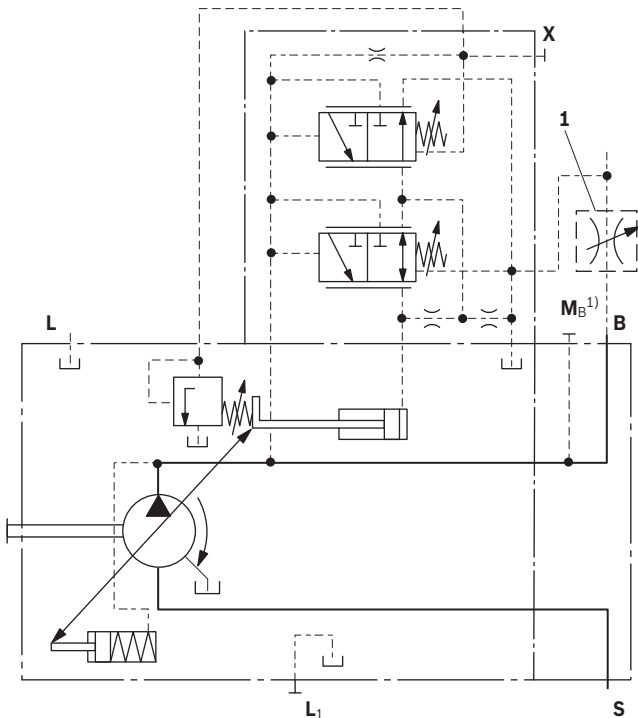

1) Only with port plates 22 and 32



## ED – Electro-hydraulic pressure control

The ED valve is set to a certain pressure by a specified variable solenoid current.

When changing the consumer (load pressure), this causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level.


The pump thus only delivers as much hydraulic fluid as the consumers can take. The desired pressure level can be set steplessly by varying the solenoid current.

As the solenoid current signal drops towards zero, the pressure will be limited to  $p_{max}$  by an adjustable hydraulic pressure cut-off (secure fail safe function in case of power failure, e.g. for fan speed control). The response time characteristic curve of the ED control was optimized for the use as a fan drive system.

When ordering, specify the type of application in plain text.


### ▼ Static current-pressure characteristic curve ED

(negative characteristic curve measured with pump in zero stroke)

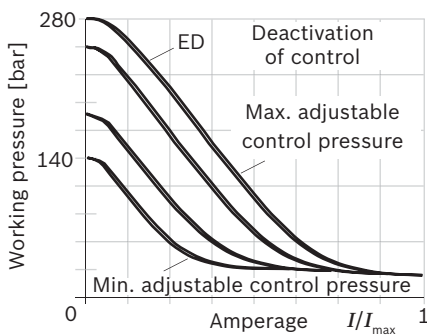

Hysteresis static < 3 bar.

### ▼ Flow-pressure characteristic curve

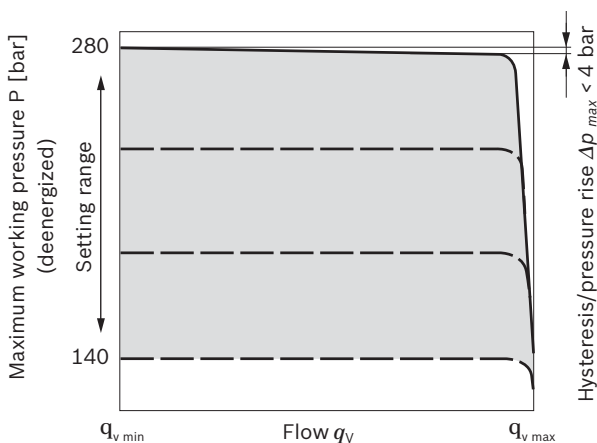


Characteristic curves valid at  $n_1 = 1500$  rpm and  $\theta_{fluid} = 50$  °C.


Control fluid consumption: 3 to 4.5 l/min.

For standby standard setting, see diagram on right, other values on request.

### ▼ Influence of the pressure setting on standby (maximally energized)

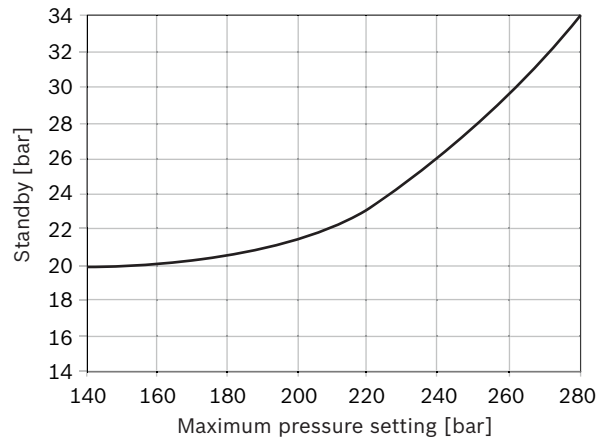

### ▼ Circuit diagram ED71/ED72

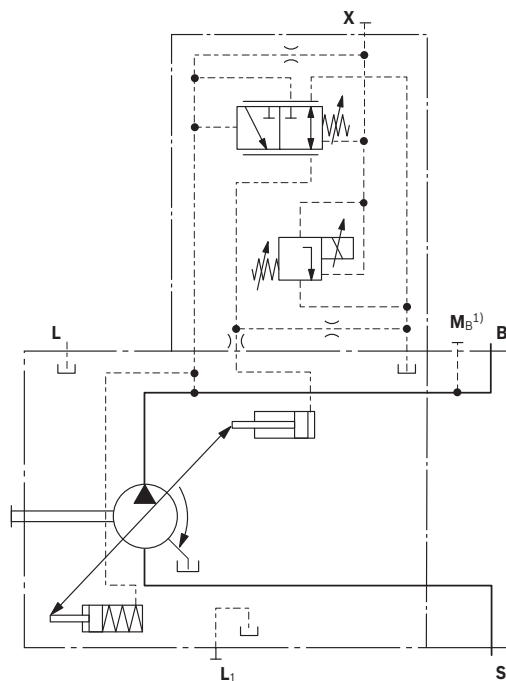


Technical data, solenoid	ED71	ED72
Voltage	12 V (±20 %)	24 V (±20 %)
Control current		
Start of control at $p_{max}$	100 mA	50 mA
End of control at $p_{min}$	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	22.7 Ω
Dither frequency	100 to 200 Hz	100 to 200 Hz
Duty cycle	100 %	100 %
Controls and type of protection: see connector version page 50		
Operating temperature range at valve -20 °C to +115 °C		

1) Only with port plates 22 and 32

## ER – Electro-hydraulic pressure control


The ER valve is set to a certain pressure by a specified variable solenoid current.  
When a change is made at the consumer (load pressure), the position of the control spool will shift. This causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level. The pump thus only delivers as much hydraulic fluid as the consumers can take. The desired pressure level can be set steplessly by varying the solenoid current. As the solenoid current signal drops towards zero, the pressure will be limited to  $p_{\min}$  (stand by).

### ▼ Static current-pressure characteristic curve ER (positive characteristic curve measured with pump in zero stroke)

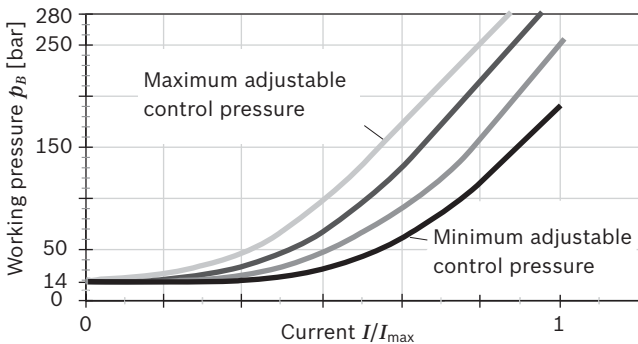


Hysteresis static current-pressure characteristic curve < 3 bar.

### ▼ Flow-pressure characteristic curve

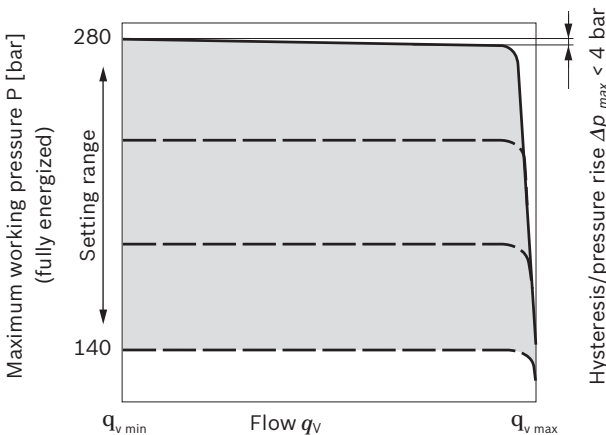

Characteristic curves valid at  $n_1 = 1500$  rpm and  $\theta_{\text{fluid}} = 50$  °C.  
Control fluid consumption: 3 to 4.5 l/min.  
Standby standard 14 bar. Other values on request.  
Influence of pressure setting on stand-by  $\pm 2$  bar.

### ▼ Circuit diagram ER71/ER72

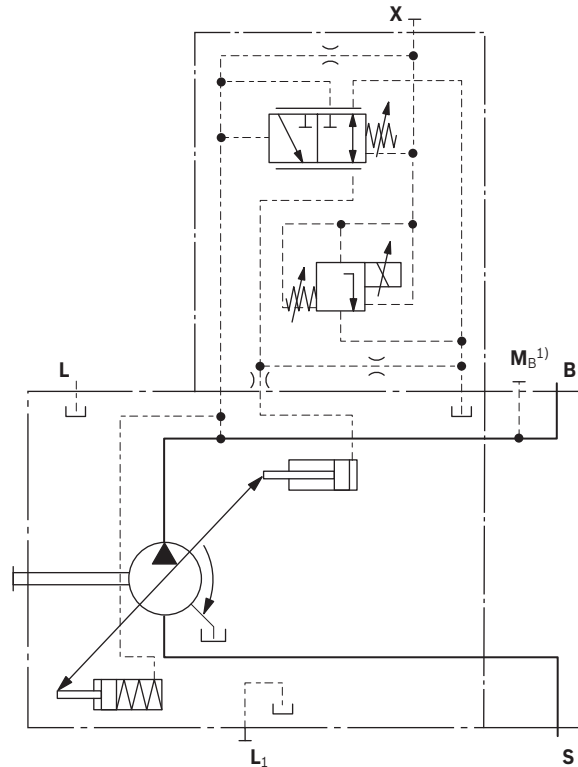

Technical data, solenoid	ED71	ED72
Voltage	12 V ( $\pm 20$ %)	24 V ( $\pm 20$ %)
Control current		
Start of control at $p_{\min}$	100 mA	50 mA
End of control at $p_{\max}$	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 to 200 Hz	100 to 200 Hz
Duty cycle	100 %	100 %
Controls and type of protection: see connector version page 50		
Operating temperature range at valve -20 °C to +115 °C		

### Project planning note!

Excessive current levels ( $I > 1200$  mA at 12 V or  $I > 600$  mA at 24 V) to the ER solenoid can result in undesired pressure increases which can lead to pump or system damage. Therefore:

- ▶ Use  $I_{\max}$  current limiter solenoids.
- ▶ An intermediate plate pressure controller can be used to protect the pump in the event of overflow.


An accessory kit with intermediate plate pressure controller can be ordered from Bosch Rexroth under part number R902490825.

1) Only with port plates 22 and 32


**Dimensions size 45**

**DRF, DRS, DRSC – Pressure and flow control, port plate 11 and 12; mounting flange C (SAE-B; 101-2)**


▼ **Port plate 12**

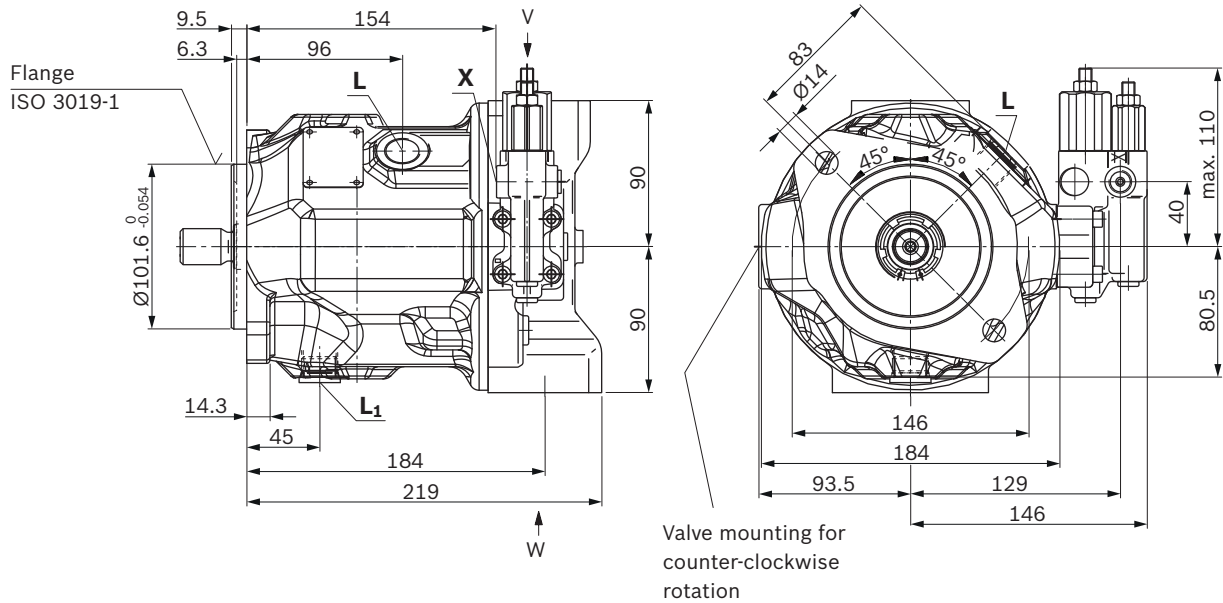


Detail V




Detail W



▼ **Port plate 11**

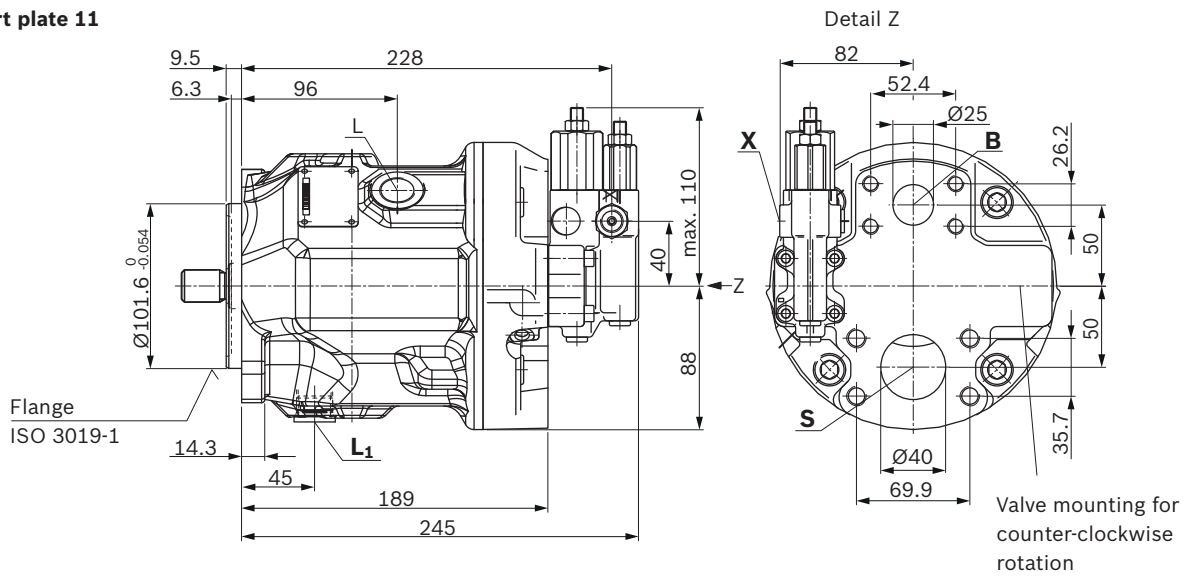


Detail Z

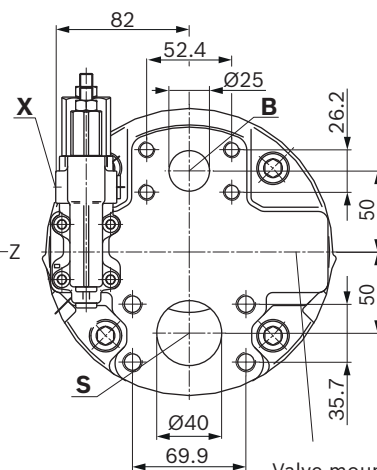





▼ Splined shaft 1 in (SAE J744)

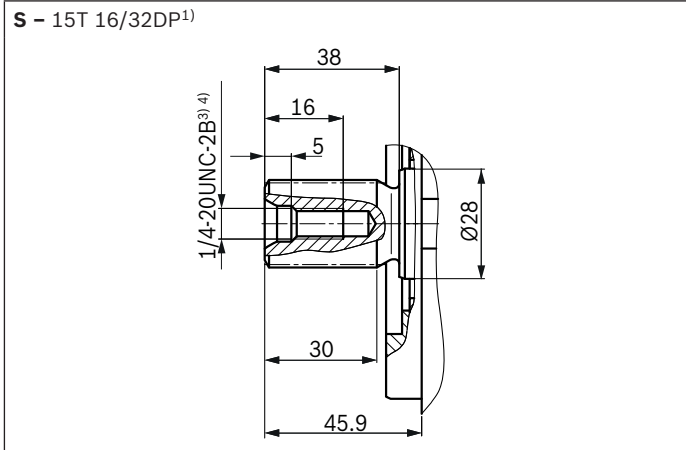

▼ Splined shaft 1 in (SAE J744)

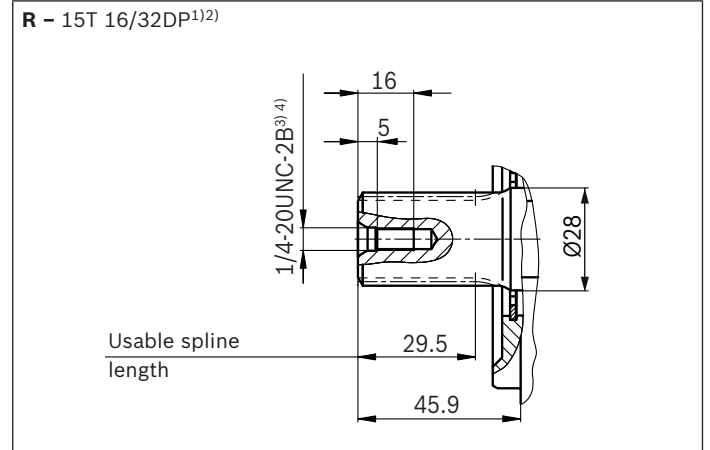

▼ Splined shaft 7/8 in (SAE J744)

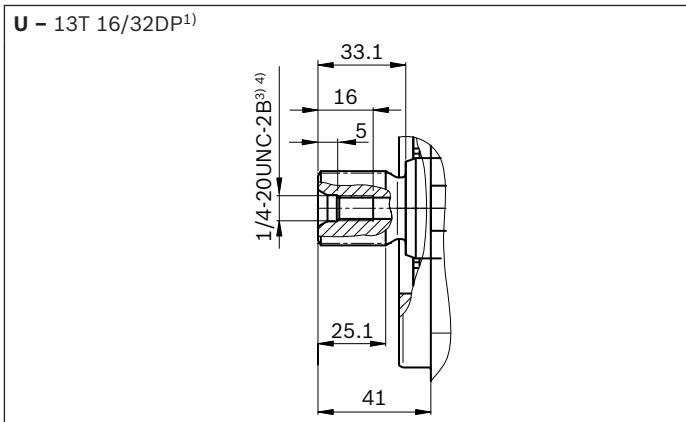


Ports		Standard	Size <sup>4)</sup>	$p_{max}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 in M10 x 1.5, 17 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/2 in M12 x 1.75; 20 deep	10	O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14UNF-2B; 13 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14UNF-2B; 13 deep	2	X <sup>8)</sup>
<b>X</b>	Pilot pressure	ISO 11926	7/16-20 UNF-2A; 12 deep	350	O
<b>M<sub>B</sub></b>	Measuring pressure <b>B</b>	DIN 3852-2 <sup>7)</sup>	G 1/4 in; 12 deep	350	X

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Thread according to ASME B1.1  
 4) For notes on tightening torques, see the instruction manual.


5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.  
 6) Metric fastening thread is a deviation from standard.  
 7) The countersink can be deeper than as specified in the standard.  
 8) Depending on the installation position, L or L<sub>1</sub> must be connected (also see installation instructions starting on page 51).  
 9) O = Must be connected (plugged when delivered)  
 X = Plugged (in normal operation)

**Port plate 11**


▼ **DR – Pressure controller**

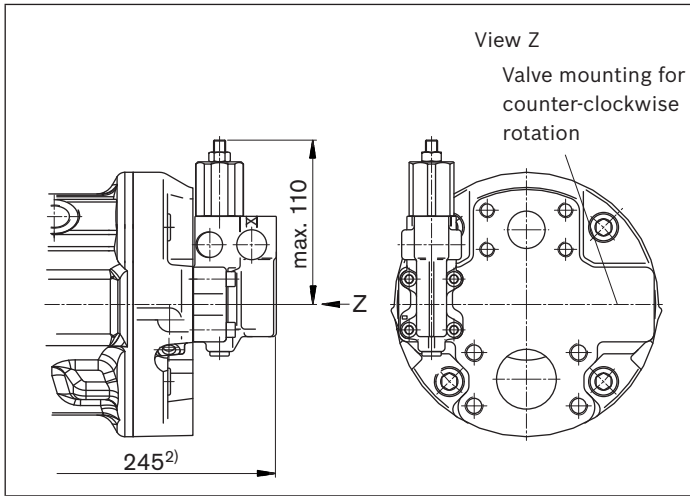


▼ **LA.DS – Pressure, flow and power controller**

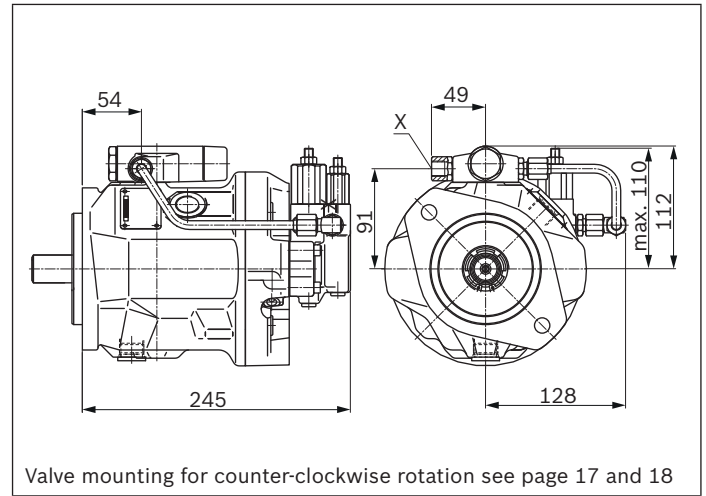

▼ **DRG – Pressure controller, remotely controlled**

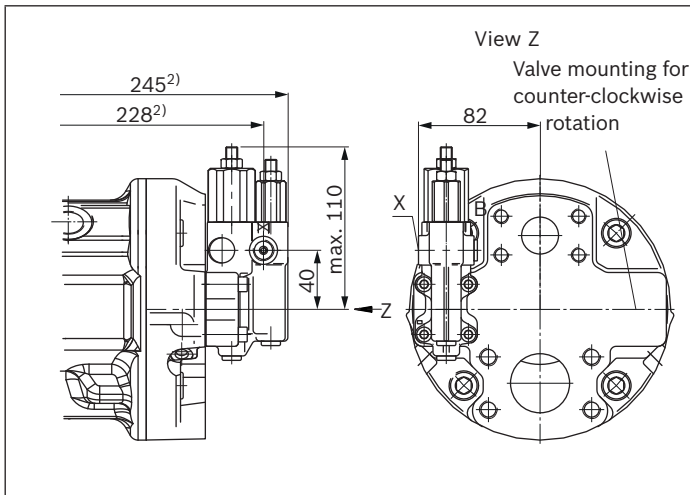


▼ **ED7./ER7. – Pressure controller, electrical**

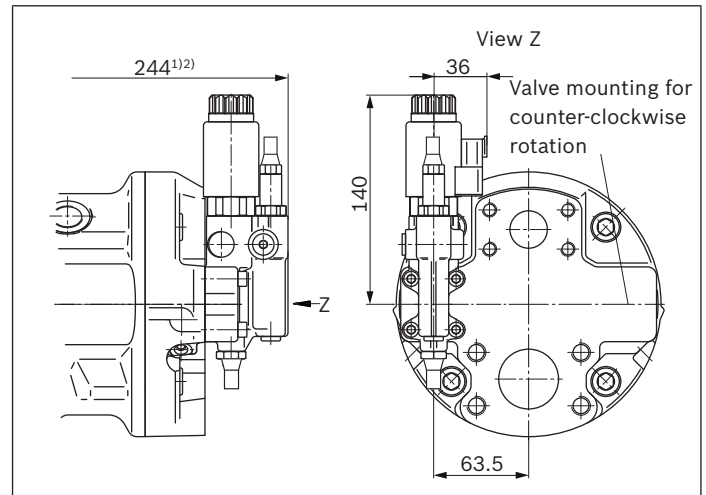


1) ER7. 279 mm if using an intermediate plate pressure controller  
2) To mounting flange

**Port plate 12**


▼ **DR – Pressure controller**

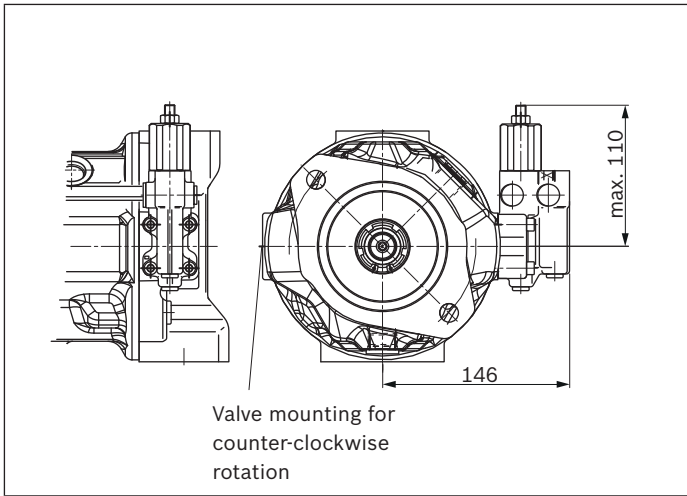


▼ **LA.DS – Pressure, flow and power controller**

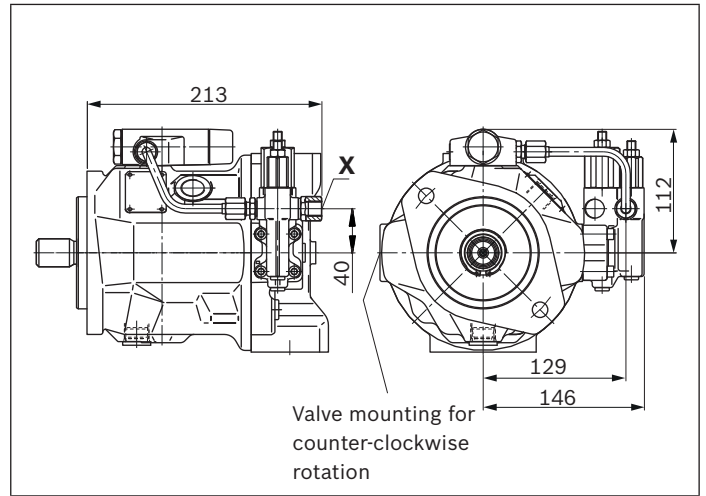

▼ **DRG – Pressure controller, remotely controlled**

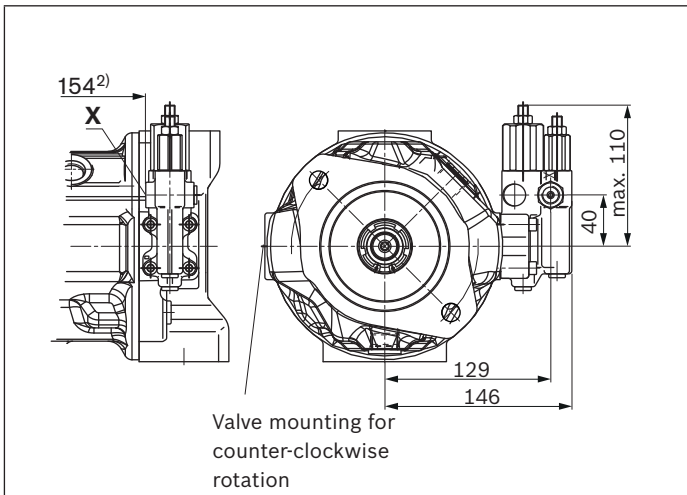


▼ **ED7./ER7. – Pressure controller, electrical**

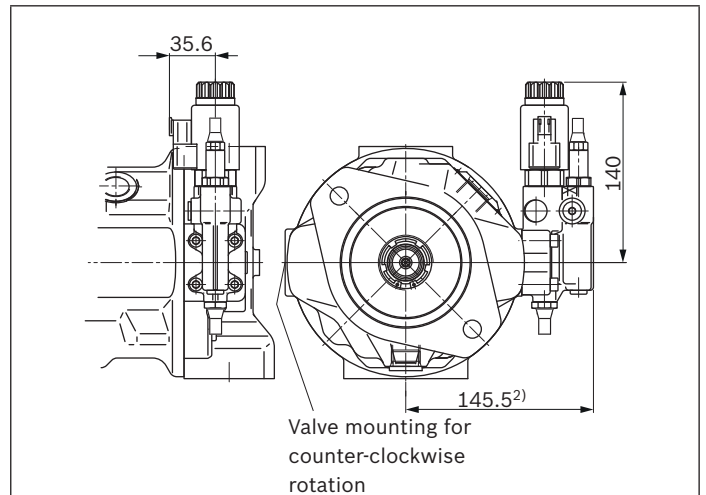

1) ER7. 180.5 mm if using an intermediate plate pressure controller  
 2) To mounting flange

**Dimensions size 71**





**DRF, DRS, DRSC – Pressure and flow control, port plate 11 and 12; mounting flange C (SAE-C; 127-2)**

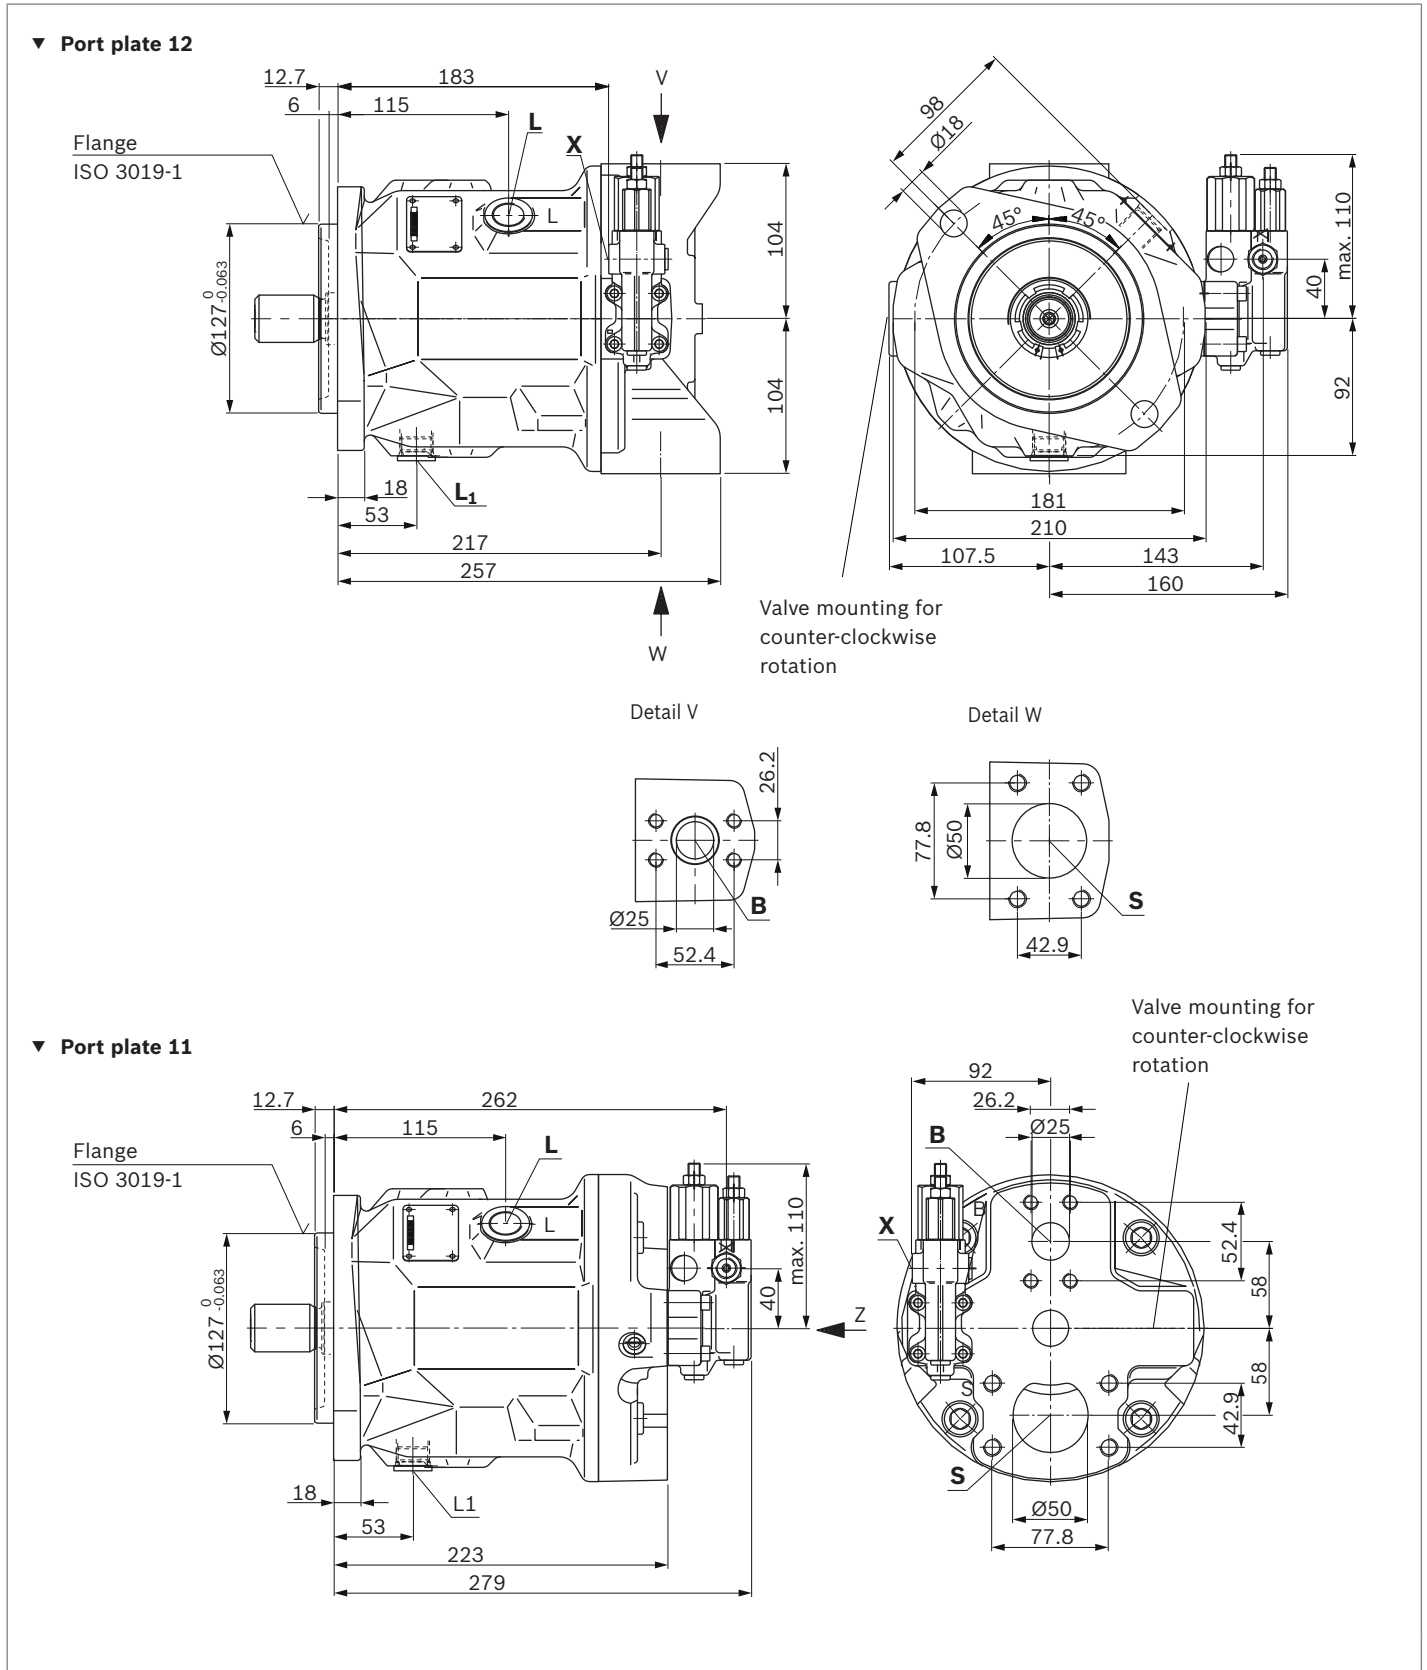





**DRF, DRS, DRSC – Pressure and flow control, port plate 12; mounting flange D (SAE-C; 127-4) and U (SAE-D; 152-4)**


▼ **Port plate 12; mounting flange D**

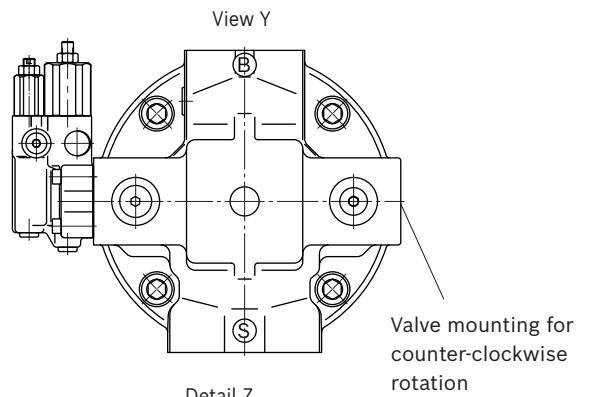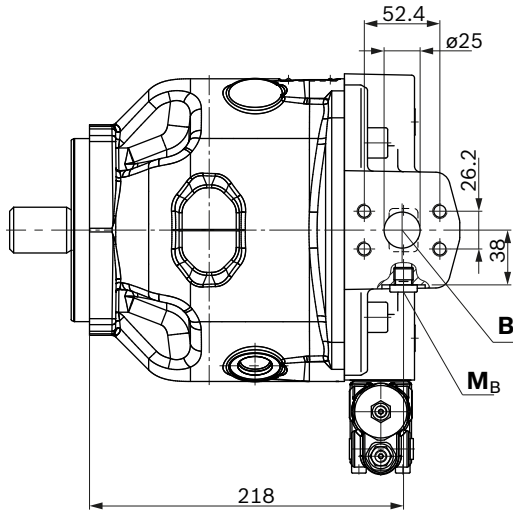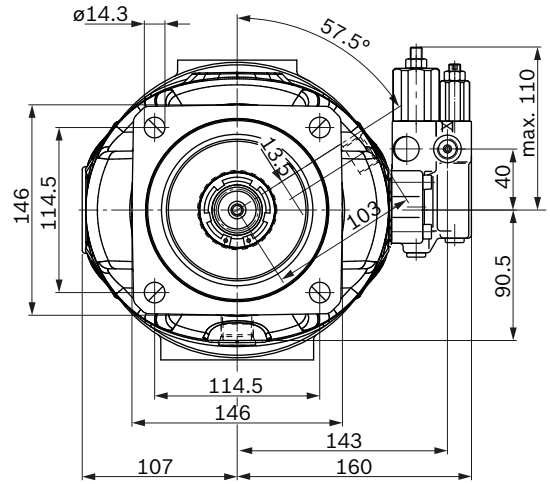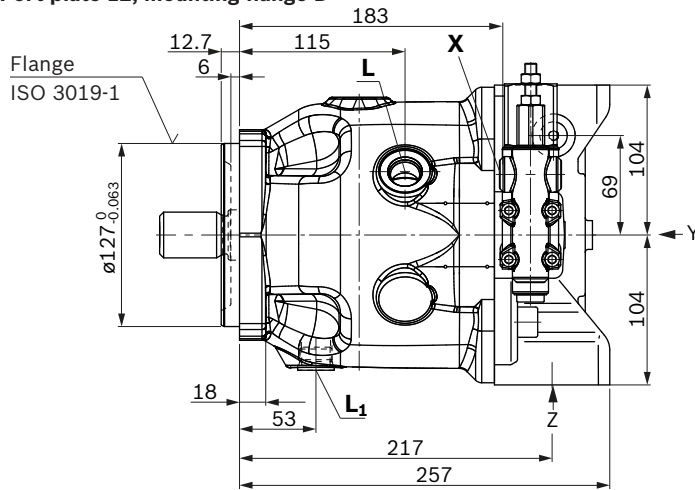


▼ **Port plate 12; mounting flange U**

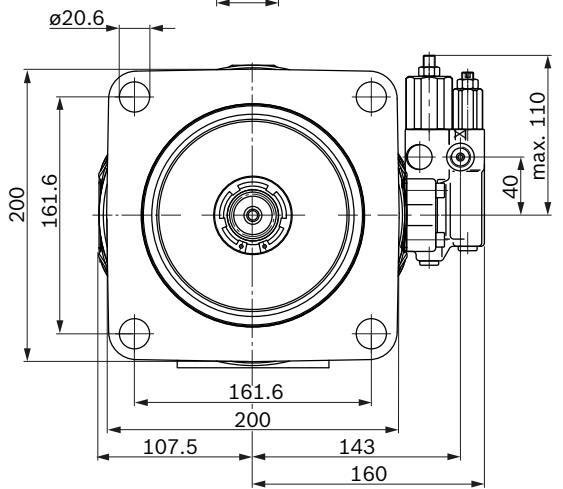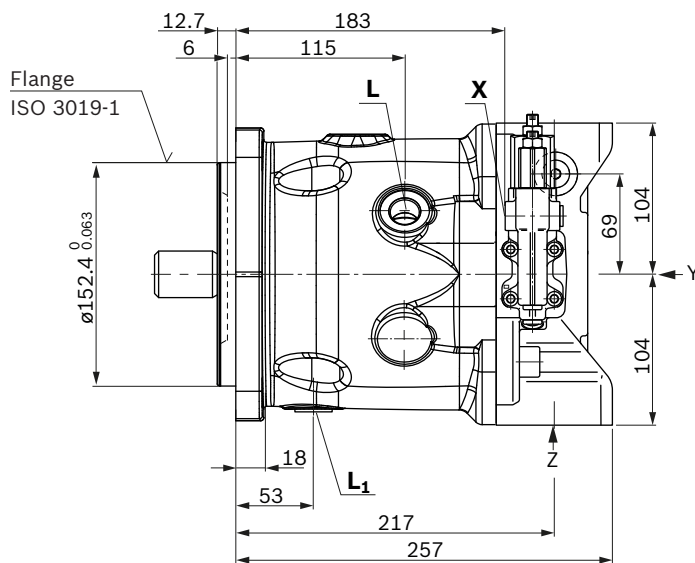


▼ Splined shaft 1 1/4 in (SAE J744)

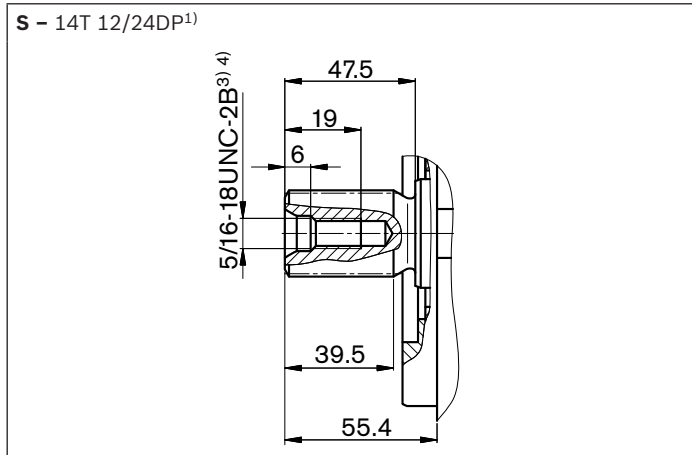

▼ Splined shaft 1 1/4 in (SAE J744)

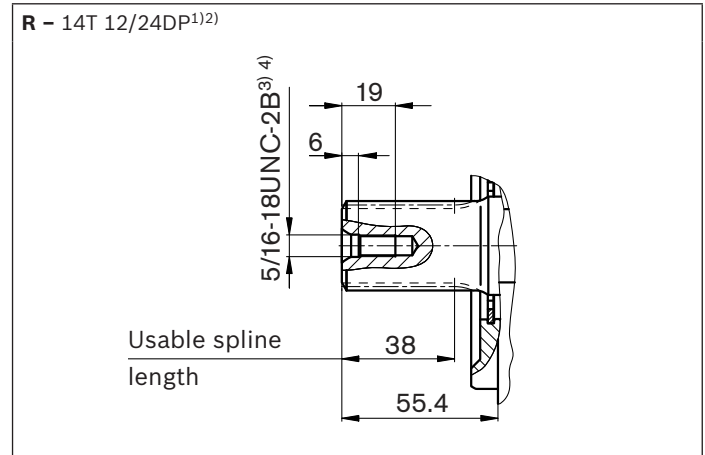

▼ Splined shaft 1 in (SAE J744)

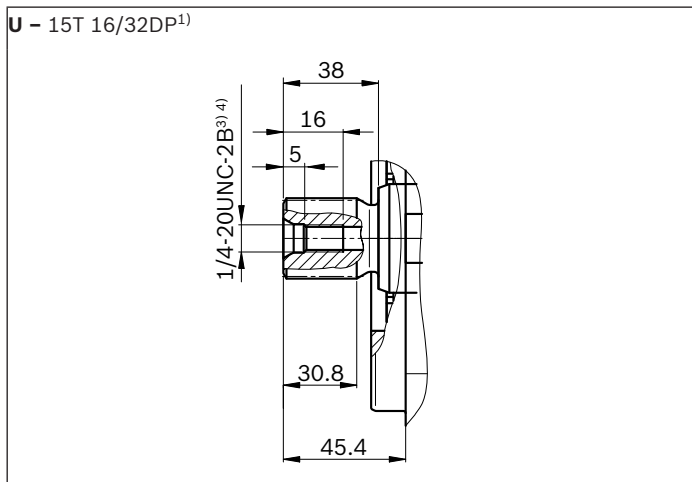


Ports		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 in M10 x 1.5, 17 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	2 in M12 x 1.75; 20 deep	10	O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14 UNF-2B; 12 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14 UNF-2B; 12 deep	2	X <sup>8)</sup>
<b>X</b>	Pilot pressure	ISO 11926	7/16-20 UNF-2B; 12 deep	350	O
<b>M<sub>B</sub></b>	Measuring pressure B	DIN 3852-2 <sup>7)</sup>	G 1/4 in; 12 deep	350	X

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Thread according to ASME B1.1  
 4) For notes on tightening torques, see the instruction manual.


5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.  
 6) Metric fastening thread is a deviation from standard.  
 7) The countersink can be deeper than as specified in the standard.  
 8) Depending on the installation position, L or L<sub>1</sub> must be connected (also see installation instructions starting on page 51).  
 9) O = Must be connected (plugged when delivered)  
 X = Plugged (in normal operation)

**Port plate 11**


▼ **DR – Pressure controller**

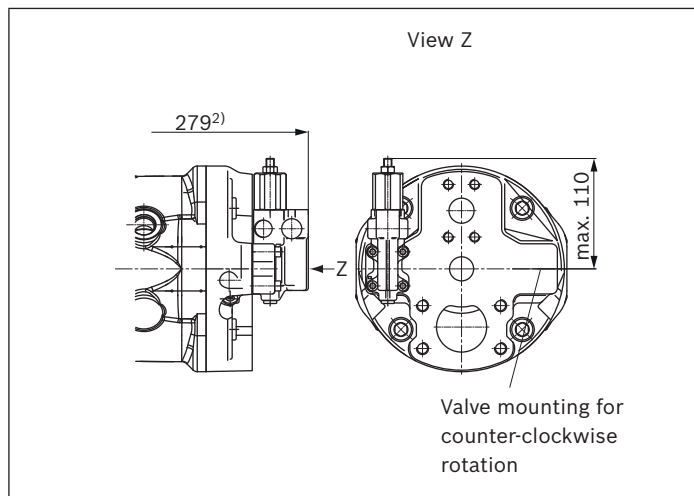


▼ **LA.DS – Pressure, flow and power controller**

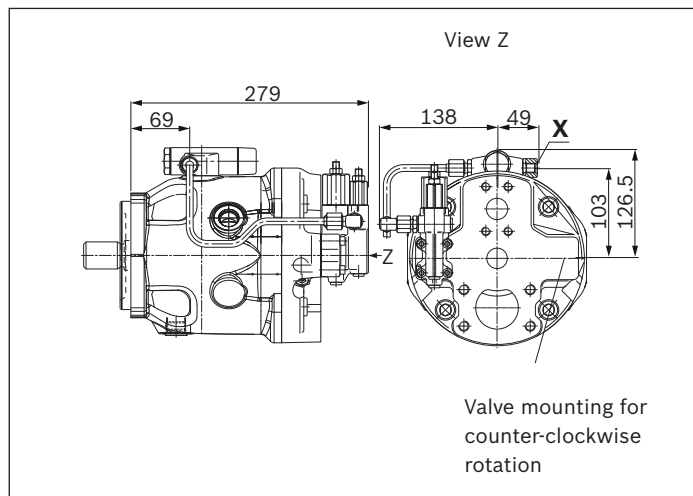

▼ **DRG – Pressure controller, remotely controlled**

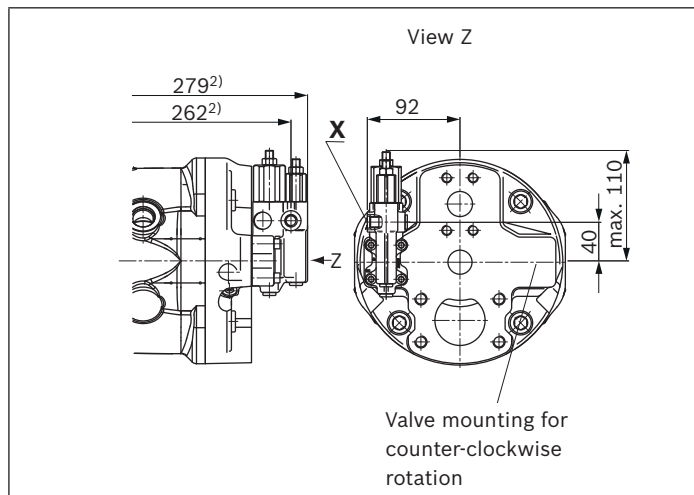

▼ **ED7./ER7. – Pressure controller, electrical**

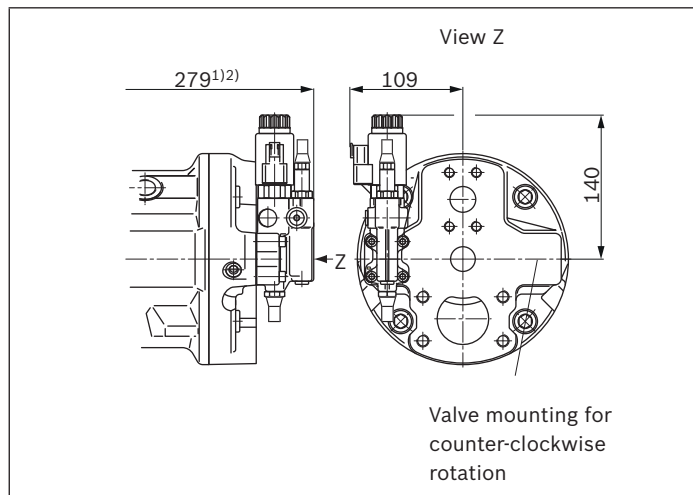


3


1) ER7. 314 mm if using an intermediate plate pressure controller  
 2) To mounting flange

**Port plate 12**


▼ **DR – Pressure controller**

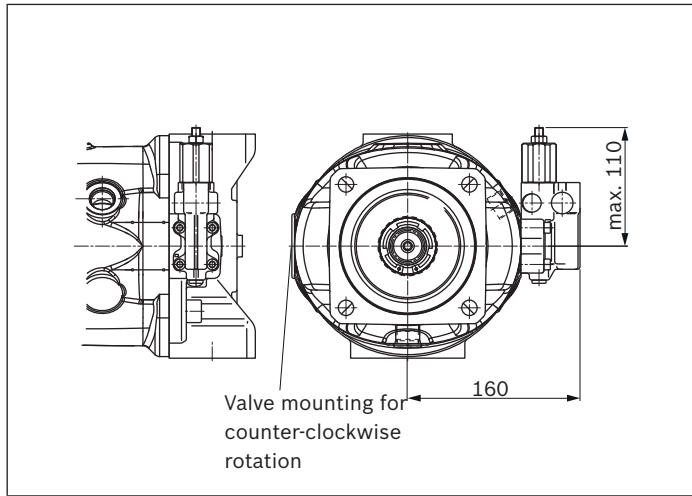


▼ **LA.DS – Pressure, flow and power controller**

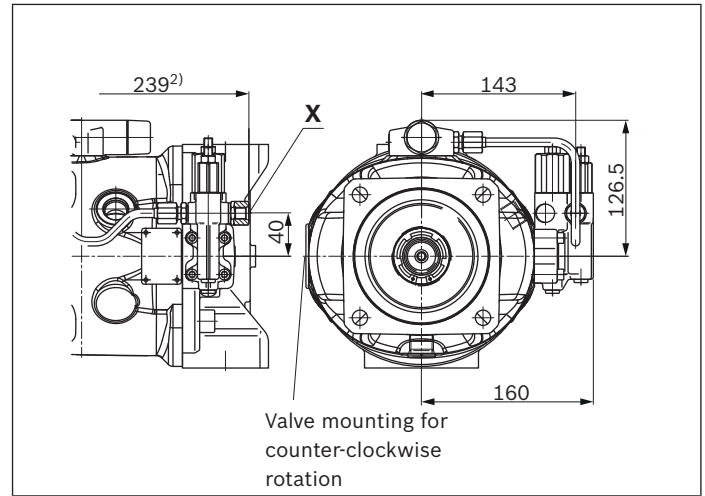

▼ **DRG – Pressure controller, remotely controlled**

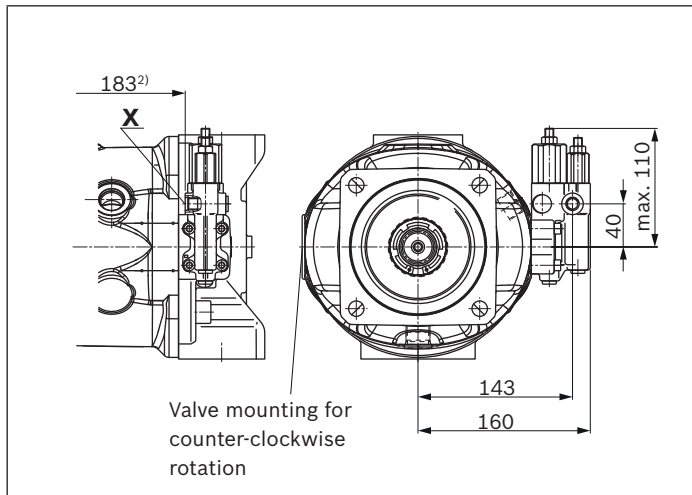

▼ **ED7./ER7. – Pressure controller, electrical**

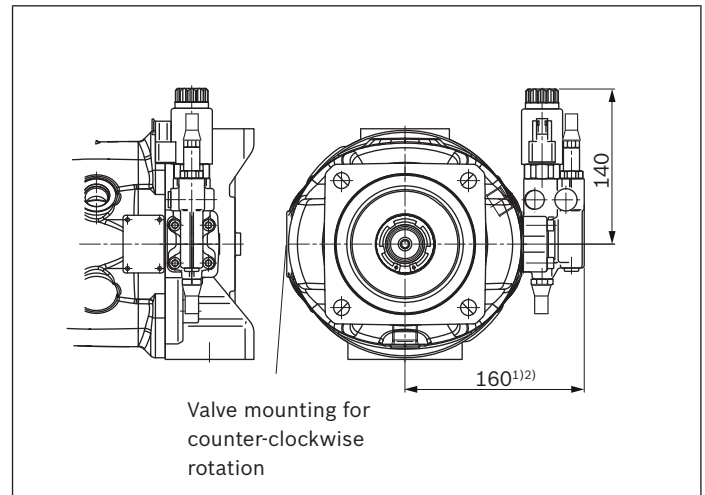


1) ER7. 195 mm if using an intermediate plate pressure controller

2) To mounting flange


**Dimensions size 100**

**DRF, DRS, DRSC – Pressure and flow control, port plate 11, 12; mounting flange C (SAE-C; 127-2), D (SAE-D; 152-4)**


▼ **Port plate 11; mounting flange D**

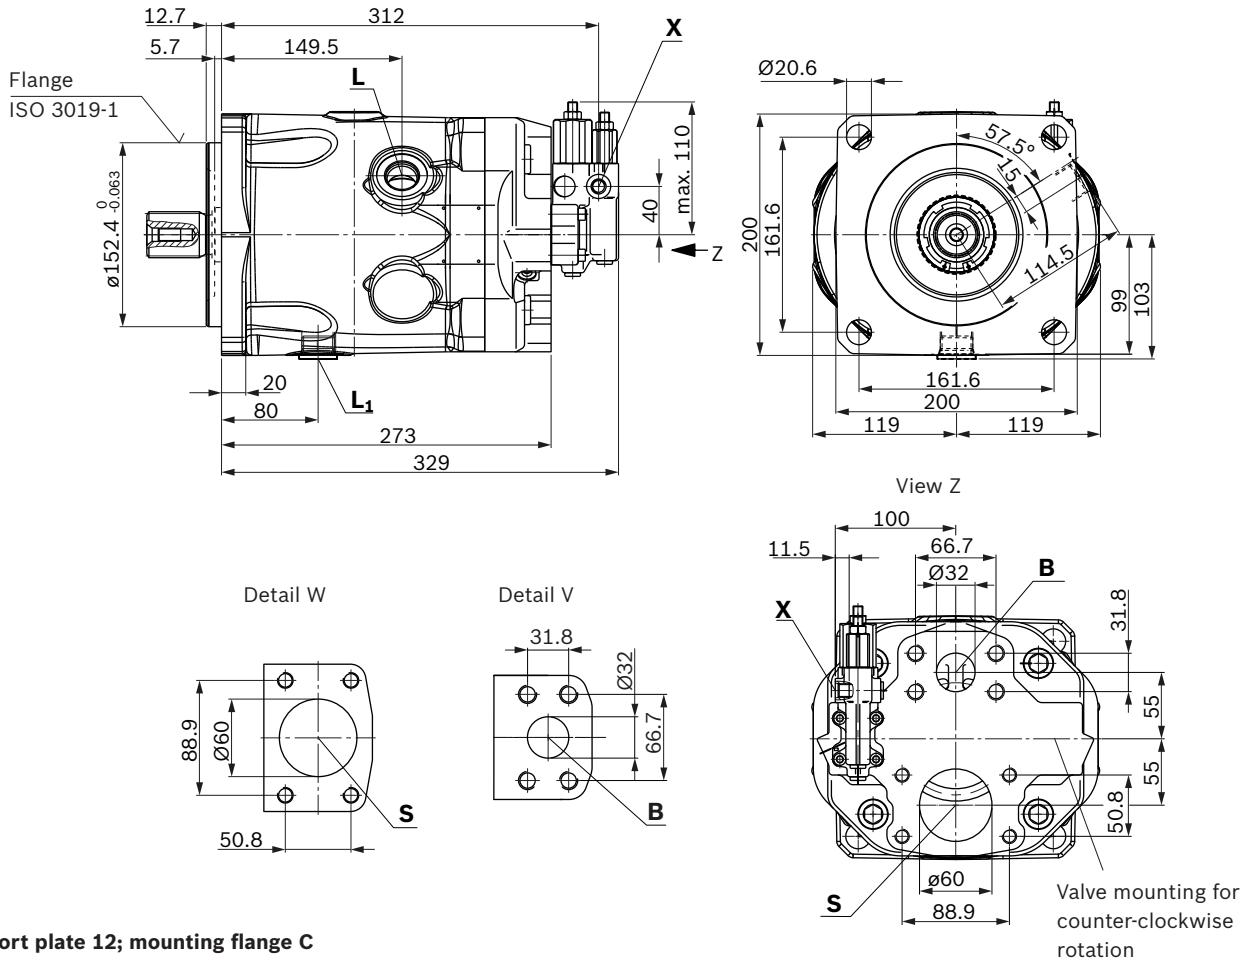


▼ **Port plate 12; mounting flange C**

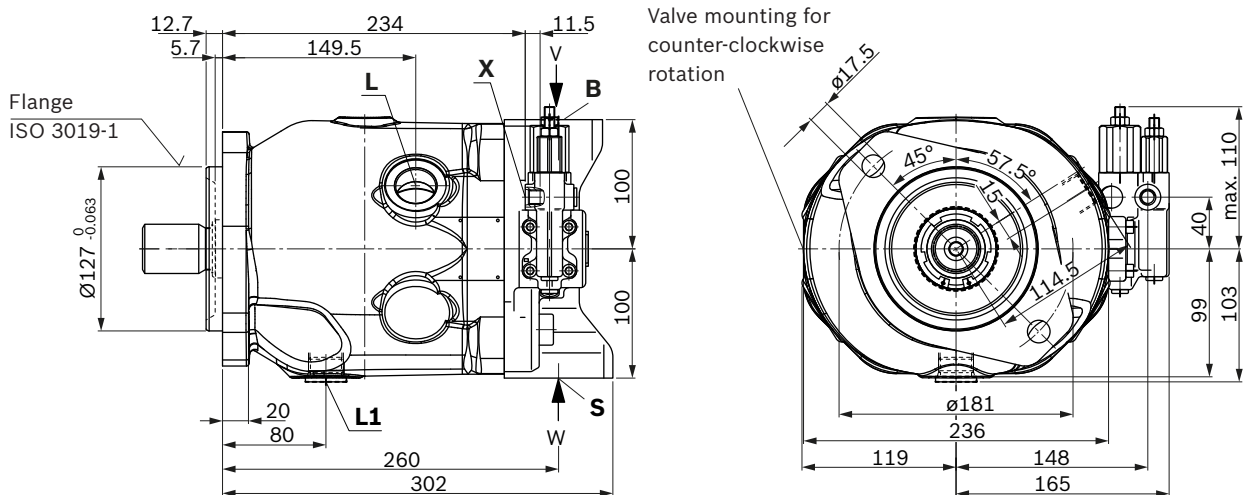


▼ Splined shaft 1 1/2 in (SAE J744)

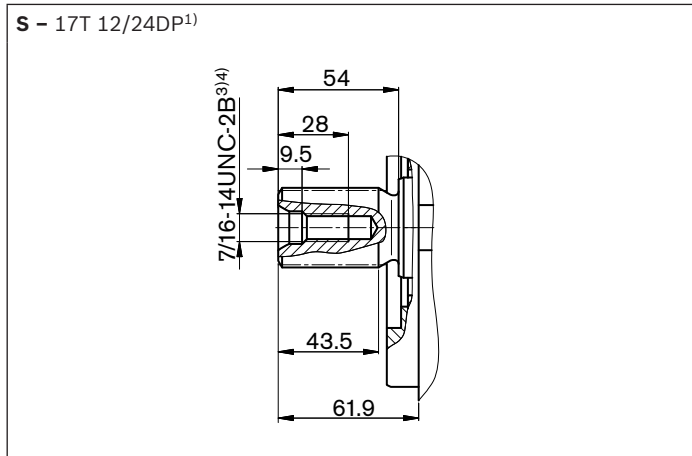

▼ Splined shaft 1 1/4 in (SAE J744)

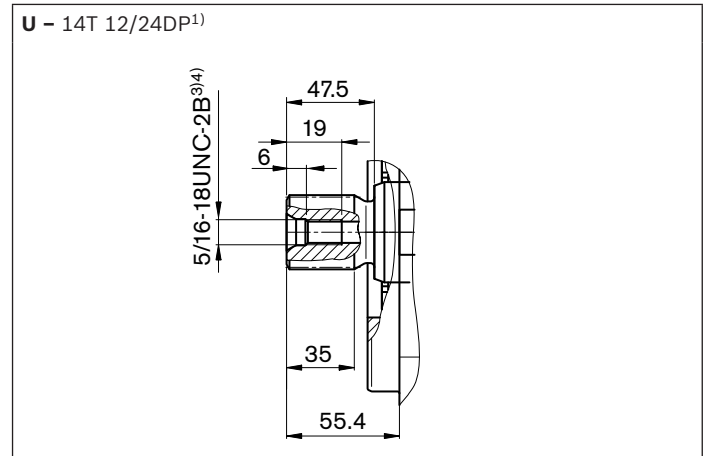

▼ Splined shaft 1 1/4 in (SAE J744)

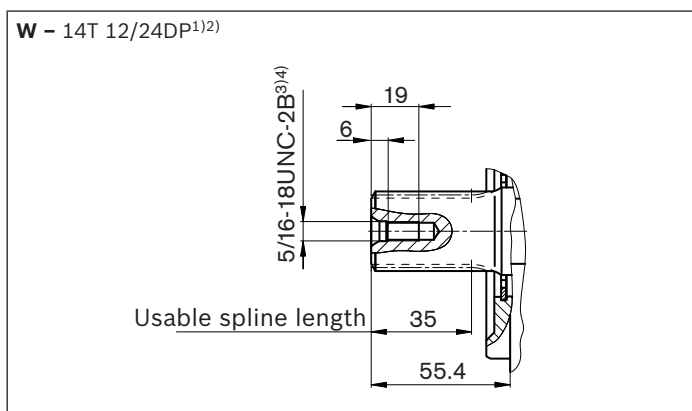


Ports	Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (high-pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/4 in M14 x 2; 19 deep	350 O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	2 1/2 in M12 x 1.75; 17 deep	10 O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	1 1/16-12 UNF-2B; 15 deep	2 O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 1/16-12 UNF-2B; 15 deep	2 X <sup>8)</sup>
<b>X</b>	Pilot pressure	ISO 11926	7/16-20 UNF; 12 deep	350 O
<b>M<sub>B</sub></b>	Measuring pressure B	DIN 3852-2 <sup>7)</sup>	G 1/4 in; 12 deep	350 X

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
3) Thread according to ASME B1.1  
4) For notes on tightening torques, see the instruction manual.


5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.  
6) Metric fastening thread is a deviation from standard.  
7) The countersink can be deeper than as specified in the standard.  
8) Depending on the installation position, L or L<sub>1</sub> must be connected (also see installation instructions starting on page 51).  
9) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)

**Port plate 11**


▼ **DR – Pressure controller**

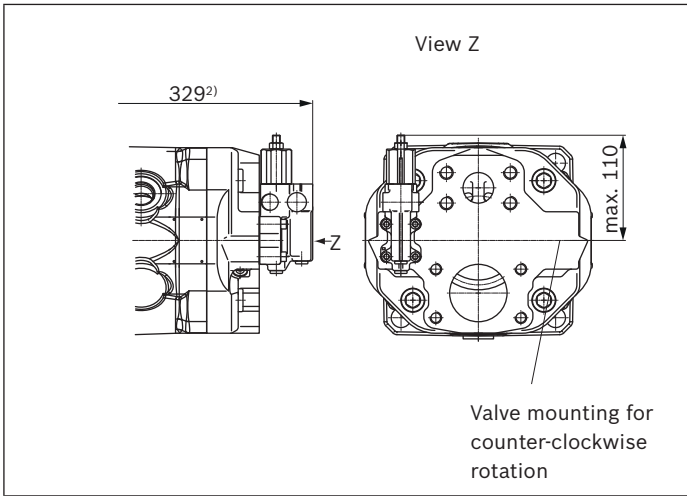


▼ **LA.DS – Pressure, flow and power controller**

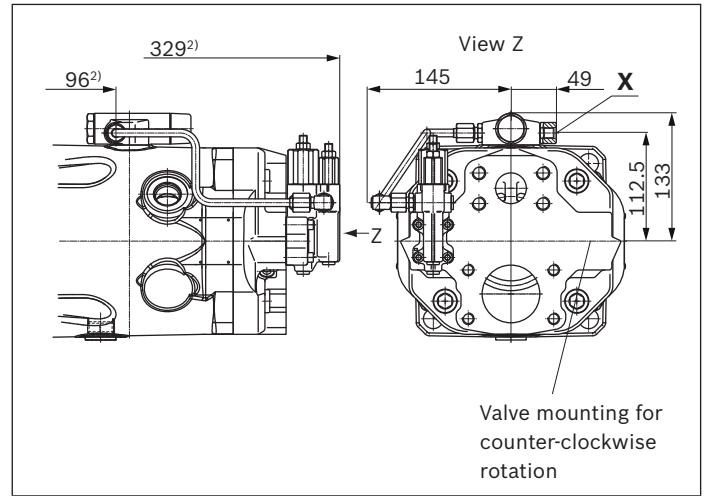

▼ **DRG – Pressure controller, remotely controlled**

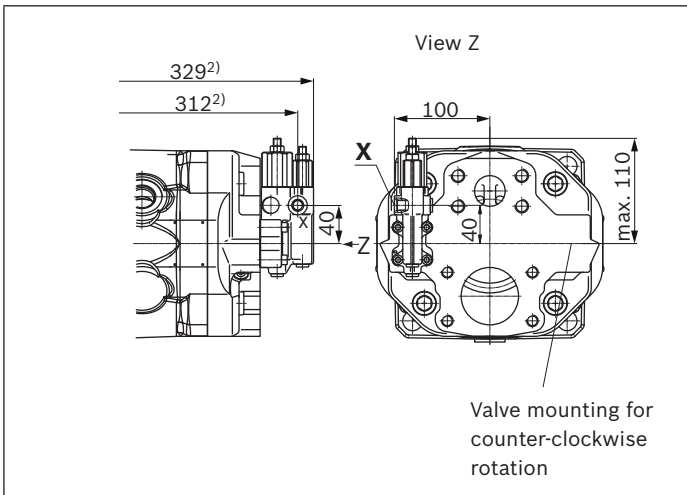

▼ **ED7./ER7. – Pressure controller, electrical**

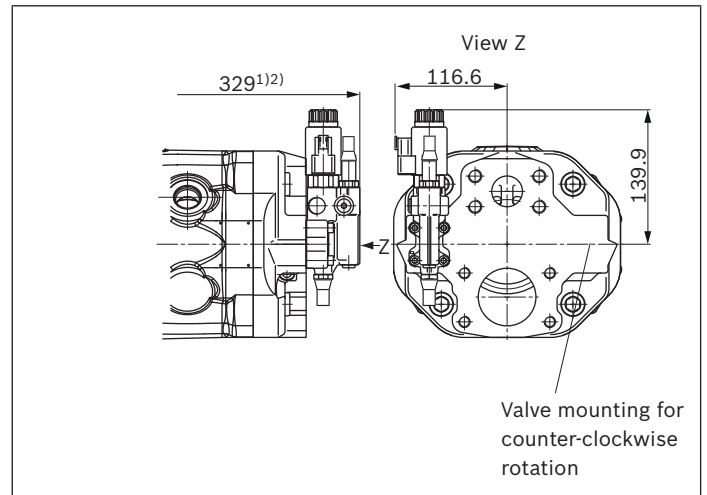


1) ER7. 364 mm if using an intermediate plate pressure controller


2) To mounting flange

**Port plate 12**


▼ **DR – Pressure controller**

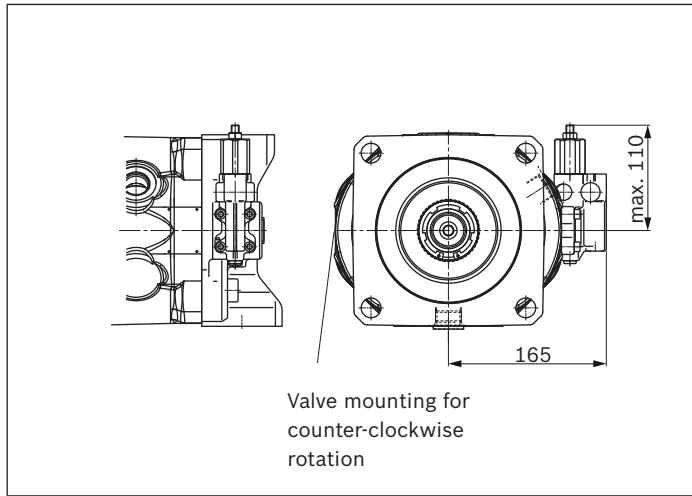


▼ **LA.DS – Pressure, flow and power controller**

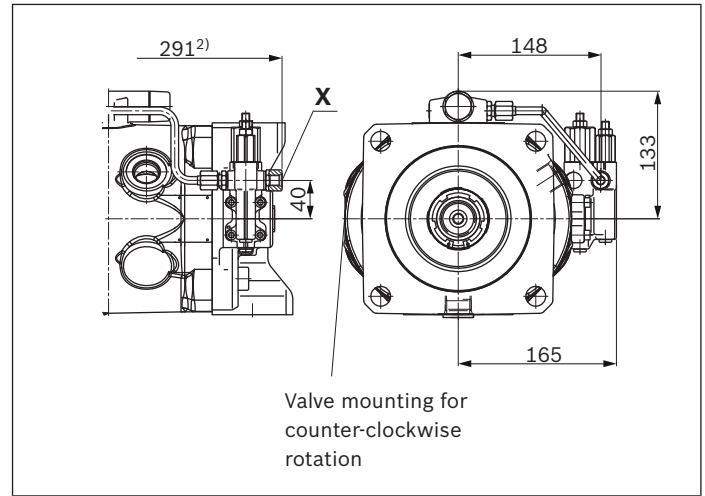

▼ **DRG – Pressure controller, remotely controlled**

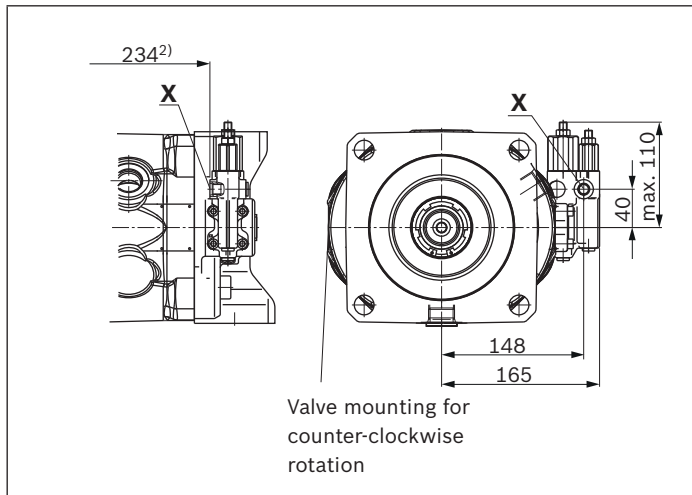

▼ **ED7./ER7. – Pressure controller, electrical**

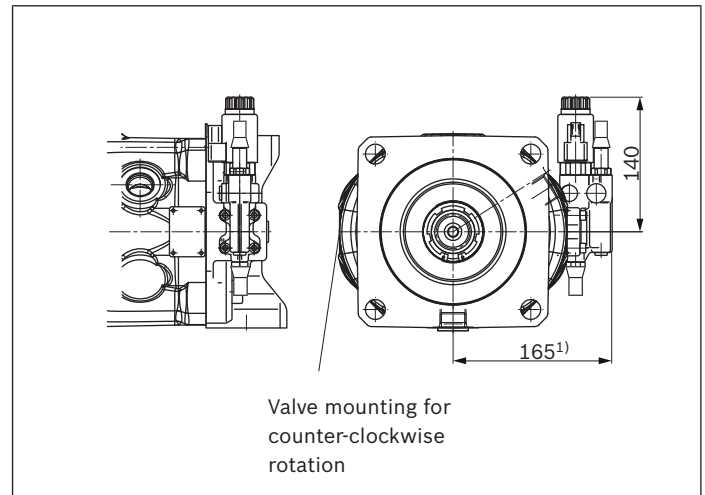

1) ER7. 200 mm if using an intermediate plate pressure controller


2) To mounting flange



**Dimensions size 140**


**DRF, DRS, DRSC – Pressure and flow control, port plate 11 and 12; mounting flange C (SAE-C; 127-2)**

▼ **Port plate 12; mounting flange C**

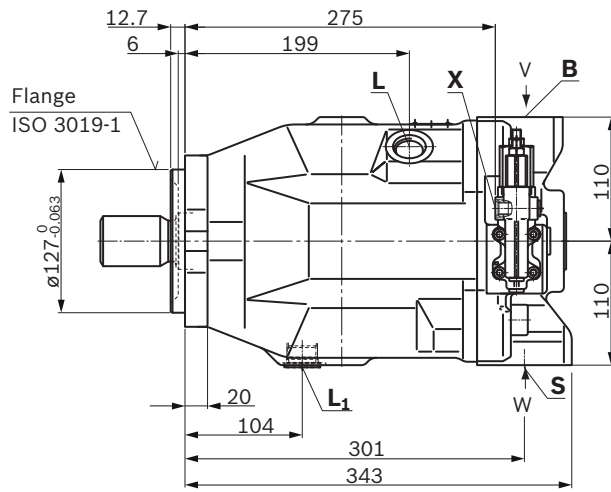


Valve mounting for counter-clockwise rotation


Detail W



Detail V





▼ **Port plate 11; mounting flange C**

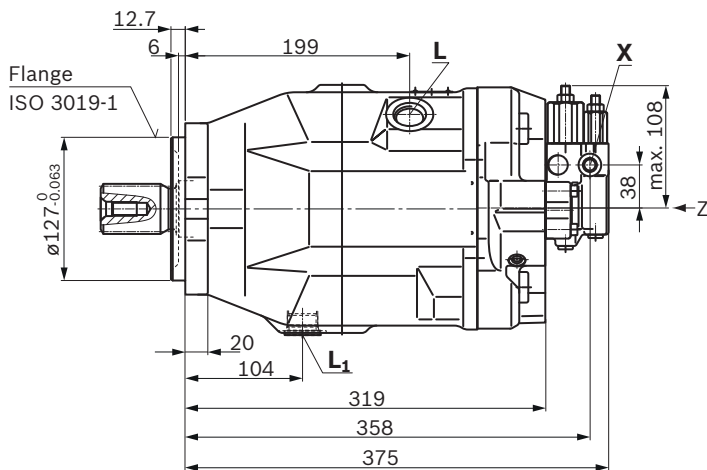

Valve mounting for counter-clockwise rotation


**DRF, DRS, DRSC – Pressure and flow control, port plate 11 and 12; mounting flange D (SAE-D; 152-4)**

▼ **Port plate 12; mounting flange D**

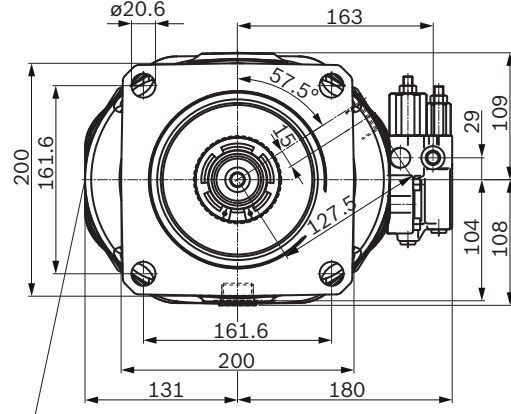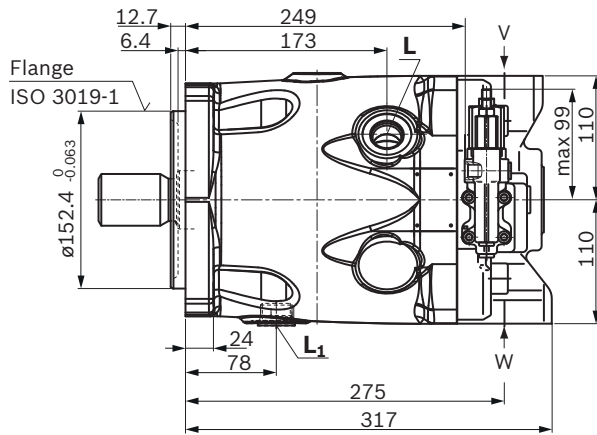


Valve mounting for counter-clockwise rotation



Detail W



Detail V




▼ **Port plate 11; mounting flange D**

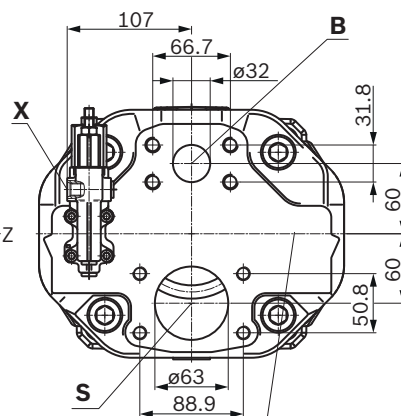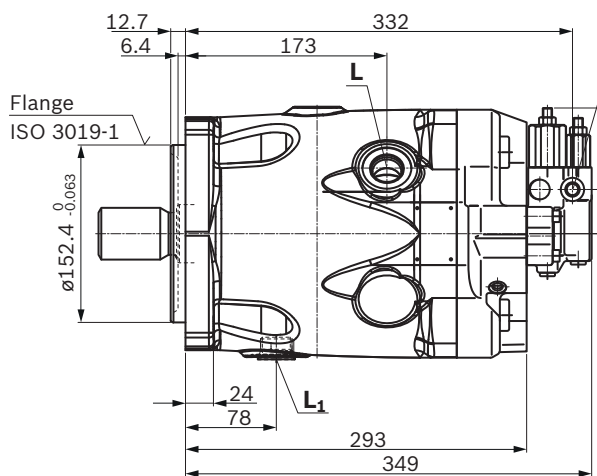


Valve mounting for counter-clockwise rotation


## ▼ Splined shaft 1 3/4 in SAE J744

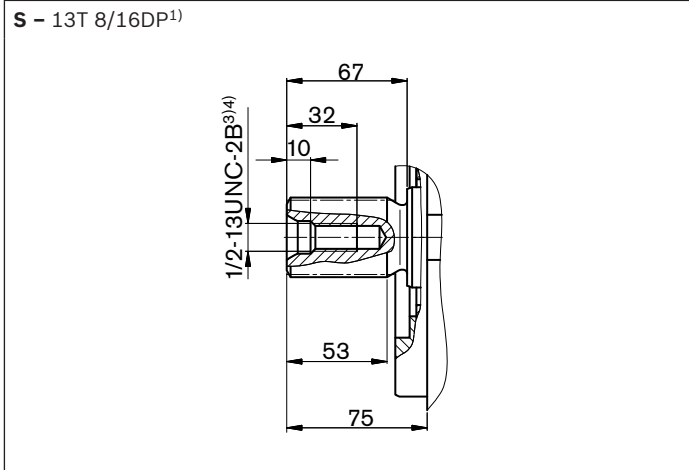

## ▼ Splined shaft 1 1/2 in SAE J744

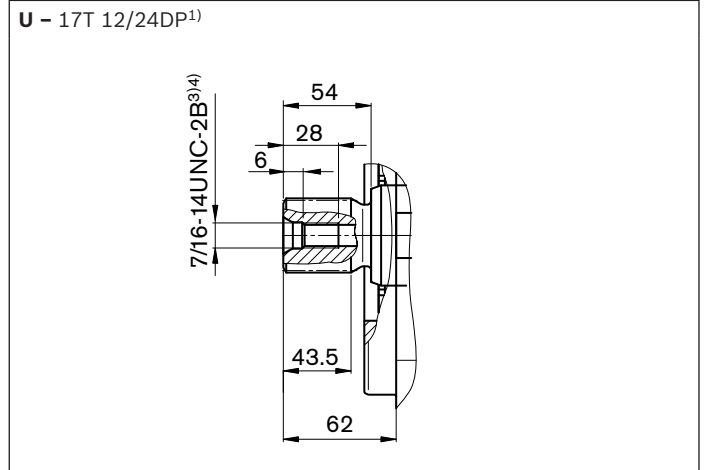

## ▼ Splined shaft 1 1/2 in SAE J744

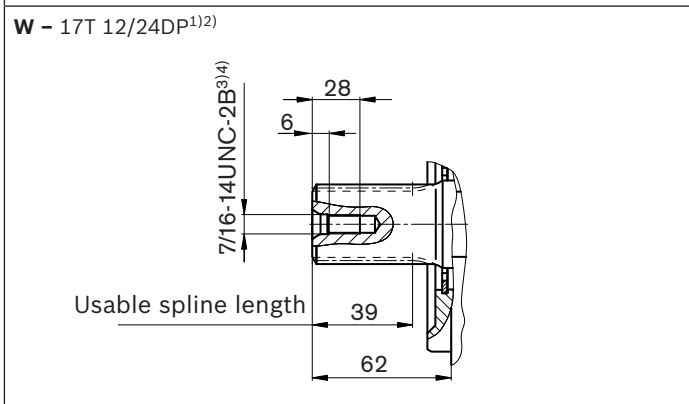

Ports		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (high-pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/4 in M14 x 2; 19 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	2 1/2 in M12 x 1.75; 17 deep	10	O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	1 1/16-12 UNF-2B; 15 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 1/16-12 UNF-2B; 15 deep	2	X <sup>8)</sup>
<b>X</b>	Pilot pressure	ISO 11926	7/16-20 UNF-2B; 12 deep	350	O
<b>M<sub>B</sub></b>	Measuring pressure B	DIN 3852-2 <sup>7)</sup>	G 1/4 in; 12 deep	350	X

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.

3) Thread according to ASME B1.1

4) For notes on tightening torques, see the instruction manual

5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

6) Metric fastening thread is a deviation from standard.

7) The countersink can be deeper than as specified in the standard.


8) Depending on the installation position, L or L<sub>1</sub> must be connected (also see installation instructions starting on page 51).

9) O = Must be connected (plugged when delivered)


X = Plugged (in normal operation)

**Port plate 11**


▼ **DR – Pressure controller; mounting flange D**

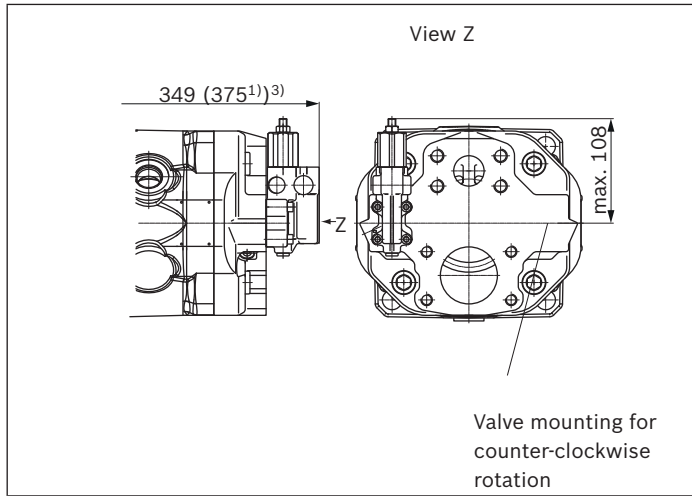


▼ **LA.DS – Pressure, flow and power controller; mounting flange D**

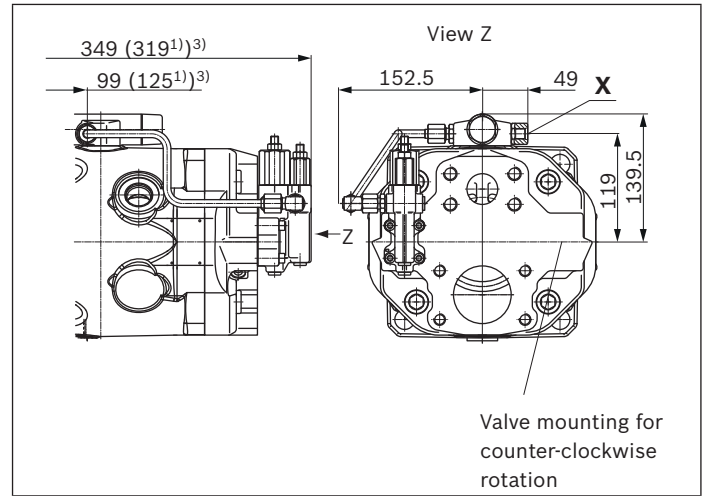

▼ **DRG – Pressure controller, remotely controlled; mounting flange D**

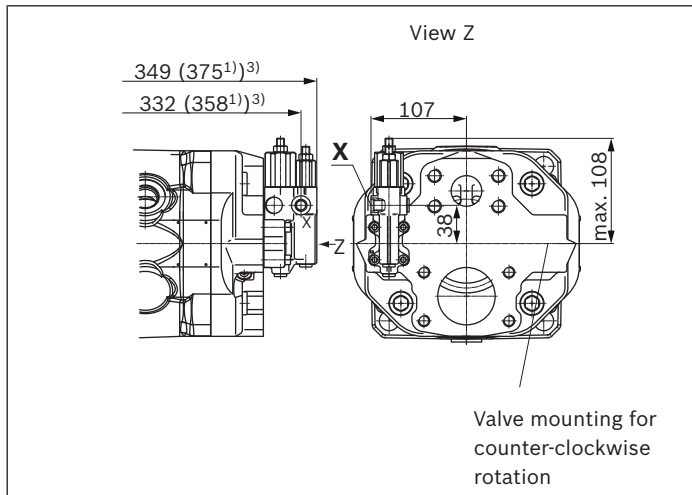


▼ **ED7./ER7. – Pressure controller, electric; mounting flange D**

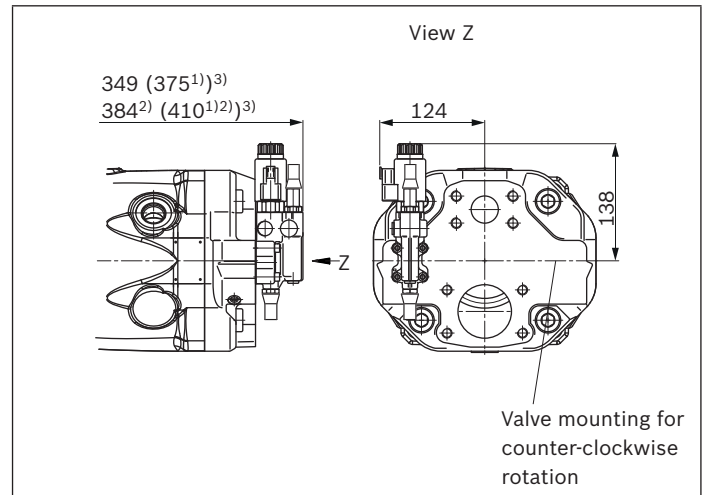


1) Dimension of mounting flange C  
 2) ER7. If using an intermediate plate pressure controller  
 3) To mounting flange

**Port plate 12**


▼ **DR – Pressure controller; mounting flange D**

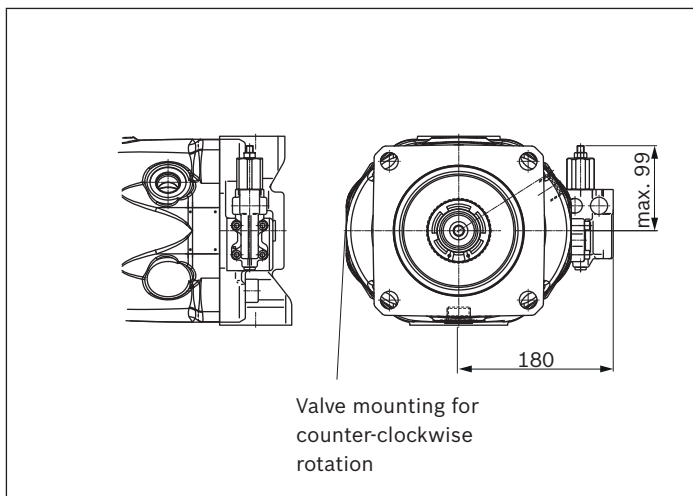


▼ **LA.DS – Pressure, flow and power controller; mounting flange D**

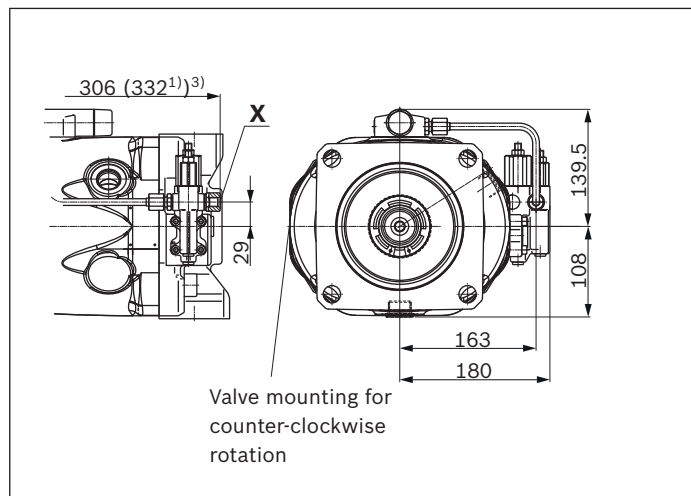

▼ **DRG – Pressure controller, remotely controlled; mounting flange D**

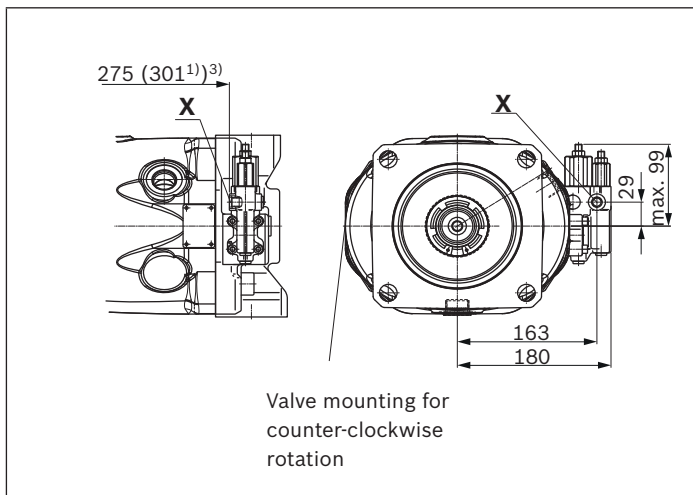

▼ **ED7./ER7. – Pressure controller, electric; mounting flange D**

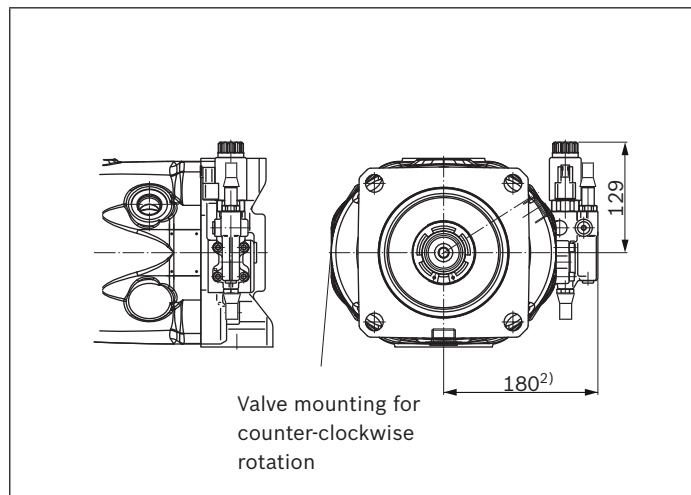


1) Dimension of mounting flange C  
 2) ER7. 215 mm if using an intermediate plate pressure controller  
 3) To mounting flange


**Dimensions size 180**

**DRF, DRS, DRSC – Pressure and flow control, port plate 11, 22 and 32; mounting flange D (SAE-D; 152-4)**


▼ **Port plate 22 and 32**

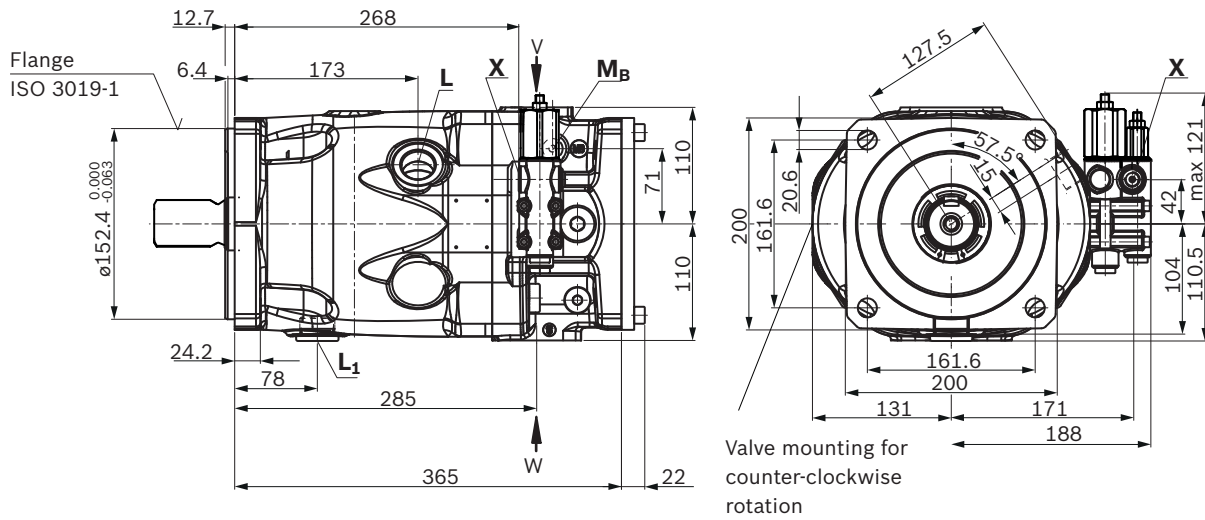


Detail W




Detail X




▼ **Port plate 11**

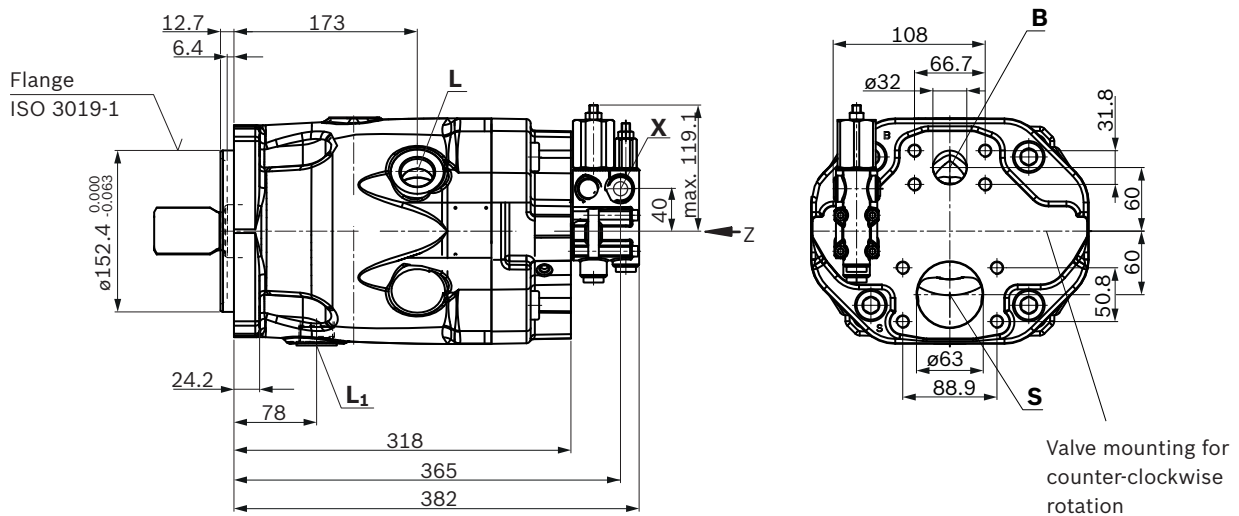

▼ Splined shaft 1 3/4 in SAE J744

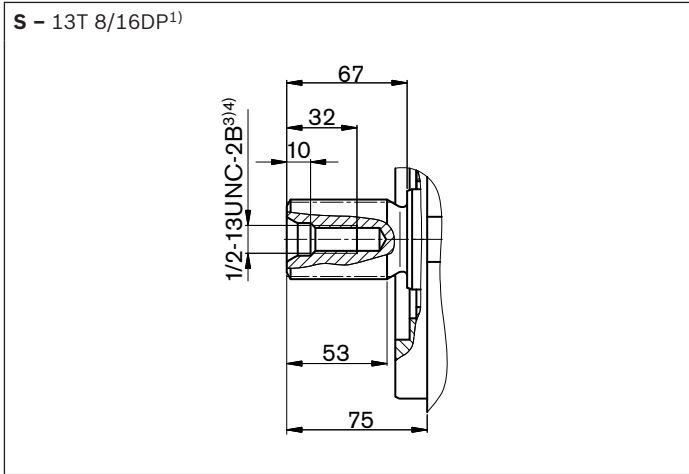

▼ Splined shaft 1 1/2 in SAE J744

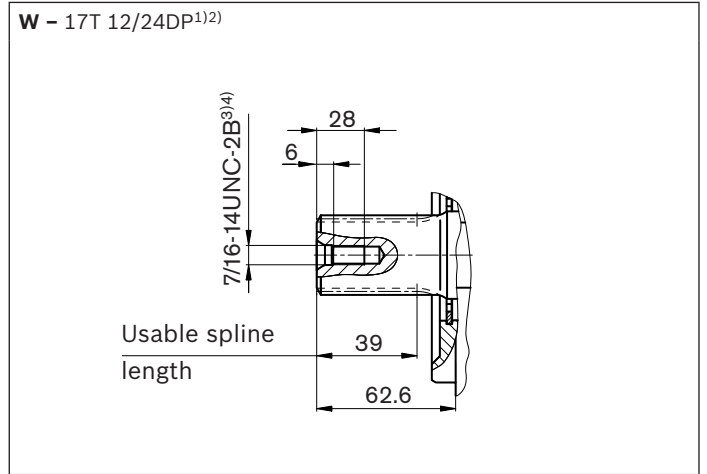


Ports		Standard	Size <sup>4)</sup>	$p_{max abs}$ [bar] <sup>5)</sup>	State <sup>9)</sup>
<b>B</b>	Working port (high-pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/4 in M14 x 2; 19 deep	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	2 1/2 in M12 x 1.75; 17 deep	10	O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	1 5/16-12 UN-2B; 15 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>7)</sup>	1 5/16-12 UN-2B; 15 deep	2	X <sup>8)</sup>
<b>X</b>	Pilot pressure	ISO 11926	7/16-20 UNF-2B; 12 deep	350	O
<b>M<sub>B</sub></b>	Measuring pressure B	DIN 3852-2 <sup>7)</sup>	G 1/4 in; 12 deep	350	X

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Thread according to ASME B1.1  
 4) For notes on tightening torques, see the instruction manual


5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.  
 6) Metric fastening thread is a deviation from standard.  
 7) The countersink can be deeper than as specified in the standard.  
 8) Depending on the installation position, L or L<sub>1</sub> must be connected (also see installation instructions starting on page 51).  
 9) O = Must be connected (plugged when delivered)  
 X = Plugged (in normal operation)

**Port plate 11**


▼ **DR – Pressure controller**

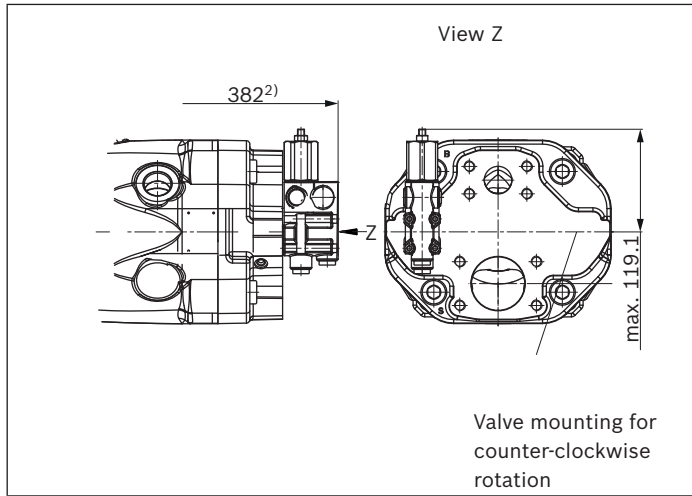


▼ **LA.DS – Pressure, flow and power controller**

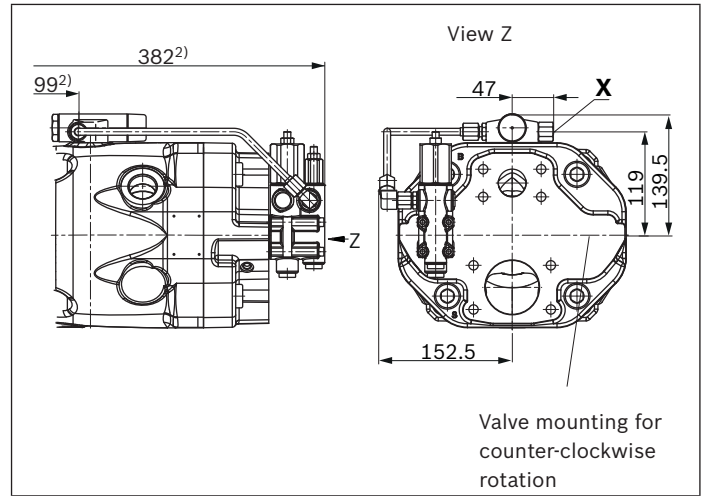

▼ **DRG – Pressure controller, remotely controlled**

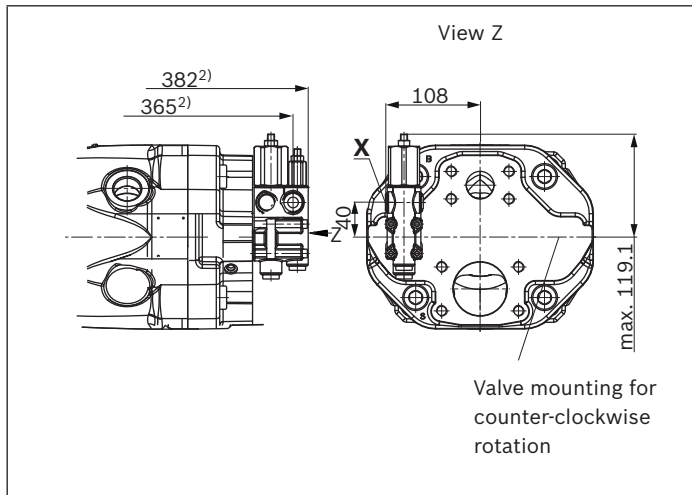

▼ **ED7./ER7. – Pressure controller, electrical**

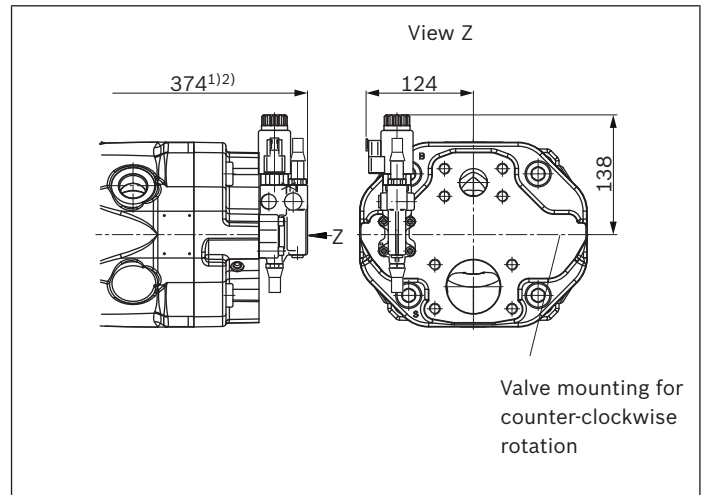


1) ER7. 409 mm if using an intermediate plate pressure controller  
2) To mounting flange




**Port plate 22 and 32**


▼ **DR – Pressure controller**

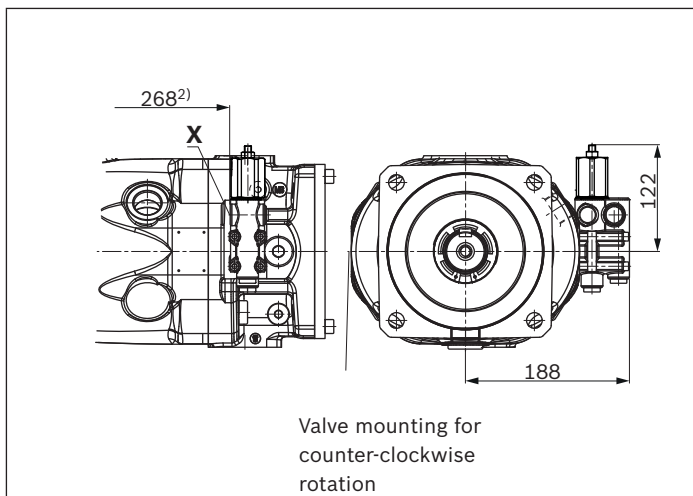


▼ **LA.DS – Pressure, flow and power controller**

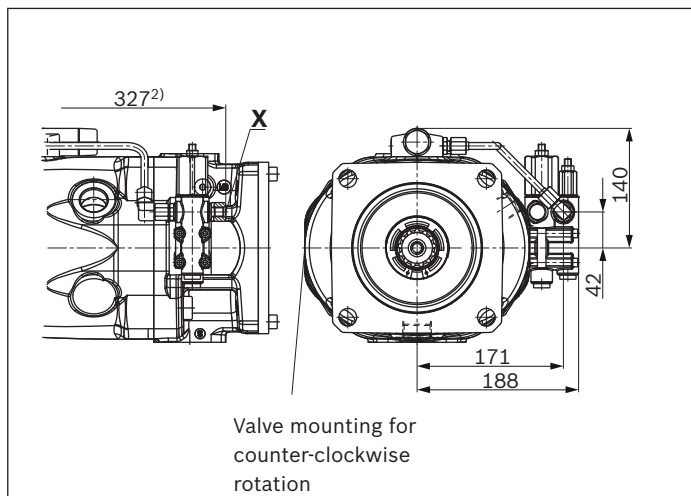

▼ **DRG – Pressure controller, remotely controlled**

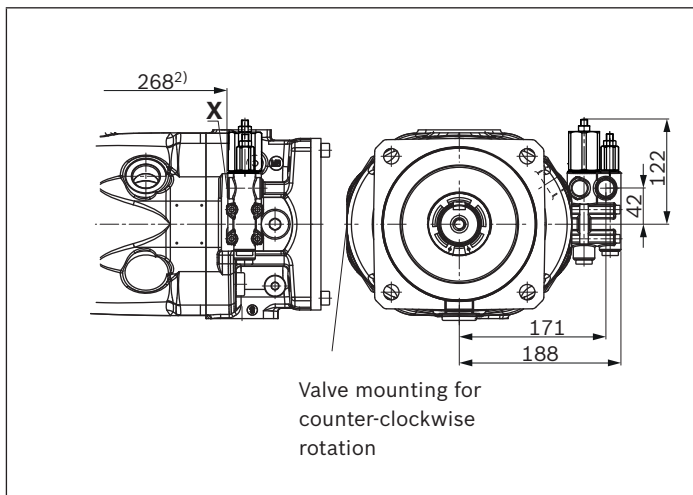

▼ **ED7./ER7. – Pressure controller, electrical**

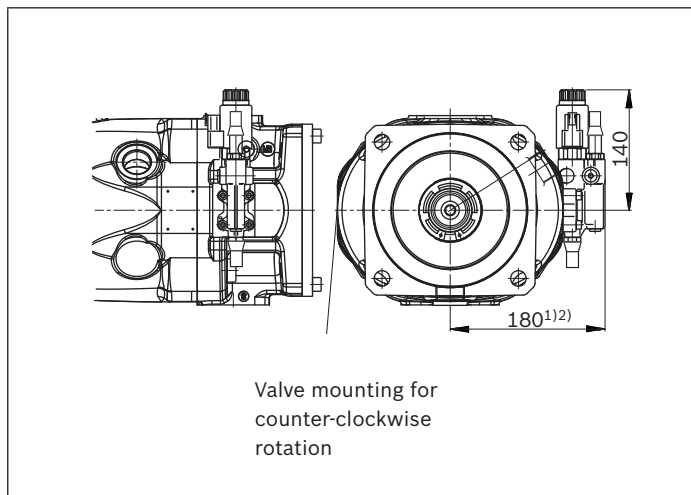

3


1) ER7. 215 mm if using an intermediate plate pressure controller  
 2) To mounting flange

## Dimensions, through drives


Flange ISO 3019-1 (SAE J744)		Hub for splined shaft <sup>1)</sup>		Availability over sizes					Code
Diameter	Attachment <sup>2)</sup>	Diameter		45	71	100	140	180	
82-2 (A)	$\frac{8}{8}, \frac{8}{8}, \infty$	5/8 in	9T 16/32DP	●	●	●	●	-	K01
	$\frac{8}{8}, \frac{8}{8}, \infty$	5/8 in	9T 16/32DP	○	○	○	○	●	U01

● = Available    ○ = On request    - = Not available

### ▼ 82-2 (A)

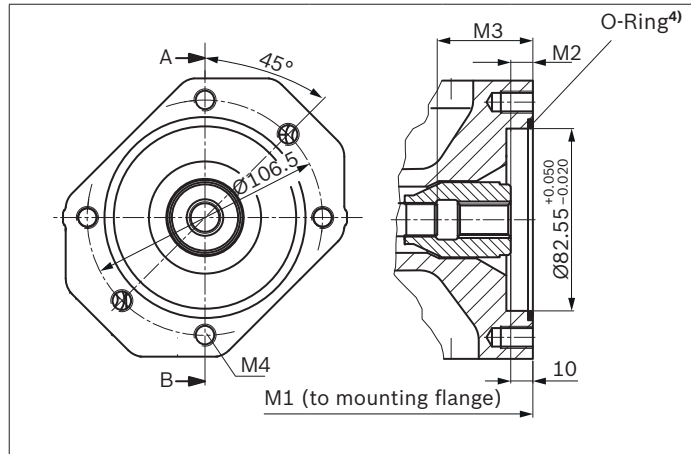

### ▼ 82-2 (A)

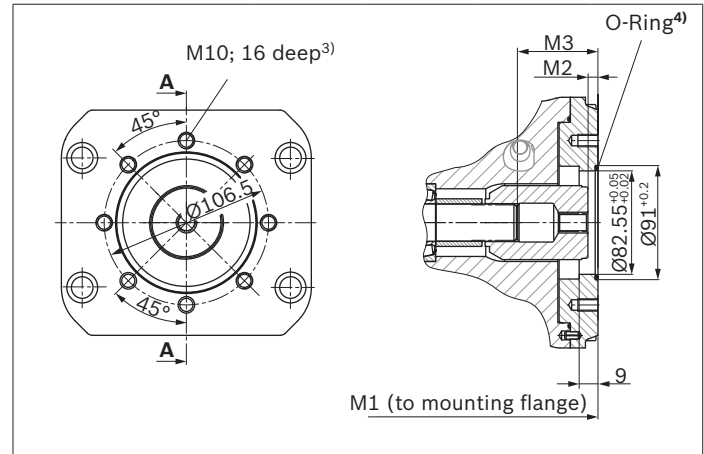

K01 (SAE J744 16-4 (A))	NG	M1	M2	M3	M4
45	229	10.7	53.4	M10 × 1.5; 16 deep	
71	267	11.8	61.3	M10 × 1.5; 20 deep	
100	338	10.5	65	M10 × 1.5; 16 deep	
140 <sup>5)</sup>	350	10.8	77.3	M10 × 1.5; 16 deep	
140 <sup>6)</sup>	376				

U01 (SAE J744 16-4 (A))	NG	M1	M2	M3
180	387	On request		


- 1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Mounting through bores pattern viewed from through drive with control at top
- 3) Thread according to DIN 13, observe the instructions in the instruction manual for the maximum tightening torques.

- 4) O-ring included in the scope of delivery
- 5) With D-flange
- 6) With C-flange

Flange ISO 3019-1 (SAE J744)		Hub for splined shaft <sup>1)</sup>		Availability over sizes					Code
Diameter	Attachment <sup>2)</sup>	Diameter		45	71	100	140	180	
82-2 (A)	⌀, ⌀ <sup>3)</sup> , ∞	3/4 in	11T 16/32DP	●	●	●	●	-	K52
	⌀, ⌀ <sup>3)</sup> , ∞	3/4 in	11T 16/32DP	○	○	○	○	●	U52


● = Available    ○ = On request    - = Not available

▼ 82-2 (A)

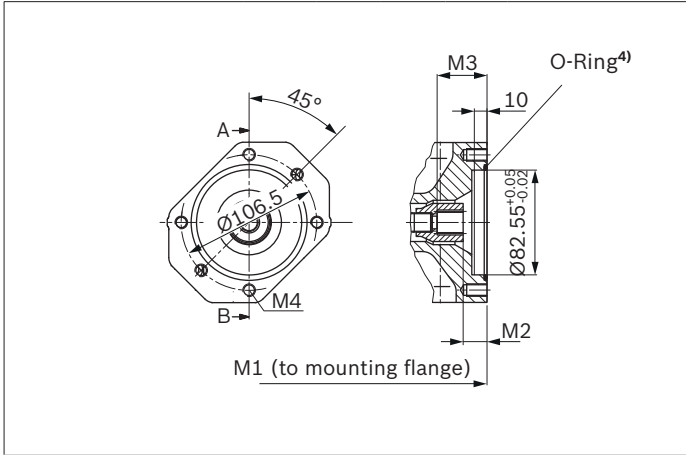

K52 (SAE J744 19-4 (A-B))	NG	M1	M2	M3	M4
45	229	18.9	38.7	M10 × 1.5; 16 deep	
71	267	21.3	41.4	M10 × 1.5; 20 deep	
100	338	19	38.9	M10 × 1.5; 16 deep	
140 <sup>5)</sup>	350	18.9	38.6	M10 × 1.5; 16 deep	
140 <sup>6)</sup>	376				

▼ 82-2 (A)

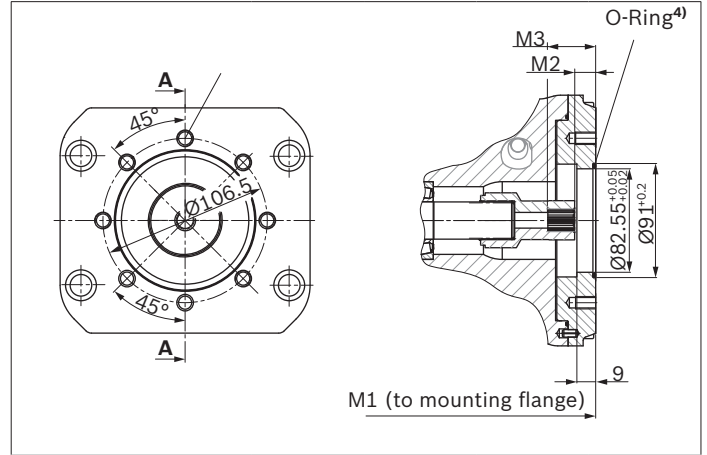

U52 SAE J744 19-4 (A-B))	NG	M1	M2	M3
180	387	On request		


1) Hub for splined shaft according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Mounting through bores pattern viewed from through drive with control at top  
3) Thread according to DIN 13, observe the instructions in the instruction manual for the maximum tightening torques.

4) O-ring included in the scope of delivery  
5) With D-flange  
6) With C-flange


Flange ISO 3019-2 (metric)		Hub for splined shaft <sup>1)</sup>		Availability over sizes					Code
Diameter	Attachment <sup>2)</sup>	Diameter		45	71	100	140	180	
101-2 (B)	⊗, ⊙, ∞	7/8 in	13T 16/32DP	●	●	●	●	-	K68
	⊗, ⊙, ∞	7/8 in	13T 16/32DP	○	○	○	○	●	U68

● = Available    ○ = On request    - = Not available

▼ **101-2**

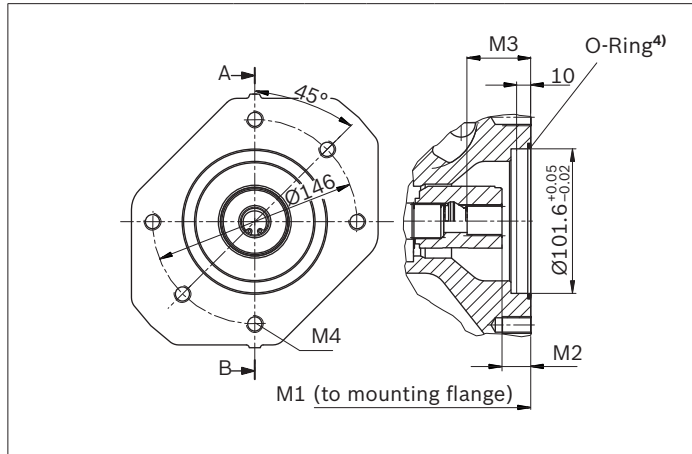

▼ **101-2**

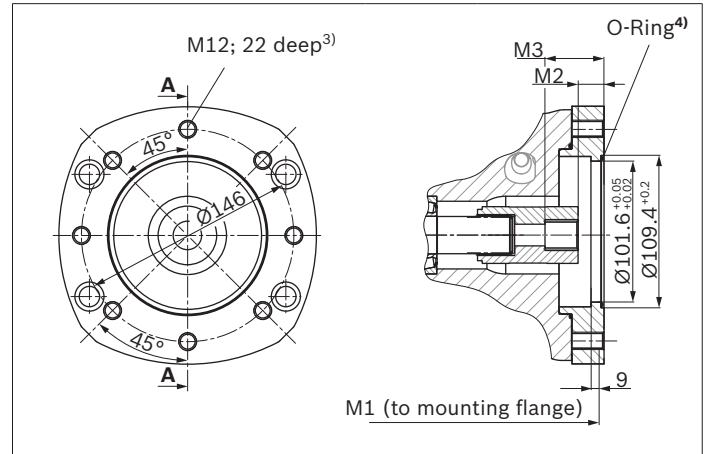

<b>K68</b> (SAE J744 22-4) (B))	<b>NG</b>	<b>M1</b>	<b>M2</b>	<b>M3</b>	<b>M4</b>
	45	229	17.9	41.7	M12 × 1.75; 18 deep
	71	267	20.3	44.1	M12 × 1.75; 20 deep
	100	338	18	41.9	M12 × 1.75; 20 deep
	140 <sup>5)</sup>	350	17.8	41.6	M12 × 1.75; 20 deep
	140 <sup>6)</sup>	376			20 deep

<b>U68</b> (SAE J744 22-4) (B))	<b>NG</b>	<b>M1</b>	<b>M2</b>	<b>M3</b>
	180	387	18.6	42.4


1) Hub for splined shaft according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Mounting through bores pattern viewed from through drive with control at top  
3) Thread according to DIN 13, observe the instructions in the instruction manual for the maximum tightening torques.

4) O-ring included in the scope of delivery  
5) With D-flange  
6) With C-flange


Flange ISO 3019-1 (SAE J744)		Splined shaft <sup>1)</sup>		Availability over sizes					Code
Diameter	Attachment <sup>2)</sup>	Diameter		45	71	100	140	180	
101-2 (B)	⌀, ⌀ <sup>∘</sup> , ∞	1 in	15T 16/32DP	●	●	●	●	-	K04
	⌀, ⌀ <sup>∘</sup> , ∞	1 in	15T 16/32DP	○	○	○	○	●	U04

● = Available    ○ = On request    - = Not available

▼ 101-2 (B)

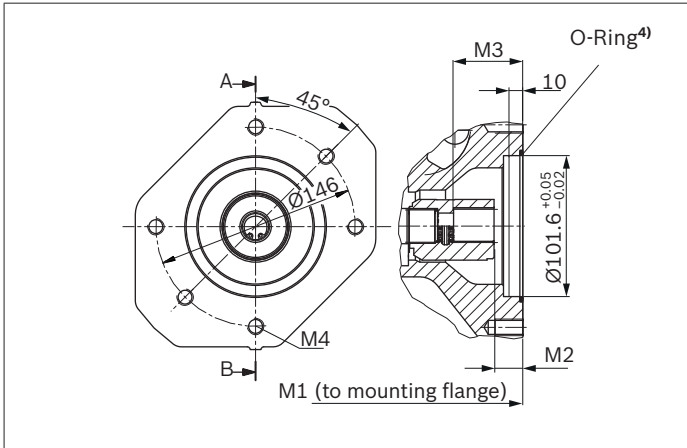

▼ 101-2 (B)

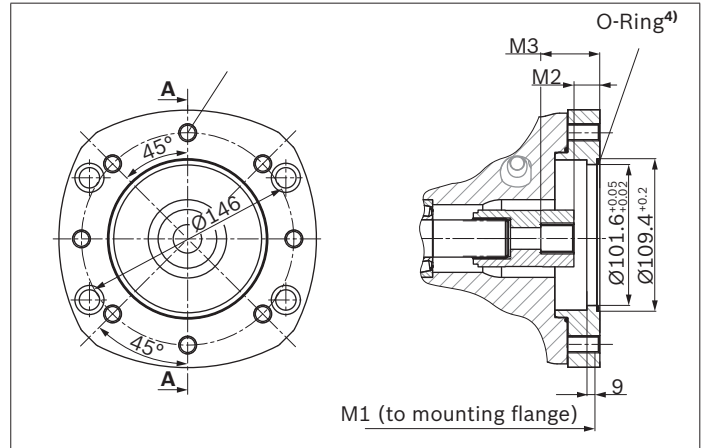

K04 (SAE J744 25-4 (B-B))	NG	M1	M2	M3	M4
	45	229	18.4	46.7	M12 × 1.75; 18 deep
	71	267	20.8	49.1	M12 × 1.75; 20 deep
	100	338	18.2	46.6	M12 × 1.75; 20 deep
	140 <sup>5)</sup>	350	18.3	45.9	M12 × 1.75; 20 deep
	140 <sup>6)</sup>	376			

U04 (SAE J744 25-4 (B-B))	NG	M1	M2	M3
	180	387	On request	


- 1) Hub for splined shaft according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Mounting through bores pattern viewed from through drive with control at top
- 3) Thread according to DIN 13, observe the instructions in the instruction manual for the maximum tightening torques.

- 4) O-ring included in the scope of delivery
- 5) With D-flange
- 6) With C-flange


Flange ISO 3019-1 (SAE J744)		Splined shaft <sup>1)</sup>		Availability over sizes					Code
Diameter	Attachment <sup>2)</sup>	Diameter		45	71	100	140	180	
127-2 (C)	$\phi, \infty$	1 1/4 in	14T 12/24DP	-	●	●	●	-	K07
	$\delta, \phi, \infty$	1 1/4 in	14T 12/24DP	-	○	○	○	●	U07

● = Available    ○ = On request    - = Not available

▼ 127-2 (C)

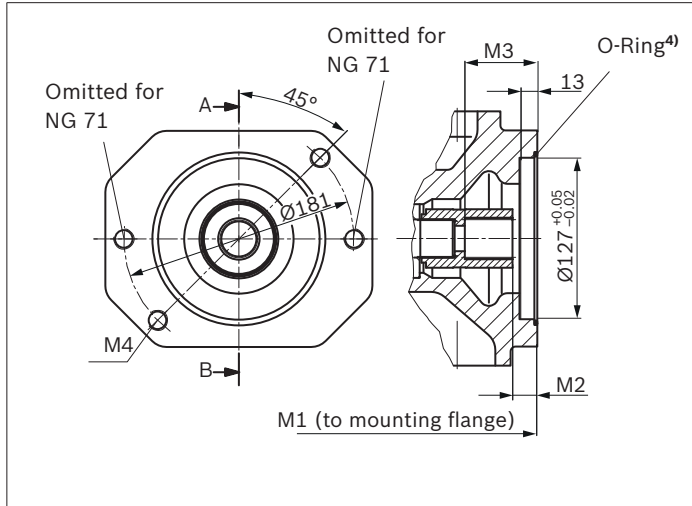

▼ 127-2 (C)

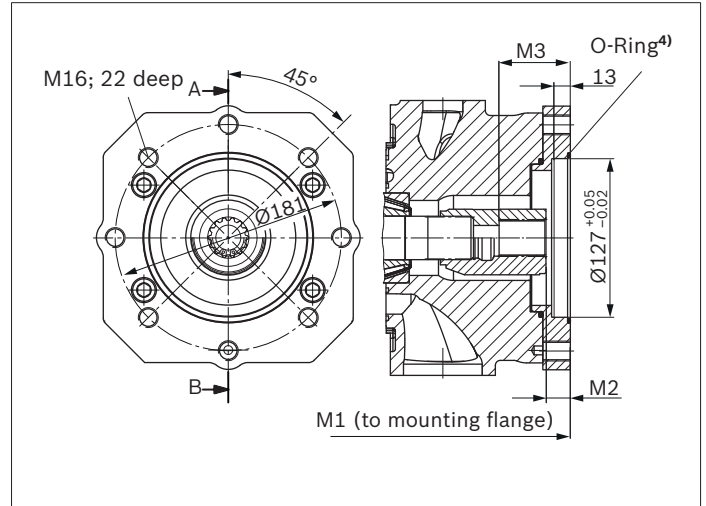

K07 (SAE J744 32-4 (C))	NG	M1	M2	M3	M4 <sup>3)</sup>
	71	267	21.8	58.6	M16 × 2; continuous
	100	338	19.5	56.4	M16 × 2; continuous
	140 <sup>5)</sup>	350	19.3	56.1	M16 × 2; 24 deep
	140 <sup>6)</sup>	376			

U07 (SAE J744 32-4 (C))	NG	M1	M2	M3
	180	387	18.9	56.1


1) Hub for splined shaft according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Mounting through bores pattern viewed from through drive with control at top  
3) Thread according to DIN 13, observe the instructions in the instruction manual for the maximum tightening torques.

4) O-ring included in the scope of delivery  
5) With D-flange  
6) With C-flange


Flange ISO 3019-1 (SAE J744)		Splined shaft <sup>1)</sup>	Availability over sizes					Code
Diameter	Attachment <sup>2)</sup>	Diameter	45	71	100	140	180	
127-2 (C)	♂, ∞	1 1/2 in 17T 12/24DP	-	-	●	●	-	K24
	♀, ♂, ∞	1 1/2 in 17T 12/24DP	-	-	○	○	●	U24

● = Available    ○ = On request    - = Not available

▼ **127-2 (C)**

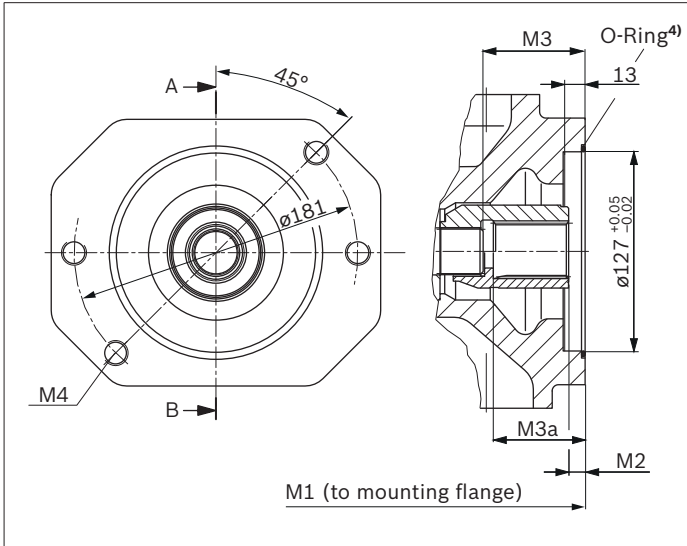

▼ **127-2 (C)**

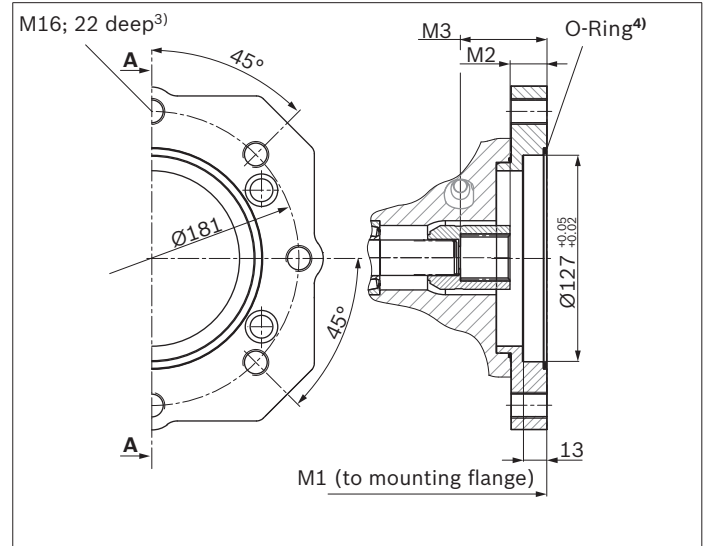


<b>K24</b> (SAE J744 38-4 (C-C))	<b>NG</b>	<b>M1</b>	<b>M2</b>	<b>M3</b>	<b>M3a</b>	<b>M4<sup>3)</sup></b>
	100	323	9.9	65	-	M16 × 2; continuous
	140 <sup>5)</sup>	350	9.7	-	69.1	M16 × 2; 24 deep
	140 <sup>6)</sup>	376				

<b>U24</b> (SAE J744 38-4 (C-C))	<b>NG</b>	<b>M1</b>	<b>M2</b>	<b>M3</b>
	180	387	9.9	62.3


1) Hub for splined shaft according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Mounting through bores pattern viewed from through drive with control at top

3) Thread according to DIN 13, observe the instructions in the instruction manual for the maximum tightening torques.  
4) O-ring included in the scope of delivery  
5) With D-flange  
6) With C-flange

Flange ISO 3019-1 (SAE J744)		Splined shaft <sup>1)</sup>		Availability over sizes					Code
Diameter	Attachment <sup>2)</sup>	Diameter		45	71	100	140	180	
127-4 (C)		1 1/4 in	14T 12/24DP	-	o	•	•	-	K15
		1 1/4 in	14T 12/24DP	-	-	o	o	•	U15


• = Available    o = On request    - = Not available

▼ 127-4 (C)

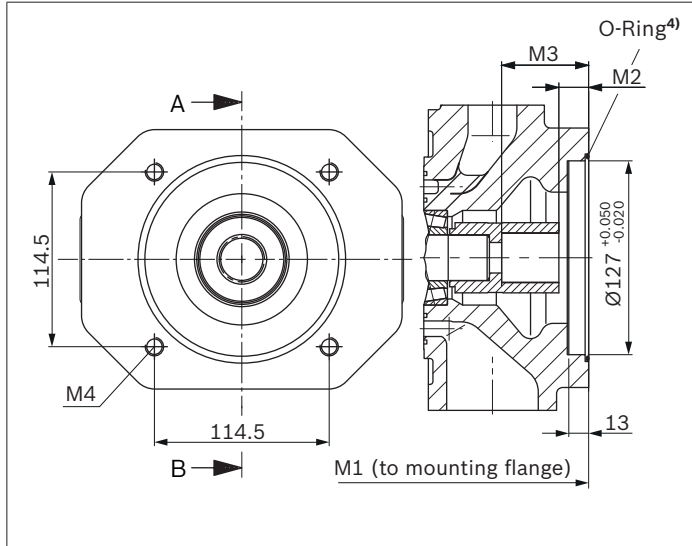

K15 (SAE J744 32-4 (C))	NG	M1	M2	M3	M4 <sup>3)</sup>
	100	338	17.9	56.5	M12 × 1.75; 22 deep
	140	350	17.9	56.5	M12 × 1.75; 22 deep

▼ 127-4 (C)

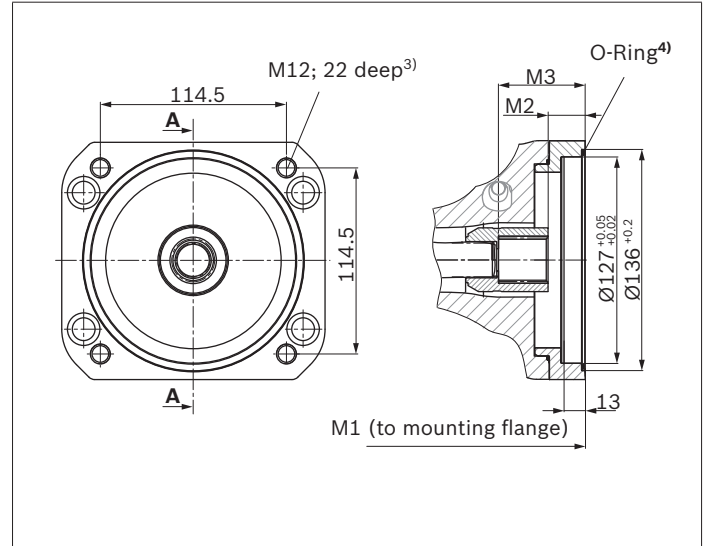

U15 (SAE J744 32-4 (C))	NG	M1	M2	M3
	180	387	20	57

1) Hub for splined shaft according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Mounting through bores pattern viewed from through drive with control at top


3) Thread according to DIN 13, observe the instructions in the instruction manual for the maximum tightening torques.  
4) O-ring included in the scope of delivery



Flange ISO 3019-1 (SAE J744)		Splined shaft <sup>1)</sup>	Availability over sizes					Code
Diameter	Attachment <sup>2)</sup>	Diameter	45	71	100	140	180	
152-4 (D)		1 3/4 in 13T 8/16DP	-	-	-	●	-	K17
		1 3/4 in 13T 8/16DP	-	-	-	○	●	U17


● = Available    ○ = On request    - = Not available

▼ 152-4 (D)

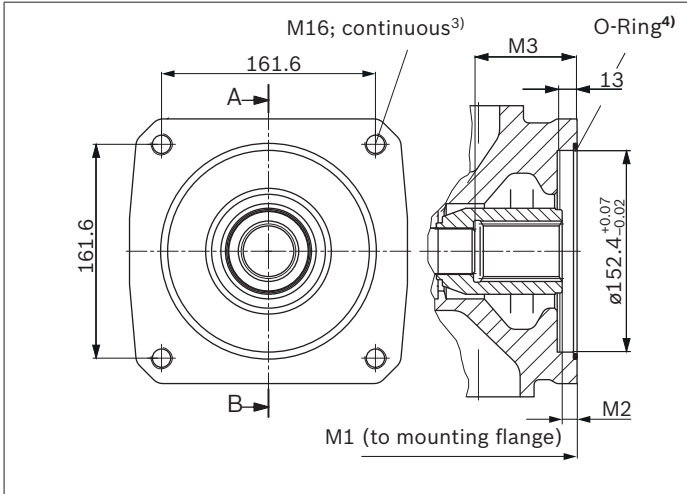

K17	NG	M1	M2	M3
152-4 (D)	140	350	11	77.3

▼ 152-4 (D)

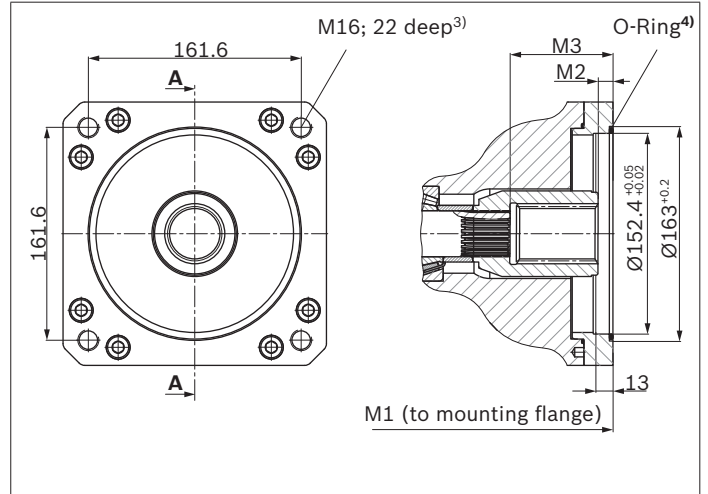

U17	NG	M1	M2	M3
152-4 (D)	180	387	10.8	78.1

1) Hub for splined shaft according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Mounting through bores pattern viewed from through drive with control at top

3) Thread according to DIN 13, observe the instructions in the instruction manual for the maximum tightening torques.  
4) O-ring included in the scope of delivery

## Overview of mounting options

Through drive			Mounting options – 2nd pump		
Flange (SAE) ISO 3019-1	Hub for splined shaft	Code <sup>1)</sup>	A10VO/31 and 32 NG (shaft)	A10VO/52 and 53 NG (shaft)	External gear pump
82-2 (A)	5/8 in	(K)(U)01	18 (U)/31	10 (U), 18 (U)	Design F
	3/4 in	(K)(U)52	18 (S, R)/31	10 (S), 18 (S, R)	
101-2 (B)	7/8 in	(K)(U)68	28 (S, R)/31	28 (S, R)	Design N/G
	1 in	(K)(U)04	45 (S, R)	45 (S, R)	
127-2 (C)	1 1/4 in	(K)(U)07	71 (S, R)	85 (U,W)	–
	1 1/2 in	(K)(U)24	100 (S)	85 (S), 100 (S)	
127-4 (C)	1 in	UE2	45 (S, R)/32	60, 63, 72 (U, W)	–
	1 1/4 in	(K)(U)15	71 (S, R)/32	63 (S, R), 72 (S, R)	
152-4 (D)	1 3/4 in	(K)(U)17	140 (S); 180 (S)/32	–	–

Mounting flange C, D and U (see order item 09 in the ordering code) and port plate with a K.. or U.. Through drive (see or items 10 and 11 in the ordering code) directly connected by the static and dynamic loading when installed.

The following table shows the version to be selected:

Mounting flange	C	D	U
Port plate	12	22 /32	22 /32
Through drive	K..	U..	U..

1) 1st Pump only with mounting flanges D or U for Uxx through drives  
(for more information, see also ordering code on page 3).

## Combination pumps A10VO + A10VO

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes. When ordering combination pumps, the type designations of the 1st and 2nd pumps must be linked by a “+”.

### Order example:

**A10VO100DR/32R-VSC12K07+**

**A10VO71DR/32R-VSC12N00**

It is permissible to use a combination of two single pumps of the same nominal size (tandem pump) considering a dynamic mass acceleration of maximum 10 g (= 98.1 m/s<sup>2</sup>) without additional support brackets.

For combination pumps consisting of more than two pumps, the mounting flange must be rated for the permissible mass torque (please consult us).

The “K..” through drives are plugged with a **non-pressure-resistant** cover. Before commissioning the units, they must therefore be equipped with pressure-resistant covers. Through drives can also be ordered with pressure-resistant covers, please state in plain text.


The “U..” through drives are equipped with a flexible, universal through drive (without hub and intermediate flange) and a pressure-resistant cover. This enables the utilization of various through drive options without any machining of the port plate. Details of the necessary adapter parts can be found in data sheet RE 95581.

### Permissible mass moment of inertia

NG			45	71	100	140	180	
for 4-hole flange								
	static	$T_m$	Nm	3000	3000	4500	4500	4500
	dynamic at 10 g (98.1 m/s <sup>2</sup> )	$T_m$	Nm	300	300	450	450	450
for 2-hole flange								
	static	$T_m$	Nm	1370	2160	3000	3000 <sup>1)</sup>	–
	dynamic at 10 g (98.1 m/s <sup>2</sup> )	$T_m$	Nm	137	216	300	300 <sup>1)</sup>	–
	Weight with port plate 11/12N00 and mounting flange C	$m$	kg	25.8	40.4	56.4	70.5	75.2
	Weight with port plate 12K.. and mounting flange C	$m$	kg	27.4	43.3	62.6	79.5	–
	Weight with port plate 22(32)U00 and mounting flange D or U	$m$	kg	32.6	51.8	76	90.2	89.4
	Distance, center of gravity at 11/12N00	$l_1$	mm	108	120	138	158	159
	Distance, center of gravity at 12Kxx	$l_1$	mm	115	129	153	177	–
	Distance, center of gravity at 22/32Uxx	$l_1$	mm	135	153	184	196	190

Please also pay attention to the installation information on page 53.

1) Pump combinations permissible only max. as double pump up to the same size.

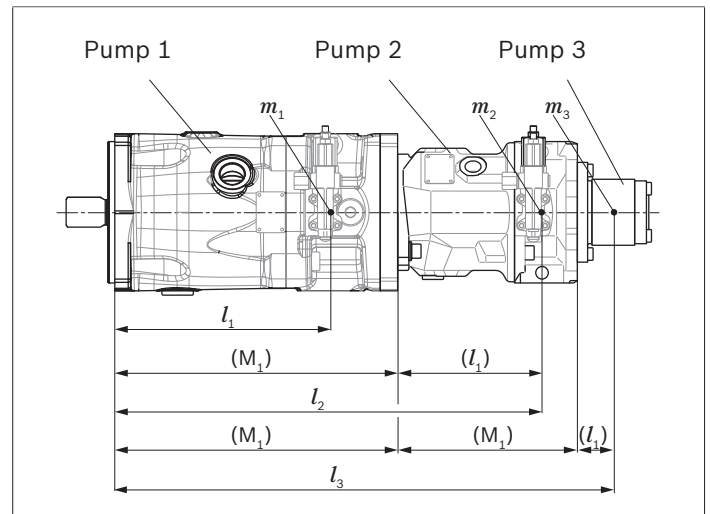

$m_1, m_2, m_3$	Weight of pump	[kg]
$l_1, l_2, l_3$	Distance, center of gravity	[mm]

$$T_m = (m_1 \cdot l_1 + m_2 \cdot l_2 + m_3 \cdot l_3) \cdot \frac{1}{102} \text{ [Nm]}$$

### Calculation for multiple pumps

- $l_1$  = Distance, center of gravity, front pump (value from “Permissible mass moment of inertia” table)
- $l_2$  = Dimension “M1” from through drive drawings (page 40 to 47) +  $l_1$  of the 2nd pump
- $l_3$  = Dimension “M1” from through drive drawings (page 40 to 47) of the 1st pump + “M1” of the 2nd pump +  $l_1$  of the 3rd pump

## Connector for solenoids


### DEUTSCH DT04-2P

Molded connector, 2-pin, without bidirectional suppressor diode

The following type of protection ensues with an installed mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

#### ▼ Switching symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

#### Notice

If necessary, you can change the position of the connector by turning the solenoid.

The procedure is defined in the instruction manual.

## Electronic controls

Control	Electronics function	Electronics		Data sheet
Electric pressure control	Controlled power outlet	RA	analog	95230
		RC4-5/30	digital	95205

## Installation instructions

### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be considered with a long-term standstill.

Particularly with the “drive shaft up/down” installation position, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running. The leakage in the housing area must be discharged to the reservoir via the highest available tank port (**L**, **L<sub>1</sub>**).

If a shared drain line is used for several units, make sure that the respective case pressure is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operating conditions, specifically on cold start. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction lines and the drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{s\ max} = 800\text{ mm}$ . The minimum suction pressure at port **S** (see the technical data on page 6) must not be fallen short of during operation and at cold starting either. When designing the reservoir, ensure adequate distance between the suction line and the drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

Key	
<b>L, L<sub>1</sub> (F)</b>	Filling / air bleeding
<b>S</b>	Suction port
<b>L, L<sub>1</sub></b>	Drain port
<b>SB</b>	Baffle (baffle plate)
$h_{t\ min}$	Minimum required immersion depth (200 mm)
$h_{min}$	Minimum required distance to reservoir bottom (100 mm)
$h_{ES\ min}$	Minimum necessary height required to protect the axial piston unit from draining (25 mm)
$h_{s\ max}$	Maximum permissible suction height (800 mm)

1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.




### Installation position

See the following examples **1** to **9**.

Further installation positions are available upon request.  
Recommended installation position: **1** and **3**

### Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir and below the minimum fluid level of the reservoir.

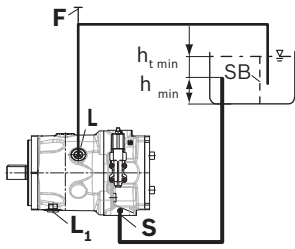
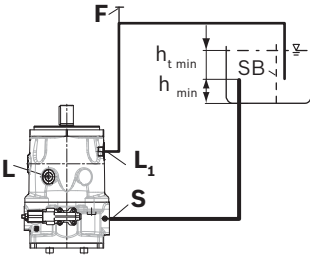
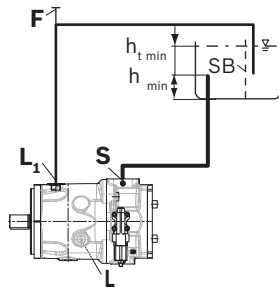
Installation position	Air bleed	Filling
<b>1</b>	<b>F</b>	<b>F (L)</b>
		
<b>2<sup>1)</sup></b>	<b>F</b>	<b>F (L<sub>1</sub>)</b>
		
<b>3</b>	<b>F</b>	<b>F (L<sub>1</sub>)</b>
		

### Notice

Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

**Above-reservoir installation**

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir. To prevent the axial piston unit from draining in position 5, the height difference  $h_{ES\ min}$  must be at least 25 mm. Observe the maximum permissible suction height  $h_{S\ max} = 800\ mm$ .

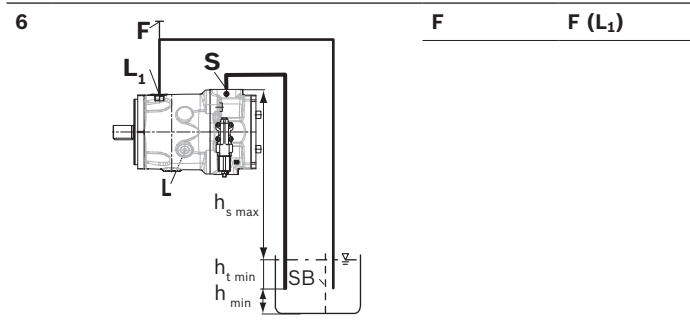
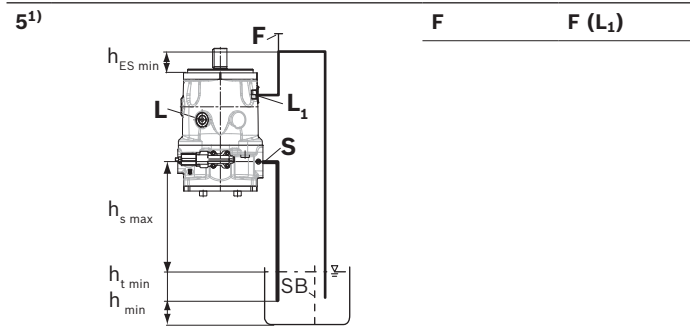
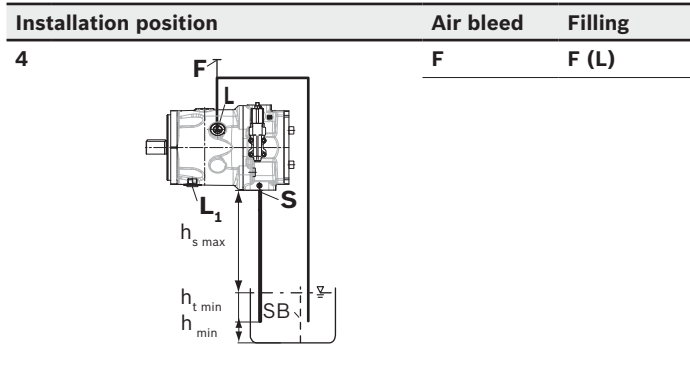


A check valve in the drain line is only permissible in individual cases. Consult us for approval.

1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

**Inside-reservoir installation**

Inside-reservoir installation is when the axial piston unit is installed in the reservoir below the minimum fluid level. The axial piston unit is completely below the hydraulic fluid. If the minimum fluid level is equal to or below the upper edge of the pump, see chapter “Above-reservoir installation”. Axial piston units with electrical components (e.g., electric control, sensors) may not be installed in a reservoir below the fluid level.

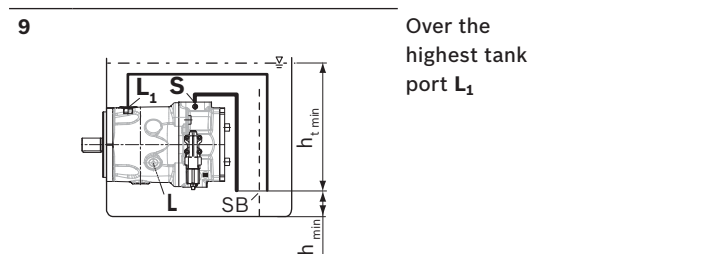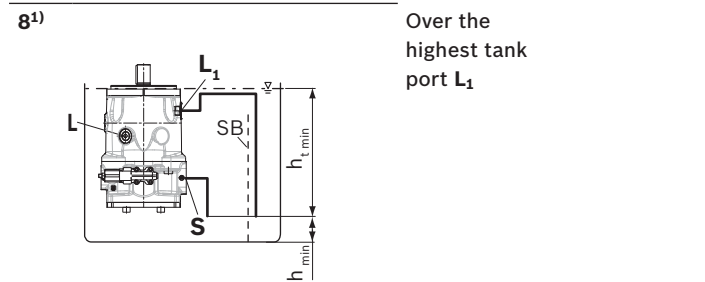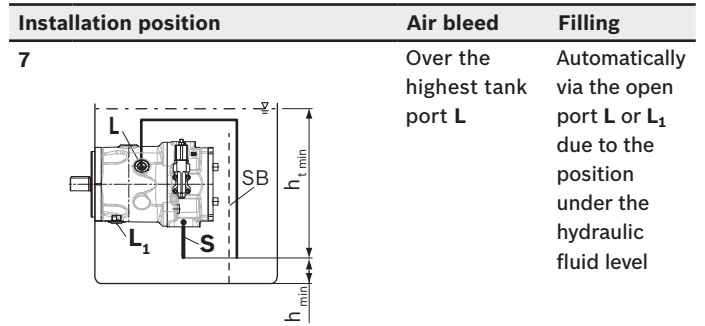

For key, see page 51.

**Assembly note**

Due to the compact design of the housing, socket-head screws with a hexagon socket must be used to attach the axial piston pump. Please observe the maximum permissible surface pressure according to VDI 2230.

Apart from this, you should take into account the information regarding tightening torques in the instruction manual.

## Project planning notes

- ▶ The A10VO axial piston variable pump is designed to be used in open circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all versions of the product are approved for use in a safety function pursuant to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference. Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.
- ▶ Pressure controllers are not protection against overpressure. A pressure relief valve is to be provided for the hydraulic system.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports are only intended to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of getting burnt on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances get blocked in position as a result of contamination (e.g. impure hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filter) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must check whether additional measures are required on the machine for the relevant application in order to bring the driven consumer into a safe position (e.g. safe stop) and ensure any measures are properly implemented.





**Bosch Rexroth AG**

Mobile Applications  
An den Kelterwiesen 14  
72160 Horb a.N., Germany  
Tel. +49 7451 92-0  
info.ma@boschrexroth.de  
www.boschrexroth.com


© Bosch Rexroth AG 2016. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# Axial piston variable pump A10VO series 52 and 53

**RE 92703**

Edition: 12.2015

Replaces: 10.2014

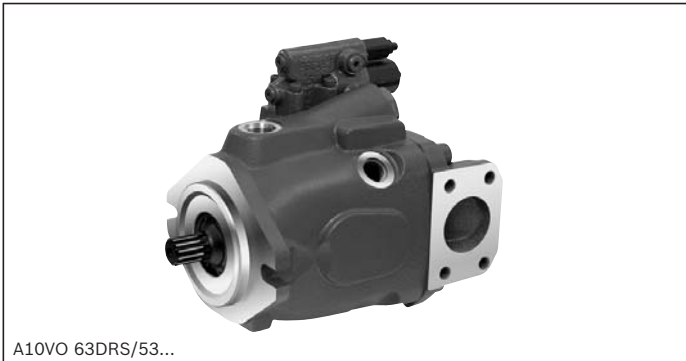

A10VO 63DRS/53...

- ▶ Sizes 10 to 100
- ▶ Nominal pressure 250 bar
- ▶ Maximum pressure 315 bar
- ▶ Open circuit

3

**Features**

- ▶ Variable pump with axial piston rotary group in swash-plate design for hydrostatic drives in open circuit.
- ▶ The flow is proportional to the drive speed and the displacement.
- ▶ The flow can be infinitely varied by adjusting the swash-plate angle.
- ▶ Stable bearing for long service life
- ▶ High permissible drive speed
- ▶ Favorable power-to-weight ratio – compact dimensions
- ▶ Low noise
- ▶ Excellent suction characteristics
- ▶ Electro-hydraulic pressure control
- ▶ Power control
- ▶ Electro-proportional swivel angle control
- ▶ Short response times

**Inhalt**

Ordering code series 52	2
Ordering code series 53	4
Hydraulic fluids	7
Operating pressure range	9
Technical data	10
DR – Pressure control	12
DRG – Pressure control, remotely operated	13
DRF (DFR) / DRS (DFR1) / DRSC– Pressure and flow control	14
LA... – Pressure, flow and power controller	16
ED – Electro-hydraulic pressure control	18
ER – Electro-hydraulic pressure control	19
EP – Electro-proportional control	20
EK – Electro-proportional control	
with controller cut-off	21
EP(K).DF / EP(K).DS / EP(K)	
with pressure and flow control	22
EP.ED / EK.ED – with electro-hydraulic pressure control	23
Dimensions size 10 to 100	24
Dimensions through drive	55
Overview of attachment options	59
Combination pumps A10VO + A10VO	60
Connector for solenoids	61
Installation instructions	62
Project planning notes	65
Safety instructions	66

## Ordering code series 52

01	02	03	04	05	06	07	08	09	10	11	12
<b>A10V(S)</b>	<b>O</b>			<b>/</b>	<b>52</b>	<b>-</b>	<b>V</b>				

<b>Axial piston unit</b>										<b>10</b>	<b>28</b>	<b>45</b>	<b>60</b>	<b>85</b>	
01	Swashplate design, variable, nominal pressure 250 bar, maximum pressure 315 bar									●	-	-	-	-	<b>A10VS</b>
										-	●	●	●	●	<b>A10V</b>

<b>Operation mode</b>											
02	Pump, open circuit										<b>O</b>

<b>Size (NG)</b>														
03	Geometric displacement, see table of values on page 10									<b>10</b>	<b>28</b>	<b>45</b>	<b>60</b>	<b>85</b>

<b>Control devices</b>																		
04	Pressure control	hydraulic									●	●	●	●	●	<b>DR</b>		
	with flow controller	hydraulic	X-T open									●	●	●	●	●	<b>DFR</b>	
			X-T plugged	with flushing function									●	●	●	●	●	<b>DFR1</b>
				without flushing function									-	●	●	●	●	<b>DRSC</b>
	with pressure cut-off	hydraulic	remotely operated									●	●	●	●	●	<b>DRG</b>	
			electric	negative control	$U = 12\text{ V}$								-	●	●	●	●	<b>ED71</b>
		$U = 24\text{ V}$											-	●	●	●	●	<b>ED72</b>
		positive control		$U = 12\text{ V}$										-	●	●	●	●
			$U = 24\text{ V}$										-	●	●	●	●	<b>ER72</b>
Differential pressure control	electric control (negative control)										-	○	○	○	●	<b>EF..<sup>1)</sup></b>		

<b>Series</b>										<b>10</b>	<b>28</b>	<b>45</b>	<b>60</b>	<b>85</b>	
05	Series 5, Index 2									●	●	●	●	●	<b>52</b>

<b>Direction of rotation</b>																
06	View on drive shaft	clockwise														<b>R</b>
		counter-clockwise														<b>L</b>

<b>Sealing material</b>											
07	FKM (fluor-caoutchouc)										<b>V</b>

<b>Drive shaft</b>																	
08	splined shaft ANSI B92.1a	standard shaft									●	●	●	●	●	<b>S</b>	
		similar to shaft "S" however for higher input torque										-	●	●	●	●	<b>R</b>
		reduced diameter, limited suitability for through drive											●	●	●	●	<b>U</b>
		similar to shaft "U", however for higher torque											-	●	●	●	●
	Parallel keyed shaft DIN 6885 limited suitability for through drive												●	-	-	-	<b>P</b>

<b>Mounting flange</b>																
09	ISO 3019-2 (ISO)	2-hole									●	-	-	-	-	<b>A</b>
	ISO 3019-1 (SAE)	2-hole									●	●	●	●	●	<b>C</b>
		4-hole										-	-	-	●	-

### Note

- Observe the engineering notes regarding each control device

1) See data sheet 92709 for precise specification

01	02	03	04	05	06	07	08	09	10	11	12
<b>A10V(S)</b>	<b>O</b>		/	<b>52</b>		-	<b>V</b>				

**Working port**

				10	28	45	60	85	
10	SAE flange port fastening thread, metric	rear	not for through drive	-	●	●	●	●	<b>11</b>
		at side, opposite	for through drive	-	●	●	●	●	<b>12</b>
		at side, offset 90°	not for through drive; available only for counter-clockwise direction of rotation	-	-	●	-	-	<b>13</b>
	Threaded port, metric	rear	not for through drive	●	-	-	-	-	<b>14</b>

**Through drive** (for attachment options, see page 59)

				10	28	45	60	85		
11	Flange ISO 3019-1	Hub for splined shaft <sup>1)</sup>								
	Diameter	Diameter								
	without through drive				●	●	●	●	●	<b>N00</b>
	82-2 (A)	5/8 in	9T 16/32DP		-	●	●	●	●	<b>K01</b>
		3/4 in	11T 16/32DP		-	●	●	●	●	<b>K52</b>
	101-2 (B)	7/8 in	13T 16/32DP		-	●	●	●	●	<b>K68</b>
		1 in	15T 16/32DP		-	-	●	●	●	<b>K04</b>
	127-4 (C)	1 1/4 in	14T 12/24DP		-	-	-	●	●	<b>K15</b>
		1 1/2 in	17T 12/24DP		-	-	-	-	●	<b>K16</b>
	127-2 (C)	1 1/4 in	14T12/24DP		-	-	-	-	●	<b>K07</b>
		1 1/2 in	17T 12/24DP		-	-	-	-	●	<b>K24</b>

**Connector for solenoids**

				10	28	45	60	85	
12	Without connector (without solenoid, with hydraulic control only, without code)			●	●	●	●	●	
	DEUTSCH – molded connector, 2-pin – without suppressor diode (for electric controls)			-	●	●	●	●	<b>P</b>

● = Available    ○ = On request    - = Not available

**Note**

- ▶ Note the project planning notes on page 65.
- ▶ In addition to the ordering code, please specify the relevant technical data when placing your order.

<sup>1)</sup> According to ANSI B92.1a

### Ordering code series 53

01	02	03	04	05	06	07	08	09	10	11	12
<b>A10V</b>	<b>O</b>			<b>/</b>	<b>53</b>	<b>-</b>	<b>V</b>				

#### Axial piston unit

**18 28 45 63 72 85 100**

01	Swashplate design, variable, nominal pressure 250 bar, maximum pressure 315 bar	•	•	•	•	•	•	•	•	•	<b>A10V</b>
----	---	---	---	---	---	---	---	---	---	---	-------------

#### Operation mode

02	Pump, open circuit										<b>O</b>
----	--------------------	--	--	--	--	--	--	--	--	--	----------

#### Size (NG)

03	Geometric displacement, see table of values on page 10	<b>18</b>	<b>28</b>	<b>45</b>	<b>63</b>	<b>72</b>	<b>85</b>	<b>100</b>
----	--	-----------	-----------	-----------	-----------	-----------	-----------	------------

#### Control devices

04	Pressure control	hydraulic									<b>DR</b>			
	with flow controller	hydraulic	X-T open								<b>DRF</b>			
			X-T plugged	with flushing function								<b>DRS</b>		
	without flushing function										<b>DRSC</b>			
	with pressure cut-off	hydraulic	remotely operated									<b>DRG</b>		
			electric	negative control	$U = 12\text{ V}$								<b>ED71</b>	
	$U = 24\text{ V}$											<b>ED72</b>		
	electric	positive control	$U = 12\text{ V}$									<b>ER71</b>		
			$U = 24\text{ V}$									<b>ER72</b>		
	Differential pressure control		electric control (negative control)									<b>EF..<sup>1)</sup></b>		
	Power control with pressure cut-off	hydraulic	start of control	from 10 to 35 bar									<b>LA5D</b>	
				36 to 70 bar									<b>LA6D</b>	
				71 to 105 bar									<b>LA7D</b>	
				106 to 140 bar										<b>LA8D</b>
				141 to 230 bar										<b>LA9D</b>
	remotely operated	hydraulic	start of control	see LA.D								<b>LA.DG</b>		
	flow control, X-T plugged	hydraulic	start of control	see LA.D									<b>LA.DS</b>	
				electrically overridable (negative control)	see LA.D									<b>LA.S</b>
	Electro-proportional control		positive control											
	with pressure control				$U = 12\text{ V}$								<b>EP1D</b>	
$U = 24\text{ V}$													<b>EP2D</b>	
with pressure and flow control (load-sensing)		X-T open		$U = 12\text{ V}$								<b>EP1DF</b>		
				$U = 24\text{ V}$									<b>EP2DF</b>	
with pressure and flow control (load-sensing)		X-T plugged		$U = 12\text{ V}$								<b>EP1DS</b>		
				$U = 24\text{ V}$									<b>EP2DS</b>	
with electro-hydraulic pressure control				$U = 12\text{ V}$								<b>EP1ED</b>		
				$U = 24\text{ V}$									<b>EP2ED</b>	

#### Note

► Observe the engineering notes regarding each control device

<sup>1)</sup> See data sheet 92709 for precise specification



6 **A10VO series 52 and 53** | Axial piston variable pump  
Ordering code series 53

01	02	03	04	05	06	07	08	09	10	11	12
<b>A10V</b>	<b>O</b>		/	<b>53</b>		-	<b>V</b>				

**Through drive** (for attachment options, see page 59)

11	Flange ISO 3019-1	Hub for splined shaft <sup>2)</sup>									
	Diameter	Diameter		<b>18</b>	<b>28</b>	<b>45</b>	<b>63</b>	<b>72</b>	<b>85</b>	<b>100</b>	
	without through drive			●	●	●	●	●	●	<b>N00</b>	
82-2 (A)	5/8 in	9T 16/32DP		●	●	●	●	●	●	<b>K01</b>	
		3/4 in	11T 16/32DP	●	●	●	●	●	●	<b>K52</b>	
101-2 (B)	7/8 in	13T 16/32DP		-	●	●	●	●	●	<b>K68</b>	
		1 in	15T 16/32DP	-	-	●	●	●	●	<b>K04</b>	
127-4 (C)	1 1/4 in	14T 12/24DP		-	-	-	●	●	●	<b>K15</b>	
		1 1/2 in	17T 12/24DP	-	-	-	-	-	●	●	<b>K16</b>
127-2 (C)	1 1/4 in	14T12/24DP		-	-	-	-	-	●	●	<b>K07</b>
		1 1/2 in	17T 12/24DP	-	-	-	-	-	●	●	<b>K24</b>

**Connector for solenoids**

12	Without connector (without solenoid, with hydraulic control only, without code)	●	●	●	●	●	●	●	
	DEUTSCH – molded connector, 2-pin – without suppressor diode (for electric controls)	●	●	●	●	●	●	●	<b>P</b>

● = Available    ○ = On request    - = Not available

**Note**

- ▶ Note the project planning notes on page 65.
- ▶ In addition to the ordering code, please specify the relevant technical data when placing your order.

<sup>2)</sup> According to ANSI B92.1a



## Hydraulic fluids

The A10VO variable pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids

### Notes on selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $\nu_{opt}$  see selection diagram).

#### Note


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact the responsible member of staff at Bosch Rexroth.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$\nu_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ }^\circ\text{C}$	$t \leq 1 \text{ min}$ , without load ( $p \leq 30 \text{ bar}$ ), $n \leq 1000 \text{ rpm}$
	Permissible temperature difference	$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid
Warm-up phase	$\nu < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ }^\circ\text{C to } -25 \text{ }^\circ\text{C}$	Note the detailed information on operation with low temperatures, see data sheet 90300-03-B.
Continuous operation	$\nu = 400 \text{ to } 10 \text{ mm}^2/\text{s}$	$\theta = -25 \text{ }^\circ\text{C to } +110 \text{ }^\circ\text{C}$	This corresponds, for example on the VG 46, to a temperature range of +5 °C to +85 °C (see selection diagram page 7)
			measured at port <b>L</b> Observe the permissible temperature range of the shaft seal ( $\Delta T = \text{approx. } 5 \text{ K}$ between the bearing/shaft seal and port <b>L</b> )
	$\nu_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		Range of optimum operating viscosity and efficiency
Short-term operation	$\nu_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 1 \text{ min}$ , $p < 0.3 \cdot p_{nom}$

#### ▼ Selection diagram

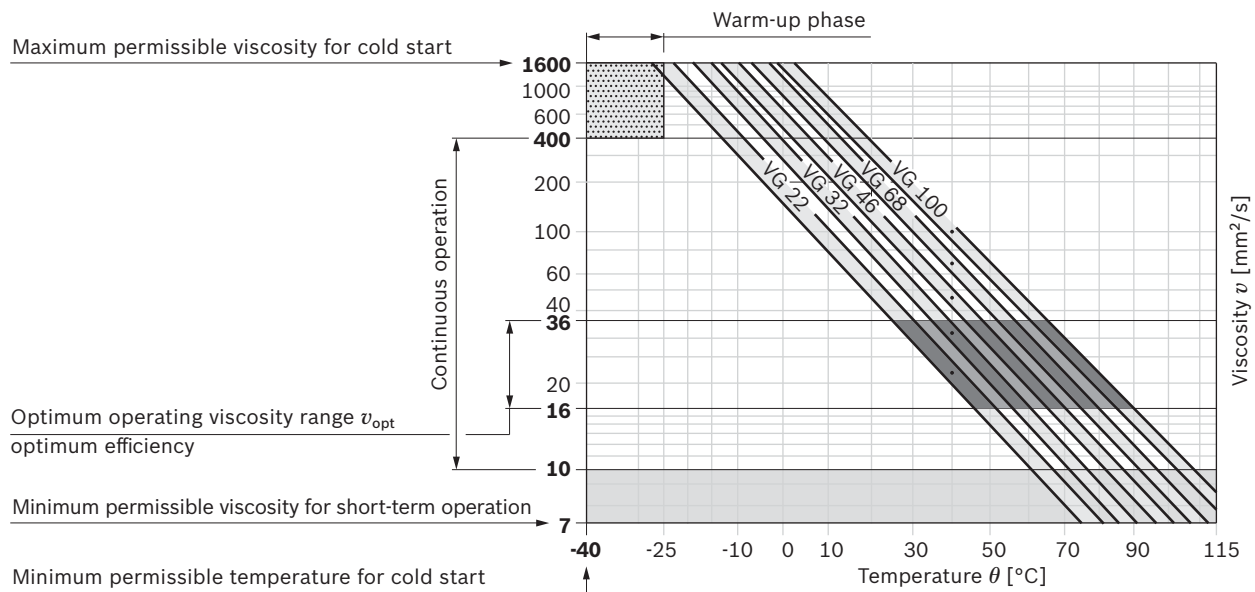

### **Filtration of the hydraulic fluid**

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.


At very high hydraulic fluid temperatures (90 °C to maximum 115 °C), cleanliness level 19/17/14 according to at least ISO 4406 is necessary.

Please contact us if the above classes cannot be observed.


## Operating pressure range

Pressure at working port B		Definition
Nominal pressure $p_{nom}$	250 bar absolute	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	315 bar absolute	The maximum pressure corresponds the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	2.5 ms	
Total operating period	300 h	
Minimum pressure $p_{B abs}$ (high pressure side)	10 bar absolute	Minimum pressure on the high-pressure side (B) which is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{A max}$	16000 bar/s	Maximum permissible rate of pressure rise and reduction during a pressure change over the entire pressure range.
Pressure at suction port S (inlet)		
Minimum pressure $p_{S min}$	Standard 0.8 bar absolute	Minimum pressure at suction port S (inlet) that is required in order to avoid damage to the axial piston unit. The minimum pressure depends on the speed and displacement of the axial piston unit.
Maximum pressure $p_{S max}$	5 bar absolute	
Case drain pressure at port L <sub>1</sub> , L <sub>2</sub>		
Maximum pressure $p_{L max}$	2 bar absolute	Maximum 0.5 bar higher than inlet pressure at port S, but not higher than $p_{L max}$ . A case drain line to the reservoir is required.

### ▼ Rate of pressure change $R_{A max}$

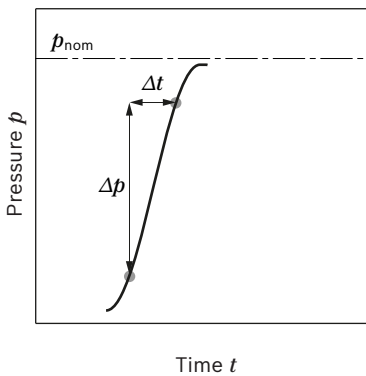


### ▼ Pressure definition

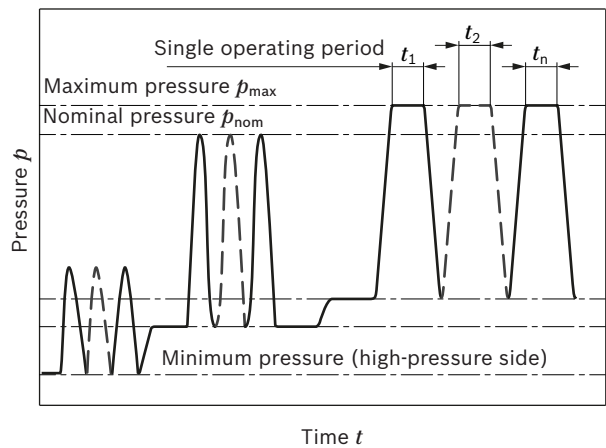

### ▼ Maximum permissible speed (limit speed)

Permissible speed by increasing inlet pressure  $p_{abs}$  at suction opening S or at  $V_g \leq V_{gmax}$

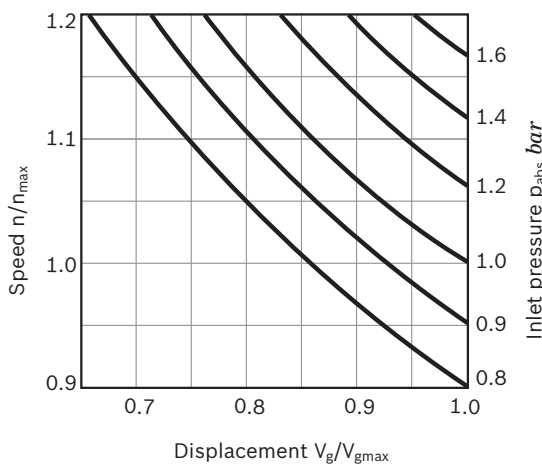

Total operating period =  $t_1 + t_2 + \dots + t_n$

### Note

Operating pressure range valid when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.

## Technical data

Size	NG		10	18	28	45	60 <sup>1)</sup>	63 <sup>2)</sup>	72	85	100
Displacement, geometric, per revolution	$V_{g \max}$	cm <sup>3</sup>	10.5	18	28	45	60	63	72	85	100
Speed maximum <sup>3)</sup>	at $V_{g \max}$	$n_{\text{nom}}$	rpm	3600	3300	3000	2600 <sup>4)</sup>	2700	2600	2600	2300
	at $V_g < V_{g \max}$	$n_{\text{max perm}}$	rpm	4320	3960	3600	3120	3140	3140	3140	2500
Flow	at $n_{\text{nom}}$ and $V_{g \max}$	$q_v$	l/min	37	59	84	117	162	163	187	230
	at $n_E = 1500$ rpm	$q_{vE}$	l/min	15	27	42	68	90	95	108	150
Power	at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 250$ bar	$P$	kW	16	25	35	49	65	68	77	96
	at $n_E = 1500$ rpm	$P_E$	kW	7	11	18	28	37	39	45	62
Torque	at $V_{g \max}$ and $\Delta p = 250$ bar	$T$	Nm	42	71	111	179	238	250	286	398
	at $V_{g \max}$ and $\Delta p = 100$ bar	$T$	Nm	17	29	45	72	95	100	114	159
Rotary stiffness of drive shaft	S	$c$	Nm/rad	9200	11000	22300	37500	65500	65500	65500	143000
	R	$c$	Nm/rad	–	14800	26300	41000	69400	69400	69400	152900
	U	$c$	Nm/rad	6800	8000	16700	30000	49200	49200	49200	102900
	W	$c$	Nm/rad	–	–	19900	34400	54000	54000	54000	117900
	P	$c$	Nm/rad	10700	–	–	–	–	–	–	–
Moment of inertia for rotary group	$J_{TW}$	kgm <sup>2</sup>	0.0006	0.0009	0.0017	0,003	0.0056	0.0056	0.0056	0,012	0,012
Maximum angular acceleration <sup>5)</sup>	$\alpha$	rad/s <sup>2</sup>	8000	6800	5500	4000	3300	3300	3300	2700	2700
Case volume	$V$	l	0.2	0.25	0.3	0.5	0.8	0.8	0.8	1	1
Weight <b>without</b> through drive (approx.)	$m$	kg	8	11.5	15	18	22	22	22	36	36
Weight <b>with</b> through drive (approx.)			–	13	18	24	28	28	28	45	45

Determining the operating characteristics			
Flow	$q_v$	$= \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T$	$= \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$	[Nm]
Power	$P$	$= \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

### Key

- $V_g$  Displacement per revolution [cm<sup>3</sup>]
- $\Delta p$  Differential pressure [bar]
- $n$  Rotational speed [rpm]
- $\eta_v$  Volumetric efficiency
- $\eta_{hm}$  Mechanical-hydraulic efficiency
- $\eta_t$  Total efficiency ( $\eta_t = \eta_v \times \eta_{hm}$ )



### Note

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends testing the load by means of experiment or calculation / simulation and comparison with the permissible values.

- 1) Only series 52
- 2) Only series 53
- 3) The values are applicable:
  - At absolute pressure  $p_{abs} = 1$  bar at suction port **S**
  - For the optimal viscosity range of  $\nu_{opt} = 36$  to  $16$  mm<sup>2</sup>/s
  - For hydraulic fluid based on mineral oils
- 4) Please contact us regarding higher speeds

- 5) The scope of application lies between the minimum necessary and the maximum permissible drive speeds. It applies for external stimuli (e. g. engine 2 to 8 times rotary frequency, Cardan shaft twice the rotary frequency). The limit value is only valid for a single pump. The load capacity of the connecting parts must be considered.

**Permissible radial and axial forces on the drive shaft**

Size	NG	10	18	28	45	60/63	72	85	100		
Maximum radial force at a/2		$F_{q \max}$	N	250	350	1200	1500	1700	1500	2000	2000
Maximum axial force		$\pm F_{ax \max}$	N	400	700	1000	1500	2000	1500	3000	3000

**Note**

► The values given are maximum values and do not apply to continuous operation. For drives with radial loading (pinion, V-belt drives), please contact us!


**Permissible input and through drive torques**

Size			10	18	28	45	60/63	72	85	100
Torque at $V_{g \max}$ and $\Delta p = 250 \text{ bar}^1$	$T_{\max}$	Nm	42	71	111	179	250	321	338	398
Input torque at drive shaft, maximum <sup>2)</sup>										
S	$T_{E \max}$	Nm	126	124	198	319	630	630	1157	1104
	$\varnothing$	in	3/4	3/4	7/8	1	1 1/4	1 1/4	1 1/2	1 1/2
R	$T_{E \max}$	Nm	–	160	250	400	650	650	1215	–
	$\varnothing$	in	–	3/4	7/8	1	1 1/4	1 1/4	1 1/2	–
U	$T_{E \max}$	Nm	60	59	105	188	306	306	628	595
	$\varnothing$	in	5/8	5/8	3/4	7/8	1	1	1 1/4	1 1/4
W	$T_{E \max}$	Nm	–	–	140	220	396	383	650	636
	$\varnothing$	in	–	–	3/4	7/8	1	1	1 1/4	1 1/4
P	$T_{E \max}$	Nm	90	–	–	–	–	–	–	–
	$\varnothing$	mm	18	–	–	–	–	–	–	–

Maximum through-drive torque

S	$T_{D \max}$	Nm	–	108	160	319	484	484	698	778
R	$T_{D \max}$	Nm	–	120	176	365	484	484	698	–
U	$T_{D \max}$	Nm	–	59	105	188	306	306	628	595
W	$T_{D \max}$	Nm	–	–	140	220	396	383	650	636

▼ Distribution of torques

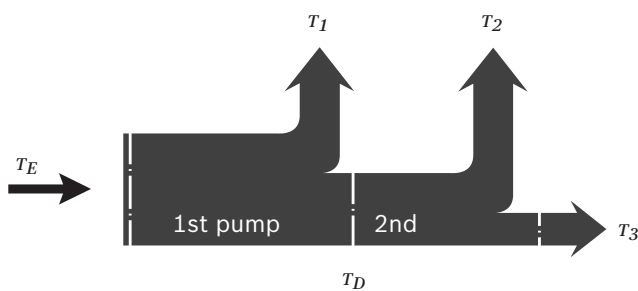

Torque at 1st pump	$T_1$
Torque at 2nd pump	$T_2$
Torque at 3rd pump	$T_3$
Input torque	$T_E = T_1 + T_2 + T_3$
	$T_E < T_{E \max}$
Through-drive torque	$T_D = T_2 + T_3$
	$T_D < T_{D \max}$


1) Efficiency not considered  
 2) For drive shafts with no radial force

## DR – Pressure control

The pressure controller limits the maximum pressure at the pump outlet within the control range of the variable pump. The variable pump only supplies as much hydraulic fluid as is required by the consumers. If the operating pressure exceeds the pressure setting at the pressure valve, the pump will regulate to a smaller displacement to reduce the control differential.


- ▶ Basic position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range<sup>1)</sup> for pressure control 35 to 250 bar. Standard is 250 bar.

### ▼ Characteristic curve DR

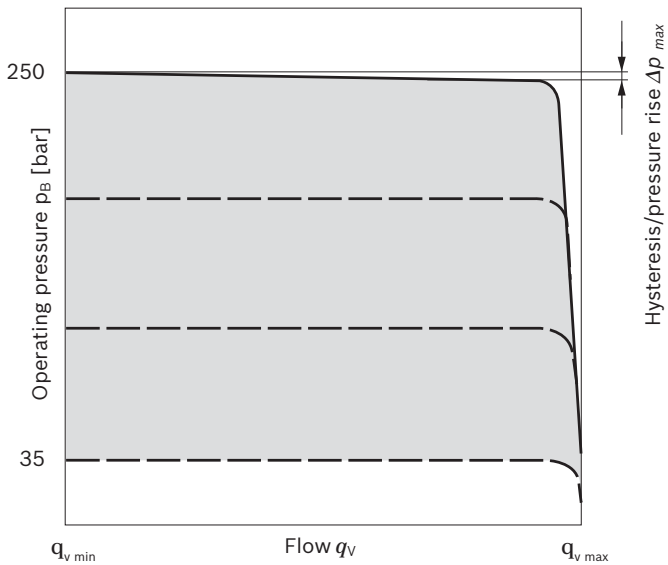

Characteristic curve valid for  $n_1 = 1500$  rpm and  $t_{\text{fluid}} = 50$  °C.

### ▼ Circuit diagram DR

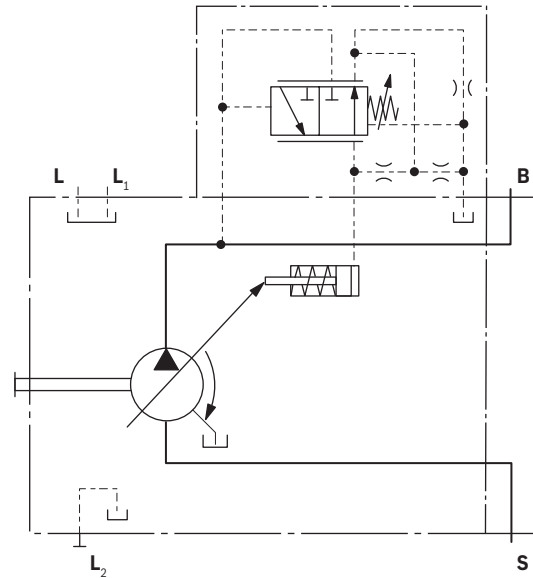

### Controller data

Size		10	18	28	45	60	72	85	100
		<b>63</b>							
Pressure increase	$\Delta p$ [bar]	6	6	6	6	8	8	12	14
Hysteresis and repeatability	$\Delta p$ [bar]	maximum 3							
Control fluid consumption	l/min	maximum approx. 3							

<sup>1)</sup> In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.

## DRG – Pressure control, remotely operated

For the remote-controlled pressure control, the LS pressure limitation is performed using a separately arranged pressure relief valve. Therefore any pressure control value under the pressure set on the pressure controller can be regulated. Pressure controller DR see page 12.

A pressure relief valve is externally piped to port **X** for remote setting of pressure below the setting of the DR control valve spool. This relief valve is not included in the scope of delivery of the DRG control.

When there is differential pressure  $\Delta p$  at the control valve and with the standard setting on the remote-controlled pressure cut-off of 20 bar, the amount of control fluid at the connection is **X** approx. 1.5 l/min. If a different setting (range 10 to 22 bar) is required, please state in plain text.

As a separate pressure relief valve (**1**) we recommend:


- ▶ a directly controlled, hydraulic or electric proportional one, suitable for the control fluid mentioned above.

The max. length of piping should not exceed 2 m.

- ▶ Basic position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range<sup>1)</sup> for pressure control 35 to 250 bar (**3**). Standard is 250 bar.
- ▶ Setting range for differential pressure 10 to 22 bar (**2**). Standard is 20 bar.


Unloading port **X** to the reservoir results in a zero stroke (standby) pressure which is approx. 1 to 2 bar higher than the defined differential pressure  $\Delta p$ , however system influences are not taken into account.

### ▼ Characteristic curve DRG

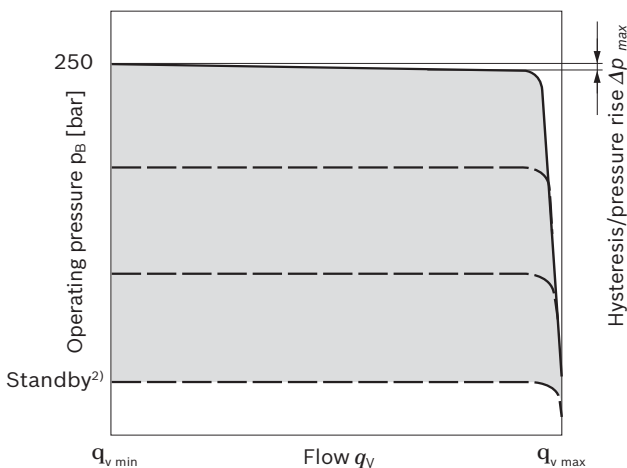

Characteristic curve valid for  $n_1 = 1500 \text{ rpm}$  and  $t_{\text{fluid}} = 50 \text{ }^\circ\text{C}$ .

### ▼ Circuit diagram DRG

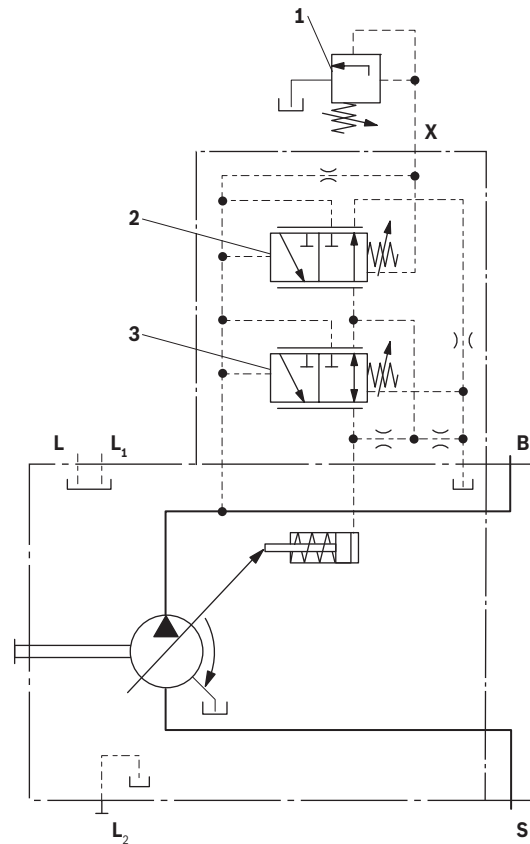

- 1** The separate pressure relief valve and the line are not included in the scope of delivery.
- 2** Remote-controlled pressure cut-off (**G**).
- 3** Pressure controller (**DR**)

### Controller data

Size	10	18	28	45	60 63	72	85	100	
Pressure increase	$\Delta p$ [bar]	6	6	6	6	8	8	12	14
Hysteresis and repeatability	$\Delta p$ [bar]	maximum 3							
Control fluid consumption	l/min	maximum approx. 4.5							

1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.


2) Zero stroke from pressure setting  $\Delta p$  on controller (**2**)

## DRF (DFR) / DRS (DFR1) / DRSC- Pressure and flow control


In addition to the pressure controller function (see page 12), a variable orifice (e.g. directional valve) is used to adjust the differential pressure upstream and downstream of the orifice. This is used to control the pump flow. The pump flow is equal to the actual hydraulic fluid quantity required by the consumer. With all controller combinations, the  $V_g$  reduction has priority.

- ▶ Basic position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range<sup>1)</sup> to 250 bar.
- ▶ DR pressure controller data see page 12

### ▼ Characteristic curve DRF (DFR) / DRS (DFR1) / DRSC

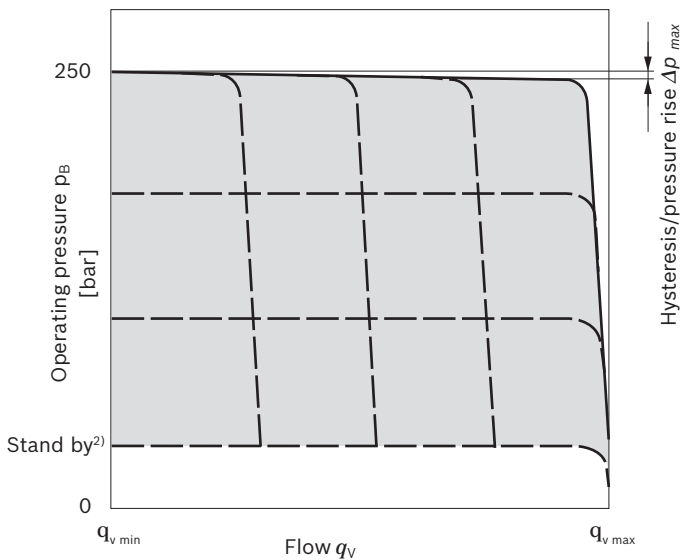

### ▼ Characteristic curve at variable speed

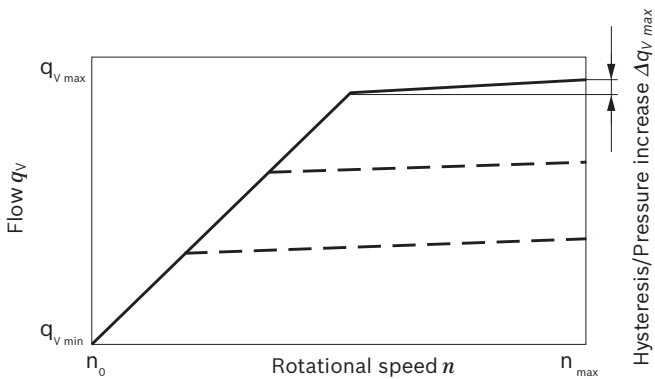


Characteristic curves valid for  $n_1 = 1500$  rpm and  $t_{fluid} = 50$  °C.

- 1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.
- 2) Zero stroke from differential pressure setting  $\Delta p$  on controller **(2)**

Possible connections at port **B**  
 (not included in the delivery contents)

LS mobile control blocks	Data sheets
M4-12	64276
M4-15	64283
LUDV mobile control blocks	
M6-15	64284
M7-22	64295

### ▼ Circuit diagram DRF (DFR)

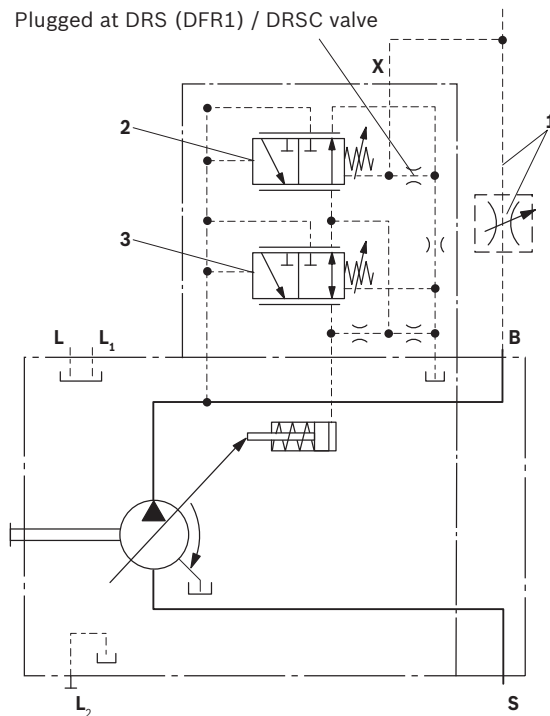

- 1** The metering orifice (control block) and the line is not included in the delivery contents.
- 2** Pressure and flow controller **(FR)**.
- 3** Pressure controller **(DR)**

#### Note

The DRS and (DFR1) and DRSC valve versions have no pilot line between **X** and the reservoir. Unloading the LS-pilot line must be possible in the valve system.

Because of the flushing function sufficient unloading of the flow control in DRS (DFR1) control valve **X**-line must also be provided.

If this pilot line of the **X** line does not have to be guaranteed, the DRSC control valve must be used.

For further information see page 15



**Differential pressure  $\Delta p$ :**

- ▶ Standard setting: 14 bar  
 If another setting is required, please state in clear text.
- ▶ Adjustment range: 14 to 22 bar

Unloading port **X** to the reservoir results in a zero stroke (standby) pressure which is approx. 1 to 2 bar higher than the defined differential pressure  $\Delta p$ , however system influences are not taken into account.

**Controller data**

- ▶ DR pressure controller data see page 12.
- ▶ Maximum flow deviation measured at drive speed  
 $n = 1500 \text{ rpm}$ .

Size		10	18	28	45	60	72	85	100
						<b>63</b>			
Flow deviation	$\Delta q_{vmax}$ [l/min]	0.5	0.9	1.0	1.8	2.5	2.5	3.1	3.1
Hysteresis; repeatability	$\Delta p$ [bar]	maximum 3							
Control fluid consumption	l/min	maximum approx. 3 to 4.5 (DRF (DFR)) maximum approx. 3 (DRS (DFR1) / DRSC)							



## LA... – Pressure, flow and power controller

Pressure control equipped as DR(G), see page 12 (13).  
Equipment of the flow control like DRS (DFR1), see page 14.

In order to achieve a constant drive torque with varying operating pressures, the swivel angle and with it the volume flow from the axial piston pump is varied so that the product of flow and pressure remains constant. Flow controller is possible below the power control curve. When

ordering please state the power characteristics to be set ex works in clear text, e.g. 20 kW at 1500 rpm.

### Controller data

- ▶ Pressure controller DR see page 12.
- ▶ Pressure and flow controller DR see page 14.
- ▶ See data sheet 92709 for electric override LA.S
- ▶ Control fluid consumption max. approx. 5.5 l/min

Start of control	Torque T [Nm] for size							Order code
	18	28	45	63	72	85	100	
10 to 35 bar	3.8 – 12.1	6 – 19	10 – 30	15 – 43	17 – 49.2	20 – 57	24 – 68	LA5
36 to 70	12.2 – 23.3	19.1 – 36	30.1 – 59	43.1 – 83	49.3 – 94.9	57.1 – 112	68.1 – 132	LA6
71 to 105	23.4 – 33.7	36.1 – 52	59.1 – 84	83.1 – 119	95.0 – 136.0	112.1 – 160	132.1 – 189	LA7
106 to 140	33.8 – 45	52.1 – 70	84.1 – 112	119.1 – 157	136.1 – 179.4	160.1 – 212	189.1 – 249	LA8
141 – 230	45.1 – 74.8	70.1 – 117	112.1 – 189	157.1 – 264	179.5 – 301.7	212.1 – 357	249.1 – 419	LA9



Conversion of the torque values in power [kW]

$$P = \frac{T}{6.4} \text{ [kW]} \quad (\text{at } 1500 \text{ rpm})$$

or


$$P = \frac{2 \times T \times n}{60000} \text{ [kW]} \quad (\text{For rotational speeds see page 10})$$

### ▼ Characteristic curve LA.DS

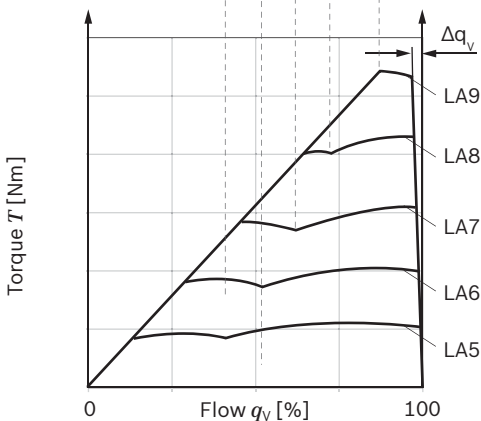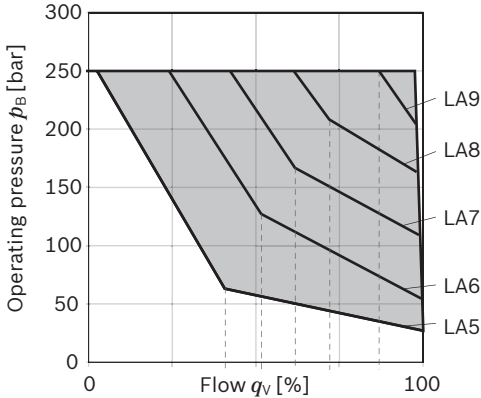

### ▼ Circuit diagram LA.DS


(for further combination options with LA.. see page 17)

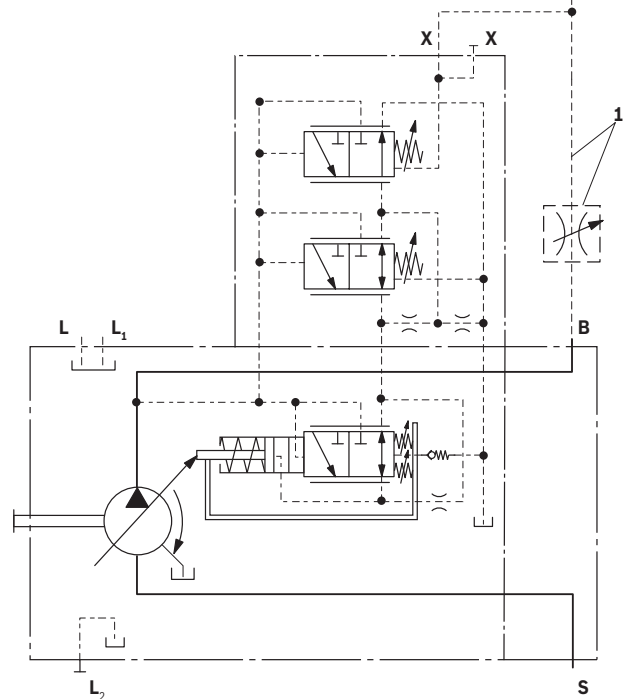


- 1 The metering orifice (control block) and the line is not included in the delivery contents.

**LA... – Variations**


▼ **Circuit diagram LA.D** with pressure cut-off

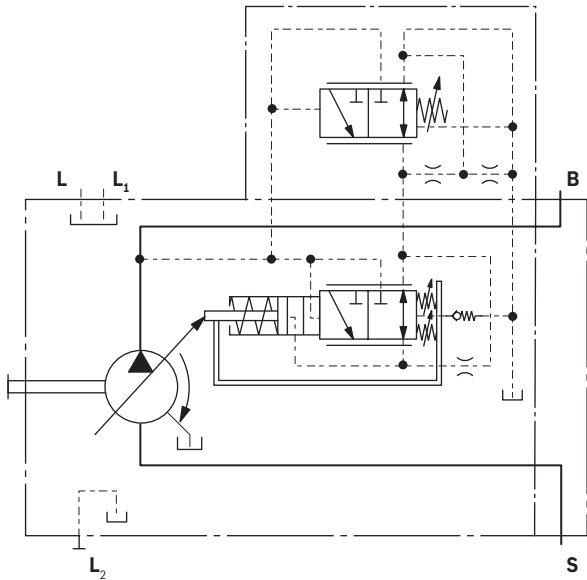

▼ **Circuit diagram LA.S** with separate flow control

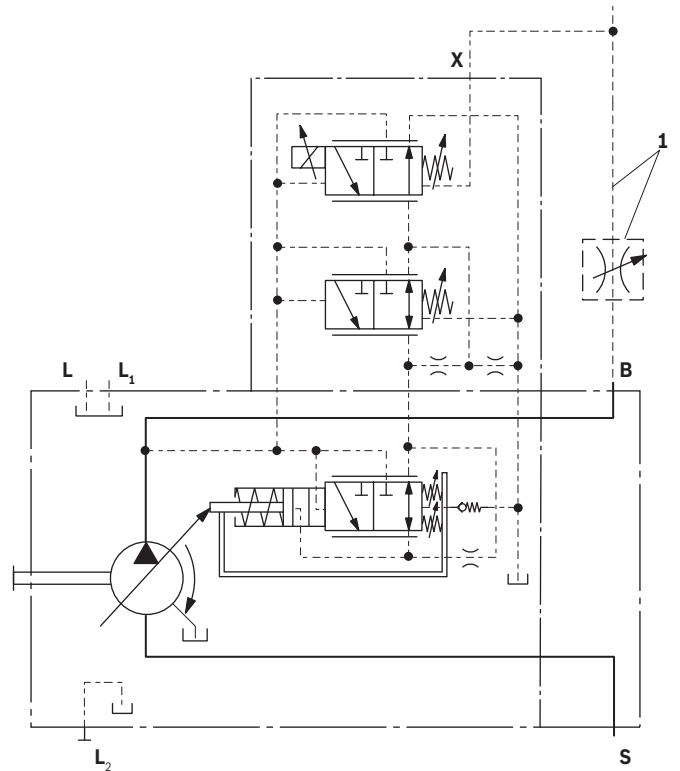

▼ **Circuit diagram LA.DG** with pressure cut-off, remotely operated

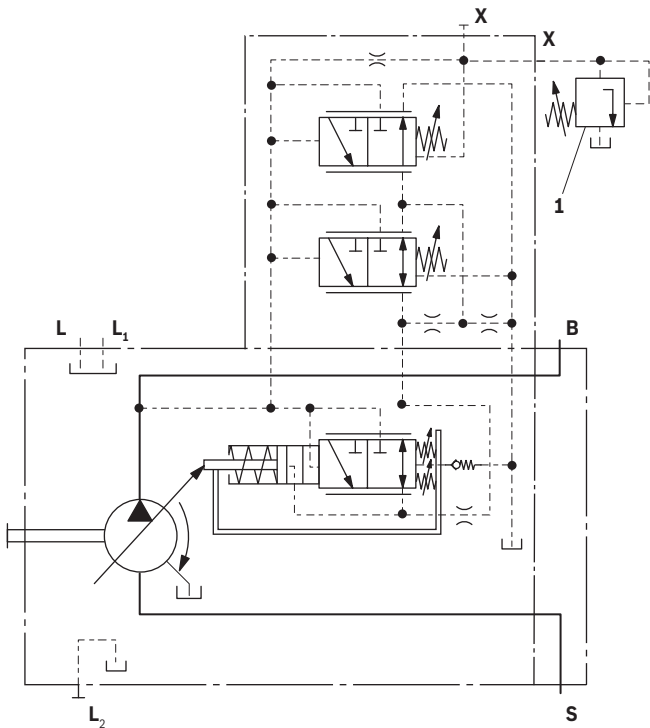

**1** The sensing orifice (control block) and the line is not included in the delivery contents.

**Controller data**

► See data sheet 92709 for electric override LA.S

**1** The pressure relief valve and the line are not included in the scope of delivery.

## ED – Electro-hydraulic pressure control

The ED valve is set to a certain pressure by a specified variable solenoid current.


When changing the consumer (load pressure), this causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level.

The pump thus only delivers as much hydraulic fluid as the consumers can take. The desired pressure level can be set steplessly by varying the solenoid current.

As the solenoid current signal drops towards zero, the pressure will be limited to  $p_{max}$  by an adjustable hydraulic pressure cut-off (secure fail safe function in case of a loss of power, e.g. for fan drives). The response time characteristic curve of the ED-control was optimized for the use as a fan drive system. When ordering, specify the type of application in clear text.


### ▼ Static current-pressure characteristic curve ED

(negative characteristic curve measured with pump in zero stroke)

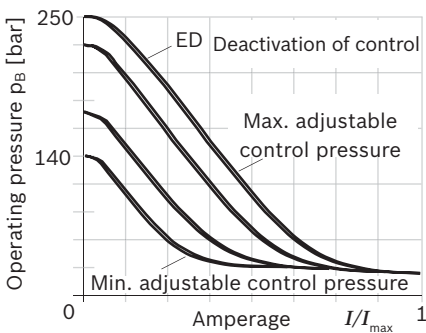

► Hysteresis static < 3 bar.

### ▼ Flow-pressure characteristic curve

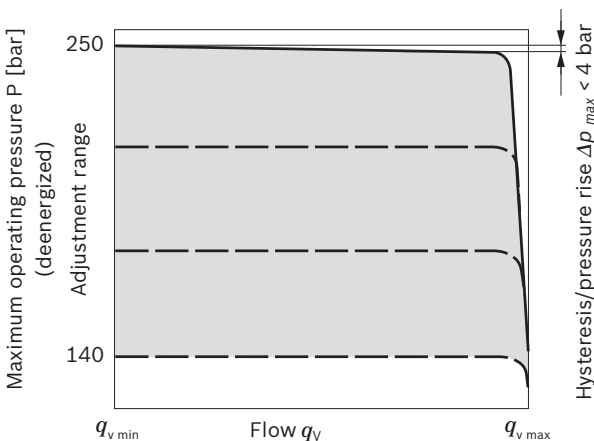


► Characteristic curves valid for  $n_1 = 1500$  rpm and  $t_{fluid} = 50$  °C.


► Control fluid consumption: 3 to 4.5 l/min.

► For standby standard setting, see the following diagram, other values on request.

### ▼ Influence of the pressure setting on standby (maximally energized)

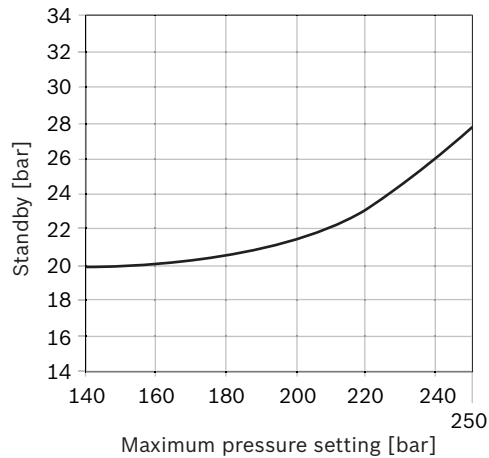

### ▼ Circuit diagram ED71/ED72

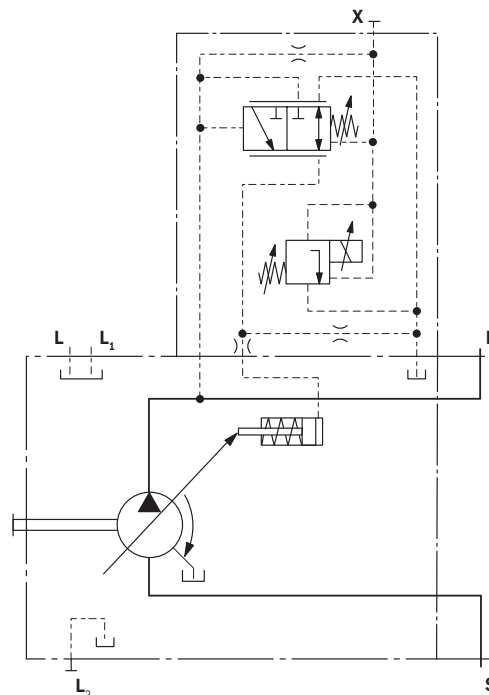

Technical data, solenoid	ED71	ED72
Voltage	12 V (±20%)	24 V (±20%)
Control current		
Start of control at $p_{max}$	100 mA	50 mA
End of control at $p_{min}$	1200 mA	600 mA
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	22.7 Ω
Dither frequency	100 to 200 Hz	100 to 200 Hz
Duty cycle	100%	100%
Type of protection: see connector version page 61		
Operating temperature range at valve	-20 °C to +115 °C	

## ER – Electro-hydraulic pressure control

The ER valve is set to a certain pressure by a specified variable solenoid current.


When changing the consumer (load pressure), this causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level.

The pump thus only delivers as much hydraulic fluid as the consumers can take. The desired pressure level can be set steplessly by varying the solenoid current.

As the solenoid current signal drops towards zero, the pressure will be limited to  $p_{min}$  (stand by).


### Observe project planning notes.

#### ▼ Static current-pressure characteristic curve ER (positive characteristic curve measured with pump in zero stroke)

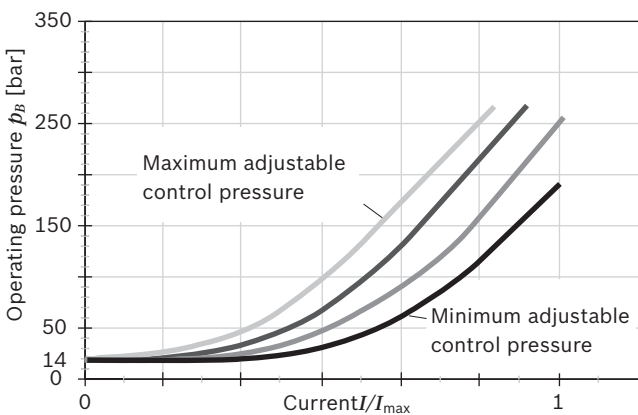


#### ► Hysteresis static current-pressure characteristic curve < 3 bar.

#### ▼ Flow-pressure characteristic curve

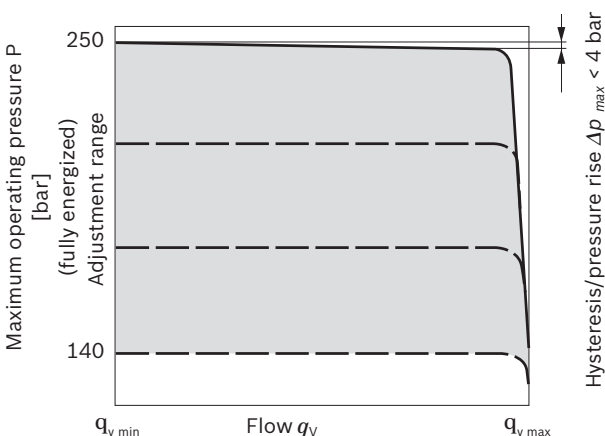

- Characteristic curves valid for  $n_1 = 1500$  rpm and  $t_{fluid} = 50$  °C.
- Control fluid consumption: 3 to 4.5 l/min.
- Standby standard 14 bar. Other values on request.
- Influence of pressure setting on stand-by  $\pm 2$  bar.

#### ▼ Circuit diagram ER71/ER72

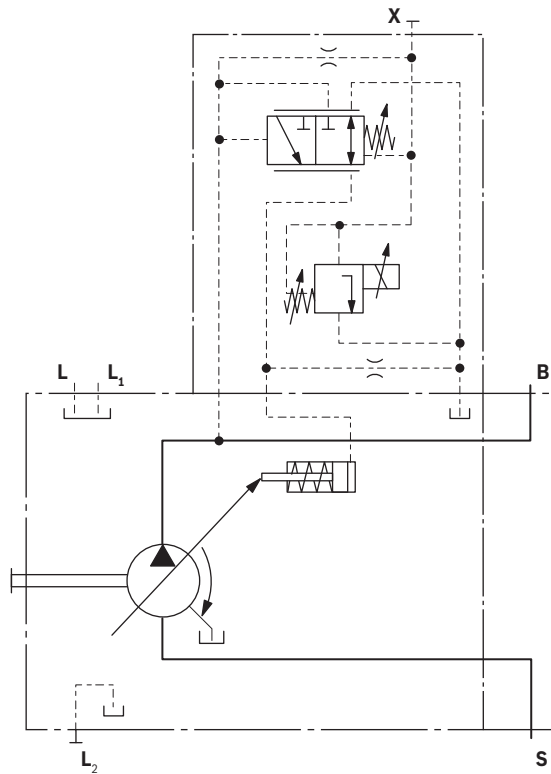

Technical data, solenoid	ER71	ER72
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Control current		
Start of control at $p_{min}$	100 mA	50 mA
End of control at $p_{max}$	1200 mA	600 mA
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 to 200 Hz	100 to 200 Hz
Duty cycle	100%	100%
Type of protection: see connector version page 61		
Operating temperature range at valve	-20 °C to +115 °C	

#### Project planning note!

Excessive current levels ( $I > 1200$  mA at 12 V or  $I > 600$  mA at 24 V) to the ER solenoid can result in undesired pressure increases which can lead to pump or system damage. Therefore:


- Use  $I_{max}$  current limiter solenoids.
  - A sandwich plate pressure reducing valve can be used to protect the pump in the event of overflow.
- An accessory kit with intermediate plate pressure controller can be ordered from Bosch Rexroth under part number R902490825.

## EP – Electro-proportional control

Electro-proportional control makes a stepless and reproducible setting of the pump displacement possible directly via the swashplate. The control force of the control piston is applied by a proportional solenoid. The control is proportional to the current (for start of control, see table right). In a depressurized state, the pump is swiveled to its initial position ( $V_{g \max}$ ) by an adjusting spring. If the operating pressure exceeds a limit value of approx. 4 bar, the pump starts to swivel from  $V_{g \max}$  to  $V_{g \min}$  without control by the solenoid (control current < start of control). With a minimum swivel angle  $V_{g \min}$  and de-energized EP solenoids, a minimum pressure of 10 bar must be maintained, or alternatively a minimum amount of 5 % of the displacement. A PWM signal is used to control the solenoid.


**EP.D:** The pressure control regulates the pump displacement back to  $V_{g \min}$  after the set target pressure has been reached. A minimum operating pressure of 14 bar is needed for safe and reproducible control. The necessary control fluid is taken from the high pressure.

### ▼ Characteristic curve EP1/2

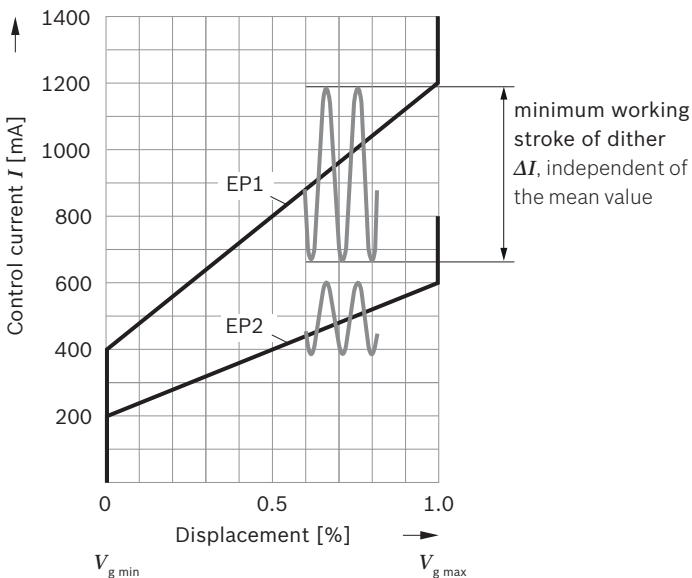

- Hysteresis static current-displacement characteristic curve < 5%.

### ▼ Circuit diagram EP.D

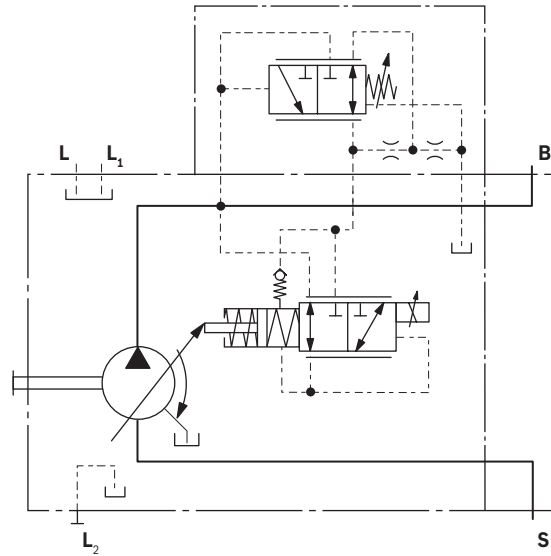

Technical data, solenoid	EP1	EP2
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Control current		
Start of control at $V_{g \min}$	400 mA	200 mA
End of control at $V_{g \max}$	1200 mA	600 mA
Minimum working stroke of the dither within the control range <sup>1)</sup>	352 mA	176 mA
Dither frequency	100 to 200 Hz	100 to 200 Hz
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Duty cycle	100%	100%
Type of protection: see connector version page 61		
Operating temperature range at valve	-20 °C to +115 °C	

### Note

We recommend the valve with flushing function for the EP.D control variant. Please contact us.

<sup>1)</sup>  $\Delta I$  = 44% of the current difference within the control range, regardless of the mean value of the current

## EK – Electro-proportional control with controller cut-off

Variants EK... is based completely on the variant EP... (see page 20).

In addition to the electro-proportional control function, a controller cut-off is integrated in the electric characteristic curve. The pump then swivels to  $V_{g\ max}$  if the pilot signal is lost (e.g., cable break) and then works with the DRF settings if necessary (see page 12). The controller cut-off is only intended for short-term use and not for permanent use if the control signal is lost. If the control signal is lost, the pump swivel times are increased by the EK valve.


A PWM signal is used to control the solenoid.

### Note

A minimum operating pressure of 50 bar is needed for safe and reproducible electro-proportional control with controller cut-off. For lower pressures, a pilot signal of > 500 mA (EK2) or > 1000 mA (EK1) is required in order to avoid undesired controller cut-off. The necessary control fluid is taken from the high pressure.


In the  $V_{g\ max}$  the spring force of the return spring is maximum. To overcome the force of this spring, the solenoid must be subjected to excessive current ( $I_{res}$ ).

### ▼ Characteristic EK1/2

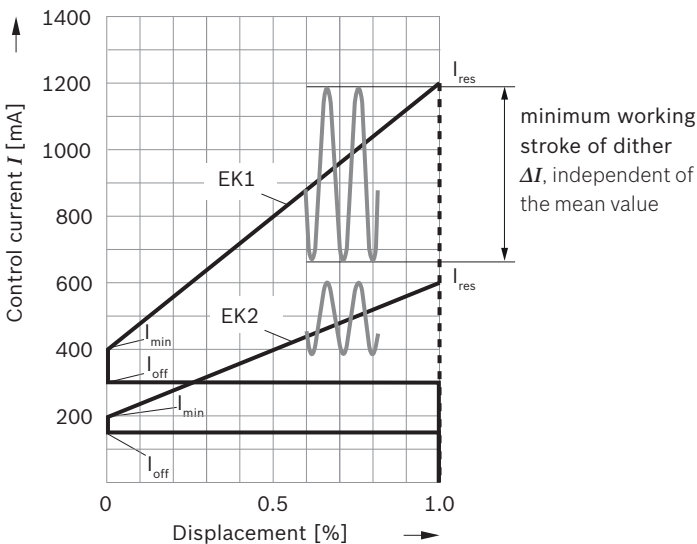

- ▶ Hysteresis static current-displacement characteristic curve < 5%.
- ▶ For changes in current, ramp times of > 200 ms must be observed.

### ▼ Circuit diagram EK.D

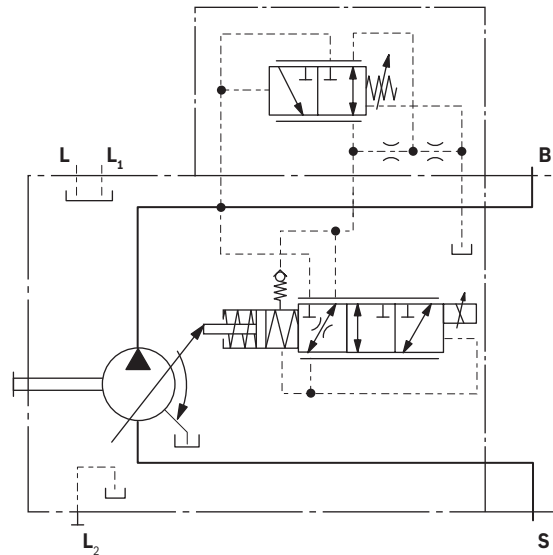

Technical data, solenoid	EK1	EK2
Voltage	12 V (±20%)	24 V (±20%)
Control current		
Start of control at $V_{g\ min}$	400 mA	200 mA
End of control at $V_{g\ max}$	1200 mA	600 mA
Minimum working stroke of the dither within the control range <sup>1)</sup>	352 mA	176 mA
Dither frequency	100 to 200 Hz	100 to 200 Hz
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	22.7 Ω
Duty cycle	100%	100%
Type of protection: see connector version page 61		
Operating temperature range at valve -20 °C to +115 °C		

	EK1	EK2
$I_{min}$ [mA]	400	200
$I_{max}$ [mA]	1200	600
$I_{off}$ [mA]	< 300	< 150
$I_{res}$ [mA]	> 1200	> 600

### Note

We recommend the valve with flushing function for the EK.D control variant. Please contact us.

<sup>1)</sup>  $\Delta I$  = 44% of the current difference within the control range, regardless of the mean value of the current

## EP(K).DF / EP(K).DS / EP(K) – with pressure and flow control

A hydraulic pressure flow control is superimposed on the electro-proportional control.

The pressure control regulates the pump displacement infinitely varied back to  $V_{g\ min}$  after the set target pressure has been reached.

This function is super-imposed on the EP or EK control, i.e. the control-current dependent EP or EK function is executed below the target pressure.


For the adjustment range of the pressure flow control, see page 12 to 15.

With all controller combinations, the  $V_g$  reduction has priority.


With flow control, the pump flow can be influenced in addition to pressure control. The pump flow is thus equal to the actual amount of hydraulic fluid required by the consumer. This is achieved using the differential pressure at the consumer (e.g. orifice).

The EP.DS or EK.DS version has no connection between X and the reservoir (load sensing). Please refer to the notes on page 14.


▼ **Circuit diagram EP.DF**

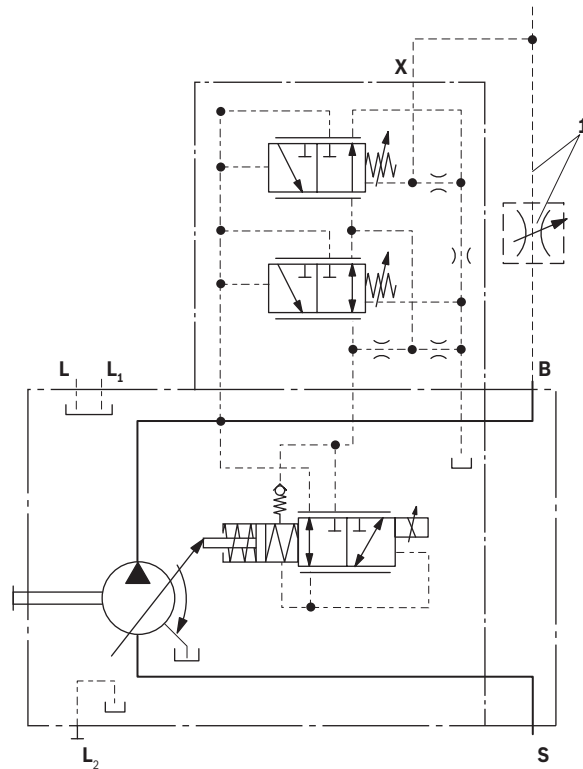

▼ **Circuit diagram EP.DS**

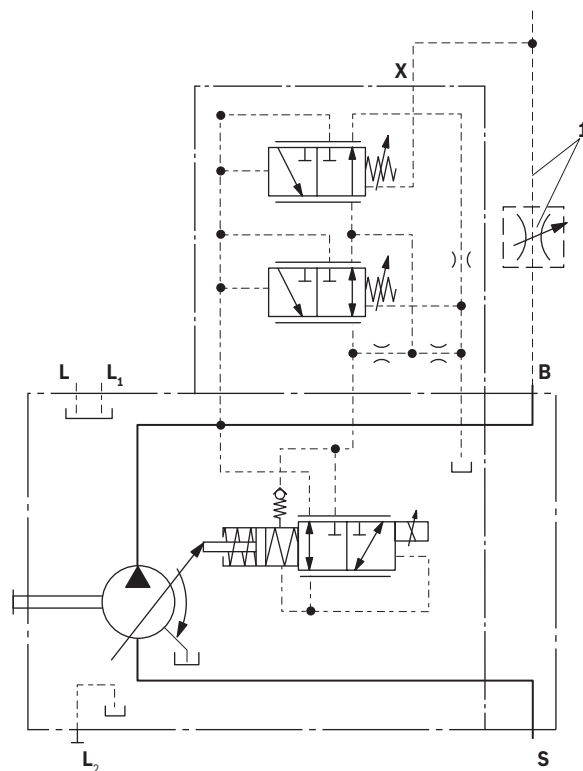

▼ **Circuit diagram EP.D**

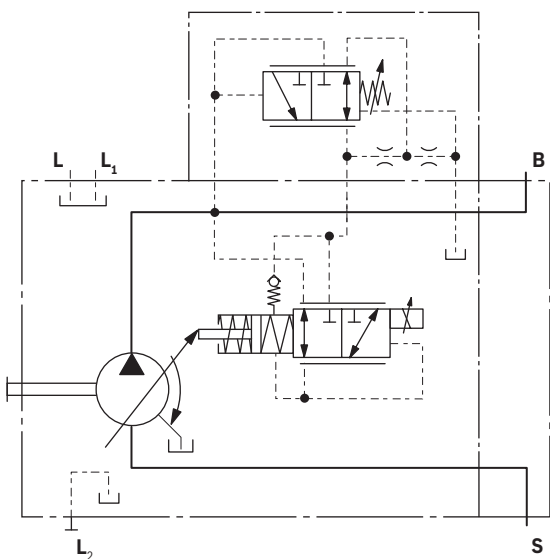

1 The sensing orifice (control block) and the line is not included in the delivery contents.



## EP.ED / EK.ED – with electro-hydraulic pressure control

The ED valve is set to a certain pressure by a specified variable solenoid current.


When changing the consumer (load pressure), this causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level.

The pump thus only delivers as much hydraulic fluid as the consumers can take. The pressure can be set steplessly by the solenoid current.


As the solenoid current signal drops towards zero, the pressure will be limited to  $p_{max}$  by an adjustable hydraulic pressure cut-off (negative characteristic curve, e.g. for fan drives ). A PWM signal is used to control the solenoid.

For further information and technical data of the solenoids for ED(ER) control please refer to pages 18 to 21.

### ▼ Circuit diagram EP.ED

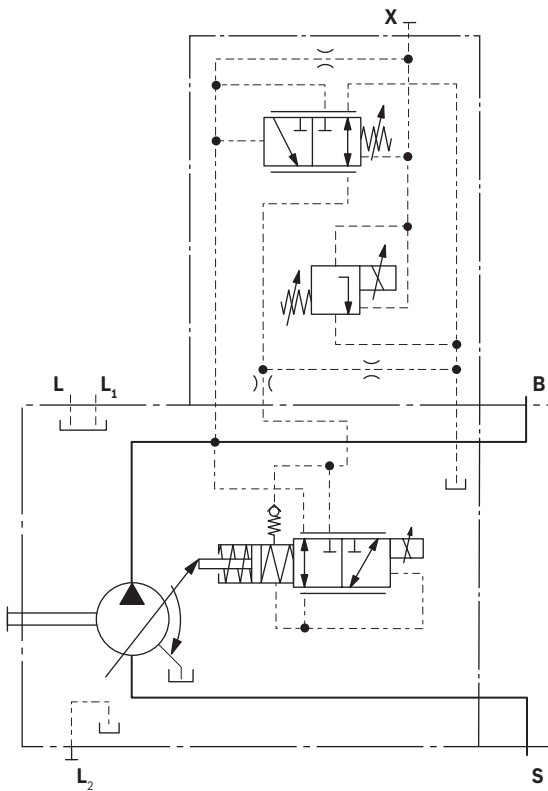


### ▼ Circuit diagram EK.ED

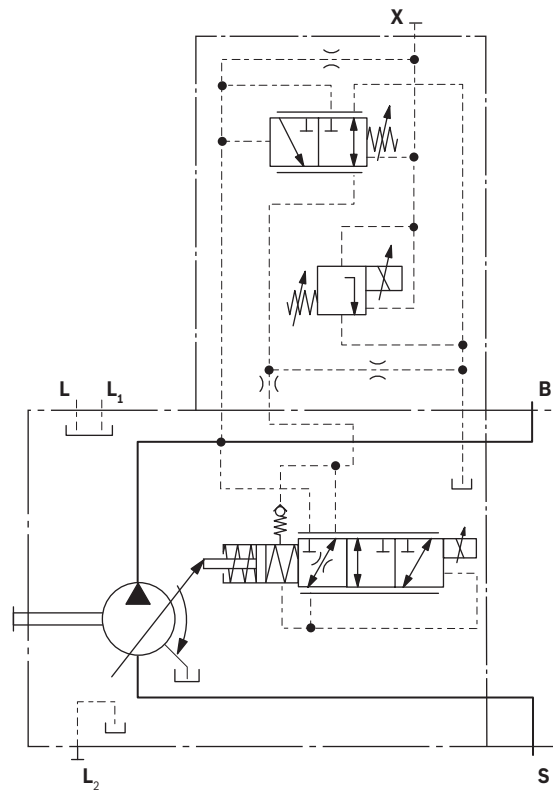



**Dimensions size 10**

**DR – Pressure controller; mounting flange C version SAE; series 52**

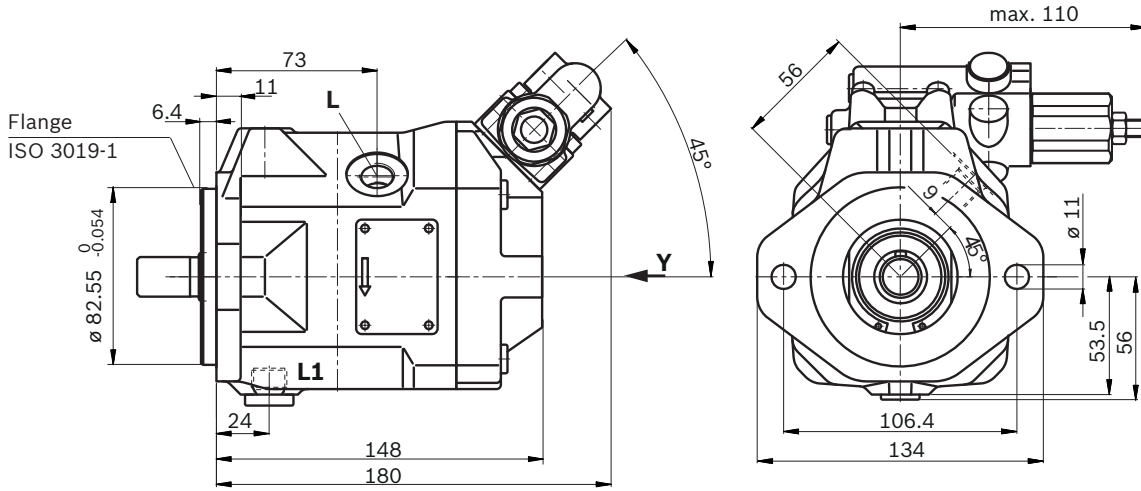


▼ **View Y**  
 Valve mounting for clockwise rotation

▼ **View Y**  
 Valve mounting for counter-clockwise rotation

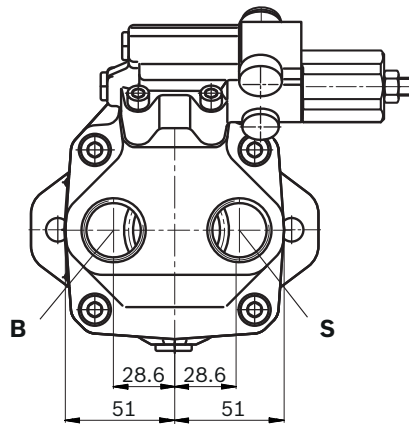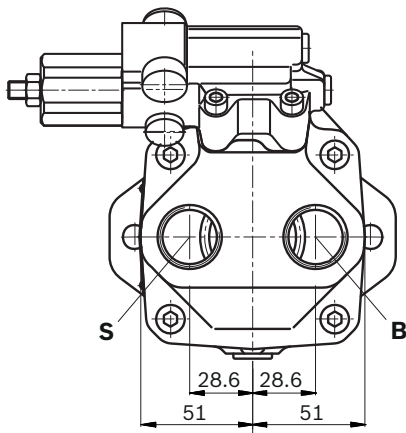


**Dimensions size 10**


**DR – Pressure controller; mounting flange A metric; series 52**

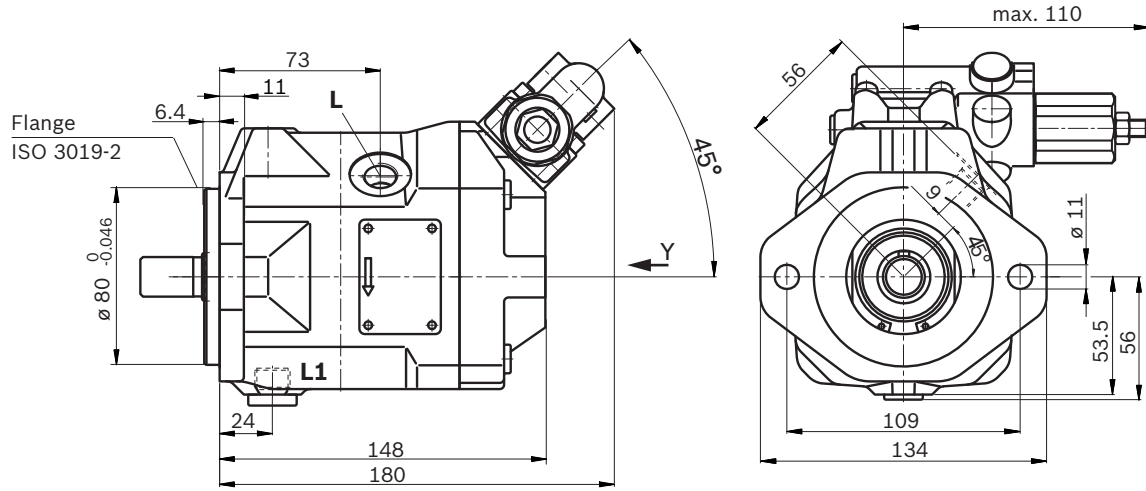


▼ **View Y**  
 Valve mounting  
 for clockwise  
 rotation

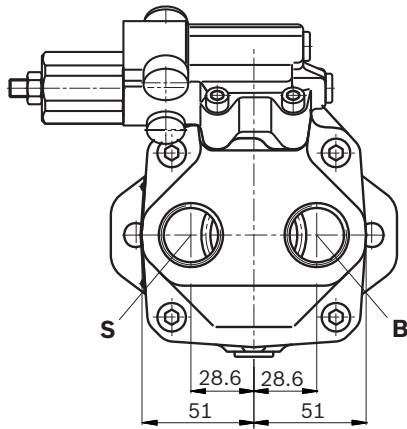


▼ **View Y**  
 Valve mounting for  
 counter-clockwise  
 rotation

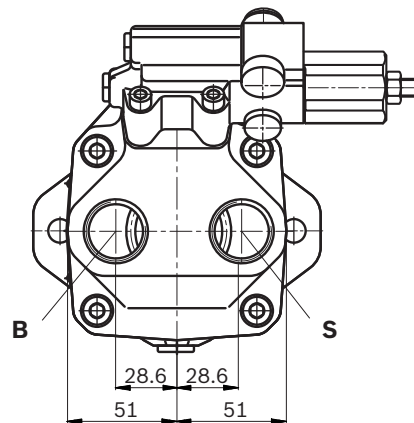


▼ **Splined shaft 3/4 in (SAE J744)**

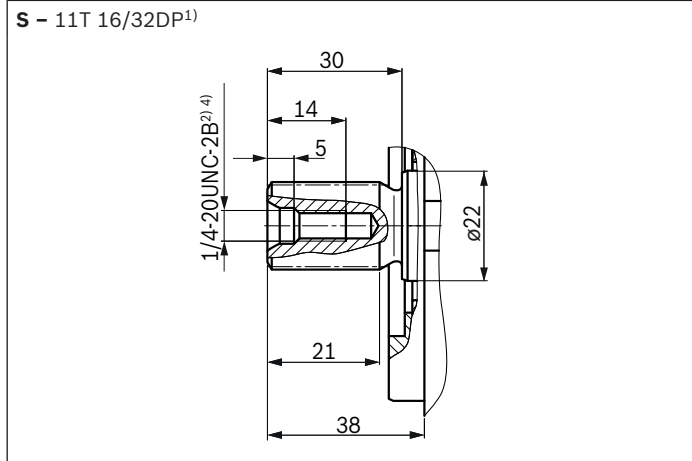

▼ **Splined shaft 5/8 in (SAE J744)**

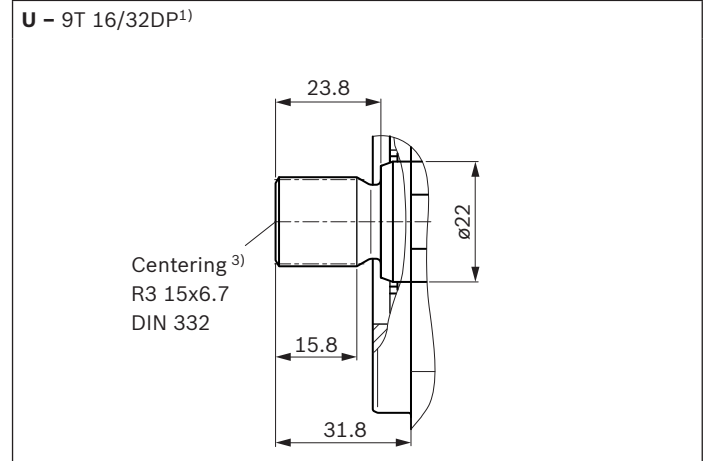

▼ **Parallel keyed shaft DIN 6885**

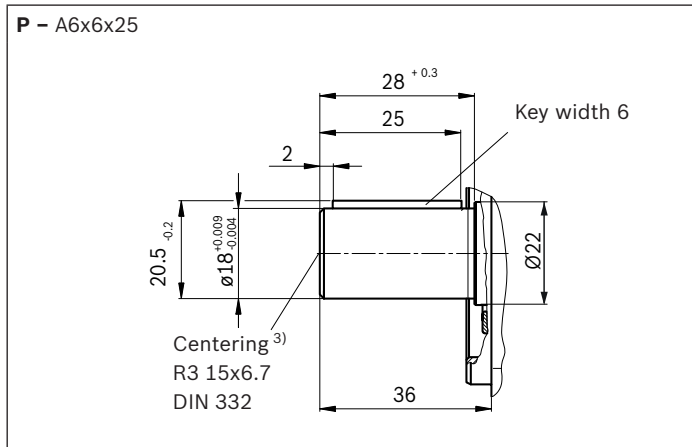


Ports	Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>8)</sup>	
<b>B</b>	Working port	DIN 3852	M27 × 2; 16 deep	315	O
<b>S</b>	Suction port	DIN 3852	M27 × 2; 16 deep	5	O
<b>Ports at mounting flange A metric</b>					
<b>L</b>	Drain port	DIN 3852 <sup>6)</sup>	M16 × 1.5; 12 deep	2	O <sup>7)</sup>
<b>L<sub>1</sub></b>	Drain port	DIN 3852 <sup>6)</sup>	M16 × 1.5; 12 deep	2	X <sup>7)</sup>
<b>X with adapter</b>	Control pressure	DIN 3852	M14 × 1.5; 12 deep	315	O
<b>Ports at mounting flange C SAE</b>					
<b>L</b>	Drain port	DIN 11926 <sup>6)</sup>	9/16-18UNF-2B; 10 deep	2	O <sup>7)</sup>
<b>L<sub>1</sub></b>	Drain port	DIN 11926 <sup>6)</sup>	9/16-18UNF-2B; 10 deep	2	X <sup>7)</sup>
<b>X without adapter</b>	Control pressure	DIN 11926	7/16-20UNF-2B; 11.5 deep	315	O


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) Coupling axially secured, e.g. with a clamp coupling or radially mounted clamping screw
- 4) Observe the instructions in the operating instructions concerning the maximum tightening torques.

- 5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 6) The spot face can be deeper than as specified in the standard.
- 7) Depending on the installation position, **L** or **L<sub>1</sub>** must be connected (also see installation instructions starting on page 62).
- 8) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)


▼ DRG – Pressure control, remotely operated (metric)<sup>1)</sup>

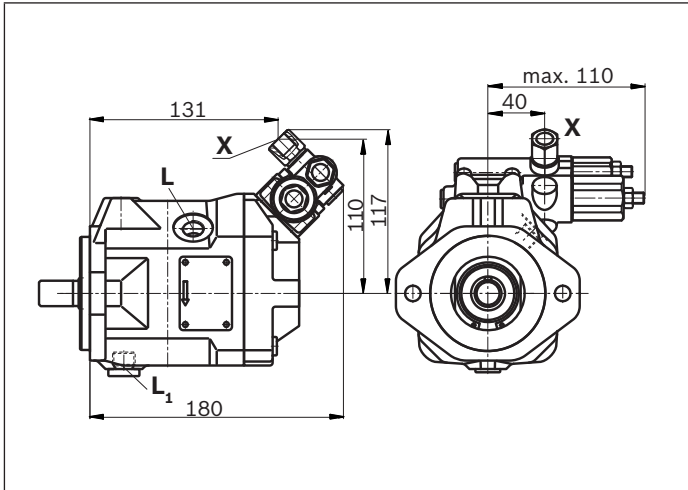


▼ DFR/DFR1 – Pressure, flow control (metric)<sup>1)</sup>

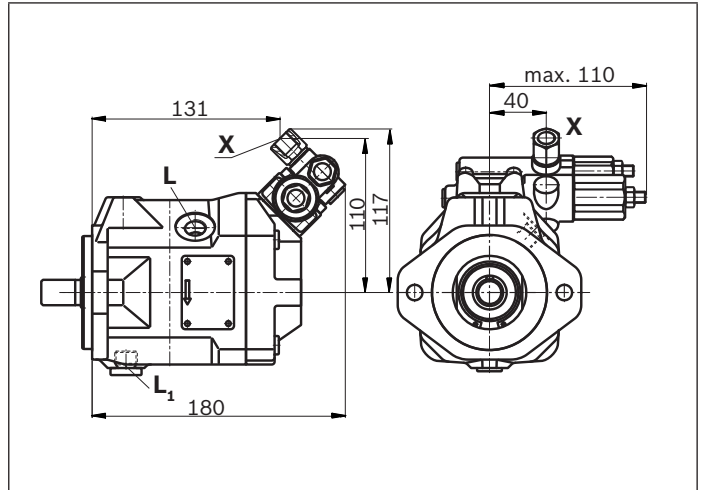

▼ DRG – Pressure control, remotely operated (SAE)<sup>1)</sup>

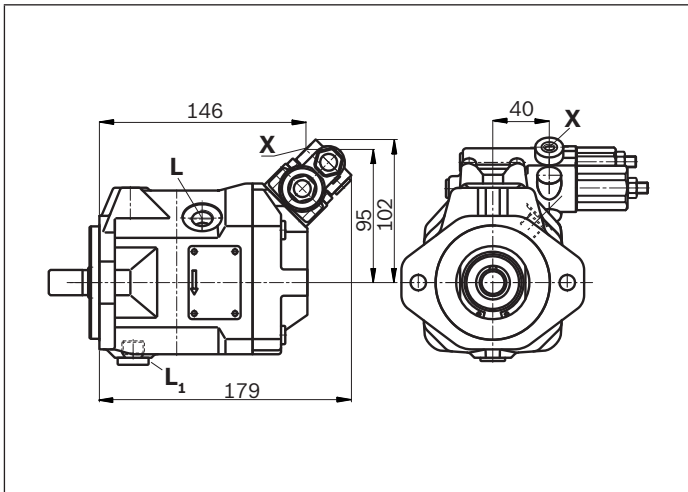

▼ DFR/DFR1 – Pressure, flow control (SAE)<sup>1)</sup>

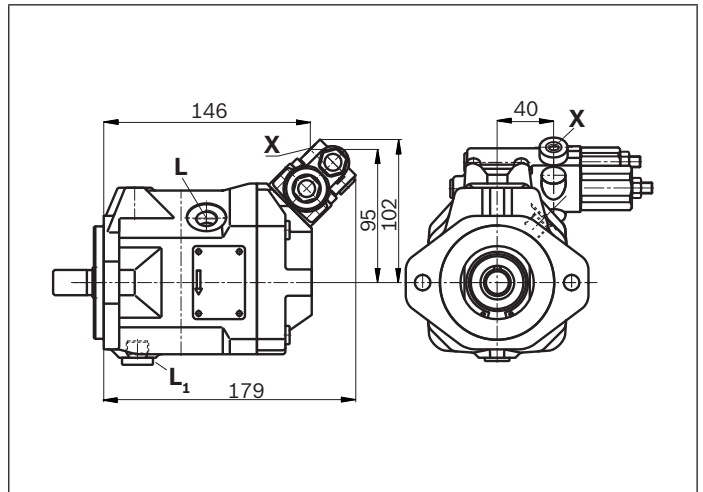


3


1) Valve mounting for clockwise or counter-clockwise rotation see page 11 and 12

**Dimensions size 18**


**DR – Hydraulic pressure controller, clockwise rotation, series 53**

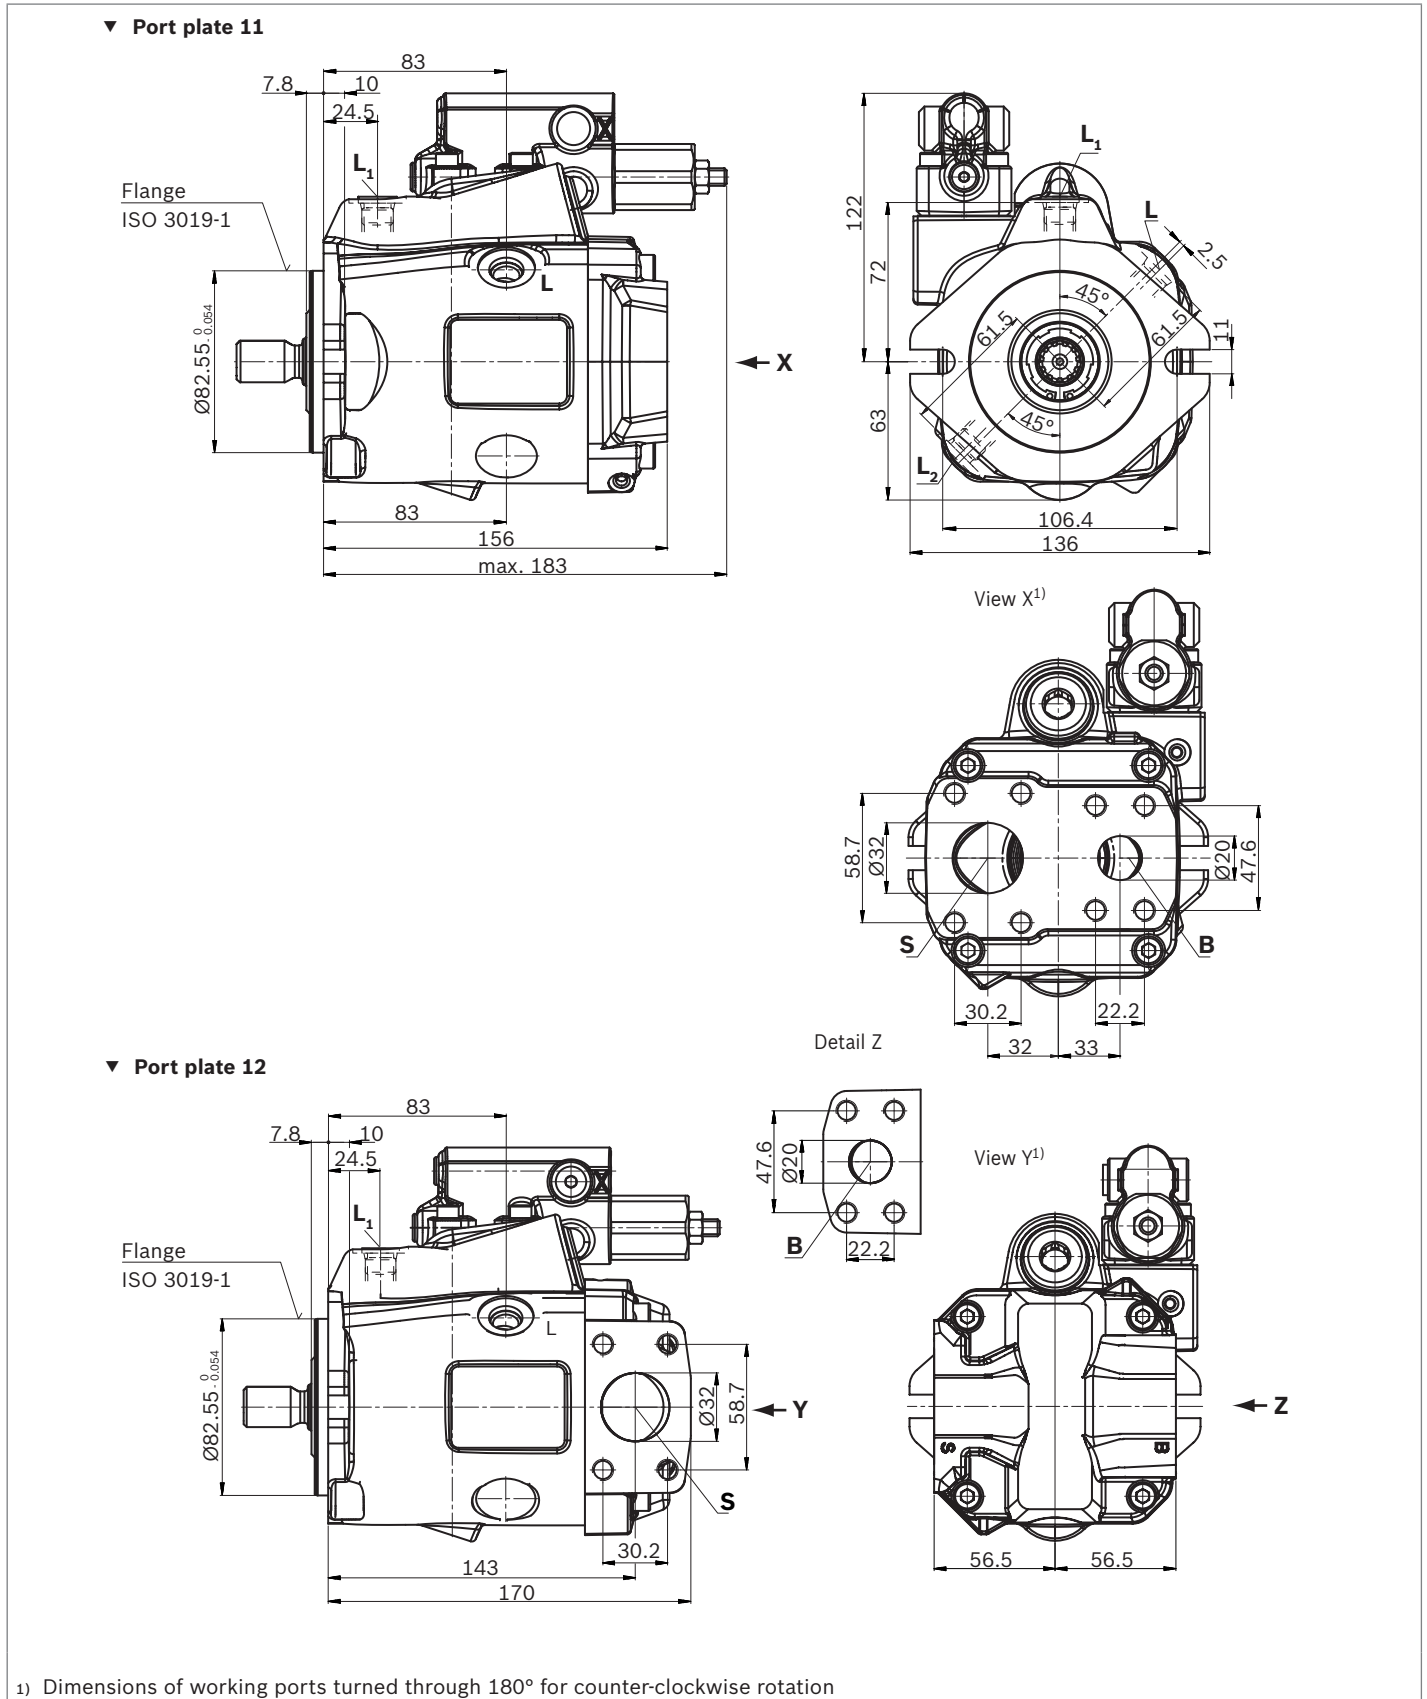


▼ Splined shaft 3/4 in (SAE J744)

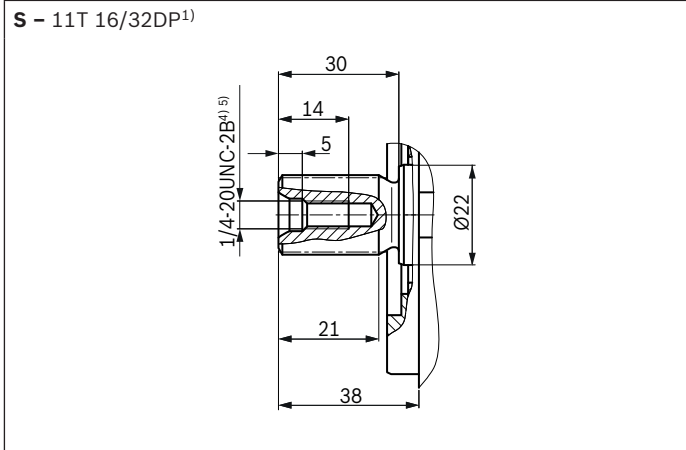

▼ Splined shaft 3/4 in (SAE J744)

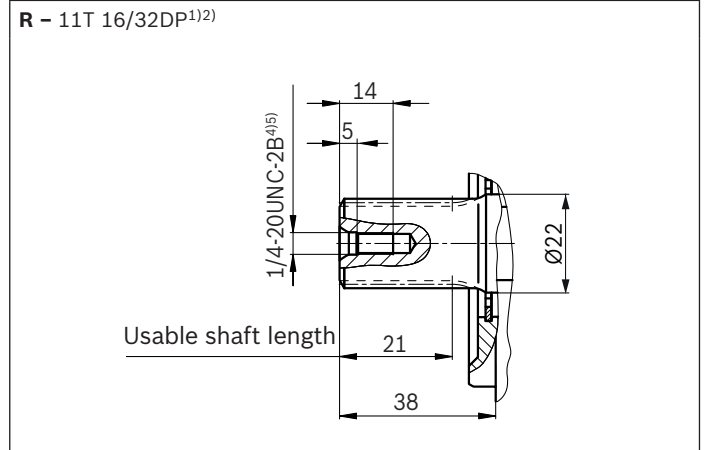

▼ Splined shaft 5/8 in (SAE J744)

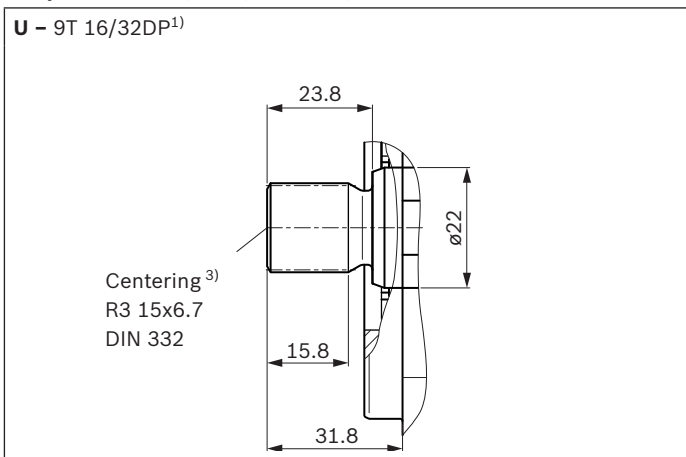


Ports		Standard	Size <sup>5)</sup>	$p_{max\ abs}$ [bar] <sup>6)</sup>	State <sup>11)</sup>
<b>B</b>	Working port (Standard pressure series) Fastening thread	SAE J518 <sup>7)</sup> DIN 13	3/4 in M10 × 1.5; 17 deep	315	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>7)</sup> DIN 13	1 1/4 in M10 × 1.5; 17 deep	5	O
<b>L</b>	Drain port	DIN 11926 <sup>8)</sup>	3/4-16UNF-2B; 12 deep	2	O <sup>9)</sup>
<b>L<sub>1</sub>, L<sub>2</sub><sup>10)</sup></b>	Drain port	DIN 11926 <sup>8)</sup>	3/4-16UNF-2B; 12 deep	2	X <sup>9)</sup>
<b>X</b>	Control pressure	DIN 11926	7/16-20UNF-2A; 11.5 deep	315	O


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Center bore according to DIN 332  
 4) Thread according to ASME B1.1  
 5) Observe the instructions in the operating instructions concerning the maximum tightening torques.

6) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.  
 7) Metric fastening thread is a deviation from standard.  
 8) The spot face can be deeper than as specified in the standard.  
 9) Depending on the installation position, **L**, **L<sub>1</sub>** or **L<sub>2</sub>** must be connected (also see installation instructions starting on page 62).  
 10) Only series 53  
 11) O = Must be connected (plugged when delivered)  
 X = Plugged (in normal operation)


▼ **DRG – Pressure controller, remote controlled, series 53**

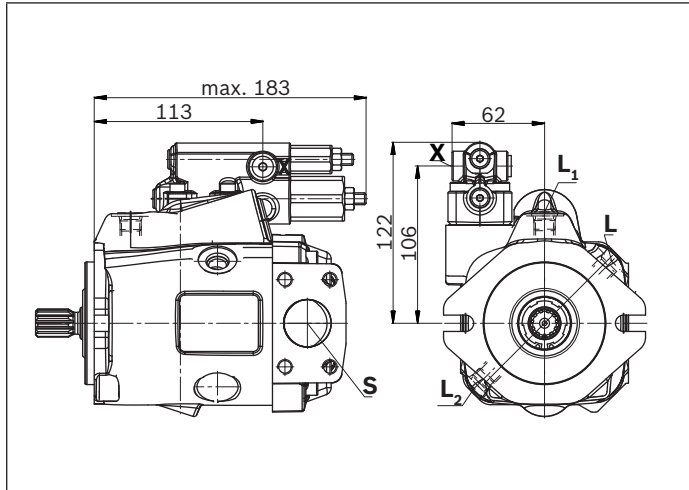


▼ **EP.D. / EK.D. – Electro-proportional control, series 53**

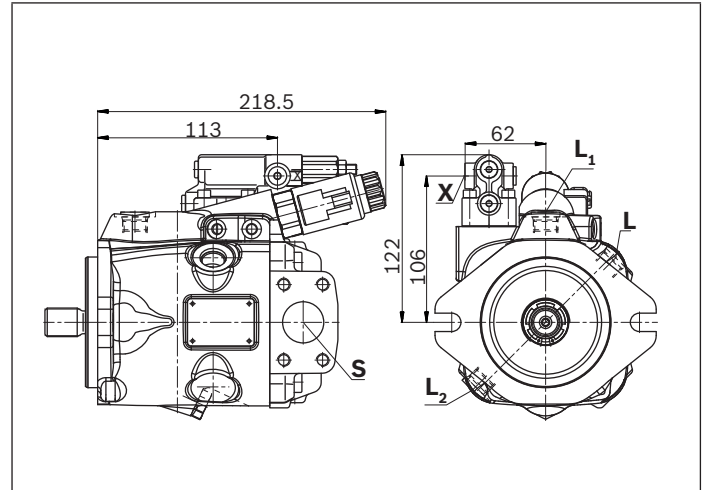


▼ **DRF/DRS/DRSC – Pressure and flow control, series 53**

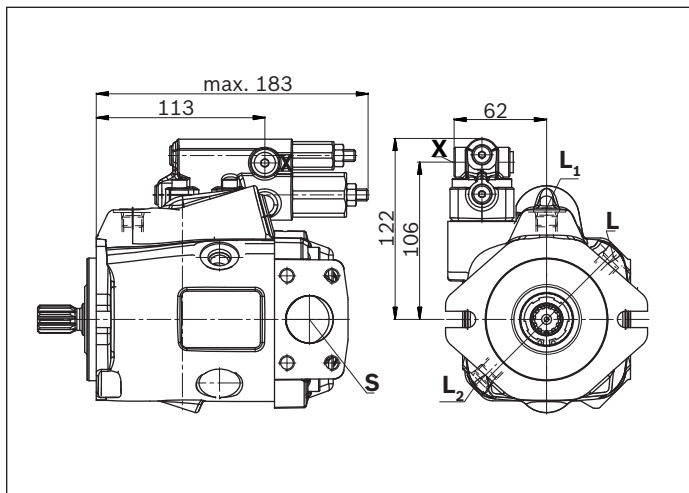


▼ **EP.ED. / EK.ED. – Electro-prop. control, series 53**

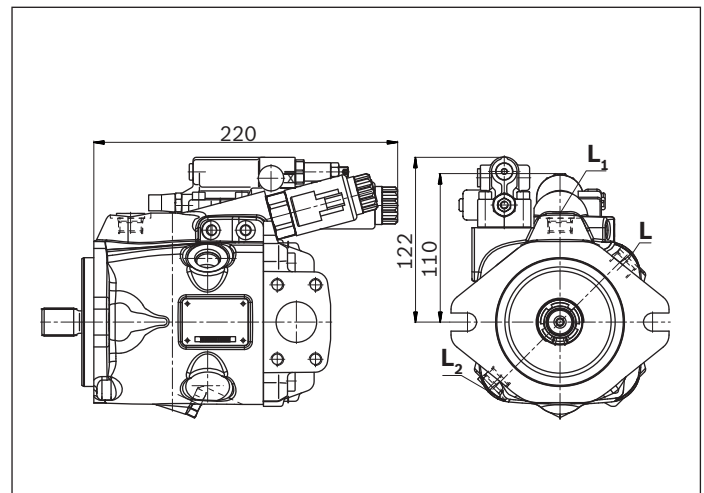

▼ **LA.D. – Pressure, flow and power control, series 53**

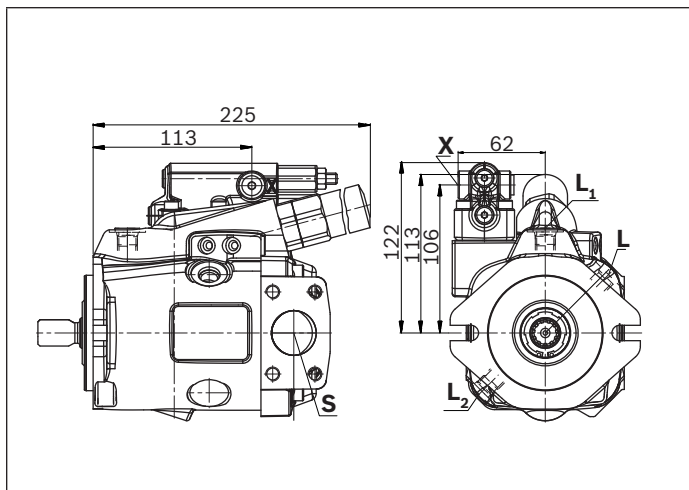

▼ **ED7. / ER7. – Electro-prop. Pressure control, series 53**

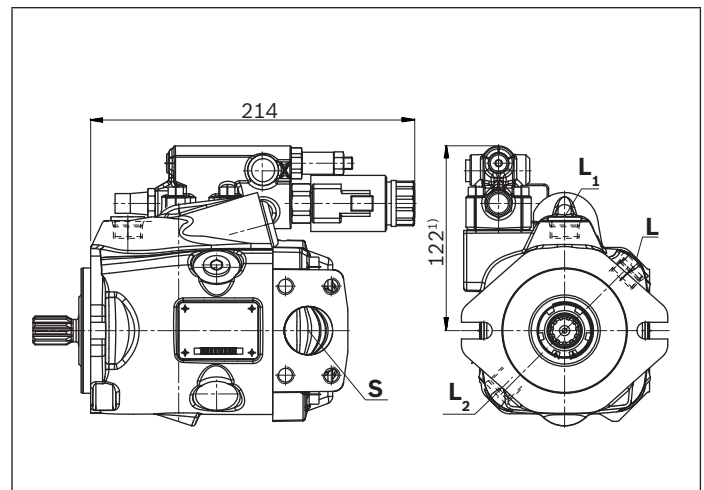


1) ER7.: 157 mm if using an intermediate plate pressure controller




**Dimensions size 28**

**DR – Hydraulic pressure controller, clockwise rotation, series 52<sup>2)</sup>**


▼ **Port plate 11**

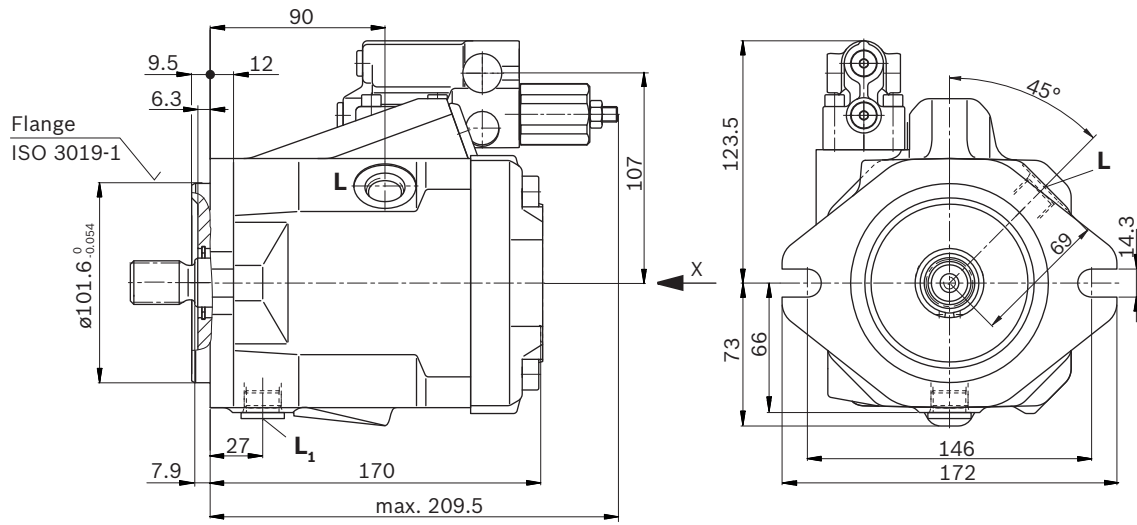


View X<sup>1)</sup>

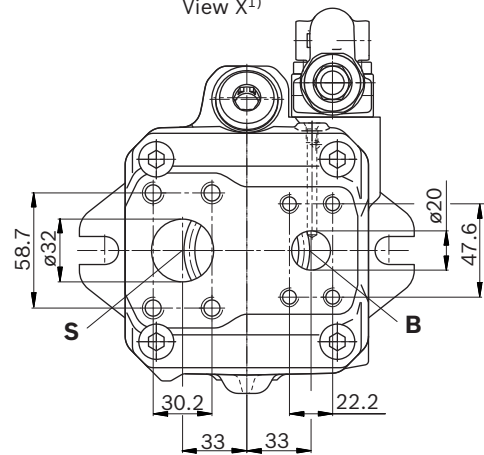


Detail Z



View Y<sup>1)</sup>

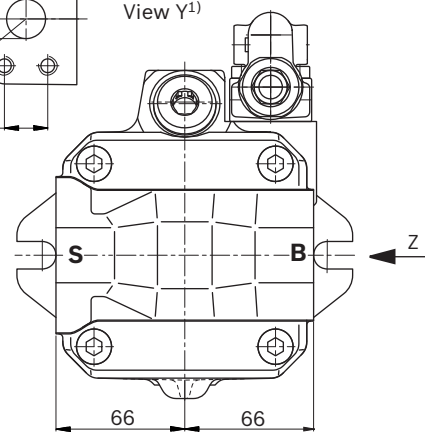


▼ **Port plate 12**

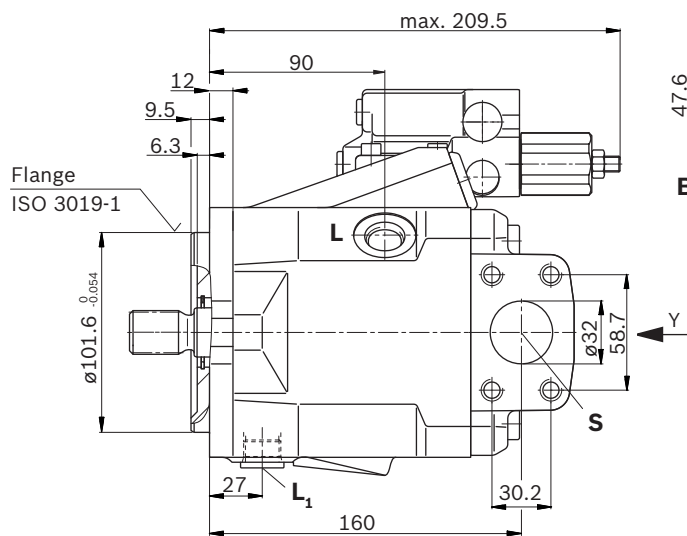


1) Dimensions of working ports turned through 180° for counter-clockwise rotation  
 2) Primary dimensions for pump apply to series 52 and 53


▼ Splined shaft 7/8 in (SAE J744)

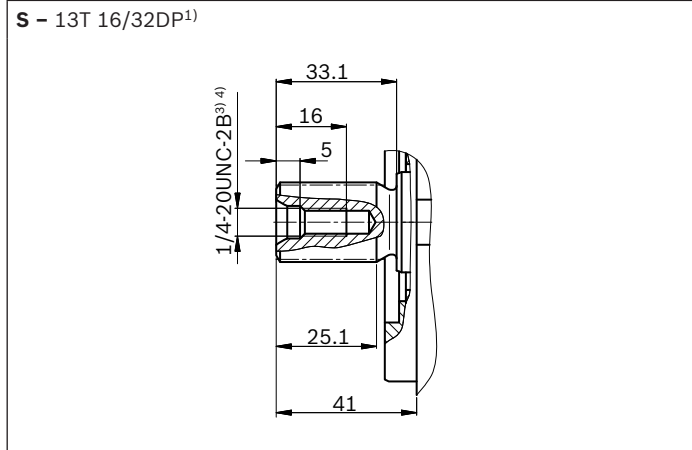


▼ Splined shaft 7/8 in (SAE J744)

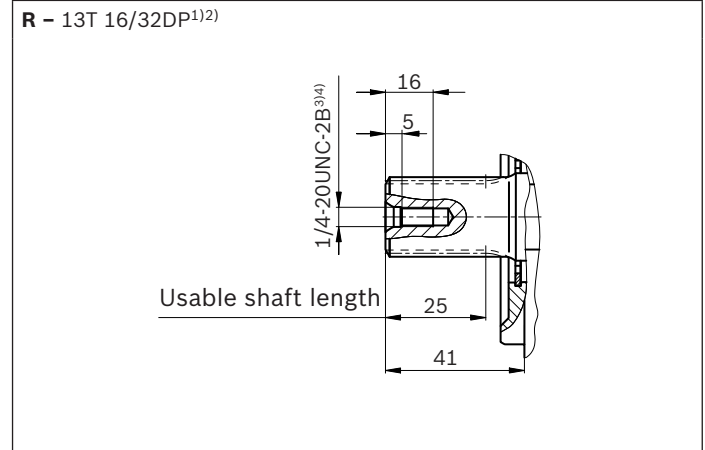

▼ Splined shaft 3/4 in (SAE J744)

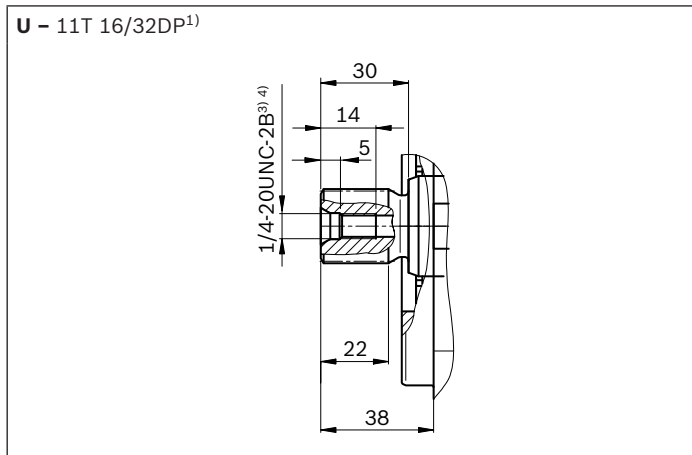

▼ Splined shaft 3/4 in (SAE J744)

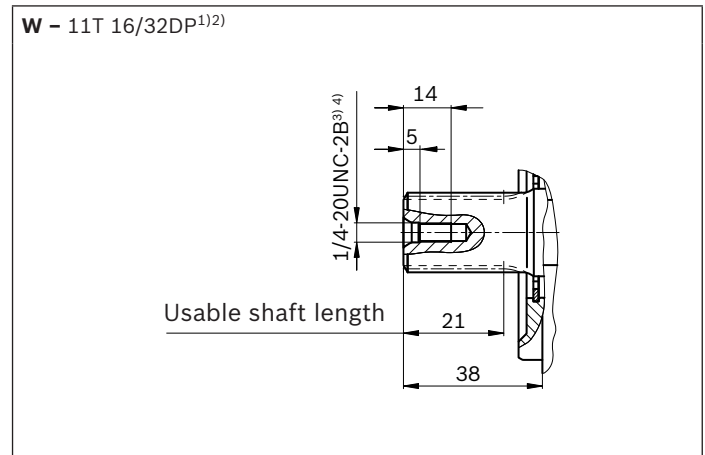


Ports	Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>10)</sup>	
<b>B</b>	Working port (Standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	3/4 in M10 × 1.5; 17 deep	315	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/4 in M10 × 1.5; 17 deep	5	O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	3/4-16UNF-2B; 12 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub>, L<sub>2</sub></b> <sup>9)</sup>	Drain port	ISO 11926 <sup>7)</sup>	3/4-16UNF-2B; 12 deep	2	X <sup>8)</sup>
<b>X</b>	Control pressure	ISO 11926	7/16-20UNF-2B; 11.5 deep	315	O


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
3) Thread according to ASME B1.1  
4) Observe the instructions in the operating instructions concerning the maximum tightening torques.  
5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

6) Metric fastening thread is a deviation from standard.  
7) The spot face can be deeper than as specified in the standard.  
8) Depending on the installation position, **L**, **L<sub>1</sub>** or **L<sub>2</sub>** must be connected (also see installation instructions starting on page 62).  
9) Only for series 53  
10) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)


▼ DRG – Pressure controller, remote controlled, series 52 (53)

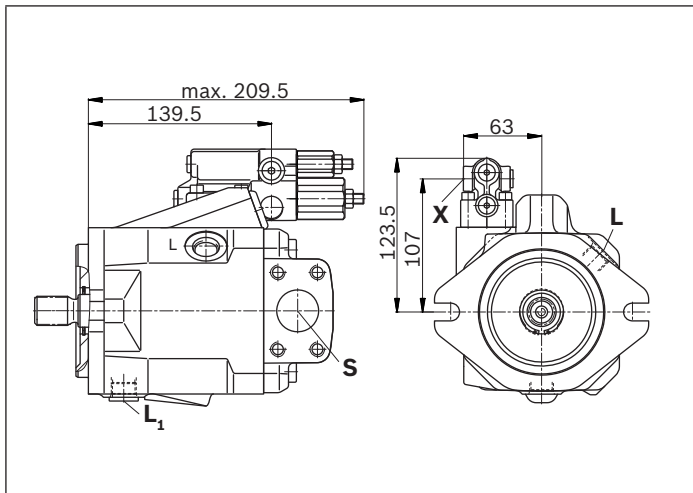


▼ EP.D. / EK.D. – Electro-proportional control, series 53

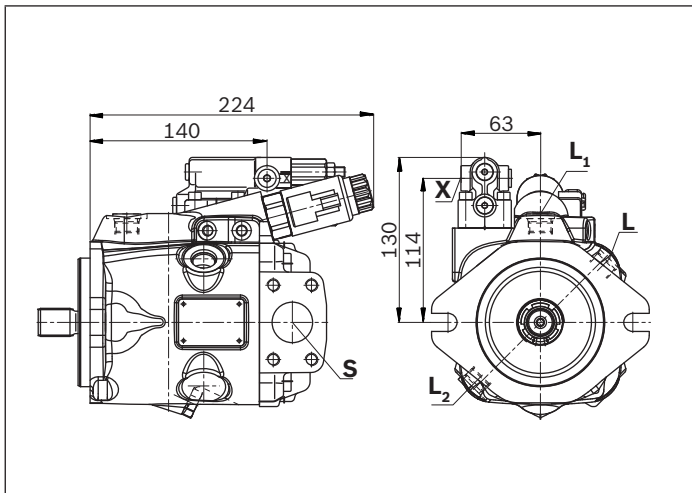


▼ DFR/DFR1/DRSC – Pressure and flow control, series 52 (53)

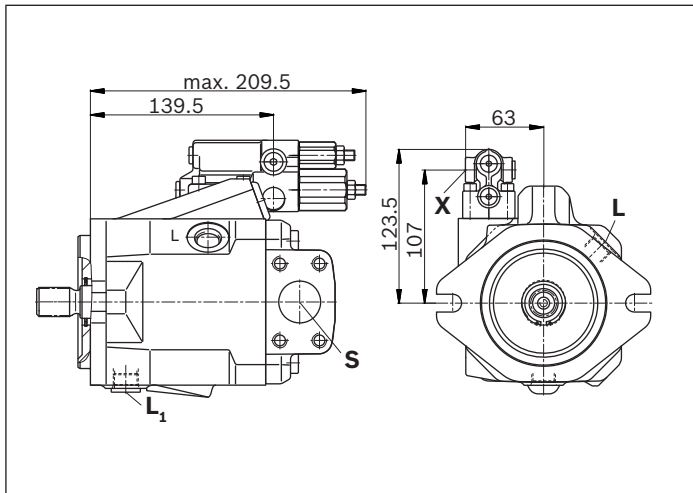


▼ EP.ED. / EK.ED. – Electro-proportional control, series 53

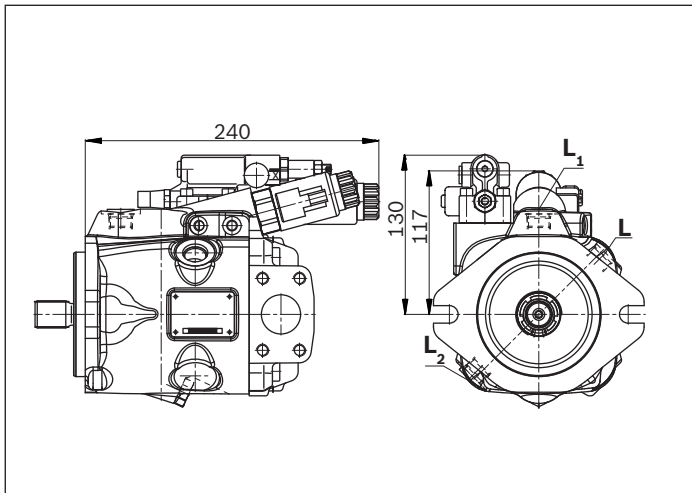

▼ LA.D. – Pressure, flow and power control, series 53

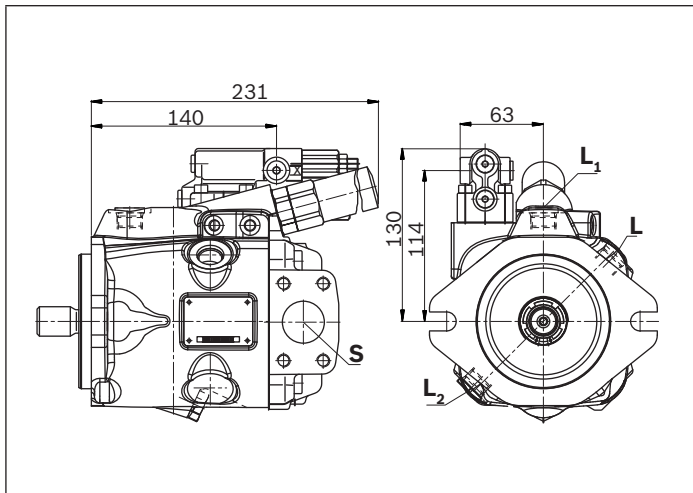


▼ ED7. / ER7. – Electro-prop. Pressure control, series 52 (53)

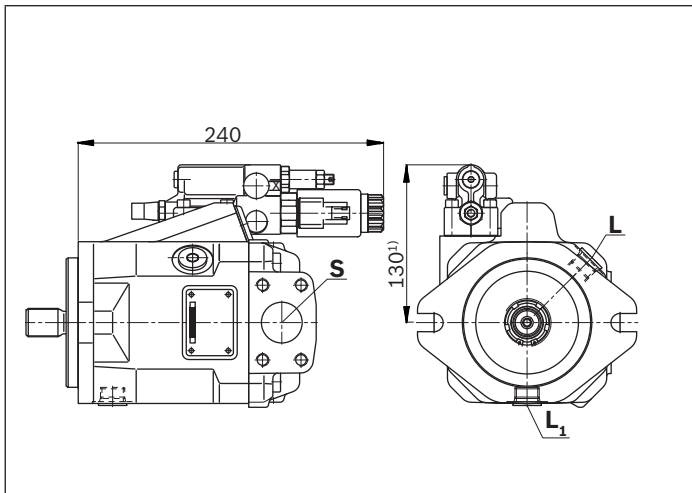

1) ER7.: 159 mm if using an intermediate plate pressure controller

**Dimensions size 45**


**DR – Hydraulic pressure controller, clockwise rotation, series 52<sup>3)</sup>**

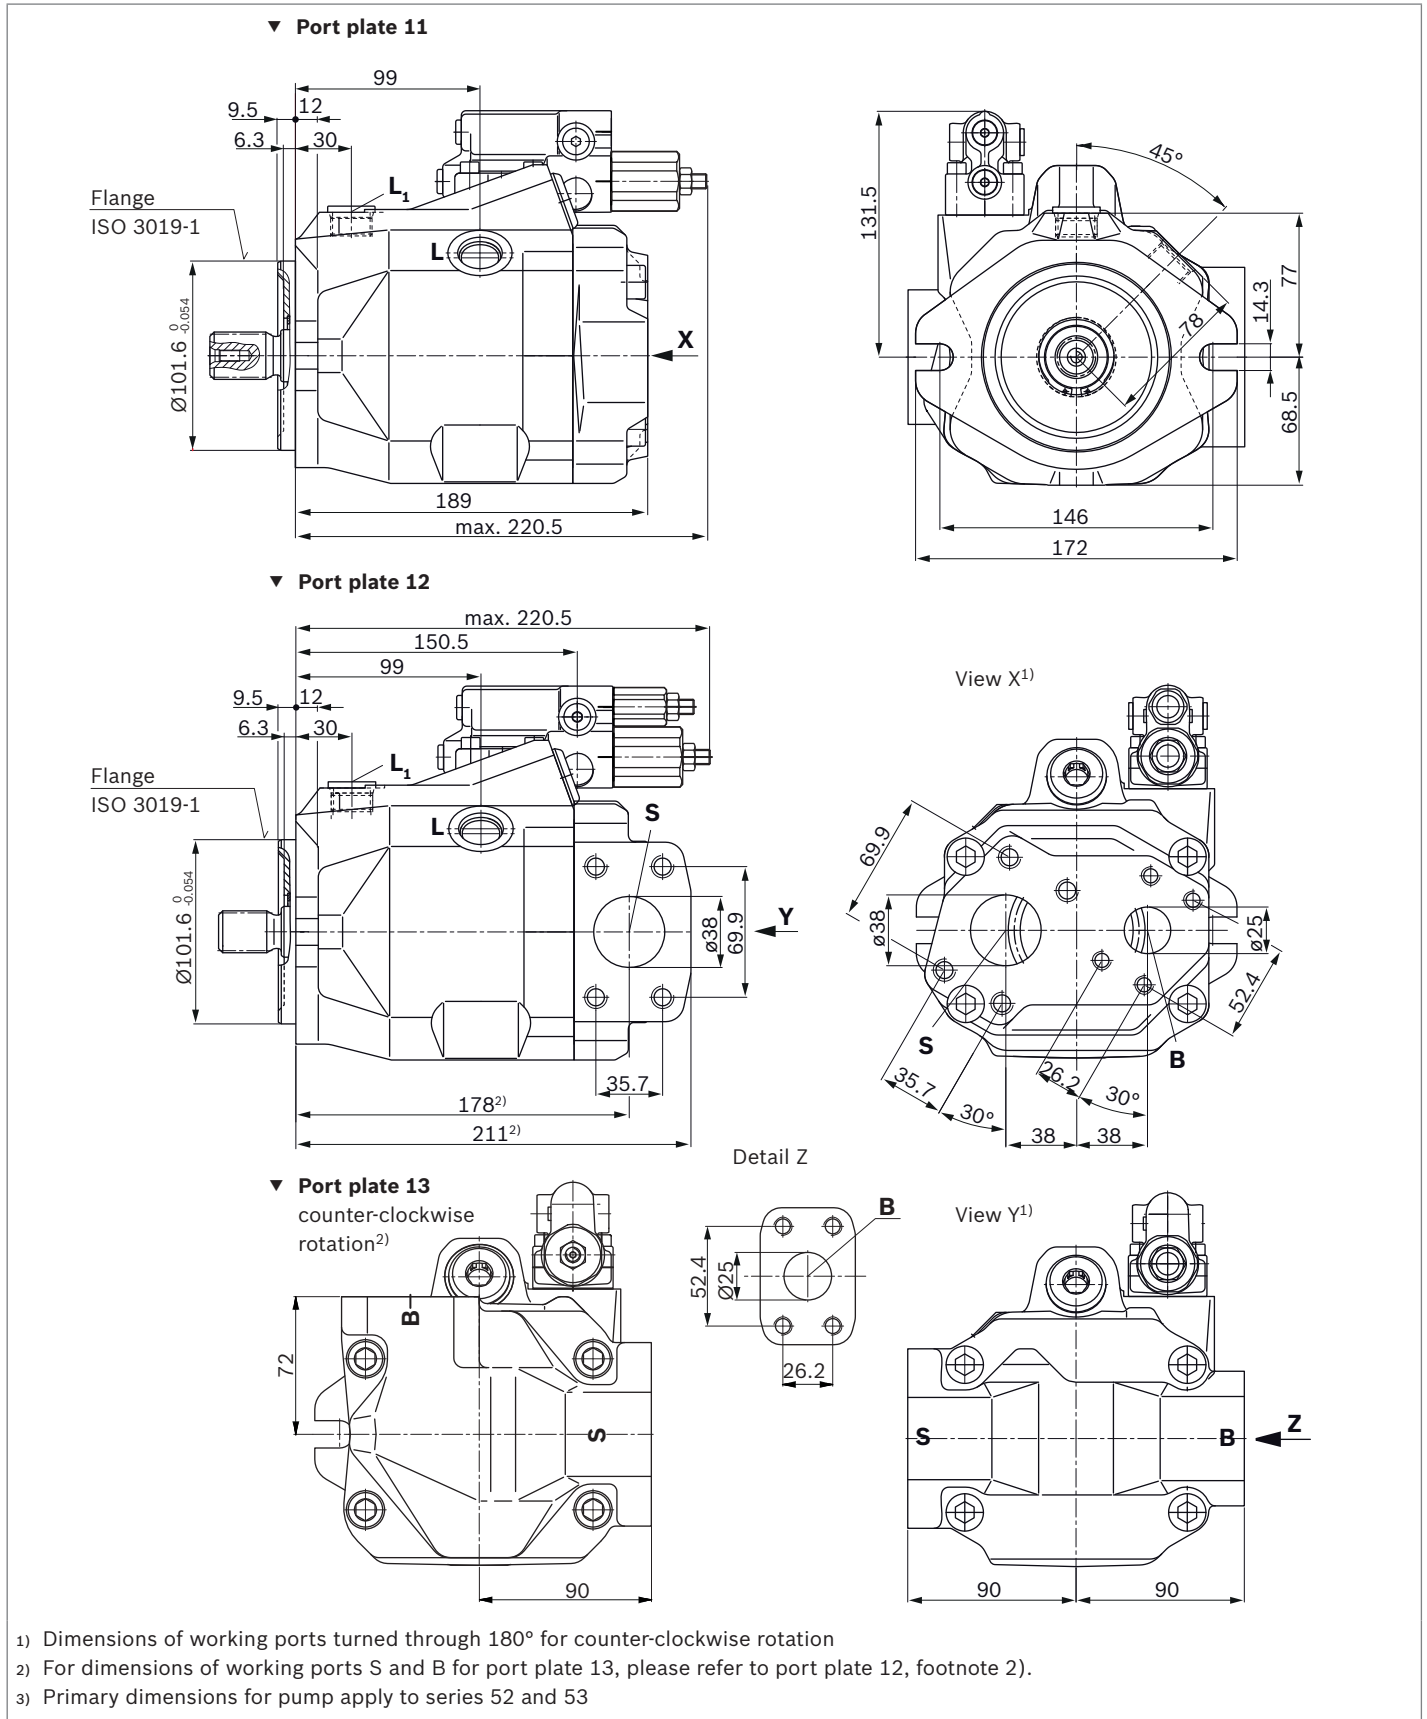

1) Dimensions of working ports turned through 180° for counter-clockwise rotation  
 2) For dimensions of working ports S and B for port plate 13, please refer to port plate 12, footnote 2).  
 3) Primary dimensions for pump apply to series 52 and 53


▼ Splined shaft 1 in SAE J744

S – 15T 16/32DP<sup>1)</sup>

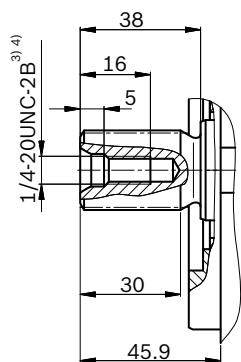


▼ Splined shaft 1 in SAE J744

R – 15T 16/32DP<sup>1)2)</sup>

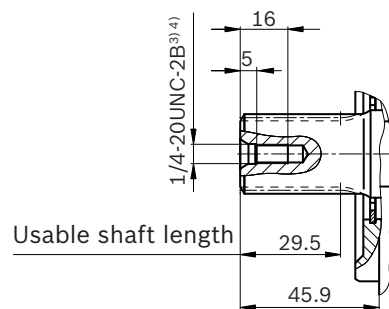


▼ Splined shaft 7/8 in SAE J744

U – 13T 16/32DP<sup>1)</sup>

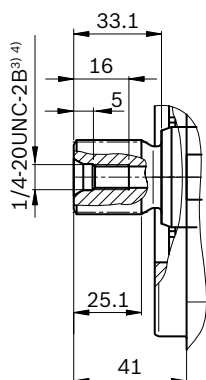

▼ Splined shaft 7/8 in SAE J744

W – 13T 16/32DP<sup>1)</sup>

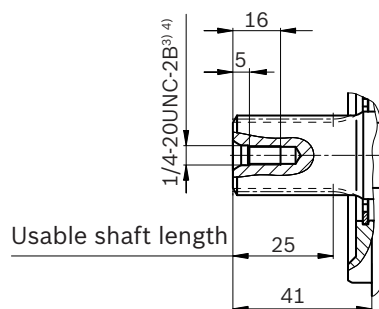


Ports		Standard	Size <sup>4)</sup>	$p_{max abs}$ [bar] <sup>5)</sup>	State <sup>10)</sup>
<b>B</b>	Working port (Standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 in M10 × 1.5; 17 deep	315	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/2 in M12 × 1.75; 20 deep	5	O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14UNF-2B; 13 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub>, L<sub>2</sub><sup>9)</sup></b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14UNF-2B; 13 deep	2	X <sup>8)</sup>
<b>X</b>	Control pressure	ISO 11926	7/16-20UNF-2A; 11.5 deep	315	O


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Thread according to ASME B1.1  
 4) Observe the instructions in the operating instructions concerning the maximum tightening torques.  
 5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

6) Metric fastening thread is a deviation from standard.  
 7) The spot face can be deeper than as specified in the standard.  
 8) Depending on the installation position, **L**, **L<sub>1</sub>** or **L<sub>2</sub>** must be connected (also see installation instructions starting on page 62).  
 9) Only series 53  
 10) O = Must be connected (plugged when delivered)  
 X = Plugged (in normal operation)


▼ **DRG – Pressure controller, remote controlled, series 52 (53)**

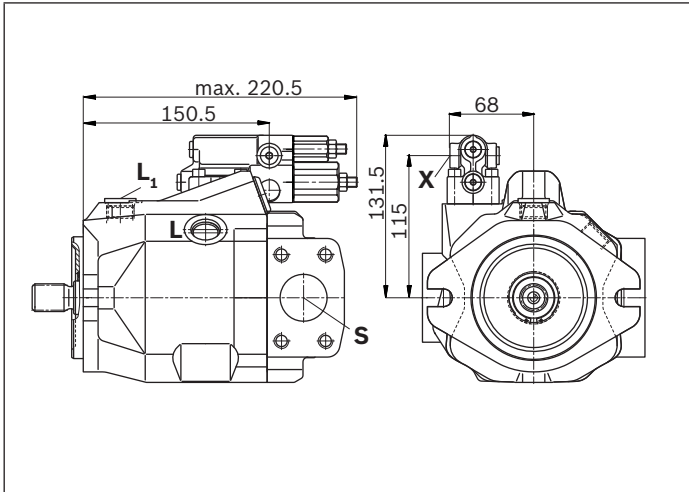


▼ **EP.D. / EK.D. – Electro-proportional control, series 53**

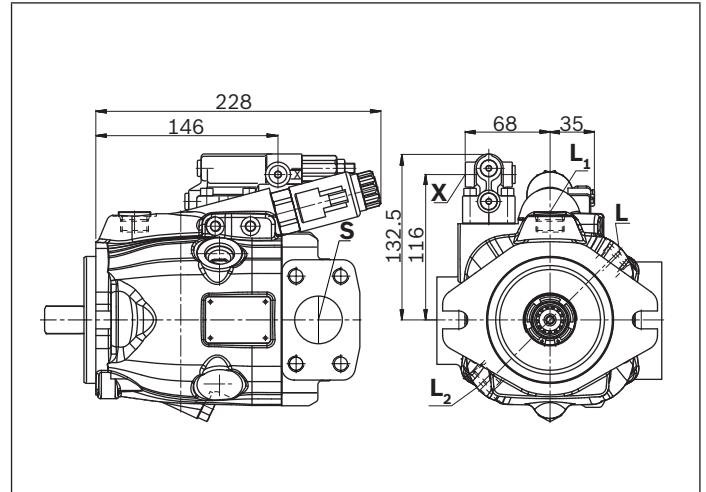


▼ **DFR/DFR1/DRSC – Pressure and flow control, series 52 (53)**

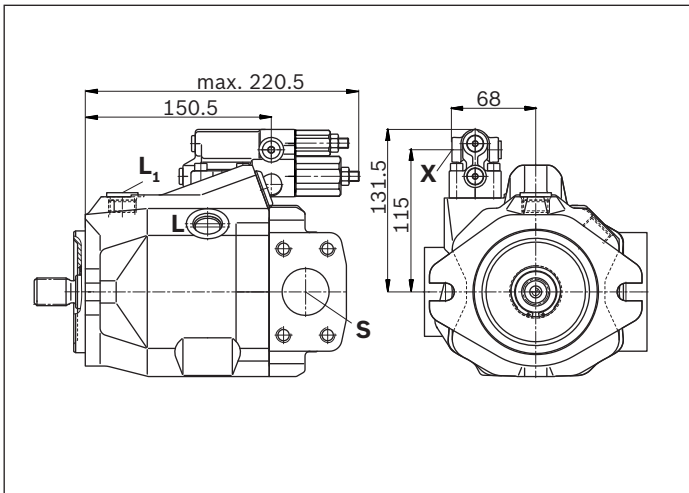


▼ **EP.ED. / EK.ED. – Electro-prop. control, series 53**

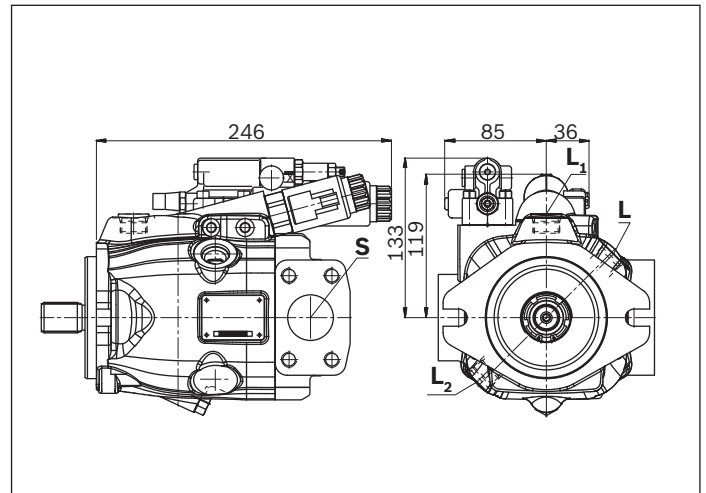

▼ **LA.D. – Pressure, flow and power control, series 53**

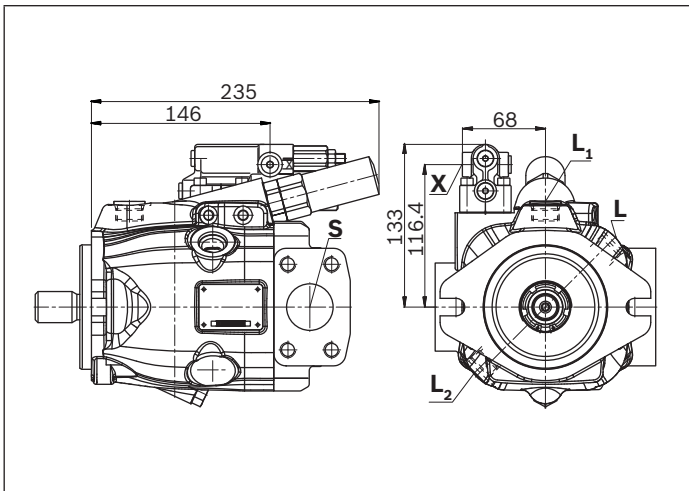


▼ **ED7. / ER7. – Electro-prop. Pressure control, series 52**

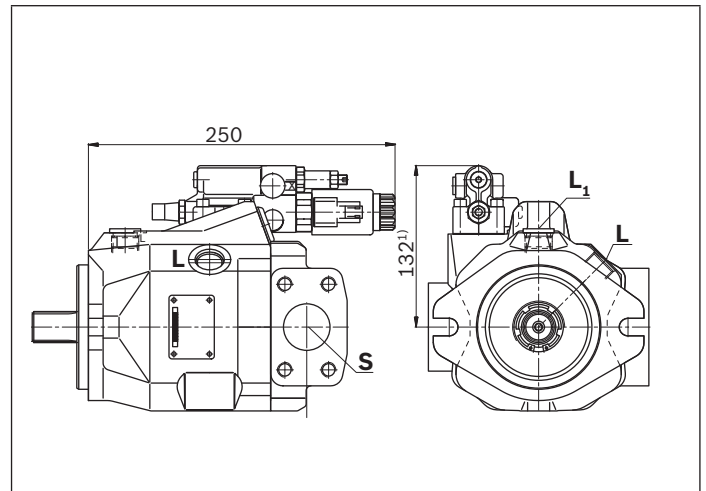

1) ER7.: 167 mm if using an intermediate plate pressure controller


**Dimensions size 60**

**DR – Hydraulic pressure controller, clockwise rotation, mounting flange C series 52**

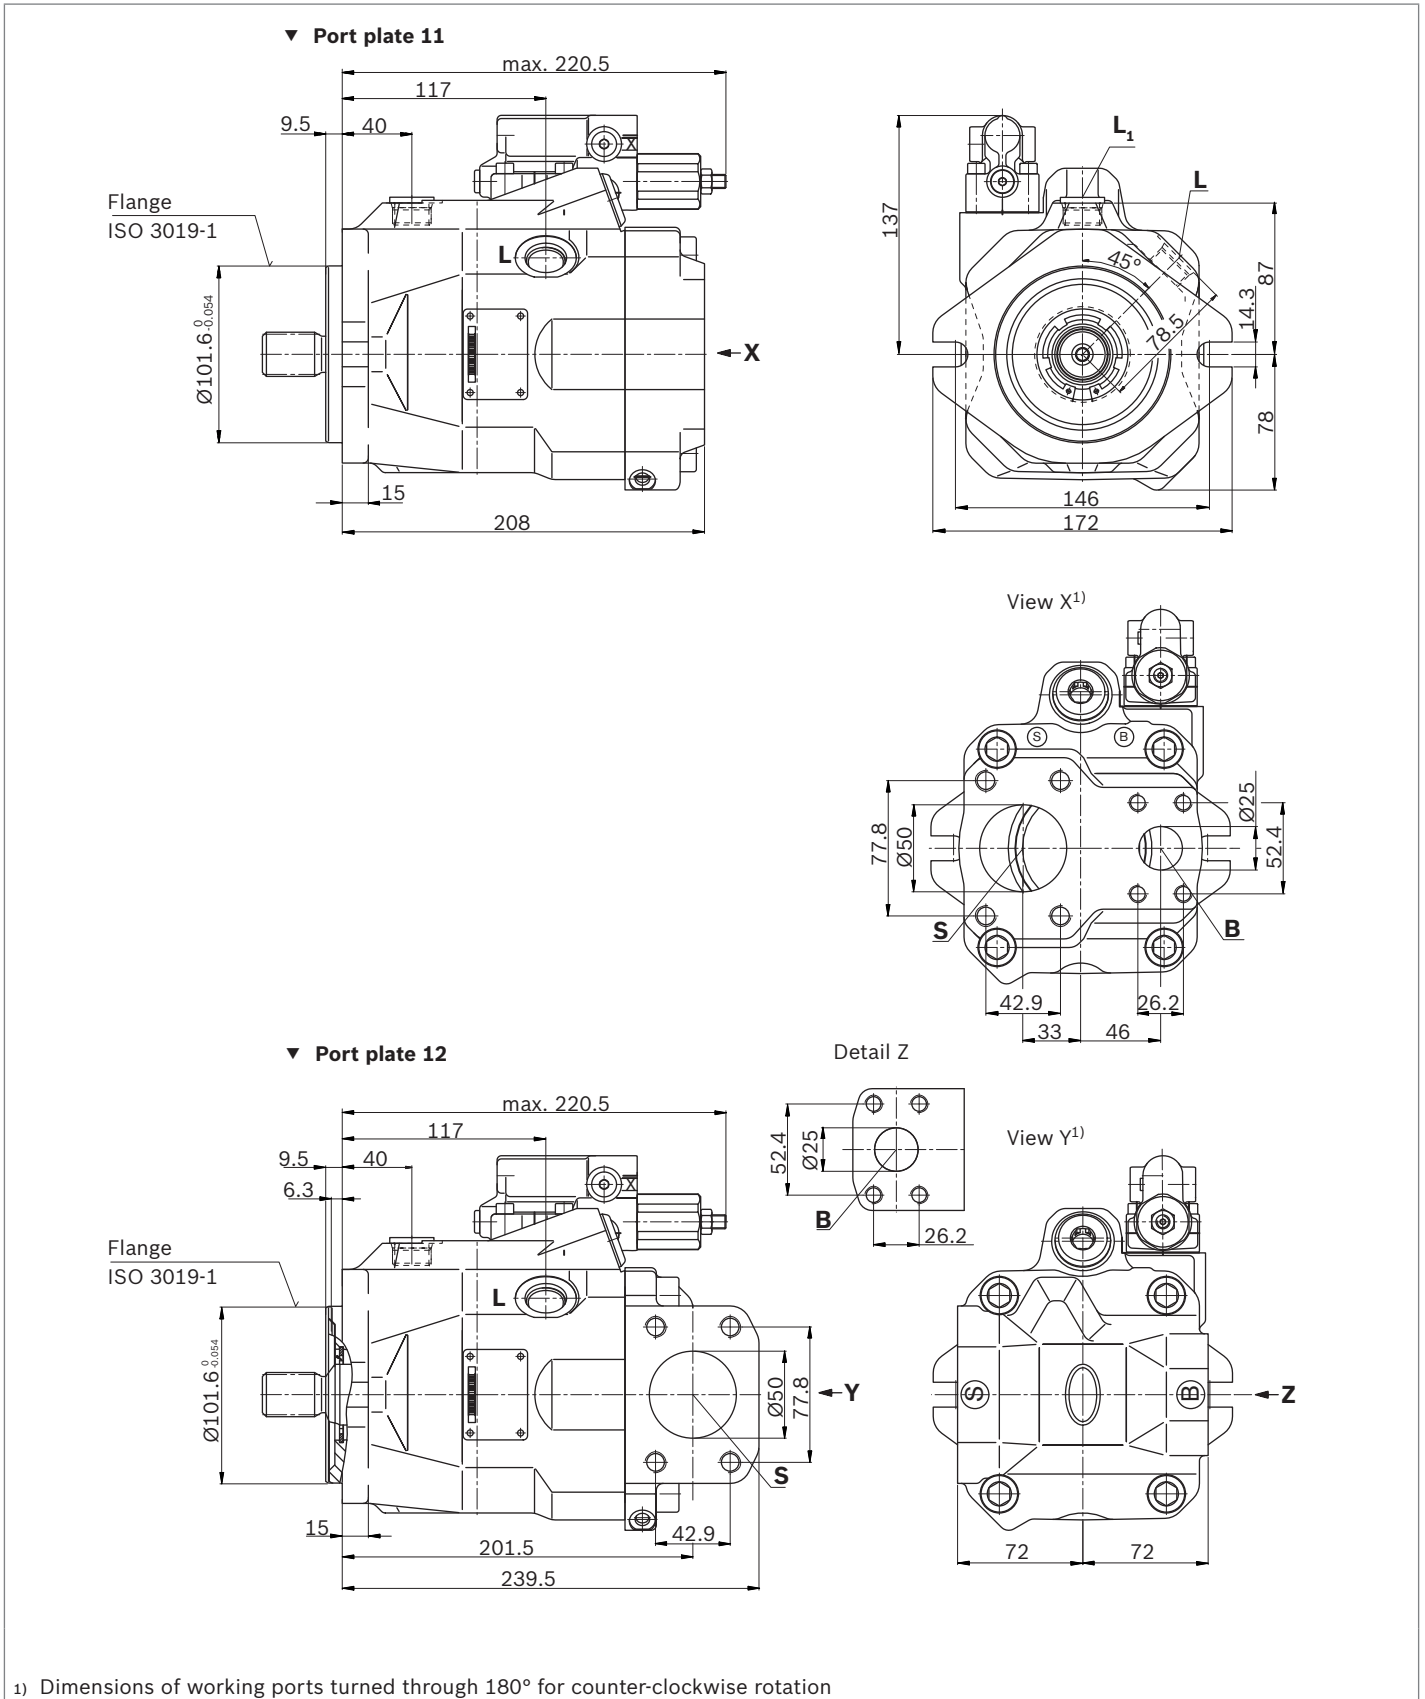

**Dimensions size 60**


**DR – Hydraulic pressure controller, clockwise rotation, mounting flange D series 52**

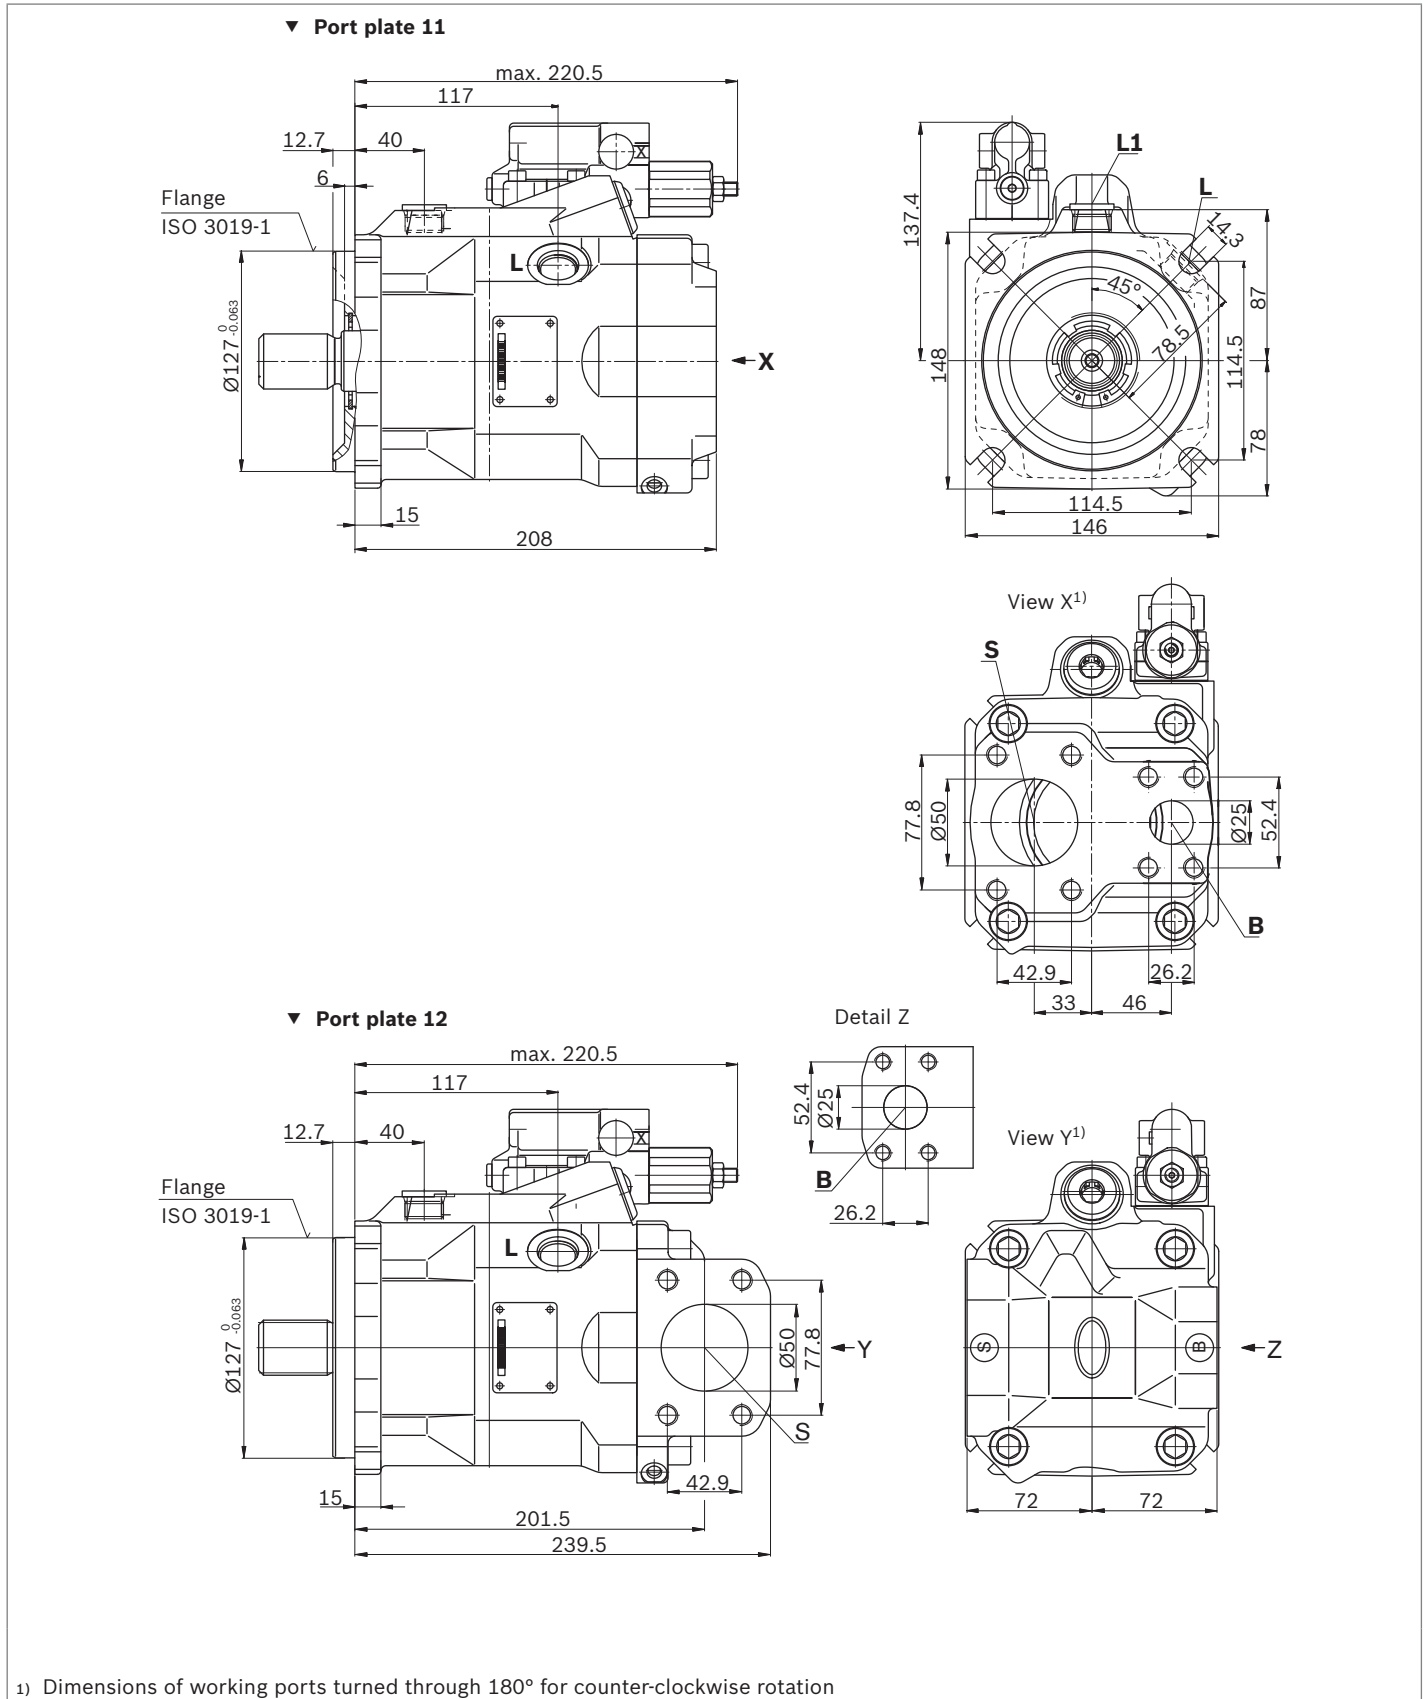




**Dimensions size 63**

**DR – Hydraulic pressure controller, clockwise rotation, mounting flange C series 53**

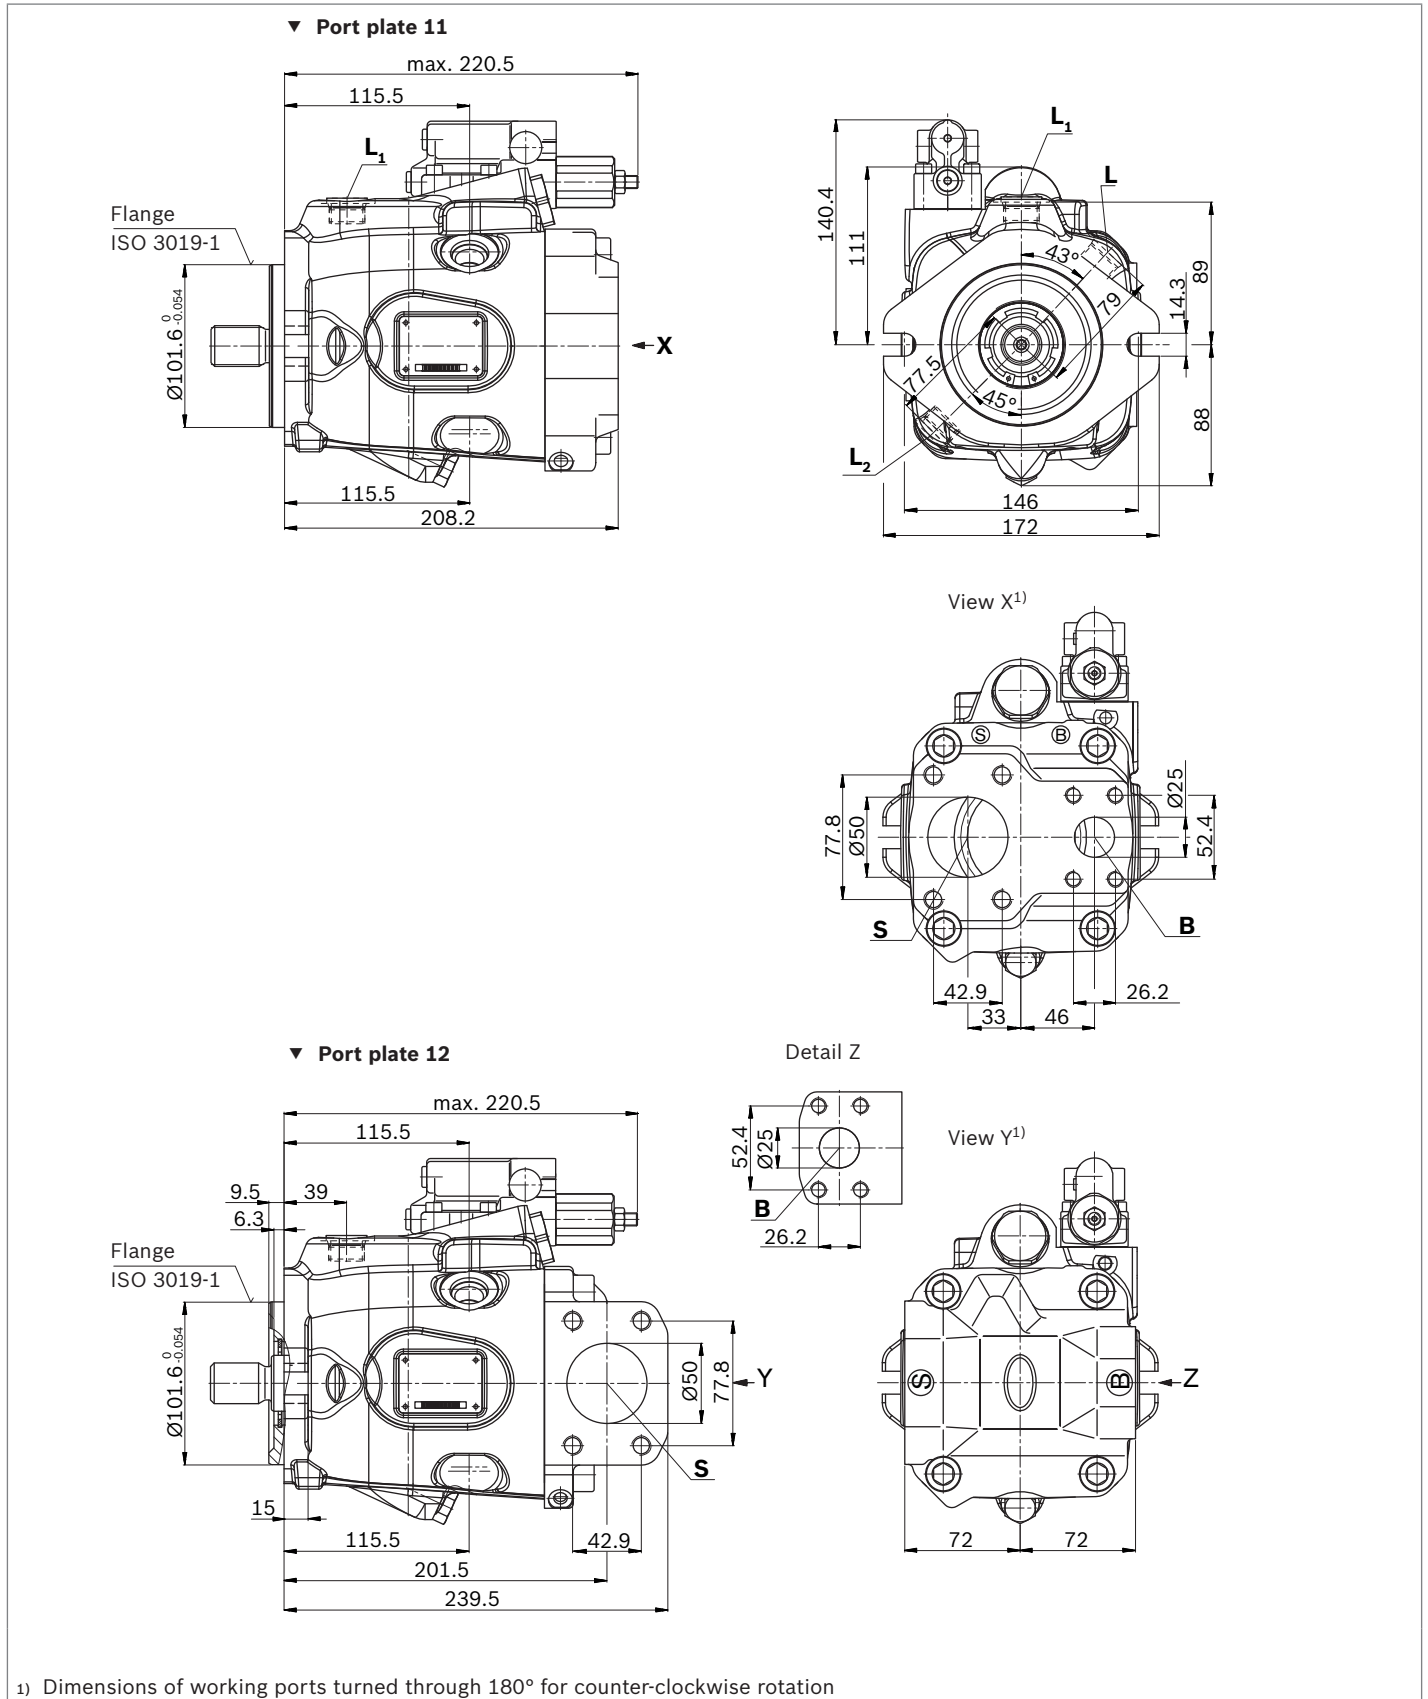


**Dimensions size 63**


**DR – Hydraulic pressure controller, clockwise rotation, mounting flange D series 53**

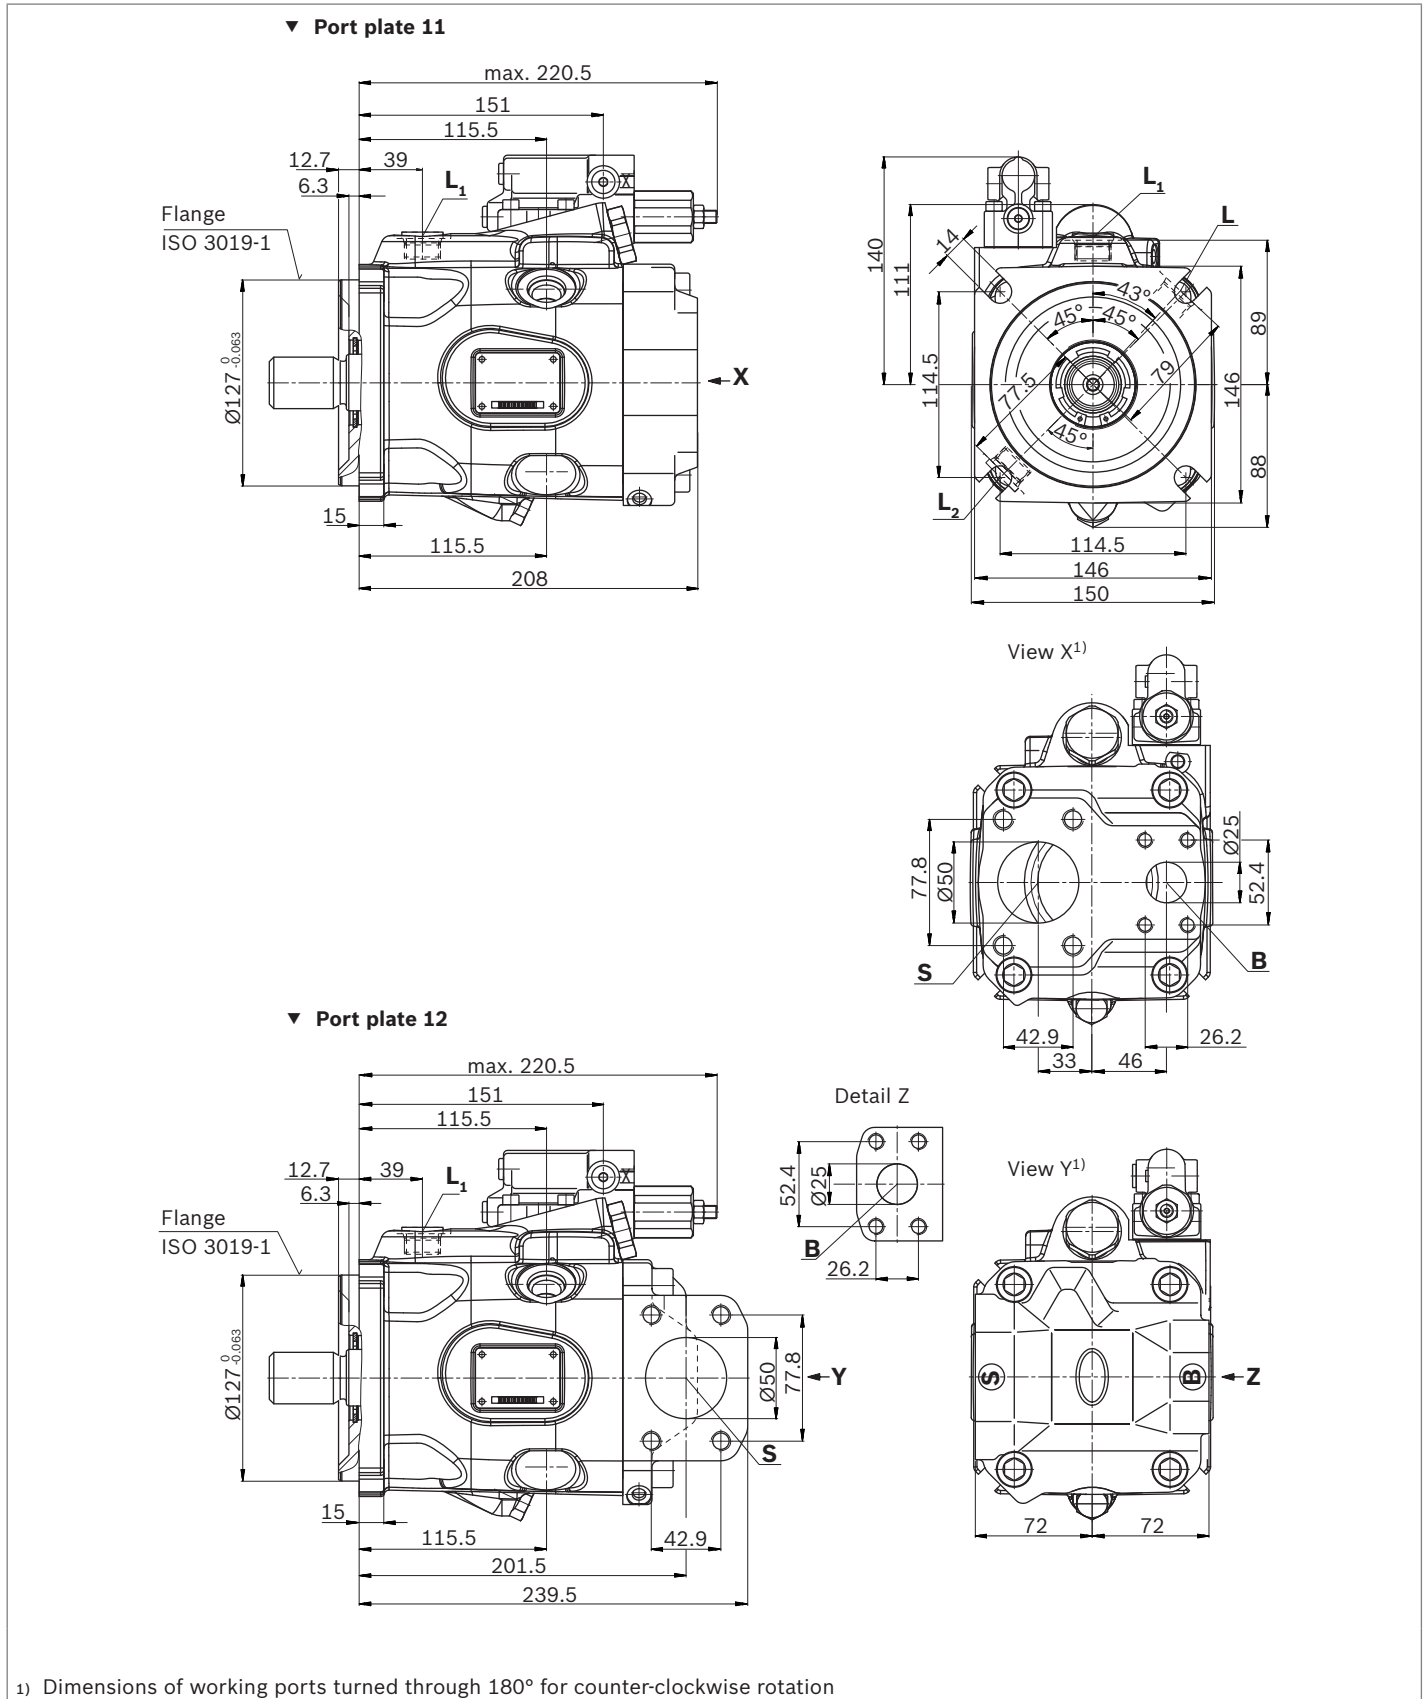


▼ Splined shaft 1 1/4 in SAE J744

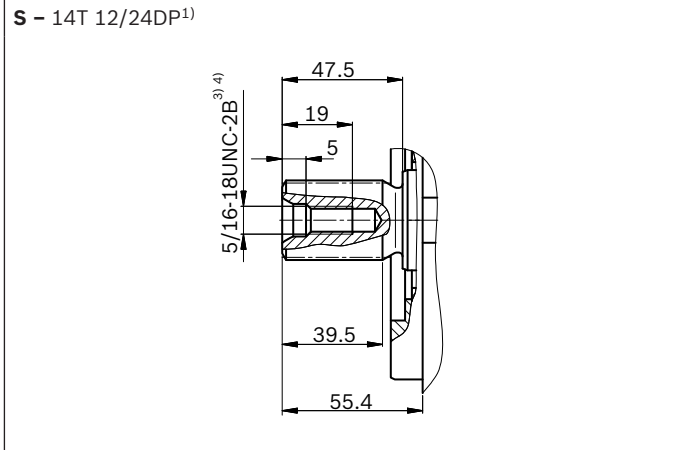


▼ Splined shaft 1 1/4 in SAE J744

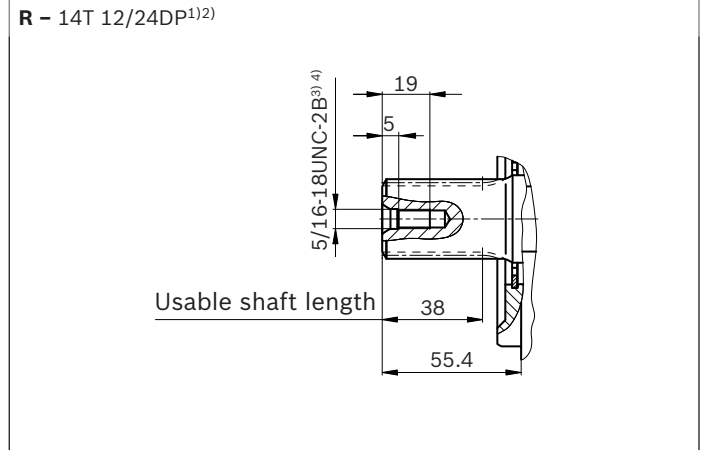

▼ Splined shaft 1 in SAE J744

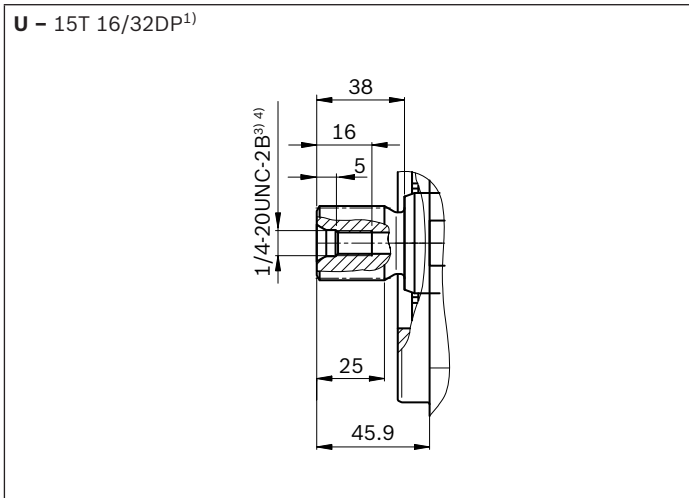

▼ Splined shaft 1 in SAE J744

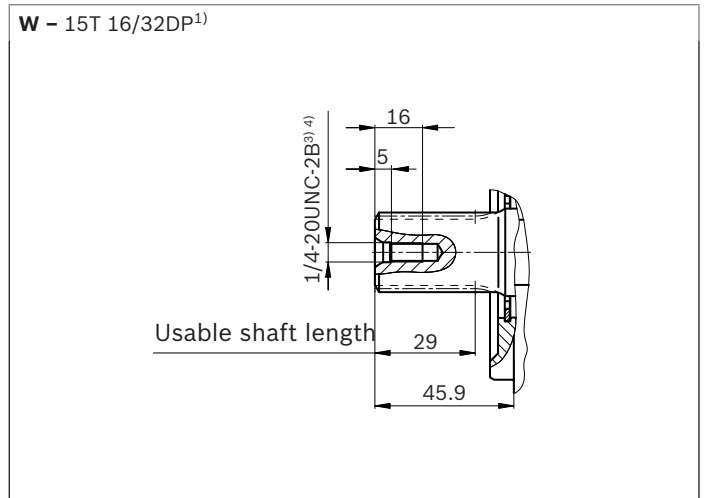


Ports	Standard	Size <sup>4)</sup>	$p_{max abs}$ [bar] <sup>5)</sup>	State <sup>10)</sup>
<b>B</b>	Working port (Standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 in M10 × 1.5; 17 deep	315 O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	2 in M12 × 1.75; 20 deep	5 O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14UNF-2B; 13 deep	2 O <sup>8)</sup>
<b>L<sub>1</sub>, L<sub>2</sub></b> <sup>9)</sup>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14UNF-2B; 13 deep	2 X <sup>8)</sup>
<b>X</b>	Control pressure	ISO 11926	7/16-20UNF-2A; 11.5 deep	315 O


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Thread according to ASME B1.1  
 4) Observe the instructions in the operating instructions concerning the maximum tightening torques.  
 5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

6) Metric fastening thread is a deviation from standard.  
 7) The spot face can be deeper than as specified in the standard.  
 8) Depending on the installation position, **L**, **L<sub>1</sub>** or **L<sub>2</sub>** must be connected (also see installation instructions starting on page 62).  
 9) Only series 53  
 10) O = Must be connected (plugged when delivered)  
 X = Plugged (in normal operation)


▼ **DRG – Pressure controller, remote controlled, series 53 (52)**

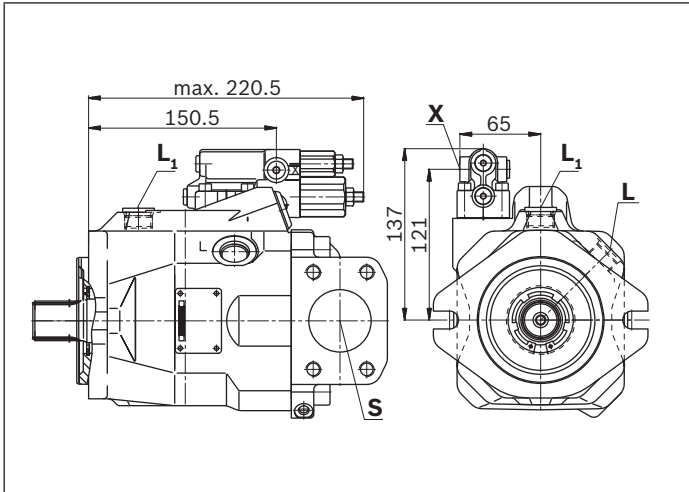


▼ **EP.D. / EK.D. – Electro-proportional control, series 53**

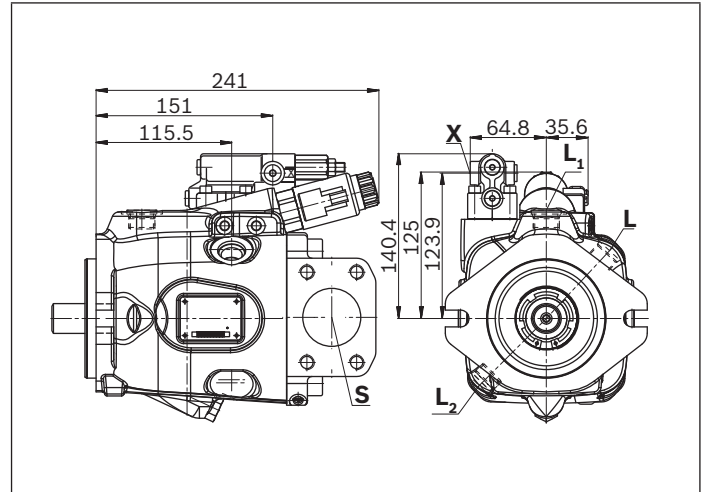


▼ **DFR/DFR1/DRSC – Pressure and flow control, series 53 (52)**

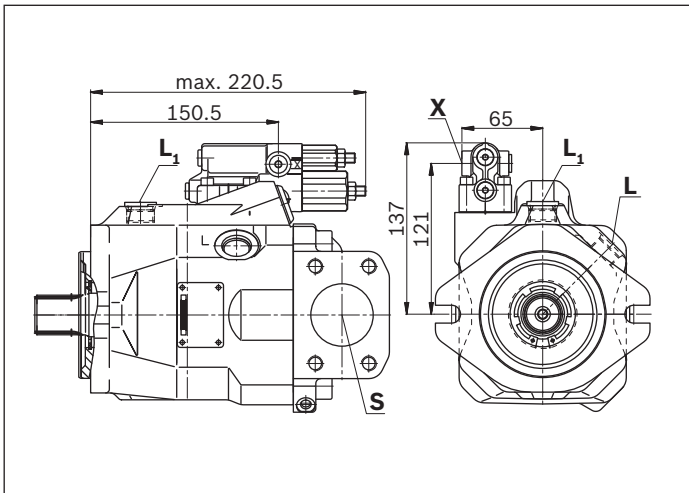


▼ **EP.ED. / EK.ED. – Electro-prop. control, series 53**

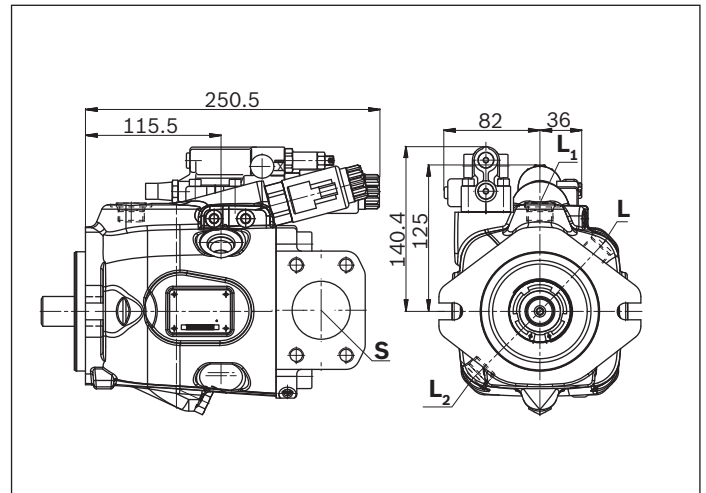

▼ **LA.D. – Pressure, flow and power control, series 53**

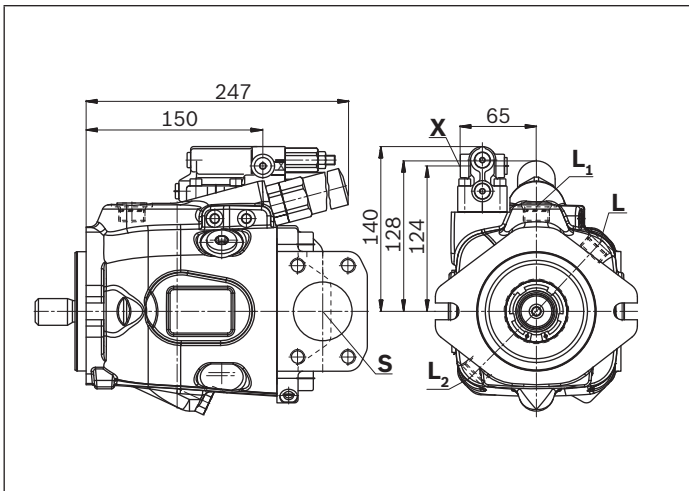


▼ **ED7. / ER7. – Electro-prop. Pressure control, series 53 (52)**

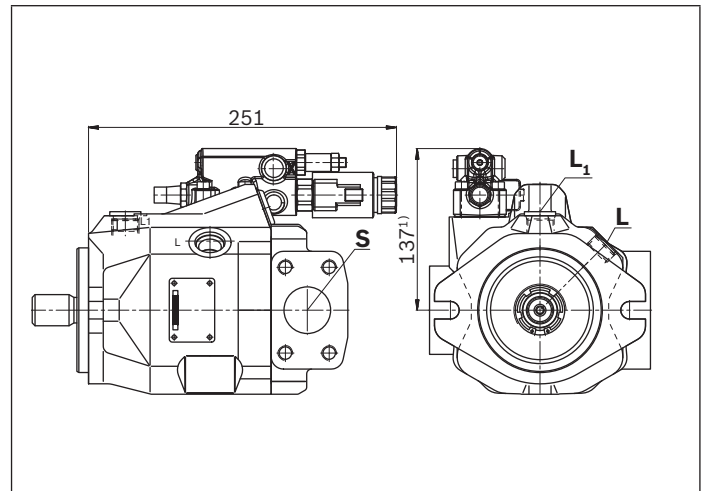

1) ER7.: 172 mm if using an intermediate plate pressure controller


**Dimensions size 72**

**DR – Hydraulic pressure controller, clockwise rotation, mounting flange C series 53**

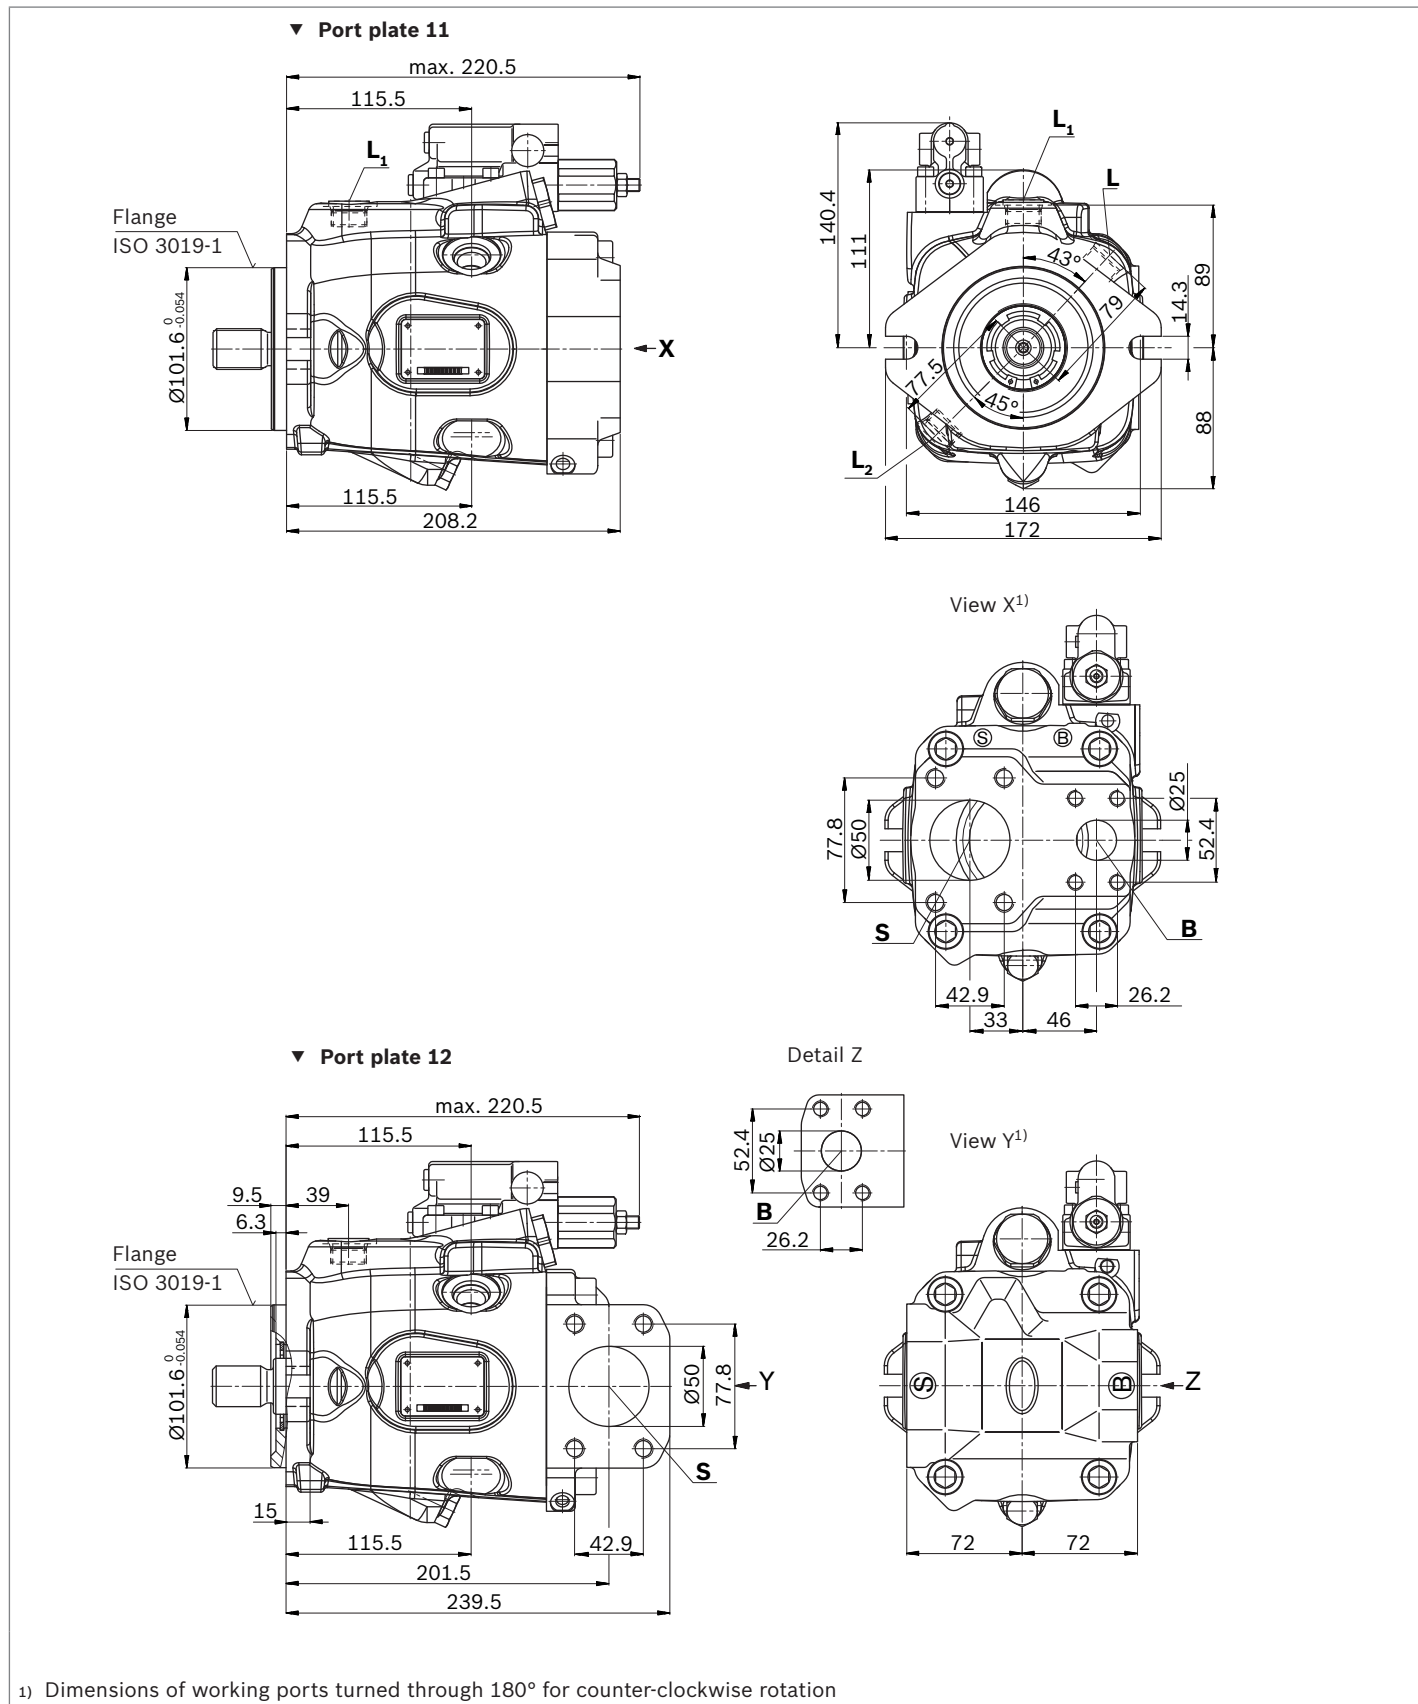


**Dimensions size 72**


**DR – Hydraulic pressure controller, clockwise rotation, mounting flange D series 53**

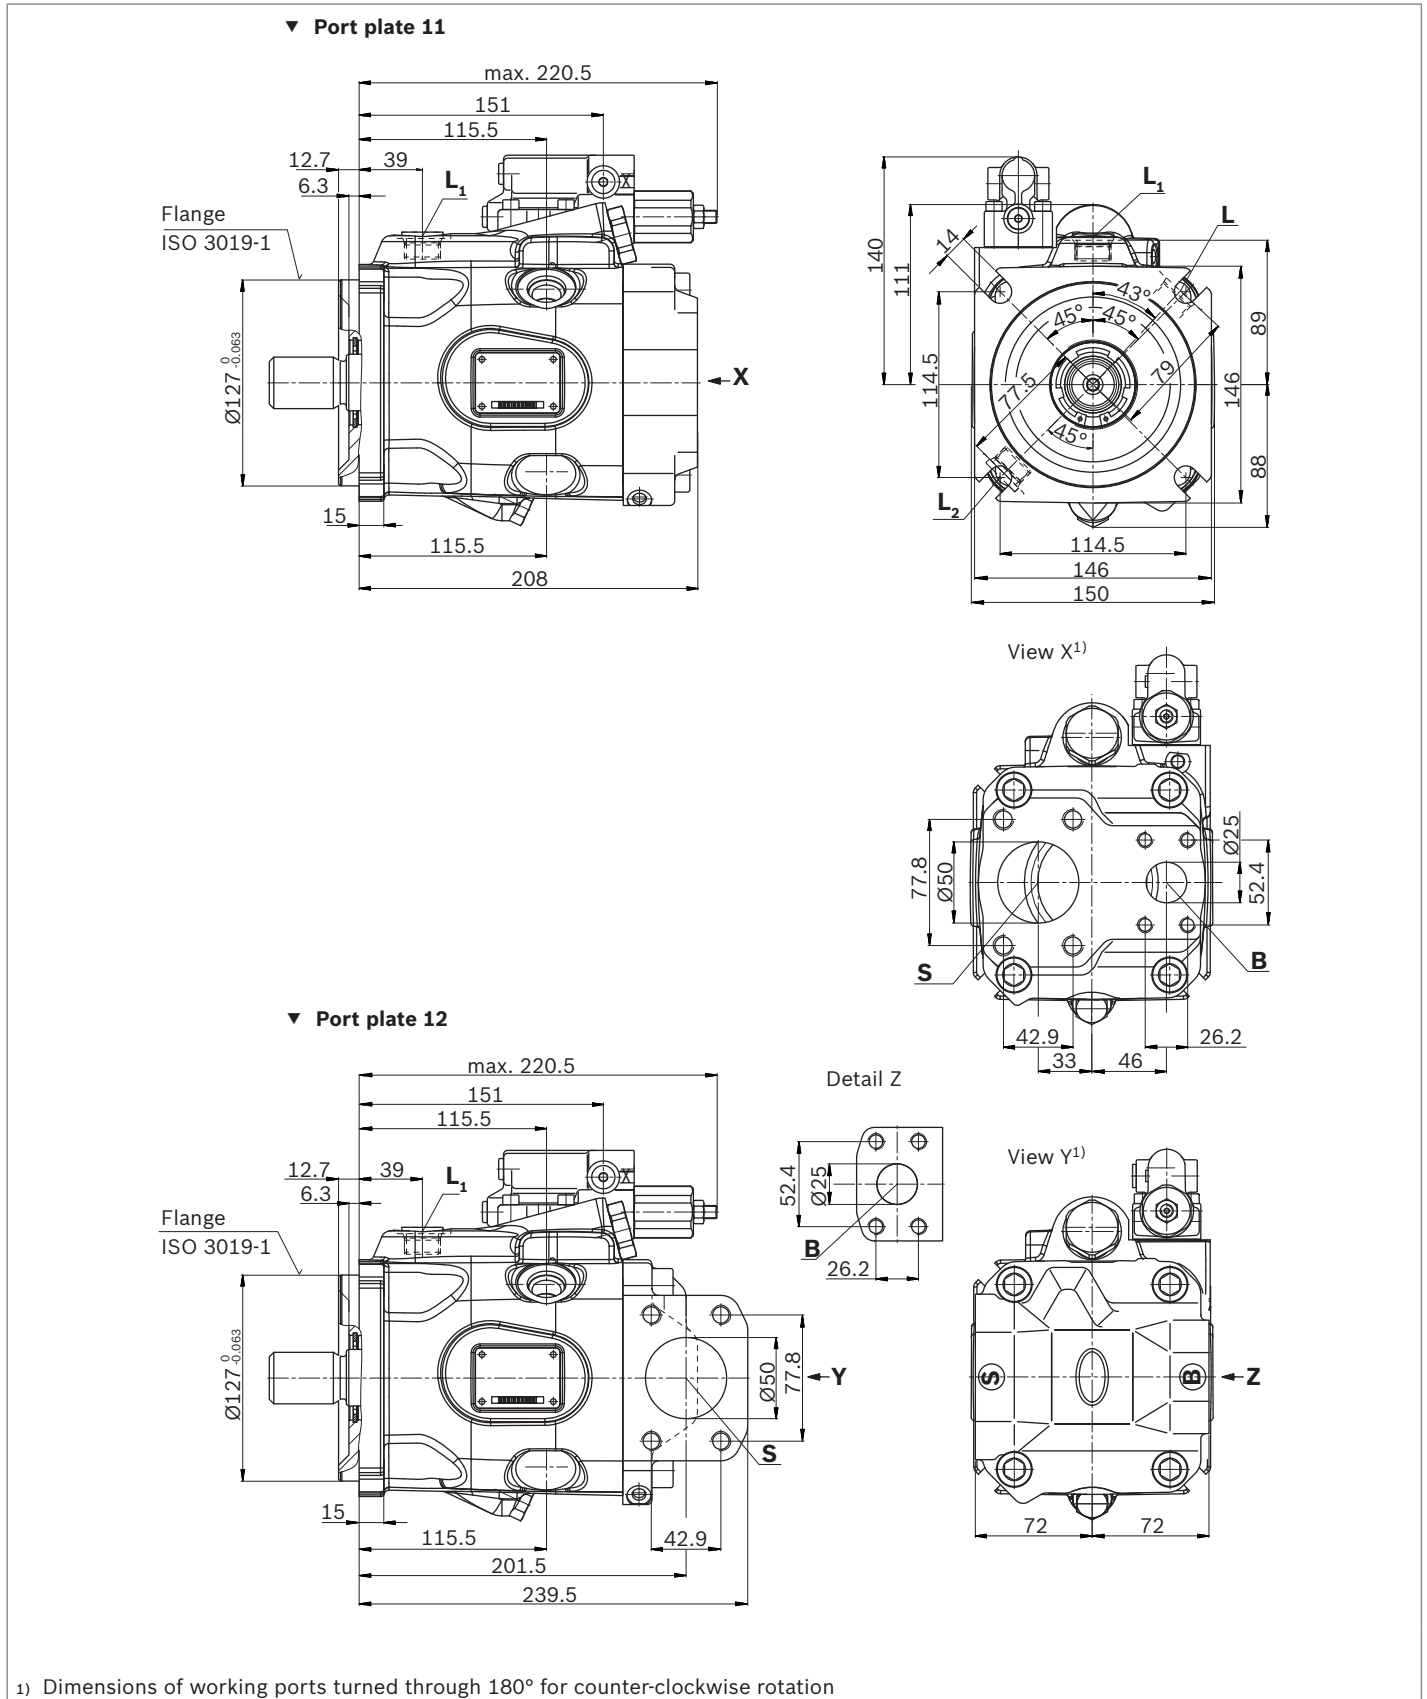


▼ Splined shaft 1 1/4 in SAE J744

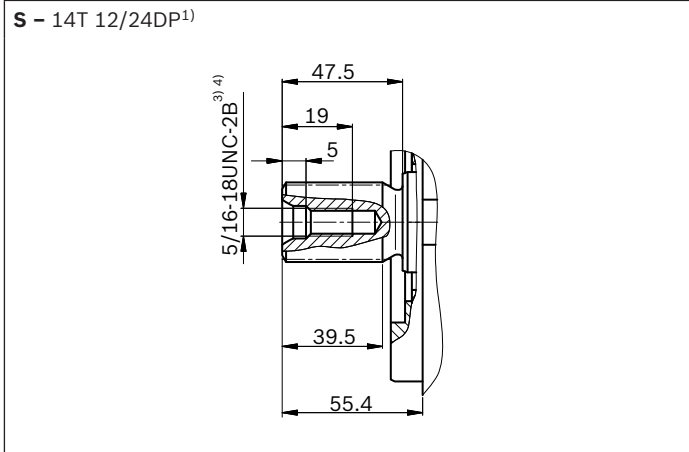


▼ Splined shaft 1 1/4 in SAE J744

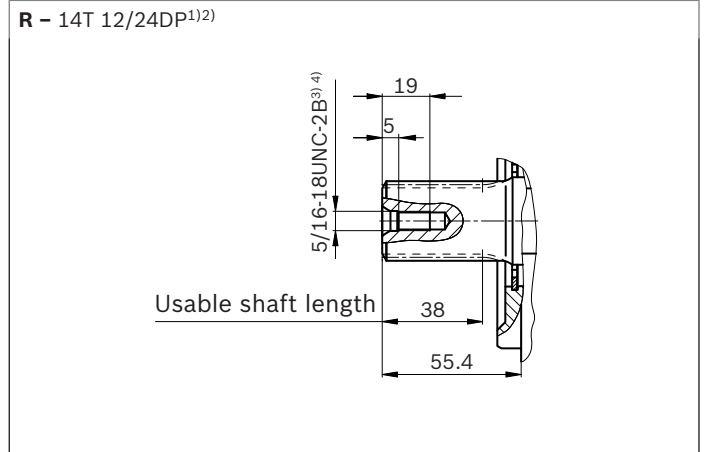

▼ Splined shaft 1 in SAE J744

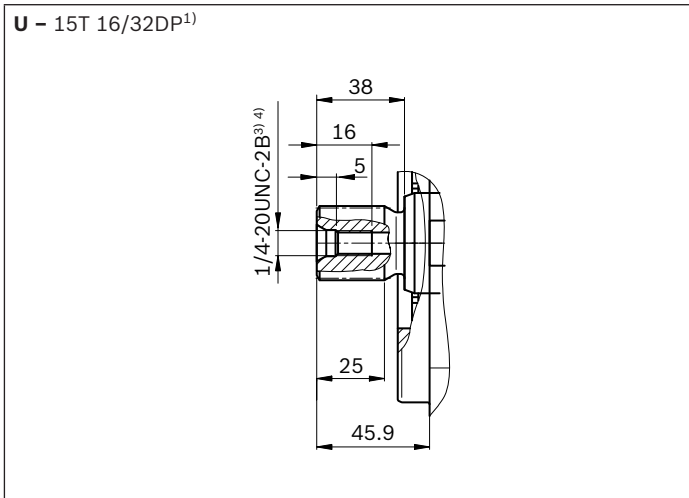

▼ Splined shaft 1 in SAE J744

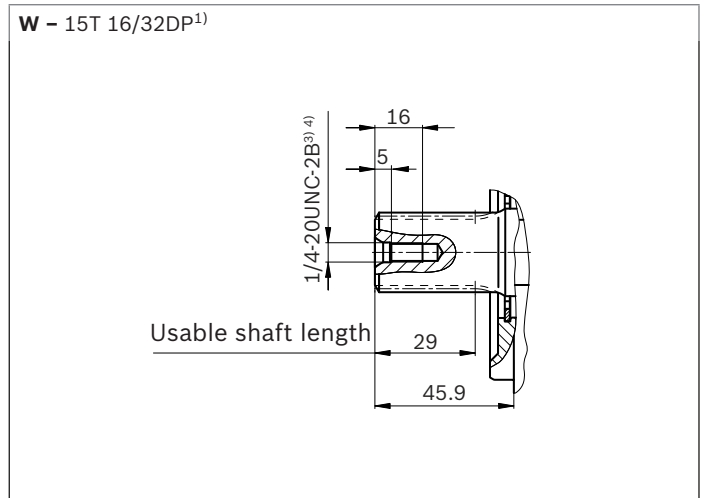

3


Ports	Standard	Size <sup>4)</sup>	$p_{max abs}$ [bar] <sup>5)</sup>	State <sup>10)</sup>
<b>B</b>	Working port (Standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 in M10 × 1.5; 17 deep	315 O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	2 in M12 × 1.75; 20 deep	5 O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14UNF-2B; 13 deep	2 O <sup>8)</sup>
<b>L<sub>1</sub>, L<sub>2</sub><sup>9)</sup></b>	Drain port	ISO 11926 <sup>7)</sup>	7/8-14UNF-2B; 13 deep	2 X <sup>8)</sup>
<b>X</b>	Control pressure	ISO 11926	7/16-20UNF-2A; 11.5 deep	315 O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Thread according to ASME B1.1  
 4) Observe the instructions in the operating instructions concerning the maximum tightening torques.  
 5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.


6) Metric fastening thread is a deviation from standard.  
 7) The spot face can be deeper than as specified in the standard.  
 8) Depending on the installation position, **L**, **L<sub>1</sub>** or **L<sub>2</sub>** must be connected (also see installation instructions starting on page 62).  
 9) Only series 53  
 10) O = Must be connected (plugged when delivered)  
 X = Plugged (in normal operation)




▼ **DRG – Pressure controller, remote controlled, series 53**

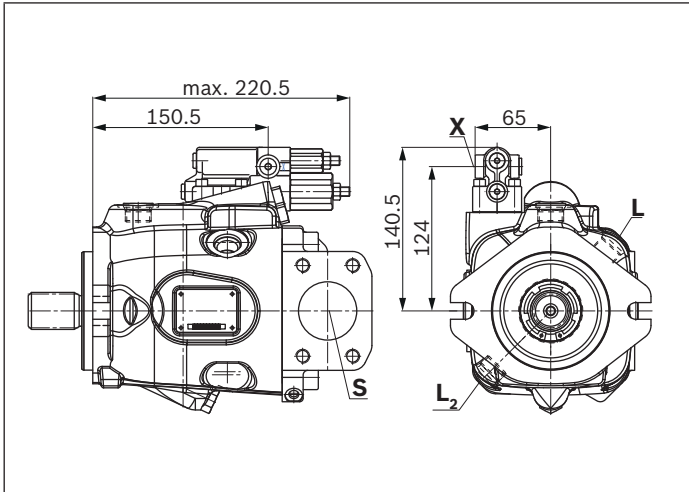


▼ **EP.D. / EK.D. – Electro-proportional control, series 53**

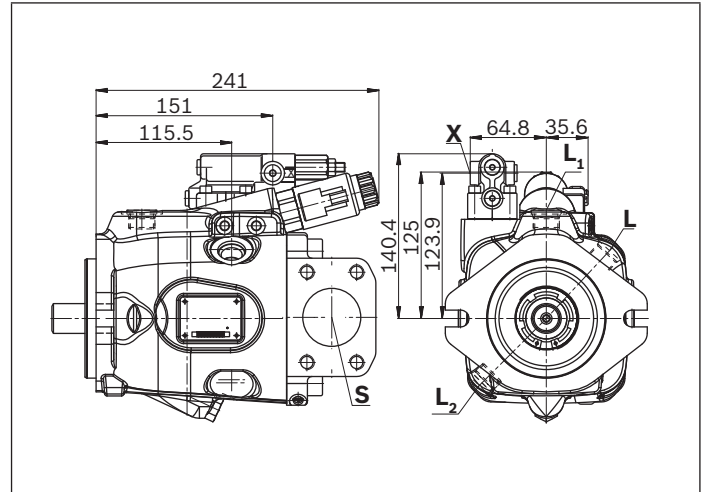


▼ **DRF/DRS/DRSC – Pressure and flow control, series 53**

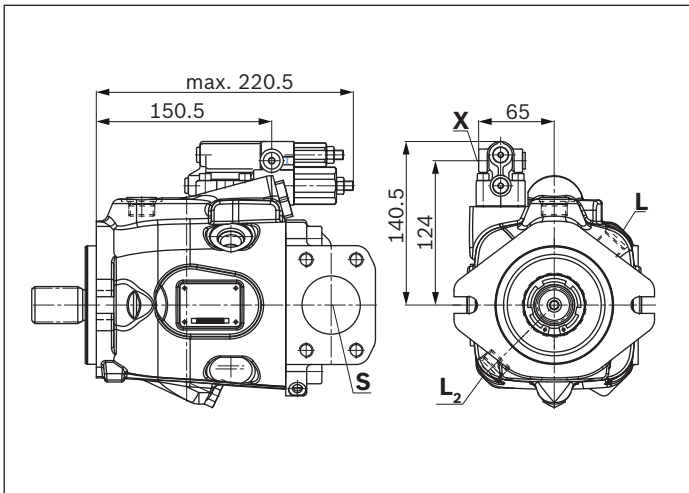


▼ **EP.ED. / EK.ED. – Electro-prop. control, series 53**

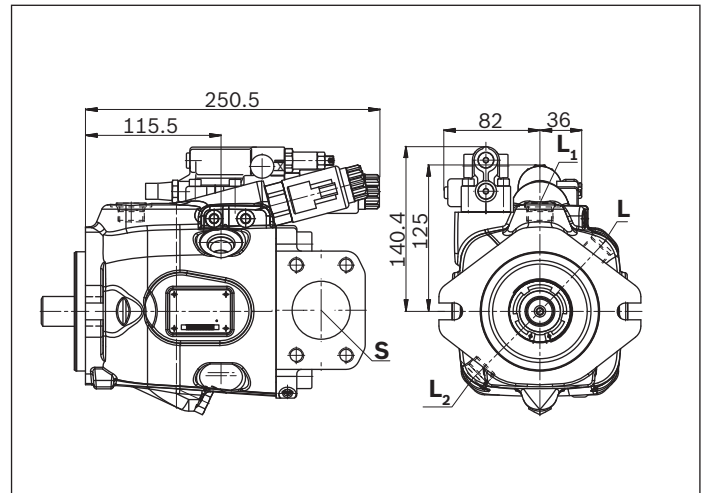

▼ **LA.D. – Pressure, flow and power control, series 53**

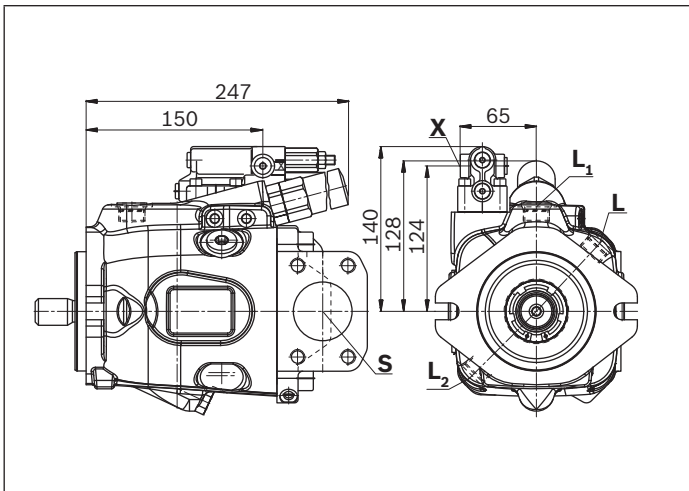

▼ **ED7. / ER7. – Electro-prop. Pressure control, series 53**

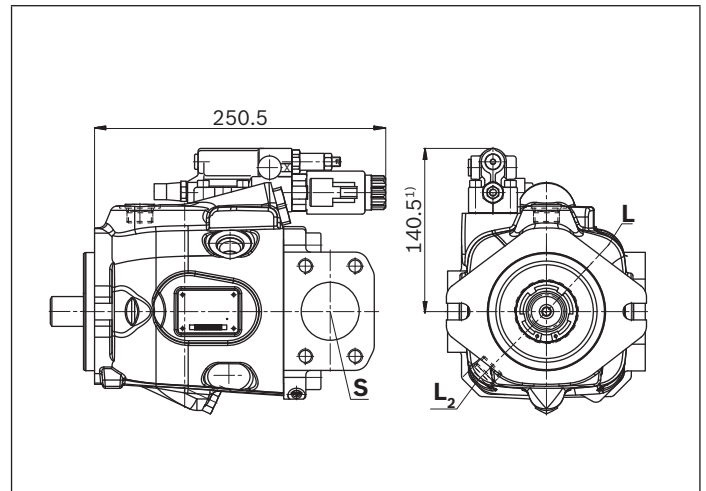


1) ER7.: 175.5 mm if using an intermediate plate pressure controller



**Dimensions size 85**


**DR – Hydraulic pressure controller, clockwise rotation, mounting flange C series 52**

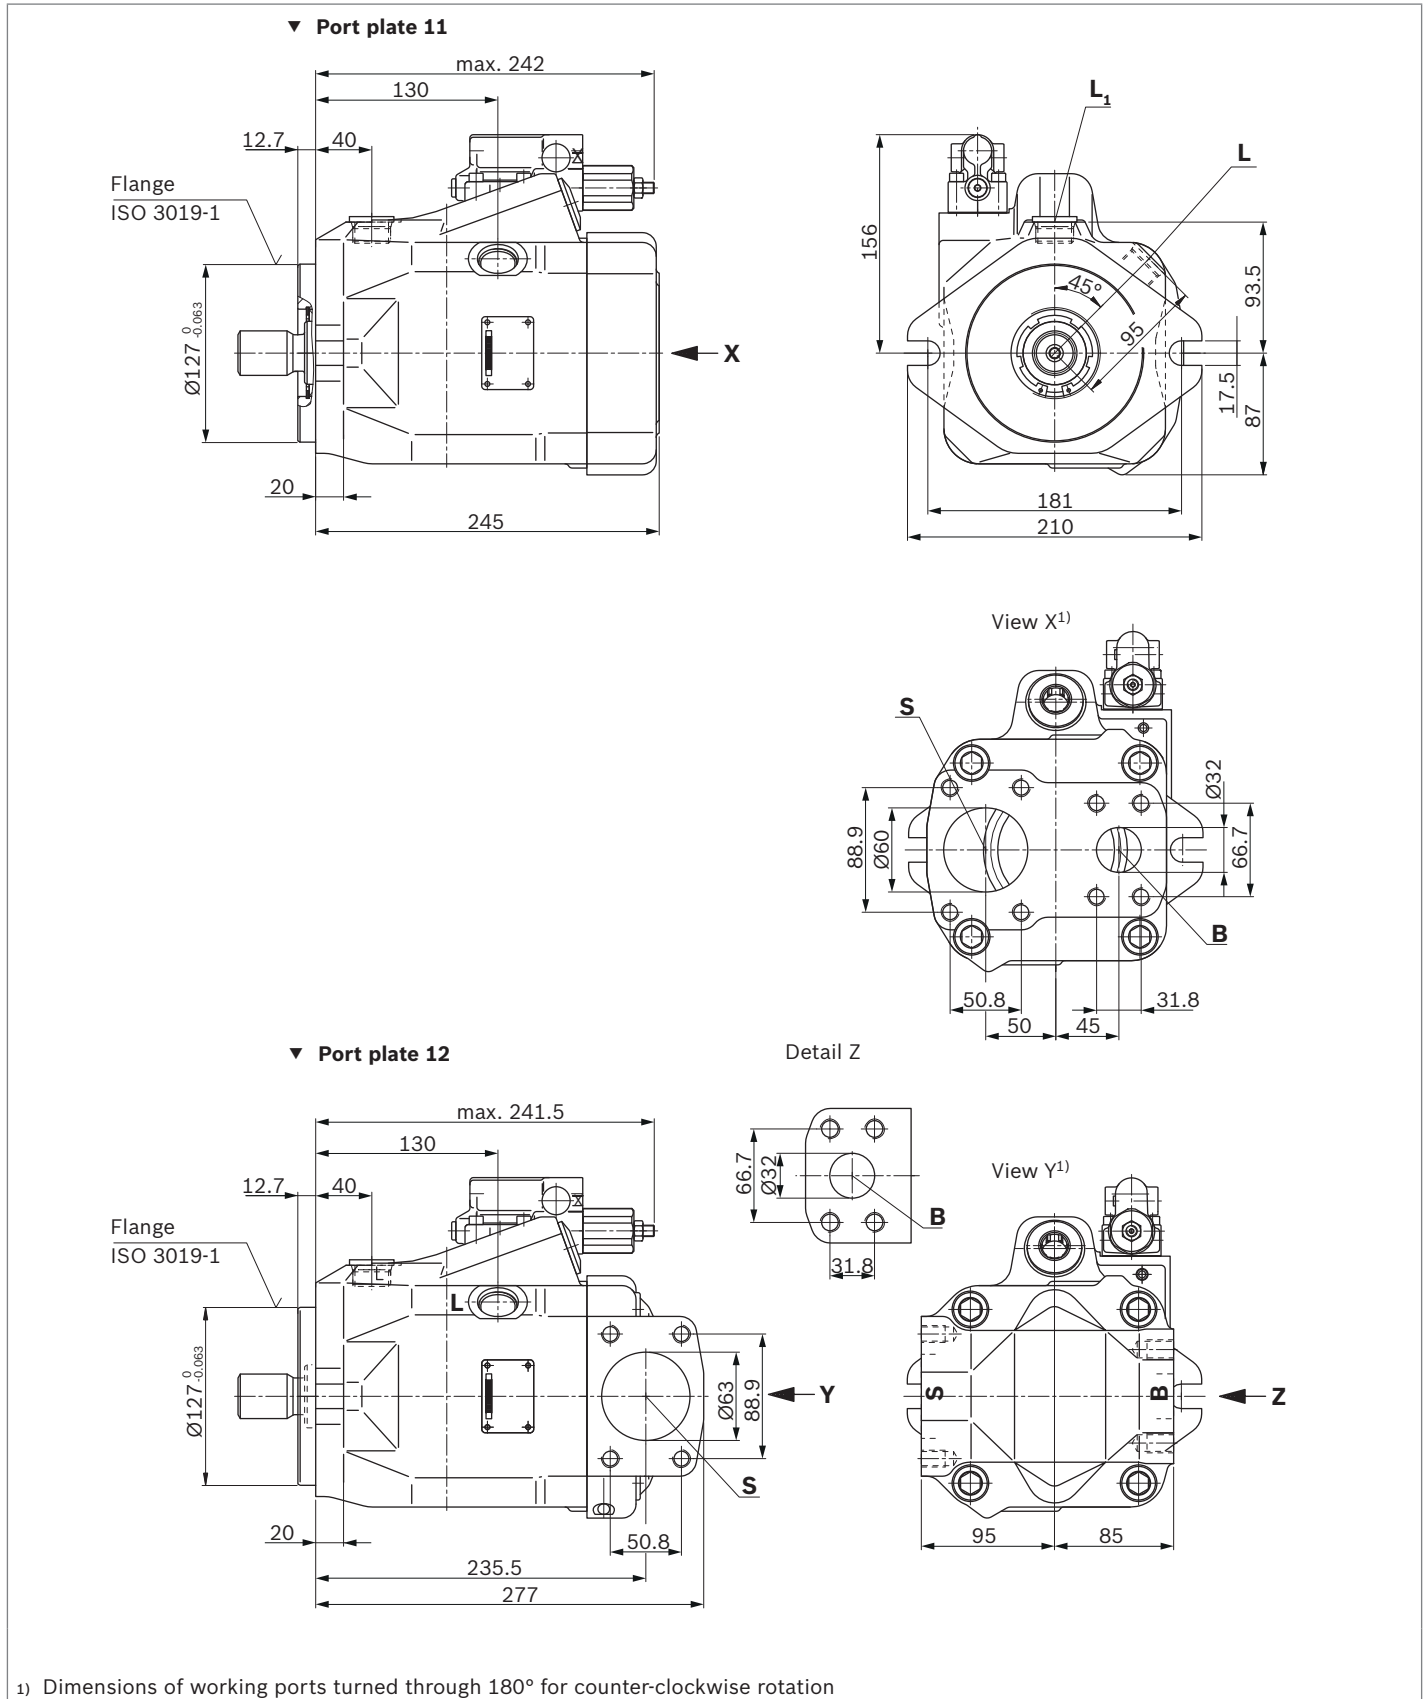


1) Dimensions of working ports turned through 180° for counter-clockwise rotation

**Dimensions size 85**


**DR – Hydraulic pressure controller, clockwise rotation, mounting flange D series 53**

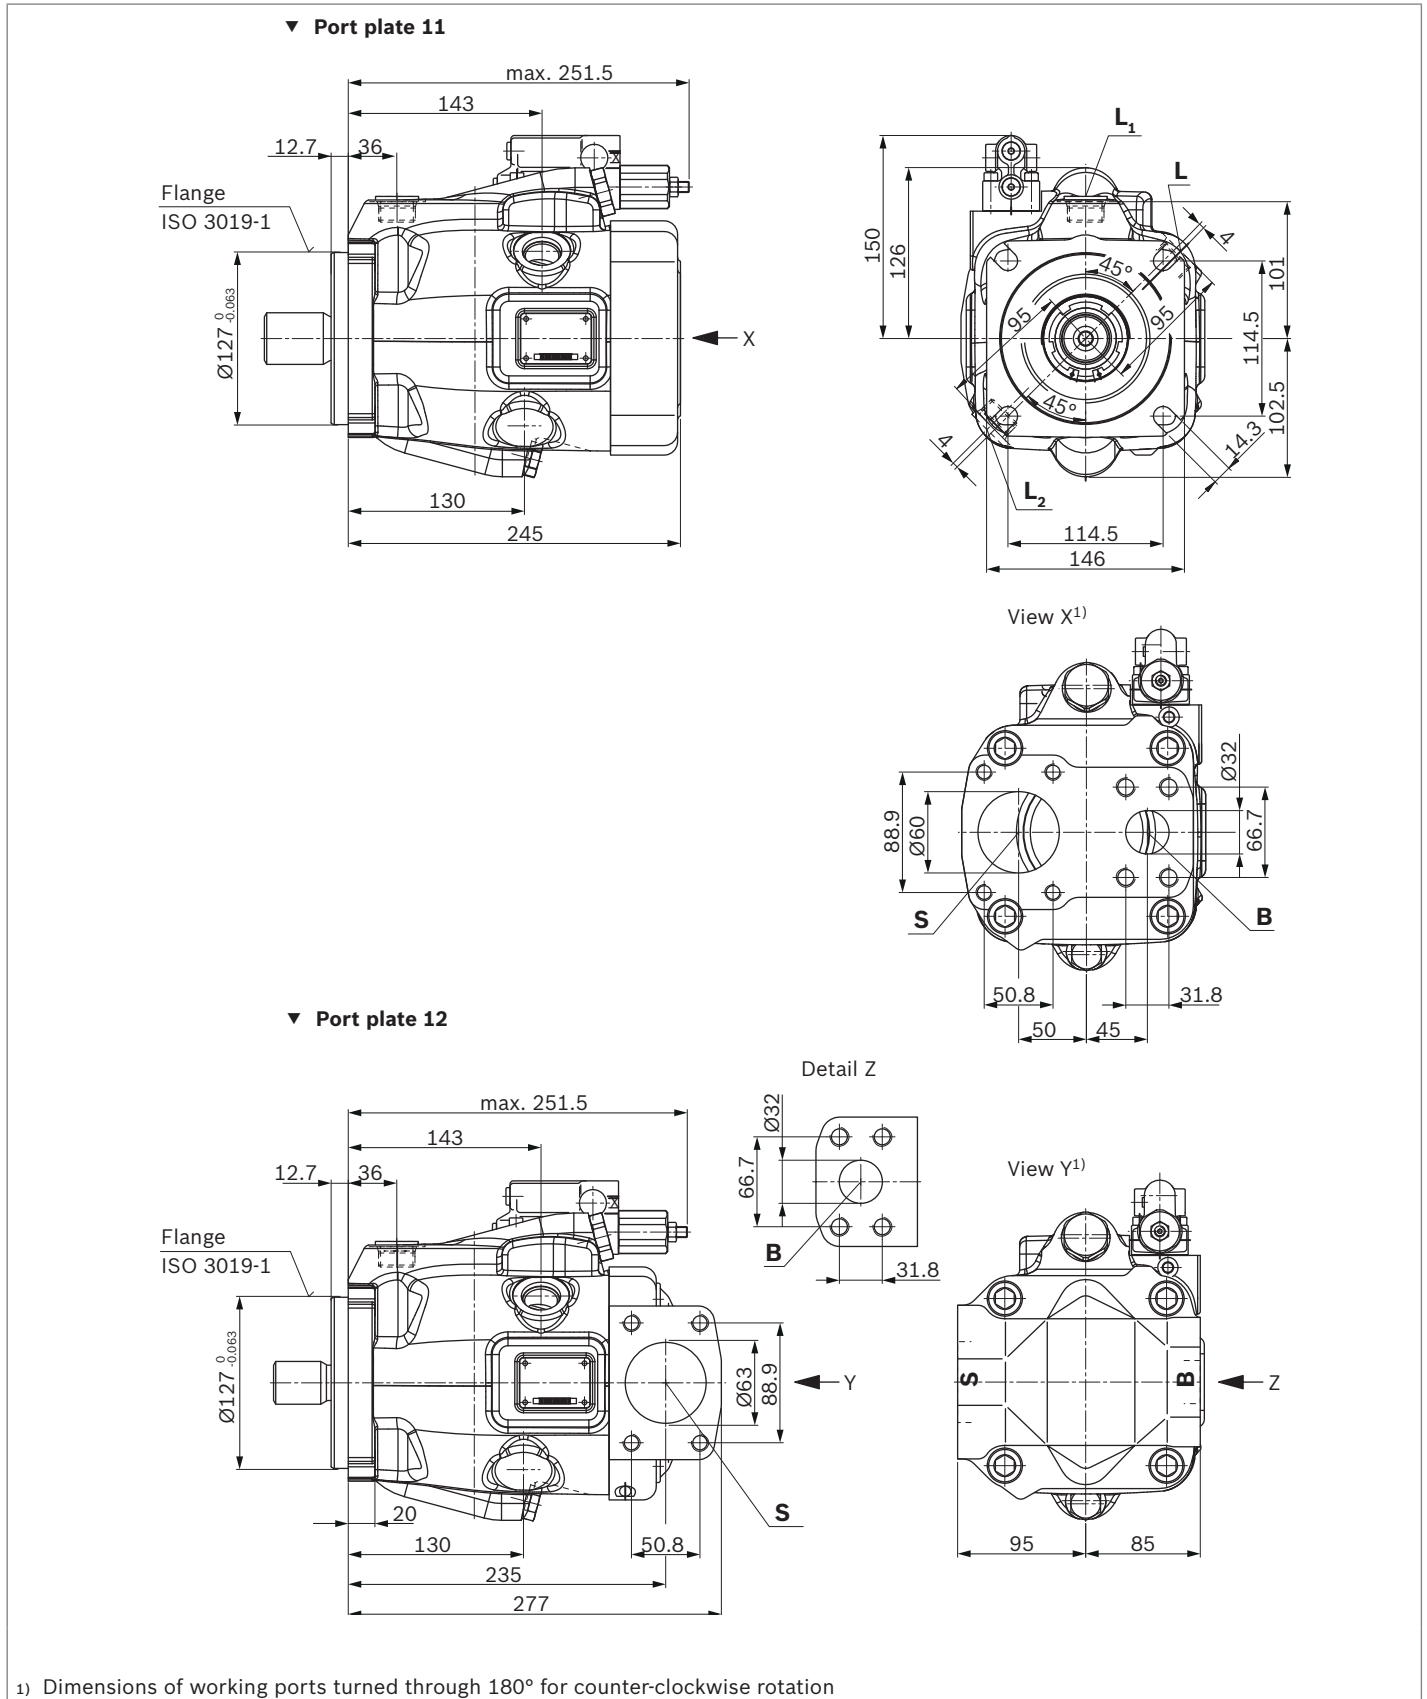


## ▼ Splined shaft 1 1/2 in SAE J744

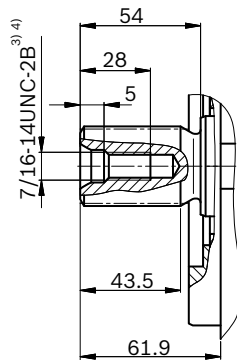S – 17T 12/24DP<sup>1)</sup>


## ▼ Splined shaft 1 1/2 in SAE J744

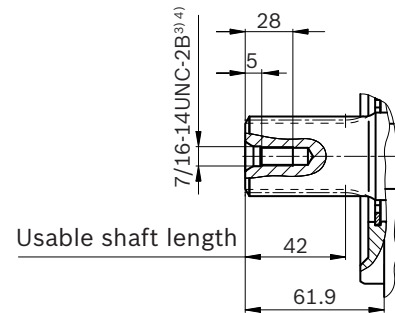R – 17T 12/24DP<sup>1)</sup>

## ▼ Splined shaft 1 1/4 in SAE J744

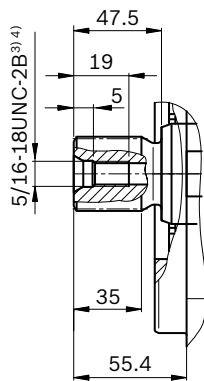U – 14T 12/24DP<sup>1)</sup>

## ▼ Splined shaft 1 1/4 in SAE J744

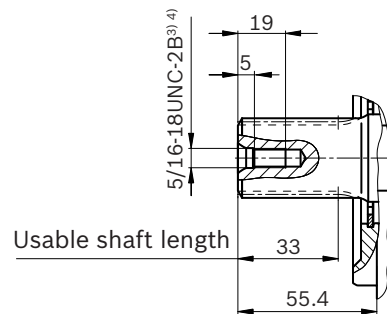
W – 14T 12/24DP<sup>1)</sup>

Ports		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>10)</sup>
<b>B</b>	Working port (high-pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/4 in M14 × 2; 19 deep	315	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	2 1/2 in M12 × 1.75; 17 deep	5	O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	1 1/16-12UNF-2B; 15 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub>, L<sub>2</sub><sup>9)</sup></b>	Drain port	ISO 11926 <sup>7)</sup>	1 1/16-12UNF-2B; 15 deep	2	X <sup>8)</sup>
<b>X</b>	Control pressure	ISO 11926	7/16-20UNF-2A; 11.5 deep	315	O


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.
- 3) Thread according to ASME B1.1
- 4) Observe the instructions in the operating instructions concerning the maximum tightening torques.
- 5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

- 6) Metric fastening thread is a deviation from standard.
- 7) The spot face can be deeper than as specified in the standard.
- 8) Depending on the installation position, **L**, **L<sub>1</sub>** or **L<sub>2</sub>** must be connected (also see installation instructions starting on page 62).
- 9) Only series 53
- 10) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)


▼ **DRG – Pressure controller, remote controlled, series 52 (53)**

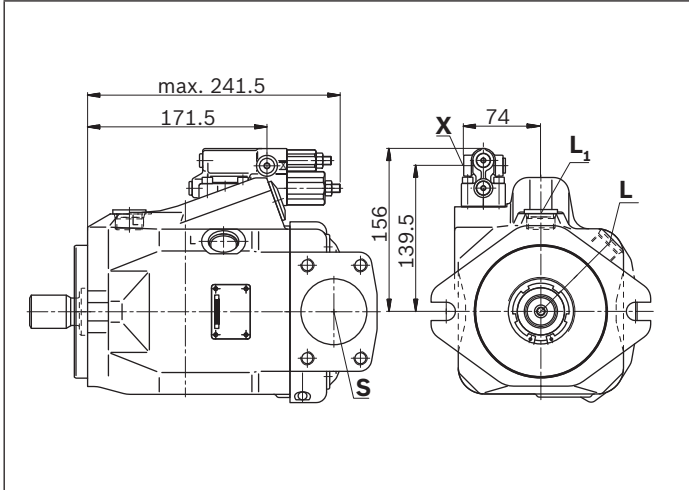


▼ **EP.D. / EK.D. – Electro-proportional control, series 53**

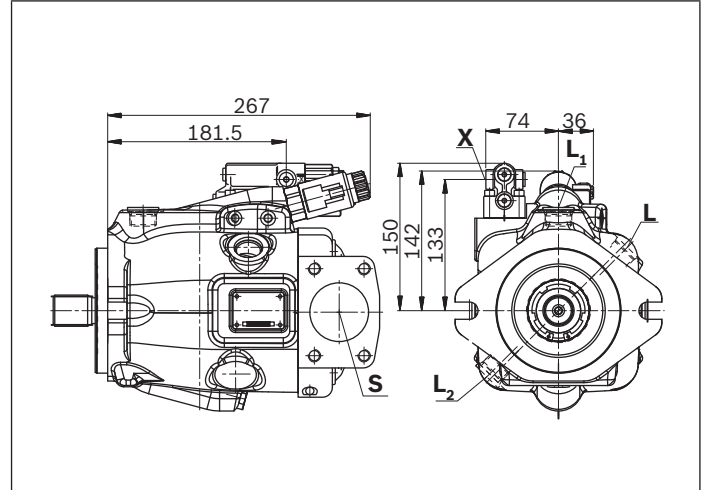


▼ **DRF/DRS/DRSC – Pressure and flow control, series 52 (53)**

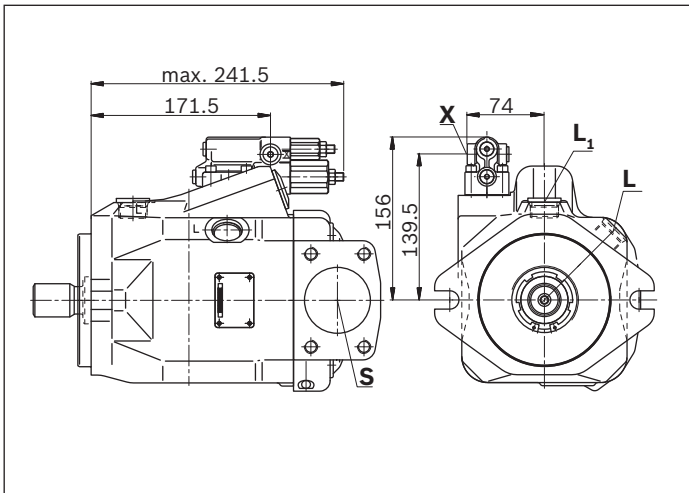


▼ **EP.ED. / EK.ED. – Electro-prop. control, series 53**

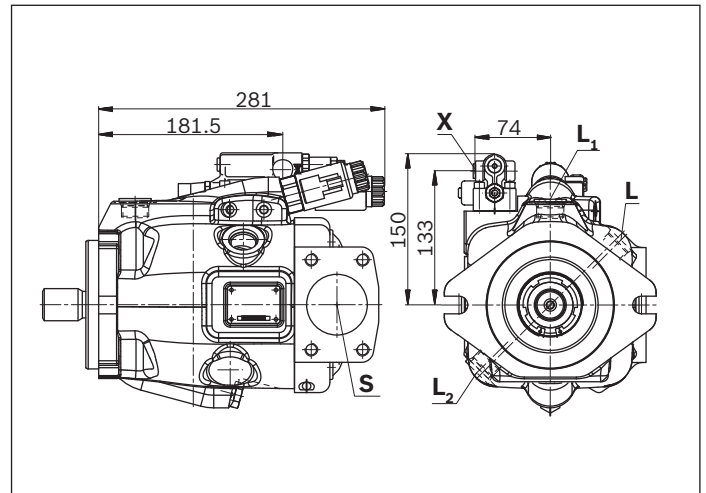

▼ **LA.D. – Pressure, flow and power control, series 53**

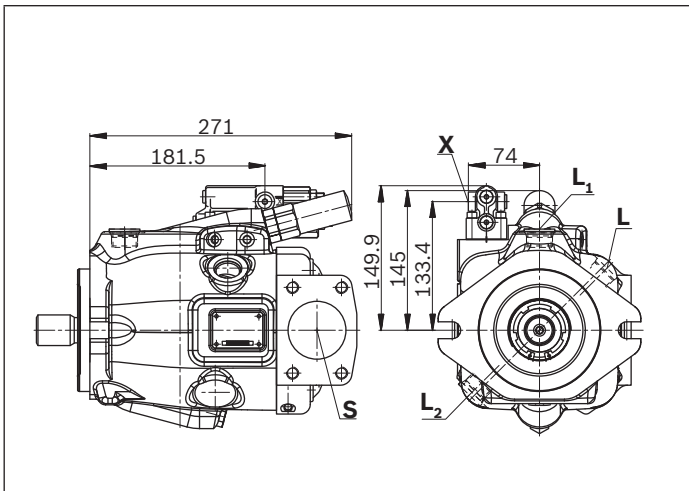


▼ **ED7. / ER7. – Electro-prop. Pressure control, series 52 (53)**

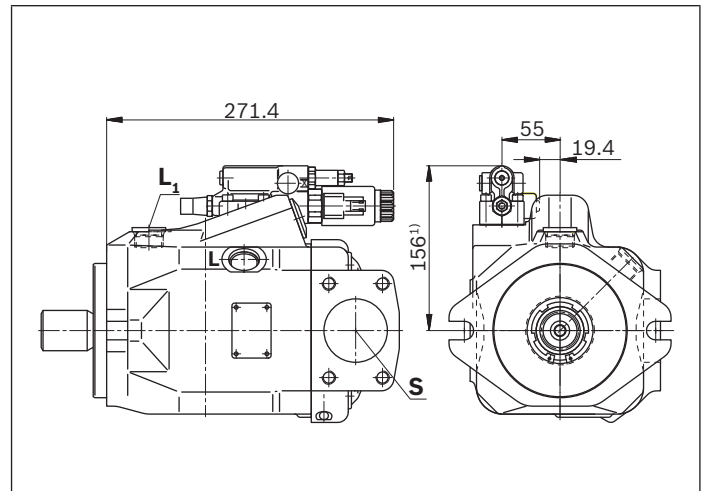

1) ER7.: 191 mm if using an intermediate plate pressure controller


**Dimensions size 100**

**DR – Hydraulic pressure controller, clockwise rotation, mounting flange C series 53**

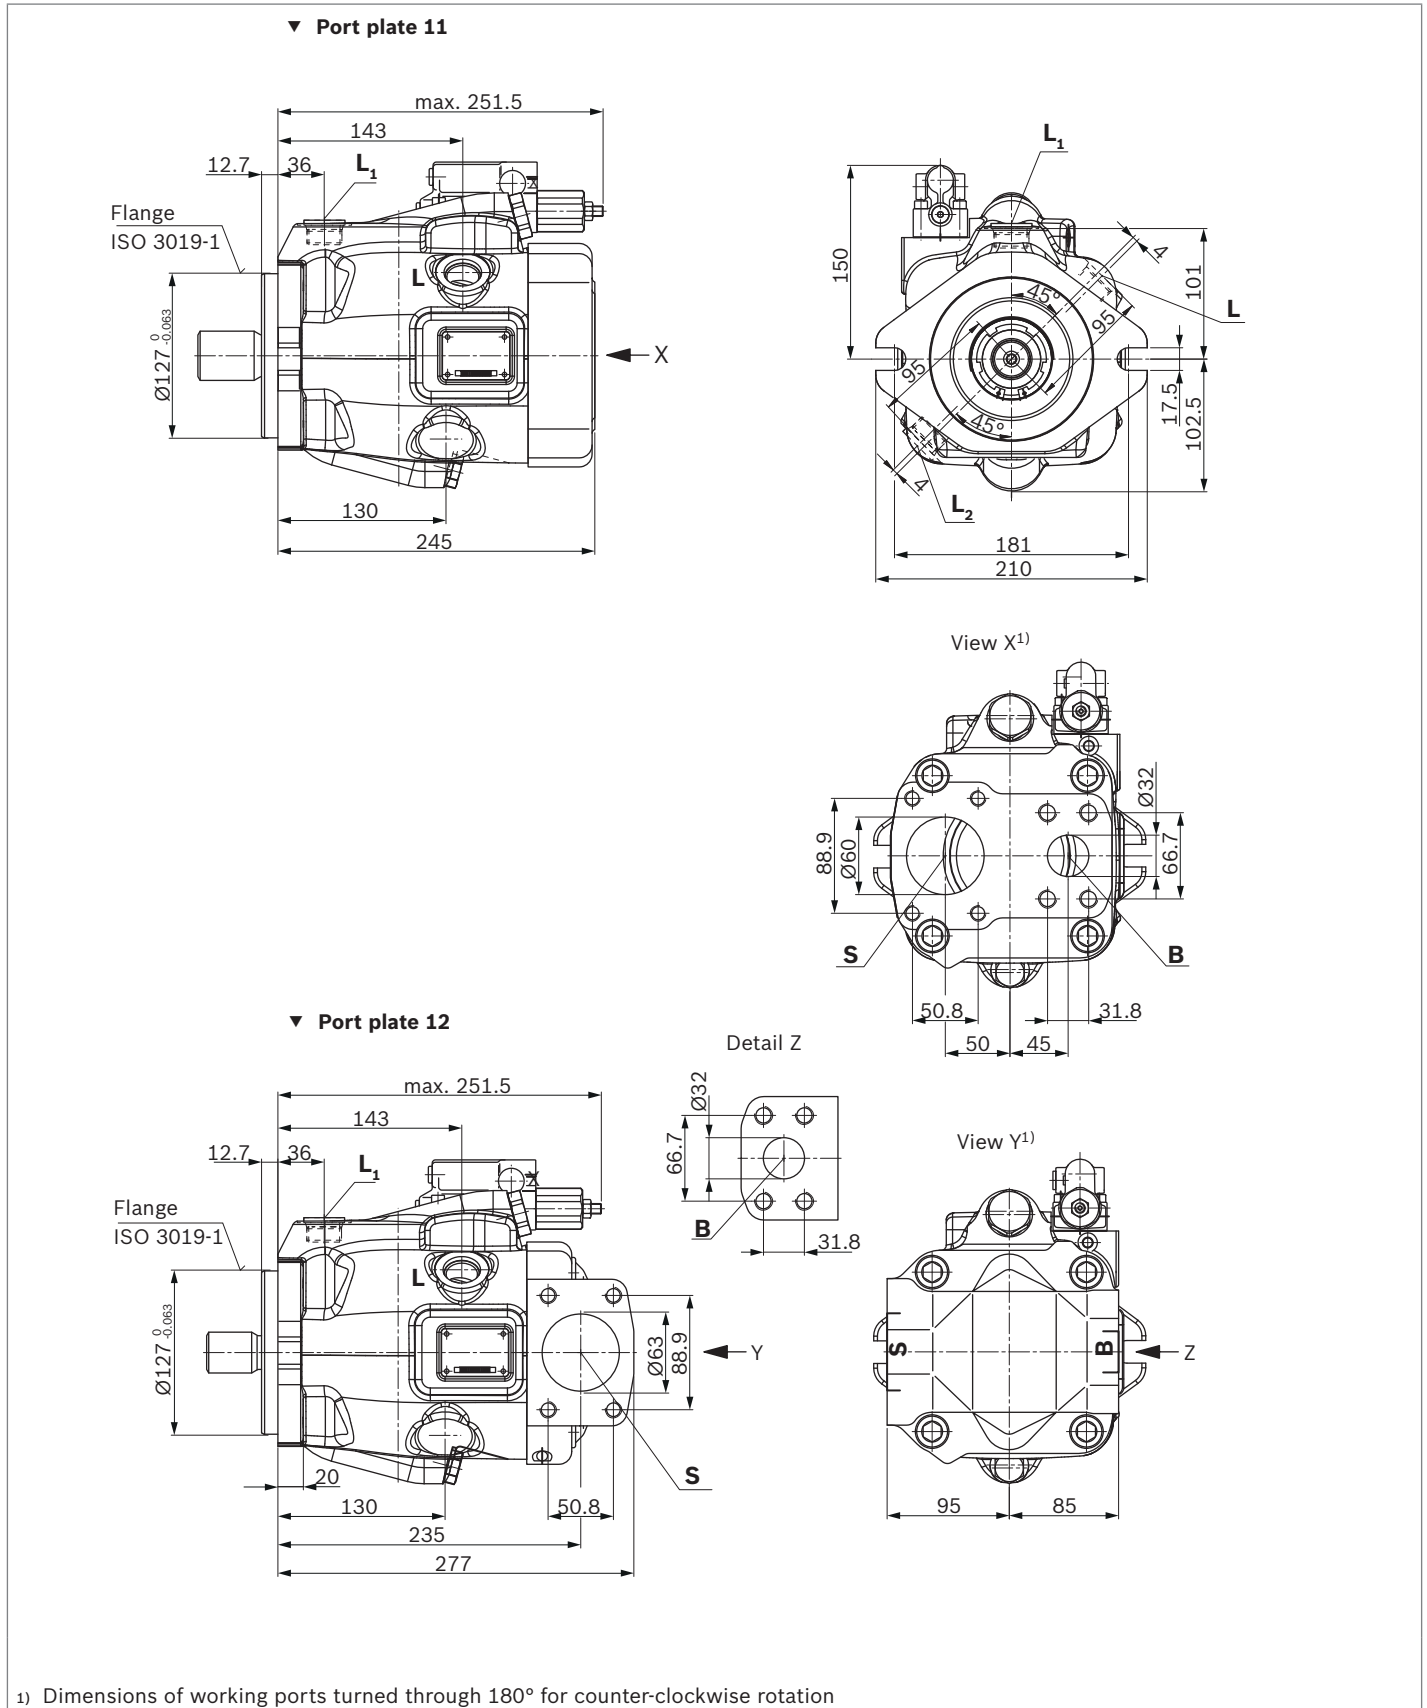


**Dimensions size 100**


**DR – Hydraulic pressure controller, clockwise rotation, mounting flange D series 53**

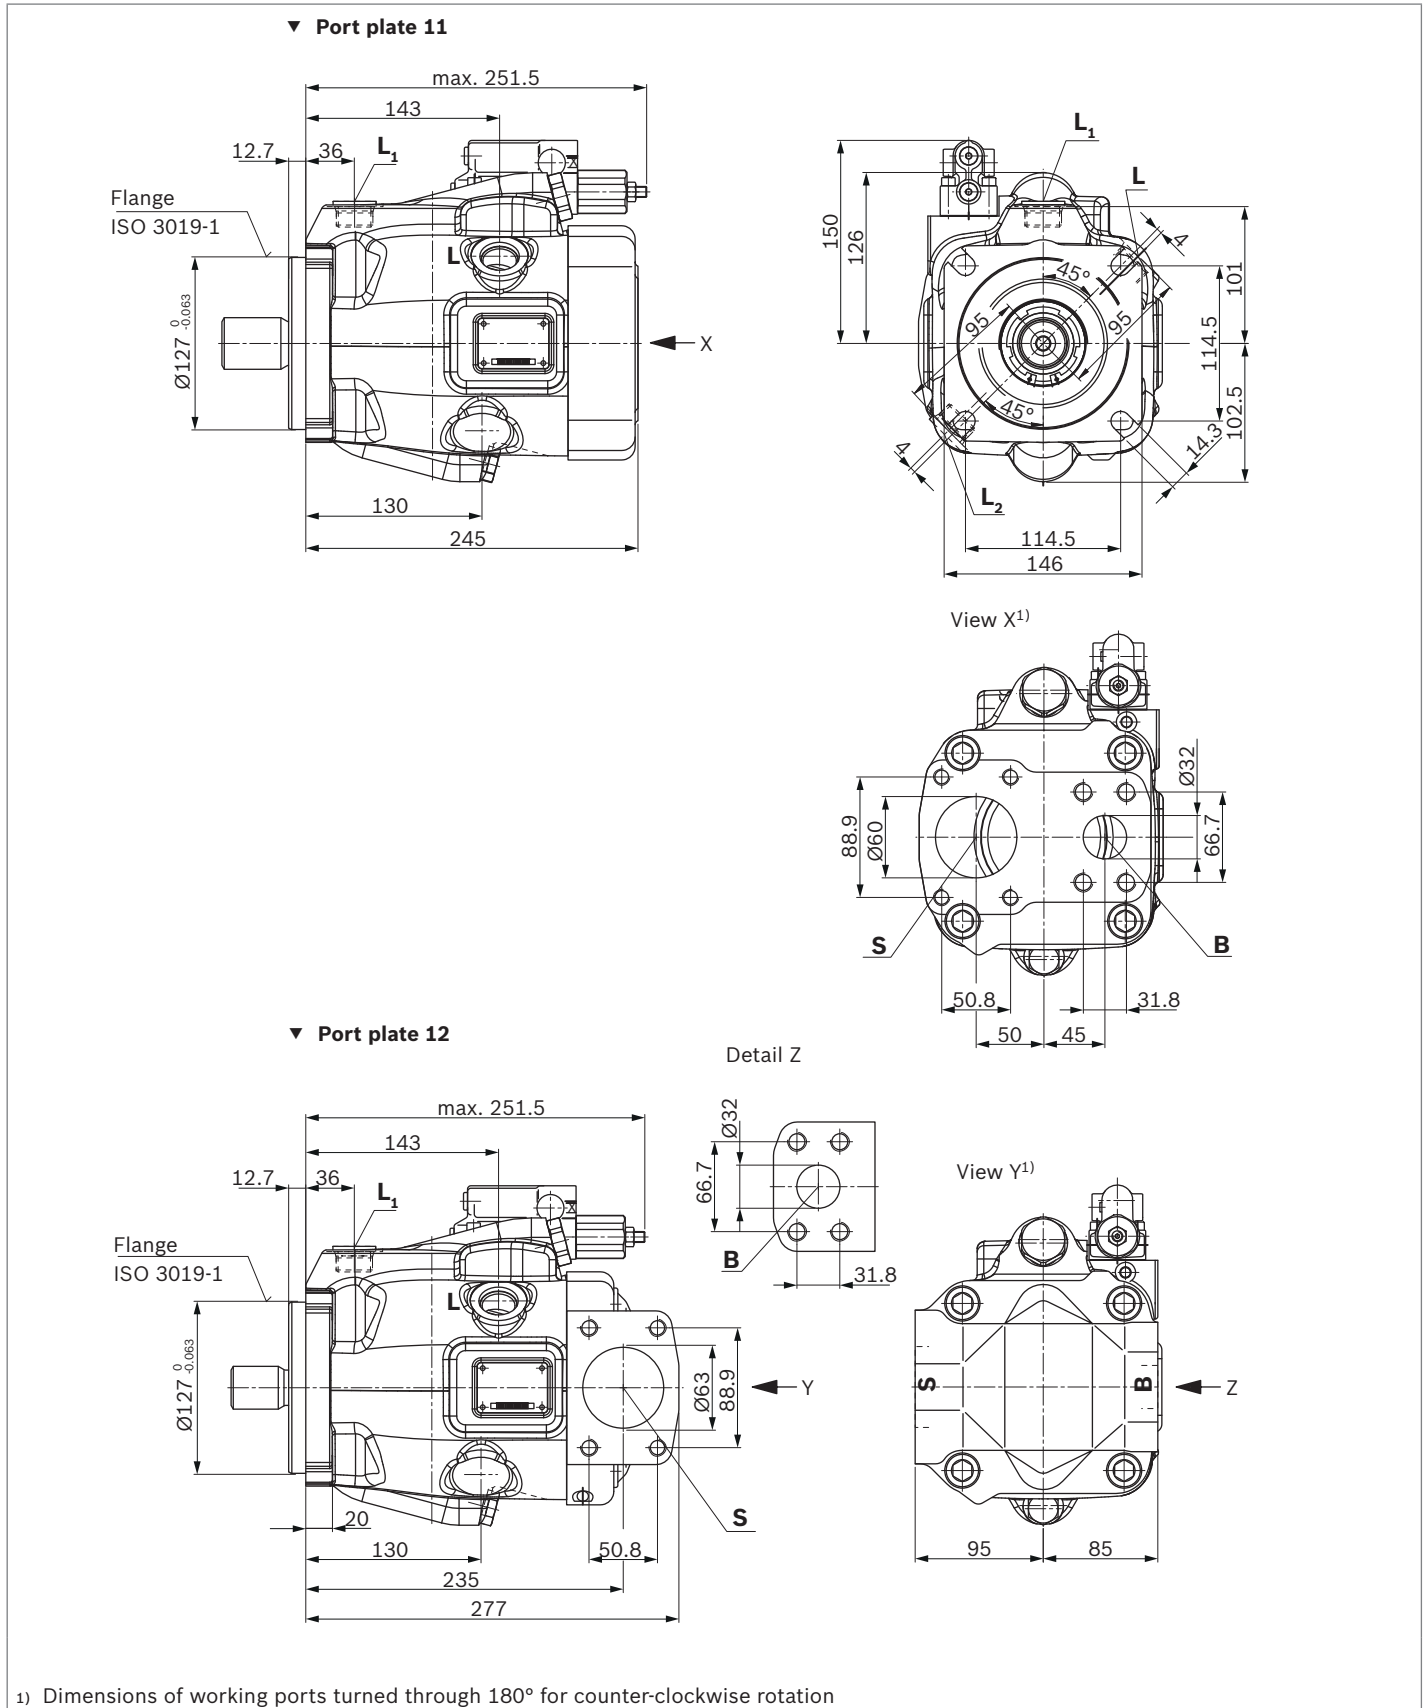


▼ Splined shaft 1 1/2 in SAE J744

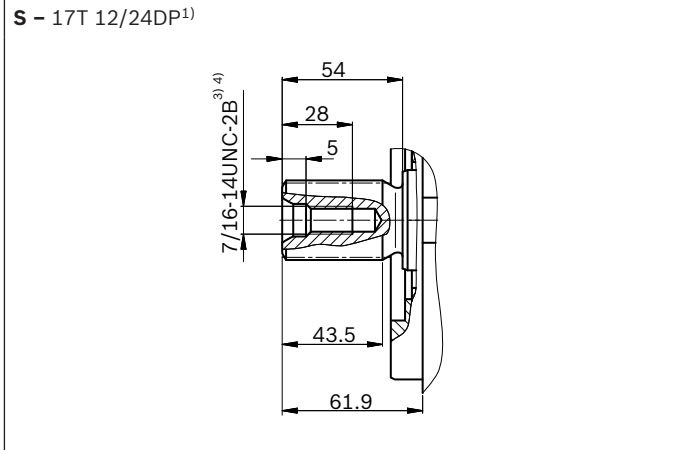

▼ Splined shaft 1 1/4 in SAE J744

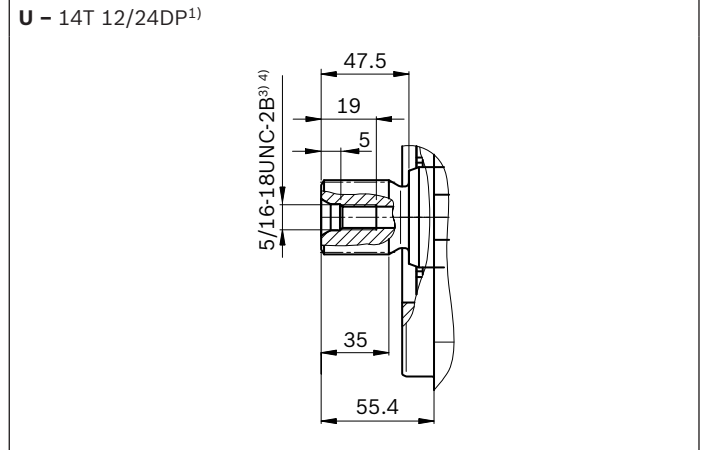

▼ Splined shaft 1 1/4 in SAE J744

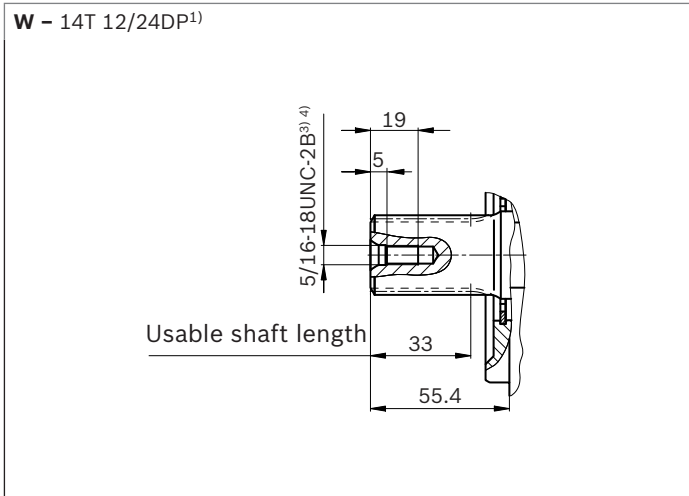


Ports		Standard	Size <sup>4)</sup>	$p_{max\ abs}$ [bar] <sup>5)</sup>	State <sup>10)</sup>
<b>B</b>	Working port (high-pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/4 in M14 × 2; 19 deep	315	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	2 1/2 in M12 × 1.75; 17 deep	5	O
<b>L</b>	Drain port	ISO 11926 <sup>7)</sup>	1 1/16-12UNF-2B; 15 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub>, L<sub>2</sub></b> <sup>9)</sup>	Drain port	ISO 11926 <sup>7)</sup>	1 1/16-12UNF-2B; 15 deep	2	X <sup>8)</sup>
<b>X</b>	Control pressure	ISO 11926	7/16-20UNF-2A; 11.5 deep	315	O


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.
- 3) Thread according to ASME B1.1
- 4) Observe the instructions in the operating instructions concerning the maximum tightening torques.
- 5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

- 6) Metric fastening thread is a deviation from standard.
- 7) The spot face can be deeper than as specified in the standard.
- 8) Depending on the installation position, **L**, **L<sub>1</sub>** or **L<sub>2</sub>** must be connected (also see installation instructions starting on page 62).
- 9) Only series 53
- 10) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)


▼ **DRG – Pressure controller, remote controlled, series 53**

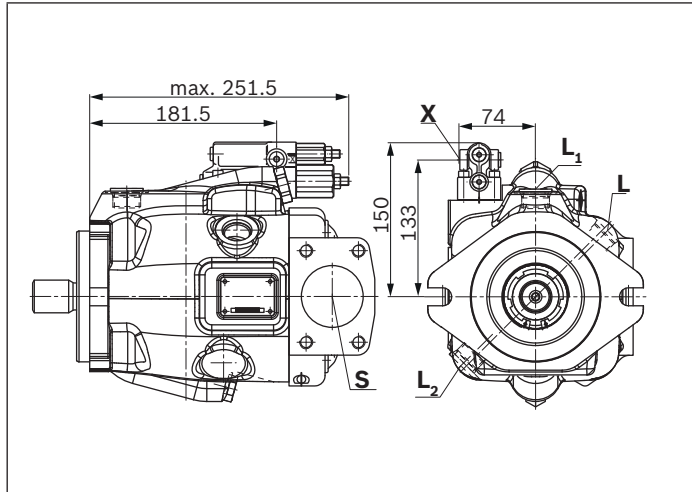


▼ **EP.D. / EK.D. – Electro-proportional control, series 53**

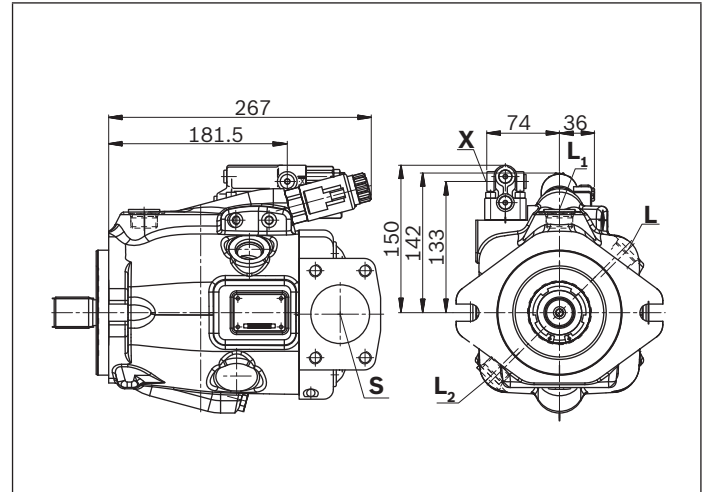


▼ **DRF/DRS/DRSC – Pressure and flow control, series 53**

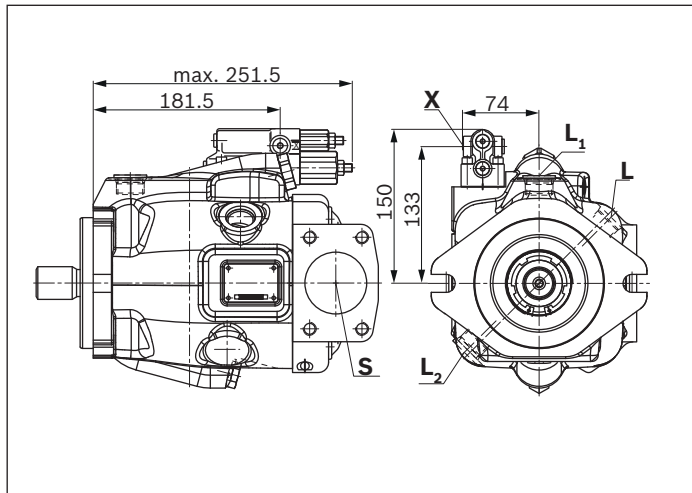


▼ **EP.ED. / EK.ED. – Electro-prop. control, series 53**

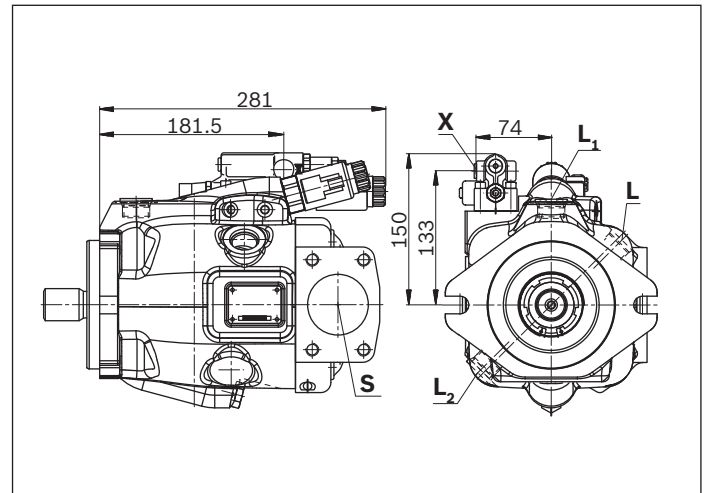

▼ **LA.D. – Pressure, flow and power control, series 53**

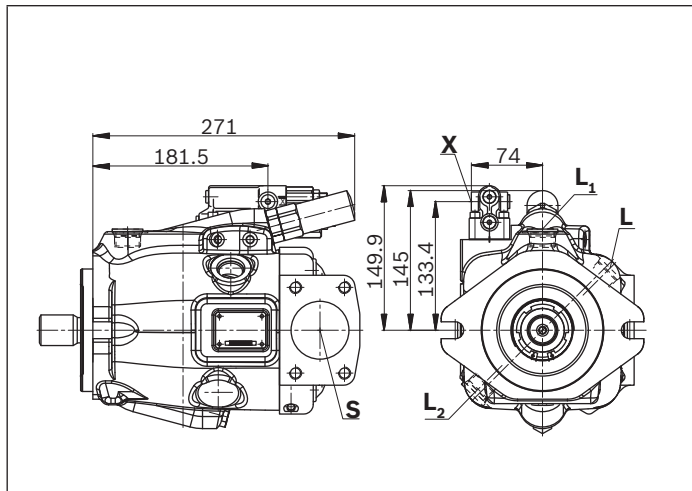

▼ **ED7. / ER7. – Electro-prop. Pressure control, series 53**

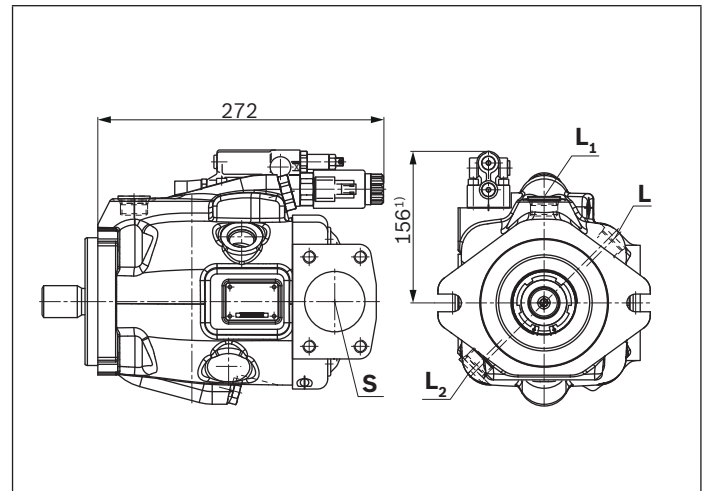

1) ER7.: 191 mm if using an intermediate plate pressure controller





### Dimensions through drive

Flange ISO 3019-1 (SAE)		Hub for splined shaft <sup>1)</sup>		Availability over sizes						Code	
Diameter	Attachment <sup>2)</sup>	Diameter		18	28	45	60/63	72	85	100	
82-2 (A)	♂, ∞	5/8 in	9T 16/32DP	●	●	●	●	●	●	●	K01
		3/4 in	11T 16/32DP	●	●	●	●	●	●	●	K52

● = Available    ○ = On request

▼ **82/-2**

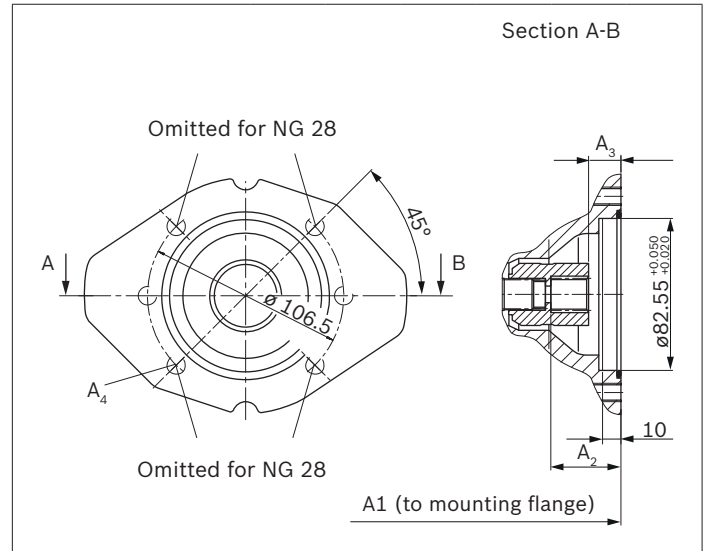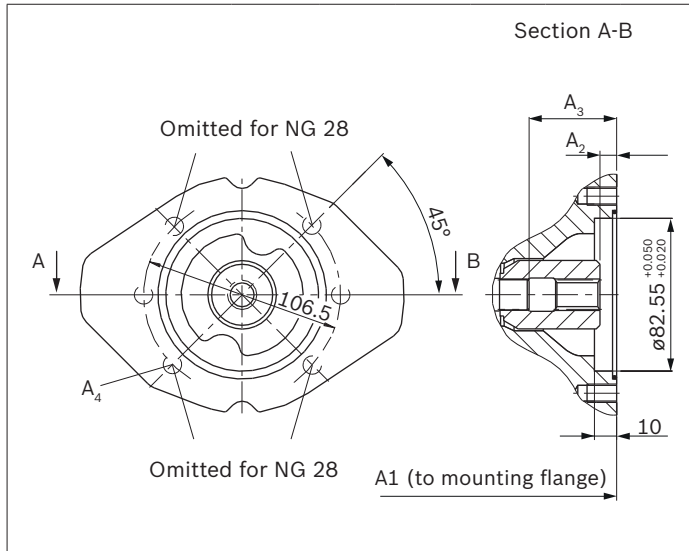

K01 (SAE J744 16-4 (A))	NG	A1	A2	A3	A4 <sup>3)</sup>
	18	182	9.3	43.3	M10×1.5; 14.5 deep
	28	204	9.9	47	M10×1.5; 16 deep
	45	229	10.7	53	M10×1.5; 16 deep
	60 63	255	9.5	59	M10×1.5; 16 deep
	72	255	9.5	59	M10×1.5; 16 deep
	85	302	13.4	68	M10×1.5; 20 deep
	100	302	13.4	68	M10×1.5; 20 deep

K52 (SAE J744 19-4 (A-B))	NG	A1	A2	A3	A4 <sup>3)</sup>
	18	182	39	18.8	M10×1.5; 14.5 deep
	28	204	39.3	18.8	M10×1.5; 16 deep
	45	229	39.4	18.9	M10×1.5; 16 deep
	60 63	255	39.4	18.9	M10×1.5; 16 deep
	72	255	39.4	18.9	M10×1.5; 16 deep
	85	302	44.1	23.6	M10×1.5; 20 deep
	100	302	44.1	23.6	M10×1.5; 20 deep



1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Mounting bores pattern viewed from through drive with control at top

3) Thread according to DIN 13, observe the instructions in the instruction manual for the maximum tightening torques.

Flange ISO 3019-1 (SAE)		Hub for splined shaft <sup>1)</sup>		Availability over sizes							Code
Diameter	Attachment <sup>2)</sup>	Diameter		18	28	45	60/63	72	85	100	
101-2 (B)	♂, ∞	7/8 in	13T 16/32DP	-	●	●	●	●	●	●	K68
		1 in	15T 16/32DP	-	-	●	●	●	●	●	K04

● = Available    ∅ = On request

▼ **101-2**

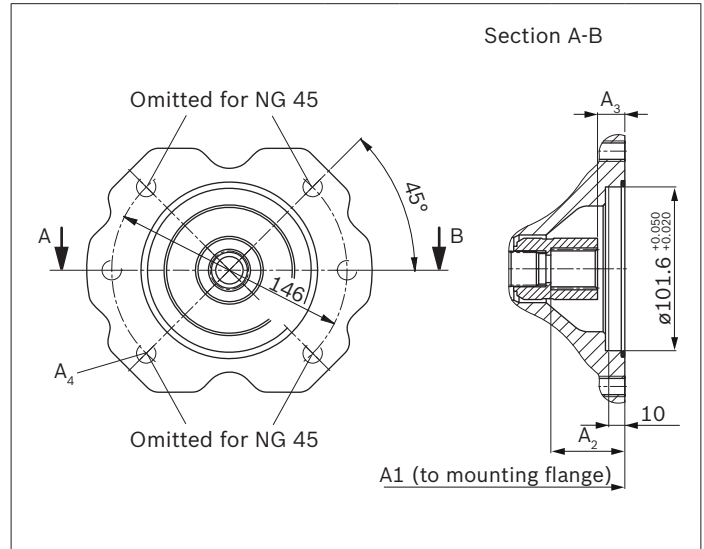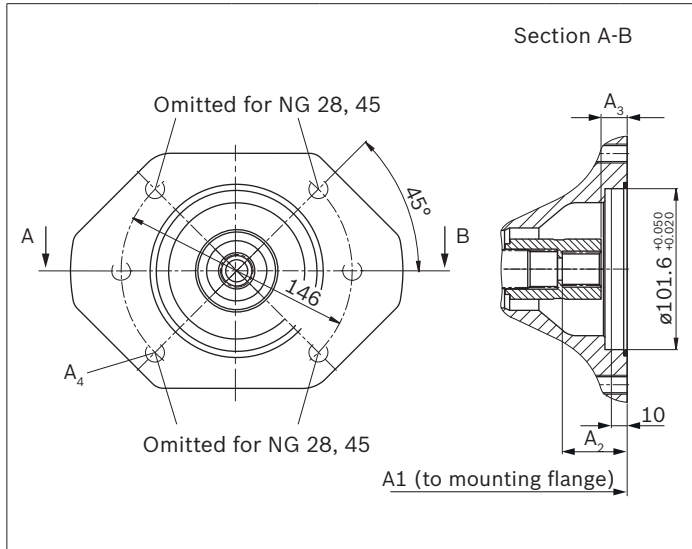

<b>K68</b> (SAE J744 22-4 (B))	NG	A1	A2	A3	A4 <sup>3)</sup>
	28	204	42.3	17.8	M12×1.75; 18 deep
	45	229	42.4	17.9	M12×1.75; 18 deep
	60 63	255	42.4	17.9	M12×1.75; 18 deep
	72	255	42.4	17.9	M12×1.75; 18 deep
	85	302	46.5	22	M12×1.75; 20 deep
	100	302	46.5	22	M12×1.75; 20 deep

<b>K04</b> (SAE J744 25-4 (B-B))	NG	A1	A2	A3	A4 <sup>3)</sup>
	45	229	47.9	18.9	M12×1.75; 18 deep
	60 63	255	47.4	18.4	M12×1.75; 18 deep
	72	255	47.4	18.4	M12×1.75; 18 deep
	85	302	51.2	22.2	M12×1.75; 20 deep
	100	302	51.2	22.2	M12×1.75; 20 deep



1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Mounting bores pattern viewed from through drive with control at top

3) Thread according to DIN 13, observe the instructions in the instruction manual for the maximum tightening torques.

Flange ISO 3019-1 (SAE)		Hub for splined shaft <sup>1)</sup>		Availability over sizes							Code
Diameter	Attachment <sup>2)</sup>	Diameter		18	28	45	60/63	72	85	100	
127-4 (C)		1 1/4 in	14T 12/24DP	-	-	-	•	•	•	•	K15
		1 1/2 in	17T 12/24DP	-	-	-	-	-	•	•	K16

• = Available    ◦ = On request

▼ 127-4

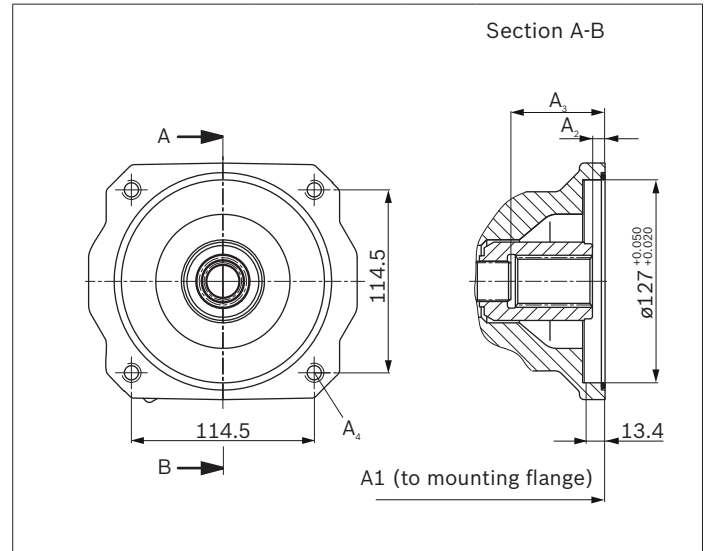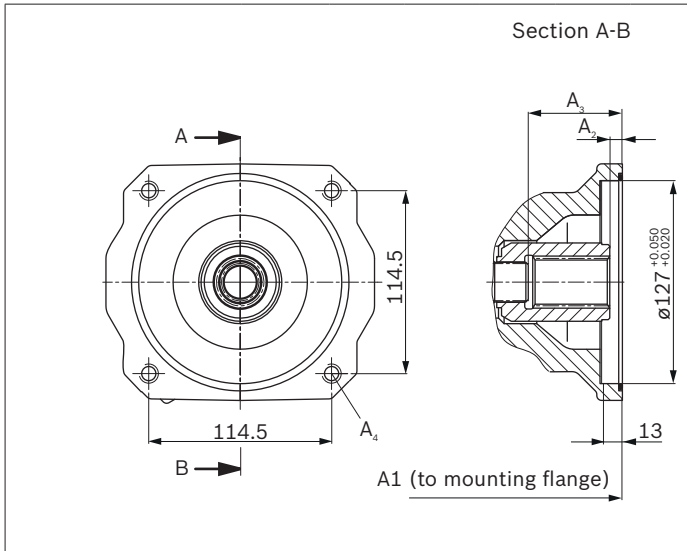

K15 (SAE J744 32-4 (C))	NG	A1	A2	A3	A4 <sup>3)</sup>
60/ 63	255	8	59	M12×1.75; 16 deep	
72	255	8	59	M12×1.75; 16 deep	
85	301.5	13	67.9	M12×1.75; through	
100	301.5	13	67.9	M12×1.75; through	

K16 (SAE J744 32-4 (C))	NG	A1	A2	A3	A4 <sup>3)</sup>
85	301.5	13	67.9	M12×1.75; through	
100	301.5	13	67.9	M12×1.75; through	


1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Mounting bores pattern viewed from through drive with control at top

3) Thread according to DIN 13, observe the instructions in the instruction manual for the maximum tightening torques.


Flange ISO 3019-1 (SAE)		Hub for splined shaft <sup>1)</sup>		Availability over sizes							Code
Diameter	Attachment <sup>2)</sup>	Diameter		18	28	45	60/63	72	85	100	
127-2 (B)	♂, ∞	1 1/4 in	14T 12/24DP	-	-	-	-	-	●	●	K07
		1 1/2 in	17T 12/24DP	-	-	-	-	-	●	●	K24

● = Available    ∞ = On request

▼ **127/2**

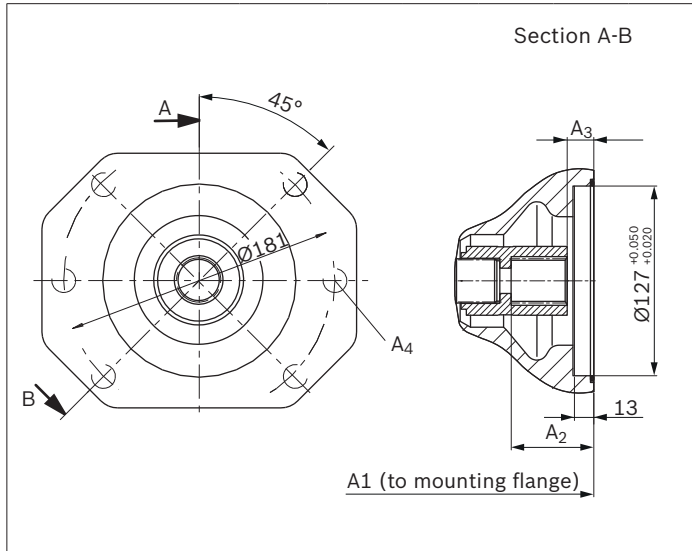

K07 (SAE J744 32-4 (C))	NG	A1	A2	A3	A4 <sup>3)</sup>
85	301.5	13	67.9	M16×2; 24 deep	
100	301.5	13	67.9	M16×2; 24 deep	

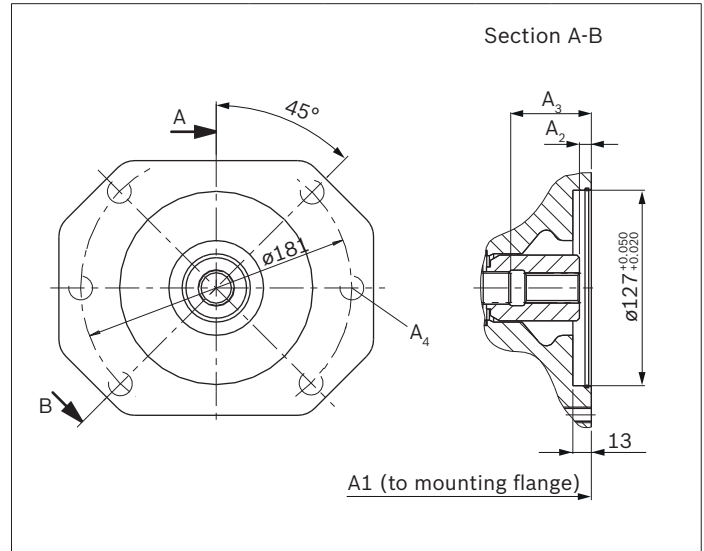

K24 (SAE J744 38-4 (C-C))	NG	A1	A2	A3	A4 <sup>3)</sup>
85	302	8	68	M16×2; 24 deep	
100	302	8	68	M16×2; 24 deep	

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Mounting bores pattern viewed from through drive with control at top

3) Thread according to DIN 13, observe the instructions in the instruction manual for the maximum tightening torques.

**Overview of attachment options**

Through drive		Attachment options – 2nd pump				
Flange ISO 3019-1	Hub for splined shaft	Code	A10V(S)O/5x NG (shaft)	A10VO/31 NG (shaft)	A1VO/10 NG (shaft)	External gear
82-2 (A)	5/8 in	K01	10 (U), 18 (U)	18 (U)	18 (S2)	AZPF
	3/4 in	K52	10 (S), 18 (S, R)	18 (S, R)	18 (S3)	
101-2 (B)	7/8 in	K68	28 (S, R) 45 (U, W) <sup>1)</sup>	28 (S, R) 45 (U,W)	35 (S4)	AZPN/AZPG
	1 in	K04	45 (S, R) 60, 63 (U, W) <sup>2)</sup> 72 (U, W) <sup>2)</sup>	45 (S, R)	35 (S5)	
127-4 (C)	1 1/4 in	K15	60, 63 (S, R) 72 (S, R)	–	–	–
	1 1/2 in	K16	85 (S) 100 (S)	–	–	–
127-2 (C)	1 1/4 in	K07	85 (U,W) 100 (U,W)	71 (S, R)	–	PGH5
	1 1/2 in	K24	85 (S) 100 (S)	–	–	–

1) Not for NG28 with K68

2) Not for NG45 with K04

## Combination pumps A10VO + A10VO

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes. When ordering combination pumps, the type designations of the 1st and 2nd pump must be linked by a "+".


**Order example:**

**A10VO85DRS/53R-VSC12K04+**

**A10VO45DRF/53R-VSC11N00**

It is permissible to use a combination of two single pumps of the same nominal size (tandem pump) considering a dynamic mass acceleration of maximum 10 g (= 98.1 m/s<sup>2</sup>) without additional support brackets.

For combination pumps consisting of more than two pumps, the mounting flange must be rated for the permissible mass torque (please consult us).

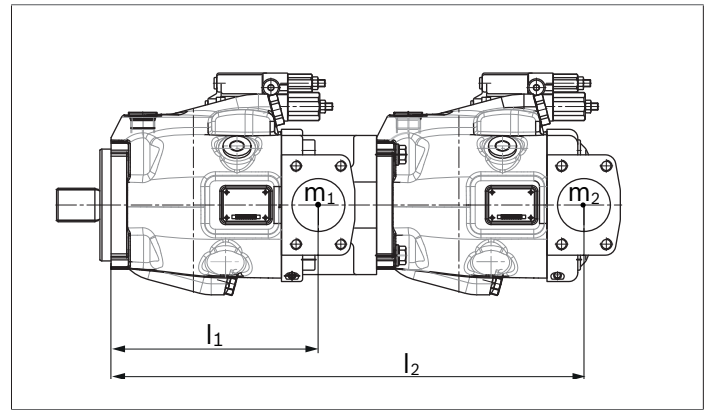

$m_1, m_2, m_3$  Weight of pump [kg]

$l_1, l_2, l_3$  Distance, center of gravity [mm]

$$T_m = (m_1 \times l_1 + m_2 \times l_2 + m_3 \times l_3) \times \frac{1}{102} \text{ [Nm]}$$

**Permissible mass moment of inertia**

NG			10	18	28	45	60/63	72	85	100
static	$T_m$	Nm	-	-	890	900	1370	1370	3080	3080
dynamic at 10 g (98.1 m/s <sup>2</sup> )	$T_m$	Nm	-	-	89	90	137	137	308	308
Weight with through-drive plate	$m$	kg	-	13	18	24	28	28	45	45
Weight without through-drive plate (e.g. 2nd pump)			8	11.5	15	18	22	22	36	36
Distance, center of gravity <b>without</b> through drive	$l_1$	mm	-	78	85	96	105	105	122	122
Distance, center of gravity <b>with</b> through drive	$l_1$	mm	-	87	99	115	127	127	150	150

## Connector for solenoids


### DEUTSCH DT04-2P-EP04

Molded connector, 2-pin, without bidirectional suppressor diode

The following type of protection ensues with a mounted mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)


#### ▼ Circuit diagram symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

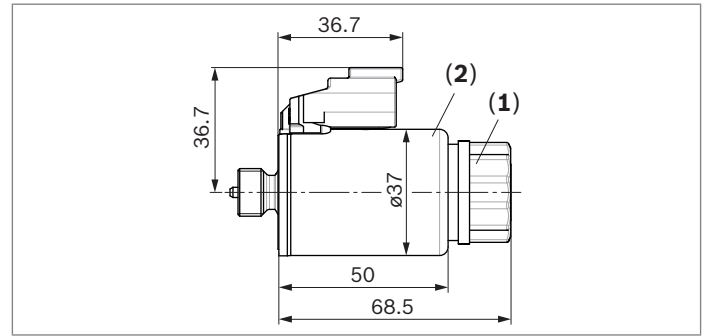

#### Changing plug position

If necessary, you can change the position of the connector by turning the solenoid.

To do this, proceed as follows:

- ▶ Loosen the mounting nut **(1)** of the solenoid. To do this, turn the mounting nut **(1)** one revolution counter-clockwise.
- ▶ Turn the solenoid body **(2)** to the desired orientation.
- ▶ Re-tighten the mounting nut.  
Tightening torque: 5+1 Nm.  
(WAF 26, 12-sided DIN 3124)

On delivery, the position of the connector may differ from that shown in the brochure or drawing.

## Electronic controls

Control	Electronics function	Electronics	Data sheet
Electric pressure control	Controlled power outlet	RA	analog 95230
		RC4-5/30	digital 95205

## Installation instructions

### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines.

Particularly with the "drive shaft up/down" installation position, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running. The case drain fluid in the pump housing must be directed to the reservoir via the highest available drain port (**L**, **L<sub>1</sub>**<sup>2)</sup>, **L<sub>2</sub>**<sup>3)</sup>).

For combinations of multiple units, the case drain fluid must be drained off at each pump. If a shared reservoir line is used for several units, make sure that the case pressure in each pump is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operational circumstances, particularly at cold start. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction line and drain line must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{s \max} = 800 \text{ mm}$ . The minimum suction pressure at port **S** must also not fall below 0.8 bar absolute during operation and during cold start.

When designing the reservoir, ensure adequate distance between the suction line and the case drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

### Note

In certain installation positions, an influence on the control characteristic can be expected. Gravity, dead weight and case pressure can cause minor shifts in control characteristic curves and changes in response time.

For key, see page 64.

1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

2) For NG10 and NG28 series 52, **L<sub>1</sub>** is opposite, **L** must then be connected if necessary.

3) Only series 53

### Installation position





See the following examples **1** to **12**.

Additional installation positions are possible upon request.

Recommended installation position: **1** and **3**

### Below-reservoir installation (standard)

Below-reservoir installation is when the axial piston unit is installed outside of the reservoir and below the minimum fluid level.

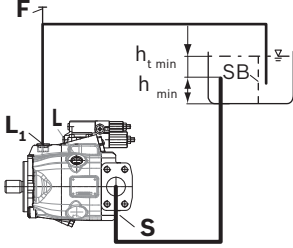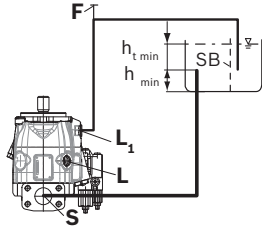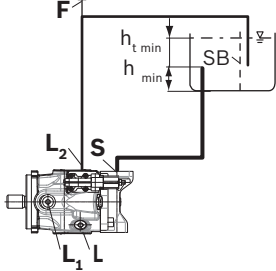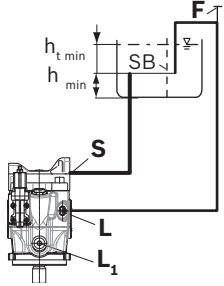Installation position	Air bleeding	Filling
<b>1</b> <sup>2)</sup> 	<b>F</b>	<b>S + L or L<sub>1</sub></b>
<b>2</b> <sup>1)</sup> 	<b>F</b>	<b>S + L<sub>1</sub></b>
<b>3</b> <sup>3)</sup> 	<b>F</b>	<b>S + L or L<sub>1</sub></b>
<b>4</b> 	<b>F</b>	<b>S + L or L<sub>1</sub></b>



**Above-reservoir installation**

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.

To prevent the axial piston unit from draining, a height difference  $h_{ES\ min}$  of at least 25 mm is required in position 6. Observe the maximum permissible suction height

$h_{S\ max} = 800\ mm$ .

A check valve in the case drain line is only permissible in individual cases. Consult us for approval.

For key, see page 64.

Installation position	Air bleeding	Filling
<p>5<sup>2)</sup></p>	F	L <sub>1</sub> or L
<p>6<sup>1)2)</sup></p>	F	L <sub>1</sub>
<p>7<sup>3)</sup></p>	F	L <sub>2</sub>
<p>8<sup>1)</sup></p>	F	S or L

1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

2) For NG10 and NG28 series 52, L<sub>1</sub> is opposite, L must then be connected if necessary.


3) Only series 53

**Reservoir installation**

Inside-reservoir installation is when the axial piston unit is installed in the reservoir below the minimum fluid level. The axial piston unit is completely below the hydraulic fluid. If the minimum fluid level is equal to or below the upper edge of the pump, see chapter "Above-reservoir installation". Axial piston units with electric components (e.g. electric controls, sensors) must not be installed in a reservoir below the fluid level.


Installation position	Air bleeding	Filling
-----------------------	--------------	---------

**9<sup>2)</sup>**

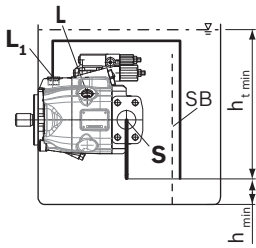


Via the highest available port <b>L</b>	Automatically via the open port <b>L</b> or <b>L<sub>1</sub></b> due to the position under the hydraulic fluid level
---	--

**10**

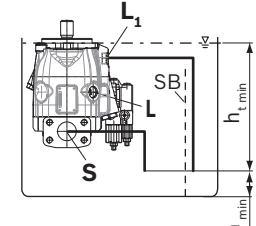


Via the highest available port <b>L<sub>1</sub></b>	Automatically via the open port <b>L</b> , <b>L<sub>1</sub></b> or <b>S</b> due to the position under the hydraulic fluid level
---	---

**11<sup>3)</sup>**

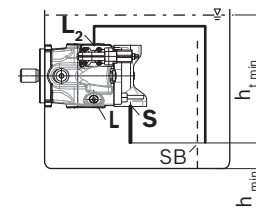

**12**

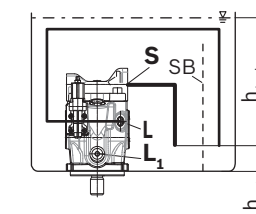

Via the highest available port <b>L</b>	Automatically via the open port <b>L</b> , <b>L<sub>1</sub></b> or <b>S</b> due to the position under the hydraulic fluid level
---	---

**Key and assembly note**

Key	
<b>F</b>	Filling / air bleeding
<b>S</b>	Suction port
<b>L; L<sub>1</sub></b>	Drain port
<b>SB</b>	Baffle (baffle plate)
$h_{t, min}$	Minimum required immersion depth (200 mm)
$h_{min}$	Minimum required distance to reservoir bottom (100 mm)
$h_{ES, min}$	Minimum necessary height required to protect the axial piston unit from draining (25 mm)
$h_{S, max}$	Maximum permissible suction height (800 mm)

**Note**

Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

- 1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.
- 2) For NG10 and NG28 series 52, **L<sub>1</sub>** is opposite, **L** must then be connected if necessary.
- 3) Only series 53

## Project planning notes

- ▶ The A10VO axial piston variable pump is designed to be used in open circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, request it from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with protection to preserve for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all variants of the product are approved for use in safety functions according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference.  
 Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.
- ▶ Pressure controllers are not safeguards against pressure overload. Be sure to add a pressure relief valve to the hydraulic system.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the intended operating conditions (pressure, flow, hydraulic fluid, temperature) with allowance for the necessary safety margins.
  - The working ports and function ports can only be used to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances, get blocked in position as a result of contamination (e.g. impure hydraulic fluid, abrasion, or residual dirt from components). As a result, the flow of hydraulic fluid and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filter) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to set the consumer being driven to a safe position (e.g. safe stop) and if necessary to ensure it is properly implemented.



**Bosch Rexroth AG**

Mobile Applications  
An den Kelterwiesen 14  
72160 Horb a.N., Germany  
Phone +49 7451 92-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information provided does not release the user from the obligation of independent judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.


# Axial piston variable pump

## A10VNO series 52 and 53

**RE 92735**

Edition: 04.2015

Replaces: 03.2012

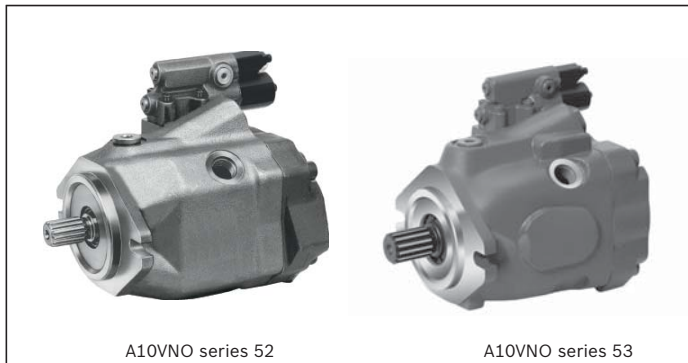

- ▶ Size 28 to 85
- ▶ Nominal pressure 210 bar
- ▶ Maximum pressure 250 bar
- ▶ open circuit

**Features**

- ▶ Variable axial piston pump of swashplate design for hydrostatic drives in open circuits.
- ▶ The flow is proportional to the drive speed and the displacement.
- ▶ The flow can be infinitely varied by adjusting the swashplate angle.
- ▶ Stable storage for long service life
- ▶ High, permissible drive speed
- ▶ Favorable power-to-weight ratio – compact dimensions
- ▶ Low noise
- ▶ Excellent suction characteristics
- ▶ Electro-hydraulic pressure control
- ▶ Short response times

**Contents**

Type code	2
Hydraulic fluids	4
Working pressure range	6
Technical data	7
DR – Pressure control	9
DRG – Pressure control remotely operated	10
DRF/DRS/DRSC – Pressure and flow control	11
ED – Electro-hydraulic pressure control	13
Dimensions, Size 28 to 85	14
Dimensions through drive	27
Overview of attachment options	29
Combination pumps A10VNO + A10VNO	30
Connector for solenoids	31
Installation instructions	32
Project planning notes	36
Safety instructions	36

## Ordering code

01	02	03	04	05	06	07	08	09	10	11	12
<b>A10VN</b>	<b>O</b>			<b>/</b>	<b>5x</b>	<b>-</b>	<b>V</b>				

### Axial piston unit

**28 45 63 85**

01	Variable swashplate design, nominal pressure 210 bar, maximum pressure 250 bar	•	•	•	•	<b>A10VN</b>
----	--	---	---	---	---	--------------

### Operating mode

02	Pump, open circuit					<b>O</b>
----	--------------------	--	--	--	--	----------

### Size (NG)

03	Geometric displacement, see table of values on page 7	<b>28</b>	<b>45</b>	<b>63</b>	<b>85</b>
----	---	-----------	-----------	-----------	-----------

### Control device

04	Pressure control	hydraulic					•	•	•	•	<b>DR</b>				
	with flow control	hydraulic	X-T open					•	•	•	•	<b>DRF</b>			
			X-T plugged					•	•	•	•	<b>DRS</b>			
					with flushing function					•	•	•	•	<b>DRSC</b>	
					without flushing function					•	•	•	•	<b>DRSC</b>	
	pressure cut-off	hydraulic	remotely operated					•	•	•	•				
electrical			negative control					•	•	•	•				
						$U = 12\text{ V}$									<b>ED71</b>
						$U = 24\text{ V}$									<b>ED72</b>

### Series

05	Series 5, index 2	-	•	•	-	<b>52</b>
	Series 5, index 3	•	-	-	•	<b>53</b>

### Direction of rotation

06	Viewed on drive shaft	clockwise									<b>R</b>
		counter-clockwise									<b>L</b>

### Sealing material

07	FKM (fluor-caoutchouc)					<b>V</b>
----	------------------------	--	--	--	--	----------

### Drive shaft

08	Splined shaft	Standard shaft					•	•	•	•	<b>S</b>
	ANSI B92.1a	similar to shaft "S" however for higher input torque					•	•	•	•	<b>R</b>

### Mounting flanges

09	ISO 3019-1 (SAE)	2-hole					•	•	•	•	<b>C</b>
		4-hole					-	-	-	•	<b>D</b>

### Working port

10	SAE flange port fastening thread, metric	rear					•	•	•	•	<b>11</b>
		at side, opposite					•	•	•	•	<b>12</b>



01	02	03	04	05	06	07	08	09	10	11	12
<b>A10VN</b>	<b>O</b>			<b>/</b>	<b>5x</b>		<b>-</b>	<b>V</b>			

**Through drive** (for fitting options, see page 29)

11	Flange ISO 3019-1 diameter	Hub for splined shaft <sup>1)</sup> diameter					
	without through drive		<b>28</b>	<b>45</b>	<b>63</b>	<b>85</b>	
	82-2 (A)	5/8 in    9T 16/32DP	●	●	●	●	<b>N00</b>
		3/4 in    11T 16/32DP	●	●	●	●	<b>K01</b>
	101-2 (B)	7/8 in    13T 16/32DP	-	●	●	●	<b>K52</b>
	1 in    15T 16/32DP	-	-	●	●	<b>K68</b>	
			-	-	●	●	<b>K04</b>

**Connector for solenoids**

12	DEUTSCH – molded connector, 2-pin – without suppressor diode (for electric controls)	●	●	●	●	<b>P</b>
----	---	---	---	---	---	----------

● = Available    ○ = On request    - = Not available

**Information**

- ▶ Note the project planning notes on page 36.
- ▶ Preservation:
  - Up to 12 months as standard
  - Up to 24 months long-term  
(state in plain text when ordering)

<sup>1)</sup> According to ANSI B92.1a

## Hydraulic fluids

The A10VNO variable pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids

### Details regarding the selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $\nu_{opt}$ , see selection diagram).

### Note


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact the responsible member of staff at Bosch Rexroth.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$\nu_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ °C}$	$t \leq 1 \text{ min}$ , without load ( $p \leq 30 \text{ bar}$ ), $n \leq 1000 \text{ rpm}$
	Permissible temperature difference	$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid
Warm-up phase	$\nu < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ °C to } -25 \text{ °C}$	Note the detailed information on operation with low temperatures, see data sheet 90300-03-B.
Continuous operation	$\nu = 400 \text{ to } 10 \text{ mm}^2/\text{s}$	$\theta = -25 \text{ °C to } +110 \text{ °C}$	This corresponds, for example on the VG 46, to a temperature range of +5 °C to +85 °C (see selection diagram page 4)
	$\nu_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		measured at port <b>L</b> observe permissible temperature range of the shaft seal ring ( $\Delta T = \text{approx. } 5 \text{ K}$ between bearing/shaft seal and port <b>L</b> )
Short-term operation	$\nu_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 1 \text{ min}$ , $p < 0.3 \cdot p_{nom}$

### ▼ Selection diagram

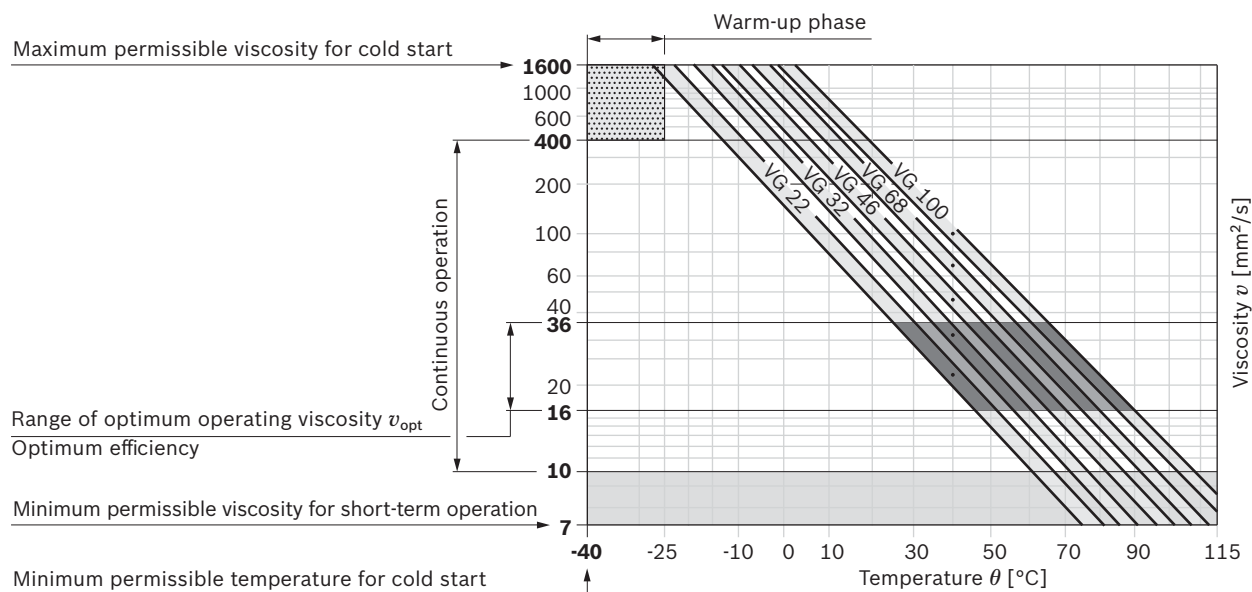

### **Filtration of the hydraulic fluid**

The finer the filtration, the better the hydraulic fluid cleanliness level, and the longer the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.


At very high hydraulic fluid temperatures (90 °C to maximum 115 °C), at least cleanliness level 19/17/14 according to ISO 4406 is necessary.

Please contact us if the above classes cannot be observed.

## Operating pressure range

Pressure at working port B		Definition
Nominal pressure $p_{nom}$	210 bar absolute	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	250 bar absolute	The maximum pressure corresponds the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	2.5 ms	
Total operating period	300 h	
Minimum pressure $p_{B abs}$ (high pressure side)	10 bar absolute	Minimum pressure on the high-pressure side ( <b>B</b> ) which is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{A max}$	16000 bar/s	Maximum permissible rate of pressure build-up and reduction during a pressure change over the entire pressure range.
Pressure at suction port S (inlet)		
Minimum pressure $p_{S min}$	Standard 0.8 bar absolute	Minimum pressure at suction port <b>S</b> (inlet) that is required in order to avoid damage to the axial piston unit. The minimum pressure depends on the speed and displacement of the axial piston unit.
Maximum pressure $p_{S max}$	5 bar absolute	
Leakage pressure at port L <sub>1</sub> , L <sub>2</sub>		
Maximum pressure $p_{L max}$	2 bar absolute	Maximum 0.5 bar higher than inlet pressure at port <b>S</b> , but not higher than $p_{L max}$ . A case drain line to the reservoir is required.


### ▼ Rate of pressure change $R_{A max}$

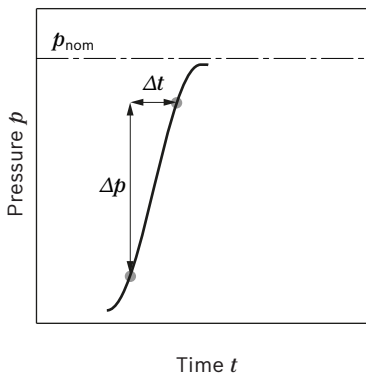

### Note

Operating pressure range valid when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.

### ▼ Pressure definition

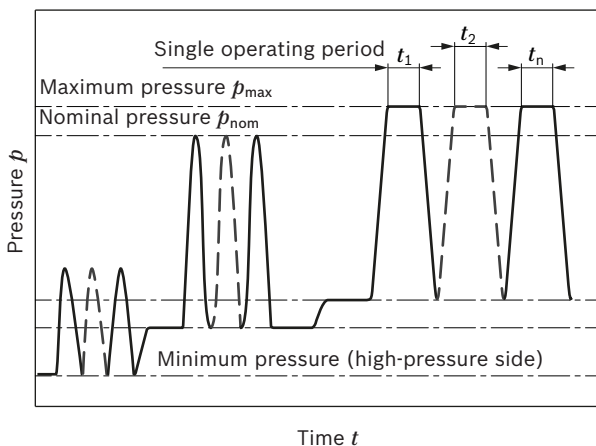

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

## Technical data

Size		NG	28	45	63	85
Displacement, geometric, per revolution		$V_{g \max}$ cm <sup>3</sup>	28	45	63	85
Maximum rotational speed <sup>1)</sup>	At $V_{g \max}$	$n_{\text{nom}}$ rpm	3200	2900	2700	2700
Flow	at $n_{\text{nom}}$ and $V_{g \max}$	$q_v$ l/min	90	131	170	230
Power	at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 210$ bar	$P$ kW	31	46	59	80
Torque	at $V_{g \max}$ and $\Delta p = 210$ bar	$T$ Nm	94	150	210	284
Rotary stiffness drive shaft	S R	$c$ Nm/rad	11000 14800	22300 26500	37500 40500	65500 69400
Moment of inertia for rotary group		$J_{GR}$ kgm <sup>2</sup>	0.00093	0.0017	0.0033	0.0056
Maximum angular acceleration <sup>2)</sup>		$\alpha$ rad/s <sup>2</sup>	6800	4900	3500	2500
Case volume		$V$ l	0.25	0.3	0.5	0.8
Weight <b>without</b> through drive (approx.)		$m$ kg	11.5	15	18	22
Weight <b>with</b> through drive (approx.)			13	18	24	28

Determining the operating characteristics	
Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$ [l/min]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{mh}}$ [Nm]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$ [kW]
Key	
$V_g$	= Displacement per revolution [cm <sup>3</sup> ]
$\Delta p$	= Differential pressure [bar]
$n$	= Rotational speed [rpm]
$\eta_v$	= Volumetric efficiency
$\eta_{mh}$	= Mechanical-hydraulic efficiency
$\eta_t$	= Total efficiency ( $\eta_t = \eta_v \times \eta_{mh}$ )



**Note**

- ▶ Theoretical values, without efficiency and tolerances; values rounded.
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or the destruction of the axial piston unit. We recommend testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.

1) The values are valid:  
 – At absolute pressure  $p_{\text{abs}} = 1$  bar at suction port **S**  
 – For the optimal viscosity range of  $\nu_{\text{opt}} = 36$  to  $16$  mm<sup>2</sup>/s  
 – For hydraulic fluid based on mineral oils

2) The scope of application lies between the minimum necessary and the maximum permissible drive speeds. It applies for external stimuli (e. g. engine 2 to 8 times rotary frequency, Cardan shaft twice the rotary frequency). The limiting value is only valid for a single pump. The load capacity of the connection parts must be considered.

**Permissible radial and axial forces of the drive shaft**


Size		NG	28	45	63	85	
Maximum radial force at a/2		$F_{q \max}$	N	150	650	1000	1350
Maximum axial force		$\pm F_{ax \max}$	N	400	650	1000	1350

**Note**  
▶ The values given are maximum values and do not apply to continuous operation. For drives with radial loading (pinion, V-belt drives), please contact us!

**Permissible input and through-drive torques**

Size			28	45	63	85	
Torque at $V_{g \max}$ and $\Delta p = 210 \text{ bar}^1$		$T_{max}$	Nm	94	150	210	284
Input torque at drive shaft, maximum <sup>2)</sup>	S	$T_{E \max}$	Nm	124	198	319	630
		$\emptyset$	in	3/4	7/8	1	1 1/4
	R	$T_{E \max}$	Nm	160	250	400	650
		$\emptyset$	in	3/4	7/8	1	1 1/4
Maximum through-drive torque	S	$T_{D \max}$	Nm	108	160	319	484
	R	$T_{D \max}$	Nm	120	176	365	484

▼ **Torque distribution**

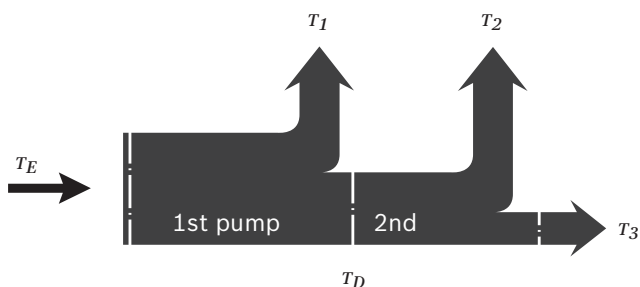

Torque at 1st pump	$T_1$
Torque at 2nd pump	$T_2$
Torque at 3rd pump	$T_3$
Input torque	$T_E = T_1 + T_2 + T_3$
	$T_E < T_{E \max}$
Through-drive torque	$T_D = T_2 + T_3$
	$T_D < T_{D \max}$


1) Efficiency not considered  
2) For drive shafts with no radial force

## DR – Pressure control

The pressure control limits the maximum pressure at the pump outlet within the control range of the variable pump. The variable pump only supplies as much hydraulic fluid as is required by the consumers. If the operating pressure exceeds the pressure setting at the pressure valve, the pump will regulate to a smaller displacement to reduce the control differential.


- ▶ Basic position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range<sup>1)</sup> for pressure control 35 to 210 bar. Standard is 210 bar.

### ▼ Characteristic curve DR

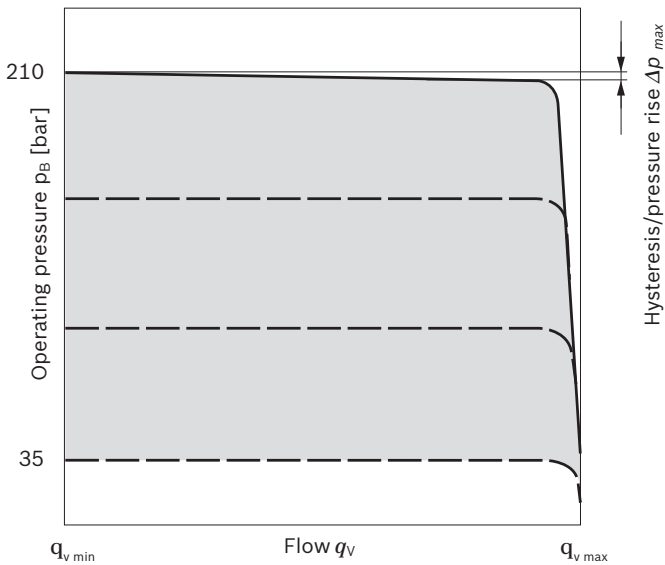

Characteristic curve valid at  $n_1 = 1500$  rpm and  $\theta_{\text{fluid}} = 50$  °C.

### ▼ Schematic DR

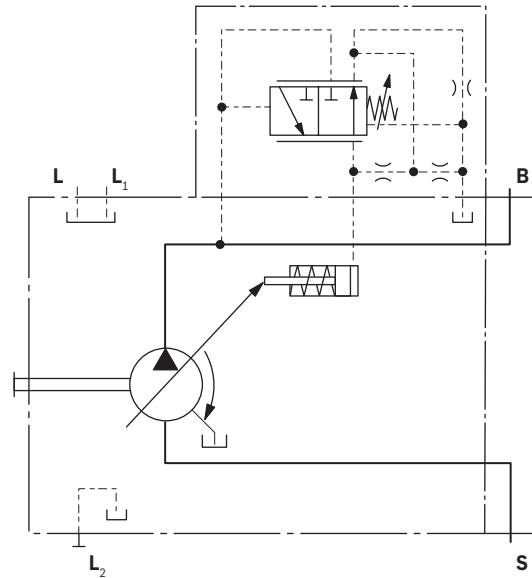

### Controller data

NG		28	45	63	85
Pressure increase	$\Delta p$ [bar]	6	6	6	8
Hysteresis and repeat precision	$\Delta p$ [bar]	maximum 4			
Pilot fluid consumption	[l/min]	maximum approx. 3			

<sup>1)</sup> In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.

## DRG – Pressure control remotely operated

For the remote-controlled pressure control, the target pressure can be set using a separately arranged pressure relief valve. Pressure control DR see page 9.

A pressure relief valve can be externally piped to port **X** for remote setting of pressure below the setting of the DR control valve spool. This relief valve is not included in the scope of supply of the pump.

The differential pressure at the DRG control valve is set as standard to 20 bar. At port **X** the amount of control fluid is about 1.5 l/min. If a different setting (range 10 to 22 bar) is required, please state in plain text.

As a separate pressure relief valve, we recommend:


**DBDH 6** (hydraulic) to RE 25402 or

**DBETR-SO 381** with orifice  $\varnothing$  0.8 mm in P (electric) to RE 29166.

The max. length of piping should not exceed 2 m.


- ▶ Basic position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range<sup>1)</sup> for pressure control 20 to 210 bar. Standard is 210 bar.

### ▼ Characteristic curve DRG

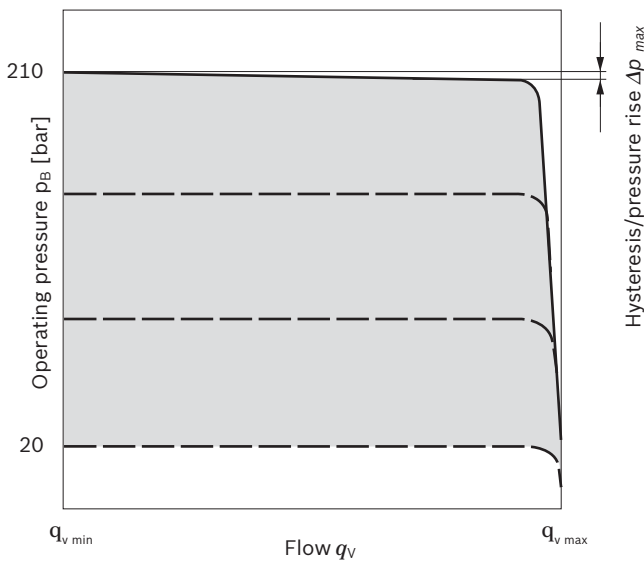

Characteristic curve valid at  $n_1 = 1500$  rpm and  $\theta_{\text{fluid}} = 50$  °C.

### ▼ Schematic DRG

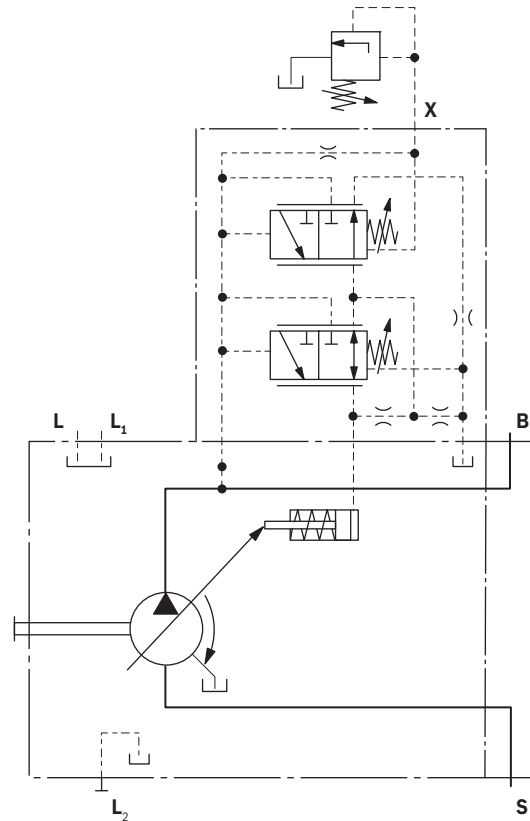

### Controller data

NG		28	45	63	85
Pressure increase	$\Delta p$ [bar]	6	6	6	8
Hysteresis and repeat precision	$\Delta p$ [bar]	maximum 4			
Pilot fluid consumption	l/min	maximum approx. 4.5			

1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.




## DRF/DRS/DRSC – Pressure and flow control


In addition to the pressure control function (see page 9), a variable orifice (e.g. directional valve) is used to adjust the differential pressure upstream and downstream of the orifice. This is used to control the pump flow. The pump flow is equal to the actual required flow by the consumer, regardless of changing pressure levels. The pressure control overrides the flow control function.

- ▶ Basic position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range<sup>1)</sup> for pressure control 35 to 210 bar. Standard is 210 bar.

### ▼ Characteristic curve DRF/DRS/DRSC

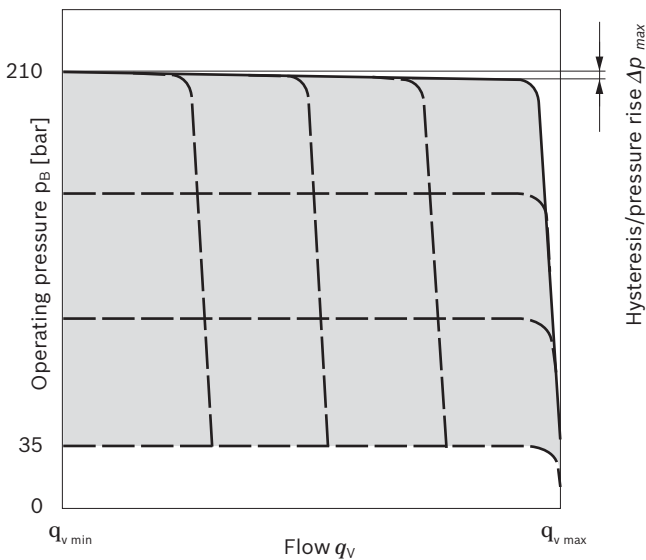

### ▼ Characteristic curve at variable speed

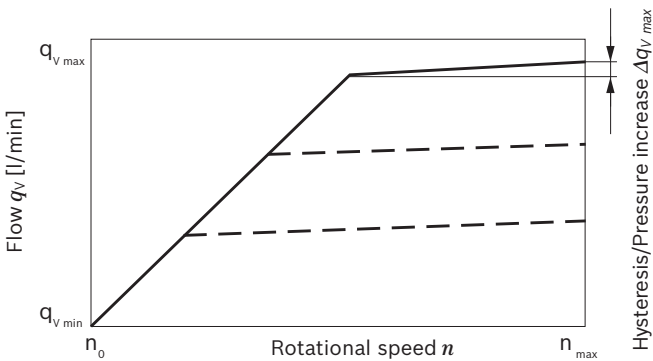


Characteristic curve valid at  $n_1 = 1500 \text{ rpm}$  and  $\theta_{\text{fluid}} = 50 \text{ }^\circ\text{C}$ .

Possible connections at port **B** (not included in the delivery contents)

LS mobile control blocks	Data sheets
M4-12	64276
M4-15	64283
LUDV mobile control blocks	
M6-15	64284
M7-22	64295

### ▼ Schematic DG

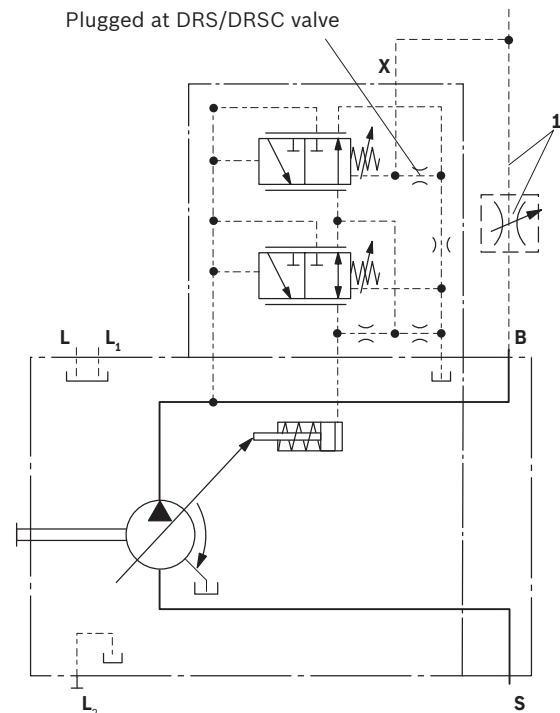

**1** The sensing orifice (control block) and the line is not included in the delivery contents.

#### Note

The DRS and DRSC valve versions have no pilot line between **X** and the reservoir. Unloading the LS-pilot line must be possible in the valve system. Because of the flushing function sufficient unloading of the flow control in DRS control valve **X**-line must also be provided. If this pilot line of the **X** line does not have to be guaranteed, the DRSC control valve must be used.

For further information see page 12

<sup>1)</sup> In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.

**Differential pressure  $\Delta p$ :**

► Standard setting: 14 to 22 bar.

If another setting is required, please state in clear text.

Relieving the load on port **X** to the reservoir results in a zero stroke ("standby") pressure which lies about 1 to 2 bar higher than the differential pressure  $\Delta p$ .

No account is taken of system influences.

**Controller data**

► DR Pressure control data see page 9.


► Maximum flow deviation measured at drive speed  
n = 1500 rpm.

<b>NG</b>		<b>28</b>	<b>45</b>	<b>63</b>	<b>85</b>
Flow deviation	$\Delta q_{vmax}$ [l/min]	0.9	1.0	1.8	2.5
Hysteresis; repeat precision	$\Delta p$ [bar]	maximum 4			
Pilot fluid consumption	[l/min]	maximum approx. 3 to 4.5 (DRF)		maximum approx. 3 (DRS / DRSC)	

## ED – Electro-hydraulic pressure control


The ED valve is set to a certain pressure by a specified variable solenoid current.  
 When a change is made at the consumer (load pressure), the position of the control piston will shift.  
 This causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level.  
 The pump thus only delivers as much hydraulic fluid as the consumers can take. The desired pressure level can be set steplessly by varying the solenoid current.  
 As the solenoid current signal drops towards zero, the pressure will be limited to  $p_{max}$  by an adjustable hydraulic pressure cut-off (secure fail safe function in case of a loss of power, e.g. for fan drives). The response time characteristic curve of the ED-control was optimized for the use as a fan drive system.  
 When ordering, specify the type of application in clear text.

### ▼ Static current-pressure characteristic curve ED (negative characteristic curve measured with pump in zero stroke)

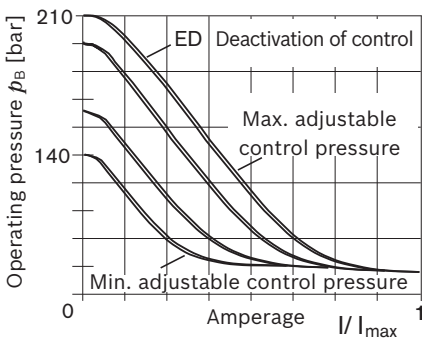


► Hysteresis static < 3 bar.

### ▼ Flow-pressure characteristic curve

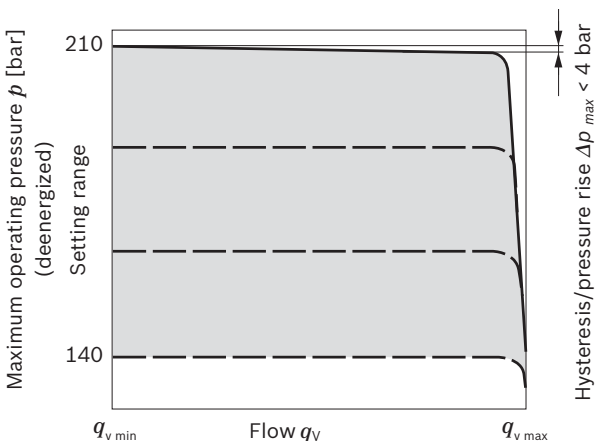

- Characteristic curve valid at  $n_1 = 1500$  rpm and  $\theta_{fluid} = 50$  °C.
- Pilot fluid consumption: 3 to 4.5 l/min.
- Standby standard setting 23 bar. Other values on request.

### ▼ Schematic ED71/ED72

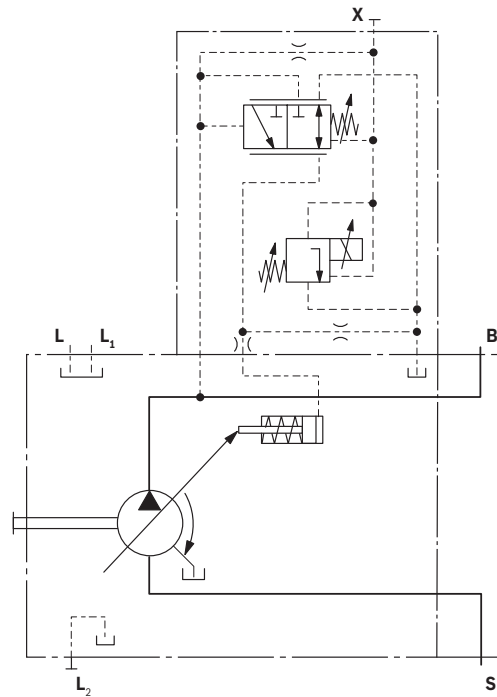


Technical data, solenoid	ED71	ED72
Voltage	12 V (±20%)	24 V (±20%)
Control current		
Start of control at $p_{min}$	100 mA	50 mA
End of control at $p_{max}$	1200 mA	600 mA
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	22.7 Ω
Dither frequency	100 to 200 Hz	100 to 200 Hz
Duty cycle	100%	100%
Type of protection: see connector version page 31		
Operating temperature range at valve -20 °C to +115 °C		


210 bar is the standard nominal pressure, higher pressures for fan drive application on request. You will also find more information about fan systems in application brochure 98065.

**Dimensions, Size 28**


**DR – Hydraulic pressure controller; clockwise rotation, series 53**

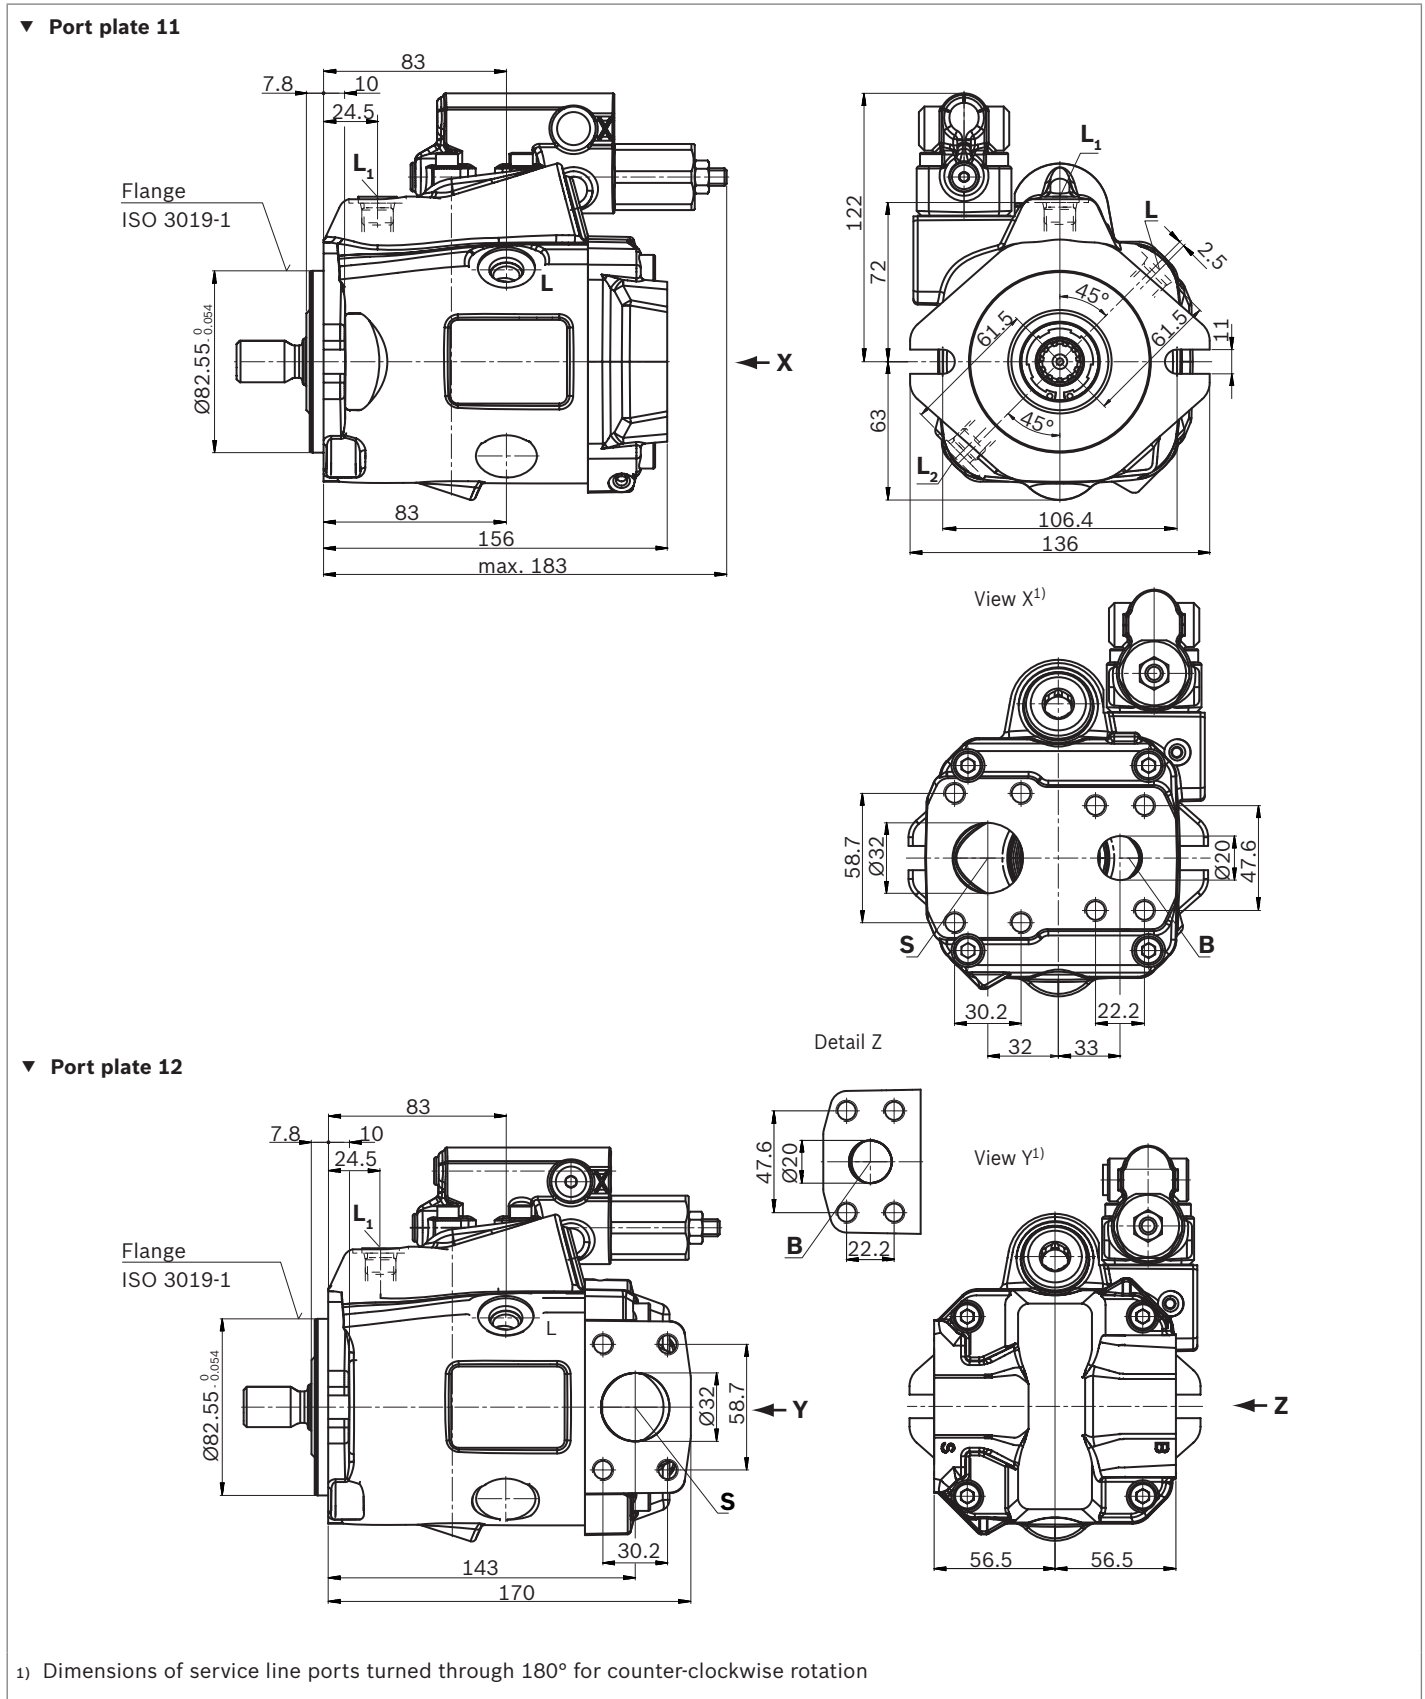

▼ Splined shaft 3/4 in (SAE J744)

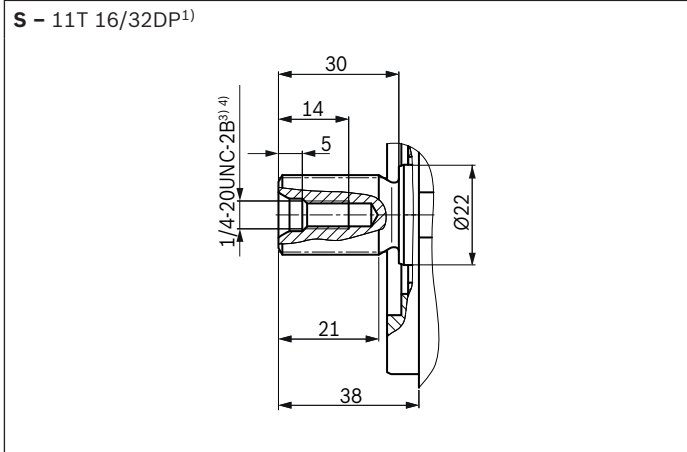

▼ Splined shaft 3/4 in (SAE J744)

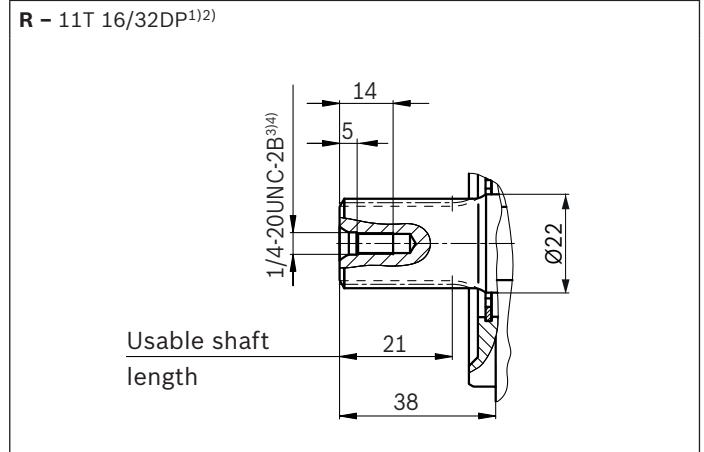


Ports		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	Condition <sup>9)</sup>
<b>B</b>	Working line port (Standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	3/4 in M10 × 1.5; 17 deep	250	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/4 in M10 × 1.5; 17 deep	5	O
<b>L</b>	Case drain port	DIN 11926 <sup>7)</sup>	3/4-16UNF-2B; 12 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub>, L<sub>2</sub></b>	Case drain port	DIN 11926 <sup>7)</sup>	3/4-16UNF-2B; 12 deep	2	X <sup>8)</sup>
<b>X</b>	Control pressure	DIN 11926	7/16-20UNF-2A; 11.5 deep	250	O


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Thread according to ASME B1.1  
 4) Observe the general instructions on page 36 concerning the maximum tightening torques.

5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.  
 6) Metric fixing thread differing from standard  
 7) The spot face can be deeper than as specified in the standard.  
 8) Depending on the installation position, L, L<sub>1</sub> or L<sub>2</sub> must be connected (also see installation instructions starting on page 32).  
 9) O = Must be connected (plugged on delivery)  
 X = Plugged (in normal operation)


▼ **DRG – Pressure controller, remote controlled, series 53**

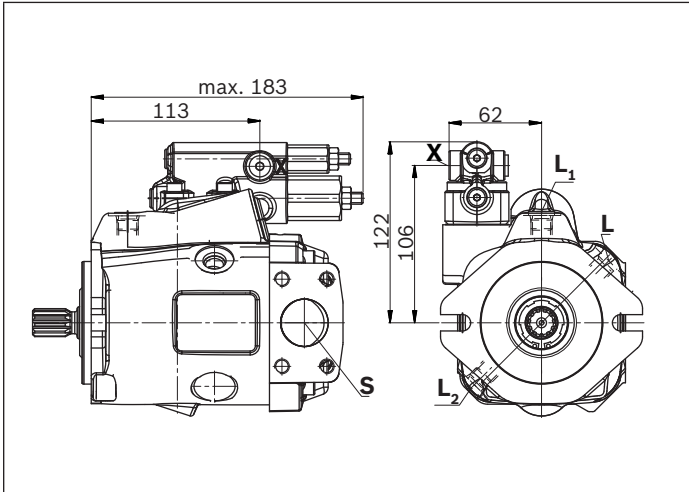

▼ **ED7. – Electro-prop. Pressure control, series 53**

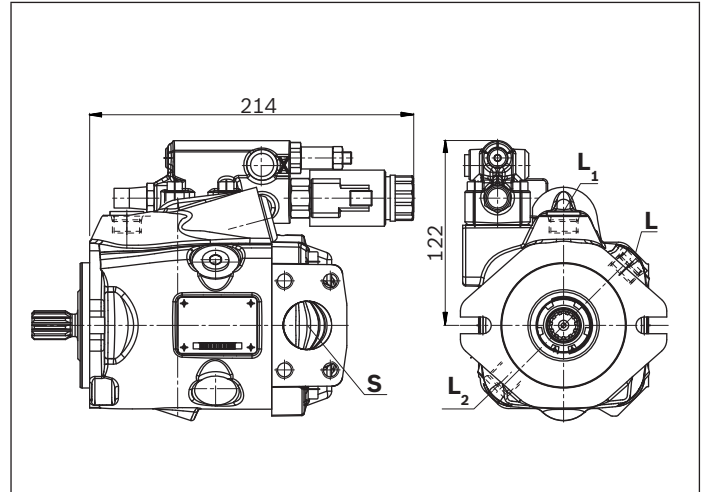


▼ **DRF/DRS/DRSC – Pressure and flow control, series 53**

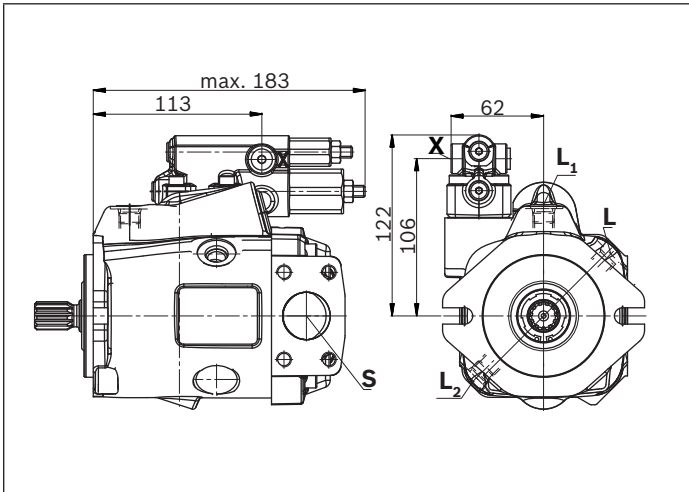


**Dimensions, Size 45**

**DR – Hydraulic pressure controller; clockwise rotation, series 52**


▼ **Port plate 11**

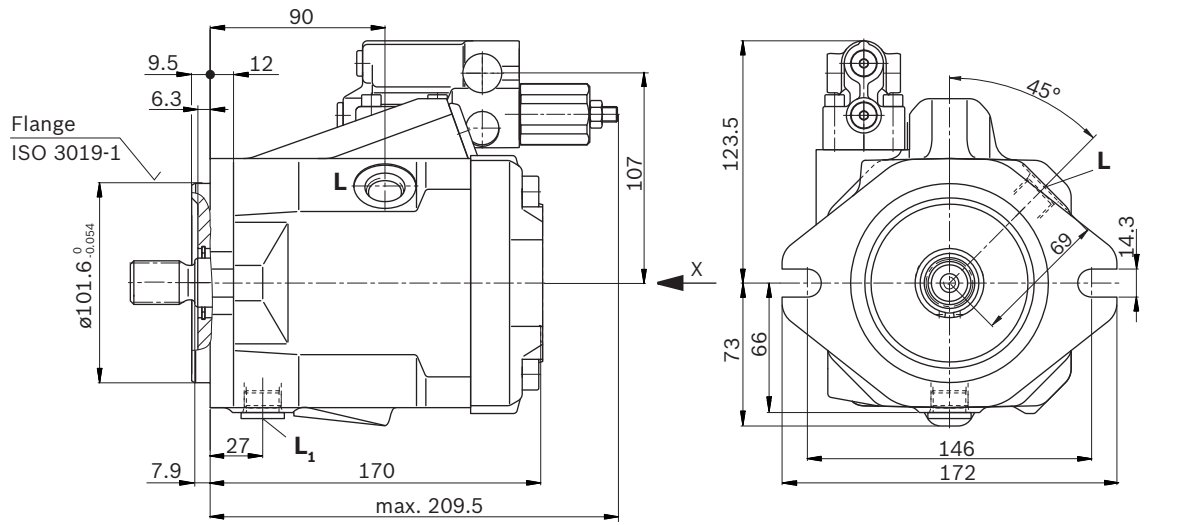

View X<sup>1)</sup>

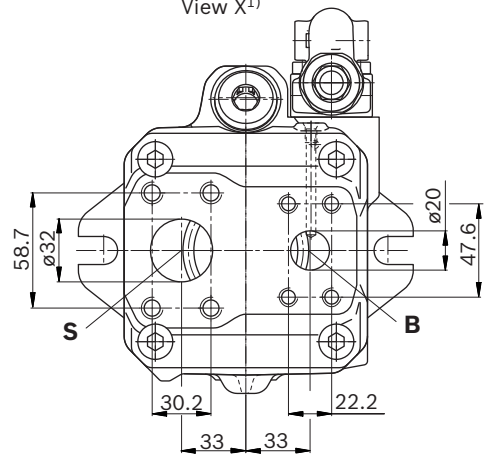


▼ **Port plate 12**

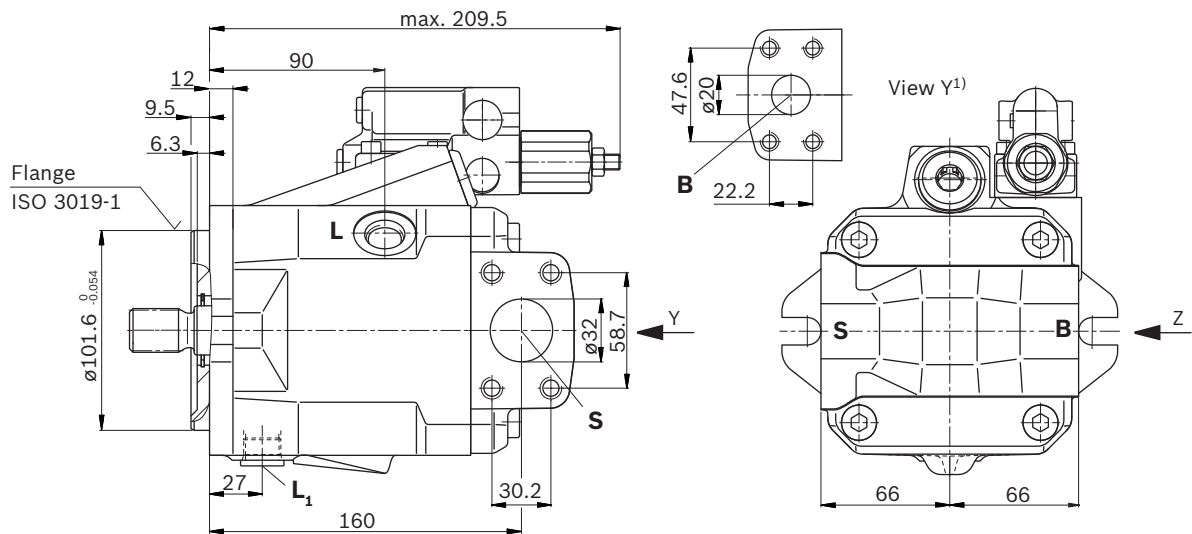


View Y<sup>1)</sup>

1) Dimensions of service line ports turned through 180° for counter-clockwise rotation

▼ **Splined shaft 7/8 in (SAE J744)**

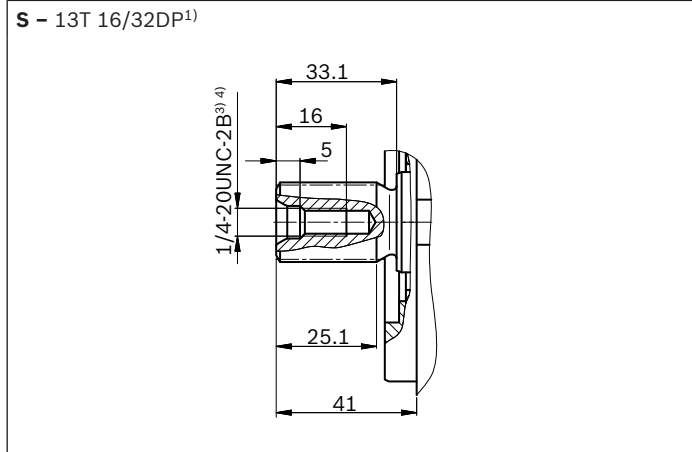

▼ **Splined shaft 7/8 in (SAE J744)**

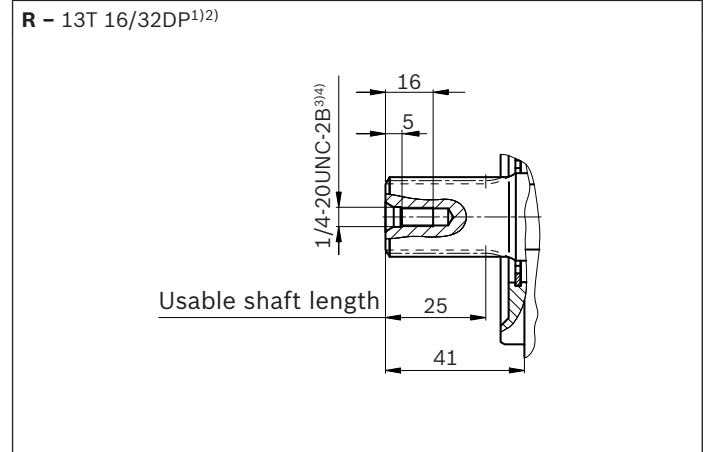


Ports		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	Condition <sup>9)</sup>
<b>B</b>	Service line port (Standard pressure series) Fixing thread	SAE J518 <sup>6)</sup> DIN 13	3/4 in M10 × 1.5; 17 deep	250	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/4 in M10 × 1.5; 17 deep	5	O
<b>L</b>	Case drain port	ISO 11926 <sup>7)</sup>	3/4-16UNF-2B; 12 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Case drain port	ISO 11926 <sup>7)</sup>	3/4-16UNF-2B; 12 deep	2	X <sup>8)</sup>
<b>X</b>	Control pressure	ISO 11926	7/16-20UNF-2B; 11.5 deep	250	O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Thread according to ASME B1.1  
 4) Observe the general instructions on page 36 concerning the maximum tightening torques.  
 5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.


6) Metric fixing thread differing from standard  
 7) The spot face can be deeper than as specified in the standard.  
 8) Depending on the installation position, L or L<sub>1</sub> must be connected (also see installation instructions starting on page 32).  
 9) O = Must be connected (plugged on delivery)  
 X = Plugged (in normal operation)




▼ **DRG – Pressure controller, remote controlled, series 52**

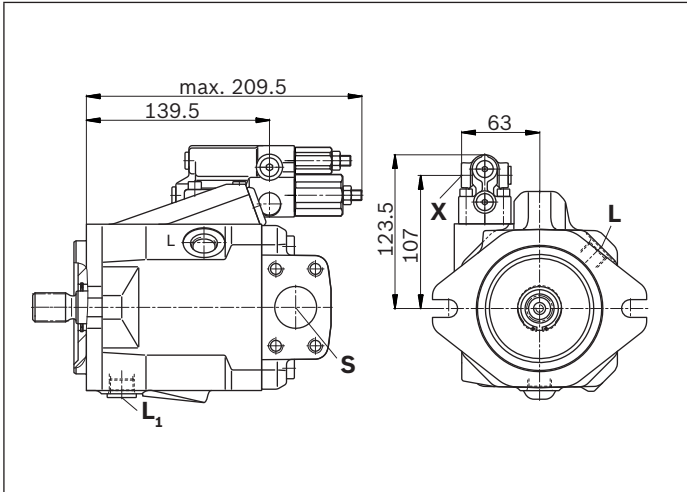

▼ **ED7. – Electro-prop. Pressure control, series 52**

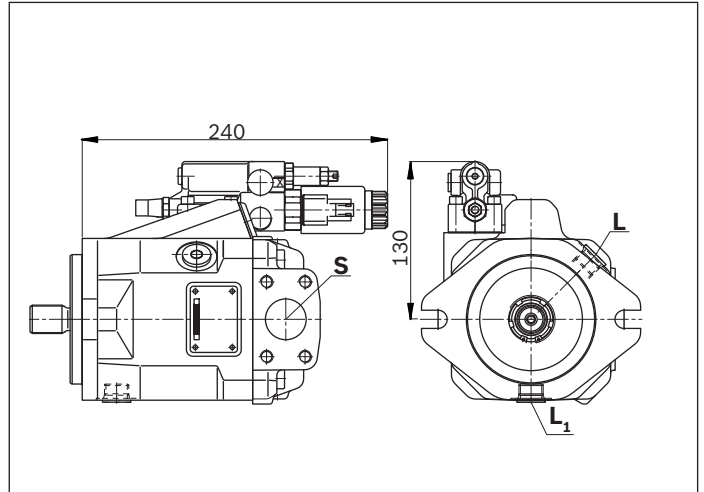


▼ **DRF/DRS/DRSC – Pressure and flow control, series 52**

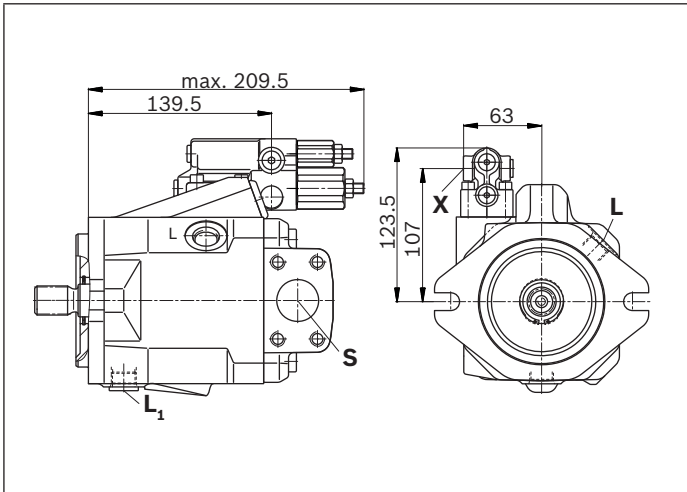


**Dimensions, Size 63**

**DR – Hydraulic pressure controller; clockwise rotation, series 52**

▼ **Port plate 11**

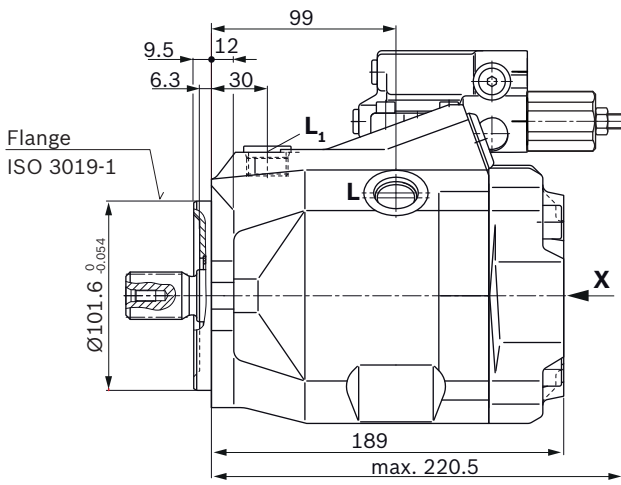


▼ **Port plate 12**

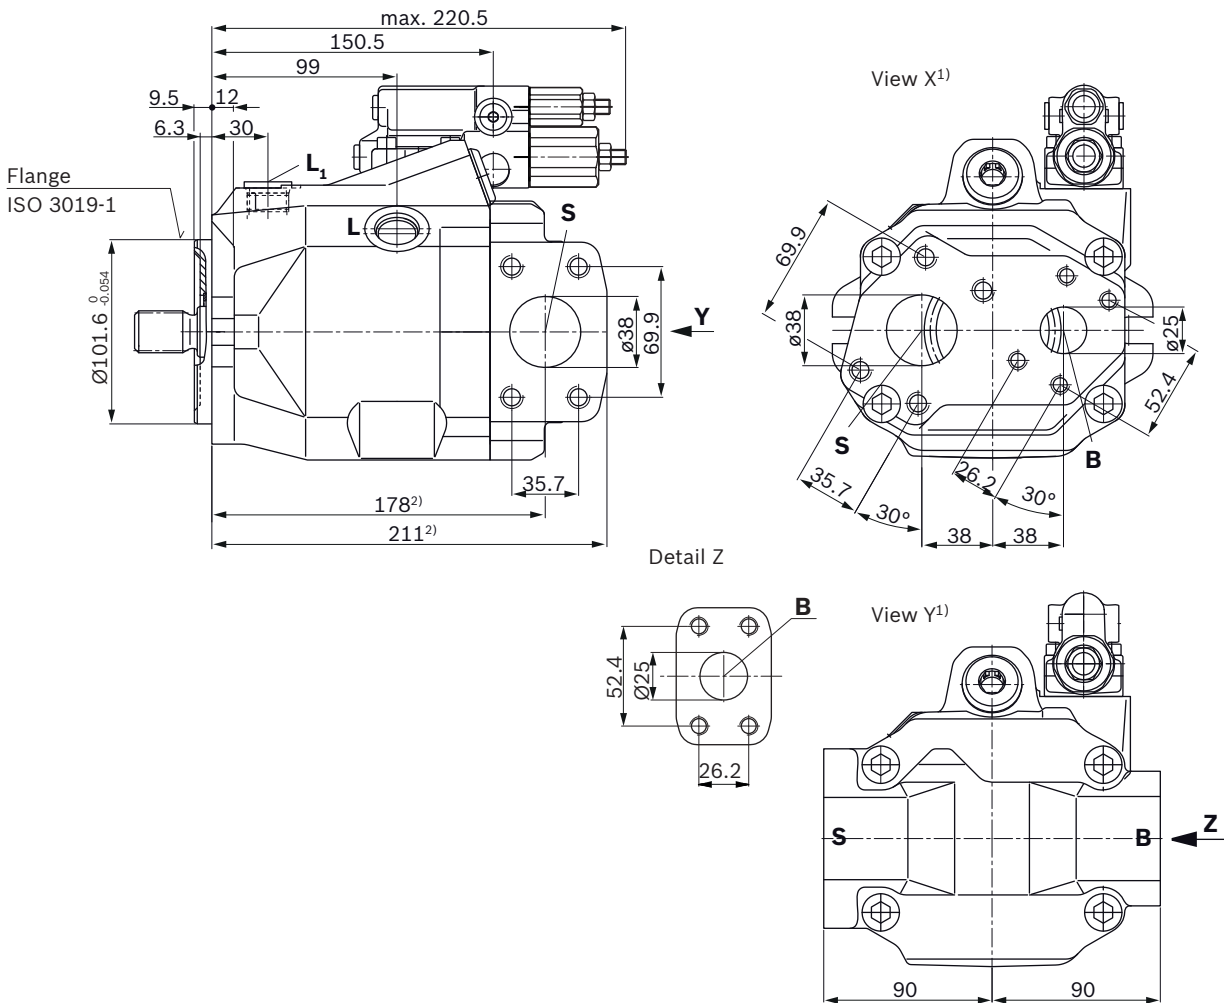


1) Dimensions of service line ports turned through 180° for counter-clockwise rotation

▼ Splined shaft 1 in SAE J744

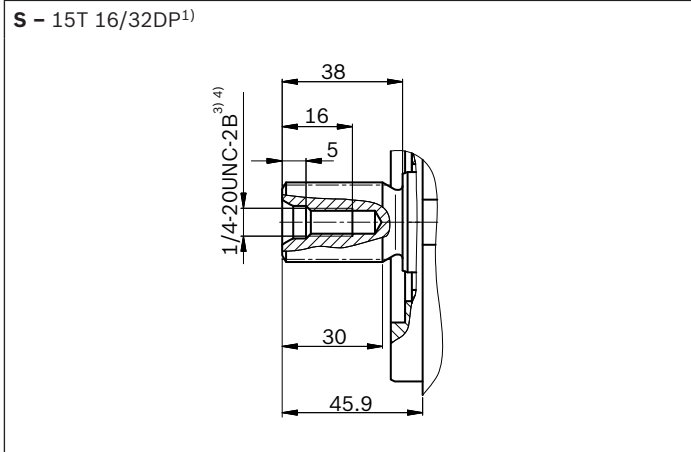

▼ Splined shaft 1 in SAE J744

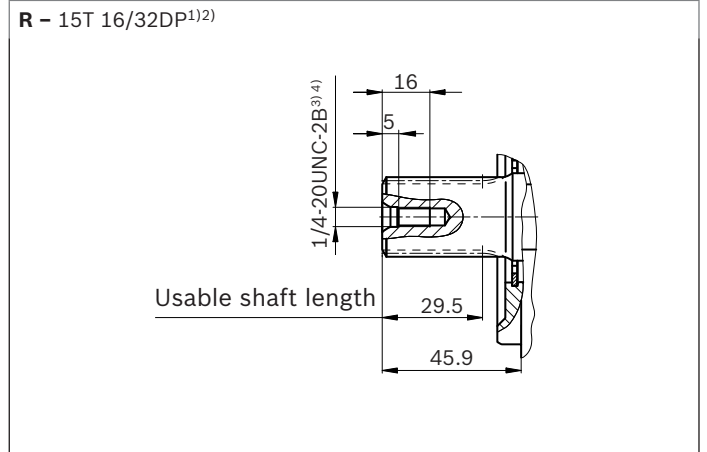


Ports		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	Condition <sup>9)</sup>
<b>B</b>	Working line port (Standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 in M10 × 1.5; 17 deep	250	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 1/2 in M12 × 1.75; 20 deep	5	O
<b>L</b>	Case drain port	ISO 11926 <sup>7)</sup>	7/8-14UNF-2B; 13 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub></b>	Case drain port	ISO 11926 <sup>7)</sup>	7/8-14UNF-2B; 13 deep	2	X <sup>8)</sup>
<b>X</b>	Control pressure	ISO 11926	7/16-20UNF-2A; 11.5 deep	250	O


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.  
 3) Thread according to ASME B1.1  
 4) Observe the general instructions on page 36 concerning the maximum tightening torques.  
 5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

6) Metric fixing thread differing from standard  
 7) The spot face can be deeper than as specified in the standard.  
 8) Depending on the installation position, L, L<sub>1</sub> or L<sub>2</sub> must be connected (also see installation instructions starting on page 32).  
 9) O = Must be connected (plugged on delivery)  
 X = Plugged (in normal operation)


▼ **DRG – Pressure controller, remote controlled, series 52**

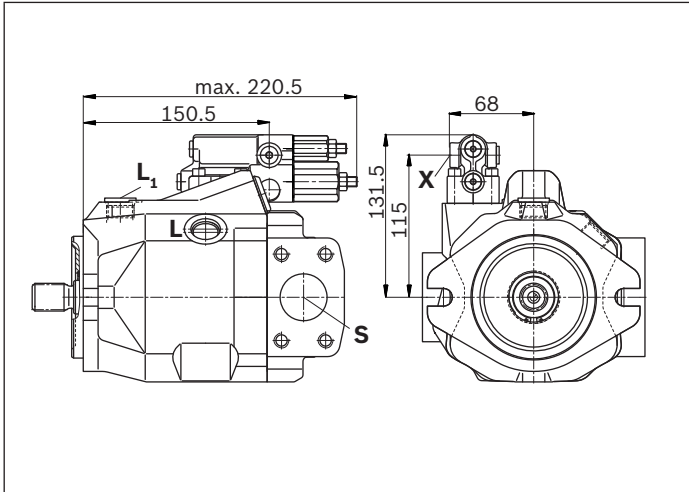

▼ **ED7. / ER7. – Electro-prop. Pressure control, series 52**

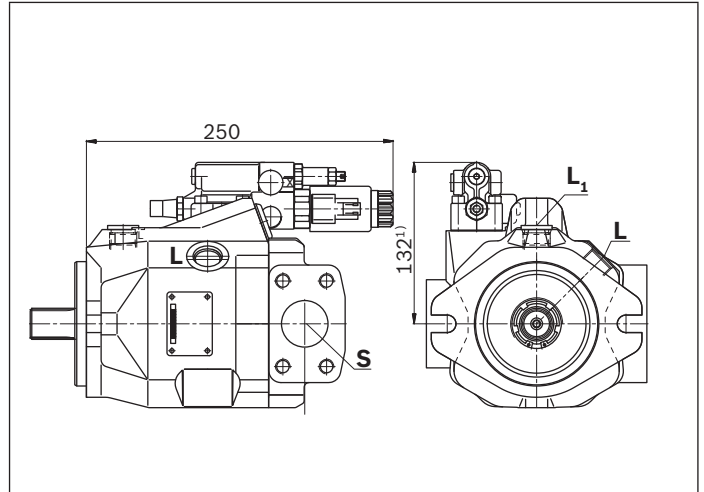


▼ **DRF/DRS/DRSC – Pressure and flow control, series 52**

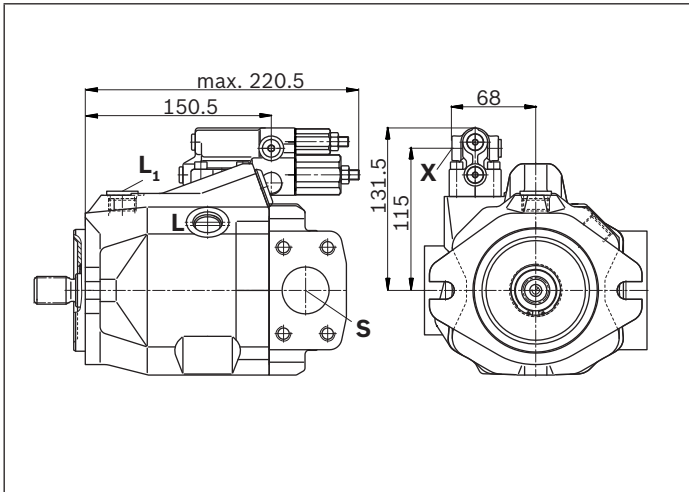


**Dimensions, Size 85**

**DR – Hydraulic pressure controller; clockwise rotation, mounting flange C series 53**


▼ **Port plate 11**

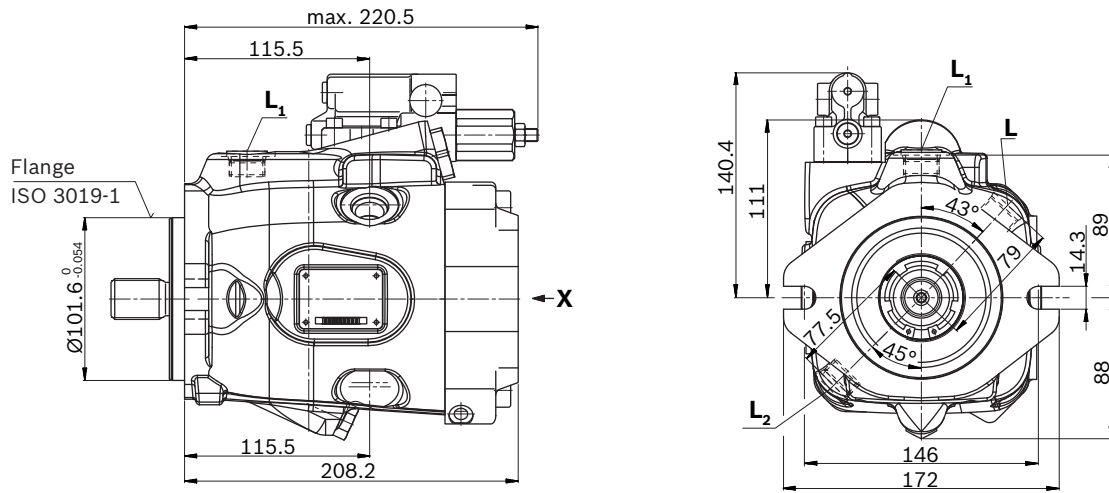


View X<sup>1)</sup>

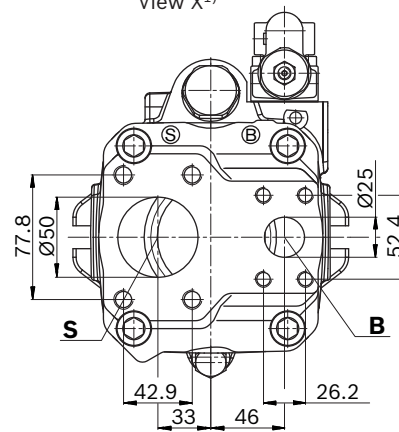


▼ **Port plate 12**

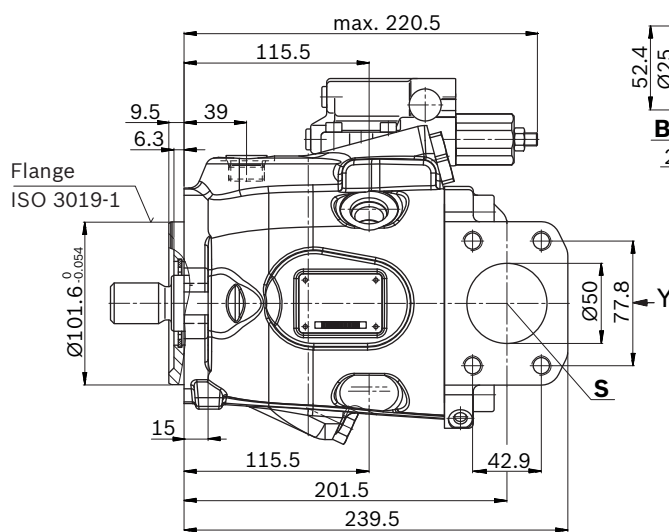

Detail Z



View Y<sup>1)</sup>

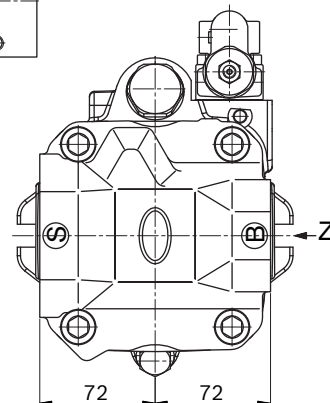


1) Dimensions of service line ports turned through 180° for counter-clockwise rotation


**Dimensions, Size 85**

**DR – Hydraulic pressure controller; clockwise rotation, mounting flange D series 53**


▼ **Port plate 11**

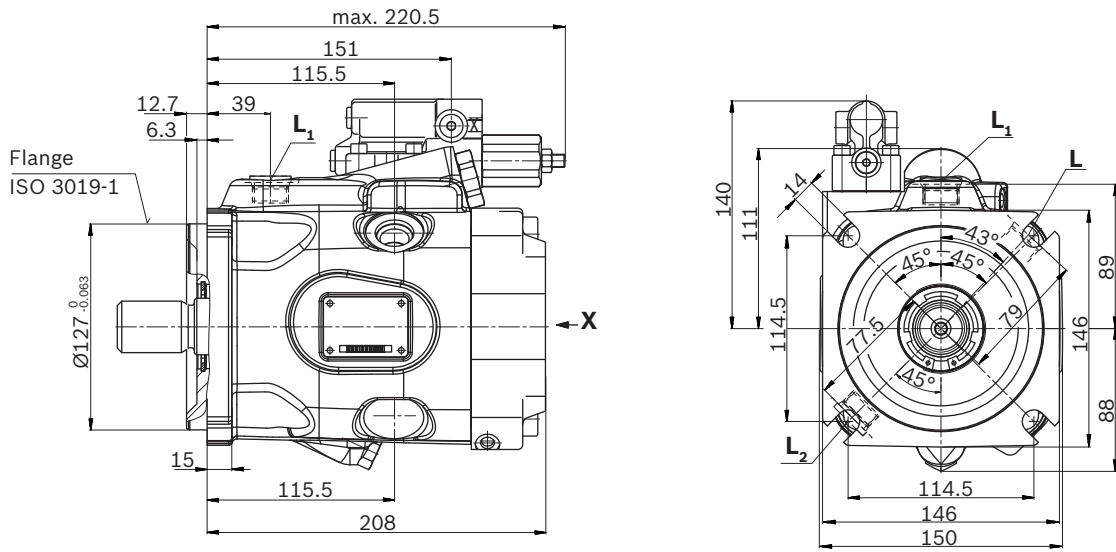

View X<sup>1)</sup>

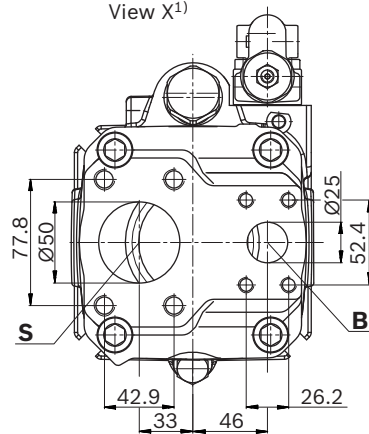


▼ **Port plate 12**

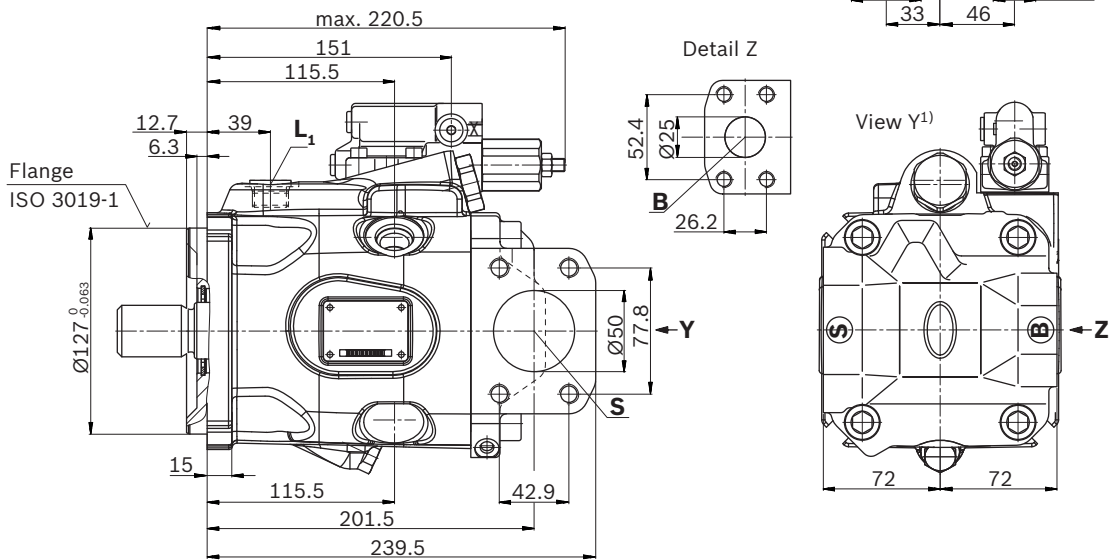


View Y<sup>1)</sup>

1) Dimensions of service line ports turned through 180° for counter-clockwise rotation

## ▼ Splined shaft 1 1/4 in SAE J744

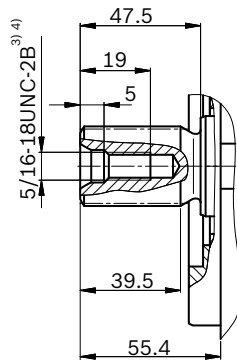S – 14T 12/24DP<sup>1)</sup>

## ▼ Splined shaft 1 1/4 in SAE J744

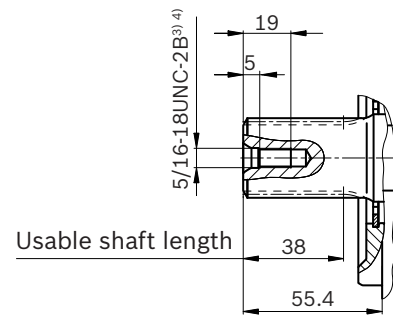
R – 14T 12/24DP<sup>1)2)</sup>

Ports		Standard	Size <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	Condition <sup>9)</sup>
<b>B</b>	Working line port (Standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	1 in M10 × 1.5; 17 deep	250	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>6)</sup> DIN 13	2 in M12 × 1.75; 20 deep	5	O
<b>L</b>	Case drain port	ISO 11926 <sup>7)</sup>	7/8-14UNF-2B; 13 deep	2	O <sup>8)</sup>
<b>L<sub>1</sub>, L<sub>2</sub></b>	Case drain port	ISO 11926 <sup>7)</sup>	7/8-14UNF-2B; 13 deep	2	X <sup>8)</sup>
<b>X</b>	Control pressure	ISO 11926	7/16-20UNF-2A; 11.5 deep	250	O


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard.
- 3) Thread according to ASME B1.1
- 4) Observe the general instructions on page 36 concerning the maximum tightening torques.
- 5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 6) Metric fixing thread differing from standard
- 7) The spot face can be deeper than as specified in the standard.
- 8) Depending on the installation position, L, L<sub>1</sub> or L<sub>2</sub> must be connected (also see installation instructions starting on page 32).
- 9) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)


▼ **DRG – Pressure controller, remote controlled, series 53**

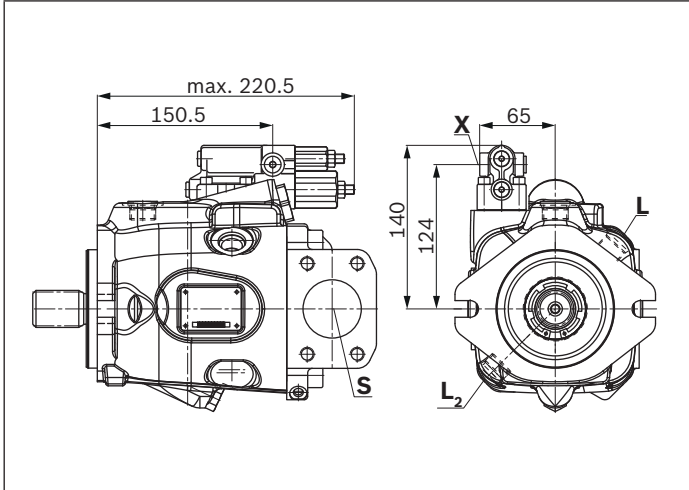

▼ **ED7. – Electro-prop. Pressure control, series 53**

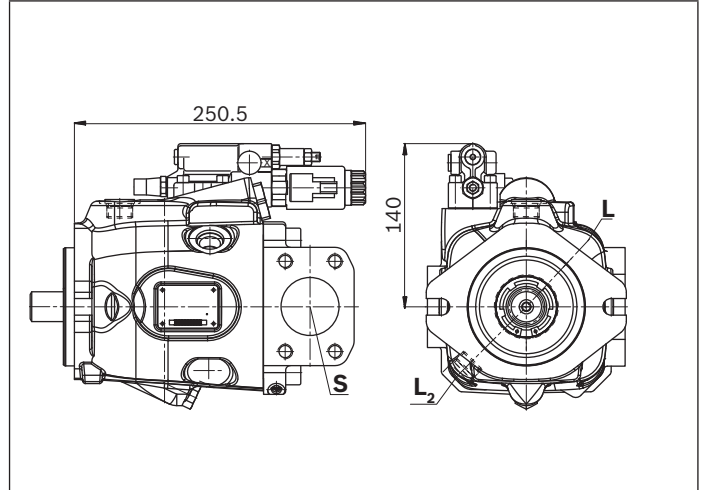

▼ **DRF/DRS/DRSC – Pressure and flow control, series 53**

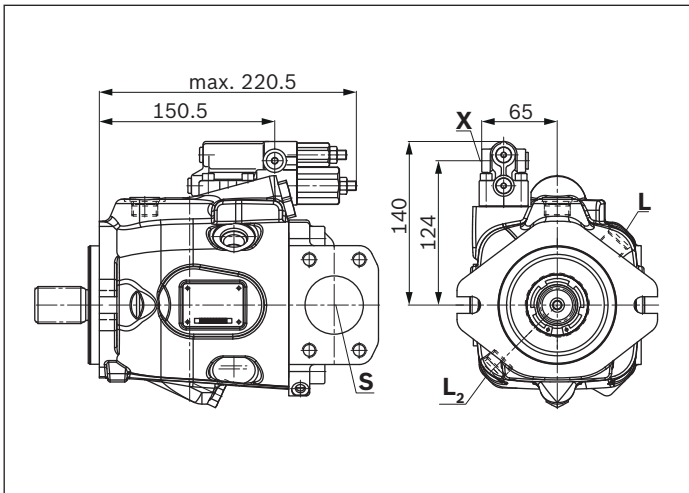





### Dimensions through drive

Flange ISO 3019-1 (SAE)		Hub for splined shaft <sup>1)</sup>		Availability over sizes				Code
diameter	Symbol <sup>2)</sup>	diameter		28	45	63	85	
82-2 (A)	ϕ, ∞	5/8 in	9T 16/32DP	●	●	●	●	K01
		3/4 in	11T 16/32DP	●	●	●	●	K52

● = Available    ○ = On request

▼ 82-2

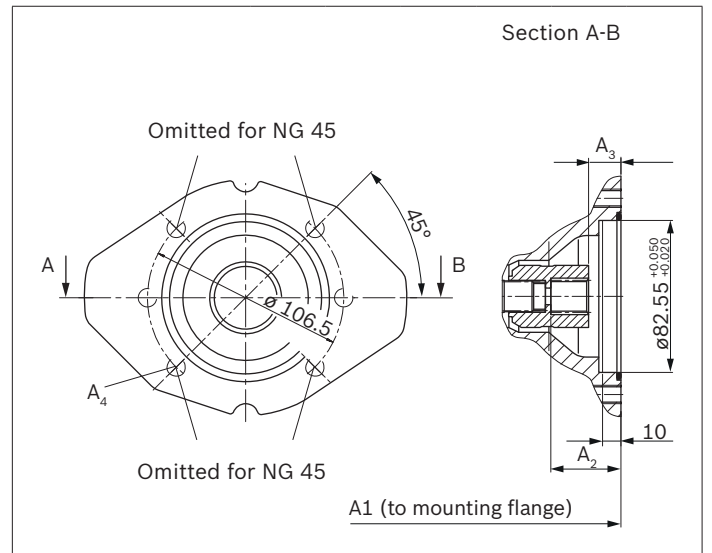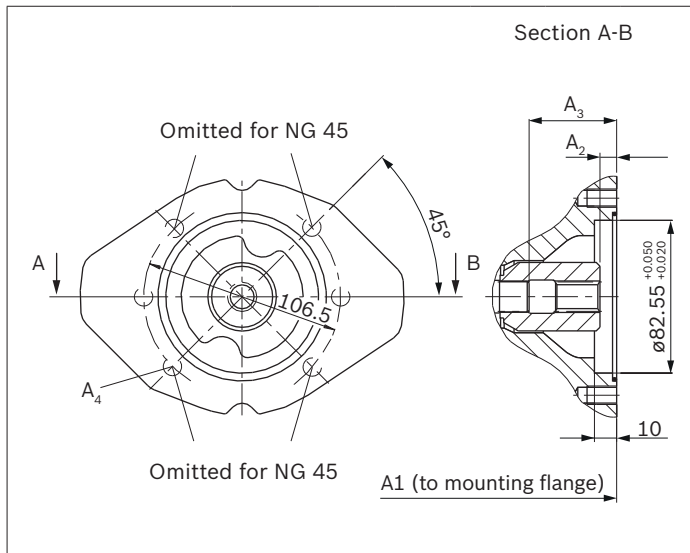

K01 (SAE J744 16-4 (A))	NG	A1	A2	A3	A4 <sup>3)</sup>
	28	182	9.3	43.3	M10×1.5; 14.5 deep
	45	204	9.9	47	M10×1.5; 16 deep
	63	229	10.7	53	M10×1.5; 16 deep
	85	255	9.5	59	M10×1.5; 16 deep

K52 (SAE J744 19-4 (A-B))	NG	A1	A2	A3	A4 <sup>3)</sup>
	28	182	39	18.8	M10×1.5; 14.5 deep
	45	204	39.3	18.8	M10×1.5; 16 deep
	63	229	39.4	18.9	M10×1.5; 16 deep
	85	255	39.4	18.9	M10×1.5; 16 deep


1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Mounting bores pattern viewed from through drive with control at top

3) Thread according to DIN 13, observe the general instructions on page 54 for the maximum tightening torques.


Flange ISO 3019-1 (SAE)		Hub for splined shaft <sup>1)</sup>		Availability over sizes				Code
diameter	Symbol <sup>2)</sup>	diameter		28	45	63	85	
101-2 (B)	⌀, ∞	7/8 in	13T 16/32DP	-	●	●	●	K68
		1 in	15T 16/32DP	-	-	●	●	K04

● = Available    ∞ = On request

▼ **101-2**

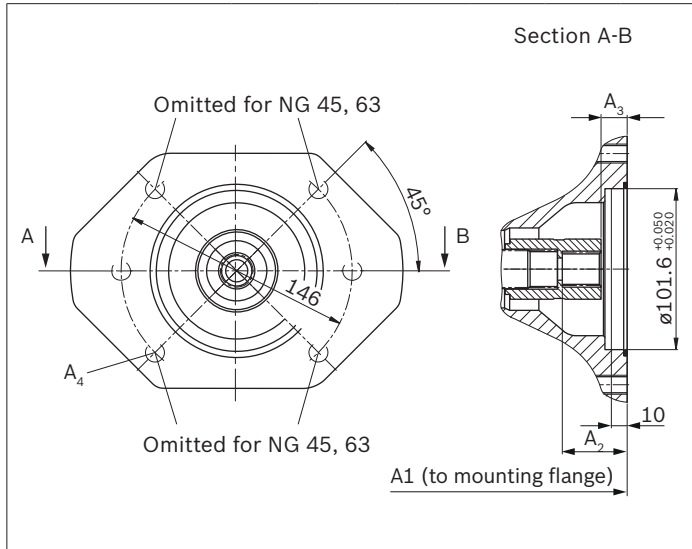

K68 (SAE J744 22-4 (B))	NG	A1	A2	A3	A4 <sup>3)</sup>
	45	204	42.3	17.8	M12×1.75; 18 deep
	63	229	42.4	17.9	M12×1.75; 18 deep
	85	255	42.4	17.9	M12×1.75; 18 deep

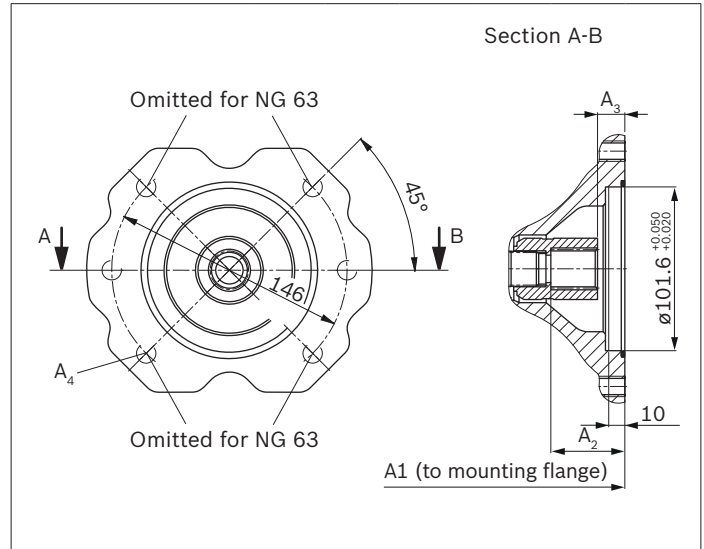

K04 (SAE J744 25-4 (B-B))	NG	A1	A2	A3	A4 <sup>3)</sup>
	63	229	47.9	18.9	M12×1.75; 18 deep
	85	255	47.4	18.4	M12×1.75; 18 deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Mounting bores pattern viewed from through drive with control at top

3) Thread according to DIN 13, observe the general instructions on page 54 for the maximum tightening torques.

**Overview of attachment options**

Through drive		Attachment of 2nd pump				External gear
Flange ISO 3019-1	Hub for splined shaft	Short code	A10VNO/5x NG (shaft)	A10V(S)O/5x NG (shaft)	A1VO/10 NG (shaft)	
82-2 (A)	5/8 in	K01	–	10 (U), 18 (U)	18 (S2)	Series F
	3/4 in	K52	28 (S, R)	10 (S) 18 (S, R)	18 (S3)	
101-2 (B)	7/8 in	K68	45 (S, R)	28 (S, R) 45 (U, W) <sup>1)</sup>	35 (S4)	Series N/G
	1 in	K04	63 (S, R)	45 (S, R) 60, 63 (U, W) <sup>2)</sup> 72 (U, W) <sup>2)</sup>	35 (S5)	

1) Not for NG28 with K68

2) Not for NG63 with K04

## Combination pumps A10VNO + A10VNO

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes. When ordering combination pumps, the type designations of the 1st and 2nd pump must be linked by a "+".


**Order example:**

**A10VNO63DRS/53R-VSC12K04+**

**A10VNO45DRF/53R-VSC11N00**

It is permissible to use a combination of two single pumps of the same nominal size (tandem pump) considering a dynamic mass acceleration of maximum 10 g (= 98.1 m/s<sup>2</sup>) without additional support brackets.

For combination pumps consisting of more than two pumps, the mounting flange must be rated for the permissible mass torque (please consult us).

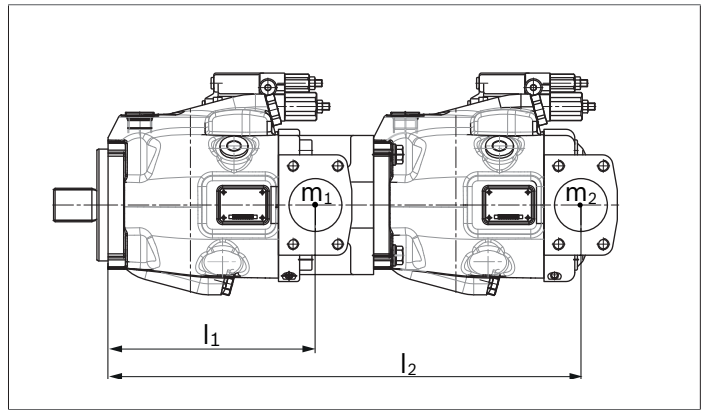

$m_1, m_2, m_3$	Weight of pump	[kg]
$l_1, l_2, l_3$	Distance, center of gravity	[mm]
$T_m = (m_1 \times l_1 + m_2 \times l_2 + m_3 \times l_3) \times \frac{1}{102} \text{ [Nm]}$		

### Permissible mass moment of inertia

Size			28	45	63	85
static	$T_m$	Nm	–	890	900	1370
dynamic at 10 g (98.1 m/s <sup>2</sup> )	$T_m$	Nm	–	89	90	137
Weight with through-drive plate	$m$	kg	13	18	24	28
Weight without through-drive plate (e.g. 2nd pump)			11.5	15	18	22
Distance, center of gravity <b>without</b> through drive	$l_1$	mm	78	85	96	105
Distance, center of gravity <b>with</b> through drive	$l_1$	mm	87	99	115	127

## Connector for solenoids


### DEUTSCH DT04-2P-EP04

Molded connector, 2-pin, without bidirectional suppressor diode

There is the following type of protection with mounted mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

#### ▼ Circuit symbol




#### ▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

## Electronic controls

Control	Electronics function	electronics		Further information
Electric pressure control	Controlled power outlet	RA	analog	95230
		RC4-5/30 <sup>1)</sup>	Digital	95205

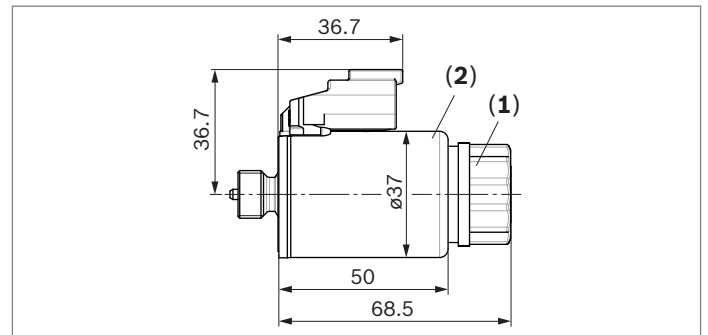

### Changing plug position

If necessary, you can change the connector orientation by turning the solenoid housing.

To do this, proceed as follows:

- ▶ Loosen the mounting nut **(1)** of the solenoid. To do this, turn the mounting nut **(1)** one turn counter-clockwise.
- ▶ Turn the solenoid body **(2)** to the desired orientation.
- ▶ Retighten the mounting nut.  
Tightening torque:  $5^{+1}$  Nm.  
(WAF 26, 12-sided DIN 3124)

On delivery, the position of the connector may differ from that shown in the brochure or drawing.

## Installation instructions

### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines.

Particularly with the "drive shaft up/down" installation position, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running. The case drain in the case interior must be directed to the reservoir via the highest available drain port (**L**, **L<sub>1</sub><sup>2)</sup>**, **L<sub>2</sub><sup>3)</sup>**). If a shared drain line is used for several units, make sure that the relevant case pressure is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operational circumstances, particularly at cold start. If this is not possible, separate reservoir lines must be laid as required.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction lines and the drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{s\ max} = 800\ \text{mm}$ . The minimum suction pressure at port **S** must also not fall below 0.8 bar absolute during operation and during cold start.

When designing the reservoir, ensure that there is sufficient distance between the suction line and the drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

### Note

In certain installation conditions, an influence on the control characteristic curves can be expected. Gravity, dead weight and case pressure can cause minor shifts in characteristics and changes in response time.

For key, see page 34.

1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

2) For NG45 and NG63 series 52, **L<sub>1</sub>** is opposite, L must then be connected if necessary.

3) Only series 53

### Installation position

See the following examples **1** to **12**.

Additional installation positions are available upon request.

Recommended installation position: **1** and **3**

### Below-reservoir installation (standard)

Below-reservoir installation is when the axial piston unit is installed outside of the reservoir below the minimum fluid level.

Installation position	Air bleeding	Filling
1 <sup>2)</sup>	F	S + L or L <sub>1</sub>
2 <sup>1)</sup>	F	S + L <sub>1</sub>
3 <sup>3)</sup>	F	S + L or L <sub>1</sub>
4	F	S + L or L <sub>1</sub>

**Above-reservoir installation**

Above-reservoir installation means the axial piston unit is installed above the minimum fluid level of the reservoir. To prevent the axial piston unit from draining in position 6, the height difference  $h_{ES\ min}$  must be at least 25 mm. Observe the maximum permissible suction height  $h_{s\ max} = 800\ mm$ .

A check valve in the drain line is only permissible in individual cases. Consult us for approval.

For key, see page 34.

Installation position	Air bleeding	Filling
<p>5<sup>2)</sup></p>	F	L <sub>1</sub> or L
<p>6<sup>1)2)</sup></p>	F	L <sub>1</sub>
<p>7<sup>3)</sup></p>	F	L <sub>2</sub>
<p>8<sup>1)</sup></p>	F	S or L

1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.


2) For NG45 and NG63 series 52, L<sub>1</sub> is opposite, L must then be connected if necessary.


3) Only series 53


### Tank installation


Inside-reservoir installation is when the axial piston unit is installed in the reservoir below the minimum fluid level. The axial piston unit is completely below the hydraulic fluid. If the minimum fluid level is equal to or below the upper edge of the pump, see chapter "Above-reservoir installation". Axial piston units with electrical components (e.g., electric control, sensors) may not be installed in a reservoir below the fluid level.

Installation position	Air bleeding	Filling
-----------------------	--------------	---------
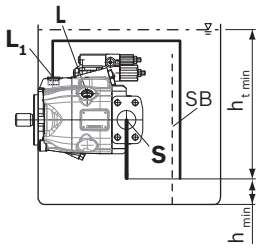
<p>g<sup>2)</sup></p> 	<p>Via the highest available port <b>L</b></p>	<p>Automatically via the open port <b>L</b> or <b>L<sub>1</sub></b> due to the position under the hydraulic fluid level</p>
---	--	---
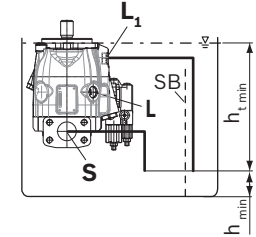
<p>10</p> 	<p>Via the highest available port <b>L<sub>1</sub></b></p>	<p>Automatically via the open port <b>L</b>, <b>L<sub>1</sub></b> or <b>S</b> due to the position under the hydraulic fluid level</p>
--	--	---
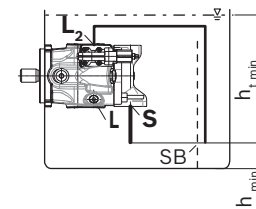
<p>11<sup>3)</sup></p> 		
--	--	--
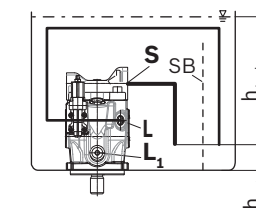
<p>12</p> 	<p>Via the highest available port <b>L</b></p>	<p>Automatically via the open port <b>L</b>, <b>L<sub>1</sub></b> or <b>S</b> due to the position under the hydraulic fluid level</p>
---	--	---

### Key and assembly note

Key	
<b>F</b>	Filling / air bleeding
<b>S</b>	Suction port
<b>L; L<sub>1</sub>; L<sub>2</sub></b>	Tank port
<b>SB</b>	Baffle (baffle plate)
<b>h<sub>t, min</sub></b>	Minimum required immersion depth (200 mm)
<b>h<sub>min</sub></b>	Minimum required distance to tank base (100 mm)
<b>h<sub>ES, min</sub></b>	Minimum necessary height needed to protect the axial piston unit from draining (25 mm).
<b>h<sub>S, max</sub></b>	Maximum permissible suction height (800 mm)

### Note

Port **F** is part of the external piping and must be provided by the customer to make filling and air bleeding easier.

1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

2) For NG45 and NG63 series 52, **L<sub>1</sub>** is opposite, **L** must then be connected if necessary.

3) Only series 53





## Project planning notes

- ▶ The A10VNO pump is designed to be used in open circuits.
- ▶ Project planning, installation and commissioning of the axial piston units requires the involvement of skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual thoroughly and completely. If necessary, request them from Bosch Rexroth.
- ▶ Before finalizing your design, request a binding installation drawing.
- ▶ The specified data and notes must be observed.
- ▶ Pressure controllers are not backups against pressure overload. A separate pressure relief valve is to be provided in the hydraulic system.
- ▶ Depending on the operating condition of the axial piston unit (operating pressure, fluid temperature), the characteristic curve may shift.
- ▶ Not all versions of the product are approved for use in a safety function pursuant to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g. MTTF<sub>d</sub>) for functional safety.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports can only be used to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control and regulation systems (e.g. valve spools) may in certain circumstances become stuck in an undefined position due to contamination (e.g. contaminated hydraulic fluid, abrasion or residual dirt from components). As a result, the hydraulic fluid flow or build-up of torque of the axial piston unit will no longer respond correctly to the operator's commands. Even the use of different filter cartridges (external or internal inlet filter) will not rule out a fault but merely minimize the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to set the consumer being driven to a safe position (e.g. safe stop) and if necessary to ensure it is properly implemented.

### **Bosch Rexroth AG**

Mobile Applications  
An den Kelterwiesen 14  
72160 Horb a.N., Germany  
Tel. +49 7451 92-0  
info.ma@boschrexroth.de  
www.boschrexroth.com


© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from this information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# Axial piston variable pump A10V(S)O, A10VO Series 3x and 5x with electro-proportional EF differential pressure control

**RE 92709**

Edition: 12.2015

Replaces: 05.2004

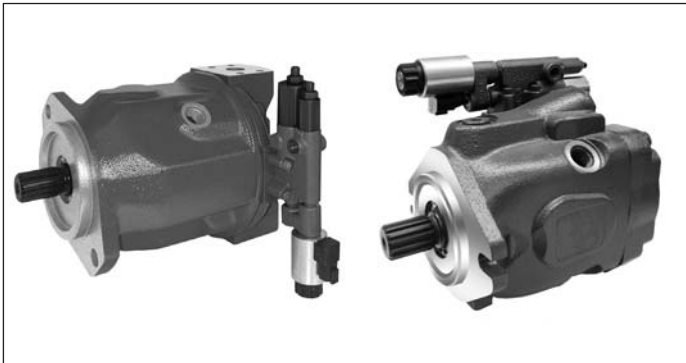**Series 31 and 32**

- ▶ Sizes 18 to 180
- ▶ Nominal pressure/maximum pressure 280 / 350 bar
- ▶ Open circuit

**Series 52 and 53**

- ▶ Sizes 18 to 100
- ▶ Nominal pressure/maximum pressure 250 / 315 bar
- ▶ Open circuit

**Features**

- ▶ Electro-proportional differential pressure control by a current signal
- ▶ High precision
- ▶ Safe function in the event of a power failure, e.g. supply of braking and steering systems
- ▶ Use of standard proportional amplifiers possible
- ▶ Compact design

**Application possibilities**

- ▶ Variations in the fine control
- ▶ Control of the maximum flow
- ▶ Use for electronic load limiting control

Further information on the relevant products can be found in the data sheets:

A10V(S)O series 31	92701
A10VO series 32	92705
A10VO series 52/53	92703

**Inhalt**

Ordering code A10V(S)O series 31	2
Ordering code A10VO series 32	3
Ordering code A10VO series 5x	4
EF – differential pressure control, electrically variable	5
Dimensions A10 V(S)O series 31 and 32	7
Dimensions A10 VO series 52 and 53	8
Connection table series 31	9
Connection table series 32	9
Connection table series 52/53	9
Connector for solenoids	10
Project planning notes	11
Safety instructions	11

2 Axial piston variable pump | **A10V(S)O, A10VO; electro-proportional EF differential pressure control**  
 Series 3x and 5x |  
 Ordering code A10V(S)O series 31

**Ordering code A10V(S)O series 31** (see also data sheet 92701)


01	02	03	04	05	06	07	08	09	10	11	12	13
	<b>A10V(S)</b>	<b>O</b>			<b>/</b>	<b>31</b>		<b>-</b>				<b>P</b>

<b>Version</b>											<b>18</b>	<b>28</b>	<b>45</b>	<b>71</b>	<b>100</b>	<b>140</b>	
01	Standard version (without code)										•	•	•	•	•	•	
	High-speed version										-	-	•	•	•	•	<b>H</b>

<b>Axial piston unit</b>																	
02	Variable swashplate design, nominal pressure 280 bar, maximum pressure 350 bar										-	•	•	•	•	•	<b>A10V</b>
											•	-	-	-	-	-	<b>A10VS</b>

<b>Operating mode</b>																	
03	Pump, open circuit																<b>O</b>

<b>Size (NG)</b>																
04	Geometric displacement										<b>18</b>	<b>28</b>	<b>45</b>	<b>71</b>	<b>100</b>	<b>140</b>

<b>Control device</b>											Controller axis <b>x y</b>								
05	Differential pressure control, electrically variable, negative characteristic curve										<b>EF.</b>								
																			
	$\Delta p$ shifting U = 12 V										•	•	•	•	•	•	<b>EF1</b>		
	Controller axis <b>y</b> U = 24 V										•	•	•	•	•	•	<b>EF2</b>		
	$\Delta p$ shifting U = 12 V										•	•	•	•	•	•	<b>EF6</b>		
	Controller axis <b>x</b> U = 24 V										•	•	•	•	•	•	<b>EF7</b>		
Possible controller combinations <sup>1)</sup>																			
Controller axis <b>x</b>					Controller axis <b>y</b>														
Pressure controller <sup>1)</sup>					Flow controller														
X-T plugged <b>without</b> flushing function					X-T plugged <b>without</b> flushing function					•	•	•	•	•	•	<b>EF.1)</b>	<b>D</b>	<b>C</b>	
X-T open <b>without</b> flushing function					X-T open <b>without</b> flushing function					•	•	•	•	•	•	<b>EF.1)</b>	<b>D</b>	<b>F</b>	
Flow control X-T plugged <b>with</b> flushing function					Pressure controller remote controlled X-T plugged <b>without</b> flushing function					•	•	•	•	•	•	<b>EF.</b>	<b>S</b>	<b>G</b>	
X-T open <b>without</b> flushing function										•	•	•	•	•	•	<b>EF.</b>	<b>F</b>	<b>G</b>	

<b>Series</b>											<b>18</b>	<b>28</b>	<b>45</b>	<b>71</b>	<b>100</b>	<b>140</b>	
06	Series 3, index 1																<b>31</b>

All other ordering code information for position 07 to 10 and 12 can be found in the data sheets 92701

<b>Port plate</b>		<b>Position</b>		<b>Fastening thread</b>								
11	Flange ports according to SAE J518	rear	metric	not for through drive		•	•	•	-	•	•	<b>11</b>
			SAE			-	-	-	•	-	-	<b>41</b>
			SAE			•	•	•	-	•	•	<b>61</b>
			SAE			-	-	-	•	-	-	<b>91</b>
		on the side opposite, top, bottom	metric			•	•	•	-	•	•	<b>12</b>
			SAE			-	-	-	•	-	-	<b>42</b>
			SAE			•	•	•	-	•	•	<b>62</b>
			SAE			-	-	-	•	-	-	<b>92</b>

<b>Connector for solenoids</b>																	
13	DEUTSCH molded connector, 2-pin, without suppressor diode																<b>P</b>

• = Available    ◦ = On request    - = Not available

1) For controller combinations with pressure controller, differential pressure control can only take place in controller axis "y". This is only possible with the combinations with EF1 and EF2.

**Ordering code A10VO series 32** (see also data sheet 92705)

01	02	03	04	05	06	07	08	09	10	11	12
<b>A10V</b>	<b>O</b>			<b>/</b>	<b>32</b>		<b>-</b>				<b>P</b>

**Axial piston unit** **45 71 100 140 180**

01	Variable swashplate design, nominal pressure 280 bar, maximum pressure 350 bar	<b>A10V</b>
----	--	-------------

**Operating mode**


02	Pump, open circuit	<b>O</b>
----	--------------------	----------

**Size (NG)**

03	Geometric displacement	<b>45 71 100 140 180</b>
----	------------------------	--------------------------

**Control device**

Controller axis **x y**

04 Differential pressure control, electrically variable, negative characteristic curve  	$\Delta p$ shifting controller axis <b>y</b>		U = 12 V	● ● ● ● ○	<b>EF1</b>		
	$\Delta p$ shifting controller axis <b>x</b>		U = 24 V	● ● ● ● ○	<b>EF2</b>		
	$\Delta p$ shifting controller axis <b>x</b>		U = 12 V	● ● ● ● ○	<b>EF6</b>		
	$\Delta p$ shifting controller axis <b>x</b>		U = 24 V	● ● ● ● ○	<b>EF7</b>		
	Possible controller combinations <sup>1)</sup>						
	Controller axis <b>x</b>	Controller axis <b>y</b>	Flow controller	X-T plugged <b>without</b> flushing function	● ● ● ● ○	<b>EF.1)</b>	<b>D C</b>
	Pressure controller <sup>1)</sup>			X-T open <b>without</b> flushing function	● ● ● ● ○	<b>EF.1)</b>	<b>D F</b>
	Flow control	X-T plugged <b>with</b> flushing function	Pressure controller remote controlled	X-T plugged <b>without</b> flushing function	● ● ● ● ○	<b>EF.</b>	<b>S G</b>
				X-T open <b>without</b> flushing function	● ● ● ● ○	<b>EF.</b>	<b>F G</b>

**Series** **45 71 100 140 180**

05	Series 3, index 2	<b>32</b>
----	-------------------	-----------

All other ordering code information for position 06 to 09 and 11 can be found in the data sheets 92705

**Port plate**

**Position**

**Fastening thread**

10 Flange ports according to SAE J518	rear	metric	not for through drive	● ● ● ● ●	<b>11</b>
	at side opposite top, bottom	metric		● ● ● ● -	<b>12</b>
		metric		- - - - ●	<b>22</b>

**Connector for solenoids**

12	DEUTSCH molded connector, 2-pin, without suppressor diode	<b>P</b>
----	---	----------

● = Available    ○ = On request    - = Not available

1) For controller combinations with pressure controller, differential pressure control can only take place in controller axis “y”. This is only possible with the combinations with EF1 and EF2.



## EF – differential pressure control, electrically variable

The differential pressure control is based on a pressure flow controller.

In combination with a pressure controller, it limits the maximum pressure at the pump outlet within the control range of the variable pump. The variable pump only supplies as much hydraulic fluid as is required by the consumers.

In combination with a remote controlled pressure controller DG, LS pressure limitation takes place via a separate pressure relief valve. More information can be found in data sheets 92701, 92703 and 92705.

In addition to the function of the pressure controller, a differential pressure is tapped off via an adjustable orifice (e.g. directional valve) which regulates the flow of the pump before and after the orifice. The pump flow is equal to the actual hydraulic fluid quantity required by the consumer.

With all controller combinations, the  $V_g$  reduction has priority.


- ▶ Basic position in depressurized state:  $V_{g \max}$ .
- ▶ Setting range for pressure control series 3x  
25 to 280 bar.  
Standard is 280 bar.

- ▶ Setting range for pressure control series 5x  
35 to 250 bar.  
Standard is 250 bar.

The electrically variable differential pressure control can be used to reduce the differential pressure by a maximum of 10 bar. A PWM signal is used to control the electrically variable controller (solenoid).

- ▶ Setting range for differential pressure control:  
20 to 40 bar.  
Standard is 24 bar.  
If another setting is required, please state in plain text.

### ▼ Characteristic curve EF

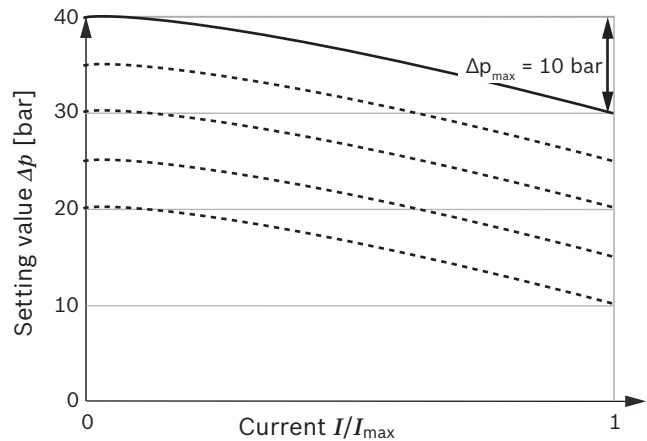

Unloading port **X** to the reservoir and with de-energized solenoid results in a zero stroke (“standby”) pressure which is about 1 to 2 bar higher than the defined differential pressure  $\Delta p$ . Other system influences are not taken into account.

Technical data, solenoids	EF1../EF6..	EF2../EF7..
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Control current		
Start of adjustment $\Delta p_{\max}$	0 mA	0 mA
End of adjustment $\Delta p_{\min}$	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 to 200 Hz	100 to 200 Hz
Minimum working stroke of the dither within the control range <sup>1)</sup>	352 mA	176 mA
Duty cycle	100 %	100 %
Operating temperature range	-20 °C to +115 °C	
Type of protection: see connector version page 10		


### Project planning note

For a maximally energized valve, a minimum differential pressure  $\Delta p$  of 10 bar must be present.


<sup>1)</sup>  $\Delta I = 44\%$  of the current difference within the control range, regardless of the mean value of the current

6 Axial piston variable pump | **A10V(S)O, A10VO; electro-proportional EF differential pressure control**  
 Series 3x and 5x |  
 EF – differential pressure control, electrically variable


▼ Circuit diagram EF.DF series 3x

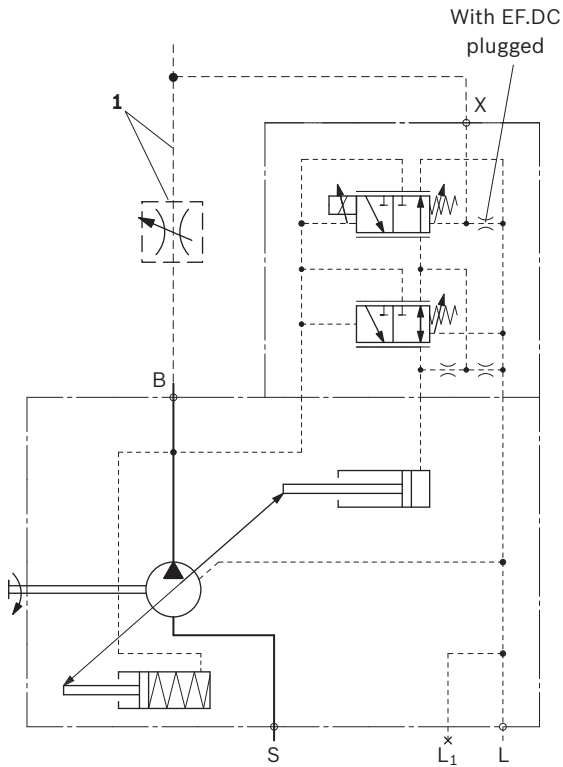


▼ Circuit diagram EF.DF series 5x

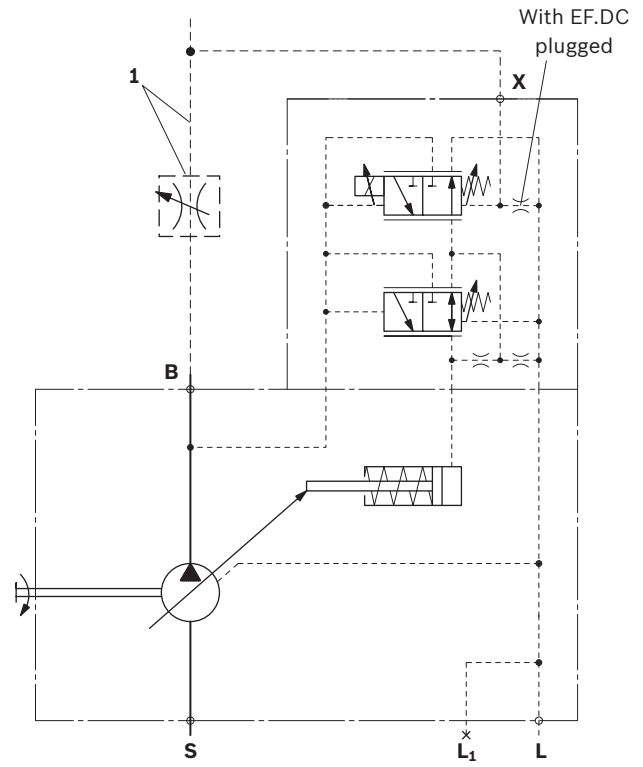

▼ Circuit diagram EF.FG series 3x

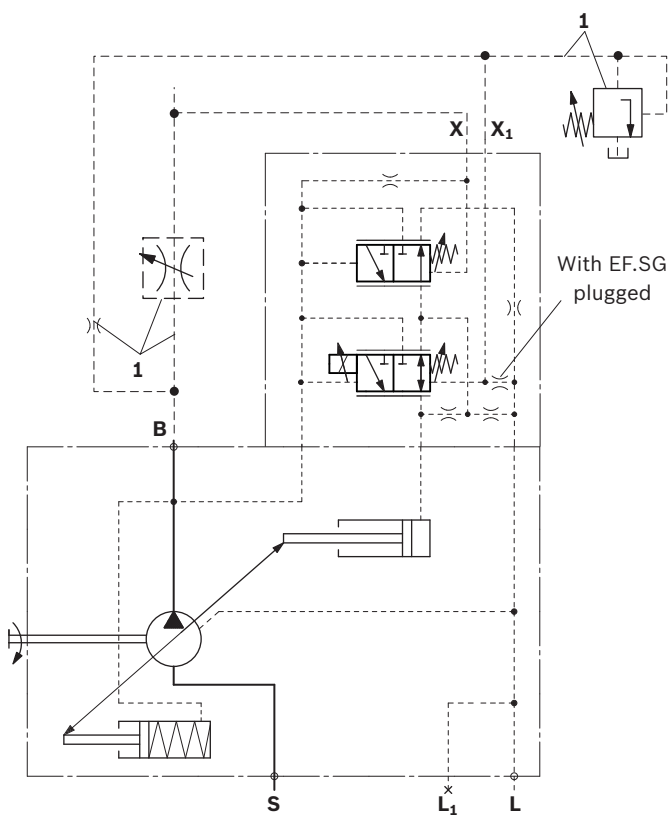

▼ Circuit diagram EF.FG series 5x

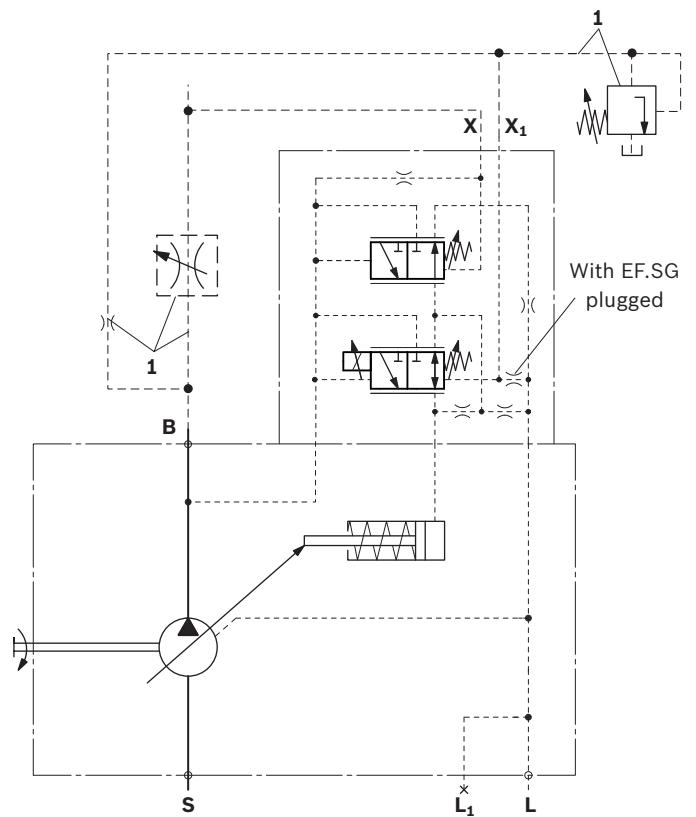


**1** The metering orifice (control block) or pressure relief valve and the line is not included in the scope of delivery.

For ports, see Connection table series 31 and Connection table series 52/53 on page 9.



**Dimensions A10 V(S)O series 31 and 32**

**Clockwise rotation** (main dimensions of the variable pump and the technical data, see data sheet 92701, 92705)

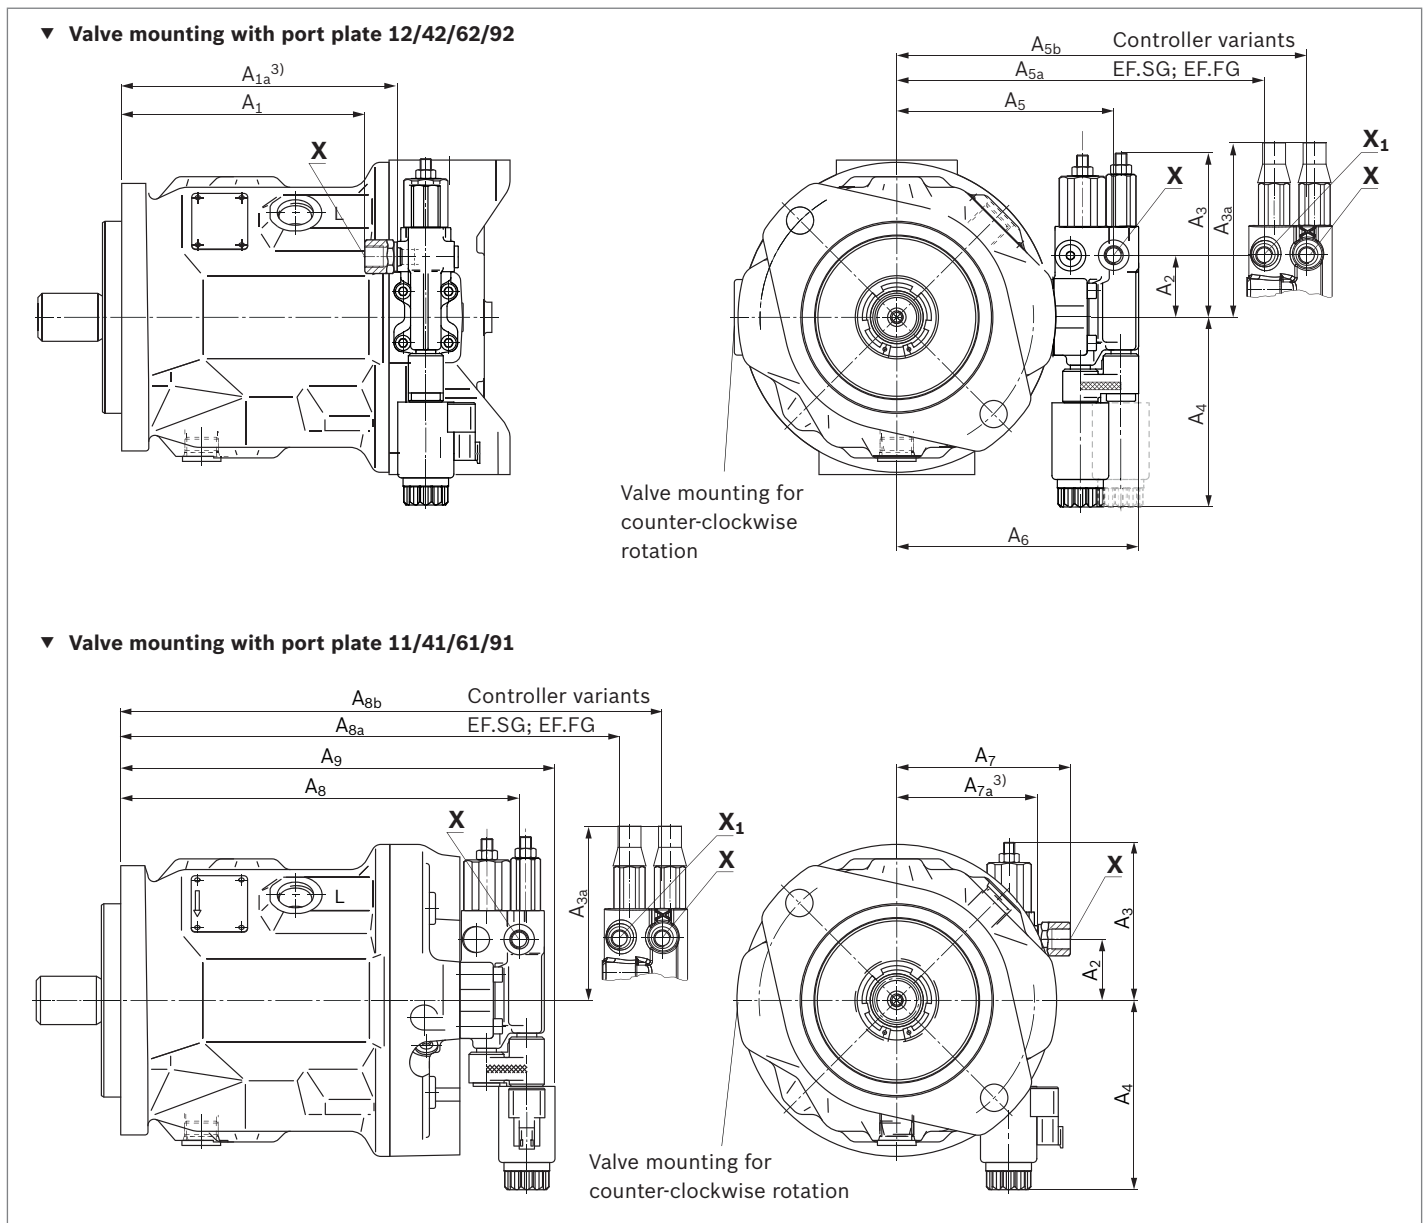

Size	A <sub>1</sub>	A <sub>1a</sub> <sup>3)</sup>	A <sub>2</sub>	A <sub>3</sub>	A <sub>3a</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>5a</sub>	A <sub>5b</sub>	A <sub>6</sub>	A <sub>7</sub>	A <sub>7a</sub> <sup>3)</sup>	A <sub>8</sub>	A <sub>8a</sub>	A <sub>8b</sub>	A <sub>9</sub>
<b>18</b>	108	129	40	110	113	124	109	81	109	133	–	–	–	–	–	–
<b>28</b>	118	139	40	110	113	124	119	91	119	142	95	74	209	181	209	232
<b>45</b>	133	154	40	110	113	124	129	101	129	153	103	82	228	200	228	251
<b>71</b>	161	182	40	110	113	124	143	115	143	167	114	93	262	234	262	285
<b>100</b>	229	250	40	110	113	124	148	120	148	172	121	100	327	299	327	350
<b>140</b> <sup>1)</sup>	233	254	29	99	102	136	163	135	163	187	on request					
<b>140</b> <sup>2)</sup>	206	227	29	99	102	136	163	135	163	187						

For ports, see Connection table series 31 and 32 on page 9.


1) Dimensions of mounting flange C

2) Dimensions of mounting flange D

3) At port plates 61, 91 or 62, 92 series 31 see data sheet 92701.

**Dimensions A10 VO series 52 and 53**

**Clockwise rotation** (main dimensions of the variable pump and the technical data, see data sheet 92703)

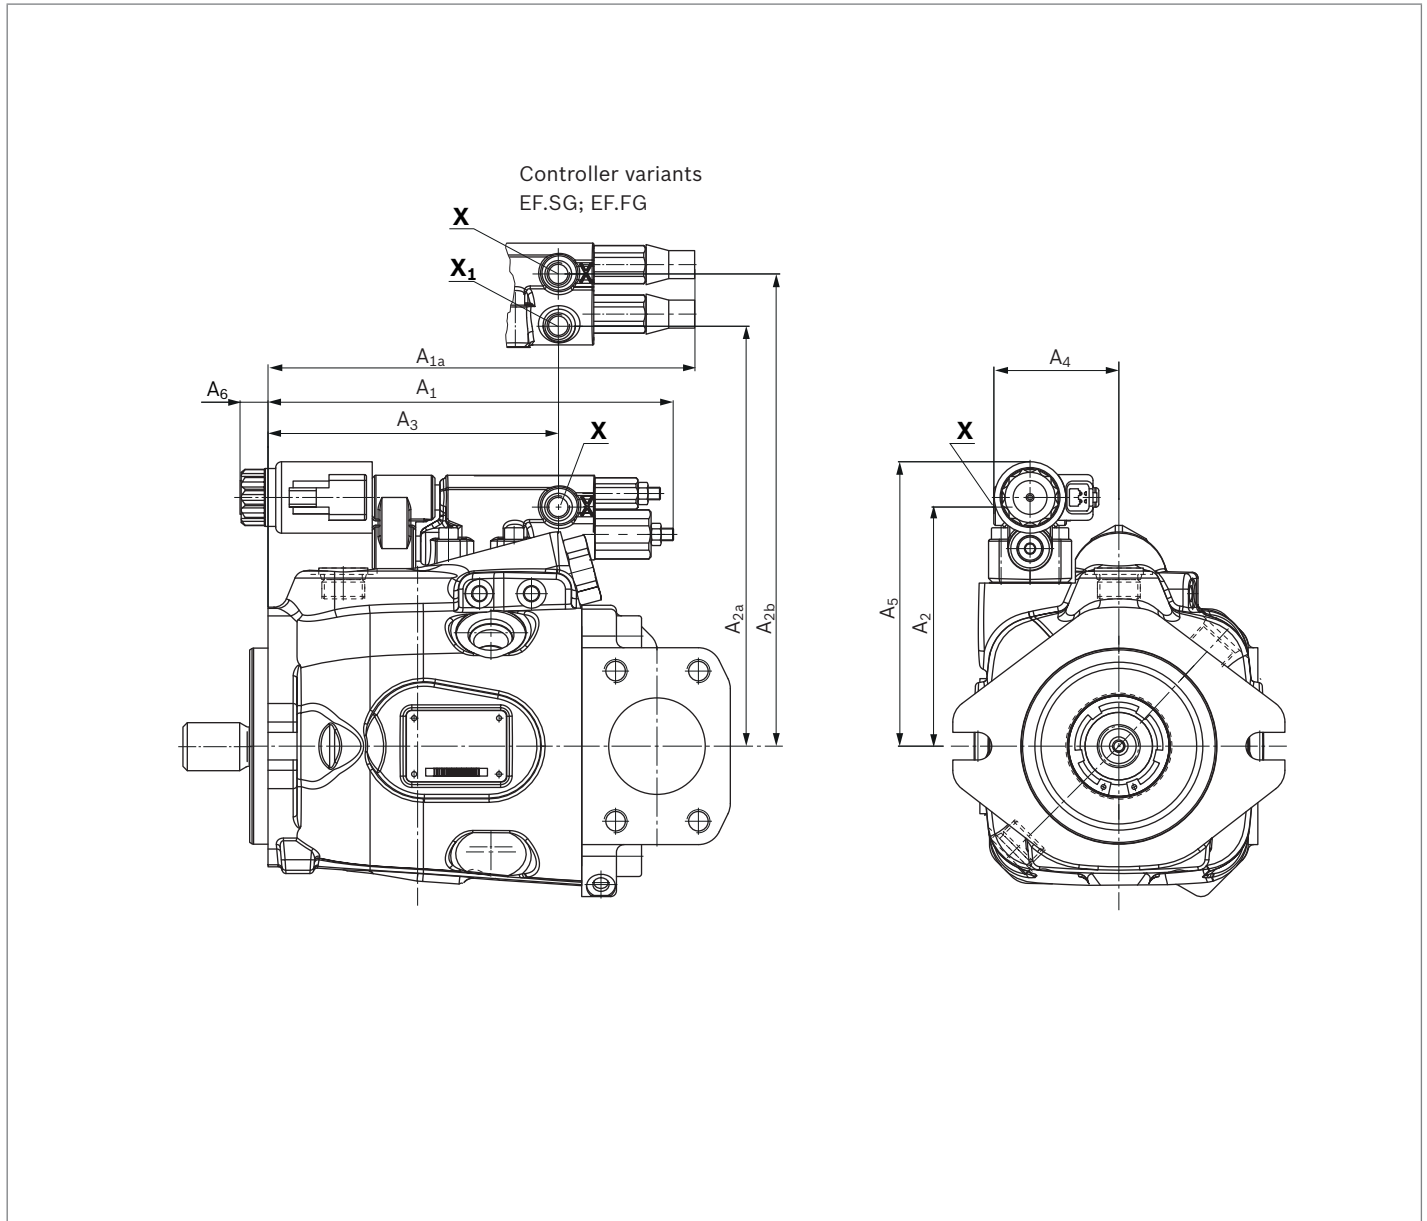

Size	A <sub>1</sub>	A <sub>1a</sub>	A <sub>2</sub>	A <sub>2a</sub>	A <sub>2b</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub>
18									
28									
45									
60									
63									
72									
85 <sup>1)</sup>	241.5	245	139.5	111.5	139.5	171.5	74	163	–
85 <sup>2)</sup>	251.5	255	139.5	111.5	139.5	181.5	74	163	–
100	251.5	255	133	105	133	181.5	74	157	–

on request

For ports, see Connection table series 52/53 on page 9.

- 1) Dimensions of mounting flange C
- 2) Dimensions of mounting flange D

## Connection table series 31

Ports version metric		Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>2)</sup>	State
<b>B</b>	Working port (high-pressure series) Fastening thread <sup>1)</sup>	SAE J518 <sup>3)</sup> DIN 13	See data sheet 92701	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread <sup>1)</sup>	SAE J518 <sup>3)</sup> DIN 13		10	O
<b>L</b>	Drain port	DIN 3852		2	O <sup>5)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>4)</sup>		2	X <sup>5)</sup>
<b>X</b>	Pilot pressure controller axis y	DIN 3852	M14 × 1.5; 12 deep	350	O
<b>X<sub>1</sub></b>	Pilot pressure controller axis x	DIN 3852	M14 × 1.5; 12 deep	350	O

Ports version SAE		Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>2)</sup>	State
<b>B</b>	Working port (high-pressure series) Fastening thread <sup>1)</sup>	SAE J518 ASME B1.1	See data sheet 92701	350	O
<b>S</b>	Suction port (standard pressure series) Fastening thread <sup>1)</sup>	SAE J518 ASME B1.1		10	O
<b>L</b>	Drain port	ISO 11926 <sup>4)</sup>		2	O <sup>5)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>4)</sup>		2	X <sup>5)</sup>
<b>X</b>	Pilot pressure controller axis y	ISO 11926 <sup>4)</sup>	7/16-14UNC-2B; 11.5 deep	350	O
<b>X<sub>1</sub></b>	Pilot pressure controller axis x	ISO 11926 <sup>4)</sup>	7/16-14UNC-2B; 11.5 deep	350	O

Port plate assignment metric/SAE see Ordering code A10V(S)O series 31 (see also data sheet 92701) and position 11 on page 2

## Connection table series 32

Ports	Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>2)</sup>	State
<b>B</b>	Working port (high-pressure series) Fastening thread <sup>1)</sup>	SAE J518 <sup>3)</sup> DIN 13	See data sheet 92705	350 O
<b>S</b>	Suction port (standard pressure series) Fastening thread <sup>1)</sup>	SAE J518 <sup>3)</sup> DIN 13		10 O
<b>L</b>	Drain port	ISO 11926 <sup>4)</sup>		2 O <sup>5)</sup>
<b>L<sub>1</sub></b>	Drain port	ISO 11926 <sup>4)</sup>		2 X <sup>5)</sup>
<b>X</b>	Pilot pressure controller axis y	ISO 11926 <sup>4)</sup>	7/16-14UNC-2B; 11.5 deep	350 O
<b>X<sub>1</sub></b>	Pilot pressure controller axis x	ISO 11926 <sup>4)</sup>	7/16-14UNC-2B; 11.5 deep	350 O

## Connection table series 52/53

Ports	Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>2)</sup>	State
<b>B</b>	Working port (high-pressure series) Fastening thread <sup>1)</sup>	SAE J518 <sup>3)</sup> DIN 13	See data sheet 92703	315 O
<b>S</b>	Suction port (standard pressure series) Fastening thread <sup>1)</sup>	SAE J518 <sup>3)</sup> DIN 13		5 O
<b>L</b>	Drain port	ISO 11926 <sup>4)</sup>		2 O <sup>5)</sup>
<b>L<sub>1</sub>, L<sub>2</sub><sup>6)</sup></b>	Drain port	ISO 11926 <sup>4)</sup>		2 X <sup>5)</sup>
<b>X</b>	Pilot pressure controller axis y	ISO 11926	7/16-20UNF-2B; 11.5 deep	315 O
<b>X<sub>1</sub></b>	Pilot pressure controller axis x	ISO 11926	7/16-20UNF-2B; 11.5 deep	315 O

- 1) Observe the instructions in the operating instructions concerning the maximum tightening torques.
- 2) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 3) Metric fastening thread is a deviation from standard.
- 4) The spot face can be deeper than as specified in the standard.

- 5) Depending on the installation position, **L**, **L<sub>1</sub>** or **L<sub>2</sub>** must be connected (please refer to installation instructions in the relevant data sheets).
- 6) Only series 53
- 7) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)

## Connector for solenoids


### DEUTSCH DT04-2P-EP04

Molded connector, 2-pin, without bidirectional suppressor diode

The following type of protection ensues with a mounted mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)


#### ▼ Switching symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

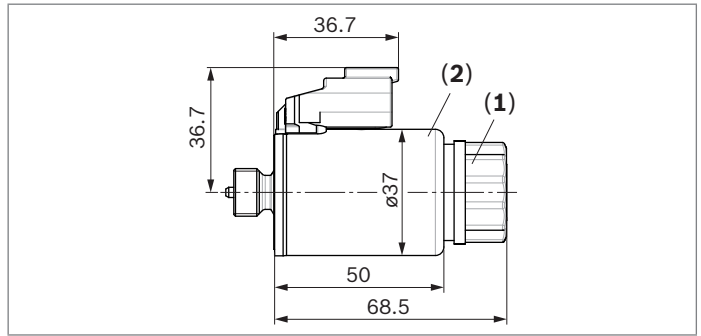

#### Note

- ▶ If necessary, you can change the position of the connector by turning the solenoid.
- ▶ The procedure is defined in the general operating instructions 90300-B.

## Electronic controls

Control	Electronics function	Electronics		Data sheet
Electric pressure control	Controlled power outlet	RA	analog	95230
		RC4-5/30	digital	95205

## Project planning notes

- ▶ The axial piston variable pump A10V(S)O with EF control is designed to be used in open circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit require the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, request it from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes must be observed.
- ▶ Depending on the operating condition of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with protection to preserve them for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all variants of the product are approved for use in safety functions according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference.  
Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.

- ▶ Pressure controllers are not safeguards against pressure overload. Be sure to add a pressure relief valve to the hydraulic system.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified peak pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports can only be used to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control and regulation systems (e.g. valve spools) may in certain circumstances become stuck in an undefined position due to contamination (e.g. contaminated hydraulic fluid, abrasion or residual dirt from components). As a result, the hydraulic fluid flow or torque build-up of the axial piston unit will no longer respond correctly to the operator's commands. Even the use of different filter cartridges (external or internal inlet filter) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must check whether additional measures on the machine are required for the relevant application in order to bring the powered load into a safe position (e.g. safe stop) and ensure all appropriate measures are taken.

**Bosch Rexroth AG**

Mobile Applications

An den Kelterwiesen 14

72160 Horb a.N., Germany

Tel. +49 7451 92-0

info.ma@boschrexroth.de

www.boschrexroth.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without consent. The information provided is solely intended to describe the product. It cannot be used to draw conclusions regarding a specific characteristic or suitability for a specific application. It does not release the user from performing their own assessments and testing. Our products are subject to natural wear and aging.

# Axial piston variable pump

## A7VO Series 63

**RE 92202**

Edition: 02.2015

Replaces: 05.2012



- ▶ Sizes 28 to 160
- ▶ Nominal pressure 350 bar
- ▶ Maximum pressure 400 bar
- ▶ Open circuit

3

**Characteristics**

- ▶ Variable pump with axial tapered piston rotary group of bent-axis design, for hydrostatic drives in open circuit
- ▶ For use in mobile and stationary applications
- ▶ Flow is proportional to the drive speed and displacement.
- ▶ The flow can be steplessly changed by adjusting the bent axis.
- ▶ Wide selection of control devices
- ▶ Compact, robust pump with a long service life

**Contents**

Ordering code	2
Hydraulic fluids	4
Shaft seal ring	5
Flow direction	5
Operating pressure range	6
Technical data	7
LR – Power controller without power override	9
LA1 – Power controller with hydraulically proportional power override	13
DR – Pressure controller	15
HD – Proportional hydraulic control	18
EP – Proportional electric control	20
Dimensions, size 28	21
Dimensions, size 55	24
Dimensions, size 80	28
Dimensions, size 107	32
Dimensions, size 160	36
Connector for solenoids	40
Installation instructions	41
Project planning notes	42
Safety instructions	42

## Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13
<b>A7V</b>	<b>O</b>			<b>/</b>	<b>63</b>		<b>-</b>	<b>V</b>		<b>B</b>	<b>01</b>	

### Axial piston unit

01	Bent-axis design, variable, nominal pressure 350 bar, maximum pressure 400 bar	<b>A7V</b>
----	--	------------

### Operating mode

02	Pump, open circuit	<b>O</b>
----	--------------------	----------

### Size (NG)

03	Geometric displacement $V_g$ (cm <sup>3</sup> ), see "Technical data" on page 7	<b>28</b>	<b>55</b>	<b>80</b>	<b>107</b>	<b>160</b>
	For sizes 250, 355 and 500, see data sheet 92203					

### Control device

		28	55	80	107	160	
04	Power controller without power override	●	●	●	●	●	<b>LR</b>
	with pressure cut-off	●	●	●	●	●	<b>LRD</b>
	with stroke limiter						
	negative control $\Delta p = 25$ bar	-	●	●	●	●	<b>LRH1</b>
	with pressure cut-off and stroke limiter						
	negative control $\Delta p = 25$ bar	-	●	●	●	●	<b>LRDH1</b>
	with pressure cut-off and load sensing	-	●	●	●	●	<b>LRDS</b>
	Power controller with hydraulically proportional power override (only available for clockwise rotation and with port plate 02)						
	with load sensing	-	●	●	-	-	<b>LA1S</b>
	with load sensing and hydraulically proportional LS-override	-	●	●	-	-	<b>LA1S5</b>
Pressure controller		●	●	●	●	●	<b>DR</b>
	remotely controlled	●	●	●	●	●	<b>DRG</b>
	with load sensing	-	●	●	●	●	<b>DRS</b>
Proportional control hydraulic		●	●	●	●	●	<b>HD1</b>
	with pressure cut-off, remotely controlled	●	●	●	●	●	<b>HD1G</b>
Proportional control electrical	Positive control $U = 24$ V	●	●	●	●	●	<b>EP2</b>

### Series

05	Series 6, index 3	<b>63</b>
----	-------------------	-----------

### Direction of rotation

		<b>28 to 160</b>		
06	Viewed on drive shaft	clockwise	●	<b>R</b>
		counter-clockwise	●	<b>L</b>

### Sealing material

07	FKM (fluoroelastomer)	<b>V</b>
----	-----------------------	----------

### Drive shaft

		<b>28 to 160</b>	
08	Splined shaft DIN 5480	●	<b>Z</b>
	Parallel keyed shaft according to DIN 6885	●	<b>P</b>

### Mounting flange

09	ISO 3019-2; 4-hole	<b>B</b>
----	--------------------	----------

### Port plate for working lines

10	SAE flange ports A and S at rear (metric fastening thread)	<b>01</b>
	SAE flange ports A and S at side (available for power controllers LA1S and LA1S5 only, metric fastening thread)	<b>02</b>

● = Available    - = Not available     = Preferred program



01	02	03	04	05	06	07	08	09	10	11	12	13
<b>A7V</b>	<b>O</b>			<b>/</b>	<b>63</b>	<b>-</b>	<b>V</b>		<b>B</b>	<b>01</b>		

**Connector for solenoids<sup>1)</sup>** (see page 40)

11	Without connector (without solenoid, with hydraulic control only; without code)	
	DEUTSCH molded connector, 2-pin – without suppressor diode	<b>P</b>

**Standard / special version**

12	Standard version (without code)	
	Special version	<b>-S</b>

● = Available    - = Not available     = Preferred program

**Notes**

- ▶ Note the project planning notes on page 42!
- ▶ Preservation:
  - Up to 12 months as standard
  - Up to 24 months long-term  
(state in plain text when ordering)

<sup>1)</sup> Connectors for other electric components may differ

## Hydraulic fluids

The A7VO variable pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)
- ▶ 90223: Fire-resistant, water-containing hydraulic fluids (HFC, HFB, HFAE, HFAS)

### Details regarding the selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$ , see selection diagram).

#### Note


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

If it is not possible to maintain the conditions above due to extreme operating parameters, we recommend flushing the case at port **U**.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ °C}$	$t \leq 3 \text{ min}$ , $n \leq 1000 \text{ rpm}$ , without load $p \leq 50 \text{ bar}$
Permissible temperature difference		$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid in the system
Warm-up phase	$v < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ °C to } -25 \text{ °C}$	at $p \leq 0.7 \times p_{nom}$ , $n \leq 0.5 \times n_{nom}$ and $t \leq 15 \text{ min}$
Continuous operation	$v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$	$\theta = -25 \text{ °C to } +103 \text{ °C}$	This corresponds, for example on the VG 46, to a temperature range of +5 °C to +85 °C (see selection diagram) measured at port <b>R<sub>1</sub>/R<sub>2</sub></b> Note the permissible temperature range of the shaft seal ( $\Delta T = \text{approx. } 12 \text{ K}$ between the bearing/shaft seal and port <b>R<sub>1</sub>/R<sub>2</sub></b> )
	$v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		Range of optimum operating viscosity and efficiency
Short-term operation	$v_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 3 \text{ min}$ , $p < 0.3 \times p_{nom}$

#### ▼ Selection diagram

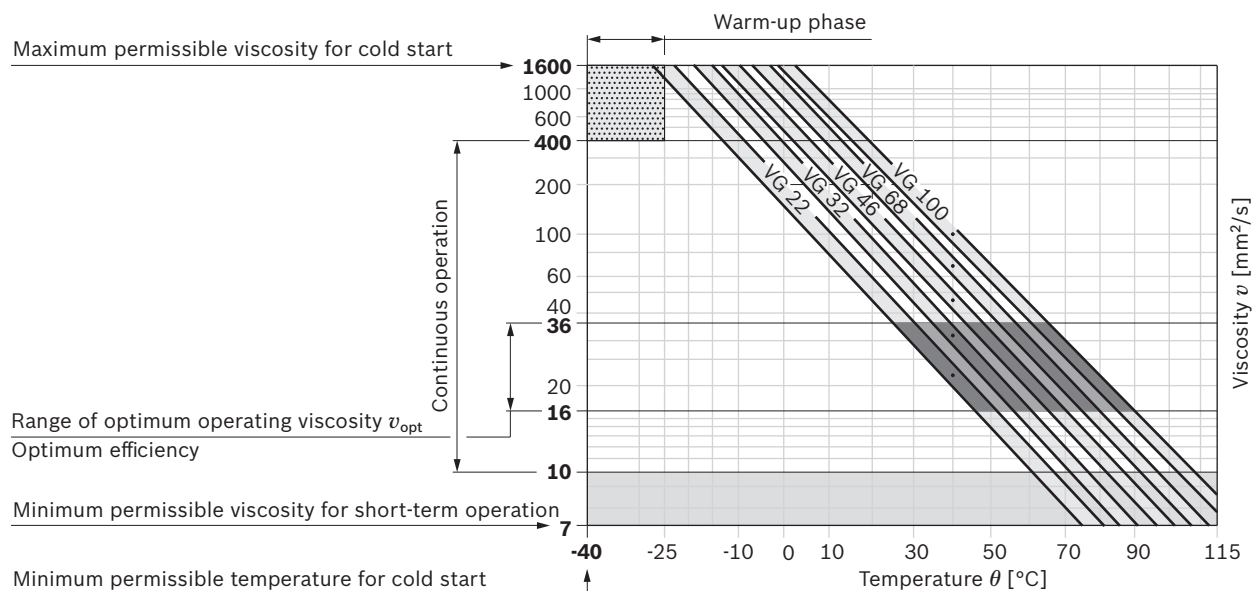

**Filtration of the hydraulic fluid**

Finer filtration improves the cleanliness level of the hydraulic fluid, which in turn increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

At very high hydraulic fluid temperatures (90 °C to maximum 103 °C, measured at port **R<sub>1</sub>/R<sub>2</sub>**) a cleanliness level is necessary of at least 19/17/14 according to ISO 4406.

**Leakage**

The case interior is connected to the suction chamber. A separate case drain line from the case to the reservoir is therefore not required (both **R** ports are plugged).


Exception: For versions with pressure controller or pressure cut-off, a drain line is needed to relieve port **T<sub>1</sub>** to the reservoir.

**Shaft seal ring**

**Permissible pressure loading**

The service life of the shaft seal is influenced by the speed of the axial piston unit and the leakage pressure in the housing (case pressure). Momentary pressure spikes ( $t < 0.1$  s) up to 10 bar are allowed. The service life of the shaft seal decreases with increasing frequency of pressure spikes and increasing mean differential pressure.

The case pressure must be equal to or higher than the ambient pressure.

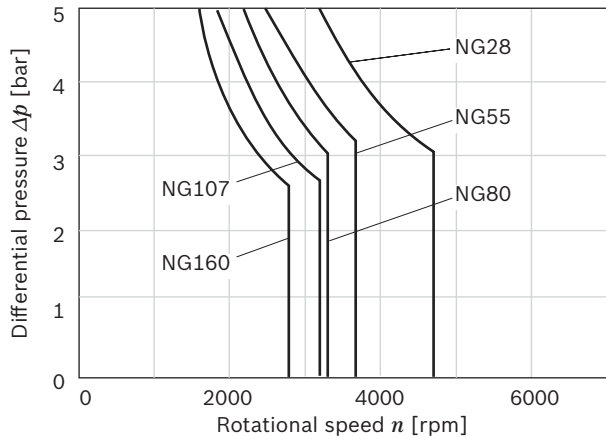

The FKM shaft seal ring may be used for leakage temperatures from -25 °C to +115 °C. For application cases below -25 °C, an NBR shaft seal is required (permissible temperature range: -40 °C to +90 °C).


**Flow direction**

Direction of rotation, viewed on drive shaft	
clockwise	counter-clockwise
<b>S to B</b>	<b>S to A</b>


## Operating pressure range

Pressure at working port A or B (high-pressure side)		Definition
Nominal pressure $p_{nom}$	350 bar absolute	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	400 bar absolute	The maximum pressure corresponds the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	10 s	
Total operating period	300 h	
Minimum pressure (high-pressure side)	10 bar absolute	Minimum pressure on high-pressure side ( <b>A</b> or <b>B</b> ) required to prevent damage to the axial piston unit.
Rate of pressure change $R_{A\ max}$	16000 bar/s	Maximum permissible rate of pressure build-up and reduction during a pressure change over the entire pressure range.
Pressure at suction port S (Inlet)		Definition
Minimum pressure $p_{S\ min}$	0.8 bar absolute	Minimum pressure at suction port <b>S</b> (inlet) that is required to avoid damage to the axial piston unit. The minimum required pressure is dependent on the speed and displacement of the axial piston unit (see diagram on page 7).
Maximum pressure $p_{S\ max}$	2 bar absolute	

### ▼ Rate of pressure change $R_{A\ max}$

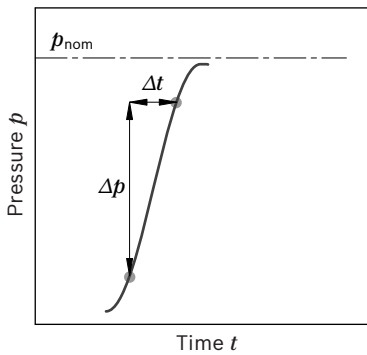

### ▼ Pressure definition

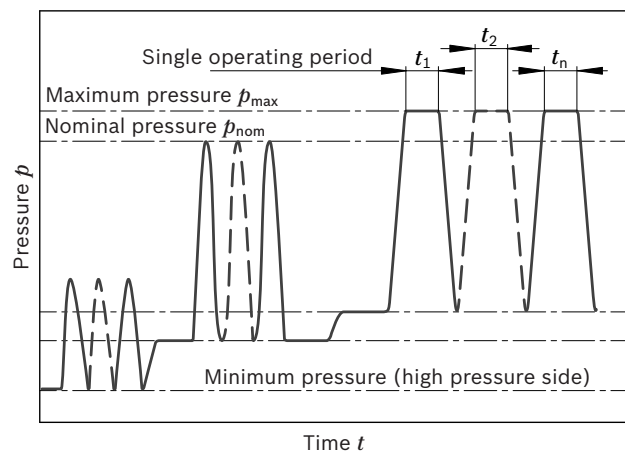

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$


### Note

Operating pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.

**Technical data**

Size		NG	28	55	80	107	160	
Displacement, geometric, per revolution		$V_{g \max}$	cm <sup>3</sup>	28.1	54.8	80	107	160
Maximum rotational speed <sup>1)</sup>	At $V_{g \max}$	$n_{\text{nom}}$	rpm	3150	2500	2240	2150	1900
	At $V_g < 0.74 \times V_{g \max}$	$n_{\text{max1}}$	rpm	4250	3400	3000	2900	2560
Maximum rotational speed <sup>2)</sup>		$n_{\text{max2}}$	rpm	4750	3750	3350	3200	2850
Flow	At $V_{g \max}$ and $n_{\text{nom}}$	$q_v$	l/min	89	137	179	230	304
Power	At $V_{g \max}$ , $n_{\text{nom}}$ and $\Delta p = 350$ bar	$P$	kW	52	80	105	134	177
Torque	At $V_{g \max}$ and $\Delta p = 350$ bar	$T$	Nm	156	305	446	596	891
Rotary stiffness	$V_{g \max}$ to $V_g/2$	$c_{\text{min}}$	kNm/rad	5	10	16	21	36
	$V_g/2$ to 0 (interpolated)	$c_{\text{max}}$	kNm/rad	16	32	49	67	104
Moment of inertia rotary group		$J_{\text{GR}}$	kgm <sup>2</sup>	0.0042	0.0042	0.0080	0.0127	0.0253
Maximum angular acceleration		$\alpha$	rad/s <sup>2</sup>	35900	31600	24200	19200	15300
Case volume		$V$	l	0.5	0.75	1.2	1.5	2.4
Weight (approx.)		$m$	kg	17	25	40	49	71

▼ **Maximum permissible speed (limit speed)**

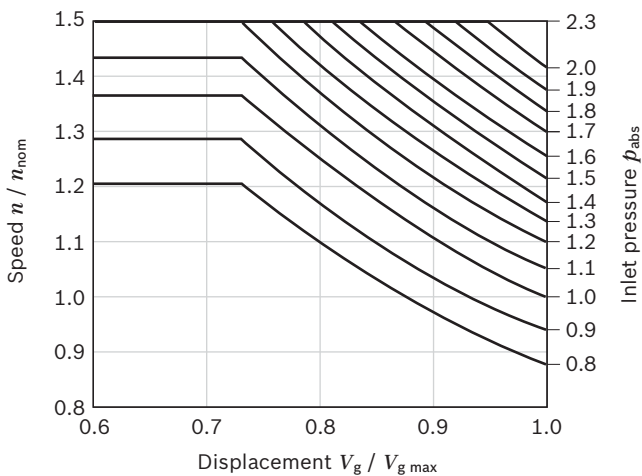

**Determining operating characteristics**



Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{\text{mh}}}$	[Nm]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]
Key		
$V_g$	=	Displacement per revolution [cm <sup>3</sup> ]
$\Delta p$	=	Differential pressure [bar]
$n$	=	Rotational speed [rpm]
$\eta_v$	=	Volumetric efficiency
$\eta_{\text{mh}}$	=	Mechanical-hydraulic efficiency
$\eta_t$	=	Total efficiency ( $\eta_t = \eta_v \times \eta_{\text{mh}}$ )

**Notes**

- ▶ Theoretical values, without efficiency and tolerances; values rounded
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Other permissible limit values, such as speed variation, reduced angular acceleration as a function of the frequency and the permissible angular acceleration at start (lower than the maximum angular acceleration) can be found in data sheet 90261.

- The values are valid:
  - At absolute pressure  $p_{\text{abs}} = 1$  bar at suction port **S**
  - For the optimal viscosity range of  $\nu_{\text{opt}} = 36$  to  $16$  mm<sup>2</sup>/s
  - For hydraulic fluid based on mineral oils.
- Maximum rotational speed (speed limit) for increased inlet pressure  $p_{\text{abs}}$  at suction port **S** and  $V_g < V_{g \max}$ , see diagram.

**Permissible radial and axial forces of the drive shaft**

Size	NG		28	55	80	107	160	
Drive shaft	∅	mm	25	30	35	40	45	
Maximum radial force <sup>1)</sup> at distance a (from shaft collar)		$F_{q \max}$	N	6436	7581	10266	13758	18278
		a	mm	14.0	17.5	20.0	22.5	25.0
Maximum torque at $F_{q \max}$		$T_{q \max}$	Nm	179	281	444	681	1019
Maximum differential pressure at $V_{g \max}$ and $F_{q \max}$		$\Delta p_{q \max}$	bar	400	322	349	400	400
Maximum axial force at standstill or pressure- free operation		$+ F_{ax \max}$	N	0	0	0	0	0
		$- F_{ax \max}$	N	315	500	710	900	11250
Permissible axial force per bar operating pressure		$+ F_{ax \text{ perm}}/\text{bar}$	N/bar	4.6	7.5	9.6	11.3	15.1


**Effect of radial force  $F_q$  on the service life of bearings**

By selecting a suitable direction of radial force  $F_q$ , the load on the bearings, caused by the internal rotary group forces can be reduced, thus optimizing the service life of the bearings. Recommended position of mating gear is dependent on direction of rotation. Example:

**Note**

- ▶ The permissible axial force in direction  $-F_{ax}$  is to be avoided, because thereby the bearing life is reduced.
- ▶ Special requirements apply in the case of belt drives. Please contact us.

▼ **Gear drive**

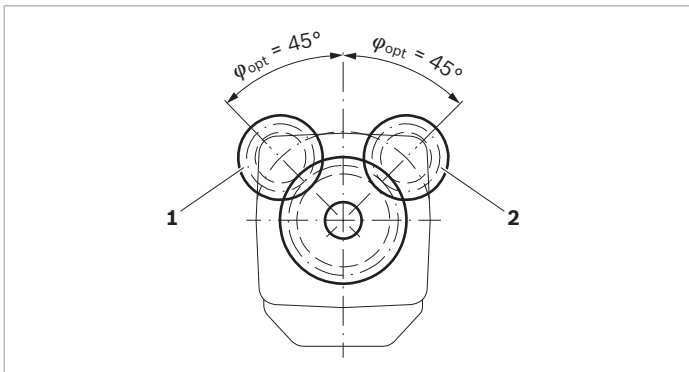

- 1 "Clockwise" rotation, pressure at port **B**
- 2 "Counter-clockwise" rotation, pressure at port **A**

1) With intermittent operation

## LR – Power controller without power override

The power controller regulates the displacement of the pump depending on the operating pressure so that a given drive power is not exceeded at constant drive speed.

The precise control with a hyperbolic control characteristic, provides an optimum utilization of available power.

The operating pressure acts on a rocker via a measuring spool which moves with the control. An externally adjustable spring force counteracts this, it determines the power setting.

If the operating pressure exceeds the set spring force, the control valve is actuated by the rocker and the pump swivels back from the initial position  $V_{g \max}$  toward  $V_{g \min}$ . When doing this, the lever length at the rocker shortens and the operating pressure may rise in the same proportion as the displacement reduces without the drive power being exceeded ( $p_B \times V_g = \text{constant}$ ;  $p_B$  = operating pressure;  $V_g$  = displacement).

When depressurized, the pump is swiveled to its initial position to  $V_{g \max}$  by a return spring.

The hydraulic output power (characteristic **LR**) is influenced by the efficiency of the pump.


► Beginning of control, setting range 50 to 220 bar

When ordering, state in plain text:


- Drive power  $P$  [kW]
- Drive speed  $n$  [rpm]
- Maximum flow  $q_{v \max}$  [l/min]

Please contact us if you need a power diagram.

### ▼ Characteristic curve LR

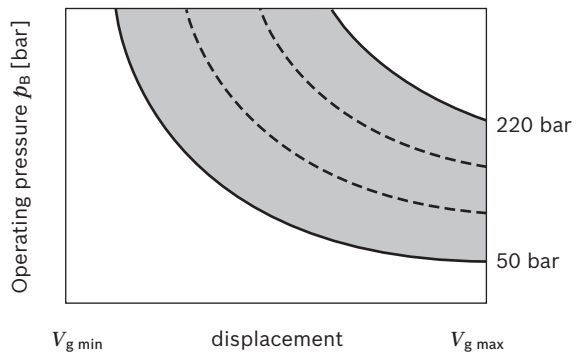

### ▼ Schematic LR

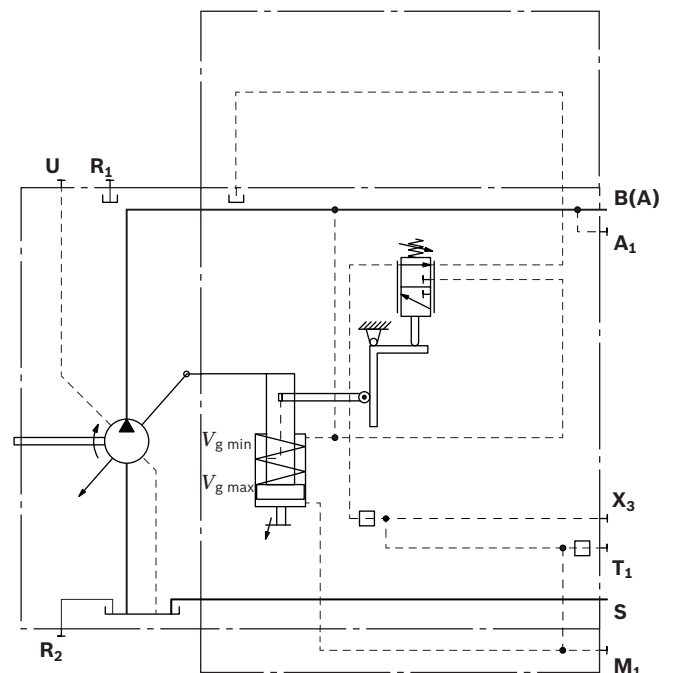

**LRD – Power controller with pressure cut-off**

The pressure cut-off is a pressure control which adjusts the displacement of the pump back to  $V_{g \text{ min}}$  after reaching the set pressure command value.

This function overrides the power controller, i.e. the power control function is executed below the pressure command value.

Pressure cut-off is preset to a pressure command value at the factory.

- ▶ Setting range 200 to 350 bar  
 When ordering, state the setting in plain text.

**Notes**

- ▶ The pressure setting of the pressure cut-off must be at least a factor of 5 higher than the beginning of control of power control.


Example:

- Beginning of control of the power controller: 50 bar
- Minimum setting of pressure cut-off:  
 $5 \times 50 = 250 \text{ bar}$


Higher settings of the pressure cut-off are always possible.

- ▶ For versions with pressure cut-off, a drain line is needed from port  $T_1$  to the reservoir.
- ▶ When port  $T_1$  is plugged and  $t_{\text{tank}} \leq 50 \text{ }^\circ\text{C}$ , this results in a permissible pressure cut-off of  $\leq 2 \text{ min}$ .
- ▶ Any pressure-relief valve included in the system to limit the maximum pressure must have its start of opening at least 20 bar above the pressure cut-off setting.

▼ **Characteristic curve LRD**

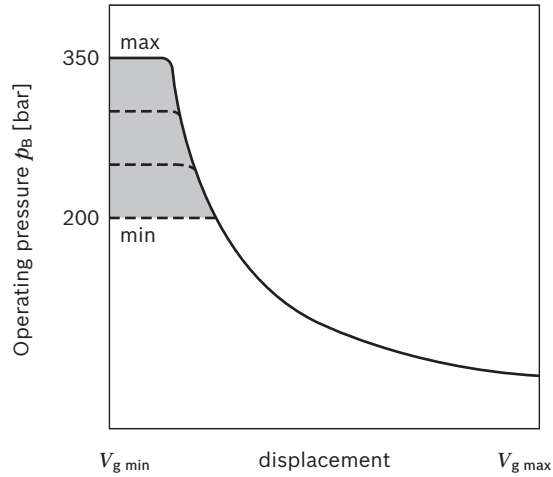

▼ **Schematic LRD**

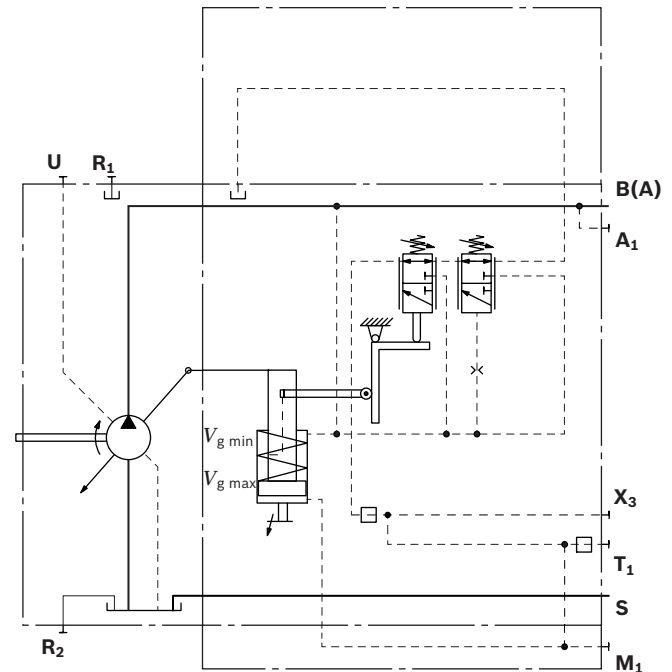



**LR... – Power controller with stroke limiter**

Due to the hydraulic stroke limiter, it is possible to change or limit the displacement of the pump continuously across the entire control range. The displacement is set proportionally using the pilot pressure  $p_{st}$  applied to port  $X_1$  (maximum of 40 bar).

The power control overrides the hydraulic stroke limiter, i.e. below the power characteristic (hyperbolic characteristic), the displacement is controlled in dependence on the pilot pressure. If the set flow or operating pressure exceeds the power control characteristic, the power control overrides and reduces the displacement along the hyperbolic characteristic.

A control pressure of 40 bar is needed to swivel the pump from its initial position  $V_{g\ max}$  to  $V_{g\ min}$ .


The necessary control power is taken from the operating pressure or the external control pressure applied to port  $Y_3$ . To ensure that the stroke limiter functions at a low operating pressure of < 40 bar, port  $Y_3$  must be supplied with an external control pressure of about 40 bar.

**LRH1 – Hydraulic stroke limiter (negative control)**


- ▶ Control from  $V_{g\ max}$  to  $V_{g\ min}$   
 As the pilot pressure increases, the pump swivels to a smaller displacement.
- ▶ Start of control (at  $V_{g\ max}$ ) can be set to 4 to 15 bar  
 When ordering, state the start of control in plain text.
- ▶ Initial position without pilot signal (pilot pressure):  $V_{g\ max}$

**▼ Characteristic curve LRH1**


control pressure increase ( $V_{g\ max} - V_{g\ min}$ )  $\Delta p = 25$  bar

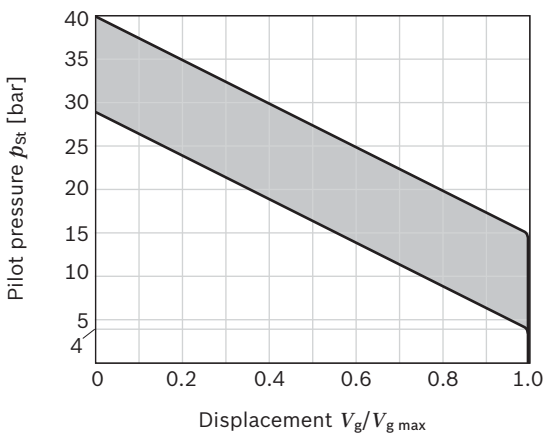

**▼ Schematic LRH1**

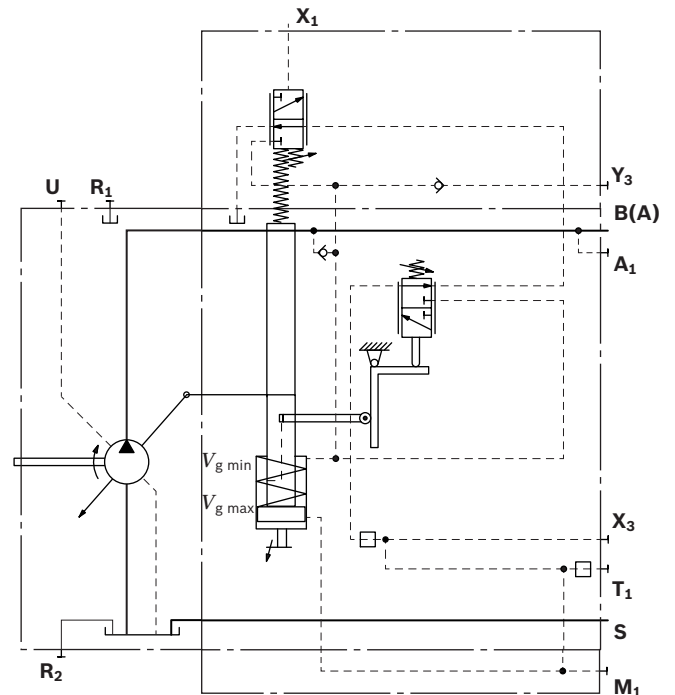

**▼ Schematic LRDH1**

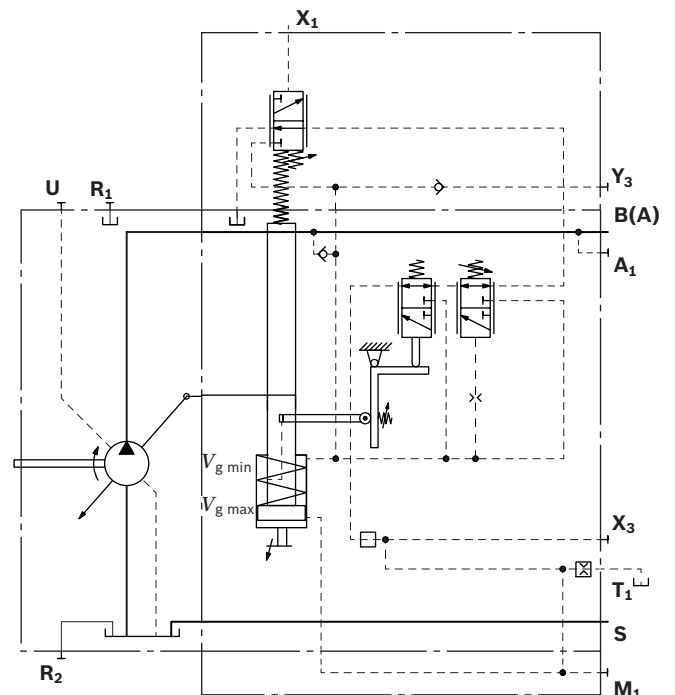

**LRDS – Power control with pressure cut-off and load sensing**

The load sensing controller works as a load-pressure controlled flow controller and adjusts the displacement of the pump to the volume required by the consumer. The flow of the pump is then dependent on the cross section of the external measuring orifice (1), which is located between the pump and the consumer. Below the power curve and the setting of the pressure cut-off and within the control range of the pump, the flow is independent of the load pressure.

The measuring orifice is usually a separately located load sensing directional valve (control block). The position of the directional valve spool determines the opening cross-section of the measuring orifice and thus the flow of the pump.

The load sensing controller compares pressure before and after the orifice and keeps the pressure drop (differential pressure  $\Delta p$ ) across the orifice – and therefore the flow – constant.

If the differential pressure  $\Delta p$  at the measuring orifice rises, the pump is swiveled back (toward  $V_{g \text{ min}}$ ). If the differential pressure  $\Delta p$  drops, the pump is swiveled out (toward  $V_{g \text{ max}}$ ) until equilibrium at the measuring orifice is restored.


$$\Delta p_{\text{measuring orifice}} = p_{\text{pump}} - p_{\text{consumer}}$$

- ▶ Setting range for  $\Delta p$  14 to 25 bar
  - ▶ Default setting 18 bar
- When ordering, state the setting in plain text.


The stand-by pressure in zero-stroke mode (metering orifice closed) is slightly higher than the  $\Delta p$  setting.

In an LUDV system, the pressure cut-off is integrated in the flow sharing control block (LUDV).

▼ **Characteristic curve LRDS**

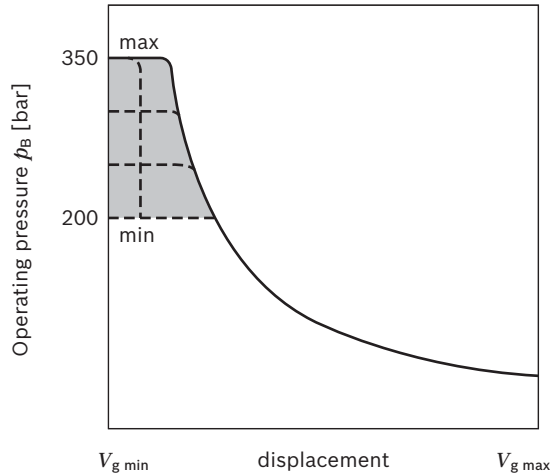

▼ **Schematic LRDS**

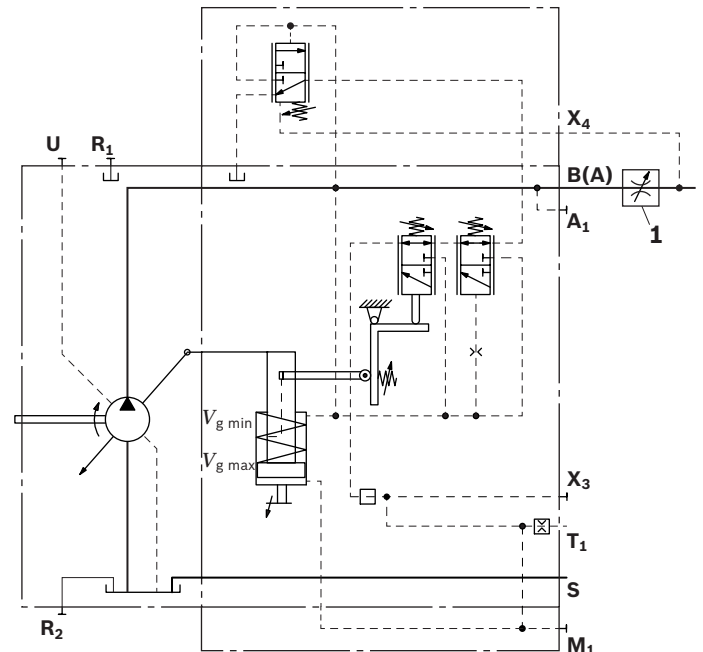

The measuring orifice (control block) (1) is not included in the scope of delivery.

## LA1 – Power controller with hydraulically proportional power override

The power controller regulates the displacement of the pump depending on the operating pressure so that a given drive power is not exceeded at constant drive speed.

The hyperbolic power curve is approximated with two measuring springs. The operating pressure acts on the measurement area of a differential piston against the measuring springs and an externally adjustable spring force which determines the power setting.


If the sum of the hydraulic forces exceeds the forces of the springs, the control oil is fed to the stroking piston, which swivels the pump back to reduce the flow.

In a depressurized state, the pump is swiveled to its initial position to  $V_{g \max}$  by a return spring.

By connecting an external pilot pressure at port  $X_3$ , it is possible to override the power control proportionally.

Increasing pilot pressure = reduced power.

### ▼ Characteristic curve LA1

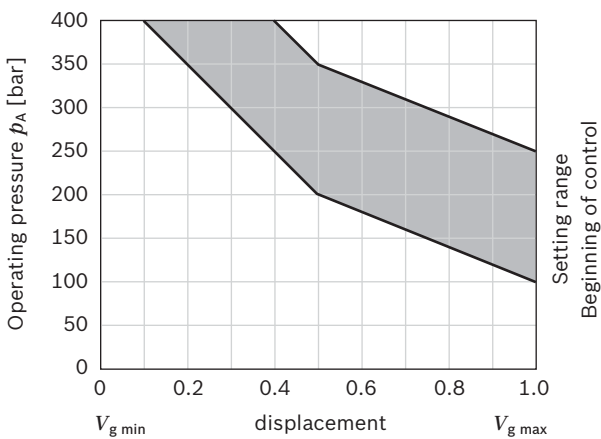

The hydraulic output power (characteristic curve) is affected by the efficiency.

When ordering, state in plain text:


- ▶ Drive power  $P$  [kW]
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum volume flow  $q_{V \max}$  [l/min]

Please contact us if you need a power diagram.


### LA1S – Power controller with load sensing

For description of load sensing, see page 12.

### ▼ Characteristic curve LA1S

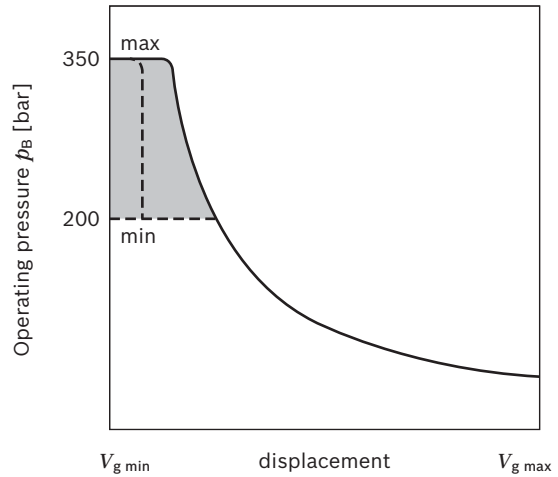

### ▼ Schematic LA1S

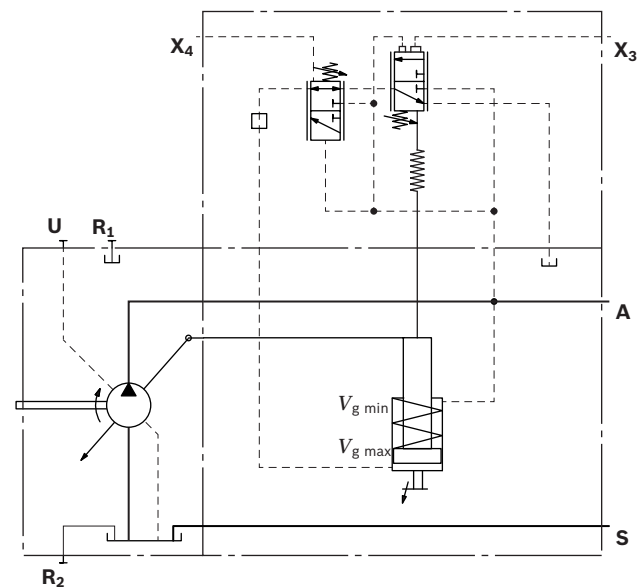

**LA1S5 – Power controller with load sensing and hydraulically proportional LS-override**


By connecting an external pilot pressure at port **X<sub>6</sub>**, it is possible to override proportionally the differential pressure  $\Delta p$  of the load sensing control.

Increasing pilot pressure = lower  $\Delta p$  setting.


An example of this is shown in the characteristic curve below.

Please consult us before carrying out project planning.

▼ **Characteristic curve LA1S5**

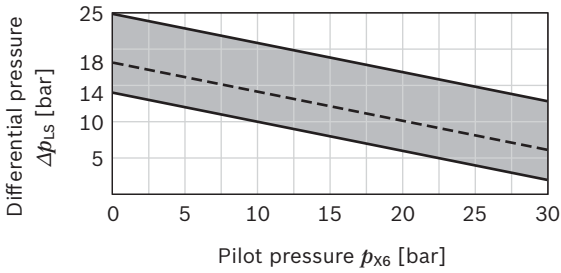

▼ **Schematic LA1S5**

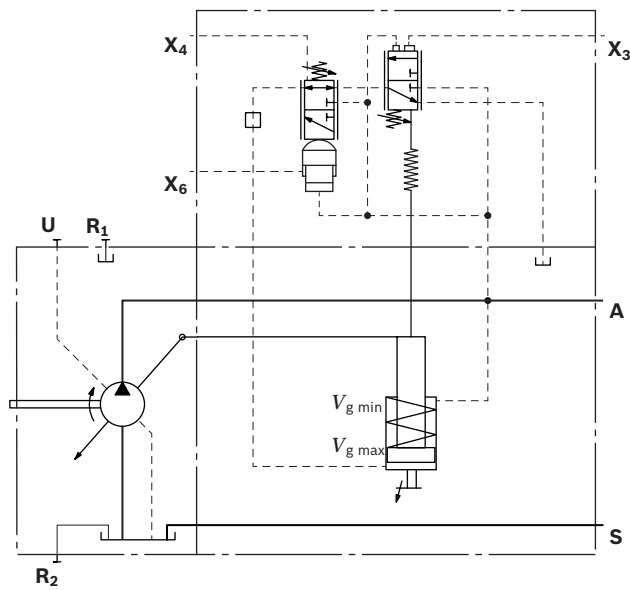

## DR – Pressure controller


The pressure control limits the maximum pressure at the pump outlet within the control range of the variable pump. The variable pump only delivers as much hydraulic fluid as is required by the consumers. If the operating pressure exceeds the setpoint value set at the integrated pressure valve, the pump control will shift toward a smaller displacement and the control deviation will decrease. When depressurized, the pump is swiveled to its initial position  $V_{g \max}$  by an adjustment spring.

- ▶ Setting range of pressure control 50 to 350 bar  
When ordering, state the setting in plain text.


### Notes

- ▶ For versions with controller **DR**, a drain line is needed from port **T<sub>1</sub>** to the reservoir.
- ▶ Any pressure-relief valve included in the system to limit the maximum pressure must be set to a cracking pressure at least 20 bar above the controller setting.

### ▼ Characteristic curve DR

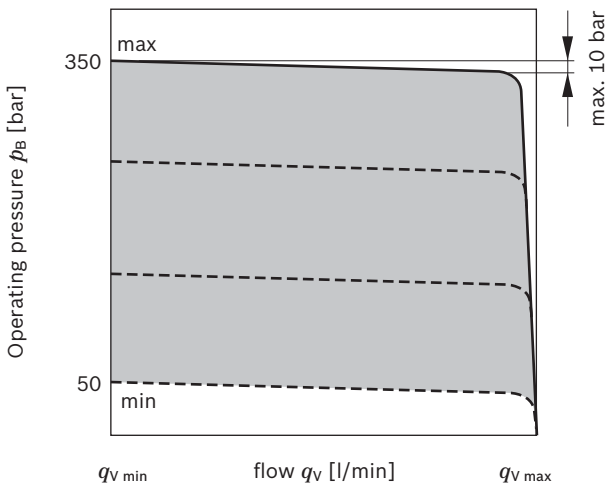


### ▼ Schematic DR

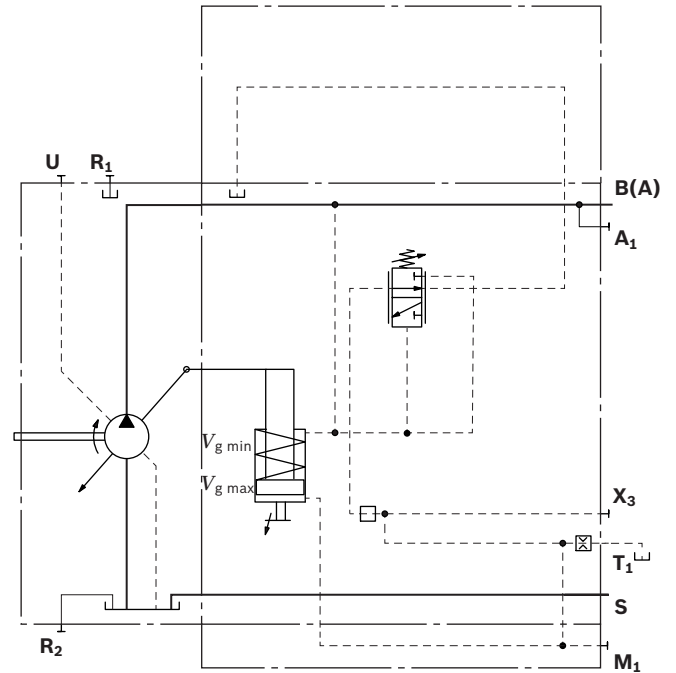

### Zero-stroke operation

The standard pump unit is designed for intermittent constant pressure operation. Short-term zero-stroke operation (< 1 min.) is permissible up to an operating pressure  $p_{\max} = 315$  bar at a reservoir temperature of  $\leq 50$  °C. In the case of longer zero-stroke operation (> 1 min), bearing flushing should be carried out via flushing port **U**.

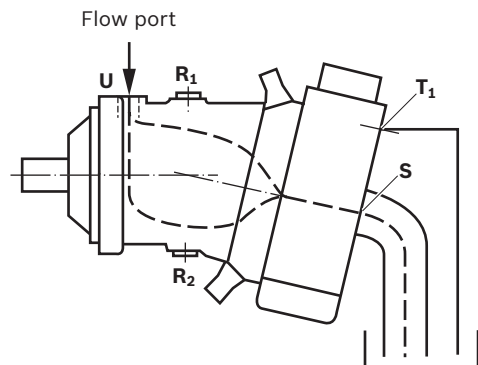

### Flushing flow (recommended)

NG	28	55	80	107	160
$q_{V \text{ flush}}$ l/min	3	4	6	8	12

Temperature of flushing fluid  $\leq$  reservoir temperature

**DRG – Pressure controller, remotely controlled**

A separate sequence valve with port plate provides the pressure control function. The valve is arranged separate from the pump; in this connection, you should not exceed the single line length of 5 m. The valve is supplied with high pressure from port **A**<sub>1</sub> of the pump. The system feeds back via port **X**<sub>3</sub> the control power of the valve into the pump; the valve adjusts the pump back to  $V_{g \text{ min}}$ . Note that ports **T** of the sequence valve and **T**<sub>1</sub> of the pump are returned to the reservoir (cooler).

- ▶ Setting range of pressure control 50 to 315 bar  
When ordering, state the setting in plain text.


**Notes**

- ▶ For versions with controller **DRG**, a drain line is needed from port **T**<sub>1</sub> to the reservoir.
- ▶ Any pressure-relief valve included in the system to limit the max. pressure must be set to a cracking pressure at least 20 bar above the controller setting.


You must order the sequence valve and the port plate separately.

- ▶ Sequence valve (**1**): DZ5DP2-1X/315YMSO21  
(Material number R900495604)
- ▶ Port plate (**2**): G 115/1  
(Material number R900424379)

▼ **Characteristic curve DRG**

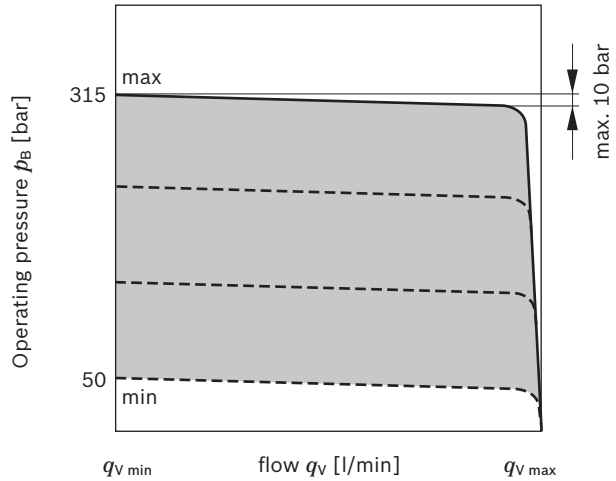

▼ **Schematic DRG**

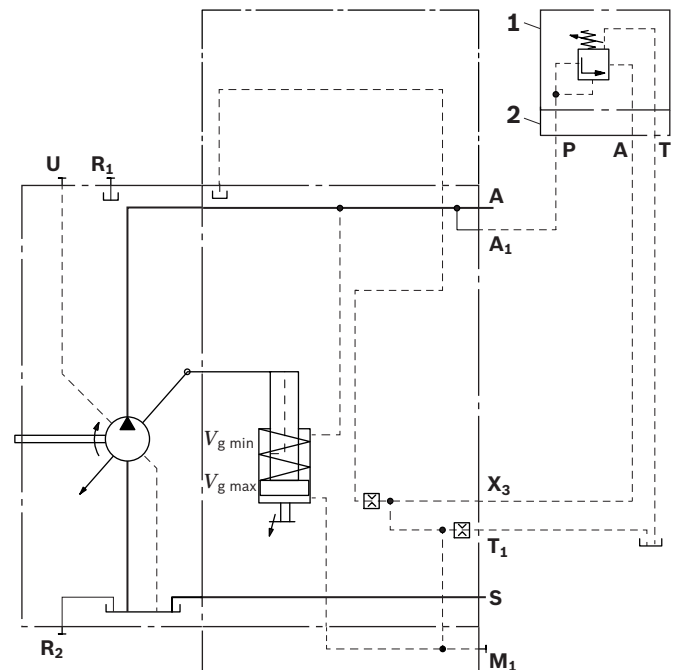


**DRS – Pressure controller with load sensing**

For description of load sensing, see page 12.


**Notes**

- ▶ For versions with controller **DRS**, a drain line is needed from port **T<sub>1</sub>** to the reservoir.
- ▶ The pressure controller overrides the load-sensing controller, i.e. the load-sensing function operates below the set pressure.

▼ **Characteristic curve DRS**

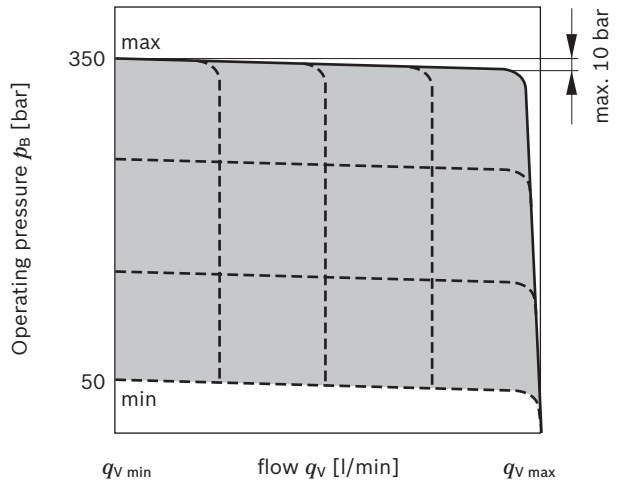

▼ **Schematic DRS**

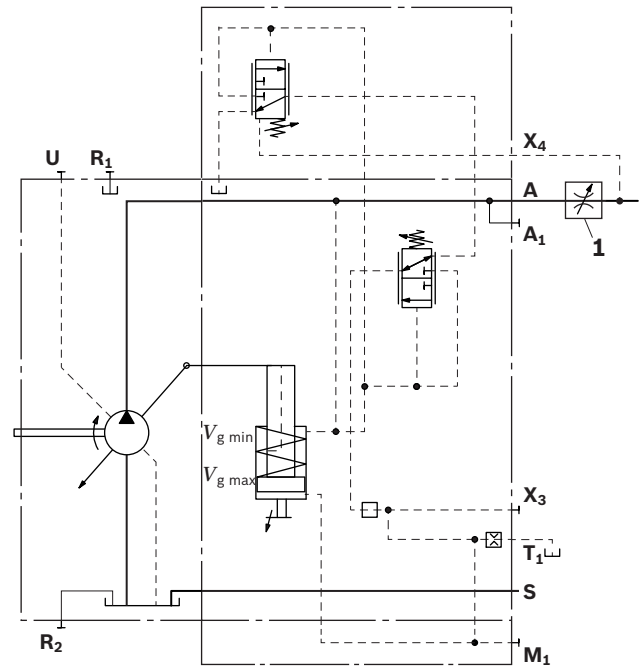

The measuring orifice (control block) **(1)** is not included in the scope of delivery.

## HD – Proportional hydraulic control

The proportional hydraulic control provides continuous control of the displacement. Control is carried out proportional to the pilot pressure applied at port **X<sub>1</sub>**.


- ▶ Maximum permissible pilot pressure  $p_{st} = 40$  bar
- ▶ Control from  $V_{g\ min}$  to  $V_{g\ max}$  (positive control)  
 As the pilot pressure increases, the pump swivels to a larger displacement.

- ▶ Start of control (at  $V_{g\ min}$ ) can be set to 4 to 15 bar  
 When ordering, state the start of control in plain text.


A control pressure of 40 bar is needed to swivel the pump from its initial position  $V_{g\ min}$  to  $V_{g\ max}$ .

The necessary control power is taken from the operating pressure or the external control pressure applied to port **Y<sub>3</sub>**. To ensure that control is guaranteed at a low operating pressure of < 40 bar too, port **Y<sub>3</sub>** must be supplied with an external control pressure of about 40 bar.

### ▼ Characteristic curve HD1 positive control increase in control pressure ( $V_{g\ min} - V_{g\ max}$ ) $\Delta p = 10$ bar

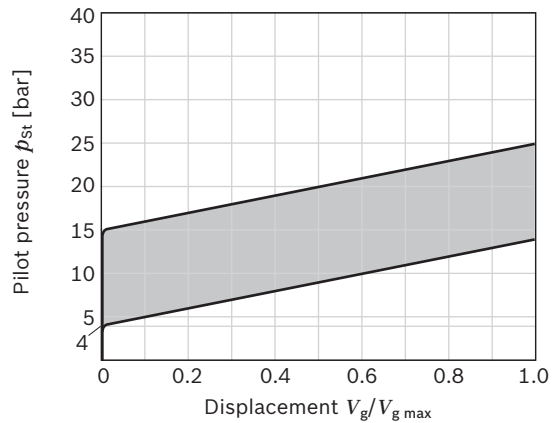

### ▼ Schematic HD

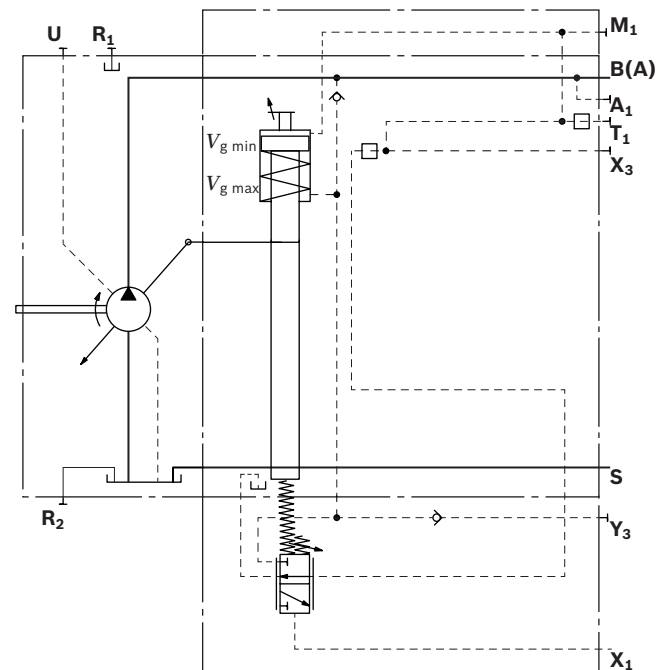



**HD1G – Proportional hydraulic control with pressure cut-off, remotely controlled**

A separate sequence valve with port plate provides the pressure cut-off function. The valve is arranged separate from the pump; in this connection, you should not exceed the single line length of 5 m. The valve is supplied with high pressure from port **A<sub>1</sub>** of the pump. The system feeds back via port **X<sub>3</sub>** the control power of the pump into the valve and at port **A** of the sequence valve's port plate diverts it into the reservoir; if the set pressure command value is exceeded, this adjusts the pump back to  $V_{g\ min}$ .

- ▶ Pressure cut-off setting range 50 to 315 bar  
 When ordering, state the pressure cut-off setting in plain text.


**Notes**

- ▶ Port **A** from the sequence valve must be returned to the reservoir (cooler).
- ▶ Any pressure-relief valve included in the system to limit the max. pressure must be set to a cracking pressure at least 20 bar above the controller setting.


You must order the sequence valve and the port plate separately.

- ▶ Sequence valve **(1)**: DZ5DP2-1X/315XYMSO20 (Material number R900490554)
- ▶ Port plate **(2)**: G 115/1 (Material number R900424379)

▼ **Characteristic curve HD1G positive control**

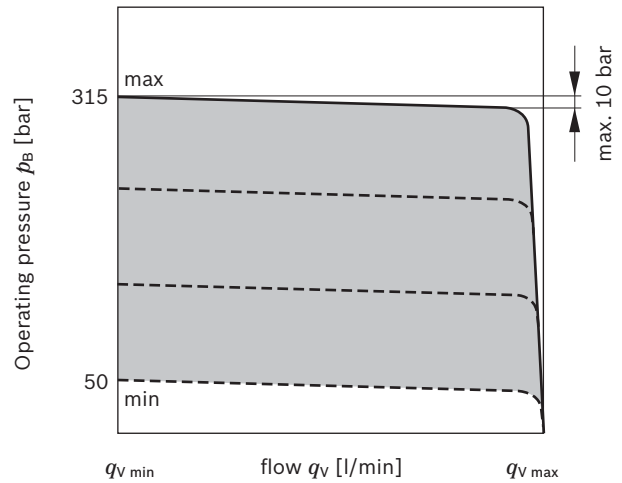

▼ **Schematic HD1G**

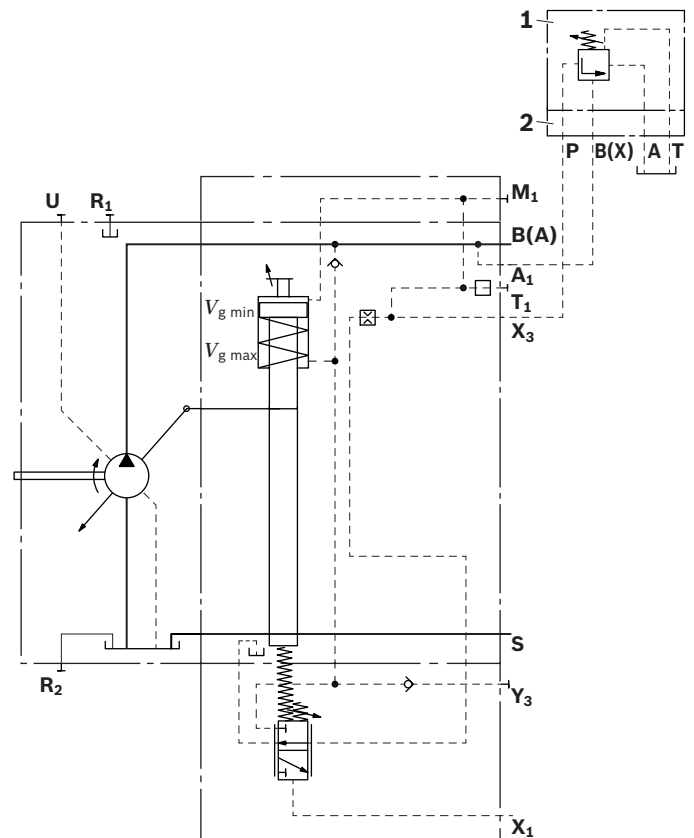

## EP – Proportional electric control

The proportional electric control, type EP, provides continuous control of the displacement. Control is proportional to the electric control current applied to the solenoid.

- ▶ Control from  $V_{g \min}$  to  $V_{g \max}$  (positive control)  
As the pilot pressure increases, the pump swivels to a larger displacement.

A control pressure of 40 bar is needed to swivel the pump from its initial position  $V_{g \min}$  to  $V_{g \max}$ .


The necessary control power is taken from the operating pressure or the external control pressure applied to port  $Y_3$ . To ensure that control is guaranteed at a low operating pressure of < 40 bar too, port  $Y_3$  must be supplied with an external control pressure of about 40 bar.

Various BODAS controllers with application software and amplifiers are available for controlling the proportional solenoids.


Further information can also be found on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics).

Technical data, solenoid	EP2
Voltage	24 V ( $\pm 20\%$ )
Control current	
Start of control	200 mA
End of control	600 mA
Current limit	0.77 A
Nominal resistance (at 20 °C)	22.7 $\Omega$
Dither frequency	100 Hz
Duty cycle	100%
Type of protection: see connector version page 40	

### ▼ Characteristic curve EP2 positive control

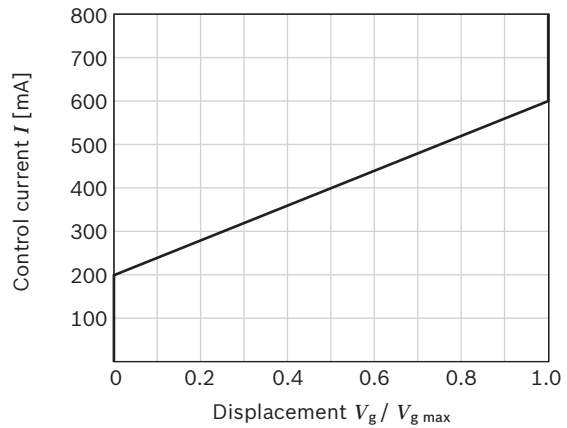



### ▼ Schematic EP2

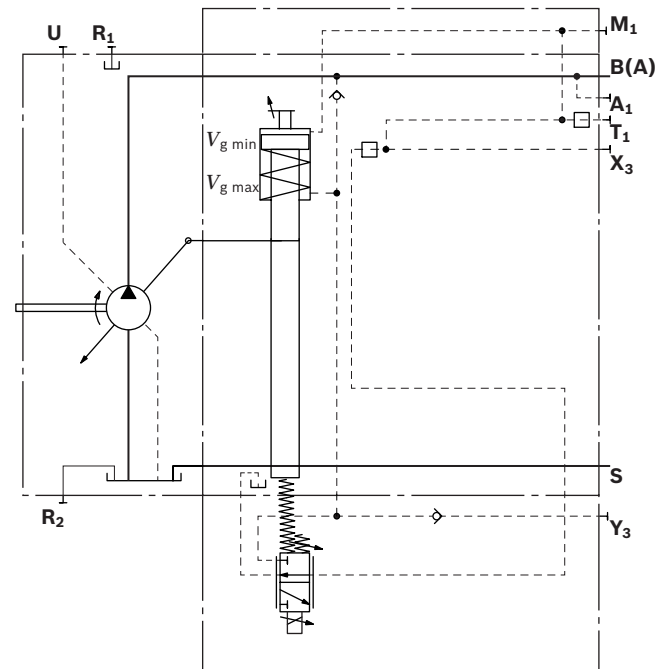

**Dimensions, size 28**


**LR – Power controller without power override**

All of the variants of the controllers on page 23 are shown for the clockwise direction of input rotation (view Y)

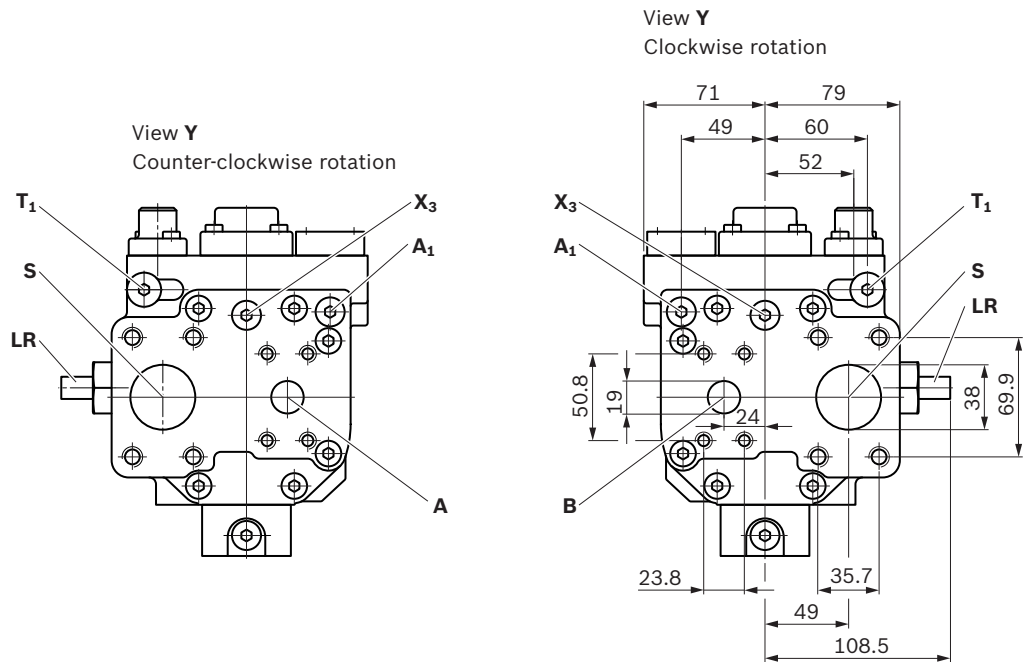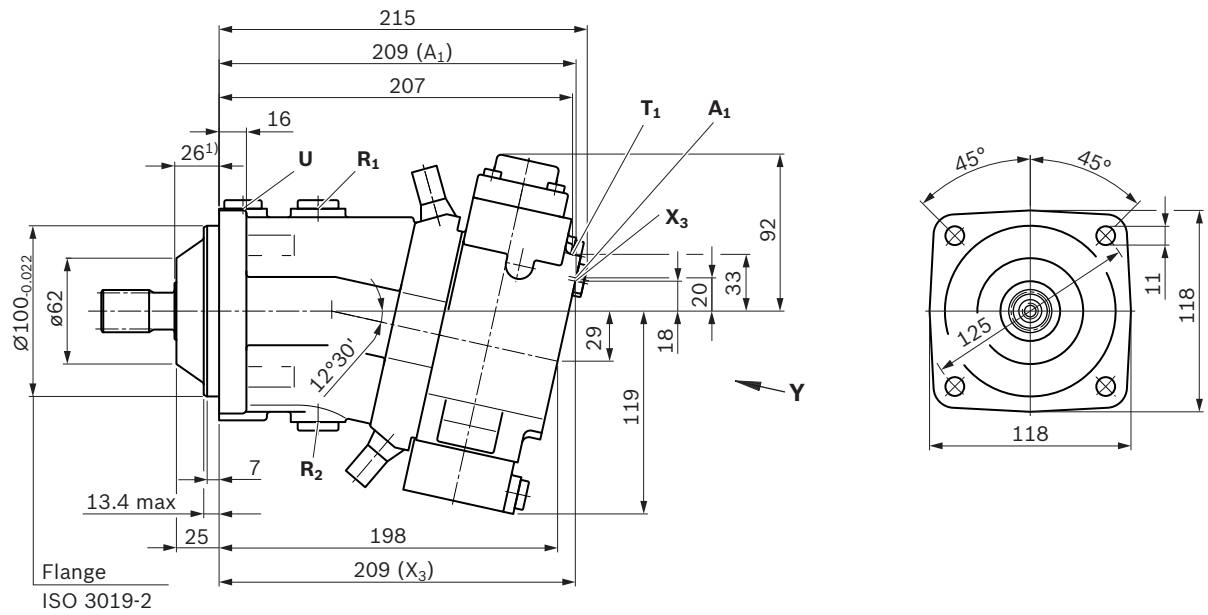


1) To shaft collar

▼ **Splined shaft DIN 5480**

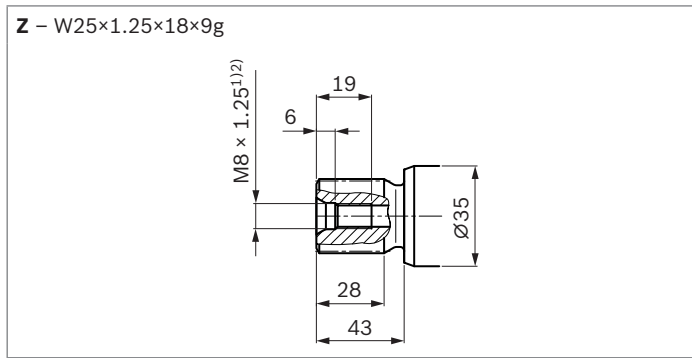

▼ **Parallel keyed shaft DIN 6885**

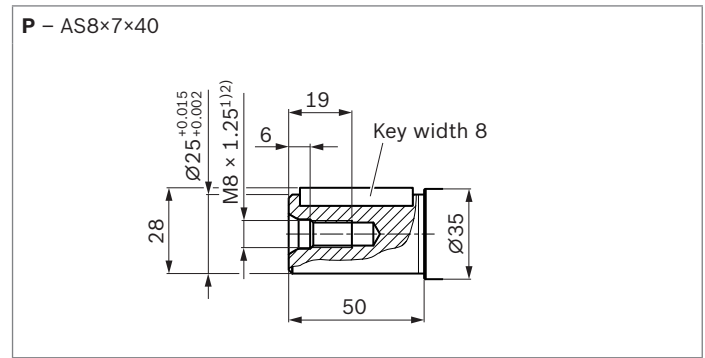


Ports	Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>3)</sup>	Status
<b>A (B)</b>	Working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	3/4 in M10 × 1.5; 17 deep	400 O
<b>S</b>	Suction port (standard series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 1/2 in M12 × 1.75; 20 deep	2 O
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M16 × 1.5; 12 deep	2 X
<b>R<sub>1</sub>, R<sub>2</sub></b>	Air bleed	DIN 3852 <sup>5)</sup>	M18 × 1.5; 12 deep	2 X
<b>A<sub>1</sub></b>	Measuring high pressure	DIN 3852 <sup>5)</sup>	M12 × 1.5; 12 deep	400 X
<b>T<sub>1</sub></b>	Control fluid drain	DIN 3852 <sup>5)</sup>	M12 × 1.5; 12 deep	400 X <sup>6)</sup>
<b>X<sub>3</sub></b>	Override	DIN 3852 <sup>5)</sup>	M12 × 1.5; 12 deep	400 X
<b>Y<sub>3</sub></b>	External control pressure	DIN 3852 <sup>5)</sup>	M14 × 1.5; 12 deep	40 X
<b>X<sub>1</sub></b>	Pilot pressure	DIN 3852 <sup>5)</sup>	M14 × 1.5; 12 deep	40 O
<b>M<sub>1</sub></b>	Control pressure measurement	DIN 3852 <sup>5)</sup>	M12 × 1.5; 12 deep	400 X


1) Center bore according to DIN 332 (thread according to DIN 13)  
 2) For notes on tightening torques, see instruction manual.  
 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.  
 4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

5) The spot face can be deeper than specified in the appropriate standard.  
 6) For versions with a pressure controller or pressure cut-off, a drain line is needed to relieve port **T<sub>1</sub>** to the reservoir.  
 O = Must be connected (plugged on delivery)  
 X = Plugged (in normal operation)


▼ **LRD** – Power controller with pressure cut-off

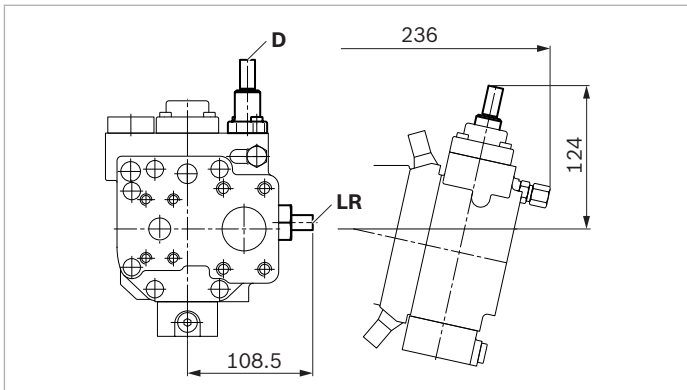


▼ **DR/DRG** – Pressure controller/pressure controller remotely controlled

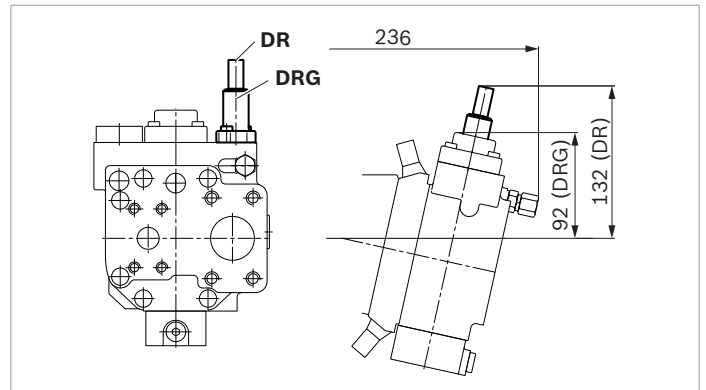

▼ **HD1, HD1G** – Proportional hydraulic control, positive control, and variant with pressure cut-off, remotely controlled

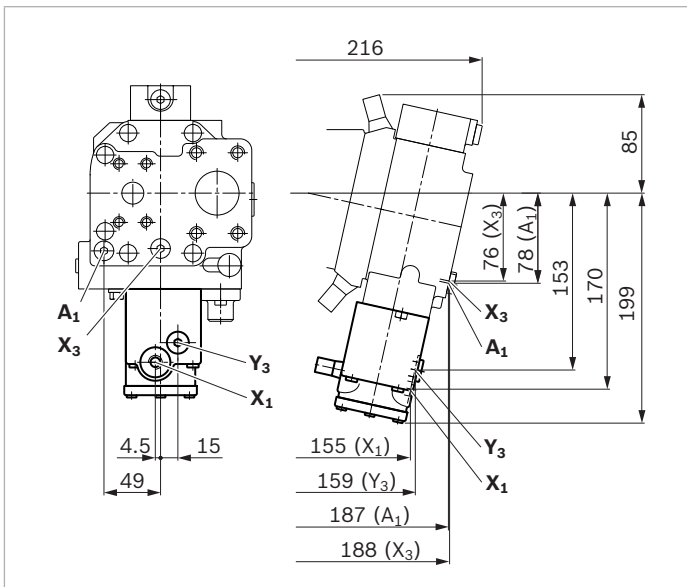


▼ **EP2** – Proportional control electric, positive control

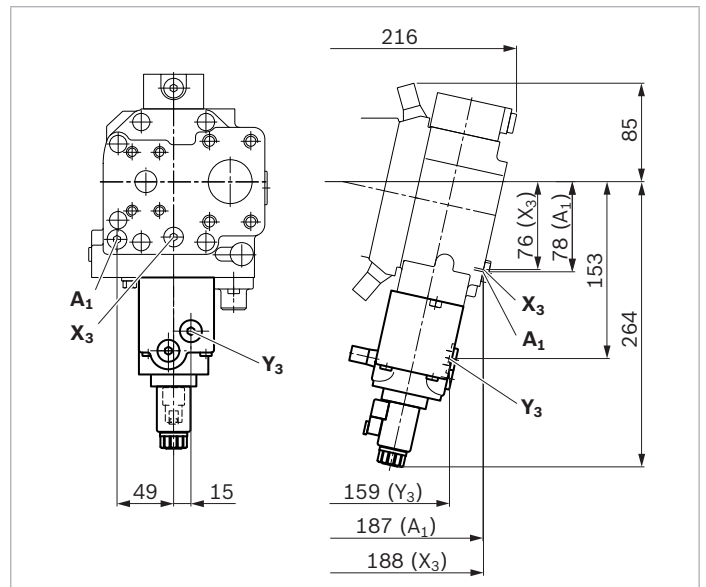

## Dimensions, size 55


### LR – Power controller without power override

All of the variants of the controllers on pages 26 and 27 are shown for the clockwise direction of input rotation (view Y)

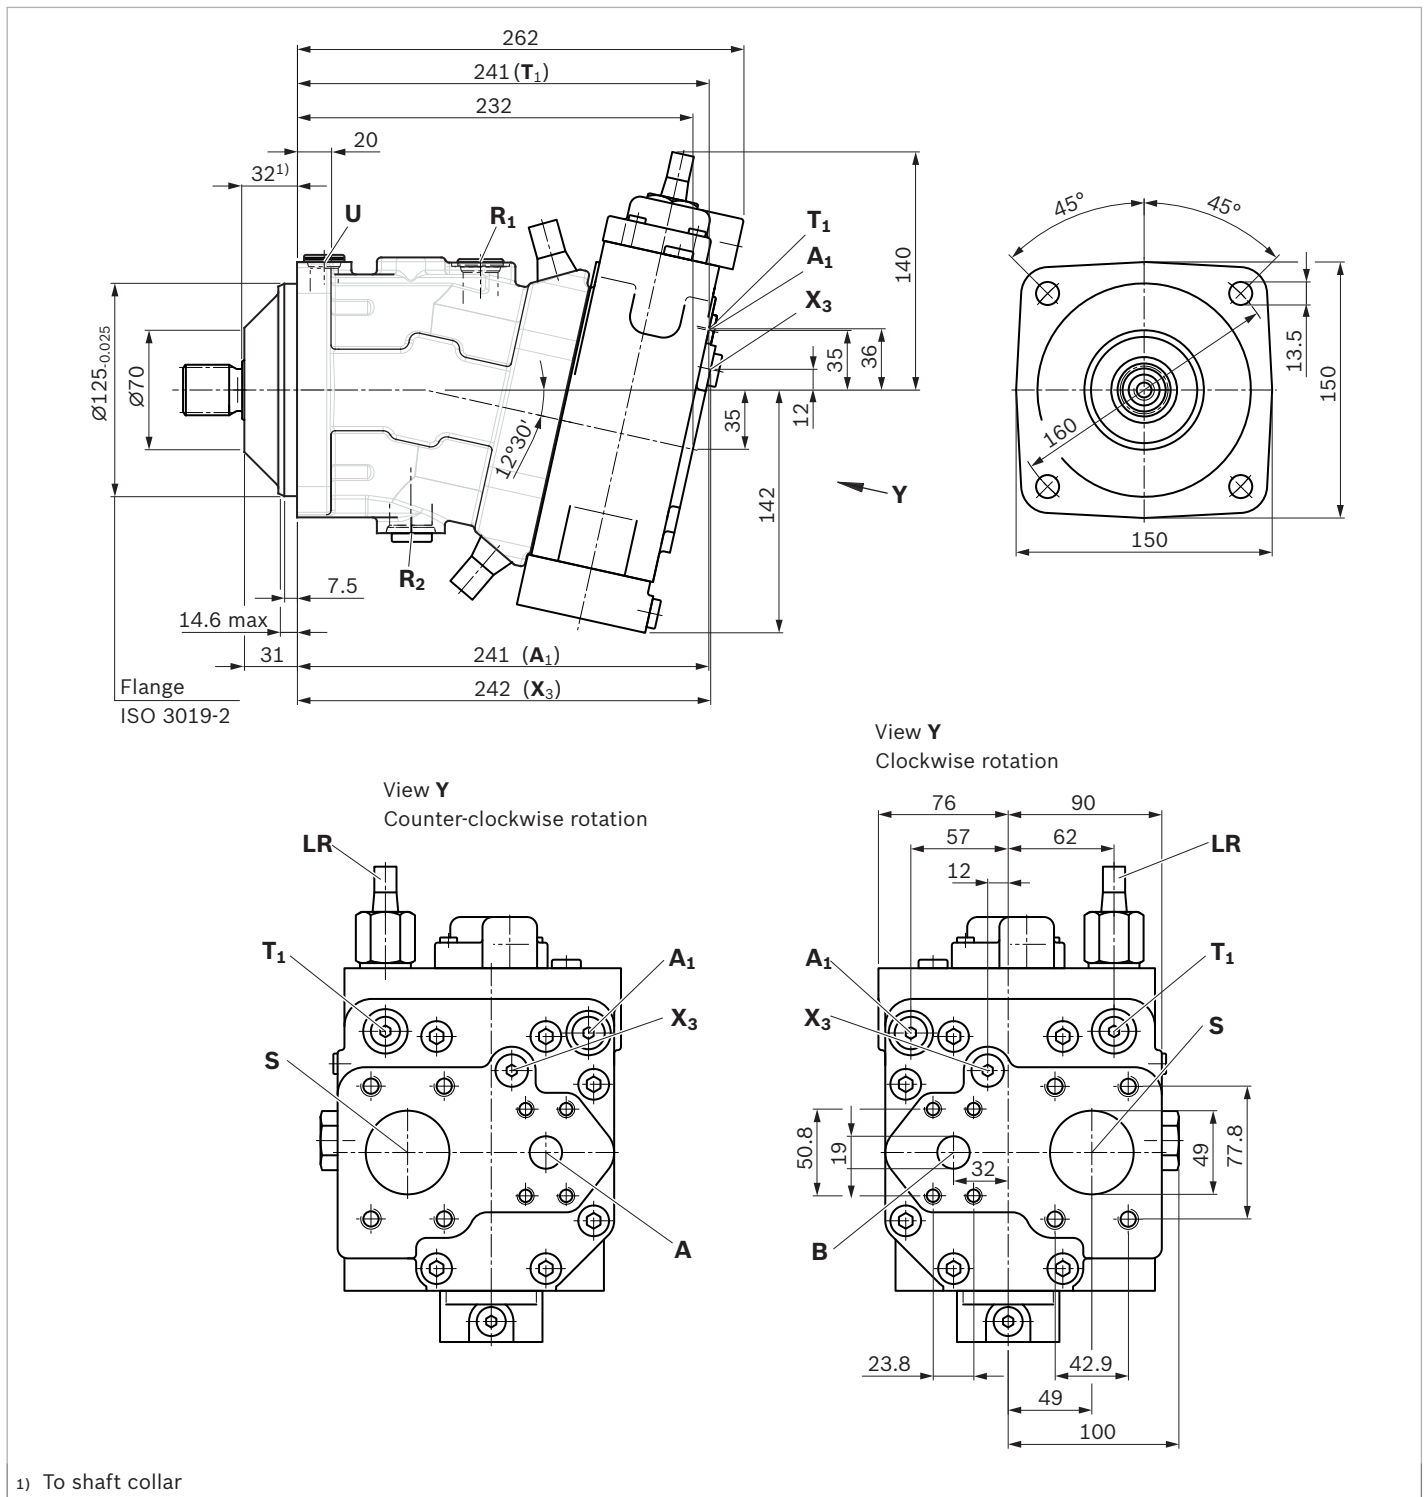


## ▼ Splined shaft DIN 5480

Z – W30×2×14×9g



## ▼ Parallel keyed shaft DIN 6885

P – AS8×7×50

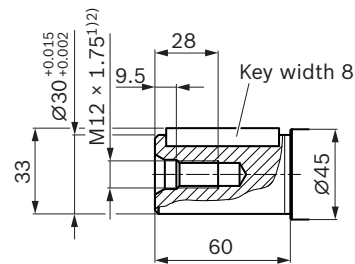


Ports	Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>3)</sup>	Status
<b>A (B)</b>	Working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	3/4 in M10 x 1.5; 17 deep	400 O
<b>S</b>	Suction port (standard series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	2 in M12 x 1.75; 20 deep <sup>2)</sup>	2 O
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M18 x 1.5; 12 deep	2 X
<b>R<sub>1</sub>, R<sub>2</sub></b>	Air bleed	DIN 3852 <sup>5)</sup>	M18 x 1.5; 12 deep	2 X
<b>R<sub>1</sub></b>	Air bleed (LA1S only.)	DIN 3852 <sup>5)</sup>	M22 x 1.5; 15.5 deep	2 X
<b>R<sub>2</sub></b>	Air bleed (LA1S only.)	DIN 3852 <sup>5)</sup>	M27 x 2; 19 deep	2 X
<b>A<sub>1</sub></b>	Measuring high pressure	DIN 3852 <sup>5)</sup>	M14 x 1.5; 12 deep	400 X
<b>T<sub>1</sub></b>	Control fluid drain	DIN 3852 <sup>5)</sup>	M12 x 1.5; 12 deep	400 X <sup>6)</sup>
<b>X<sub>3</sub></b>	Override	DIN 3852 <sup>5)</sup>	M14 x 1.5; 12 deep	400 X
<b>Y<sub>3</sub></b>	External control pressure	DIN 3852 <sup>5)</sup>	M14 x 1.5; 12 deep	40 X
<b>X<sub>1</sub></b>	Pilot pressure	DIN 3852 <sup>5)</sup>	M14 x 1.5; 12 deep	40 O
<b>X<sub>4</sub></b>	Load pressure	DIN 3852 <sup>5)</sup>	M14 x 1.5; 12 deep	400 O
<b>M<sub>1</sub></b>	Control pressure measurement	DIN 3852 <sup>5)</sup>	M12 x 1.5; 12 deep	400 X


- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) For notes on tightening torques, see instruction manual.
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

- 5) The spot face can be deeper than specified in the appropriate standard.
- 6) For versions with a pressure controller or pressure cut-off, a drain line is needed to relieve port **T<sub>1</sub>** to the reservoir.  
O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)


▼ **LRD** – Power controller with pressure cut-off

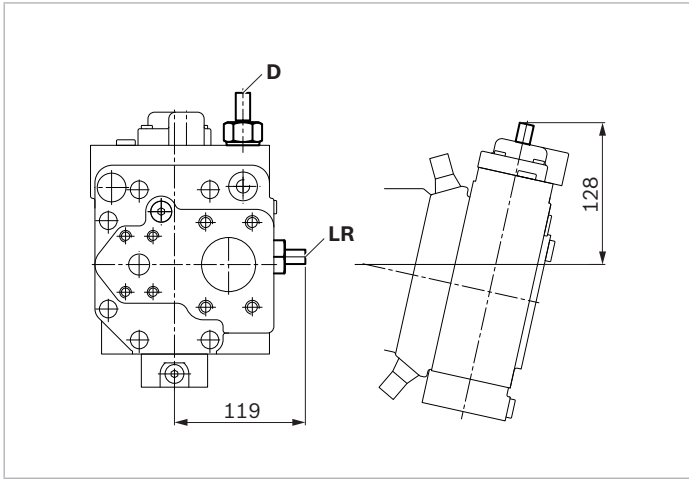


▼ **LRDS** – Power control with pressure cut-off and load sensing

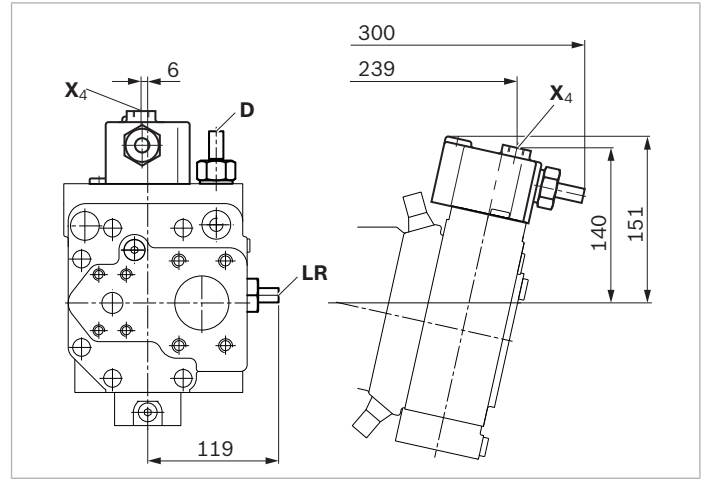

▼ **LRDH1** – Power control with pressure cut-off and stroke limiter

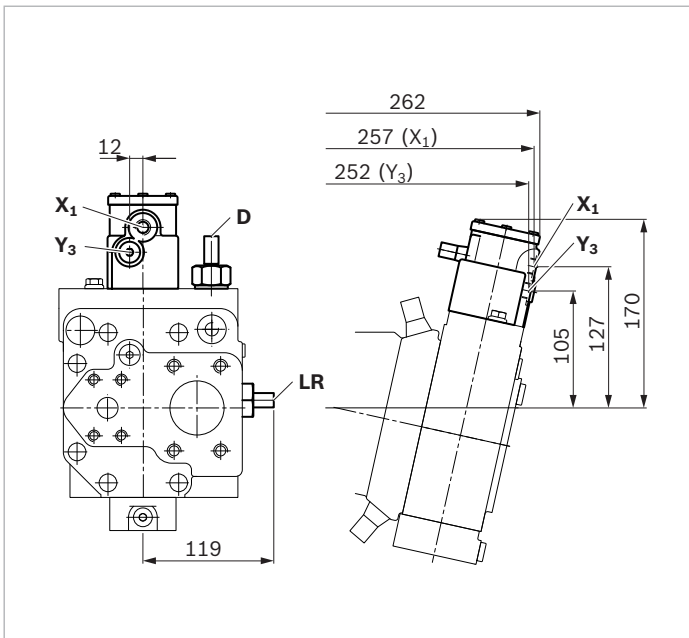


▼ **LA1S** – Power control with load sensing,  
**LA1S5** – Power control with load sensing and hydraulically  
 proportional LS-override

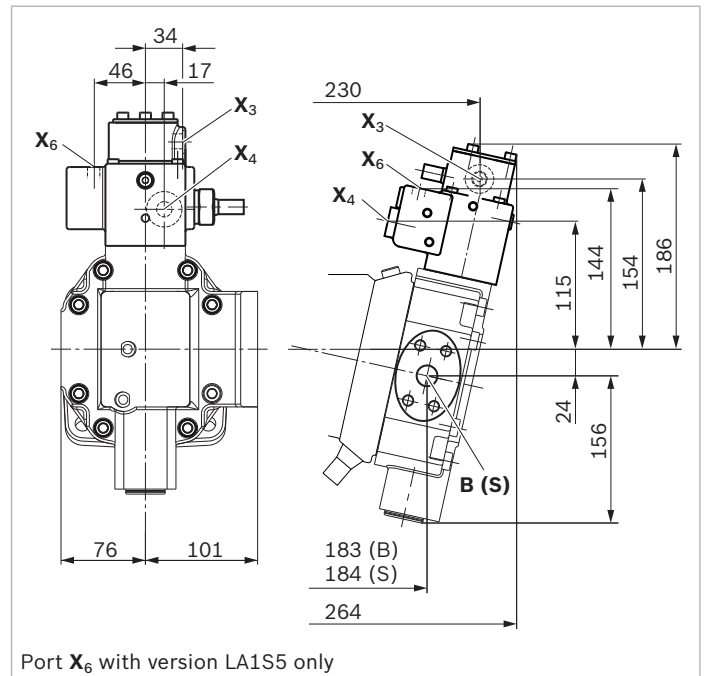





▼ **DR/DRG** – Pressure controller/pressure controller remotely controlled

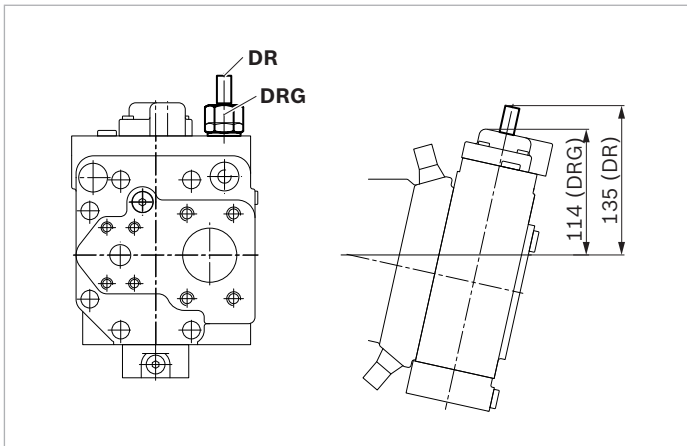


▼ **DRS** – Pressure controller with load sensing

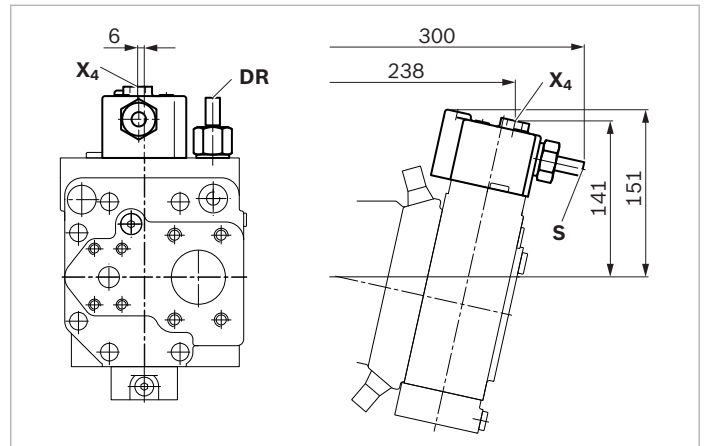

▼ **HD1, HD1G** – Proportional hydraulic control, positive control, and variant with pressure cut-off, remotely controlled

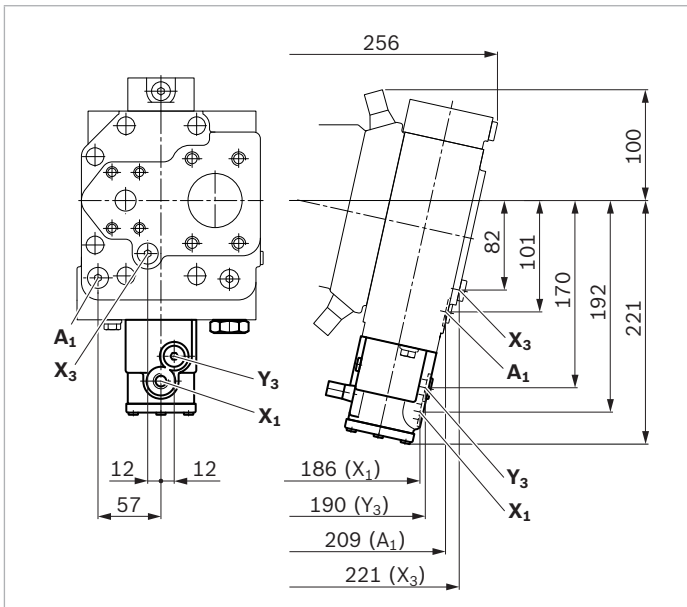


▼ **EP2** – Proportional control electric, positive control

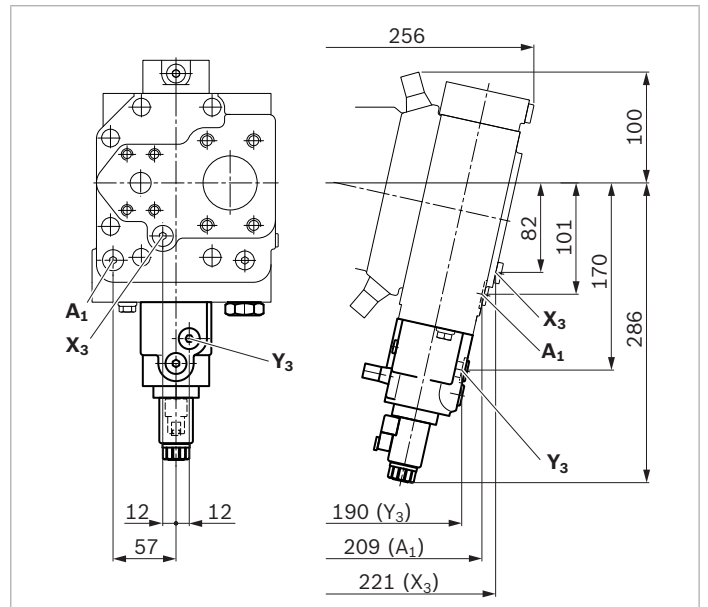




## ▼ Splined shaft DIN 5480

Z – W35×2×16×9g



## ▼ Parallel keyed shaft DIN 6885

P – AS10×8×56

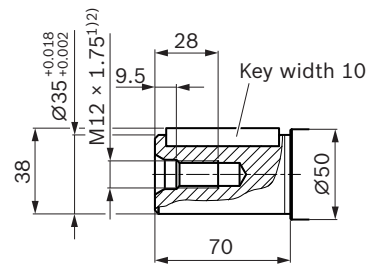


Ports	Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>3)</sup>	Status
<b>A (B)</b>	Working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 in M12 × 1.75; 17 deep	400 O
<b>S</b>	Suction port (standard series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	2 1/2 in M12 × 1.75; 17 deep	2 O
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M18 × 1.5; 12 deep	2 X
<b>R<sub>1</sub>, R<sub>2</sub></b>	Air bleed	DIN 3852 <sup>5)</sup>	M18 × 1.5; 12 deep	2 X
<b>R<sub>1</sub></b>	Air bleed (LA1S only.)	DIN 3852 <sup>5)</sup>	M22 × 1.5; 15.5 deep	2 X
<b>R<sub>2</sub></b>	Air bleed (LA1S only.)	DIN 3852 <sup>5)</sup>	M27 × 2; 19 deep	2 X
<b>A<sub>1</sub></b>	Measuring high pressure	DIN 3852 <sup>5)</sup>	M16 × 1.5; 12 deep	400 X
<b>T<sub>1</sub></b>	Control fluid drain	DIN 3852 <sup>5)</sup>	M12 × 1.5; 12 deep	400 X <sup>6)</sup>
<b>X<sub>3</sub></b>	Override	DIN 3852 <sup>5)</sup>	M16 × 1.5; 12 deep	400 X
<b>Y<sub>3</sub></b>	External control pressure	DIN 3852 <sup>5)</sup>	M14 × 1.5; 12 deep	40 X
<b>X<sub>1</sub></b>	Pilot pressure	DIN 3852 <sup>5)</sup>	M14 × 1.5; 12 deep	40 O
<b>X<sub>4</sub></b>	Load pressure	DIN 3852 <sup>5)</sup>	M14 × 1.5; 12 deep	400 O
<b>M<sub>1</sub></b>	Control pressure measurement	DIN 3852 <sup>5)</sup>	M12 × 1.5; 12 deep	400 X


- Center bore according to DIN 332 (thread according to DIN 13)
- For notes on tightening torques, see instruction manual.
- Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

- The spot face can be deeper than specified in the appropriate standard.
  - For versions with a pressure controller or pressure cut-off, a drain line is needed to relieve port **T<sub>1</sub>** to the reservoir.
- O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)


▼ **LRD** – Power controller with pressure cut-off

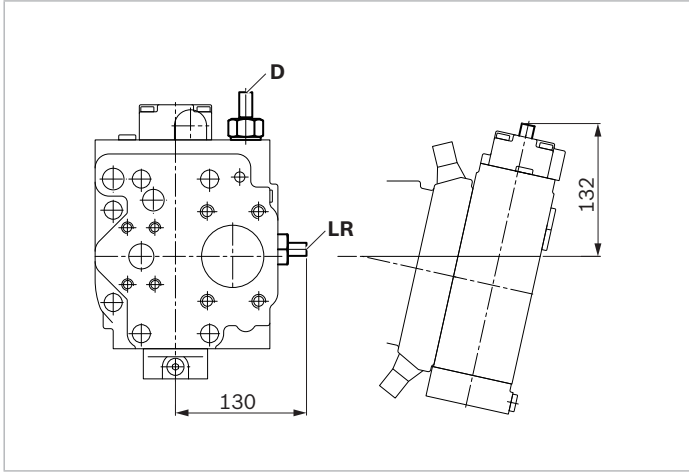


▼ **LRDS** – Power control with pressure cut-off and load sensing

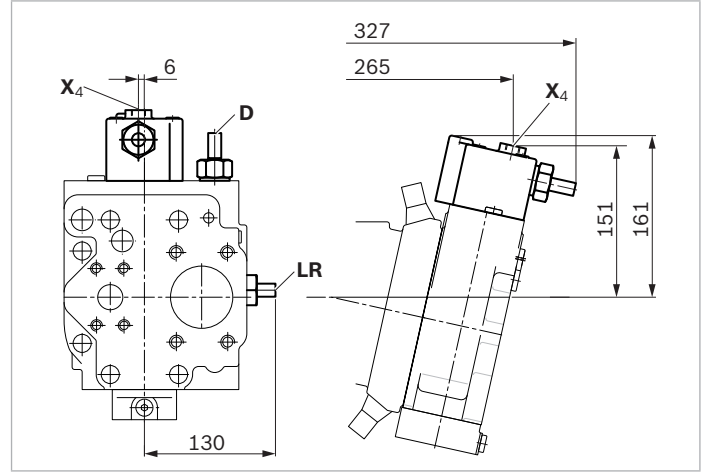

▼ **LRDH1** – Power control with pressure cut-off and stroke limiter

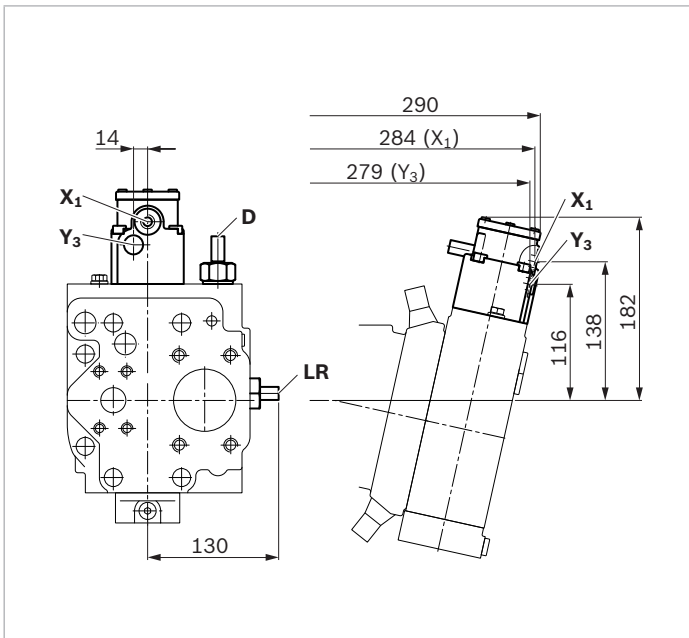


▼ **LA1S** – Power control with load sensing,  
**LA1S5** – Power control with load sensing, can be overridden on a hydraulically proportional basis

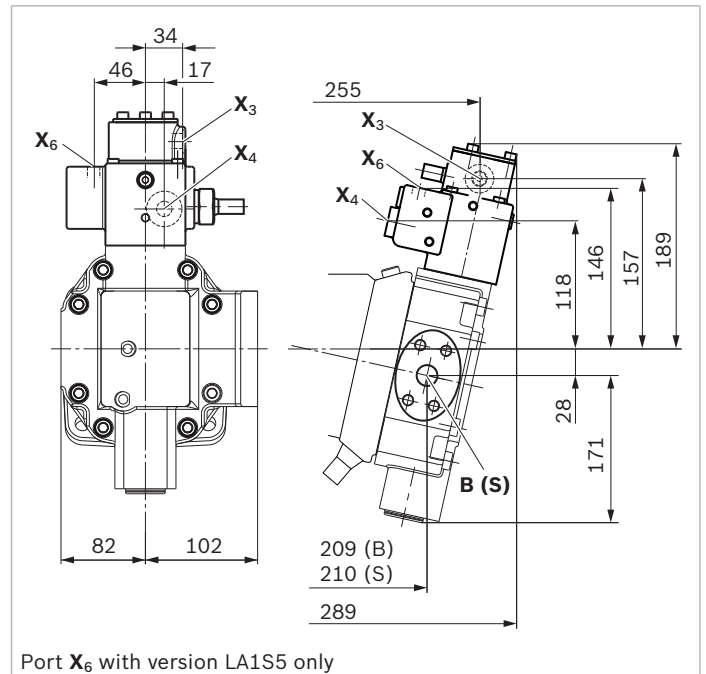


Port X<sub>6</sub> with version LA1S5 only


▼ **DR/DRG** – Pressure controller/pressure controller remotely controlled

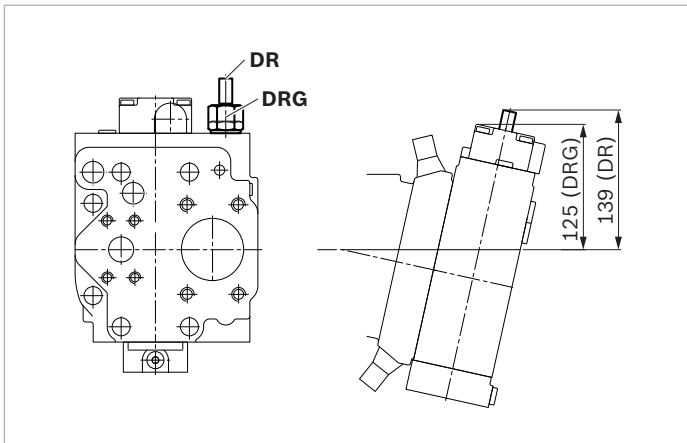


▼ **DRS** – Pressure controller with load sensing

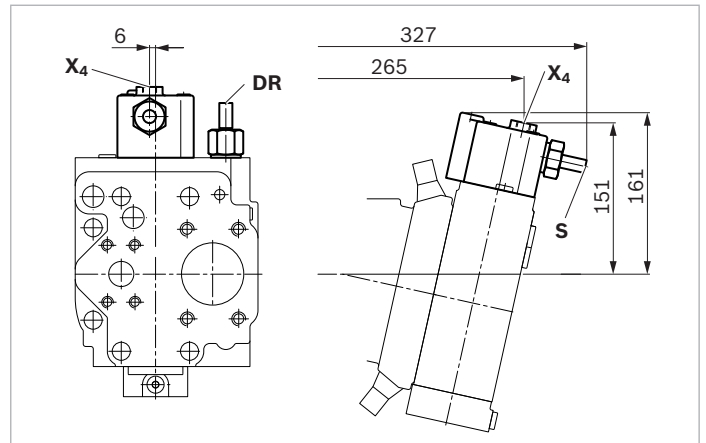

▼ **HD1, HD1G** – Proportional hydraulic control, positive control, and variant with pressure cut-off, remotely controlled

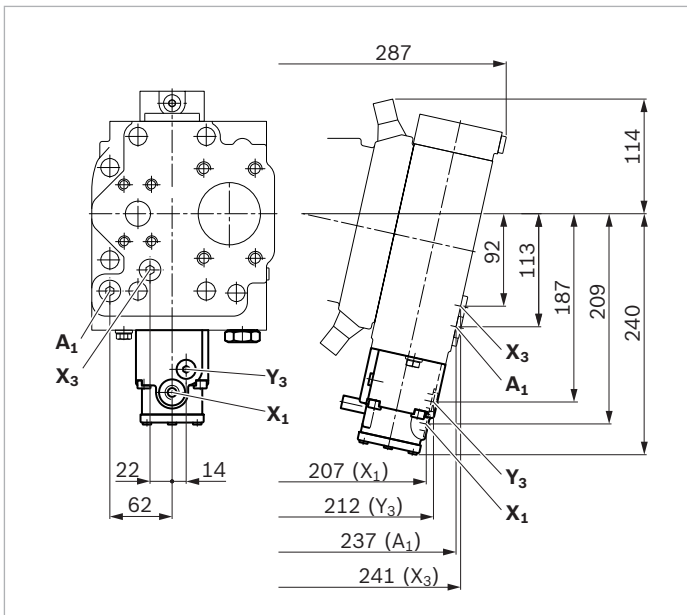


▼ **EP2** – Proportional control electric, positive control

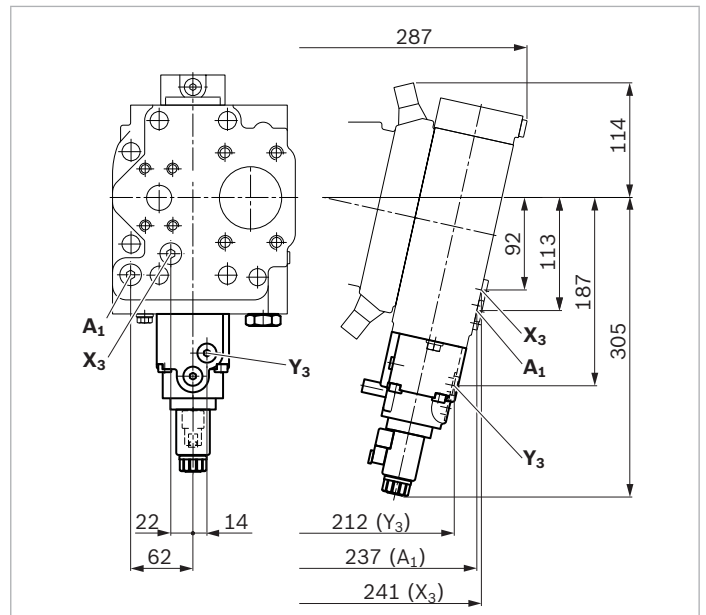


**Dimensions, size 107**

**LR – Power controller without power override**


All of the variants of the controllers on pages 34 and 35 are shown for the clockwise direction of input rotation (view Y)

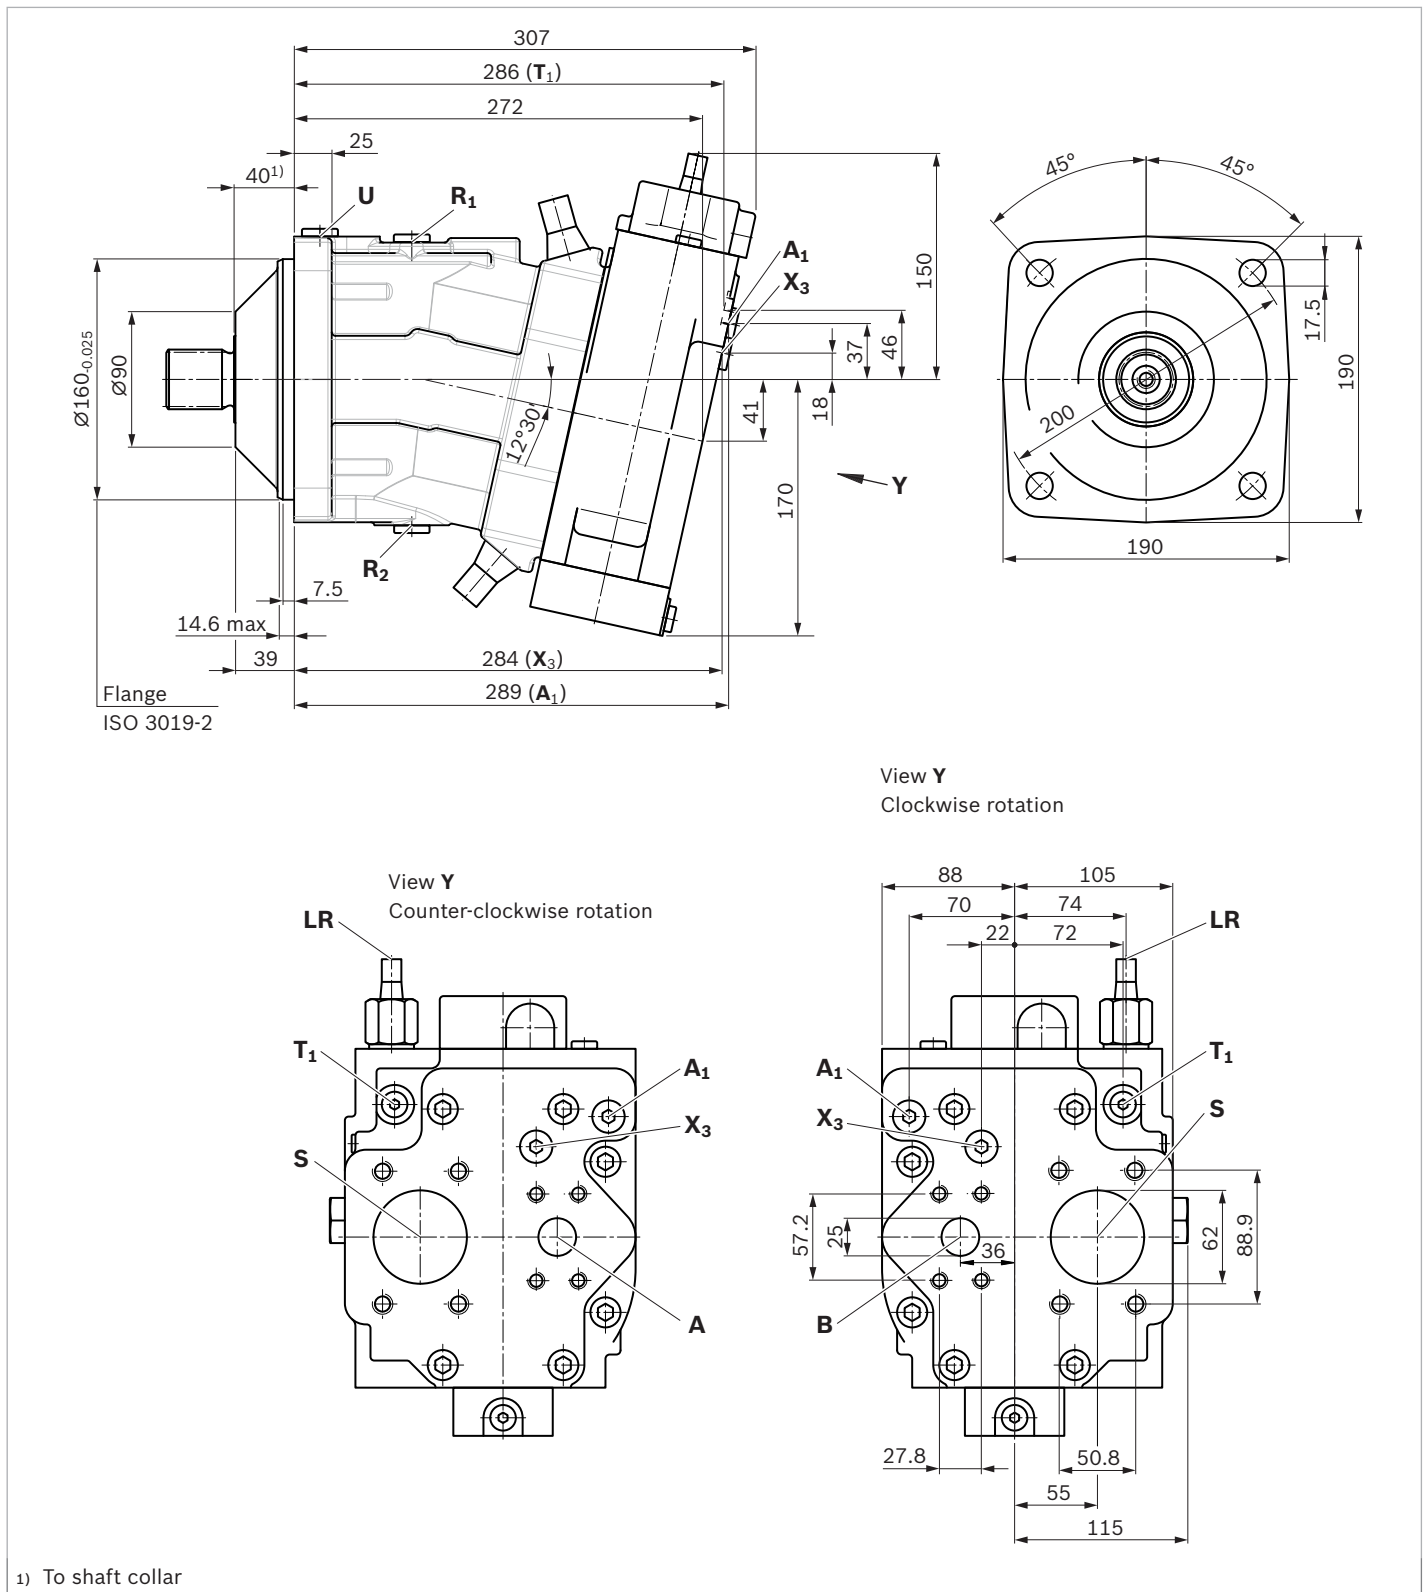

▼ **Splined shaft DIN 5480**

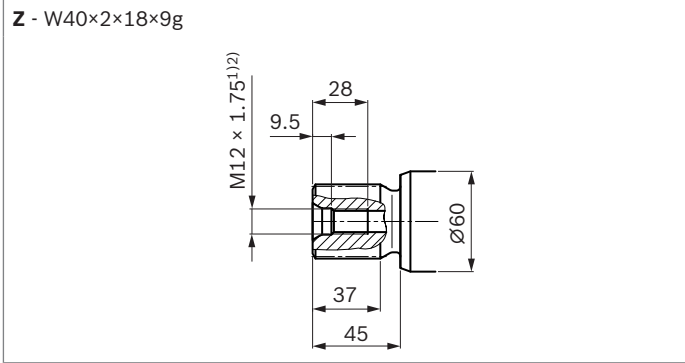

▼ **Parallel keyed shaft DIN 6885**

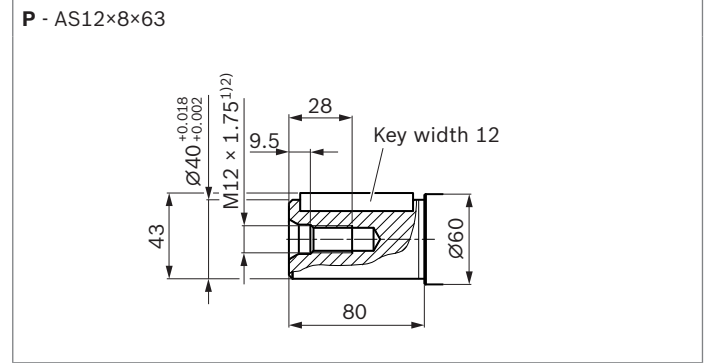


Ports		Standard	Size <sup>2)</sup>	$p_{max abs}$ [bar] <sup>3)</sup>	Status
<b>A (B)</b>	Working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 in M12 × 1.75; 17 deep	400	O
<b>S</b>	Suction port (standard series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	2 1/2 in M12 × 1.75; 17 deep	2	O
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M18 × 1.5; 12 deep	2	X
<b>R<sub>1</sub>, R<sub>2</sub></b>	Air bleed	DIN 3852 <sup>5)</sup>	M18 × 1.5; 12 deep	2	X
<b>A<sub>1</sub></b>	Measuring high pressure	DIN 3852 <sup>5)</sup>	M16 × 1.5; 12 deep	400	X
<b>T<sub>1</sub></b>	Control fluid drain	DIN 3852 <sup>5)</sup>	M12 × 1.5; 12 deep	400	X <sup>6)</sup>
<b>X<sub>3</sub></b>	Override	DIN 3852 <sup>5)</sup>	M16 × 1.5; 12 deep	400	X
<b>Y<sub>3</sub></b>	External control pressure	DIN 3852 <sup>5)</sup>	M14 × 1.5; 12 deep	40	X
<b>X<sub>1</sub></b>	Pilot pressure	DIN 3852 <sup>5)</sup>	M14 × 1.5; 12 deep	40	O
<b>X<sub>4</sub></b>	Load pressure	DIN 3852 <sup>5)</sup>	M14 × 1.5; 12 deep	400	O
<b>M<sub>1</sub></b>	Control pressure measurement	DIN 3852 <sup>5)</sup>	M12 × 1.5; 12 deep	400	X


1) Center bore according to DIN 332 (thread according to DIN 13)  
 2) For notes on tightening torques, see instruction manual.  
 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.  
 4) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

5) The spot face can be deeper than specified in the appropriate standard.  
 6) For versions with a pressure controller or pressure cut-off, a drain line is needed to relieve port **T<sub>1</sub>** to the reservoir.  
 O = Must be connected (plugged on delivery)  
 X = Plugged (in normal operation)


▼ **LRD** – Power controller with pressure cut-off

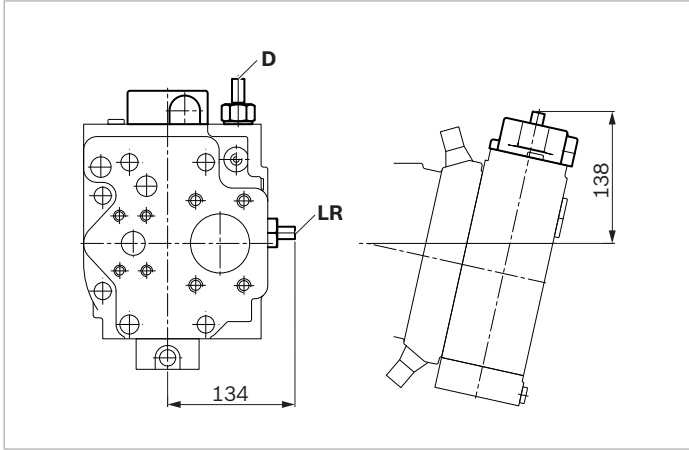

▼ **LRDS** – Power control with pressure cut-off and load sensing

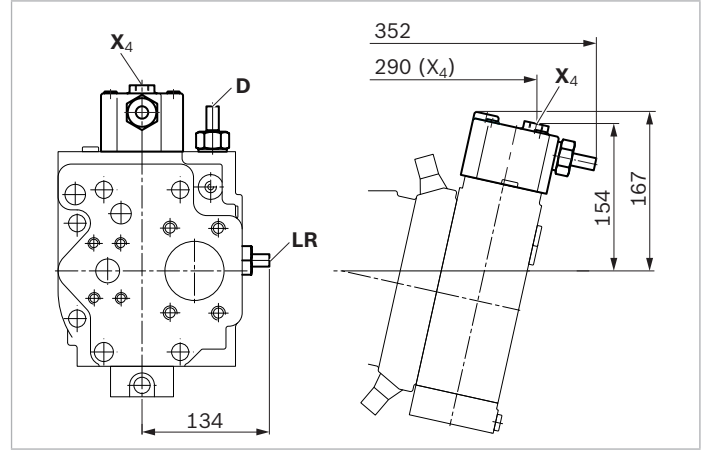


▼ **LRDH1** – Power control with pressure cut-off and stroke limiter

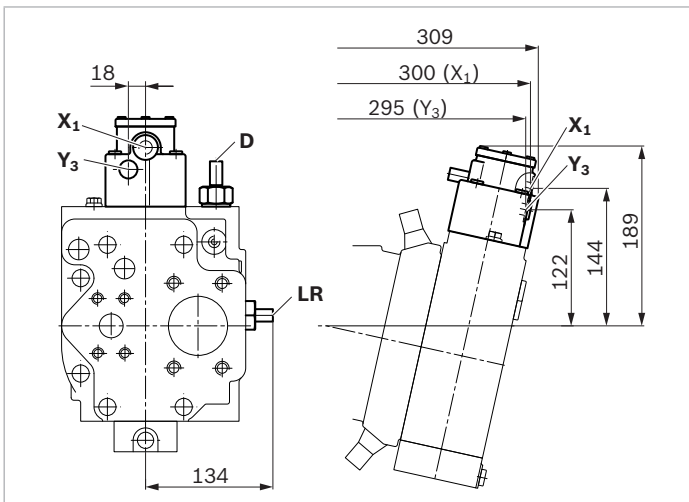





▼ **DR/DRG** – Pressure controller/pressure controller remotely controlled

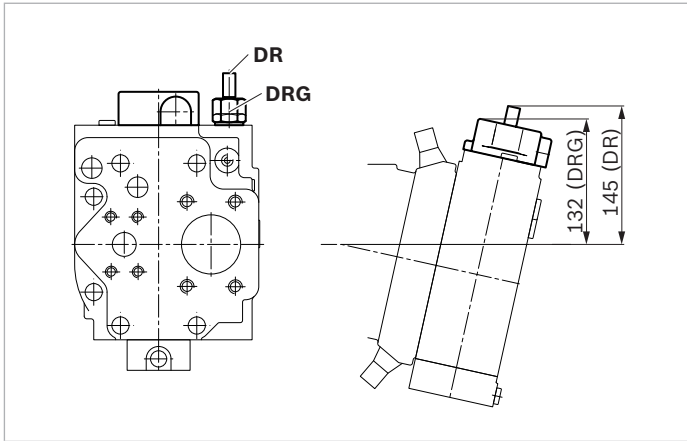


▼ **DRS** – Pressure controller with load sensing

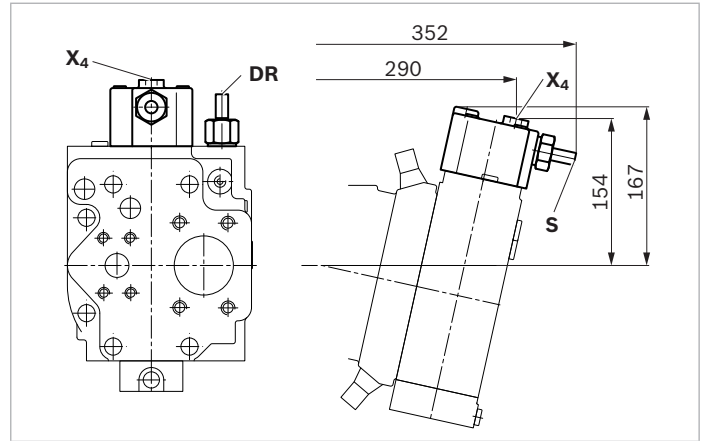

▼ **HD1, HD1G** – Proportional hydraulic control, positive control, and variant with pressure cut-off, remotely controlled

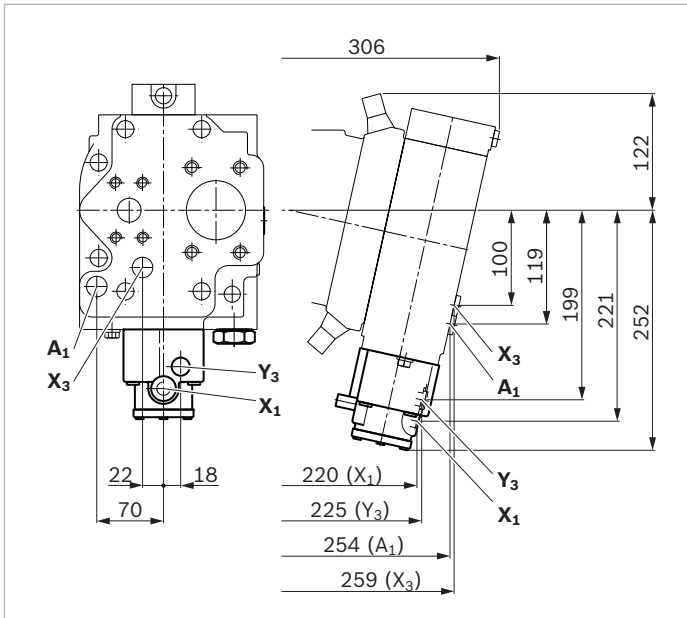


▼ **EP2** – Proportional control electric, positive control

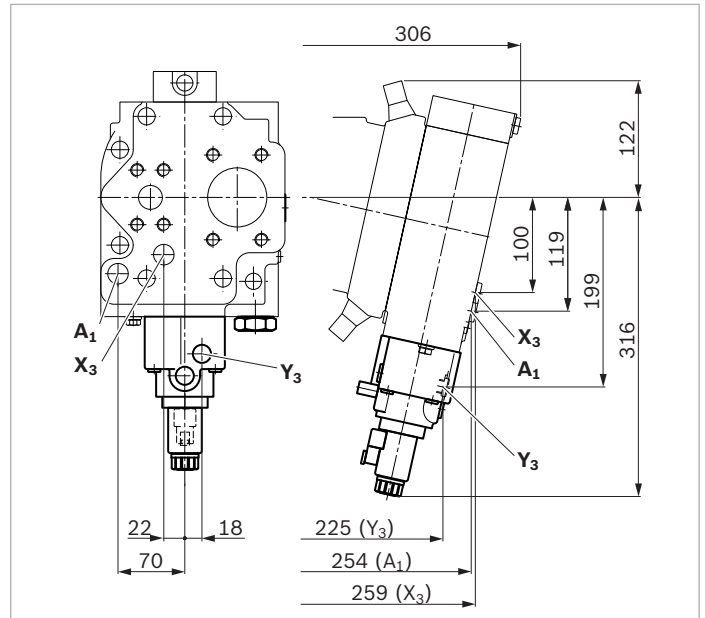

**Dimensions, size 160**


**LR – Power controller without power override**

All of the variants of the controllers on pages 38 and 39 are shown for the clockwise direction of input rotation (view Y)

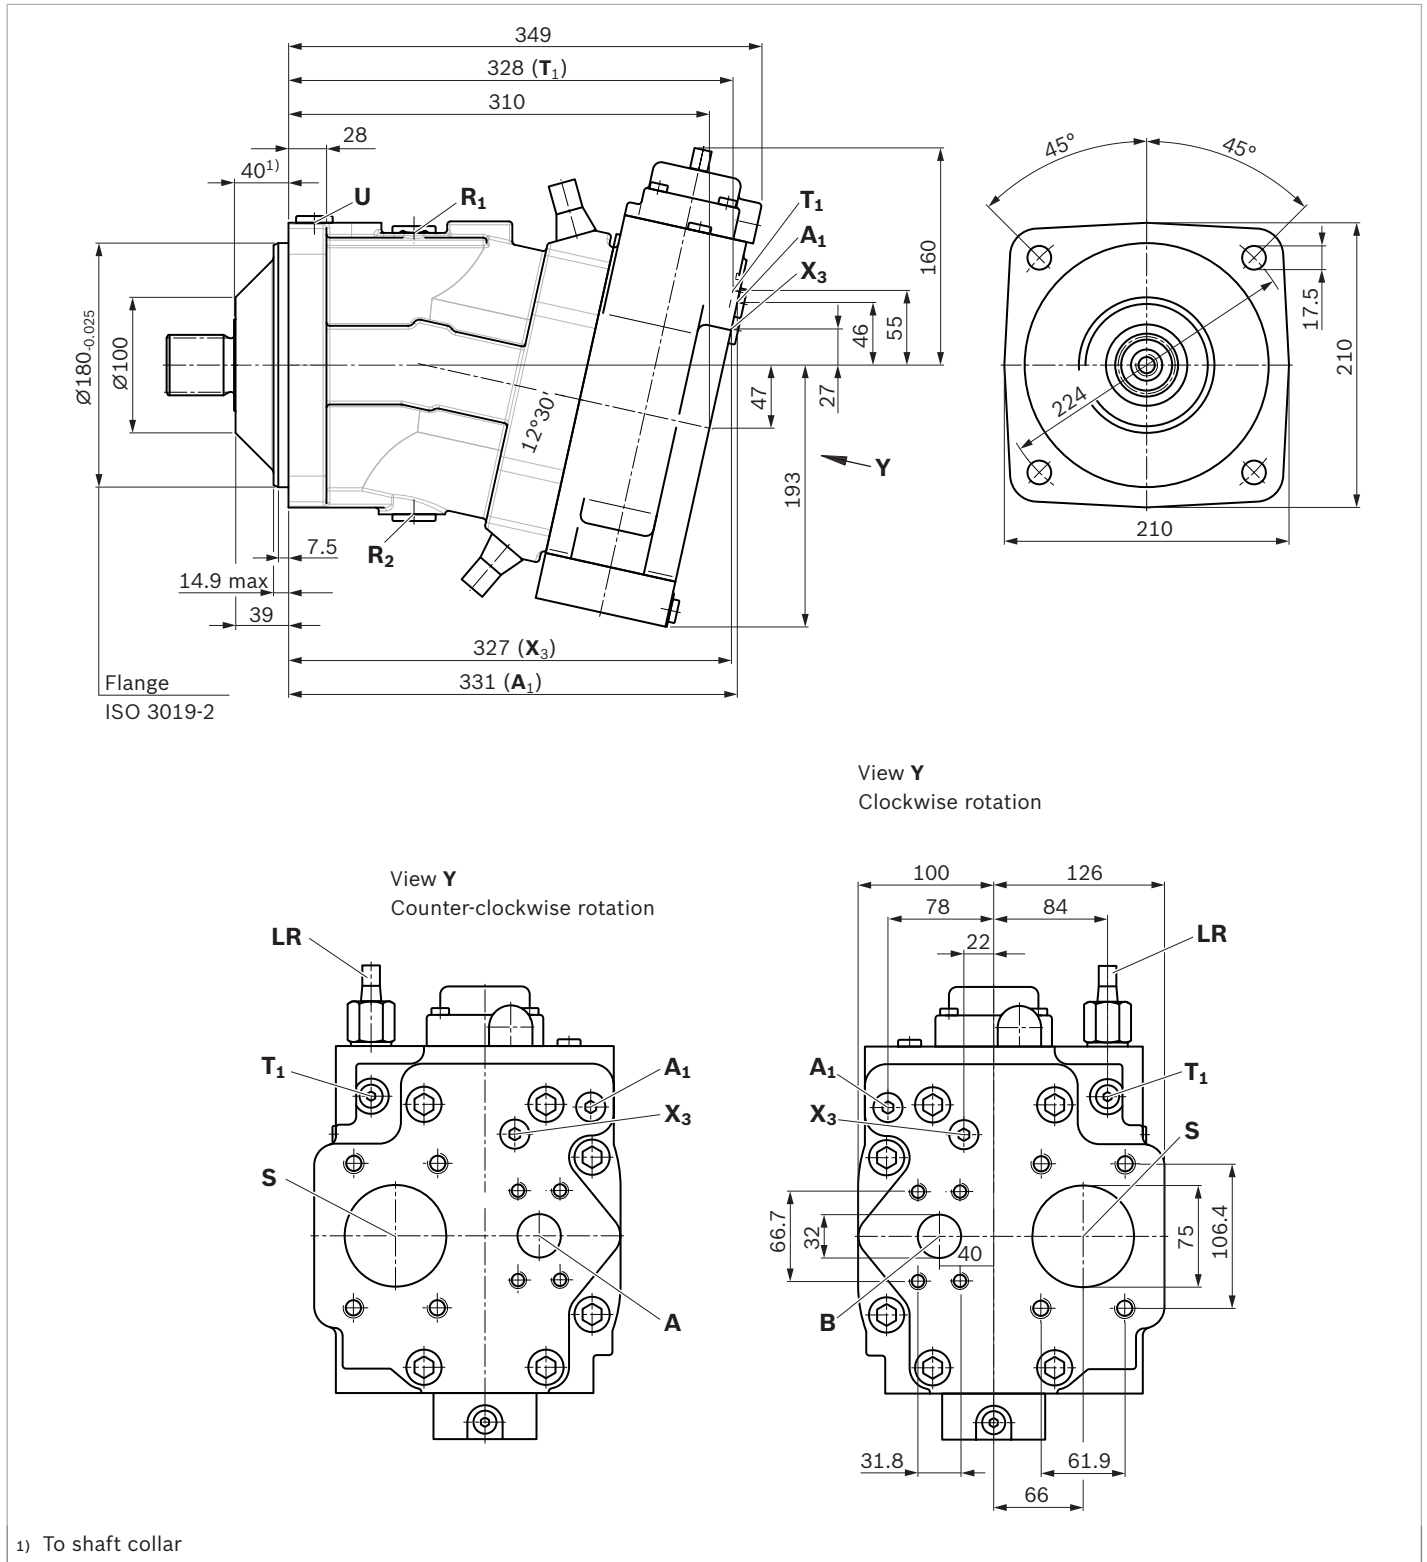


## ▼ Splined shaft DIN 5480

Z – W45×2×21×9g



## ▼ Parallel keyed shaft DIN 6885

P – AS14×9×70

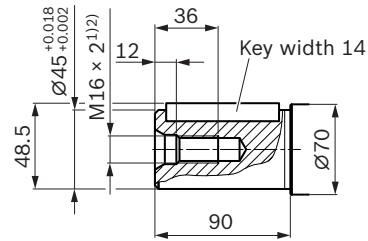


Ports	Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>3)</sup>	Status
<b>A (B)</b>	Working port (high-pressure series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	1 1/4 in M14 × 1.5; 19 deep	400 O
<b>S</b>	Suction port (standard series) fastening thread	SAE J518 <sup>4)</sup> DIN 13	3 in M16 × 1.5; 24 deep	2 O
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M22 × 1.5; 14 deep	2 X
<b>R<sub>1</sub>, R<sub>2</sub></b>	Air bleed	DIN 3852 <sup>5)</sup>	M26 × 1.5; 16 deep	2 X
<b>A<sub>1</sub></b>	Measuring high pressure	DIN 3852 <sup>5)</sup>	M16 × 1.5; 12 deep	400 X
<b>T<sub>1</sub></b>	Control fluid drain	DIN 3852 <sup>5)</sup>	M12 × 1.5; 12 deep	400 X <sup>6)</sup>
<b>X<sub>3</sub></b>	Override	DIN 3852 <sup>5)</sup>	M16 × 1.5; 12 deep	400 X
<b>Y<sub>3</sub></b>	External control pressure	DIN 3852 <sup>5)</sup>	M14 × 1.5; 12 deep	40 X
<b>X<sub>1</sub></b>	Pilot pressure	DIN 3852 <sup>5)</sup>	M14 × 1.5; 12 deep	40 O
<b>X<sub>4</sub></b>	Load pressure	DIN 3852 <sup>5)</sup>	M14 × 1.5; 12 deep	400 O
<b>M<sub>1</sub></b>	Control pressure measurement	DIN 3852 <sup>5)</sup>	M12 × 1.5; 12 deep	400 X


- Center bore according to DIN 332 (thread according to DIN 13)
- For notes on tightening torques, see instruction manual.
- Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

- The spot face can be deeper than specified in the appropriate standard.
- For versions with a pressure controller or pressure cut-off, a drain line is needed to relieve port **T<sub>1</sub>** to the reservoir.  
O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)


▼ **LRD** – Power controller with pressure cut-off

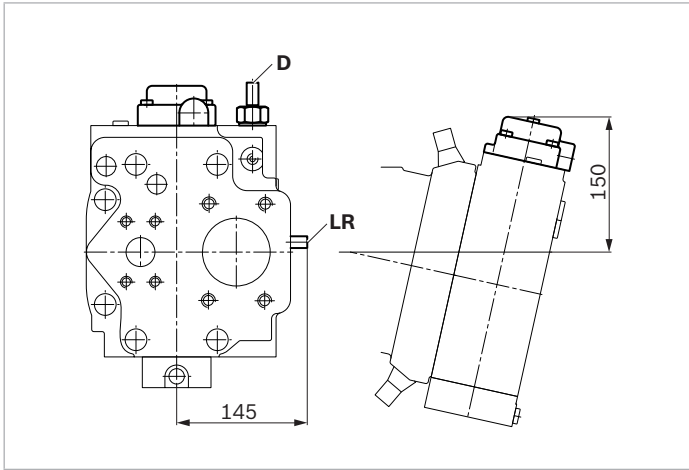


▼ **LRDS** – Power control with pressure cut-off and load sensing

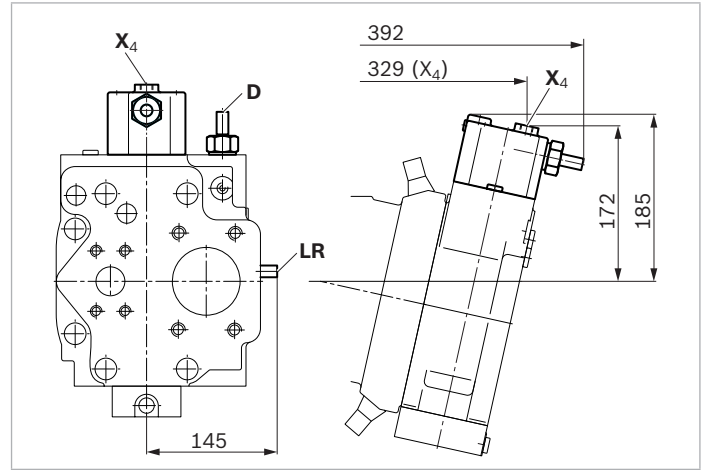


▼ **LRDH1** – Power control with pressure cut-off and stroke limiter

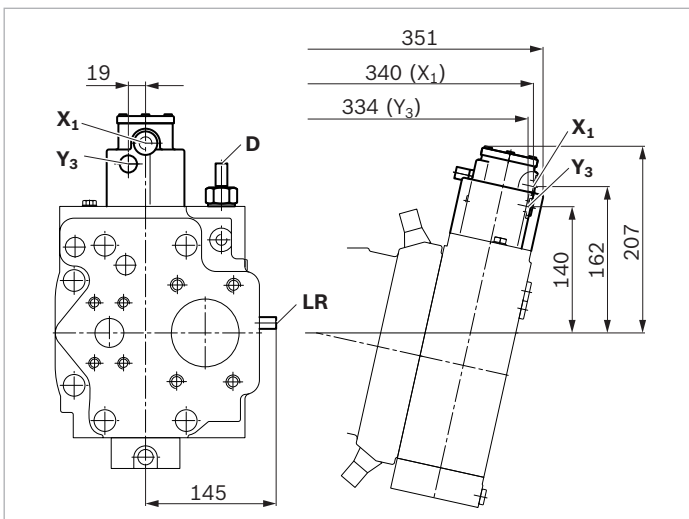


▼ **DR/DRG** – Pressure controller/pressure controller remotely controlled

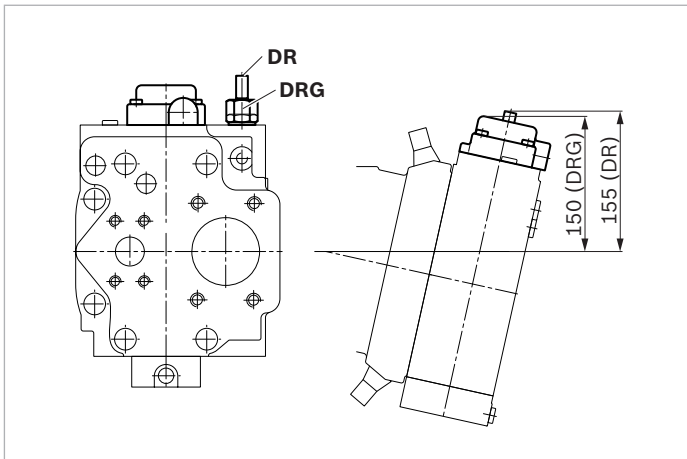


▼ **DRS** – Pressure controller with load sensing

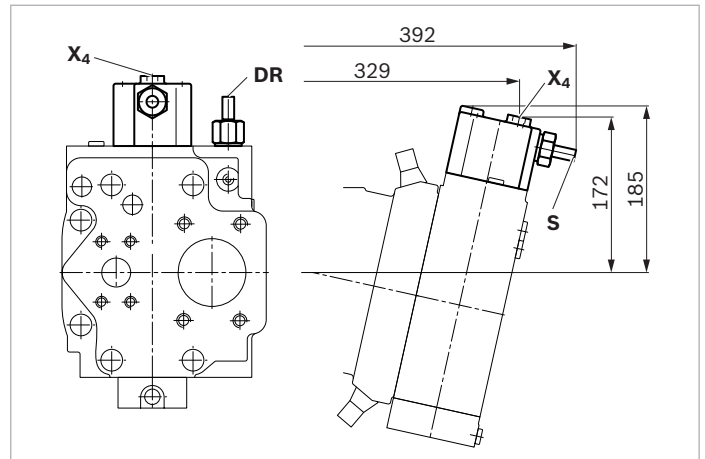

▼ **HD1, HD1G** – Proportional hydraulic control, positive control, and variant with pressure cut-off, remotely controlled

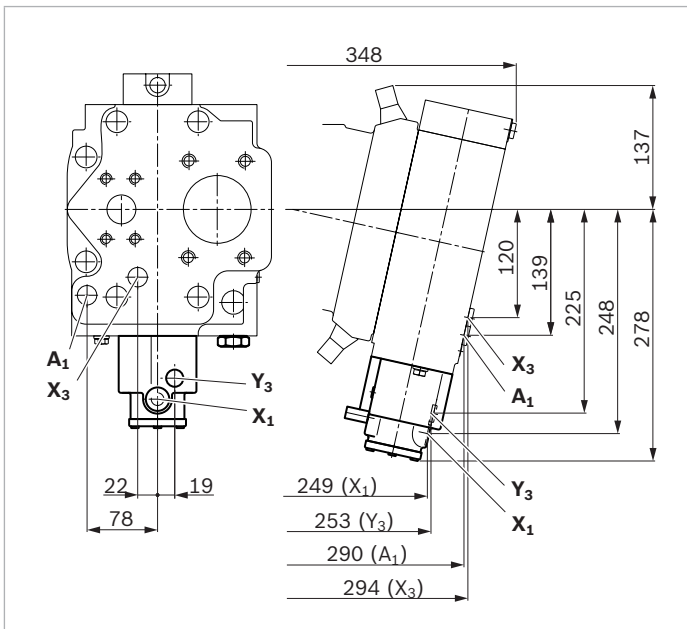

▼ **EP2** – Proportional control electric, positive control

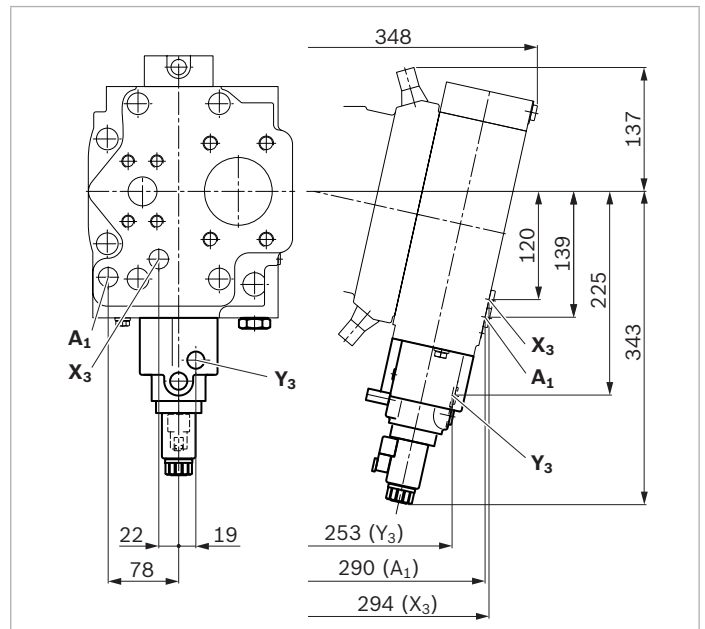

## Connector for solenoids


### DEUTSCH DT04-2P-EP04

Molded connector, 2-pin, without bidirectional suppressor diode

There is the following type of protection with mounted mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

#### ▼ Circuit symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery.

This can be supplied by Bosch Rexroth on request (material number R902601804).

#### Note

If necessary, you can change the connector orientation by turning the solenoid housing.

The procedure can be taken from the instruction manual.

## Installation instructions

### General

At commissioning and during operation, the axial piston unit must be filled with hydraulic fluid and air bled. This must also be observed following a long standstill as the axial piston unit can empty via the hydraulic lines. Particularly in the installation position "drive shaft upwards", filling and air bleeding must be carried out completely as there is, for example, a danger of dry running. The pump housing is internally connected to the suction chamber. A separate drain line from the case to the reservoir is not needed. Exception: For versions with pressure controller or pressure cut-off, a drain line is needed to relieve port **T<sub>1</sub>** to the reservoir.

To achieve favorable noise values, decouple all connecting lines using elastic elements.

In all operating conditions, the suction line and the drain line must flow into the reservoir below the minimum fluid level. The minimum suction pressure at port **S** must not fall below 0.8 bar absolute during operation either.

When designing the reservoir, ensure that there is adequate spacing between the suction line and the drain line. This minimizes oil turbulence and carries out degassing, which prevents the heated hydraulic fluid from being sucked directly back in again.

### Notes

- ▶ Axial piston units with electric components (e.g. electric controls, sensors) must not be installed in a reservoir below the fluid level.
- ▶ In certain installation conditions, an influence on the control characteristic curves can be expected. Gravity, dead weight and case pressure can cause minor shifts in characteristics and changes in response time.


Key	
<b>R<sub>1</sub>/R<sub>2</sub></b>	Air bleed port
<b>U</b>	Bearing flushing
<b>S</b>	Suction port
<b>T<sub>1</sub></b>	Control fluid drain
<b>h<sub>t min</sub></b>	Minimum required immersion depth (200 mm)
<b>h<sub>min</sub></b>	Minimum required spacing to reservoir base (100 mm)
<b>SB</b>	Baffle (baffle plate)

### Installation position


See the following examples **1** to **4**.

Additional installation positions are available upon request. Recommended installation position: **1** and **2**.


Installation position	Air bleeding	Filling
<b>1</b>	<b>R<sub>1</sub></b>	<b>S</b>




<b>2</b>	<b>R<sub>2</sub></b>	<b>S</b>
----------	----------------------	----------



<b>3</b>	<b>T<sub>1</sub></b>	<b>S</b>
----------	----------------------	----------



<b>4</b>	<b>U</b>	<b>S</b>
----------	----------	----------



## Project planning notes

- ▶ The A7VO pump is designed to be used in open circuits.
- ▶ Project planning, installation and commissioning of the axial piston units requires the involvement of skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual thoroughly and completely. If necessary, request them from Bosch Rexroth.
- ▶ Before finalizing your design, request a binding installation drawing.
- ▶ The specified data and notes must be observed.
- ▶ Pressure controllers are no protection from pressure overload. A separate pressure relief valve is to be provided in the hydraulic system.
- ▶ Depending on the operating condition of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- ▶ Not all versions of the product are approved for use in a safety function pursuant to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports can only be used to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control and regulation systems (e.g. valve spools) may in certain circumstances become stuck in an undefined position due to contamination (e.g. contaminated hydraulic fluid, abrasion or residual dirt from components). As a result, the hydraulic fluid flow or build-up of torque of the axial piston unit will no longer respond correctly to the operator's commands. Even the use of different filter cartridges (external or internal inlet filter) will not rule out a fault but merely minimize the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to set the consumer being driven to a safe position (e.g. safe stop) and if necessary to ensure it is properly implemented.

**Bosch Rexroth AG**  
Mobile Applications  
Glockeraustrasse 4  
89275 Elchingen, Germany  
Tel. +49 7308 / 82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from this information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.





**Bosch Rexroth AG**

Mobile Applications  
Glockeraustrasse 4  
89275 Elchingen, Germany  
Tel. +49 7308 / 82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from this information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# Axial piston variable pump A7VO

**RE 92203/06.09** 1/52  
Replaces: 05.99

## Data sheet

Series 63  
Sizes NG250 to 500  
Nominal pressure 350 bar  
Peak pressure 400 bar  
Open circuit



## Contents

Type code for Standard program	2
Technical data	4
Dimensions size 250	10
Dimensions size 250 High-Speed-Version	12
Dimensions size 355	14
Dimensions size 500	16
<b>DR</b> Pressure control	18
<b>DRG</b> remote pressure control	20
<b>LRD</b> Power control with integrated pressure control	22
<b>LRG</b> with remote pressure control	26
<b>LRDH</b> with hydraulic stroke limiter	28
<b>LRDN</b> with hydraulic stroke limiter	31
<b>HD.D</b> Hydraulic control, pilot pressure dependent	34
<b>HD.D</b> with intrgrated pressure control	37
<b>HD.G</b> with remote pressure control	38
<b>EP.D</b> Electric control with proportional valve	40
<b>EP.D</b> with integrated pressure control	42
<b>EP.G</b> with remote pressure control	43
Plug	45
Optical swivel angle indicator	46
Electric swivel angle indicator	47
Installation instructions standard program	48
Installation instructions High-Speed-Version	49
General information	52

## Features

- Variable axial piston pump with tapered piston rotary group in bent axis design for hydrostatic drives in open circuits
- For operation in mobile and industrial applications
- The flow is proportional to the drive speed and the displacement and steplessly variable from  $q_{v \max}$  to  $q_{v \min} = 0$
- Wide range of controls and adjustment devices
- Compact, robust bearing system for long service life
- Available with Long Life bearings for special fluids and extreme service life requirements
- Pressure control is standard
- Optical or electric swivel angle indicator available

# Type code for standard program

	<b>A7V</b>		<b>O</b>			<b>/</b>	<b>63</b>		<b>-</b>	<b>V</b>				
01	02	03	04	05	06		07	08		09	10	11	12	13

## Fluid / Version

		250	355	500	
01	Mineral oil and HFD. HFD only in conjunction with Long-Life-Lagerung „L“ (no code)	●	●	●	
	For operation on HFC, special high performance version A4VSO...F see RE 92053	●	●	–	
	High-Speed-Version (only mineral oil)	●	–	–	H <sup>1)</sup>

## Axial piston unit

02	Bent axis design, variable, nominal pressure 350 bar, peak pressure 400 bar				A7V
----	---	--	--	--	-----

## Drive shaft bearings

		250	355	500	
03	Mechanical bearings (no code)	●	●	●	
	Long-Life-bearings	●	●	●	L

## Type of operation

04	Pump, open circuit				O
----	--------------------	--	--	--	---

## Size

05	Displacement $V_{g \max}$ [cm <sup>3</sup> ] NG28 to 160 see RE 92202	250	355	500	
----	--	-----	-----	-----	--

## Control devices

		250	355	500	
06	Pressure control	●	●	●	DR
	Pressure control, remotely adjustable	●	●	●	DRG
	Power control				
	with integrated pressure control (fixed setting)	●	●	●	LRD
	hydraulic stroke limiter	●	●	●	LRDH1
	initial position $V_{g \max}$	●	●	●	LRDH2
		●	●	●	LRDH3
	hydraulic stroke limiter	●	●	●	LRDN1
	initial position $V_{g \min}$	●	●	●	LRDN2
		●	●	●	LRDN3
	with pressure control remotely adjustable	●	●	●	LRG
	hydraulic stroke limiter	●	●	●	LRGH1
	initial position $V_{g \max}$	●	●	●	LRGH2
		●	●	●	LRGH3
	hydraulic stroke limiter	●	●	●	LRGN1
	initial position $V_{g \min}$	●	●	●	LRGN2
		●	●	●	LRGN3
	Hydraulic control, pilot pressure dependent,				
	with integrated pressure control (fixed setting)	●	●	●	HD1D
		●	●	●	HD2D
	●	●	●	HD3D	
with pressure control, remotely adjustable	●	●	●	HD1G	
	●	●	●	HD2G	
	●	●	●	HD3G	
Hydraulic control, with electric proportional valve <sup>2)</sup>					
with integrated pressure control (fixed setting)	Control voltage 12 V	●	●	●	EP1D
	Control voltage 24 V	●	●	●	EP2D
with pressure control, remotely adjustable	Control voltage 12 V	●	●	●	EP1G
	control voltage 24 V	●	●	●	EP2G

<sup>1)</sup> recommended for new projects

<sup>2)</sup> for operation on HFD-fluids please observe RE 29181 (proportional pressure reducing valve type DRE4K)

## Type code for standard program

	<b>A7V</b>		<b>O</b>			<b>/</b>	<b>63</b>		<b>-</b>	<b>V</b>				
01	02	03	04	05	06		07	08		09	10	11	12	13

		250	355	500		
<b>Series</b>						
07	Series 6, Index 3	●	●	●	<b>63</b>	
<b>Direction of rotation</b>						
08	with view on drive shaft	clockwise	●	●	●	<b>R</b>
		counter clockwise	●	●	●	<b>L</b>
<b>Seals</b>						
09	FKM (Fluoro-rubber)	●	●	●	<b>V</b>	
<b>Drive shaft</b>						
10	Splined shaft to DIN 5480	●	●	●	<b>Z</b>	
	Keyed parallel shaft to DIN 6885	●	●	●	<b>P</b>	
<b>Mounting flange</b>						
11	Similar to ISO 3019-2	4-hole	●	-	-	<b>B</b>
		8-hole	-	●	●	<b>H</b>
<b>Service line connections</b>						
12	SAE-flanged port B or A, at rear (metric fixing bolts) SAE flanged port S, at rear (metric fixing bolts)	●	●	●	<b>01</b>	
	SAE- flanged ports B or A, on opposite side (metric fixing bolts) SAE- flanged port S, on opposite side (metric fixing bolts)	●	●	●	<b>02</b>	
<b>Swivel angle indicator</b>						
13	Without swivel angle indicator (no code)	●	●	●		
	With optical swivel angle indicator	●	●	●	<b>V</b>	
	With electric swivel angle indicator	●	●	●	<b>E</b>	

### Note

Exact value for  $V_{g \min}$  and  $V_{g \max}$  (displacement) must be stated in clear text when ordering ( $V_{g \min} \dots \text{cm}^3/\text{rev.}$ ,  $V_{g \max} \dots \text{cm}^3/\text{rev.}$ )

Setting range  $V_{g \min}: 0 \text{ to } 0.2 \cdot V_{g \max}$   
 $V_{g \max}: V_{g \max} \text{ down to } 0.8 \cdot V_{g \max}$

● = Available

- = Not available

■ = Preferred program

# Technical data

## Hydraulic fluid

For extensive information on the selection of hydraulic fluids and application conditions please consult our data sheets RE 90220 (mineral oils), RE 90221 (ecologically acceptable fluids) and RE 90223 (HF-fluids).

The variable pump A7VO is not suitable for operation on HFA fluids. When operating on HFD or ecologically acceptable fluids, limitations to the technical data and seals according to RE 90223 and RE 90221 must be observed.

For the sizes 250 and 355 with **operation on HFC-fluids**, the **A4VSO..F** must be used. For certain selected HFC fluids the same pressures and speeds are permissible as for operation on mineral oil. See RE 92053.

When ordering, state the fluid to be used in clear text.

### Operating viscosity range

In order to obtain optimum efficiency and service life, we recommend that the operating viscosity (at operating temperature) be selected in the range

$$v_{\text{opt}} = \text{opt. viscosity range } 16 \dots 36 \text{ mm}^2/\text{s}$$

referred to tank temperature (open circuit).

### Limit of viscosity range

For critical operating conditions the following values apply:

$$v_{\text{min}} = 10 \text{ mm}^2/\text{s}$$

for short periods ( $t < 3 \text{ min}$ )  
at max. permissible case drain temperature  
 $t_{\text{max}} = +90^\circ\text{C}$ .

$$v_{\text{max}} = 1000 \text{ mm}^2/\text{s}$$

for short periods (on cold start maximum operating viscosity of  $100 \text{ mm}^2/\text{s}$  should be reached within 15 min)  
 $t_{\text{min}} = -25^\circ\text{C}$

Note, that the maximum fluid temperature of  $90^\circ\text{C}$  may not be exceeded at any point (e.g. around the bearings). The fluid temperature in the bearing area is influenced by drive speed and pressure, and is typically 12 K higher than the average case drain temperature.

### Temperature range


(see selection diagram)

$$t_{\text{min}} = -25^\circ\text{C}$$

$$t_{\text{max}} = +90^\circ\text{C}$$

For detailed information on operation with low temperatures see RE 90300-03-B.

### Selection diagram

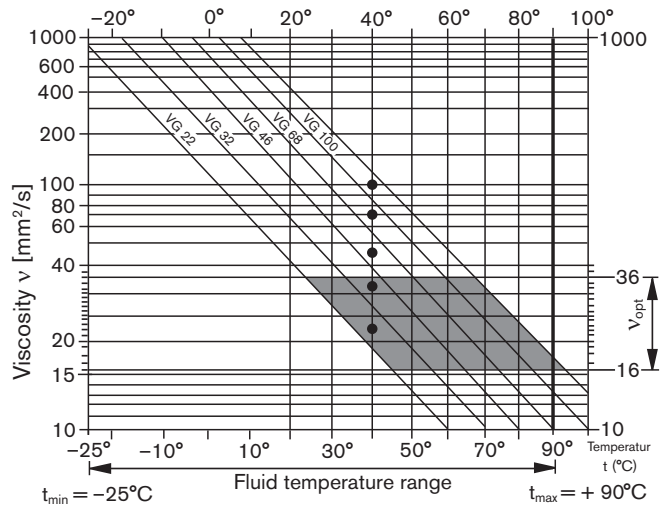

### Notes on the selection of hydraulic fluids

In order to select the correct fluid, it is necessary to know the operating temperature in the tank (open circuit) in relation to the ambient temperature.

The hydraulic fluid should be selected so that within the operating temperature range, the viscosity lies within the optimum range ( $v_{\text{opt}}$ ) see shaded section in the selection diagram. We recommend, that the higher viscosity grade is selected in each case.

Example: at an ambient temperature of  $X^\circ\text{C}$  the operating temperature in the tank is  $60^\circ\text{C}$ . In the optimum viscosity range ( $v_{\text{opt}}$ ; shaded area), this corresponds to grades VG 46 or VG 68; select: VG 68.

### Important:

The case drain temperature is influenced by pressure and speed and is always higher than the tank temperature. However the max. temperature at any point in the system may not exceed  $90^\circ\text{C}$ .

If the above conditions cannot be met, due to extreme operating parameters we recommend a housing flushing via port U.

### Filtration

The finer the filtration, the better the achieved cleanliness of the fluid and the longer the life of the axial piston pump.

To ensure a reliable functioning of the axial piston unit, a minimum cleanliness class of

20/18/15 acc. to ISO 4406 is necessary.



## Technical data

### Long-Life-Bearings (L)

For long service life requirements and when using HFD-fluids. Identical external dimensions as units with standard bearings. A retroactive conversion to Long-Life Bearings is possible. It is recommended, that the bearings and housing be flushed via port U.

### Bearing flushing

#### Flushing flows (recommended)

NG	250	355	500
$q_{\text{flow}}$ (L/min)	10	16	16

### Operation in standby (in pressure control mode)

Operation in standby, without external flushing via port U is only permissible for short periods:

A7VO maximum 15 min at 200 bar  
3 min at 350 bar


HA7VO maximum 5 min at 200 bar  
1 min at 350 bar

For other pressure levels information on request

Influence of drive speed can be neglected


At tank temperature  $\leq 50^\circ\text{C}$

For longer periods of standby operation it is necessary to implement housing flushing via port U.

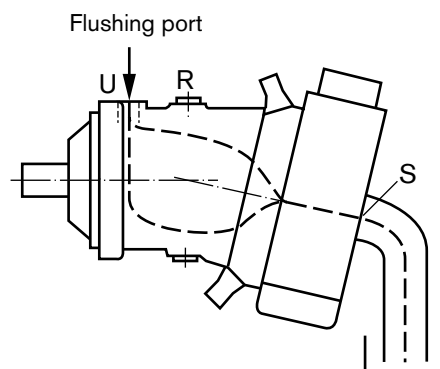

Flushing flows for A7VO same as bearing flushing

#### Flushing flows HA7VO (High-Speed-version)

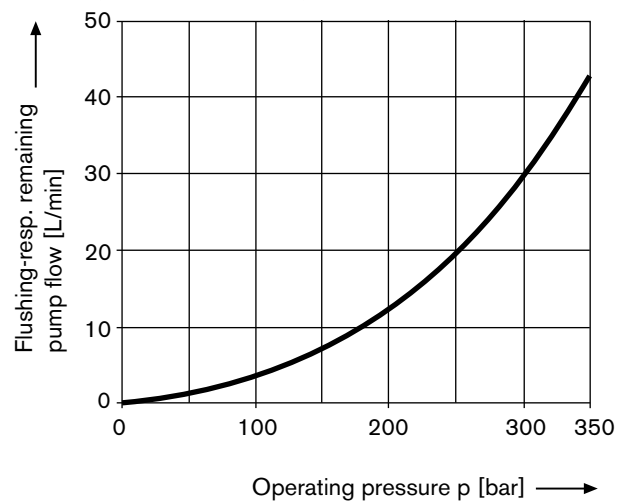




# Technical data

## Shaft seal FKM (Fluoro-rubber)

### Permissible case pressure

The service life of the shaft seal is influenced by pump drive speed and case pressure. It is recommended not to exceed the continuous averaged case pressure of 3 bar abs. (max. perm. case pressure 4 bar abs. at reduced speed, see diagram).

The case pressure must be equal to or higher than the external pressure on the shaft seal (in case of the standard version). For the High-Speed-version please consult us.

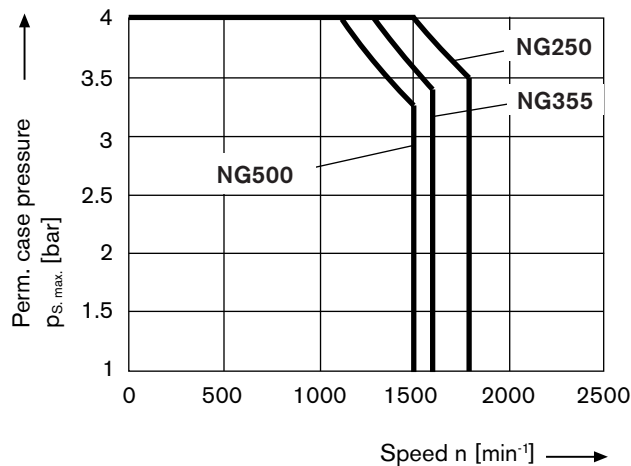

Special operating conditions may make it necessary to restrict these values .

### Important:

- maximum permissible drive speed of variable pump (see table of values, page 8)
- max. permissible case pressure  $p_{s,max}$  \_\_\_\_\_ 4 bar
- an increase in case pressure results in a higher control begin of the **HD**- and **DR**- controls.

Exact details of the shift in control characteristics on request.

Factory setting of the control begin at  $p_s = 1$  bar.

### Temperature range

The FKM shaft seal is suitable for case temperatures of -25° C to +90°C.

# Technical data

**Table of values** (theoretical values, without considering  $\eta_{mh}$  and  $\eta_v$ ; values rounded off)

Size	NG		250	250H	355	500	
	High-Speed-Version						
Displacement	$V_{g \max}^{1)}$	cm <sup>3</sup>	250	250	355	500	
	$V_{g \min}^{1)}$	cm <sup>3</sup>	0	0	0	0	
Speed maximum <sup>2)4)</sup>	at $V_{g \max}$	$n_{nom}$	rpm	1500	1800	1320	1200
Speed maximum <sup>3)4)</sup>	at $V_g \leq V_{g \max}$	$n_{max}$	rpm	1800	–	1600	1500
Maximum flow <sup>4)</sup>	at $n_{nom}$ ( $V_{g \max}$ )	$q_{v \max \text{ nom}}$	L /min	375	450	469	600
Maximum power <sup>4)</sup>	at $q_{v \text{ nom}}$ and $\Delta p = 350$ bar	$P_{nom}$	kW	219	262	273	350
Torque <sup>4)</sup>	at $V_{g \max}$ and $\Delta p = 350$ bar (continuous operation)	$T_{max}$	Nm	1391	1391	1978	2785
Rotary stiffness	$V_{g \max}$ to $0.5 \cdot V_{g \max}$	$c_{min}$	Nm/rad	59500	59500	74800	115000
	$0.5 \cdot V_{g \max}$ to $0_{(interpolated)}$	$c_{max}$	Nm/rad	181000	181000	262000	391000
Moment of inertia rotary group		$J_{TW}$	kgm <sup>2</sup>	0.061	0.061	0.102	0.178
Angular acceleration maximum		$\alpha$	rad/s <sup>2</sup>	10000	10000	8300	5500
Case volume		$V$	L	3	3	5	7
Weight approx.		$m$	kg	102	102	173	234

<sup>1)</sup> Standard setting for limitation of the swivel angle. If another setting is required, please state in clear text.

Setting range  $V_{g \max}$ :  $V_{g \max}$  to  $0.8 \cdot V_{g \max}$

$V_{g \min}$ : 0 to  $0.2 \cdot V_{g \max}$

<sup>2)</sup> Nominal speed in self priming operation with an absolute pressure ( $p_s$ ) of 1 bar at inlet port S and mineral oil with a density of 0,88 kg/L

<sup>3)</sup> The values apply for  $V_g \leq V_{g \max}$  or an increase in inlet pressure  $p_s$  at the inlet port S (see diagram page 5)

<sup>4)</sup> Depending on the type of fluid, restrictions may be necessary, see chapter hydraulic fluids page 4

## Important

Exceeding the maximum or falling below the minimum permissible values can lead to a loss of function, a reduction in operational service life or total destruction of the axial piston unit. More details on limiting values for speed fluctuations, reduction in angular acceleration dependent on the frequency and the permissible starting angular acceleration (below the maximum angular acceleration) can be found in data sheet RE 90261.

## Determination of size

$$\text{Flow } q_v = \frac{V_g \cdot n \cdot \eta_v}{1000} \quad [\text{L/min}]$$

$$\text{Drive torque } T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{mh}} \quad [\text{Nm}]$$

$$\text{Power } P = \frac{2\pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t} \quad [\text{kW}]$$

$V_g$  = Geometr. displacement per revolution in cm<sup>3</sup>

$\Delta p$  = Differential pressure in bar

$n$  = Speed in rpm



$\eta_v$  = Volumetric efficiency

$\eta_{mh}$  = Mechanical-hydraulic efficiency

$\eta_t$  = Overall efficiency ( $\eta_t = \eta_v \cdot \eta_{mh}$ )

# Technical data

## Permissible radial and axial forces on the drive shaft

Size	NG	250	355	500
Radial force, maximum <sup>1)</sup> (at $p_{A,B} = 1 \text{ bar}$ )	 $F_{q \max}$ N	1200	1500	1900
Axial force, maximum <sup>2)</sup> (at $p_{A,B} = 1 \text{ bar}$ )	 $+ F_{ax \max}$ N $- F_{ax \max}$ N	4000 1200	5000 1500	6250 1900

<sup>1)</sup> When at standstill or pressureless circulation of the axial piston unit. Under pressurized condition higher forces are permissible, please consult us

<sup>2)</sup> Maximum permissible axial force at standstill or pressureless circulation of the axial piston unit

Regarding the permissible axial force, the direction of the force must be taken into consideration:

$- F_{ax \max}$  = increase of bearing life

$+ F_{ax \max}$  = decrease of bearing life

### Influence of the radial force $F_q$ on the bearing life


Through a favourable direction of the actuating radial force  $F_q$ , the internal load on the bearings can be compensated for and in this manner an optimum on bearing life can be obtained, please consult us.





# Dimensions size 250

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Ports A (B) and S at rear (01)

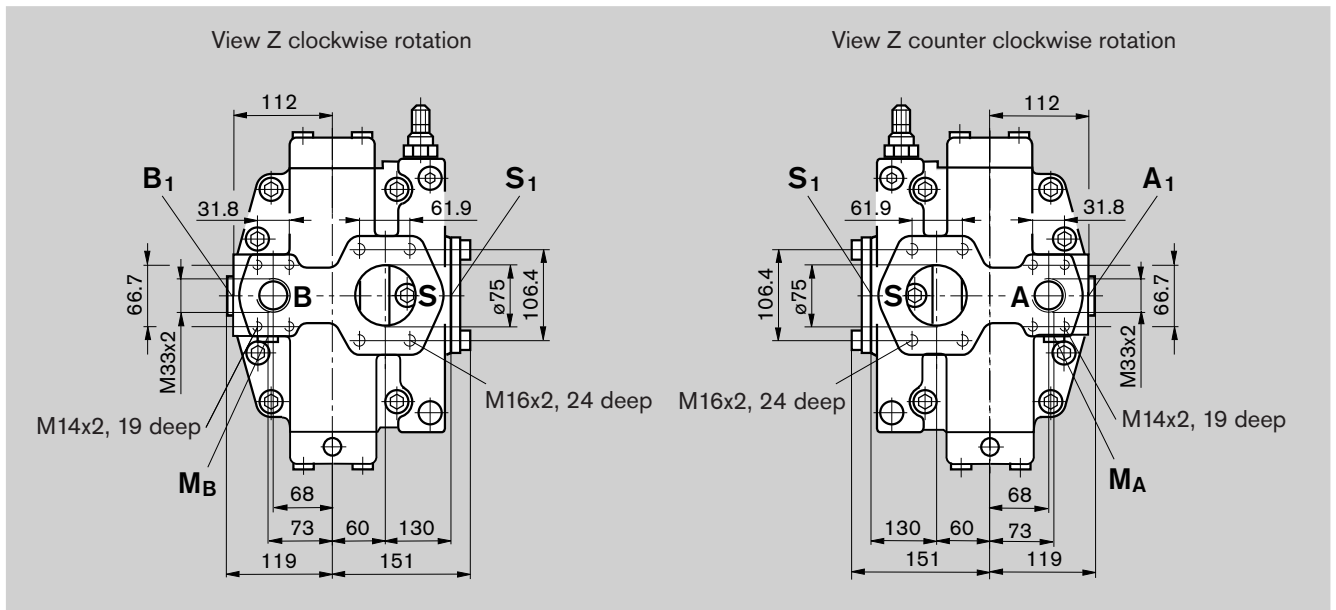

## Drive shafts

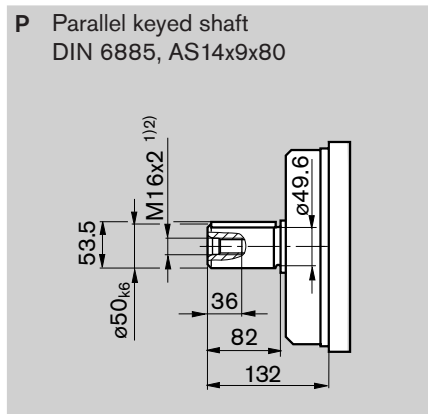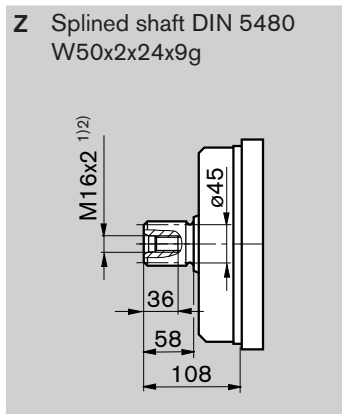

<sup>1)</sup> Centering bore to DIN 332  
(Thread to DIN 13)

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
A, (B)	Pressure outlet (high pressure range) Fixing thread	SAE J518 <sup>4)</sup> DIN 13	1 1/4in M14x2; 19 deep	400	O
S	Suction (standard pressure range) Fixing thread	SAE J518 <sup>4)</sup> DIN 13	3 in M16x2; 24 deep	7	O
U	Flushing	DIN 3852	M14x1.5; 12 deep	3	X
R <sub>1</sub>	Case drain	DIN 3852	M22x1.5; 14 deep	3	O
R <sub>2</sub>	Case drain	DIN 3852	M22x1.5; 14 deep	3	X
M <sub>A</sub> , M <sub>B</sub>	Measuring pressure A, B	DIN 3852	M14x1.5; 12 deep	400	X

<sup>2)</sup> For the max. tightening torques the general information on page 52 must be observed

<sup>3)</sup> Depending on the application, momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices and fittings.

<sup>4)</sup> Only dimensions to SAE J518

O = Must be connected (closed on delivery)


X = Plugged (in normal operation)



# Dimensions size 250 High-Speed-Version


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Ports A (B) and S at rear (01)

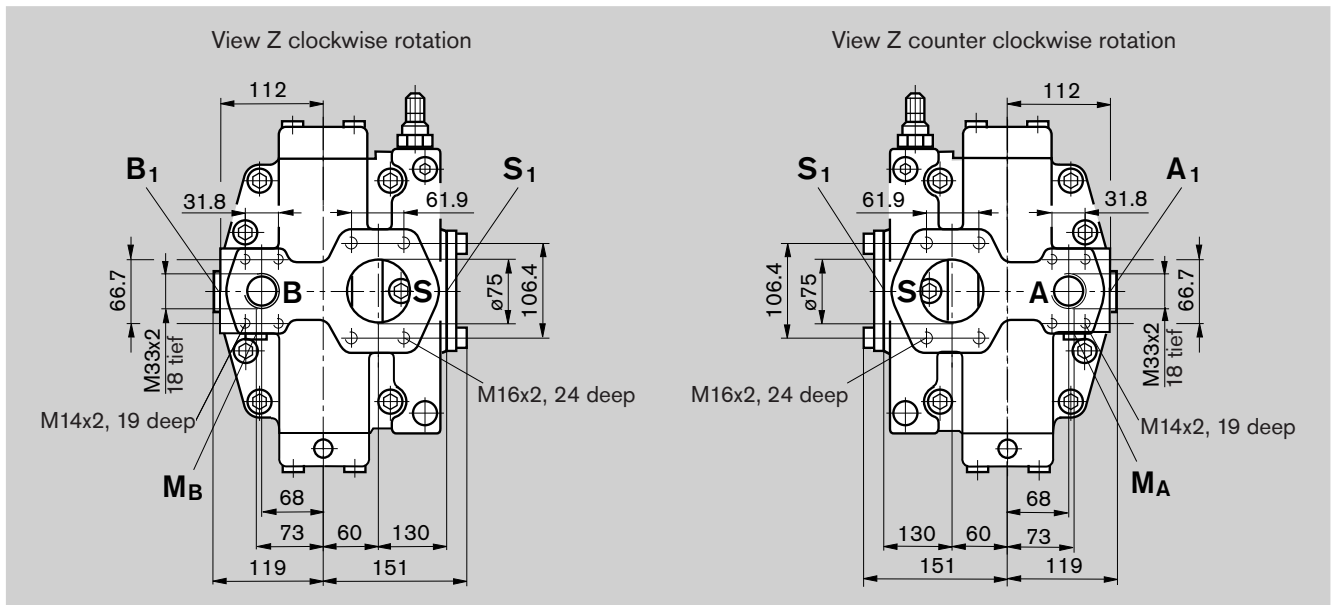


## Drive shafts

**Z** Splined shaft DIN 5480  
W50x2x24x9g



**P** Parallel keyed shaft  
DIN 6885, AS14x9x80



<sup>1)</sup> Centering bore to DIN 332  
(Thread to DIN 13)

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
A, (B)	Pressure outlet (high pressure series) Fixing thread	SAE J518 <sup>4)</sup> DIN 13	1 1/4in M14x2; 19 deep	400	O
A <sub>1</sub> , (B <sub>1</sub> )	2. Pressure outlet (high pressure series) Fixing thread	SAE J518 <sup>4)</sup> DIN 13	1 1/4in M14x2; 19 deep	400	X <sup>5)</sup>
S	Suction (standard pressure series) Fixing thread	SAE J518 <sup>4)</sup> DIN 13	3 in M16x2; 24 deep	3 <sup>6)</sup>	O
S <sub>1</sub>	2. Suction (standard pressure series) Fixing thread	SAE J518 <sup>4)</sup> DIN 13	3 in M16x2; 24 deep	3 <sup>6)</sup>	X <sup>7)</sup>
U	Flushing	DIN 3852	M14x1.5; 12 deep	3	X
R <sub>1</sub> , R <sub>2</sub>	Case drain	DIN 3852	M22x1.5; 14 deep	3	X <sup>8)</sup>
M <sub>A</sub> , M <sub>B</sub>	Measuring outlet pressure A, B	DIN 3852	M14x1.5; 12 deep	400	X

<sup>2)</sup> For the max. tightening torques the general information on page 52 must be observed

<sup>3)</sup> Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices and fittings.

<sup>4)</sup> Only dimensions to SAE J518

<sup>5)</sup> Closed pressure tight with plug M33x2

<sup>6)</sup> Note: suction chamber and leakage chamber are connected inside pump housing, observe permissible pressure load on shaft seal, see page 7

<sup>7)</sup> Closed pressure tight with flange plate

<sup>8)</sup> Both ports are plugged. Leakage chamber is connected with suction chamber. Separate case drain line to tank is not necessary.

O = Must be connected (closed on delivery)



X = Plugged (in normal operation)

# Dimensions size 355


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Ports A (B) and S on opposite sides (02), clockwise rotation


(without control devices)

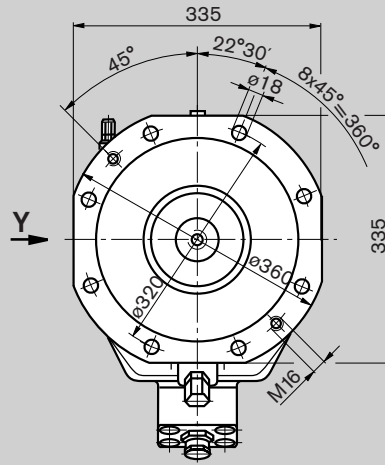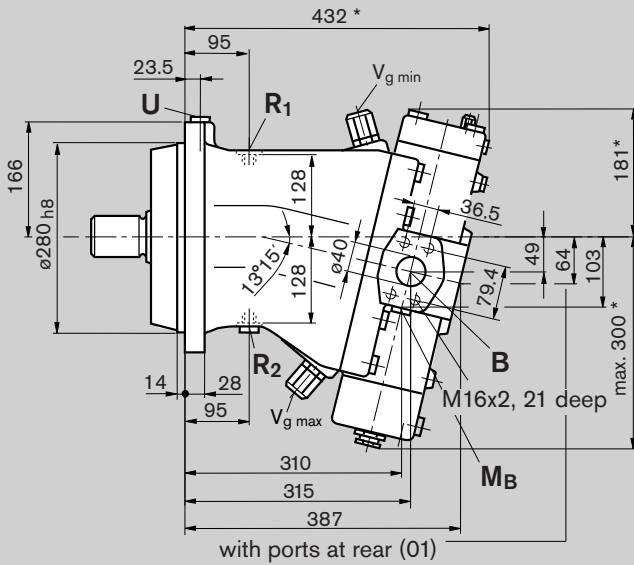


\* see control devices

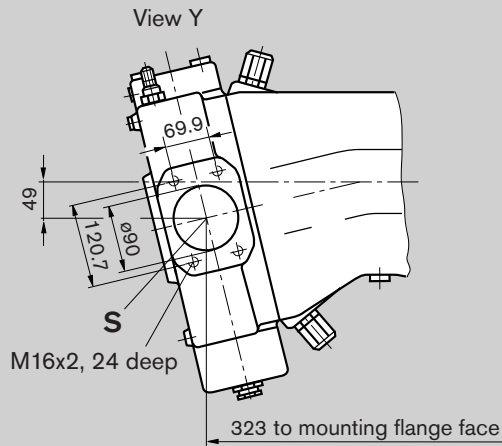

View Z clockwise rotation

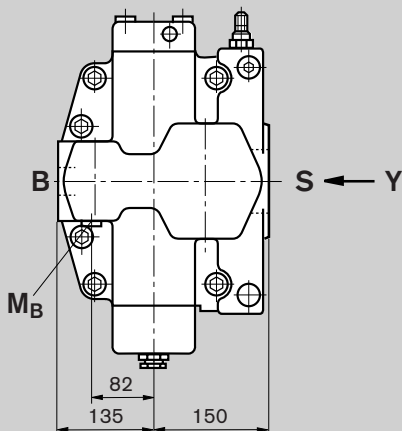

View Z counter clockwise rotation

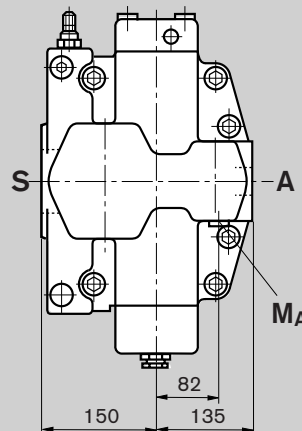






# Dimensions size 355

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Ports A (B) and S at rear (01)

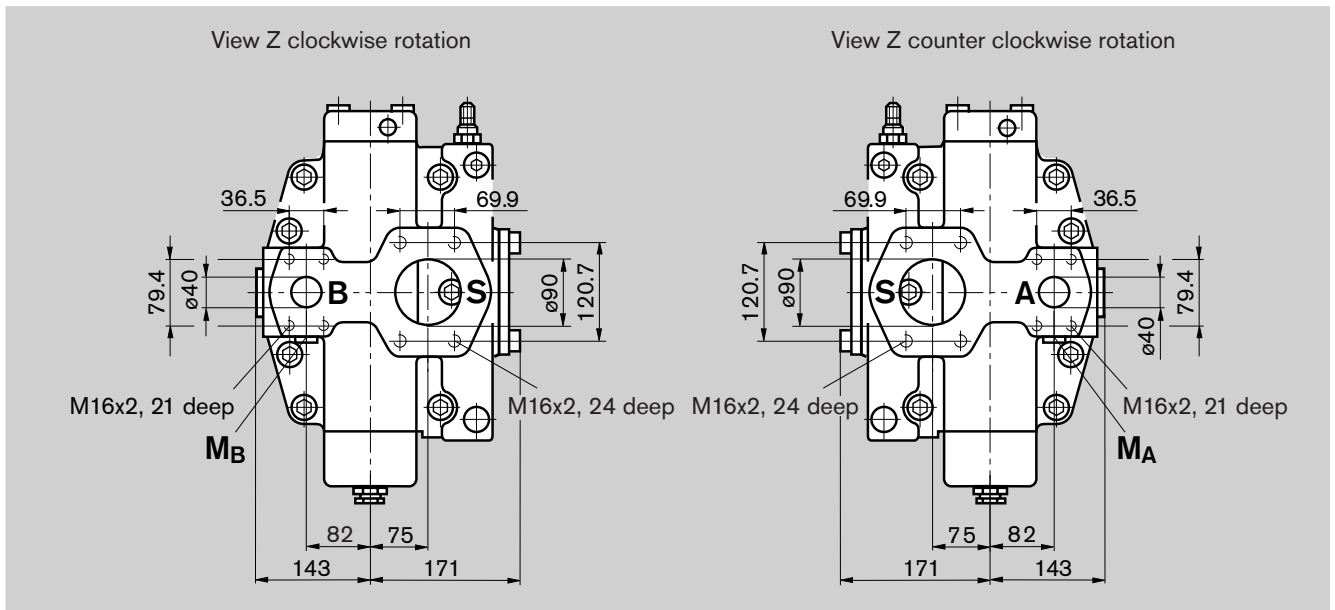

## Drive shafts

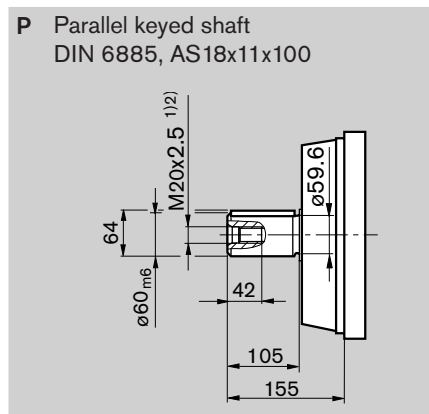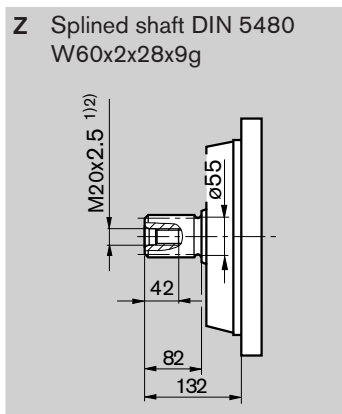

<sup>1)</sup> Centering bore to DIN 332  
(Thread to DIN 13)

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
A, (B)	Pressure outlet (high pressure range) Fixing thread	SAE J518 <sup>4)</sup> DIN 13	1 1/2in M16x2; 21 deep	400	O
S	Suction (standard pressure range) Fixing thread	SAE J518 <sup>4)</sup> DIN 13	3 1/2 in M16x2; 24 deep	7	O
U	Flushing	DIN 3852	M14x1.5; 12 deep	3	X
R <sub>1</sub>	Case drain	DIN 3852	M33x2; 18 deep	3	O
R <sub>2</sub>	Case drain	DIN 3852	M33x2; 18 deep	3	X
M <sub>A</sub> , M <sub>B</sub>	Measuring outlet pressure A, B	DIN 3852	M14x1.5; 12 deep	400	X

<sup>2)</sup> For the max. tightening torques the general information on page 52 must be observed

<sup>3)</sup> Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices and fittings.

<sup>4)</sup> Only dimensions to SAE J518

O = Must be connected (closed on delivery)


X = Plugged (in normal operation)



# Dimensions size 500


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Ports A (B) and S at rear (01)

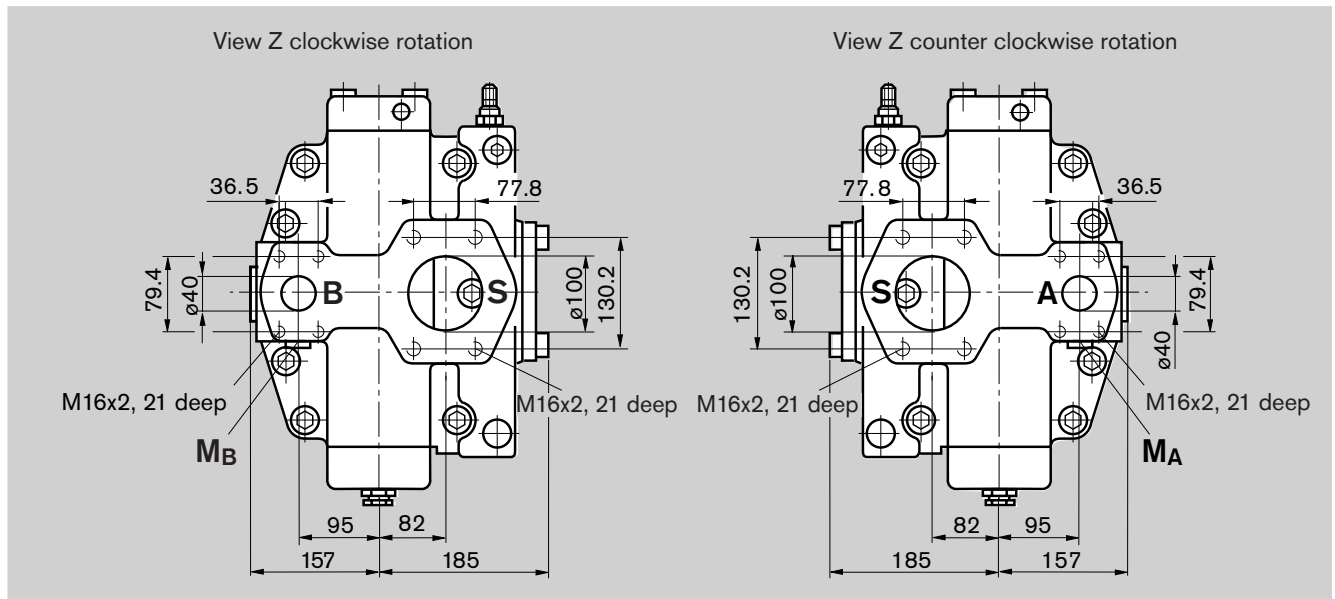


## Drive shafts

**Z** Splined shaft DIN 5480  
W70x3x22x9g



**P** Parallel keyed shaft  
DIN 6885, AS20x12x100



<sup>1)</sup> Centering bore to DIN 332  
(Thread to DIN 13)

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
A, (B)	Pressure outlet (high pressure range) Fixing thread	SAE J518 <sup>4)</sup> DIN 13	1 1/2in M16x2, 21 deep	400	O
S	Suction (standard pressure range) Fixing thread	SAE J518 <sup>4)</sup> DIN 13	4 in M16x2, 21 deep	7	O
U	Flushing	DIN 3852	M18x1.5; 12 deep	3	X
R <sub>1</sub>	Case drain	DIN 3852	M33x2; 18 deep	3	O
R <sub>2</sub>	Case drain	DIN 3852	M33x2; 18 deep	3	X
M <sub>A</sub> , M <sub>B</sub>	Measuring outlet pressure A, B	DIN 3852	M14x1.5; 12 deep	400	X

<sup>2)</sup> For the max. tightening torques the general information on page 52 must be observed

<sup>3)</sup> Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices and fittings.

<sup>4)</sup> Only dimensions to SAE J518

O = Must be connected (closed on delivery)

X = Plugged (in normal operation)

# DR Pressure control

**Initial position:**  $V_{g\ max}$  in pressureless condition

The pressure control limits the maximum pump output pressure within the control range of the pump. This max. pressure level can be set at the integrated control valve. When reaching this preset level, the pump destrokes and supplies only the amount of flow as needed by the users (actuators).


**Setting range of the pressure control** \_\_\_\_\_ 50 to 350 bar  
Standard setting is 350 bar.

If another setting is required please state in clear text.


## Important

- A recommended main line relief valve in the system to safeguard against excessive pressure spikes must have a cracking pressure at least 20 bar above the DR control setting.
- The control begin and the DR-control characteristic is influenced by housing pressure. An increase in housing pressure results in a higher control begin and thus a parallel shifting of the control curve (see page 7).
- Operation in standby see page 6.

## Characteristic

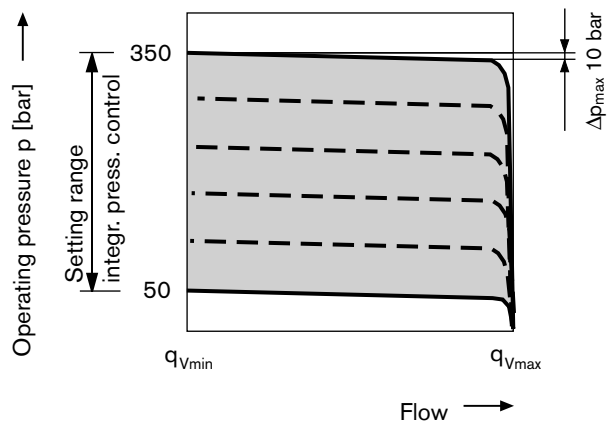

## Schematic

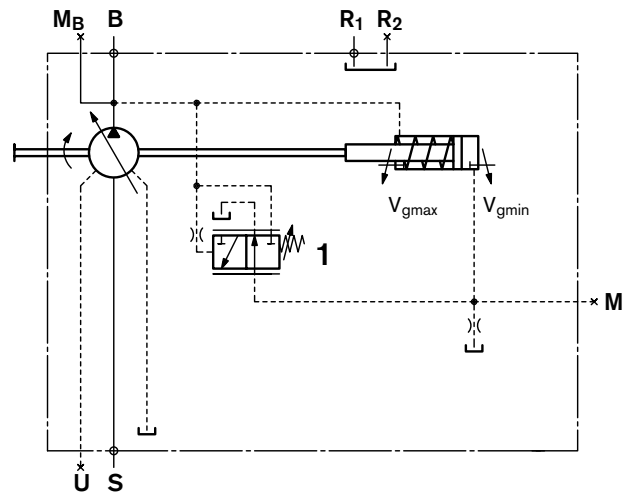

## Sub assemblies

- 1 Integrated pressure control valve

## Ports for


- M Measuring pressure on control piston (plugged)

# Dimensions DR

For general dimensions see pages 10 to 17


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Clockwise rotation

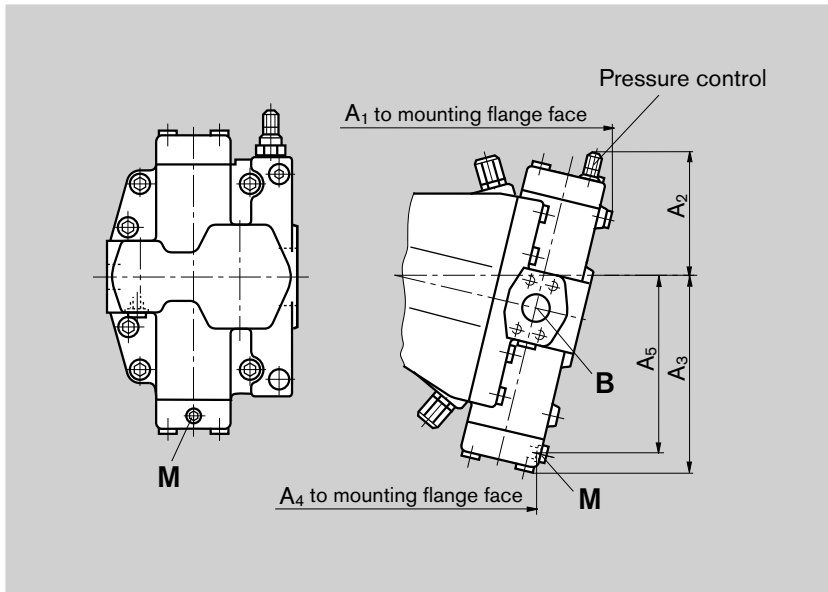

NG	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>
250	385	161	248	297	227
355	430	175	279	333	257
500	490	200	306	382	284

Counter clockwise rotation

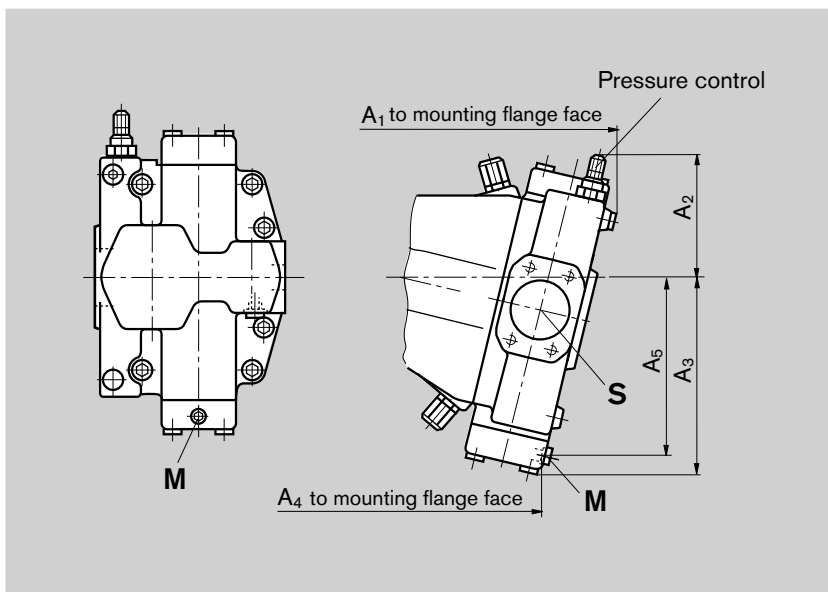

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
M	Measuring pressure on control piston	DIN 3852	M14x1.5; 12 deep	400	X

<sup>2)</sup> For the max. tightening torques the general information on page 52 must be observed

<sup>3)</sup> Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices and fittings.

X = Plugged (in normal operation)

# DRG Pressure control remotely adjustable

**Initial position:**  $V_{g\ max}$  in pressureless condition

In order to obtain a remote adjustment of the pressure control level a separate pilot pressure relief (item 2) valve must be connected to port  $X_3$ . This relief valve is not included in the supply of the DRG control.

Setting range of the pressure control \_\_\_\_\_ 50 to 350 bar

The spring force on the pressure compensator spool causes a differential pressure between pump output pressure and pressure at  $X_3$  (as soon as the relief valve opens and the pressure control function takes place). Standard setting of this differential pressure 25 bar.

As long as the the pressure is below the set pressure of the relief valve, the pressures on both sides of the pressure compensator spool are equal and the additional spring force keeps this spool in a shifted position (Spool in equilibrium).

As soon as the set pressure of the relief valve is reached, this valve will start to open and the pilot flow will result in a differential pressure over the compensator spool, which causes this spool to shift and brings the pump to a smaller displacement.

$V_{g\ min}$ .

The differential pressure at the pressure compensator spool (item 1) is normally set at 25 bar, which results in a pilot flow at  $X_3$  of approx. 2 L/min.

In case another setting (range 14 to 50 bar) is required, please state in clear text when ordering.

As a seperate pilot relief valve we recommend:

DBD 6 (hydraulic) see RE 25402


DBETR-SO 437 with dampened spool (electric) see RE 29166

The max. line lenght should not exceed 2 m.


**Note**

- The beginning of control and the DRG control characteristic are influenced by housing pressure. An increase in housing pressure results in a higher beginning of control (see page 7) and thus a parallel shift of the control characteristic.
- Standby operation see page 6.

**Characteristic**

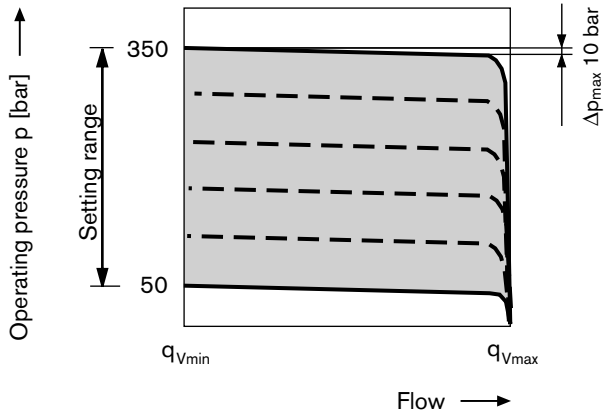

**Schematic**

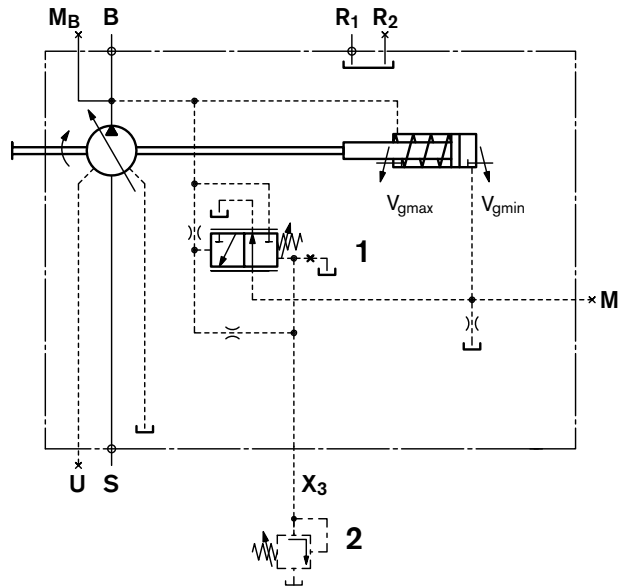

**Sub assemblies**

- 1 Integrated pressure compensator
- 2 Separate pilot pressure relief valve (not in scope of supply)

**Ports for**


- $X_3$  Separate pressure relief valve
- M Measuring pressure on control piston (plugged)

# Dimensions DRG

General dimensions see page 10 to 17

Before finalizing your design, request a binding installation drawing. Dimensions in mm.


Clockwise rotation

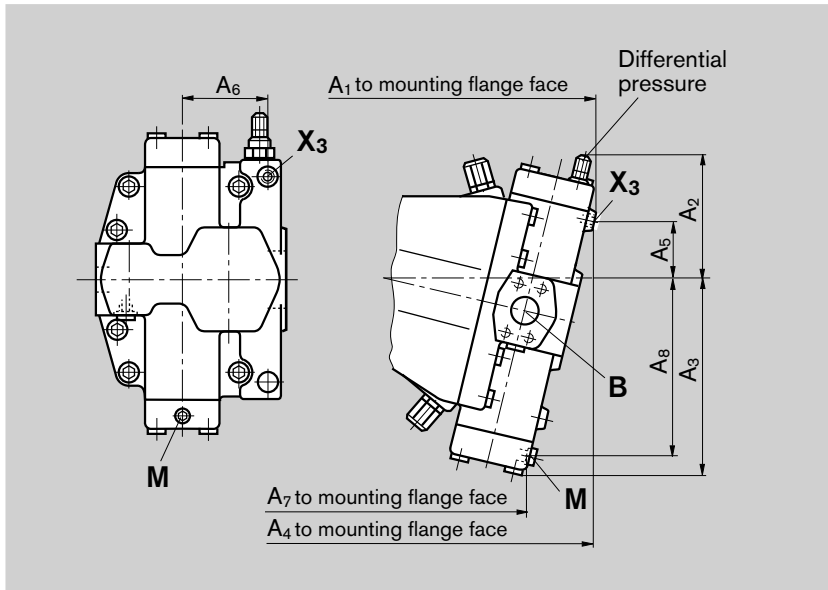

NG	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>
250	385	161	248	380	74
355	430	175	279	425	82
500	490	200	306	483	96

NG	A <sub>6</sub>	A <sub>7</sub>	A <sub>8</sub>
250	112	297	227
355	131	333	257
500	142	382	284

Counter clockwise rotation

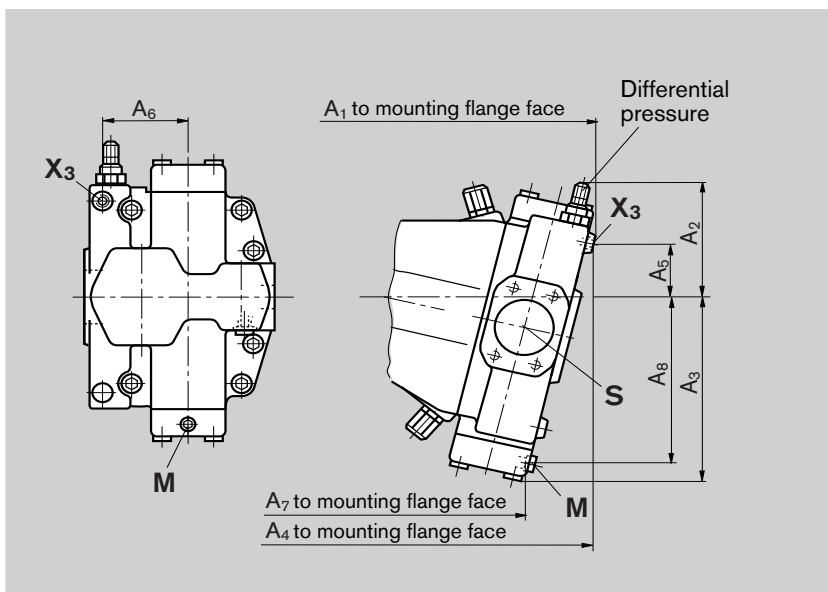

## Ports

Designation	Ports for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
X <sub>3</sub>	Separate pressure relief valve	DIN 3852	M14x1.5; 12 deep	400	O
M	Measuring pressure on control piston	DIN 3852	M14x1.5; 12 deep	400	X

<sup>2)</sup> For the max. tightening torques the general information on 52 must be observed

<sup>3)</sup> Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices or fittings.

O = Must be connected (closed on delivery)

X = Plugged (in normal operation)

# LR<sub>D</sub> Power control with integrated pressure control

**Initial position:**  $V_{g \max}$  in pressureless condition

## Power control

The power control adjusts the pump displacement in relation to the operating pressure in such a manner, that a given drive power at constant drive speed is not exceeded.

$$p_B \cdot V_g = \text{constant (drive power)}$$

$p_B$  = operating pressure;  $V_g$  = displacement

This precise control along the hyperbolic control characteristic permits an optimum utilisation of drive power.

The operating pressure acts on a lever mechanism via the measuring spool in the displacement control piston. It is offset by the externally set spring force which acts on the pilot valve and determines the power setting.

When the operating pressure exceeds the set spring force, the power control pilot valve is actuated via the lever mechanism and the pump swivel towards a smaller displacement  $V_{g \min}$ . This in turn reduces the effective moment on the lever mechanism and the operating pressure can increase in the same ratio by which the pump output flow is reduced, without exceeding the installed drive power ( $p_B \cdot V_g = \text{constant}$ ).

Setting range for the control begin of the power control from \_\_\_\_\_ 50 to 300 bar.

## Note


- The control begin and the LR-power control characteristic are influenced by pump inlet pressure. An increase in pump inlet pressure results in a higher control begin (see page 5) and thus a parallel shift of the control characteristic.
- The hydraulic output power (LR-characteristic) is influenced by pump efficiency

**When ordering please state in clear text:**

- Drive power  $P$  in kW
- Drive speed  $n$  in rpm
- Maximum flow  $q_{v \max}$  in L/min


**The integrated pressure control is standard** and overrides the power control, description see page 24

## Characteristic

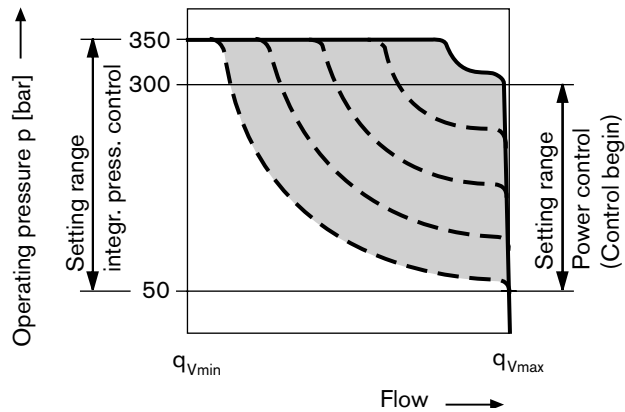

## Schematic

Power control with integrated pressure control

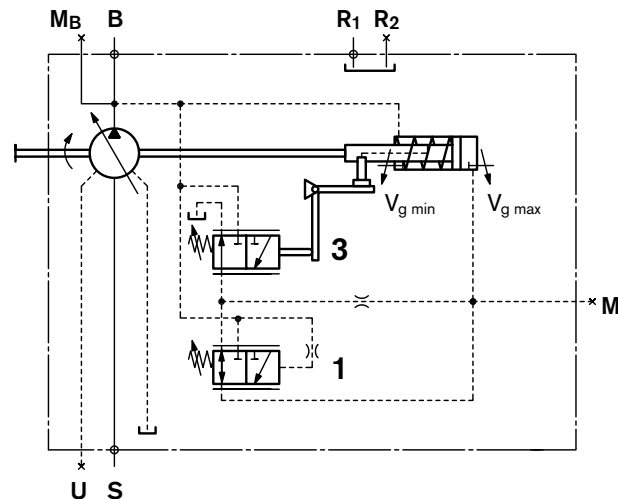

## Sub assemblies

- 1 Pressure control
- 3 Power control

## Port for

- M Measuring pressure on control piston (plugged)

Dimensions see page 25




# LR<sub>D</sub> Power control with integrated pressure control

Initial position  $V_{g\max}$

Power control characteristics in kW


**NG 250**

at 1500 rpm

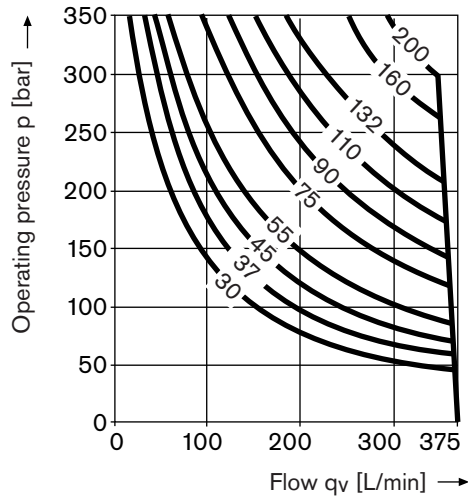


**NG 500**

at 1000 rpm

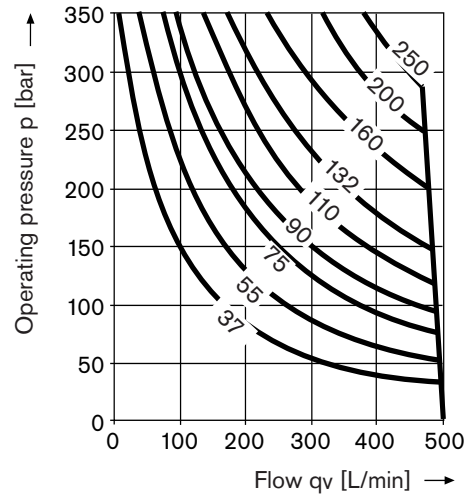

**NG 355**

at 1500 rpm

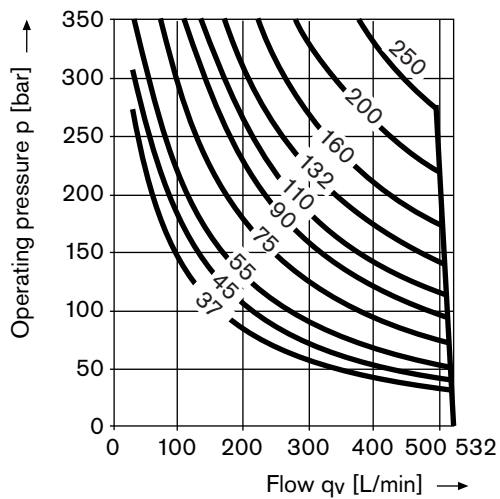

# LRD with integrated pressure control

**Initial position:**  $V_{g \max}$  in pressureless condition

The pressure control is overriding the power control.

It protects the pump against excessive pressure and consequential damage.

The pressure control valve is integrated into the port plate and can be set externally.

Upon reaching the set pressure level the pump will destroke towards lower displacement.


**Setting range of the pressure control** \_\_\_\_\_ 50 to 350 bar  
Standard setting: 350 bar.

If another setting is required please state in clear text.

## Note


- A recommended main line relief valve in the system to safeguard against excessive pressure spikes must have a cracking pressure at least 20 bar above the pressure control setting.
- The control begin and the pressure control characteristic are influenced by housing pressure. An increase in housing pressure results in a higher control begin (see page 7) and thus a parallel shift of the characteristic.
- Standby operation see page 6.

## Characteristic

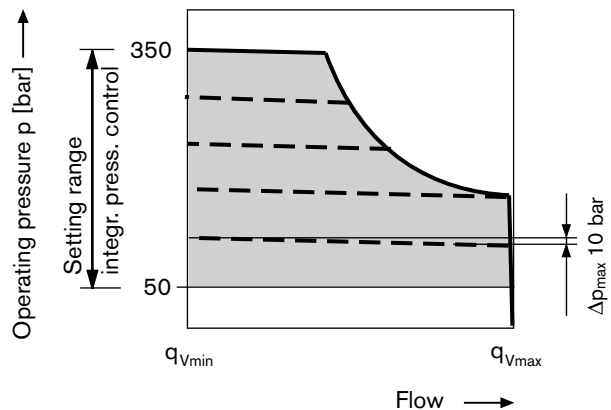

## Schematic

Power control with integrated pressure control

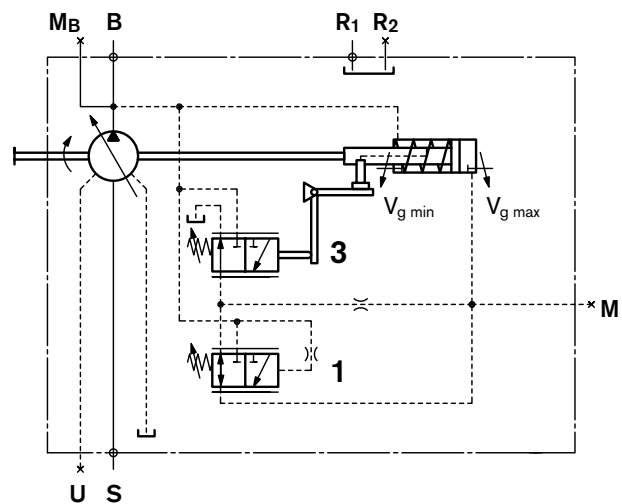

## Sub assemblies

- 1 Pressure control
- 3 Power control

## Port for


- M Measuring pressure on control piston (plugged)

# Dimensions LRD

General dimensions see page 10 to 17


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Clockwise rotation

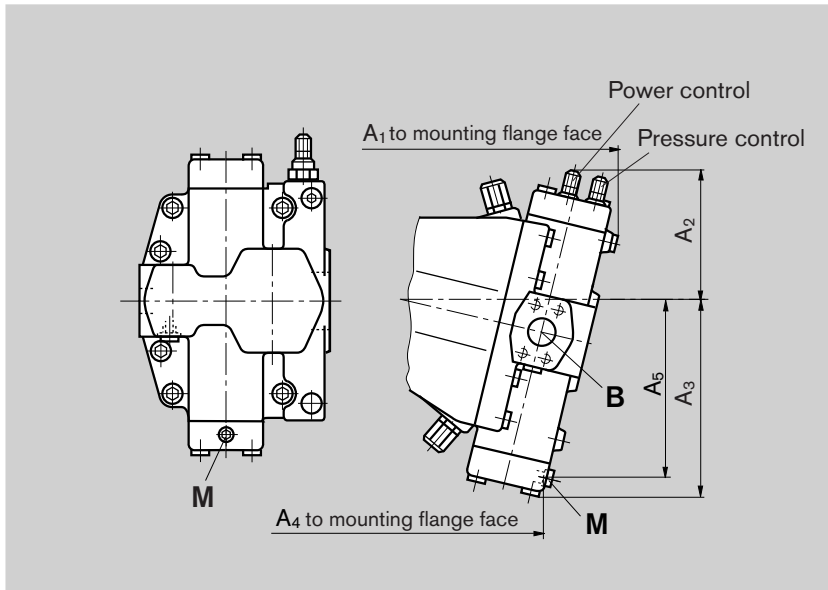

NG	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>
250	385	170	248	297	227
355	430	175	279	333	257
500	490	200	306	382	284

Counter clockwise rotation

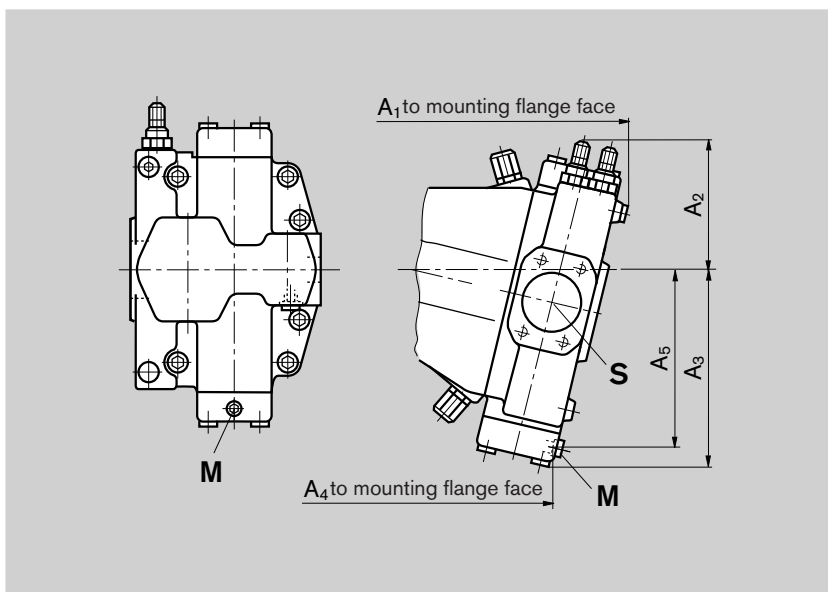

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
M	Measuring pressure on control piston	DIN 3852	M14x1.5; 12 deep	400	X

<sup>2)</sup> For the max. tightening torques the general information on page 52 must be observed

<sup>3)</sup> Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices and fittings.

X = Plugged (in normal operation)

# LRG with remotely adjustable pressure control

**Initial position:**  $V_{g\ max}$  in pressureless condition

The remotely adjustable pressure control overrides the power control.

In order to obtain a remote adjustment of the pressure control level a separate pilot pressure relief (item 2) valve must be connected to port  $X_3$ . This relief valve is not included in the supply of the DRG control.

Setting range of the pressure control \_\_\_\_\_ 50 to 350 bar

The spring force on the pressure compensator spool causes a differential pressure between pump output pressure and pressure at  $X_3$  (as soon as the relief valve opens and the pressure control function takes place). Standard setting of this differential pressure 25 bar.

As long as the the pressure is below the set pressure of the relief valve, the pressures on both sides of the pressure compensator spool are equal and the additional spring force keeps this spool in a shifted position (Spool in equilibrium).

As soon as the set pressure of the relief valve is reached, this valve will start to open and the pilot flow will result in a differential pressure over the compensator spool, which causes this spool to shift and brings the pump to a smaller displacement  $V_{g\ min}$ .

Upon reaching the set pressure control level (set pressure at pilot relief valve plus differential pressure at pressure control compensator) the pump will go over to the pressure control mode.

The differential pressure at the pressure compensator spool (item 1) is normally set at 25 bar, which results in a pilot flow at  $X_3$  of approx. 2 L/min.

In case another setting (range 14 to 50 bar) is required, please state in clear text when ordering.

As a separate pilot relief valve we recommend:

DBD 6 (hydraulic) see RE 25402


DBETR-SO 437 with dampened spool (electric) see RE 29166

The max. line length should not exceed 2 m.

**Note**


- The beginning of control and the DRG control characteristic are influenced by housing pressure. An increase in housing pressure results in a higher beginning of control (see page 7) and thus a parallel shift of the control characteristic.
- Standby operation see page 6.

**Characteristic**

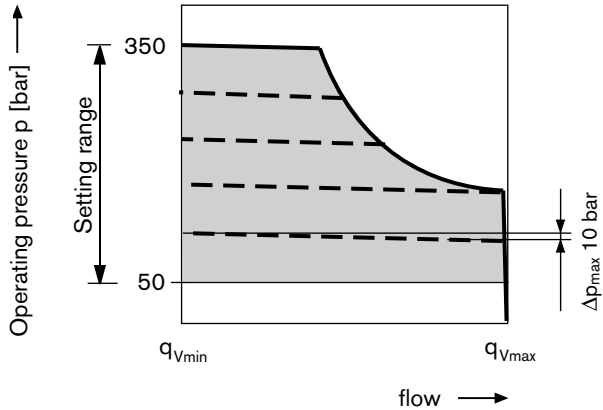

**Schematic**

Power control with remotely adjustable pressure control

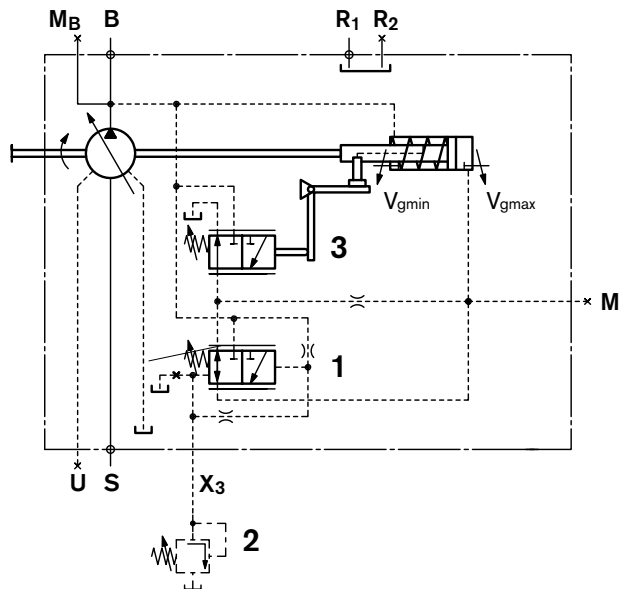

**Sub assemblies**

- 1 Integrated pressure control compensator
- 2 Separate pressure relief valve (not in scope of supply)
- 3 Power control

**Ports for**


- $X_3$  Separate pressure relief valve
- M Measuring pressure on control piston (plugged)

# Dimensions LRG

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

General dimensions see page 10 to 17


Clockwise rotation

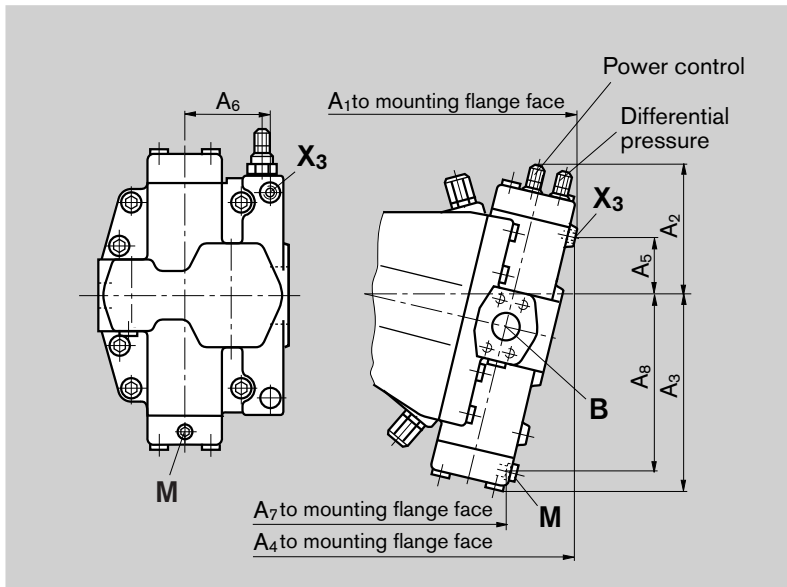

NG	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>
250	385	170	248	380	74
355	430	175	279	425	82
500	490	200	306	483	96

NG	A <sub>6</sub>	A <sub>7</sub>	A <sub>8</sub>
250	112	297	227
355	131	333	257
500	142	382	284

Counter clockwise rotation

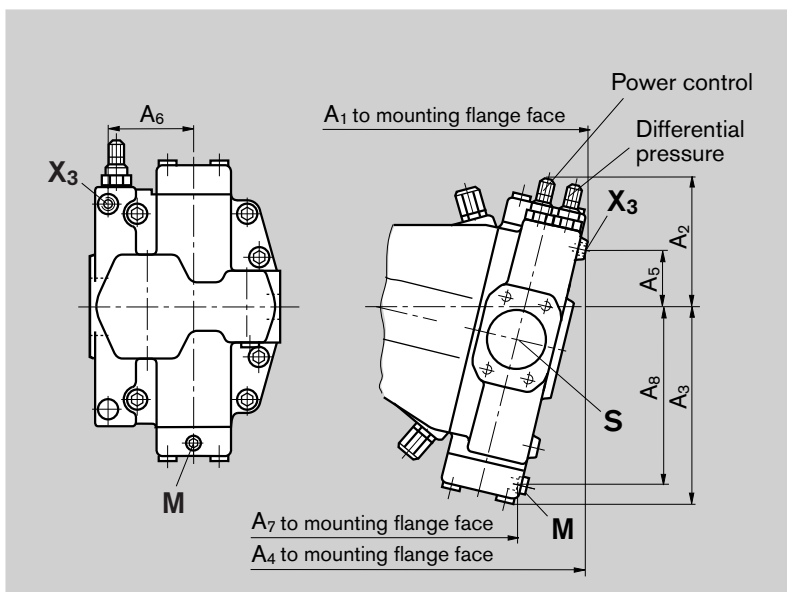

## Ports

Designation	Ports for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
X <sub>3</sub>	Separate pressure relief valve	DIN 3852	M14x1.5; 12 deep	400	O
M	Measuring pressure on control piston	DIN 3852	M14x1.5; 12 deep	400	X

<sup>2)</sup> For the max. tightening torques the general information on 52 must be observed

<sup>3)</sup> Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices or fittings.

O = Must be connected (closed on delivery)

X = Plugged (in normal operation)

# LRDH with hydraulic stroke limitation

**Initial position:**  $V_{g \max}$  in pressureless condition

The hydraulic stroke limitation is used for infinite adjustment of the displacement from  $V_{g \max}$  bis  $V_{g \min}$ .

It is overridden by the power control.

The displacement is set by the pilot pressure applied at port  $X_1$

Maximum permissible pilot pressure \_\_\_\_\_ 100 bar

The hydraulic stroke limitation takes the required control pressure from the pump output pressure. It must be noted, that the pump operating pressure must be at least 40 bar.

If the pressure is lower, the pump must be supplied with an external control pressure of at least 40 bar into port  $X_2$ .

The control begin is adjustable.


**Control begin (bar), please state in clear test when ordering.**

## Note

- The control begin and the LRDH-control characteristic are influenced by pump inlet pressure. An increase in pump inlet pressure results in a higher control begin (see page 5) and thus a parallel shift of the control characteristic.

## Schematic

Power control with integrated pressure control and hydraulic stroke limitation H

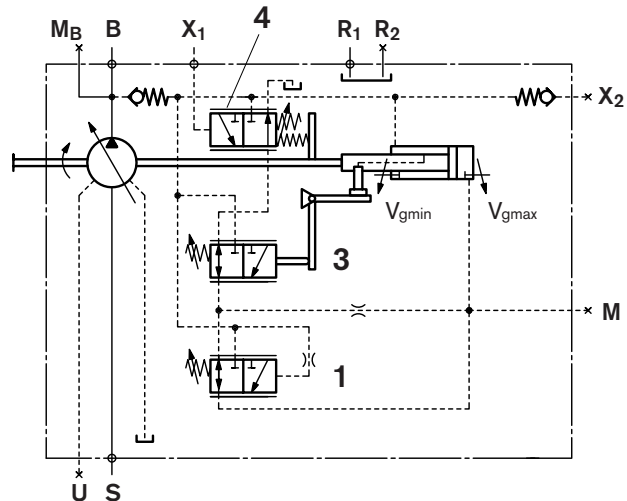

## Sub assemblies

- 1 Pressure control
- 3 Power control
- 4 Hydraulic stroke limitation H

## Ports for

- $X_1$  Pilot pressure
- $X_2$  External control pressure (plugged)
- M Measuring pressure on control piston(plugged)

Dimensions see page 30


# LRDH with hydraulic stroke limitation

## Characteristics

**H1**  $\Delta p_{St}$  for hydraulic stroke limitation \_\_\_\_\_ 10 bar

Control begin adjustable \_\_\_\_\_ 2 to 20 bar


Standard setting of control begin \_\_\_\_\_ 5 bar

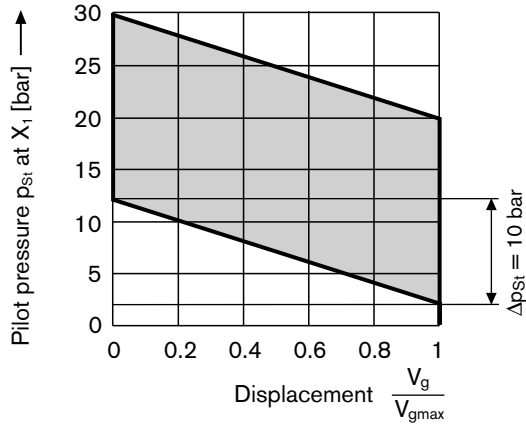

**H2**  $\Delta p_{St}$  for hydraulic stroke limitation \_\_\_\_\_ 25 bar

Control begin adjustable \_\_\_\_\_ 5 to 50 bar


Standard setting of control begin \_\_\_\_\_ 10 bar

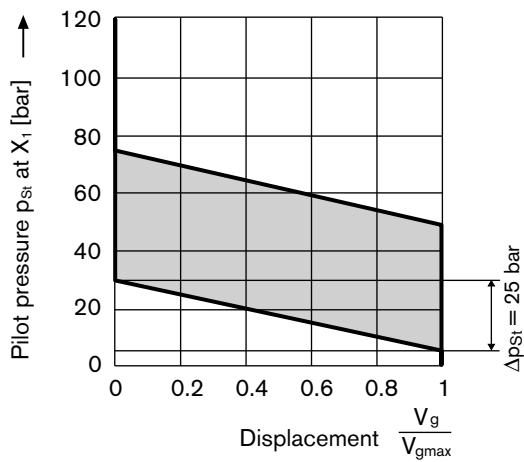

**H3**  $\Delta p_{St}$  for hydraulic stroke limitation \_\_\_\_\_ 35 bar

Control begin adjustable \_\_\_\_\_ 7 to 50 bar

Standard setting of control begin \_\_\_\_\_ 10 bar

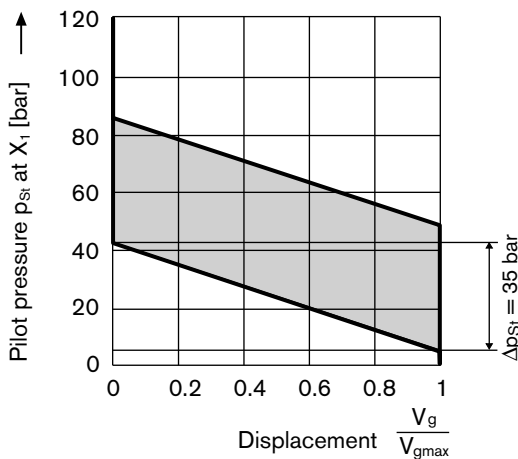


# Dimensions LRdH

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

General dimensions see page 10 to 17


Clockwise rotation

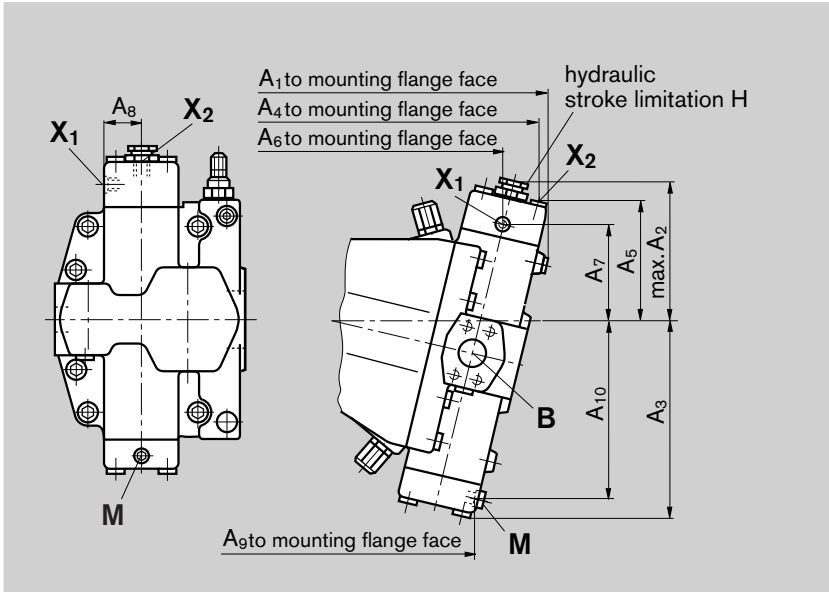

NG	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>
250	385	188	248	370	144
355	432	203	279	416	157
500	490	215	306	470	169

NG	A <sub>6</sub>	A <sub>7</sub>	A <sub>8</sub>	A <sub>9</sub>	A <sub>10</sub>
250	327	123	49	297	227
355	366	137	54	333	257
500	417	148	61.5	382	284

Counter clockwise rotation

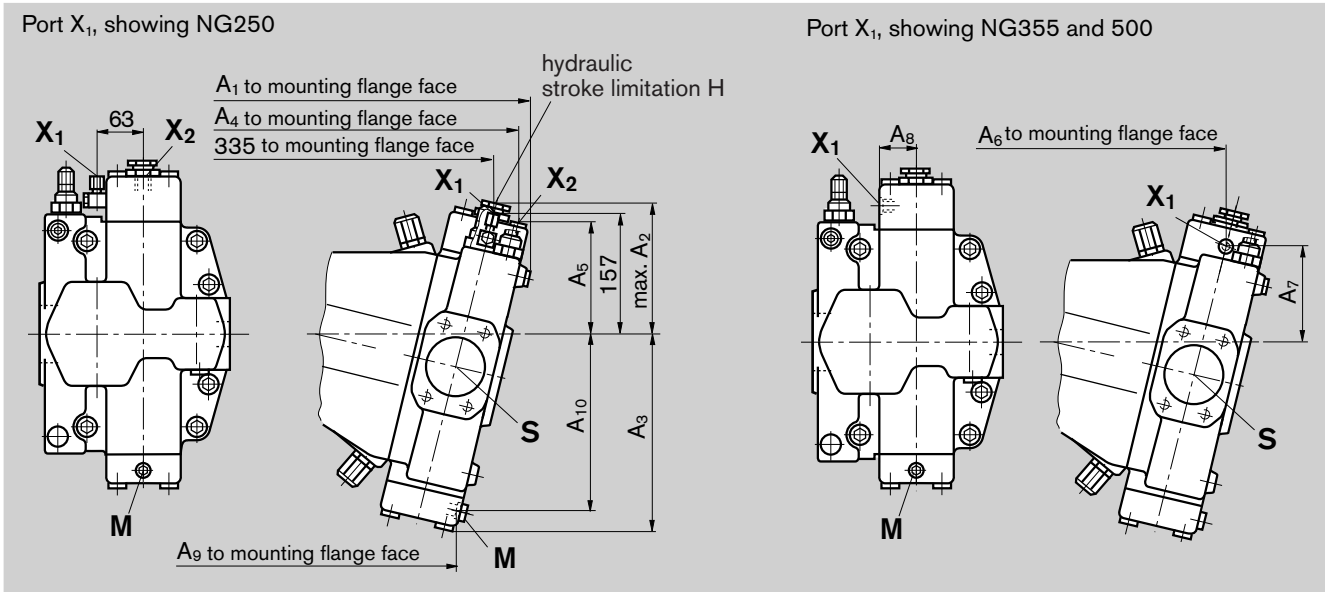

## Ports

Designation	Ports for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
X <sub>1</sub>	Pilot pressure	DIN 3852	M14x1.5; 12 deep	100	O
X <sub>2</sub>	External control pressure	DIN 3852	M14x1.5; 12 deep (NG250 a. 355)	400	X
		DIN 3852	M18x1.5; 12 deep (NG500)	400	X
M	Measuring pressure on control piston	DIN 3852	M14x1.5; 12 deep	400	X

<sup>2)</sup>For the max. tightening torques the general information on 52 must be observed

<sup>3)</sup>Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices or fittings.

O = Must be connected (closed on delivery)

X = Plugged (in normal operation)



## LRDN with hydraulic stroke limitation

**Initial position:**  $V_{g\ min}$  in pressureless condition

The hydraulic stroke limitation is used for infinite adjustment of the displacement from  $V_{g\ min}$  to  $V_{g\ max}$ .

It is overridden by the power control.

Displacement is set by the pilot pressure applied at port  $X_1$ .

Maximum permissible pilot pressure  $p$  \_\_\_\_\_ 100 bar

A minimum pressure of 40 bar is required for hydraulic stroke limitation. The necessary control fluid is taken from the pump outlet pressure side.

An external control pressure is not required when the operating pressure  $> 40$  bar and  $V_{g\ min} > 0$ . In this case the port  $X_2$  must be plugged prior to commissioning. Otherwise an external control pressure source of at least 40 bar must be connected to port  $X_2$ .

The control begin is adjustable.


**Control begin (bar), please state in clear text when ordering.**

### Note

- The control begin and the LRDN-control characteristic are influenced by pump inlet pressure. An increase in pump inlet pressure results in a higher control begin (see page 5) and thus a parallel shift of the control characteristic.

### Schematic

Power control with integrated pressure control and hydraulic stroke limitation N

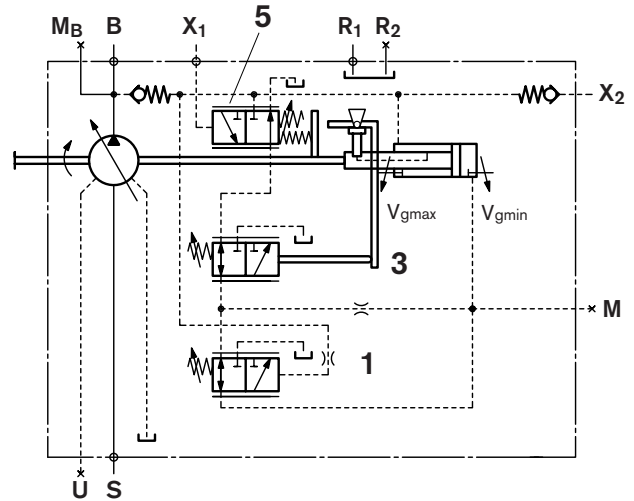

### Sub assemblies

- 1 Pressure control
- 3 Power control
- 5 Hydraulic stroke limitation N

### Ports for

- $X_1$  Pilot pressure
- $X_2$  External control pressure
- M Measuring of pressure on control piston (plugged)

Dimensions see page 33


# LRDN with hydraulic stroke limitation

## Characteristics

**N1**  $\Delta p_{st}$  for hydraulic stroke limitation \_\_\_\_\_ 10 bar

Control begin adjustable \_\_\_\_\_ 2 to 20 bar


Standard setting of control begin \_\_\_\_\_ 5 bar

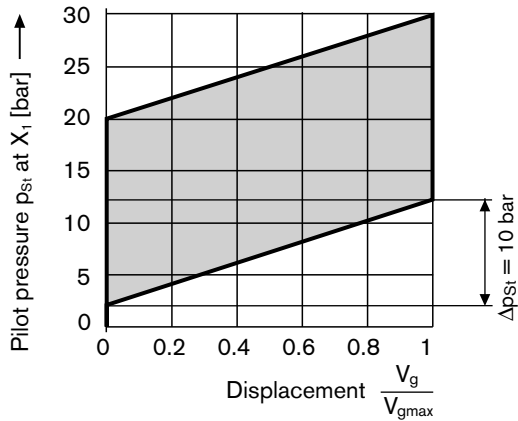

**N2**  $\Delta p_{st}$  for hydraulic stroke limitation \_\_\_\_\_ 25 bar

Control begin adjustable \_\_\_\_\_ 5 to 50 bar


Standard setting of control begin \_\_\_\_\_ 10 bar

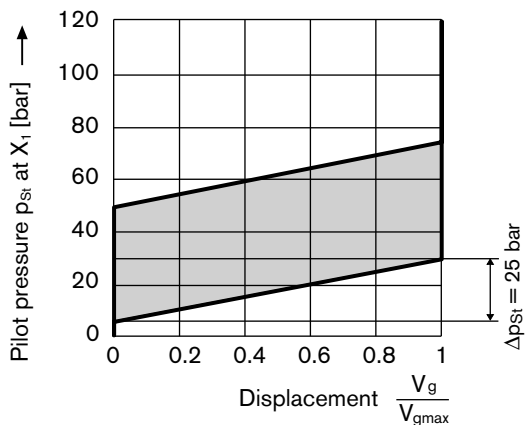

**N3**  $\Delta p_{st}$  for hydraulic stroke limitation \_\_\_\_\_ 35 bar

Control begin adjustable \_\_\_\_\_ 7 to 50 bar

Standard setting of control begin \_\_\_\_\_ 10 bar

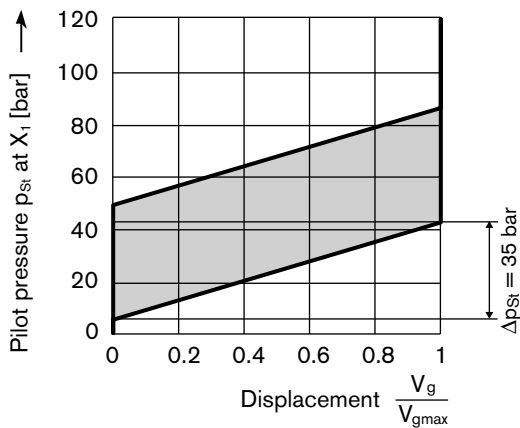


# Dimensions LRDN

General dimensions see page 10 to 17

Before finalizing your design, request a binding installation drawing. Dimensions in mm.


Clockwise rotation

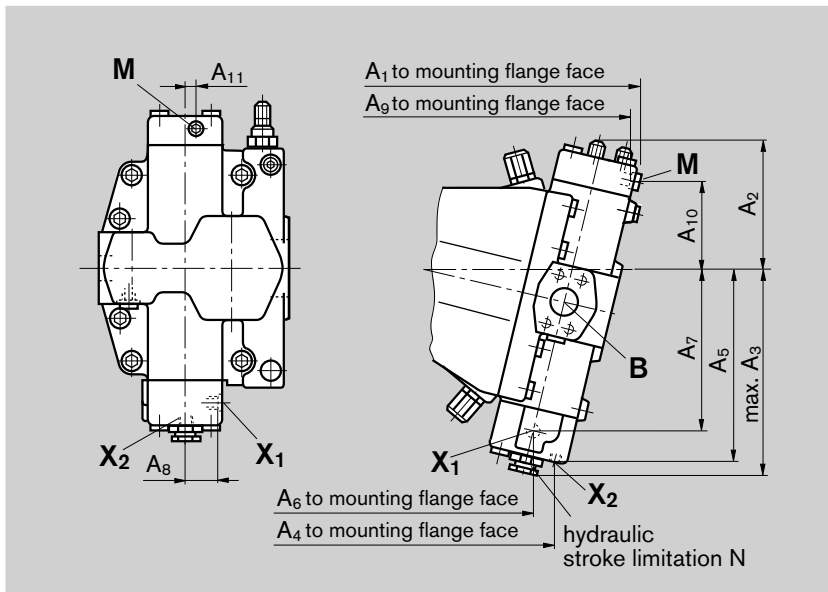

NG	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub>
250	385	170	275	276	248	248
355	430	175	300	315	275	278
500	492	200	325	359	300	322

NG	A <sub>7</sub>	A <sub>8</sub>	A <sub>9</sub>	A <sub>10</sub>	A <sub>11</sub>
250	210	49	377	116	14
355	234	54	425	132	20
500	258	61.5	483	144	20

Counter clockwise rotation

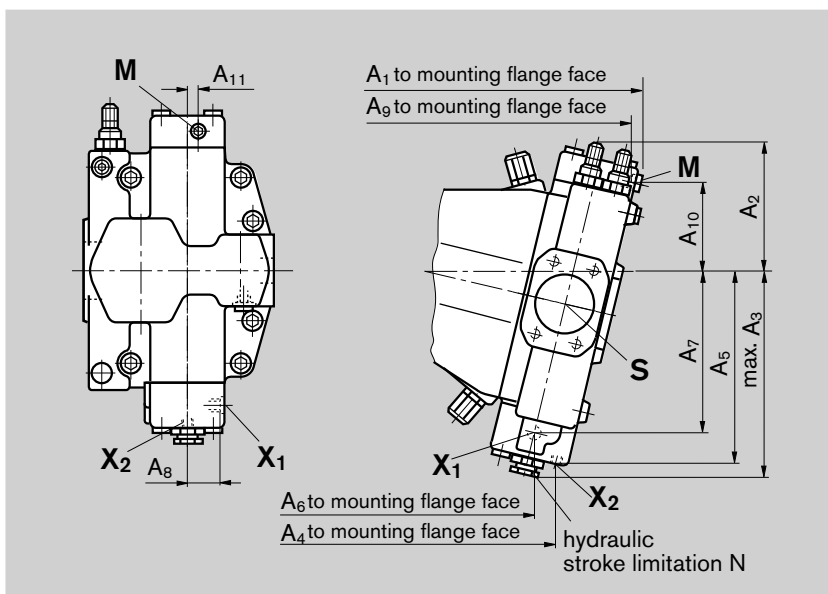

## Ports

Designation	Ports for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
X <sub>1</sub>	Pilot pressure	DIN 3852	M14x1.5; 12 deep	100	O
X <sub>2</sub>	External control pressure	DIN 3852	M14x1.5; 12 deep (NG250 a. 355)	400	O <sup>4)</sup>
		DIN 3852	M18x1.5; 12 deep (NG500)	400	O <sup>4)</sup>
M	Measuring pressure on control piston	DIN 3852	M14x1.5; 12 deep	400	X

<sup>2)</sup> For the max. tightening torques the general information on page 52 must be observed

<sup>3)</sup> Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices and fittings.

<sup>4)</sup> If no external control pressure is connected, port X<sub>2</sub> must be plugged

O = Must be connected (closed on delivery)


X = Plugged (in normal operation)




# HD.D Hydraulic control, pilot pressure dependent

## Characteristics


**HD1D**  $\Delta p_{St}$  \_\_\_\_\_ 10 bar  
 Control begin adjustable \_\_\_\_\_ 2 to 20 bar  
 Standard setting of control begin \_\_\_\_\_ 5 bar

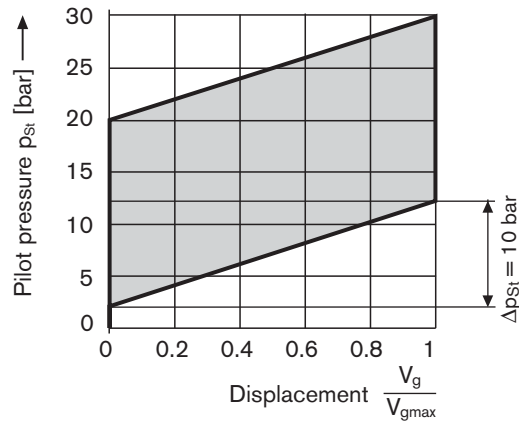

**HD2D**  $\Delta p_{St}$  \_\_\_\_\_ 25 bar  
 Control begin adjustable \_\_\_\_\_ 5 to 50 bar  
 Standard setting of control begin \_\_\_\_\_ 10 bar

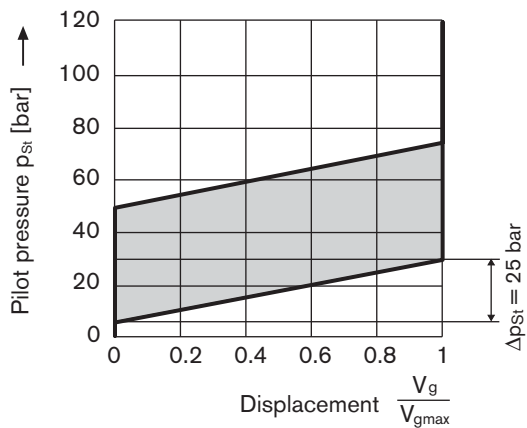

**HD3D**  $\Delta p_{St}$  \_\_\_\_\_ 35 bar  
 Control begin adjustable \_\_\_\_\_ 7 to 50 bar  
 Standard setting of control begin \_\_\_\_\_ 10 bar

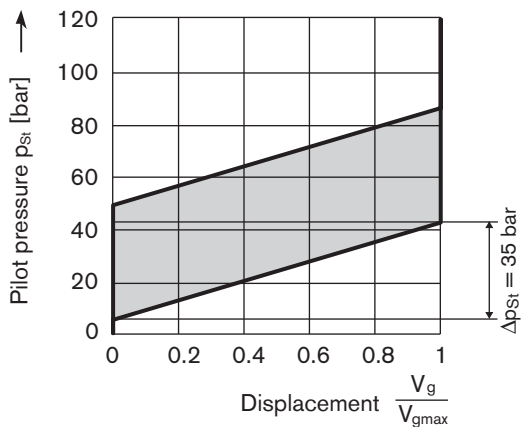


# Dimensions HD.D

General dimensions see page 10 to 17

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Clockwise rotation

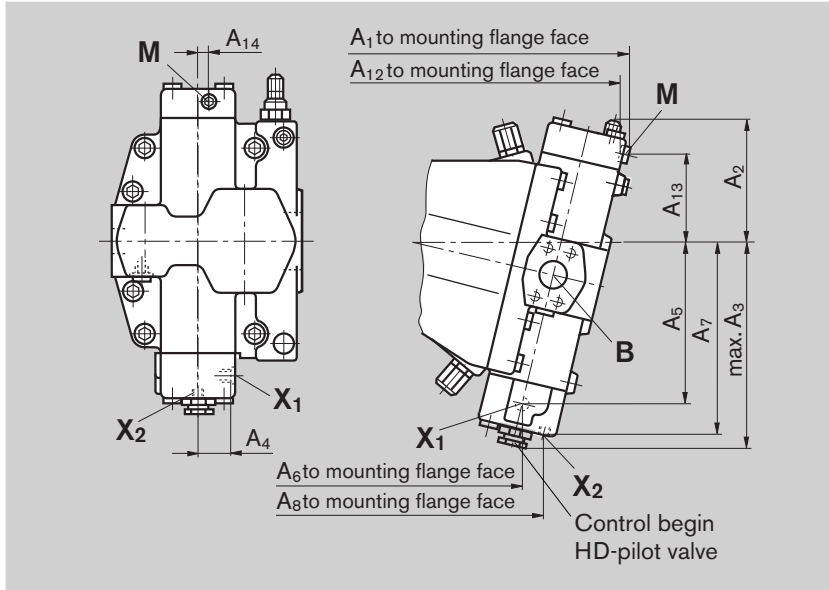


NG	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>
250	385	161	275	49	210
355	432	181	300	54	234
500	492	200	325	61.5	258

NG	A <sub>6</sub>	A <sub>7</sub>	A <sub>8</sub>
250	248	248	276
355	278	275	315
500	322	300	359

NG	A <sub>12</sub>	A <sub>13</sub>	A <sub>14</sub>
250	377	116	14
355	425	132	20
500	483	144	20

Counter clockwise rotation

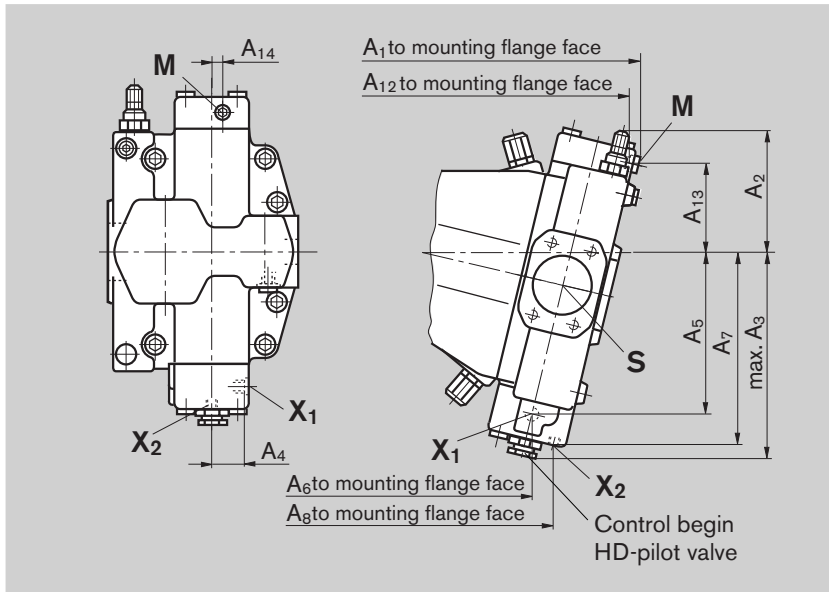

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
X <sub>1</sub>	Pilot pressure	DIN 3852	M14x1.5; 12 deep	100	O
X <sub>2</sub>	External control pressure	DIN 3852	M14x1.5; 12 deep (NG250 a. 355)	400	O <sup>4)</sup>
		DIN 3852	M18x1.5; 12 deep (NG500)	400	O <sup>4)</sup>
M	Measuring pressure on control piston	DIN 3852	M14x1.5; 12 deep	400	X

<sup>2)</sup> For the max. tightening torques the general information on page 52 must be observed

<sup>3)</sup> Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices and fittings.

<sup>4)</sup> If no external control pressure is connected, port X<sub>2</sub> must be plugged

O = Must be connected (closed on delivery)

X = Plugged (in normal operation)

## HD.D with integrated pressure control

**Initial position:**  $V_{g\ min}$  in pressureless condition

The pressure control overrides the HD-function i.e. below the setting of the pressure control the HD-function can be operated

It protects the pump against excessive pressure and subsequent damage.

The pressure control valve is integrated into the port plate and can be set externally.

Upon reaching the set pressure control level the pump will swivel towards a lower displacement.

**Setting range of the pressure control** \_\_\_\_\_ 50 to 350 bar  
Standard setting at 350 bar.


If a different setting is required, please state in clear text.

A recommended main line relief valve in the system to safeguard against excessive pressure spikes must have a cracking pressure at least 20 bar above the pressure control setting.

### Note


- The beginning of control and the pressure control characteristic are influenced by housing pressure. An increase in housing pressure results in a higher beginning of control (see page 7) and thus a parallel shift of the control characteristic
- Standby operation see page 6.

### Characteristic

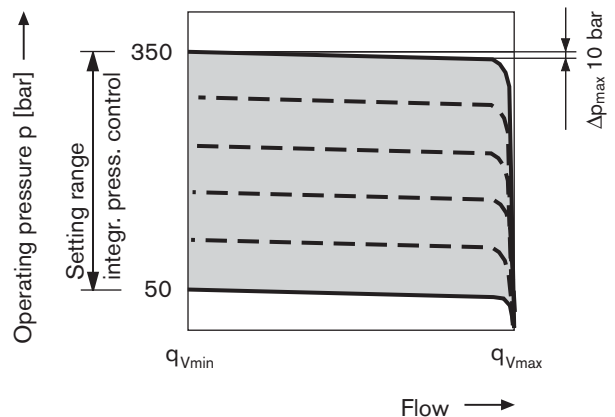

### Schematic

Hydraulic control, pilot pressure dependent with integrated pressure control

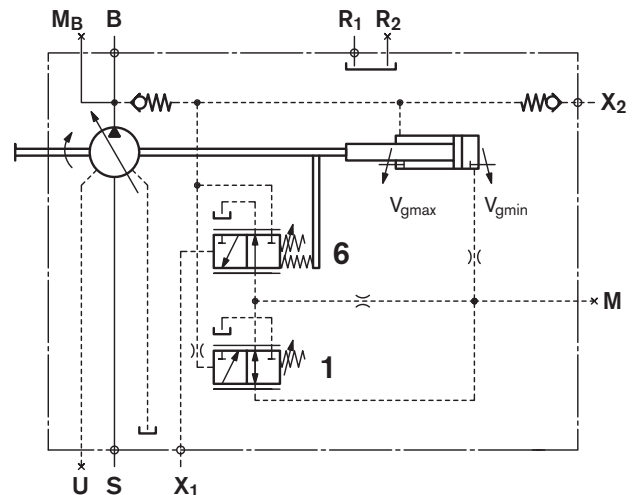

### Sub assemblies

- 1 Pressure control
- 6 HD-Pilot valve

### Ports for

- X<sub>1</sub> Pilot pressure
- X<sub>2</sub> External control pressure
- M Measuring pressure on control piston (plugged)

Dimensions see page 39






# Dimensions HD.D and HD.G

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

General dimensions see page 10 to 17

Clockwise rotation

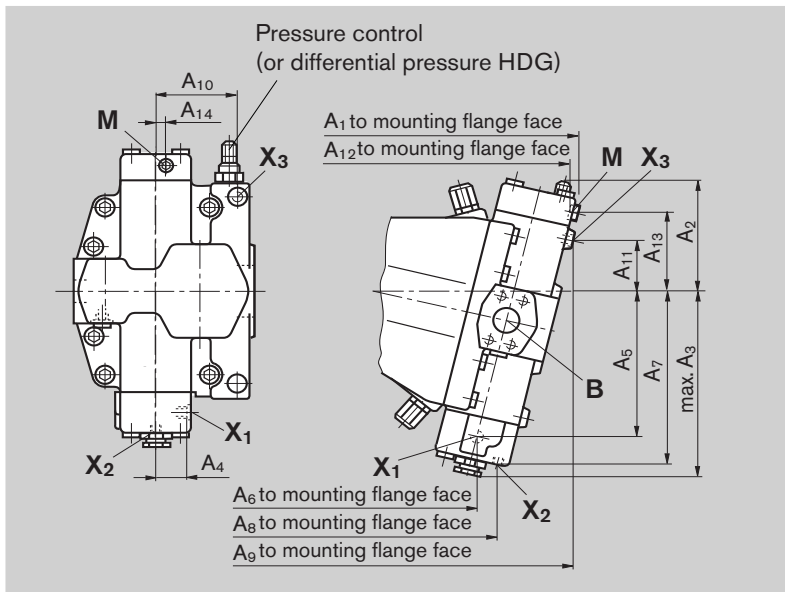


NG	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>
250	385	161	275	49	210
355	432	181	300	54	234
500	492	200	325	61.5	258

NG	A <sub>6</sub>	A <sub>7</sub>	A <sub>8</sub>	A <sub>9</sub>	A <sub>10</sub>
250	248	248	276	380	112
355	278	275	315	425	131
500	322	300	359	483	142

NG	A <sub>11</sub>	A <sub>12</sub>	A <sub>13</sub>	A <sub>14</sub>
250	74	377	116	14
355	82	425	132	20
500	96	483	144	20

Counter clockwise rotation

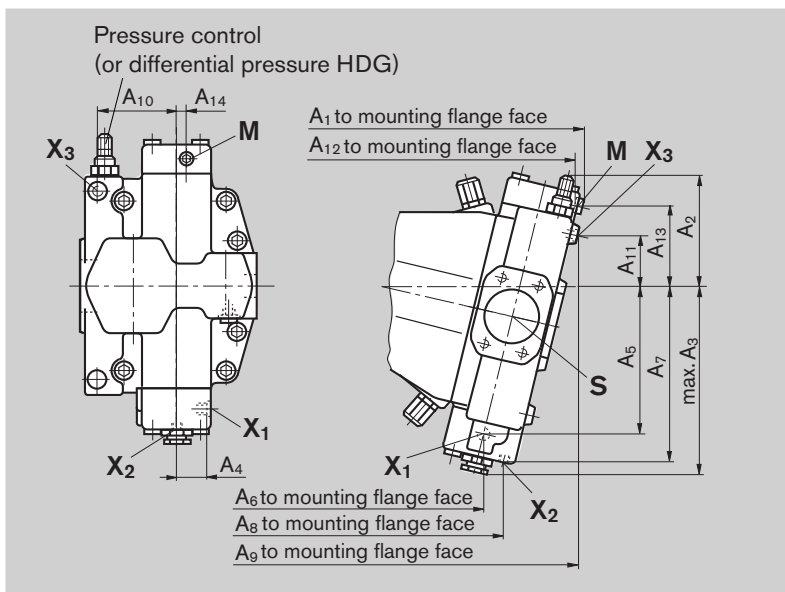

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
X <sub>1</sub>	Pilot pressure	DIN 3852	M14x1.5; 12 deep	100	O
X <sub>2</sub>	External control pressure	DIN 3852	M14x1.5; 12 deep (NG250 a. 355)	400	O <sup>4)</sup>
		DIN 3852	M18x1.5; 12 deep (NG500)	400	O <sup>4)</sup>
X <sub>3</sub> (for HDG)	Separate pressure relief valve	DIN 3852	M14x1.5; 12 deep	400	O
M	Measuring of pressure on control piston	DIN 3852	M14x1.5; 12 deep	400	X

<sup>2)</sup> For the max. tightening torques the general information on page 52 must be observed

<sup>3)</sup> Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices and fittings.

<sup>4)</sup> If no external control pressure is connected, port X<sub>2</sub> must be plugged

O = Must be connected (closed on delivery)

X = Plugged (in normal operation)

## EP.D Electric control with proportional valve

**Initial position:**  $V_{g \min}$  in pressureless condition

The electro-hydraulic control with proportional valve enables a stepless adjustment of the pump displacement dependent on an electric current signal.

The displacement is proportional to the current signal to the solenoid of a proportional pressure reducing valve DRE4K (see RE 29181), i.e. an increasing current signal results in an increasing displacement.

A minimum control pressure of 40 bar is required. The necessary control fluid is taken from the pump outlet pressure side.

An external control pressure is not required when the operating pressure  $> 40$  bar and  $V_{g \min} > 0$ . In this case the port  $X_2$  must be plugged prior to commissioning. Otherwise an external control pressure of at least 40 bar must be connected to port  $X_2$ .

A pilot pressure of 30 bar is required at port P to actuate the proportional valve DRE4K.

### Pilot pressure at port P

Required  $p_{\min}$  \_\_\_\_\_ 30 bar  
 $p_{\max}$  \_\_\_\_\_ 100 bar

### Important

- For operation on HF-fluids please observe the information in RE 29181 (Proportional-pressure reducing valve Type DRE4K).
- The beginning of control and the pressure control characteristic are influenced by housing pressure. An increase in housing pressure results in a higher beginning of control (see page 7) and thus a parallel shift of the control characteristic.
- Type of protection proportional valve to IP65

### Note

#### The spring return feature in the control unit is not a safety device

The spool valve inside the control unit can get stuck in an undefined position by internal contamination (contaminated hydraulic fluid, abrasion or residual contamination from system components). As a result, the axial piston unit can no longer supply the flow specified by the operator.

Check whether your application requires that remedial measures be taken on your machine in order to bring the driven consumer into a safe position (e.g. immediate stop).

### Technical data proportional-press. reducing valve


	EP1	EP2
Operating voltage (DC)	12V(±20%)	24V (±20%)
Control current		
Control begin at $V_{g \min}$	900 mA	450 mA
Control end at $V_{g \max}$	1400 mA	700 mA
Current limit	2,2 A	1,0 A
Nom. resistance (at 20°C)	2,4 Ω	12 Ω
Duty cycle	100 %	100 %
Type of protection (HIRSCHMANN) to DIN EN 60529	IP65	IP65

Various amplifiers for control of the proportional valve are available in the Rexroth program, see RE 29181.

**Integrated pressure control EP.D is standard** and overrides the EP function. Description see page 43.


## EP.D Electric control with proportional valve

### Characteristic

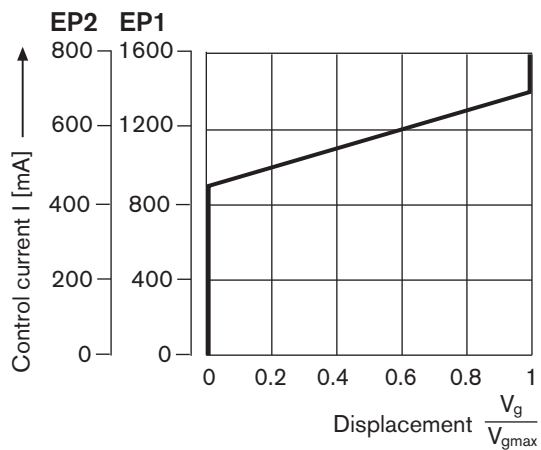

### Schematic

Electric control with proportional pressure reducing valve

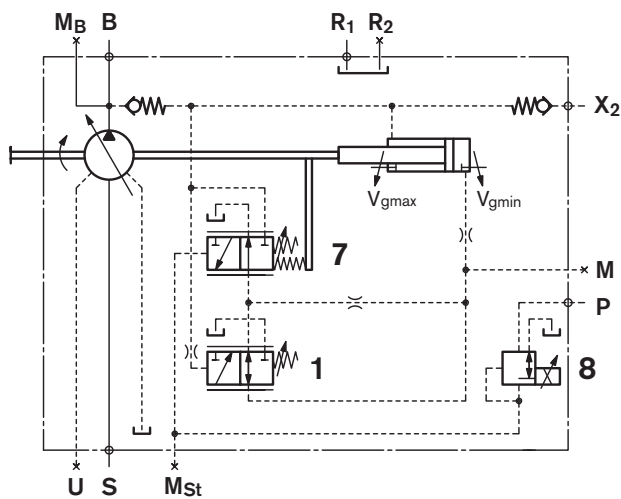

### Sub assemblies

- 1 Pressure control
- 7 Pilot valve
- 8 Proportional pressure reducing valve (see RE 29181)  
incl. conductor box (Hirschmann plug without  
suppressor diode) see page 50

### Ports for

- P Pilot pressure
- X<sub>2</sub> External control pressure
- M Measuring pressure on control piston (plugged)
- M<sub>st</sub> Measuring pilot pressure (plugged)


Dimensions see page 42

# Dimensions EP.D

General dimensions see page 10 to 17

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Clockwise rotation

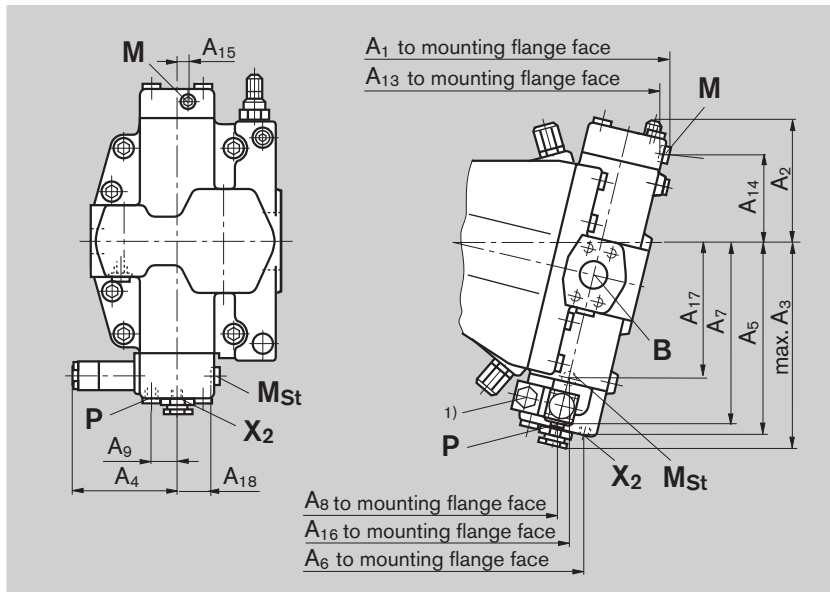


NG	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub>
250	385	161	275	115	248	276
355	432	181	300	116	275	315
500	492	200	325	123	300	359

NG	A <sub>7</sub>	A <sub>8</sub>	A <sub>9</sub>	A <sub>10</sub>	A <sub>11</sub>	A <sub>12</sub>
250	238	241	36	112	380	74
355	268	286	36	131	425	82
500	294	328	43	142	483	96

NG	A <sub>13</sub>	A <sub>14</sub>	A <sub>15</sub>	A <sub>16</sub>	A <sub>17</sub>	A <sub>18</sub>
250	377	116	14	248	210	49
355	425	132	20	278	234	54
500	483	144	20	322	258	61.5

<sup>1)</sup> Cable connection M16x1.5 for cable diameter 4.5 to 10 mm  
Plug description and dimensions see page 50

Counter clockwise rotation

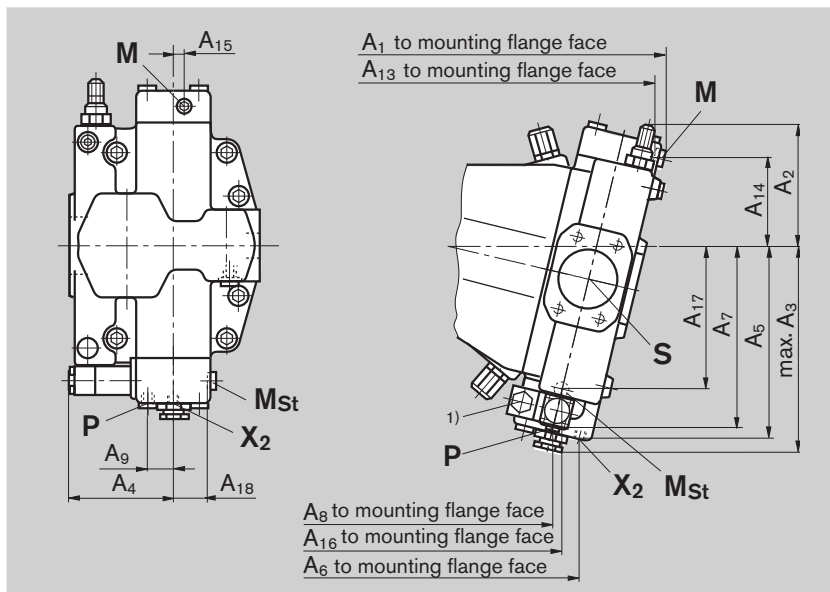

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
P	Pilot pressure for proportional valve	DIN 3852	M14x1.5; 12 deep	100	O
X <sub>2</sub>	External control pressure	DIN 3852	M14x1.5; 12 deep (NG250 a. 355)	400	O <sup>4)</sup>
		DIN 3852	M18x1.5; 12 deep (NG500)	400	O <sup>4)</sup>
M	Measuring pressure on control piston	DIN 3852	M14x1.5; 12 deep	400	X
M <sub>St</sub>	Measuring pilot pressure	DIN 3852	M14x1.5; 12 deep	100	X

<sup>2)</sup> For the max. tightening torques the general information on page 52 must be observed

<sup>3)</sup> Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices and fittings.

<sup>4)</sup> If no external control pressure is connected, port X<sub>2</sub> must be plugged

O = Must be connected (closed on delivery)

X = Plugged (in normal operation)

## EP.D with integrated pressure control

**Initial position:**  $V_{g\ min}$  in pressureless condition

The pressure control overrides the EP-function i.e. below the setting of the pressure control the EP-function can be operated.

It protects the pump against excessive pressure and subsequent damage.

The pressure control valve is integrated into the port plate and can be set externally.

Upon reaching the set pressure control level the pump will swivel towards a lower displacement.

**Setting range of the pressure control** \_\_\_\_\_ 50 to 350 bar  
Standard setting at 350 bar.


If a different setting is required, please state in clear text.

A recommended main line relief valve in the system to safeguard against excessive pressure spikes must have a cracking pressure at least 20 bar above the pressure control setting.

### Note


- The beginning of control and the pressure control characteristic are influenced by housing pressure. An increase in housing pressure results in a higher beginning of control (see page 7) and thus a parallel shift of the control characteristic
- Standby operation see page 6.

### Characteristic

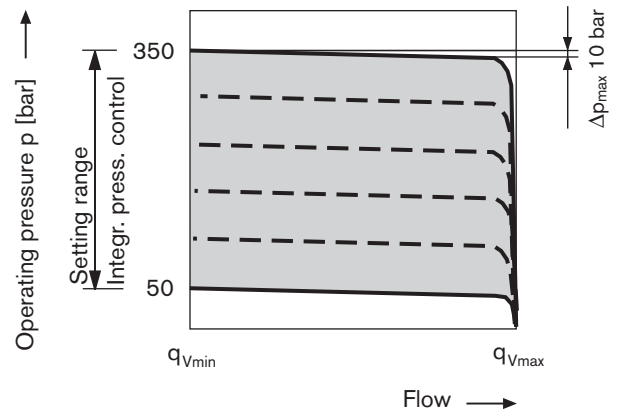

### Schematic

Electric control with proportional pressure reducing valve

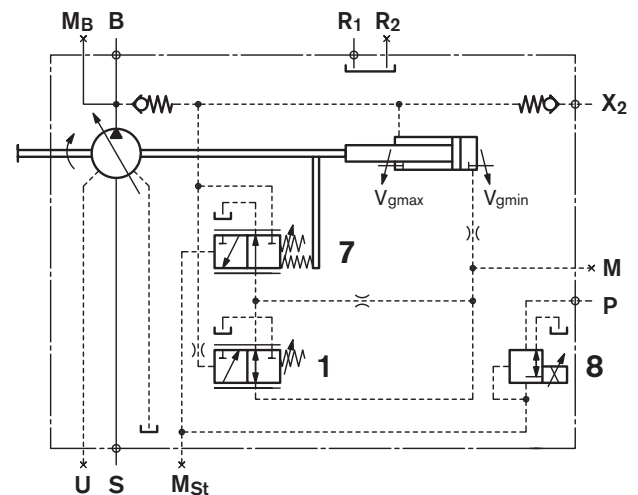

### Sub assemblies

- 1 Pressure control
- 7 Pilot valve
- 8 Proportional pressure reducing valve incl. conductor box (Hirschmann plug without suppressor diode) see page 46

### Ports for

- P Pilot pressure  
 $X_2$  External control pressure  
 M Measuring pressure on control piston (plugged)  
 $M_{St}$  Measuring pilot pressure (plugged)

Dimensions see page 45

# EP.G with remotely adjustable pressure control

**Initial position:**  $V_{g\ min}$  in pressureless condition

The pressure control overrides the EP- function.

In order to obtain a remote adjustment of the pressure control level a separate pilot pressure relief (item 2) valve must be connected to port  $X_3$ . This relief valve must be ordered separately to the DRG control.

Setting range of the pressure control \_\_\_\_\_ 50 to 350 bar

The spring force on the pressure compensator spool causes a differential pressure between pump output pressure and pressure at  $X_3$  (as soon as the relief valve opens and the pressure control function takes place). Standard setting of this differential pressure 25 bar.

As long as the the pressure is below the set pressure of the relief valve, the pressures on both sides of the pressure compensator spool are equal and the additional spring force keeps this spool in a shifted position (Spool in equilibrium).

As soon as the set pressure of the relief valve is reached, this valve will start to open and the pilot flow will result in a differential pressure over the compensator spool, which causes this spool to shift and brings the pump to a smaller displacement  $V_{g\ min}$ .

Upon reaching the set pressure control level (set pressure at pilot relief valve plus differential pressure at pressure control compensator) the pump will go over to the pressure control mode.

The differential pressure at the pressure compensator spool (item 1) is normally set at 25 bar, which results in a pilot flow at  $X_3$  of approx. 2 L/min.

In case another setting (range 14 to 50 bar) is required, please state in clear text when ordering.

As a separate pilot relief valve we recommend:

DBD 6 (hydraulic) see RE 25402


DBETR-SO 437 with dampened spool  
(electric) see RE 29166

The max. line length should not exceed 2 m.

## Note


- The beginning of control and the pressure control characteristic are influenced by housing pressure. An increase in housing pressure results in a higher beginning of control (see page 7) and thus a parallel shift of the control characteristic.
- Standby operation see page 6.

## Characteristic

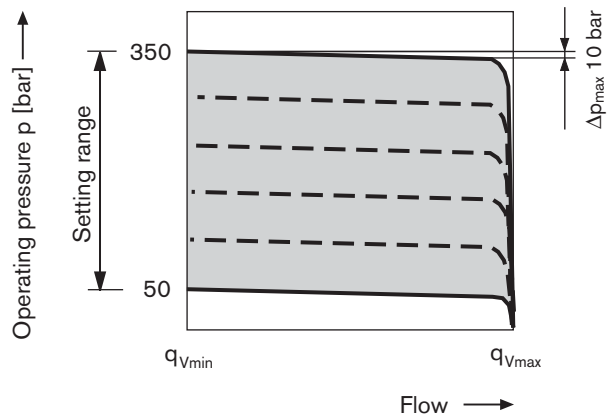

## Schematic

Electric control with proportional pressure reducing valve and remotely adjustable pressure control

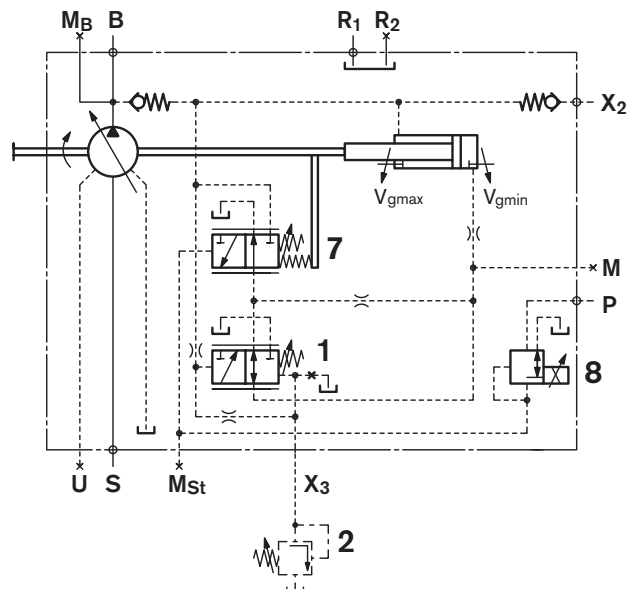

## Sub assemblies

- 1 Integrated pressure control compensator
- 2 Separate pressure relief valve (not in scope of supply)
- 7 Pilot valve
- 8 Proportional pressure reducing valve

## Ports for

- P Pilot pressure for proportional valve
- $X_2$  External control pressure
- $X_3$  Separate pressure relief valve (EPG)
- M Measuring pressure on control piston (plugged)
- $M_{St}$  Measuring pilot pressure (plugged)


Dimensions see page 45

# Dimensions EP.D and EP.G

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

General dimensions see page 10 to 17

Clockwise rotation

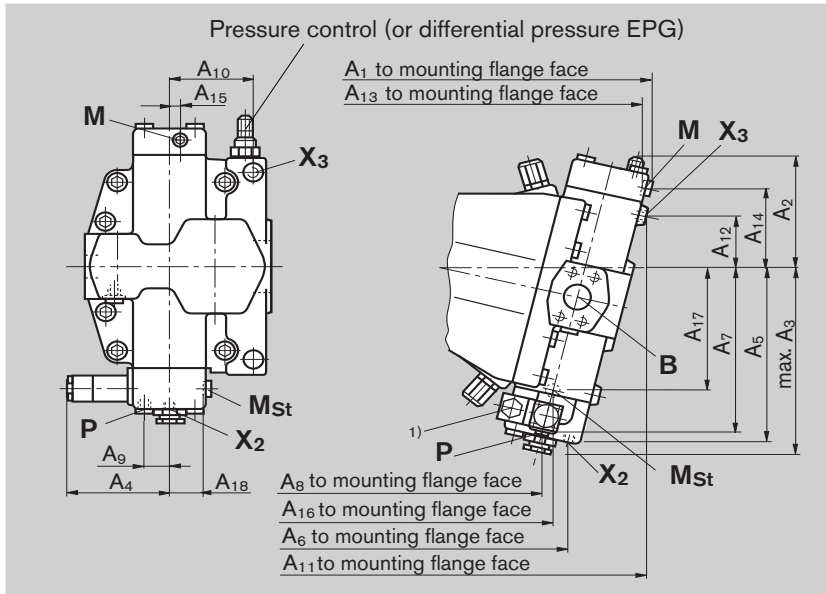


NG	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub>	A <sub>6</sub>
250	385	161	275	115	248	276
355	432	181	300	116	275	315
500	492	200	325	123	300	359

NG	A <sub>7</sub>	A <sub>8</sub>	A <sub>9</sub>	A <sub>10</sub>	A <sub>11</sub>	A <sub>12</sub>
250	238	241	36	112	380	74
355	268	286	36	131	425	82
500	294	328	43	142	483	96

NG	A <sub>13</sub>	A <sub>14</sub>	A <sub>15</sub>	A <sub>16</sub>	A <sub>17</sub>	A <sub>18</sub>
250	377	116	14	248	210	49
355	425	132	20	278	234	54
500	483	144	20	322	258	61.5

Counter clockwise rotation

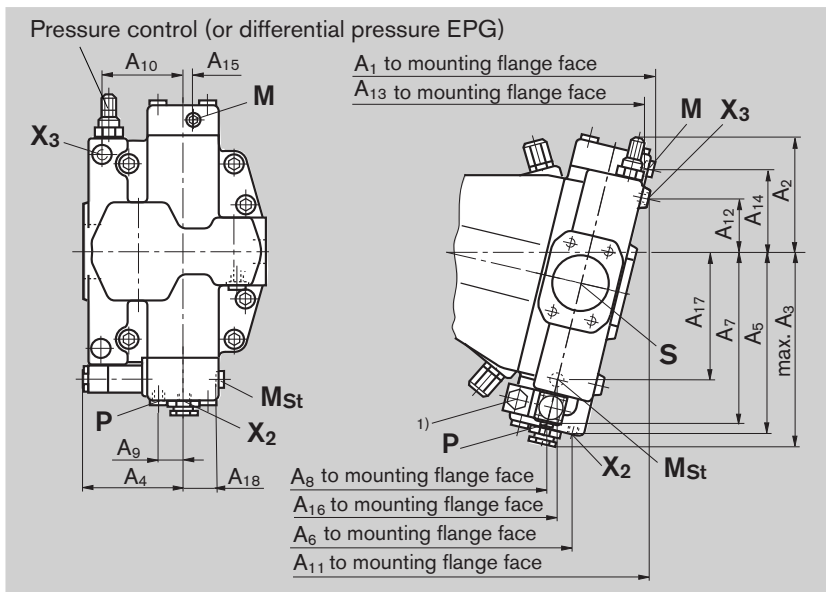

<sup>1)</sup> Cable connection M16x1.5 for cable diameter 4.5 to 10 mm  
Plug description and dimensions see page 50

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Peak pressure [bar] <sup>3)</sup>	State
P	Pilot pressure for proportional valve	DIN 3852	M14x1.5; 12 deep	100	O
X <sub>2</sub>	External control pressure	DIN 3852	M14x1.5; 12 deep (NG250 a. 355)	400	O
		DIN 3852	M18x1.5; 12 deep (NG500)	400	O
X <sub>3</sub> (for EPG)	Separate pressure relief valve	DIN 3852	M14x1.5; 12 deep	400	O
M	Measuring pressure on control piston	DIN 3852	M14x1.5; 12 deep	400	X
M <sub>St</sub>	Measuring pilot pressure	DIN 3852	M14x1.5; 12 deep	100	X

<sup>2)</sup> For the max. tightening torques the general information on page 52 must be observed

<sup>3)</sup> Depending on the application momentary pressure spikes can occur. Take this into consideration when selecting the measuring devices and fittings.

<sup>4)</sup> If no external control pressure is connected, port X<sub>2</sub> must be plugged

O = Must be connected (closed on delivery)

X = Plugged (in normal operation)

# Visual swivel angle indicator

Before finalizing your design, request a binding installation drawing. Dimensions in mm.


The swivel angle is indicated by a pin at the side of the port plate (the cap nut must be removed).

The protruding length of the pin varies in accordance with the position of the lens plate.

The pump is at zero if the pin is flush with the port plate.


The length of the pin is approx. 8 mm when swivelled to max. angle  $V_{g \max}$ .

## Schematic example LRD – initial position $V_{g \max}$

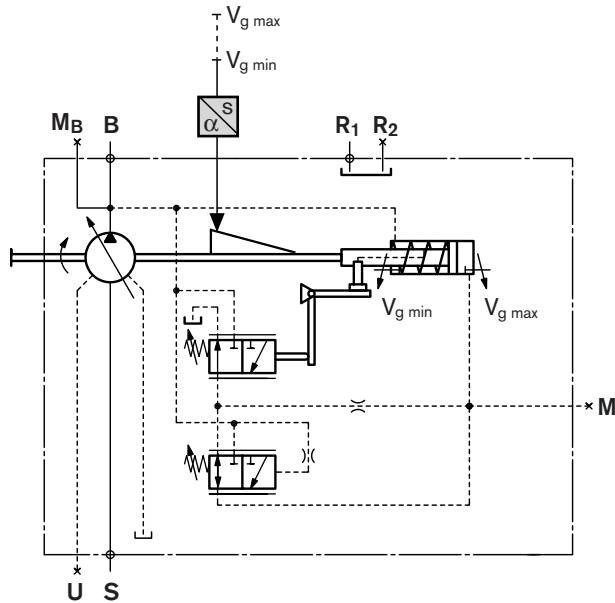

## Dimensions

General dimensions see page 10 to 17

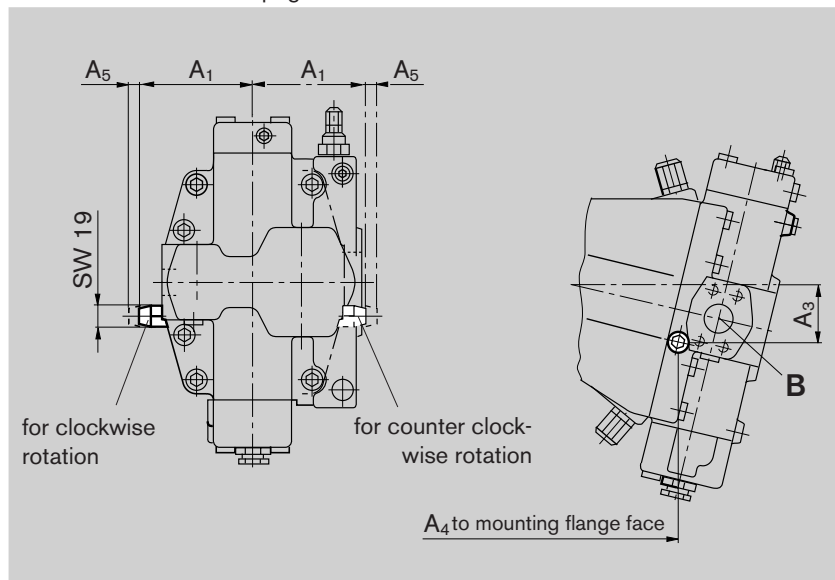

NG	A <sub>1</sub>	A <sub>3</sub>	A <sub>4</sub>	A <sub>5</sub> *
250	136.5	73	238	11
355	159.5	84	266	11
500	172.5	89	309	11

\* Dimension to remove the cap nut



# Electric swivel angle indicator


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

In this case the pump swivel angle is indicated via an inductive position transducer.

It converts the displacement of the control device into an electrical signal. This signal can be used to feed the value of swivel angle to an amplifier card for example.


Inductive transducer Type IW9 – 03 – 01

## Schematic example EPD – initial position $V_{g \min}$

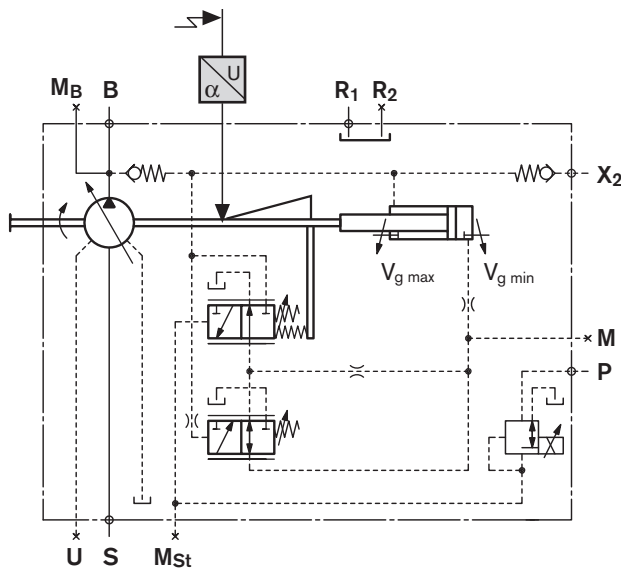

## Dimensions

General dimensions see page 10 to 17

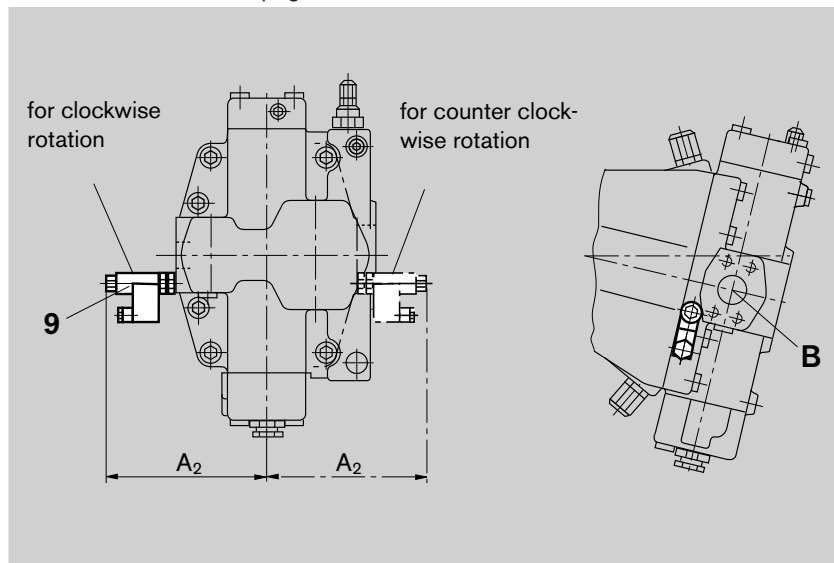

NG	A <sub>2</sub>
250	182
355	205
500	218

## Sub assemblies

- 9 Inductive transducer IW9-03-01 with conductor box (mating plug) Hirschmann plug without suppressore diode, with cable connection M16x1.5 for cable diameter 4.5 to 10 mm  
Plug description and dimensions see page 50

# Installation instructions standard version

## General

During commissioning and operation the axial piston unit must be full with fluid at all times and must be deaerated. This is also important after prolonged periods of standstill since the system can empty itself via the hydraulic lines

The leakage fluid in the housing must be drained to tank via the highest positioned case drain port.

Under all operating conditions the case drain line and the suction line inside the reservoir must be below the minimum fluid level

The minimum inlet pressure at port S may not fall below 0.8 bar absolute.

## Installation position


See examples below. Further installation positions are possible, please consult us.

### Mounting below the reservoir (standard)

Pump below the minimum reservoir fluid level

Recommended installation position: 1 and 2

### Mounting above the reservoir

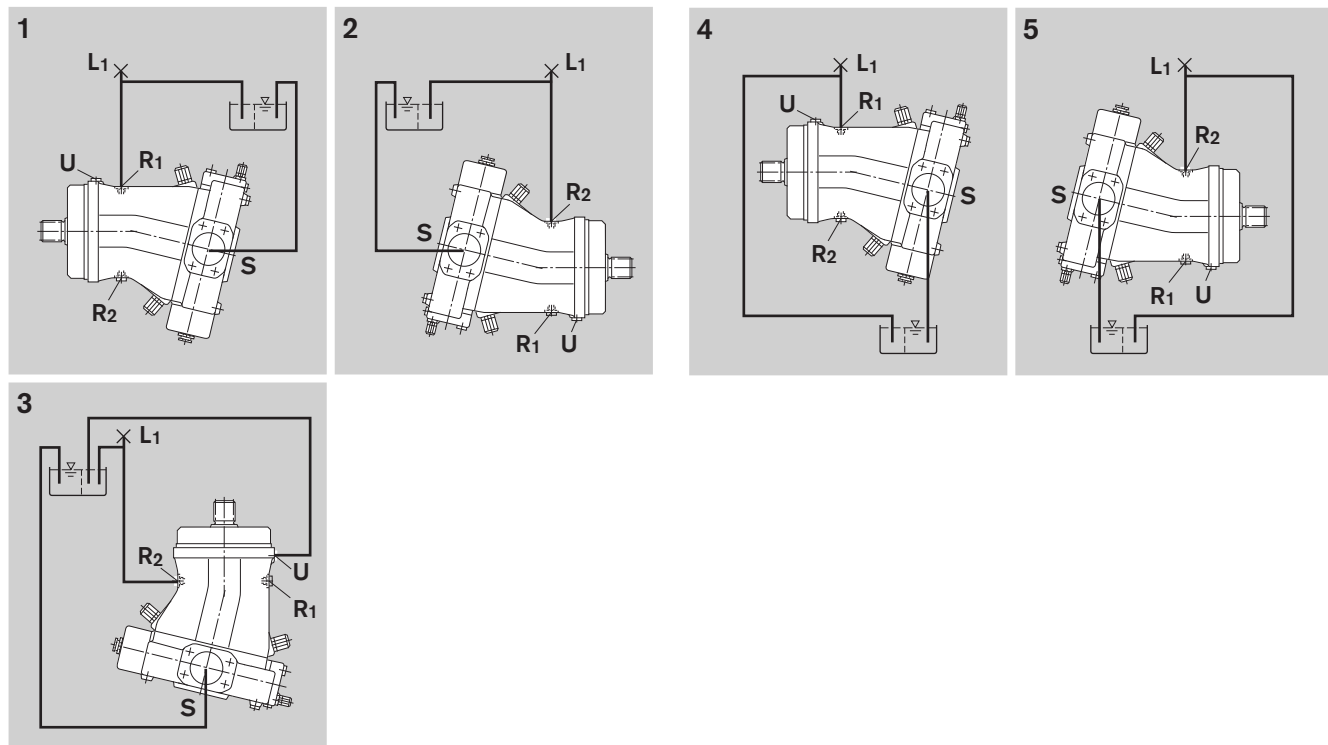

Installation position	Deaerate	Filling
1	-	R <sub>1</sub> (L <sub>1</sub> )
2	-	R <sub>2</sub> (L <sub>1</sub> )
3	U	R <sub>2</sub> (L <sub>1</sub> )

Installation position	Deaerate	Filling
4	-	R <sub>1</sub> (L <sub>1</sub> )
5	-	R <sub>2</sub> (L <sub>1</sub> )

# Installation instructions High-Speed-version

## General

During commissioning and operation the axial piston unit must be full with fluid at all times and must be deaerated. This is also important after prolonged periods of standstill since the system can empty itself via the hydraulic lines

The leakage chamber and suction chamber are connected inside the pump housing. A case drain line to tank is not necessary.

The suction line inside the reservoir must end up below the minimum fluid level under all operating conditions.

The minimum inlet pressure at port S may not fall below 0.8 bar absolute.


## Installation position

See examples below. Further installation positions are possible, please consult us

### Mounting below the reservoir (standard)

Pump below the minimum reservoir fluid level

Recommended installation position: 1 and 2.

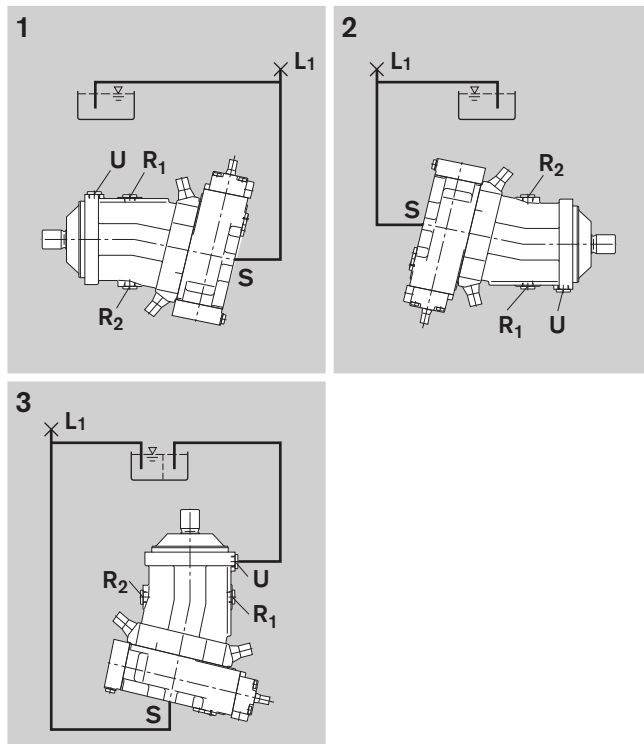

Installation position	Deaerate	Filling
1	R <sub>1</sub>	S (L <sub>1</sub> )
2	R <sub>2</sub>	S (L <sub>1</sub> )
3	U	S (L <sub>1</sub> )

# Plug

## On EP-control and electric swivel angle indicator E


### HIRSCHMANN DIN EN 175 301-803-A /ISO 4400

Without bi-directional suppressor diode

Type of protection to DIN/EN 60529: IP65

The sealing ring in the cable connection is suitable for a cable diameter of 4.5 mm to 10 mm.

The HIRSCHMANN-plug is included in the delivery of the pump.

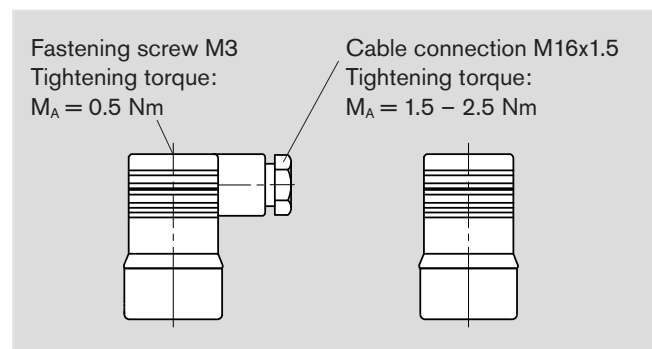

# Notes

# Safety information

- The pump A7VO was designed for operation in open loop circuits
- Systems design, installation and commissioning requires trained technicians or tradesmen.
- All hydraulic ports can only be used for the fastening of hydraulic service lines.
- During and shortly after operation of a pump the housing and especially a solenoid can be extremely hot, avoid being burned; take suitable safety measures (wear protective clothing).
- Dependent on the operating conditions of the axial piston pump (operating pressure, fluid temperature) deviations in the performance curves can occur.
- Pressure ports:  
All materials and port threads are selected and designed in such a manner, that they can withstand the peak pressures. The machine and system manufacturer must ensure, that all connecting elements and hydraulic lines are suitable for the actual operating conditions (pressures, flow, fluid, temperature) in accordance with the necessary safety factors.
- All given data and information must be adhered to..
- The product has not been released as a component in the safety concept of a total machine system acc. to DIN EN ISO 13849.
- The following tightening torques are valid:
  - Female threads in the axial piston unit:  
the maximum permissible tightening torques  $M_{G\max}$  are maximum values for the female threads in the pump casting and may not be exceeded. For values see table below.
  - Fittings:  
please comply with the manufacturer's information regarding the max. permissible tightening torques for the used fittings.
  - Fastening bolts:  
for fastening bolts to DIN 13 we recommend to check the permissible tightening torques in each individual case to VDI 2230.
  - Plugs:  
for the metal plugs, supplied with the axial piston unit the following min. required tightening torques  $M_v$  apply (see table)

Port thread size		Max. perm. tightening torque in female threads $M_{G\max}$	Required tightening torque of plugs or fittings $M_v$	Across the flats in Allan screws
M14x1.5	DIN 3852	80 Nm	35 Nm	6 mm
M18x1.5	DIN 3852	140 Nm	60 Nm	8 mm
M22x1.5	DIN 3852	210 Nm	80 Nm	10 mm
M33x2	DIN 3852	540 Nm	225 Nm	17 mm

Bosch Rexroth AG  
Hydraulics  
Axial Piston Units  
An den Kelterwiesen 14  
72160 Horb a.N., Germany  
Telefon +49 (0) 74 51 - 92 0  
Telefax +49 (0) 74 51 - 82 21  
info.brm-ak@boschrexroth.de  
www.boschrexroth.com/axial-piston-pumps

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.


Subject to change.

# Axial piston variable pump A18VO series 11

**RE 92270**

Edition: 06.2015

Replaces: 06.2012

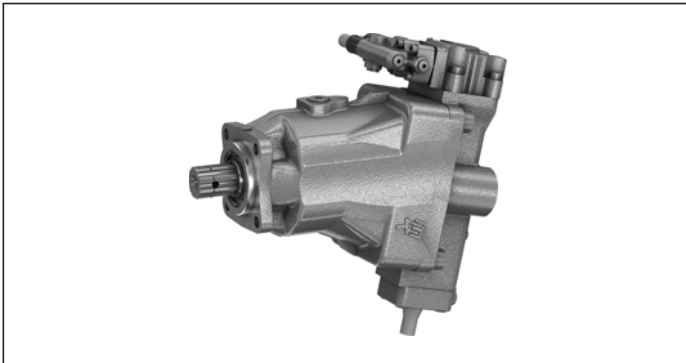

- ▶ High-pressure pump for use in commercial vehicles
- ▶ Sizes 55 to 107
- ▶ Nominal pressure 350 bar
- ▶ Maximum pressure 400 bar
- ▶ Open circuit

3

**Features**

- ▶ Variable pump with axial tapered piston rotary group in bent-axis design with special properties and dimensions for use in commercial vehicles.
- ▶ Flow is proportional to the drive speed and displacement.
- ▶ The flow can be infinitely varied by adjusting the swivel angle.
- ▶ Favorable power/weight ratio, small dimensions, optimum efficiency and economic design
- ▶ High self-suction capability
- ▶ Flange and shaft designed for direct mounting on the power take-off of commercial vehicles
- ▶ Low noise level

**Contents**

Type code	2
Hydraulic fluid	4
Working pressure range	5
Technical data	6
DRS – Pressure controller with load sensing	8
EP – Proportional control, electric	10
Dimensions, size 55	12
Dimensions, size 80	14
Dimensions, size 107	16
Connector for solenoids	19
Speed sensors DSA and DSM	19
Accessories	20
Installation instructions	22
Other related documents	23
Project planning notes	24
Safety instructions	24

## Type code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15
A18V	O				0	/	11	N		W	KO			-

### Axial piston unit

01	Bent-axis design, variable, nominal pressure 350 bar, maximum pressure 400 bar, for commercial vehicles (trucks)	A18V
----	--	------

### Operating mode

02	Pump, open circuit	O
----	--------------------	---

### Size (NG)

03	Geometric displacement, see table of values on page 6	055	080	107
----	---	-----	-----	-----

### Control devices

		055	080	107			
04	Pressure controller with load sensing	•	•	•	DRS		
	Proportional control, electric	positive control	$U = 12\text{ V}$	•	•	•	EP1
				$U = 24\text{ V}$	•	•	•
		negative control	$U = 12\text{ V}$	-	-	•	EP5
				$U = 24\text{ V}$	-	-	•

### Connector for solenoids

05	Without connector (without solenoid, only for hydraulic control)	0
	DEUTSCH molded connector, 2-pin – without suppressor diode	P

### Auxiliary functions 1

06	Without auxiliary functions	0
----	-----------------------------	---

### Series

07	Series 1, index 1	11
----	-------------------	----

### Design of ports and fastening threads

08	Metric, connecting thread with profiled sealing ring according to DIN 3852	N
----	--	---

### Direction of rotation

09	Viewed on drive shaft	clockwise	R
		counter-clockwise	L

### Sealing material

10	FKM (fluoroelastomer) including the two shaft seals made of FKM	W
----	---	---

### Mounting flange

11	Special flange ISO 7653-1985 (for trucks)	KO
----	---	----

### Drive shaft

12	Splined shaft similar to DIN ISO 14 (for trucks)	E8
----	--	----

### Working port

13	Threaded ports <b>A</b> and <b>S</b> at rear	1
	Threaded ports <b>A</b> and <b>S</b> at rear, with mounted suction adapter	2

### Speed sensor

		055	080	107	
14	Without speed sensor	•	•	•	0
	DSA speed sensor mounted <sup>1)</sup>	-	•	-	V
	DSM speed sensor mounted <sup>1)</sup>	-	•	-	M

<sup>1)</sup> Specify type key of sensor in accordance with data sheet 95133 (DSA) and/or 95132 (DSM) separately and observe the requirements for the electronics



01	02	03	04	05	06	07	08	09	10	11	12	13	14	15
<b>A18V</b>	<b>O</b>				<b>0</b>	<b>/</b>	<b>11</b>	<b>N</b>		<b>W</b>	<b>K0</b>			<b>-</b>

**Standard / special version**

15	Standard version	<b>0</b>
	Standard version with installation variants, e. g. thread adapter mounted on the <b>X</b> port	<b>Y</b>
	Special version	<b>S</b>

● = Available    - = Not available

**Note**  
 Note the project planning notes on page 24.

## Hydraulic fluid

The A18VO variable pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)

Variable pump A18VO is not suitable for operation with water-containing HF hydraulic fluids.

### Details regarding the selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$ , see selection diagram).

#### Note


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

Please contact us if the above conditions cannot be met due to extreme operating parameters.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ °C}^{1)}$	$t \leq 3 \text{ min}$ , without load ( $p \leq 50 \text{ bar}$ ), $n \leq 1000 \text{ rpm}$
Permissible temperature difference		$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid in the system
Warm-up phase	$v = 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ °C to } -25 \text{ °C}$	at $p \leq 0.7 \times p_{nom}$ , $n \leq 0.5 \times n_{nom}$ and $t \leq 15 \text{ min}$
Continuous operation	$v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$		This corresponds, for example on the VG 46, to a temperature range of +5 °C to +85 °C (see selection diagram)
		$\theta = -25 \text{ °C to } +103 \text{ °C}$	measured at air bleed port <b>R</b> Note the permissible temperature range of the shaft seal <sup>1)</sup> ( $\Delta T = \text{approx. } 12 \text{ K}$ between the bearing/shaft seal and port <b>R</b> )
	$v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		Range of optimum operating viscosity and efficiency
Short-term operation	$v_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 3 \text{ min}$ , $p < 0.3 \times p_{nom}$

#### ▼ Selection diagram

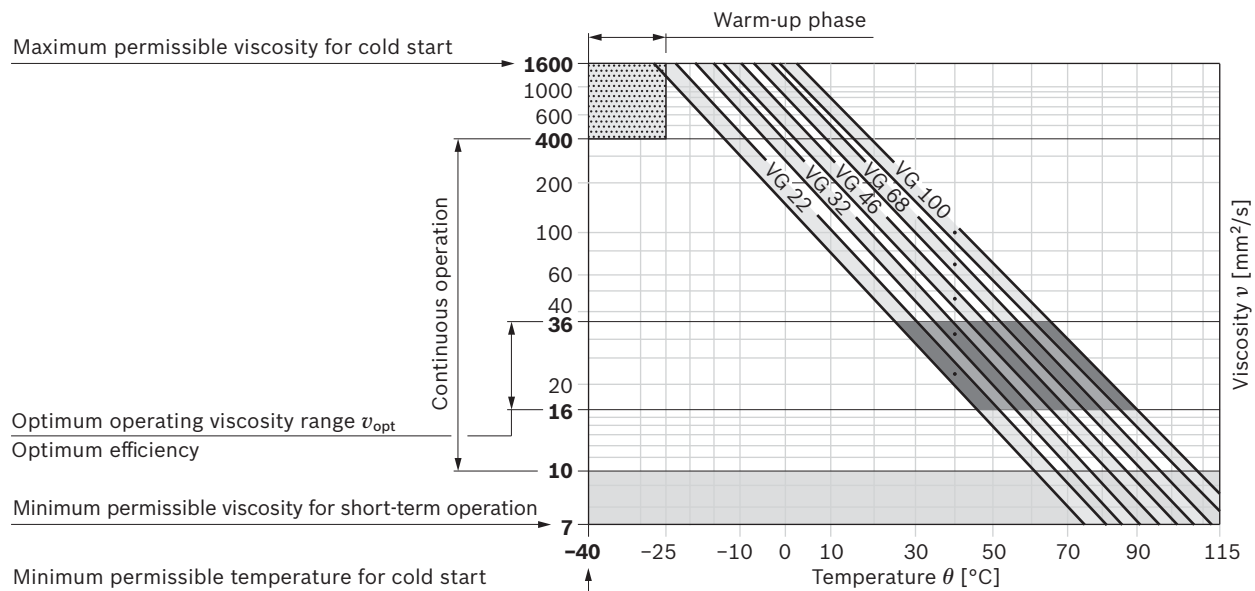

1) The FKM shaft seal is permissible for temperatures of -25 °C to +115 °C, please contact us for temperatures below -25 °C.

**Filtration of the hydraulic fluid**

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.


A cleanliness level of at least 20/18/15 according to ISO 4406 is to be adhered to.

At very high hydraulic fluid temperatures (90 °C to maximum 103 °C, measured at air bleed port **R**), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.


**Working pressure range**

Pressure at working port A (high-pressure side)		Definition
Nominal pressure $p_{nom}$	350 bar absolute	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	400 bar absolute	The maximum pressure corresponds the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	5 s	
Total operating period	50 h	
Minimum pressure (high-pressure side)	10 bar absolute	Minimum pressure on high-pressure side ( <b>A</b> ) required to prevent damage to the axial piston unit.
Rate of pressure change $R_{A\ max}$	9000 bar/s	Maximum permissible rate of pressure build-up and reduction during a pressure change over the entire pressure range.
Pressure at suction port S (inlet)		Definition
Minimum pressure $p_{S\ min}$	0.8 bar absolute	Minimum pressure at suction port <b>S</b> (inlet) that is required to avoid damage to the axial piston unit. The minimum required pressure is dependent on the speed and displacement of the axial piston unit (see diagram on page 6).
Maximum pressure $p_{S\ max}$	2 bar absolute	

▼ **Rate of pressure change  $R_{A\ max}$**

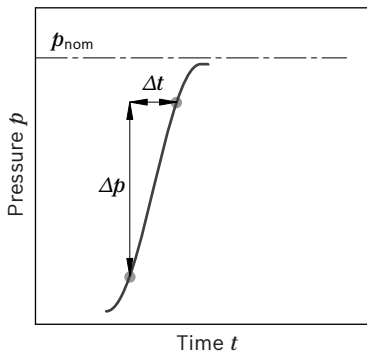

▼ **Pressure definition**

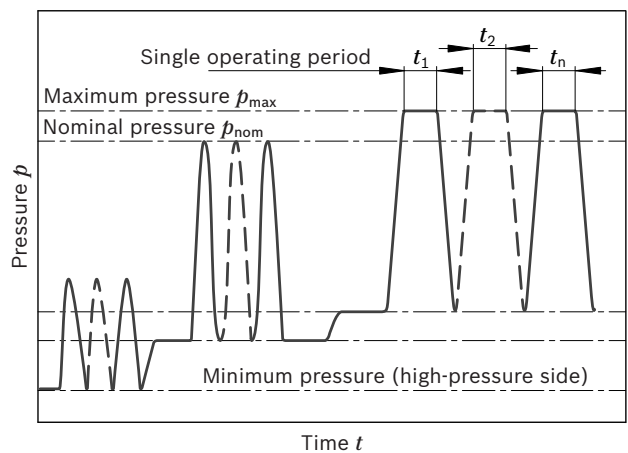

Total operating period =  $t_1 + t_2 + \dots + t_n$


**Note**

Working pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.

## Technical data

Size		NG	55	80	107	
Displacement, geometric, per revolution		$V_{g \max}$	cm <sup>3</sup>	54.8	80	107
Maximum rotational speed <sup>1)</sup>	at $V_{g \max}$	$n_{\text{nom}}$	rpm	2500	2240	2150
	at $V_g < 0.74 \times V_{g \max}$	$n_{\text{max1}}$	rpm	3400	3000	2900
Maximum rotational speed <sup>2)</sup>		$n_{\text{max2}}$	rpm	3750	3350	3200
Flow	at $n_{\text{nom}}$ and $V_{g \max}$	$q_v$	l/min	137	179	230
Power	at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 350$ bar	$P$	kW	80	105	134
Torque	at $V_{g \max}$ and $\Delta p = 350$ bar	$T$	Nm	305	446	596
Rotary stiffness	$V_{g \max}$ to $0.5 \times V_{g \max}$	$c_{\text{min}}$	Nm/rad	10594	15911	21469
	$0.5 \times V_{g \max}$ to 0 (interpolated)	$c_{\text{max}}$	Nm/rad	32103	48971	67666
Moment of inertia for rotary group		$J_{\text{TW}}$	kgm <sup>2</sup>	0.0034	0.0066	0.0109
Maximum angular acceleration		$\alpha$	rad/s <sup>2</sup>	31600	24200	19200
Case volume		$V$	l	0.6	0.8	1.2
Mass moment		$T_G$	Nm	21	32	41
Weight (approx.)		$m$	kg	16	21	25

### ▼ Maximum speed (speed limit)

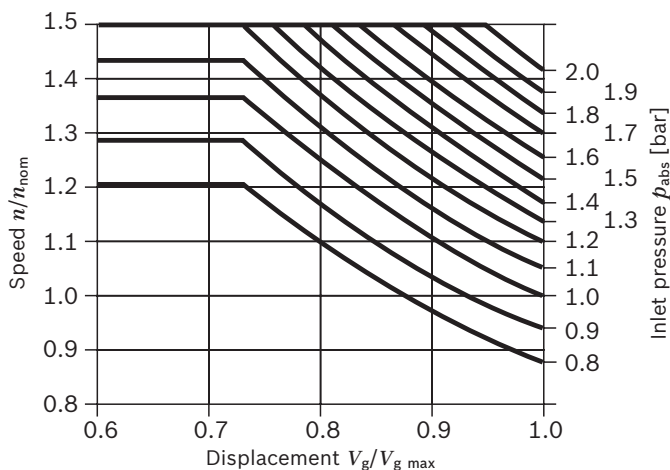

### Determining operating characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{\text{hm}}}$	[Nm]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

### Key

$V_g$	Displacement per revolution [cm <sup>3</sup> ]
$\Delta p$	Differential pressure [bar]
$n$	Rotational speed [rpm]
$\eta_v$	Volumetric efficiency
$\eta_{\text{hm}}$	Hydraulic mechanical efficiency
$\eta_t$	Total efficiency ( $\eta_t = \eta_v \times \eta_{\text{hm}}$ )

### Note


- ▶ Theoretical values, without efficiency and tolerances; values rounded.
- ▶ Exceeding the maximum or falling below the minimum permissible values can lead to a loss of function, a reduction in operational service life or total destruction of the axial piston unit. Other permissible limit values, such as speed variation, reduced angular acceleration as a function of the frequency and the permissible angular acceleration at start (lower than the maximum angular acceleration) can be found in data sheet 90261.

1) The values are valid:

- At absolute pressure  $p_{\text{abs}} = 1$  bar at suction port **S**
- For the optimal viscosity range of  $\nu_{\text{opt}} = 36$  to  $16$  mm<sup>2</sup>/s
- For hydraulic fluid based on mineral oils.

2) Maximum rotational speed (speed limit) for increased inlet pressure  $p_{\text{abs}}$  at suction port **S** and  $V_g < V_{g \max}$ , see diagram.

**Permissible axial forces of the drive shaft**

Size		NG	55	80	107
Maximum axial force at standstill or pressure-free operation		+ $F_{ax \max}$ N	0	0	0
		- $F_{ax \max}$ N	66	86	103

**Note**

- ▶ The values given are maximum values and do not apply to continuous operation.
- ▶ The permissible axial force in direction  $-F_{ax}$  is to be avoided as the lifetime of the bearing is reduced.
- ▶ Radial forces are not permissible.

## DRS – Pressure controller with load sensing

### Function of the pressure controller

The pressure controller limits the maximum pressure at the pump output within the control range of the pump. The variable pump only delivers as much hydraulic fluid as the consumers actually need. If the operating pressure exceeds the setpoint value set at the pressure valve, the pump will regulate to a smaller displacement to reduce the control differential.

When depressurized, the pump is swiveled to its initial position  $V_{g \max}$  by an adjustment spring.

- ▶ Setting range for pressure control 100 to 400 bar
- ▶ Standard setting 350 bar

### Note

- ▶ Any pressure-relief valve included in the system to limit the maximum pressure must have its start of opening at least 20 bar above the pressure controller setting.
- ▶ The pressure controller overrides the load-sensing controller, i.e. the load-sensing function operates below the set pressure.
- ▶ To ensure thermal stability, a drain line from port **T** to the reservoir is generally required (not needed for EP control).

When ordering, state in clear text:

- ▶ Pressure controller setting
- ▶  $\Delta p$  setting for load sensing function

Unless otherwise specified, the pump will be delivered with standard settings.

### Zero-stroke operation

The standard version is designed for intermittent constant pressure operation. Short-term zero-stroke operation (< 1 min) is permissible up to an operating pressure of  $p_{nom} = 350$  bar at a reservoir temperature of  $\leq 50$  °C.

### Load-sensing function

The load sensing controller works as a load-pressure controlled flow controller and adjusts the displacement of the pump to the volume required by the consumer.

The flow of the pump is then dependent on the cross section of the external metering orifice (1), which is located between the pump and the consumer. Below the setting of the pressure controller and within the control range of the pump, the flow is not dependent on the load pressure.

The metering orifice is usually a separately located load sensing directional valve (control block). The position of the directional valve spool determines the opening cross-section of the metering orifice and thus the flow of the pump.

The load sensing controller compares the pressure before the metering orifice with that after the orifice and maintains the pressure drop encountered here (differential pressure  $\Delta p$ ) and thus the flow constant.


If the differential pressure  $\Delta p$  at the metering orifice rises, the pump is swiveled back (toward  $V_{g \min}$ ). If the differential pressure  $\Delta p$  drops, the pump is swiveled out (toward  $V_{g \max}$ ) until equilibrium at the metering orifice is restored.

$$\Delta p_{\text{Metering orifice}} = p_{\text{Pump}} - p_{\text{Consumer}}$$


- ▶ Setting range for  $\Delta p$  19 to 40 bar
- ▶ Standard setting 30 bar

The stand-by pressure in zero-stroke mode (metering orifice closed) is slightly higher than the  $\Delta p$  setting.

### ▼ Characteristic curve DRS

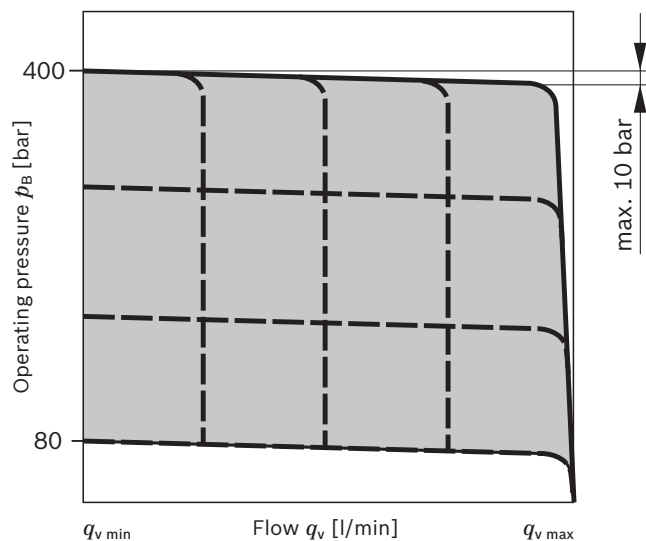

▼ **Circuit diagram DRS**

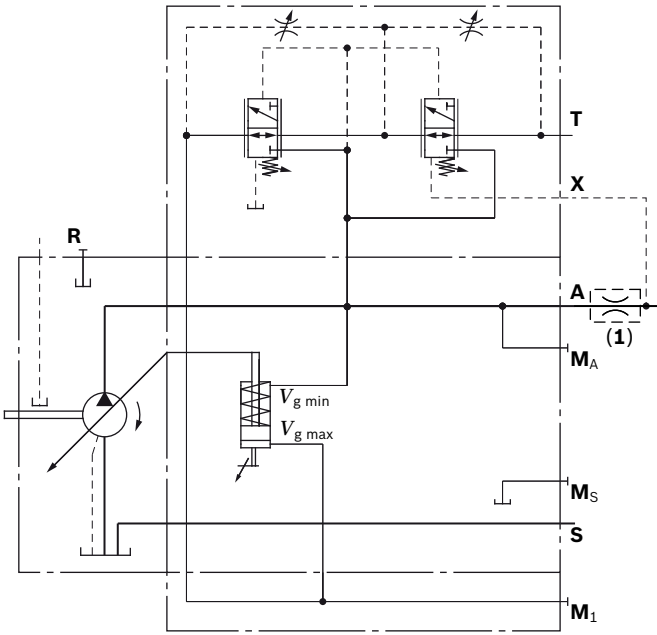

The metering orifice (control block) (1) is not included in the scope of delivery.

## EP – Proportional control, electric

The electric proportional control provides infinite control of the displacement. Control is proportional to the electric control current applied to the solenoid.

### EP1, EP2 – Positive control

Adjustment from  $V_{g \min}$  to  $V_{g \max}$


With increasing control current, the pump swivels to a larger displacement. A control pressure is needed to swivel the pump from its initial position  $V_{g \min}$  to  $V_{g \max}$ . The control power required is drawn from the working pressure. To enable a pressure to be built up, a residual volume of approx. 10% of  $V_{g \max}$  is a fixed setting.

### EP5, EP6 – Negative control

Adjustment from  $V_{g \max}$  to  $V_{g \min}$

With increasing control current, the pump swivels to a smaller displacement. The control power required is drawn from the working pressure.

#### ▼ Characteristic curve EP

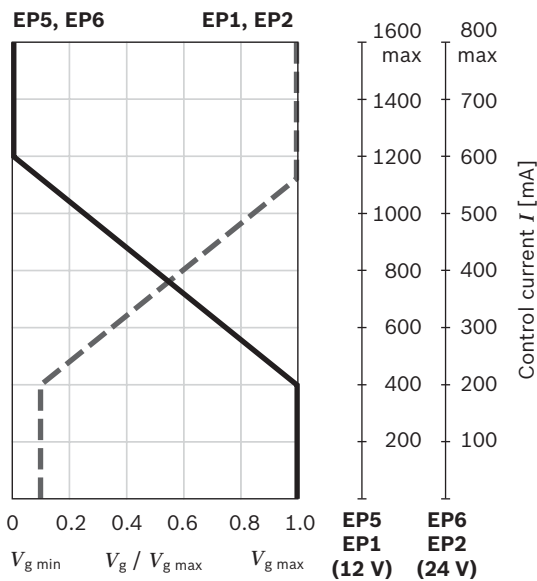


Technical data, solenoid	EP1, EP5	EP2, EP6
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Control current		
Start of control	400 mA	200 mA
End of control	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 Hz	100 Hz
Duty cycle	100%	100%
Type of protection: see connector version page 19		

Various BODAS controllers with application software and amplifiers are available for controlling the proportional solenoids.


Further information can also be found on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics).



▼ Circuit diagram EP1, EP2

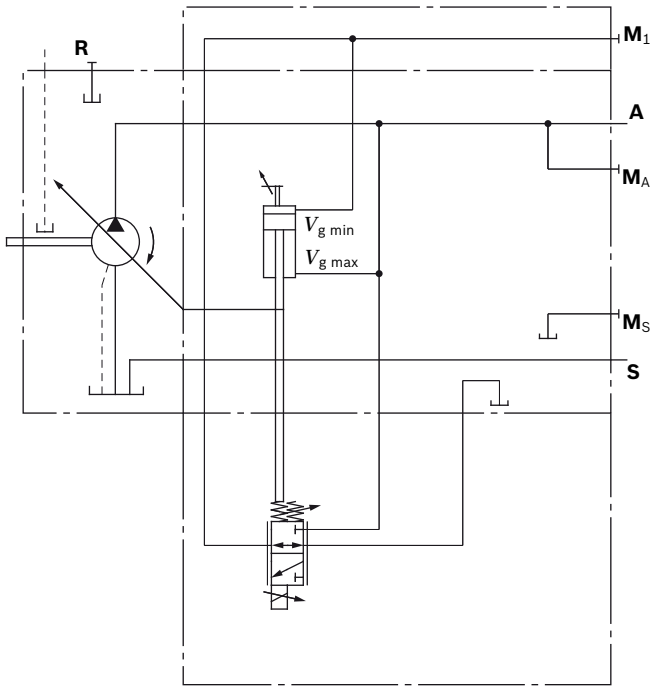


▼ Circuit diagram EP5, EP6

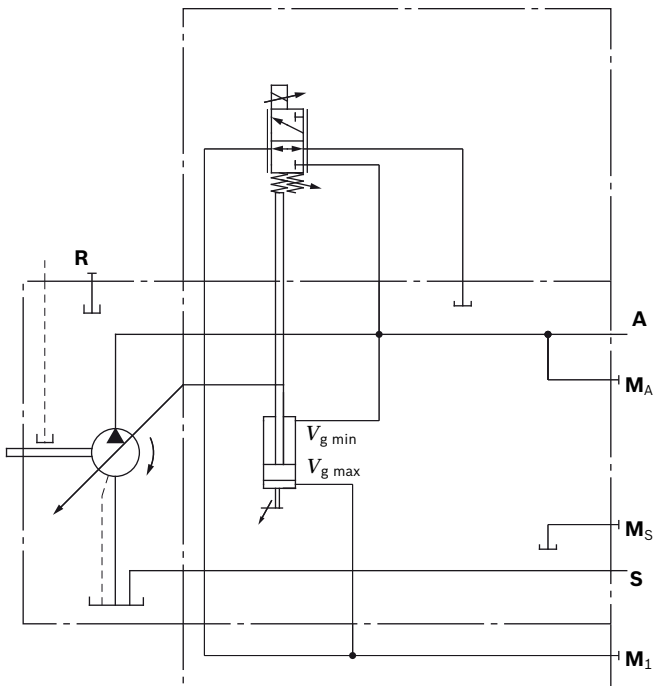


**Dimensions, size 55**


**DRS – Pressure controller with load sensing**

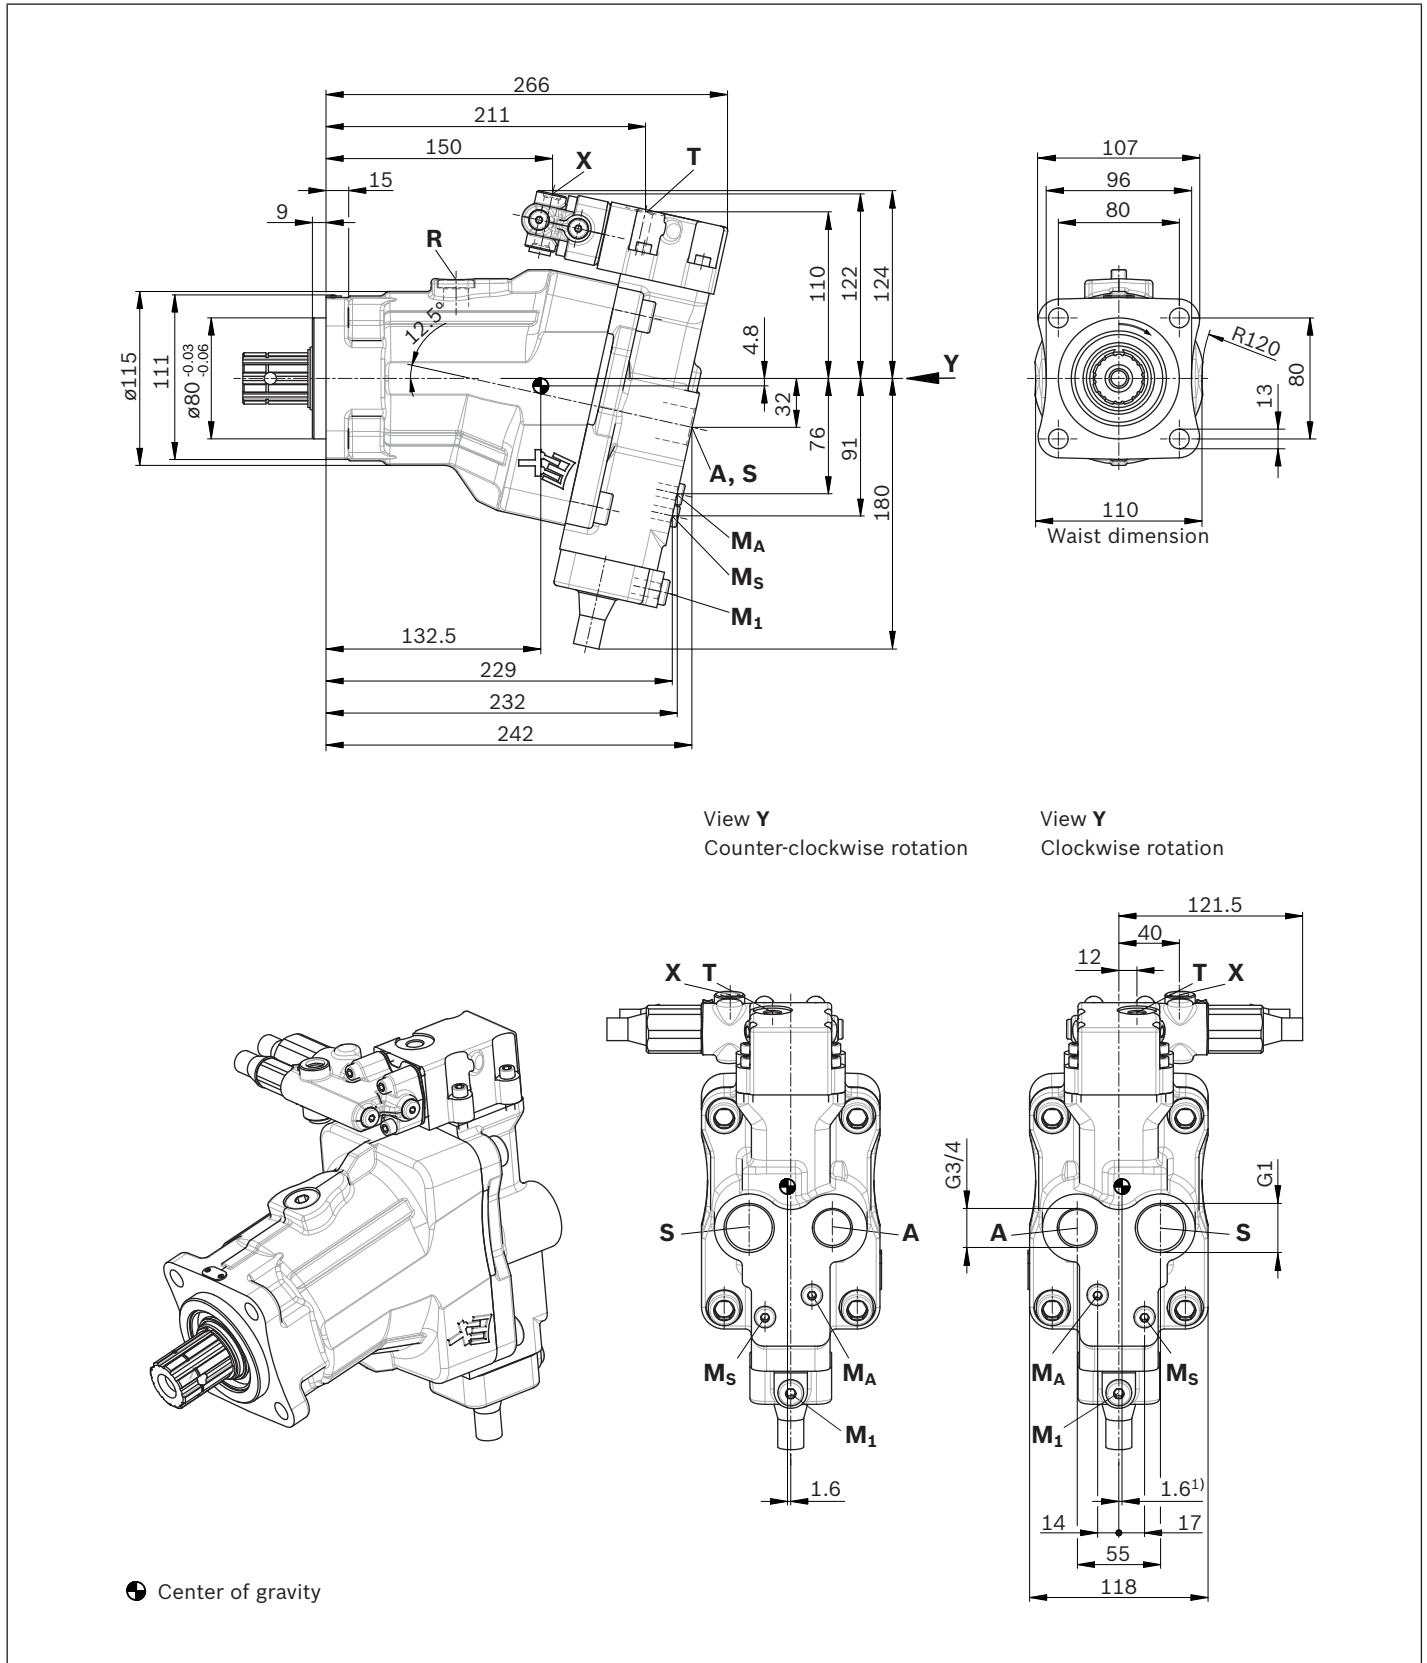

**EP1, EP2 – Proportional electric control, positive control**

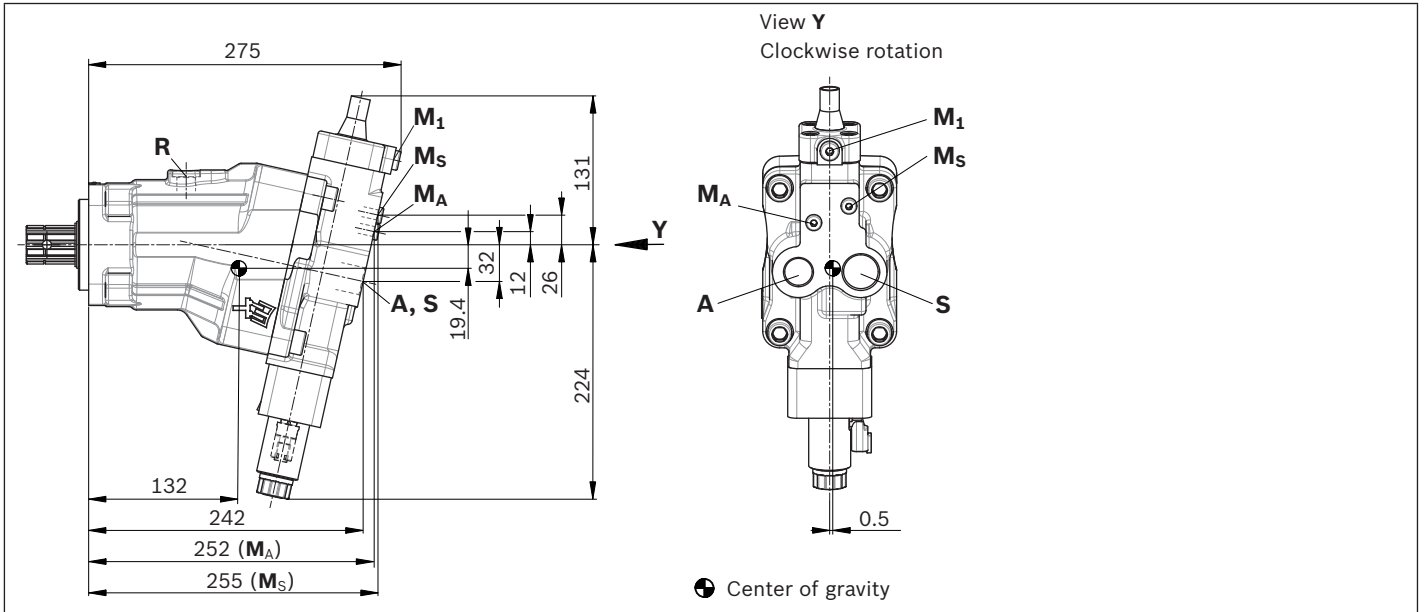

▼ **Splined shaft similar to DIN ISO 14**

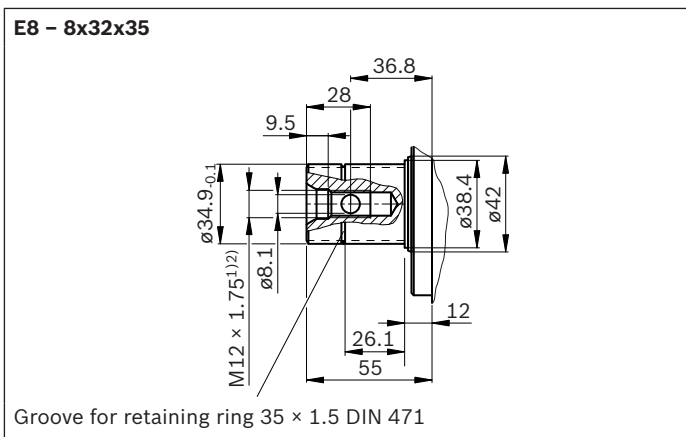


Ports	Standard	Size <sup>2)</sup>	$p_{max abs}$ [bar] <sup>3)</sup>	State <sup>6)</sup>	
<b>A</b>	Working port	DIN ISO 228	G3/4; 16 deep	400	O
<b>S</b>	Suction port	DIN ISO 228	G1; 18 deep	2	O
<b>T</b>	Drain port (DRS only)	DIN 3852 <sup>5)</sup>	M12 x 1.5; 12 deep	2	O
<b>MA</b>	Measuring port, high pressure	DIN 3852 <sup>5)</sup>	M10 x 1; 8 deep	400	X
<b>Ms</b>	Measuring port, suction pressure	DIN 3852 <sup>5)</sup>	M10 x 1; 8 deep	2	X
<b>M1</b>	Measuring port, stroking chamber	DIN 3852 <sup>5)</sup>	M12 x 1.5; 12 deep	400	X
<b>R</b>	Air bleed port	DIN 3852 <sup>5)</sup>	M18 x 1.5; 12 deep	2	X <sup>4)</sup>
<b>X</b>	Load pressure port (DRS only)	ISO 11926 <sup>5)</sup>	7/16-20UNF-2B; 11.5 deep	400	O


- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) For notes on tightening torques, see instruction manual
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 4) Only open port **R** for filling and air bleeding.
- 5) The spot face can be deeper than as specified in the standard.
- 6) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)

**Dimensions, size 80**


**DRS – Pressure controller with load sensing**

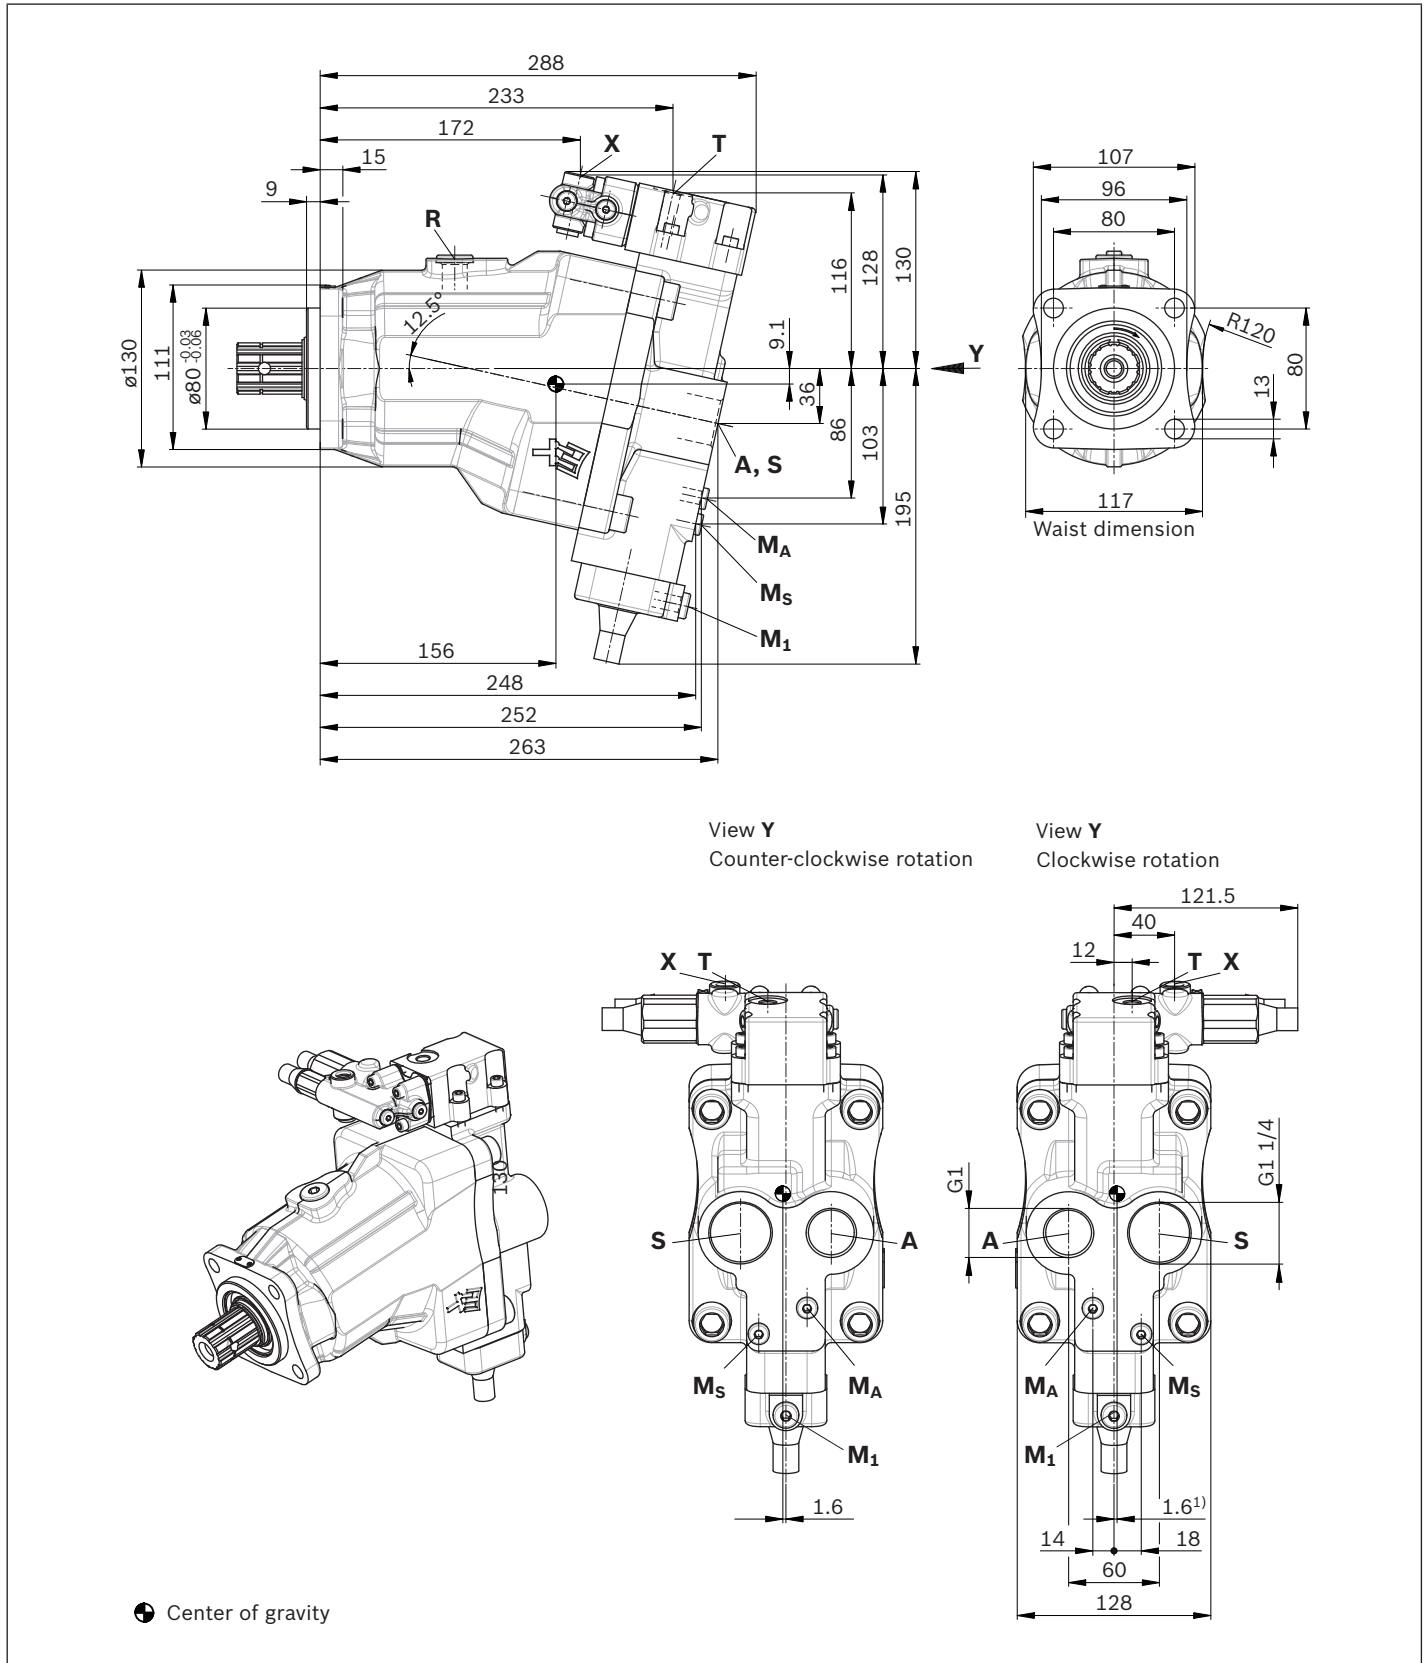

**EP1, EP2 – Proportional electric control, positive control**

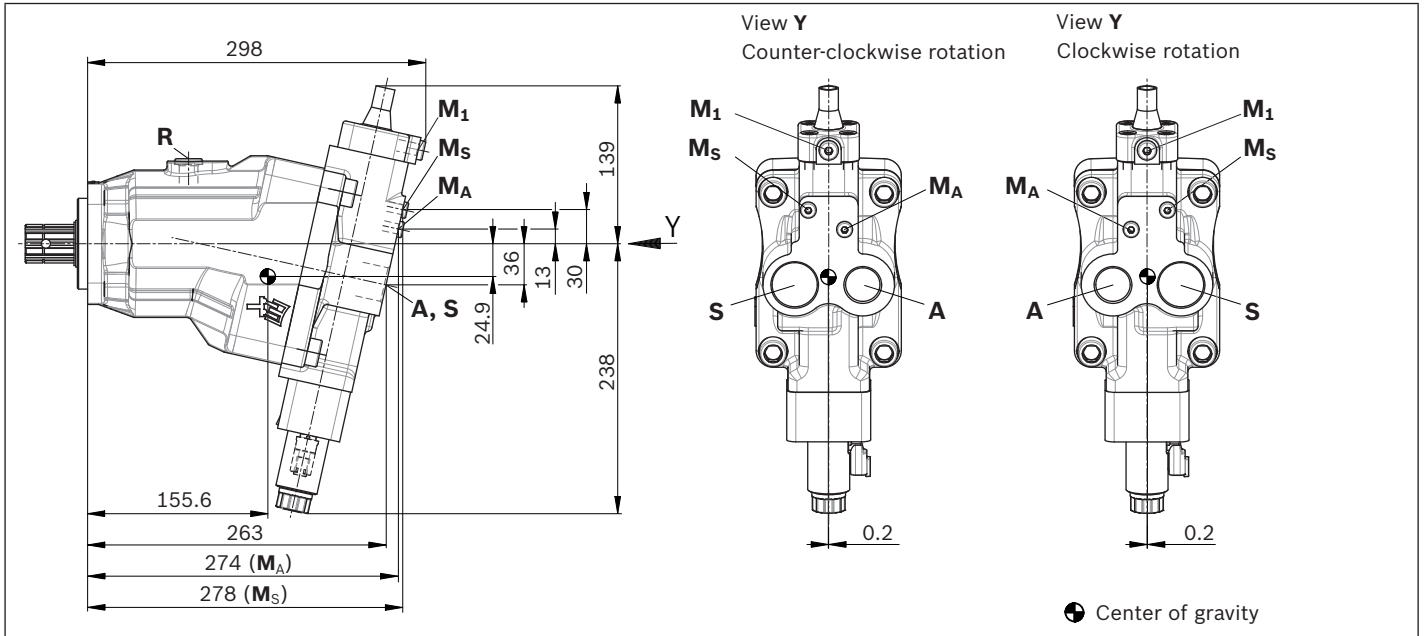

▼ **Splined shaft similar to DIN ISO 14**

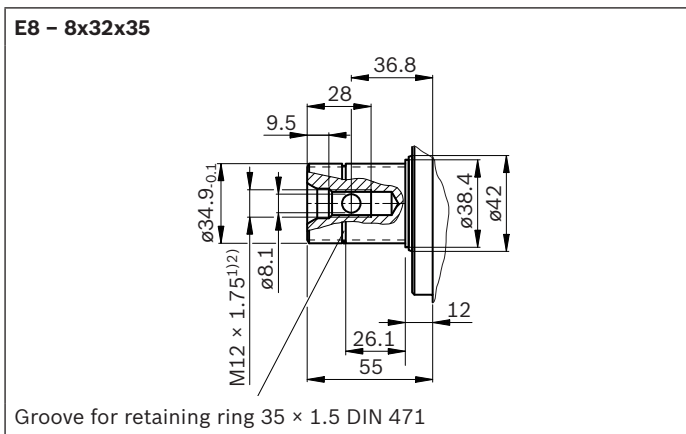


Ports	Standard	Size <sup>2)</sup>	$p_{max\ abs}$ [bar] <sup>3)</sup>	State <sup>6)</sup>	
<b>A</b>	Working port	DIN ISO 228	G1; 18 deep	400	O
<b>S</b>	Suction port	DIN ISO 228	G1 1/4; 20 deep	2	O
<b>T</b>	Drain port (DRS only)	DIN 3852 <sup>5)</sup>	M12 x 1.5; 12 deep	2	O
<b>MA</b>	Measuring port, high pressure	DIN 3852 <sup>5)</sup>	M10 x 1; 8 deep	400	X
<b>MS</b>	Measuring port, suction pressure	DIN 3852 <sup>5)</sup>	M10 x 1; 8 deep	2	X
<b>M1</b>	Measuring port, stroking chamber	DIN 3852 <sup>5)</sup>	M12 x 1.5; 12 deep	400	X
<b>R</b>	Air bleed port	DIN 3852 <sup>5)</sup>	M18 x 1.5; 12 deep	2	X <sup>4)</sup>
<b>X</b>	Load pressure port (DRS only)	ISO 11926 <sup>5)</sup>	7/16-20UNF-2B; 11.5 deep	400	O


- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) For notes on tightening torques, see instruction manual
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 4) Only open port **R** for filling and air bleeding.
- 5) The spot face can be deeper than as specified in the standard.
- 6) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)

**Dimensions, size 107**


**DRS – Pressure controller with load sensing**

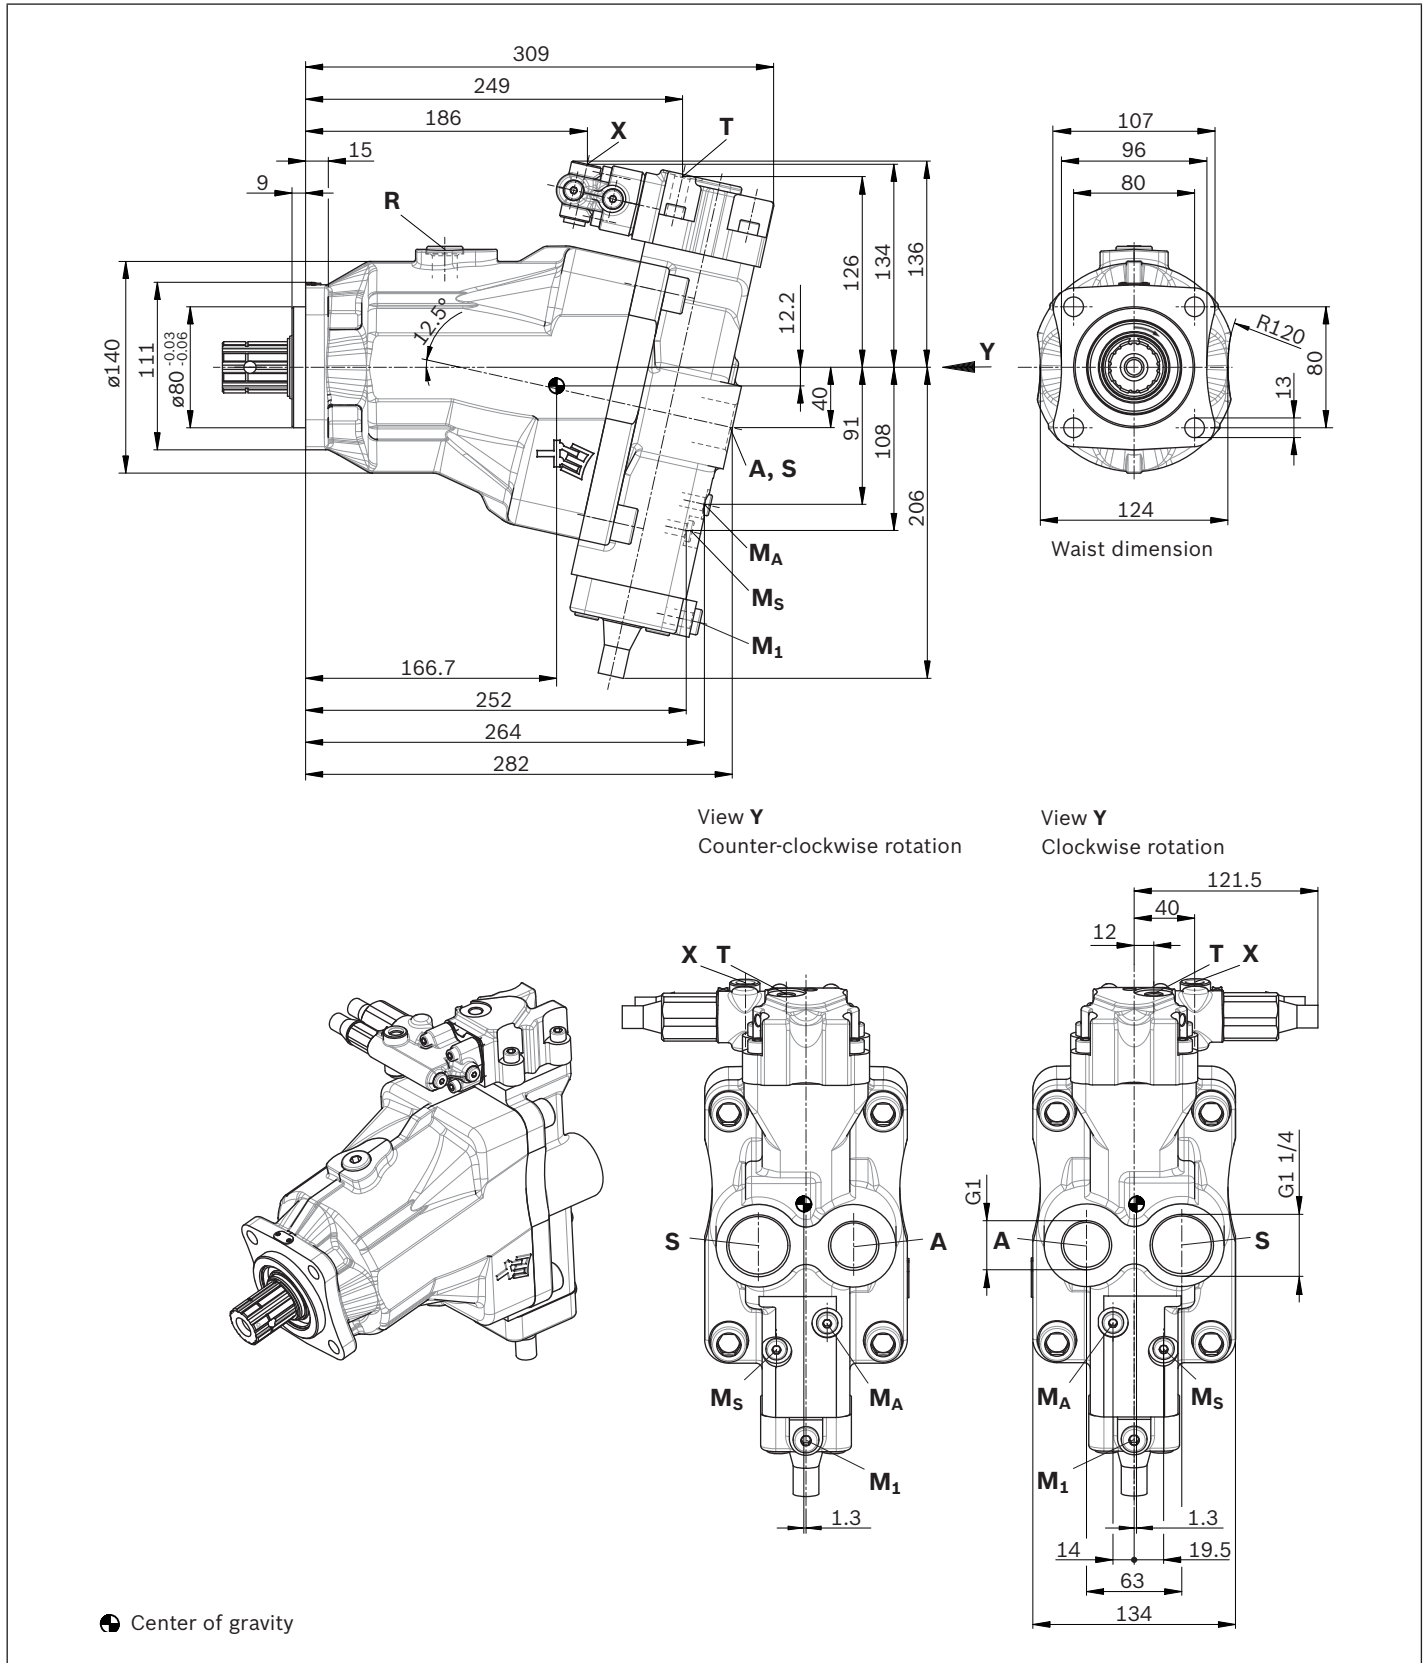


**EP1, EP2 – Proportional electric control, positive control**

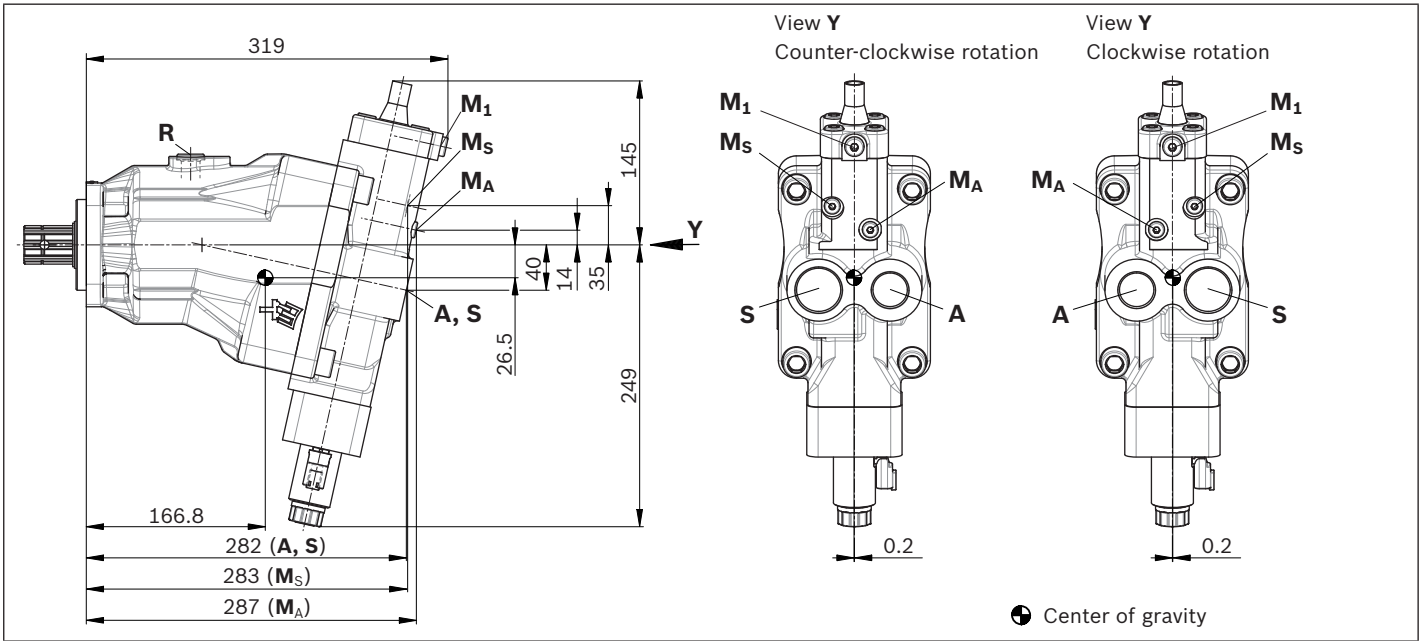

**EP5, EP6 – Proportional electric control, negative control**

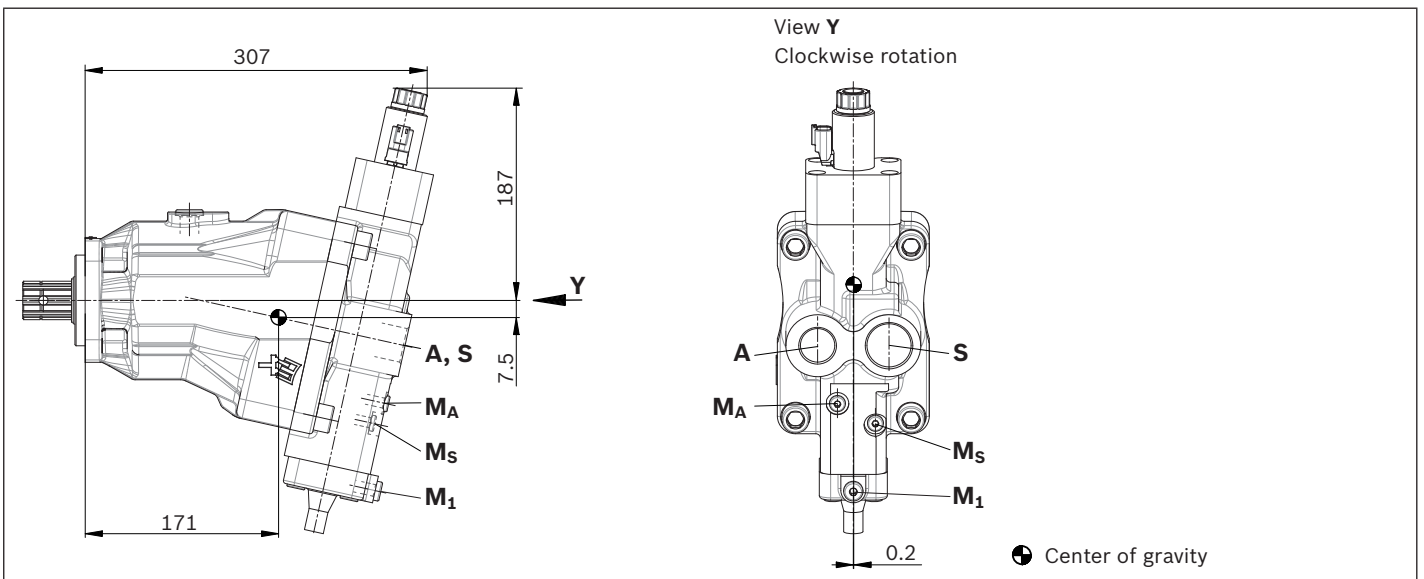

▼ Splined shaft similar to DIN ISO 14

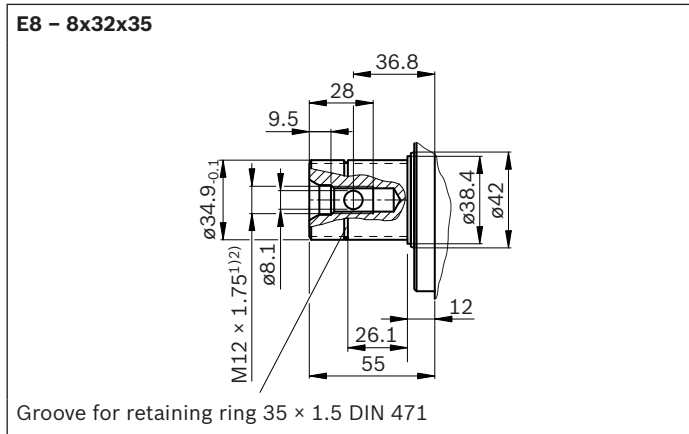

Ports		Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>3)</sup>	State <sup>6)</sup>
<b>A</b>	Working port	DIN ISO 228	G1; 18 deep	400	O
<b>S</b>	Suction port	DIN ISO 228	G1 1/4; 20 deep	2	O
<b>T</b>	Drain port (DRS only)	DIN 3852 <sup>5)</sup>	M12 × 1.5; 12 deep	2	O
<b>M<sub>A</sub></b>	Measuring port, high pressure	DIN 3852 <sup>5)</sup>	M10 × 1; 8 deep	400	X
<b>M<sub>S</sub></b>	Measuring port, suction pressure	DIN 3852 <sup>5)</sup>	M10 × 1; 8 deep	2	X
<b>M<sub>I</sub></b>	Measuring port, stroking chamber	DIN 3852 <sup>5)</sup>	M12 × 1.5; 12 deep	400	X
<b>R</b>	Air bleed port	DIN 3852 <sup>5)</sup>	M18 × 1.5; 12 deep	2	X <sup>4)</sup>
<b>X</b>	Load pressure port (DRS only)	ISO 11926 <sup>5)</sup>	7/16-20UNF-2B; 11.5 deep	400	O

- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) For notes on tightening torques, see instruction manual
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 4) Only open port **R** for filling and air bleeding.
- 5) The spot face can be deeper than as specified in the standard.
- 6) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)



## Connector for solenoids


### DEUTSCH DT04-2P-EP04

Molded connector, 2-pin, without bidirectional suppressor diode

There is the following type of protection with mounted mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

#### ▼ Circuit symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

#### Note

- ▶ If necessary, you can change the connector orientation by turning the solenoid housing.
- ▶ The procedure can be taken from the instruction manual.

## Speed sensors DSA and DSM


A signal proportional to pump speed can be generated with the fitted DSA/DSM speed sensor. The DSA/DSM sensor registers the speed and direction of rotation.

Type code, technical data, dimensions and details on the connector, plus safety instructions about the sensor can be found in the relevant data sheet 95133 (DSA) and 95132 (DSM).


The sensor is mounted on the port provided for this purpose with a mounting bolt.

<b>Size</b>	<b>80</b>
Number of teeth	21

#### ▼ Circuit diagram

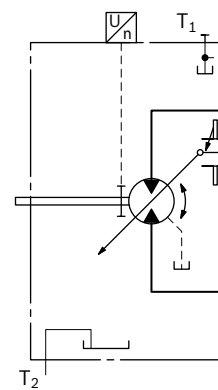


#### Dimensions

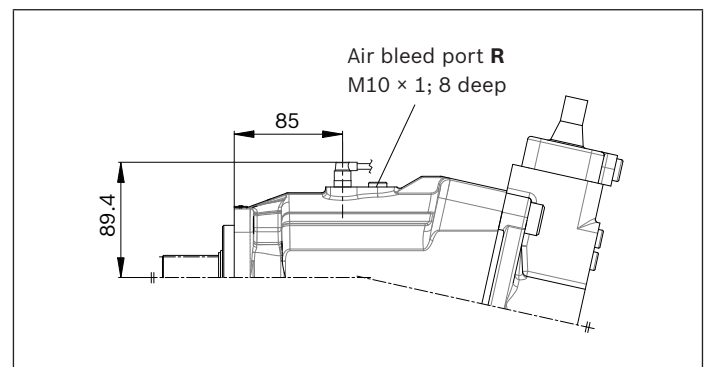

## Accessories

### Suction adapter

#### ▼ Dimensions

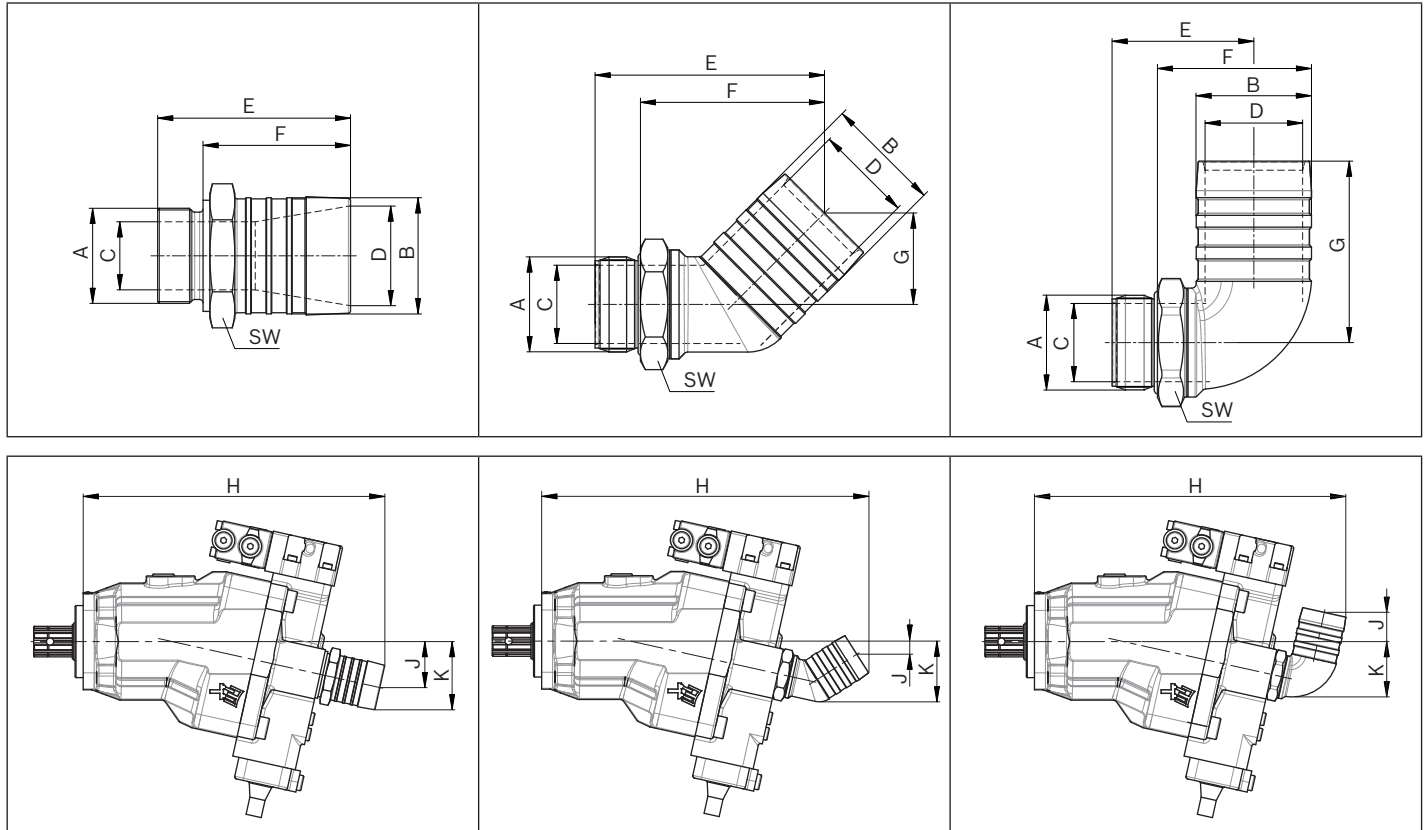

Axial piston unit		Suction adapter		Version	Material number	ø C	ø D	E	F	G	WAF	H	J	K
NG	Port S	Inner ø												
	A	B [in]	B [mm]											
55	G1	1 1/2	39	Straight	R902600251	23.5	33.5	72	54	-	41	301	44	63
55	G1	2	51		R902602028	26	44	82	64	-	55	312	47	70
80	G1 1/4	2	51		R902600252	30	44	85	65	-	55	335	51	76
107												354	55	79
107	G1 1/4	2 1/2	63		R902601630	31	54	82	64	-	65	354	54	79
55	G1	1 1/2	39	45°	R909831600	26	31	101	82	45	41	342	7	59
55	G1	2	51		R902602029	26	43	100	81	44	41	344	7	61
80	G1 1/4	2	51		R909831597	34	43	101	81	40	50	364	15	68
107												383	18	71
107	G1 1/4	2 1/2	63		R902601631	35	54	100	81	44	50	387	14	74
55	G1	1 1/2	39	90°	R909831599	26	31	64	44	85	41	321	41	56
55	G1	2	51		R902602030	26	43	62	42	81	41	324	38	58
80	G1 1/4	2	51		R909831598	35	43	63	43	80	50	346	33	66
107												365	29	70

When ordering, quote the material number of the version required

**Notes on suction line**

- ▶ Keep as short and straight as possible, without sharp bend
- ▶ Use a supporting ring for plastic hoses
- ▶ Use two hose clamps to protect the suction hose against air suction
- ▶ Note pressure resistance of suction hose compared to ambient pressure

**Replacing seals**

The O-rings used as seals to prevent air from entering the suction line are to be replaced after every removal and new installation in order to guarantee complete sealing.

Material number for O-rings:

- ▶ R909083802: O-ring for suction adapter G1
- ▶ R909083808: O-ring for suction adapter G1 1/4


**Coupling flange**

There are special, modified coupling flanges in 4-hole and 6-hole design for the cardan shaft drive.


The coupling flange is not included in the scope of delivery and must be ordered separately.

▼ **4-hole coupling flange, complete – ø 90**

Material number: R902060152

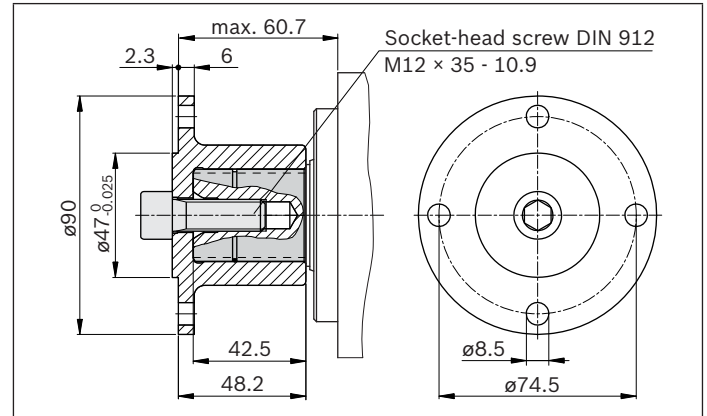▼ **6-hole coupling flange, complete – ø 100**

Material number: R902060153

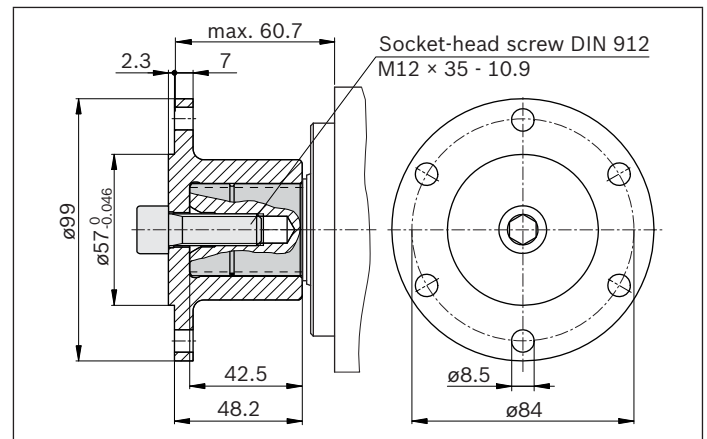**Note**

- ▶ Assembly of the coupling flange is carried out by pulling onto the drive shaft with the aid of the threaded bore in the drive shaft end.
- ▶ The coupling flange must be clamped on the drive shaft using a socket-head screw. In addition, permanent lubrication should be applied between the drive shaft and the coupling flange.
- ▶ The socket-head screw should be secured in a suitable manner (e.g. gluing with Loctite 276) and tightened with a tightening torque of 130 Nm.
- ▶ Sudden axial impact upon the drive shaft will lead to rotary group damage and therefore must be avoided at all costs.

## Installation instructions

### General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This must also be observed following a long standstill as the axial piston unit can empty via the hydraulic lines.

The pump housing is internally connected to the suction chamber. A separate drain line from the housing to the reservoir is not needed. Exception: To ensure thermal stability, a drain line from port **T** to the reservoir is generally required with the DRS controller.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction line and drain line must flow into the reservoir below the minimum fluid level.

The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{s\ max} = 800\ \text{mm}$ . The minimum suction pressure at port **S** must not fall below 0.8 bar absolute during both operation and during cold start.

When designing the reservoir, ensure that there is adequate spacing between the suction line and the drain line. This minimizes oil turbulence and carries out degassing, which prevents the heated hydraulic fluid from being sucked directly back in again.

Key	
<b>F</b>	Filling/air bleeding
<b>R</b>	Air bleed port
<b>S</b>	Suction port
<b>T</b>	Drain port (DRS only)
<b>M<sub>S</sub></b>	Measuring port, suction pressure
<b>SB</b>	Baffle (baffle plate)
$h_{t\ min}$	Minimum required immersion depth (200 mm)
$h_{min}$	Minimum required distance to reservoir bottom (100 mm)
$h_{s\ max}$	Maximum permissible suction height (800 mm)

### Note

Port **F** is part of the external piping and must be provided by the customer to make filling and air bleeding easier.

### Installation position



See the following examples **1** to **4**.

Additional installation positions are available upon request.

Recommended installation position: **1** and **2**.

### Below-reservoir installation (standard)



Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.

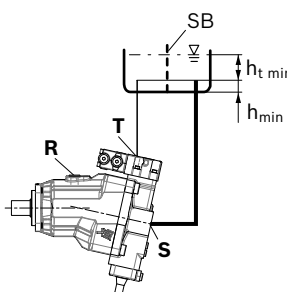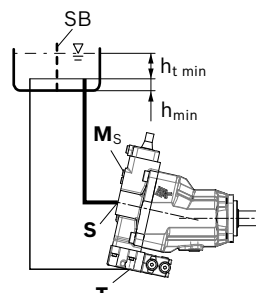Installation position	Air bleeding	Filling
<b>1</b>	<b>R</b>	<b>S</b>
		
<b>2</b>	<b>M<sub>S</sub></b>	<b>S</b>
		

### Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.

Observe the maximum permissible suction height  $h_{s\ max} = 800\ \text{mm}$ .

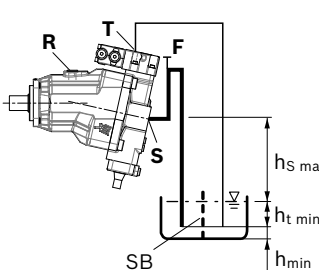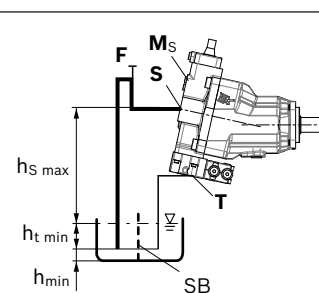Installation position	Air bleeding	Filling
<b>3</b>	<b>R</b>	<b>F</b>
		
<b>4</b>	<b>M<sub>S</sub></b>	<b>F</b>
		

## Other related documents

Other pumps with special properties and dimensions for use in commercial vehicles can be found in the following data sheets:

- ▶ 91510: Fixed pump A17FNO, 250/300 bar
- ▶ 91520: Fixed pump A17FO, 350/400 bar
- ▶ 92280: Variable pump, A18VLO 350/400 bar

## Project planning notes

- ▶ The A18VO pump is designed to be used in open circuits.
- ▶ The project planning, installation and commissioning of the axial piston unit require the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, request it from Bosch Rexroth.
- ▶ Before finalizing your design, request a binding installation drawing.
- ▶ The specified data and notes must be observed.
- ▶ Depending on the operating condition of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation times apply under optimal storage conditions, details of these conditions can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all variants of the product are approved for use in safety functions according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g. MTTF<sub>d</sub>) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference. Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.

- ▶ Pressure controllers are not safeguards against pressure overload. A pressure relief valve is to be provided in the hydraulic system.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports can only be used to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control and regulation systems (e.g. valve spools) may in certain circumstances become stuck in an undefined position due to contamination (e.g. contaminated hydraulic fluid, abrasion or residual dirt from components). As a result, the hydraulic fluid flow or build-up of torque of the axial piston unit will no longer respond correctly to the operator's commands. Even the use of different filter cartridges (external or internal inlet filter) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to set the consumer being driven to a safe position (e.g. safe stop) and if necessary to ensure it is properly implemented.

**Bosch Rexroth AG**  
Mobile Applications  
Glockeraustrasse 4  
89275 Elchingen, Germany  
Tel. +49 7308 82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com


© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# Axial Piston Variable Pump A18VLO Series 11

**RE 92280**

Issue: 06.2012

Replaces: 06.2009

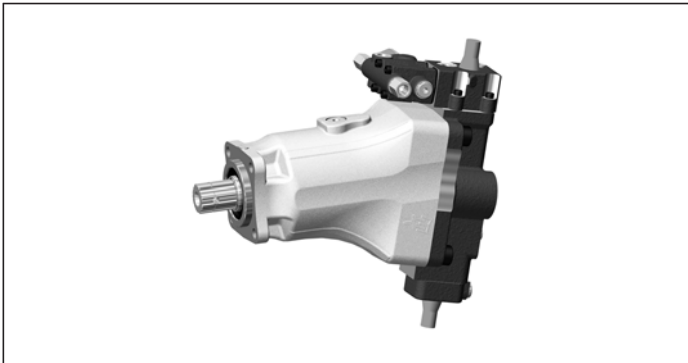

- ▶ Size 80
- ▶ Nominal pressure 350 bar
- ▶ Maximum pressure 400 bar
- ▶ For commercial vehicles
- ▶ Open circuit

3

**Features**

- ▶ Variable pump with axial tapered piston rotary group of bent-axis design with special characteristics and dimensions for use in commercial vehicles
- ▶ The flow is proportional to the drive speed and displacement.
- ▶ The flow can be infinitely varied by adjusting the bent-axis angle.
- ▶ Favorable power-to-weight ratio, compact dimensions, optimum efficiency, economical design
- ▶ High self-suction capability
- ▶ Flange and shaft designed for direct mounting on the power take-off of commercial vehicles
- ▶ Low noise levels
- ▶ Increased pressure (350/400 bar) compared to standard pump A17VO
- ▶ Increased service life through use of long-life bearings

**Contents**

Ordering code	2
Technical data	3
DRS – Pressure control with load sensing	8
Dimensions size 80	10
Suction stud	12
Coupling flange	13
Installation instructions	14
Other related documents	15
General instructions	16

**Ordering code**

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	
<b>A18V</b>	<b>LO</b>	<b>080</b>	<b>DRS</b>	<b>0</b>	<b>E</b>	<b>/</b>	<b>11</b>	<b>N</b>		<b>W</b>	<b>K0</b>		<b>0</b>	<b>-</b>	

**Axial piston unit**

01	Bent-axis design, variable, nominal pressure 350 bar, maximum pressure 400 bar, for commercial vehicles (trucks)	<b>A18V</b>
----	--	-------------

**Operating mode**

02	Pump, Open circuit, with long-life bearings	<b>LO</b>
----	---	-----------

**Sizes (NG)**

03	Geometric displacement, see table of values on page 6	<b>080</b>
----	---	------------

**Control devices**

04	Pressure controller with load sensing	<b>DRS</b>
----	---------------------------------------	------------

**Additional functions 1**

05	Without additional functions	<b>0</b>
----	------------------------------	----------

**Additional functions 2**

06	DRS controller with external pump measuring pressure port and mechanically adjustable $V_{g \text{ min}}$ stop	<b>E</b>
----	--	----------

**Series**

07	Series 1, index 1	<b>11</b>
----	-------------------	-----------

**Configuration of ports and fastening threads**

08	Metric, port threads with profiled sealing ring according to DIN 3852	<b>N</b>
----	---	----------

**Directions of rotation**

09	Viewed on drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

**Seals**

10	FKM (fluor-caoutchouc) including the 2 shaft seal rings in FKM	<b>W</b>
----	--	----------

**Mounting flange**

11	Special flange ISO 7653-1985 (for trucks)	<b>K0</b>
----	---	-----------

**Drive shaft**

12	Splined shaft similar to DIN ISO 14 (for trucks)	<b>E8</b>
	Splined shaft E8 with coupling flange	<b>C8</b>

**Port plate for service lines**

13	Threaded ports A and S at rear	<b>1</b>
	Threaded ports A and S at rear, with suction stud mounted in S	<b>2</b>

**Additional functions 3**

14	Without additional functions	<b>0</b>
----	------------------------------	----------

**Standard / special version**

15	Standard version	<b>0</b>
	Special version	<b>S</b>



## Technical data

### Hydraulic fluid


Before starting project planning, please refer to our data sheets RE 90220 (mineral oil) and RE 90221 (environmentally acceptable hydraulic fluids) for detailed information regarding the choice of hydraulic fluid and application conditions.

If environmentally acceptable hydraulic fluids are used, the limitations regarding technical data or other seals must be observed. Please contact us.

### Note

Variable pump A18VLO is not suitable for operation with water-containing HF hydraulic fluid.

### ▼ Selection diagram

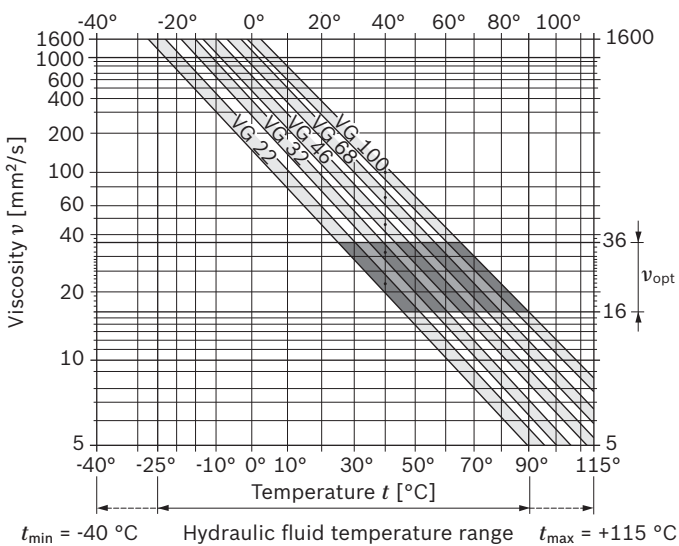

### Details regarding the choice of hydraulic fluid

The correct choice of hydraulic fluid requires knowledge of the operating temperature in relation to the ambient temperature: in an open circuit the reservoir temperature.

The hydraulic fluid should be chosen so that the operating viscosity in the operating temperature range is within the optimum range ( $\nu_{opt}$  see shaded area of the selection diagram). We recommended that the higher viscosity class be selected in each case.

Example: At an ambient temperature of X °C, an operating temperature of 60 °C is set in the circuit. In the optimum operating viscosity range ( $\nu_{opt}$ , shaded area), this corresponds to the viscosity classes VG 46 or VG 68; to be selected: VG 68.

### Note

The case drain temperature, which is affected by pressure and speed, can be higher than the reservoir temperature. At no point of the component may the temperature be higher than 115 °C. The temperature difference specified below is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact us.

### Viscosity and temperature of hydraulic fluid

	Viscosity [mm <sup>2</sup> /s]	Temperature	Comment
Transport and storage at ambient temperature		$T_{min} \geq -40 \text{ °C}$ $T_{opt} = +5 \text{ °C to } +20 \text{ °C}$	factory preservation: up to 12 months with standard, up to 24 months with long-term
(Cold) start-up	$\nu_{max} = 1600$	$T_{St} \geq -40 \text{ °C}$	$t \leq 3 \text{ min}$ , without load ( $p \leq 50 \text{ bar}$ ), $n \leq 1000 \text{ rpm}$
Permissible temperature difference		$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid
Warm-up phase	$\nu < 1600 \text{ to } 400$	$T = -40 \text{ °C to } -25 \text{ °C}$	at $p \leq 0.7 \cdot p_{nom}$ , $n \leq 0.5 \cdot n_{nom}$ and $t \leq 15 \text{ min}$
Operating phase			
Temperature difference		$\Delta T = \text{approx. } 12 \text{ K}$	between hydraulic fluid in the bearing and at port R
Maximum temperature		115 °C 103 °C	in the bearing measured at port R
Continuous operation	$\nu = 400 \text{ to } 10$ $\nu_{opt} = 36 \text{ to } 16$	$T = -25 \text{ °C to } +90 \text{ °C}$	measured at port R, no restriction within the permissible data
Short-term operation	$\nu_{min} \geq 7$	$T_{max} = +103 \text{ °C}$	measured at port R, $t < 3 \text{ min}$ , $p < 0.3 \cdot p_{nom}$
Shaft seal FKM		$T \leq +115 \text{ °C}$	see page 4

### **Filtration of the hydraulic fluid**

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

To ensure the functional reliability of the axial piston unit, a gravimetric analysis of the hydraulic fluid is necessary to determine the amount of solid contaminant and to determine the cleanliness level according to ISO 4406. A cleanliness level of at least 20/18/15 is to be maintained.

At very high hydraulic fluid temperatures (90 °C to maximum 115 °C), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.

If the above classes cannot be achieved, please contact us.

### **Case drain fluid**

The case drain chamber is connected to the suction chamber. A case drain line from the case to the reservoir is not required (port "R" is plugged).

On versions with DRS control, a case drain line for discharge from port "T" to the reservoir is absolutely essential.

### **Shaft seal**

The FKM shaft seal may be used for case drain temperatures from -25 °C to +115 °C.

#### **Note**


For the temperature range below -25 °C, the values in the table on page 3 are to be observed.

## Operating pressure range


Valid when using hydraulic fluids based on mineral oils

Pressure at service line port A		Definition
Nominal pressure $p_{nom}$	350 bar absolute	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	400 bar absolute	The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	5 s	
Total operating period	50 h	
Minimum pressure (high-pressure side)	10 bar absolute	Minimum pressure at the high-pressure side (A) which is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{A\ max}$	9000 bar/s	Maximum permissible rate of pressure rise and reduction during a pressure change over the entire pressure range.
Pressure at suction port S (inlet)		
Minimum pressure $p_{S\ min}$	0.8 bar absolute	Minimum pressure at suction port S (inlet) which is required in order to prevent damage to the axial piston unit. The minimum pressure is dependent on the speed and displacement of the axial piston unit.
Maximum pressure $p_{S\ max}$	2 bar absolute	

### ▼ Rate of pressure change $R_{A\ max}$

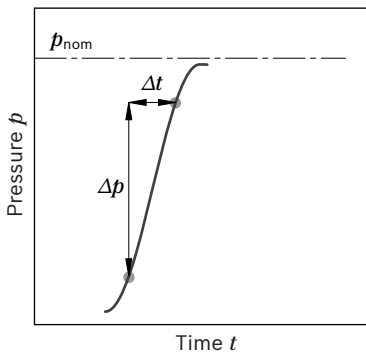

### ▼ Pressure definition

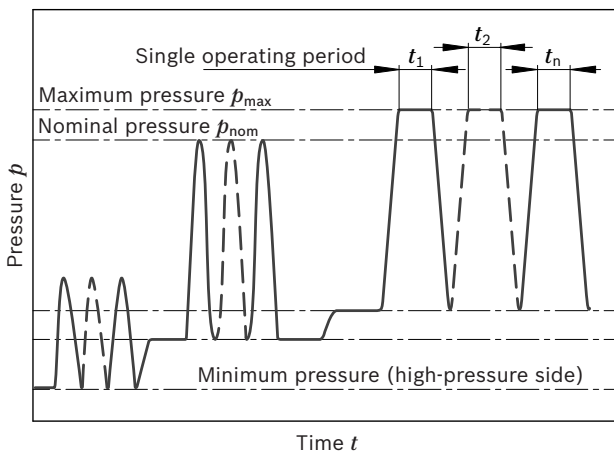

Total operating period =  $t_1 + t_2 + \dots + t_n$

#### Note

Values for other hydraulic fluids, please contact us.

**Table of values**


Theoretical values, without efficiency and tolerances;  
values rounded

Size		NG	80
Displacement geometric, per revolution		$V_{g \max}$	cm <sup>3</sup>
Speed maximum <sup>1)</sup>	at $V_{g \max}$	$n_{\text{nom}}$	rpm
	at $V_g < 0.74 \cdot V_{g \max}$	$n_{\text{max1}}$	rpm
Speed maximum <sup>2)</sup>		$n_{\text{max2}}$	rpm
Flow	at $n_{\text{nom}}$ and $V_{g \max}$	$q_v$	L/min
Power	at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 350$ bar	$P$	kW
Torque	at $V_{g \max}$ and $\Delta p = 350$ bar	$T$	Nm
Rotary stiffness	$V_{g \max}$ to $0.5 \cdot V_{g \max}$	$c_{\text{min}}$	Nm/rad
	$0.5 \cdot V_{g \max}$ bis 0 (interpolated)	$c_{\text{max}}$	Nm/rad
Moment of inertia for rotary group		$J_{\text{GR}}$	kgm <sup>2</sup>
Maximum angular acceleration		$a$	rad/s <sup>2</sup>
Case volume		$V$	L
Mass moment		$T_G$	Nm
Mass (approx.)		$m$	kg

1) The values are valid:

- at an absolute pressure  $p_{\text{abs}} = 1$  bar at suction port S
- for the optimum viscosity range from  $\nu_{\text{opt}} = 36$  to  $16$  mm<sup>2</sup>/s
- with hydraulic fluid based on mineral oils

2) Maximum rotational speed (limit speed) for increased inlet pressure  $p_{\text{abs}}$  at suction port S and  $V_g < V_{g \max}$ , see the following diagram.

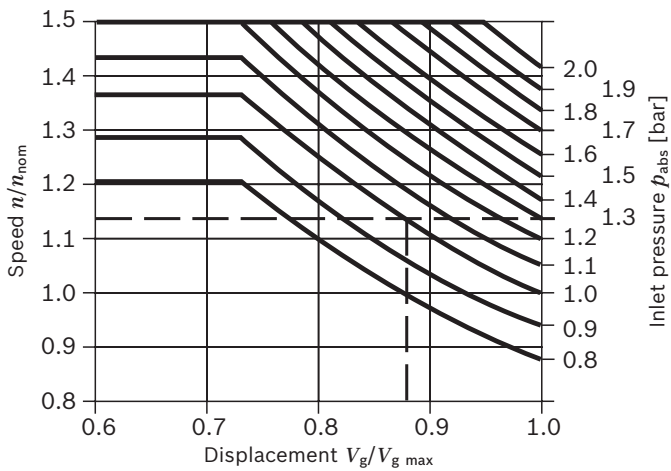**Determining the operating characteristics****Formulas**

$$\text{Flow } q_v = \frac{V_g \cdot n \cdot \eta_v}{1000} \quad [\text{L/min}]$$

$$\text{Torque } T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{\text{mh}}} \quad [\text{Nm}]$$

$$\text{Power } P = \frac{2 \pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t} \quad [\text{kW}]$$

**Key**


- $V_g$  = Displacement per revolution in cm<sup>3</sup>
- $\Delta p$  = Differential pressure in bar
- $n$  = Speed in rpm
- $\eta_v$  = Volumetric efficiency
- $\eta_{\text{mh}}$  = Mechanical-hydraulic efficiency
- $\eta_t$  = Total efficiency ( $\eta_t = \eta_v \cdot \eta_{\text{mh}}$ )

**Note**

Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Other permissible limit values, with respect to speed variation, reduced angular acceleration as a function of the frequency and the permissible start up angular acceleration (lower than the maximum angular acceleration) can be found in data sheet RE 90261.

### Permissible axial forces of the drive shaft

The values given are maximum values and do not apply to continuous operation. For drives with radial loading (pinion, V-belt drives), please contact us!

Size	NG	80
When standstill or when axial piston unit operating in non-pressurized conditions	$\pm F_{ax\ max}$ N	0
Permissible axial force per bar operating pressure	 $F_{ax}$	$+ F_{ax\ max}$ N/bar
		$- F_{ax\ max}$ N/bar

### Note

Influence of the direction of the permissible axial force:

$+ F_{ax\ max}$  = Increase in service life of bearings

$- F_{ax\ max}$  = Reduction in service life of bearings (avoid)

## DRS – Pressure control with load sensing

### Function of the pressure controller

The pressure controller limits the maximum pressure at the pump outlet within the control range of the pump. The variable pump only delivers as much hydraulic fluid as the consumers actually need. If the operating pressure exceeds the pressure setpoint set at the integrated pressure valve, the pump will regulate to a smaller displacement to reduce the control deviation.

In a non-pressurized state, the pump is swiveled to its initial position to  $V_{g\ max}$  by a return spring.

- ▶ Setting range for pressure control: 80 to 400 bar
- ▶ Standard setting: 350 bar

### Note

A pressure-relief valve is provided to limit the maximum pressure in the system. This must be at least 20 bar above the control setting at the start of opening.

The pressure controller overrides the load sensing controller, i.e. the load sensing function operates below the set pressure.

### Load sensing function

The load sensing controller works as a load-pressure controlled flow compensator and adjusts the displacement of the pump to the volume required by the consumer.

The flow of the pump is then dependent on the cross section of the external metering orifice (1), which is located between the pump and the consumer. Below the setting of the pressure control and within the control range of the pump, the flow is not dependent on the load pressure.

As a rule, the metering orifice is a separately located load sensing directional valve (control block). The position of the directional valve piston determines the opening cross section of the metering orifice and thus the flow of the pump.

The load sensing controller compares the pressure before the metering orifice with that after the orifice and maintains the pressure drop encountered here (differential pressure  $\Delta p$ ) and thus the flow constant.


If the differential pressure  $\Delta p$  at the metering orifice rises, the pump is swiveled back (toward  $V_{g\ min}$ ). If the differential pressure  $\Delta p$  drops, the pump is swiveled out (toward  $V_{g\ max}$ ) until equilibrium at the metering orifice is restored.

$$\Delta p_{\text{Metering orifice}} = p_{\text{Pump}} - p_{\text{Consumer}}$$

- ▶ Setting range for  $\Delta p$  19 to 40 bar
- ▶ Standard setting: 30 bar

The stand-by pressure in zero-stroke mode (metering orifice closed) is slightly higher than the  $\Delta p$  setting.

▼ **Characteristic DRS**

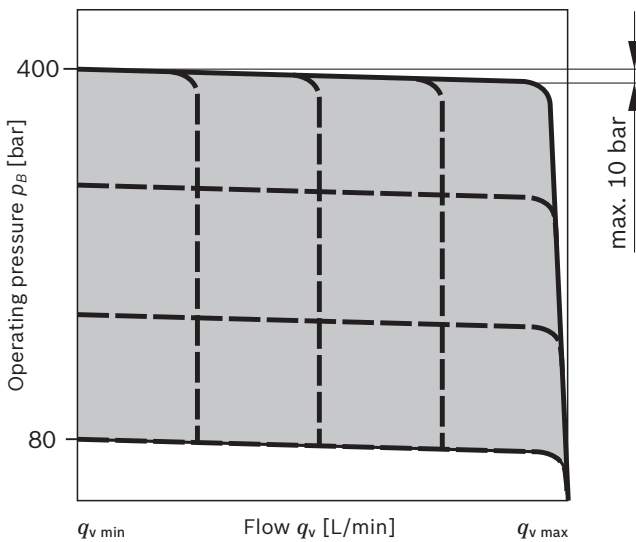

**Zero-stroke mode**

The standard version is designed for intermittent, constant-pressure operation. Short-term (< 1 min), zero-stroke operation is permissible up to an operating pressure  $p_{nom} = 350$  bar with reservoir temperature  $\leq 50$  °C.

**Note**

To ensure thermal stability, a case drain line from port "T" to the reservoir is generally required with the DRS controller.

When ordering, please state in plain text:

- ▶ Pressure control setting
- ▶  $\Delta p$  setting for load sensing function


If these details are missing from the order, the pump will be delivered with the standard setting, see page 8.

**DRS.E**

**With external pump measuring pressure port**

With the standard DRS controller, the internal pump pressure at the LS piston is compared to the load pressure from the X port. With the DRS.E controller, the pressure from the inlet line to the valve block is led via a separate external line to port  $X_2$  where it is compared to the load pressure at the LS piston. For partial flow quantities, this results in better system efficiency.

▼ **Schematic DRS.E**

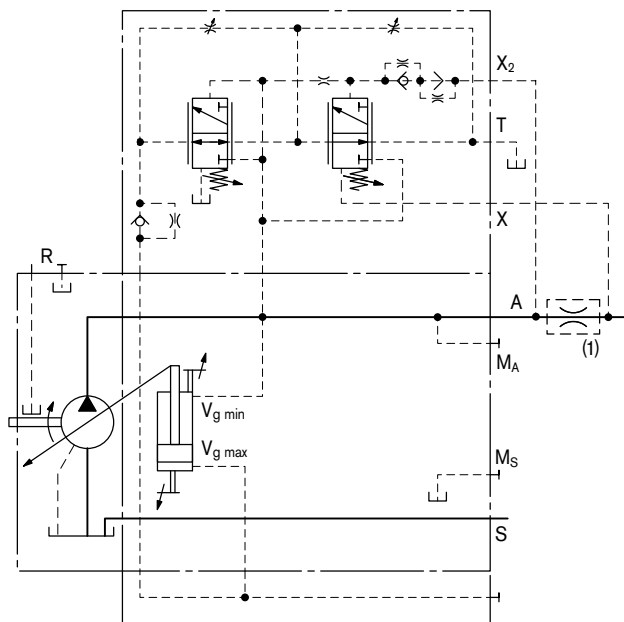


(1) The sensing orifice (control block) is not included in the delivery contents.





## Drive shaft

Splined shaft similar to DIN ISO 14 ...with coupling flange

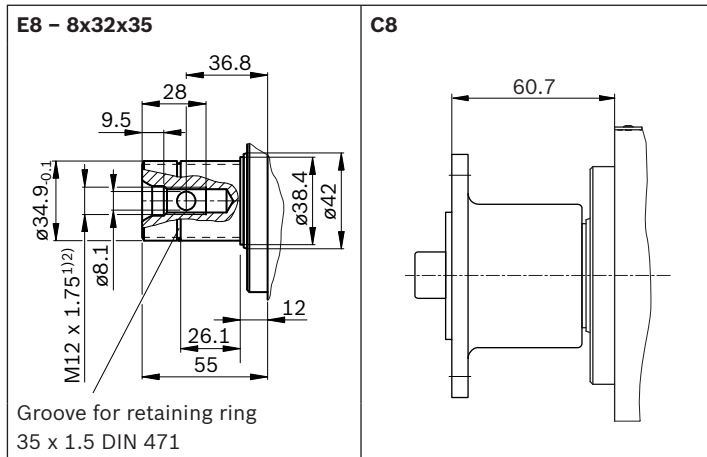

## Ports


Designation	Port for	Standard	Size <sup>2)</sup>	Maximum pressure [bar] <sup>3)</sup>	State <sup>6)</sup>
A	Service line	DIN ISO 228	G1; 18 deep	400	O
S	Suction line	DIN ISO 228	G1 1/4; 20 deep	2	O
T	Drain line (DRS only)	DIN 3852 <sup>5)</sup>	M12 x 1.5; 12 deep	2	O
M <sub>A</sub>	Measuring pressure A	DIN 38525 <sup>1)</sup>	M10 x 1; 8 deep	400	X
M <sub>S</sub>	Measuring suction pressure	DIN 38525 <sup>1)</sup>	M10 x 1; 8 deep	2	X
M <sub>1</sub>	Measuring stroking chamber	DIN 3852 <sup>5)</sup>	M12 x 1.5; 12 deep	400	X
R	Air bleed	DIN 3852 <sup>5)</sup>	M18 x 1.5; 12 deep	2	X <sup>4)</sup>
X	Load pressure (load sensing)	ISO 11926 <sup>5)</sup>	7/16-20UNF-2B; 11.5 deep	400	O
X <sub>2</sub>	Pump working pressure	DIN 3852 <sup>5)</sup>	M14 x 1.5; 12 deep	400	O

- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) Observe the general instructions on page 16 for the maximum tightening torques.
- 3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

- 4) Only open port R for filling and air bleed.
- 5) The spot face can be deeper than specified in the appropriate standard.
- 6) O = Must be connected (plugged on delivery)  
X = Plugged (in normal operation)

## Suction stud

### Dimensions

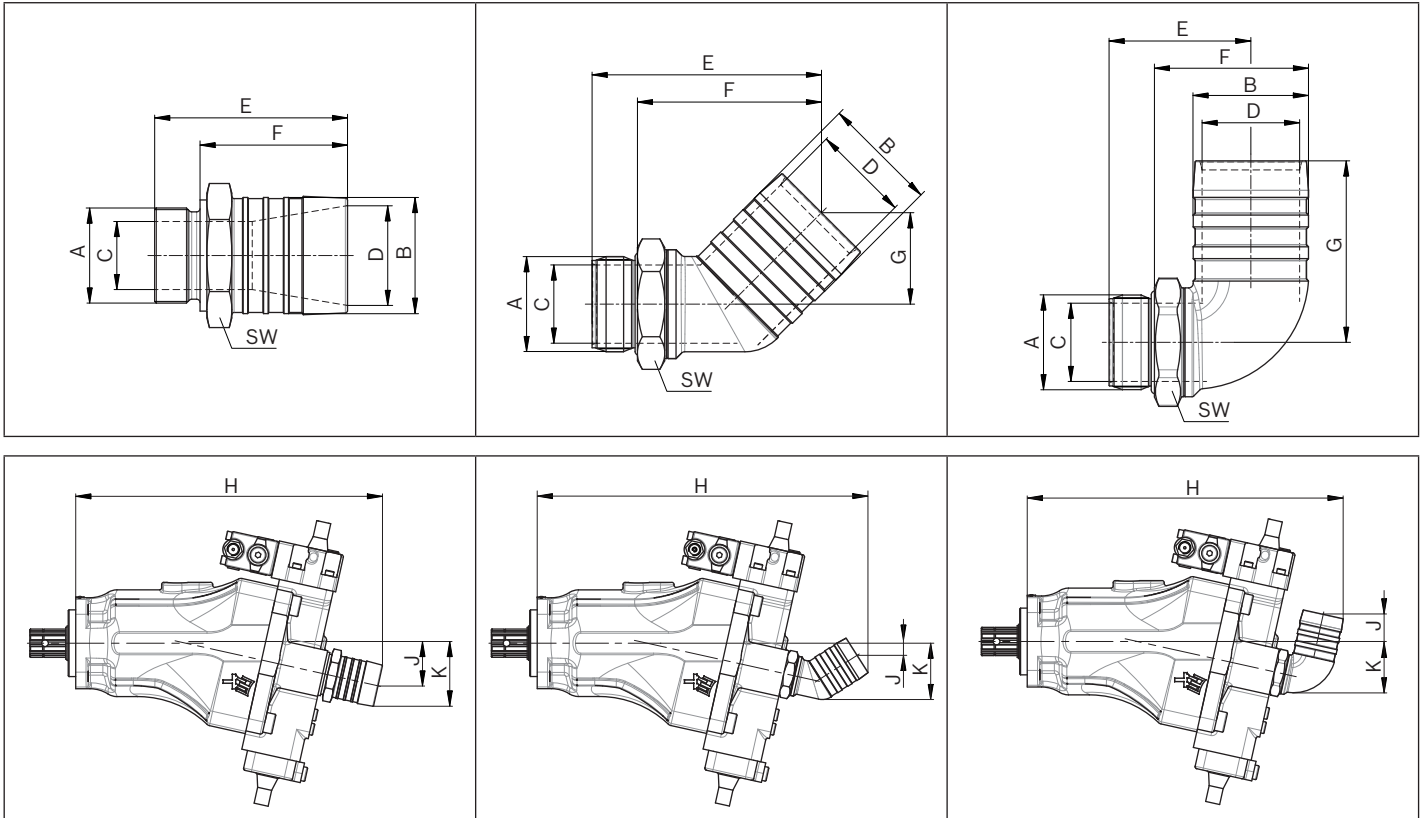

Axial piston unit		Suction stud		Version	Material number	ØC	ØD	E	F	G	SW	H	J	K
NG	Port S	Inner ø												
	A	B [in]	B [mm]											
80	G1 1/4	2	51	Straight	R902600252	30	44	85	65	-	55	368	51	76
				45°	R909831597	34	43	101	81	40	50	397	15	68
				90°	R909831598	35	43	63	43	80	50	379	33	66

**Notes on suction line**

- ▶ Keep as short and straight as possible, without bend
- ▶ Use a supporting ring for plastic hoses
- ▶ Use two hose clamps to protect the suction hose against air suction
- ▶ Note pressure resistance of suction hose compared to ambient pressure

**Replacing seals**

The O-rings used as seals to prevent air from entering the suction line are to be replaced after every removal and new installation in order to guarantee complete sealing.

**Material number for O-rings:**


- ▶ R902083808: O-ring for suction stud G1 1/4

**Coupling flange**


There are specially modified coupling flanges in 4-hole and 6-hole designs for the cardan-shaft drive.

**4-hole coupling flange, complete – Ø90**

Material number: R902060152

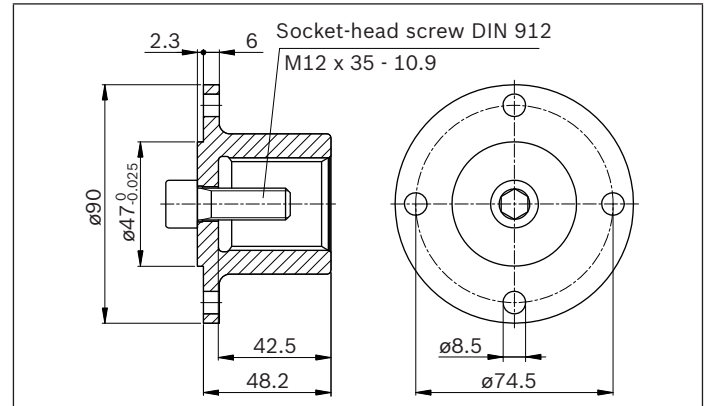**6-hole coupling flange, complete – Ø100**

Material number: R902060153

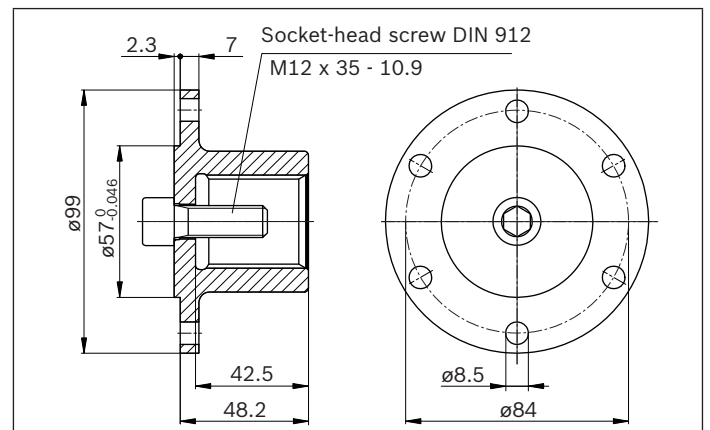**Note**

The coupling flange is installed by screwing it onto the drive shaft with the help of the threaded bore in the end of the drive shaft.

The coupling flange must be glued onto the splined drive shaft with Loctite 574 and clamped (= 130 Nm).

Sudden or abrupt forces acting on the drive shaft could lead to damage to the rotary group and must therefore be avoided.

## Installation instructions

### General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This must also be observed following a relatively long standstill as the axial piston unit may drain back to the reservoir via the hydraulic lines.

The case drain chamber is internally connected to the suction chamber. A case drain line from the case to the reservoir is not required. However, to ensure thermal stability, a case drain line from port "T" to the reservoir is generally required with the DRS.E controller.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction and case drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure; it must not, however, be higher than  $h_{s\ max} = 800\ \text{mm}$ . The minimum suction pressure at port S must also not fall below 0.8 bar absolute during operation and during cold start.


### Installation position

See the following examples 1 to 4.

Further installation positions are available upon request.  
Recommended installation position: 1 and 2.

### Below-reservoir installation (standard)


Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.

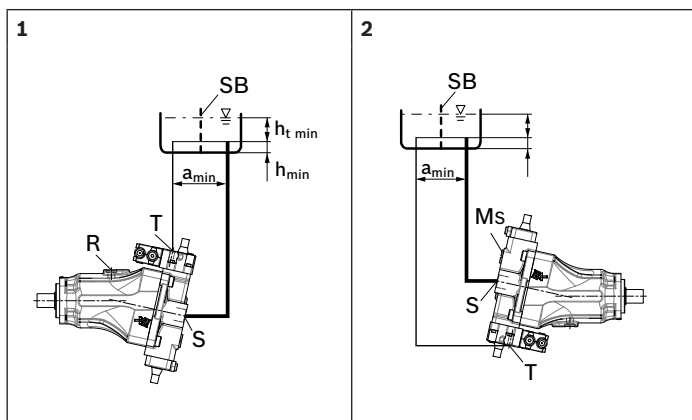

Installation position	Air bleed	Filling
1	R	S
2	M <sub>s</sub>	S

### Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir. Observe the maximum permissible suction height  $h_{s\ max} = 800\ \text{mm}$ .

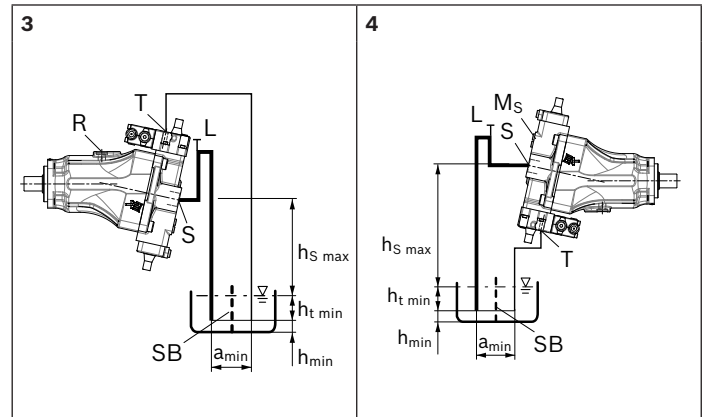

Installation position	Air bleed	Filling
3	R	L
4	M <sub>s</sub>	L

Key	
L	Filling / air bleed
R	Air bleed port
S	Suction port
T	Drain port (DRS only)
SB	Baffle (baffle plate)
$h_{t\ min}$	Minimum required immersion depth (200 mm)
$h_{min}$	Minimum required spacing to reservoir bottom (100 mm)
$h_{s\ max}$	Maximum permissible suction height (800 mm)
M <sub>s</sub>	Measuring port suction pressure
$a_{min}$	When designing the reservoir, ensure adequate space between the suction line and the case drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

## Other related documents

Other pumps with special characteristics and dimensions for use in commercial vehicles can be found in the following data sheets:

- ▶ RE 91510: Fixed pump A17FNO, 250/300 bar
- ▶ RE 91520: Fixed pump A17FO, 300/350 bar
- ▶ RE 91540: 2-circuit fixed pump A18FDO, 350/400 bar
- ▶ RE 92260: Variable pump A17VO, 300/350 bar
- ▶ RE 92270: Variable pump A18VO, 350/400 bar

## General instructions

- ▶ The pump A18VLO is designed to be used in open circuits.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e. g. by wearing protective clothing).
- ▶ Depending on the operating conditions of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- ▶ Service line ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The service line ports and function ports can only be used to accommodate hydraulic lines.
- ▶ The data and notes contained herein must be adhered to.
- ▶ Before finalizing your design, request a binding installation drawing.
- ▶ The product is not approved as a component for the safety concept of a general machine according to ISO 13849.
- ▶ Pressure controls are not backups against pressure overload. A pressure-relief valve is to be provided in the hydraulic system.
- ▶ The following tightening torques apply:
  - Fittings:
    - Observe the manufacturer's instructions regarding the tightening torques of the fittings used.
  - Mounting bolts:
    - For mounting bolts with metric ISO threads according to DIN 13, we recommend checking the tightening torque in individual cases in accordance with VDI 2230.
  - Female threads in the axial piston unit:
    - The maximum permissible tightening torques  $M_{G \max}$  are maximum values of the female threads and must not be exceeded. For values, see the following table.
  - Threaded plugs:
    - For the metallic threaded plugs supplied with the axial piston unit, the required tightening torques of threaded plugs  $M_V$  apply. For values, see the following table.

Ports		Maximum permissible tightening torque of the female threads $M_{G \max}$	Required tightening torque of the threaded plugs $M_V$	WAF Hexagon socket of the threaded plugs
Standard	Size of thread			
DIN 3852 <sup>1)</sup>	M10 x 1	30 Nm	15 Nm <sup>2)</sup>	5 mm
	M12 x 1.5	50 Nm	25 Nm <sup>2)</sup>	6 mm
	M14 x 1.5	80 Nm	35 Nm	6 mm
	M18 x 1.5	66 Nm	60 Nm	8 mm
ISO 11926	7/16-20UNF-2B	40 Nm	15 Nm	3/16 in
DIN ISO 228	G1	480 Nm	–	–
	G1 1/4	720 Nm	–	–

- 1) The tightening torques apply for screws in the "dry" state as received on delivery and in the "lightly oiled" state for installation.
- 2) In the "lightly oiled" condition, the  $M_V$  is reduced to 10 Nm for M10 x 1 and to 17 Nm for M12 x 1.5.

### Bosch Rexroth AG

Mobile Applications  
 Glockeraustrasse 4  
 89275 Elchingen, Germany  
 Tel.: +49 73 08 82-0  
 Fax: +49 73 08 72 74  
 info.brm@boschrexroth.de  
 www.boschrexroth.com/axial-piston-pumps

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# Axial Piston Variable Double Pump A8VO

**RE 93010/03.09** 1/40  
Replaces: 11.07

## Data sheet

Series 61 / 63  
Sizes 55...200  
Nominal pressure 350 bar  
Peak pressure 400 bar  
for open circuit



3

## Contents

Ordering Code / Standard Program	2
Technical Data	4
LA0, LA1 - Individual Power Controller	7
EP - Electric Control with Proportional Solenoid	11
Unit Dimensions, Size 55	12
Unit Dimensions, Size 80	16
Unit Dimensions, Size 107	20
Unit Dimensions, Size 140	24
Unit Dimensions, Size 200	28
Power Take-off Dimensions	32
Overview of Attachments	34
Power Take-off, Auxiliary Pump and Valves	35
Connector for Solenoids	37
Installation Notes	38
General Notes	40

## Features

- Variable double pump with two axial tapered piston rotary groups of bent-axis design for hydrostatic drives in open circuits
- The flow is proportional to the input speed and to the displacement, and is infinitely variable from  $q_{V \max}$  to  $q_{V \min} = 0$
- The pump is suitable for direct mounting on the flywheel case in diesel engines
- One common suction port for auxiliary pump and both circuits
- A wide range of control instruments is available for different control and regulating functions
- Individual power controller
- Integrated auxiliary pump with pressure-relief valve, optionally with additional pressure-reduction valve
- Power take-off for mounting axial piston and gear pumps
- Excellent power to weight ratio
- Long service life

## Ordering Code / Standard Program

<b>A8V</b>	<b>O</b>			<b>/</b>		<b>R</b>	<b>1</b>	<b>-</b>	<b>N</b>	<b>Z</b>		<b>05</b>				
01	02	03	04		05	06	07		08	09	10	11	12	13	14	15

**Axial piston unit**

01	Bent-axis design, variable	<b>A8V</b>
----	----------------------------	------------

**Operation mode**

02	Double pump (parallel construction), for open circuits	<b>O</b>
----	--	----------

**Size**

03	≈ Displacement $V_{g \max}$ in $\text{cm}^3$ , per rotary group	<b>55</b>	<b>80</b>	<b>107</b>	<b>140</b>	<b>200</b>
----	---	-----------	-----------	------------	------------	------------

**Control device**

		<b>55</b>	<b>80</b>	<b>107</b>	<b>140</b>	<b>200</b>	
04	Individual power controller without power override						
	with hydraulic stroke limiter, positive control and external pilot pressure supply	●	○	●	○	○	<b>LA0H2</b>
	with load sensing	-	-	○	○	○	<b>LA0S</b>
	with hydraulic power coupling	●	●	●	○	-	<b>LA0K</b>
	and load sensing	-	○	○	●	○	<b>LA0KS</b>
	and hydraulic stroke limiter, negative control	○	○	○	○	○	<b>LA0KH1</b>
	hydraulic stroke limiter, positive control and external pilot pressure supply	●	●	●	●	●	<b>LA0KH2</b>
	hydraulic stroke limiter, negative control and external pilot pressure supply	○	○	●	●	●	<b>LA0KH3</b>
04	Individual power controller with power override by pilot pressure						
	with hydraulic stroke limiter, positive control and external pilot pressure supply	●	●	●	●	●	<b>LA1H2</b>
	with load sensing	-	-	●	●	●	<b>LA1S</b>
	with hydraulic power coupling	○	○	○	○	-	<b>LA1K</b>
	and load sensing	-	○	●	●	●	<b>LA1KS</b>
	and hydraulic stroke limiter, negative control	●	●	●	●	●	<b>LA1KH1</b>
	hydraulic stroke limiter, positive control and external pilot pressure supply	●	●	●	●	●	<b>LA1KH2</b>
	hydraulic stroke limiter, negative control and external pilot pressure supply	○	○	○	○	○	<b>LA1KH3</b>
	Electric control with prop. solenoid (positive control) U = 24V	-	-	●	●	-	<b>EP2</b>

**Series**

		<b>55</b>	<b>80</b>	<b>107</b>	<b>140</b>	<b>200</b>	
05	Series 6; Index 1, 3	●	-	-	-	-	<b>61</b>
		-	●	●	●	●	<b>63</b>

**Direction of rotation**

06	viewed from shaft end: clockwise	<b>R</b>
----	----------------------------------	----------

**Gear ratio ( $n_{\text{input}} / n_{\text{rotary groups}}$ )**

07	$i = 1$	<b>1</b>
----	---------	----------

**Seals**

08	NBR (nitrile-caoutchouc), shaft seal ring in FKM (fluor-caoutchouc)	<b>N</b>
----	---	----------

**Shaft end**

09	Splined shaft, DIN 5480	<b>Z</b>
----	-------------------------	----------

**Mounting flange**

		<b>55</b>	<b>80</b>	<b>107</b>	<b>140</b>	<b>200<sup>1)</sup></b>	
10	To fit flywheel case (conforming to SAE J617) of internal combustion engine (hole diameter for fixing $\varnothing 11$ mm)	●	●	●	●	-	<b>G</b>
		-	-	-	-	●	<b>N</b>

<sup>1)</sup> Hole diam. 11 mm for new projects only (previous types with short code G and hole diam. 14 mm)



# Ordering Code / Standard Program

<b>A8V</b>	<b>O</b>			<b>/</b>		<b>R</b>	<b>1</b>	<b>-</b>	<b>N</b>	<b>Z</b>		<b>05</b>				
01	02	03	04		05	06	07		08	09	10	11	12	13	14	15

## Service line port

11	SAE flange ports A1 and A2 at side, opposite (metric fixing thread) SAE flange port S at rear (metric fixing thread)	<b>05</b>
----	---	-----------

## Auxiliary pump

		55	80	107	140	200	
12	without integrated auxiliary pump	without power take-off (PTO)		●	●	●	K00
		with power take-off (PTO)		●	●	●	K...
	with integrated auxiliary pump,	without power take-off (PTO)		●	●	●	F00
		with power take-off (PTO)		●	●	●	F...

## Power take-off <sup>1) 2)</sup>

		55	80	107	140	200	
12	Flange SAE J744 <sup>3)</sup>	Hub for splined shaft <sup>4)</sup>					
	82-2 (A)	5/8in	9T	16/32DP (A)	●	●	...01
	101-2 (B)	7/8in	13T	16/32DP (B)	●	●	...02
		1in	15T	16/32DP (B-B)	●	●	...04
	127-2 (C)	1 1/4in	14T	12/24DP (C)	○	●	...07
	152-4 (D)	1 1/4in	14T	12/24DP (C)	-	-	...86
1 3/4in		13T	8/16DP (D)	-	-	...17	

## Valves

		K..	F..	
13	Without valves (only for versions <b>without</b> auxiliary pump, K..)	●	-	0
	With pressure-relief valve (only for versions <b>with</b> auxiliary pump, F..)	-	●	1
	With pressure-relief and pressure-reduction valve, (only for versions <b>with</b> auxiliary pump, F..). U = 24V	-	●	4

## Connector for solenoids (only for EP)

		55	80	107	140	200	
14	DEUTSCH connector molded, 2-pin, without suppressor diode	-	-	●	●	-	P

## Standard / special version

15	Standard version	(without code)	
		combined with attachment part or attachment pump	-K
	Special version		-S
		combined with attachment part or attachment pump	-SK

<sup>1)</sup> Note installation conditions (see pages 32/33)

<sup>2)</sup> Other PTOs on request

<sup>3)</sup> 2 = 2-hole; 4 = 4-hole

<sup>4)</sup> Hub for splined shaft according to ANSI B92.1a-1976 (splined shafts assigned according to SAE J744, see pages 32/33)

● = available    ○ = on request    - = not available

# Technical Data

## Hydraulic fluid

Before starting project planning, please refer to our data sheets RE 90220 (mineral oil), RE 90221 (environmentally acceptable hydraulic fluids) and RE 90223 (HF hydraulic fluids) for detailed information regarding the choice of hydraulic fluids and application conditions.

The A8VO variable double pump is not suitable for operation with HFA. If HFB, HFC and HFD or environmentally acceptable hydraulic fluids are being used, the limitations regarding technical data and seals mentioned in RE 90221 and RE 90223 must be observed.

When ordering, please indicate the used hydraulic fluid.

### Operating viscosity range

We recommend that a viscosity (at operating temperature) for optimum efficiency and service life purposes of

$$v_{\text{opt}} = \text{optimum operating viscosity } 16 \text{ to } 36 \text{ mm}^2/\text{s}$$

be chosen, taken the tank temperature (open circuits) into account.

### Limits of viscosity range

The following values apply in extreme cases:

$v_{\text{min}} = 5 \text{ mm}^2/\text{s}$   
 short-term ( $t < 3 \text{ min}$ )  
 at max. perm. temperature of  $t_{\text{max}} = +115^\circ\text{C}$ .


$v_{\text{max}} = 1600 \text{ mm}^2/\text{s}$ ,  
 short-term ( $t < 3 \text{ min}$ )  
 at cold start ( $p \leq 30 \text{ bar}$ ,  $n \leq 1000 \text{ rpm}$ ,  $t_{\text{min}} = -40^\circ\text{C}$ ).  
 Only for starting up without load. Optimum operating viscosity must be reached within approx. 15 minutes.

Note that the maximum hydraulic fluid temperature of  $115^\circ\text{C}$  must not be exceeded locally either (e.g. in the bearing area). The temperature in the bearing area is – depending on pressure and speed – up to 12 K higher than the average case drain temperature.

Special measures are necessary in the temperature range from  $-40^\circ\text{C}$  to  $-25^\circ\text{C}$  (cold start phase); please contact us.

For detailed information about use at low temperatures, see RE 90300-03-B.

## Selection diagram

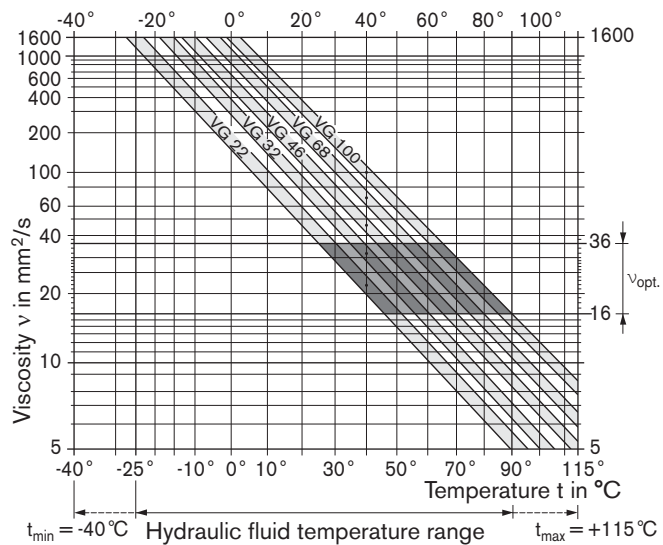

### Details regarding the choice of hydraulic fluid

The correct choice of hydraulic fluid requires knowledge of the operating temperature in relation to the ambient temperature, in an open circuit the tank temperature.

The hydraulic fluid should be chosen so that the operating viscosity in the operating temperature range is within the optimum range ( $v_{\text{opt}}$ ) - the shaded area of the selection diagram. We recommended that the higher viscosity class be selected in each case.

Example: At an ambient temperature of  $X^\circ\text{C}$ , an operating temperature of  $60^\circ\text{C}$  is set. In the optimum viscosity range ( $v_{\text{opt}}$ , shaded area) this corresponds to the viscosity classes VG 46 or VG 68; to be selected: VG 68.

### Note:

The case drain temperature, which is affected by pressure and speed, is always higher than the tank temperature. At no point in the system may the temperature be higher than  $115^\circ\text{C}$ .

If the above conditions cannot be maintained due to extreme operating parameters, please contact us.

### Filtration

The finer the filtration, the higher the cleanliness level of the hydraulic fluid and the longer the service life of the axial piston unit.

To ensure functional reliability of the axial piston unit, the hydraulic fluid must have a cleanliness level of at least

20/18/15 according to ISO 4406.

At very high hydraulic fluid temperatures ( $90^\circ\text{C}$  to max.  $115^\circ\text{C}$ ) at least cleanliness level

19/17/14 according to ISO 4406 is required.

If the above classes cannot be observed, please contact us.

# Technical Data

## Operating pressure range

### Input

Pressure on port S


The minimum permissible inlet pressure depends on the input speed. The following limit values must not be exceeded or undercut.

$p_{abs \ min}$  \_\_\_\_\_ 0.8 bar

The max. pressure  $p_{abs \ max}$  is also dependent on the speed (see following diagram).

### Minimum permissible inlet pressure at suction port S with increased speed

In order to avoid damage to the pump (cavitation), a minimum inlet pressure at the suction port must be assured. The minimum inlet pressure is depends on the speed and the displacement of the variable pump.

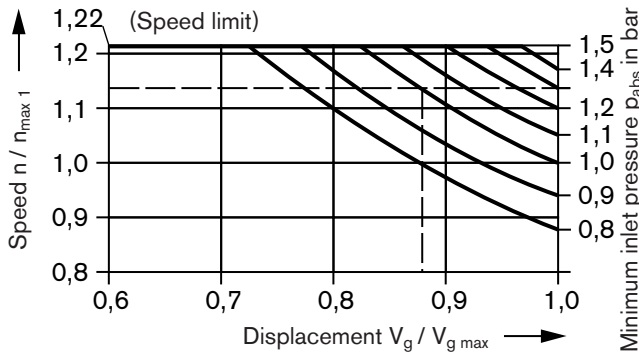

### Example:

Given: Size 80, input speed 2560 rpm

Required: Necessary minimum inlet pressure  $p_{abs}$  at suction port S

Solution: Speed ratio  $\frac{n}{n_{max \ 1}} = \frac{2560}{2240} = 1.14$

results in a minimum inlet pressure of  $p_{abs} = 1.3$  bar at full swivel angle ( $V_{g \ max}$ ).

If a free inlet flow can only be achieved at e.g.  $p_{abs} = 1$  bar, the displacement must be reduced to  $0.88 \cdot V_{g \ max}$ .

Note:

- Max. speed  $n_{max}$  (speed limit, see page 6)
- Min. and max. permissible pressure at port S.
- Permissible values for the shaft seal ring

### Output

Pressure on port  $A_1$  or  $A_2$   
(pressure data according to DIN 24312)

Nominal pressure  $p_N$  \_\_\_\_\_ 350 bar

Peak pressure  $p_{max}$  \_\_\_\_\_ 400 bar

Nominal pressure: Max. design pressure at which fatigue strength is ensured.

Peak pressure: Max. operating pressure which is permissible for short-term ( $t < 1$  s).

## Case drain fluid

The case drain chamber is connected to the suction and gear chambers. A case drain line to the tank is not required. Note the special feature of size 200 for flushing fluid.


## External flushing fluid connection

All A8VO variable double pumps in **size 200** always require an external flushing fluid connection from the R4 port to the tank, to ensure cooling and lubrication of the bearing sets.


This line should have an internal diameter  $\geq 15$  mm.

Note:

The tank level must be higher than the position of the R4 port (see page 37).

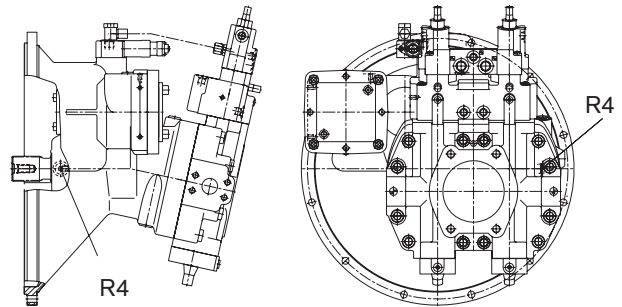

Circuit diagram with R4 port



## Temperature range of shaft seal ring

The FKM shaft seal ring is permissible for case drain temperatures of  $-40^\circ\text{C}$  to  $+115^\circ\text{C}$ .

## Auxiliary pump

Max. permissible pressure  $p_{max}$  \_\_\_\_\_ 40 bar

The pressure-relief valve installed to protect the integrated auxiliary pump has a fixed setting of 30 bar.

## Input

Via flexible coupling.

# Technical Data

**Table of values** (theoretical values, without efficiencies and tolerances; values rounded)

Size			55	80	107	140	200		
Displacement	$V_{g \max}$	cm <sup>3</sup>	2 x 54.8	2 x 80	2 x 107	2 x 140	2 x 200		
	$V_{g \min}$	cm <sup>3</sup>	0	0	0	0	0		
Gear ratio $i = n_{\text{input}}/n_{\text{rotary groups}}$			1.0	1.0	1.0	1.0	1.0		
Input speed	at $V_{g \max}^1)$	$n_{\max 1}$	rpm	2500	2240	2150	2100	1950	
	at $V_g \leq V_{g \max}^2)$	$n_{\max}$	rpm	3000	2750	2450	2450	2250	
Flow	at $n_{\max}$ and $V_{g \max}$	$q_{v \max}$	L/min	2 x 137	2 x 179	2 x 230	2 x 294	2 x 390	
Power									
at $n_{\max}$ , $V_{g \max}$ and $\Delta p=350$ bar			$P_{\max}$	kW	160	209	268	294 <sup>3)</sup>	325 <sup>3)</sup>
Input torque									
at $V_{g \max}$ and $\Delta p=350$ bar			$T_{\max}$	Nm	611	891	1192	1337 <sup>3)</sup>	1592 <sup>3)</sup>
Rotary stiffness (single rotary group) <sup>5)</sup>									
$V_{g \max}$ to $0,5 \cdot V_{g \max}$			$c_{TW}$	Nm/rad	11213	17985	25565	41408	39505
$0,5 \cdot V_{g \max}$ to $0$ (interpolated)			$c_{TW}$	Nm/rad	41442	67666	89381	146677	156876
Moment of inertia for rotary group									
with power take-off, without attachment pump			$J_{TW}$	kgm <sup>2</sup>	0.0161	0.0209	0.0345	0.0581	0.0849
without power take-off (PTO)			$J_{TW}$	kgm <sup>2</sup>	0.0126	0.0173	0.0288	0.0500	0.0750
Angular acceleration (single rotary group) <sup>5)</sup>			$\alpha$	rad/s <sup>2</sup>	25800	21800	17100	7500	11000
Mass approx.			m	kg	82	90	116	146	180
<b>Variation: with integrated auxiliary pump, F00, F..<sup>4)</sup></b>									
Displacement with integrated auxiliary pump			$V_{g \max}$	cm <sup>3</sup>	8.6	8.6	8.6 (10.7) <sup>4)</sup>	10.7	11 (19) <sup>4)</sup>
Effective displacement			$V_{g \max/\text{eff}}$	cm <sup>3</sup>	9.7	9.7	11 (13.7)	12.7	13.6 (23.6)
Gear ratio $i = n_{\text{input}}/n_{\text{aux. pump}}$					0.887	0.887	0.780	0.843	0.804
<b>Variation: with power take-offs, K., F..</b>									
Max. torque at PTO			$T_{\max}$	Nm	250	350	380	450	650
Gear ratio $i = n_{\text{input}}/n_{\text{PTO}}$					1.0	1.0	1.0	1.0	0.804

<sup>1)</sup> The values shown are valid for absolute pressure ( $p_{\text{abs}}$ ) of 1 bar at suction port S and for operation with mineral fluids with a specific mass of 0.88kg/L.

<sup>2)</sup> The values shown are valid for  $V_g \leq V_{g \max}$  or for an increase in the inlet pressure  $p_{\text{abs}}$  at the suction port S (see page 5).

<sup>3)</sup> Observe max. permissible torque!

<sup>4)</sup> (...) = Available on request!

<sup>5)</sup> **Caution:** Exceeding the permissible limit values may result in a loss of function, a reduction in service life or in the destruction of the axial piston unit.

Other permissible limit values with respect to speed variation, reduced angular acceleration as a function of the frequency and the permissible startup angular acceleration (lower than the maximum angular acceleration) can be found in data sheet RE 90261.

## Calculation of nominal size

$$\text{Flow} \quad q_v = \frac{V_g \cdot n \cdot \eta_v}{1000} \quad \text{in L/min}$$

$$\text{Torque} \quad T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{mh}} \quad \text{in Nm}$$

$$\text{Power} \quad P = \frac{2\pi \cdot T \cdot n}{60 \cdot 1000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t} \quad \text{in kW}$$

$V_g$  = Displacement per revolution in cm<sup>3</sup>

$\Delta p$  = Differential pressure in bar

$N$  = Speed in rpm

$\eta_v$  = Volumetric efficiency

$\eta_{mh}$  = Mechanical-hydraulic efficiency

$\eta_t$  = Overall efficiency ( $\eta_t = \eta_v \cdot \eta_{mh}$ )

## LA0, LA1 - Individual Power Controller

On the variable double pump with individual power controller LA0/LA1, the two rotary groups are not mechanically coupled, i.e. each rotary group is fitted with a separate power controller.

The power controller controls the displacement of the pump depending on the operating pressure so that a defined input power is not exceeded.


The power setting is adjusted individually for each control and can be different; each pump can be set to 100% input power.

The hyperbolic power characteristic is approximated using two measuring springs. The operating pressure acts on the measuring surfaces of a differential piston against the measuring springs and an externally adjustable spring force, which determines the power setting.

If the sum of the hydraulic forces exceeds the spring forces, control fluid is supplied to the control piston, which swivels the pump back to reduce the flow.

When not under pressure, the pump is swiveled back to its initial position at  $V_{g \max}$  by a return spring.

Characteristic: LA0; LA1

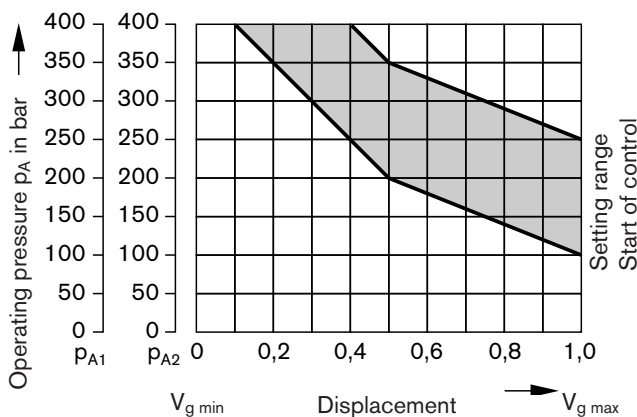

The hydraulic output power (characteristic) is influenced by the efficiency of the double pump.

Please state in clear text when ordering:

- Application: e.g. excavator
- Input power  $P$  in kW
- Input speed  $n$  in rpm
- Max. flow  $q_{V \max}$  in L/min
- Max. operating pressure (primary pressure valve setting)

After clarifying the details, a power diagram can be created by our computer.

### LA0

Individual power controller without power override

### LA1

Individual power controller with power override by pilot pressure

An external pilot pressure is applied to the third measuring surface of the differential piston (port  $X_3$ ), thus enabling the set power to be reduced (negative power override).

The mechanically set basic power can be varied using different pilot pressures. This means that different power settings are possible.

If the pilot pressure signal is variably controlled by a load-limiting control, the sum of the hydraulic powers is equal to the input power. The pilot pressure for the power override is generated by an external control element or by the mounted pressure-reduction valve (see page 36).

The electric signal for controlling the pressure-reduction valve must be generated by an external electronic controller. The BODAS controllers RC (RE 95 200) in conjunction with the LLC software (see RE 95 310) are available for this purpose (further information on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics)):

– BODAS controller RC

Series 20	_____	RE 95200
Series 21	_____	RE 95201
Series 22	_____	RE 95202
Series 30	_____	RE 95203

#### Note:

If there is no power override, port  $X_3$  to the tank should be depressurized.

# LA0, LA1 - Individual Power Controller

## LA0H; LA1H

### Individual power controller with hydraulic stroke limiter

The hydraulic stroke limiter enables the displacement to be infinitely varied or limited across the entire control range of  $V_{g \max}$  to  $V_{g \min}$ .

The displacement is set by the pilot pressure  $p_{St}$  applied at port  $X_1$  (max. 40 bar).

The hydraulic stroke limiter is overridden by the power controller, i.e. below the power controller characteristic, the displacement is adjusted depending on the pilot pressure. If the set flow or the operating pressure is such that the power controller characteristic is exceeded, the power controller overrides the stroke limiter and reduces the displacement along the spring characteristic.

**Note:** The H1/H2/H3 characteristic curve is influenced by the design of the power controller!

## LA0H1/3; LA1H1/3

### Hydraulic stroke limiter (negative control)

Control range from  $V_{g \max}$  to  $V_{g \min}$ .

With increasing pilot pressure the pump swivels to a smaller displacement.

Start of control (at  $V_{g \max}$ ) adjustable \_\_\_\_\_ from 4 – 15 bar

**Note:** The start of control depends on the power controller setting.

Please specify start of control in clear text when ordering.  
Initial position in depressurized state:  $V_{g \max}$

#### Note for H1:

A pressure  $\geq 30$  bar is necessary for control. The required control fluid is taken from the high-pressure line.

When using negative control directional valves, the control pressure is supplied from the negative control system via the high-pressure line.


#### Note for H3:

A pressure  $\geq 30$  bar is necessary for control. The required control pressure is taken from the high-pressure line or the external control pressure applied at port  $Y_3$  ( $\geq 30$  bar).

When using standard open-center directional valves, this control must be carried out with the external control pressure supply.

Characteristic: LA0H1/3; LA1H1/3

pilot pressure increase ( $V_{g \max} - V_{g \min}$ ) \_\_\_\_\_  $\Delta p = \text{approx. } 25 \text{ bar}$

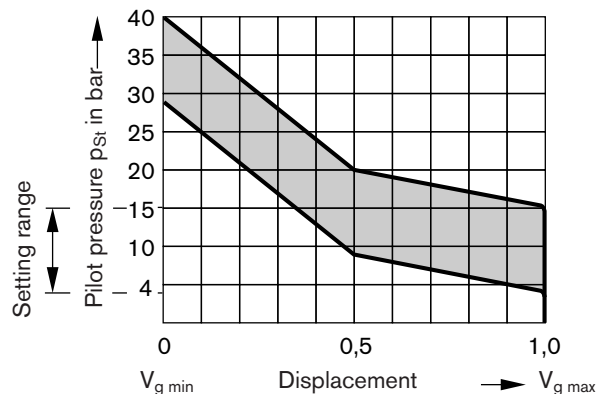

## LA0H2; LA1H2

### Hydraulic stroke limiter and external pilot pressure supply (positive control)

Control range from  $V_{g \min}$  to  $V_{g \max}$ .

With increasing pilot pressure the pump swivels to a larger displacement.


Start of control (at  $V_{g \min}$ ) adjustable \_\_\_\_\_ 0 to 15 bar  
Please specify start of control in clear text when ordering.

Initial position in depressurized state:  $V_{g \max}$

To control from  $V_{g \max}$  to  $V_{g \min}$  a pressure  $\geq 30$  bar is required. The required fluid is taken from the high-pressure line or the external control pressure applied at port  $Y_3$  ( $\geq 30$  bar) (pilot pressure  $<$  start of control).

Characteristic: LA0/1H2


Pilot pressure increase ( $V_{g \min} - V_{g \max}$ ) \_\_\_\_\_  $\Delta p = \text{approx. } 25 \text{ bar}$

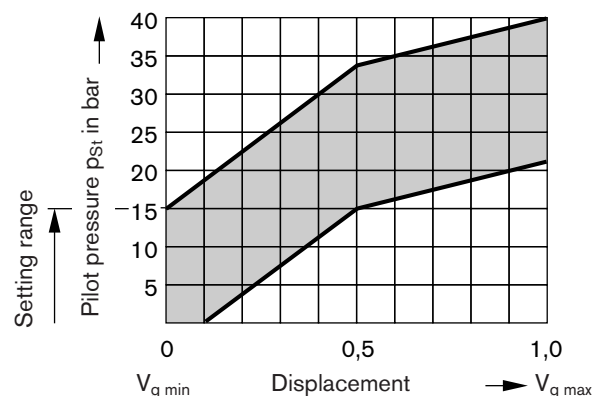

**Note:** If port  $Y_3$  is present (H2 + H3), it must always be connected to an external control pressure. If there is no external control pressure supply, this connection to the tank must be depressurized.

# LA0, LA1 - Individual Power Controller

Circuit diagram: LA1H2

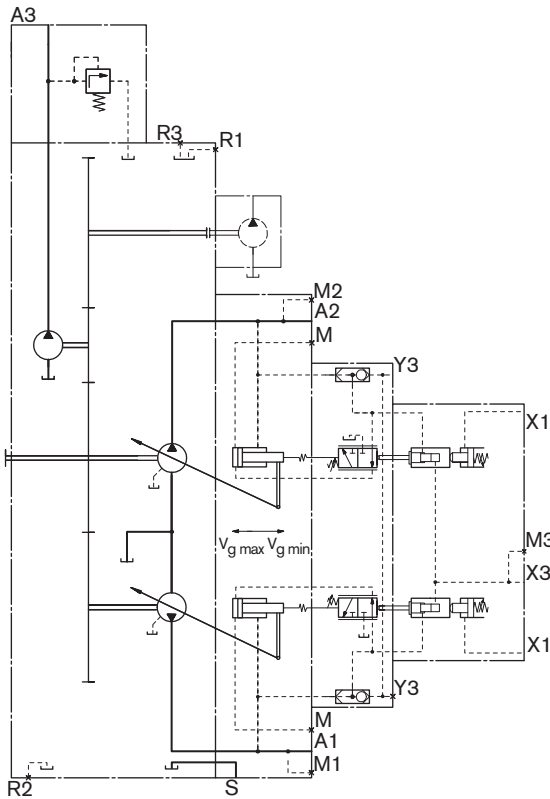

## LA0K; LA1K

### Individual power controller with hydraulic coupling

The hydraulic coupling of the two individual controller provides the function of a summation power control. However, the two rotary groups are coupled hydraulically, not mechanically.


The operating pressures of the two circuits each act on the differential pistons in the two individual controls, causing both rotary groups to swivel out and back together.

If one pump is working at less than 50% of the total input power, the remaining power can be transferred to the other pump, up to a limit of 100% of the total input power.


With the additional H1/H3 hydraulic stroke limiter function, each rotary group can be independently swiveled back to a smaller  $V_g$  than is currently specified by the power control.

Circuit diagram: LA1KH1

Circuit diagram module for LA0KH1

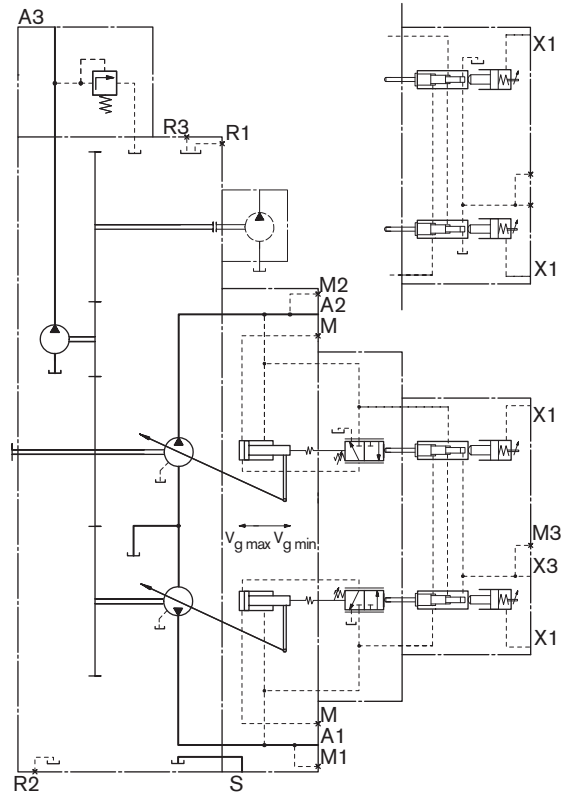

Circuit diagram module for LA0KH3

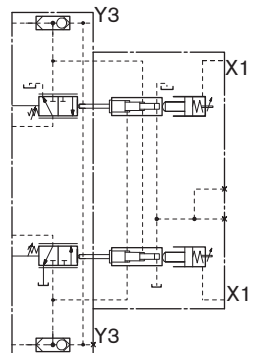

# LA0, LA1 - Individual Power Controller

## LA0S; LA1S, LA0KS, LA1KS

### Individual power controller with load sensing

The load-sensing controller is a flow control option that operates as a function of the load pressure to regulate the pump displacement to match the consumer flow requirement.

The flow depends here on the cross section of the external measuring orifice (1) fitted between the pump and the consumer. The flow is independent of the load pressure below the power characteristic and within the control range of the pump.

The measuring orifice is usually a separately arranged load sensing directional valve (control block). The position of the directional valve piston determines the opening cross section of the measuring orifice and thus the flow of the pump.

The load-sensing controller compares pressure before and after the measuring orifice and maintains the pressure drop (differential pressure  $\Delta p$ ) and thus the flow constant.

If the differential pressure  $\Delta p$  on the measuring orifice increases, the pump is swiveled back towards  $V_{g\ min}$  and, if the  $\Delta p$  decreases, the pump is swiveled out towards  $V_{g\ max}$  until equilibrium in the valve is restored.

$$\Delta p_{\text{measuring orifice}} = p_{\text{pump}} - p_{\text{consumer}}$$

Setting range for  $\Delta p$  \_\_\_\_\_ 14 - 25 bar


Standard setting \_\_\_\_\_ 18 bar  
(please state in clear text).

The stand-by pressure in zero stroke operation (measuring orifice plugged) is slightly above the  $\Delta p$  setting.

In an LUDV (flow sharing) system, the pressure cut-off is integrated in the LUDV valve block.

(1) The measuring orifice (control block) is not included in supply.

Circuit diagram: LA1S

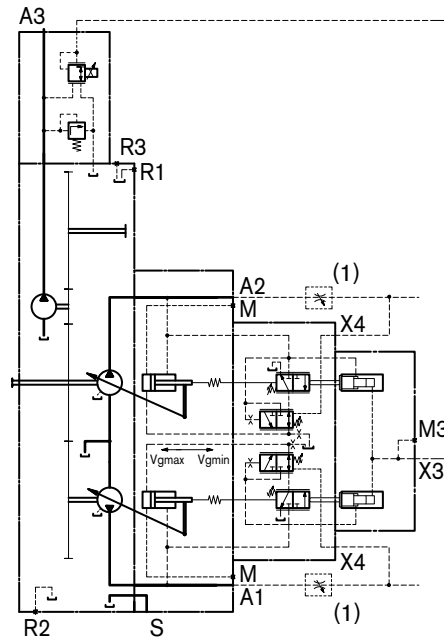



## EP Electric Control with Proportional Solenoids

With the electric control with proportional solenoid, the pump displacement is adjusted proportionally and steplessly to the current by means of the magnetic force.

Control from  $V_{g \min}$  to  $V_{g \max}$


With increasing control current the pump swivels to a larger displacement.

Initial position without control signal (control current):  $V_{g \min}$

The required control pressure is taken either from the operating pressure or from the externally applied control pressure at port  $Y_3$ .

To ensure the control even at low operating pressure  $< 30$  bar, the port  $Y_3$  must be supplied with an external control pressure of approx. 30 bar.

Characteristic: EP2

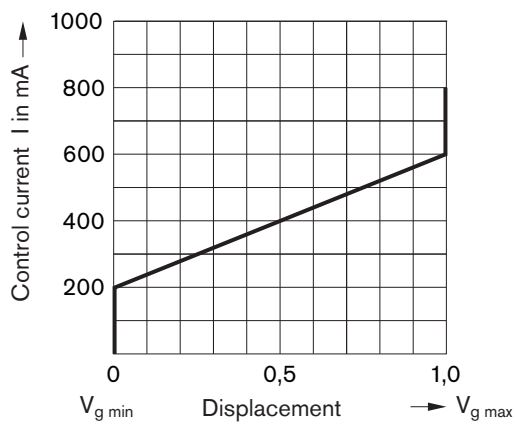

### Note on load sensing "S" and electric control "EP":

When operated at  $V_{g \min}$  ( $> 5$  min), the hydraulic fluid in the case can become heated to an impermissible temperature. Please contact us.

Solenoid technical data	EP2
Voltage	24 V ( $\pm 20\%$ )
Control current	
Start of control at $V_{g \ 0}$	200 mA
End of control at $V_{g \ max}$	600 mA
Limiting current	0.77 A
Nominal resistance (at 20°C)	22.7 $\Omega$
Dither frequency	100 Hz
Actuated time	100%
Type of protection according to DIN/EN 60529	IP67 and IP69K

The following electronic controllers and amplifiers are available for controlling the proportional solenoids (information is also available on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics)):

– BODAS controller RC

Series 20 \_\_\_\_\_ RE 95200

Series 21 \_\_\_\_\_ RE 95201


Series 22 \_\_\_\_\_ RE 95202

Series 30 \_\_\_\_\_ RE 95203

and application software

– Analog amplifier RA \_\_\_\_\_ RE 95230


Circuit diagram: EP2

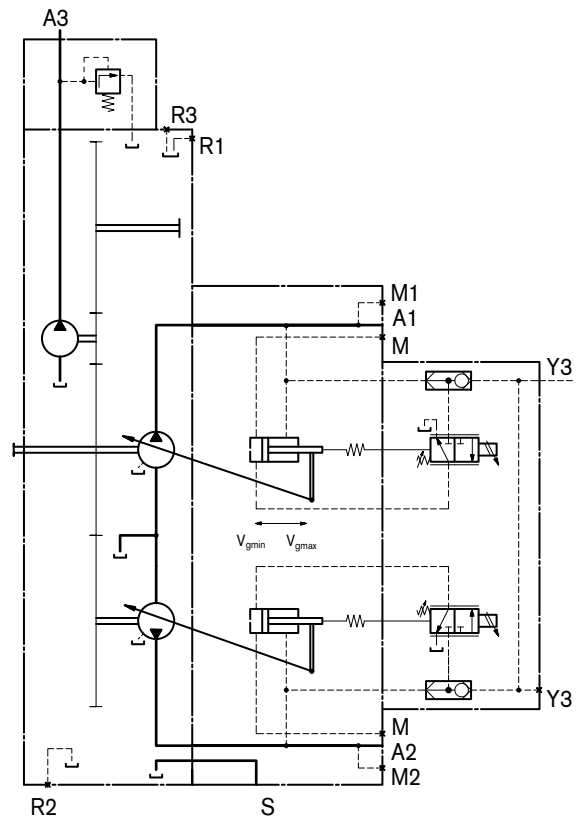



# Unit Dimensions, Size 55

## Shaft end

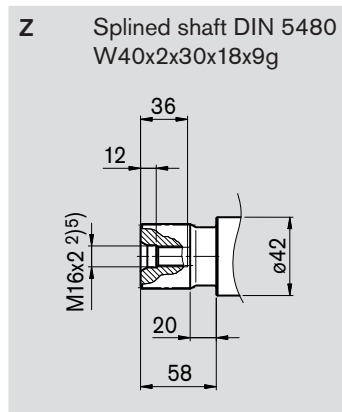

## Ports

A <sub>1</sub> , A <sub>2</sub>	Service line ports (high-pressure series)	SAE J518	3/4in	
	Fixing thread	DIN 13	M10x1.5; 17 deep <sup>5)</sup>	
S	Suction port (standard series)	SAE J518	3in	
	Fixing thread	DIN 13	M16x2; 21 deep <sup>5)</sup>	
A <sub>3</sub>	Service line port (auxiliary pump)	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>5)</sup>
R <sub>1</sub> , R <sub>3</sub>	Air bleed port <sup>6)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
R <sub>2</sub>	Fluid drain <sup>6)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
M	Gauge port for control pressure <sup>6)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>5)</sup>
M <sub>3</sub>	Gauge port for power override <sup>3)</sup> <sup>6)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>1</sub>	Pilot pressure port for hydraulic stroke limiter	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>3</sub>	Pilot pressure port for power override <sup>3)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
Y <sub>3</sub>	External control pressure port <sup>4)</sup> <sup>7)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>

<sup>2)</sup> Center bore according to DIN 332 (thread according to DIN 13)

<sup>3)</sup> On the LA0 version, the port has no function

<sup>4)</sup> Only for versions LA...H2 and LA...H3

<sup>5)</sup> Please observe the general notes for the max. tightening torques on page 40.

<sup>6)</sup> Plugged


<sup>7)</sup> 1x plugged, 1x open

# Unit Dimensions, Size 55

Before finalizing your design, please request a binding installation drawing. Dimensions in mm


## LA0H2, LA1H2

Individual power controller with hydraulic stroke limiter and external pilot pressure supply (positive control)

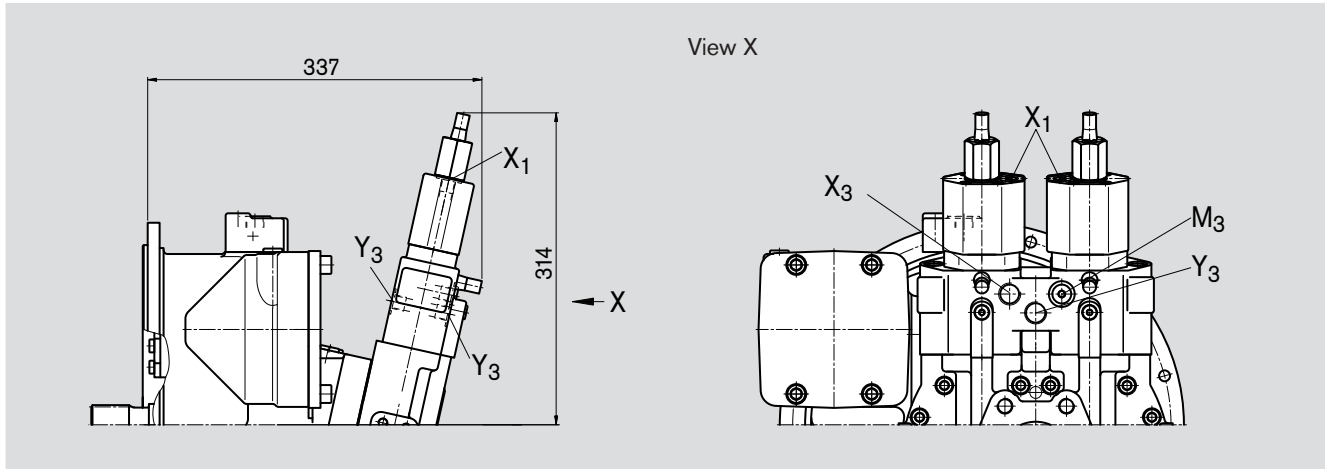

## LA0K, LA1K


Individual power controller with hydraulic power coupling

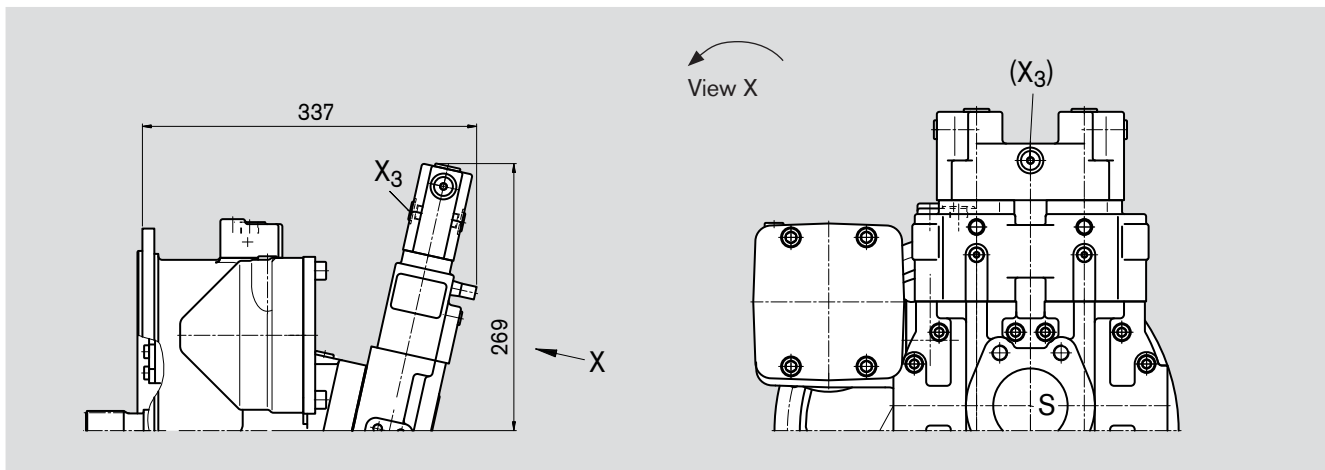

# Unit Dimensions, Size 55

## LA0KH2, LA1KH2


Individual power controller with hydraulic power coupling, hydraulic stroke limiter and external pilot pressure supply (positive control)

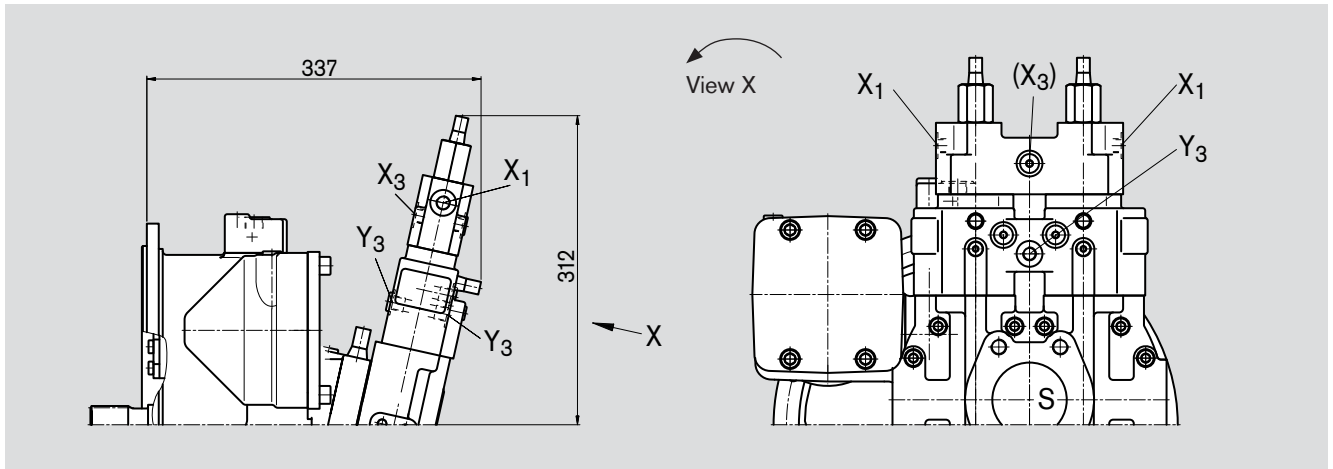



# Unit Dimensions, Size 80

## Shaft end

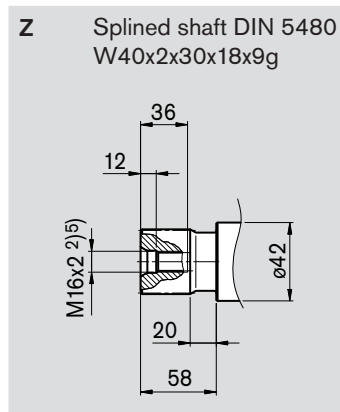

## Ports

A <sub>1</sub> , A <sub>2</sub>	Service line ports (high-pressure series)	SAE J518	1 in	
	Fixing thread	DIN 13	M12x1.75; 17 deep <sup>5)</sup>	
S	Suction port (standard series)	SAE J518	3 in	
	Fixing thread	DIN 13	M16x2; 21 deep <sup>5)</sup>	
A <sub>3</sub>	Service line port (auxiliary pump)	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>5)</sup>
R <sub>1</sub> , R <sub>3</sub>	Air bleed port <sup>6)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
R <sub>2</sub>	Fluid drain <sup>6)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
M	Gauge port for control pressure <sup>6)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>5)</sup>
M <sub>1</sub> , M <sub>2</sub>	Gauge port for high-pressure <sup>6)</sup>	ISO11926	9/16-18UNF-2B; 12 deep	80 Nm <sup>5)</sup>
M <sub>3</sub>	Gauge port for power override <sup>3)</sup> <sup>6)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>1</sub>	Pilot pressure port for hydraulic stroke limiter	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>3</sub>	Pilot pressure port for power override <sup>3)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>4</sub>	Pilot pressure port for load sensing	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
Y <sub>3</sub>	External control pressure port <sup>4)</sup> <sup>7)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>

<sup>2)</sup> Center bore according to DIN 332 (thread according to DIN 13)

<sup>3)</sup> On the LA0 version, the port has no function

<sup>4)</sup> Only for versions LA...H2 and LA...H3

<sup>5)</sup> Please observe the general notes for the max. tightening torques on page 40.

<sup>6)</sup> Plugged


<sup>7)</sup> 1x plugged, 1x open

# Unit Dimensions, Size 80

Before finalizing your design, please request a binding installation drawing. Dimensions in mm


## LA0H2, LA1H2

Individual power controller with hydraulic stroke limiter and external pilot pressure supply (positive control)

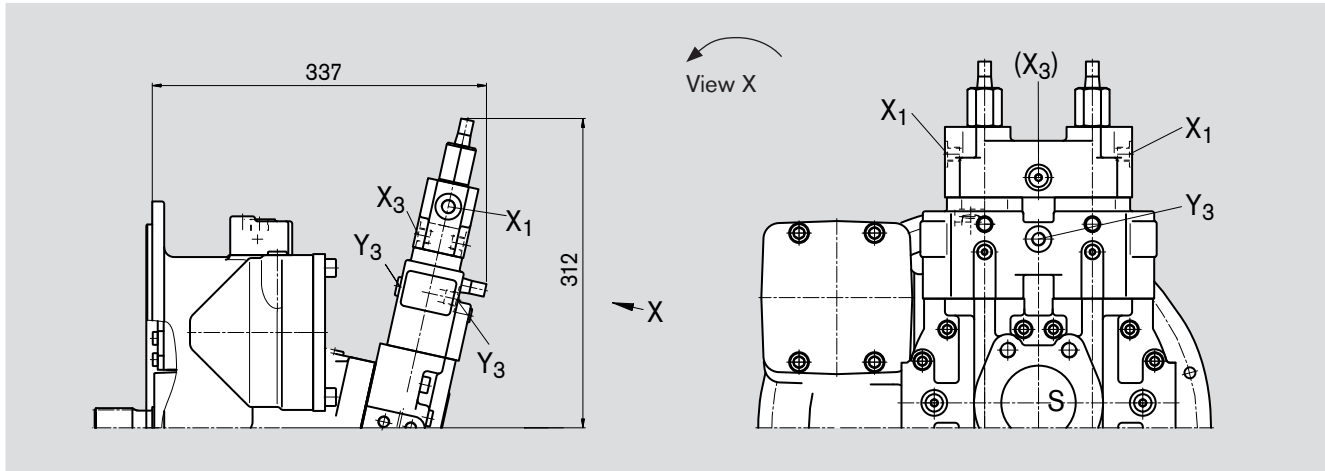


## LA0K, LA1K

Individual power controller with hydraulic power coupling

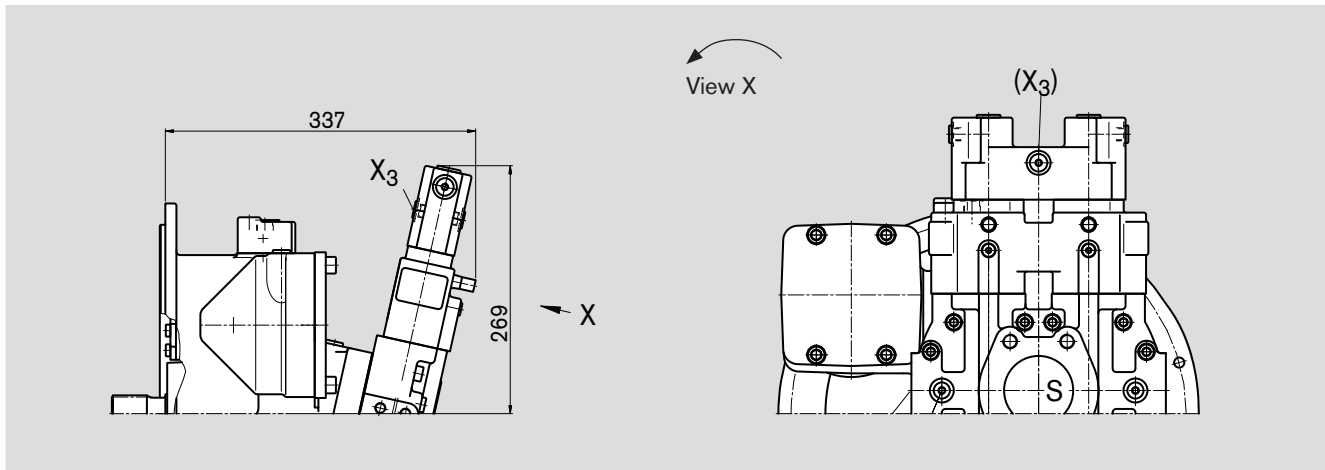

## LA0KH2, LA1KH2

Individual power controller with hydraulic power coupling, hydraulic stroke limiter and external pilot pressure supply (positive control)

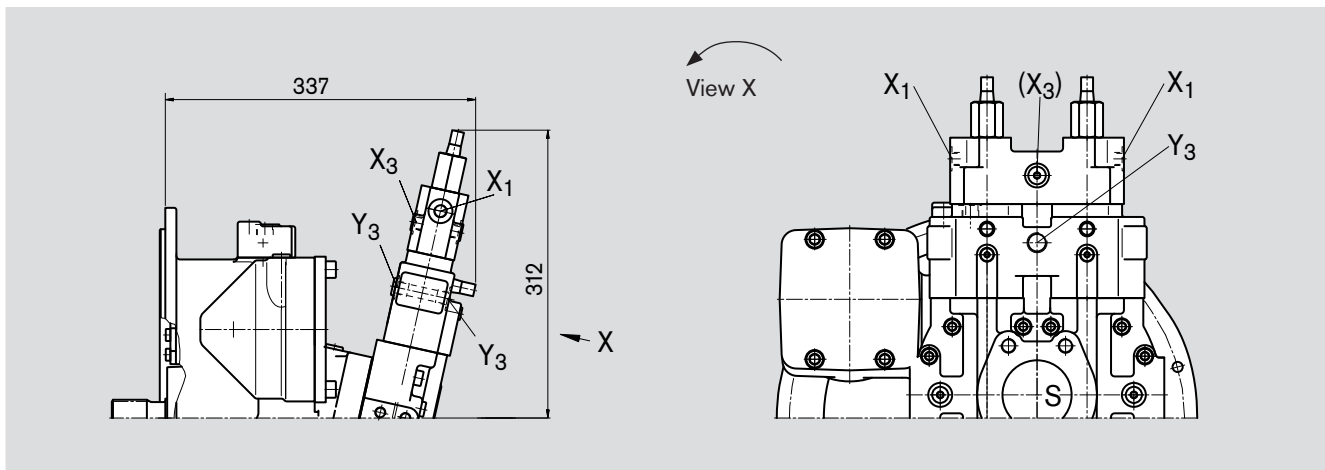




# Unit Dimensions, Size 80

Before finalizing your design, please request a binding installation drawing. Dimensions in mm

## LA0KS, LA1KS

Individual power controller with hydraulic power coupling and load sensing

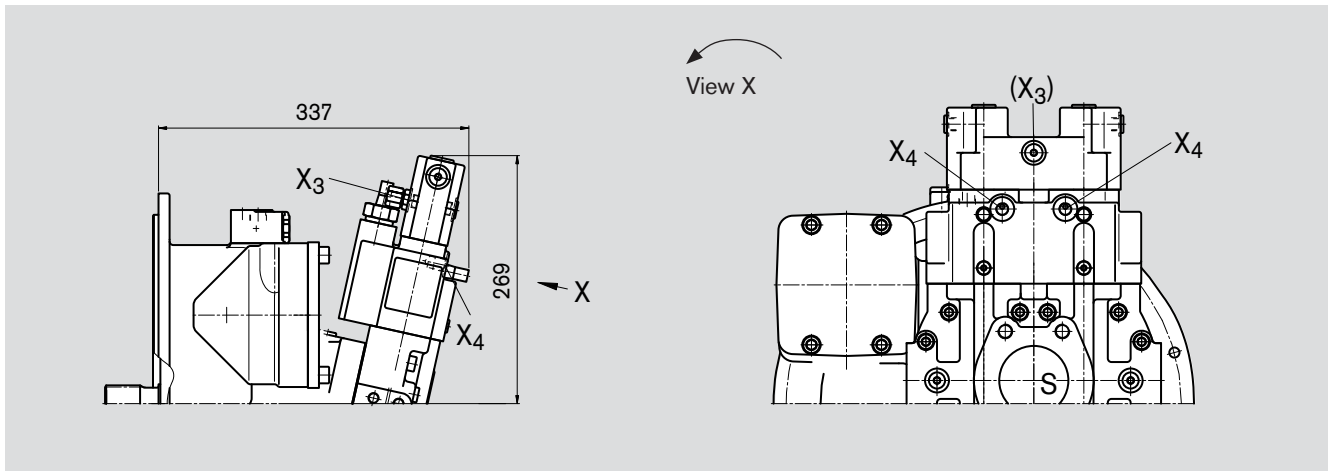


# Unit Dimensions, Size 107

Before finalizing your design, please request a binding installation drawing. Dimensions in mm

## LA0KH1/H3, LA1KH1/H3


Individual power controller with hydraulic coupling and hydraulic stroke limiter (negative control)

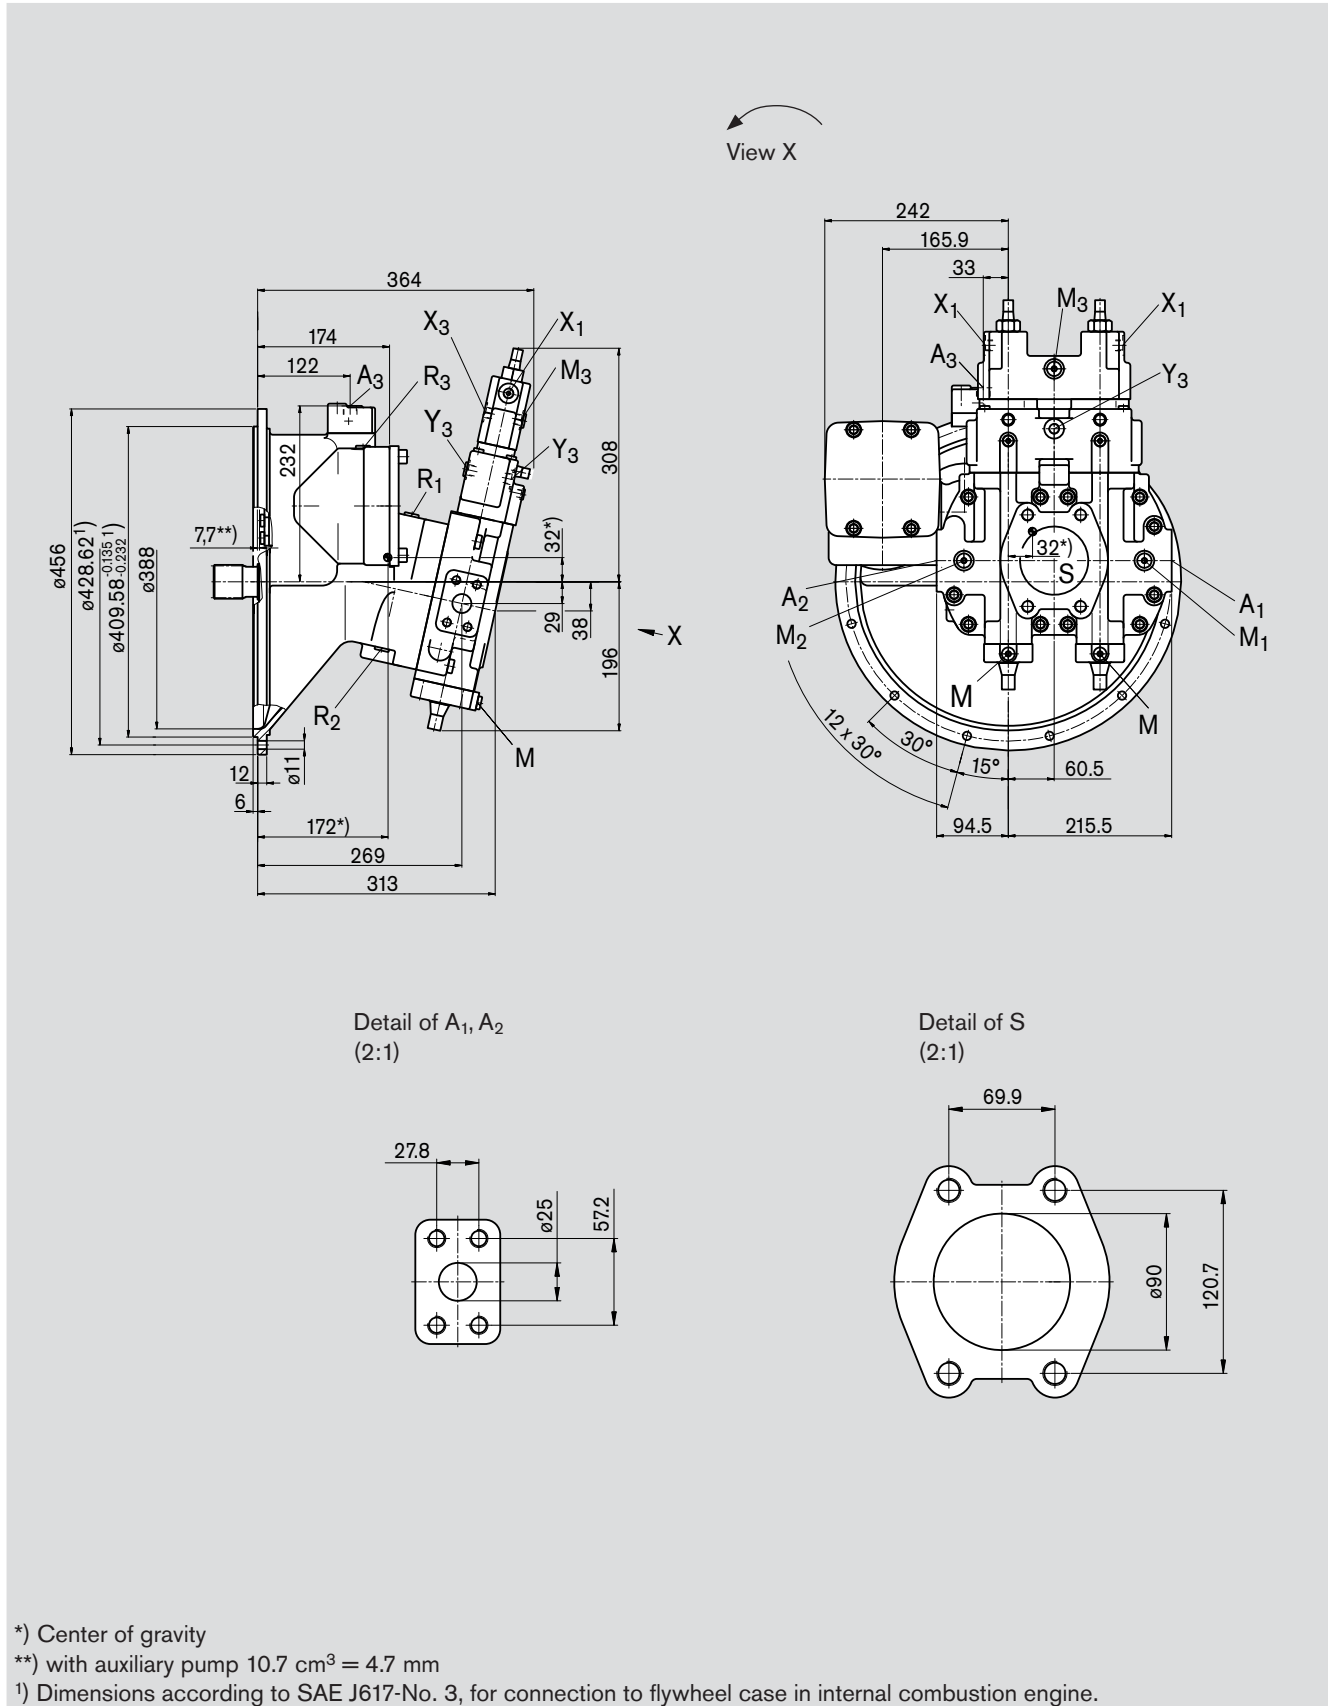

\*) Center of gravity  
 \*\*) with auxiliary pump 10.7 cm<sup>3</sup> = 4.7 mm  
 1) Dimensions according to SAE J617-No. 3, for connection to flywheel case in internal combustion engine.

# Unit Dimensions, Size 107

## Shaft end

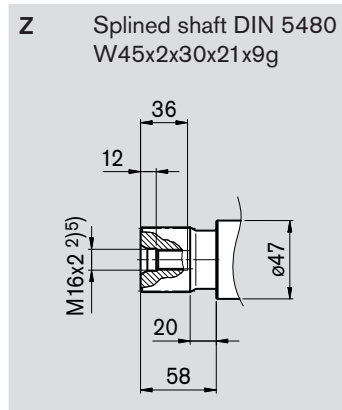

## Ports

A <sub>1</sub> , A <sub>2</sub>	Service line ports (high-pressure series)	SAE J518	1 in	
	Fixing thread	DIN 13	M12x1.75; 17 deep <sup>5)</sup>	
S	Suction port (standard series)	SAE J518	3 1/2 in	
	Fixing thread	DIN 13	M16x2; 21 deep <sup>5)</sup>	
A <sub>3</sub>	Service line port (auxiliary pump)	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>5)</sup>
R <sub>1</sub> , R <sub>3</sub>	Air bleed port <sup>6)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
R <sub>2</sub>	Fluid drain <sup>6)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
M	Gauge port for control pressure <sup>6)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>5)</sup>
M <sub>1</sub> , M <sub>2</sub>	Gauge ports for high-pressure <sup>6)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
M <sub>3</sub>	Gauge port for power override <sup>3)</sup> <sup>6)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>1</sub>	Pilot pressure port for hydraulic stroke limiter	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>3</sub>	Pilot pressure port for power override <sup>3)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>4</sub>	Pilot pressure port for load sensing	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
Y <sub>3</sub>	External control pressure port <sup>4)</sup> <sup>7)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>

<sup>2)</sup> Center bore according to DIN 332 (thread according to DIN 13)

<sup>3)</sup> On the LA0 version, the port has no function

<sup>4)</sup> Only for versions LA...H2 and LA...H3

<sup>5)</sup> Please observe the general notes for the max. tightening torques on page 40.

<sup>6)</sup> Plugged


<sup>7)</sup> 1x plugged, 1x open

# Unit Dimensions, Size 107

Before finalizing your design, please request a binding installation drawing. Dimensions in mm


## LA0H2, LA1H2

Individual power controller with hydraulic stroke limiter and external pilot pressure supply (positive control)

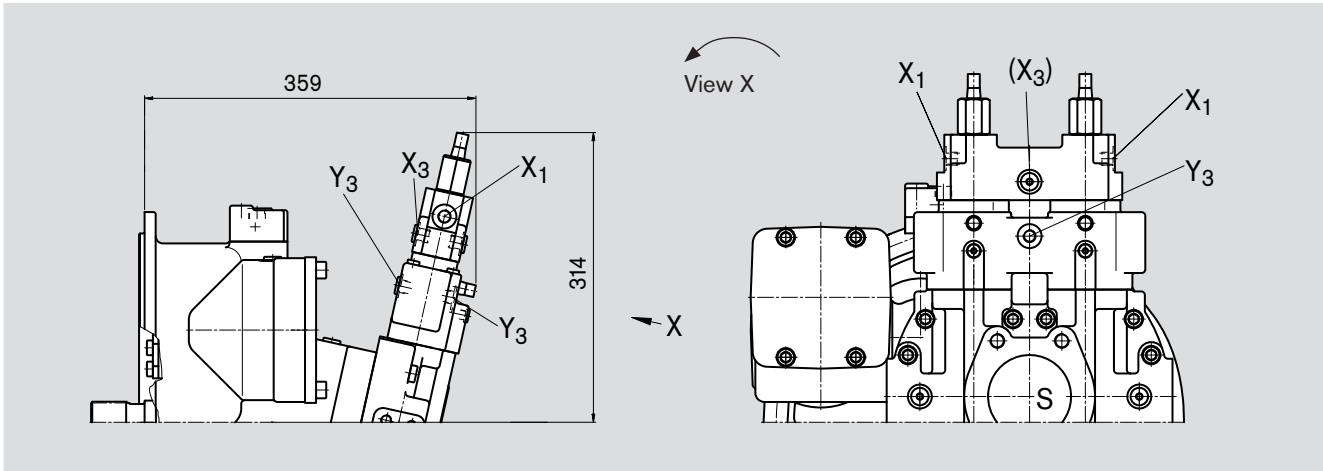


## LA0K, LA1K

Individual power controller with hydraulic power coupling

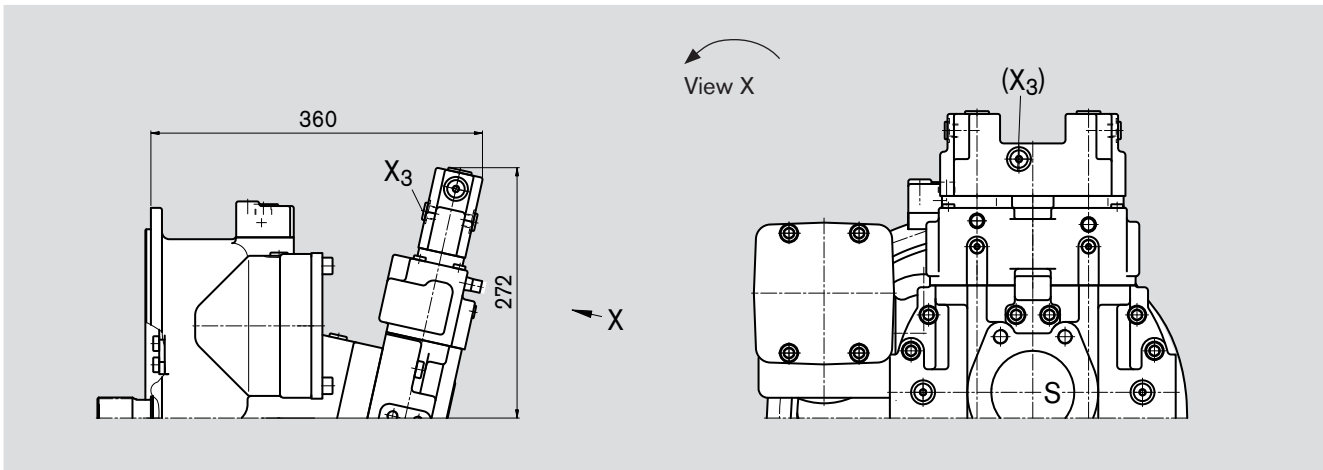

## LA0KH2, LA1KH2

Individual power controller with hydraulic power coupling, hydraulic stroke limiter and external pilot pressure supply (positive control)

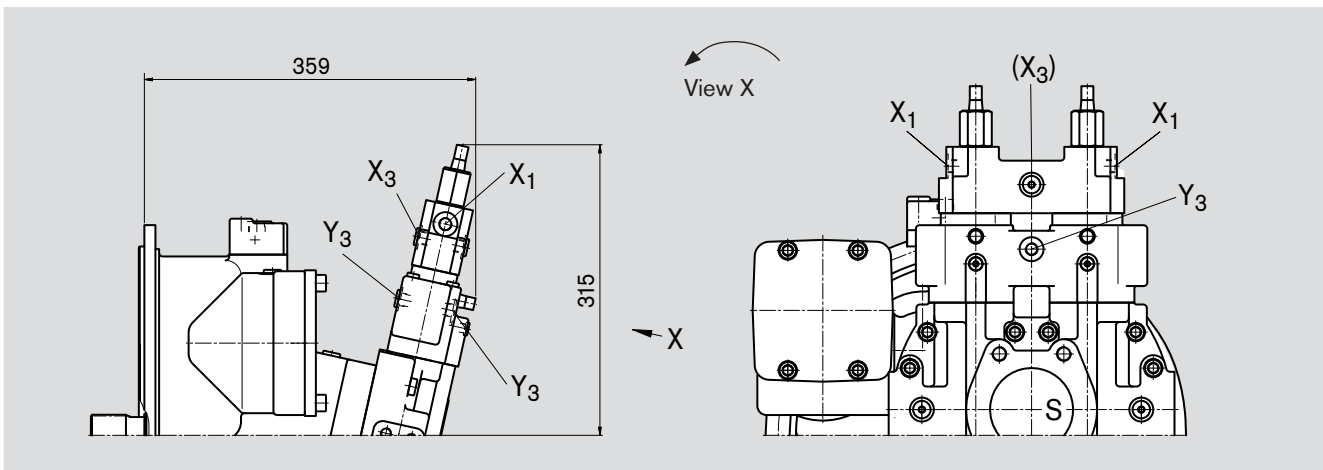


# Unit Dimensions, Size 107

Before finalizing your design, please request a binding installation drawing. Dimensions in mm


## LA0S, LA1S

Individual power controller with load sensing

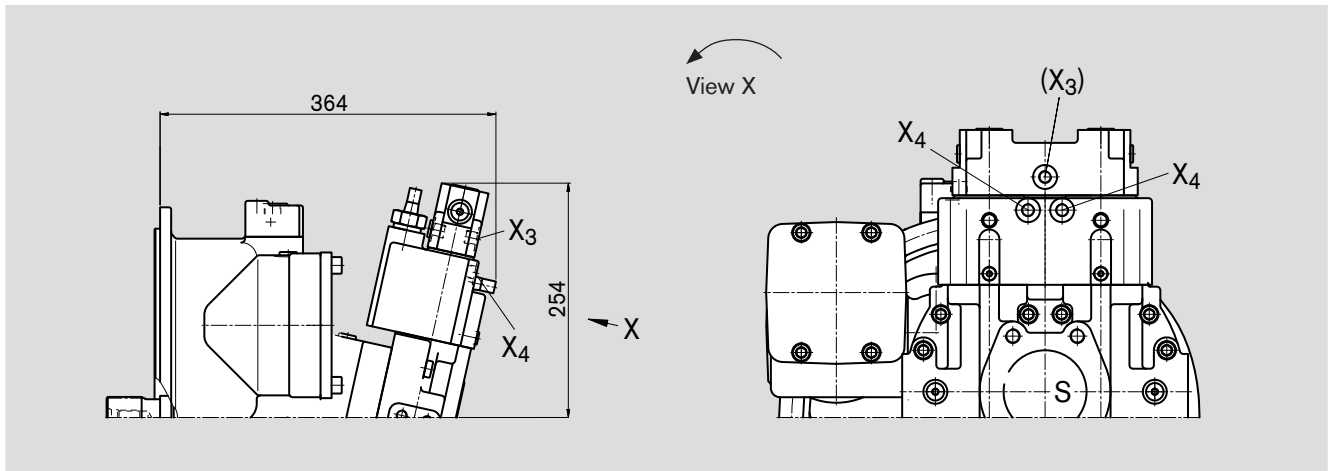


## LA0KS, LA1KS

Individual power controller with hydraulic power coupling and load sensing

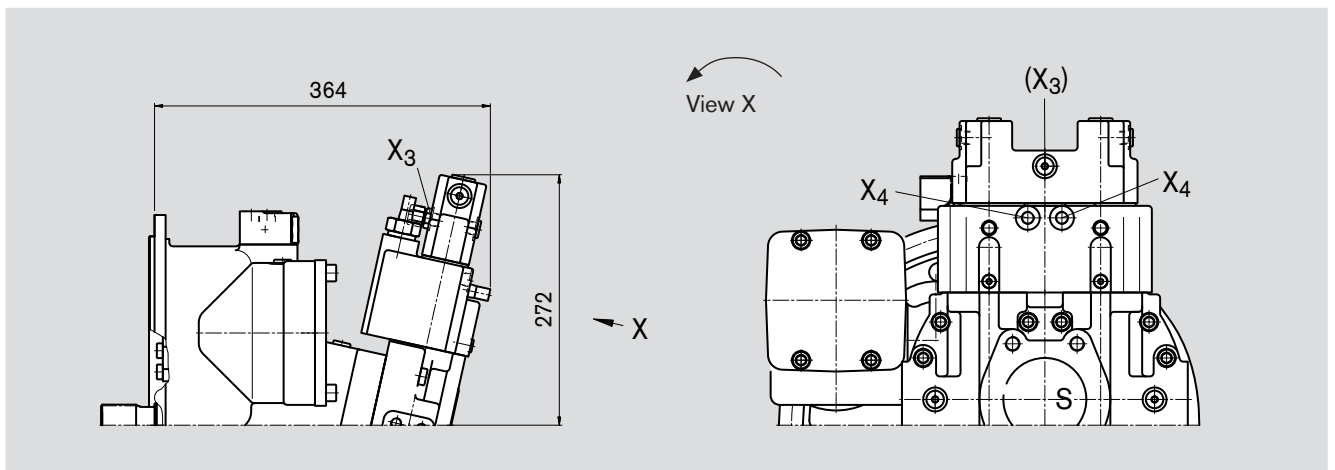

## EP2

Electric control with proportional solenoid (positive control)

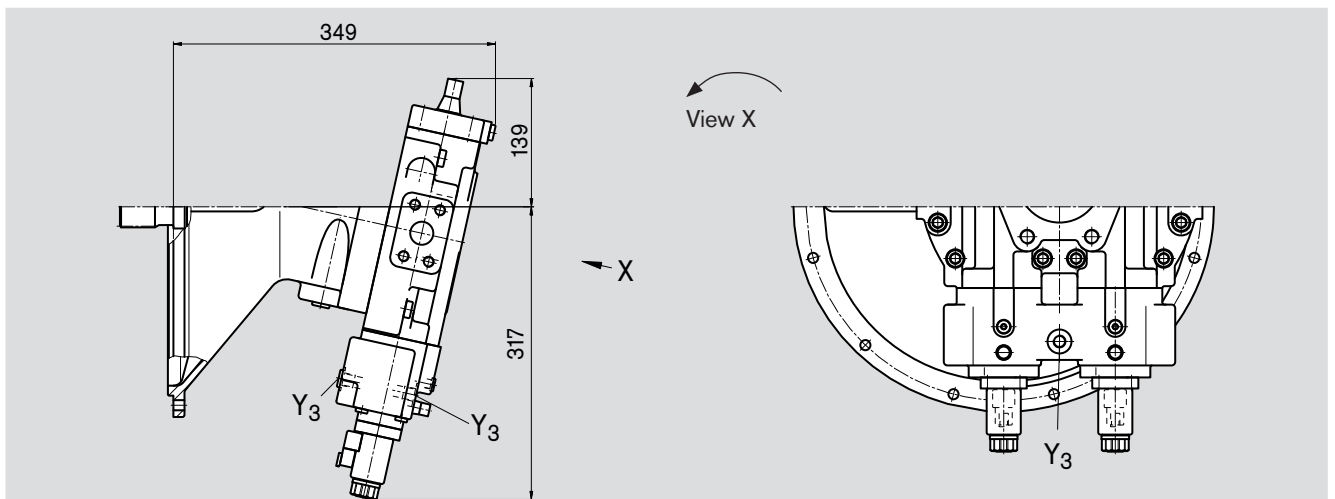


# Unit Dimensions, Size 140

Before finalizing your design, please request a binding installation drawing. Dimensions in mm

## LA0KH1/H3, LA1KH1/H3

Individual power controller with hydraulic coupling and hydraulic stroke limiter (negative control)

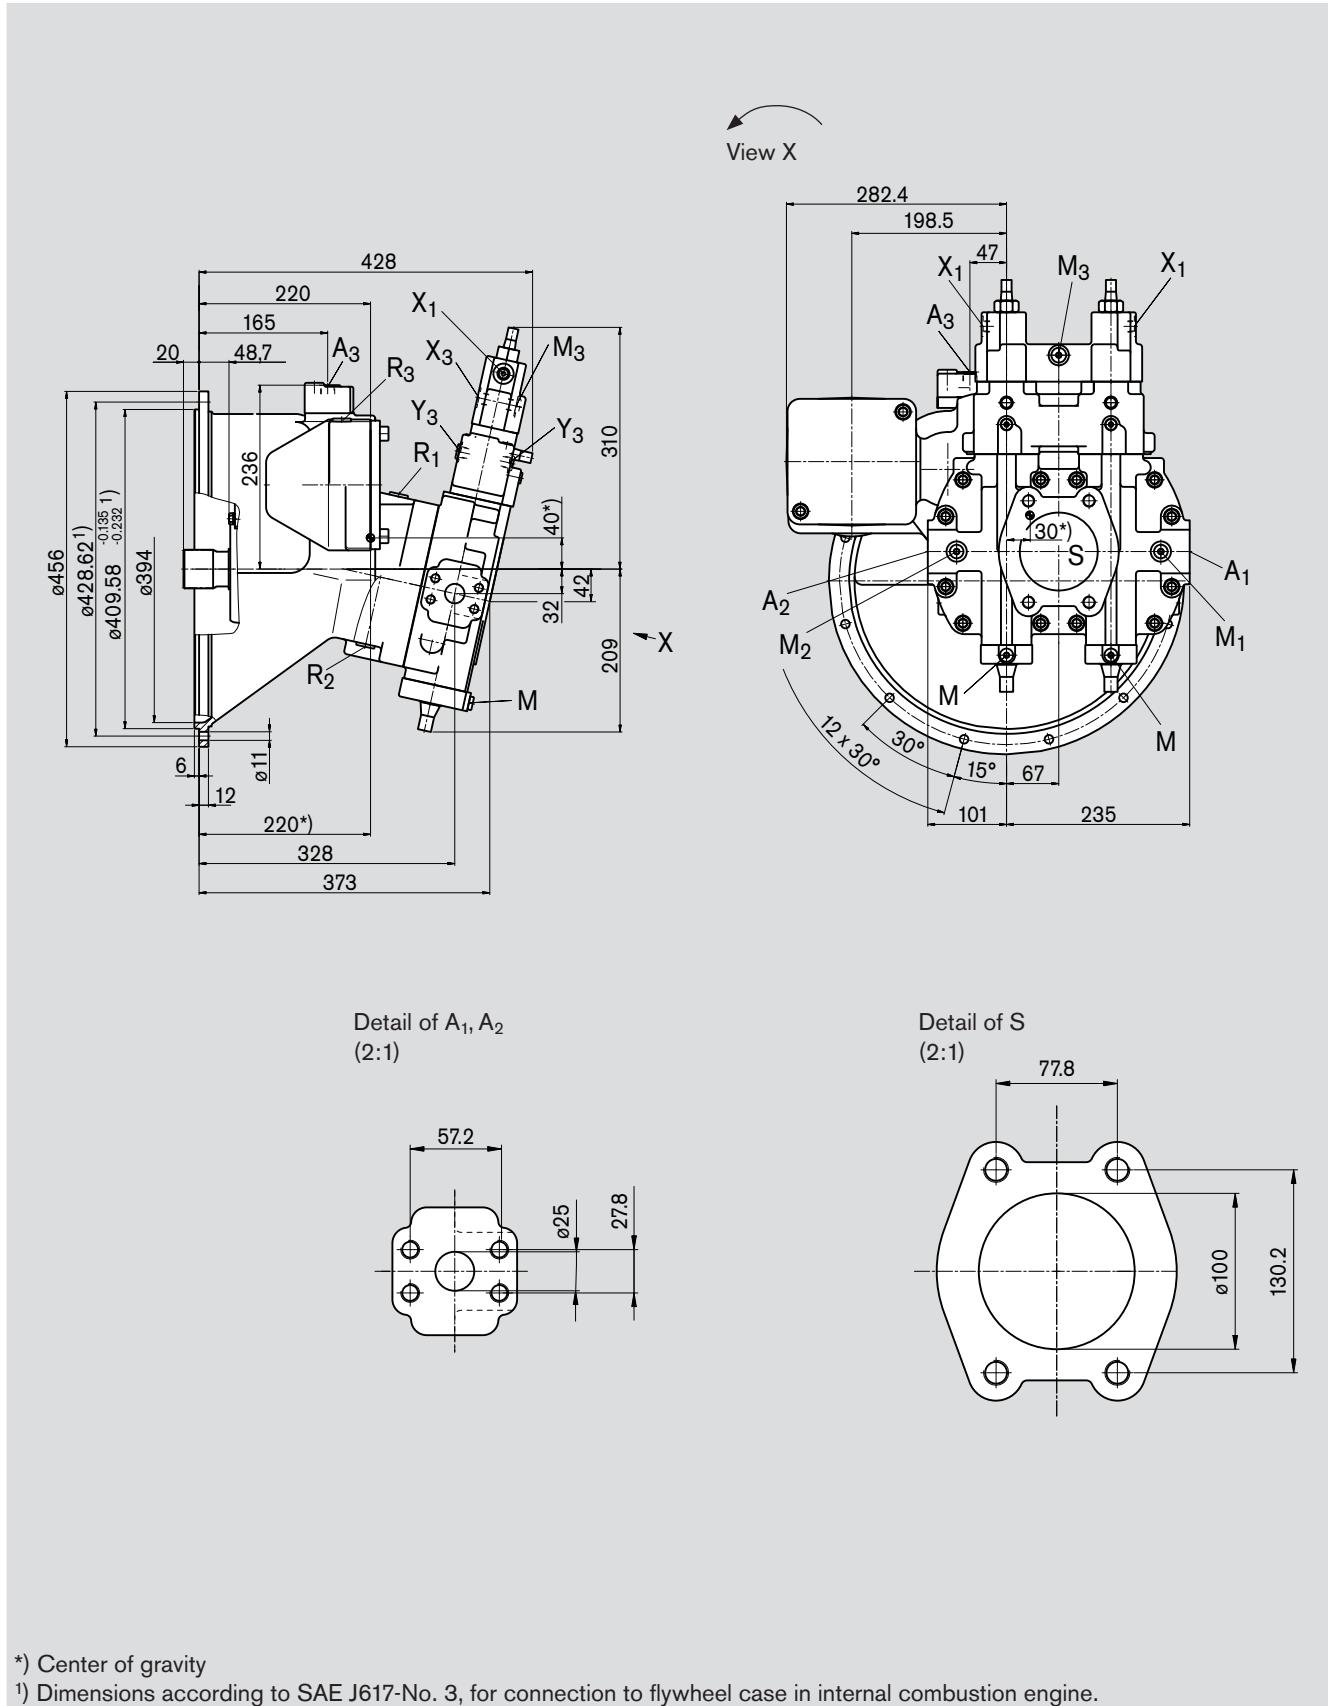


\*) Center of gravity

1) Dimensions according to SAE J617-No. 3, for connection to flywheel case in internal combustion engine.

# Unit Dimensions, Size 140

## Shaft end

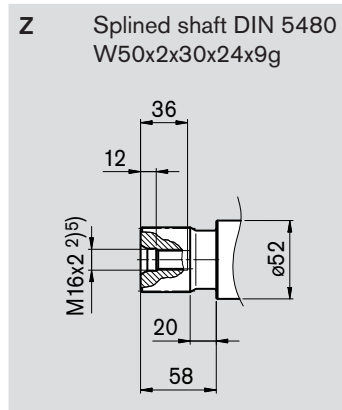

## Ports

A <sub>1</sub> , A <sub>2</sub>	Service line ports (high-pressure series) Fixing thread	SAE J518 DIN 13	1 in M12x1,75; 17 deep <sup>5)</sup>	
S	Suction port (standard series) Fixing thread	SAE J518 DIN 13	4 in M16x2; 21 deep <sup>5)</sup>	
A <sub>3</sub>	Service line port (auxiliary pump)	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>5)</sup>
R <sub>1</sub> , R <sub>3</sub>	Air bleed port <sup>6)</sup>	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>5)</sup>
R <sub>2</sub>	Fluid drain <sup>6)</sup>	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>5)</sup>
M	Gauge port for control pressure <sup>6)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>5)</sup>
M <sub>1</sub> , M <sub>2</sub>	Gauge port for high-pressure <sup>6)</sup>	ISO11926	9/16-18UNF-2B; 12 deep	80 Nm <sup>5)</sup>
M <sub>3</sub>	Gauge port for power override <sup>3)</sup> <sup>6)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>1</sub>	Pilot pressure port for hydraulic stroke limiter	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>3</sub>	Pilot pressure port for power override <sup>3)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>4</sub>	Pilot pressure port for load sensing	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
Y <sub>3</sub>	External control pressure port <sup>4)</sup> <sup>7)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>

<sup>2)</sup> Center bore according to DIN 332 (thread according to DIN 13)

<sup>3)</sup> On the LA0 version, the port has no function

<sup>4)</sup> Only for versions LA...H2 and LA...H3

<sup>5)</sup> Please observe the general notes for the max. tightening torques on page 40.

<sup>6)</sup> Plugged


<sup>7)</sup> 1x plugged, 1x open

# Unit Dimensions, Size 140

Before finalizing your design, please request a binding installation drawing. Dimensions in mm


## LA0H2, LA1H2

Individual power controller with hydraulic stroke limiter and external pilot pressure supply (positive control)

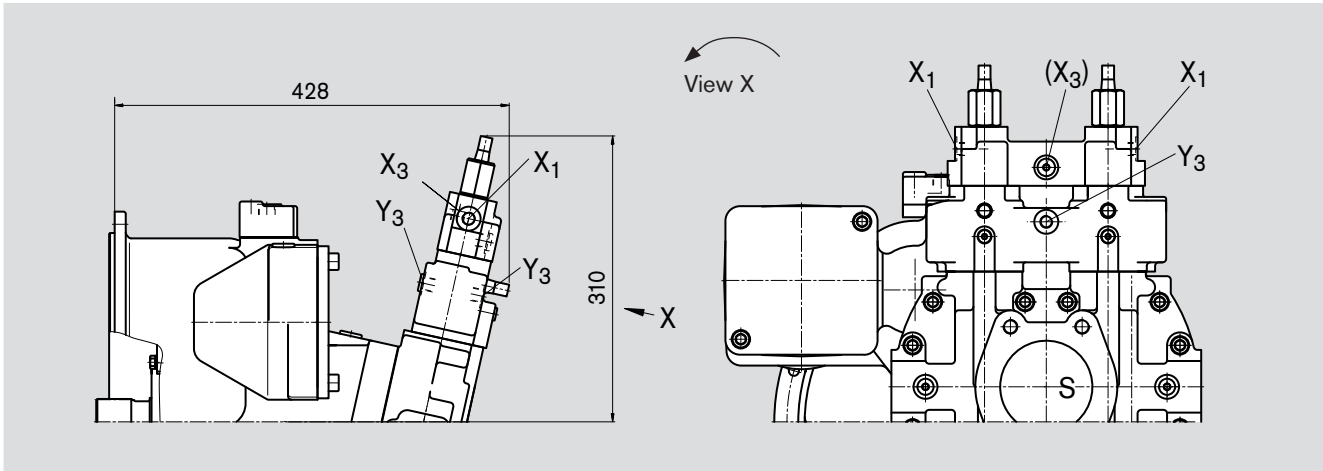


## LA0K, LA1K

Individual power controller with hydraulic power coupling

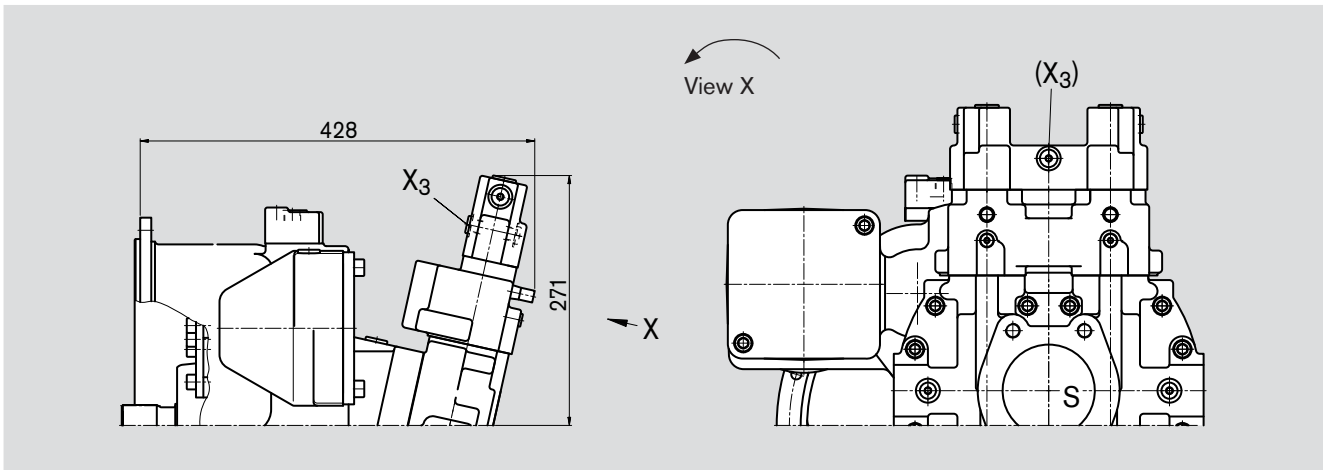

## LA0KH2, LA1KH2

Individual power controller with hydraulic power coupling, hydraulic stroke limiter and external pilot pressure supply (positive control)

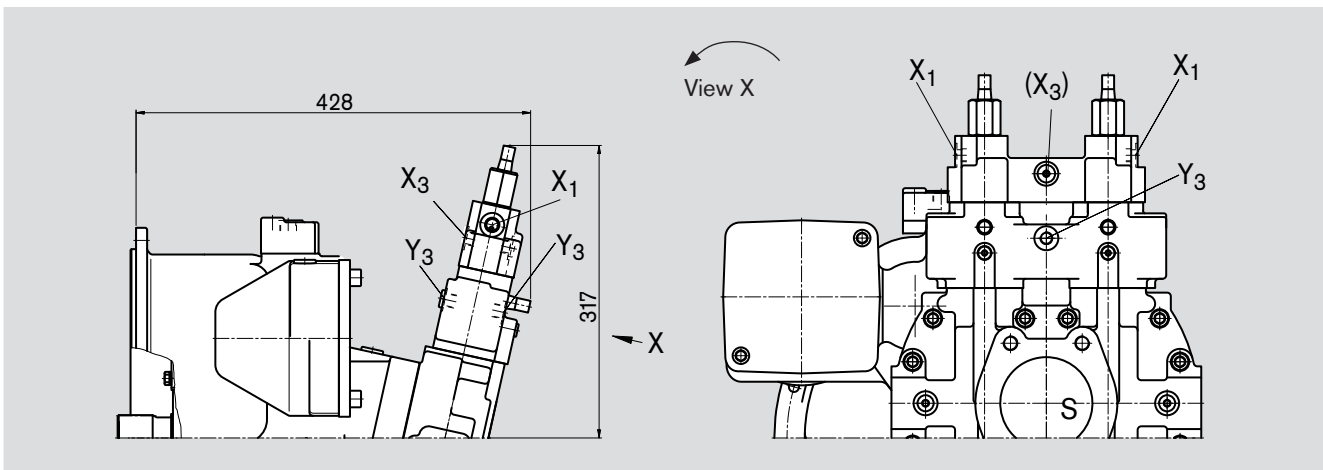




# Unit Dimensions, Size 140

Before finalizing your design, please request a binding installation drawing. Dimensions in mm

## LA0S, LA1S


Individual power controller with load sensing

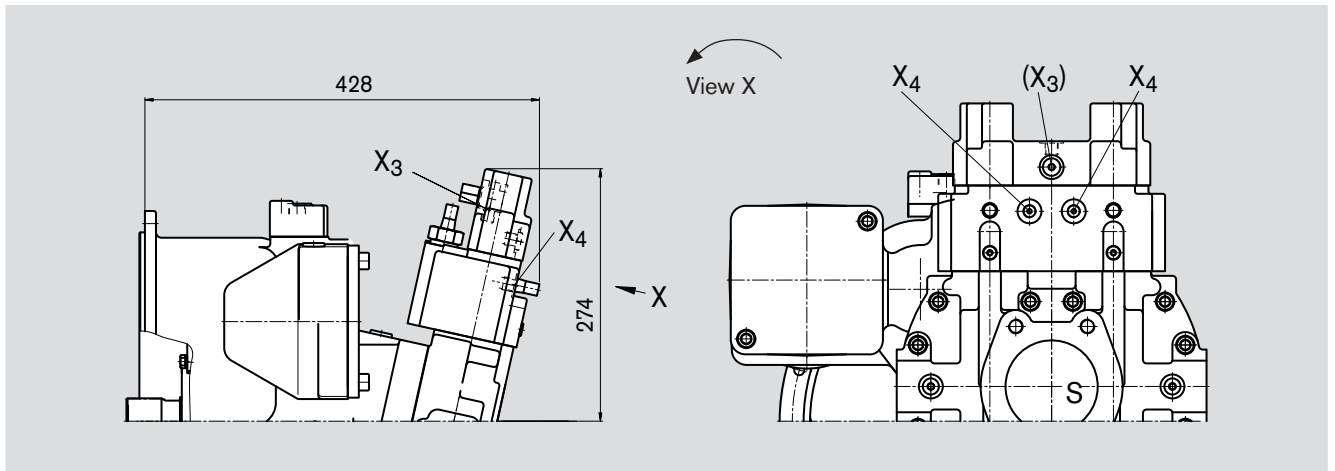

3


## LA0KS, LA1KS

Individual power controller with hydraulic power coupling and load sensing

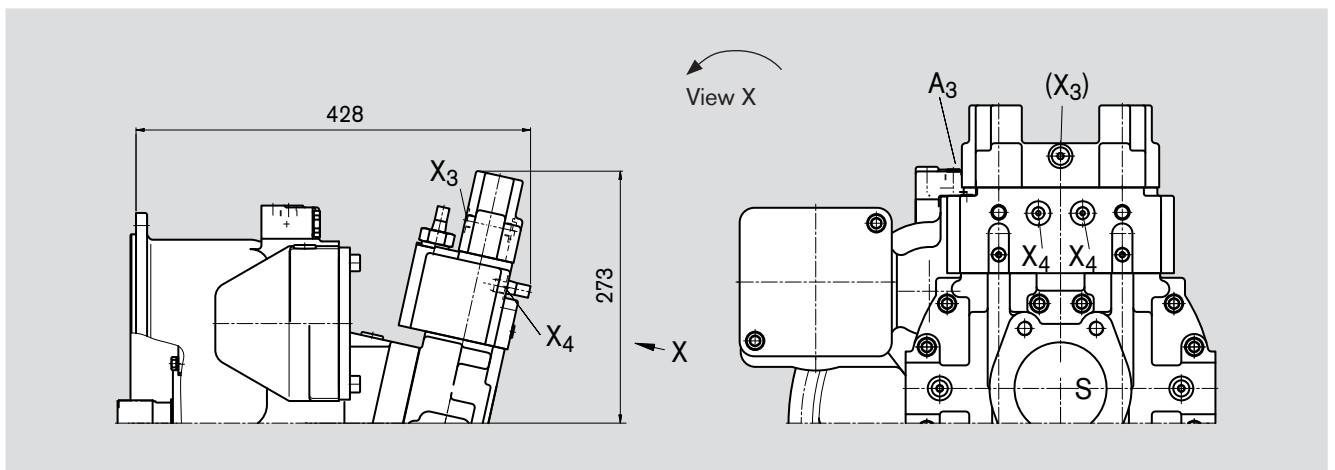

## EP2

Electric control with proportional solenoid (positive control)

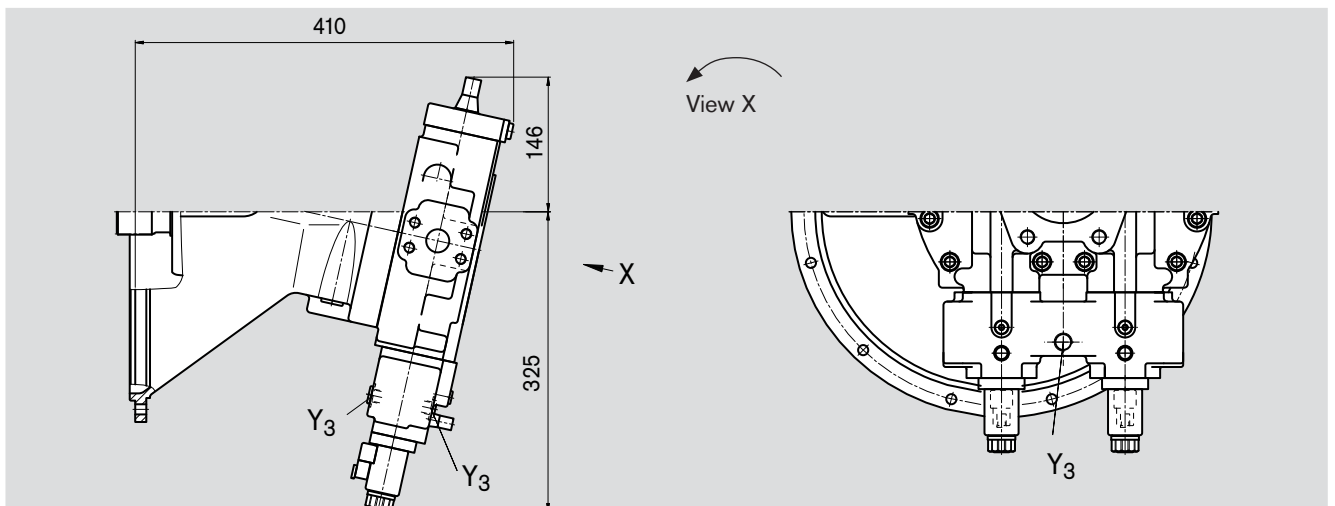


# Unit Dimensions, Size 200

Before finalizing your design, please request a binding installation drawing. Dimensions in mm

## LA0KH1/H3, LA1KH1/H3

Individual power controller with hydraulic coupling and hydraulic stroke limiter (negative control)

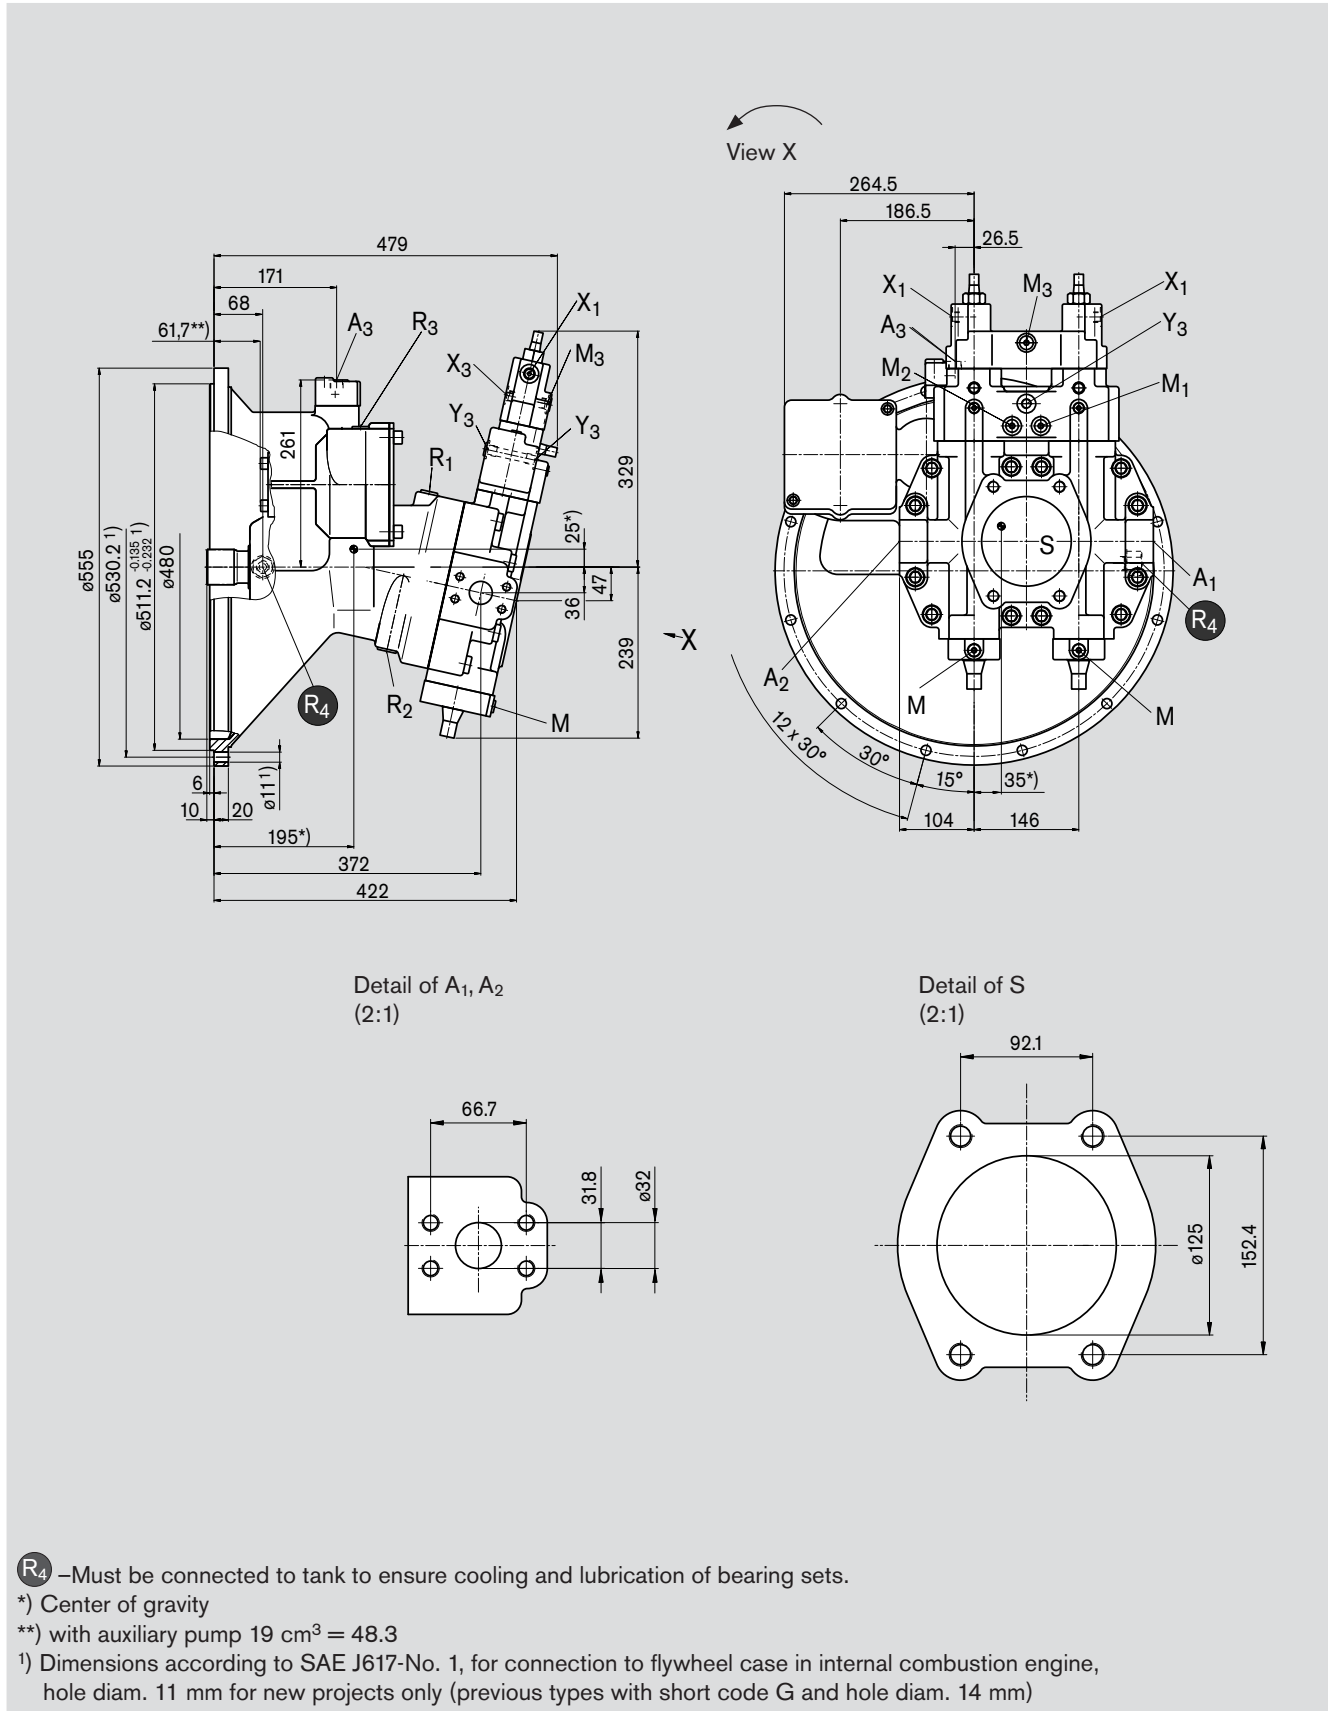

**R<sub>4</sub>** –Must be connected to tank to ensure cooling and lubrication of bearing sets.


\*) Center of gravity

\*\*\*) with auxiliary pump 19 cm<sup>3</sup> = 48.3

1) Dimensions according to SAE J617-No. 1, for connection to flywheel case in internal combustion engine, hole diam. 11 mm for new projects only (previous types with short code G and hole diam. 14 mm)

# Unit Dimensions, Size 200

## Shaft end

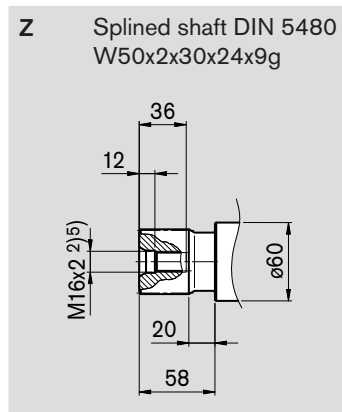

## Ports

A <sub>1</sub> , A <sub>2</sub>	Service line ports (high-pressure series) Fixing thread	SAE J518 DIN 13	1 1/4in M12x1.75; 19 deep <sup>5)</sup>	
S	Suction port (standard series) Fixing thread	SAE J518 DIN 13	5in M16x2; 23 deep <sup>5)</sup>	
A <sub>3</sub>	Service line port (auxiliary pump)	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>5)</sup>
R <sub>1</sub> , R <sub>3</sub>	Air bleed port <sup>6)</sup>	DIN 3852	M22x1.5; 12 deep	210 Nm <sup>5)</sup>
R <sub>2</sub>	Fluid drain <sup>6)</sup>	DIN 3852	M22x1.5; 12 deep	210 Nm <sup>5)</sup>
R <sub>4</sub>	Flushing fluid port <sup>6)</sup>	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>5)</sup>
M	Gauge port for control pressure <sup>6)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>5)</sup>
M <sub>1</sub> , M <sub>2</sub>	Gauge port for high-pressure <sup>6)</sup>	ISO11926	9/16-18UNF-2B; 12 deep	80 Nm <sup>5)</sup>
M <sub>3</sub>	Gauge port for power override <sup>3)</sup> <sup>6)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>1</sub>	Pilot pressure port for hydraulic stroke limiter	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>3</sub>	Pilot pressure port for power override <sup>3)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
X <sub>4</sub>	Pilot pressure port for load sensing	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>
Y <sub>3</sub>	External control pressure port <sup>4)</sup> <sup>7)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>5)</sup>

<sup>2)</sup> Center bore according to DIN 332 (thread according to DIN 13)

<sup>3)</sup> On the LA0 version, the port has no function

<sup>4)</sup> Only for versions LA...H2 and LA...H3

<sup>5)</sup> Please observe the general notes for the max. tightening torques on page 40.

<sup>6)</sup> Plugged


<sup>7)</sup> 1x plugged, 1x open

# Unit Dimensions, Size 200

Before finalizing your design, please request a binding installation drawing. Dimensions in mm


## LA0H2, LA1H2

Individual power controller with hydraulic stroke limiter and external pilot pressure supply (positive control)

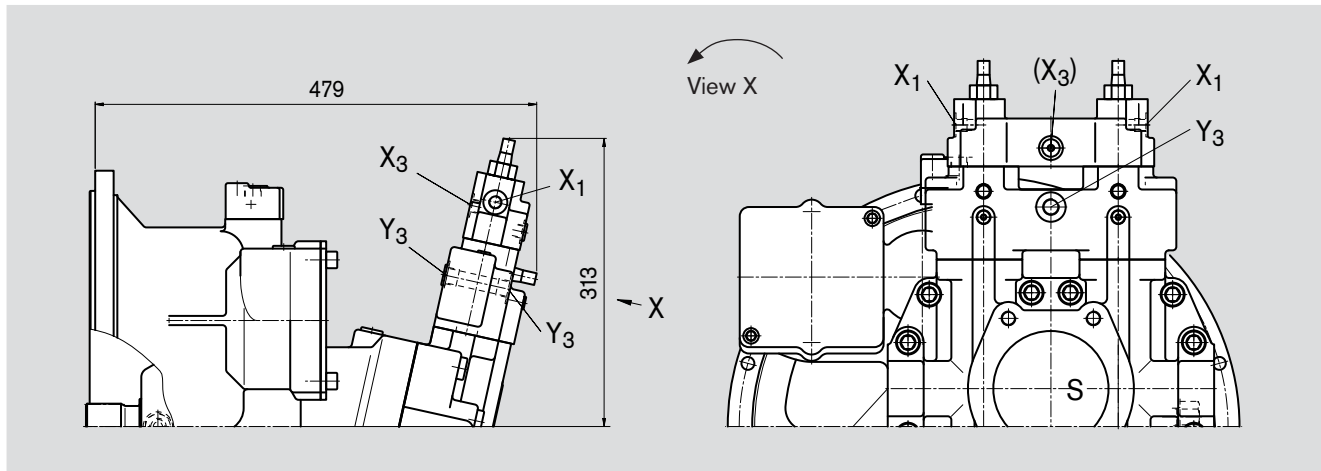


## LA0KH2, LA1KH2

Individual power controller with hydraulic power coupling, hydraulic stroke limiter and external pilot pressure supply (positive control)

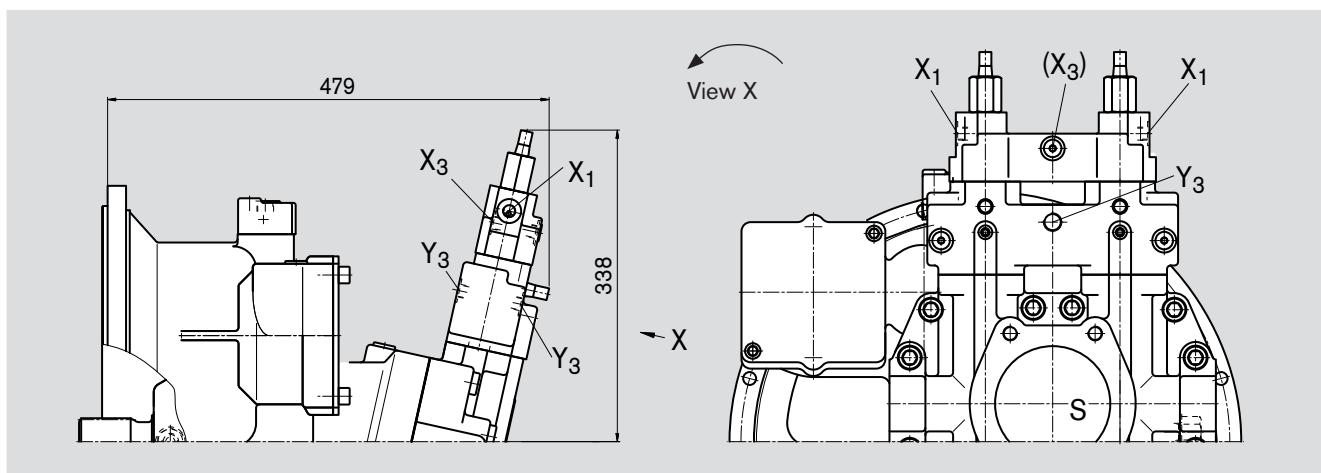

## LA0S, LA1S

Individual power controller with load sensing

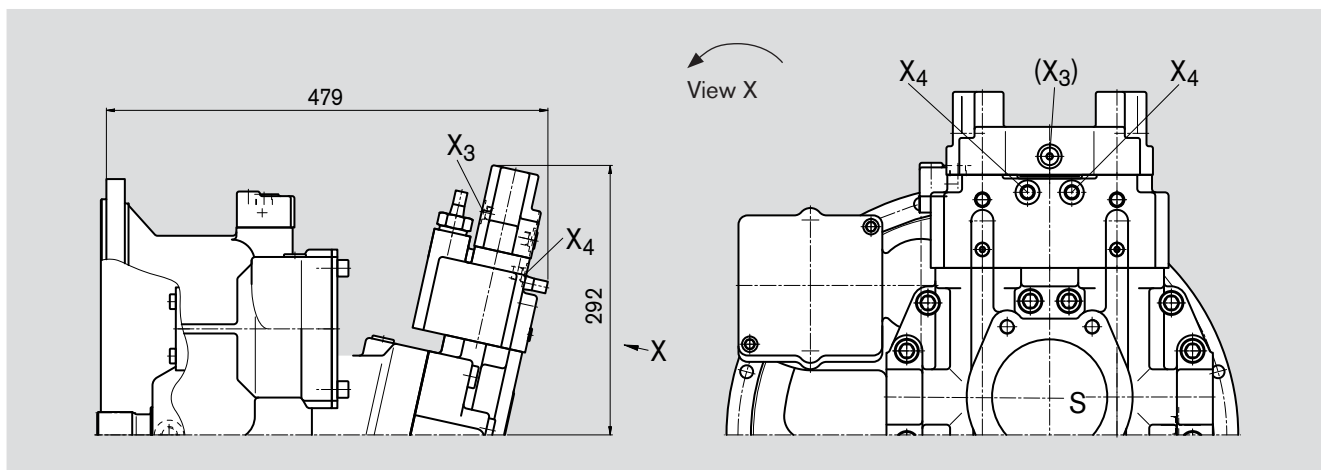


# Unit Dimensions, Size 200

Before finalizing your design, please request a binding installation drawing. Dimensions in mm

## LA0KS, LA1KS


Individual power controller with hydraulic power coupling and load sensing

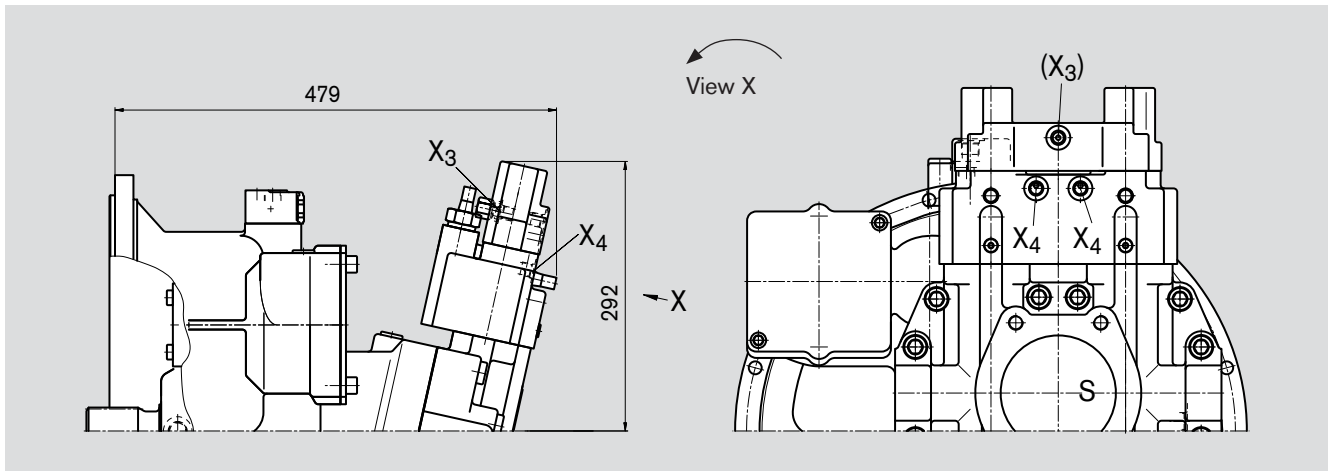

# Power Take-off Dimensions

Before finalizing your design, please request a binding installation drawing. Dimensions in mm

**K01/F01** Flange SAE J744 – 82-2 (A)  
 Hub for splined shaft according to ANSI B92.1a-1976 5/8in 9T 16/32DP <sup>1)</sup> (SAE J744 – 16-4 (A))

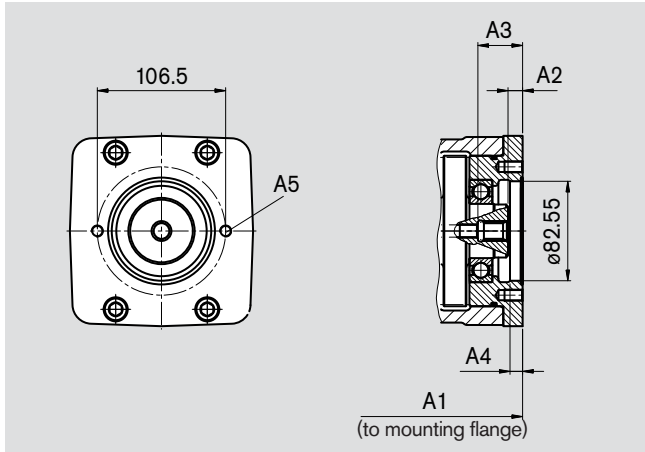


Size	A1	A2	A3	A4	A5 <sup>2)</sup>
55	178	10.1	35.1	10.5	M10x1.5;15 deep
80	178	10.1	35.1	10.5	M10x1.5;15 deep
107	190	12.1	37.1	10.5	M10x1.5;15 deep
140	232	11.1	36.1	10.1	M10x1.5;14 deep
200	260	12	37	10.2	M10x1.5;15 deep

Note related to the position of the fixing threads:  
 Standard position is shown. Further positions of the fixing threads available on request.  
 Please specify in clear text.

**K02/F02** Flange SAE J744 – 101-2 (B)  
 Hub for splined shaft according to ANSI B92.1a-1976 7/8in 13T 16/32DP <sup>1)</sup> (SAE J744 – 22-4 (B))

**K04/F04** Flange SAE J744 – 101-2 (B)  
 Hub for splined shaft according to ANSI B92.1a-1976 1in 15T 16/32DP <sup>1)</sup> (SAE J744 – 25-4 (B-B))

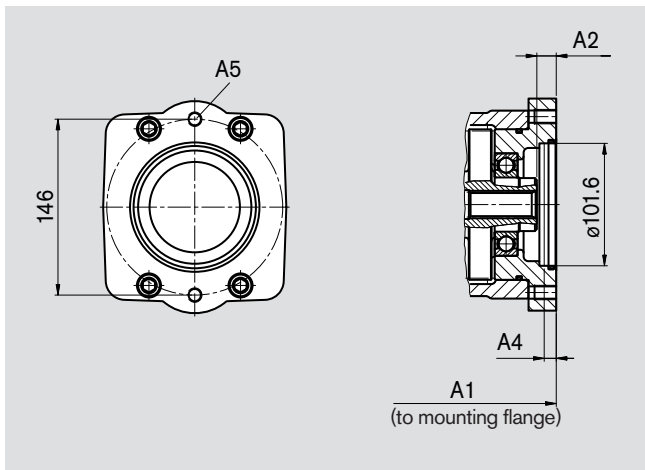

**K02/F02, K04/F04**

Size	A1	A2	A4	A5 <sup>2)</sup>
55	185	13.1	10	M12x1.75;18 deep
80	185	13.1	10	M12x1.75;18 deep
107	197	16.1	10	M12x1.75;18 deep
140	243	15.1	12.1	M12x1.75;18 deep
200	262.5	14.5	10.4	M12x1.75;18 deep

Note related to the position of the fixing threads:  
 Standard position is shown. Further positions of the fixing threads available on request.  
 Please specify in clear text.

<sup>1)</sup> 30° pressure angle, flat root, side fit, tolerance class 5


<sup>2)</sup> Thread according to DIN13, please observe the general notes for the max. tightening torques on page 40.

# Power Take-off Dimensions

Before finalizing your design, please request a binding installation drawing. Dimensions in mm

## K07/F07 Flange SAE J744 – 127-2 (C)

Hub for splined shaft according to ANSI B92.1a-1976 1 1/4in 14T 12/24DP <sup>1)</sup> (SAE J744 – 32-4 (C))

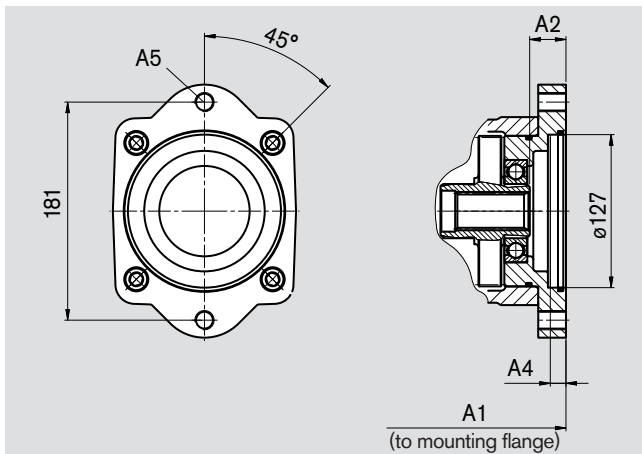

Size	A1	A2	A3	A4	A5 <sup>2)</sup>
55					
80	185	16.1	59.1 <sup>3)</sup>	13	M16x2
107	197	30.1	–	13	M16x2
140	243	15.1	–	13	M16x2
200	267.5	19.5	–	11	M16x2

<sup>3)</sup> Illustration as for K01

Note related to the position of the fixing threads:

Standard position is shown. Further positions of the fixing threads available on request.


Please specify in clear text.

## K86/F86 Flange SAE J744 – 152-4 (D)

Hub for splined shaft according to ANSI B92.1a-1976 1 1/4in 14T 12/24DP <sup>1)</sup> (SAE J744 – 32-4 (C))

## K17/F17 Flange SAE J744 – 152-4 (D)

Hub for splined shaft according to ANSI B92.1a-1976 1 3/4in 13T 8/16DP <sup>1)</sup> (SAE J744 – 44-4 (D))

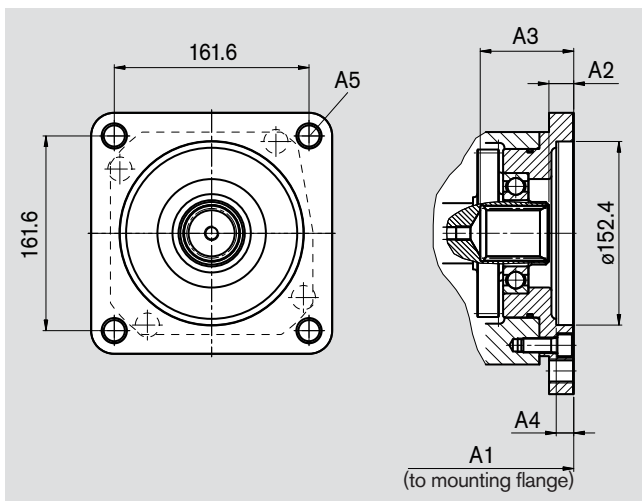

### K86/F86, K17/F17

Size	A1	A2	A3	A4	A5 <sup>2)</sup>
140	248.5	20.6	77.6	14.5	M20x2.5
200	267.5	19.5	76.5	14.5	M20x2.5

<sup>1)</sup> 30° pressure angle, flat root, side fit, tolerance class 5

<sup>2)</sup> Thread according to DIN13, please observe the general notes for the max. tightening torques on page 40.

# Overview of Attachments

Flange	Hub for splined shaft	Short code K.../F...	Attachment for 2nd pump						External gear pump
			A4FO Size (Shaft)	A4VG Size (Shaft)	A10VG Size (Shaft)	A10VO/31 Size (Shaft)	A10VO/53 Size (Shaft)	A11VO Size (Shaft)	
<b>Power take-off – A8VO55/80</b>									
82-2 (A)	5/8in	01	–	–	–	–	–	–	Size F Sizes 4-22 <sup>1)</sup>
101-2 (B)	7/8in	02	16, 22, 28 (S)	–	18 (S)	28 (S, R)	28 (S, R) 45 (U, W)	–	Size N Sizes 20-32 <sup>1)</sup> Size G Sizes 38-45 <sup>1)</sup>
	1in	04	–	28 (S)	28,45 (S)	–	45 (S, R) 60 (U, W)	40 (S)	–
127-2 (C)	1 1/4in	07	–	40, 56, (S)	–	–	60 (S)	60 (S) <sup>2)</sup>	–
<b>Power take-off – A8VO107</b>									
82-2 (A)	5/8in	01	–	–	–	–	–	–	Size F Sizes 4-22 <sup>1)</sup>
101-2 (B)	7/8in	02	16, 22, 28 (S)	–	18 (S)	28 (S, R) 45 (U)	28 (S, R) 45 (U, W)	–	Size N Sizes 20-32 <sup>1)</sup> Size G Sizes 38-45 <sup>1)</sup>
	1in	04	–	28 (S)	28,45 (S)	45 (S, R)	45 (S, R) 60 (U, W)	40 (S)	–
127-2 (C)	1 1/4in	07	–	40, 56, 71 (S)	–	–	60 (S)	60 (S)	–
<b>Power take-off – A8VO140</b>									
82-2 (A)	5/8in	01	–	–	–	–	–	–	Size F Sizes 4-22 <sup>1)</sup>
101-2 (B)	7/8in	02	16, 22, 28 (S)	–	18 (S)	28 (S, R) 45 (U)	28 (S, R) 45 (U, W)	–	Size N Sizes 20-32 <sup>1)</sup> Size G Sizes 38-45 <sup>1)</sup>
	1in	04	–	28 (S)	28,45 (S)	45 (S, R)	45 (S, R) 60 (U, W)	40 (S)	–
127-2 (C)	1 1/4in	07	–	40, 56, 71 (S)	63 (S)	71 (S, R) 100 (U)	60 (S) 85 (U)	60(S)	–
152-4 (D)	1 1/4in	86	–	–	–	–	–	75 (S)	–
	1 3/4in	17	–	90 (S)	–	140 (S)	–	95 (S)	–
<b>Power take-off – A8VO200</b>									
82-2 (A)	5/8in	01	–	–	–	–	–	–	Size F Sizes 4-22 <sup>1)</sup>
101-2 (B)	7/8in	02	16, 22, 28 (S)	–	18 (S)	28 (S, R) 45 (U)	28 (S, R) 45 (U, W)	–	Size N Sizes 20-32 <sup>1)</sup> Size G Sizes 38-45 <sup>1)</sup>
	1in	04	–	28 (S)	28,45 (S)	45 (S, R)	45 (S, R) 60 (U, W)	40 (S)	–
127-2 (C)	1 1/4in	07	–	40, 56, 71 (S)	–	71 (S, R) 100 (U)	60 (S) 85 (U)	60 (S)	–
152-4 (D)	1 1/4in	86	–	–	–	–	–	75 (S)	–
	1 3/4in	17	–	90, 125 (S)	–	140 (S)	–	95, 130 (S)	–

<sup>1)</sup> Rexroth recommends special gear pump versions. Please contact us.

<sup>2)</sup> For mounting the A11VO size 60, side threaded ports for A<sub>1</sub> and A<sub>2</sub> are required. Please contact us.







# Power Take-off, Auxiliary Pump and Valves

**Variation:**

with power take-off, with integrated auxiliary pump (pilot fluid pump) and pressure-relief valve, F..1

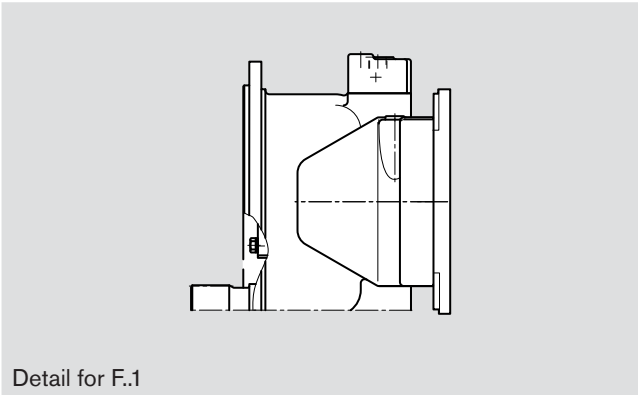


For technical data, see table of values on page 6.  
 The pressure-relief valve installed to protect the integrated auxiliary pump has a fixed setting of 30 bar.  
 For mounting on PTO:  
 Axial piston pumps and gear pumps

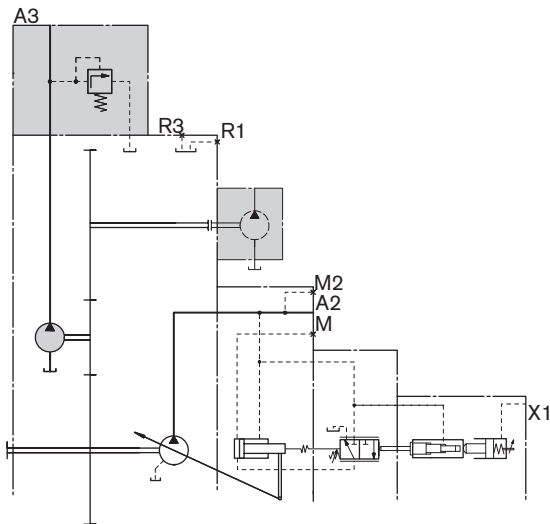


**Variation:**

with power take-off, with integrated auxiliary pump (pilot fluid pump), with pressure-relief and pressure-reduction valves, F..4

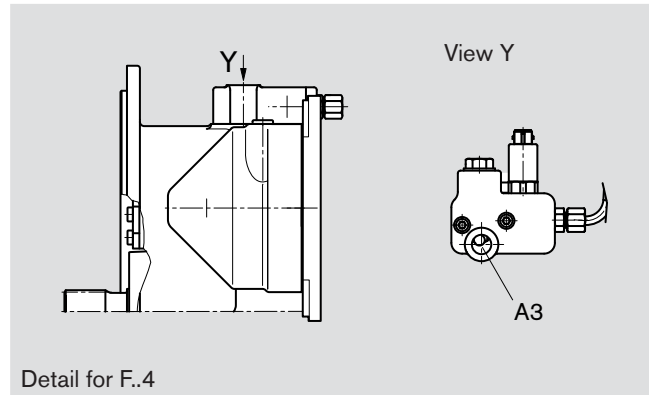

For technical data, see table of values on page 6.  
 The pressure-relief valve installed to protect the integrated auxiliary pump has a fixed setting of 30 bar. An electrically controlled pressure-reduction valve can be used to override the power setting (load-limiting control).

Pressure-reduction valve control voltage:  
 F..4 → 24V DC  
 Recommended frequency → >100Hz  
 For mounting on PTO:  
 Axial piston pumps and gear pumps

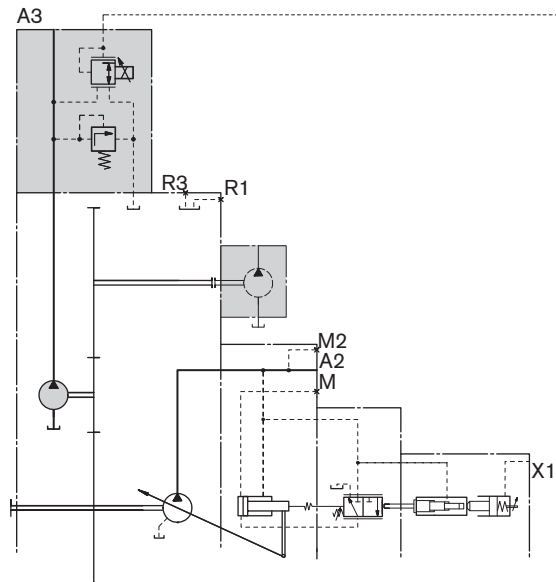

# Connector for Solenoids (only for EP)

## DEUTSCH DT04-2P-EP04, 2-pin

Molded, without bi-directional suppressor diode  
(standard) \_\_\_\_\_ P


Type of protection according to DIN/EN 60529: IP67 and IP69K

### Mating connector

DEUTSCH DT06-2S-EP04  
Rexroth Mat. No. R902601804

consisting of: \_\_\_\_\_ DT designation  
 – 1 case \_\_\_\_\_ DT06-2S-EP04  
 – 1 wedge \_\_\_\_\_ W2S  
 – 2 sockets \_\_\_\_\_ 0462-201-16141

The mating connector is not included in supply.  
This can be supplied by Rexroth on request.

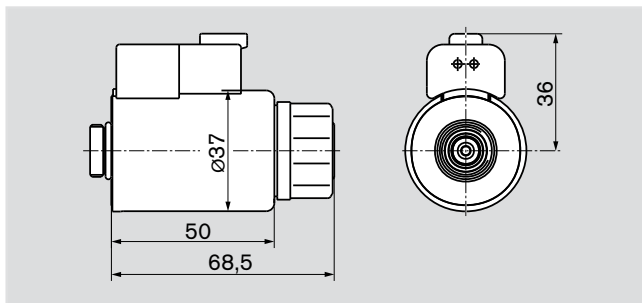

### Note for round solenoids:

The position of the connector can be changed by turning the solenoid body.

The following procedure is to be observed:

1. Loosen the fixing nut (1)
2. Turn the solenoid body (2) to the desired position
3. Tighten the fixing nut  
Tightening torque of fixing nut:  $5^{+1}$  Nm  
(width across flats WAF26, 12-sided DIN 3124)

# Installation Notes

## General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This is also to be observed following a relatively long standstill as the system may empty via the hydraulic lines.

The case drain chamber is internally connected to the suction chamber. A case drain line to the tank is not required.

Note the special feature of size 200 for flushing fluid. (Port R4)

In all operational states, the suction line must flow into the tank below the minimum fluid level.


The minimum suction pressure at port S must not fall below of 0.8 bar absolute.

## Installation position

Shaft horizontal.

## Below-tank installation

Below-tank installation is when the pump is fitted below the minimum fluid level in the tank.

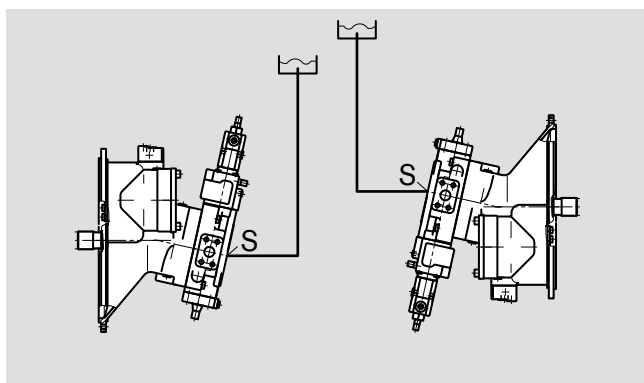

# Notice

## General Notes

- The A8VO pump is designed to be used in open circuits.
- Project planning, assembly and commissioning of the pump require the involvement of qualified personnel.
- The service line ports and function ports are only designed for mounting hydraulic lines.
- During and shortly after operation, there is a risk of burns on the pump and especially on the solenoids. Take suitable safety precautions, e.g. wear protective clothing.
- There may be shifts in the characteristic depending on the operating state of the pump (operating pressure, fluid temperature).
- Tightening torques:
  - The tightening torques specified in this data sheet are maximum values and must not be exceeded (maximum values for screw thread).  
Manufacturer's instruction for the max. permissible tightening torques of the used armatures must be observed!
  - For DIN 13 fixing screws we recommend checking the tightening torque individually according to VDI 2230 Edition 2003.
- The data and information contained herein must be adhered to.

Bosch Rexroth AG  
Hydraulics  
Axial Piston Units  
Glockeraustrasse 2  
89275 Elchingen, Germany  
Phone +49 (0) 73 08 82-0  
Fax +49 (0) 73 08 72 74  
info.brm-ak@boschrexroth.de  
www.boschrexroth.com/axial-piston-pumps

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.


The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Subject to change.

# Axial piston variable double pump A8VO225 Series 72

**RE 93013**

Edition: 03.2014

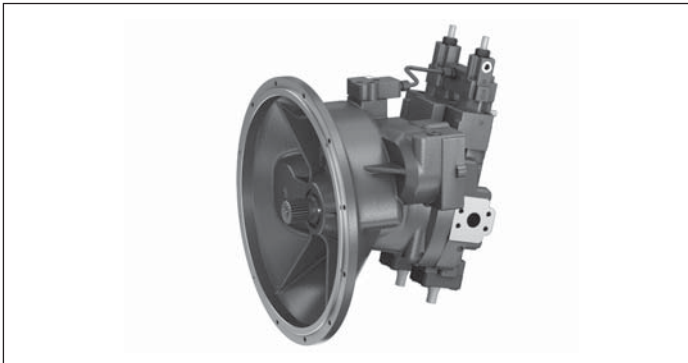

- ▶ Size 225
- ▶ Nominal pressure 380 bar
- ▶ Maximum pressure 420 bar
- ▶ Open circuit

3

**Features**

- ▶ Variable double pump with two axial tapered piston rotary groups with bent-axis design for open-circuit hydrostatic drives
- ▶ Flow is proportional to drive speed and displacement
- ▶ Adjusting the swashplate rotary group enables the volume flow to be steplessly varied
- ▶ The pump is suitable for direct attachment to the fly-wheel case of a diesel engine
- ▶ A common suction port for both circuits and the auxiliary pump
- ▶ Integrated auxiliary pump with pressure-relief valve
- ▶ Power take-off variants for attachment of axial piston and gear pumps
- ▶ Very favorable power-to-weight ratio
- ▶ Long service life

**Contents**

Ordering code	2
Hydraulic fluids	4
Shaft seal	5
Drive	5
Operating pressure range	5
Technical data	6
Individual power controller	7
Dimensions, size 225	10
Power take-offs, auxiliary pump and valves	12
Installation instructions	14
General instructions	15

## Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17
<b>A8V</b>	<b>O</b>	<b>225</b>		<b>0</b>	<b>/</b>	<b>72</b>	<b>M</b>	<b>R</b>	<b>-</b>	<b>N</b>	<b>1</b>	<b>G1</b>	<b>A2</b>	<b>5</b>		<b>-</b>

### Axial piston unit

01	Bent-axis design, variable, nominal pressure 380 bar, maximum pressure 420 bar	<b>A8V</b>
----	--	------------

### Operating mode

02	Double pump (parallel design), open circuit	<b>O</b>
----	---	----------

### Size (NG)

03	Geometrical displacement per rotary group, see Technical data on page 6	<b>225</b>
----	---	------------

### Control devices

04	Individual power controller with pilot pressure power override, with hydraulic power coupling and hydraulic lift limitation	Negative control	<b>LA1KH1</b>
		Positive control, external pilot pressure supply	<b>LA1KH2</b>

### Swivel angle indicator

05	Without swivel angle indicator	<b>0</b>
----	--------------------------------	----------

### Series

06	Series 7, index 2	<b>72</b>
----	-------------------	-----------

### Configuration of ports and fastening threads

07	Metric, port threads with O-ring seal according to ISO 6149	<b>M</b>
----	---	----------

### Direction of rotation

08	Viewed on drive shaft, right	<b>R</b>
----	------------------------------	----------

### Sealing material

09	NBR (nitrile rubber), FKM (fluoroelastomer)	<b>N</b>
----	---	----------

### Transmission ratio ( $n_{drive} / n_{rotary\ groups}$ )

10	$i = 1$	<b>1</b>
----	---------	----------

### Mounting flange

11	Suitable for the flywheel case (acc. to SAE J617) of the combustion engine	<b>G1</b>
----	--	-----------

### Drive shaft

12	Splined shaft DIN 5480	<b>A2</b>
----	------------------------	-----------

### Service line ports

13	SAE flange ports <b>A</b> <sub>1</sub> and <b>A</b> <sub>2</sub> on opposite sides (metric fastening thread) SAE flange port <b>S</b> at rear (metric fastening thread)	<b>5</b>
----	--	----------

### Auxiliary pump

14	Without integrated auxiliary pump		<b>U</b>
	With integrated auxiliary pump	Standard	<b>F</b>
		Large	<b>B</b>



01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17
<b>A8V</b>	<b>O</b>	<b>225</b>		<b>0</b>	<b>/</b>	<b>72</b>	<b>M</b>	<b>R</b>	<b>-</b>	<b>N</b>	<b>1</b>	<b>G1</b>	<b>A2</b>	<b>5</b>		<b>-</b>

**Power take-offs**

15	Without power take-off	<b>0000</b>
----	------------------------	-------------

**Valves**

16	Without valves (only for the version <b>without</b> auxiliary pump, U)	<b>0</b>
	With pressure-relief valve (only for versions <b>with</b> auxiliary pump, F)	<b>A</b>
	With pressure limitation and pressure reducing valve, U = 24 V (only for versions with auxiliary pump, F)	<b>C</b>

**Standard / special version**

17	Standard version	<b>0</b>
	Standard version with installation variants, e. g. T ports against standard open or closed	<b>Y</b>
	Special version	<b>S</b>

**Note**

Preservation:

- ▶ up to 12 months as standard
- ▶ up to 24 months long-term  
(state in plain text when ordering)

## Hydraulic fluids

The A8VO variable double pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: environmentally acceptable hydraulic fluids
- ▶ 90222: fire-resistant, water-free hydraulic fluids (HFDR/HFDU)

### Details regarding the selection of hydraulic fluid

The hydraulic fluid should be chosen such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$  see selection diagram).

### Note


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact the responsible member of staff at Bosch Rexroth.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ °C}$	$t \leq 3 \text{ min}$ , $n \leq 1000 \text{ rpm}$ , without load $p \leq 50 \text{ bar}$
Permissible temperature difference		$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid in system
Warm-up phase	$v < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ °C to } -25 \text{ °C}$	At $p \leq 0.7 \cdot p_{nom}$ , $n \leq 0.5 \cdot n_{nom}$ and $t \leq 15 \text{ min}$
Continuous operation	$v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$	$\theta = -25 \text{ °C to } +103 \text{ °C}$	This corresponds, for example on the VG 46, to a temperature range of +5 °C to +85 °C (see selection diagram) measured at port <b>R</b> Note the permissible temperature range of the shaft seal ( $\Delta T = \text{approx. } 12 \text{ K}$ between the bearing/shaft seal and port <b>R</b> )
	$v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		Range of optimum operating viscosity and efficiency
Short-term operation	$v_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 3 \text{ min}$ , $p < 0.3 \cdot p_{nom}$

### ▼ Selection diagram

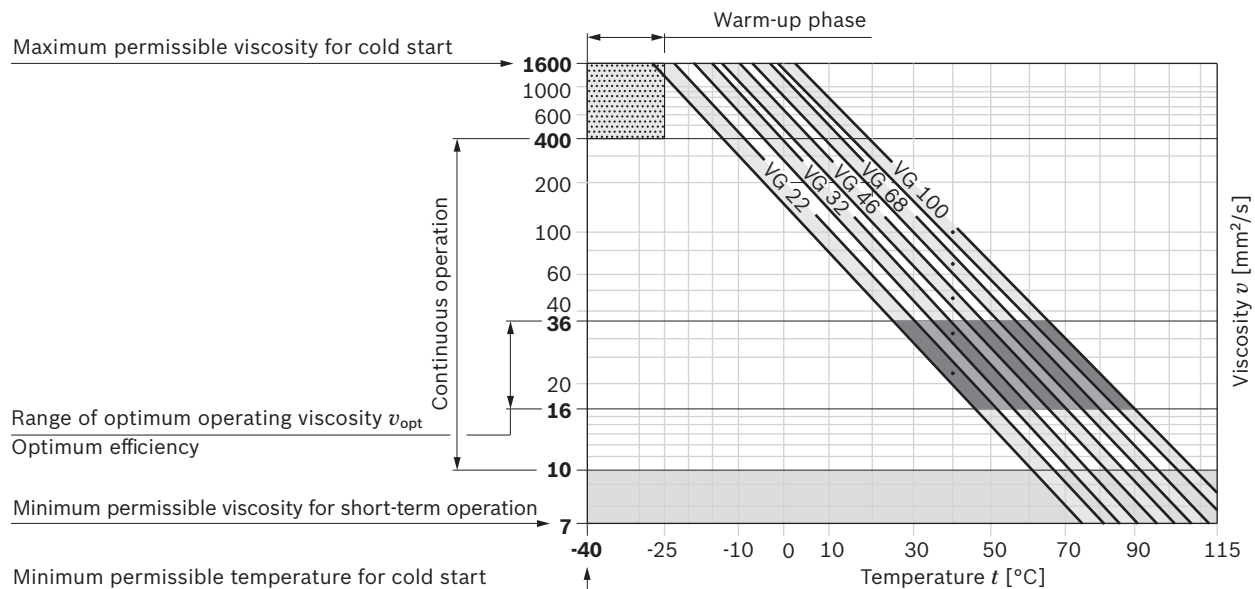

### Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

At very high hydraulic fluid temperatures (90 °C to maximum 103 °C, measured at port **R**), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.

### Shaft seal

The FKM shaft seal ring may be used for case drain temperatures from -25 °C to +115 °C. For application cases below -25 °C, an NBR shaft seal is required (permissible temperature range: -40 °C to +90 °C).


### Drive

Via elastic coupling.


### Operating pressure range

Pressure at service line port <b>A<sub>1</sub></b> or <b>A<sub>2</sub></b>		Definition
Nominal pressure $p_{nom}$	380 bar absolute	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	420 bar absolute	The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	10 s	
Total operating period	300 h	
Minimum pressure (high-pressure side)	25 bar absolute	Minimum pressure on the high-pressure side ( <b>A<sub>1</sub></b> and <b>A<sub>2</sub></b> ) that is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{A\ max}$	9000 bar/s	Maximum permissible rate of pressure build-up and reduction during a pressure change over the entire pressure range.
Pressure at suction port <b>S</b> (inlet)		
Minimum pressure $p_{S\ min}$	0.8 bar absolute	Minimum pressure at suction port <b>S</b> (inlet) that is required in order to avoid damage to the axial piston unit. The minimum pressure depends on the speed and displacement of the axial piston unit.
Maximum pressure $p_{S\ max}$	1.5 bar absolute	
Auxiliary pump		
Maximum pressure $p_{max}$	40 bar absolute	

#### ▼ Rate of pressure change $R_{A\ max}$

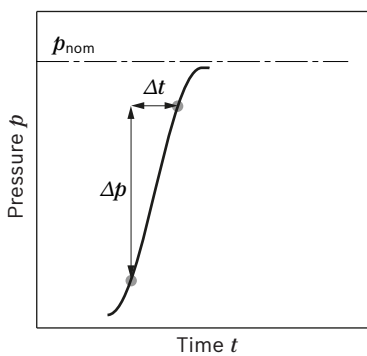

#### ▼ Pressure definition

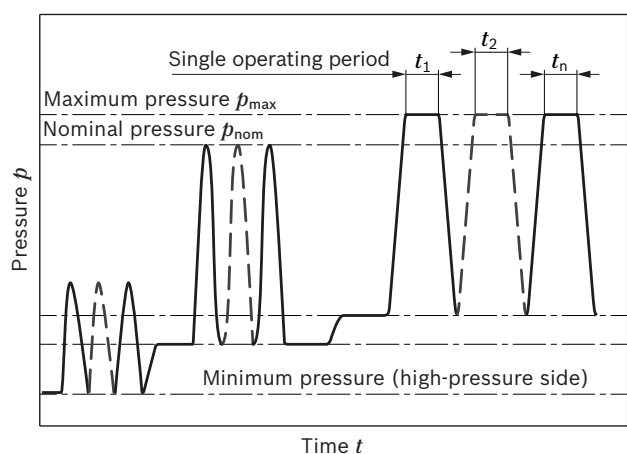

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

#### Note

- ▶ Valid when using hydraulic fluids based on mineral oils
- ▶ Values for other hydraulic fluids, please contact us.

Formulas		
Flow	$q_v = \frac{V_g \cdot n \cdot \eta_v}{1000}$	[l/min]
Torque	$T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{mh}}$	[Nm]
Power	$P = \frac{2 \pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t}$	[kW]
Key		
$V_g$	= Displacement per revolution [cm <sup>3</sup> ]	
$\Delta p$	= Differential pressure [bar]	
$n$	= Rotational speed [rpm]	
$\eta_v$	= Volumetric efficiency	
$\eta_{mh}$	= Mechanical-hydraulic efficiency	
$\eta_t$	= Total efficiency ( $\eta_t = \eta_v \cdot \eta_{mh}$ )	


**Note**

- ▶ Theoretical values, without efficiency levels and tolerances; values rounded
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Other permissible limit values, such as speed variation, reduced angular acceleration as a function of the frequency and the permissible angular acceleration at start (lower than the maximum angular acceleration) can be found in data sheet 90261.
- ▶ Transport and storage  
 $\theta_{min} \geq -50 \text{ °C}$ ,  $\theta_{opt} = +5 \text{ °C to } +20 \text{ °C}$

**Technical data**

Size	NG		225
Displacement geometric, per revolution	$V_{g \max}$	cm <sup>3</sup>	2 x 224.6
	$V_{g \min}$	cm <sup>3</sup>	0
Transmission ratio $i = n_{drive}/n_{rotary \text{ groups}}$			1.0
Maximum rotational speed	at $V_{g \max}^{1)}$	$n_{nom}$	rpm 2050
	at $V_g < 0.74 \cdot V_{g \max}^{2)}$	$n_{max}$	rpm 2300
Flow	at $n_{nom}$ and $V_{g \max}$	$q_v$	l/min 2 x 460
Power	At $n_{nom}$ , $V_{g \max}$ and $\Delta p = 250 \text{ bar}$	$P$	kW 384
Torque	at $V_{g \max}$ and $\Delta p = 250 \text{ bar}$ (both pumps)	$T^{3)}$	Nm 1788
Rotary stiffness of individual rotary group	$V_{g \max}$ to $0.5 \cdot V_{g \max}$	$c_{min}$	Nm/rad 72995
	$0.5 \cdot V_{g \max}$ bis $0_{(interpolated)}$	$c_{max}$	Nm/rad 318679
Moment of inertia for rotary group	with power take-off, without attachment pump	$J_{TW}$	kgm <sup>2</sup> 0.0879
	without power take-off	$J_{TW}$	kgm <sup>2</sup> 0.0708
Angular acceleration of individual rotary group		$\alpha$	rad/s <sup>2</sup> 10000
Weight (approx.)	$m$	kg	194
<b>Variation: with integrated auxiliary pump, F0000, F...</b>			
Displacement with integrated auxiliary pump	$V_{g \max}$	cm <sup>3</sup>	11 (19)
Displacement effective	$V_{g \max}$	cm <sup>3</sup>	13.6 (23.6)
Transmission ratio $i = n_{drive}/n_{auxiliary \text{ pump}}$			0.804
<b>Variation: with power take-offs, U...., F...</b>			
Maximum torque at power take-off	$T_{T3 \max}$	Nm	800
Transmission ratio $i = n_{drive}/n_{auxiliary \text{ pump}}$			0.804

▼ **Maximum permissible speed (speed limit)**

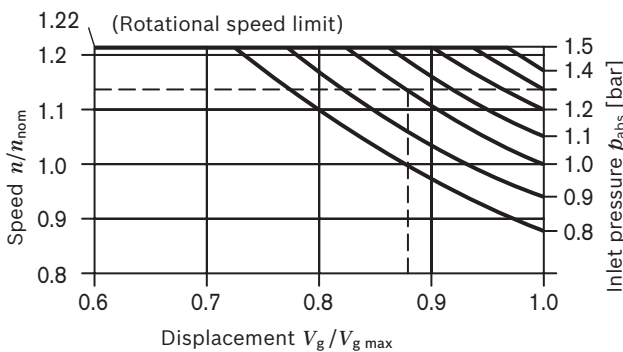

- 1) The values are applicable:
  - at absolute pressure  $p_{abs} = 1 \text{ bar}$  at suction port **S**
  - for the optimal viscosity range of  $\nu_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$
  - for hydraulic fluid based on mineral oils
- 2) Maximum rotational speed (limit speed) for increased inlet pressure  $p_{abs}$  at suction port **S** and  $V_g < V_{g \max}$ , see diagram.
- 3) Input torque  $T$  is the sum of the individual torques of rotary group 1 ( $T_{T1}$ ), rotary group 2 ( $T_{T2}$ ) and power take-off ( $T_{T3}$ )
  - $T_{T1}$  = Torque of rotary group 1 ( $V_g, \Delta p$ )
  - $T_{T2}$  = Torque of rotary group 2 ( $V_g, \Delta p$ )
  - $T_{T3}$  = Torque of power take-off
  - Condition for all operating conditions:  $T_{T1} + T_{T2} + T_{T3} \leq T$

## Individual power control

The two rotary groups of the variable double pump with individual power controller LA1 are not mechanically coupled, i.e. each rotary group is equipped with a separate power controller.


The power control regulates the displacement of the pump depending on the operating pressure so that a given drive power is not exceeded.

Power is set individually for each controller and may differ, whereby each pump can be set to 100% drive power.

The hyperbolic power curve is approximated with two mass springs. The operating pressure acts on the measurement area of a differential piston against the mass springs and of a spring force that can be varied from the outside, which determines the power setting.

If the sum of the hydraulic forces exceeds the forces of the springs, the control fluid is fed to the stroking piston, swiveling the pump back and setting it to a smaller volume flow. In a depressurized state, the pump is swiveled to its initial position to  $V_{g \max}$  by a return spring.

### ▼ Characteristic LA1

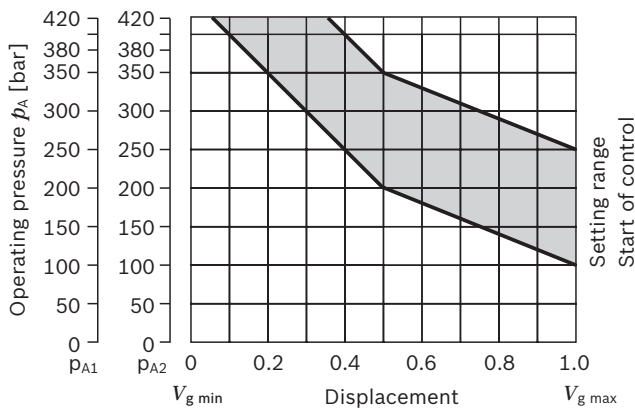

The hydraulic output power (characteristic LR) is influenced by the efficiency of the double pump.

When ordering, state in plain text:

- ▶ Application: e.g. excavator
- ▶ Drive power  $P$  [kW]
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum volume flow  $q_{V \max}$  [l/min]
- ▶ Maximum working pressure (primary pressure valve setting)

After clarifying the details a power diagram can be created by our computer.

### LA1

#### Individual power controller with power override through pilot pressure

The third measuring area of the differential piston is charged with an external pilot pressure (port  $X_3$ , allowing the set power to be reduced (negative power override). The mechanically adjusted basic setting can be hydraulically adjusted by means of different pilot pressure settings. This makes different power setting possible.

If the pilot pressure signal is variably controlled via a load limiting control, the sum of the hydraulic powers equals the drive power. The pilot pressure for power override is generated by an external control element or by the mounted pressure reducing valve (see page 13).

The electric signal for controlling the pressure reducing valve must be generated in an external control electronic circuit. Various BODAS controllers RC in conjunction with LLC software are available for this purpose.

Further information can also be found on the internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics).

#### Note!


If there is no power override, port  $X_3$  to the reservoir must be relieved.

**LA1K**  
**Individual power controller mit hydraulic coupling**

The hydraulic coupling of the two individual controllers is the result of the accumulated power control function. However, the two rotary groups are not coupled mechanically, but rather hydraulically. The operating pressures of the two circuits each act on the differential piston of the two individual controllers, swiveling the two rotary groups out and back together. If one pump is working with less than 50% of the total drive power, the power that is set free can be additionally transmitted to the other pump, in borderline cases up to 100% of the total drive power.

**Note**  
With the additional function hydraulic stroke limiter, each rotary group can be swiveled back independently of a smaller  $V_g$  than that currently specified by the power control.

▼ **Schematic LA1KH1**

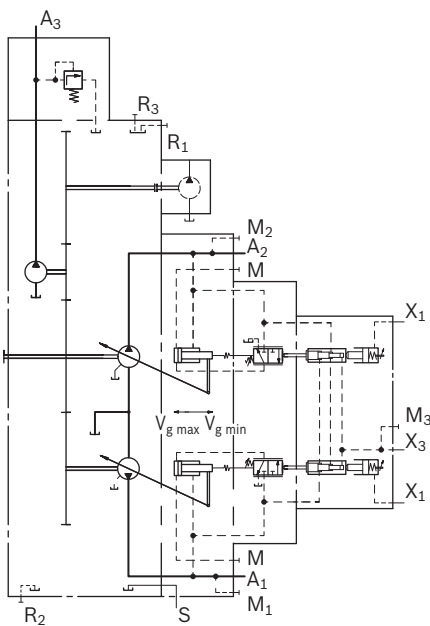

**LA1H**  
**Individual power controller with hydraulic stroke limiter**

The hydraulic stroke limiter allows the displacement to be steplessly varied or limited over the entire adjustment range of  $V_{g \max}$  to  $V_{g \min}$ . The displacement is set by a pilot pressure  $p_{st}$  applied to port  $X_1$  (maximal 40 bar). The power control overrides the hydraulic stroke limiter control, i.e. below the power characteristic, the displacement is controlled by the pilot pressure. If the set flow or operating pressure exceeds the power characteristic, the power control overrides and reduces the displacement following the spring characteristic.


**Instructions**  
The H1/H2 characteristic is influenced by the design of the power controller!

**LA1H1**  
**Hydraulic stroke limiter (negative control)**

- ▶ Control from  $V_{g \max}$  to  $V_{g \min}$ .  
With increasing pilot pressure the pump swivels to a smaller displacement.
- ▶ Start of control (at  $V_{g \max}$ ), adjustable of 4 to 15 bar. Start of control depends on the setting of the power controller. State start of control in clear text in the order.
- ▶ Initial position in depressurized state:  $V_{g \max}$

▼ **Characteristic LA1H1**

Pilot pressure increase ( $V_{g \max}$  to  $V_{g \min}$ )  $\Delta p =$  approx. 25 bar

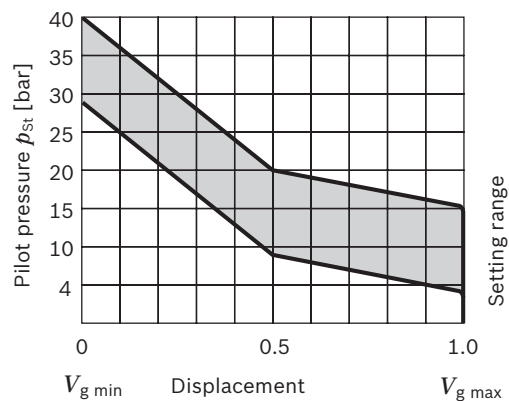

**Note**  
A pressure of  $\geq 30$  bar is needed for control. The necessary positioning fluid is taken from the high-pressure line. If negative control directional valves are used, control pressure supply from the negative control system is ensured via the high-pressure line


**LA1H2**

**Hydraulic stroke limiter and external pilot pressure supply (positive control)**


- ▶ Control from  $V_{g \text{ min}}$  to  $V_{g \text{ max}}$ .  
With increasing pilot pressure the pump swivels to a higher displacement.
- ▶ Start of control (at  $V_{g \text{ min}}$ ), adjustable of 0 to 15 bar.  
State start of control in clear text in the order.
- ▶ Initial position in depressurized state:  $V_{g \text{ max}}$

▼ **Characteristic LA1H2**

Pilot pressure increase ( $V_{g \text{ min}} - V_{g \text{ max}}$ )  $\Delta p = \text{approx. } 25 \text{ bar}$

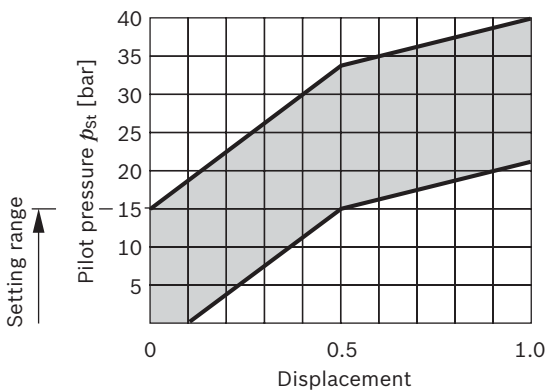

▼ **Schematic LA1H2**

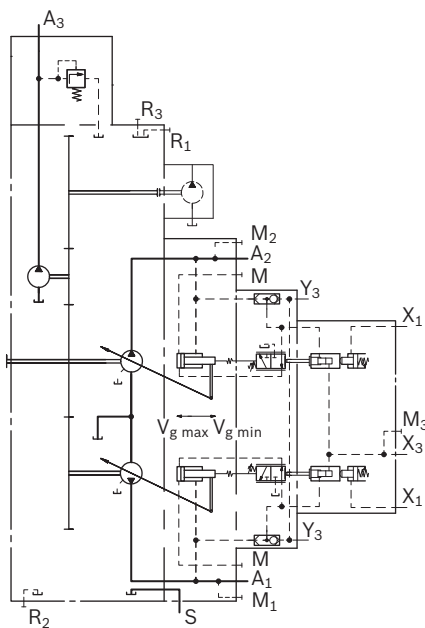


**Note**


- ▶ To adjust from  $V_{g \text{ max}}$  to  $V_{g \text{ min}}$ , a pressure of  $\geq 30 \text{ bar}$  is needed. The necessary control power is taken from the high pressure or the remote control pressure ( $\geq 30 \text{ bar}$ ) acting on port  $Y_3$  (pilot pressure  $<$  start of control).
- ▶ If there is a  $Y_3$  port (H2) this must always be connected to a remote control pressure. Without a remote control pressure supply, this port to the reservoir must be relieved.

**Dimensions size 225**

**LA1KH1 – Individual power controller, negative control**

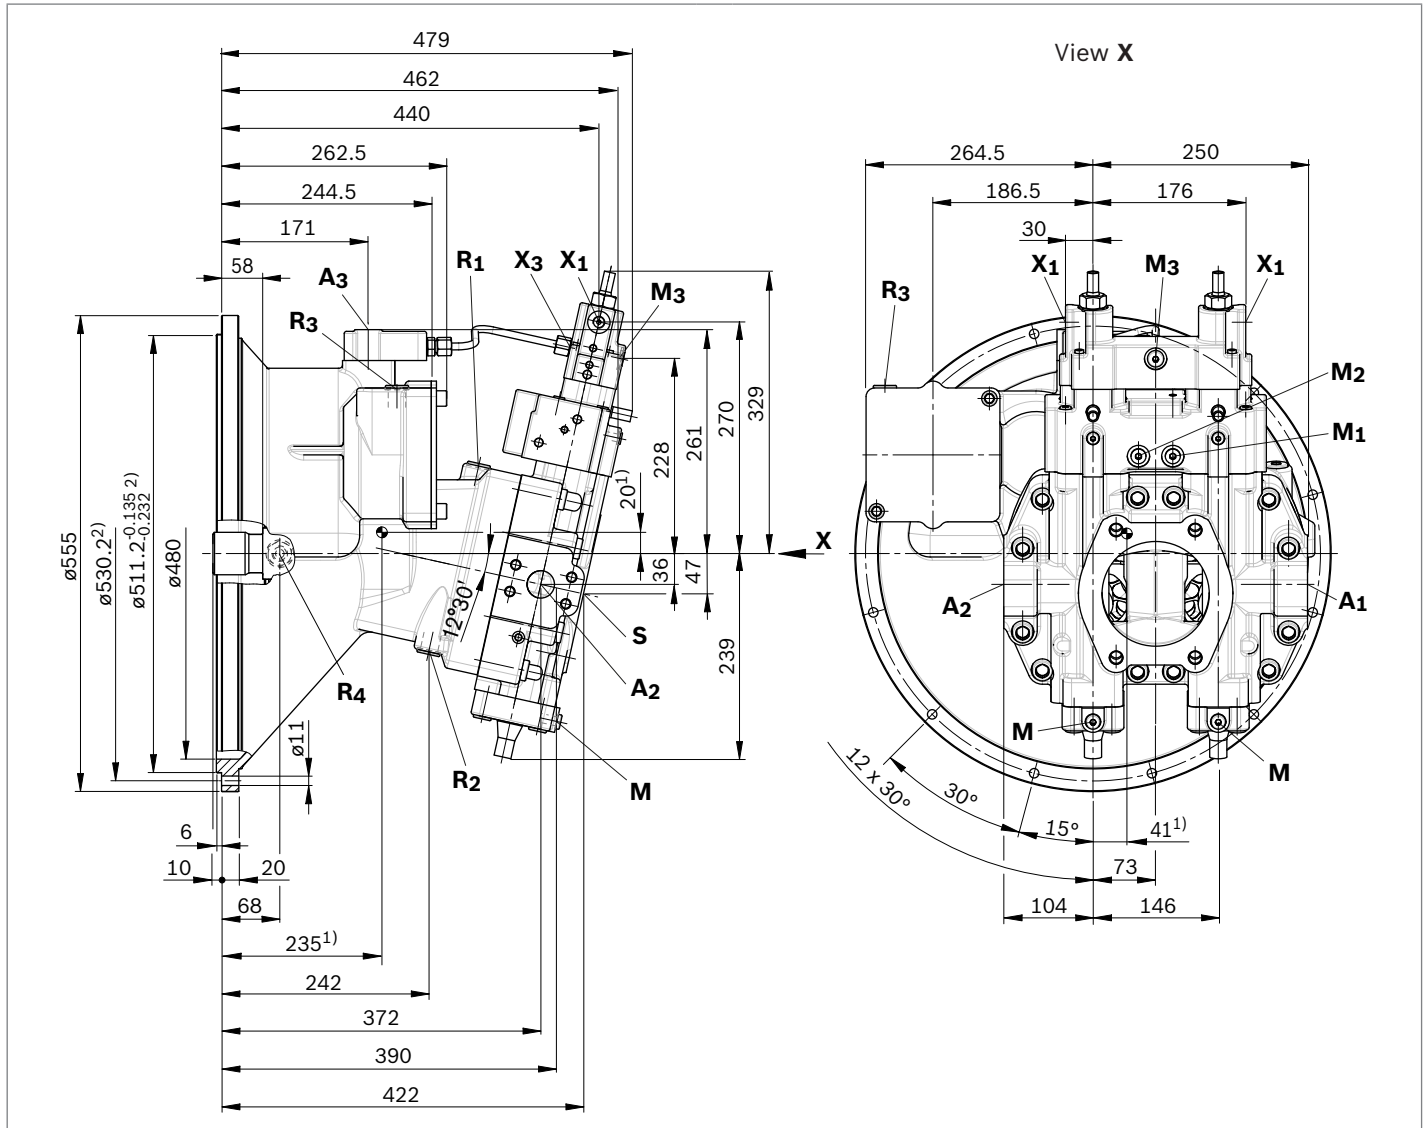


▼ **Splined shaft DIN 5480**

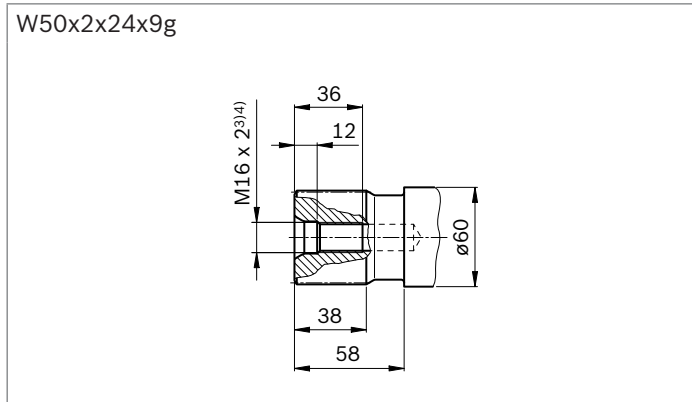

- 1) Center of gravity
- 2) Dimensions according to SAE J617-No. 1, for connection to the flywheel case of the combustion engine
- 3) Center bore according to DIN 332 (thread according to DIN 13)


▼ **Partial views**

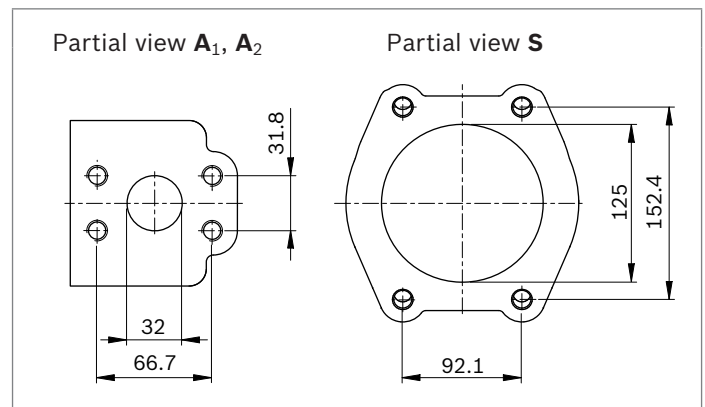

- 4) Observe the general instructions on page 15 for the maximum tightening torques.



**LA1KH2 – Individual power controller, negative control**

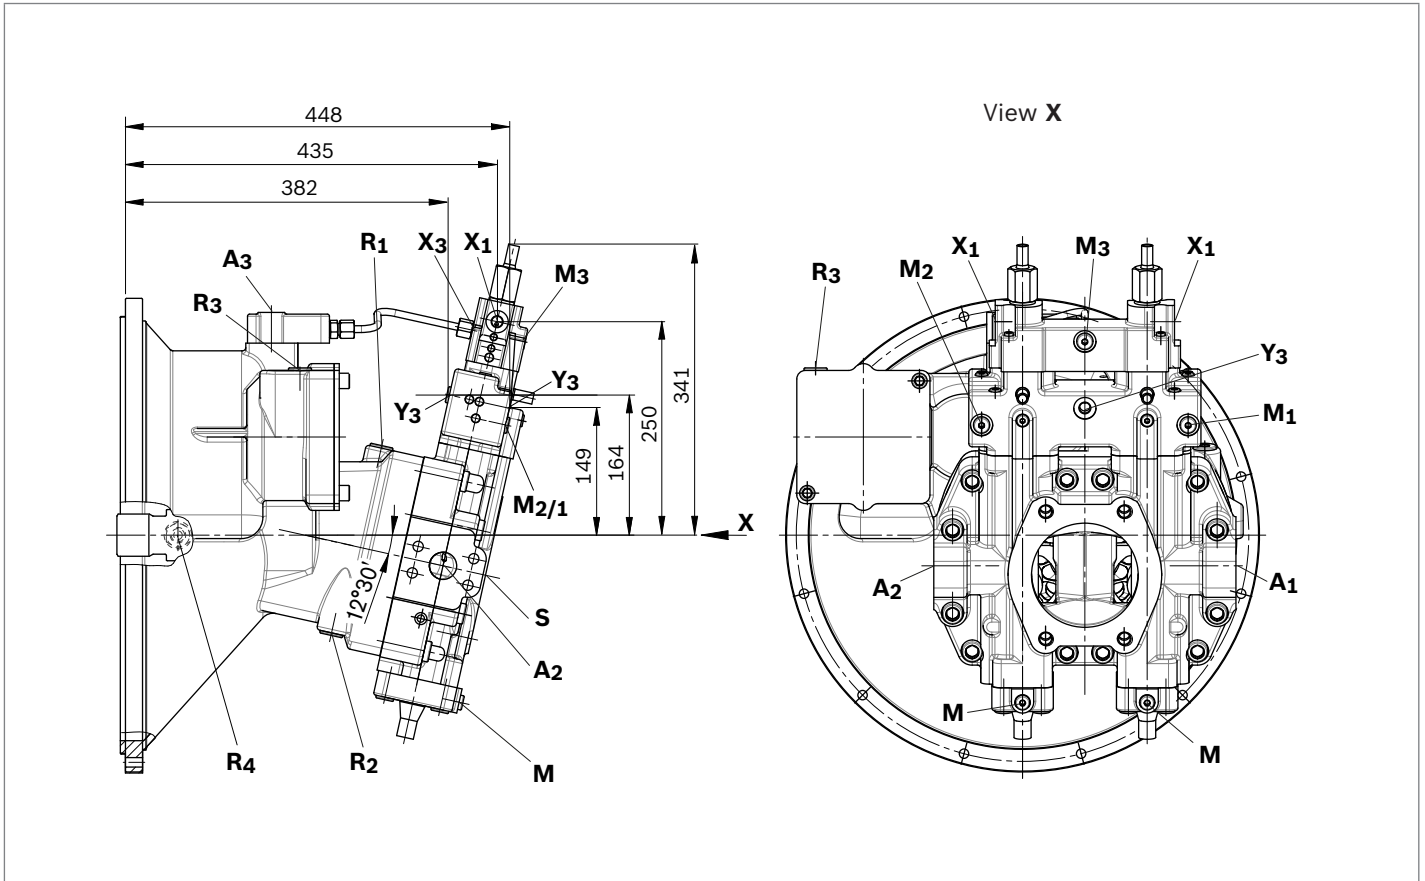


Ports		Standard	Size <sup>1)</sup>	$p_{max\ abs}$ [bar] <sup>2)</sup>	Status <sup>6)</sup>
<b>A<sub>1</sub>, A<sub>2</sub></b>	Service line port (high-pressure series) Fastening thread	SAE J518 <sup>3)</sup> DIN 13	1 1/4 in M12 x 1.75; 19 deep	420	O
<b>S</b>	Suction port (standard pressure series) Fastening thread	SAE J518 <sup>3)</sup> DIN 13	5 in M16 x 2; 23 deep	1.5	O
<b>A<sub>3</sub></b>	Service line port for auxiliary pump	DIN 3852 <sup>4)</sup>	M18 x 1.5; 12 deep	40	O
<b>R<sub>1</sub>, R<sub>3</sub></b>	Air bleed	DIN 3852 <sup>4)</sup>	M22 x 1.5; 12 deep	1.5	X
<b>R<sub>2</sub></b>	Oil drain	DIN 3852 <sup>4)</sup>	M22 x 1.5; 12 deep	1.5	X
<b>R<sub>4</sub></b>	Flow port	ISO 11926 <sup>4)</sup>	3/4-16 UNF-2B; 12 deep	1.5	O
<b>M</b>	Measurement of stroking chamber pressure	DIN 3852 <sup>4)</sup>	M12 x 1.5; 12 deep	420	X
<b>M<sub>1</sub></b>	Pressure measurement <b>A<sub>1</sub></b>	DIN 3852 <sup>4)</sup>	M14 x 1.5; 12 deep	420	X
<b>M<sub>2</sub></b>	Pressure measurement <b>A<sub>2</sub></b>	DIN 3852 <sup>4)</sup>	M14 x 1.5; 12 deep	420	X
<b>M<sub>3</sub></b>	Power override measurement	DIN 3852 <sup>4)</sup>	M14 x 1.5; 12 deep	40	X
<b>X<sub>1</sub></b>	Stroke limiter pilot pressure	DIN 3852 <sup>4)</sup>	M14 x 1.5; 12 deep	40	O
<b>X<sub>3</sub></b>	Power override pilot pressure	DIN 3852 <sup>4)</sup>	M14 x 1.5; 12 deep	40	P
<b>Y<sub>3</sub></b>	Auxiliary pressure <sup>5)</sup>	DIN 3852 <sup>4)</sup>	M14 x 1.5; 12 deep	40	O

- 1) Observe the general instructions on page 15 for the maximum tightening torques.
- 2) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 3) Metric fastening thread, deviating from standard.
- 4) The spot face can be deeper than specified in the appropriate standard.
- 5) Only with version LA...H2
- 6) O = Must be connected (plugged on delivery)  
 X = Plugged (in normal operation)  
 P = Piped


## Power take-offs, auxiliary pump and valves

with power take-off,  
 without integrated auxiliary pump, U....0

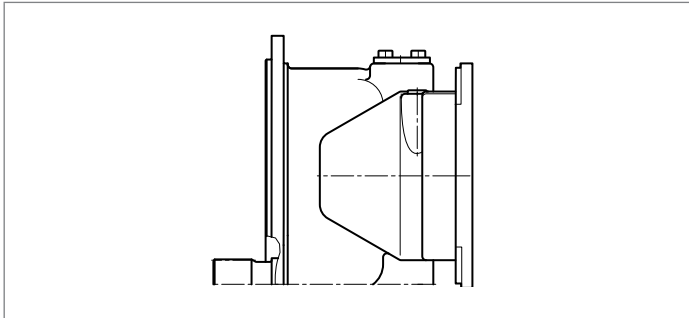


- ▶ Technical data, see page 6.
- ▶ Attachable to the power take-off:  
axial piston pumps and gear pumps.

### ▼ Schematic

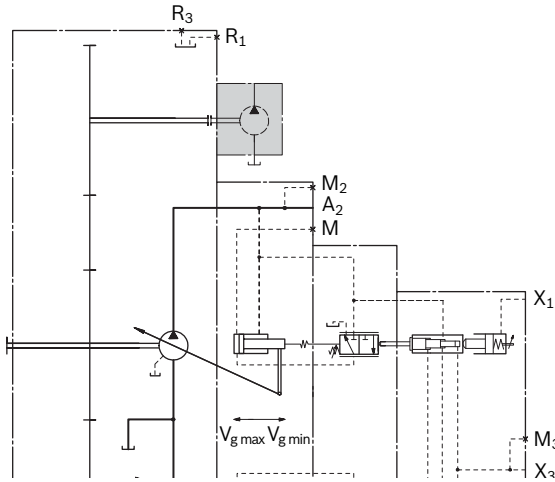


Without power take-off, with integrated auxiliary pump  
 (control fluid pump) and pressure-relief valve, F0000A

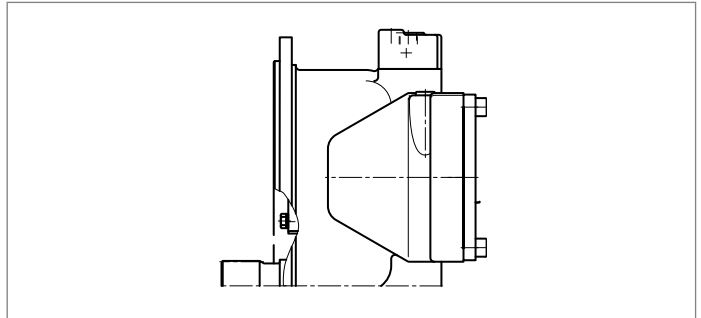


- ▶ Technical data, see page 6.
- ▶ The pressure-relief valve installed as a pressure safeguard for the integrated auxiliary pump is permanently set at a value of 30 bar.

### ▼ Schematic

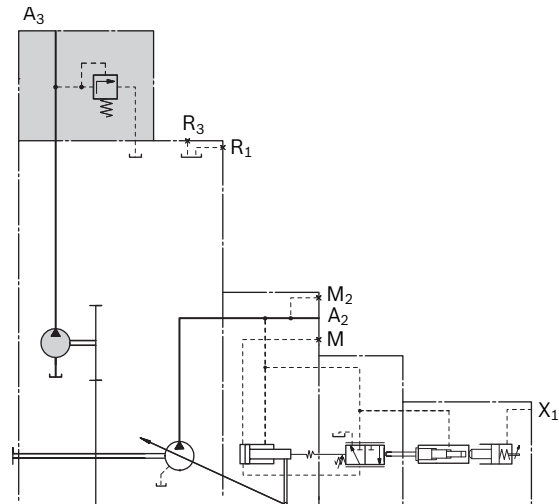


**With power take-off, mit integrated auxiliary pump (pilot fluid pump) and pressure-relief valve, F....A**

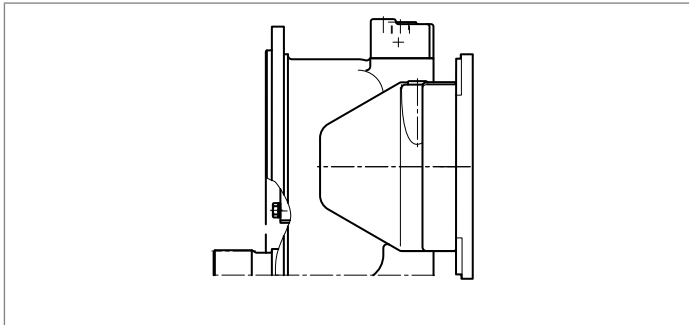

- ▶ Technical data, see page 6.
- ▶ The pressure-relief valve installed as a pressure safeguard for the integrated auxiliary pump is permanently set at a value of 30 bar.
- ▶ Attachable to the power take-off: axial piston pumps and gear pumps


▼ **Schematic**

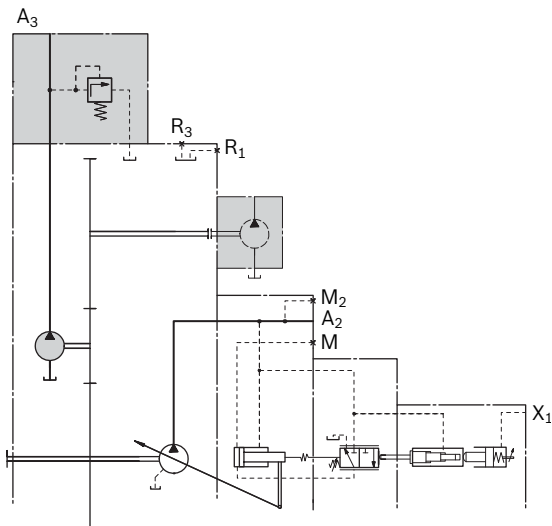

**Pressure reducing valve**


- ▶ Control voltage: 24 V DC
- ▶ Recommended frequency:  $\geq 150$  Hz
- ▶ Connector AMP Junior Timer, 2-pin, type of protection according to DIN 40050-9: IP69k
- ▶ Mating connector  
 The mating connector is not included in the delivery contents. This can be supplied by Bosch Rexroth on request.
  - Material number R901022127
  - Please refer to data sheet 08006.
  - Conductor outer diameter 2.2 to 3.0 mm

**With power take-off, mit integrated auxiliary pump (pilot fluid pump), mit pressure limitation valve and pressure reducing valve, F....C**

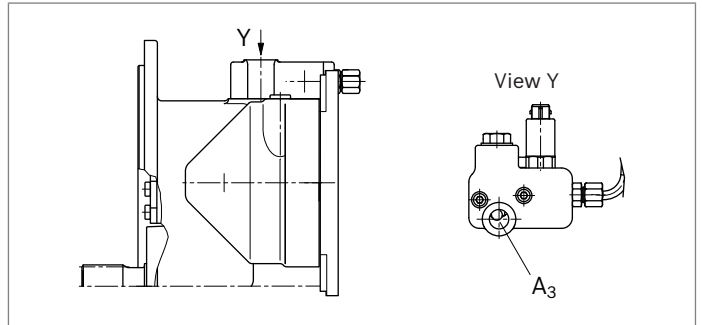

- ▶ Technical data, see page 6.
- ▶ The pressure-relief valve installed as a pressure safeguard for the integrated auxiliary pump is permanently set at a value of 30 bar.
- ▶ An electrically variable pressure reducing valve can be used, for example to override the power setting (load limiting control) (see below).
- ▶ Can be fitted to the power take-off: axial piston pump and gear pump

▼ **Schematic**

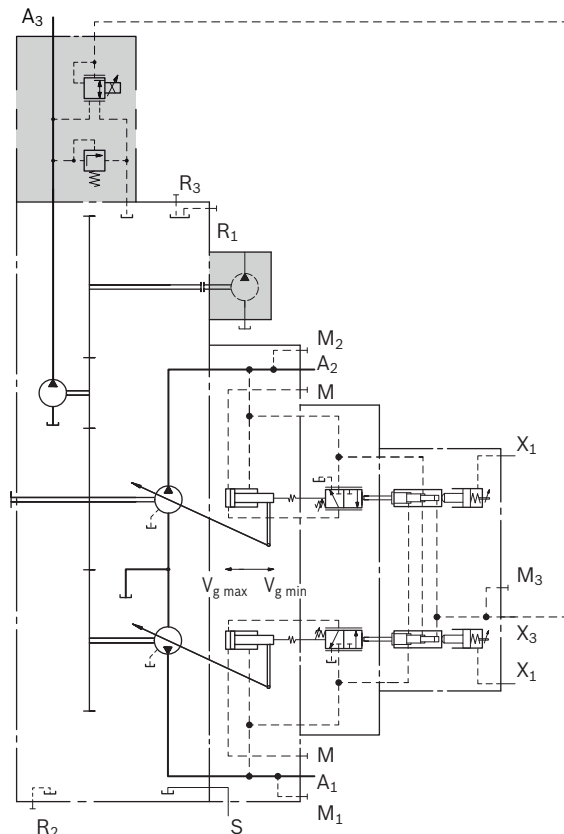

## Installation instructions

### General

The axial piston unit and in particular the pressure reducing valve must be completely filled with hydraulic fluid and air-bled before electrical connections are made. This must also be observed following a relatively long standstill as the axial piston unit may drain back to the reservoir via the hydraulic lines.

In all operating conditions, the suction and drain lines must flow into the reservoir below the minimum fluid level. The minimum suction pressure at port **S** must not exceed 0.8 bar absolute during operation, even after a cold start. When designing the reservoir, ensure adequate space between the suction line and the case drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

### Installation position


See the following examples 1 and 2.

### External connection for flush oil

A8VO variable double pumps of **nominal size 225 must have** an external connection from port **R<sub>4</sub>** to the reservoir. Flush oil for cooling and lubrication of the bearings is drawn via this port **R<sub>4</sub>**.

The internal diameter of this line shall be  $\geq 15\text{mm}$ .

### ▼ Schematic with port R<sub>4</sub>



### Below-reservoir installation

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.

Installation position	Air bleed	Filling
<b>1</b> 	<b>R<sub>1</sub> + R<sub>3</sub></b>	<b>S + R<sub>4</sub></b>
<b>2</b> 	<b>R<sub>2</sub></b>	<b>S + R<sub>4</sub></b>

Key	
<b>R<sub>1</sub>, R<sub>3</sub></b>	Port for air bleeding
<b>R<sub>2</sub></b>	Port for oil draining
<b>R<sub>4</sub></b>	Flow port
<b>S</b>	Suction port
<b>SB</b>	Baffle (baffle plate)
$h_{t\ min}$	Minimum required immersion depth (200 mm)
$h_{\min}$	Minimum required distance to reservoir bottom (100 mm)

## General instructions

- ▶ The A8VO pump is designed to be used in open circuits.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of skilled person.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e. g. by wearing protective clothing).
- ▶ Depending on the operating conditions of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- ▶ Service line ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The service line ports and function ports can only be used to accommodate hydraulic lines.
- ▶ The data and notes contained herein must be adhered to.
- ▶ Before finalizing your design, request a binding installation drawing.
- ▶ Not all variants of the product are approved for use in safety functions according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g. MTTF<sub>d</sub>) for functional safety.
- ▶ Pressure controls are not backups against pressure overload. A separate pressure-relief valve is to be provided in the hydraulic system.
- ▶ The following tightening torques apply:
  - Fittings:
    - Observe the manufacturer's specifications regarding the tightening torques of the fittings used.
  - Mounting bolts:
    - For mounting bolts with metric ISO threads according to DIN 13, we recommend checking the tightening torque individually according to VDI 2230.
  - Female thread of the axial piston unit:
    - The maximum permissible tightening torques  $M_{G \max}$  are maximum values of the female threads and must not be exceeded. For values, see the following table.
  - Threaded plugs:
    - For the metallic threaded plugs supplied with the axial piston unit, the required tightening torques of threaded plugs  $M_V$  apply. For values, see the following table.

Ports		Maximum permissible tightening torque of the female threads $M_{G \max}$	Required tightening torque of the threaded plugs $M_V$	WAF hexagon socket for the threaded plugs
Standard	Thread size			
DIN 3852 <sup>1)</sup>	M12 x 1.5	50 Nm	25 Nm <sup>2)</sup>	6 mm
	M14 x 1.5	80 Nm	35 Nm	6 mm
	M18 x 1.5	140 Nm	60 Nm	8 mm
	M22 x 1.5	210 Nm	80 Nm	10 mm
ISO 11926	3/4-16 UNF-2B	160 Nm	70 Nm	5/16 in

1) The tightening torques apply for screws in the "dry" state as received on delivery and in the "lightly oiled" state for installation.

2) In the "lightly oiled" state, the  $M_V$  is reduced to 17 Nm for M12 x 1.5.

**Bosch Rexroth AG**

Mobile Applications  
Glockeraustraße 4  
89275 Elchingen, Germany  
Tel.: +49-7308-82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# Axial Piston Variable Double Pump A20VO

**RE 93 100/05.06** 1/16  
Replace: 07.03

## Technical data sheet

Series 1	
Sizes	Nominal pressure/ Peak pressure
60	250/315 bar
95...520	350/400 bar
for open circuits	



## Contents

Ordering Code / Standard Program	2
Technical Data	3
Through Drive	3
Control Devices	4
Unit Dimensions, Size 60	6
Unit Dimensions, Size 95	8
Unit Dimensions, Size 190 (with impeller)	10
Unit Dimensions, Size 260 (with impeller)	12
Unit Dimensions, Size 520	14
General Notes	16

## Features

- Variable pump with two axial piston rotary groups in swash-plate design for use in open circuit hydrostatic drives
- For use in mobile and stationary applications
- The pump consists of proven components from the A11VO (RE 92500), A10VO/53 (RE 92703) or A4VSO (RE 92050) variable pumps
- The pump operates under self-priming condition, with tank pressurisation or with charge pump (sizes 190...260)
- A wide variety of controls are available
- Setting of the constant power control is possible via external adjustments, even when the unit is operating (only with power control).
- The pump is available with a through drive to mount a gear pump or a second axial piston pump
- Output flow is proportional to drive speed and pump displacement and is steplessly variable between maximum and zero displacement

# Ordering Code / Standard Program

<b>A20V</b>		<b>O</b>			<b>/</b>	<b>10</b>		<b>-</b>					
01	02	03	04	05		06	07		08	09	10	11	12

## Axial piston unit

01	Swashplate design, variable (Back to back - design)											<b>A20V</b>
----	---	--	--	--	--	--	--	--	--	--	--	-------------

## Charge pump (impeller)

	60	95	190	260	520		
02	without charge pump (no code)	●	●	-	-	●	
	with charge pump	-	-	●	●	-	<b>L</b>

## Operation

03	Double pump, open circuit											<b>O</b>
----	---------------------------	--	--	--	--	--	--	--	--	--	--	----------

## Size

04	≈ Displacement $V_{g \max}$ in $\text{cm}^3$ (per rotary group)	<b>60</b>	<b>95</b>	<b>190</b>	<b>260</b>	<b>520</b>
----	---	-----------	-----------	------------	------------	------------

## Control devices

	60	95	190	260	520		
05	see RE 92703 (A10VO/53)	●	-	-	-	-	
	see RE 92500 (A11VO)	-	●	●	●	-	
	see RE 92050 (A4VSO) and RE 92060, RE 92064, RE 92076	-	-	-	-	●	

## Series

06	Series 1, Index 0											<b>10</b>
----	-------------------	--	--	--	--	--	--	--	--	--	--	-----------

## Direction of rotation

07	viewed on shaft end	clockwise					<b>R</b>
		counter-clockwise					<b>L</b>

## Seals

08	NBR (nitril-caoutchouc), shaft seal ring in FKM (fluor-caoutchouc)	●	●	●	●	-	<b>N</b>
	FKM (fluor-caoutchouc)	-	-	-	-	●	<b>V</b>

## Shaft end

	60	95	190	260	520		
10	Splined shaft DIN 5480	-	●	●	●	●	<b>Z</b>
	Splined shaft, ANSI B92.1a-1976	●	●	-	-	-	<b>S</b>
		-	-	●	●	-	<b>T</b>
	Parallel keyed shaft, DIN 6885	-	-	-	-	●	<b>P</b>

## Mounting flange

	60	95	190	260	520		
09	SAE J744 - 4-hole	●	●	●	●	-	<b>D</b>
	To fit flywheel housing (conform to SAE J617) of internal combustion engine (details on request)	-	●	●	-	-	<b>G</b>
	ISO 3019-2 - 8-hole	-	-	-	-	●	<b>H</b>

## Service line ports

	60	95	190	260	520		
11	Two service line ports and one scution port at site, opposite (fastening thread metric)	●	●	●	●	-	<b>24</b>
	At the site two service line ports each, opposite and one suction port displaced by 90° (fastening thread metric)	-	-	-	-	●	<b>26</b>

## Boost pump and through drive<sup>1)</sup>

	60	95	190	260	520		
12	without boost pump, without through drive	●	●	●	●	-	<b>N00</b>
	without boost pump, with through drive						
	Flange SAE J744						
	Splined shaft hub						
	82-2 (A)	5/8 in	9T 16/32DP (A)	○	○	○	<b>K01</b>
	127-2 (C)	1 1/4in	14T 12/24DP (C)	-	-	-	<b>K07</b>
	with through drive shaft, without hub, without intermediate flange, closed by a cover	-	-	-	-	●	<b>K99</b>

● = available    ○ = available on request    - = not available

<sup>1)</sup> Please contact us



# Technical Data

**Table of values** (theoretical values, without efficiencies  $\eta_{mh}$  and  $\eta_v$ ; values rounded)

Size	<i>without charge pump</i>		60	95	190	260	520
	<i>with charge pump</i>						
Displacement (per rotary group)	$V_{g \max}$	cm <sup>3</sup>	60	93,8	192,7	260	520
	$V_{g \min}$	cm <sup>3</sup>	0	0	0	0	0
Speed							
maximal <sup>1)</sup> at $V_{g \max}$	$n_{\max}$	min <sup>-1</sup>	2700	2350	2500 <sup>2)</sup>	2300 <sup>2)</sup>	1450
Speed max. <sup>3)</sup> at $V_g \leq V_{g \max}$	$n_{\max}$	min <sup>-1</sup>	3200	2780	2500	2300	1720
Flow							
at $n_{\max}$ and $V_{g \max}$	$q_{v \max}$	L/min	2x162	2x220	2x482	2x598	2x754
Power at $q_{v \max}$ and $\Delta p = 350$ bar	$P_{\max}$	kW	135 <sup>4)</sup>	257	562	698	880
Torque at $V_{g \max}$							
at long-term ( $\Delta p = 350$ bar)	$T_{\max}$	Nm	477 <sup>4)</sup>	1045	2147	2897	5793
max. perm., short term ( $\Delta p = 400$ bar)	$T_{\max}$	Nm	602 <sup>4)</sup>	1194	2454	3310	6621
Moment of inertia (of the rotating parts)	J	kgm <sup>2</sup>	0,0113	0,0346	0,0604	0,0912	0,696
Mass approx.	m	kg	44				640

<sup>1)</sup> The values are quoted for an absolute pressure ( $p_{abs}$ ) of 1 bar at suction port S and mineral operating fluid.

<sup>2)</sup> The values are quoted for an absolute pressure ( $p_{abs}$ ) of at least 0.8 bar at suction port S and mineral operating fluid.

<sup>3)</sup> The values are quoted for  $V_g < V_{g \max}$  or increase of the input pressure  $p_{abs}$  at suction port S.


<sup>4)</sup>  $\Delta p = 250$  bar (long-term operation) or rather 315 bar (short term).

## Through Drive


Please contact us.

# Control Devices

## Example circuit diagram Size 60: DFR

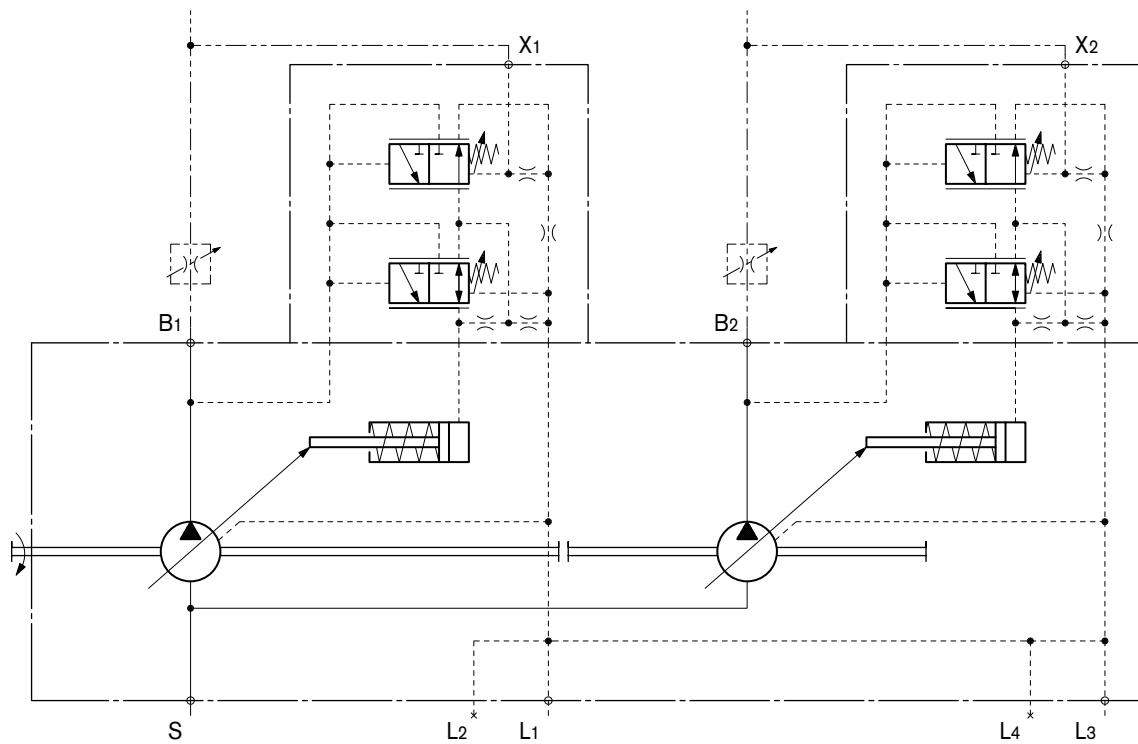


## Example circuit diagram Size 95...260: HD1D

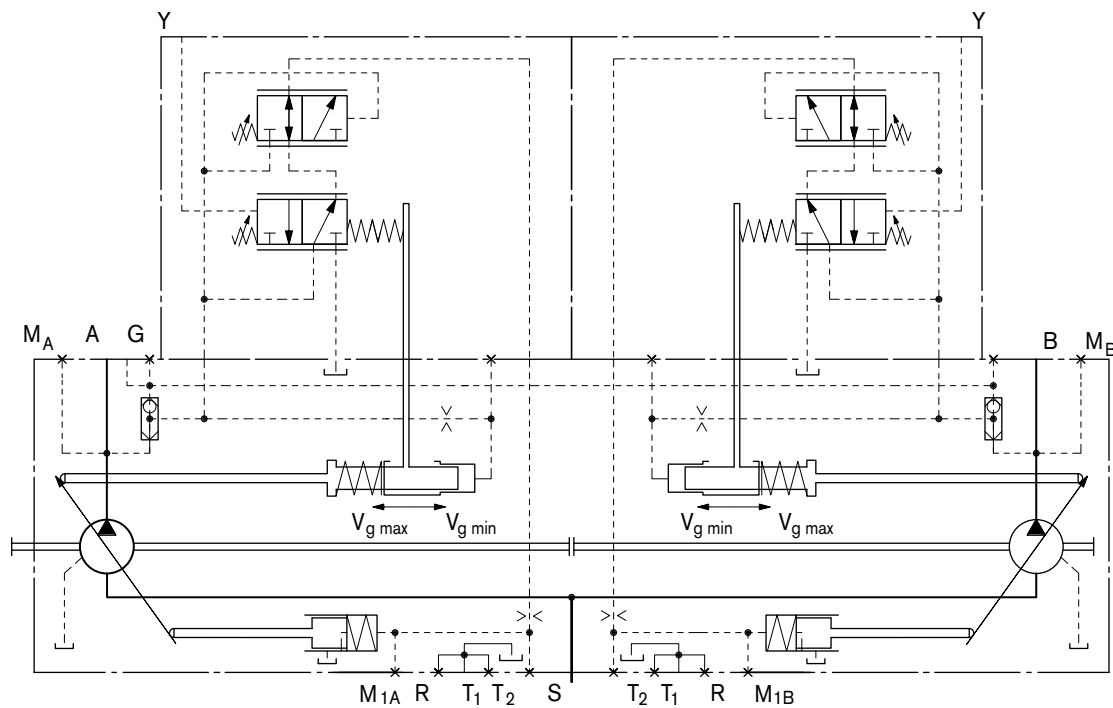

# Control Devices

## Example circuit diagram Size 520: LR2DN

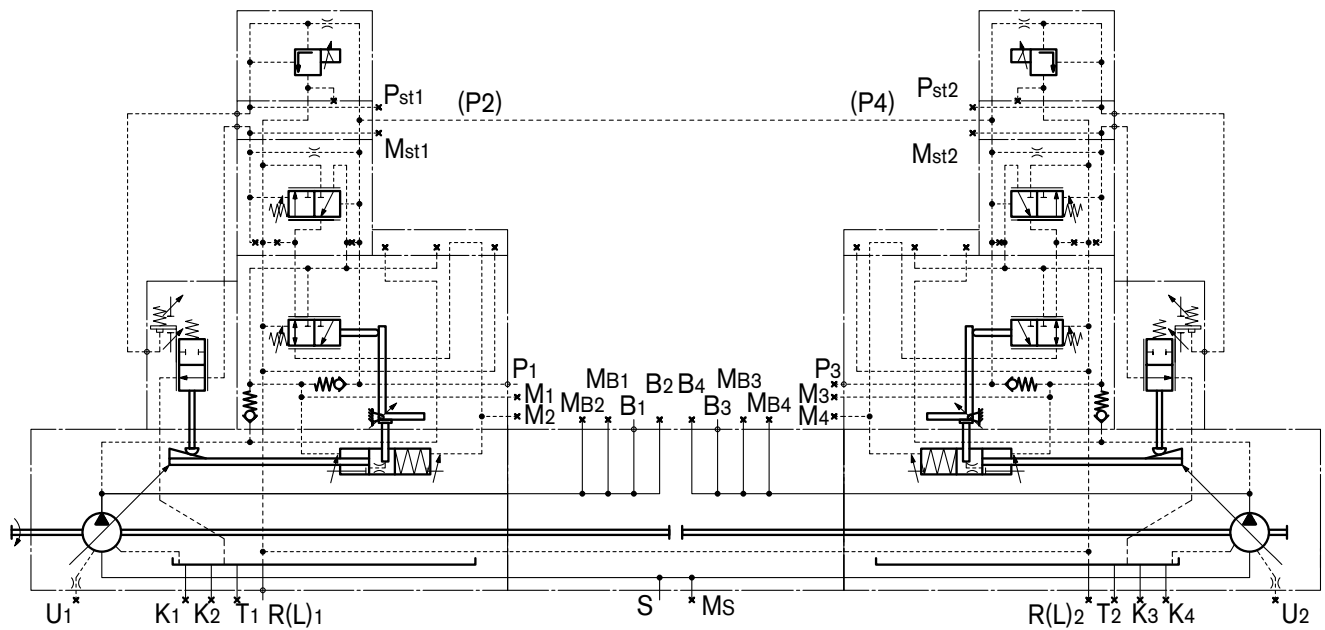

Further technical datas as soon as control devices see

for size 60 \_\_\_\_\_ RE 95703 (A10VO/53)


for sizes 95 ... 260 \_\_\_\_\_ RE 92500 (A11VO)

for size 520 \_\_\_\_\_ RE 92050 (A4VSO), RE 92060, RE 92064, RE 92076

# Unit Dimensions, Size 60

For controller selection see RE 92703 (A10VO/53)


Before finalizing your design, please request a  
approved installation drawing.  
Dimensions in mm

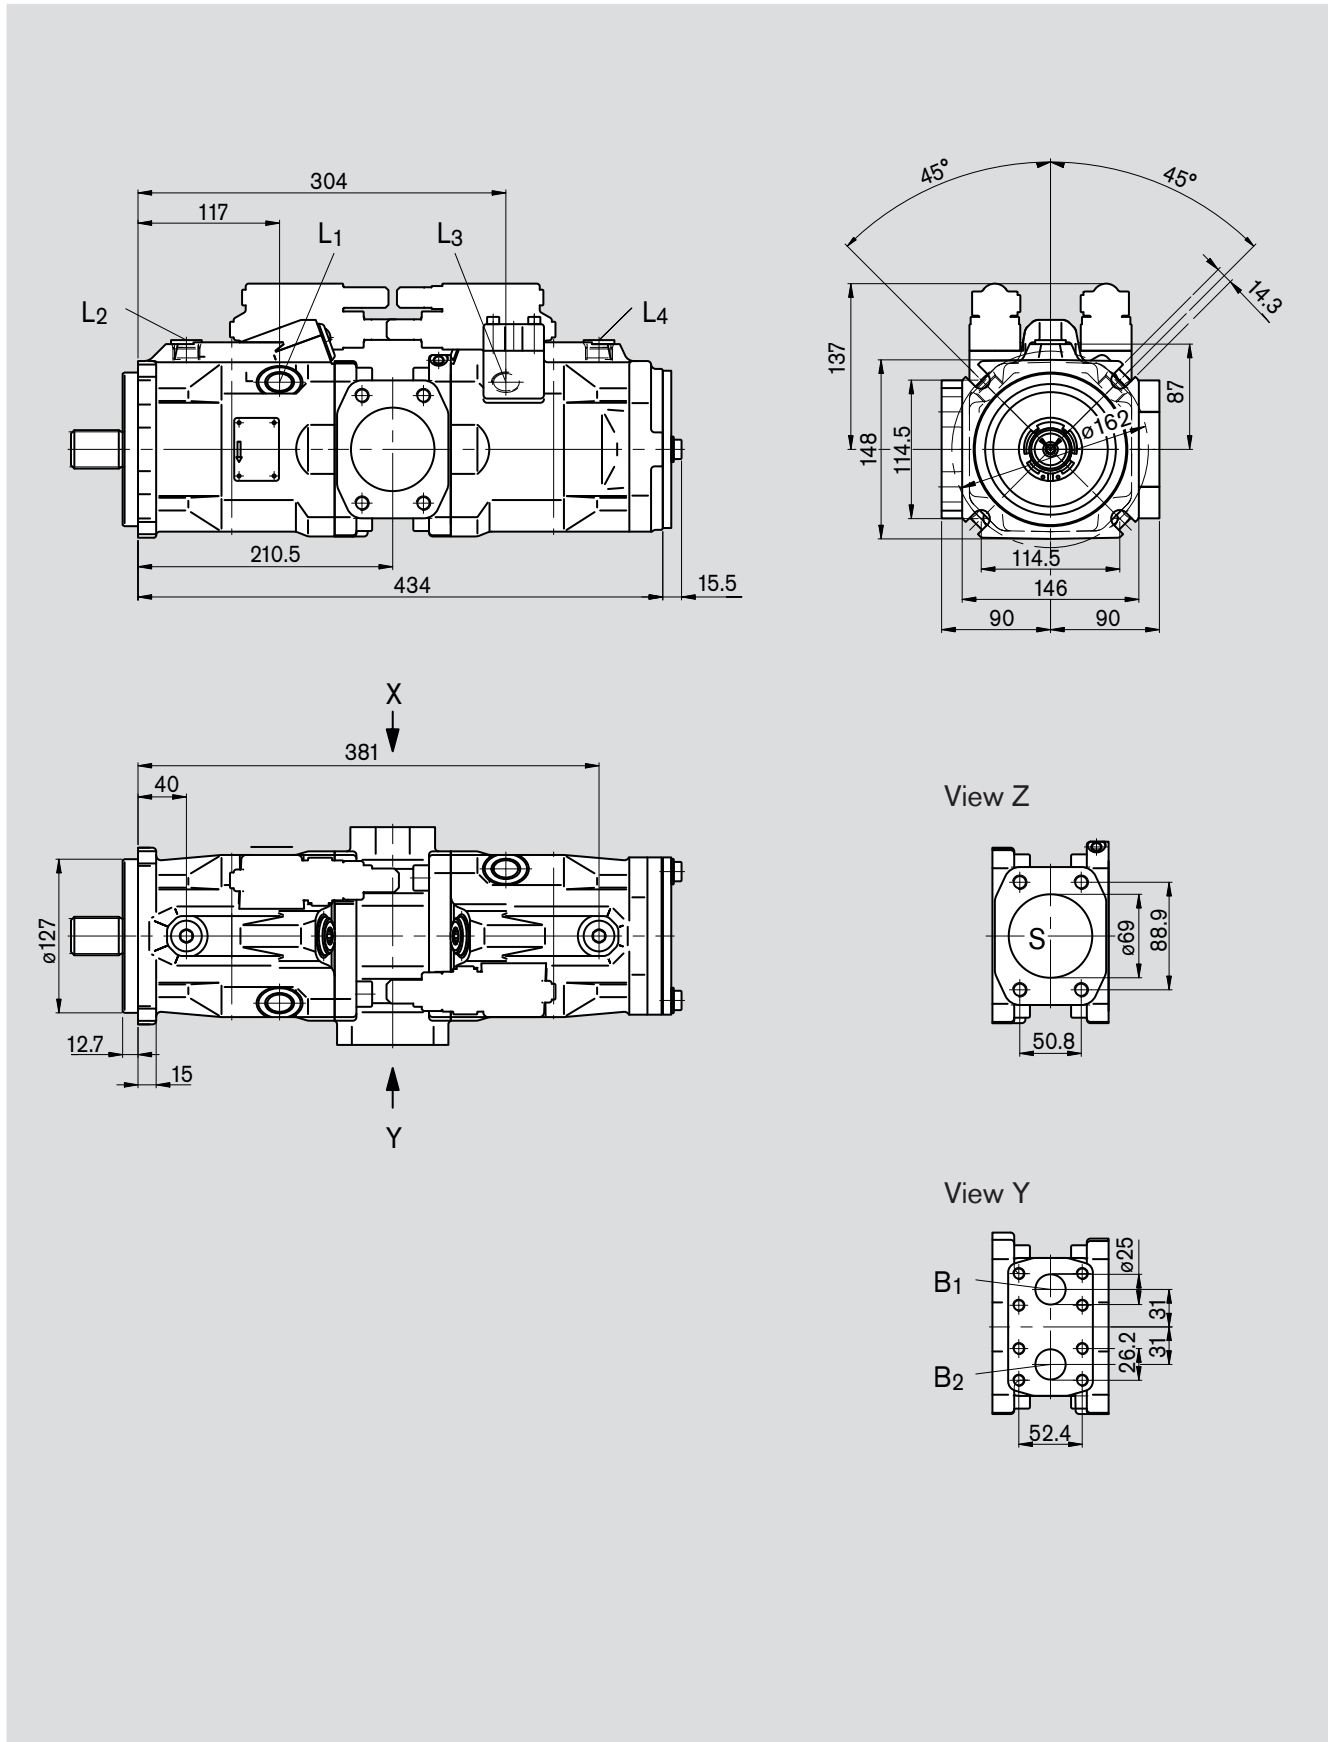

# Unit Dimensions, Size 60

Before finalizing your design, please request a  
approved installation drawing.  
Dimensions in mm

## Shaft end

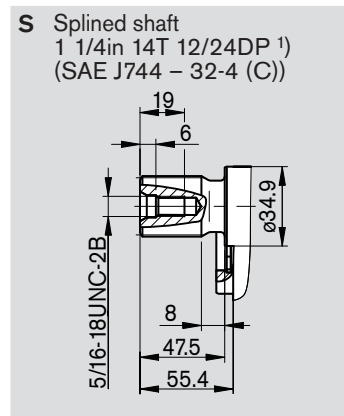

## Ports

B <sub>1</sub> , B <sub>2</sub>	Service ports (High pressure series)	SAE J518	1 in	
	Fastening thread	DIN 13	M10x1,5; 17 deep <sup>2)</sup>	
S	Suction port	SAE J518	2 1/2 in	
	Fastening thread	DIN 13	M12x1,75; 20 deep <sup>2)</sup>	
L <sub>1,2,3,4</sub>	Case drain	DIN 3852	7/8-14UNF-2B	240 Nm <sup>2)</sup>


<sup>1)</sup> ANSI B92.1a-1976, pressure angle 30°, flat rood, side fit, tolerance class 5

<sup>2)</sup> please observe the general notes for the max. tightening torques on page 16

# Unit Dimensions, Size 95

For controller selection see RE92500 (A11VO)



Before finalizing your design, please request a approved installation drawing.  
Dimensions in mm

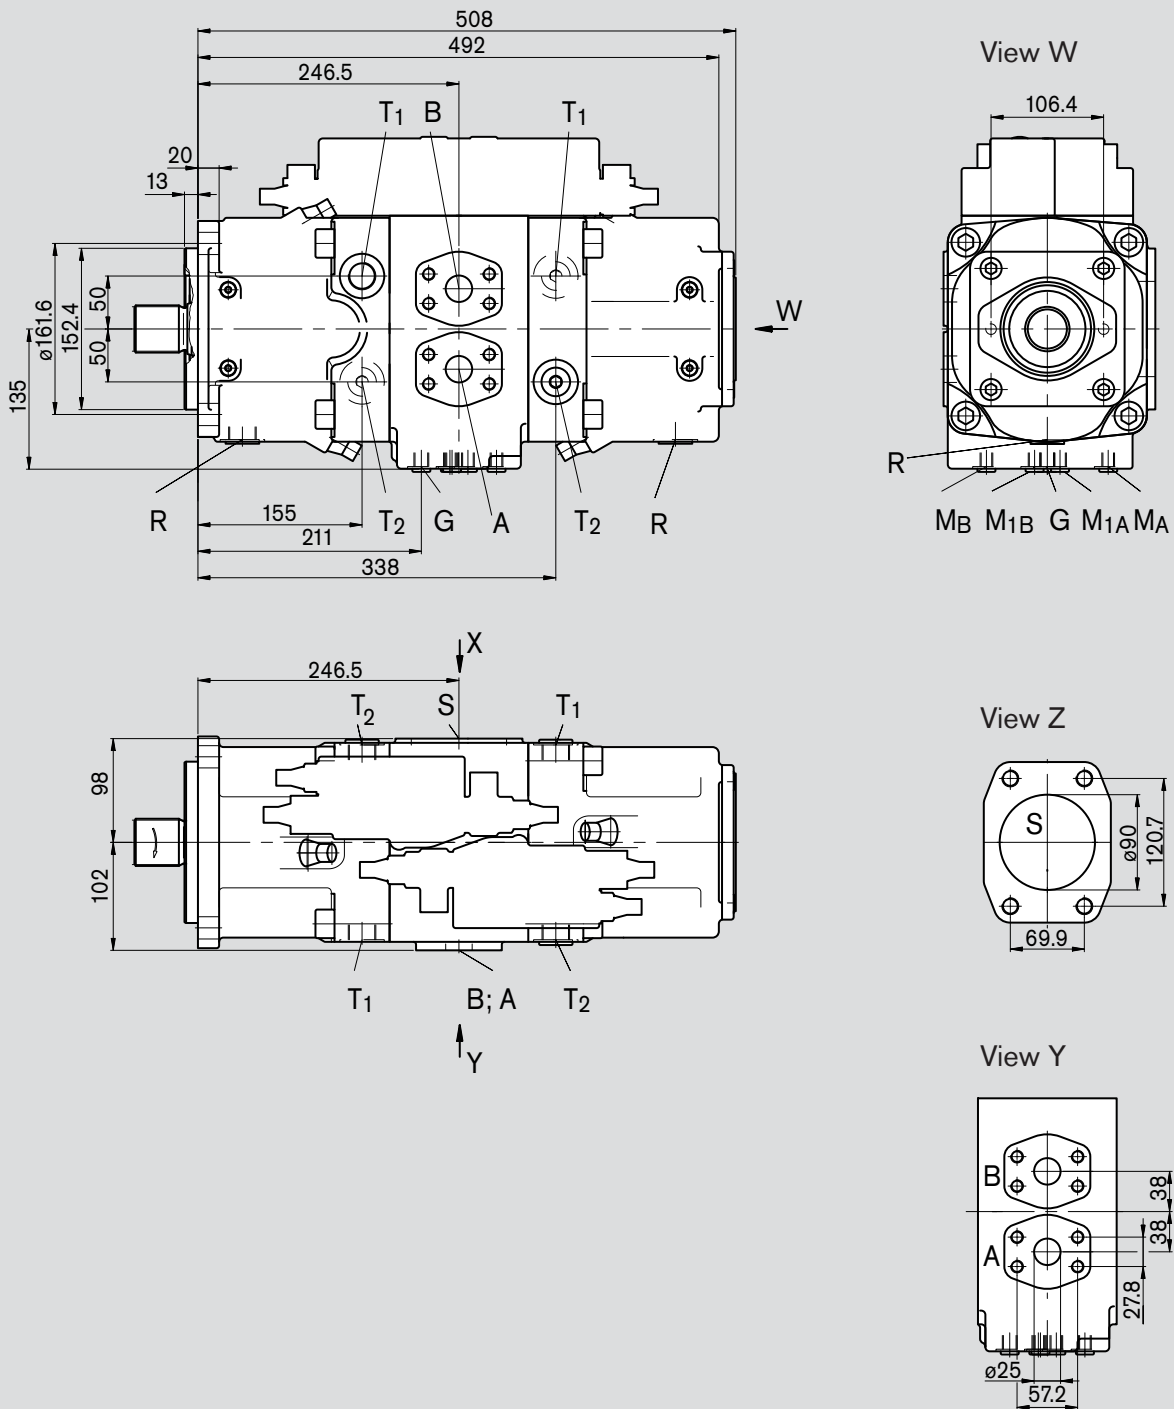

# Unit Dimensions, Size 95

Before finalizing your design, please request a approved installation drawing.  
Dimensions in mm

## Shaft ends

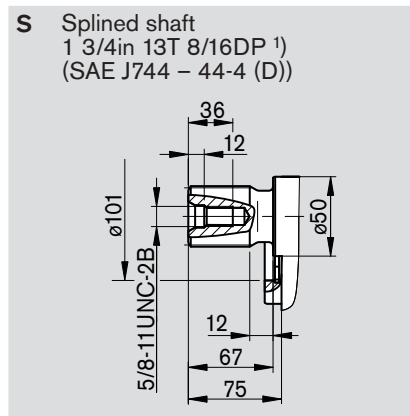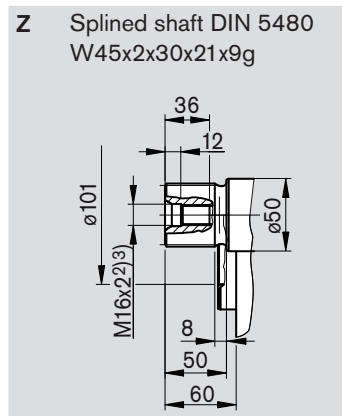

## Ports

A, B	Service ports (High pressure series)	SAE J518	1 in	
	Fastening threads	DIN 13	M12x1,75; 17 deep <sup>3)</sup>	
S	Suction port (standard series)	SAE J518	3 1/2 in	
	Fastening threads	DIN 13	M16x2; 24 deep <sup>3)</sup>	
T <sub>1</sub> , T <sub>2</sub>	Case drain	DIN3852	M26x1,5; 14 deep	230 Nm <sup>3)</sup>
M <sub>A</sub> , M <sub>B</sub>	Gauge point positioning chamber	DIN3852	M12x1,5; 12 deep	50 Nm <sup>3)</sup>
M <sub>A1</sub> , M <sub>B1</sub>	Gauge point for service port	DIN3852	M12x1,5; 12 deep	50 Nm <sup>3)</sup>
R	Air bleed, drain port	DIN3852	M26x1,5; 14 deep	230 Nm <sup>3)</sup>
G	Control pressure port (controller) <sup>4)</sup>	DIN3852	M14x1,5; 12 deep	80 Nm <sup>3)</sup>

<sup>1)</sup> ANSI B92.1a-1976, pressure angle 30°, flat rood, side fit, tolerance class 5

<sup>2)</sup> Center bore according to DIN 332 (thread according to DIN13)


<sup>3)</sup> please observe the general notes for the max. tightening torques on page 16

<sup>4)</sup> At design with stroke limiter (H..., U2), HD and EP with fitting GE10-PLM (in other case is port G plugged)

# Unit Dimensions, Size 190 (with impeller)

Before finalizing your design, please request a approved installation drawing.  
Dimensions in mm

For controller selection see RE92500 (A11VO)


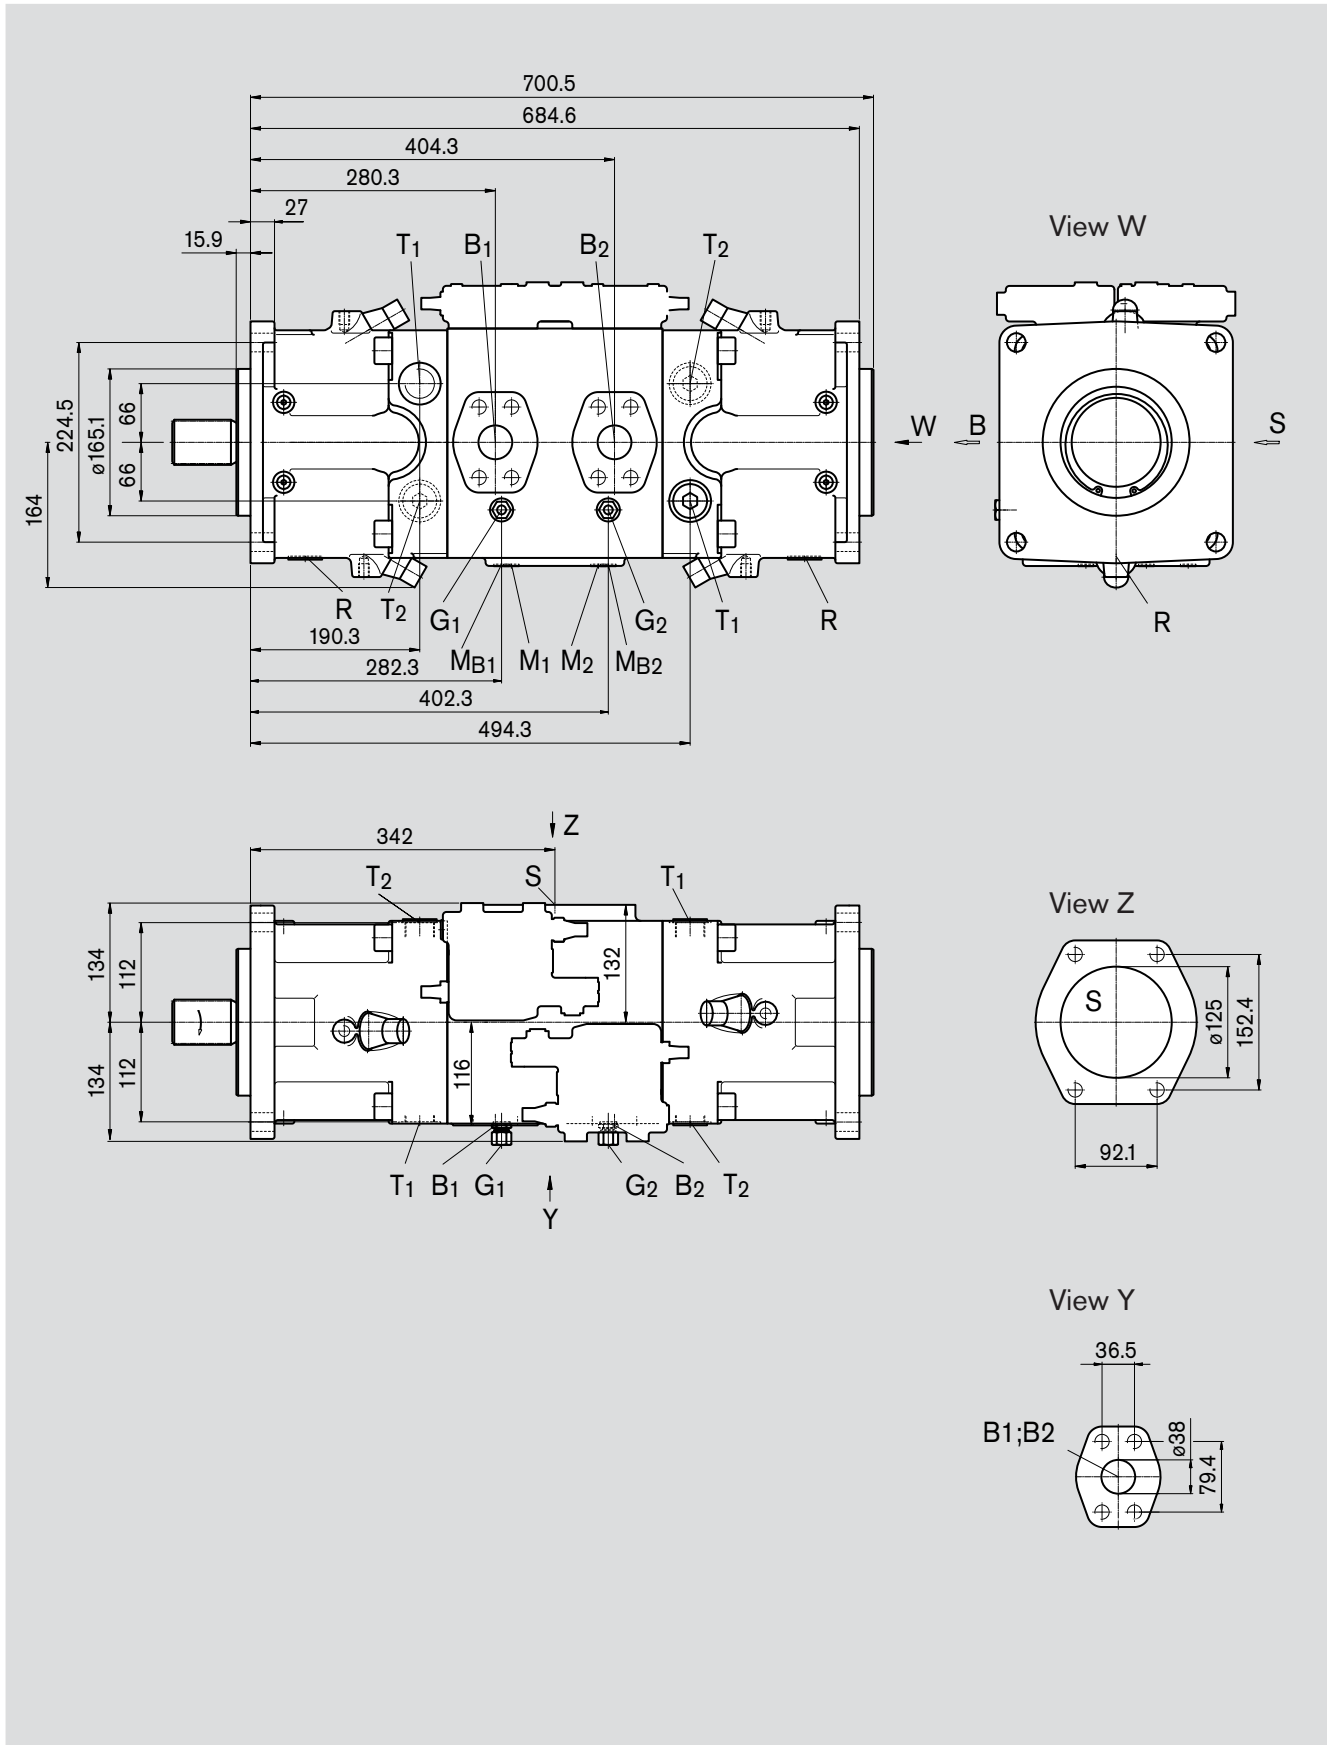




# Unit Dimensions, Size 190 (with impeller)

Before finalizing your design, please request a approved installation drawing. Dimensions in mm

## Shaft ends

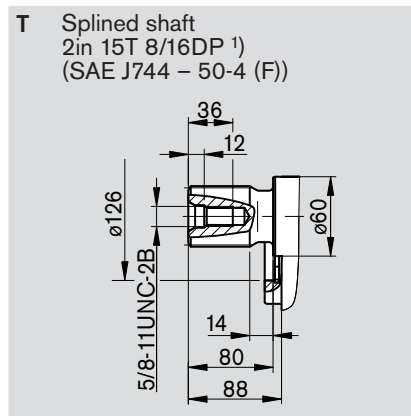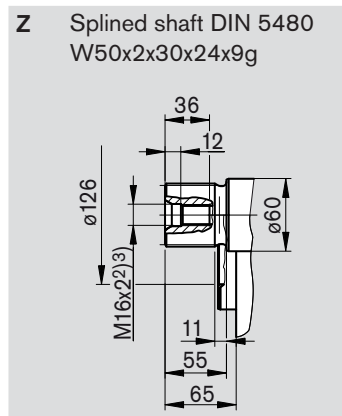

## Connections

B <sub>1</sub> , B <sub>2</sub>	Service ports (High pressure series)	SAE J518	1 1/2 in	
	Fastening threads	DIN 13	M16x2; 21 deep	
S	Suction port (standard series)	SAE J518	5 in	
	Fastening threads	DIN 13	M16x2; 23 deep	
T <sub>1</sub> , T <sub>2</sub>	Case drain	DIN3852	M33x2; 18 deep	540 Nm <sup>4)</sup>
M <sub>1</sub> , M <sub>2</sub>	Gauge point positioning chamber	DIN3852	M12x1,5; 12 deep	50 Nm <sup>4)</sup>
M <sub>B1</sub> , M <sub>B2</sub>	Gauge point for service port	DIN3852	M12x1,5; 12 deep	50 Nm <sup>4)</sup>
R	Air bleed, drain port	DIN3852	M33x2; 16 deep	540 Nm <sup>4)</sup>
G <sub>1</sub> , G <sub>2</sub>	Control pressure port (controller) <sup>4)</sup>	DIN3852	M14x1,5; 12 deep	80 Nm <sup>4)</sup>

<sup>1)</sup> ANSI B92.1a-1976, pressure angle 30°, flat rood, side fit, tolerance class 5

<sup>2)</sup> Center bore according to DIN 332 (thread according to DIN13)


<sup>3)</sup> please observe the general notes for the max. tightening torques on page 16

<sup>4)</sup> At design with stroke limiter (H..., U2), HD and EP with fitting GE10-PLM (in other case is port G plugged)

# Unit Dimensions, Size 260 (with impeller)

Before finalizing your design, please request a approved installation drawing. Dimensions in mm



For controller selection see RE92500 (A11VO)

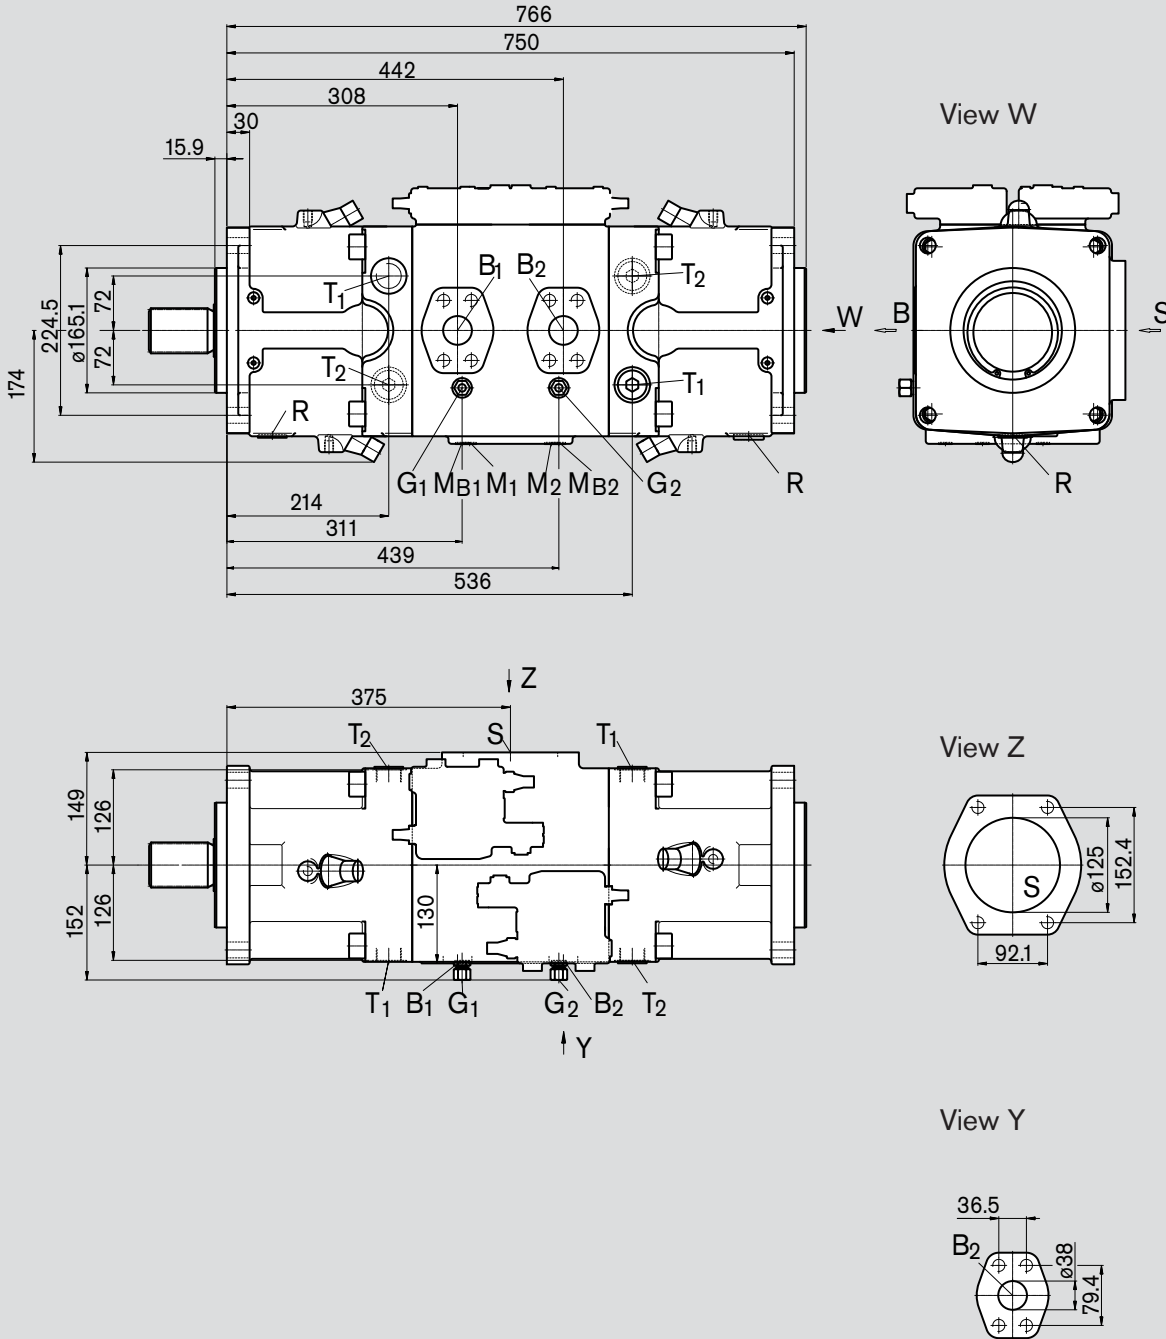

# Unit Dimensions, Size 260 (with impeller)

Before finalizing your design, please request a approved installation drawing. Dimensions in mm

## Shaft ends

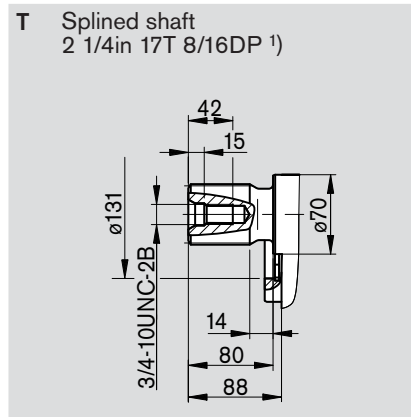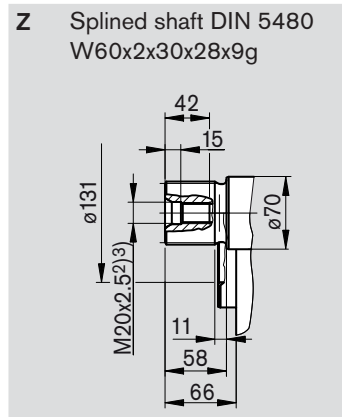

## Connections

B <sub>1</sub> , B <sub>2</sub>	Service ports (High pressure series)	SAE J518	1 1/2 in	
	Fastening threads	DIN 13	M16x2; 21 deep <sup>3)</sup>	
S	Suction port (standard series)	SAE J518	5 in	
	Fastening threads	DIN 13	M16x2; 23 deep <sup>3)</sup>	
T <sub>1</sub> , T <sub>2</sub>	Case drain	DIN3852	M33x2; 18 deep	540 Nm <sup>3)</sup>
M <sub>1</sub> , M <sub>2</sub>	Gauge point positioning chamber	DIN3852	M12x1,5; 12 deep	50 Nm <sup>3)</sup>
M <sub>B1</sub> , M <sub>B2</sub>	Gauge point for service port	DIN3852	M12x1,5; 12 deep	50 Nm <sup>3)</sup>
R	Air bleed, drain port	DIN3852	M33x2; 16 deep	540 Nm <sup>3)</sup>
G <sub>1</sub> , G <sub>2</sub>	Control pressure port (controller) <sup>3)</sup>	DIN3852	M14x1,5; 12 deep	80 Nm <sup>3)</sup>

<sup>1)</sup> ANSI B92.1a-1976, pressure angle 30°, flat rood, side fit, tolerance class 5

<sup>2)</sup> Center bore according to DIN 332 (thread according to DIN13)

<sup>3)</sup> please observe the general notes for the max. tightening torques on page 16


<sup>4)</sup> At design with stroke limiter (H..., U2), HD and EP with fitting GE10-PLM (in other case is port G plugged)

# Unit Dimensions, Size 520

Before finalizing your design, please request a approved installation drawing. Dimensions in mm

For controller selection see RE92064 (A4VS)


Picture for counter-clockwise

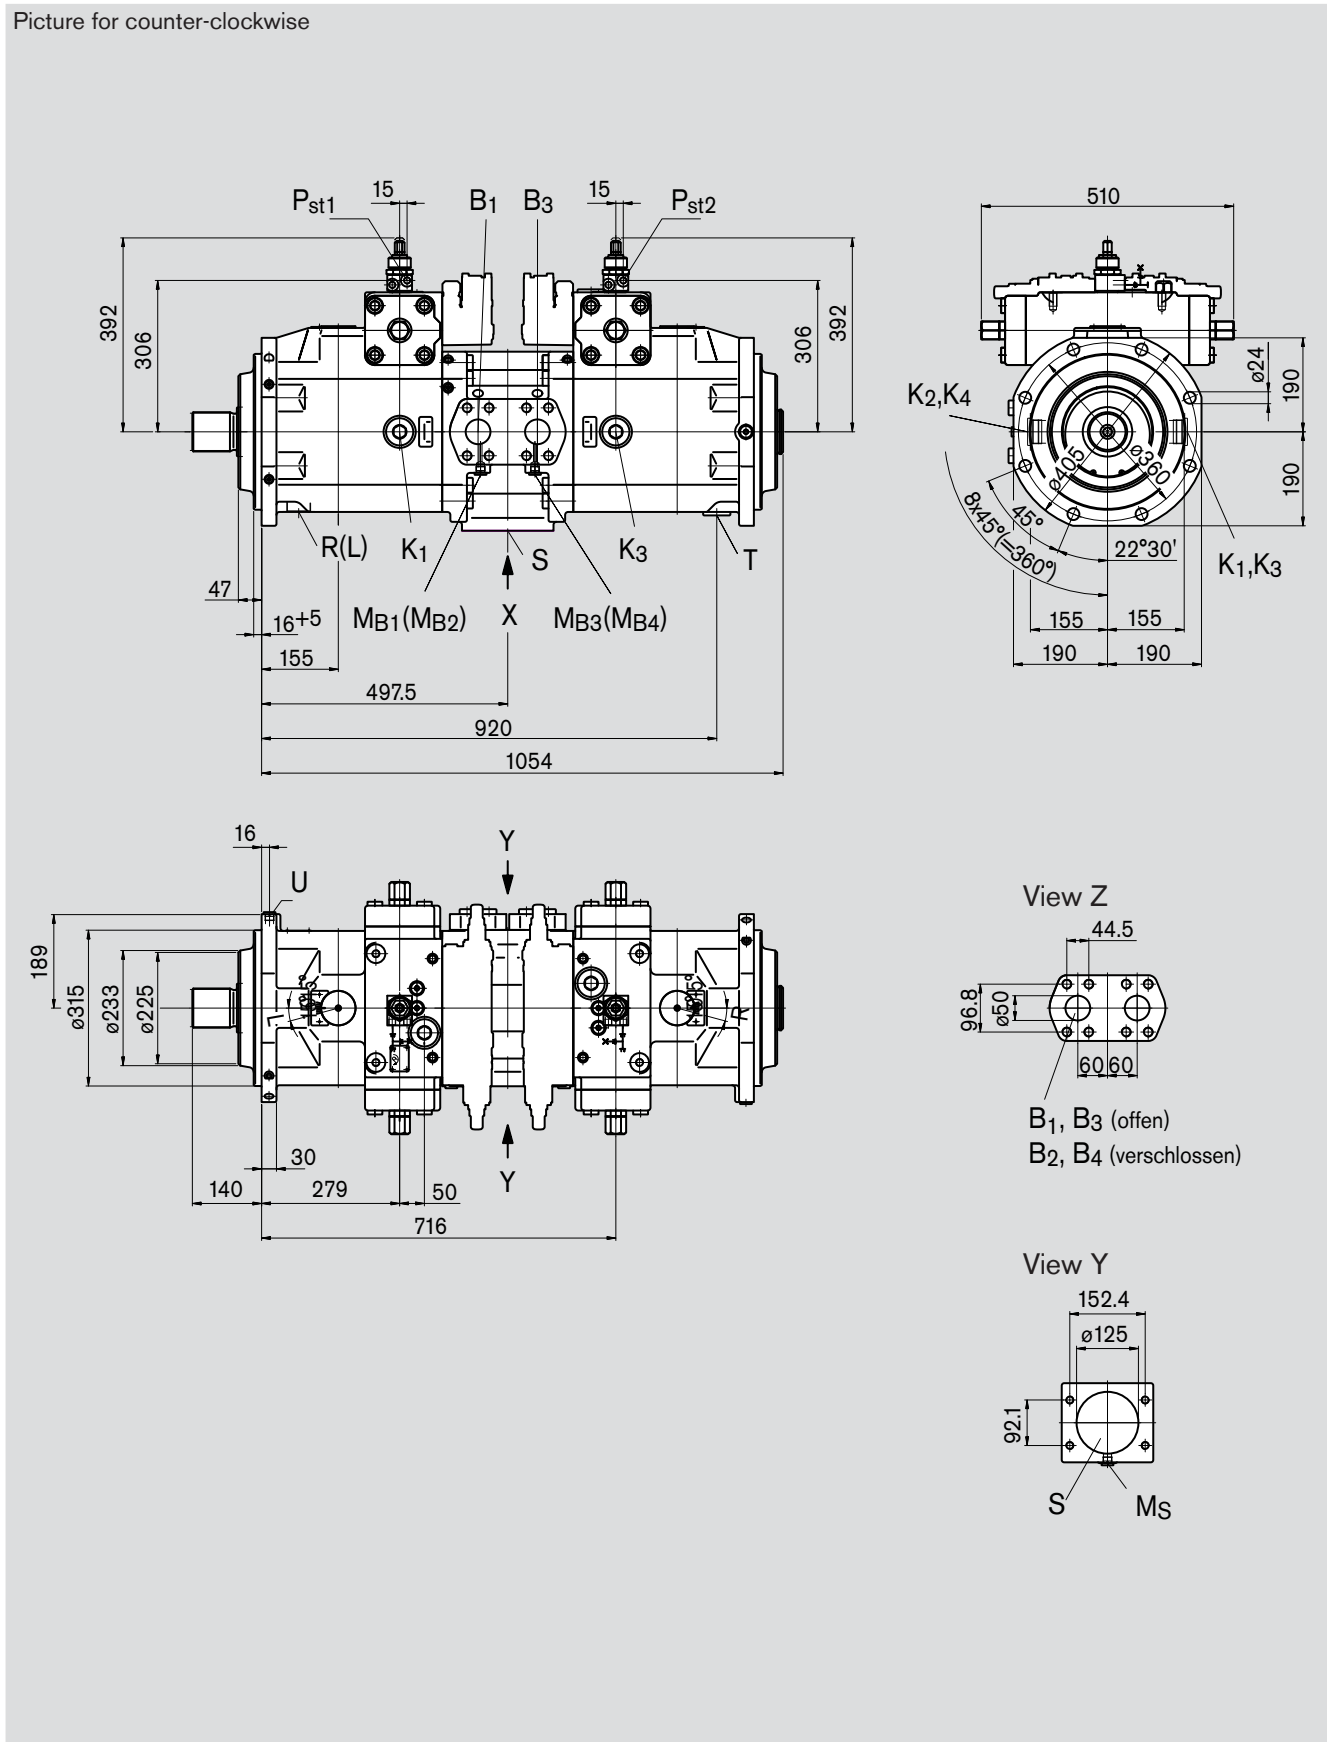

# Unit Dimensions, Size 520

Before finalizing your design, please request a approved installation drawing. Dimensions in mm

## Shaft ends

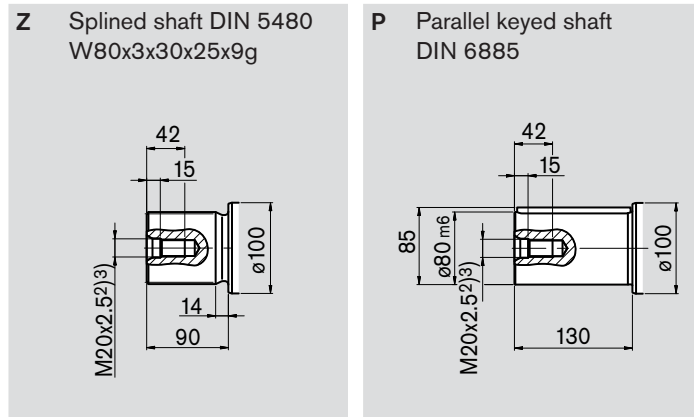

## Connections

B <sub>1</sub> - B <sub>4</sub>	Service line ports (High pressure series)	SAE J518	2 in	
	Fastening threads	DIN 13	M20x2,5; 24 deep <sup>3)</sup>	
S	Suction port (standard series)	SAE J518	5 in	
	Fastening threads	DIN 13	M16x2; 24 deep <sup>3)</sup>	
K <sub>1</sub> - K <sub>4</sub>	Flush ports		M48x2; 22 deep	960 Nm <sup>3)</sup>
M <sub>B1</sub> , M <sub>B4</sub>	Gauge point for operating pressure	DIN3852	M18x1,5; 12 deep	140 Nm <sup>3)</sup>
M <sub>S</sub>	Gauge point for suction port	DIN3852	M18x1,5; 12 deep	140 Nm <sup>3)</sup>
P <sub>st1</sub> , P <sub>st2</sub>	Pilot pressure port		M14x1,5; 12 deep	80 Nm <sup>3)</sup>
R (L)	Air bleed, drain port	DIN3852	M48x2; 22 deep	960 Nm <sup>3)</sup>
T	Case drain	DIN3852	M48x2; 22 deep	960 Nm <sup>3)</sup>
U	Flush port	DIN3852	M18x1,5; 12 deep	140 Nm <sup>3)</sup>

<sup>1)</sup> ANSI B92.1a-1976, pressure angle 30°, flat rood, side fit, tolerance class 5

<sup>2)</sup> Center bore according to DIN 332 (thread according to DIN13)

<sup>3)</sup> please observe the general notes for the max. tightening torques on page 16

<sup>4)</sup> At design with stroke limiter (H1) with fitting GE10-PLM (in other case is port G plugged)

## General Notes

- The pump A20VO is designed to be used in open circuits.
- Project planning, assembly and commissioning of the pump require the involvement of trained personnel.
- The working and functional ports are only designed to accommodate hydraulic piping.
- There is a danger of burns from the pump and especially the solenoids during and shortly after operation. Suitable safety precautions, e.g. protective clothing plan.
- The characteristic curve may shift depending on the operating status (operating pressure, fluid temperature) of the pump.
- Tightening torques:
  - The tightening torques specified in this data sheet are maximum values and may not be exceeded (maximum value for screw thread). Manufacturer specifications for the max. permissible tightening torques of the used fittings must be observed!
  - For DIN 13 fastening screws we recommend checking the tightening torque individually according to VDI 2230 Edition 2003.
- The data and information contained herein must be adhered to.

Bosch Rexroth AG  
Hydraulics  
Product Segment Axial Piston Units  
Elchingen Plant  
Glockeraustrasse 2  
89275 Elchingen, Germany  
Phone +49 (0) 73 08 82-0  
Facsimile +49 (0) 73 08 72 74  
info.brm-ak@boschrexroth.de  
www.boschrexroth.com/brm

Horb Plant  
An den Kelterwiesen 14  
72160 Horb, Germany  
Phone +49 (0) 74 51 92-0  
Facsimile +49 (0) 74 51 82 21

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.


Subject to change.

# Axial piston variable double pump A28VLO Series 10

**RE 93110**

Edition: 04.2016

Replaces: 12.2015

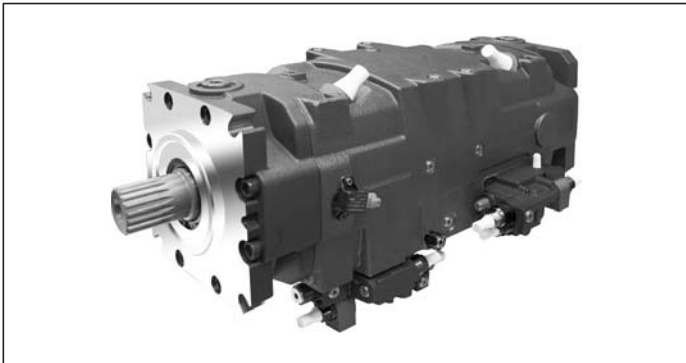

- ▶ Sizes 280
- ▶ Nominal pressure 350 bar
- ▶ Maximum pressure 420 bar
- ▶ Open circuit

**Features**

- ▶ Variable axial piston double pump of swashplate design for hydrostatic drives in open circuit.
- ▶ For use preferably in mobile applications
- ▶ Flow is proportional to the drive speed and displacement.
- ▶ The flow can be infinitely varied by adjusting the swashplate angle.
- ▶ One suction port, two pressure ports.
- ▶ Special control devices program for mobile applications, with different control and regulation functions.
- ▶ Compact design
- ▶ High efficiency
- ▶ High power density
- ▶ Low noise level

**Contents**

Ordering code	2
Hydraulic fluids	5
Charge pump (impeller)	6
Operating pressure range	7
Technical data	8
Power control	11
Stroke control	18
Pressure controller	19
Dimensions, size 280	22
Connector for solenoids	28
Installation instructions	29
Project planning notes	31
Safety instructions	31

## Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	
<b>A28V</b>	<b>LO</b>	<b>280</b>								/	<b>10</b>		<b>R</b>	<b>V</b>	<b>E4</b>		<b>1</b>	<b>K0</b>	<b>0000</b>	<b>0</b>	-	

### Axial piston unit

01	Double pump, variable swashplate design	<b>A28V</b>
----	---	-------------

### Operation mode

		<b>280</b>
02	Pump, open circuit with charge pump	● <b>LO</b>

### Sizes (NG)

03	Geometric displacement, see "Technical data" on page 8	<b>280</b>
----	--	------------

### Pump 1: control devices: basic controller

The basic controller can be combined with at most two additional controllers (05, 06, 07)

04	Single power control	fixed setting			●	<b>LR</b>	
		override	electric-proportional	negative control	$U = 12 V$	●	<b>L3</b>
					$U = 24 V$	●	<b>L4</b>
			hydraulic-proportional,	negative control		●	<b>L5</b>
		positive control			●	<b>L6</b>	
	Summation power controller	override hydraulic-proportional, high pressure	negative control	with stop	●	<b>CR</b>	
		Combination of CR and L5 = C5			●	<b>C5</b>	
	Pressure control with one-side swiveling	fixed setting			●	<b>DR</b>	
		electric-proportional with integrated pilot valve for external pilot pressure supply	positive control	$U = 24 V$	○	<b>D2<sup>2)</sup></b>	
	Stroke control <sup>1)</sup>	override	positive control	$U = 12 V$	●	<b>E1</b>	
electric-proportional			$U = 24 V$	●	<b>E2</b>		

### Pump 1: Additional control: Pressure controller

05	Without additional control (without symbol)	●	
	with one-side swiveling, fixed setting	●	<b>DR</b>

### Pump 1: additional control for basic controller L4 and CR<sup>1)</sup>: stroke control or unloading

06	Without additional control (without symbol)				●	
	Stroke control	override electric-proportional	positive control	$U = 12 V$	●	<b>E1</b>
				$U = 24 V$	●	<b>E2</b>
	Stroke control	hydraulic-proportional, control pressure	negative control	$\Delta p = 20 \text{ bar}$	●	<b>H3</b>
			positive control		●	<b>H4</b>
		hydraulic-proportional, control pressure	negative control	$\Delta p = 35 \text{ bar}$	●	<b>H5</b>
			positive control		●	<b>H6</b>

### Pump 1: Additional control: load sensing

07	Without additional control (without symbol)	●	
	Load sensing, internal pump pressure, fixed setting	●	<b>S0</b>

### Pump 2: control combination

08	Identical with pump 1	●	<b>1</b>
	Various controls, please contact us	●	<b>2</b>

1) The stroke control systems can be combined with either pressure controllers or load sensing controllers. A combination of all three controllers is not possible

2) Not combinable with other controllers



01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	
<b>A28V</b>	<b>LO</b>	<b>280</b>								/	<b>10</b>		<b>R</b>	<b>V</b>	<b>E4</b>		<b>1</b>	<b>K0</b>	<b>0000</b>	<b>0</b>	<b>-</b>	

**Depressurized basic position and external control pressure supply** **280**

09	Maximum swivel angle ( $V_{g \max}$ )		
	Without external control pressure supply (standard for power and pressure controllers)	●	<b>A</b>
	With external control pressure supply (integrated shuttle valve, standard for negative stroke control)	●	<b>B</b>
	Minimum swivel angle ( $V_{g \min}$ )		
	With external control pressure supply (integrated shuttle valve, standard for positive stroke control)	●	<b>C</b>

**Connector for solenoids<sup>3)</sup>** (see page 29)

10	Without connector (only for hydraulic controls)	●	<b>0</b>
	DEUTSCH connector	●	<b>P</b>
	AMP connector (Junior-Timer), 2-pin (only for D2 controller)	○	<b>S</b>

**Swivel angle indicator**

11	Without optical swivel angle indicator	●	<b>0</b>
	With electric swivel angle sensor <sup>4)</sup> as per data sheet 95150		
	Power supply 5 V DC	●	<b>B</b>
	Power supply 8 V - 32 V DC		
		●	<b>K</b>

**Series**

12	Series 1, Index 0		<b>10</b>
----	-------------------	--	-----------

**Configuration of port and fastening threads**

13	ANSI, all fastening threads according to ASME B1.1, all port threads with O-ring seal according to ISO 11926	○	<b>A</b>
	Metric, all fastening threads according to DIN 13, all port threads with O-ring seal according to ISO 6149	●	<b>M</b>

**Direction of rotation**

14	With view on drive shaft		<b>R</b>
	clockwise		

**Sealing material**

15	FKM (fluor-caoutchouc)		<b>V</b>
----	------------------------	--	----------

**Mounting flanges**

16	SAE J744		<b>E4</b>
	165-4		

**Drive shaft**

17	Splined shaft ANSI B92.1a		<b>T3</b>
	2 1/4 in 17T 8/16DP		
	Splined shaft DIN 5480	●	<b>A4</b>
	W60x2x28x9g		

● = Available    ○ = On request    - = Not available

<sup>3)</sup> Connectors for other electric components may deviate  
<sup>4)</sup> Please contact us if the swivel angle sensor is used for control

4 **A28VLO Series 10** | Axial piston variable double pump  
Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	
<b>A28V</b>	<b>LO</b>	<b>280</b>								/	<b>10</b>		<b>R</b>	<b>V</b>	<b>E4</b>		<b>1</b>	<b>K0</b>	<b>0000</b>	<b>0</b>	-	

**Service line port**

**280**

18	SAE service line port <b>A, B</b> at side, SAE-suction port <b>S</b> at bottom	•	<b>1</b>
----	--	---	----------

**Control fluid pump and pressure relief valve**

19	Without integrated control oil pump, without pressure-relief valve	•	<b>K0</b>
----	--	---	-----------

**Through drive**

20	Without through drive <sup>5)</sup>	•	<b>0000</b>
----	-------------------------------------	---	-------------

**Speed sensor**

21	Without	•	<b>0</b>
----	---------	---	----------

**Standard/special version**

22	Standard version		<b>0</b>
	Special version		<b>S</b>

**Note**

- ▶ Note the project planning notes on page 32.
- ▶ In addition to the ordering code, please specify the relevant technical data when placing your order.

• = Available    ◦ = On request    - = Not available

<sup>5)</sup> With through drive on request

## Hydraulic fluids

The A28V(L)O variable pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)

### Notes on selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$  see selection diagram).

#### Note


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact the responsible member of staff at Bosch Rexroth.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ °C}^{1)}$	$t \leq 3 \text{ min}$ , without load ( $20 \text{ bar} \leq p \leq 50 \text{ bar}$ , $n \leq 1000 \text{ rpm}$ )
	Permissible temperature difference	$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid
Warm-up phase	$v < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ °C to } -25 \text{ °C}$	at $p \leq 0.7 \times p_{nom}$ , $n \leq 0.5 \times n_{nom}$ and $t \leq 15 \text{ min}$
Continuous operation	$v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$	$\theta = -25 \text{ °C to } +110 \text{ °C}$	This corresponds, for example on the VG 46, to a temperature range of +5 °C to +85 °C (see selection diagram)
			measured at port <b>T</b> Note the permissible temperature range of the shaft seal ( $\Delta T = \text{approx. } 5 \text{ K}$ between bearing/shaft seal and port <b>T</b> )
	$v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		Range of optimum operating viscosity and efficiency
Short-term operation	$v_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 3 \text{ min}$ , $p < 0.3 \times p_{nom}$

### ▼ Selection diagram

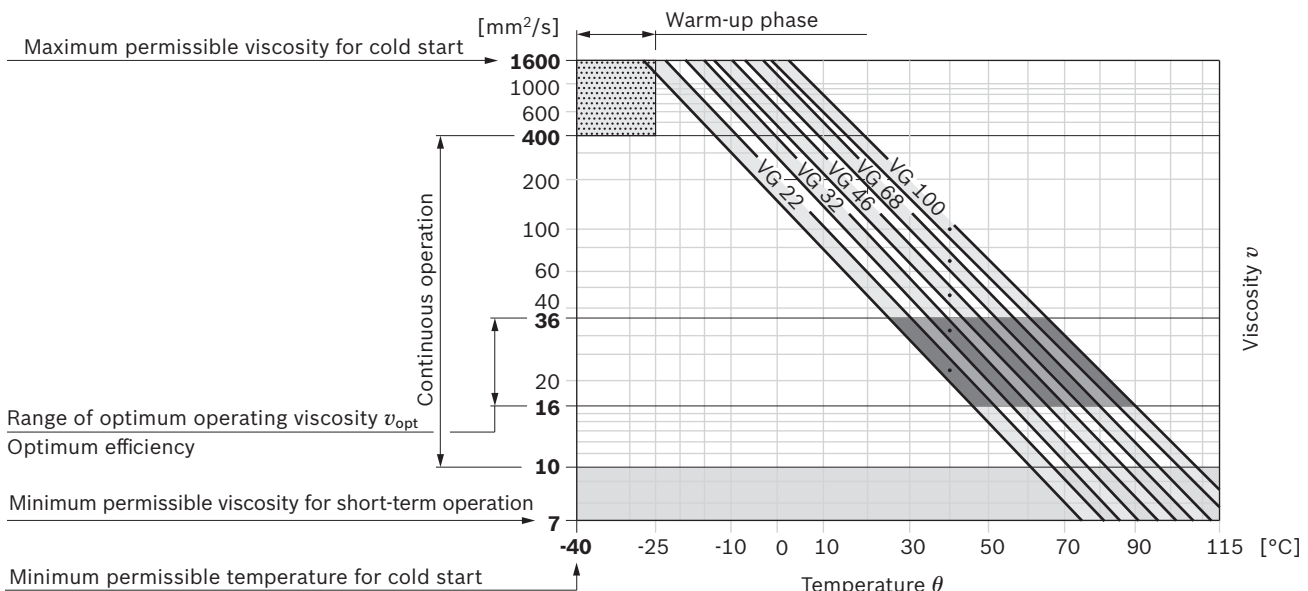

1) At temperatures below -25 °C, an NBR shaft seal is required (permissible temperature range -40 °C bis +90 °C)

### Filtration of the hydraulic fluid


Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

In order to guarantee the functional reliability of the axial piston unit it is necessary to carry out a gravimetric evaluation of the hydraulic fluid to determine the particle contamination and the cleanliness level according to ISO 4406. A cleanliness level of at least 20/18/15 must be maintained. At very high hydraulic fluid temperatures (90 °C to maximum 115 °C), a cleanliness class of at least 19/17/14 according to ISO 4406 is necessary.

Please contact us if the above classes cannot be observed.

### Charge pump (impeller)


The charge pump is a circulating pump with which the A28VLO 280 is filled and therefore can be operated at higher speeds. This also simplifies cold starting at low temperatures and high viscosity of the hydraulic fluid. Externally increasing the inlet pressure is therefore unnecessary in most cases. Charging the reservoir with compressed air is not permissible.

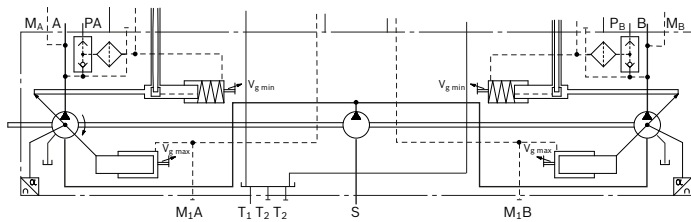


## Operating pressure range

Pressure at working line port A		Definition
Nominal pressure $p_{nom}$	350 bar	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	420 bar	The maximum pressure corresponds to the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	10 s	
Total operating period	300 h	
Minimum pressure $p_{A abs}$ (high-pressure side)	15 bar	Minimum pressure on the high-pressure side (A) which is required in order to prevent damage to the axial piston unit. The minimum pressure depends on the rotational speed and the swivel angle (see diagram).
Rate of pressure change $R_{A max}$	16000 bar/s	Maximum permissible rate of pressure build-up and pressure reduction during a pressure change over the entire pressure range.
Pressure at suction port S (inlet)		
Minimum pressure $p_{S min}$	$\geq 0.7$ bar absolute	Minimum pressure at suction port S (inlet) that is required in order to avoid damage to the axial piston unit. The minimum pressure depends on the speed and displacement of the axial piston unit.
Maximum pressure $p_{S max}$	$\leq 2$ bar absolute	
Drain pressure at port T <sub>1</sub> , T <sub>2</sub> , T <sub>3</sub>		
Maximum pressure $p_{L max}$	4 bar	Maximum 1.2 bar higher than inlet pressure at port S, but not higher than $p_{L max}$ . A case drain line to the reservoir is required.
Peak Pressure $p_{L peak}$	7 bar	$t < 0.1$ s

### ▼ Rate of pressure change $R_{A max}$

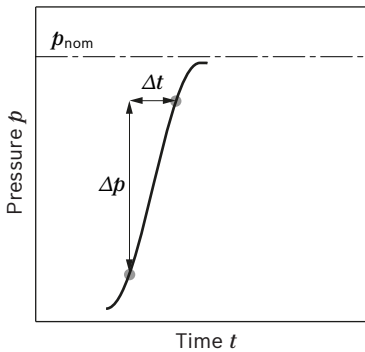

### ▼ Pressure definition

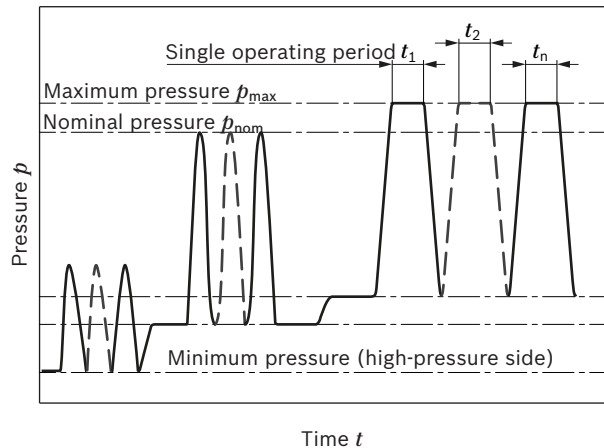

Total operating period =  $t_1 + t_2 + \dots + t_n$

#### Note

Operating pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.

## Technical data

### With charge pump (A28VLO)

Size		NG		280
Displacement, geometric, per revolution by rotary group		$V_{g \max}$	cm <sup>3</sup>	280
		$V_{g \min}$	cm <sup>3</sup>	0
Maximum rotational speed <sup>1)</sup>	at $V_{g \max}$ <sup>2)</sup>	$n_{\text{nom}}$	rpm	1900
	at $V_g \leq V_{g \max}$ <sup>3)</sup>	$n_{\text{max}}$	rpm	1900
Flow	at $n_{\text{nom}}$ and $V_{g \max}$	$q_v$	L/min	2 x 532
Power	at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 350$ bar	$P$	kW	2 x 310
Torque	at $V_{g \max}$ and $\Delta p = 350$ bar <sup>2)</sup>	$T$	Nm	2 x 1560
Rotary stiffness drive shaft	2 1/4 in 17T 8/16DP T3	$c$	kNm/rad	519
	W60x2x28x9g A4	$c$	kNm/rad	645
Moment of inertia rotary group		$J_{\text{TW}}$	kgm <sup>2</sup>	0.198
Maximum angular acceleration <sup>4)</sup>		$\alpha$	rad/s <sup>2</sup>	4200
Case volume		$V$	L	9.5
Weight (without through drive) approx.		$m$	kg	305



### Determining the operating characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{\text{hm}}}$	[Nm]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]
Key		
$V_g$	=	Displacement per revolution [cm <sup>3</sup> ]
$\Delta p$	=	Differential pressure [bar]
$n$	=	Rotational speed [rpm]
$\eta_v$	=	Volumetric efficiency
$\eta_{\text{hm}}$	=	Hydraulic mechanical efficiency
$\eta_t$	=	Total efficiency ( $\eta_t = \eta_v \times \eta_{\text{hm}}$ )

- 1) The values are applicable:
- for the optimum viscosity range from  $\nu_{\text{opt}} = 36$  to  $16$  mm<sup>2</sup>/s
  - with hydraulic fluid on the basis of mineral oils
- 2) The values apply at absolute pressure  $p_{\text{abs}} = 1$  bar at suction port **S**.

- 3) Maximum rotational speed (rotational speed limit) in the case of increasing the inlet pressure  $p_{\text{abs}}$  at suction port **S** and  $V_g < V_{g \max}$ .
- 4) The data are valid for values between the minimum required and maximum permissible speed. Valid for external excitation (e. g. diesel engine 2 to 8 times rotary frequency; cardan shaft twice the rotary frequency). The limiting value is only valid for a single pump. The load capacity of the connection parts must be considered.

**Permissible radial and axial forces of the drive shafts**

Size	NG	280	280
Drive shaft		2 1/4	W60
Maximum radial force at distance a (from shaft collar)		$F_{q \max}$ N	18000 23600
		a mm	40 29
Maximum axial force		$+ F_{ax \max}$ N	1800 1800
		$- F_{ax \max}$ N	850 850


**Note**

- ▶ Theoretical values, without efficiency and tolerances; values rounded
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. We recommend testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.
- ▶ Special requirements apply in the case of belt drives. Please contact us.

### Permissible input torques

Size	NG		280
Torque at $V_{g \max}$ and $\Delta p = 350 \text{ bar}^1$	$T_{\max}$	Nm	3120
Input torque at drive shaft, maximum <sup>2)</sup>			
	T3	2 1/4 in	$T_{E \max}$ Nm 4380
	A4	W60	$T_{E \max}$ Nm 5780
Maximum through-drive torque	$T_{D \max}$	Nm	-

#### ▼ Distribution of torques

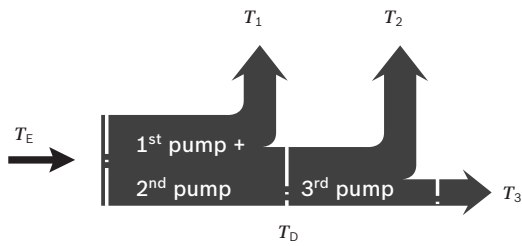

Torque at 1 <sup>st</sup> pump + 2 <sup>nd</sup> pump	$T_1$
Torque at 3 <sup>rd</sup> pump	$T_2$
Torque at 4 <sup>th</sup> pump	$T_3$
Input torque	$T_E = T_1 + T_2 + T_3$
	$T_E < T_{E \max}$
Through-drive torque	$T_D = T_2 + T_3$
	$T_D < T_{D \max}$

1) Efficiency not considered

2) For drive shafts free of radial force



## Power control

### LR – Power controller, fixed setting

The power controller regulates the displacement of the pump depending on the operating pressure so that a given drive power is not exceeded at constant drive speed. The precise control with a hyperbolic control characteristic, provides an optimum utilization of available power. The operating pressure acts on a rocker via a measuring piston moved together with the control. An externally adjustable spring force counteracts this, it determines the power setting. The depressurized basic position is  $V_{g \max}$ . If the operating pressure exceeds the set spring force, the control valve will be actuated by the rocker and the pump will swivel back from the basic setting  $V_{g \max}$  toward  $V_{g \min}$ . Here, the leverage at the rocker may be shortened and the operating pressure may rise in the same relation as the displacement is reduced ( $p_B \times V_g = \text{constant}$ ;  $p_B$  = operating pressure;  $V_g$  = displacement).

The hydraulic output power (characteristic LR) is influenced by the efficiency of the pump.


Setting range for beginning of control 50 to 350 bar

When ordering, state in plain text:


- ▶ Drive power  $P$  [kW]
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{V \max}$  [l/min]

Please contact us if you need a power diagram.

### ▼ Characteristic LR

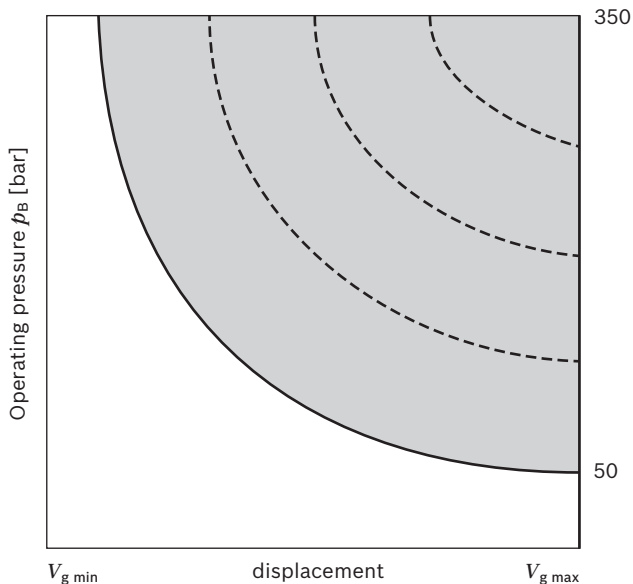

### ▼ Circuit diagram LR

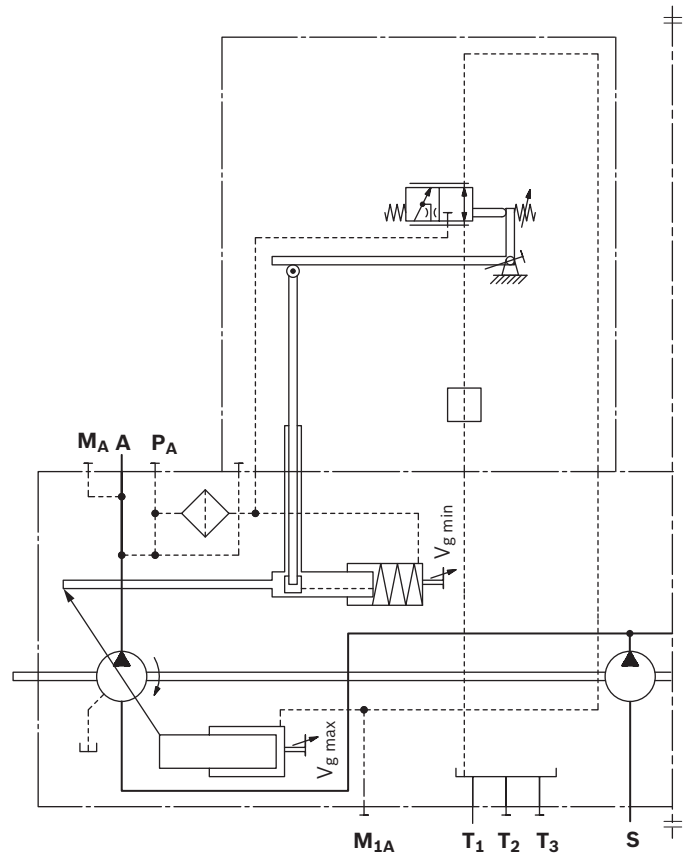

Illustrated for purposes of clarity, only pump A

**L3/L4 – Power controller, electric-proportional override (negative control)**


A control current acts against the adjustment spring of the power control via a proportional solenoid.  
The mechanically adjusted basic power setting can be reduced by means of different control current settings.  
Increasing control current = reduced power.  
If the pilot control signal is variably controlled via a load limiting control, the power draw of all consumers is adjusted to the power draw possible for the diesel engine (e.g. electronic load limiting control LLC (data sheet 95310) in BODAS controller RC2-2).

Technical data, solenoid	L3	L4
Voltage	12 V (±20%)	24 V (±20%)
Control current		
Beginning of control	400 mA	200 mA
End of control	1200 mA	600 mA
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	22.7 Ω
Dither frequency	100 Hz	100 Hz
Duty cycle	100%	100%
Type of protection: see connector version page 29		

When ordering, state in plain text:


- ▶ Drive power  $P$  [kW] at beginning of control
- ▶ Control current  $I$  [mA] at drive power  $P$  [kW]
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{V \max}$  [l/min]

▼ **Effect of power override through current increase**

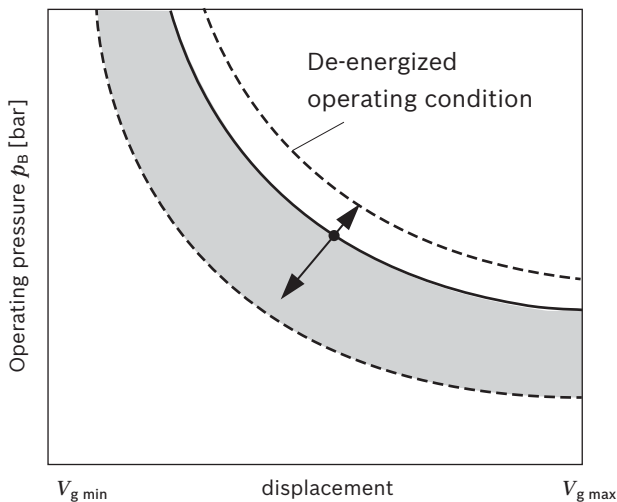

**Note**  
In operating condition **L3** de-energized (jump 400 to 0 mA):  
Power increase by a factor of 2 of the table values.  
In operating condition **L4** de-energized (jump 200 to 0 mA):  
Power increase by a factor of 1 of the table values.

**Circuit diagram L4**

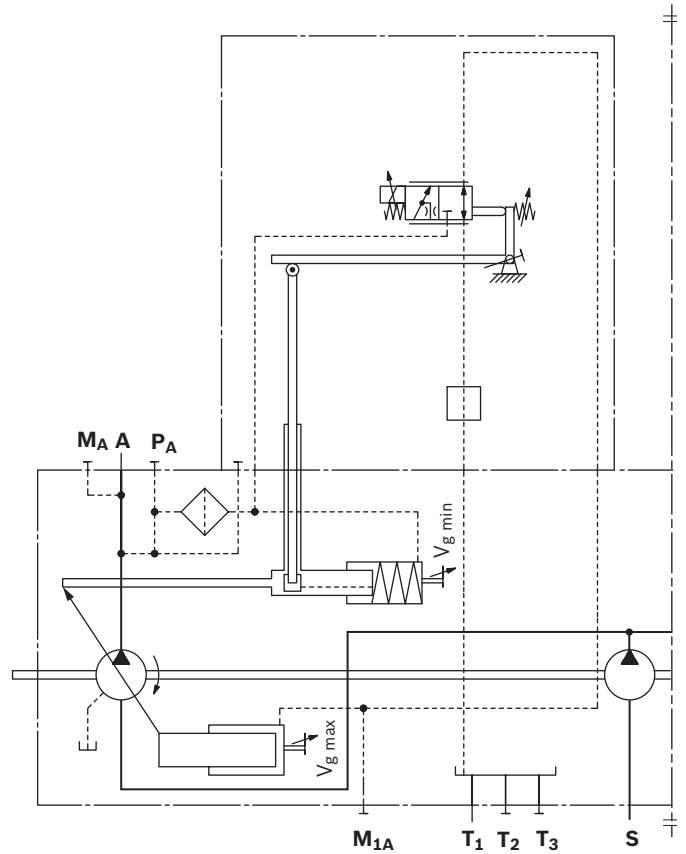

Illustrated for purposes of clarity, only pump A

Reduction of power by control current to the proportional solenoids with **L3**<sup>1)</sup>

**Power reduction/control current** [kW /100 mA]

Size	Rotational speed [rpm]		
	1000	1500	1800
280	11.4	17.1	20.5

Reduction of power by control current to the proportional solenoids with **L4**<sup>1)</sup>

**Power reduction/control current** [kW/100 mA]

Size	Rotational speed [rpm]		
	1000	1500	1800
280	22.9	34.4	41.2

<sup>1)</sup> Values in the tables are reference points. Determination of the exact power override on request.

**L5 – Power controller, hydraulic-proportional override (negative control)**

A pilot pressure acts against the adjustment spring of the power control via a valve.

The mechanically adjusted basic power setting can be reduced by means of different pilot pressure settings.

Increasing pilot pressure = reduced power.

- ▶ Maximum permissible pilot pressure  $p_{st\ max} = 100\ bar$
- If the pilot pressure signal is adjusted by a load limiting control, the power reduction of all consumers is reduced to match the available power from the diesel engine.

Reduction of power by pilot pressure at port **L5**

**Power reduction/pilot pressure [kW/bar]**


Size	Rotational speed [rpm]		
	1000	1500	1800
280	4.4	6.6	7.9

Values in the tables are reference points. Determination of the exact power override on request.


When ordering, state in plain text:

- ▶ Drive power  $P$  [kW] at beginning of control
- ▶ Pilot pressure  $p_{st}$  [bar] in **L5** at drive power  $P$  [kW]
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{V\ max}$  [l/min]

▼ **Effect of power override through pilot pressure increase**

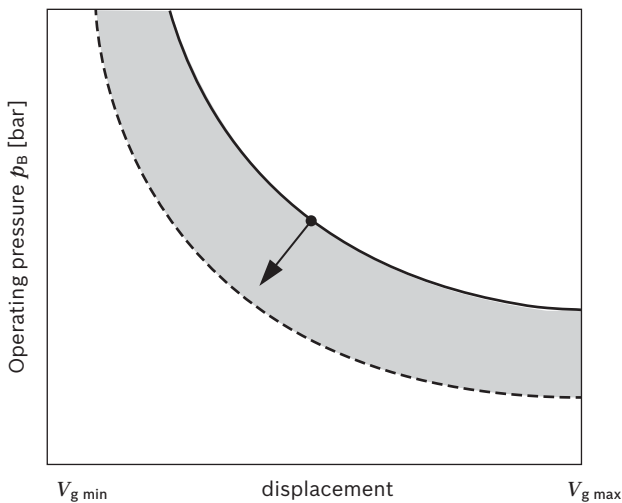

▼ **Circuit diagram L5**

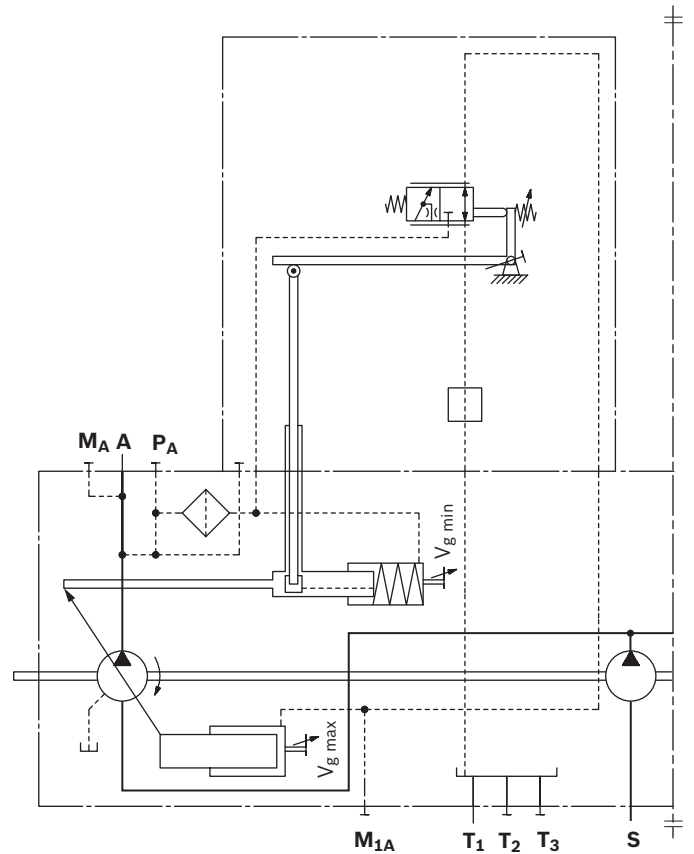

Illustrated for purposes of clarity, only pump A

Change in beginning of control in bar when pilot pressure is changed from minimum to maximum.

The factor pilot pressure to beginning of control is 1:7.


**CR – Summation hp-control of two power-controlled pumps, high-pressure-related override (with stop)**

With two pumps of the same size working in different circuits, the CR controller limits the overall power. The CR works like the normal LR with a fixed maximum power setting along the power hyperbola. The high-pressure-related override reduces the power setpoint in dependence on the operating pressure of the other pump. That happens proportionally below the beginning of control and is blocked by a stop when the minimum power is reached. Here, the **CR** port of the one pump has to be connected to the **M<sub>A</sub>** port of the other pump. The maximum power of the first pump is reached when the second pump is working at idle when depressurized. When defining the maximum power, the idle power of the second pump has to be taken into account. The minimum power of each pump is reached when both pumps are working at high pressure. The minimum power usually equates to 50% of the total power. Power that is released by the pressure control or other overrides remains unconsidered.


Setting range for beginning of control is 50 bar to 300 bar. When ordering, please specify separately for each pump:

- ▶ Maximum drive power  $P_{max}$  [kW]
- ▶ Minimum drive power  $P_{min}$  [kW]
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{Vmax}$  [l/min]

▼ **Characteristic CR**

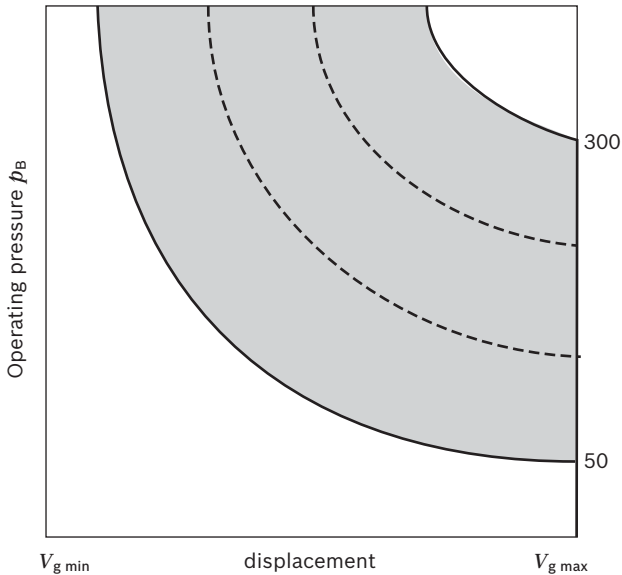


▼ **Circuit diagram CR**

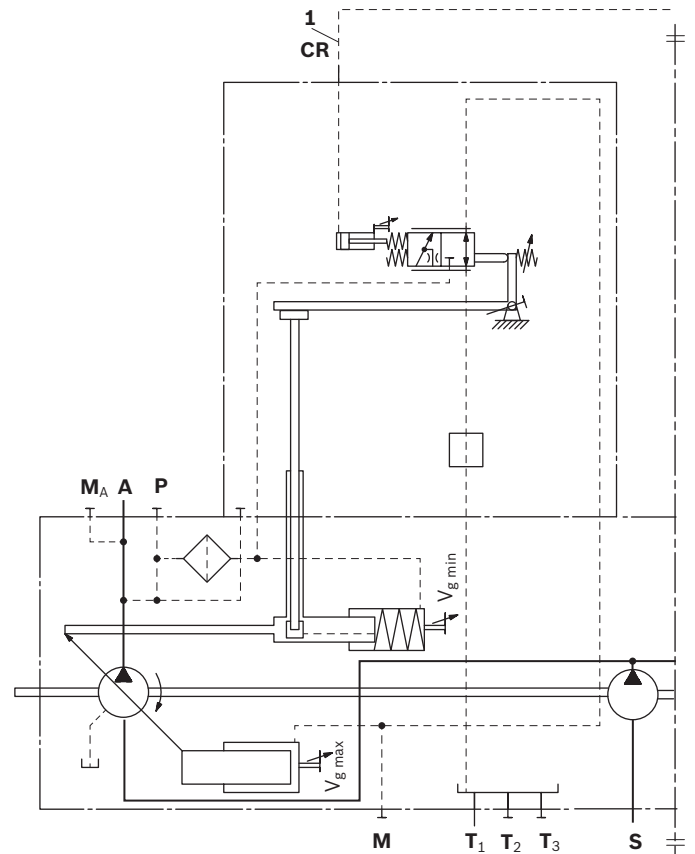

1 Piping is not included in the scope of delivery. Illustrated for purposes of clarity, only pump A

▼ **Effect of power override of a pump with increasing pressure in the 2<sup>nd</sup> pump**

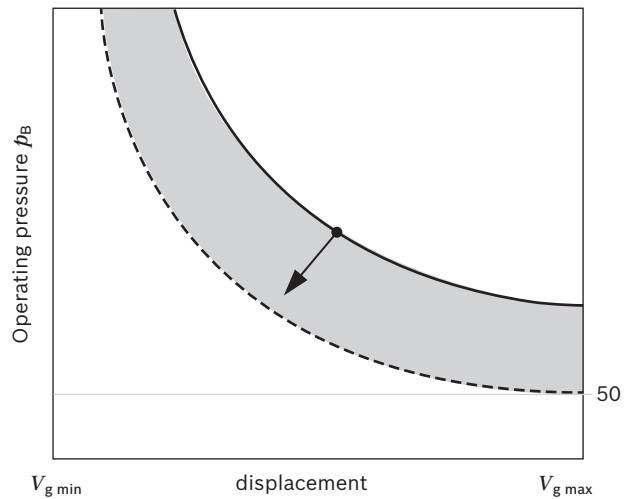

**H3 – Stroke control, hydraulic-proportional, pilot pressure (negative control)**

With pilot-pressure-related control, the pump displacement is adjusted in proportion to the pilot pressure applied at port **H3**.

Basic position without pilot signal is  $V_{g\ max}$ . Mechanically depressurized basic position is  $V_{g\ max}$  (see ordering code digit 09, letter B).


- ▶ Adjustment from  $V_{g\ max}$  to  $V_{g\ min}$   
With increasing pilot pressure, the pump swivels to a smaller displacement.
- ▶ Setting range for beginning of control (at  $V_{g\ max}$ )  
5 bar to 10 bar, standard is 10 bar. State beginning of control in plain text in the order.
- ▶ Maximum permissible pilot pressure  $p_{St\ max} = 100\ bar$

The necessary control fluid is taken from the operating pressure or the external control pressure applied to port **P**. If the pump is to be adjusted from the basic position  $V_{g\ min}$  or from a low operating pressure, port **P** must be supplied with an external control pressure of at least 30 bar, maximum 50 bar.

**Note**


If no external control pressure is applied to **P**, the version “Maximum swivel angle ( $V_{g\ max}$ ), without external control pressure supply” is to be ordered (see ordering code 09, letter A).

▼ **Circuit diagram H3**

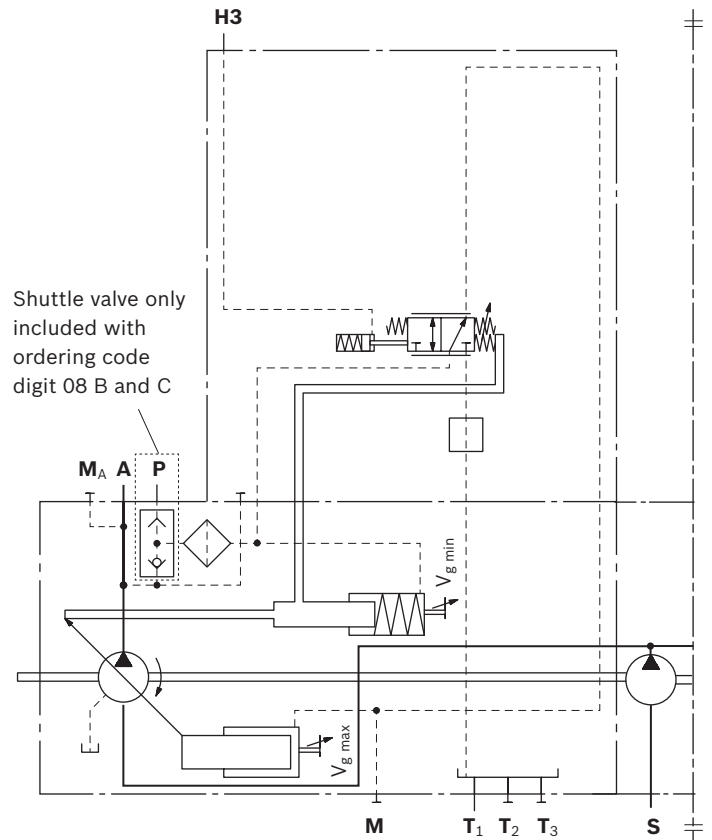

Illustrated for purposes of clarity, only pump A

▼ **Characteristic H3 (negative)**

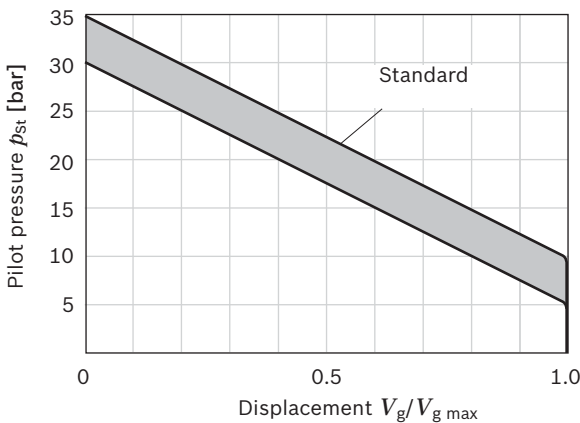

Increase in pilot pressure  $V_{g\ max}$  to  $V_{g\ min}$ :  $\Delta p = 25\ bar$

When ordering, state in plain text:

- ▶ Beginning of control [bar] at  $V_{g\ max}$

**H5 – Stroke control, hydraulic-proportional, pilot pressure (negative control)**

With pilot-pressure-related control, the pump displacement is adjusted in proportion to the pilot pressure applied at port **H5**.

Basic position without pilot signal is  $V_{g \max}$ , which includes the mechanically depressurized basic position  $V_{g \max}$  (see ordering code digit 08).


- ▶ Maximum permissible pilot pressure  $p_{St \max} = 100$  bar
- ▶ Adjustment from  $V_{g \max}$  to  $V_{g \min}$   
With increasing pilot pressure, the pump swivels to a smaller displacement.
- ▶ Beginning of control (at  $V_{g \max}$ ) 10 bar

The necessary control power is taken from the operating pressure or the external control pressure applied to port **P**. If the pump is to be adjusted at low operating pressure, port **P** must have an external control pressure supply of at least 30 bar, maximum 50 bar.

**Note**


If no external control pressure is applied to **P**, the version “Maximum swivel angle ( $V_{g \max}$ ), without external control pressure supply” is to be ordered (see ordering code digit 08, A).

▼ **Characteristic H5 (negative)**

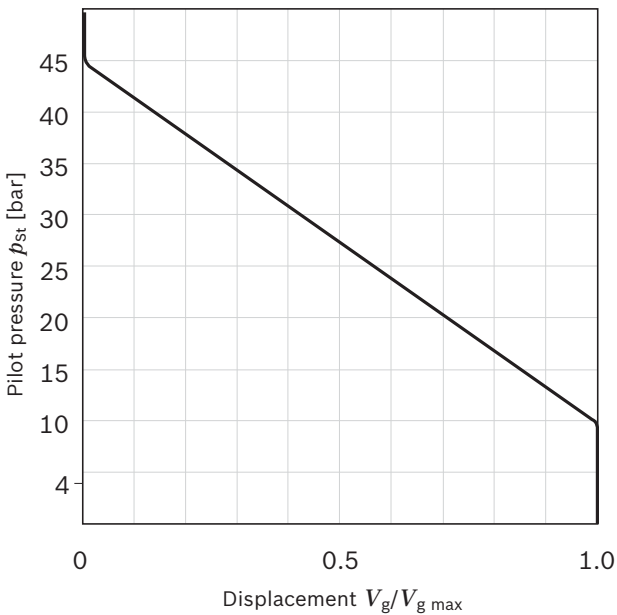

Increase in pilot pressure  $V_{g \max}$  to  $V_{g \min}$ :  $\Delta p = 35$  bar

▼ **Circuit diagram H5**

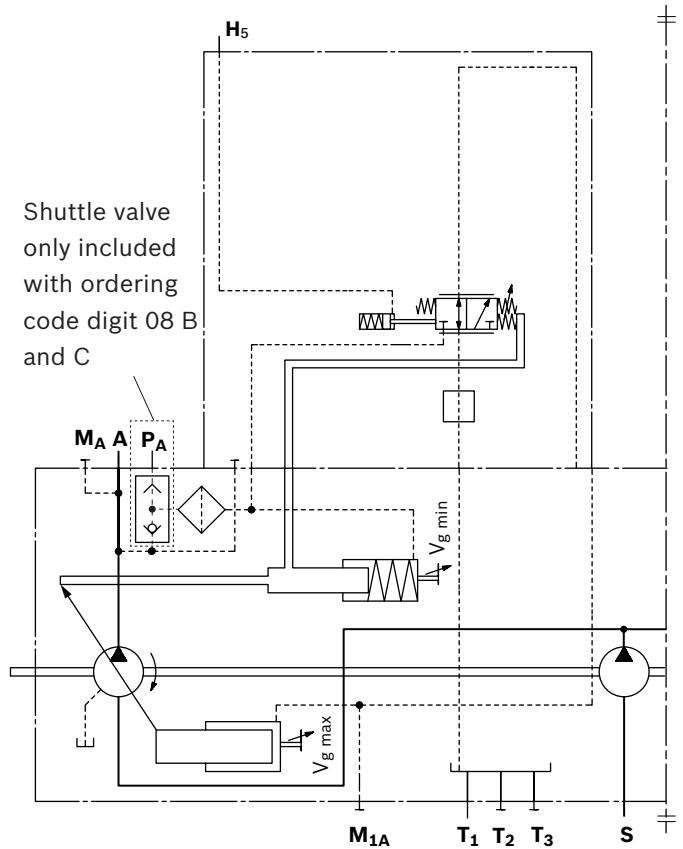

Illustrated for purposes of clarity, only pump A

**H6 – Stroke control, hydraulic-proportional, pilot pressure (positive control)**

With pilot-pressure-related control, the pump displacement is adjusted in proportion to the pilot pressure applied at port **H6**.

Basic position without pilot signal is  $V_{g\ min}$ , which includes the mechanically depressurized basic position  $V_{g\ min}$  (see ordering code digit 08).


- ▶ Maximum permissible pilot pressure  $p_{St\ max} = 100\ bar$
- ▶ Adjustment from  $V_{g\ min}$  to  $V_{g\ max}$   
With increasing pilot pressure the pump swivels to a larger displacement.
- ▶ Beginning of control (at  $V_{g\ min}$ ) 10 bar.

The necessary control power is taken from the operating pressure or the external control pressure applied to port **P**. If the pump is to be adjusted from the zero basic setting or from a low operating pressure, port **P** must be supplied with an external control pressure of at least 30 bar, maximum 50 bar.

**Note**


If no external control pressure is applied to **P**, the version “Maximum swivel angle ( $V_{g\ max}$ ), without external control pressure supply” is to be ordered (see ordering code digit 08, A).

▼ **Characteristic H6 (positive)**

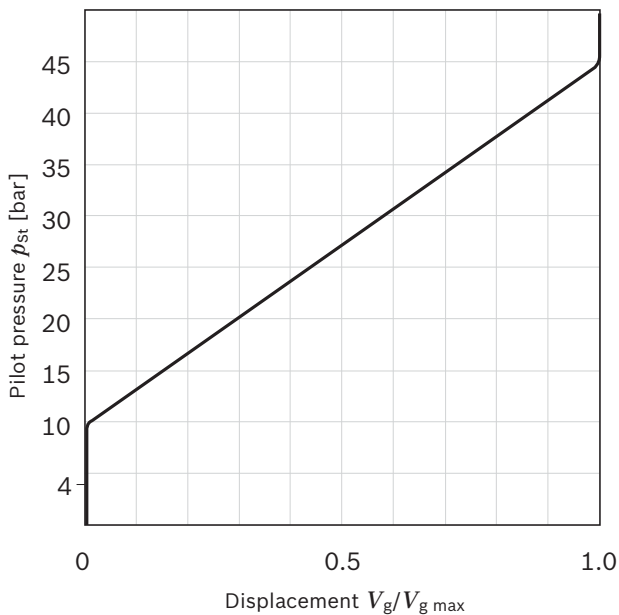

Increase in pilot pressure  $V_{g\ min}$  to  $V_{g\ max}$ :  $\Delta p = 35\ bar$

▼ **Circuit diagram H6**

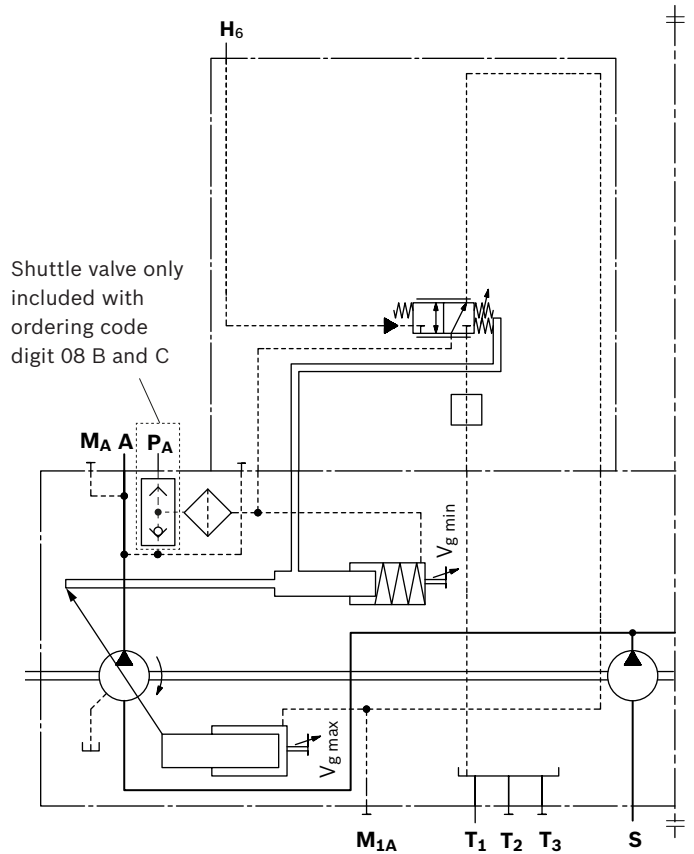

Illustrated for purposes of clarity, only pump A

## Stroke control

### E1/E2 – Stroke control, electric, proportional (positive control)


With the electrical stroke limiter with proportional solenoid, the pump displacement is steplessly adjusted in proportion to the current via the magnetic force. Basic position without pilot signal is  $V_{g \min}$ , which includes the mechanically depressurized basic position  $V_{g \min}$  (see ordering code digit 08).

With increasing control current the pump swivels to a higher displacement (from  $V_{g \min}$  to  $V_{g \max}$ ). The necessary control fluid is taken from the operating pressure or the external control pressure applied to port **P**. If the pump is to be adjusted from the basic position  $V_{g \min}$  or from a low operating pressure, port **P** must be supplied with an external control pressure of at least 30 bar, maximum 50 bar.

#### Note

If there is no external control pressure applied to **P**, the version “Maximum swivel angle ( $V_{g \max}$ ), without external control pressure supply” must be ordered (see ordering code digit 08, A).

#### ▼ Characteristic E1/E2

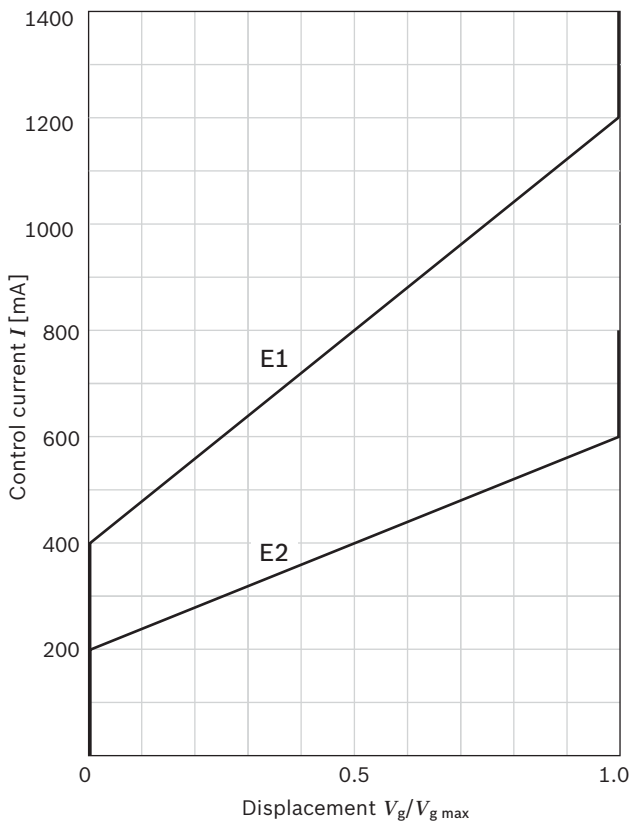

BODAS RC controllers with application software and analog amplifier RA are available for controlling the proportional solenoids.


Further information can also be found on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics).

Technical data, solenoid	E1	E2
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Control current		
Beginning of control at $V_{g \min}$	400 mA	200 mA
End of control at $V_{g \max}$	1200 mA <sup>1)</sup>	600 mA <sup>2)</sup>
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 Hz	100 Hz
Duty cycle	100%	100%
Type of protection: see connector version page 29		

When ordering, state in plain text:

- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{V \max}$  [l/min]
- ▶ Minimum flow  $q_{V \min}$  [l/min]

#### ▼ Circuit diagram E1/E2

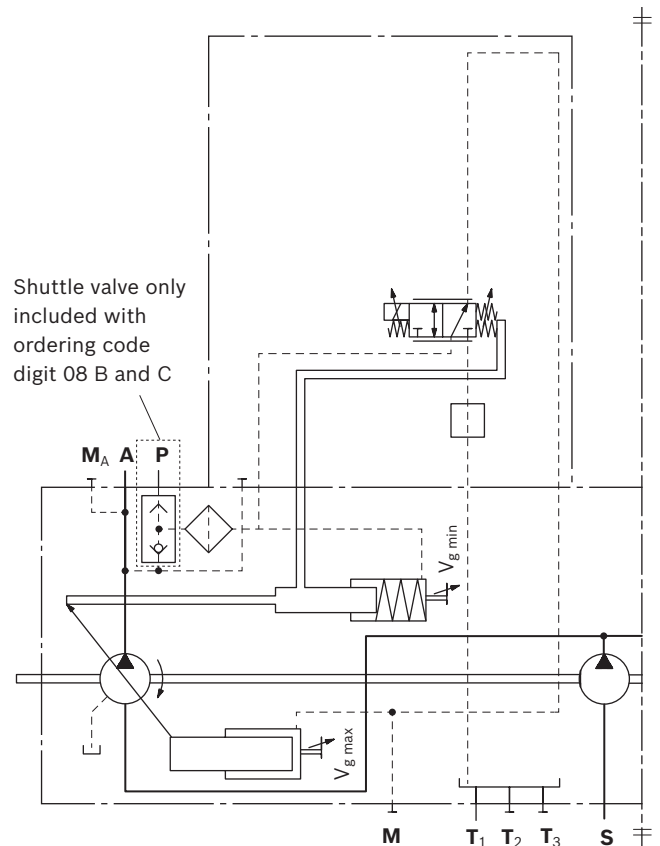

- 1) Because of the control hysteresis, a control current of up to 1300 mA may be required for the  $V_{g \max}$  position.
- 2) Because of the control hysteresis, a control current of up to 650 mA may be required for the  $V_{g \max}$  position.





**D2 – Proportional pressure control with one-side swiveling, electric override (M2 with two-side swiveling) (positive control)**

The pressure controller keeps the pressure in a hydraulic system constant within its control range even under varying flow conditions. The variable pump only supplies as much hydraulic fluid as is required by the consumers.

If the operating pressure exceeds the setting at the integrated pressure control valve, the pump is automatically swiveled back to reduce the control differential.

- ▶ Initial position in depressurized state:  $V_{g \max}$
- ▶ Pressure controller basic setting: 32 bar/300 mA


The basic setting of the pressure controller can be overridden. The pressure control value is proportional to the electrical current acting on the solenoids of the pressure reducing valve.

- ▶ Pressure setting overridden:  
32 bar/300 mA to 350 bar/750 mA
- ▶ Auxiliary pressure for controlling D2 at port **Y**:  
 $p_{\min} = 40 \text{ bar}$ ;  $p_{\max} = 50 \text{ bar}$ .  
Port **X** acts solely as a measuring port ( $p_{\max} = 50 \text{ bar}$ ).  
Pressurization leads to an impermissible increase in pressure.

**Notice**

Applying current above the limit of 750 mA to the proportional solenoid results in an impermissible increase in pressure.  
Make sure that currents above the permissible limit are not applied to the proportional solenoid.

▼ **Characteristic D2**

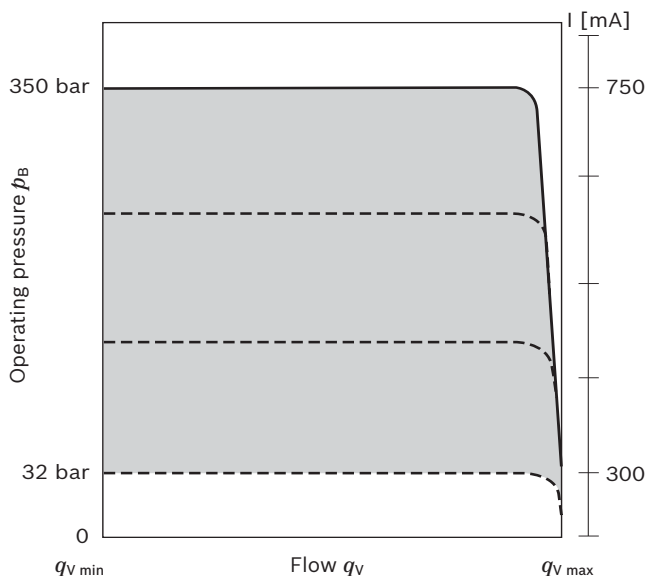


Technical data, solenoid	D2	D2
Voltage	24 V	24 V
Control current		
Beginning of control at $V_{g \min}$		300 mA
End of control at $V_{g \max}$		750 mA
Current limit	750 mA	750 mA
Nominal resistance (at 20 °C (68 °F))	12 $\Omega$	12 $\Omega$
Dither frequency	200 Hz	200 Hz
Duty cycle	100%	100 %
Type of protection: see connector version page 63		

The following electronic controllers and amplifiers are available for controlling the proportional solenoids:

BODAS RC controllers Series	Data sheet
20	95200
21	95201
22	95202
30	95203
and application software	95230
Analog amplifier RA	95230

▼ **Circuit diagram D2**

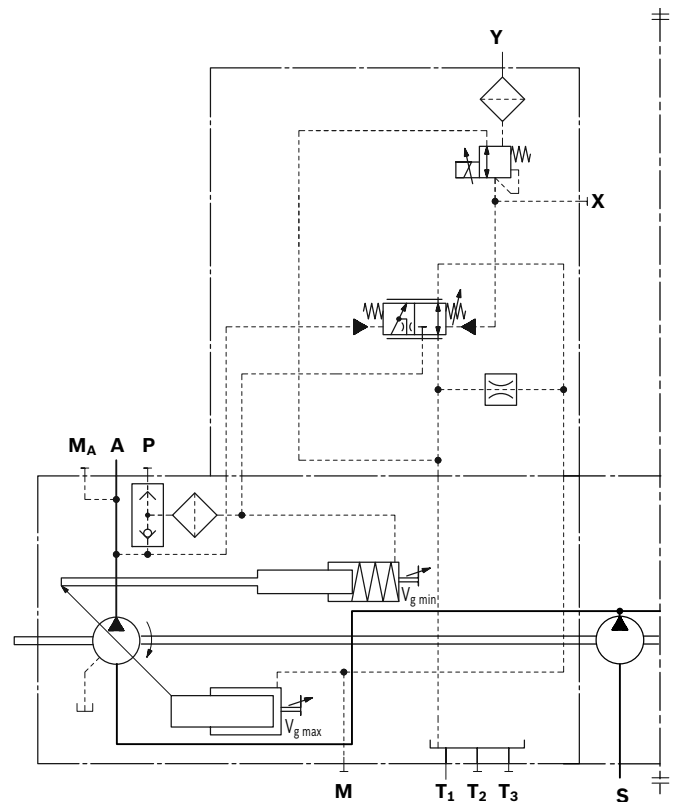

**DRS0 – Pressure control with load sensing**


The load sensing controller works as a load-pressure controlled flow controller and adjusts the displacement of the pump to the volume required by the consumer. The flow of the pump is then dependent on the cross section of the external metering orifice (1), which is located between the pump and the consumer. Below the setting of the pressure controller and within the control range of the pump, the flow is not dependent on the load pressure. The metering orifice is usually a separately located load sensing directional valve (control block). The position of the directional valve spool determines the opening cross-section of the metering orifice and thus the flow of the pump. The load sensing controller compares pressure before and after the sensing orifice and keeps the pressure drop (differential pressure  $\Delta p$ ) across the orifice – and therefore the flow – constant. If the differential pressure  $\Delta p$  at the metering orifice rises, the pump is swiveled back (toward  $V_{g \text{ min}}$ ). If the differential pressure  $\Delta p$  drops, the pump is swiveled out (toward  $V_{g \text{ max}}$ ) until equilibrium at the metering orifice is restored.

$$\Delta p_{\text{measuring orifice}} = p_{\text{pump}} - p_{\text{consumer}}$$

- ▶ Setting range for  $\Delta p$  14 to 30 bar (please state in plain text)
- ▶ Standard adjustment 14 bar

The stand-by pressure in zero stroke operation (metering orifice closed) is slightly higher than the  $\Delta p$ -setting.

▼ **Characteristic DRS0**

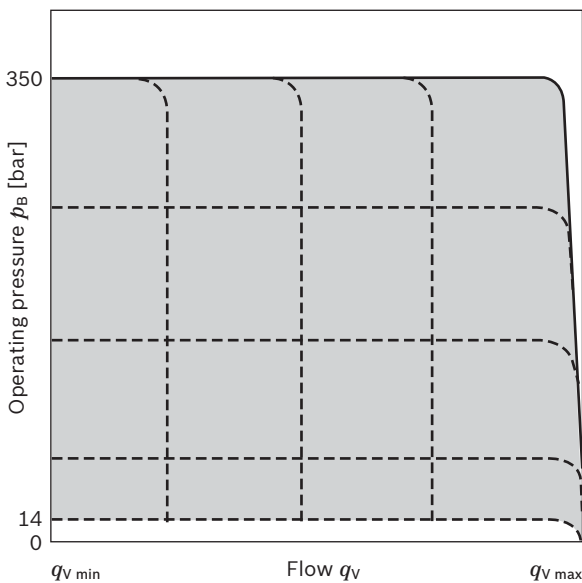


**Hydraulic  $V_{g \text{ min}}$  stop**

The hydraulic  $V_{g \text{ min}}$  stop opens the valve outlet to the case drain chamber when a minimum position is reached, damping the controller and reducing overshoot. This can cause a connection from high pressure or external control pressure via the controller and the hydraulic  $V_{g \text{ min}}$  stop to the case drain chamber.

When ordering, state in plain text:

- ▶ Pressure setting  $p$  [bar] at pressure controller DR
- ▶ Differential pressure  $\Delta p$  [bar] at load sensing controller S0

▼ **Circuit diagram DRS0**

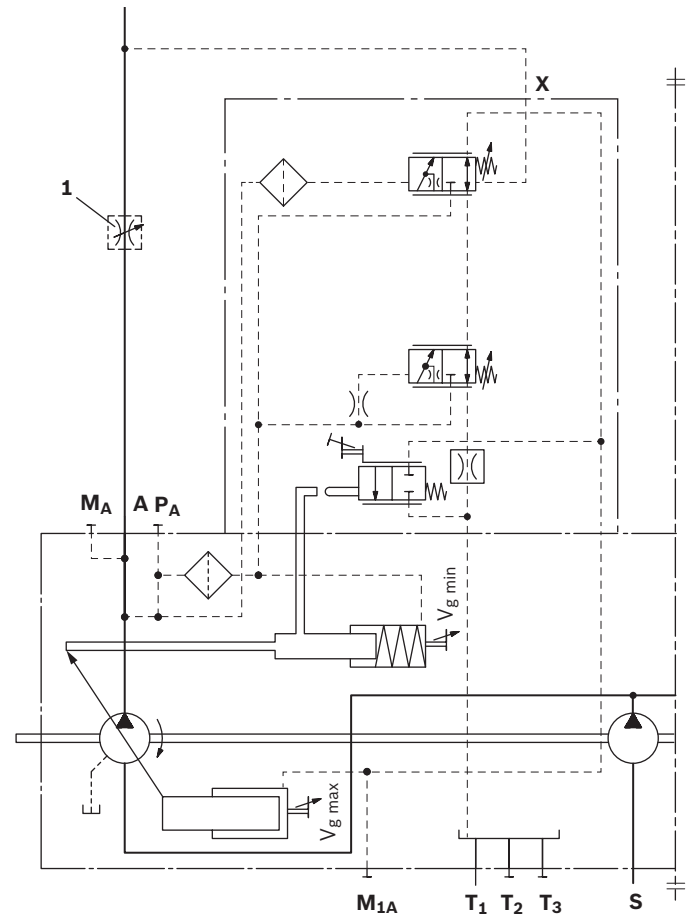

Illustrated for purposes of clarity, only pump A

- 1 The measuring orifice (control block) is not included in the scope of delivery.

**C5H3 – Cross-sensing control with power-controlled double pumps, stroke control, hydraulic-proportional, pilot-pressure related**

The method of function is made up of controllers L5 and CR to C5.

For the operation, refer to chapters “L5 – Power controller, hydraulic-proportional override (negative control)” on page 13 and “CR – Summation hp-control of two power-controlled pumps, high-pressure-related override (with stop)” on page 14.


The function of H3 controller “H3 – Stroke control, hydraulic-proportional, pilot pressure (negative control)” can be found on page 15.

Setting range for beginning of control 50 to 300 bar


When ordering, please specify:

- ▶ Maximum drive power  $P_{max}$  [kW]
- ▶ Minimum drive power  $P_{min}$  [kW]
- ▶ Drive speed  $n$  [rpm]
- ▶ Maximum flow  $q_{Vmax}$  [L/min]

▼ **Characteristic CR**

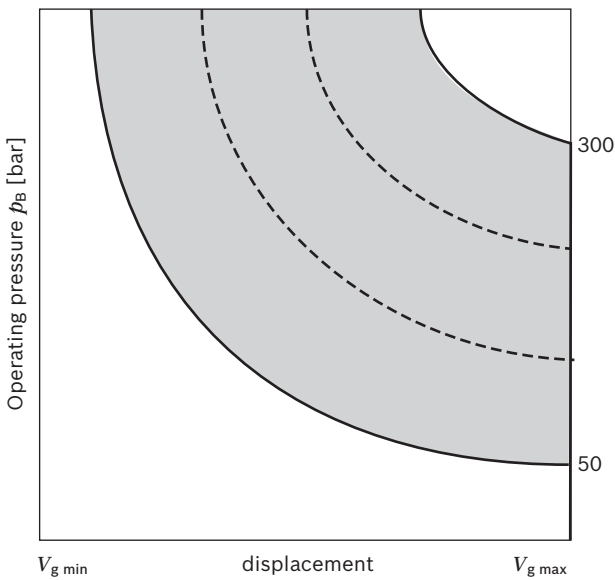


▼ **Circuit diagram CR**

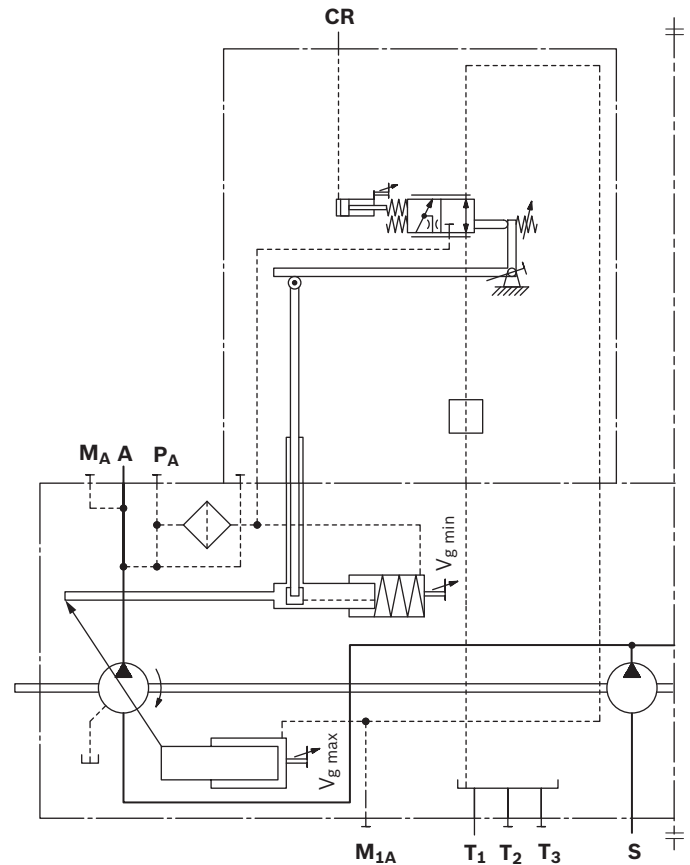

Illustrated for purposes of clarity, only pump A


▼ **Effect of power override of a pump with increasing pressure in the 2<sup>nd</sup> pump**

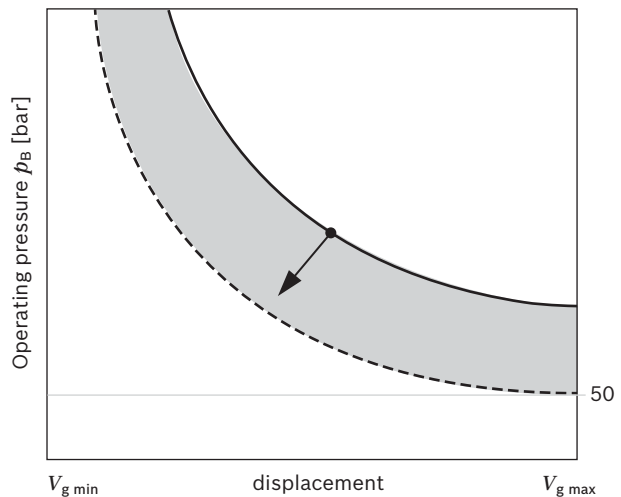

**Dimensions, size 280**


**LRDRS0 – Power controller with pressure controller, load sensing and with electric swivel angle sensor (Part 1/2)**

Clockwise rotation

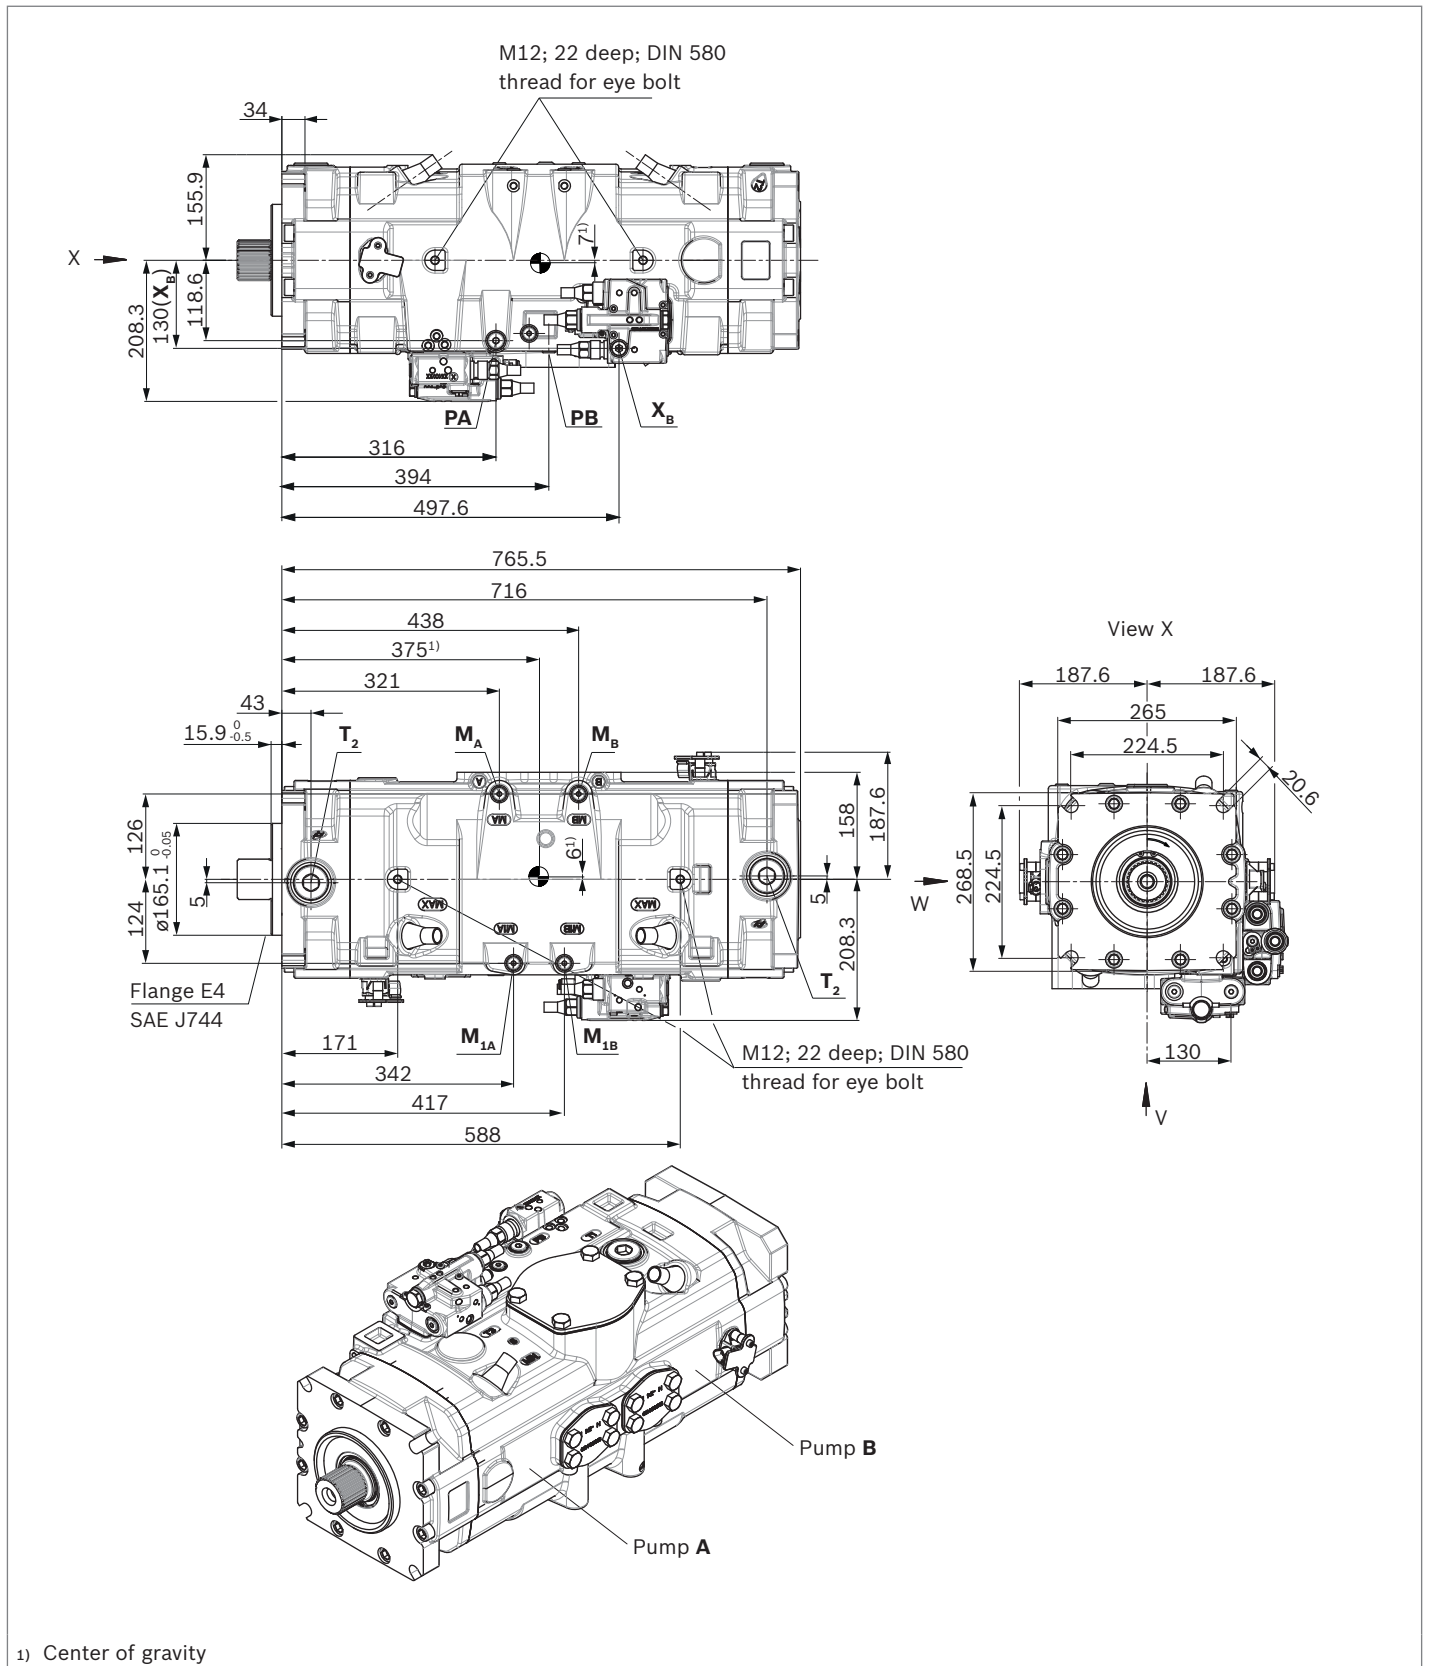

**LRDRS0 – Power controller with pressure controller, load sensing and with electric swivel angle sensor (Part 2/2)**

Clockwise rotation

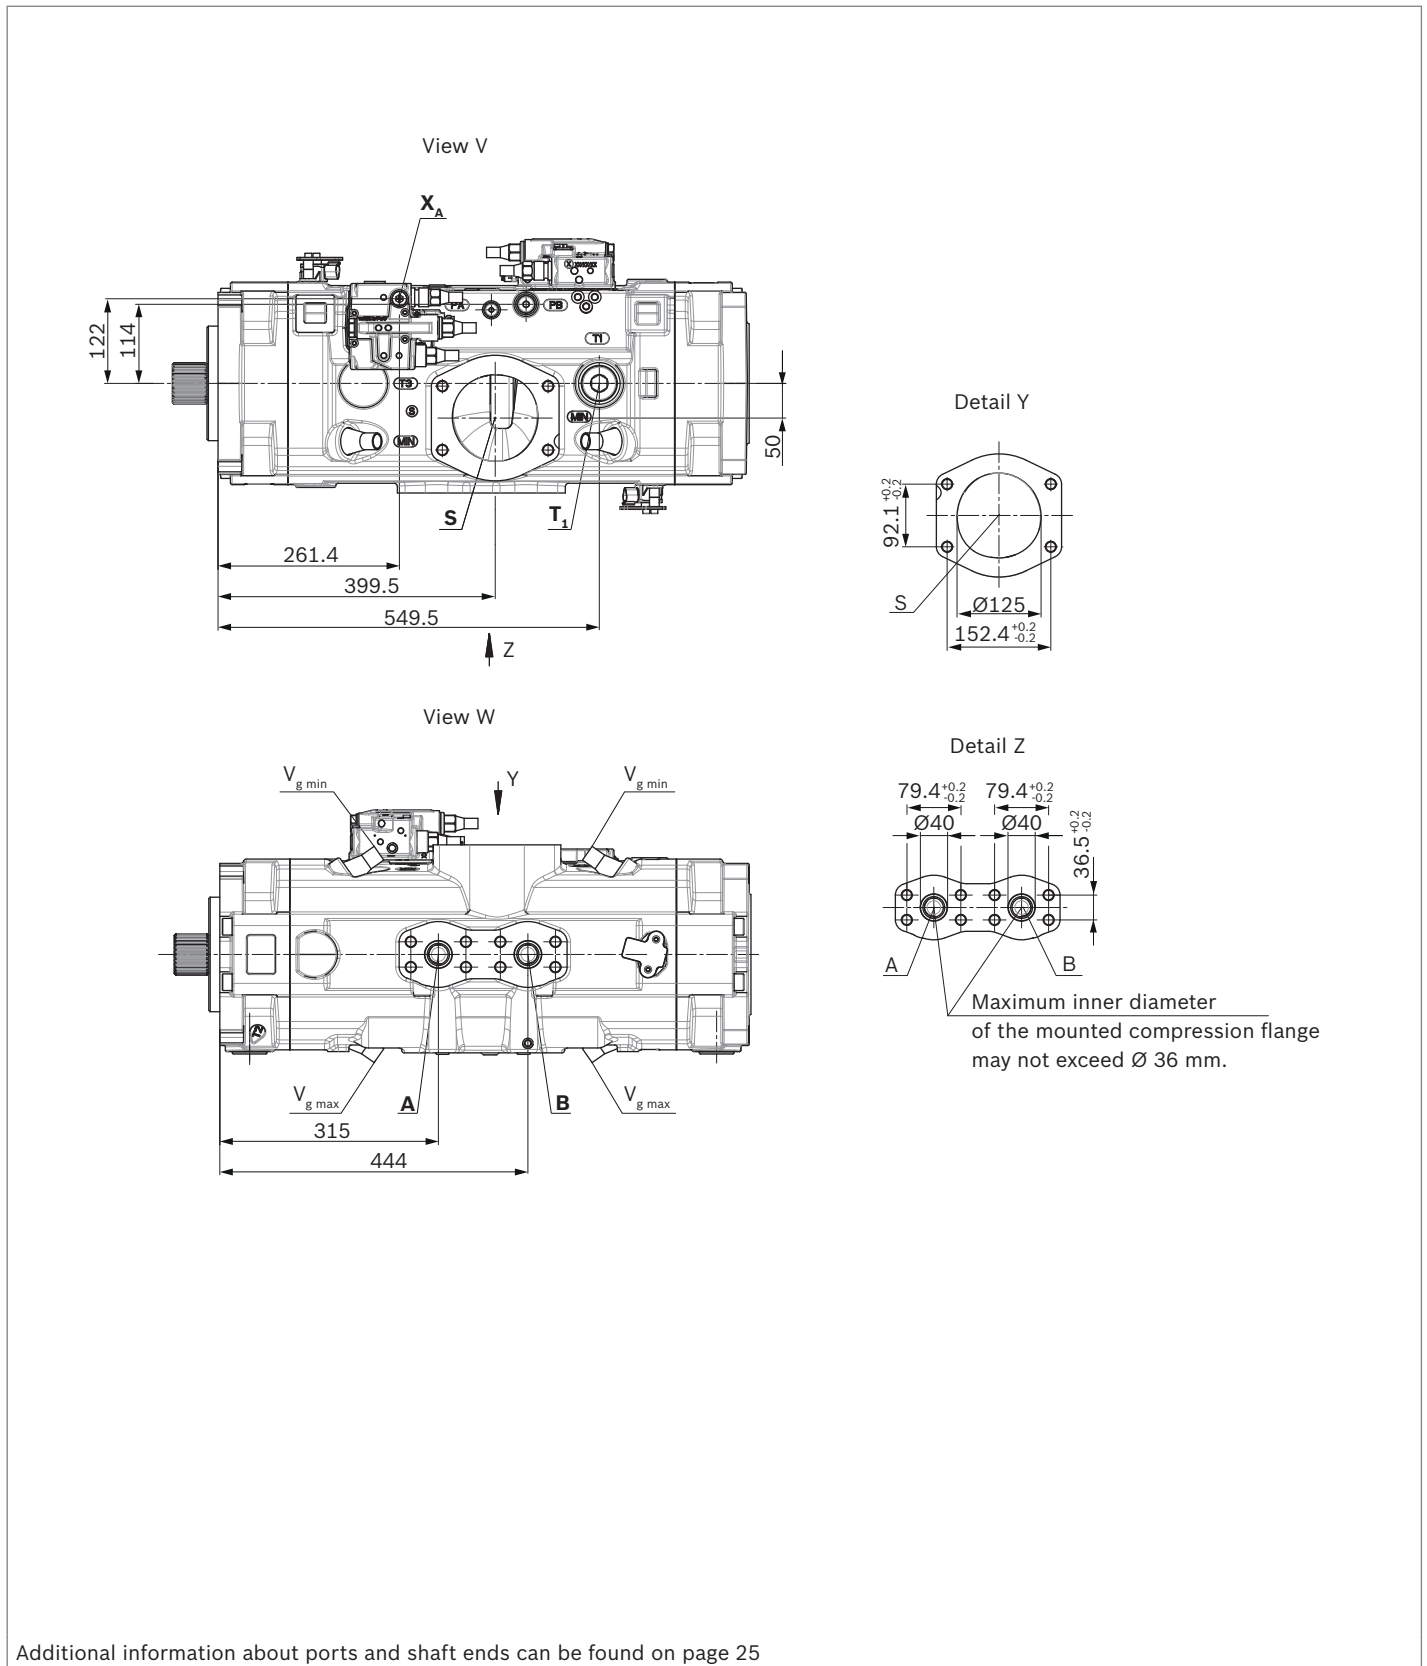


**SAE-version**

Ports		Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>7)</sup>	State <sup>9)</sup>		
Pump A	Pump B				Pump A	Pump B	
<b>A</b>	<b>B</b>	Service line port Fastening thread	SAE J518 <sup>5)</sup> ASME B1.1	1 1/2 in 5/8-11UNC-2B; 35 deep	420	O	O
<b>S</b>		Suction port Fastening thread	SAE J518 <sup>5)</sup> ASME B1.1	5 in 5/8-11UNC-2B; 35 deep	30	O	
<b>T<sub>1</sub></b>	–	Drain port	ISO 11926 <sup>6)</sup>	1 5/8; 19.5 deep	10	X <sup>8)</sup>	–
<b>T<sub>2</sub></b>	<b>T<sub>2</sub></b>	Drain port	ISO 11926 <sup>6)</sup>	1 5/8; 19.5 deep	10	O <sup>8)</sup>	O <sup>8)</sup>
<b>CR</b>	<b>CR</b>	Pilot signal (only at CR)	ISO 11926	9/16-18UNF-2B; 13 deep	420	O	O
<b>H.</b>	<b>H.</b>	Pilot signal (only at H3, H4, H5, H6)	ISO 11926	9/16-18UNF-2B; 13 deep	100	O	O
<b>L.</b>	<b>L.</b>	Override power control (only at L3, L4, L5, L6)	ISO 11926	9/16-18UNF-2B; 13 deep	100	O	O
<b>M<sub>1A</sub></b>	<b>M<sub>1B</sub></b>	Measuring, control pressure	ISO 11926 <sup>6)</sup>	9/16-18UNF-2B; 13 deep	420	X	X
<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>	Measuring, operating pressure A, B	ISO 11926 <sup>6)</sup>	9/16-18UNF-2B; 13 deep	420	X	X
<b>P<sub>A</sub></b>	<b>P<sub>B</sub></b>	External control pressure (Ordering code digit 9 version B or C = with external control pressure supply)	ISO 11926 <sup>6)</sup>	9/16-18UNF-2B; 13 deep	50	O	O
		Port <b>P</b> is without function (Ordering code digit 9 version A = without external control pressure supply)	ISO 11926 <sup>5)</sup>	3/4-16UNF-2B; 12.5 deep	420	X	X


**Metric version**

Ports		Standard	Size <sup>2)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>7)</sup>	State <sup>9)</sup>		
Pump A	Pump B				Pump A	Pump B	
<b>A</b>	<b>B</b>	Service line port Fastening thread	SAE J518 <sup>5)</sup> DIN 13	1 1/2 in M16 x 2; 24 deep	420	O	O
<b>S</b>		Suction port Fastening thread	SAE J518 <sup>5)</sup> DIN 13	5 in M16 x 2; 24 deep	30	O	
<b>T<sub>1</sub></b>	–	Drain port	ISO 6149 <sup>6)</sup>	M42 x 2; 19.5 deep	10	X <sup>8)</sup>	–
<b>T<sub>2</sub></b>	<b>T<sub>2</sub></b>	Drain port	ISO 6149 <sup>6)</sup>	M42 x 2; 19.5 deep	10	O <sup>8)</sup>	O <sup>8)</sup>
<b>CR</b>	<b>CR</b>	Pilot signal (only at CR)	ISO 6149	M14 x 1.5; 11.5 deep	420	O	O
<b>H.</b>	<b>H.</b>	Pilot signal (only at H3, H4, H5, H6)	ISO 6149	M14 x 1.5; 11.5 deep	100	O	O
<b>L.</b>	<b>L.</b>	Override power control (only at L3, L4, L5, L6)	ISO 6149	M14 x 1.5; 11.5 deep	100	O	O
<b>M<sub>1A</sub></b>	<b>M<sub>1B</sub></b>	Measuring, control pressure	ISO 6149 <sup>6)</sup>	M14 x 1.5; 12 deep	420	X	X
<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>	Measuring, operating pressure A, B	ISO 6149 <sup>6)</sup>	M14 x 1.5; 12 deep	420	X	X
<b>P<sub>A</sub></b>	<b>P<sub>B</sub></b>	External control pressure (Ordering code digit 9 version B or C = with external control pressure supply)	ISO 6149 <sup>6)</sup>	M14 x 1.5; 11.5 deep	50	O	O
		Port <b>P</b> is without function (Ordering code digit 9 version A = without external control pressure supply)	ISO 6149 <sup>6)</sup>	M18 x 1.5; 14.5 deep	420	X	X

▼ **Splined shaft SAE J744**

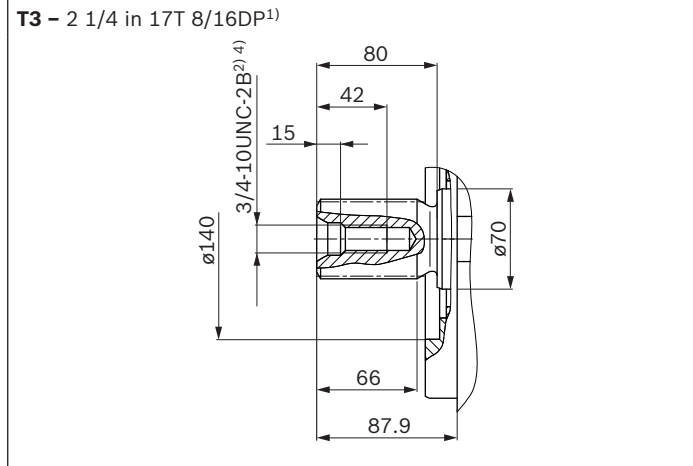

▼ **Splined shaft DIN 5480**

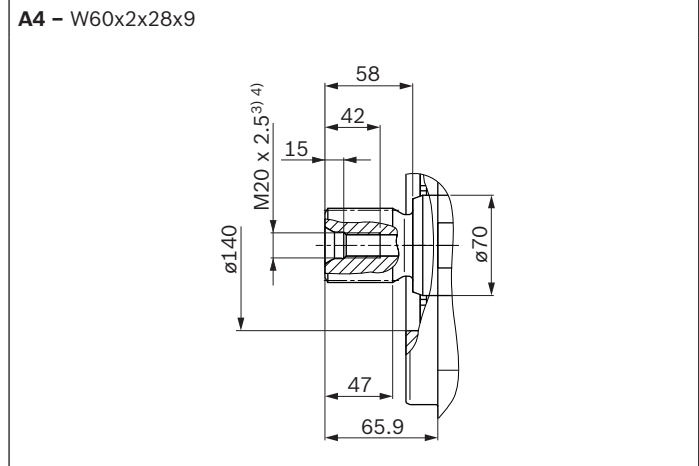


1) ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Thread according to ASME B1.1  
 3) Centering bore according to DIN 332 (thread according to DIN 13)  
 4) Observe the general instructions on page 32 concerning the maximum tightening torques.  
 5) Metric fixing thread is a deviation from standard.  
 6) The spot face can be deeper than as specified in the standard


7) Depending on the application, momentary pressure peaks may occur. Keep this in mind when selecting measuring devices and fittings.  
 8) Depending on installation position, T<sub>1</sub>, T<sub>2</sub> or T<sub>3</sub> must be connected (see also Installation instructions on pages 30 and 31).  
 9) O = Must be connected (plugged on delivery)  
 X = Plugged (in normal operation)




▼ **xxS0 – Additional controller; Load sensing, internal pump pressure, fixed setting**

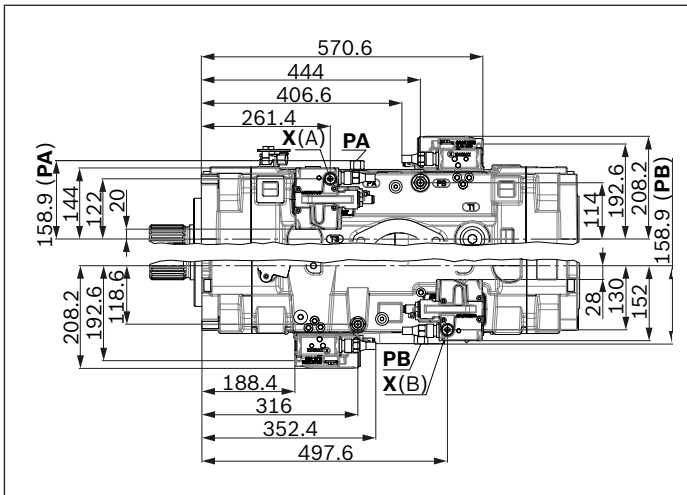


▼ **L3/L4 – Power controller, electric-proportional override**

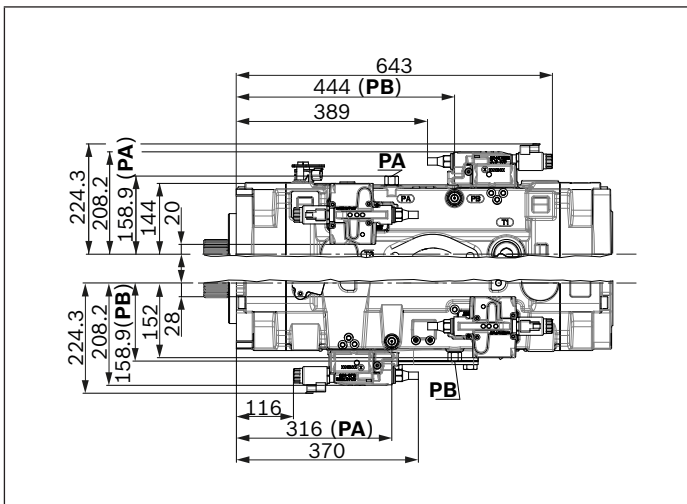


▼ **CR – Power controller, hydraulic-proportional override, high pressure, with stop**

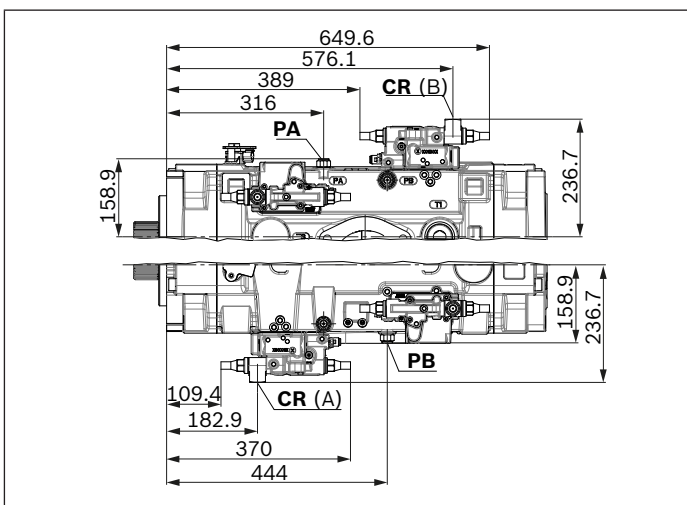


▼ **E1/E2 – Stroke control electric-proportional**

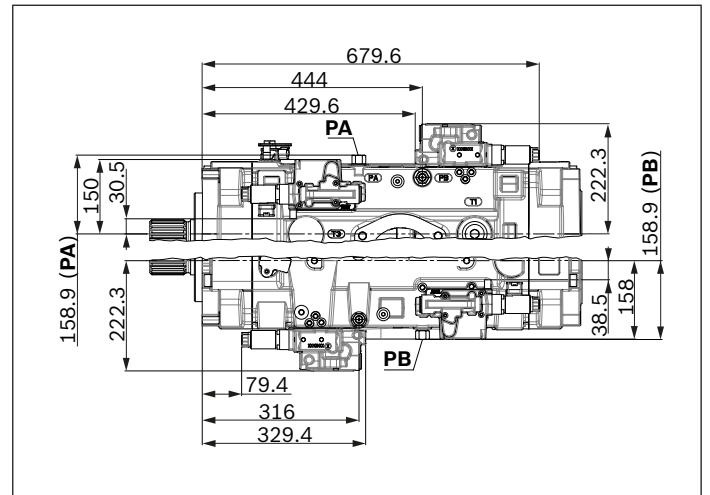


▼ **L5/L6 – Power controller, hydraulic-proportional override**

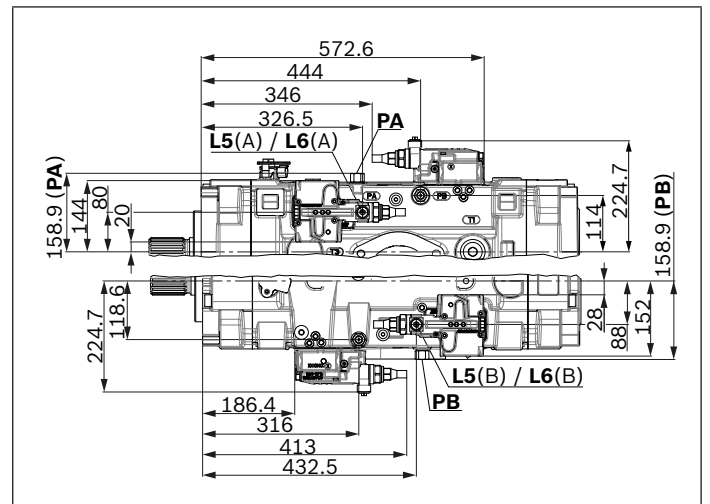

▼ **DR – Pressure controller**

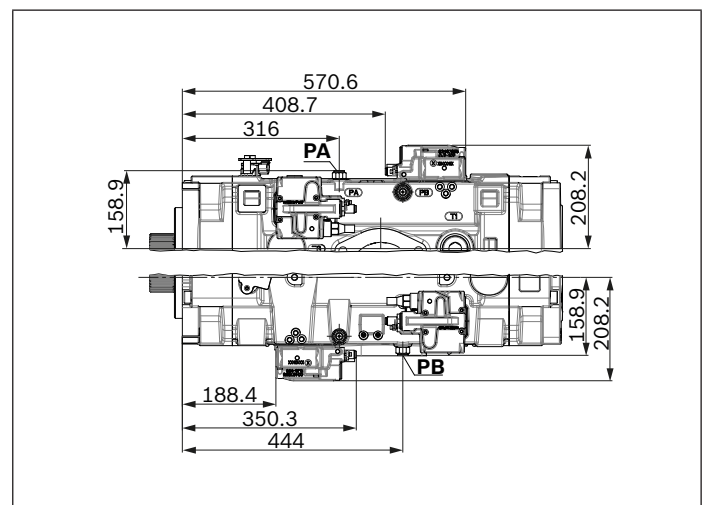

▼ **H3/H4/H5/H6 – Stroke control, hydraulic-proportional, pilot pressure**

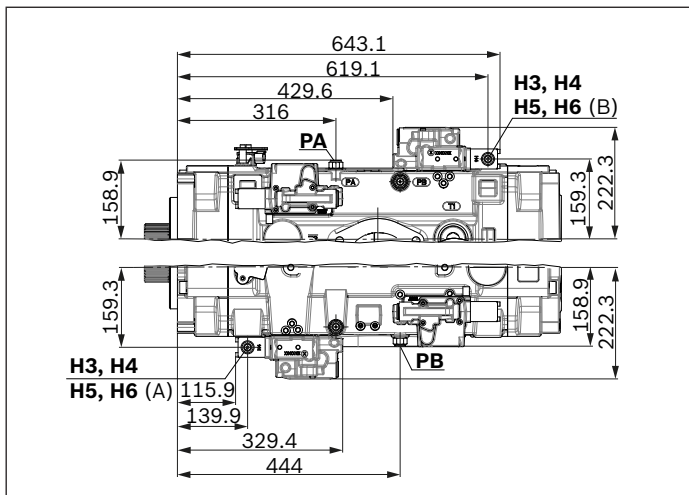

## Connector for solenoids


### DEUTSCH DT04-2P-EP04

Molded connector, 2-pin, without bidirectional suppressor diode

There is the following type of protection with mounted mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)


#### ▼ Circuit diagram symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

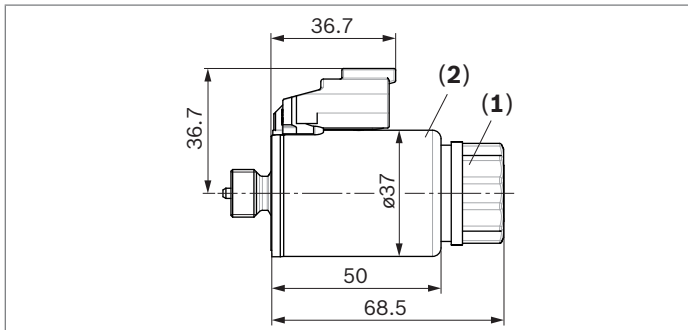

### Changing connector orientation

If necessary, you can change the position of the connector by turning the solenoid.

To do this, proceed as follows:

- ▶ Loosen the mounting nut **(1)** of the solenoid.  
To do this, turn the mounting nut **(1)** one revolution counter-clockwise.
- ▶ Turn the solenoid body **(2)** to the desired orientation.
- ▶ Re-tighten the mounting nut.  
Tightening torque: 5+1 Nm.  
(WAF 26, 12-sided DIN 3124)

On delivery, the position of the connector may differ from that shown in the brochure or drawing.

### AMP Junior-Timer, 2-pin

Type of protection:


- ▶ IP69K (DIN 40050-9)

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R901022127); see also data sheet 08006.

- ▶ Outer diameter of conductor 2.2 mm to 3.0 mm

#### Manual override

When power supply to the vehicle is interrupted, maximum operating pressure can be established by means of a manual override so that the vehicle can be driven under its own power from a danger zone.

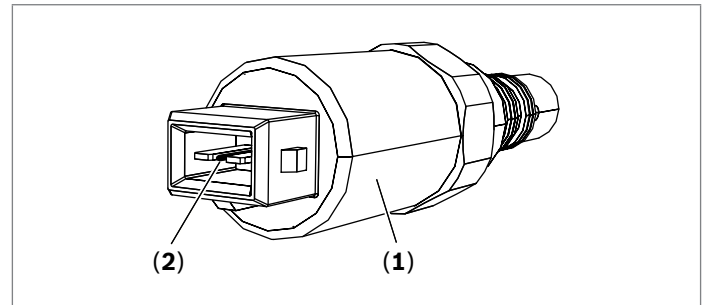

To activate the manual override:

- ▶ Unplug the electrical connector from the pressure reducing valve **(1)**.
- ▶ Using a pointed tool, press both PINs **(2)** in up to the stop.  
Both PINs must remain in the depressed position!

## Installation instructions

### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines.

Particularly in the installation position “drive shaft upwards”, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running.

The case drain fluid in the case interior must be directed to the reservoir via the highest drain port (**T<sub>1</sub>**, **T<sub>2</sub>**, **T<sub>3</sub>**).

For combinations of multiple units, the case drain fluid must be drained off at each pump. If a shared drain line is used for this purpose, make sure that the case pressure in each pump is not exceeded. In the event of pressure differences at the drain ports of the units, the shared drain line must be changed so that the minimum permissible case pressure of all connected units is not exceeded in any situation. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction line and drain line must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{S \max} = 800 \text{ mm}$ . The minimum suction pressure at port **S** must also not fall below 0.8 bar absolute (without charge pump) or 0.7 bar absolute (with charge pump) during operation and during a cold start.

When designing the reservoir, ensure adequate distance between the suction line and the case drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

### Note

In certain installation positions, an influence on the control characteristic curves can be expected. Gravity, dead weight and case pressure can cause minor characteristic shifts and changes in response time.

### Installation position



See examples **1** to **6** below.

Further installation positions are available upon request.

Recommended installation position: **1** and **2**

### Below-reservoir installation (standard)

Below-reservoir installation is when the axial piston unit is installed outside of the reservoir and below the minimum fluid level.

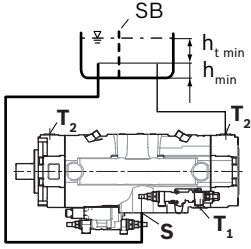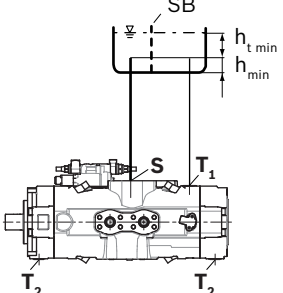Installation position	Air bleeding	Filling
<b>1</b> 	<b>T<sub>2</sub></b>	<b>S + T<sub>2</sub></b>
<b>2</b> 	<b>T<sub>1</sub></b>	<b>S + T<sub>1</sub></b>


**Above-reservoir installation**

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.


To prevent the axial piston unit from draining, a height difference  $h_{ES\ min}$  of at least 25 mm at port **T<sub>2</sub>** is required in position 6. Observe the maximum permissible suction height  $h_{S\ max} = 800$  mm.

Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

Installation position	Air bleeding	Filling
<b>3</b>	<b>F</b>	<b>T<sub>2</sub> (F)</b>



Installation position	Air bleeding	Filling
<b>4</b>	<b>S (F)</b>	<b>T<sub>1</sub> (F)</b>

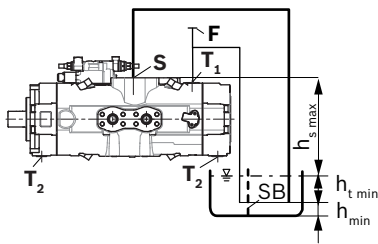

Key	
<b>F</b>	Filling / air bleeding
<b>S</b>	Suction port
<b>T</b>	Drain port
<b>SB</b>	Baffle (baffle plate)
$h_{t\ min}$	Minimum required immersion depth (200 mm)
$h_{min}$	Minimum required distance to reservoir base (100 mm)
$h_{ES\ min}$	Minimum necessary height required to protect the axial piston unit from draining (25 mm)
$h_{S\ max}$	Maximum permissible suction height (800 mm)

**Inside-reservoir installation**



Inside-reservoir installation is when the axial piston unit is installed in the reservoir below the minimum fluid level.

The axial piston unit is completely below the hydraulic fluid. If the minimum fluid level is equal to or below the upper edge of the pump, see chapter “Above-reservoir installation”.

Axial piston units with electrical components (e.g., electric control, sensors) may not be installed in a reservoir below the fluid level.

Exception: Installation of the pump with E2/E6 control only with HIRSCHMANN connector and if mineral hydraulic fluids are used and the fluid temperature in the reservoir does not exceed 80 °C

Installation position	Air bleeding	Filling
<b>5</b>	via the highest available port <b>T<sub>2</sub></b>	automatically via the open port <b>T<sub>2</sub></b> due to position below hydraulic fluid level
<b>6</b>	via the highest available port <b>T<sub>1</sub></b>	automatically via the open port <b>T<sub>1</sub></b> due to position below hydraulic fluid level

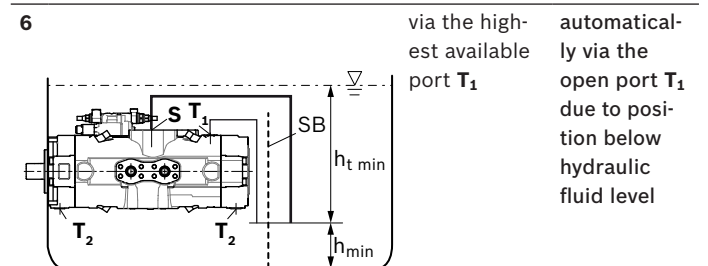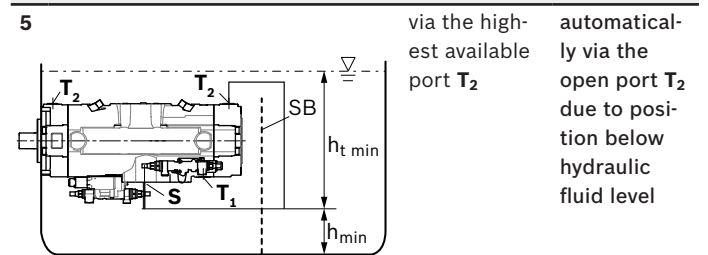

**Note**  
Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

## Project planning notes

- ▶ The A28V(L)O variable pump is designed to be used in open circuits.
- ▶ Project planning, installation and commissioning of the axial piston units requires the involvement of skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, request it from Bosch Rexroth.
- ▶ Before finalizing your design, request a binding installation drawing.
- ▶ The data and notes contained herein must be adhered to.
- ▶ Depending on the operating condition of the axial piston unit (operating pressure, fluid temperature), the characteristic curve may shift.
- ▶ The characteristic curve may also shift due to the dither frequency or control electronics.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation times apply under optimal storage conditions, details of these conditions can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all variants of the product are approved for use in safety functions according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference.  
Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.

- ▶ Pressure controllers are not safeguards against pressure overload. Be sure to add a pressure relief valve to the hydraulic system.
- ▶ Service line ports:
  - The ports and fixing threads are designed for the specified peak pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The service line ports and function ports can only be used to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of burning on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances, get blocked in position as a result of contamination (e.g. impure hydraulic fluid, abrasion, or residual dirt from components). As a result, the flow of hydraulic fluid and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filter) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to set the consumer being driven to a safe position (e.g. safe stop) and if necessary to ensure it is properly implemented.

**Bosch Rexroth AG**  
Mobile Applications  
An den Kelterwiesen 14  
72160 Horb a.N., Germany  
Tel. +49 7451 92-0  
info.ma@boschrexroth.de  
www.boschrexroth.com/brm

© Bosch Rexroth AG 2016. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

## Axial piston pumps

### Variable pumps, closed circuits

<b>Designation</b>	<b>Type</b>	<b>Size</b>	<b>Series</b>	<b>Data sheet</b>	<b>Page</b>
Variable pump	A4VG	28...125	32	92003	887
Variable pump	A4VG	110...280	40	92004	959
Variable pump	A4VTG	71...90	33	92013	1031
Variable pump	A10VG	18...63	10	92750	1055
Variable pump	A4CSG	250...750		92105	1099
Variable double pump	A22VG	45	40	93221	1135
Variable double pump	A24VG	45...125	10	93240	1161
2-Circuit Axial Piston Variable Pump	A30VG	28		93430	1199





# Axial piston variable pump A4VG Series 32

Europe

**RE-E 92003**

Edition: 04.2016

Replaces: 06.2012



- ▶ High-pressure pump for applications in a closed circuit
- ▶ Size 28 to 125
- ▶ Nominal pressure 400 bar
- ▶ Maximum pressure 450 bar
- ▶ Closed circuit

**Features**

- ▶ Integrated auxiliary pump for boost and pilot oil supply
- ▶ Flow direction changes smoothly when the swashplate is moved through the neutral position
- ▶ High-pressure relief valves with integrated boost function
- ▶ With adjustable pressure cut-off as standard
- ▶ Boost-pressure relief valve
- ▶ Through drive for mounting of further pumps up to same nominal size
- ▶ Large variety of controls
- ▶ Swashplate design

**Contents**

Type code	2
Hydraulic fluids	5
Shaft seal	6
Working pressure range	7
Technical data	8
NV – Version without control module	11
DG – Hydraulic control, direct operated	11
HD – Proportional control, hydr., pilot-pressure related	12
HW – Proportional control, hydraulic, mechanical servo	14
EP – Proportional control, electric	16
EZ – Two-point control, electric	18
DA – Automatic control, speed related	19
ET – Electric control, direct operated	22
Dimensions, size 28 to 125	45
Dimensions, through drive	50
Overview of mounting options	53
Combination pumps A4VG + A4VG	54
High-pressure relief valves	55
Pressure cut-off	56
Mechanical stroke limiter	57
Stroking chamber pressure port X <sub>3</sub> and X <sub>4</sub>	58
Filtration in the boost pump suction line	59
Filtration in the boost pump pressure line	59
External boost pressure supply	61
Dimensions with filter fitted	62
Swivel angle sensor	63
Connector for solenoids	64
Rotary inch valve	65
Installation dimensions for coupling assembly	66
Installation instructions	67
Project planning notes	70
Safety instructions	71

## Type code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	
A4V	G			D					/	32		-	N									

### Axial piston unit

01	Swashplate design, variable, nominal pressure 400 bar, maximum pressure 450 bar	A4V
----	---	-----

### Operating mode

02	Pump, closed circuit	G
----	----------------------	---

### Size (NG)

03	Geometric displacement, see "Technical data" on page 8	28	40	56	71	90	125
----	--	----	----	----	----	----	-----

### Control device

		28	40	56	71	90	125		
04	Without control module	●	●	●	●	●	●	NV	
	Proportional control, hydraulic	Pilot-pressure related $p = 6$ to 18 bar	●	●	●	●	●	●	HD3
		Mechanical servo	●	●	●	●	●	●	HW
	Proportional control, electric	$U = 12$ V	●	●	●	●	●	●	EP3
		$U = 24$ V	●	●	●	●	●	●	EP4
	Two-point control, electric	$U = 12$ V	●	●	●	●	●	●	EZ1
		$U = 24$ V	●	●	●	●	●	●	EZ2
	Automatic control, speed related	$U = 12$ V	●	●	●	●	●	●	DA1
		$U = 24$ V	●	●	●	●	●	●	DA2
	Hydraulic control, direct operated		●	●	●	●	●	●	DG
Electric control, direct operated, two pressure reducing valves	$U = 12$ V	●	●	●	●	-	-	ET5	
	$U = 24$ V	●	●	●	●	-	-	ET6	

### Pressure cut-off

05	Pressure cut-off (standard)	D
----	-----------------------------	---

### Neutral position switch

06	Without neutral position switch (without code)	●	
	Neutral position switch (for HW control only)	●	L

### Mechanical stroke limiter

07	Without mechanical stroke limiter (without code)	●	
	Mechanical stroke limiter, externally adjustable	●	M

### Stroking chamber pressure port

08	Without stroking chamber pressure port $X_3, X_4$ (without code)	●	
	Stroking chamber pressure port $X_3, X_4$	●	T

### DA control valve

		NV	HD	HW	DG	DA	EP	EZ		
09	Without DA control valve	●	●	●	●	-	●	●	1	
	DA control valve, fixed setting	-	●	●	●	●	●	-	2	
	DA control valve, mechanically adjustable with position lever	direction of actuation, clockwise	-	●	●	●	●	●	-	3R
		direction of actuation, counter-clockwise	-	●	●	●	●	●	-	3L
	DA control valve, fixed setting, ports for pilot control device	-	●	●	-	●	●	-	7	
	DA control valve, fixed setting and brake inch valve mounted, control with brake fluid		-	-	-	-	●	-	-	8

● = Available    ○ = On request    - = Not available     = Preferred program

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	
<b>A4V</b>	<b>G</b>			<b>D</b>					<b>/</b>	<b>32</b>		<b>-</b>	<b>N</b>									

**Series**

10	Series 3, index 2	<b>32</b>
----	-------------------	-----------

**Direction of rotation**

11	Viewed on drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

**Sealing material**

12	NBR (nitrile rubber), shaft seal in FKM (fluoroelastomer)	<b>N</b>
----	---	----------

**Drive shaft**

			28	40	56	71	90	125	
13	Splined shaft DIN 5480	for single pump	●	●	●	●	●	●	<b>Z</b>
		for combination pump – 1st pump	- <sup>1)</sup>	●	●	●	●	●	<b>A</b>
	Splined shaft ANSI B92.1a	for single pump	●	●	●	●	●	●	<b>S</b>
		for combination pump – 1st pump	- <sup>2)</sup>	- <sup>2)</sup>	●	●	- <sup>2)</sup>	●	<b>T</b>
		only for combination pump – 2nd pump	-	●	-	-	●	-	<b>U</b>

**Mounting flange**

			28	40	56	71	90	125	
14	SAE J744	2-hole	●	●	●	-	-	-	<b>C</b>
		2+4-hole	-	-	-	●	●	●	<b>F</b>

**Working port**

			28	40	56	71	90	125	
15	SAE working port <b>A</b> and <b>B</b> , top and bottom	Suction port <b>S</b> bottom	-	●	●	●	●	●	<b>02</b>
		Suction port <b>S</b> top	-	●	●	○	○	○	<b>03</b>
		Suction port <b>S</b> bottom	●	-	-	-	-	-	<b>10</b>
		Suction port <b>S</b> bottom	-	-	-	●	○	●	<b>13</b>
		Suction port <b>S</b> top	-	-	-	○	○	○	<b>13</b>
		Suction port <b>S</b> top	●	-	●	-	-	-	<b>13</b>

**Boost pump**

16	Without integrated boost pump	without through drive	<b>N</b>
		with through drive	<b>K</b>
	Integrated boost pump	with and without through drive	<b>F</b>

**Through drive**

			28	40	56	71	90	125	
17	Without through drive, versions N and F (no. 16) only		●	●	●	●	●	●	<b>00</b>
	Flange SAE J744 <sup>4)</sup>	Hub for splined shaft	●	●	●	●	●	●	<b>01</b>
		82-2 (A)	5/8 in 9T 16/32DP <sup>5)</sup>	●	●	●	●	●	<b>02</b>
	101-2 (B)	7/8 in 13T 16/32DP <sup>5)</sup>	●	●	●	●	●	●	<b>02</b>
		1 in 15T 16/32DP <sup>5)</sup>	●	●	●	●	●	●	<b>04</b>
	127-2 (C) <sup>6)</sup>	1 in 15T 16/32DP <sup>5)</sup>	-	●	-	-	-	-	<b>09</b>
		1 1/4 in 14T 12/24DP <sup>5)</sup>	-	-	●	●	●	●	<b>07</b>
	152-2/4 (D)	W35 2×16×9 g <sup>7)</sup>	-	-	-	-	●	-	<b>73</b>
		1 3/4 in 13T 8/16DP <sup>5)</sup>	-	-	-	-	-	●	<b>69</b>

● = Available    ○ = On request    - = Not available

= Preferred program

1) Standard for combination pump – 1st pump: Shaft Z

2) Standard for combination pump – 1st pump: Shaft S

3) Only possible without attachment filter

4) 2 = 2-hole; 4 = 4-hole

5) Hub for splined shaft to ANSI B92.1a

6) NG90 to 125 with additional 4-hole-flange (127-4)

7) Hub for splined shaft according to DIN 5480.

4 **A4VG Series 32** | Axial piston variable pump  
Type code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	
<b>A4V</b>	<b>G</b>			<b>D</b>					<b>/</b>	<b>32</b>		<b>-</b>	<b>N</b>									

<b>High-pressure relief valve</b>		Setting range $\Delta p$	28	40	56	71	90	125		
18	High pressure relief valve, pilot operated	100 to 420 bar	with bypass	-	-	-	●	●	●	<b>1</b>
	High-pressure relief valve, direct operated, fixed setting	250 to 420 bar	without bypass	●	●	●	-	-	-	<b>3</b>
			with bypass	●	●	●	-	-	-	<b>5</b>
		100 to 250 bar	without bypass	●	●	●	-	-	-	<b>4</b>
			with bypass	●	●	●	-	-	-	<b>6</b>

<b>Filtration boost circuit/external boost pressure supply</b>		28	40	56	71	90	125	
19	Filtration in the boost pump suction line	●	●	●	●	●	●	<b>S</b>
	Filtration in the boost pump pressure line	●	●	●	●	●	●	<b>D</b>
	Ports for external boost circuit filtration ( $F_e$ and $F_a$ )	●	●	●	●	●	●	<b>D</b>
	Attachment filter with cold start valve	-	●	●	●	●	●	<b>F</b>
	Attachment filter with cold start valve and visual contamination indicator	-	●	●	●	●	●	<b>P</b>
	Attachment filter with cold start valve and electric contamination indicator	-	●	●	●	●	●	<b>B</b>
	External boost pressure supply (version without integrated boost pump - N00, K...)	●	●	●	●	●	●	<b>E</b>

<b>Swivel angle sensor</b>									
20	Without swivel angle sensor (without code)							●	
	Electric swivel angle sensor <sup>8)</sup>							●	<b>R</b>

<b>Connector for solenoids<sup>9)</sup></b>										
21	Without connector (without code), only for purely hydraulic control							●		
	DEUTSCH molded connector, 2-pin	without suppressor diode							●	<b>P</b>
		with suppressor diode (only for EZ and DA)							●	<b>Q</b>

<b>Standard / special version</b>									
22	Standard version	without code							
		combined with attachment part or attachment pump							<b>-K</b>
	Special version								<b>-S</b>
		combined with attachment part or attachment pump							<b>-SK</b>

● = Available    ○ = On request    - = Not available

 = Preferred program

**Notice**

- ▶ Note the project planning notes on page 70.
- ▶ In addition to the type code, please specify the relevant technical data when placing your order.

<sup>8)</sup> Please contact us if the swivel angle sensor is used for control  
<sup>9)</sup> Connectors for other electric components may deviate

## Hydraulic fluids

The A4VG variable pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)
- ▶ 90225: Axial piston units for operation with water-free and water-containing fire-resistant hydraulic fluids (HFDR, HFDU, HFAE, HFAS, HFB, HFC).

### Notes on selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$  see selection diagram).

### Notice


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

Please contact us if the above conditions cannot be met due to extreme operating parameters.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ }^\circ\text{C}$	$t \leq 3 \text{ min}$ , $n \leq 1000 \text{ min}^{-1}$ , without load $p \leq 50 \text{ bar}$
	Permissible temperature difference	$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid in the system
Warm-up phase	$v = 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ }^\circ\text{C to } -25 \text{ }^\circ\text{C}$	at $p \leq 0.7 \times p_{nom}$ , $n \leq 0.5 \times n_{nom}$ and $t \leq 15 \text{ min}$
Continuous operation	$v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$	$\theta = -25 \text{ }^\circ\text{C to } +110 \text{ }^\circ\text{C}$	this corresponds, for VG 46 for example, to a temperature range of +5 °C to +85 °C (see selection diagram below)
	$v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		measured at port <b>T</b> Observe the permissible temperature range of the shaft seal ( $\Delta T = \text{approx. } 5 \text{ K}$ between bearing/shaft seal and port <b>T</b> )
Short-term operation	$v_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 3 \text{ min}$ , $p < 0.3 \times p_{nom}$

### ▼ Selection diagram

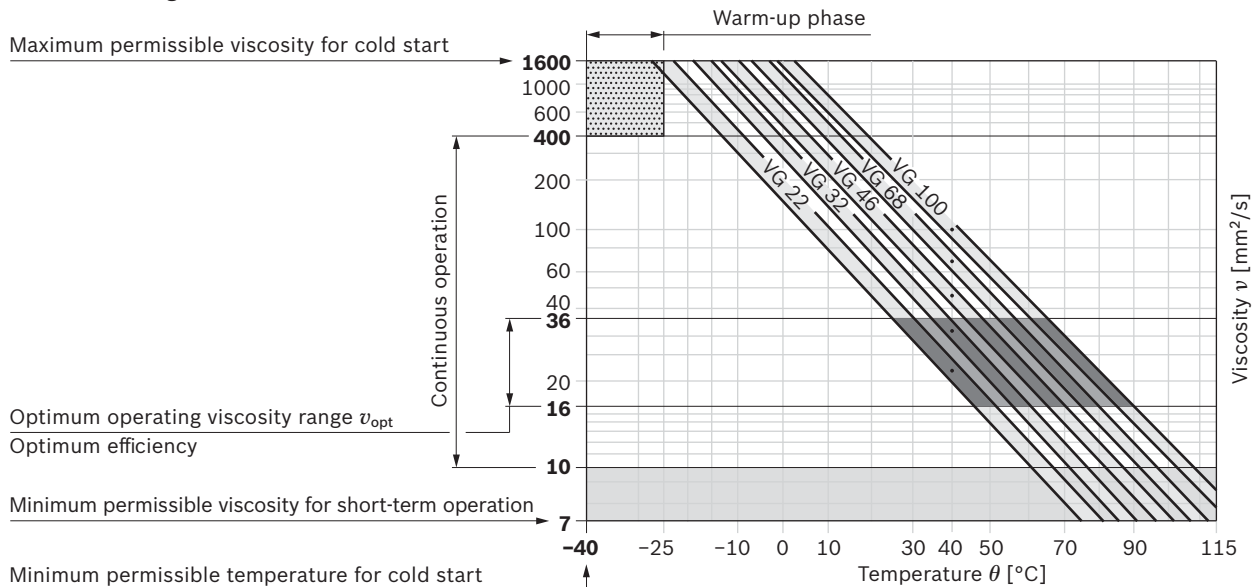

### Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit. A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

Depending on the system and the application, for the A4VG we recommend: Filter elements  $\beta_{20} \geq 100$ .


At very high hydraulic fluid temperatures (90 °C to maximum 110 °C, measured at port T), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.

### Shaft seal

#### Permissible pressure loading

The service life of the shaft seal is influenced by the speed of the axial piston unit and the leakage pressure in the housing (case pressure). Momentary ( $t < 0.1$  s) pressure peaks of up to 10 bar are allowed. The service life of the shaft seal decreases with increasing frequency of pressure peaks and increasing mean differential pressure.

The case pressure must be higher than the ambient pressure.

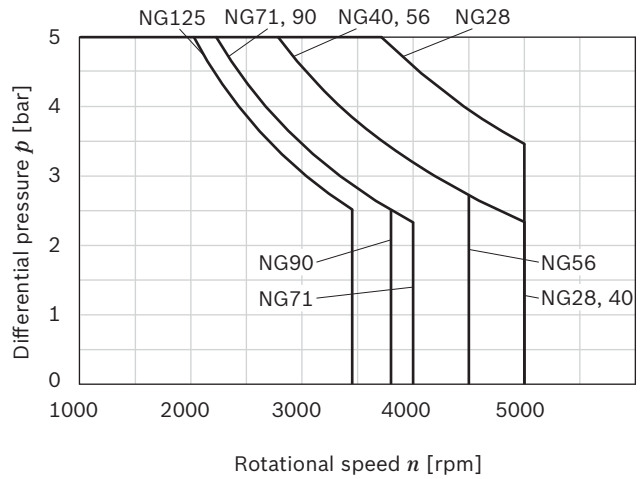


The FKM shaft seal ring may be used for leakage temperatures from -25 °C to +115 °C. For application cases below -25 °C, an NBR shaft seal is required (permissible temperature range: -40 °C to +90 °C).


## Working pressure range

Pressure at working port A or B		Definition
Nominal pressure $p_{nom}$	400 bar	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	450 bar	The maximum pressure corresponds to the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	10 s	
Total operating period	300 h	
Minimum pressure (high-pressure side)	25 bar	Minimum pressure at the high-pressure side (A or B) which is required to prevent damage to the axial piston unit.
Minimum pressure (low-pressure side)	10 bar above case pressure	Minimum pressure at the low-pressure side (A or B) which is required to prevent damage to the axial piston unit.
Rate of pressure change $R_{A\ max}$	9000 bar/s	Maximum permissible rate of pressure build-up and reduction during a pressure change across the entire pressure range.
Boost pump		
Nominal pressure $p_{Sp\ nom}$	25 bar	
Maximum pressure $p_{Sp\ max}$	40 bar	
Pressure at suction port S (inlet)		
Continuous $p_{S\ min}$ ( $v \leq 30\ mm^2/s$ )	$\geq 0.8$ bar absolute	
Momentary, during cold start ( $t < 3\ min$ )	$\geq 0.5$ bar absolute	
Maximum pressure $p_{S\ max}$	$\leq 5$ bar absolute	
Control pressure		
Minimum control pressure $p_{St\ min}$		To ensure the function of the control, a minimum control pressure $p_{St\ min}$ at $n = 2000\ rpm$ is necessary depending on the rotational speed and working pressure
Controls EP, HD, HW	20 bar above case pressure	
Controls DA, DG, EZ, ET	25 bar above case pressure	

### ▼ Rate of pressure change $R_{A\ max}$

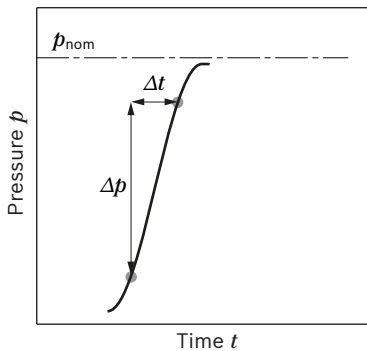

### ▼ Pressure definition

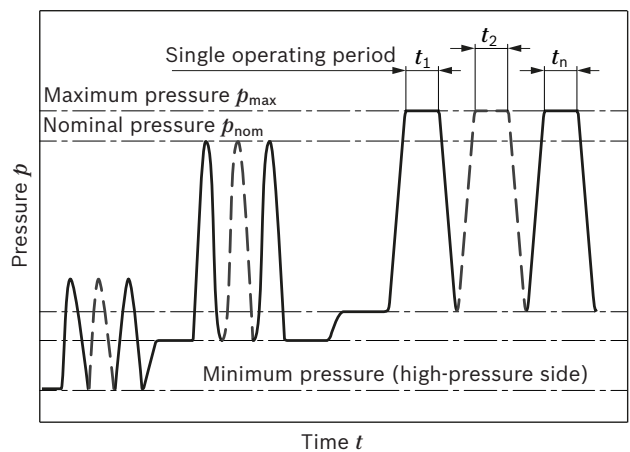

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

#### Notice

Working pressure range valid when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.

## Technical data

Size		NG		28	40	56	71	90	125	
Displacement, geometric, per revolution	variable pump	$V_{g \max}$	cm <sup>3</sup>	28	40	56	71	90	125	
	boost pump (at $p = 20$ bar)	$V_{g Sp}$	cm <sup>3</sup>	6.1	8.6	11.6	19.6	19.6	28.3	
Rotational speed <sup>1)</sup>	maximum at $V_{g \max}$	$n_{nom}$	rpm	4250	4000	3600	3300	3050	2850	
	limited, maximum <sup>2)</sup>	$n_{max1}$	rpm	4500	4200	3900	3600	3300	3250	
	intermittent, maximum <sup>3)</sup>	$n_{max2}$	rpm	5000	5000	4500	4100	3800	3450	
	minimum	$n_{min}$	rpm	500	500	500	500	500	500	
Flow	at $n_{nom}$ and $V_{g \max}$	$q_v$	l/min	119	160	202	234	275	356	
Power <sup>4)</sup>	at $n_{nom}$ , $V_{g \max}$ and $\Delta p = 400$ bar	$P$	kW	79	107	134	156	183	238	
Torque <sup>4)</sup>	at $V_{g \max}$ and	$\Delta p = 400$ bar	$T$	Nm	178	255	357	452	573	796
		$\Delta p = 100$ bar	$T$	Nm	45	64	89	113	143	199
Rotary stiffness of drive shaft	S	$c$	kNm/rad	31.4	69	80.8	98.8	158.1	218.3	
	T	$c$	kNm/rad	–	–	95	120.9	–	252.1	
	A	$c$	kNm/rad	–	79.6	95.8	142.4	176.8	256.5	
	Z	$c$	kNm/rad	32.8	67.5	78.8	122.8	137	223.7	
	U	$c$	kNm/rad	–	50.8	–	–	107.6	–	
Moment of inertia for rotary group		$J_{TW}$	kgm <sup>2</sup>	0.0022	0.0038	0.0066	0.0097	0.0149	0.0232	
Maximum angular acceleration <sup>5)</sup>		$\alpha$	rad/s <sup>2</sup>	38000	30000	24000	21000	18000	14000	
Case volume		$V$	l	0.9	1.1	1.5	1.3	1.5	2.1	
Weight (without through drive) approx.		$m$	kg	29	31	38	50	60	80	

### Notice

- ▶ Theoretical values, without efficiency and tolerances; values rounded
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommend testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.

### Determining the operating characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$	[Nm]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

### Key

- $V_g$  Displacement per revolution [cm<sup>3</sup>]
- $\Delta p$  Differential pressure [bar]
- $n$  Rotational speed [rpm]
- $\eta_v$  Volumetric efficiency
- $\eta_{hm}$  Hydraulic-mechanical efficiency
- $\eta_t$  Total efficiency ( $\eta_t = \eta_v \times \eta_{hm}$ )



- 1) The values are applicable:
  - for the optimum viscosity range from  $n_{opt} = 36$  to  $16 \text{ mm}^2/\text{s}$
  - for hydraulic fluid based on mineral oils (for HF hydraulic fluids, observe the technical data in 90225)
- 2) Valid at half corner power (e.g. at  $V_{g \max}$  and  $p_N/2$ )
- 3) Valid at  $\Delta p = 70$  to  $150$  bar or  $\Delta p < 300$  bar and  $t < 0.1$  s
- 4) Without boost pump



- 5) The data are valid for values between the minimum required and maximum permissible rotational speed.  
Valid for external excitation (e.g. diesel engine 2 to 8 times rotary frequency, cardan shaft twice the rotary frequency).  
The limit value is only valid for a single pump.  
The load capacity of the connecting parts must be considered.





**Permissible radial and axial forces on the drive shaft**



▼ **Splined shaft DIN 5480**

Size	NG		28	40	40	56	56	71	
Drive shaft			W25	W30	W35	W30	W35	W35	
Maximum radial force at distance a (from shaft collar)		$F_{q \max}$	N	3030	3608	3092	5051	4329	5489
		a	mm	17.5	17.5	20	17.5	20	20
Maximum axial force		$+ F_{ax \max}$	N	1557	2120	2120	2910	2910	4242
		$- F_{ax \max}$	N	417	880	880	1490	1490	2758

Size	NG		71	90	90	125	125	
Drive shaft			W40	W35	W45	W40	W45	
Maximum radial force at distance a (from shaft collar)		$F_{q \max}$	N	4803	6957	5411	8455	7516
		a	mm	22.5	20	25	22.5	25
Maximum axial force		$+ F_{ax \max}$	N	4242	4330	4330	6053	6053
		$- F_{ax \max}$	N	2758	2670	2670	3547	3547

▼ **Splined shaft ANSI B92.1a**

Size	NG		28	40	40	56	56	71	
Drive shaft		in	1	1	1 1/4	1 1/4	1 3/8	1 1/4	
Maximum radial force at distance a (from shaft collar)		$F_{q \max}$	N	2983	4261	3409	4772	4338	6050
		a	mm	19	19	24	24	24	24
Maximum axial force		$+ F_{ax \max}$	N	1557	2120	2120	2910	2910	4242
		$- F_{ax \max}$	N	417	880	880	1490	1490	2758

Size	NG		71	90	90	125	125	
Drive shaft		in	1 3/8	1 1/4	1 3/4	1 3/4	2	
Maximum radial force at distance a (from shaft collar)		$F_{q \max}$	N	5500	7670	5478	7609	6658
		a	mm	24	24	33.5	33.5	40
Maximum axial force		$+ F_{ax \max}$	N	4242	4330	4330	6053	6053
		$- F_{ax \max}$	N	2758	2670	2670	3547	3547


**Notice**

- The axial and radial forces generally influence the service life of the bearings.
- Special requirements apply in the case of belt drive and cardan shaft. Please contact us.

**Permissible input and through-drive torques**

Size	NG		28	40	56	71	90	125
Torque at $V_{g\ max}$ and $\Delta p = 400\ bar^{1)}$	T	Nm	178	255	357	452	573	796
Maximum input torque at drive shaft <sup>2)</sup>								
DIN 5480	Z	$T_{E\ max}$	Nm	352	522	522	912	1460
				W25	W30	W30	W35	W35
	A	$T_{E\ max}$	Nm	–	912	912	1460	2190
					W35	W35	W40	W45
ANSI B92.1a (SAE J744)	S	$T_{E\ max}$	Nm	314	602	602	602	1640
			in	1	1 1/4	1 1/4	1 1/4	1 3/4
	T	$T_{E\ max}$	Nm	–	–	970	970	–
			in	–	–	1 3/8	1 3/8	–
U <sup>3)</sup>	$T_{E\ max}$	Nm	–	314	–	–	602	
		in	–	1	–	–	1 1/4	
Maximum through-drive torque <sup>4)</sup>	$T_{D\ max}$	Nm	231	314	521	660	822	1110

▼ **Distribution of torques**

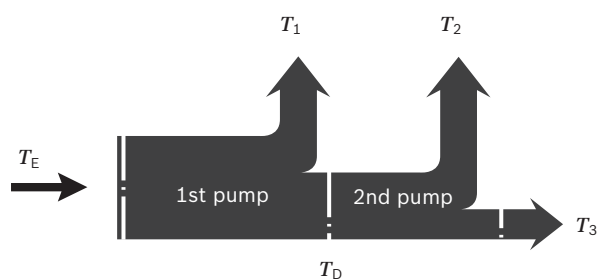


Torque at 1st pump	$T_1$
Torque at 2nd pump	$T_2$
Torque at 3rd pump	$T_3$
Input torque	$T_E = T_1 + T_2 + T_3$
	$T_E < T_{E\ max}$
Through-drive torque	$T_D = T_2 + T_3$
	$T_D < T_{D\ max}$

- 1) Efficiency not considered
- 2) For drive shafts free of radial force
- 3) Shaft "U" is only permitted as drive shaft on the 2nd pump on a combination pump of the same size.
- 4) Note maximum input torque for shaft S!

### NV – Version without control module

The mounting surface for the control module is machined and sealed with the standard seal for control modules and a cover plate. This version is ready for retrofitting to control modules (HD, HW, EP, EZ). When used directly for “DA” control and in combinations with “DA” control, the appropriate adjustments must be made to the spring assembly of the adjustment cylinder and control plate.

▼ Standard version<sup>1)</sup>

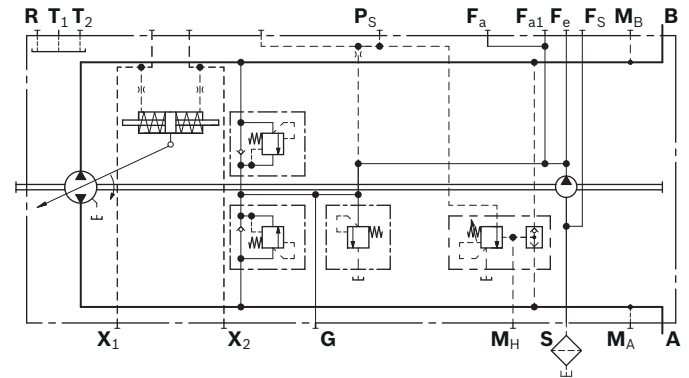

### DG – Hydraulic control, direct operated

With the direct operated hydraulic control (DG), the output flow of the pump is controlled by a hydraulic control pressure, applied directly to the stroking piston through either port **X<sub>1</sub>** or **X<sub>2</sub>**.

Flow direction is determined by which control pressure port is pressurized (refer to table below).

Pump displacement is infinitely variable and proportional to the applied control pressure, but is also influenced by system pressure and pump drive speed.

In order to use the optional built-in pressure cut-off, port **P<sub>S</sub>** must be used as the control pressure source for the selected control module.


See page 56 for a functional description of the pressure cut-off.

Maximum permissible control pressure: 40 bar


Use of the DG control requires a review of the engine and vehicle parameters to ensure that the pump is set up correctly. We recommend that all DG applications be reviewed by a Bosch Rexroth application engineer.

If the pump is also equipped with a DA control valve (see page 19), automotive operation is possible for travel drives.

▼ Standard version<sup>1)</sup>

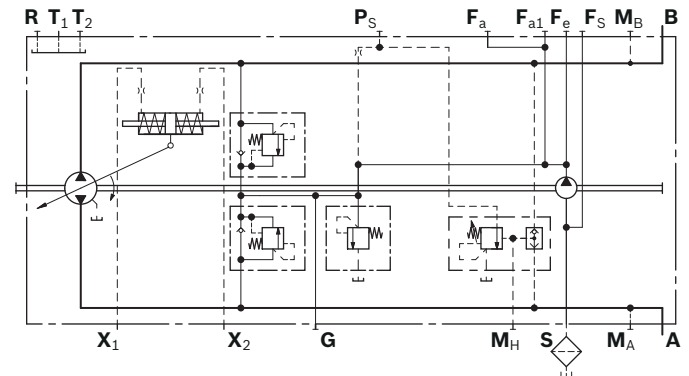

▼ Version with DA control valve<sup>1)</sup>

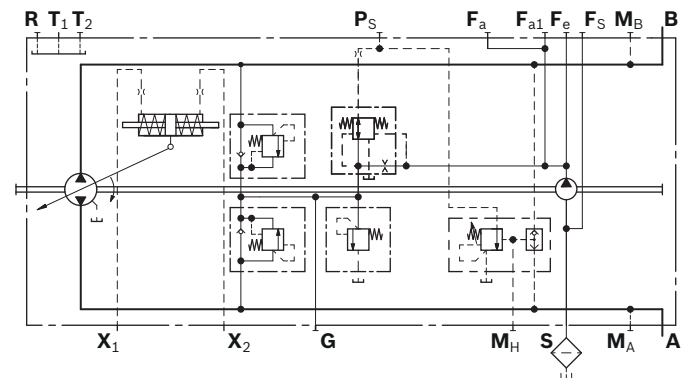

Correlation of direction of rotation, control and flow direction								
Direction of rotation	clockwise				counter-clockwise			
Size	28 to 56		71 to 125		28 to 56		71 to 125	
Control pressure	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>
Flow direction	<b>A to B</b>	<b>B to A</b>	<b>B to A</b>	<b>A to B</b>	<b>B to A</b>	<b>A to B</b>	<b>A to B</b>	<b>B to A</b>
Working pressure	<b>M<sub>B</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>A</sub></b>

1) Size 28 without port **F<sub>a1</sub>** and **F<sub>S</sub>**

## HD – Proportional control, hydraulic, pilot-pressure related


The output flow of the pump is infinitely variable between 0 and 100%, proportional to the difference in pilot pressure applied to the two pilot pressure ports ( $Y_1$  and  $Y_2$ ).

The pilot signal, coming from an external source, is a pressure signal. Flow is negligible, as the pilot signal acts only on the control spool of the control valve.

This control spool then directs control oil into and out of the stroking cylinder to adjust pump displacement as required.

A feedback lever connected to the stroking piston maintains the pump flow for any given pilot signal within the control range.

If the pump is also equipped with a DA control valve (see page 19), automotive operation is possible for travel drives.

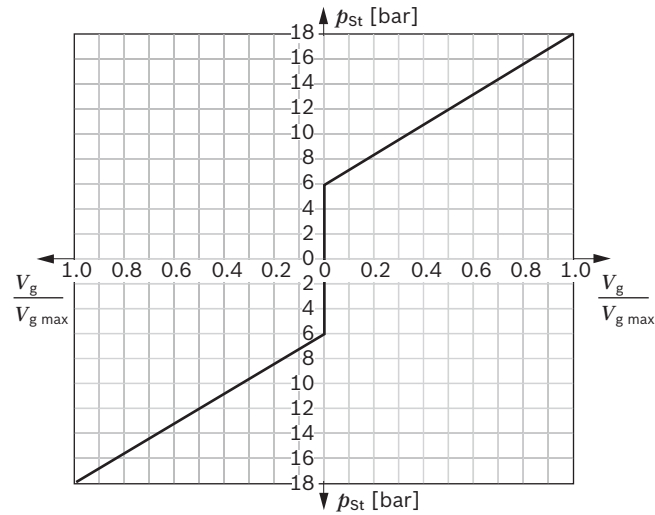


- ▶  $V_g$  = Displacement at  $p_{St}$   
 $V_{g\ max}$  = Displacement at  $p_{St} = 18$  bar
- ▶ Pilot signal  $p_{St} = 6$  to 18 bar (at port  $Y_1, Y_2$ )
- ▶ Start of control at 6 bar
- ▶ End of control at 18 bar (maximum displacement  $V_{g\ max}$ )


### Notice

In the neutral position, the HD control module must be vented to reservoir via the external pilot control device.

### ▼ Standard version<sup>1)</sup>

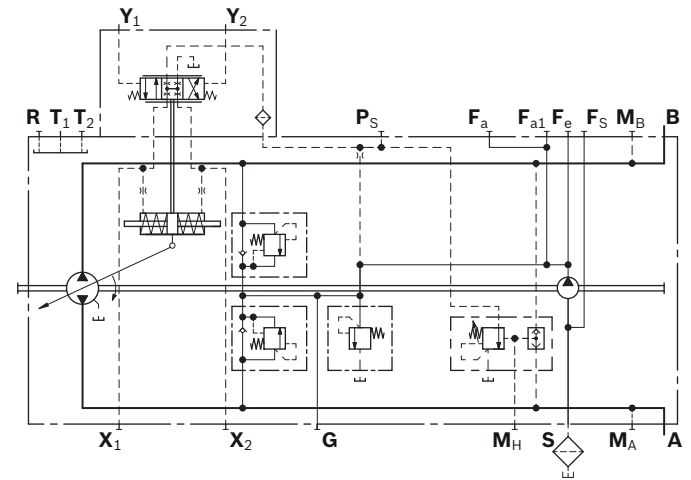


### ▼ Version with DA control valve<sup>1)</sup>

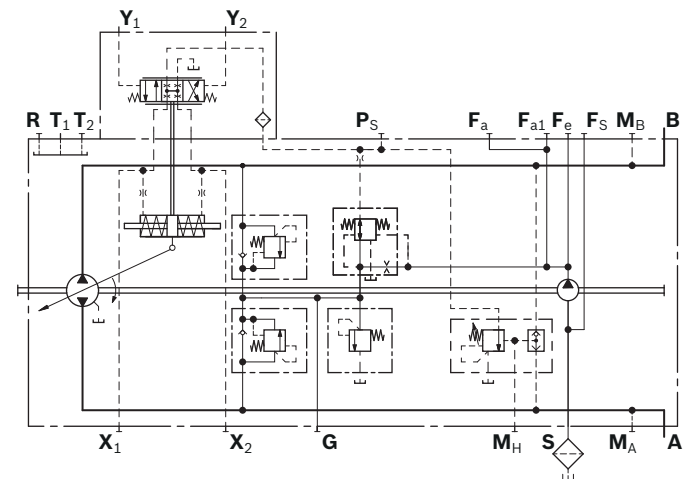

1) Size 28 without port  $F_{a1}$  and  $F_s$


<b>Correlation of direction of rotation, control and flow direction</b>								
Direction of rotation	clockwise				counter-clockwise			
Size	28 to 56		71 to 125		28 to 56		71 to 125	
Pilot signal	<b>Y<sub>1</sub></b>	<b>Y<sub>2</sub></b>	<b>Y<sub>1</sub></b>	<b>Y<sub>2</sub></b>	<b>Y<sub>1</sub></b>	<b>Y<sub>2</sub></b>	<b>Y<sub>1</sub></b>	<b>Y<sub>2</sub></b>
Control pressure	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>
Flow direction	<b>A to B</b>	<b>B to A</b>	<b>B to A</b>	<b>A to B</b>	<b>B to A</b>	<b>A to B</b>	<b>A to B</b>	<b>B to A</b>
Working pressure	<b>M<sub>B</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>A</sub></b>

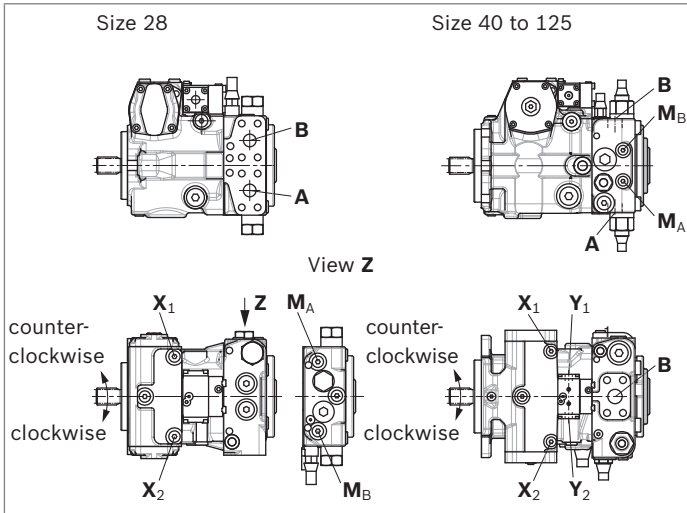

## HW – Proportional control, hydraulic, mechanical servo

The output flow of the pump is infinitely variable between 0 and 100%, proportional to the swivel angle of the control lever.

A feedback lever connected to the stroking piston maintains the pump flow for any given position of the control lever. If the pump is also equipped with a DA control valve (see page 19), automotive operation is possible for travel drives.

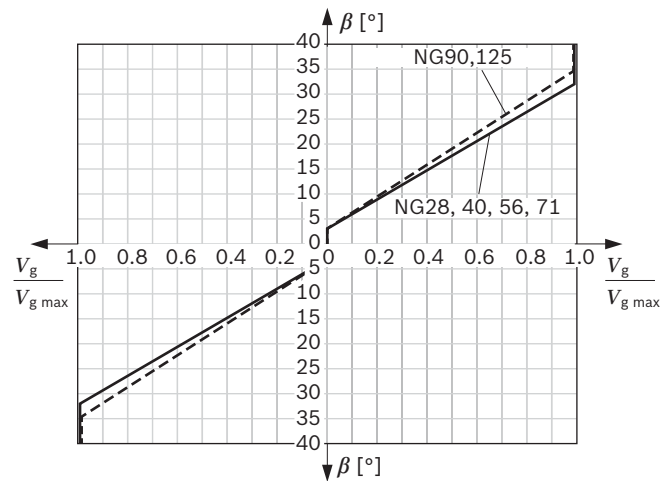

Swivel angle  $\beta$  at the control lever for pump displacement change:

- ▶ Start of control at  $\beta = \pm 3^\circ$
- ▶ End of control at  $\beta$  (max. displacement  $V_{g \max}$ )
  - Size 28 to 71 at  $\pm 32^\circ$
  - Size 90 to 125 at  $\pm 34.5^\circ$
- ▶ Rotational limit  $\beta$  of the control lever (internal)  $\pm 38^\circ$

The maximum required torque at the lever is 170 Ncm. To prevent damage to the HW control module, a positive mechanical stop of  $36.5^\circ \pm 1$  must be provided for the HW control lever on the customer side.

### Notice

- ▶ Spring centering enables the pump, depending on pressure and speed, to move automatically to the neutral position ( $V_g = 0$ ) as soon as there is no longer any torque on the control lever of the HW control module.
- ▶ If necessary, the position of the lever can be changed. The procedure is defined in the instruction manual.
- ▶ On delivery, the position of the lever may differ from that shown in the drawing.


### Option: Neutral position switch

The switch contact in the neutral position switch is closed when the control lever on the HW control module is in its neutral position. The switch opens when the control lever is moved out of the central position in either direction. Thus, the neutral position switch provides a monitoring function for drive units that require the pump to be in the neutral position during certain operating conditions (e.g. starting diesel engines).


### Technical Data

Load capacity	20 A (continuous), without switching operations
Switching capacity	15 A / 32 V (resistive load) 4 A / 32 V (inductive load)
Connector version	DEUTSCH DT04-2P-EP04 (mating connector, see page 64)

### ▼ Standard version<sup>1)</sup>

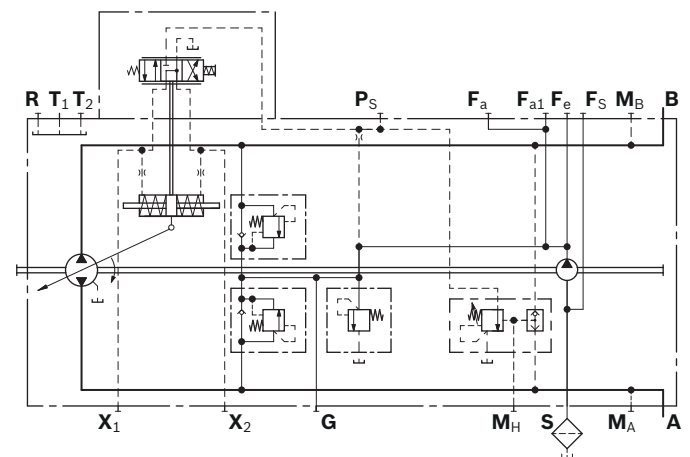


### ▼ Version with DA control valve and neutral position switch<sup>1)</sup>

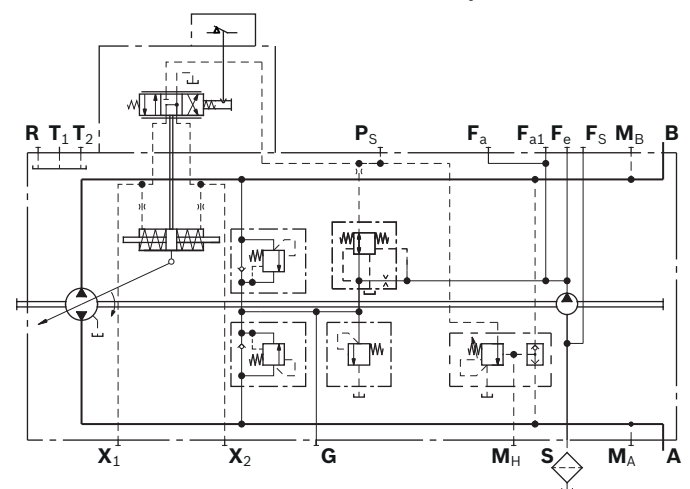

1) Size 28 without port  $F_{a1}$  and  $F_s$

Correlation of direction of rotation, control and flow direction								
Direction of rotation	clockwise				counter-clockwise			
Size	28 to 56		71 to 125		28 to 56		71 to 125	
Lever direction	a	b	a	b	a	b	a	b
Control pressure	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>
Flow direction	B to A	A to B	A to B	B to A	A to B	B to A	B to A	A to B
Working pressure	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>

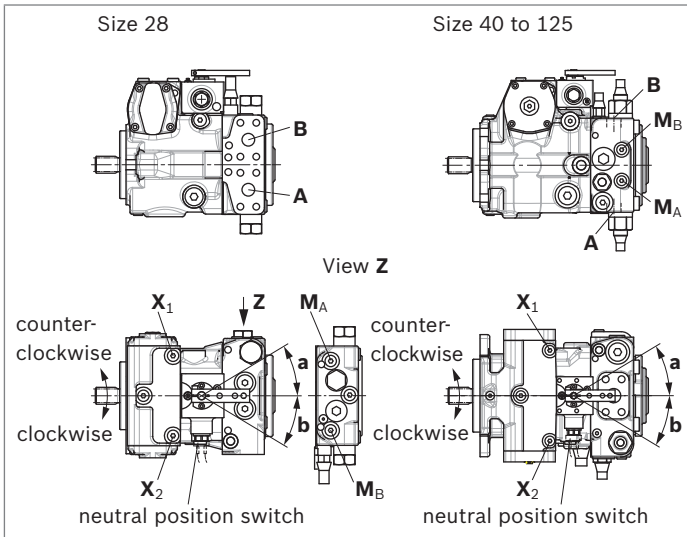

## EP – Proportional control, electric


The output flow of the pump is infinitely variable between 0 and 100%, proportional to the electrical current supplied to solenoid **a** or **b**.

The electrical energy is converted into a force acting on the control spool.

This control spool then directs control oil into and out of the stroking cylinder to adjust pump displacement as required.

A feedback lever connected to the stroking piston maintains the pump flow for any given current within the control range.

If the pump is also equipped with a DA control valve (see page 19), automotive operation is possible for travel drives.

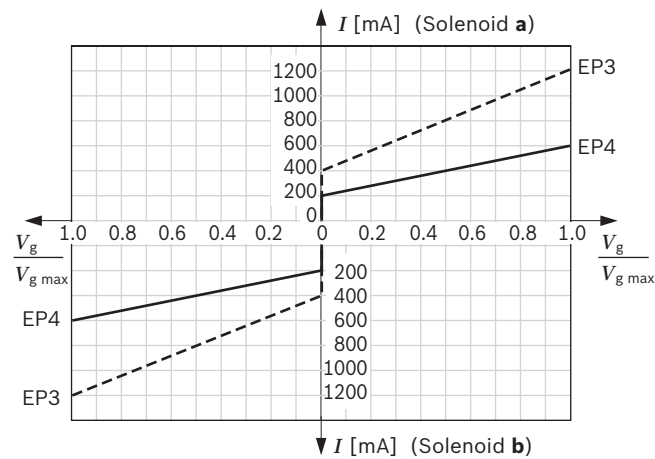

### Notice

The proportional solenoids do not have manual override. Proportional solenoids with manual override and spring return are available on request.

1) Minimum required oscillation range of the control current  $\Delta I_{p-p}$  (peak to peak) within the respective control range (start of control to end of control)


2) Size 28 without port **F<sub>a1</sub>** and **F<sub>s</sub>**

Technical data, solenoid	EP3	EP4
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Control current		
Start of control at $V_g = 0$	400 mA	200 mA
End of control at $V_{g \max}$	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither		
Frequency	100 Hz	100 Hz
Minimum oscillation range <sup>1)</sup>	240 mA	120 mA
Duty cycle	100%	100%
Type of protection: see connector version page 64		


Various BODAS controllers with application software and amplifiers are available for controlling the proportional solenoids.

Further information can also be found on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics)

### ▼ Standard version<sup>2)</sup>

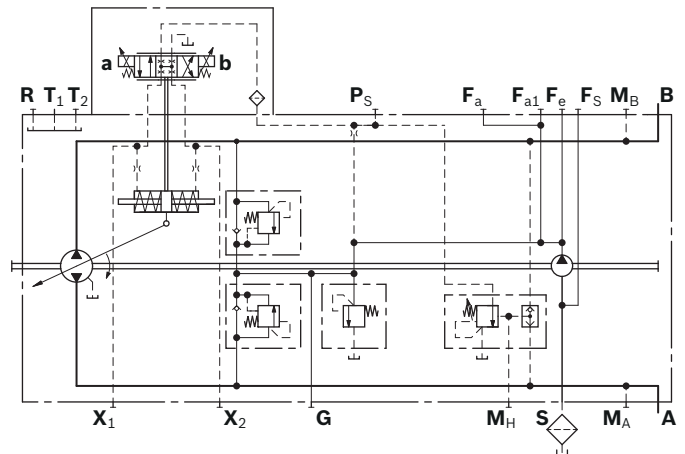


### ▼ Version with DA control valve<sup>2)</sup>

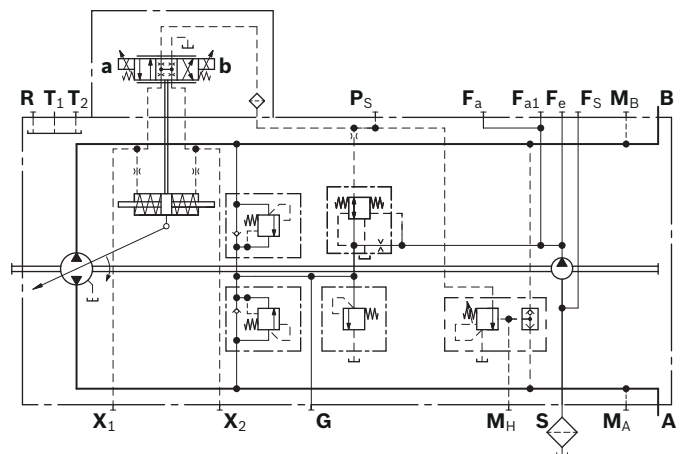



Correlation of direction of rotation, control and flow direction								
Direction of rotation	clockwise				counter-clockwise			
Size	28 to 56		71 to 125		28 to 56		71 to 125	
Actuation of solenoid	a	b	a	b	a	b	a	b
Control pressure	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
Flow direction	A to B	B to A	B to A	A to B	B to A	A to B	A to B	B to A
Working pressure	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>

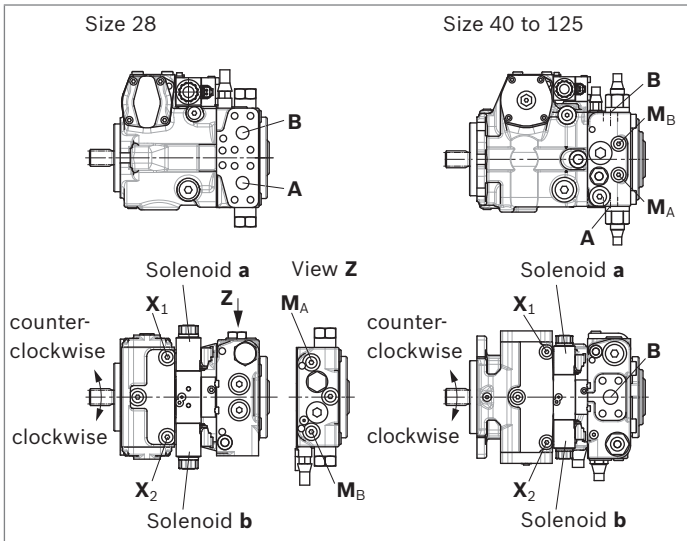


## EZ – Two-point control, electric

By actuating either switching solenoid **a** or **b**, internal control pressure is applied directly to the stroking piston and the pump swivels to maximum displacement. The EZ control enables pump flow to be switched between  $V_g = 0$  and  $V_{g \max}$ .


Flow direction is determined by which solenoid is energized.

Technical data, solenoid	EZ1	EZ2
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Neutral position $V_g = 0$	de-energized	de-energized
Position $V_g \max$	energized	energized
Nominal resistance (at 20 °C)	5.5 $\Omega$	21.7 $\Omega$
Nominal power	26.2 W	26.5 W
Minimum active current required	1.32 A	0.67 A
Duty cycle	100%	100%
Type of protection: see connector version page 64		

### ▼ Standard version<sup>1)</sup>

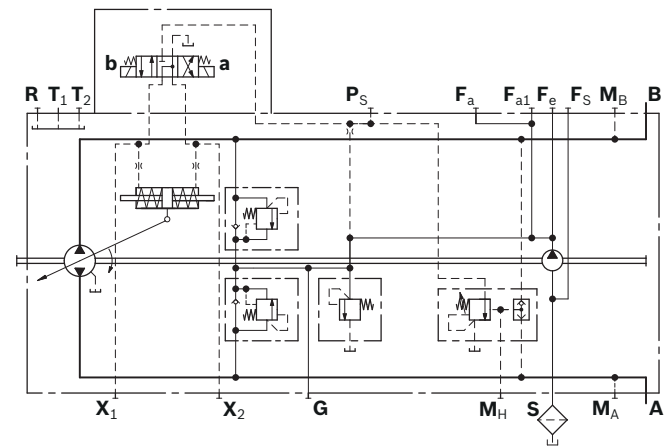

Correlation of direction of rotation, control and flow direction								
Direction of rotation	clockwise				counter-clockwise			
Size	28 to 56		71 to 125		28 to 56		71 to 125	
Actuation of solenoid	a	b	a	b	a	b	a	b
Control pressure	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>
Flow direction	B to A	A to B	A to B	B to A	A to B	B to A	B to A	A to B
Working pressure	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>

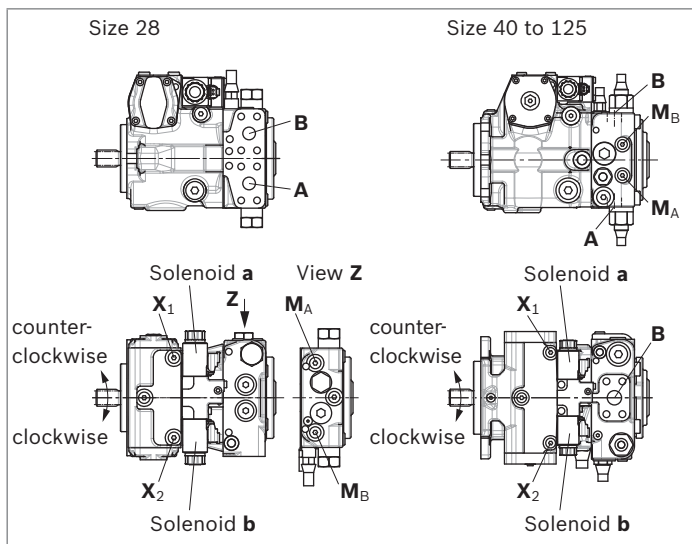

1) Size 28 without port  $F_{a1}$  and  $F_s$

## DA – Automatic control, speed related

The DA closed loop control is an engine speed-dependent system for travel drives. The built-in DA control valve generates a pilot pressure that is proportional to pump (engine) drive speed. This pilot pressure is directed to the stroking cylinder of the pump by an electromagnetically actuated 4/3-way directional valve. The pump displacement is infinitely variable in each flow direction and is influenced by both pump drive speed and system pressure. The flow direction (e.g. machine moving forward or backward) is determined by either solenoid **a** or **b** being activated. Increasing the pump drive speed generates a higher pilot pressure from the DA control valve, with a subsequent increase in pump flow.

Depending on the selected pump operating characteristics, increasing system pressure (e.g. machine load) causes the pump to swivel back towards a smaller displacement. An overload protection for the engine (against stalling) is achieved by combining this pressure-dependent reduction in pump stroke with a reduction in pilot pressure as the engine speed drops.

Any additional power requirement, e.g. for hydraulic functions from attachments, could cause the engine speed to drop further. This will cause a further reduction in pilot pressure and thus of the pump displacement. Automatic power distribution and full exploitation of the available power are achieved in this way, both for the travel drive and for the implement hydraulics, with priority given to the implement hydraulics.

Various override options are available for DA control function to allow controlled operation of the implement hydraulics with high rpm at reduced vehicle speed.

The DA control valve can also be used in pumps with EP, DG, HW and HD control modules to protect the combustion engine against overload.

### Notice


DA closed loop control is only suitable for certain types of travel drive systems and requires review of the engine and vehicle parameters to ensure that the pump is used correctly and that machine operation is safe and efficient. We recommend that all DA applications be reviewed by a Bosch Rexroth application engineer.

Technical data, solenoid	DA1	DA2
Voltage	12 V (±20%)	24 V (±20%)
Neutral position $V_g = 0$	de-energized	de-energized
Position $V_g \text{ max}$	energized	energized
Nominal resistance (at 20 °C)	5.5 Ω	21.7 Ω
Nominal power	26.2 W	26.5 W
Minimum required active current	1.32 A	0.67 A
Duty cycle	100%	100%
Type of protection: see connector version page 64		

### DA..2 – DA control valve, fixed setting

Pilot pressure is generated in relation to drive speed.

#### ▼ DA control valve, fixed setting, DA1D2/DA2D2<sup>1)</sup>

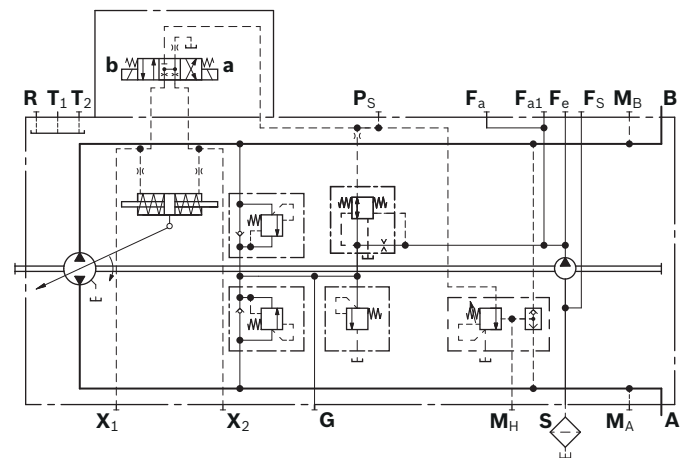

1) Size 28 without port  $F_{a1}$  and  $F_s$

**DA..3 – DA control valve, mechanically adjustable with position lever**

Pilot pressure is generated in relation to drive speed.

Any reduction of pilot pressure possible, independently of drive speed, through mechanical actuation of the position lever (inch function).

The maximum permissible actuation torque at the position lever is  $T_{max} = 4 \text{ Nm}$ .

Maximum angle of rotation  $70^\circ$ , lever position: any.


**DA..3R**

Direction of actuation of the position lever: clockwise

**DA..3L**

Direction of actuation of the position lever: counter-clockwise

▼ **Circuit diagram DA1D3/DA2D3<sup>1)</sup>**

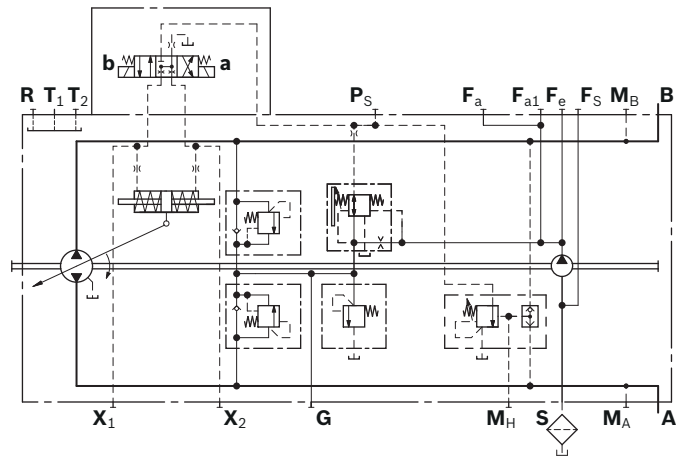


**DA..7 – DA control valve, fixed setting, ports for pilot control device as inch valve**

Any reduction of the pilot pressure possible, independent of the drive speed is achieved by the mechanical actuation of the pilot control device.

The pilot control device is installed separately from the pump (for example in the driver's cabin) and connected to the pump by two hydraulic control lines via ports **P<sub>S</sub>** and **Y**. A suitable pilot control device must be ordered separately and is not included in the scope of delivery.

Note: Rotary inch valves, see page 65.

▼ **Circuit diagram DA1D7/DA2D7<sup>1)</sup>**

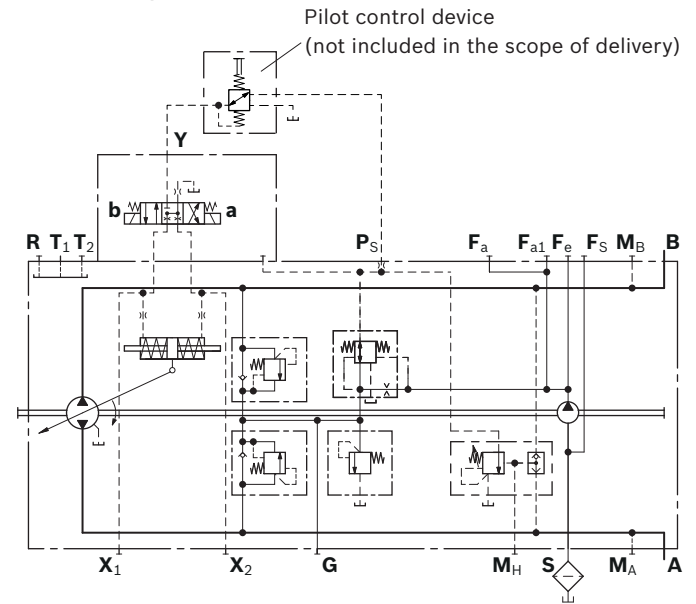

1) Size 28 without port **F<sub>a1</sub>** and **F<sub>s</sub>**

**DA..8 – DA control valve, fixed setting and brake inch valve mounted**


Only for pumps with DA control module

- ▶ Version with throttle valve size 28, 40, 56, 71
- ▶ Version with pressure reducing valve size 90, 125



Permits reduction of the pilot pressure, independently of the drive speed via hydraulic control (port **Z**).

Control at port **Z** by means of brake fluid based on mineral oil.

▼ **Circuit diagram DA1D8/DA2D8 with throttle valve<sup>1)</sup>**

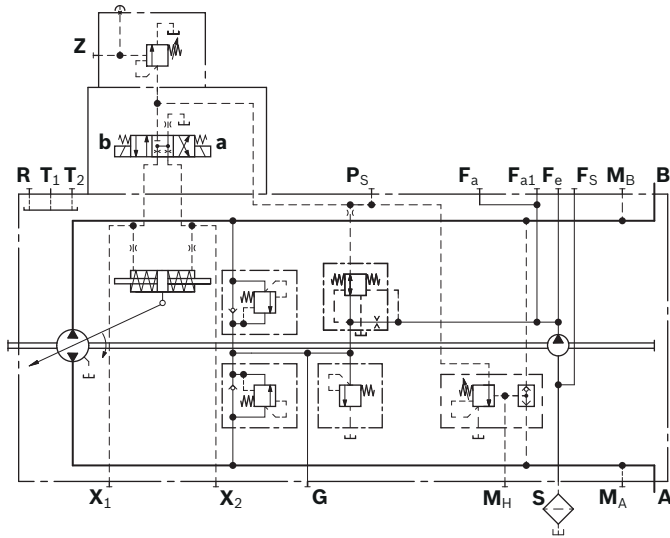

▼ **Circuit diagram DA1D8/DA2D8 with pressure reducing valve<sup>1)</sup>**

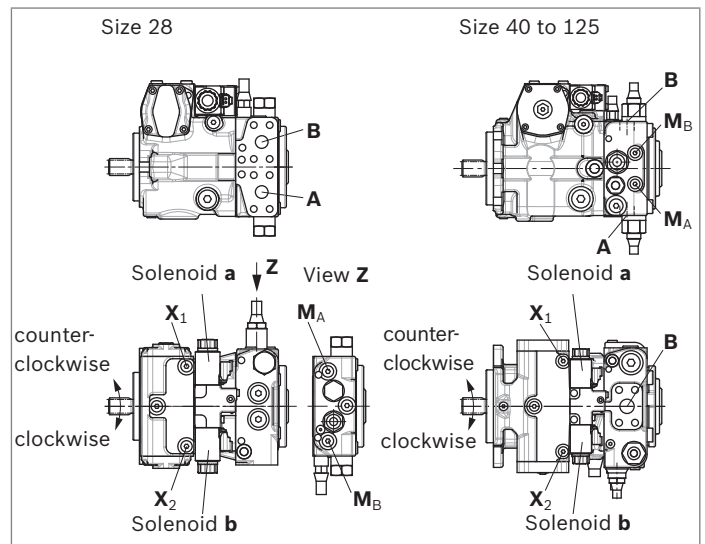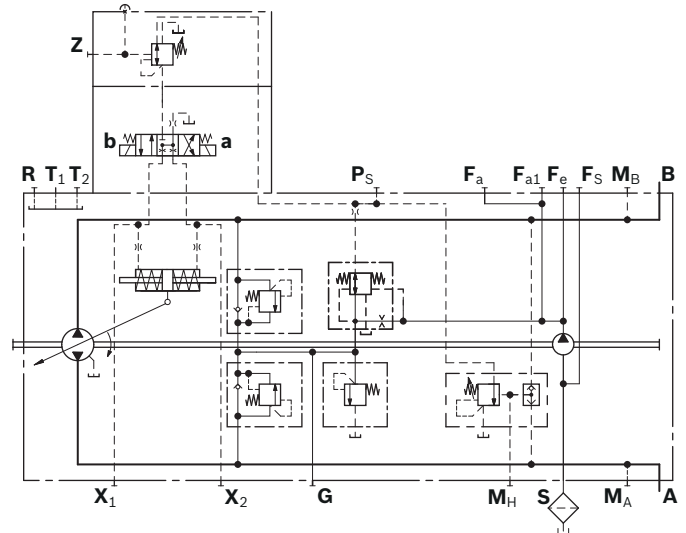

**Correlation of direction of rotation, control and flow direction**

Direction of rotation	clockwise				counter-clockwise			
Size	28 to 56		71 to 125		28 to 56		71 to 125	
Actuation of solenoid	<b>a</b>	<b>b</b>	<b>a</b>	<b>b</b>	<b>a</b>	<b>b</b>	<b>a</b>	<b>b</b>
Control pressure	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>
Flow direction	<b>B to A</b>	<b>A to B</b>	<b>A to B</b>	<b>B to A</b>	<b>A to B</b>	<b>B to A</b>	<b>B to A</b>	<b>A to B</b>
Working pressure	<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>


<sup>1)</sup> Size 28 without port **F<sub>a1</sub>** and **F<sub>S</sub>**

## ET – Electric control, direct operated

The output flow of the pump is infinitely variable between 0 to 100%. Depending on the preselected current **I** at solenoids **a** and **b** of the pressure reducing valves, the stroking cylinder of the pump is proportionally supplied with control pressure. The two control pressures **X<sub>1</sub>** and **X<sub>2</sub>** can be controlled independently. The pump displacement that arises at a certain control current is dependent on the speed and working pressure of the pump. A different flow direction is associated with each pressure reducing valve. Maximum permissible control pressure **P<sub>S</sub>**: 40 bar.

Technical data, solenoid	ET5	ET6
Voltage	12 V (±20%)	24 V (±20%)
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	22.7 Ω
Dither		
Frequency	100 Hz	100 Hz
Minimum oscillation range <sup>1)</sup>	240 mA	120 mA
Duty cycle	100%	100%
Type of protection: see connector version page 64		

### ▼ Standard version<sup>1)</sup>

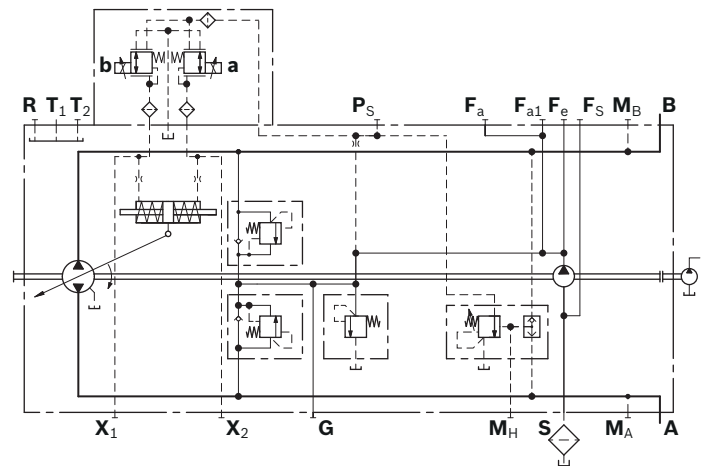


Correlation of direction of rotation, control and flow direction								
Direction of rotation	clockwise				counter-clockwise			
Size	28 to 56		71		28 to 56		71	
Actuation of solenoid	a	b	a	b	a	b	a	b
Control pressure	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>
Flow direction	B to A	A to B	A to B	B to A	A to B	B to A	B to A	A to B
Working pressure	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>

<sup>1)</sup> Size 28 without port **F<sub>a1</sub>** and **F<sub>s</sub>**

**Dimensions, size 28**

**NV – Version without control module**


Standard: SAE working port **A** and **B**, same side right, suction port **S** bottom (10)

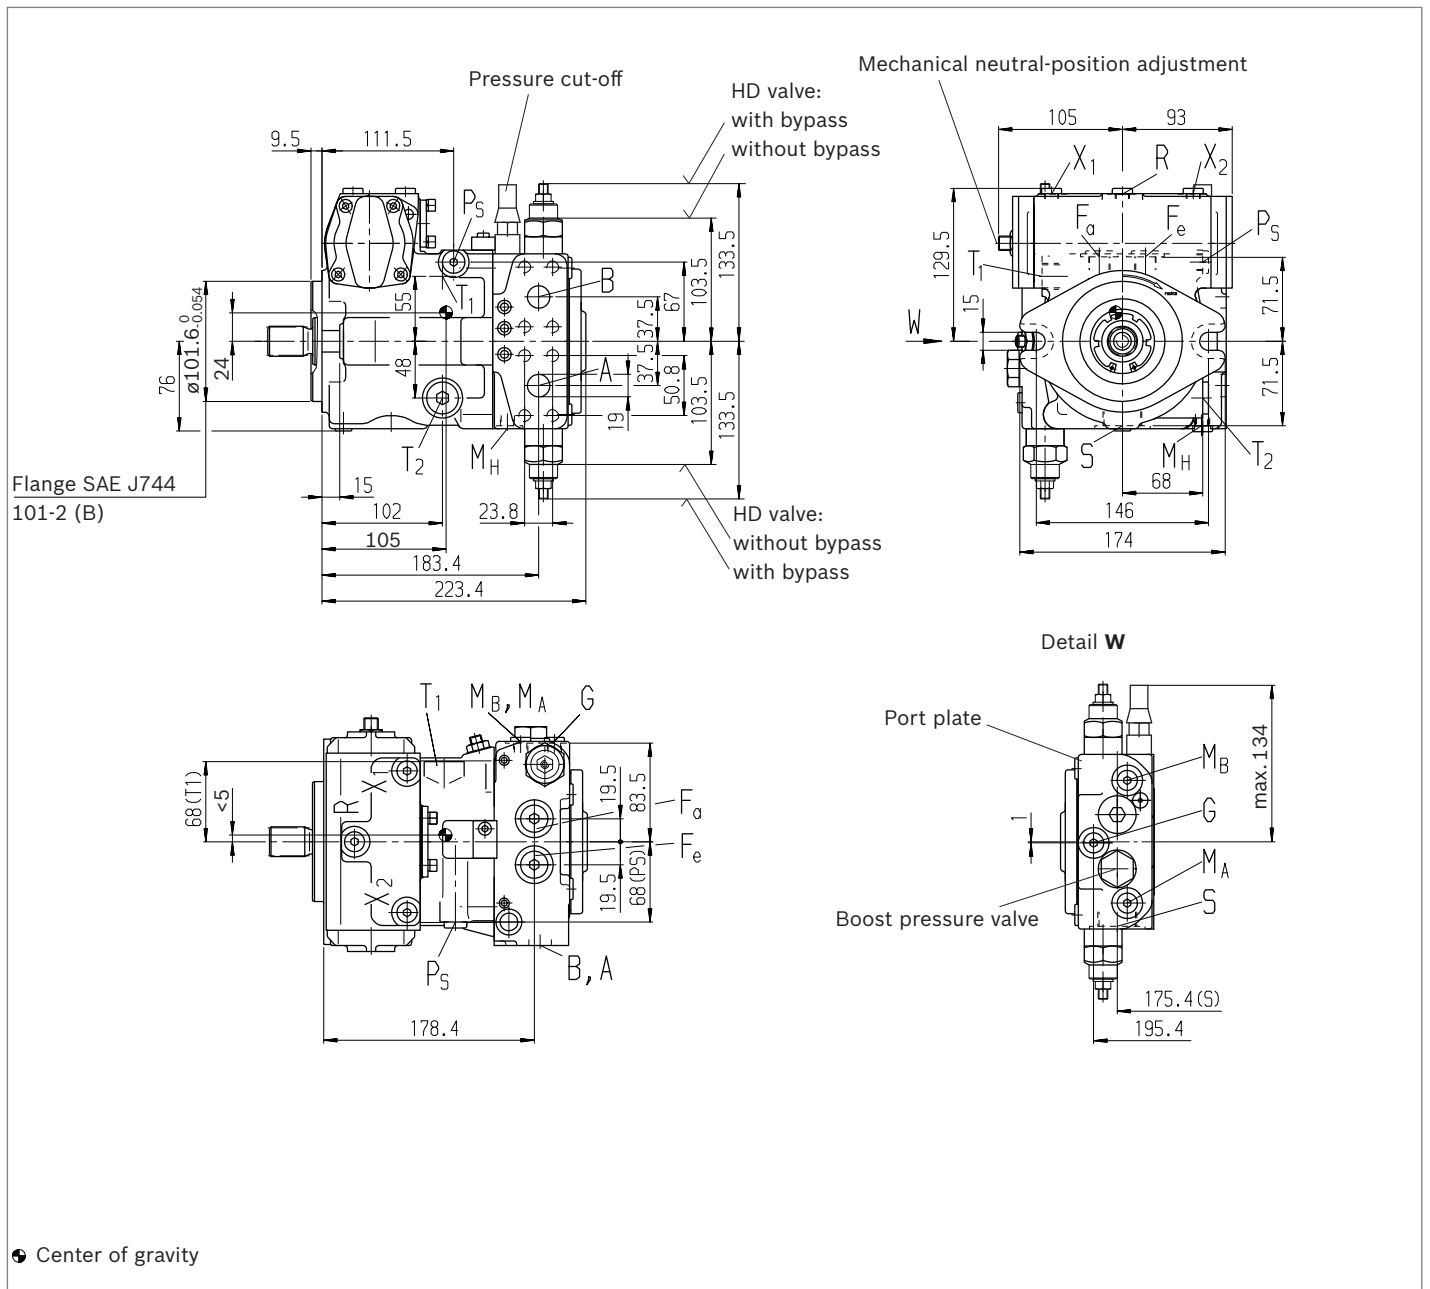


**Notice**

Option: SAE working port **A** and **B**, same side left, suction port **S** top (13): Port plate 10 rotated through 180°, installation drawing on request

▼ **Splined shaft DIN 5480**

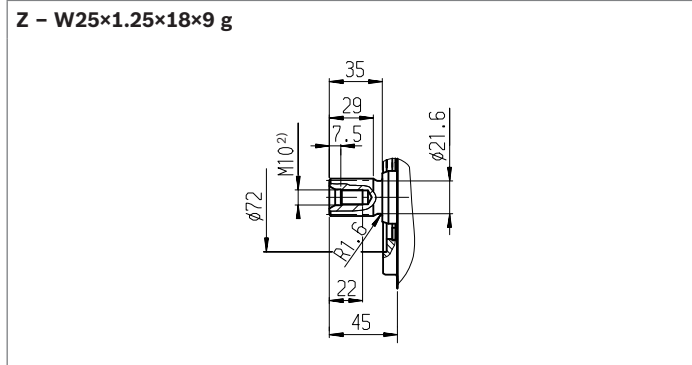

▼ **Splined shaft ANSI B92.1a**

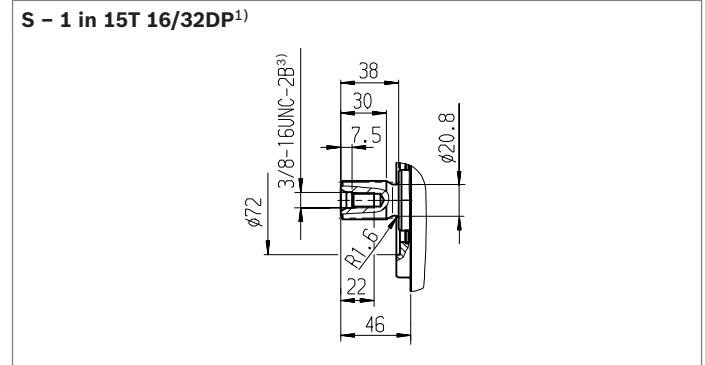


Ports	Standard	Size	$p_{max}$ [bar] <sup>4)</sup>	State <sup>10)</sup>
<b>A, B</b>	Working port Fastening thread	SAEJ518 <sup>5)</sup> DIN 13	3/4 in M10 × 1.5; 17 deep	450 O
<b>S</b>	Suction port	DIN 3852 <sup>8)</sup>	M33 × 2; 18 deep	5 O <sup>6)</sup>
<b>T<sub>1</sub></b>	Drain port	DIN 3852 <sup>8)</sup>	M22 × 1.5; 14 deep	3 O <sup>7)</sup>
<b>T<sub>2</sub></b>	Drain port	DIN 3852 <sup>8)</sup>	M22 × 1.5; 14 deep	3 X <sup>7)</sup>
<b>R</b>	Air bleed port	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	3 X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice)	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40 X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice, DG only)	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40 O
<b>X<sub>3</sub>, X<sub>4</sub><sup>9)</sup></b>	Stroking chamber pressure port	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40 X
<b>G</b>	Boost pressure port inlet	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40 X
<b>P<sub>s</sub></b>	Pilot pressure port	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40 X
<b>P<sub>s</sub></b>	Pilot pressure port (DA..7 only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40 O
<b>Y</b>	Pilot pressure port outlet (DA..7 only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40 O
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring port pressure A, B	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	450 X
<b>M<sub>H</sub></b>	Measuring port, high pressure	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	450 X
<b>F<sub>a</sub></b>	Boost pressure port inlet	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40 X
<b>F<sub>e</sub></b>	Boost pressure port outlet	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40 X
<b>Y<sub>1</sub>, Y<sub>2</sub></b>	Pilot pressure port (pilot signal HD only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40 O
<b>Z</b>	Pilot pressure port (inch signal DA..8 only)	DIN 3852 <sup>8)</sup>	M10 × 1; 8 deep	40 X

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
2) Center bore according to DIN 332 (thread according to DIN 13)  
3) Thread according to ASME B1.1  
4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.  
5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.


6) Plugged at external boost pressure supply.  
7) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 67).  
8) The countersink can be deeper than as specified in the standard.  
9) Optional, see page 58  
10) O = Must be connected (plugged when delivered)  
X = Plugged (observe installation instructions)




▼ **HD** – Proportional control, hydraulic, pilot-pressure related

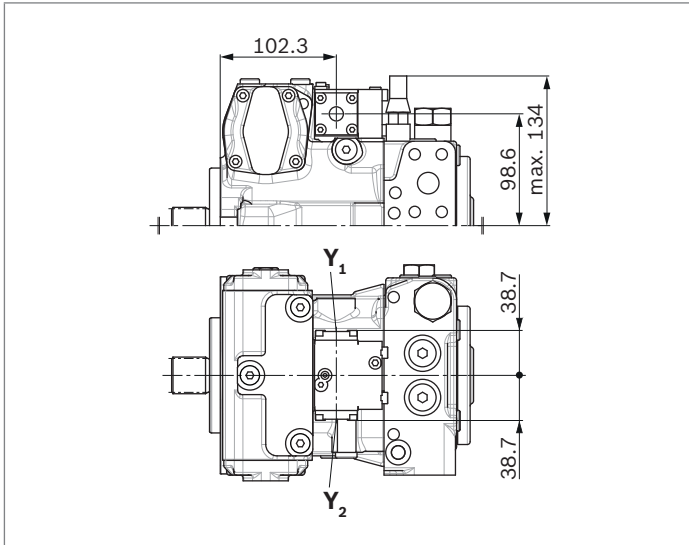


▼ **HW** – Proportional control, hydraulic, mechanical servo

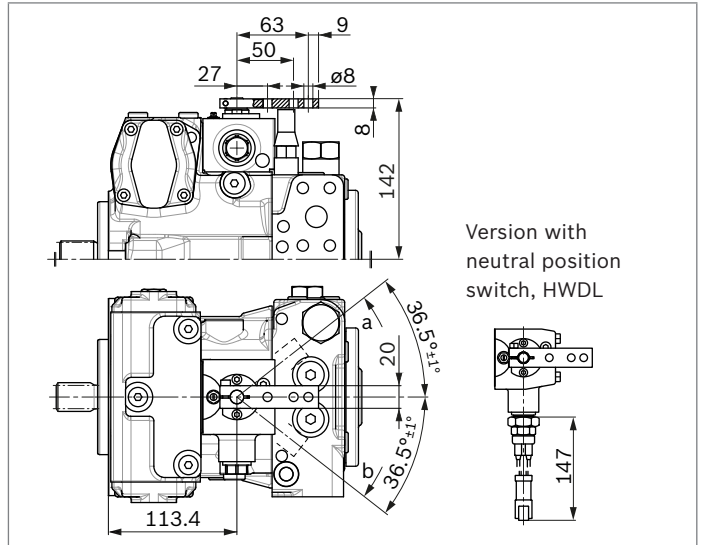


▼ **EP** – Proportional control, electric

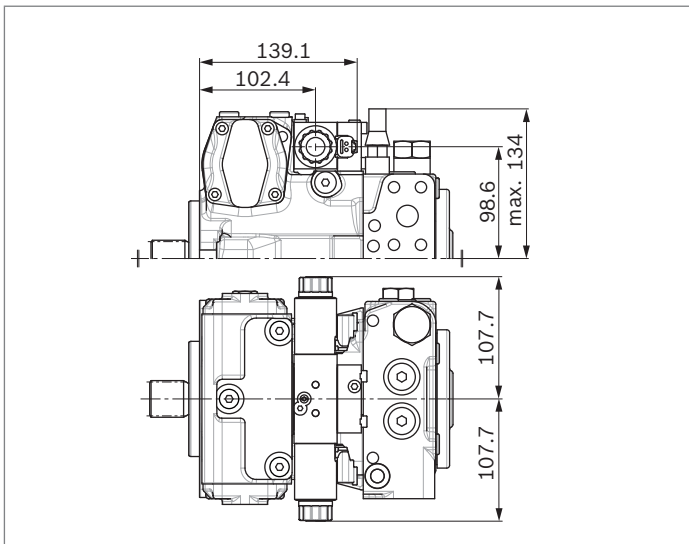

▼ **EZ** – Two-point control, electric

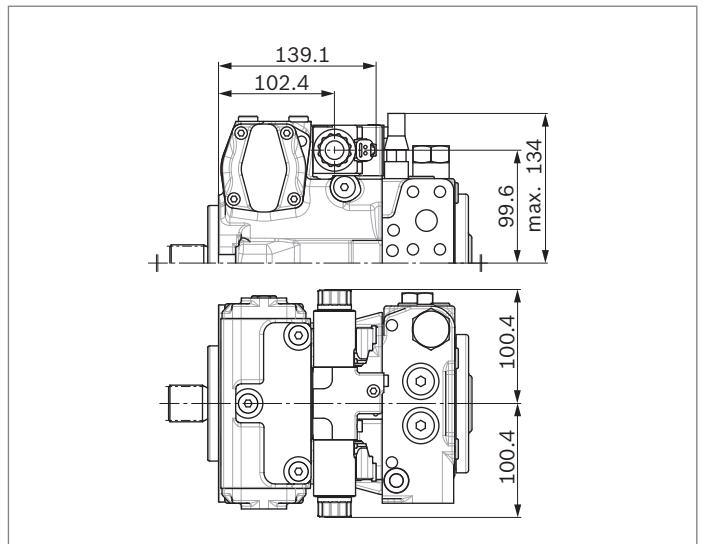


▼ **DG** – Hydraulic control, direct operated

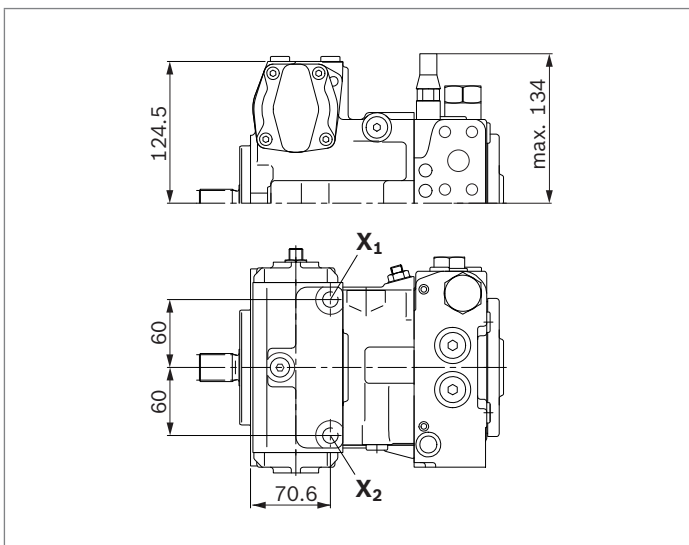


4

**DA control valve**


▼ **DA..2** – fixed setting

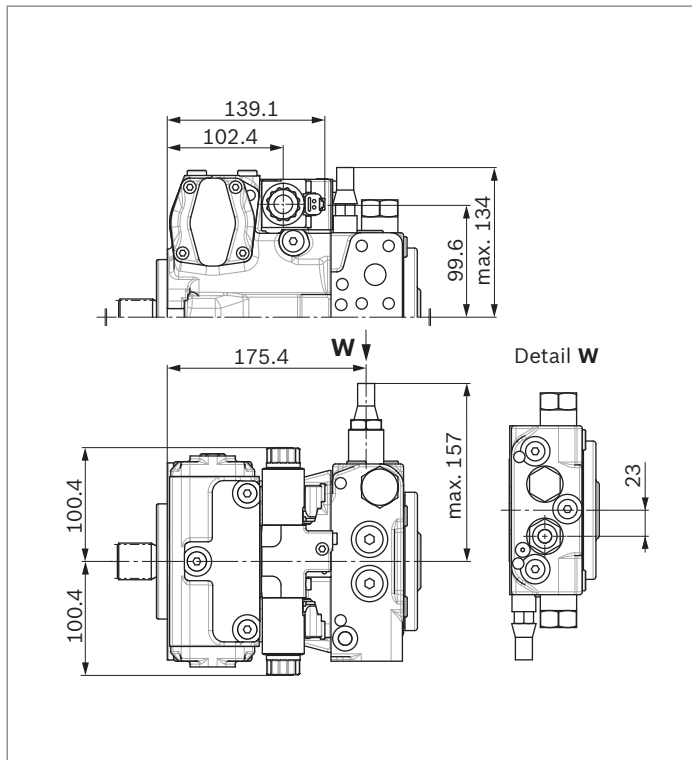


▼ **DA..3** – Mechanically adjustable with position lever

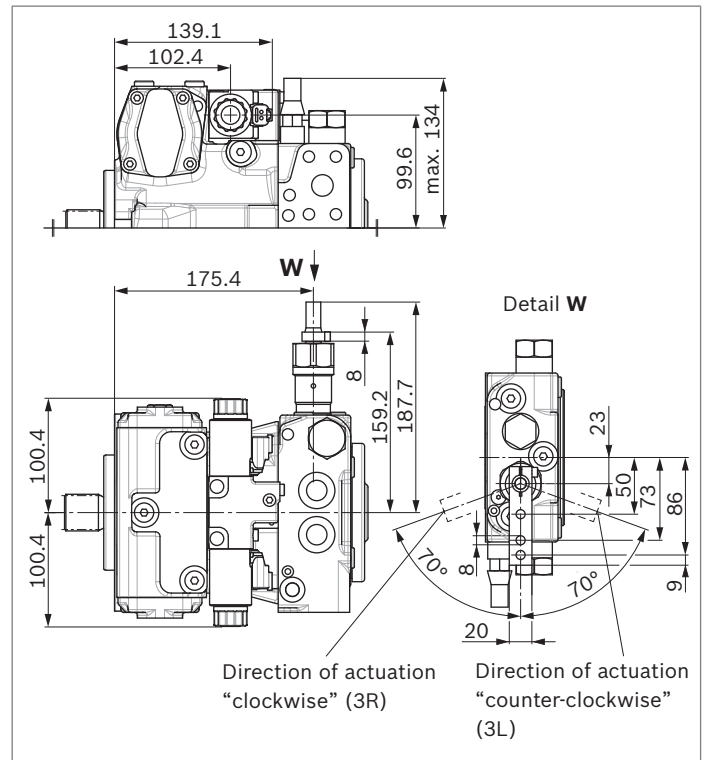

▼ **DA..7** – Fixed setting and ports for pilot control device

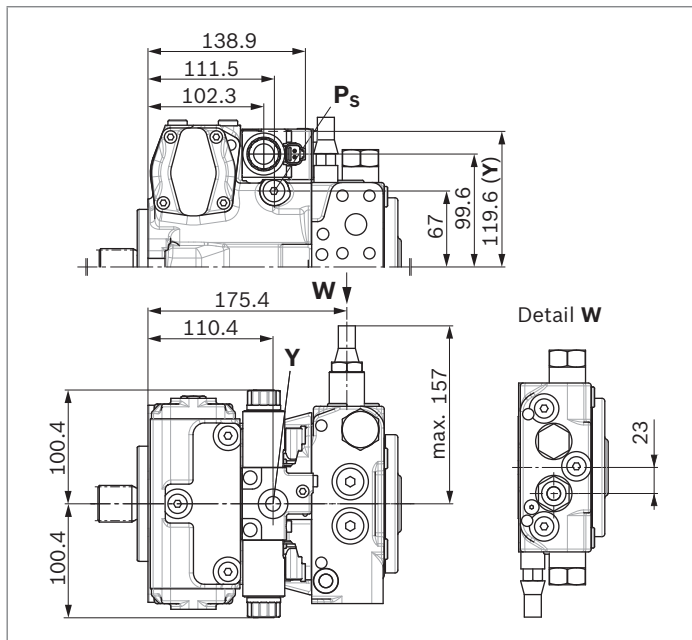


▼ **DA..8** – Fixed setting and inch valve mounted

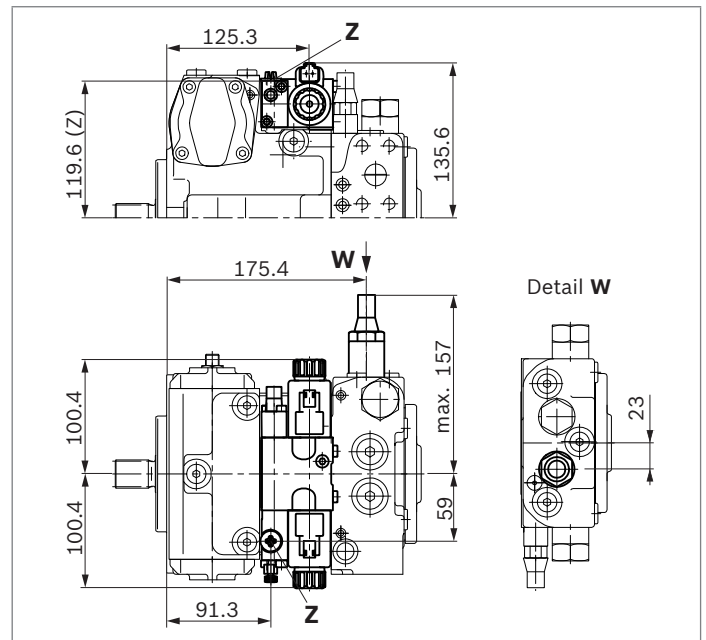

**Dimensions, size 40**


**NV – Version without control module**

Standard: SAE working port **A** and **B** top and bottom, suction port **S** bottom (02)

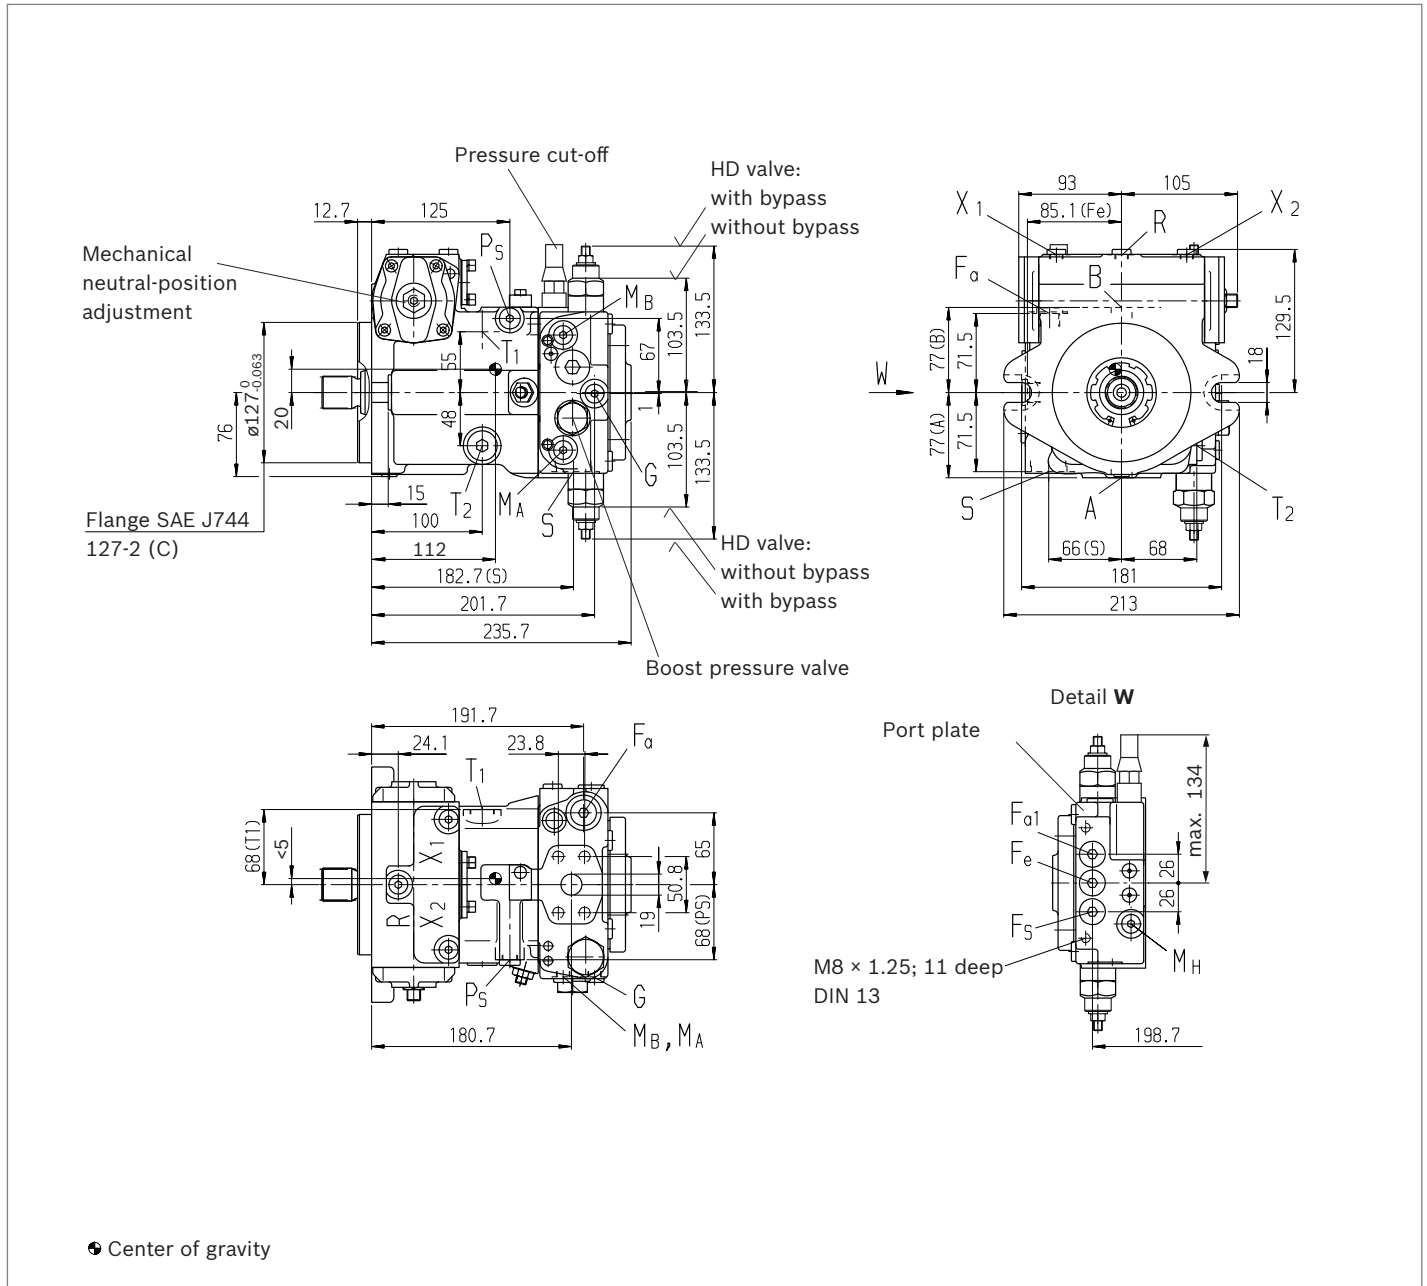


**Notice**  
 Option: SAE working port **A** and **B** top and bottom, suction port **S** top (03), port plate (02) rotated through 180°, installation drawing on request


▼ Splined shaft DIN 5480

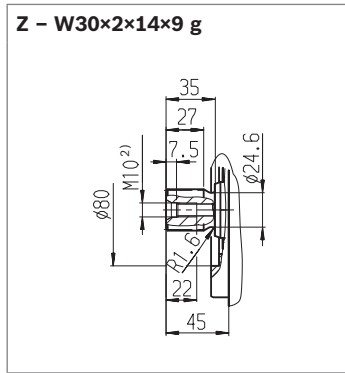


▼ Splined shaft DIN 5480

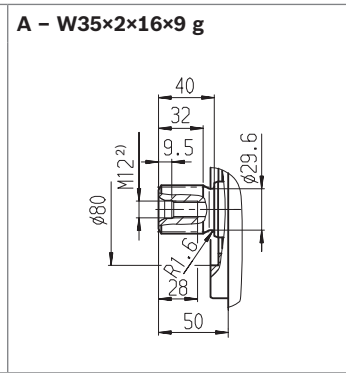

▼ Splined shaft ANSI B92.1a

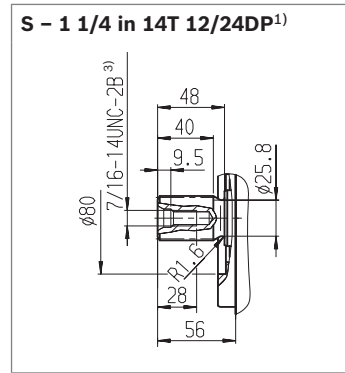

▼ Splined shaft ANSI B92.1a

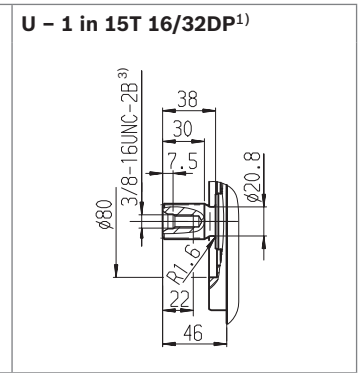


Ports	Standard	Size	$p_{max}$ [bar] <sup>4)</sup>	State <sup>10)</sup>	
<b>A, B</b>	Working port Fastening thread	SAEJ518 <sup>5)</sup> DIN 13	3/4 in M10 × 1.5; 17 deep	450	O
<b>S</b>	Suction port	DIN 3852 <sup>8)</sup>	M33 × 2; 18 deep	5	O <sup>6)</sup>
<b>T<sub>1</sub></b>	Drain port	DIN 3852 <sup>8)</sup>	M22 × 1.5; 14 deep	3	O <sup>7)</sup>
<b>T<sub>2</sub></b>	Drain port	DIN 3852 <sup>8)</sup>	M22 × 1.5; 14 deep	3	X <sup>7)</sup>
<b>R</b>	Air bleed port	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	3	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice)	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice, DG only)	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40	O
<b>X<sub>3</sub>, X<sub>4</sub><sup>9)</sup></b>	Stroking chamber pressure port	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40	X
<b>G</b>	Boost pressure port inlet	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40	X
<b>P<sub>s</sub></b>	Pilot pressure port	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40	X
<b>P<sub>s</sub></b>	Pilot pressure port (DA..7 only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40	O
<b>Y</b>	Pilot pressure port outlet (DA..7 only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40	O
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring port pressure A, B	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	450	X
<b>M<sub>H</sub></b>	Measuring port, high pressure	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	450	X
<b>F<sub>a</sub></b>	Boost pressure port inlet	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40	X
<b>F<sub>a1</sub></b>	Boost pressure port inlet (attachment filter)	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40	X
<b>F<sub>e</sub></b>	Boost pressure port outlet	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40	X
<b>F<sub>s</sub></b>	Line from filter to suction port (cold start)	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40	X
<b>Y<sub>1</sub>, Y<sub>2</sub></b>	Pilot pressure port (pilot signal HD only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40	O
<b>Z</b>	Pilot pressure port (inch signal DA..8 only)	DIN 3852 <sup>8)</sup>	M10 × 1; 8 deep	40	X


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Center bore according to DIN 332 (thread according to DIN 13)
- 3) Thread according to ASME B1.1
- 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

- 6) Plugged at external boost pressure supply.
- 7) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 67).
- 8) The countersink can be deeper than as specified in the standard.
- 9) Optional, see page 58
- 10) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)


▼ **HD** – Proportional control, hydraulic, pilot-pressure related

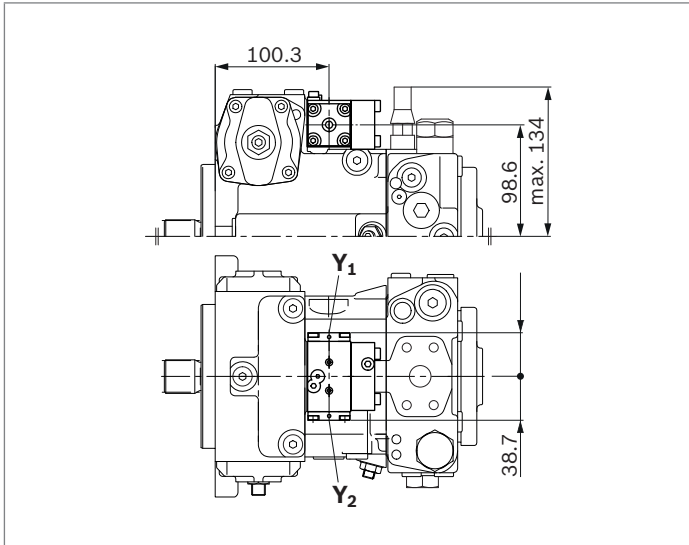


▼ **HW** – Proportional control, hydraulic, mechanical servo

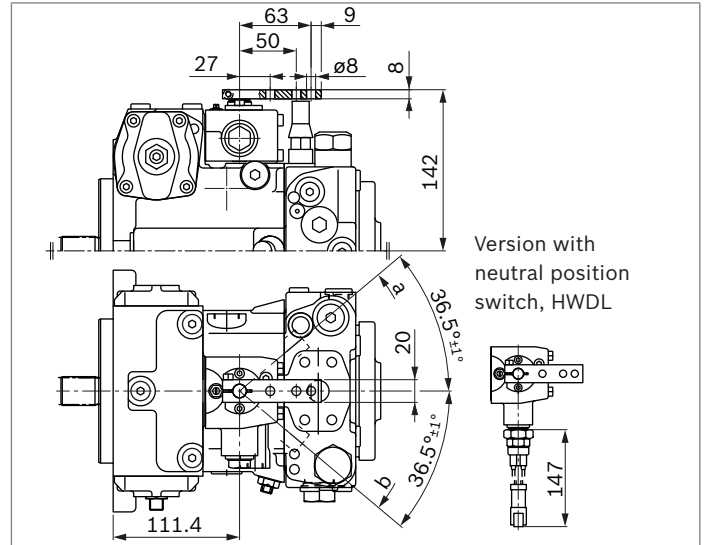


▼ **EP** – Proportional control, electric

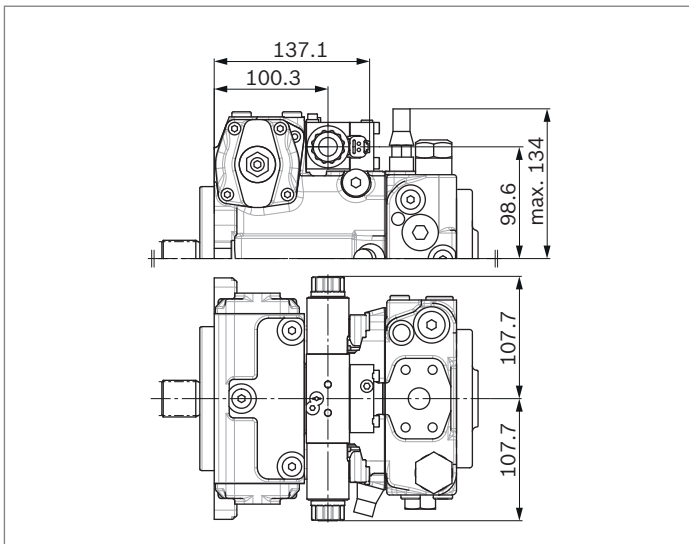

▼ **EZ** – Two-point control, electric

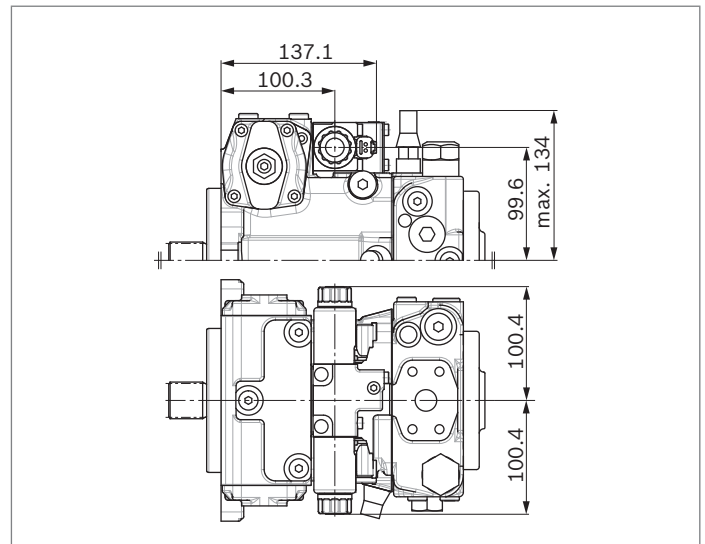


▼ **DG** – Hydraulic control, direct operated

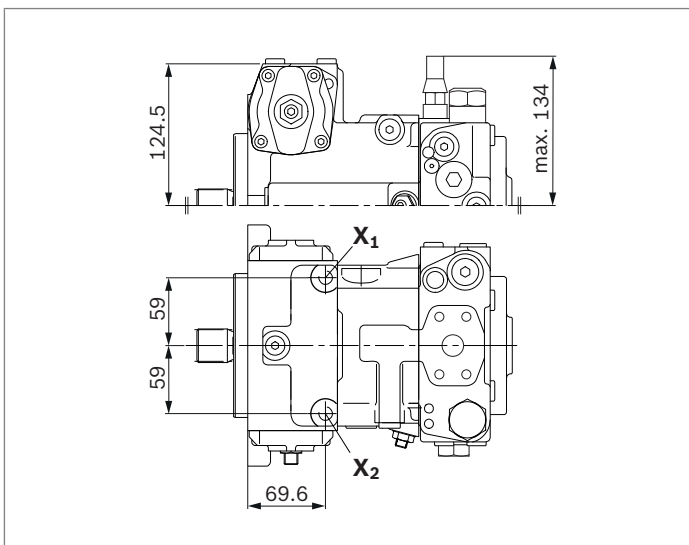


**DA control valve**


▼ **DA..2** – Fixed setting

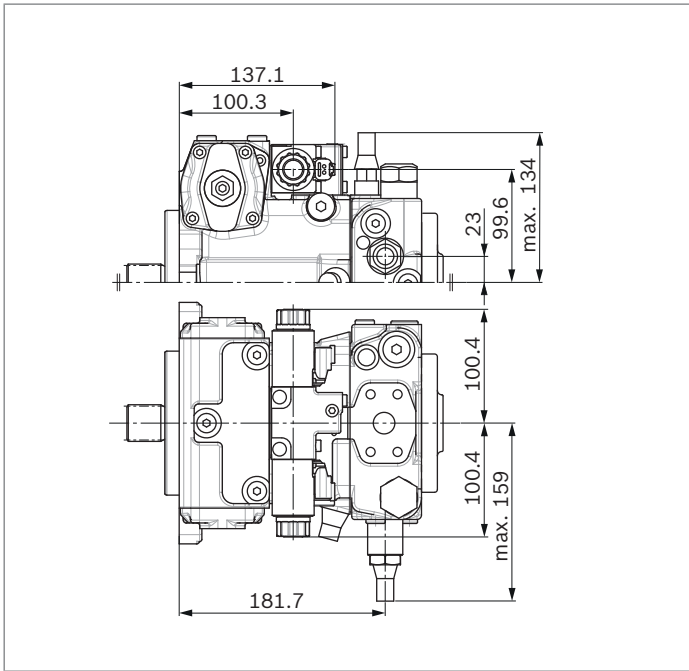


▼ **DA..3** – Mechanically adjustable with position lever

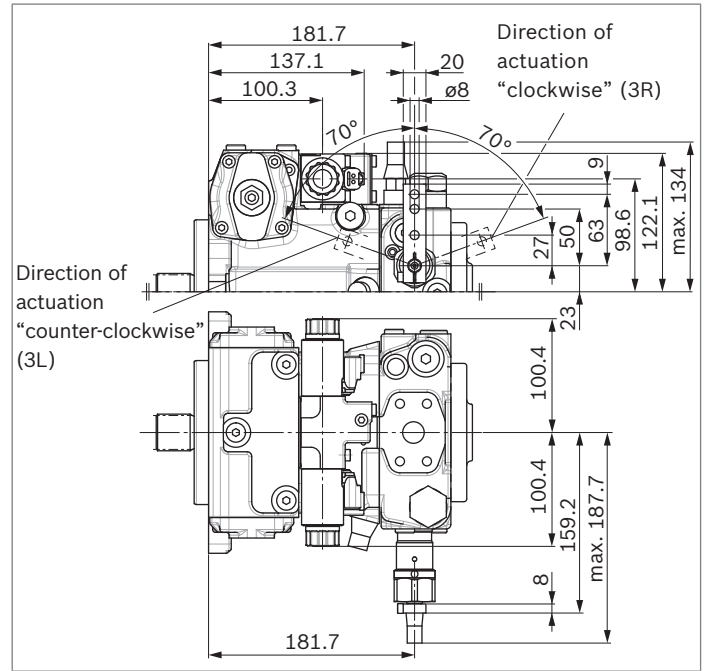

▼ **DA..7** – Fixed setting and ports for pilot control device

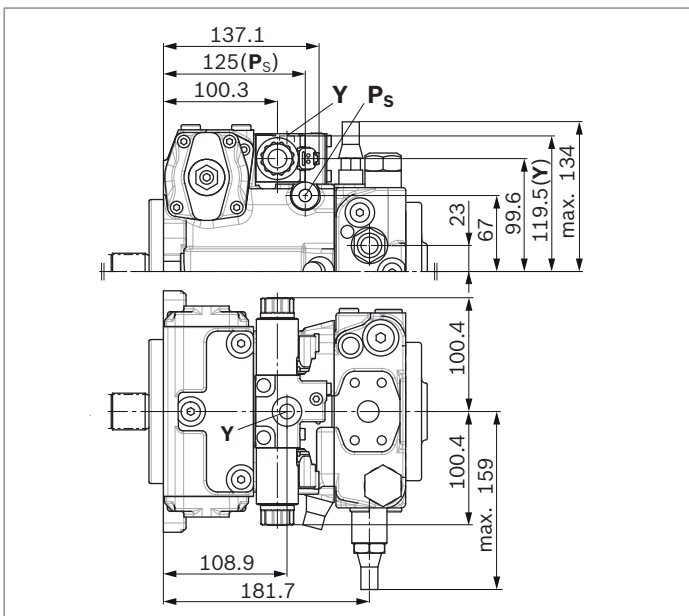


▼ **DA..8** – Fixed setting and inch valve mounted

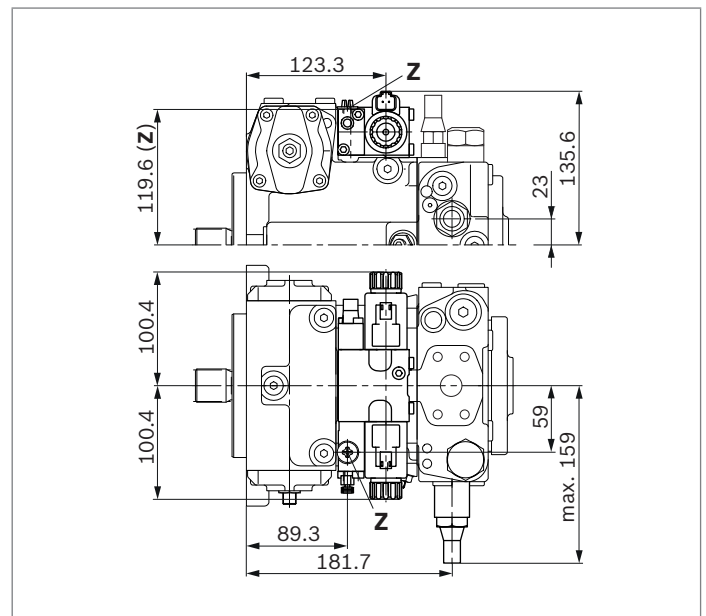

**Dimensions, size 56**

**NV – Version without control module**


Standard: SAE working port **A** and **B** top and bottom, suction port **S** bottom (02)

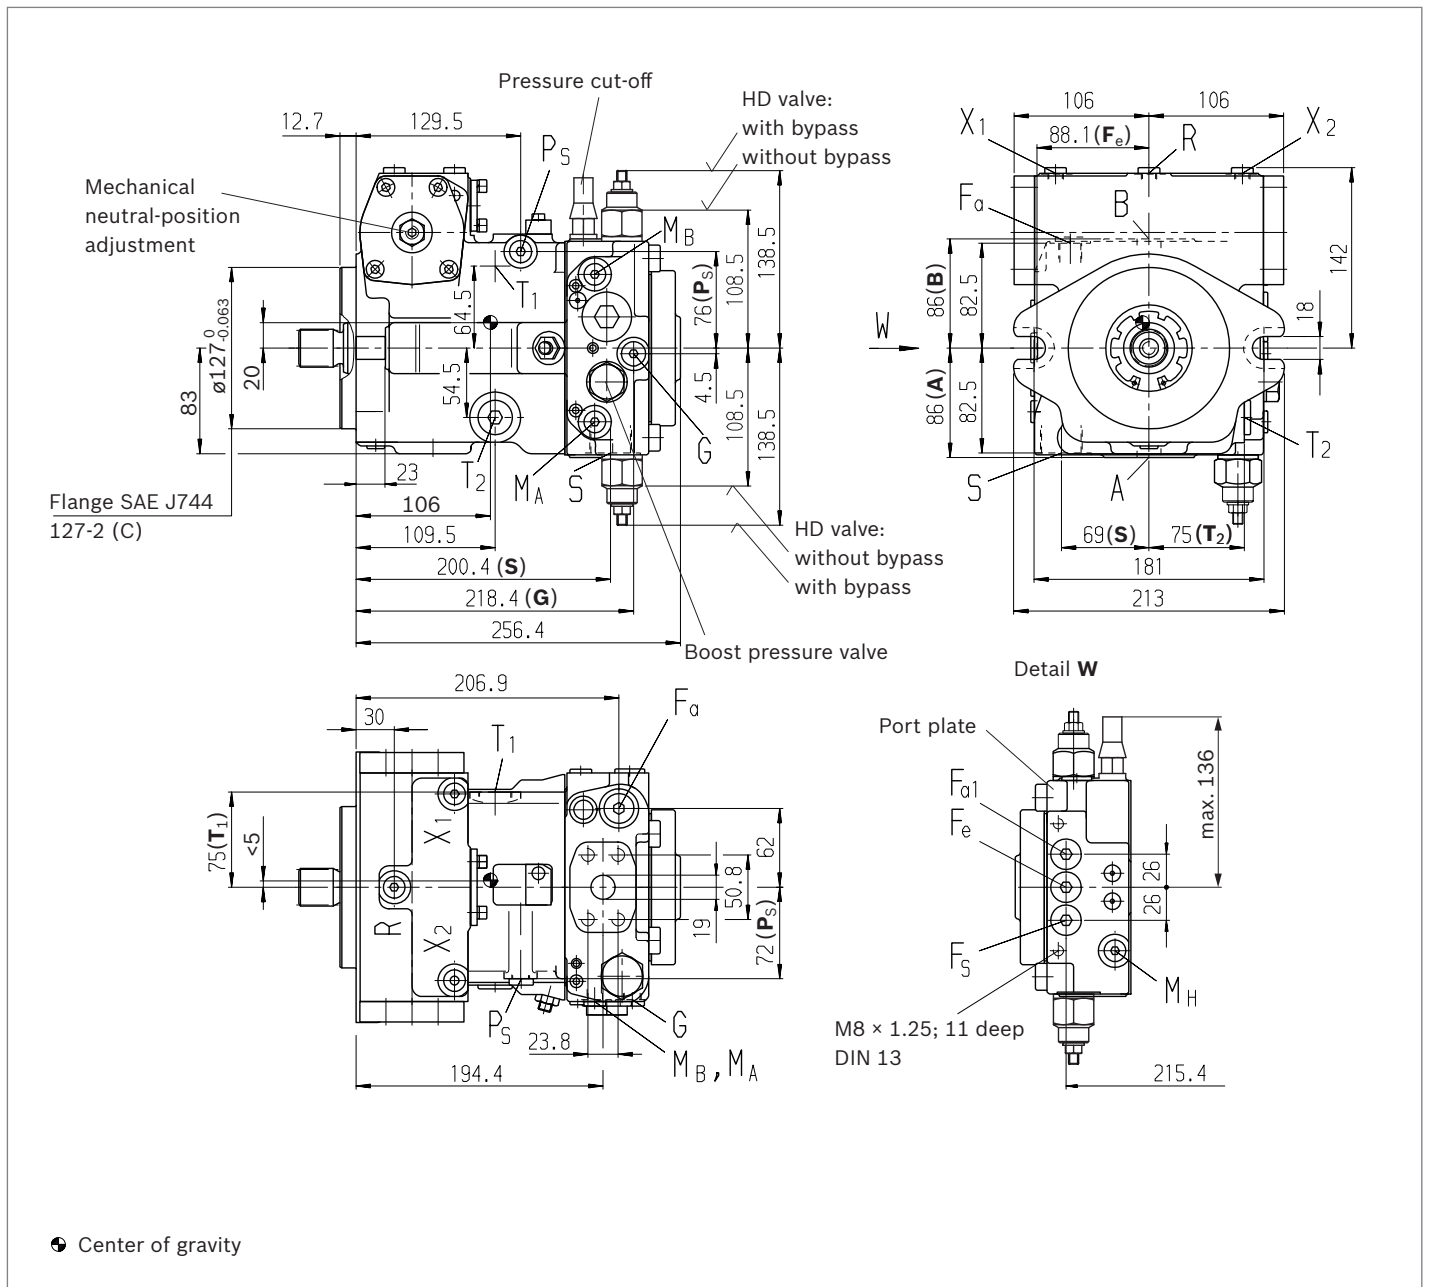

**Notice**  
 Option: SAE working port **A** and **B** top and bottom, suction port **S** top (03), port plate (02) rotated through 180°, installation drawing on request

**NV – Version without control module**

Option: SAE working port **A** and **B**, same side left, suction port **S** top (13)

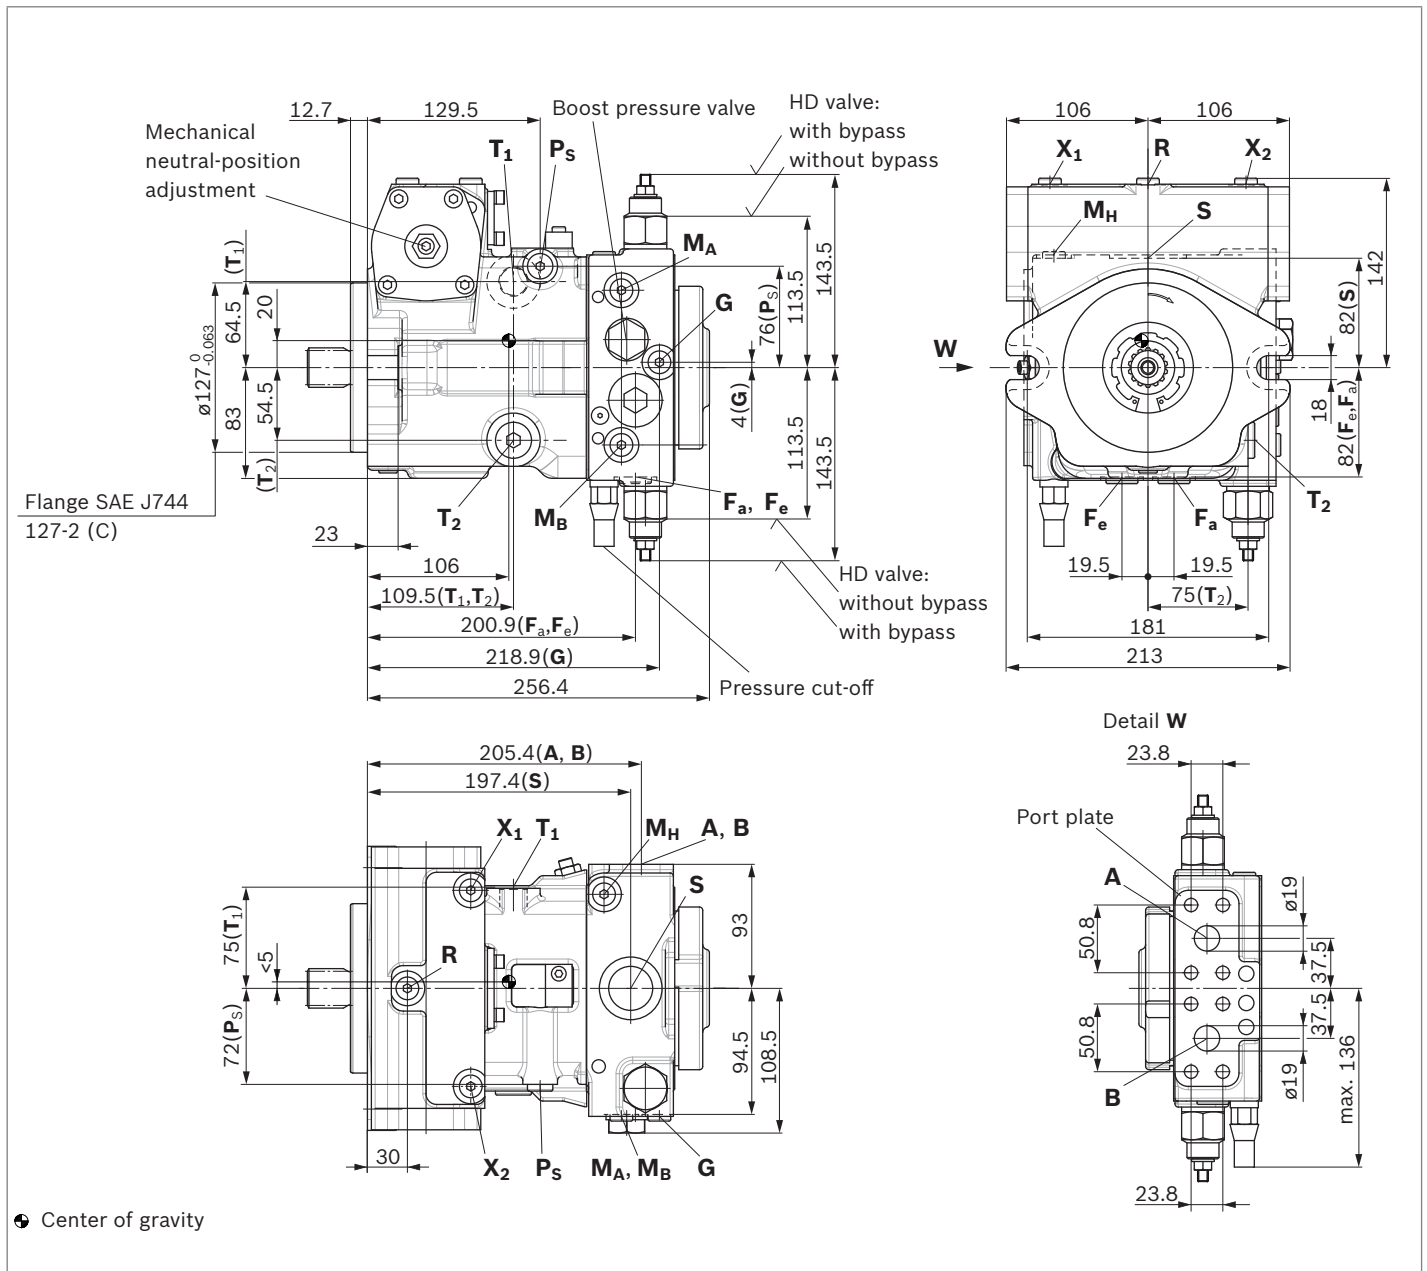





▼ Splined shaft DIN 5480

▼ Splined shaft DIN 5480

▼ Splined shaft ANSI B92.1a

▼ Splined shaft ANSI B92.1a

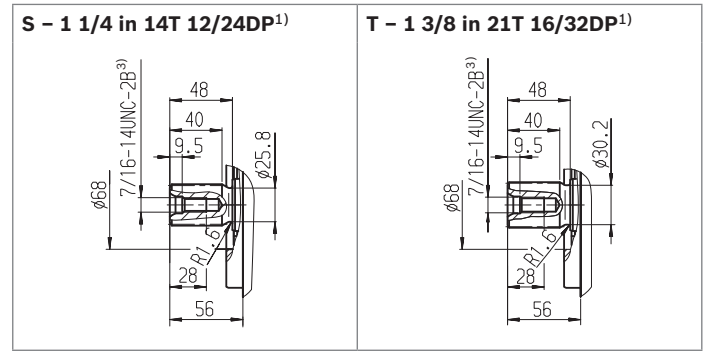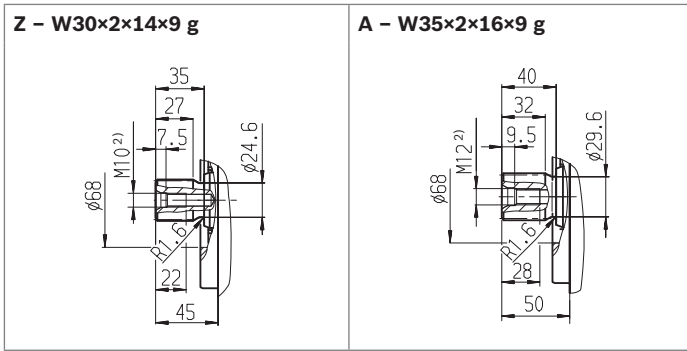


Ports	Standard	Size	$p_{max}$ [bar] <sup>4)</sup>	State <sup>10)</sup>
<b>A, B</b>	Working port Fastening thread	SAEJ518 <sup>5)</sup> DIN 13	3/4 in M10 × 1.5; 17 deep	450 O
<b>S</b>	Suction port	DIN 3852 <sup>8)</sup>	M33 × 2; 18 deep	5 O <sup>6)</sup>
<b>T<sub>1</sub></b>	Drain port	DIN 3852 <sup>8)</sup>	M22 × 1.5; 14 deep	3 O <sup>7)</sup>
<b>T<sub>2</sub></b>	Drain port	DIN 3852 <sup>8)</sup>	M22 × 1.5; 14 deep	3 X <sup>7)</sup>
<b>R</b>	Air bleed port	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	3 X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice)	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40 X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice, DG only)	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40 O
<b>X<sub>3</sub>, X<sub>4</sub><sup>9)</sup></b>	Stroking chamber pressure port	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40 X
<b>G</b>	Boost pressure port inlet	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40 X
<b>P<sub>S</sub></b>	Pilot pressure port	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40 X
<b>P<sub>S</sub></b>	Pilot pressure port (DA..7 only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40 O
<b>Y</b>	Pilot pressure port outlet (DA..7 only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40 O
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring port pressure A, B	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	450 X
<b>M<sub>H</sub></b>	Measuring port, high pressure	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	450 X
<b>F<sub>a</sub></b>	Boost pressure port inlet	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40 X
<b>F<sub>a1</sub></b>	Boost pressure port inlet (attachment filter)	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40 X
<b>F<sub>e</sub></b>	Boost pressure port outlet	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40 X
<b>F<sub>S</sub></b>	Line from filter to suction port (cold start)	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40 X
<b>Y<sub>1</sub>, Y<sub>2</sub></b>	Pilot pressure port (pilot signal HD only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40 O
<b>Z</b>	Pilot pressure port (inch signal DA..8 only)	DIN 3852 <sup>8)</sup>	M10 × 1; 8 deep	40 X


1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5  
 2) Center bore according to DIN 332 (thread according to DIN 13)  
 3) Thread according to ASME B1.1  
 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.  
 5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

6) Plugged at external boost pressure supply.  
 7) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 67).  
 8) The countersink can be deeper than as specified in the standard.  
 9) Optional, see page 58  
 10) O = Must be connected (plugged when delivered)  
 X = Plugged (in normal operation)


▼ **HD** – Proportional control, hydraulic, pilot-pressure related

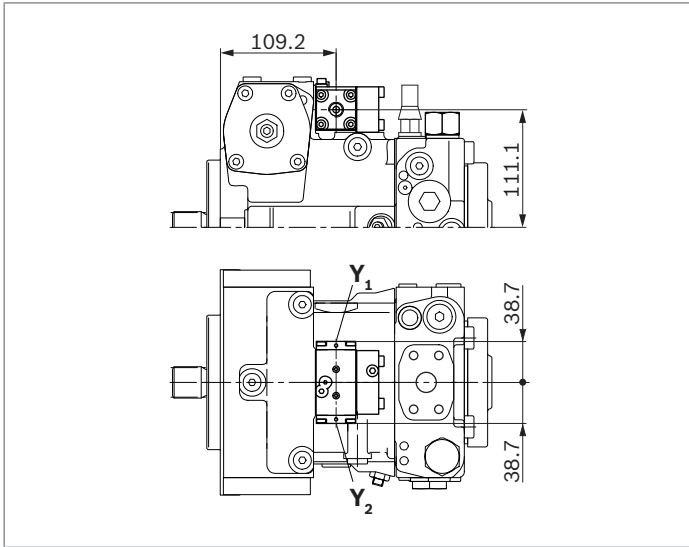


▼ **HW** – Proportional control, hydraulic, mechanical servo

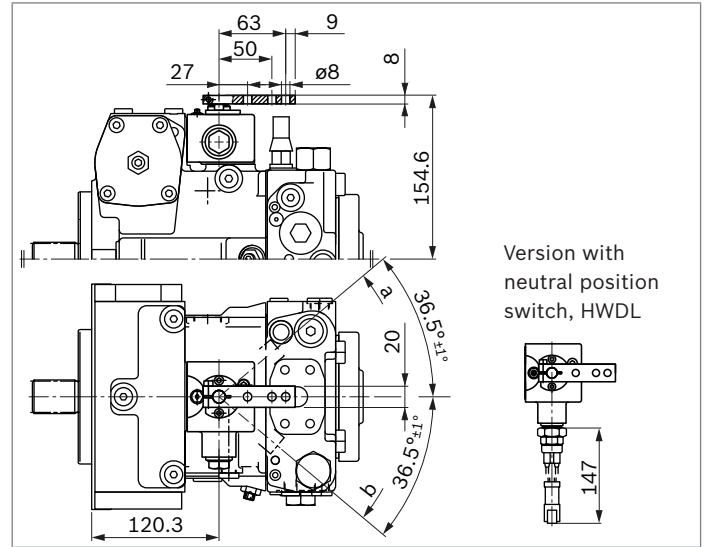


▼ **EP** – Proportional control, electric

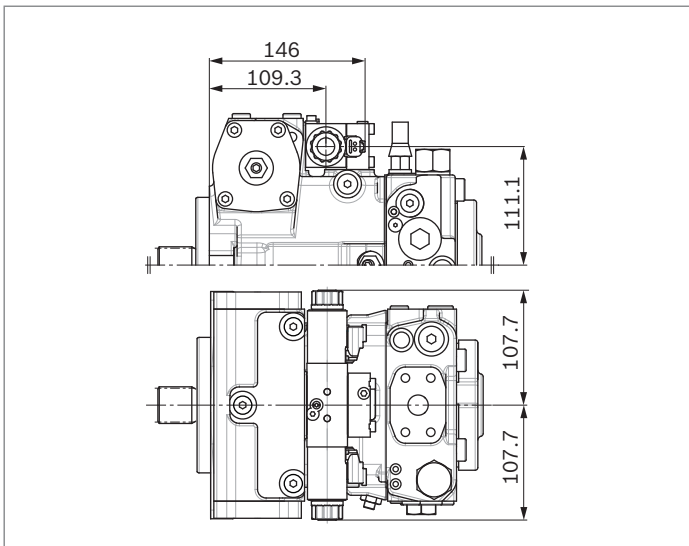

▼ **EZ** – Two-point control, electric

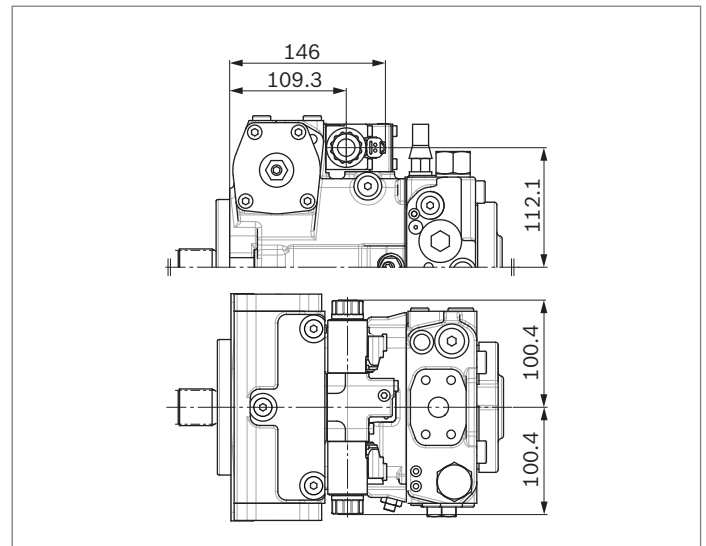

▼ **DG** – Hydraulic control, direct operated

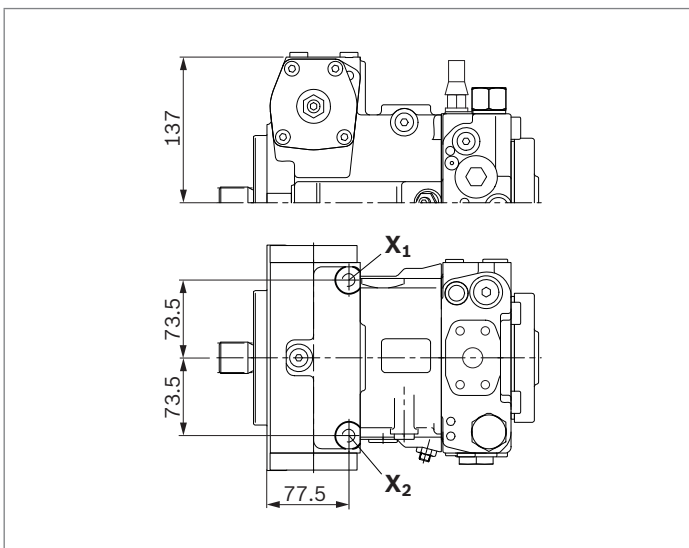




## Dimensions, size 71

### NV – Version without control module

Standard: SAE working port **A** and **B** top and bottom, suction port **S** bottom (02)

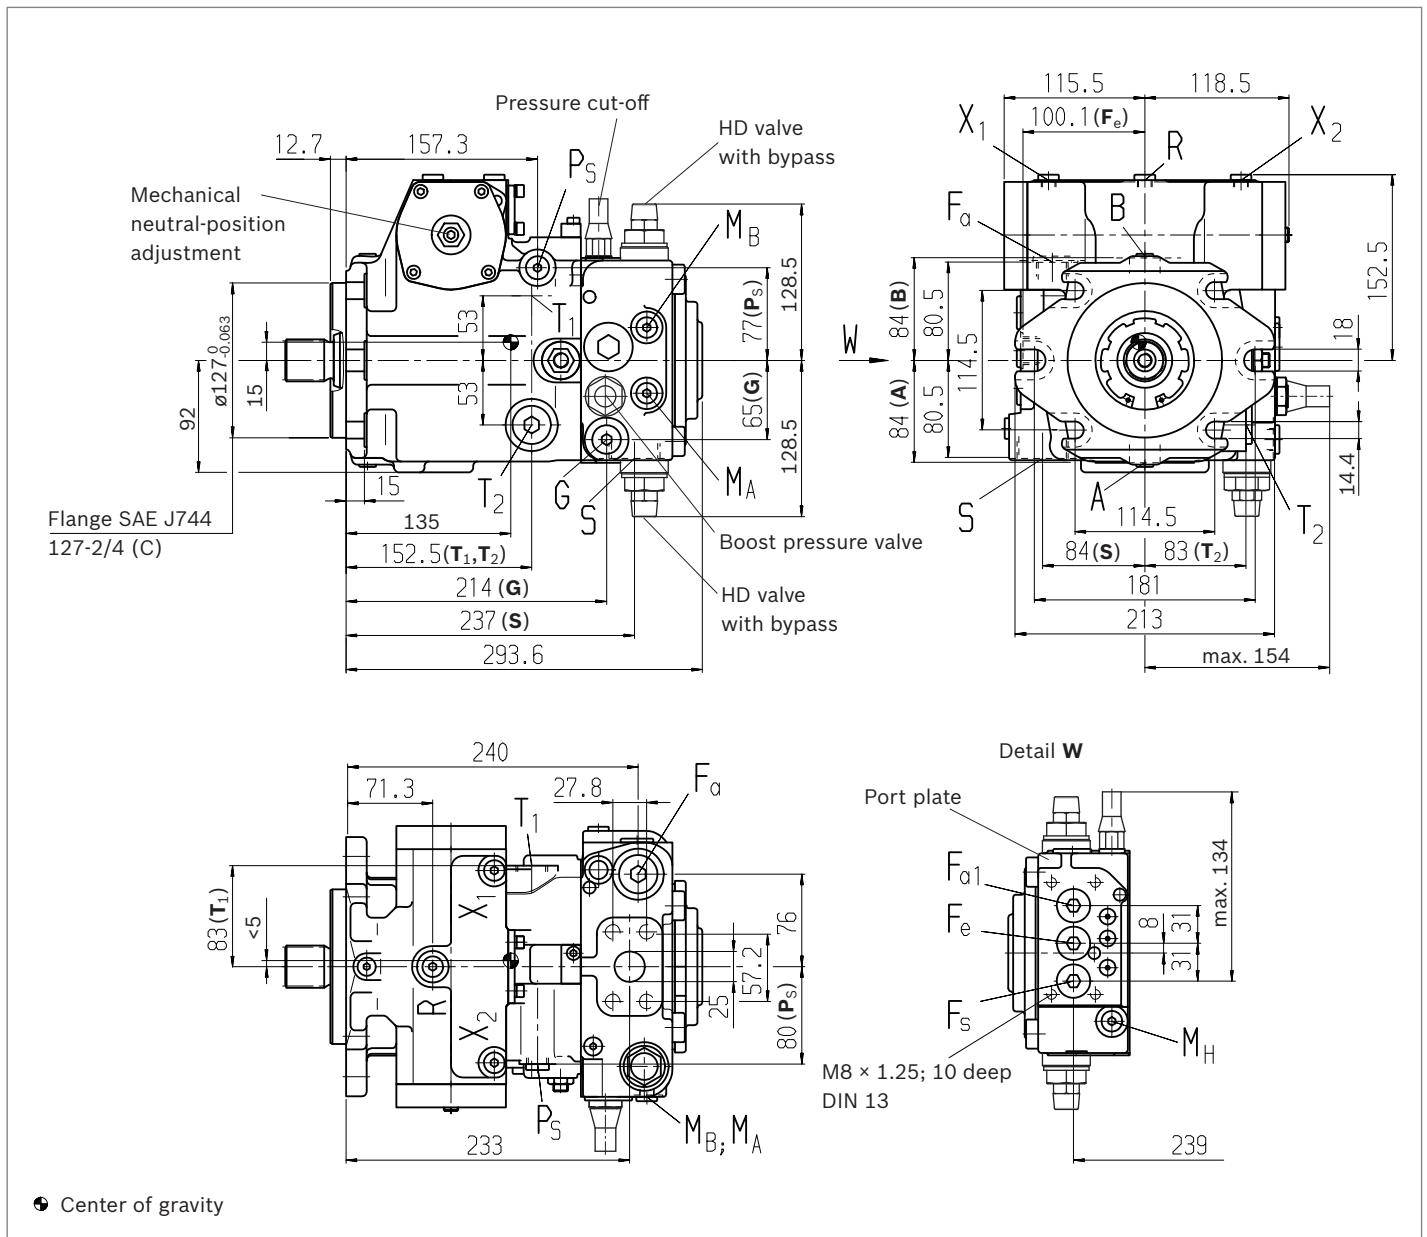


#### Notice

Option: SAE working port **A** and **B** top and bottom, suction port **S** top (03). Port plate (02) rotated through 180°, installation drawing on request

**NV – Version without control module**


Standard: SAE working port **A** and **B**, same side left, suction port **S** bottom (10)

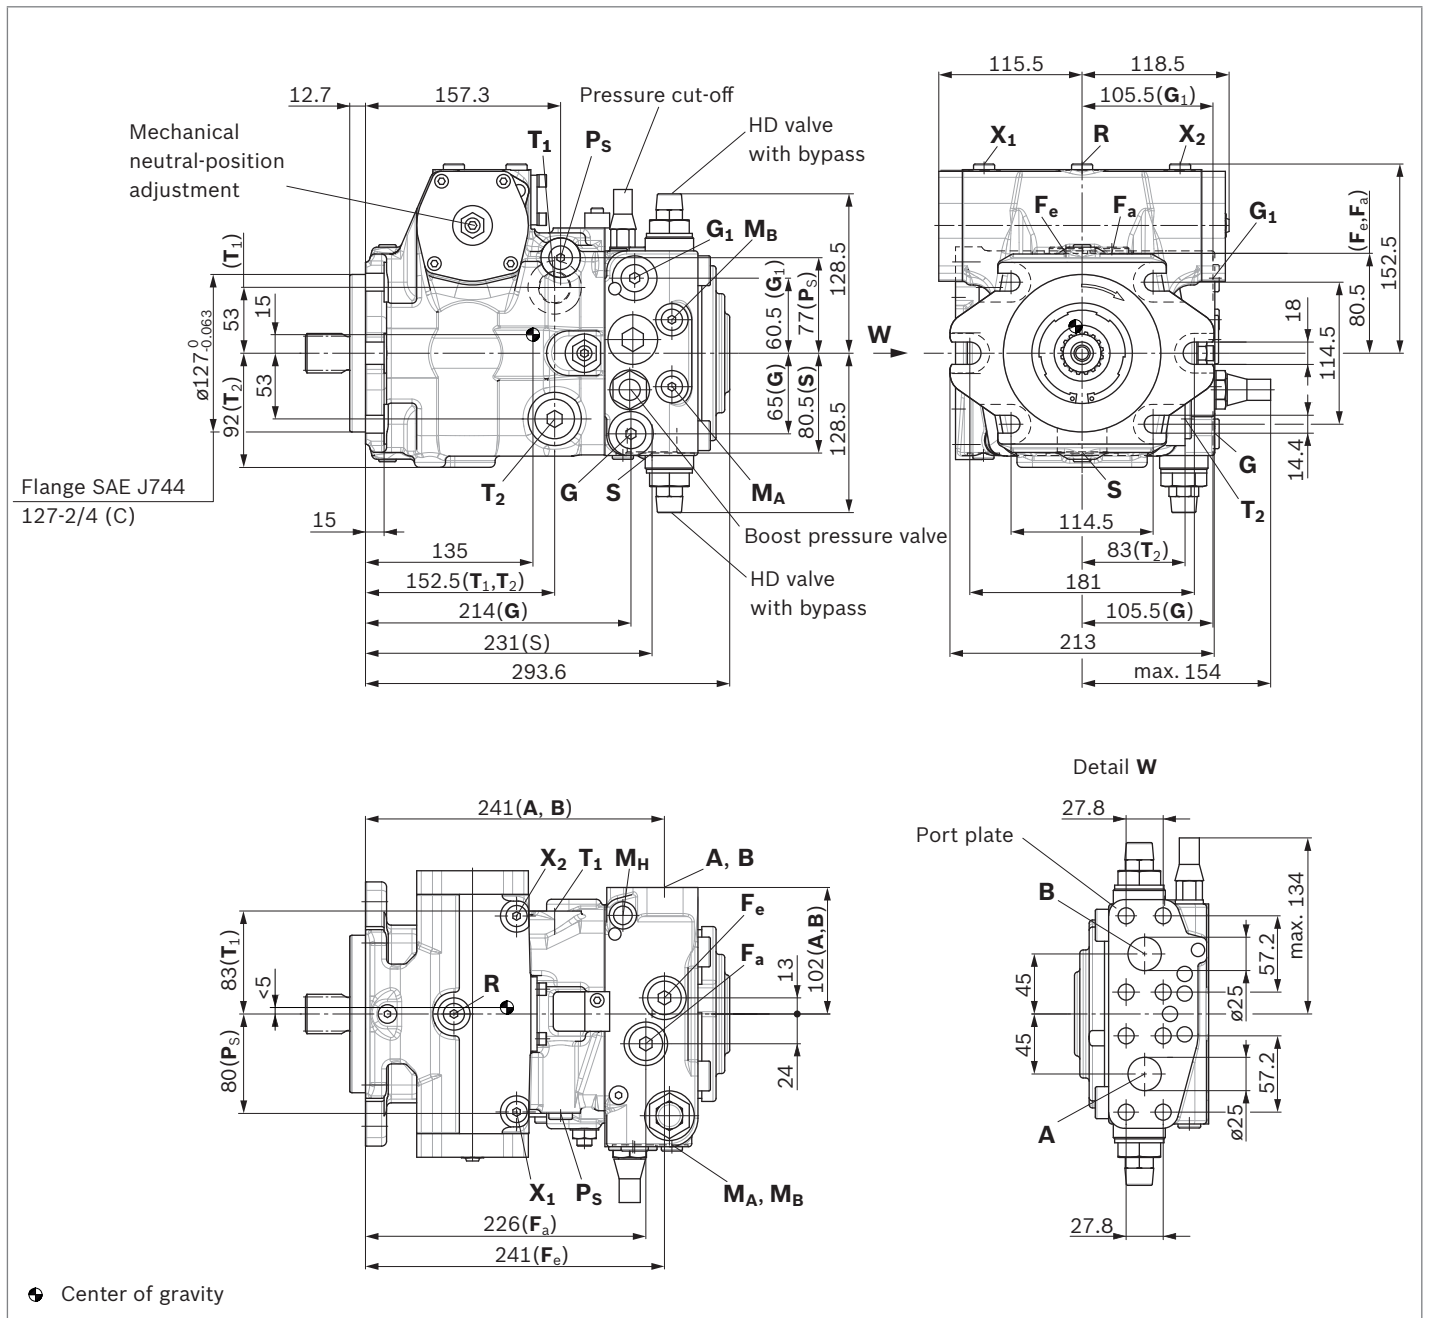


**Notice**

Option: SAE working port **A** and **B**, same side right, suction port **S** top (13), installation drawing on request


▼ Splined shaft DIN 5480

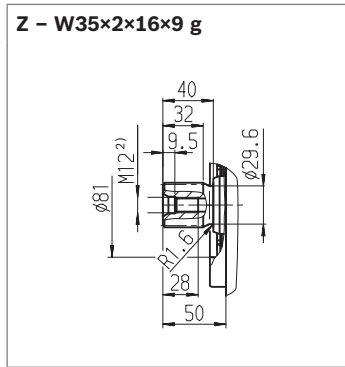


▼ Splined shaft DIN 5480

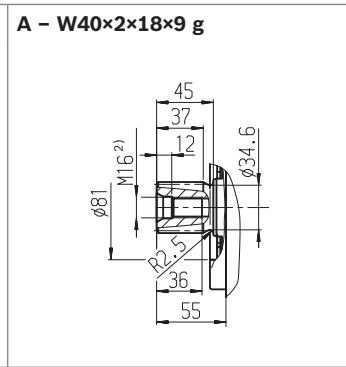

▼ Splined shaft ANSI B92.1a

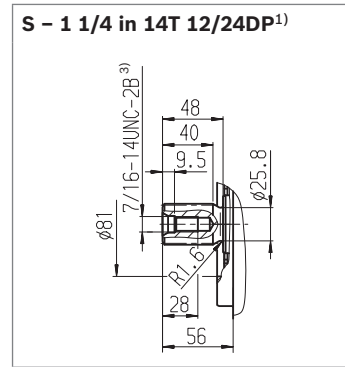

▼ Splined shaft ANSI B92.1a

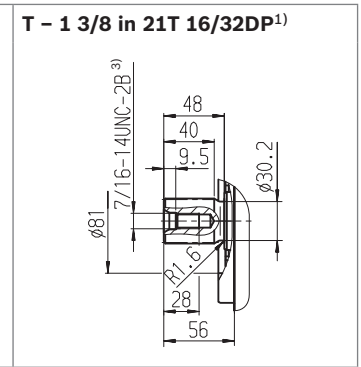


Ports		Standard	Size	$p_{max}$ [bar] <sup>4)</sup>	State <sup>10)</sup>
<b>A, B</b>	Working port Fastening thread	SAEJ518 <sup>5)</sup> DIN 13	1 in M12 × 1.75; 17 deep	450	O
<b>S</b>	Suction port	DIN 3852 <sup>8)</sup>	M42 × 2; 20 deep	5	O <sup>6)</sup>
<b>T<sub>1</sub></b>	Drain port	DIN 3852 <sup>8)</sup>	M26 × 1.5; 16 deep	3	O <sup>7)</sup>
<b>T<sub>2</sub></b>	Drain port	DIN 3852 <sup>8)</sup>	M26 × 1.5; 16 deep	3	X <sup>7)</sup>
<b>R</b>	Air bleed port	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	3	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice)	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice, DG only)	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40	O
<b>X<sub>3</sub>, X<sub>4</sub><sup>9)</sup></b>	Stroking chamber pressure port	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40	X
<b>G</b>	Boost pressure port inlet	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40	X
<b>P<sub>S</sub></b>	Pilot pressure port	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40	X
<b>P<sub>S</sub></b>	Pilot pressure port (DA..7 only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40	O
<b>Y</b>	Pilot pressure port outlet (DA..7 only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40	O
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring port pressure A, B	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	450	X
<b>M<sub>H</sub></b>	Measuring port, high pressure	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	450	X
<b>F<sub>a</sub></b>	Boost pressure port inlet	DIN 3852 <sup>8)</sup>	M26 × 1.5; 16 deep	40	X
<b>F<sub>a1</sub></b>	Boost pressure port inlet (attachment filter)	DIN 3852 <sup>8)</sup>	M22 × 1.5; 14 deep	40	X
<b>F<sub>e</sub></b>	Boost pressure port outlet	DIN 3852 <sup>8)</sup>	M22 × 1.5; 14 deep	40	X
<b>F<sub>S</sub></b>	Line from filter to suction port (cold start)	DIN 3852 <sup>8)</sup>	M22 × 1.5; 14 deep	40	X
<b>Y<sub>1</sub>, Y<sub>2</sub></b>	Pilot pressure port (pilot signal HD only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 8 deep	40	O
<b>Z</b>	Pilot pressure port (inch signal DA..8 only)	DIN 3852 <sup>8)</sup>	M10 × 1; 12 deep	40	X


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Center bore according to DIN 332 (thread according to DIN 13)
- 3) Thread according to ASME B1.1
- 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

- 6) Plugged at external boost pressure supply.
- 7) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 67).
- 8) The countersink can be deeper than as specified in the standard.
- 9) Optional, see page 58
- 10) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)


▼ **HD** – Proportional control, hydraulic, pilot-pressure related

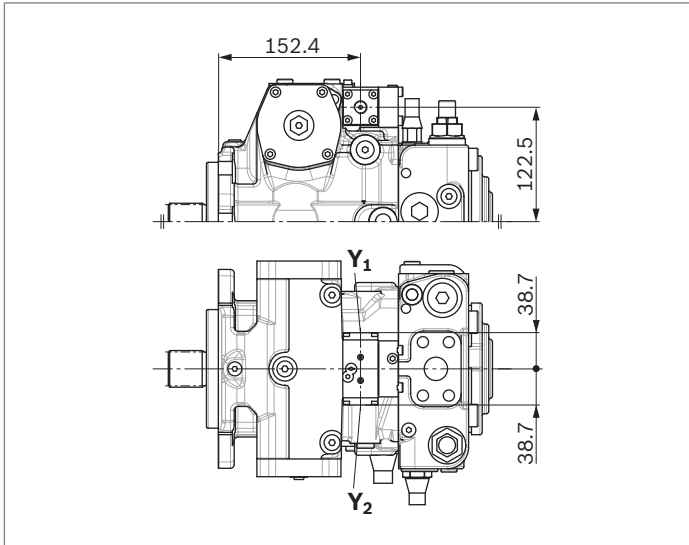


▼ **HW** – Proportional control, hydraulic, mechanical servo

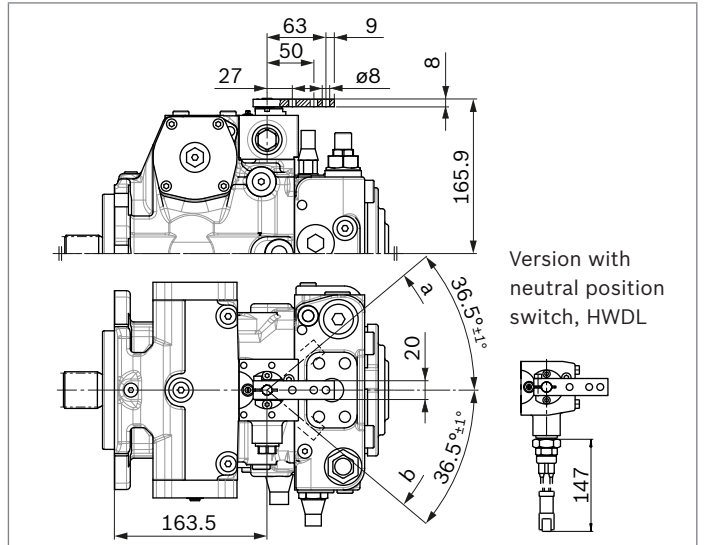


▼ **EP** – Proportional control, electric

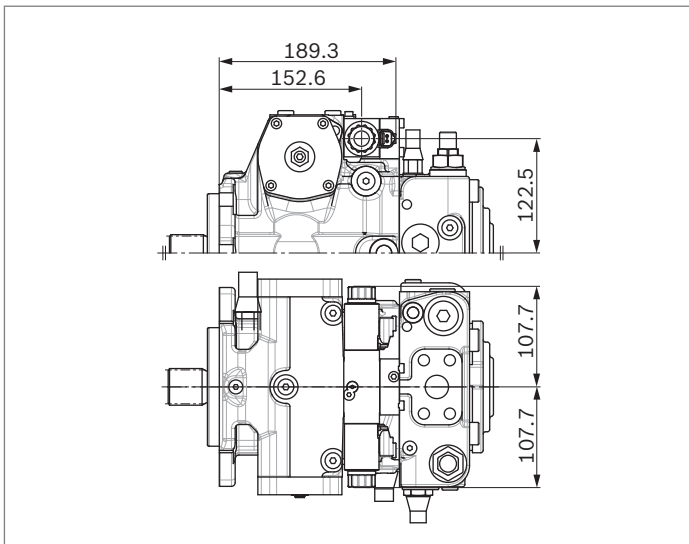

▼ **EZ** – Two-point control, electric

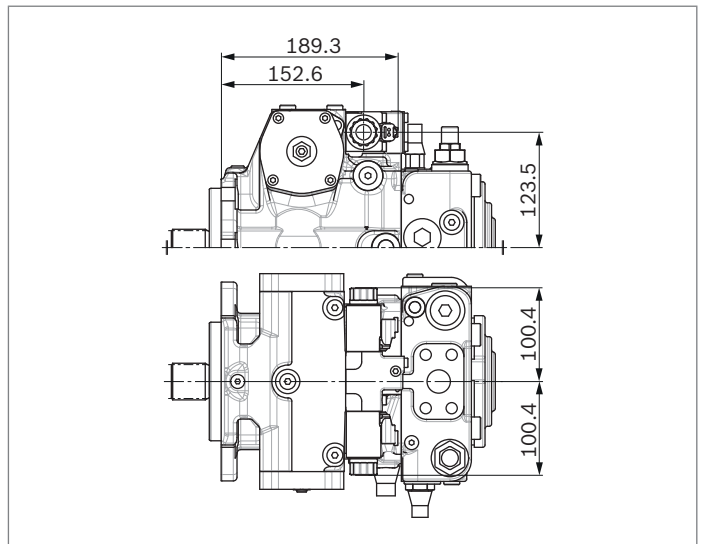


▼ **DG** – Hydraulic control, direct operated

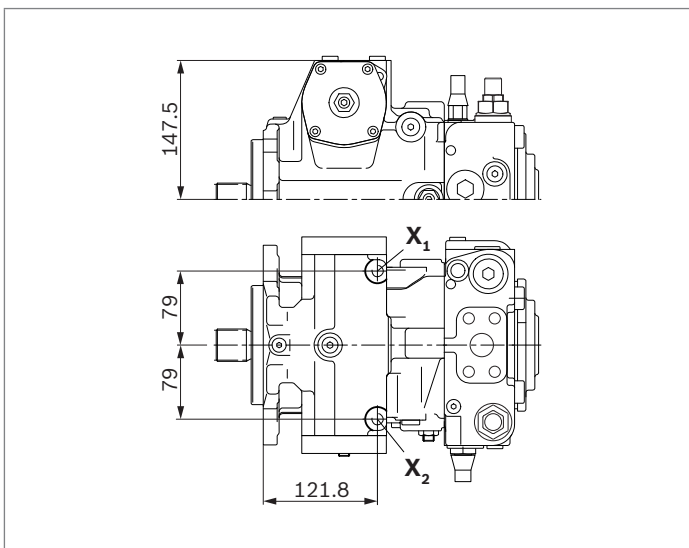


**DA control valve**


▼ **DA..2** – Fixed setting

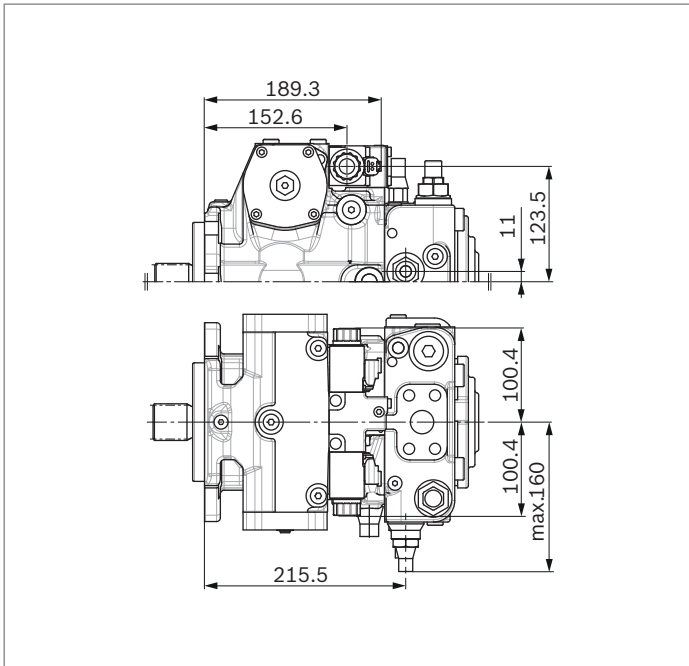


▼ **DA..3** – Mechanically adjustable with position lever

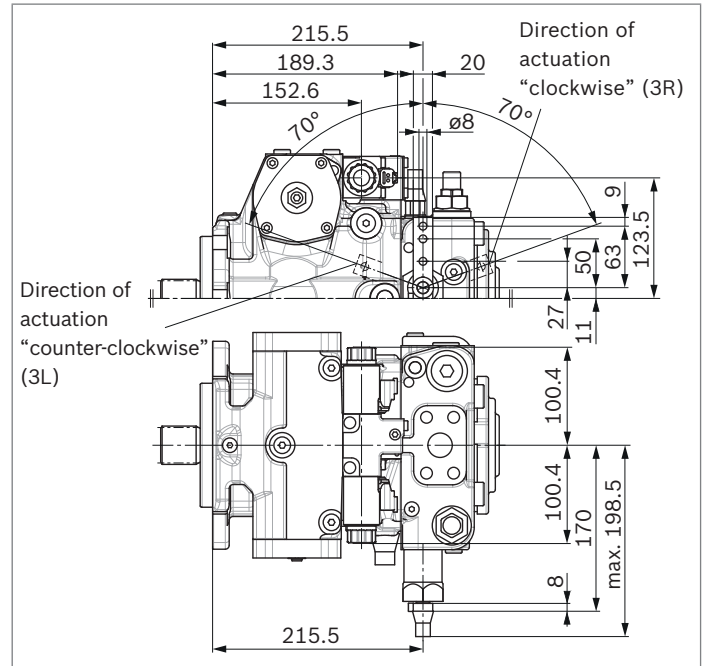

▼ **DA..7** – Fixed setting and ports for pilot control device

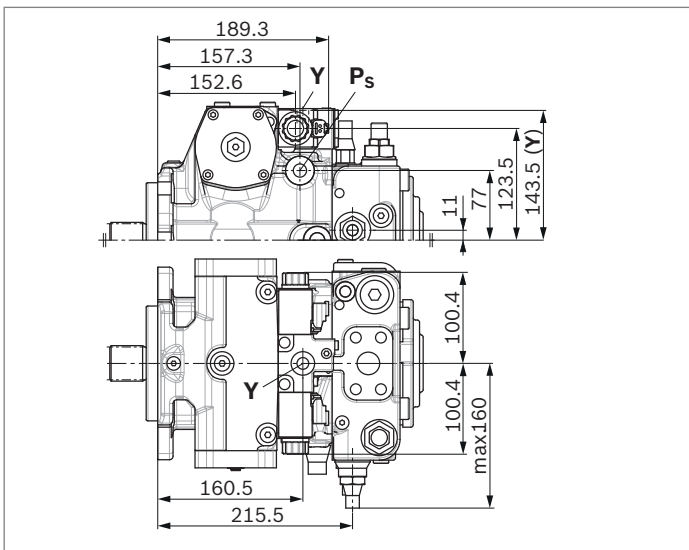

▼ **DA..8** – Fixed setting and inch valve mounted

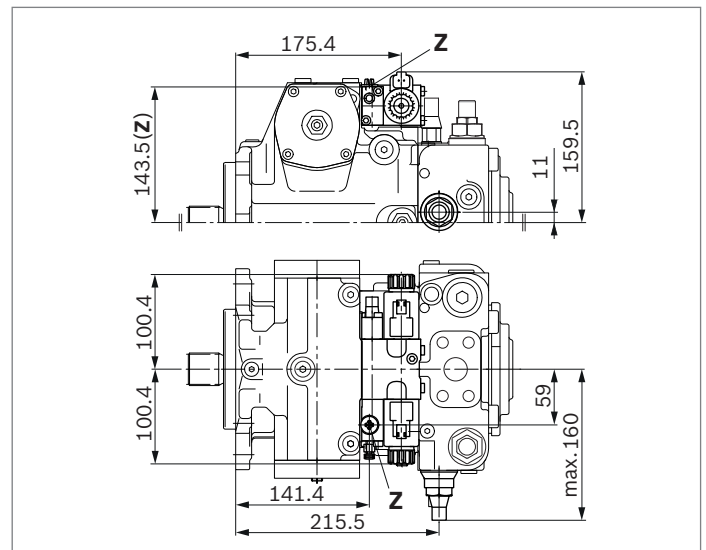




**Dimensions, size 90**


**NV – Version without control module**

Standard: SAE working port **A** and **B** top and bottom, suction port **S** bottom (02)

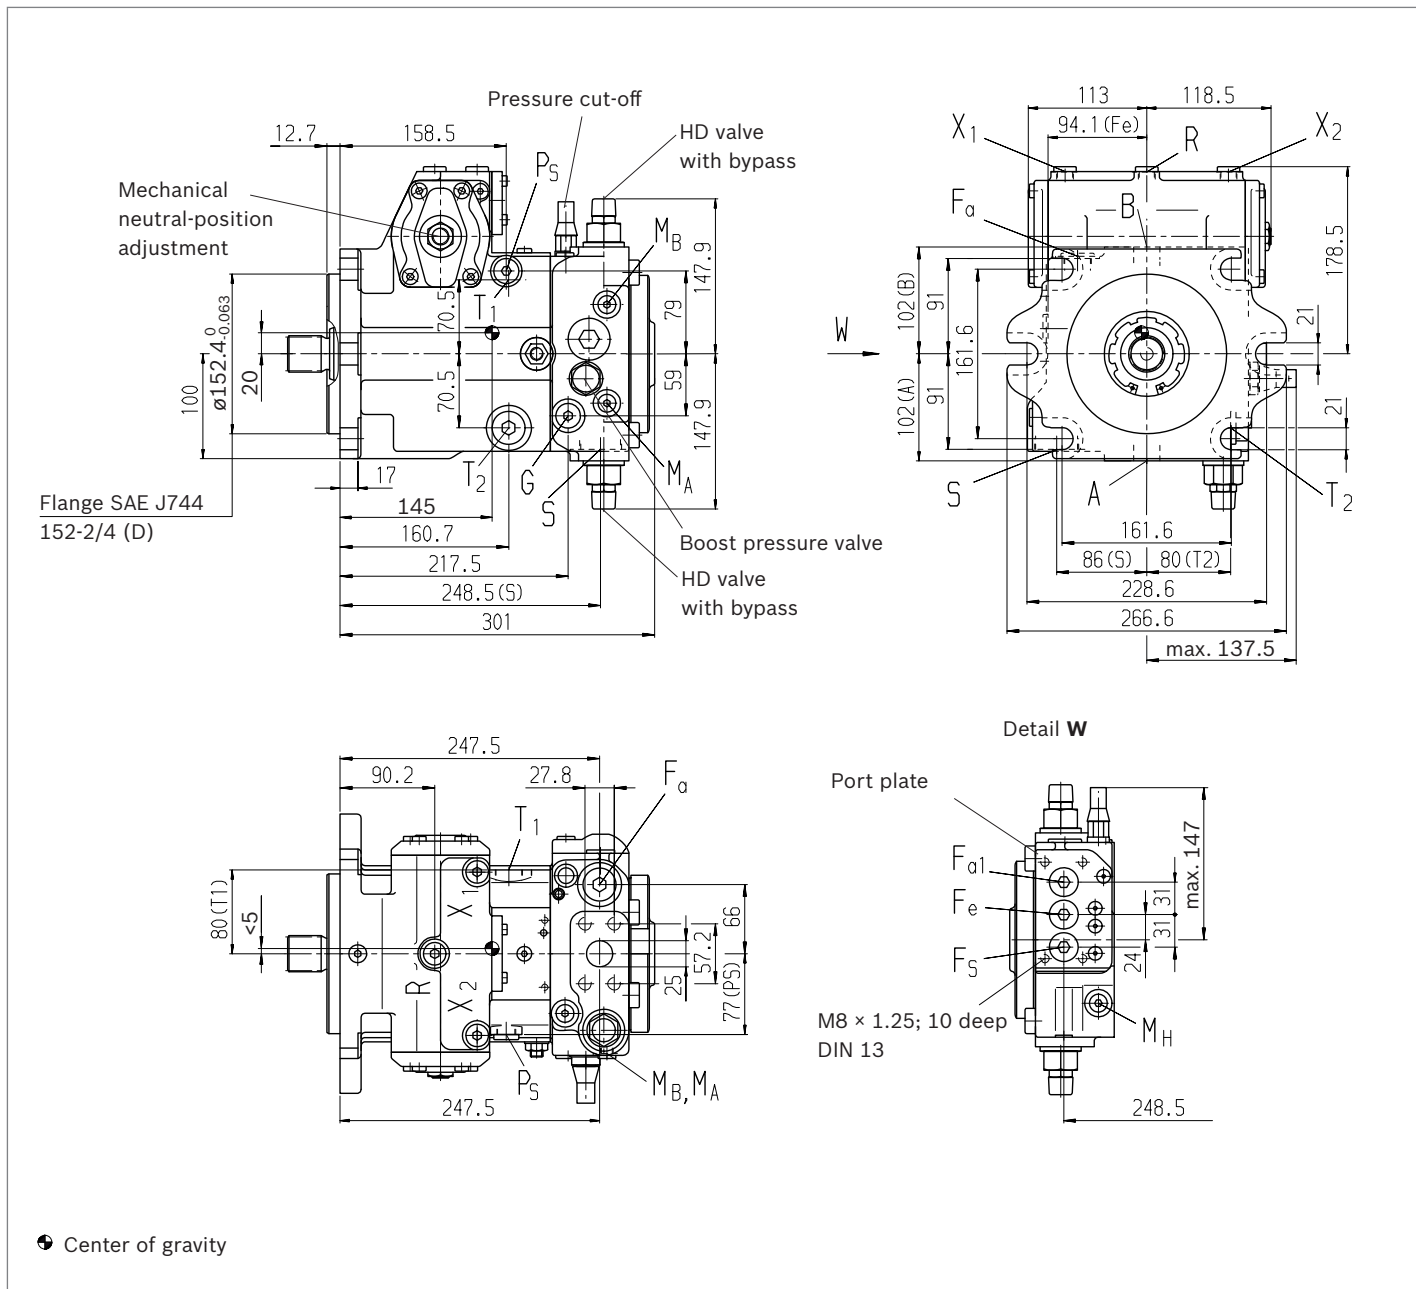


**Notice**  
 Option: SAE working port **A** and **B** top and bottom, suction port **S** top (03). Port plate (02) rotated through 180°, installation drawing on request


▼ Splined shaft DIN 5480

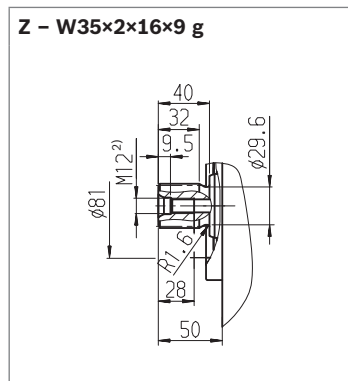


▼ Splined shaft DIN 5480

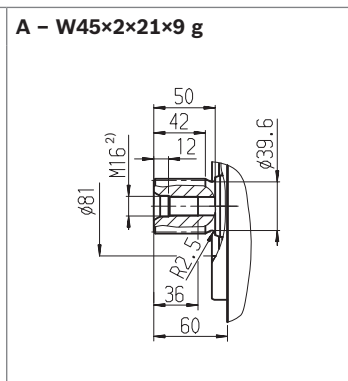

▼ Splined shaft ANSI B92.1a

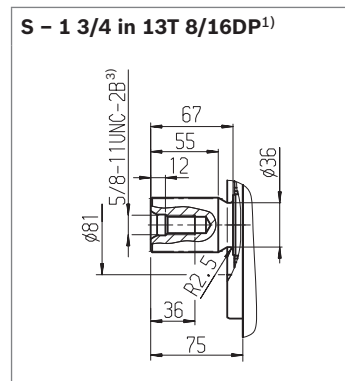

▼ Splined shaft ANSI B92.1a

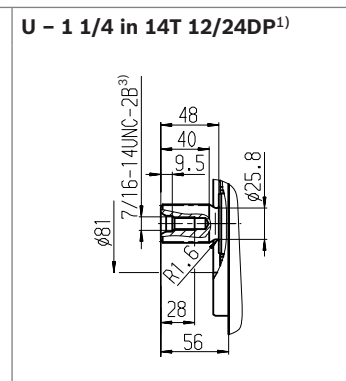


Ports	Standard	Size	$p_{max}$ [bar] <sup>(4)</sup>	State <sup>(10)</sup>	
<b>A, B</b>	Working port	SAE J518 <sup>(5)</sup>	1 in	450	O
	Fastening thread	DIN 13	M12 × 1.75; 17 deep		
<b>S</b>	Suction port	DIN 3852 <sup>(8)</sup>	M42 × 2; 20 deep	5	O <sup>(6)</sup>
<b>T<sub>1</sub></b>	Drain port	DIN 3852 <sup>(8)</sup>	M26 × 1.5; 16 deep	3	O <sup>(7)</sup>
<b>T<sub>2</sub></b>	Drain port	DIN 3852 <sup>(8)</sup>	M26 × 1.5; 16 deep	3	X <sup>(7)</sup>
<b>R</b>	Air bleed port	DIN 3852 <sup>(8)</sup>	M16 × 1.5; 12 deep	3	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice)	DIN 3852 <sup>(8)</sup>	M16 × 1.5; 12 deep	40	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice, DG only)	DIN 3852 <sup>(8)</sup>	M16 × 1.5; 12 deep	40	O
<b>X<sub>3</sub>, X<sub>4</sub><sup>(9)</sup></b>	Stroking chamber pressure port	DIN 3852 <sup>(8)</sup>	M12 × 1.5; 12 deep	40	X
<b>G</b>	Boost pressure port inlet	DIN 3852 <sup>(8)</sup>	M18 × 1.5; 12 deep	40	X
<b>P<sub>s</sub></b>	Pilot pressure port	DIN 3852 <sup>(8)</sup>	M18 × 1.5; 12 deep	40	X
<b>P<sub>s</sub></b>	Pilot pressure port (DA..7 only)	DIN 3852 <sup>(8)</sup>	M18 × 1.5; 12 deep	40	O
<b>Y</b>	Pilot pressure port outlet (DA..7 only)	DIN 3852 <sup>(8)</sup>	M18 × 1.5; 12 deep	40	O
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring port pressure A, B	DIN 3852 <sup>(8)</sup>	M12 × 1.5; 12 deep	450	X
<b>M<sub>H</sub></b>	Measuring port, high pressure	DIN 3852 <sup>(8)</sup>	M12 × 1.5; 12 deep	450	X
<b>F<sub>a</sub></b>	Boost pressure port inlet	DIN 3852 <sup>(8)</sup>	M26 × 1.5; 16 deep	40	X
<b>F<sub>a1</sub></b>	Boost pressure port inlet (attachment filter)	DIN 3852 <sup>(8)</sup>	M22 × 1.5; 14 deep	40	X
<b>F<sub>e</sub></b>	Boost pressure port outlet	DIN 3852 <sup>(8)</sup>	M22 × 1.5; 14 deep	40	X
<b>F<sub>s</sub></b>	Line from filter to suction port (cold start)	DIN 3852 <sup>(8)</sup>	M22 × 1.5; 14 deep	40	X
<b>Y<sub>1</sub>, Y<sub>2</sub></b>	Pilot pressure port (pilot signal HD only)	DIN 3852 <sup>(8)</sup>	M14 × 1.5; 12 deep	40	O
<b>Z</b>	Pilot pressure port (inch signal DA..8 only)	DIN 3852 <sup>(8)</sup>	M10 × 1; 8 deep	40	X


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Center bore according to DIN 332 (thread according to DIN 13)
- 3) Thread according to ASME B1.1
- 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

- 6) Plugged at external boost pressure supply.
- 7) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 67).
- 8) The countersink can be deeper than as specified in the standard.
- 9) Optional, see page 58
- 10) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)


▼ **HD** – Proportional control, hydraulic, pilot-pressure related

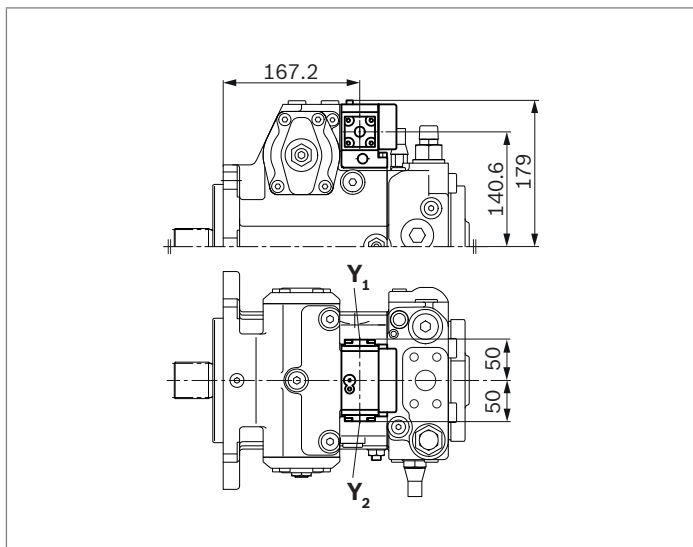


▼ **HW** – Proportional control, hydraulic, mechanical servo

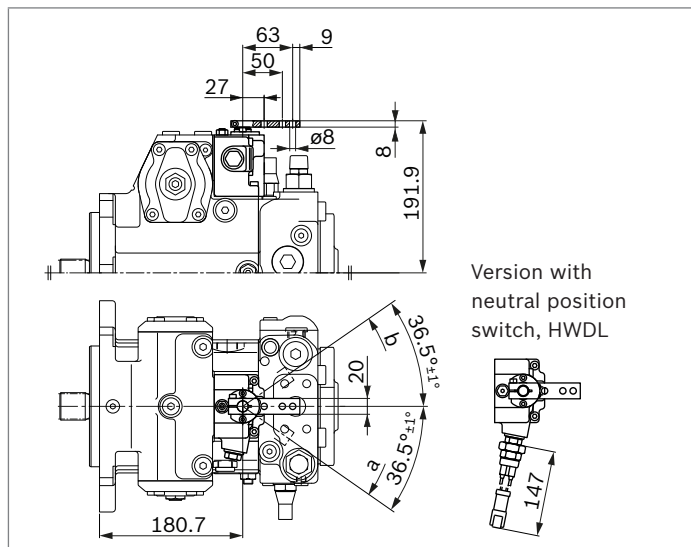


▼ **EP** – Proportional control, electric

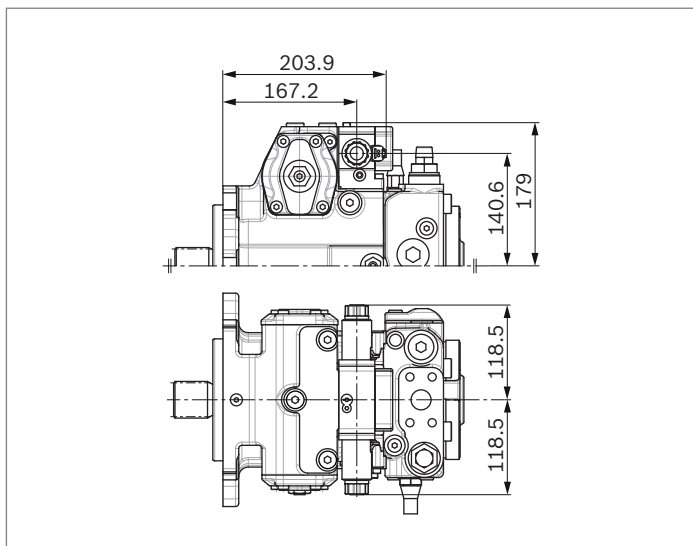

▼ **EZ** – Two-point control, electric

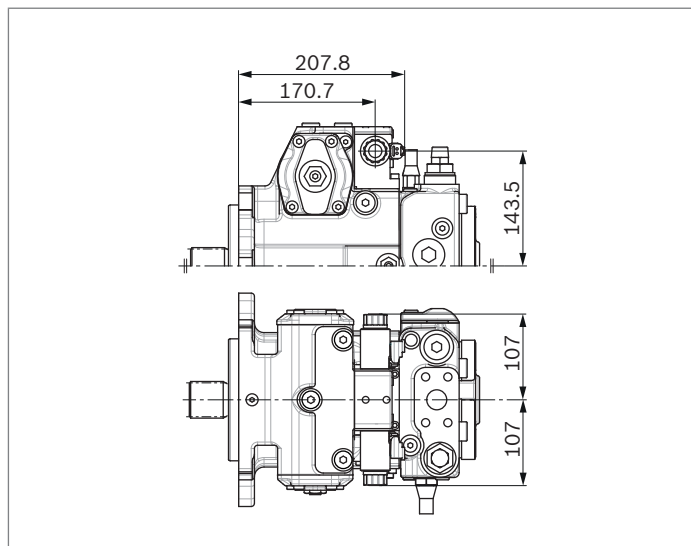


▼ **DG** – Hydraulic control, direct operated

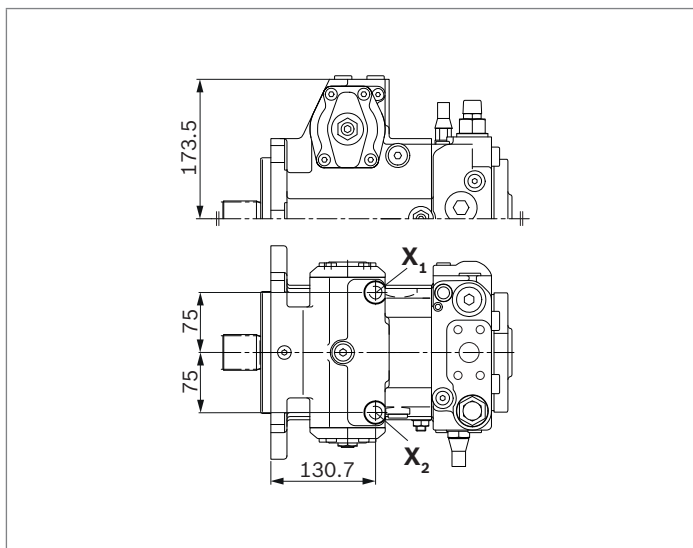


4

**DA control valve**


▼ **DA..2** – Fixed setting

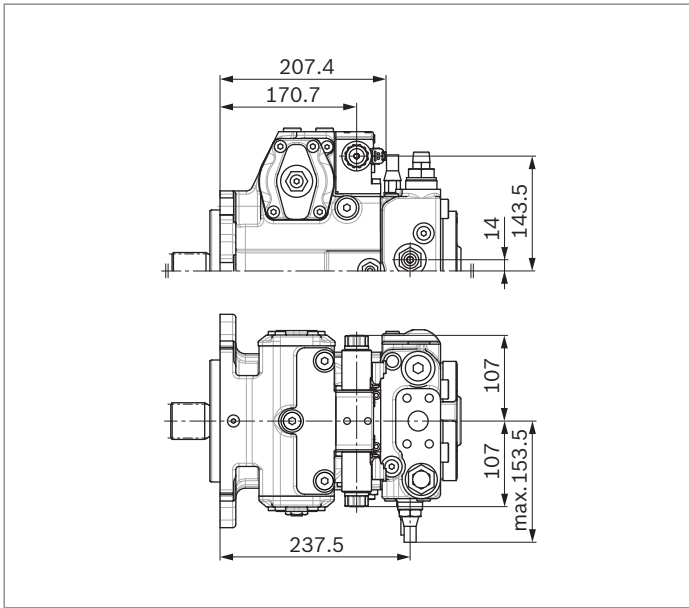


▼ **DA..3** – Mechanically adjustable with position lever

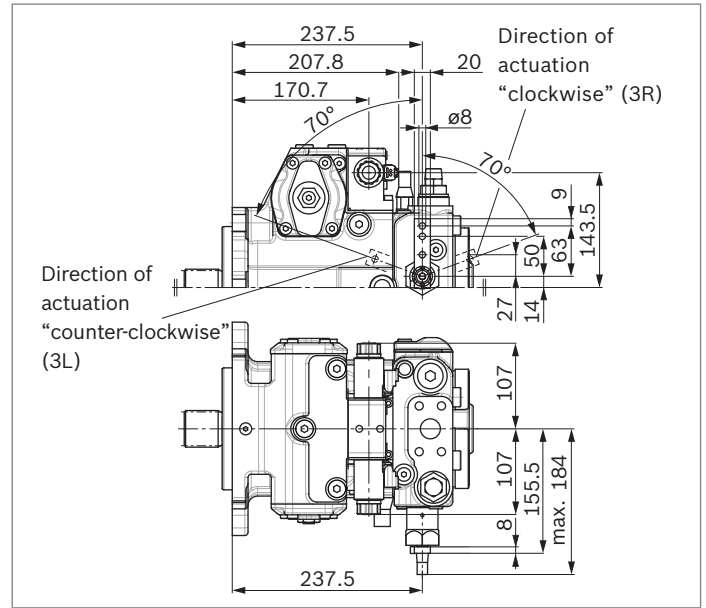

▼ **DA..7** – Fixed setting and ports for pilot control device

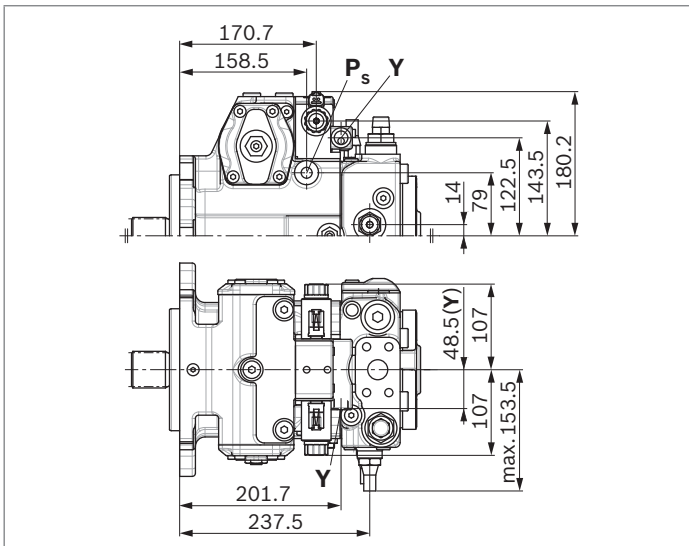


▼ **DA..8** – Fixed setting and inch valve mounted

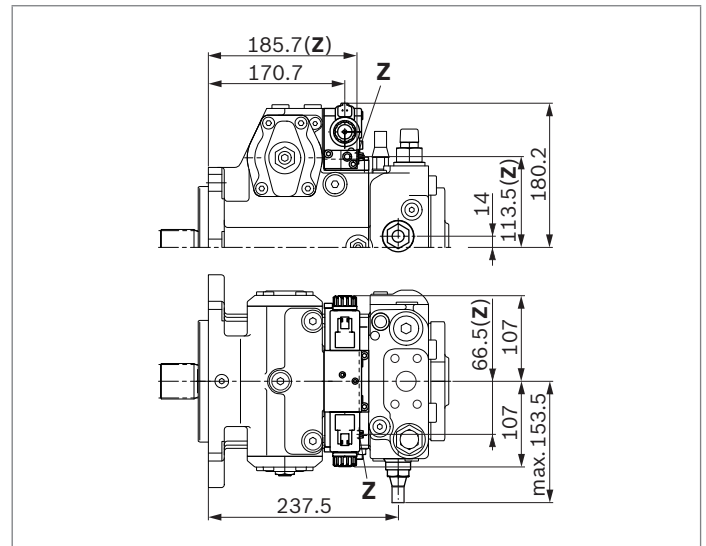

**Dimensions, size 125**

**NV – Version without control module**


Standard: SAE working port **A** and **B** top and bottom, suction port **S** bottom (02)

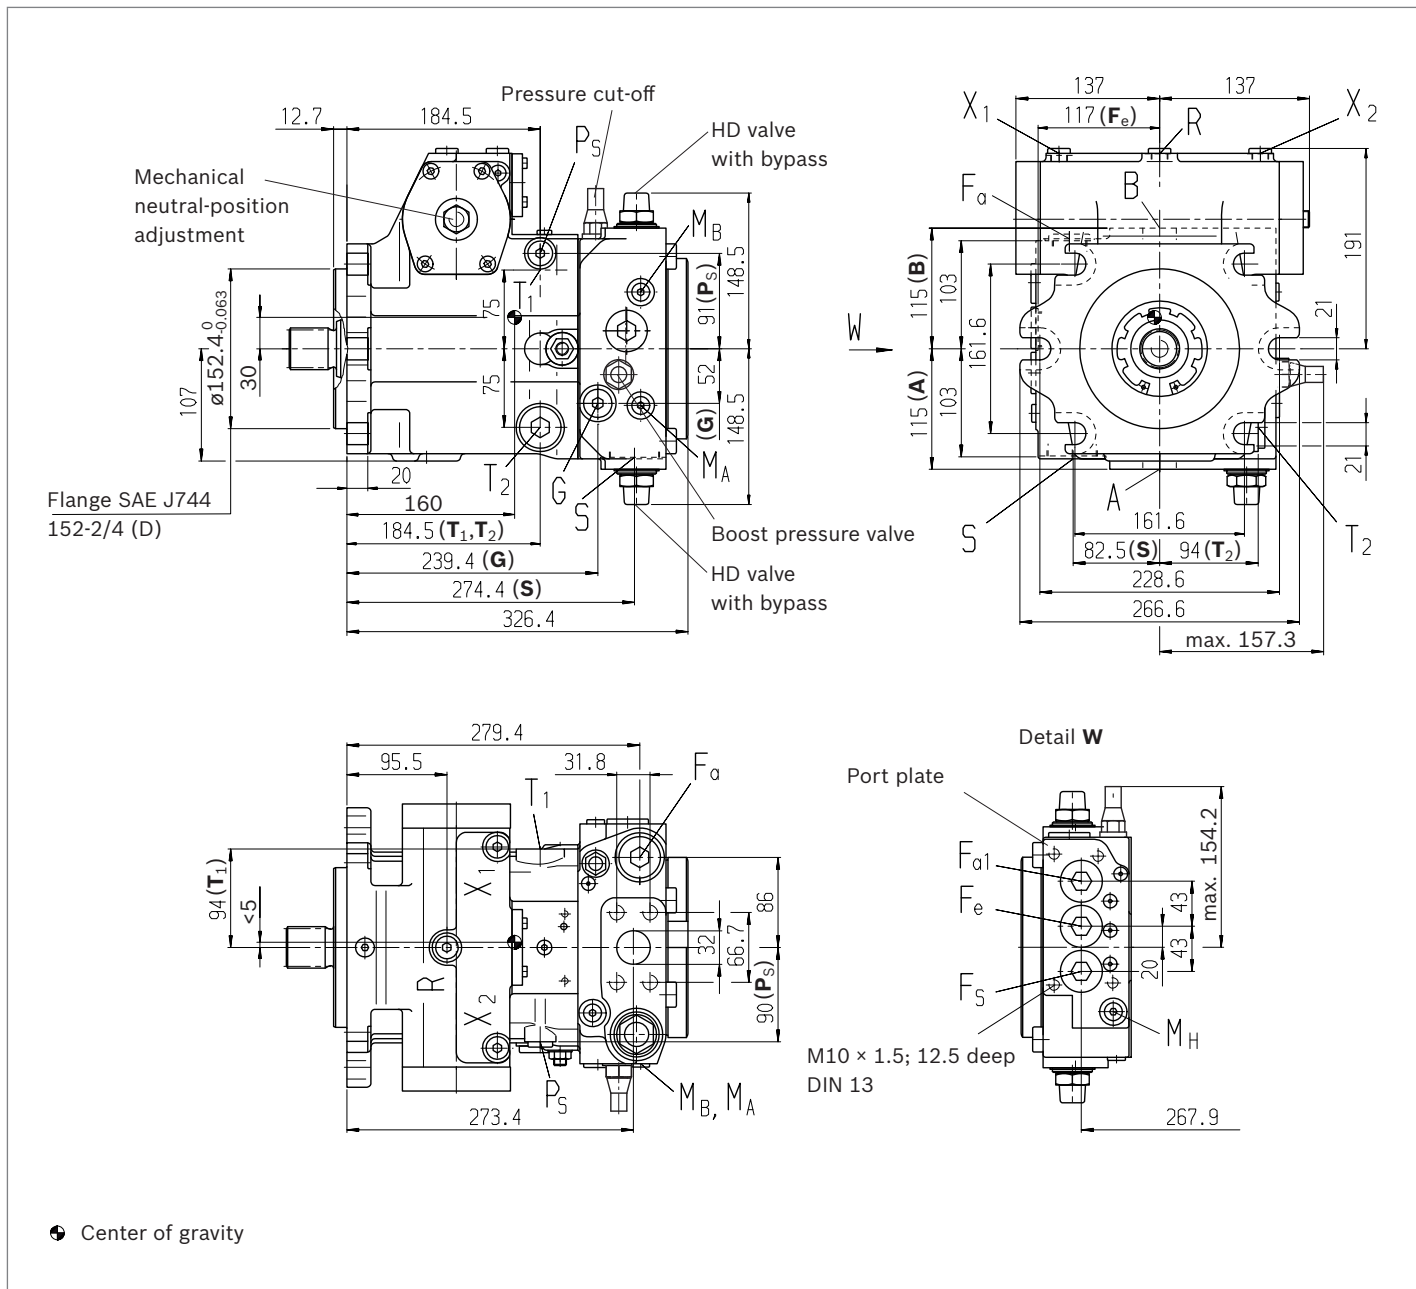


**Notice**  
 Option: SAE working port **A** and **B** top and bottom, suction port **S** top (03). Port plate (02) rotated through 180°, installation drawing on request




## ▼ Splined shaft DIN 5480

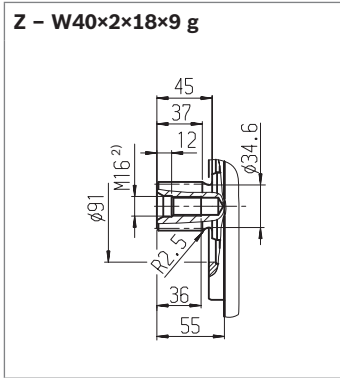


## ▼ Splined shaft DIN 5480

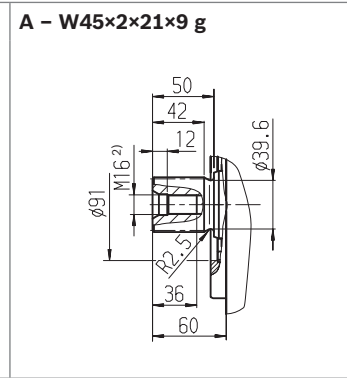

## ▼ Splined shaft ANSI B92.1a

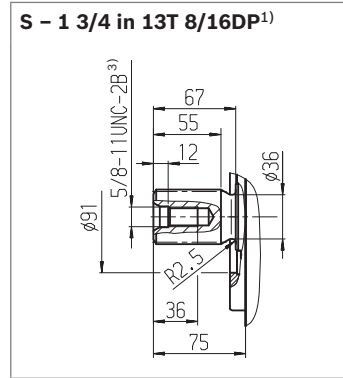

## ▼ Splined shaft ANSI B92.1a

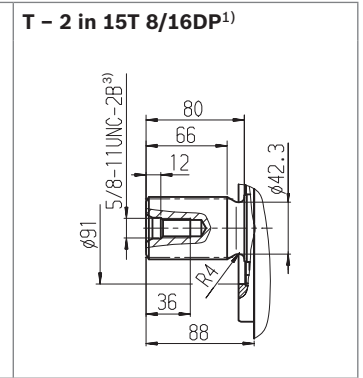


Ports	Standard	Size	$p_{\max}$ [bar] <sup>4)</sup>	State <sup>10)</sup>
<b>A, B</b>	Working port Fastening thread	SAEJ518 <sup>5)</sup> DIN 13	1 1/4 in M14 × 2; 19 deep	450 O
<b>S</b>	Suction port	DIN 3852 <sup>8)</sup>	M48 × 2; 22 deep	5 O <sup>6)</sup>
<b>T<sub>1</sub></b>	Drain port	DIN 3852 <sup>8)</sup>	M33 × 2; 18 deep	3 O <sup>7)</sup>
<b>T<sub>2</sub></b>	Drain port	DIN 3852 <sup>8)</sup>	M33 × 2; 18 deep	3 X <sup>7)</sup>
<b>R</b>	Air bleed port	DIN 3852 <sup>8)</sup>	M16 × 1.5; 12 deep	3 X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice)	DIN 3852 <sup>8)</sup>	M16 × 1.5; 12 deep	40 X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice, DG only)	DIN 3852 <sup>8)</sup>	M16 × 1.5; 12 deep	40 O
<b>X<sub>3</sub>, X<sub>4</sub><sup>9)</sup></b>	Stroking chamber pressure port	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	40 X
<b>G</b>	Boost pressure port inlet	DIN 3852 <sup>8)</sup>	M22 × 1.5; 12 deep	40 X
<b>P<sub>S</sub></b>	Pilot pressure port	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40 X
<b>P<sub>S</sub></b>	Pilot pressure port (DA..7 only)	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40 O
<b>Y</b>	Pilot pressure port outlet (DA..7 only)	DIN 3852 <sup>8)</sup>	M18 × 1.5; 12 deep	40 O
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring port pressure A, B	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	450 X
<b>M<sub>H</sub></b>	Measuring port, high pressure	DIN 3852 <sup>8)</sup>	M12 × 1.5; 12 deep	450 X
<b>F<sub>a</sub></b>	Boost pressure port inlet	DIN 3852 <sup>8)</sup>	M33 × 2; 18 deep	40 X
<b>F<sub>a1</sub></b>	Boost pressure port inlet (attachment filter)	DIN 3852 <sup>8)</sup>	M33 × 2; 18 deep	40 X
<b>F<sub>e</sub></b>	Boost pressure port outlet	DIN 3852 <sup>8)</sup>	M33 × 2; 18 deep	40 X
<b>F<sub>S</sub></b>	Line from filter to suction port (cold start)	DIN 3852 <sup>8)</sup>	M33 × 2; 18 deep	40 X
<b>Y<sub>1</sub>, Y<sub>2</sub></b>	Pilot pressure port (pilot signal HD only)	DIN 3852 <sup>8)</sup>	M14 × 1.5; 12 deep	40 O
<b>Z</b>	Pilot pressure port (inch signal DA..8 only)	DIN 3852 <sup>8)</sup>	M10 × 1; 8 deep	40 X


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Center bore according to DIN 332 (thread according to DIN 13)
- 3) Thread according to ASME B1.1
- 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

- 6) Plugged at external boost pressure supply.
- 7) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 67).
- 8) The countersink can be deeper than as specified in the standard.
- 9) Optional, see page 58
- 10) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)


▼ **HD** – Proportional control, hydraulic, pilot-pressure related

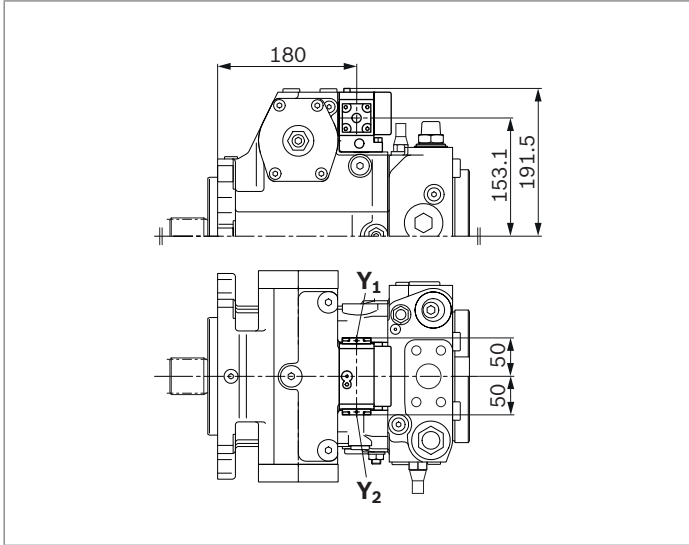


▼ **HW** – Proportional control, hydraulic, mechanical servo

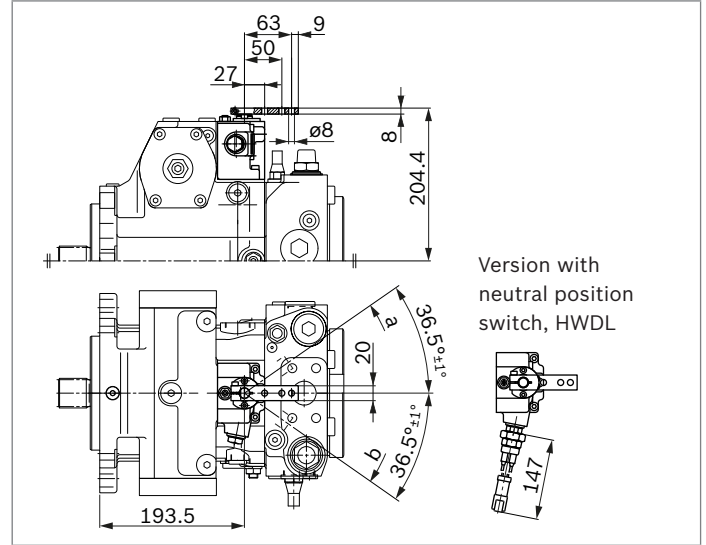


▼ **EP** – Proportional control, electric

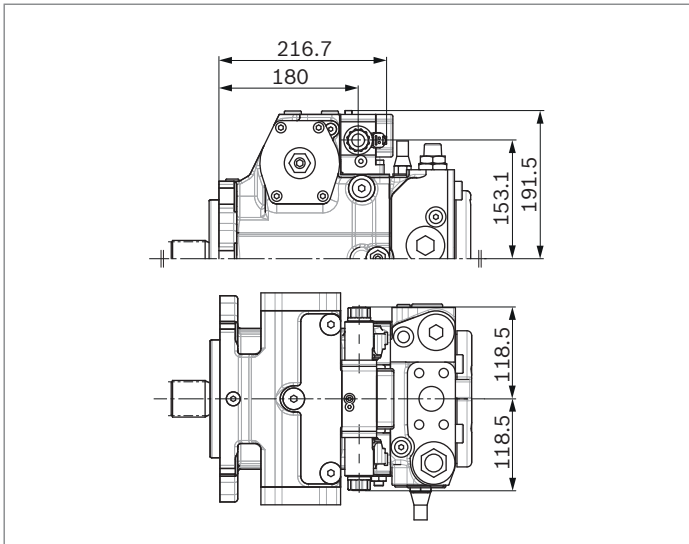

▼ **EZ** – Two-point control, electric

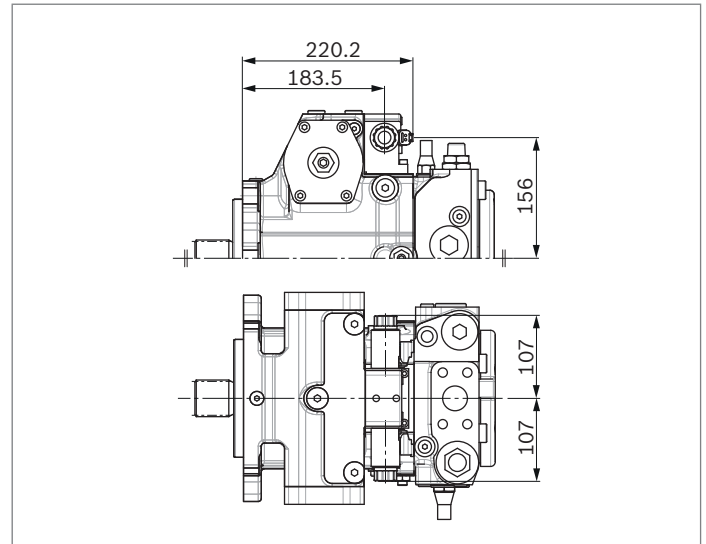


▼ **DG** – Hydraulic control, direct operated

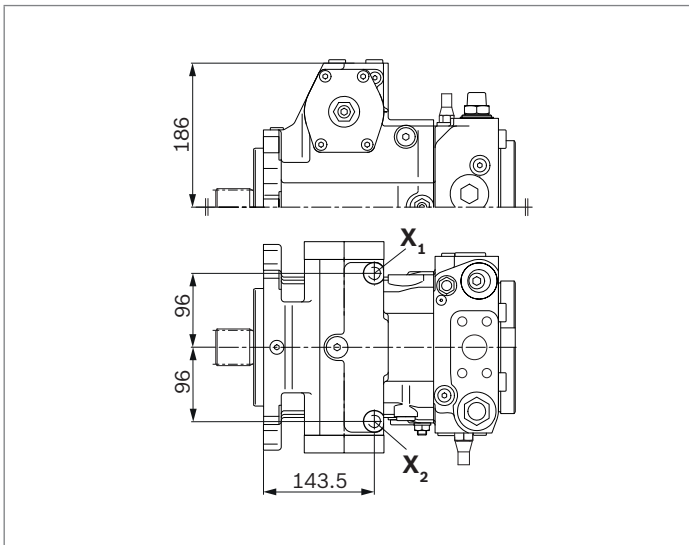




**DA control valve**


▼ **DA..2** – Fixed setting

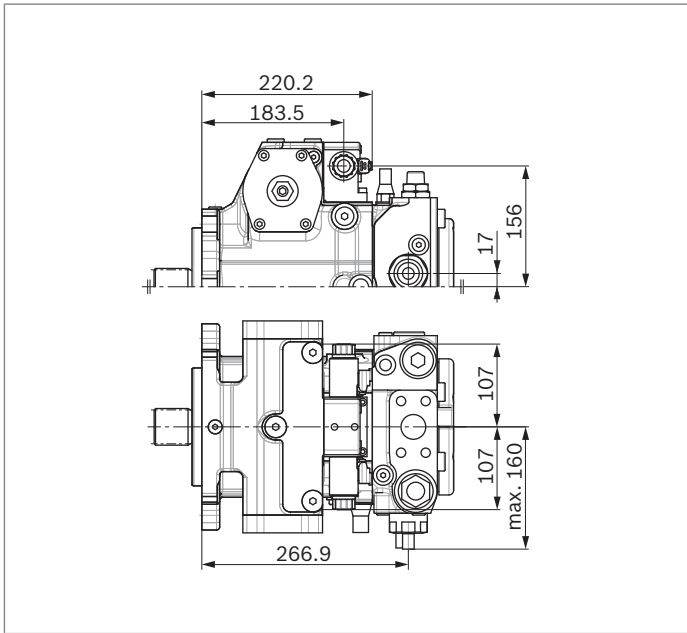


▼ **DA..3** – Mechanically adjustable with position lever

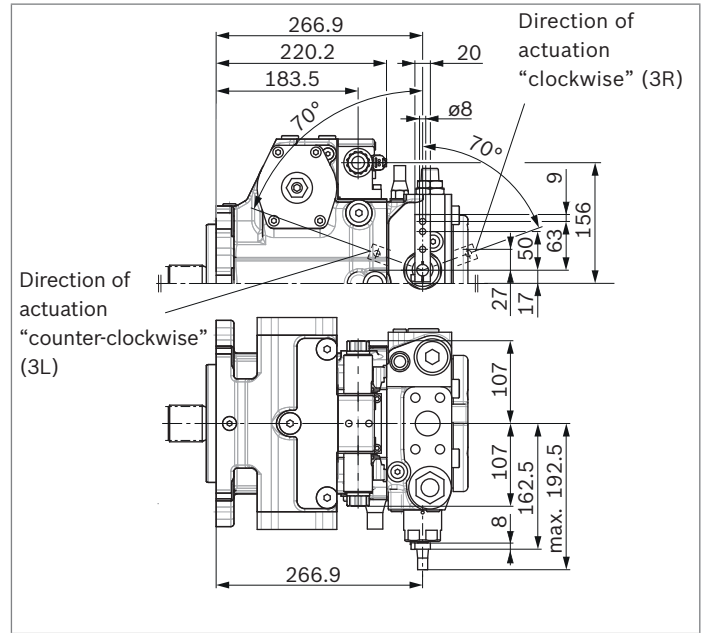

▼ **DA..7** – Fixed setting and ports for pilot control device

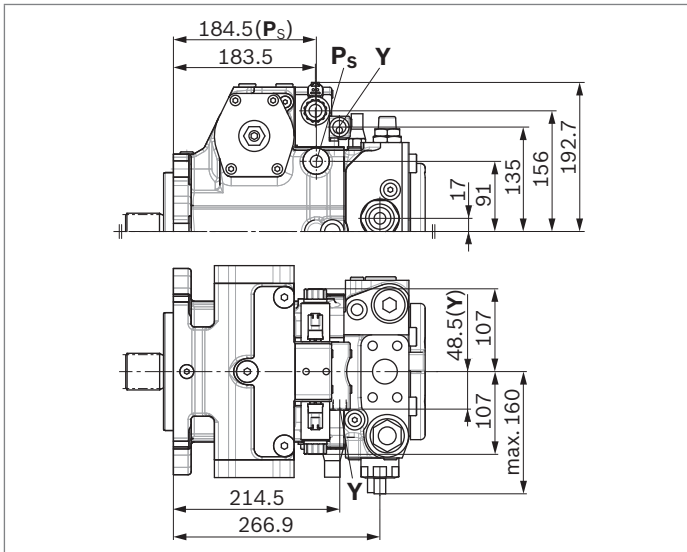

▼ **DA..8** – Fixed setting and inch valve mounted

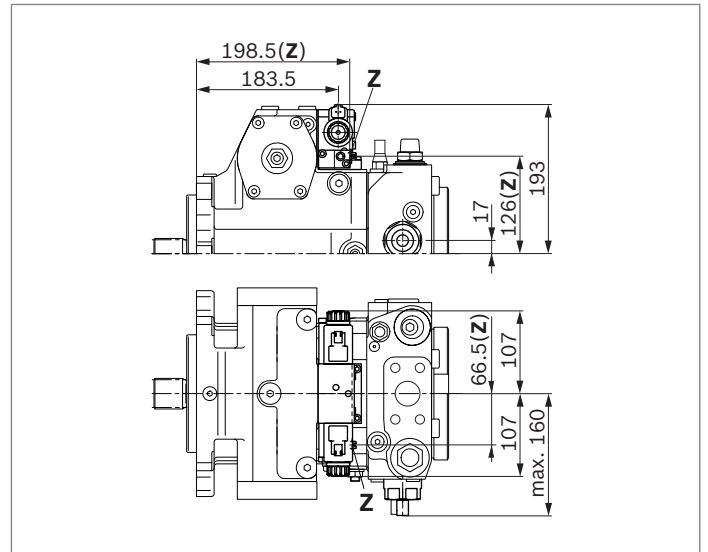


4

## Dimensions, through drive


Flange SAE J744	Hub for splined shaft <sup>1)</sup>	28	40	56	71	90	125	Code
Without through drive		•	•	•	•	•	•	<b>00</b>
82-2 (A)	5/8 in 9T 16/32DP	•	•	•	•	•	•	<b>01</b>

▼ **N00** – without boost pump, without through drive / **F00** – with boost pump, without through drive

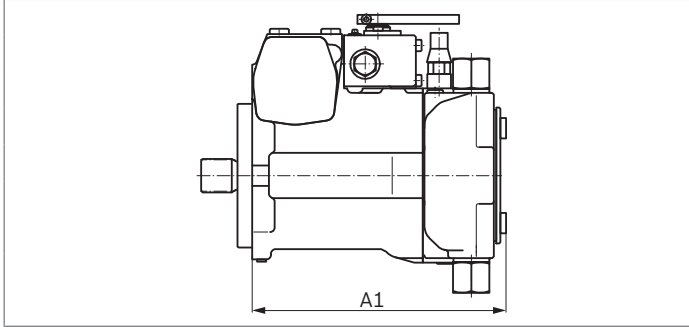

NG	A1 (N00)	A1 (F00)
<b>28</b>	213.9	223.4
<b>40</b>	220.2	235.7
<b>56</b>	239.4	256.4
<b>71</b>	279.1	293.6
<b>90</b>	287	301
<b>125</b>	320.9	326.4

▼ **F01/K01**<sup>4)</sup>

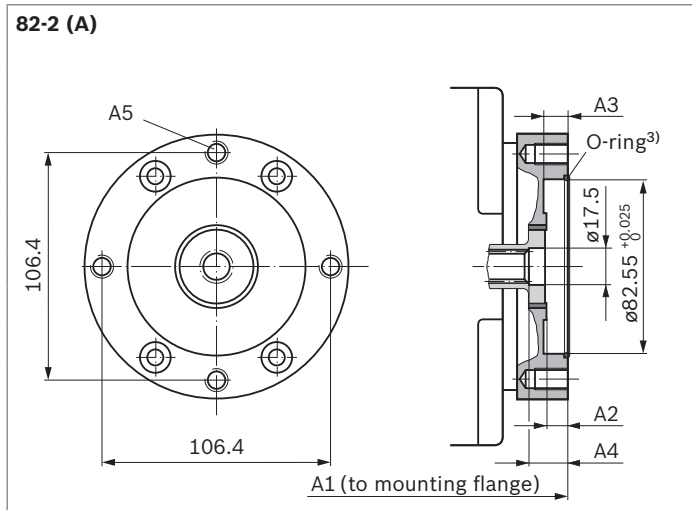

NG	A1 (F01)	A1 (K01)	A2	A3	A4
<b>28</b>	227.9	227.9	7.5	7.5	14.5
<b>40</b>	239.7	234.2	9	9	18
<b>56</b>	261.4	254.9	10	10	18
<b>71</b>	297.6	297.6	9	10	17
<b>90</b>	304	304	9	8	-
<b>125</b>	330.9	330.9	10.5	9	-
NG	A5 <sup>2)</sup>				
<b>28 to 125</b>	M10 × 1.5; 15 deep				

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5


2) Thread according to DIN 13

3) O-ring included in the scope of delivery

4) The illustration shows the 2-hole version. Please state in plain text whether the 2-hole horizontal or the 2-hole vertical version is used.


Flange SAE J744	Hub for splined shaft <sup>1)</sup>	28	40	56	71	90	125	Code
101-2 (B)	7/8 in 13T 16/32DP	●	●	●	●	●	●	<b>02</b>
	1 in 15T 16/32DP	●	●	●	●	●	●	<b>04</b>
127-2 (C)	1 in 15T 16/32DP	-	●	-	-	-	-	<b>09</b>

▼ **F02/K02; F04/K04<sup>4)</sup>**

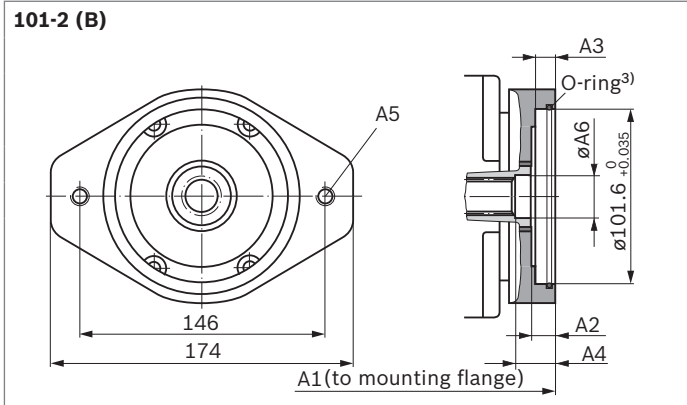


NG	A1	A2	A3	A4 (02)	A4 (04)	A5 <sup>2)</sup>
<b>28</b>	230.4	9.7	9.7	16.2	13.7	M12 × 1.75; 19 deep
<b>40</b>	240.7	11	11 <sup>5)</sup>	17	16	M12 × 1.75; 19 deep
<b>56</b>	262.4	12	11	19.5	18.5	M12 × 1.75; 19 deep
<b>∅A6</b>						
<b>F02 / K02</b>	24					
<b>F04 / K04</b>	27					

▼ **F02/K02; F04/K04<sup>4)</sup>**

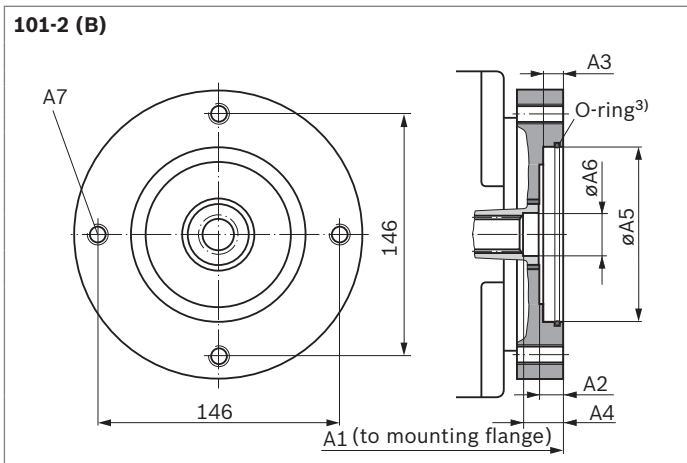

NG	A1	A2	A3	A4 (02)	A4 (04)	∅A5	(K)	(F)
<b>71</b>	300.6	13	9.8	17	15.5	101.6	$^{+0.035}_0$	$^{+0.035}_0$
<b>90</b>	305	9	11	17	15	101.6	$^{+0.035}_0$	$^{+0.022}_0$
<b>125</b>	330.9	10	11	17	16.5	101.6	$^{+0.025}_0$	$^{+0.025}_0$
<b>NG</b>	<b>A7<sup>2)</sup></b>							
<b>71, 90</b>	M12 × 1.75; 21 deep							
<b>125</b>	M12 × 1.75; 18 deep							
<b>∅A6</b>								
<b>F02 / K02</b>	24							
<b>F04 / K04</b>	27							

▼ **F09/K09**

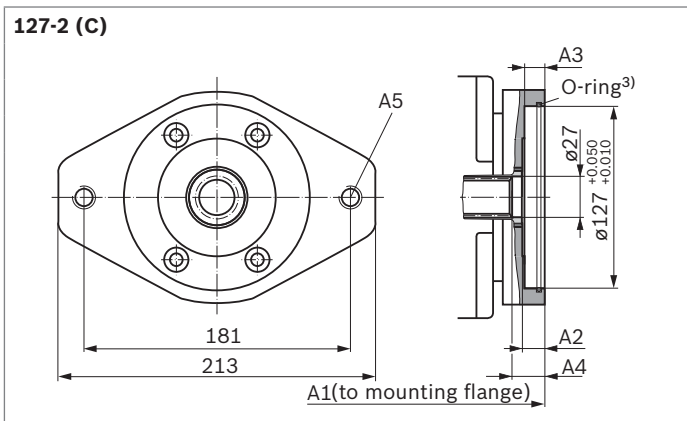


NG	A1	A2	A3	A4
<b>40</b>	244.7	14	14	19.5
<b>NG</b>	<b>A5<sup>2)</sup></b>			
<b>40</b>	M16 × 2; 20 deep			

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to DIN 13
- 3) O-ring included in the scope of delivery

- 4) The illustration shows the 2-hole version. Please state in plain text whether the 2-hole horizontal or the 2-hole vertical version is used.
- 5) For F04/K04 9.7 mm


Flange SAE J744	Hub for splined shaft	28	40	56	71	90	125	Code
127-2 (C)	1 1/4 in 14T 12/24DP <sup>1)</sup>	-	-	●	●	●	●	<b>07</b>
152-2/4 (D)	W35 2×16×9 g (according to DIN 5480)	-	-	-	-	●	-	<b>73</b>
	1 3/4 in 13T 8/16DP <sup>1)</sup>	-	-	-	-	-	●	<b>69</b>

▼ **F07/K07<sup>4)</sup>**

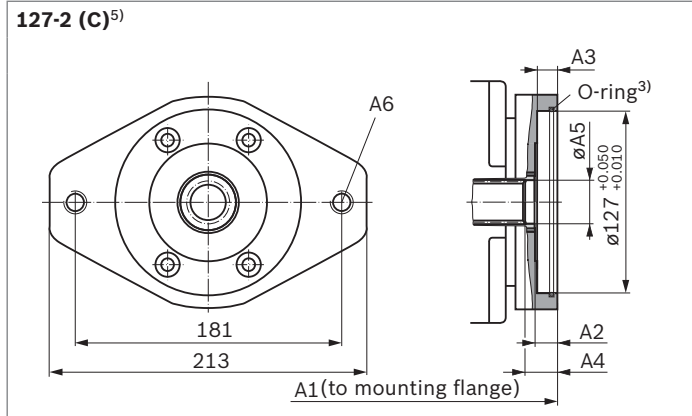


NG	A1	A2	A3	A4	øA5	A6 <sup>2)</sup>
<b>56</b>	266.4	15	14	17.5	32.7	M16 × 2; 20 deep
<b>71</b>	303.6	15	13.5	20	33.5	M16 × 2; 24 deep

▼ **F07/K07<sup>4)</sup>**

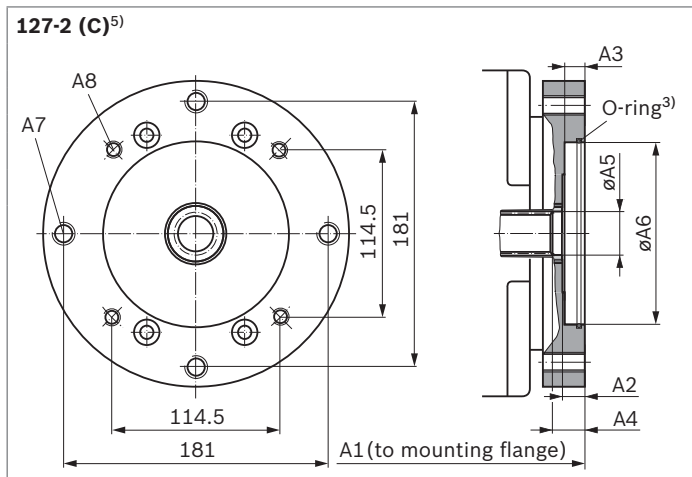

NG	A1	A2	A3	A4	øA5	øA6
<b>90</b>	309	13	14	20.5	33.5	127 <sup>+0.025</sup> <sub>0</sub>
<b>125</b>	335.9	15	15.5	22.5	33.5	127 <sup>+0.025</sup> <sub>0</sub>
NG	A7 <sup>2)</sup>		A8 <sup>2)</sup>			
<b>90, 125</b>	M16 × 2; 23 deep		M12 × 1.75; 18 deep			

▼ **F73/K73; F69/K69<sup>6)</sup>**

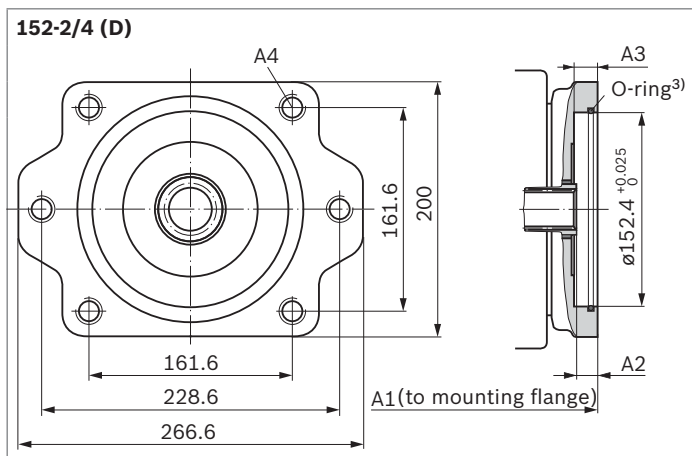

NG	A1	A2	A3	A4 <sup>2)</sup>
<b>90</b>	309	12	14	M20 × 2.5; 20 deep
<b>125</b>	343.9	18	14	M20 × 2.5; 20 deep

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to DIN 13
- 3) O-ring included in the scope of delivery
- 4) The illustration shows the 4- and the 2-hole version. Please state in plain text whether the 4-hole, the 2-hole horizontal or the 2-hole vertical version is used.
- 5) NG90 to 125 with additional 4-hole-flange (127-4)
- 6) The illustration shows the 4+2-hole version. Please state in plain text whether the 2-hole, the 4-hole or the 4+2-hole vertical version is used.

**Overview of mounting options**

Through drive <sup>1)</sup>		Mounting option – 2. pump						
Flange	Hub for splined shaft	Code	A4VG/32 NG (shaft)	A10V(S)O/3X NG (shaft)	A10V(S)O/5X NG (shaft)	A11VO/1 NG (shaft)	A10VG NG (shaft)	External gear pump <sup>2)</sup>
82-2 (A)	5/8 in	<b>F/K01</b>	–	18 (U)	10, 18 (U)	–	–	AZPF NG4 to 22
101-2 (B)	7/8 in	<b>F/K02</b>	–	28 (S) 45 (U)	28 (S) 45 (U)	–	18 (S)	AZPN NG20 to 36 AZPG NG32 to 50
	1 in	<b>F/K04</b>	28 (S)	45 (S)	45 (S) 60, 63, 72 (U)	40 (S)	28 (S) 45 (S)	–
127-2 (C) <sup>3)</sup>	1 in	<b>F/K09</b>	40 (U)	71 (U)	60, 63, 71 (U)	–	–	–
	1 1/4 in	<b>F/K07</b>	40, 56, 71 (S)	71 (S) 100 (U)	60, 63, 71 (S) 85, 100 (U)	60 (S)	63 (S)	–
152-2/4 (D)	W35	<b>F/K73</b>	90 (Z)	–	–	–	–	–
	1 3/4 in	<b>F/K69</b>	90, 125 (S)	140 (S)	–	95, 130, 145 (S)	–	–

1) Availability of the individual sizes, see type code on page 3.

2) Bosch Rexroth recommends special versions of the gear pumps.  
Please contact us.

3) A10VO/5X with 4-hole flange attachable only to A4VG NG90 to 125

## Combination pumps A4VG + A4VG

### Total length A

A4VG 1st pump	A4VG 2. Pump <sup>1)</sup>					
	NG28	NG40	NG56	NG71	NG90	NG125
NG28	453.8	–	–	–	–	–
NG40	464.1	480.4	–	–	–	–
NG56	485.8	502.1	522.8	–	–	–
NG71	524.0	539.3	560.0	597.2	–	–
NG90	528.4	544.7	565.4	602.6	610.0	–
NG125	554.3	571.6	592.3	629.5	644.9	670.3

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes. When ordering combination pumps, the type designations of the 1st and 2nd pumps must be linked by a “+”.


Order example:

**A4VG56EP3D1/32R-NAC02F073SP + A4VG56EP3D1/32R-NSC02F003SP**

A tandem pump, with two pumps of equal size, is permissible without additional supports, assuming that the dynamic acceleration does not exceed maximum 10 g (= 98.1 m/s<sup>2</sup>).

From size 71 upward, we recommend using the 4-hole mounting flange.

For combination pumps consisting of more than two pumps, the mounting flange must be rated for the permissible moment of inertia, please contact us.

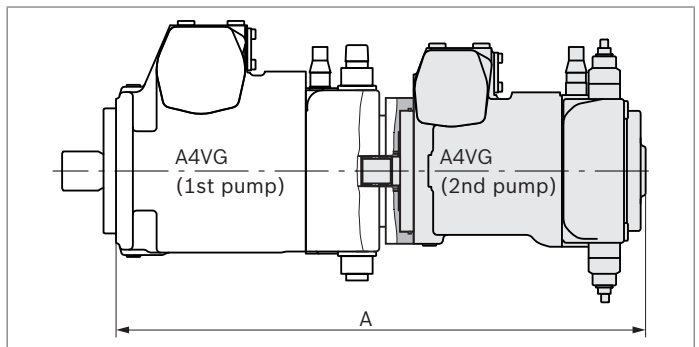

<sup>1)</sup> 2nd pump without through drive and with boost pump, F00

## High-pressure relief valves

The two high-pressure relief valves protect the hydrostatic transmission (pump and motor) from overloading. They limit the maximum pressure in the respective high-pressure line and serve simultaneously as boost valves.

High-pressure relief valves are not working valves and are only suitable for pressure peaks or high rates of pressure change.

### Setting ranges

High-pressure relief valve, direct operated (NG28 to 56)	Differential pressure setting $\Delta p_{HD}$
Valve setting range <b>3, 5</b>	420 bar
$\Delta p$ 250 to 420 bar (see type code)	400 bar
	360 bar
	340 bar
	320 bar
	300 bar
	270 bar
	250 bar
Valve setting range <b>4, 6</b> $\Delta p$	250 bar
100 to 250 bar (see type code)	230 bar
	200 bar
	150 bar
	100 bar

High-pressure relief valve, pilot operated (NG71 to 125)	Differential pressure setting $\Delta p_{HD}$
Valve setting range	420 bar
<b>1</b> $\Delta p$ 100 to 420 bar (see type code)	400 bar
	360 bar
	340 bar
	320 bar
	300 bar
	270 bar
	250 bar
	230 bar
	200 bar
	150 bar
	100 bar


Settings on high-pressure relief valve A and B	
Differential pressure setting	$\Delta p_{HD} = \dots$ bar
Cracking pressure of the HD valve (at $q_{v1}$ ) ( $p_{max} = \Delta p_{HD} + p_{Sp}$ )	$p_{max} = \dots$ bar

- ▶ The valve settings are made at  $n = 1000$  rpm and at  $V_{g\ max}$  ( $q_{v1}$ ). There may be deviations in the cracking pressures with other operating parameters.
- ▶ When ordering, state differential pressure setting in plain text.

### Example

Working pressure	Boost pressure	Safety	Differential pressure
$p_{A,B}$ 400 bar	$p_{Sp}$ 30 bar	+ 30 bar	$\Delta p_{HD}$ <b>400 bar</b>

### Setting diagram

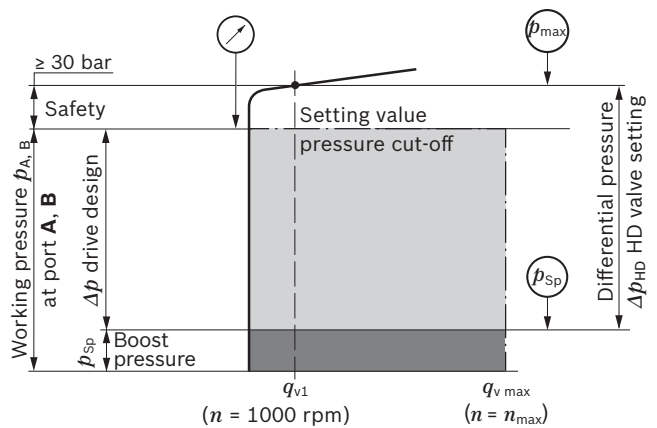

### Bypass function

A connection between the two high-pressure channels **A** and **B** can be established using the bypass valve (e.g. for machine towing).

#### ▶ Towing speed

The maximum towing speed is dependent on the gear ratio in the vehicle and must be calculated by the vehicle manufacturer. The corresponding flow of  $q_v = 30$  l/min may not be exceeded.

#### ▶ Towing distance

The vehicle may only be towed out of the immediate danger zone.

For further information on the bypass function, see the instruction manual.

### Notice

The bypass function and the pilot-operated high pressure relief valves (size 71 to 125) are not illustrated in the circuit diagrams.

## Pressure cut-off

The pressure cut-off is a pressure control which, after reaching the set pressure, adjusts the displacement of the pump back to  $V_{g \text{ min}}$ .

This valve prevents the operation of the high-pressure relief valves when accelerating or decelerating.


The high-pressure relief valves protect against the pressure peaks which occur during fast swiveling of the swashplate and limit the maximum pressure in the system.

The setting range of the pressure cut-off may be anywhere within the entire working pressure range. However, it must be set 30 bar lower than the setting value of the high-pressure relief valves (see setting diagram, page 55).

Please state the setting value of the pressure cut-off in plain text when ordering.

### ▼ Circuit diagram with pressure cut-off

**Example: Two-point electric control, EZ1D/EZ2D**

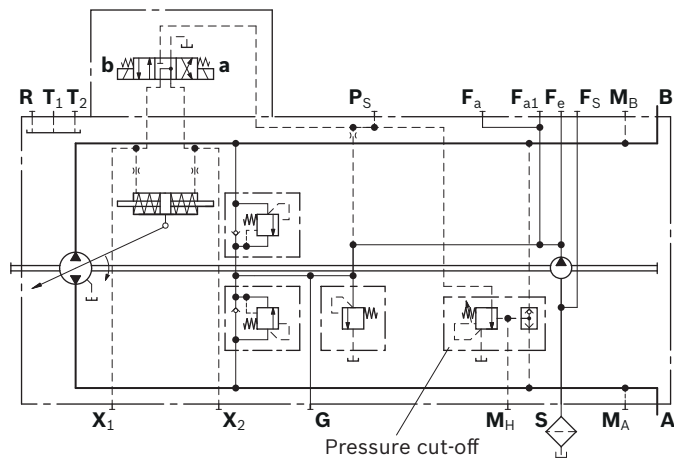




### Mechanical stroke limiter

The mechanical stroke limiter is an auxiliary function allowing the maximum displacement of the pump to be steplessly reduced, regardless of the control module used.


By means of two threaded pins, the stroke of the stroking piston and thus the maximum swivel angle of the pump can be limited.

### Dimensions

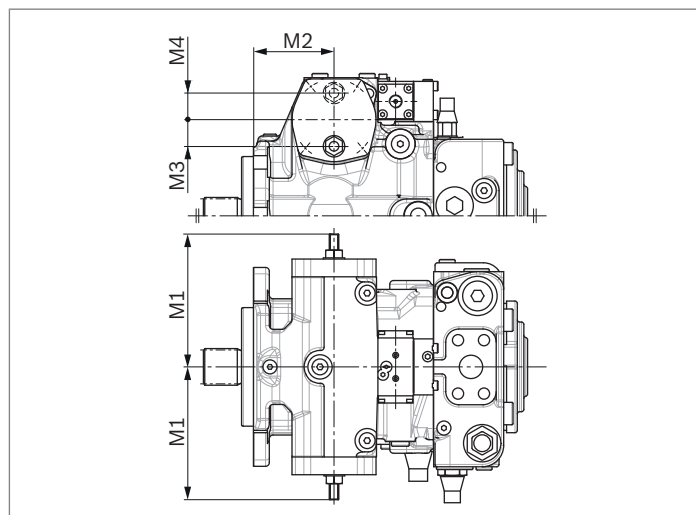

NG	M1 max	M2	M3	M4
28	110.6	40.1	24	-
40	110.6	38.1	24	-
56	130.5	44	25.5	-
71	135.4	86.3	-	28.5
90	147	95.7	31.5	-
125	173.7	104.5	-	35.5


### ▼ Circuit diagram<sup>1)</sup>

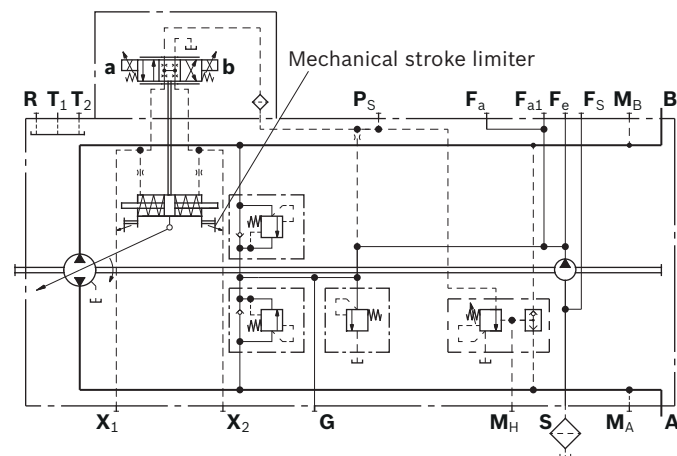

1) Size 28 without port  $F_{a1}$  and  $F_s$


### Stroking chamber pressure port X<sub>3</sub> and X<sub>4</sub>

#### Dimensions

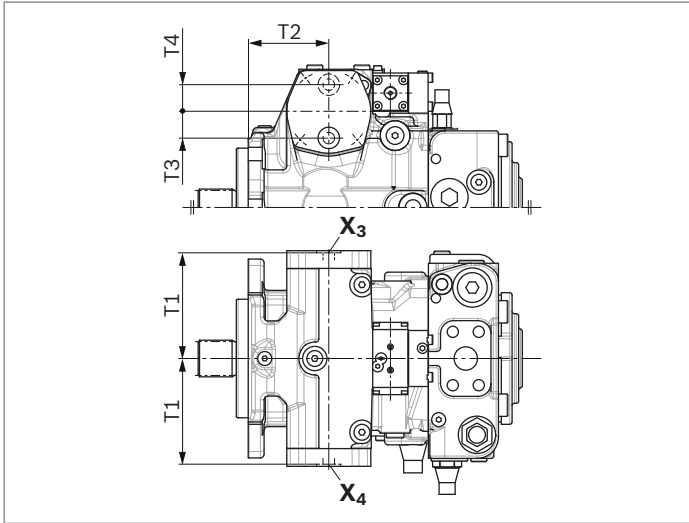

NG	T1	T2	T3	T4
28	92	40.1	-	24
40	92	38.1	-	24
56	104.5	44	-	25
71	113.5	86.3	28	-
90	111.5	95.7	-	30
125	136	104.5	34	-

#### ▼ Circuit diagram<sup>1)</sup>

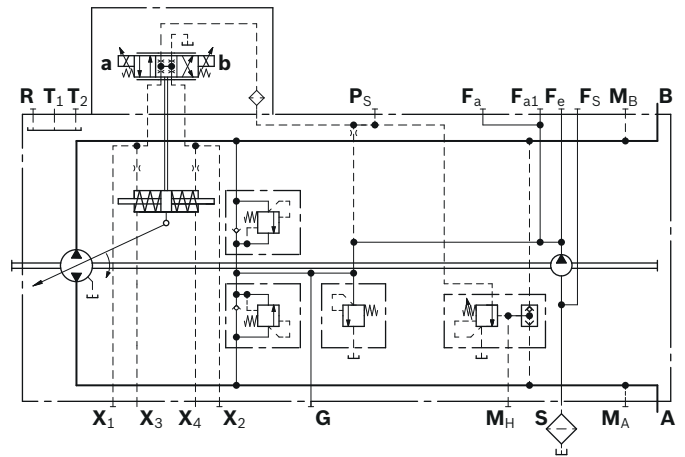

Ports	Standard <sup>2)</sup>	Size	$p_{max}$ [bar] <sup>3)</sup>	State <sup>4)</sup>
X <sub>3</sub> , X <sub>4</sub>	DIN 3852	M12 × 1.5; 12 deep	40	X

1) Size 28 without port F<sub>a1</sub> and F<sub>s</sub>

2) The countersink can be deeper than as specified in the standard.

3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

4) X = Plugged (in normal operation)

## Filtration in the boost pump suction line


### Version S

Filter version	Suction filter without bypass
Recommendation	With contamination indicator
Recommended flow resistance at filter element	
At $v = 30 \text{ mm}^2/\text{s}$ , $n = n_{\text{max}}$	$\Delta p \leq 0.1 \text{ bar}$
At $v = 1000 \text{ mm}^2/\text{s}$ , $n = n_{\text{max}}$	$\Delta p \leq 0.3 \text{ bar}$
Pressure at suction port S	
Continuous $p_{S \text{ min}}$ ( $v \leq 30 \text{ mm}^2/\text{s}$ )	$\geq 0.8 \text{ bar absolute}$
Short-term, at a cold start ( $t < 3 \text{ min}$ )	$\geq 0.5 \text{ bar absolute}$
Maximum pressure $p_{S \text{ max}}$	$\leq 5 \text{ bar absolute}$

Use of version S is preferred.

The suction filter is not included in the scope of delivery.

#### ▼ Circuit diagram

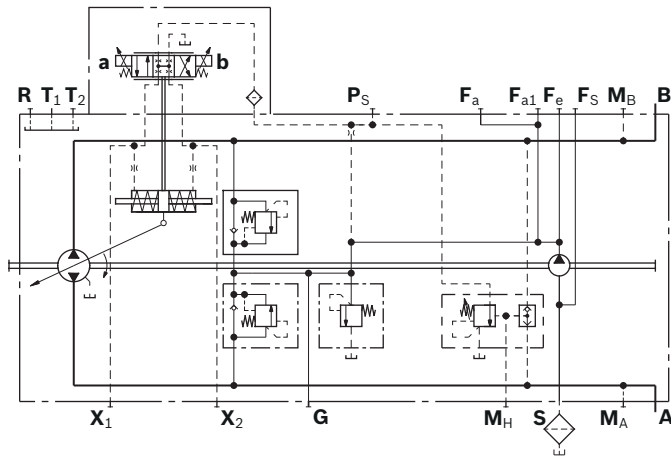

## Filtration in the boost pump pressure line

### Version D

#### Ports for external boost circuit filtration


Ports	
Boost pressure inlet	Port $F_a$
Boost pressure outlet	Port $F_e$
Filter version	Boost pressure filter without bypass
Recommendation	With contamination indicator
Filter arrangement	Separate in the pressure line (inline filter)
Permissible flow resistance at filter element <sup>1)</sup>	
At $v = 30 \text{ mm}^2/\text{s}$	$\Delta p \leq 1 \text{ bar}$
For cold start	$\Delta p \leq 3 \text{ bar}$

#### Notice

- Filters with a bypass **not recommended**, (exception DG, see below). Please contact us for applications with a bypass.
- On versions with DG control (with pilot pressure not from a boost circuit), a filter **with** a bypass and **with** a contamination indicator must be used.

The boost pressure filter is not included in the scope of delivery.

#### ▼ Circuit diagram

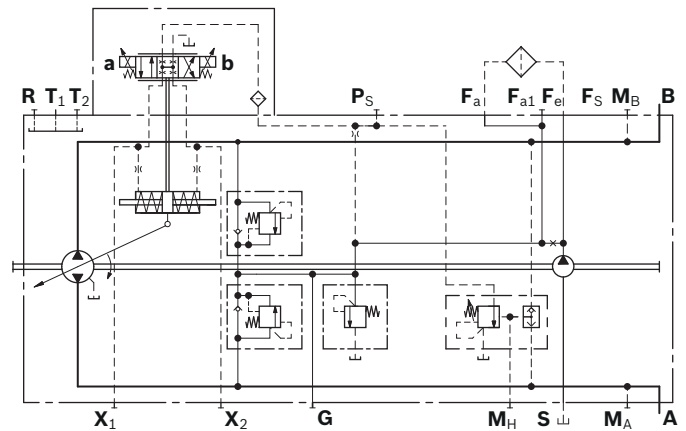

1) Valid for entire speed range  $n_{\text{min}}$  to  $n_{\text{max}}$

**Version F<sup>3)</sup>**


**Attachment filter with cold start valve**

Filter version	Attachment filter without bypass
Recommendation	Version with contamination indicator, see P, B (differential pressure $\Delta p = 5$ bar)
Filter grade (absolute)	20 $\mu\text{m}$
Filter material	Glass fiber
Pressure rating	100 bar
Filter arrangement	Mounted on pump


The attachment filter is equipped with a cold start valve and thereby protects the pump from damage. The valve opens at flow resistance of  $\Delta p \geq 6$  bar.

**▼ Filter characteristics**

Differential pressure/flow characteristics to ISO 3968 (valid for clean filter element).

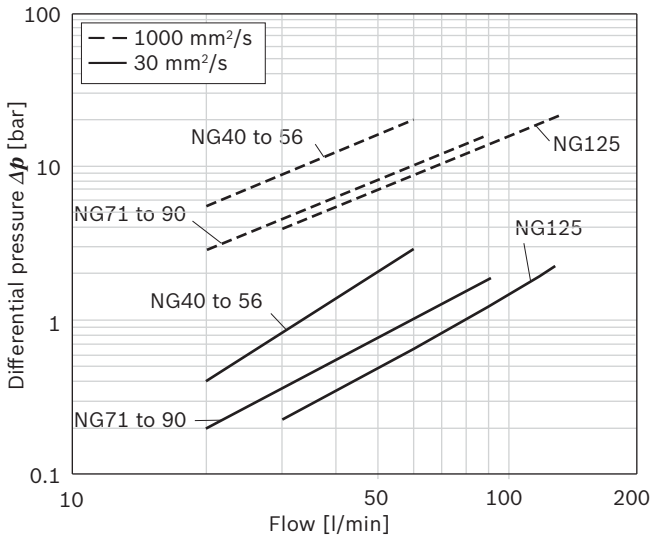

**▼ Circuit diagram**

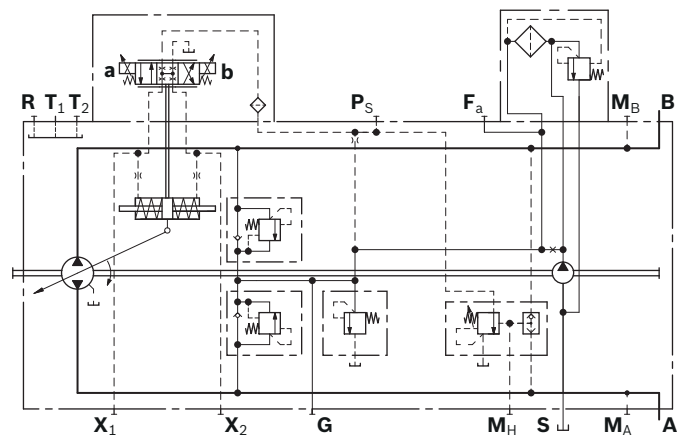

1) Valid for entire speed range  $n_{\min} - n_{\max}$

2) Thread according to DIN 3852;

The countersink may be deeper than specified in the standard.

**Version P<sup>1)</sup>**


**Attachment filter with cold start valve and visual contamination indicator**

Filtration similar to version F, however with additional visual contamination indicator.

**Technical data**

Display type	Green/red window
Differential pressure (switching pressure)	$\Delta p = 5$ bar

**▼ Circuit diagram**

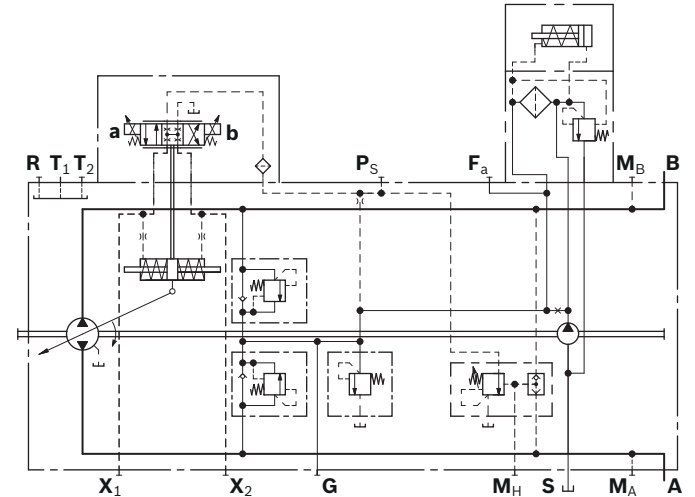

3) To protect the filter element against electrostatic charge, the hydraulic fluid must have a minimum conductivity of 300 pS/m on versions with attachment filter F, P and B. Please contact us if this value cannot be observed.

**Version B<sup>1)</sup>**


**Attachment filter with cold start valve and electric contamination indicator**

Filtration similar to version F, however with additional electric contamination indicator.

**Technical data**

Display type	Electrical	
Connector version (mating connector, see page 64)	DEUTSCH DT04-2P-EP04	
Differential pressure (switching pressure)	$\Delta p = 5 \text{ bar}$	
Maximum switching capacity	12 V DC	24 W
	24 V DC	48 W
Type of protection IP67	DIN EN 60529	

▼ **Circuit diagram**

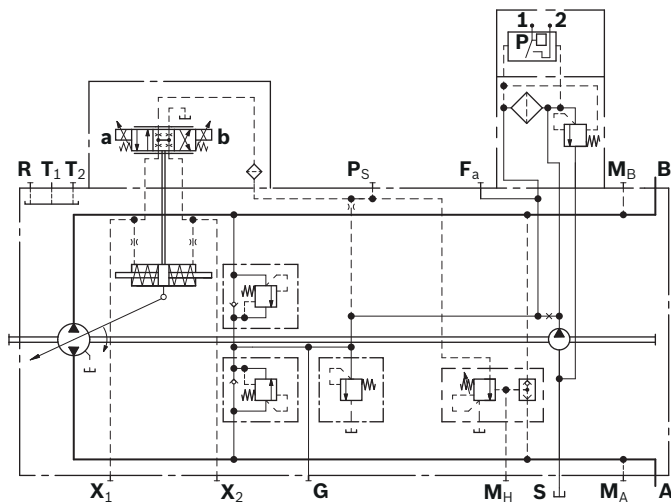

**External boost pressure supply**

**Version E**

This variation should be used in versions without integrated boost pump (**N** and **K**).


Port **S** is plugged.

The boost pressure supply comes from port **F<sub>a</sub>**.

The filter should be installed separately on port **F<sub>a</sub>** before the boost pressure supply.

To ensure the functional reliability, maintain the required cleanliness level for the boost fluid fed in at port **F<sub>a</sub>** (see page 6).

▼ **Circuit diagram**

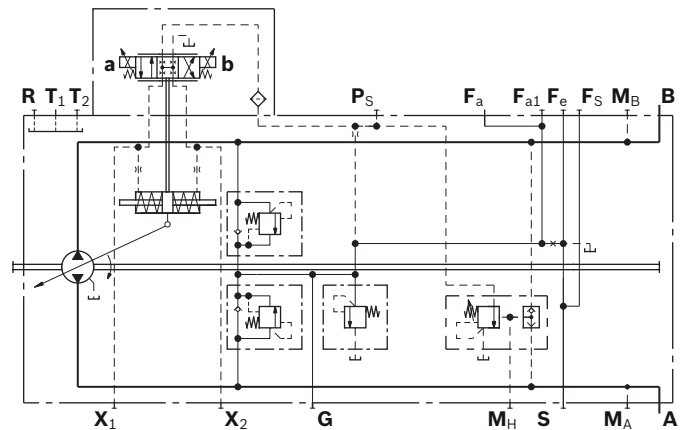


1) To protect the filter element against electrostatic charge buildup, the hydraulic fluid must have a minimum conductivity of 300 pS/m on versions with attachment filter F, P and B. Please contact us if this value cannot be observed.

### Dimensions with filter fitted

▼ **Version F**


Attachment filter with cold start valve

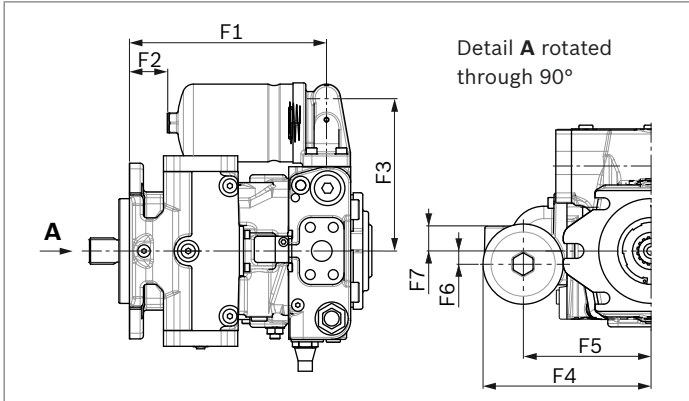

NG	F1	F2	F3	F4	F5	F6	F7	F8
<b>40</b>	201.7	47.7	160	175	135	0	42	78.5
<b>56</b>	218.4	64.4	163	178	138	0	42	78.5
<b>71</b>	239	46.5	185	203.5	155	16	29	65.5
<b>90</b>	248.5	56	179	197.5	149	0	45	81.5
<b>125</b>	235.9	59.4	201	219.5	171	0	53	89.5


▼ **Version P**

Attachment filter with cold start valve and visual contamination indicator

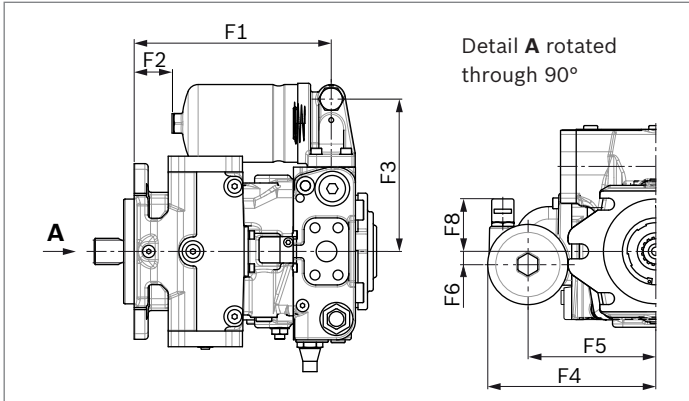

▼ **Version B**

Attachment filter with cold start valve and electric contamination indicator

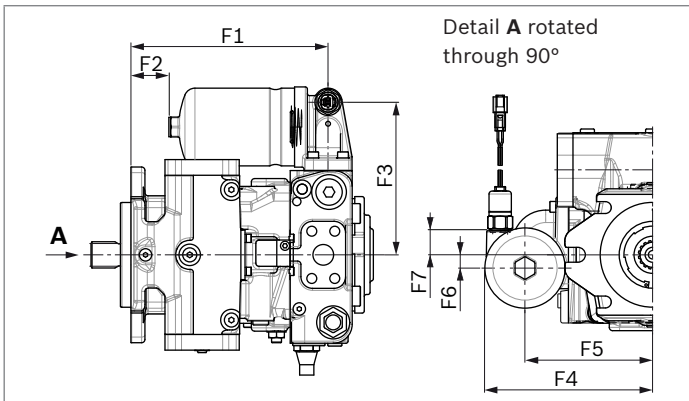

### Swivel angle sensor

The swivel angle sensor is used to detect the swivel angle of axial piston units and thus the displacement using a Hall-effect based sensor IC. The determined measurement value is converted into an analog signal.


Please contact us if the swivel angle sensor is used for control.

Characteristics	
Supply voltage $U_b$	10 to 30 V DC
Output voltage $U_a$	0.5 V $(V_{g \max})$ 2.5 V $(V_{g 0})$ 4.5 V $(V_{g \max})$
Reverse polarity protection	Short-circuit resistant
EMC resistance	Details on request
Operating temperature range	-40 °C to +115 °C
Vibration resistance, sinusoidal vibration EN 60068-2-6	10 g / 5 to 2000 Hz
Shock resistance: continuous shock IEC 68-2-29	25 g
Salt spray resistance (DIN 50 021-SS)	96 h
Type of protection with installed mating connector	IP67 – DIN/EN 60529 IP69K – DIN 40050-9
Housing material	Plastic
Connector version	AMP Super Seal 1.5


### Output voltage

Direction of rotation	Flow direction	Working pressure	Output voltage	
			at $V_{g 0}$	at $V_{g \max}$
clockwise	A to B	$M_B$	2.5 V	4.5 V
	B to A	$M_A$	2.5 V	0.5 V
counter-clockwise	B to A	$M_A$	2.5 V	4.5 V
	A to B	$M_B$	2.5 V	0.5 V

### ▼ Circuit diagram

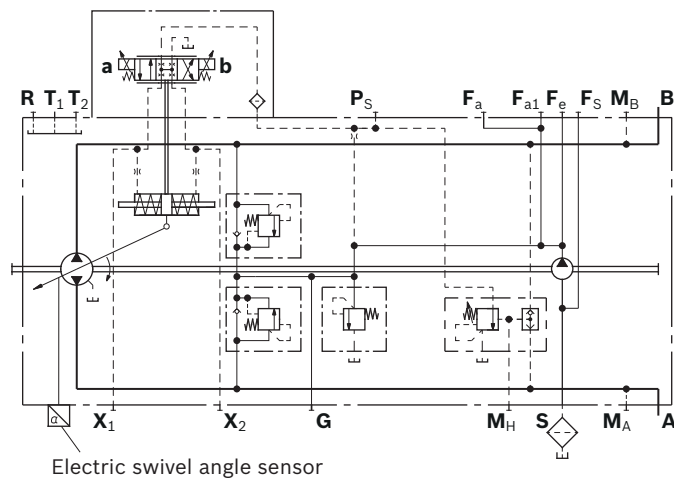

### Dimensions

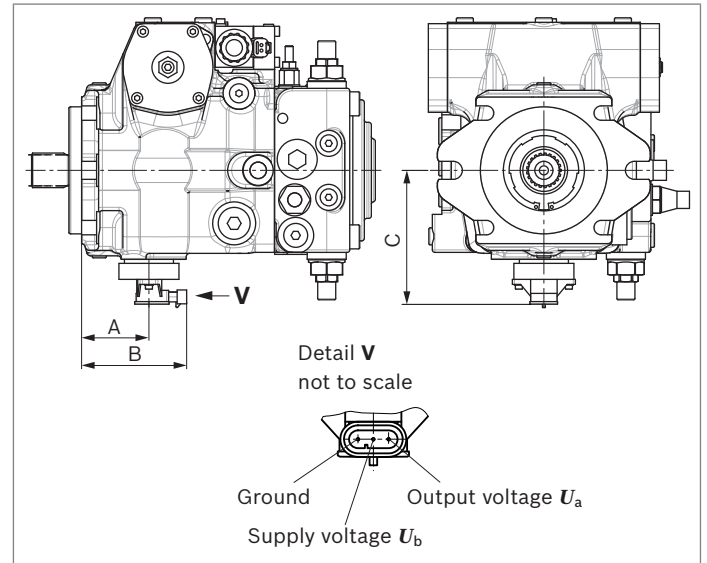

NG	A	B	C
28	56.6	94	119
40	58.6	96	119
56	60.5	97.5	128.5
71	71.6	108.6	137.5
90	70.7	107.7	145.5
125	78	115	152.5

### Mating connector AMP Superseal 1.5; 3-pin

Consisting of	AMP No.
1 socket housing, 3-pin	282087-1
3 single-wire seals, yellow	281934-2
3 socket contacts 1.8 - 3.3 mm	183025-1

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902602132).

### Notice

It is not possible to retrofit existing units with a swivel angle sensor.

## Connector for solenoids

### DEUTSCH DT04-2P-EP04

- ▶ **P:** Molded, 2-pin, without bidirectional suppressor diode (standard).
- ▶ **Q:** Molded, 2-pin, with bidirectional suppressor diode (only for switching solenoids on control module EZ and DA)

The following type of protection ensues with the installed mating connector:


- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

The protection circuit with bidirectional suppressor diode is needed to limit overvoltages. Overvoltages are caused by switching off the current with switches, relay contacts or by disconnecting the mating connector while voltage is applied.

#### ▼ Switching symbol

**Without** bidirectional suppressor diode

**With** bidirectional suppressor diode

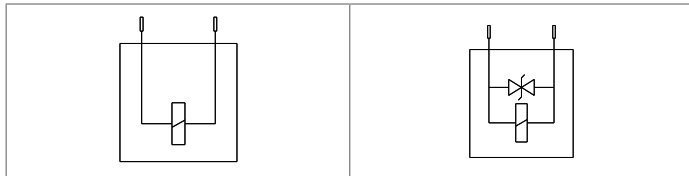

#### ▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

#### Notice

- ▶ If necessary, you can change the position of the connector by turning the solenoid.
- ▶ The procedure is defined in the instruction manual.



### Rotary inch valve

Any reduction of the pilot pressure possible, independently of the drive speed, through mechanical actuation of the position lever. Maximum angle of rotation 90°, lever position: any. The valve is arranged separately from the pump and is connected to the pump by a hydraulic control line via port **P<sub>S</sub>** (maximum line length: approx. 2 m). The rotary inch valve must be ordered separately.


NG	Material number	Direction of actuation of the position lever	Throttle cross-section $\varnothing$
28, 40,	R902048734	Clockwise	4.6
56, 71,	R902048735	Counter-clockwise	4.6
90	R902070172	Clockwise	2.7
	R902066994	Counter-clockwise	2.7
125	R902048740	Clockwise	4.7
	R902048741	Counter-clockwise	4.7

#### Notice


The rotary inch valve can be used regardless of the control module.

#### ▼ Circuit diagram:

Hydraulic control, speed-related,  
DA with separately attached rotary inch valve

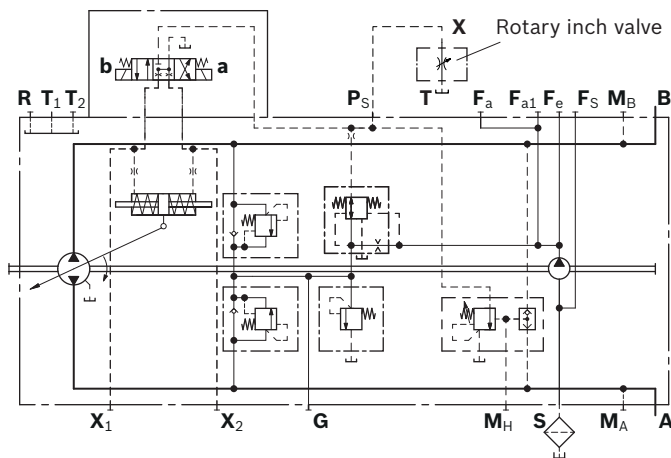

### Dimensions

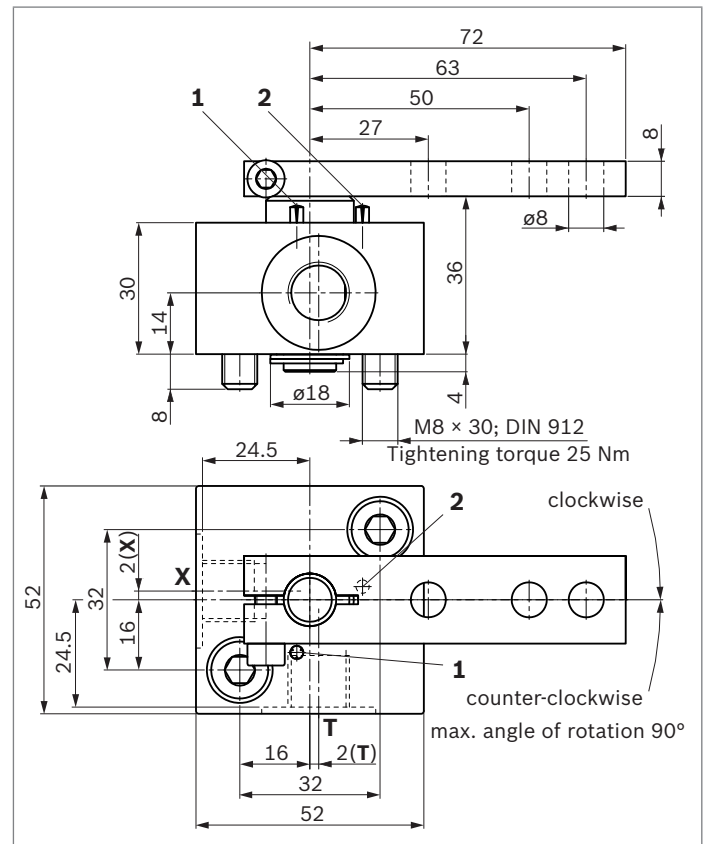

#### Notice

Limitation 1 and 2 are function stops for inching. They are not to be used as a mechanical limitation within the system. We recommend limiting the angle of rotation to 85° within the system.

Ports		Standard <sup>1)</sup>	Size	$p_{max}$ [bar] <sup>2)</sup>	State <sup>3)</sup>
X	Pilot pressure port	DIN 3852	M14 x 1.5; 12 deep	40	O
T	Drain port	DIN 3852	M14 x 1.5; 12 deep	3	O

1) The countersink can be deeper than as specified in the standard.  
2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

3) O = Must be connected (plugged on delivery)

## Installation dimensions for coupling assembly


To ensure that rotating components (coupling hub on drive shaft) and fixed components (housing, snap ring) do not come into contact with each other, the installation conditions described here must be observed. This depends on the pump size and the splined shaft.

### SAE splined shaft (spline according to ANSI B92.1a)

Splined shaft **S** or **T**

The outer diameter of the coupling hub must be smaller than the inner diameter of the snap ring (dimension  $d_2$ ) in the area near the drive shaft collar (dimension  $x_2 - x_3$ ).

Observe diameter of relief on sizes 28 and 40.

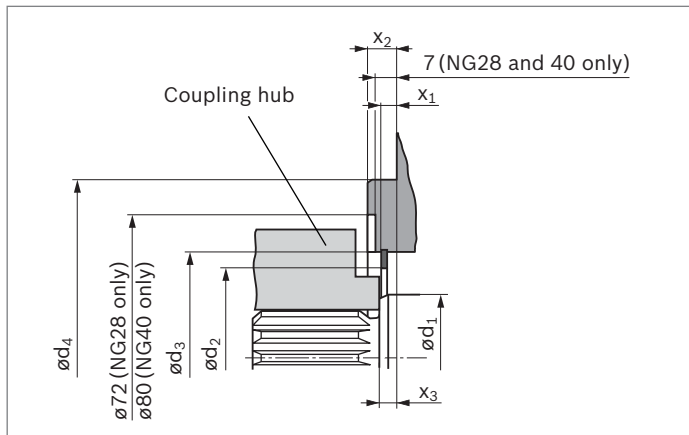


### DIN splined shaft (spline according to DIN 5480)

Splined shaft **Z** or **A**

The outer diameter of the coupling hub must be smaller than the case diameter  $d_3$  in the area near the drive shaft collar (dimension  $x_2 - x_4$ ).

Observe diameter of relief on sizes 28 and 40.

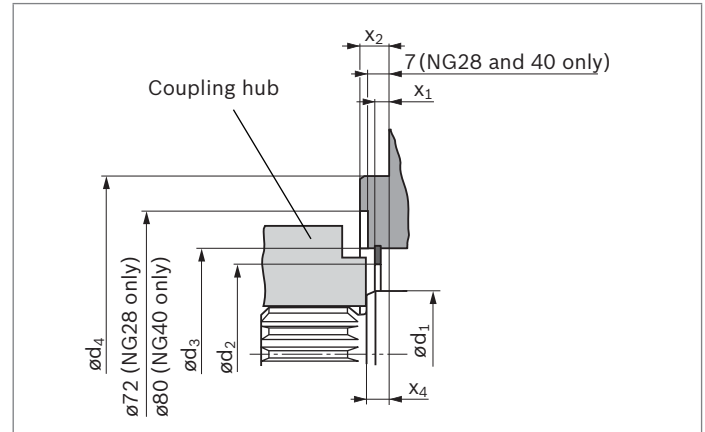

NG	$\text{ød}_1$	$\text{ød}_{2 \text{ min}}$	$\text{ød}_3$	$\text{ød}_4$	$x_1$	$x_2$	$x_3$	$x_4$
<b>28</b>	35	43.4	55±0.1	101.6	3.3 <sup>+0.2</sup>	9.5 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
<b>40</b>	40	51.4	63±0.1	127	4.3 <sup>+0.2</sup>	12.7 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
<b>56</b>	40	54.4	68±0.1	127	7.0 <sup>+0.2</sup>	12.7 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
<b>71</b>	45	66.5	81±0.1	127	7.0 <sup>+0.2</sup>	12.7 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
<b>90</b>	50	66.5	81±0.1	152.4	6.8 <sup>+0.2</sup>	12.7 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
<b>125</b>	55	76.3	91±0.1	152.4	7.0 <sup>+0.2</sup>	12.7 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>

## Installation instructions

### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines.

Particularly in the installation position “drive shaft upwards”, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running.

The leakage in the housing area must be directed to the reservoir via the highest drain port (**T<sub>1</sub>**, **T<sub>2</sub>**). For combination pumps, the leakage must be drained off at each pump. If a shared drain line is used for several units, make sure that the respective case pressure is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operating conditions, specifically on cold start. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

Under all operating conditions, the suction line and drain line must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{s\ max} = 800\ \text{mm}$ .

The suction pressure at port **S** must also not fall below the minimum value of 0.8 bar absolute during operation (cold start 0.5 bar absolute).

### Installation position

See the following examples 1 to 12.

Further installation positions are available upon request.

Recommended installation position: 1 and 2.


### Notice

- ▶ Size 71 to 125  
For installation position “drive shaft upward”, an **R<sub>1</sub>** port is needed (special version).
- ▶ If filling the stroking chambers via **X<sub>1</sub>** to **X<sub>4</sub>** is not possible in the final installation position, then this must take place before installation, e. g. in installation position 2.
- ▶ To prevent unexpected actuation and damage, the stroking chambers must be air bled via the ports **X<sub>1</sub>**, **X<sub>2</sub>**, or **X<sub>3</sub>**, **X<sub>4</sub>** depending on the installation position.
- ▶ In certain installation positions, an influence on the control characteristic can be expected. Gravity, dead weight and case pressure can cause minor shifts in control characteristic curves and changes in response time.


### Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir and below the minimum fluid level of the reservoir.


Installation position	Air bleeding the housing	Air bleeding the stroking chamber	Filling
1	R	X <sub>1</sub> , X <sub>2</sub>	S + T <sub>1</sub> + X <sub>1</sub> + X <sub>2</sub>




2	-	-	S + T <sub>2</sub>
---	---	---	--------------------




Installation position	Air bleeding the housing	Air bleeding the stroking chamber	Filling
3	-	X <sub>1</sub> , X <sub>2</sub>	S + T <sub>2</sub> + X <sub>1</sub> + X <sub>2</sub>




4	R <sub>1</sub>	X <sub>3</sub> , X <sub>4</sub>	S + T <sub>2</sub> + X <sub>3</sub> + X <sub>4</sub>
---	----------------	---------------------------------	--



5	-	X <sub>3</sub>	S + T <sub>1</sub> + X <sub>3</sub>
---	---	----------------	-------------------------------------



6	-	X <sub>4</sub>	S + T <sub>2</sub> + X <sub>4</sub>
---	---	----------------	-------------------------------------




### Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.


Observe the maximum permissible suction height  $h_{S \max} = 800 \text{ mm}$ .

Recommendation for installation position 10 (drive shaft upward): A check valve in the drain line (cracking pressure 0.5 bar) can prevent the housing area from draining.


Installation position	Air bleeding the housing	Air bleeding the stroking chamber	Filling
7	F <sub>2</sub> + R	X <sub>1</sub> , X <sub>2</sub>	F <sub>1</sub> + F <sub>2</sub> + X <sub>1</sub> + X <sub>2</sub>




8	F <sub>2</sub> (S) + F <sub>1</sub> (T <sub>2</sub> )	-	F <sub>2</sub> (S) + F <sub>1</sub> (T <sub>2</sub> )
---	---	---	---




9	F <sub>2</sub> (S) + F <sub>1</sub> (T <sub>2</sub> )	X <sub>1</sub> , X <sub>2</sub>	F <sub>2</sub> (S) + F <sub>1</sub> (T <sub>2</sub> ) + X <sub>1</sub> + X <sub>2</sub>
---	---	---------------------------------	---

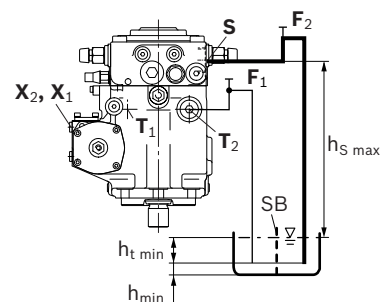


Installation position	Air bleeding the housing	Air bleeding the stroking chamber	Filling
<b>10</b>	$F_2 + R_1$	$X_3, X_4$	$F_1 + F_2 + X_3 + X_4$

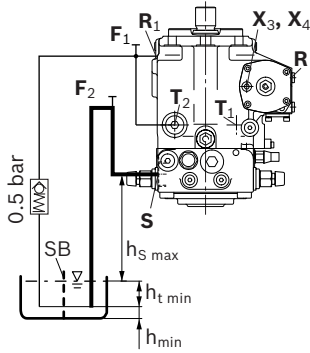

<b>11</b>	$F_2 (S) + F_1 (T_1)$	$X_3$	$F_2 (S) + F_1 (T_1) + X_3$
-----------	-----------------------	-------	-----------------------------



<b>12</b>	$F_2 (S) + F_1 (T_2)$	$X_4$	$F_2 (S) + F_1 (T_2) + X_4$
-----------	-----------------------	-------	-----------------------------



Key	
$F_1, F_2$	Filling / air bleeding
<b>R</b>	Air bleed port
$R_1$	Air bleed port (special version)
<b>S</b>	Suction port
$T_1, T_2$	Drain port
$X_1, X_2$	Control pressure port
$X_3, X_4$	Stroking chamber pressure port
<b>SB</b>	Baffle (baffle plate)
$h_{t \min}$	Minimum required immersion depth (200 mm)
$h_{\min}$	Minimum required distance to reservoir bottom (100 mm)
$h_{s \max}$	Maximum permissible suction height (800 mm)

#### Notice

Ports  $F_1$  and  $F_2$  are part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

## Project planning notes

- ▶ The pump A4VG is designed to be used in closed circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all versions of the product are approved for use in a safety function according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference.  
Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.
- ▶ The pressure cut-off is not a safeguard against pressure overload. Be sure to add a pressure relief valve to the hydraulic system.
- ▶ Please note the details regarding the tightening torques of port threads and other threaded joints in the instruction manual.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports are only intended to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of getting burnt on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances get blocked in position as a result of contamination (e.g. impure hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filter) will not rule out a fault but merely reduce the risk.  
The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to set the consumer being driven to a safe position (e.g. safe stop) and if necessary to ensure it is properly implemented.
- ▶ Moving parts in high-pressure relief valves may in certain circumstances become stuck in an undefined position due to contamination (e.g. impure hydraulic fluid). This can result in restriction or loss of the load holding function in lifting winches.  
The machine/system manufacturer must check whether additional measures are required on the machine for the relevant application in order to keep the load in a safe position and ensure they are properly implemented.

**Bosch Rexroth AG**

Mobile Applications  
Glockeraustraße 4  
89275 Elchingen, Germany  
Tel. +49 7308 82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© Bosch Rexroth AG 2016. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.



# Axial piston variable pump

## A4VG Series 40

**RE 92004**

Edition: 07.2016

Replaces: 06.2012



- ▶ High-pressure pump for applications in a closed circuit up to 500 bar
- ▶ Size 110...280
- ▶ Nominal pressure 450 bar
- ▶ Maximum pressure 500 bar
- ▶ Closed circuit

### Features

- ▶ High power density owing to a very high pressure level
- ▶ Integrated auxiliary pump for boost and pilot oil supply
- ▶ Flow direction changes smoothly when the swashplate is moved through the neutral position
- ▶ High-pressure relief valves with integrated boost function
- ▶ With adjustable pressure cut-off as standard
- ▶ Boost-pressure relief valve
- ▶ Through drive for mounting of further pumps up to same nominal size
- ▶ High total efficiency
- ▶ Large variety of controls
- ▶ Swashplate design

### Contents

Type code	2
Hydraulic fluid	6
Shaft seal	7
Working pressure range	8
Technical data	9
HP – Proportional hydraulic control, pilot-pressure rel.	12
HW – Proportional hydraulic control, mechanical servo	13
HT – Hydraulic control, direct operated	15
DA – Automatic control, speed-related	16
EP – Proportional control, electric	19
EZ – Two-point control, electric	20
EV – Electric control, direct operated	21
ET – Electric control, direct operated	22
Dimensions size 110 to 280	23
Dimensions, through drive	50
Overview of mounting options	53
Combination pumps A4VG + A4VG	54
High-pressure relief valves	55
Pressure cut-off	56
Bypass function	56
Neutral valve	57
Mechanical stroke limiter	58
Stroking chamber pressure port X <sub>3</sub> and X <sub>4</sub>	59
Filtration in the boost pump suction line	60
Filtration in the boost pump pressure line	60
External boost pressure supply	62
Dimensions with mounted filter	63
Swivel angle sensor	64
Connector for solenoids	65
Speed sensor	66
Installation dimensions for coupling assembly	67
Installation instructions	68
Project planning notes	71
Safety instructions	72

## Type code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	
A4V	G							/	40	M		N						A		0		-	

### Axial piston unit

01	Swashplate design, variable, nominal pressure 450 bar, maximum pressure 500 bar	A4V
----	---	-----

### Operating mode

02	Pump, closed circuit	G
----	----------------------	---

### Size (NG)

03	Geometric displacement, see "Technical data" on page 9	110	125	145	175	210	280
----	--	-----	-----	-----	-----	-----	-----

### Control device

		110	125	145	175	210	280	
04	Proportional control, hydraulic pilot-pressure related $p = 6$ to 18 bar mechanical servo, hexagon shaft with lever, free position with neutral position switch	-	o	o	o	o	o	
		-	•	•	•	•	•	
		-	•	•	•	•	•	
	Hydraulic control, direct operated		-	•	•	•	•	•
	Automatic control, speed related		$U = 12$ V	•	•	•	•	•
			$U = 24$ V	•	•	•	•	•
	Proportional control, electric with manual override and spring return		$U = 12$ V	•	•	•	•	•
			$U = 24$ V	•	•	•	•	•
			$U = 12$ V	•	•	•	•	•
			$U = 24$ V	•	•	•	•	•
Two-point control, electric		$U = 12$ V	•	•	•	•	•	
		$U = 24$ V	•	•	•	•	•	
Electric control, direct operated, 4/3-way directional valve, one pressure reducing valve (DRE)		$U = 12$ V	•	•	•	o	o	
		$U = 24$ V	•	•	•	•	o	o
Electric control, direct operated, two pressure reducing valves (DRE)		$U = 12$ V	•	•	•	•	o	o
		$U = 24$ V	•	•	•	•	o	o

### Pressure cut-off

05	Without pressure cut-off	without bypass	0
		with bypass	C
	Pressure cut-off, with bypass (not for HT)	Fixed setting, hydraulic, mechanical	D

### Connector for solenoids<sup>1)</sup>

06	Without connector (only for purely hydraulic control)	0
	DEUTSCH molded connector, 2-pin – without suppressor diode	P

### Swivel angle sensor

07	Without swivel angle sensor	0
	Electric swivel angle sensor (DWS20-1, 3-pin) <sup>2)</sup>	R

• = Available    o = On request    - = Not available

= Preferred program

1) Connectors for other electric components may deviate.

2) Please contact us if the swivel angle sensor is used for control

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	
<b>A4V</b>	<b>G</b>								<b>/</b>	<b>40</b>	<b>M</b>		<b>N</b>					<b>A</b>		<b>0</b>		<b>-</b>	

**Additional function**

08	Without additional function	<b>0</b>
	Mechanical stroke limiter, externally adjustable	<b>M</b>
	Stroking chamber pressure port <b>X<sub>3</sub>, X<sub>4</sub></b>	<b>T</b>
	Mechanical stroke limiter and stroking chamber pressure port <b>X<sub>3</sub>, X<sub>4</sub></b>	<b>B</b>
	Neutral valve $U = 12 V^{(3)}$	<b>N</b>
	and mechanical stroke limiter, externally adjustable	<b>P</b>
	and ports <b>X<sub>3</sub>, X<sub>4</sub></b> for stroking chamber pressure	<b>R</b>
	and mechanical stroke limiter and ports <b>X<sub>3</sub>, X<sub>4</sub></b>	<b>S</b>
	Neutral valve $U = 24 V^{(3)}$	<b>U</b>
	and mechanical stroke limiter, externally adjustable	<b>V</b>
	and ports <b>X<sub>3</sub>, X<sub>4</sub></b> for stroking chamber pressure	<b>W</b>
	and mechanical stroke limiter and ports <b>X<sub>3</sub>, X<sub>4</sub></b>	<b>Y</b>

**DA control valve**

		HP	HW	HT	DA	EP	EZ	EV	
09	Without DA control valve	●	●	●	-	●	●	●	<b>0</b>
	DA control valve, fixed setting	●	●	●	●	●	-	-	<b>1</b>
	DA control valve, mechanically adjustable with direction of actuation, clockwise	●	●	●	●	●	-	-	<b>2</b>
	position lever direction of actuation, counter-clockwise	●	●	●	●	●	-	-	<b>3</b>
	DA control valve, fixed setting and brake inch valve based on mineral oil mounted, control with brake fluid	-	-	-	●	-	-	-	<b>5</b>
	DA control valve, fixed setting, ports for pilot control device	●	●	●	●	●	-	-	<b>6</b>

**Series**

10	Series 4, index 0	<b>40</b>
----	-------------------	-----------

**Configuration of port and fastening threads**

11	Metric, ISO 6149 with O-ring seal	<b>M</b>
----	-----------------------------------	----------

**Direction of rotation**

12	Viewed on drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

**Sealing material**

13	NBR (nitrile rubber), shaft seal in FKM (fluoroelastomer)	<b>N</b>
----	---	----------

**Mounting flange**

		110	125	145	175	210	280	
14	SAE J744	127-2/4	●	●	-	-	-	<b>C6</b>
		152-2/4	●	●	●	●	-	<b>D6</b>
		165-4	○	-	-	●	●	<b>E4</b>

**Drive shaft**

		110	125	145	175	210	280	
15	Splined shaft	1 3/8 in	21T	16/32DP	●	-	-	<b>V8</b>
	ANSI B92.1a-1976	1 3/4 in	13T	8/16DP	●	●	-	<b>T1</b>
		2 in	15T	8/16DP	●	●	●	<b>T2</b>
		2 1/4 in	17T	8/16DP	-	-	●	<b>T3</b>
	Splined shaft DIN 5480	W40×2×18×9	●	-	-	-	-	<b>Z9</b>
		W45×2×21×9	●	●	●	●	-	<b>A1</b>
		W50×2×24×9	-	-	●	●	-	<b>A2</b>
		W55×2×26×9	-	-	-	●	●	<b>A3</b>

● = Available    ○ = On request    - = Not available     = Preferred program

3) Cannot be combined with EV or brake inch valve

4 **A4VG Series 40** | Axial piston variable pump  
Type code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	
<b>A4V</b>	<b>G</b>								/	<b>40</b>	<b>M</b>		<b>N</b>					<b>A</b>		<b>0</b>		-	

**Working port**

16	SAE working port <b>A</b> and <b>B</b> , on left side (45° left)	<b>1</b>
	SAE working port <b>A</b> and <b>B</b> , on right side (45° right) <sup>4)</sup>	<b>2</b>

**Boost pump and rotary group configuration**

			110	125	145	175	210	280	
17	Standard rotary group	Boost pump integrated, through drive convertible	●	●	●	●	●	●	<b>F</b>
		without boost pump, through drive convertible	●	●	●	●	●	●	<b>U</b>
	High-speed rotary group	Boost pump integrated, through drive convertible	●	-	●	●	-	-	<b>V</b>
		without boost pump, through drive convertible	●	-	●	●	-	-	<b>W</b>

**Through drive<sup>5)</sup>**

						110	125	145	175	210	280	
18	Without through drive					●	●	●	●	●	●	<b>0000</b>
	Flange SAE J744		Hub for splined shaft <sup>6)</sup>									
	Diameter	Mounting <sup>7)</sup>	Code	Diameter	Code							
82-2 (A)	⌀	A1	5/8 in	9T 16/32DP	S2	●	-	●	●	-	○	<b>A1S2</b>
			3/4 in	11T 16/32DP	S3	●	-	●	●	●	●	<b>A1S3</b>
	∞	A2	5/8 in	9T 16/32DP	S2	●	●	●	●	○	●	<b>A2S2</b>
			3/4 in	11T 16/32DP	S3	●	-	●	●	●	●	<b>A2S3</b>
101-2 (B)	⌀	B1	7/8 in	13T 16/32DP	S4	●	●	●	●	●	●	<b>B1S4</b>
			1 in	15T 16/32DP	S5	●	-	●	●	●	●	<b>B1S5</b>
	∞	B2	7/8 in	13T 16/32DP	S4	●	●	●	●	●	●	<b>B2S4</b>
			1 in	15T 16/32DP	S5	●	-	●	●	○	○	<b>B2S5</b>
	♂	B5	7/8 in	13T 16/32DP	S4	●	-	●	○	○	○	<b>B5S4</b>
			1 in	15T 16/32DP	S5	○	-	●	○	●	●	<b>B5S5</b>
101-4 (B)	⌀	B4	7/8 in	13T 16/32DP	S4	○	-	●	○	●	○	<b>B4S4</b>
			1 in	15T 16/32DP	S5	●	-	●	○	○	○	<b>B4S5</b>
127-2 (C)	⌀	C1	1 in	15T 16/32DP	S5	-	-	○	-	-	-	<b>C1S5</b>
			1 1/4 in	14T 12/24DP	S7	●	-	●	○	○	○	<b>C1S7</b>
	∞	C2	1 1/4 in	14T 12/24DP	S7	●	●	●	●	●	●	<b>C2S7</b>
			1 3/8 in	21T 16/32DP	V8	○	-	●	●	-	-	<b>C2V8</b>
	♂	C2	1 3/4 in	13T 8/16DP	T1	-	-	●	●	-	-	<b>C2T1</b>
			1 1/4 in	14T 12/24DP	S7	●	-	●	○	○	○	<b>C5S7</b>
127-4 (C)	⌀	C4	1 1/4 in	14T 12/24DP	S7	●	-	●	●	○	●	<b>C4S7</b>
			1 3/8 in	21T 16/32DP	V8	●	●	-	-	-	-	<b>C4V8</b>
152-4 (D)	⌀	D4	1 3/4 in	13T 8/16DP	T1	-	-	●	●	●	●	<b>D4T1</b>
165-4 (E)	⌀	E4	1 3/4 in	13T 8/16DP	T1	-	-	-	●	●	-	<b>E4T1</b>
			2 in	15T 8/16DP	T2	-	-	-	-	●	●	<b>E4T2</b>

● = Available    ○ = On request    - = Not available     = Preferred program

4) Only possible without attachment filter.

5) Specifications for version with integrated boost pump, please contact us for version without boost pump

6) Hub for splined shaft according to ANSI B92.1a-1976 (drive shaft allocation according to SAE J744)

7) Mounting hole pattern viewed on through drive

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	
<b>A4V</b>	<b>G</b>								/	<b>40</b>	<b>M</b>		<b>N</b>					<b>A</b>		<b>0</b>		-	

**High-pressure relief valve**

19	High-pressure relief valve, direct operated, fixed setting, with low-pressure relief valve, fixed setting	<b>A</b>
----	---	----------

**Filtration boost circuit/external boost pressure supply**

20	Filtration in the boost pump suction line	<b>S</b>
	Filtration in the boost pump pressure line	<b>D</b>
	Ports for external boost circuit filtration ( <b>F<sub>e</sub></b> and <b>F<sub>a</sub></b> )	
	Attachment filter with cold start valve <sup>8)</sup>	<b>F</b>
	Attachment filter <sup>8)</sup> with cold start valve and electric contamination indicator – DEUTSCH connector	<b>B</b>
External boost pressure supply (on version without integrated boost pump)		<b>E</b>

**Pressure sensor**

21	Without pressure sensor	<b>0</b>
----	-------------------------	----------

**Other sensors**

22	Without sensor	<b>0</b>
	Speed sensor DSM, DSA <sup>9)</sup>	<b>V</b>

**Standard / special version**

22	Standard version	<b>0</b>
	Standard version with installation variants, e.g. <b>T</b> ports against standard open or closed	<b>Y</b>
	Special version	<b>S</b>

● = Available    ○ = On request    - = Not available     = Preferred program

**Notice**

- ▶ Note the project planning notes on page 71!
- ▶ In addition to the type code, please specify the relevant technical data when placing your order.

<sup>8)</sup> Only available for working ports located on left  
<sup>9)</sup> Specify type code of sensor acc. to data sheet (DSM - 95132, DSA 95133) separately and observe the requirements on the electronics

## Hydraulic fluid

The A4VG variable pump is designed for operation with HLP mineral oil according to DIN 51524.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)
- ▶ 90225: Axial piston units for operation with water-free and water-containing fire-resistant hydraulic fluids (HFDR, HFDU, HFAE, HFAS, HFB, HFC).

### Notes on selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$  see selection diagram).

### Notice


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

Please contact us if the above conditions cannot be met due to extreme operating parameters.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ °C}$	$t \leq 3 \text{ min}$ , $n \leq 1000 \text{ min}^{-1}$ , without load $p \leq 50 \text{ bar}$
Permissible temperature difference		$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid in the system
Warm-up phase	$v = 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ °C to } -25 \text{ °C}$	at $p \leq 0.7 \times p_{nom}$ , $n \leq 0.5 \times n_{nom}$ and $t \leq 15 \text{ min}$
Continuous operation	$v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$	$\theta = -25 \text{ °C to } +110 \text{ °C}$	this corresponds, for VG 46 for example, to a temperature range of +5 °C to +85 °C (see selection diagram)
	$v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		measured at port <b>T</b> Observe the permissible temperature range of the shaft seal ( $\Delta T = \text{approx. } 5 \text{ K}$ between bearing/shaft seal and port <b>T</b> )
Short-term operation	$v_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 3 \text{ min}$ , $p < 0.3 \times p_{nom}$

### ▼ Selection diagram

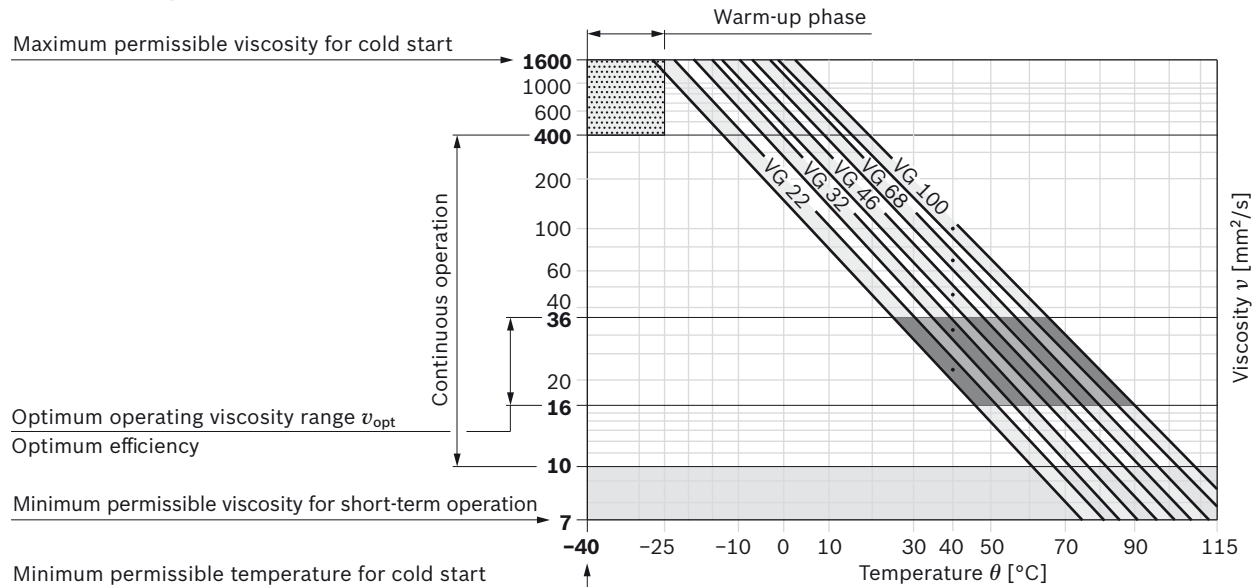

**Filtration of the hydraulic fluid**

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.


Depending on the system and the application, for the A4VG we recommend: Filter elements  $\beta_{20} \geq 100$ .

At very high hydraulic fluid temperatures (90 °C to maximum 110 °C, measured at port **T**), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.

**Shaft seal**

**Permissible pressure loading**

The service life of the shaft seal is influenced by the rotational speed of the axial piston unit and the leakage pressure in the housing (case pressure). Momentary ( $t < 0.1$  s) pressure peaks of up to 10 bar are allowed. The service life of the shaft seal decreases with increasing frequency of pressure peaks and increasing mean differential pressure. The case pressure must be higher than the ambient pressure.

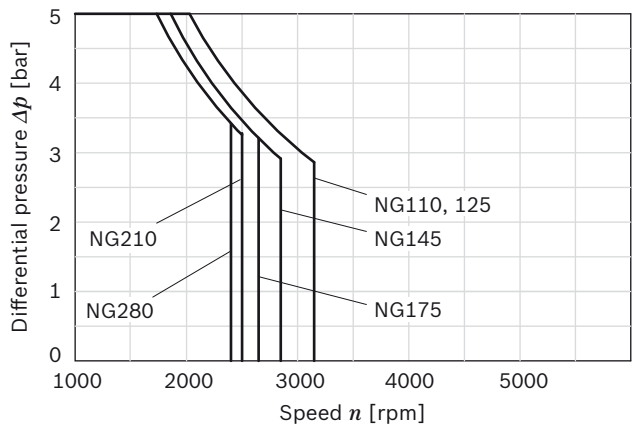


The FKM shaft seal ring may be used for leakage temperatures from -25 °C to +115 °C. For application cases below -25 °C, an NBR shaft seal is required (permissible temperature range: -40 °C to +90 °C).




## Working pressure range

Pressure at working port A or B		Definition
Nominal pressure $p_{nom}$	450 bar	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	500 bar	The maximum pressure corresponds to the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	10 s	
Total operating period	300 h	
Minimum pressure (high-pressure side)	25 bar	Minimum pressure at the high-pressure side ( <b>A</b> or <b>B</b> ) which is required to prevent damage to the axial piston unit.
Minimum pressure (low-pressure side)	10 bar above case pressure	Minimum pressure at the low-pressure side ( <b>A</b> or <b>B</b> ) which is required to prevent damage to the axial piston unit.
Rate of pressure change $R_{A\ max}$	9000 bar/s	Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
<b>Boost pump</b>		
Nominal pressure $p_{Sp\ nom}$	25 bar	
Maximum pressure $p_{Sp\ max}$	40 bar	
Pressure at suction port <b>S</b> (inlet)		
Continuous $p_{S\ min}$ ( $v \leq 30\ mm^2/s$ )	$\geq 0.8$ bar absolute	
Short-term, at a cold start ( $t < 3\ min$ )	$\geq 0.5$ bar absolute	
Maximum pressure $p_{S\ max}$	$\leq 5$ bar absolute	
<b>Control pressure</b>		
Minimum control pressure $p_{St\ min}$		To ensure the function of the control, a minimum control pressure $p_{St\ min}$ at $n = 2000\ rpm$ is necessary depending on the rotational speed and working pressure
Controls HP, HW, EP	20 bar above case pressure	
Controls HT, DA, EV, EZ, ET	25 bar above case pressure	

### ▼ Rate of pressure change $R_{A\ max}$

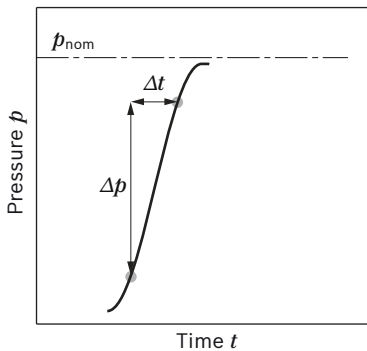

### ▼ Pressure definition

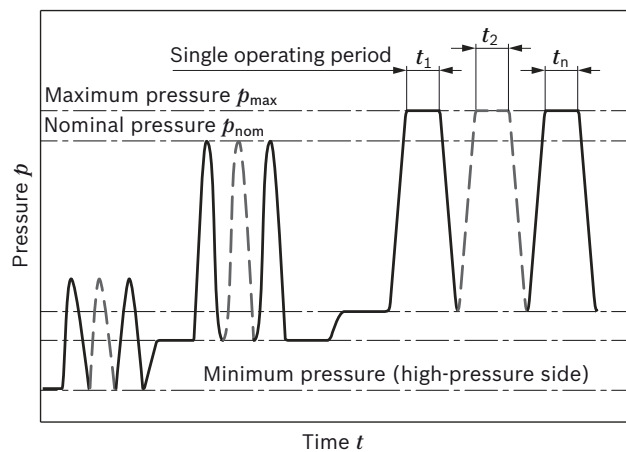

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

#### Notice

Working pressure range valid when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.



**Technical data**

Size		NG	110	125	145	175	210	280		
Displacement, geometric, per revolution										
	variable pump	$V_{g \max}$	cm <sup>3</sup>	110.4	125	145.3	175.4	210.6	280.3	
	boost pump (at $p = 20$ bar)	$V_{g Sp}$	cm <sup>3</sup>	24.5	31	32	39	46	60	
Torque <sup>2)</sup>	at $V_{g \max}$ and	$\Delta p = 430$ bar	$T$	Nm	756	856	994	1200	1441	1918
		$\Delta p = 100$ bar	$T$	Nm	176	200	231	279	335	446
Rotary stiffness of drive shaft	V8	$c$	kNm/rad	173	-	-	-	-	-	
	T1	$c$	kNm/rad	214	193	248	266	-	-	
	T2	$c$	kNm/rad	246	219	293	-	394	411	
	T3	$c$	kNm/rad	-	-	340	374	483	510	
	Z9	$c$	kNm/rad	219	-	-	-	-	-	
	A1	$c$	kNm/rad	251	222	300	326	407	-	
	A2	$c$	kNm/rad	-	-	326	357	-	-	
	A3	$c$	kNm/rad	-	-	-	-	516	546	
Moment of inertia for rotary group		$J_{TW}$	kgm <sup>2</sup>	0.0218	0.0232	0.0330	0.0570	0.0632	0.0975	
Maximum angular acceleration <sup>3)</sup>		$\alpha$	rad/s <sup>2</sup>	14500	13000	12000	10000	8000	5000	
Case volume		$V$	l	2.5	2.3	3.3	3.1	4.9	5.4	
Weight (without through drive) approx.		$m$	kg	88	84	106	115	152	160	
<b>Standard rotary group</b>										
Rotational speed <sup>1)</sup>	maximum at $V_{g \max}$	$n_{nom S}$	rpm	3150	3000	2850	2650	2500	2400	
	at $\Delta p \geq 40$ bar ( $t < 15$ s)	$n_{max 40}$	rpm	3350	3150	3000	2800	2650	2550	
	minimum	$n_{min}$	rpm	500	500	500	500	500	500	
Flow	at $n_{nom}$ and $V_{g \max}$	$q_v$	l/min	348	375	414	465	527	673	
Power <sup>2)</sup>	at $n_{nom}$ , $V_{g \max}$ and $\Delta p = 430$ bar	$P$	kW	249	269	297	333	377	482	
<b>High-speed rotary group</b>										
Rotational speed <sup>1)</sup>	maximum at $V_{g \max}$	$n_{nom H}$	rpm	3400	-	3050	3000	-	-	
	at $\Delta p \geq 40$ bar ( $t < 15$ s)	$n_{max 40}$	rpm	3600	-	3200	3100	-	-	
	minimum	$n_{min}$	rpm	500	-	500	500	-	-	
Flow	at $n_{nom}$ and $V_{g \max}$	$q_v$	l/min	375	-	443	526	-	-	
Power <sup>2)</sup>	at $n_{nom}$ , $V_{g \max}$ and $\Delta p = 430$ bar	$P$	kW	269	-	318	377	-	-	





**Notice**

- ▶ Theoretical values, without efficiency and tolerances; values rounded
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommend testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.





- 1) The values are applicable:
  - for the optimum viscosity range from  $n_{opt} = 36$  to  $16$  mm<sup>2</sup>/s
  - for hydraulic fluid based on mineral oils (for HF hydraulic fluids, observe the technical data in 90225)
- 2) Without boost pump
- 3) The data are valid for values between the minimum required and maximum permissible rotational speed.  
Valid for external excitation (e.g. diesel engine 2 to 8 times rotary frequency, cardan shaft twice the rotary frequency).  
The limit value is only valid for a single pump.  
The load capacity of the connecting parts must be considered.

**Permissible radial and axial forces of the drive shafts**

▼ **Splined shaft ANSI B92.1a**

Size	NG		110	110	110	125	125	145	145	
Drive shaft		in	1 3/8	1 3/4	2	1 3/4	2	1 3/4	2	
Maximum radial force at distance a (from shaft collar)		$F_{q \max}$	N	9524	7483	6548	6500	5800	9241	8086
		a	mm	24	33.5	40	33.5	40	33.5	40
Maximum axial force		$+ F_{ax \max}$	N	6305	6305	6305	6411	6411	6763	6763
		$- F_{ax \max}$	N	4095	4095	4095	3989	3989	4437	4437
Size	NG		145	175	175	210	210	280	280	
Drive shaft		in	2 1/4	1 3/4	2 1/4	2	2 1/4	2	2 1/4	
Maximum radial force at distance a (from shaft collar)		$F_{q \max}$	N	8086	4800	4400	11185	10059	14562	13256
		a	mm	40	33.5	40	40	40	40	40
Maximum axial force		$+ F_{ax \max}$	N	6763	7252	7252	7760	7760	8450	8450
		$- F_{ax \max}$	N	4437	4748	4748	5040	5040	5150	5150

▼ **Splined shaft DIN 5480**

Size	NG		110	110	125	145	145	175	175	
Drive shaft			W40	W45	W45	W45	W50	W45	W50	
Maximum radial force at distance a (from shaft collar)		$F_{q \max}$	N	11000	10500	7200	9000	8500	5500	5000
		a	mm	22.5	25	25	25	27.5	25	27.5
Maximum axial force		$+ F_{ax \max}$	N	6305	6305	6411	6763	6763	7252	7252
		$- F_{ax \max}$	N	4095	4095	3989	4437	4437	4748	4748
Size	NG		210	210	280					
Drive shaft			W45	W55	W55					
Maximum radial force at distance a (from shaft collar)		$F_{q \max}$	N	13500	12500	14500				
		a	mm	25	29	29				
Maximum axial force		$+ F_{ax \max}$	N	7760	7760	8450				
		$- F_{ax \max}$	N	5040	5040	5150				

**Determining the operating characteristics**

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$	[Nm]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

**Key**

$V_g$	Displacement per revolution [cm <sup>3</sup> ]
$\Delta p$	Differential pressure [bar]
$n$	Rotational speed [rpm]
$\eta_v$	Volumetric efficiency
$\eta_{hm}$	Hydraulic-mechanical efficiency
$\eta_t$	Total efficiency ( $\eta_t = \eta_v \times \eta_{hm}$ )


**Notice**

- ▶ The axial and radial forces generally influence the service life of the bearings.
- ▶ Special requirements apply in the case of belt drive and cardan shaft. Please contact us.

**Permissible input and through-drive torques**

Size	NG		110	125	145	175	210	280
Torque at $V_{g \max}$ and $\Delta p = 430 \text{ bar}^1)$	$T$	Nm	756	856	994	1200	1441	1918
Maximum input torque at drive shaft <sup>2)</sup>								
ANSI B92.1a-1976	<b>V8</b> 1 3/8 in	$T_{E \max}$	Nm	970	-	-	-	-
	<b>T1</b> 1 3/4 in	$T_{E \max}$	Nm	1640	1640	1640	1640	-
	<b>T2</b> 2 in	$T_{E \max}$	Nm	2670	2670	2670	-	2670
	<b>T3</b> 2 1/4 in	$T_{E \max}$	Nm	-	-	4070	4070	4070
DIN 5480	<b>Z9</b> W40	$T_{E \max}$	Nm	On request	-	-	-	-
	<b>A1</b> W45	$T_{E \max}$	Nm	2190	2190	2190	2190	-
	<b>A2</b> W50	$T_{E \max}$	Nm	-	-	3140	3140	-
	<b>A3</b> W55	$T_{E \max}$	Nm	-	-	-	-	4350
Maximum through-drive torque	$T_{D \max}$	Nm	934	1110	1110	1760	2641	2641

▼ **Distribution of torques**

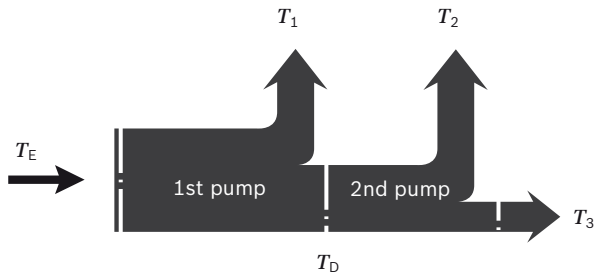

Torque at 1st pump	$T_1$
Torque at 2nd pump	$T_2$
Torque at 3rd pump	$T_3$
Input torque	$T_E = T_1 + T_2 + T_3$
	$T_E < T_{E \max}$
Through-drive torque	$T_D = T_2 + T_3$
	$T_D < T_{D \max}$

1) Efficiency not considered  
2) For drive shafts free of radial force

## HP – Proportional control, hydraulic, pilot-pressure related


The output flow of the pump is infinitely variable between 0 and 100%, proportional to the difference in pilot pressure applied to the two pilot pressure ports (**Y<sub>1</sub>** and **Y<sub>2</sub>**).

The pilot signal, coming from an external source, is a pressure signal. Flow is negligible, as the pilot signal acts only on the control spool of the control valve.

This control spool then directs control oil into and out of the stroking cylinder to adjust pump displacement as required.

A feedback lever connected to the stroking piston maintains the pump flow for any given pilot signal within the control range.

If the pump is also equipped with a DA control valve (see page 16), automotive operation is possible for travel drives.


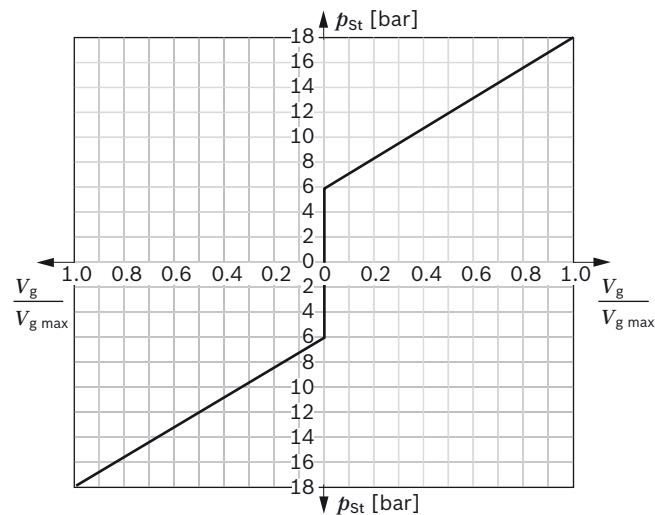


- ▶  $V_g$  = Displacement at  $p_{St}$   
 $V_{g\ max}$  = Displacement at  $p_{St} = 18\ \text{bar}$
- ▶ Pilot signal  $p_{St} = 6\ \text{to}\ 18\ \text{bar}$  (at port **Y<sub>1</sub>**, **Y<sub>2</sub>**)
- ▶ Start of control at 6 bar
- ▶ End of control at 18 bar (maximum displacement  $V_{g\ max}$ )

### Notice

In the neutral position, the HP control module must be vented to reservoir via the external pilot control device.

### Standard version

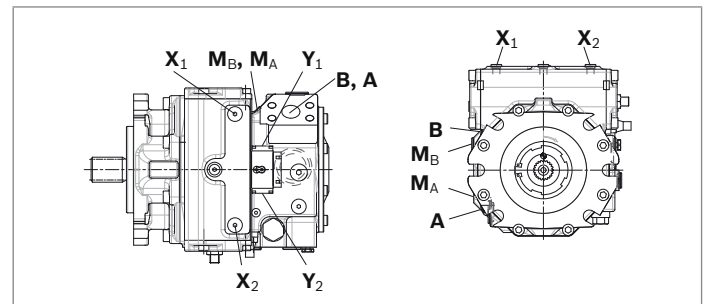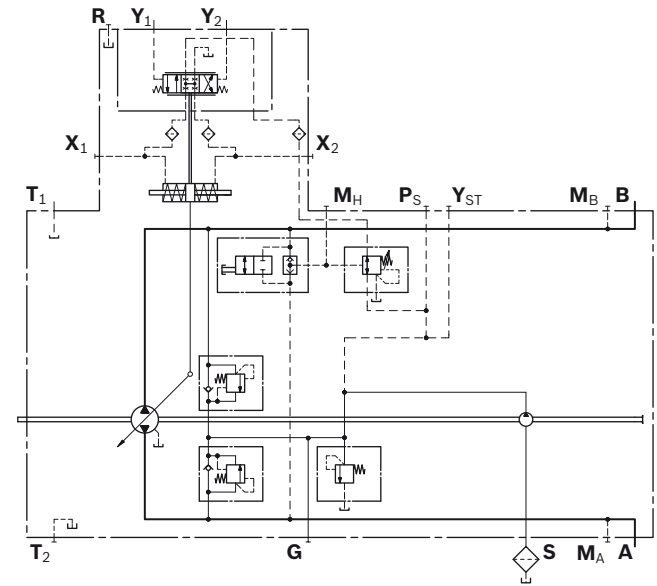

### Correlation of direction of rotation, control and flow direction


Direction of rotation	clockwise		counter-clockwise	
	<b>Y<sub>1</sub></b>	<b>Y<sub>2</sub></b>	<b>Y<sub>1</sub></b>	<b>Y<sub>2</sub></b>
Pilot signal	<b>Y<sub>1</sub></b>	<b>Y<sub>2</sub></b>	<b>Y<sub>1</sub></b>	<b>Y<sub>2</sub></b>
Control pressure	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>
Flow direction	<b>B to A</b>	<b>A to B</b>	<b>A to B</b>	<b>B to A</b>
Working pressure	<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>A</sub></b>

## HW – Proportional control, hydraulic, mechanical servo

The output flow of the pump is infinitely variable between 0 and 100%, proportional to the swivel angle of the control lever.

A feedback lever connected to the stroking piston maintains the pump flow for any given position of the control lever.

If the pump is also equipped with a DA control valve (see page 16), automotive operation is possible for travel drives.

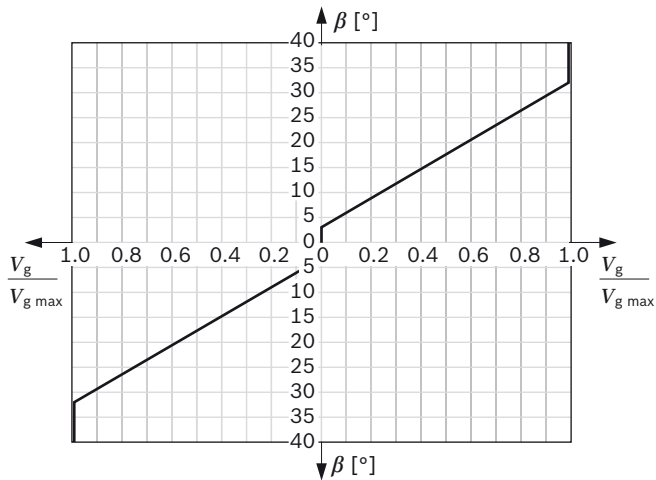

Swivel angle  $\beta$  at the control lever for pump displacement change:

- ▶ Start of control at  $\beta = \pm 3^\circ$
- ▶ End of control at  $\beta$  (maximum displacement  $V_{g \max}$ ) at  $\pm 32^\circ$
- ▶ Rotational limit  $\beta$  of the control lever (internal)  $\pm 38^\circ$

The maximum required torque at the lever is 170 Ncm. To prevent damage to the HW control module, a positive mechanical stop of  $36.5^\circ \pm 1$  must be provided for the HW control lever on the customer side.

### Notice

- ▶ Spring centering enables the pump, depending on pressure and speed, to move automatically to the neutral position ( $V_g = 0$ ) as soon as there is no longer any torque on the control lever of the HW control module.
- ▶ If necessary, the position of the lever can be changed. The procedure is defined in the instruction manual.
- ▶ On delivery, the position of the lever may differ from that shown in the drawing.


### Option: Neutral position switch

The switch contact in the neutral position switch is closed when the control lever on the HW control module is in its neutral position. The switch opens when the control lever is moved out of the central position in either direction. Thus, the neutral position switch provides a monitoring function for drive units that require the pump to be in the neutral position during certain operating conditions (e.g. starting diesel engines).


### Technical data

Load capacity	20 A (continuous), without switching operations
Switching capacity	15 A / 32 V (resistive load) 4 A / 32 V (inductive load)
Connector version	DEUTSCH DT04-2P-EP04 (mating connector, see page 65)


### ▼ Standard version

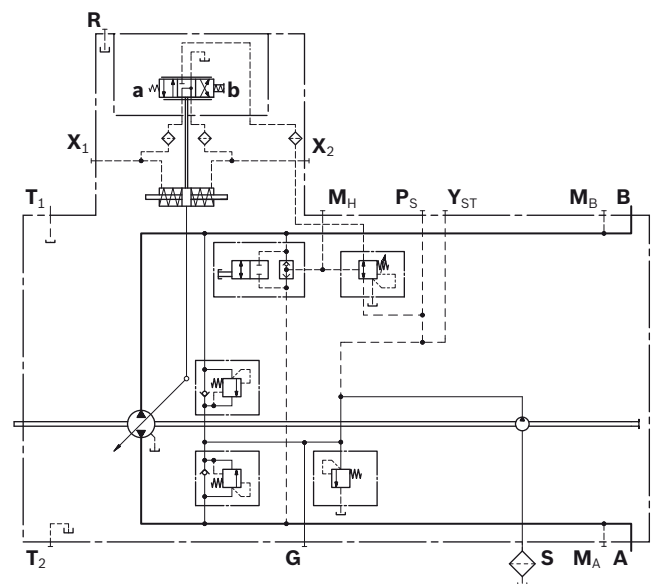

### ▼ Version with neutral position switch



14 **A4VG Series 40** | Axial piston variable pump  
 HW – Proportional control, hydraulic, mechanical servo

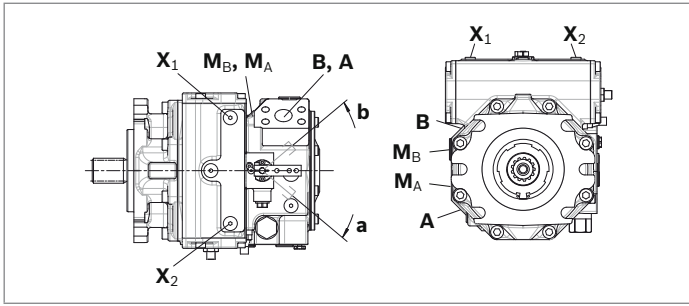

<b>Correlation of direction of rotation, control and flow direction</b>				
Direction of rotation	clockwise		counter-clockwise	
	a	b	a	b
Lever direction	a	b	a	b
Control pressure	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
Flow direction	B to A	A to B	A to B	B to A
Working pressure	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>

## HT – Hydraulic control, direct operated

With the direct operated hydraulic control, the output flow of the pump is controlled by a hydraulic control pressure, applied directly to the stroking piston through either port **X<sub>1</sub>** or **X<sub>2</sub>**.

Flow direction is determined by which control pressure port is pressurized (refer to table below).


Pump displacement is infinitely variable and proportional to the applied control pressure, but is also influenced by system pressure and pump drive speed.

In order to use the optional built-in pressure cut-off, port **Y<sub>HT</sub>** must be used as the control pressure source for the selected control module. See page 56 for a functional description of the pressure cut-off.

Maximum permissible control pressure: 40 bar


Use of the HT control requires a review of the engine and vehicle parameters to ensure that the pump is set up correctly. We recommend that all HT applications be reviewed by a Bosch Rexroth application engineer.

If the pump is also equipped with a DA control valve (see page 16), automotive operation is possible for travel drives.

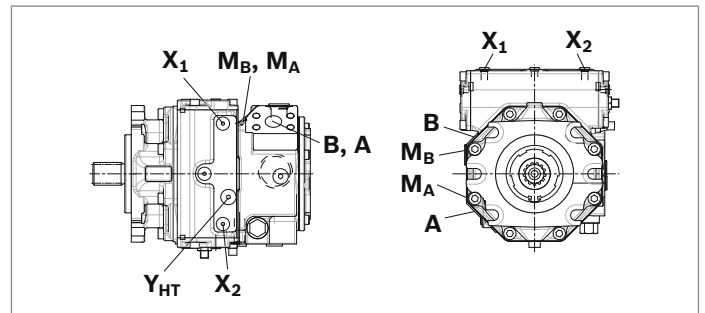

Correlation of direction of rotation, control and flow direction				
Direction of rotation	clockwise		counter-clockwise	
Control pressure	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>
Flow direction	<b>B to A</b>	<b>A to B</b>	<b>A to B</b>	<b>B to A</b>
Working pressure	<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>B</sub></b>	<b>M<sub>A</sub></b>

### ▼ Circuit diagram

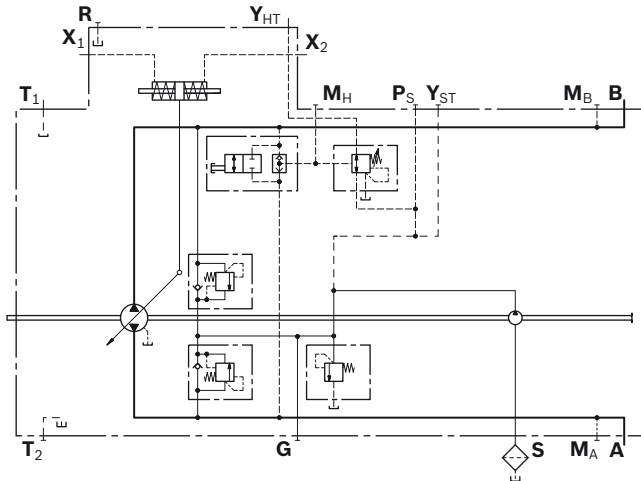

## DA – Automatic control, speed related

The DA closed loop control is an engine speed-dependent system for travel drives. The built-in DA control valve generates a pilot pressure that is proportional to pump (engine) drive speed. This pilot pressure is directed to the stroking cylinder of the pump by an electromagnetically actuated 4/3-way directional valve. The pump displacement is infinitely variable in each flow direction and is influenced by both pump drive speed and system pressure. The flow direction (e.g. machine moving forward or backward) is determined by either solenoid **a** or **b** being activated. Increasing the pump drive speed generates a higher pilot pressure from the DA control valve, with a subsequent increase in pump flow.

Depending on the selected pump operating characteristics, increasing system pressure (e.g. machine load) causes the pump to swivel back towards a smaller displacement. An overload protection for the engine (against stalling) is achieved by combining this pressure-dependent reduction in pump stroke with a reduction in pilot pressure as the engine speed drops.

Any additional power requirement, e.g. for hydraulic functions from attachments, could cause the engine speed to drop further. This will cause a further reduction in pilot pressure and thus of the pump displacement. Automatic power distribution and full exploitation of the available power are achieved in this way, both for the travel drive and for the implement hydraulics, with priority given to the implement hydraulics.

Various override options are available for DA control function to allow controlled operation of the implement hydraulics with high rpm at reduced travel speed.


The DA control valve can also be used in pumps with HP, HW, HT, DA and EP control modules to protect the combustion engine against overload.

### Notice

- ▶ Our Sales department will provide you detailed information. Use our computer program to work out the input design that meets your needs. All DA applications must be approved by a Bosch Rexroth application engineer.
- ▶ DA closed loop control is only suitable for certain types of travel drive systems and requires review of the engine and vehicle parameters to ensure that the pump is used correctly and that machine operation is safe and efficient. We recommend that all DA applications be reviewed by a Bosch Rexroth application engineer.

Technical data, solenoid	DA1	DA2
Voltage	12 V (±20%)	24 V (±20%)
Neutral position $V_g = 0$	de-energized	de-energized
Position $V_{g \max}$	Current switched on	Current switched on
Nominal resistance (at 20 °C)	5.5 Ω	21.7 Ω
Nominal power	26.2 W	26.5 W
Minimum active current required	1.32 A	0.67 A
Duty cycle	100%	100%

Type of protection: see connector version page 65

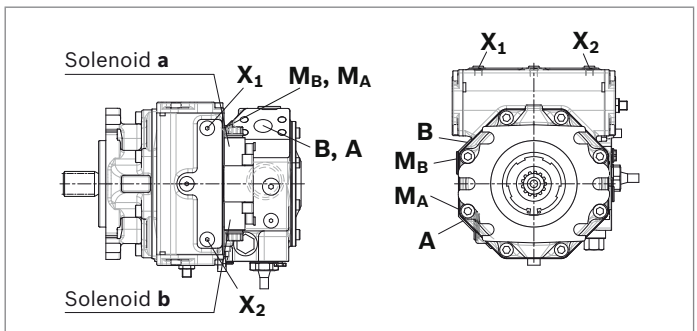


Correlation of direction of rotation, control and flow direction				
Direction of rotation	clockwise		counter-clockwise	
Actuation of solenoid	<b>a</b>	<b>b</b>	<b>a</b>	<b>b</b>
Control pressure	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>
Flow direction	<b>A to B</b>	<b>B to A</b>	<b>B to A</b>	<b>A to B</b>
Working pressure	<b>M<sub>B</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>



**DA..1 – DA control valve, fixed setting**

Pilot pressure is generated in relation to drive speed.

▼ **Circuit diagram**

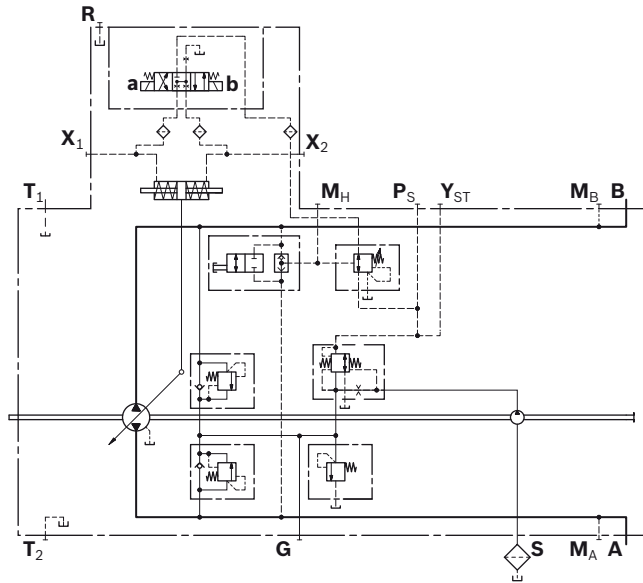

**DA..2, DA..3 – DA control valve, mechanically adjustable with position lever**

Pilot pressure is generated in relation to drive speed.

Any reduction of pilot pressure possible, independently of drive speed, through mechanical actuation of the position lever (inch function).

The maximum permissible actuation torque at the position lever is  $T_{max} = 4 \text{ Nm}$ .

Maximum angle of rotation 70°, lever position: any.


**DA..2**

Direction of actuation of the position lever: clockwise

**DA..3**

Direction of actuation of the position lever: counter-clockwise

▼ **Circuit diagram**

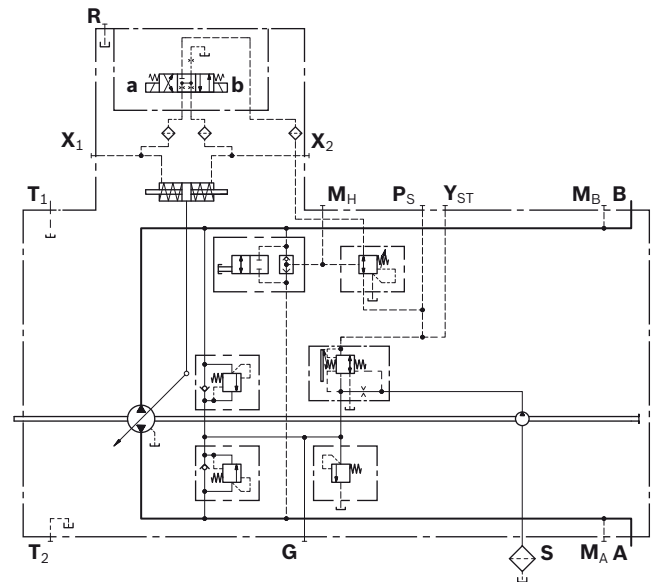

**DA..5 – DA control valve, fixed setting and brake inch valve mounted**


Only for pumps with DA control module.

Version with pressure reducing valve.

Permits reduction of the pilot pressure, independently of the drive speed via hydraulic control (port **Z**).

Control at port **Z** by means of brake fluid based on mineral oil.

▼ **Circuit diagram**

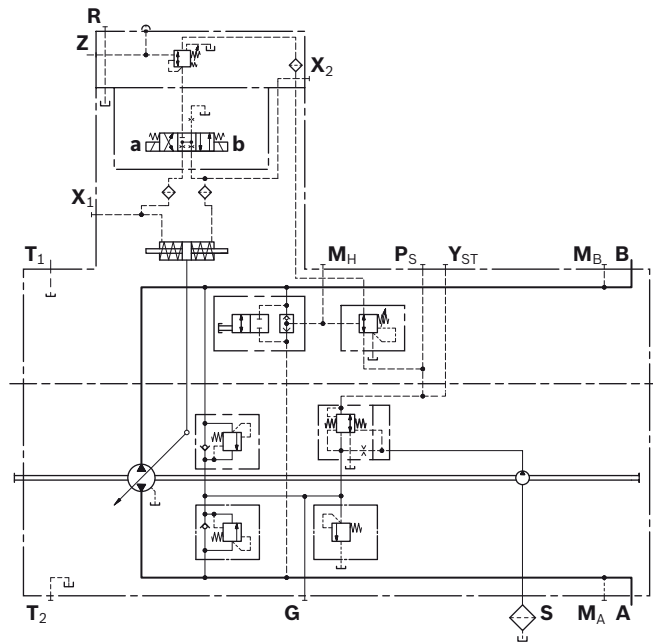


**DA..6 – DA control valve, fixed setting, ports for pilot control device as inch valve**

Any reduction of the pilot pressure possible, independent of the drive speed is achieved by the mechanical actuation of the pilot control device.

The pilot control device is installed separately from the pump (for example in the driver's cabin) and connected to the pump by two hydraulic control lines via ports **P<sub>S</sub>** and **Y<sub>ST</sub>**. A suitable pilot control device must be ordered separately and is not included in the scope of delivery.

▼ **Circuit diagram**

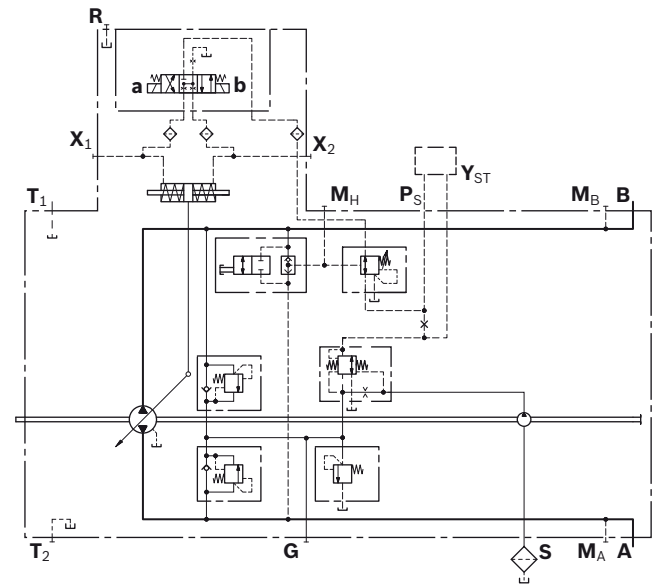

## EP – Proportional control, electric


The output flow of the pump is infinitely variable between 0 and 100%, proportional to the electrical current supplied to solenoid **a** or **b**.

The electrical energy is converted into a force acting on the control spool.

This control spool then directs control oil into and out of the stroking cylinder to adjust pump displacement as required.

A feedback lever connected to the stroking piston maintains the pump flow for any given current within the control range.

If the pump is also equipped with a DA control valve (see page 16), automotive operation is possible for travel drives.

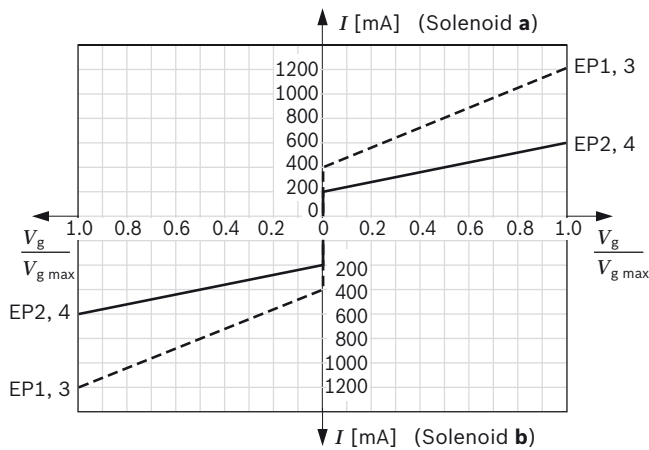

### Notice



The proportional solenoids in version EP1/EP2 do not have manual override. Proportional solenoids with manual override and spring return are available on request (version EP3/EP4).

Technical data, solenoid	EP1, 3	EP2, 4
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Control current		
Start of control at $V_g = 0$	400 mA	200 mA
End of control at $V_{g,max}$	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither		
Frequency	100 Hz	100 Hz
minimum oscillation range <sup>1)</sup>	240 mA	120 mA
Duty cycle	100%	100%
Type of protection: see connector version page 65		

Various BODAS controllers with application software and amplifiers are available for controlling the proportional solenoids.

Further information can also be found on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics)

### ▼ Circuit diagram

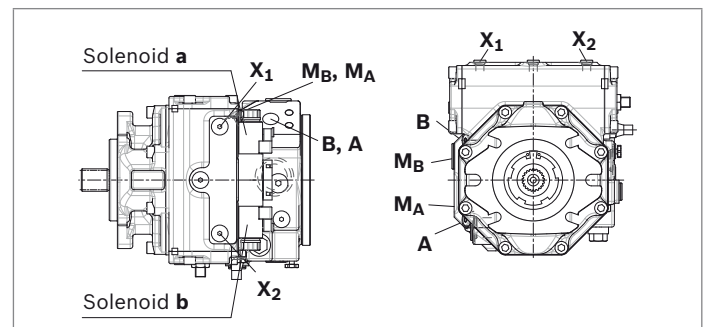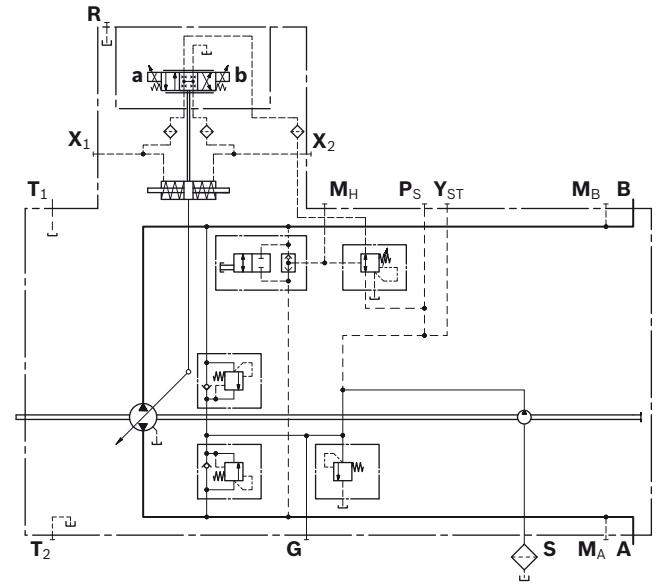

Correlation of direction of rotation, control and flow direction			
Direction of rotation	clockwise	counter-clockwise	
Actuation of solenoid	<b>a</b>	<b>b</b>	
Control pressure	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	
Flow direction	<b>B to A</b>	<b>A to B</b>	
Working pressure	<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>	

<sup>1)</sup> Minimum required oscillation range of the control current  $\Delta I_{p-p}$  (peak to peak) within the respective control range (start of control to end of control)


## EZ – Two-point control, electric

By actuating either switching solenoid **a** or **b**, internal control pressure is applied directly to the stroking piston and the pump swivels to maximum displacement. The EZ control enables pump flow to be switched between  $V_g = 0$  and  $V_{g \max}$ .


Flow direction is determined by which solenoid is energized.

Technical data, solenoid	EZ1	EZ2
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Neutral position $V_g = 0$	de-energized	de-energized
Position $V_{g \max}$	Current switched on	Current switched on
Nominal resistance (at 20 °C)	5.5 $\Omega$	21.7 $\Omega$
Nominal power	26.2 W	26.5 W
Minimum active current required	1.32 A	0.67 A
Duty cycle	100%	100%
Type of protection: see connector version page 65		

Correlation of direction of rotation, control and flow direction				
Direction of rotation	clockwise		counter-clockwise	
	a	b	a	b
Actuation of solenoid				
Control pressure	$X_2$	$X_1$	$X_2$	$X_1$
Flow direction	<b>A to B</b>	<b>B to A</b>	<b>B to A</b>	<b>A to B</b>
Working pressure	$M_B$	$M_A$	$M_A$	$M_B$

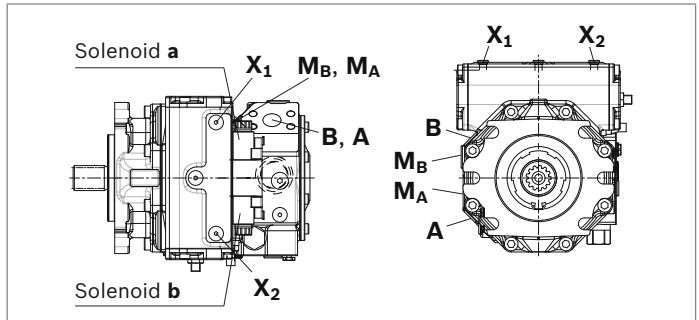

### ▼ Circuit diagram

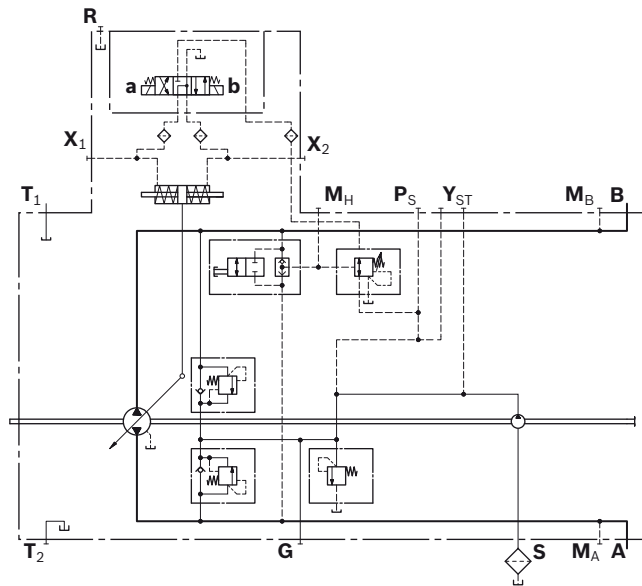

## EV – Electric control, direct operated

With the direct operated electric control (EV), the output flow of the pump is infinitely variable between 0 and 100%, controlled by the control pressure of the pressure reducing valve. This control pressure level is proportional to the electric current, applied to the solenoid of the pressure reducing valve. This control pressure is then connected directly to the stroking cylinder of the pump by energizing either switching solenoid **a** or **b** on the EV control module, which determines the direction of the pump flow. The resulting pump displacement at a certain control pressure is also influenced by pump drive speed and working pressure.


Technical data, pressure reducing valve	EV1	EV2
Voltage	12 V	24 V
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	21.7 Ω
Dither		
Frequency	100 Hz	100 Hz
minimum oscillation range <sup>1)</sup>	240 mA	120 mA
Duty cycle	100%	100%
Type of protection: see connector version page 65		

Various BODAS controllers with application software and amplifiers are available for controlling the proportional solenoids.

Further information can also be found on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics)


Technical data, solenoid	EV1	EV2
Voltage	12 V (±20%)	24 V (±20%)
Neutral position $V_g = 0$	de-energized	de-energized
Position $V_{g \max}$	Current switched on	Current switched on
Nominal resistance (at 20 °C)	5.5 Ω	21.7 Ω
Nominal power	26.2 W	26.5 W
Minimum active current required	1.32 A	0.67 A
Duty cycle	100%	100%
Type of protection: see connector version page 65		

### ▼ Circuit diagram

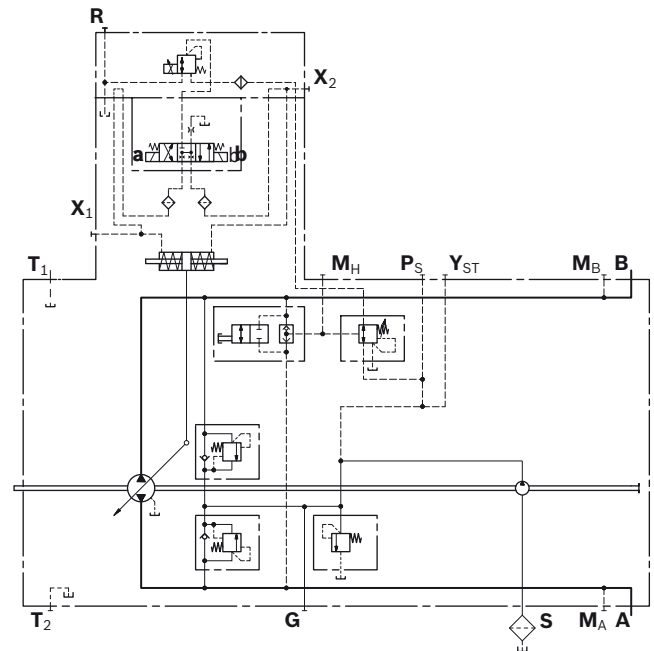

### Correlation of direction of rotation, control and flow direction

Direction of rotation	clockwise		counter-clockwise	
	a	b	a	b
Actuation of solenoid				
Control pressure	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>	<b>X<sub>2</sub></b>	<b>X<sub>1</sub></b>
Flow direction	<b>A to B</b>	<b>B to A</b>	<b>B to A</b>	<b>A to B</b>
Working pressure	<b>M<sub>B</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>A</sub></b>	<b>M<sub>B</sub></b>

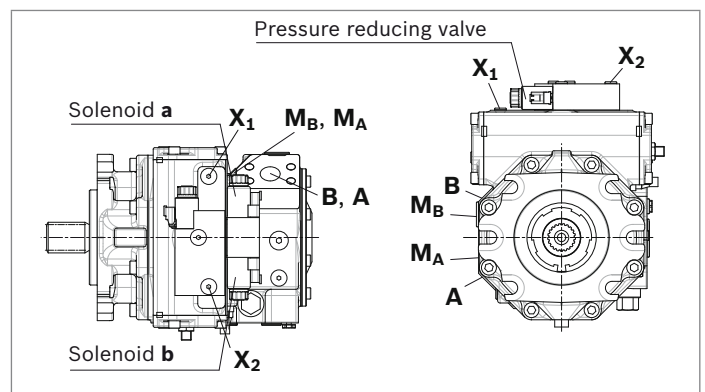


<sup>1)</sup> Minimum required oscillation range of the control current  $\Delta I_{p-p}$  (peak to peak) within the respective control range (start of control to end of control)

## ET – Electric control, direct operated

The output flow of the pump is infinitely variable between 0 and 100%. Depending on the preselected current  $I$  at solenoids **a** and **b** of the pressure reducing valves, the stroking cylinder of the pump is proportionally supplied with control pressure. The pump displacement that arises at a certain control current is dependent on the speed and working pressure of the pump. A different flow direction is associated with each pressure reducing valve. Maximum permissible control pressure: 40 bar.


Technical data, solenoid	ET5	ET6
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither		
Frequency	100 Hz	100 Hz
minimum oscillation range <sup>1)</sup>	240 mA	120 mA
Duty cycle	100%	100%
Type of protection: see connector version page 65		

### ▼ Circuit diagram

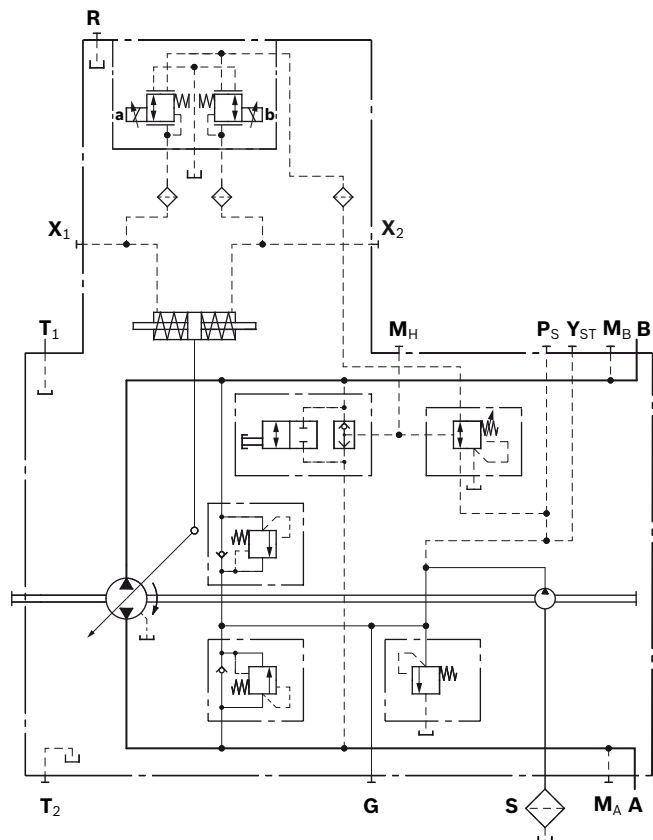

1) Minimum required oscillation range of the control current  $\Delta I_{p-p}$  (peak to peak) within the respective control range (start of control to end of control)


Correlation of direction of rotation, control and flow direction				
Direction of rotation	clockwise		counter-clockwise	
Actuation of solenoid	a	b	a	b
Control pressure (in X <sub>3</sub> , X <sub>4</sub> optional)	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
	X <sub>3</sub>	X <sub>4</sub>	X <sub>3</sub>	X <sub>4</sub>
Flow direction	B to A	A to B	A to B	B to A
Working pressure	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>

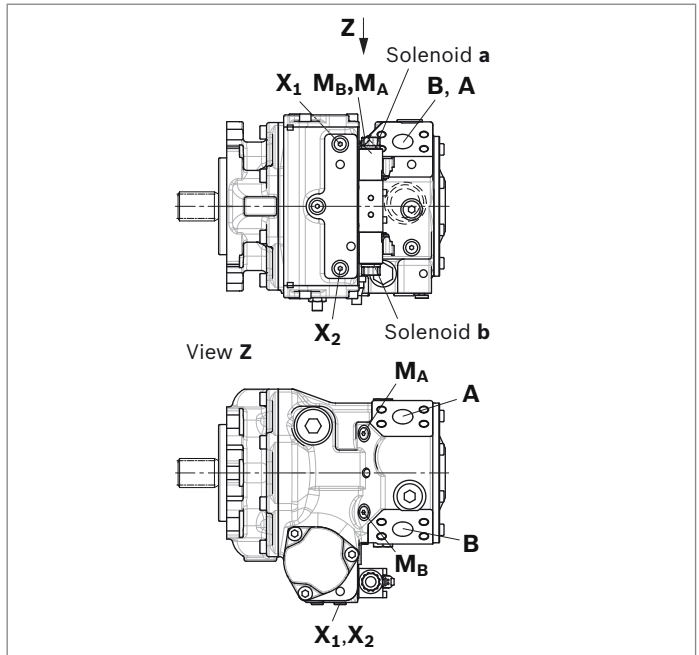

**Dimensions, size 110**


**EP – Proportional control, electric**

SAE working ports **A** and **B**, on left side 45° (viewed on drive shaft)<sup>1)</sup>

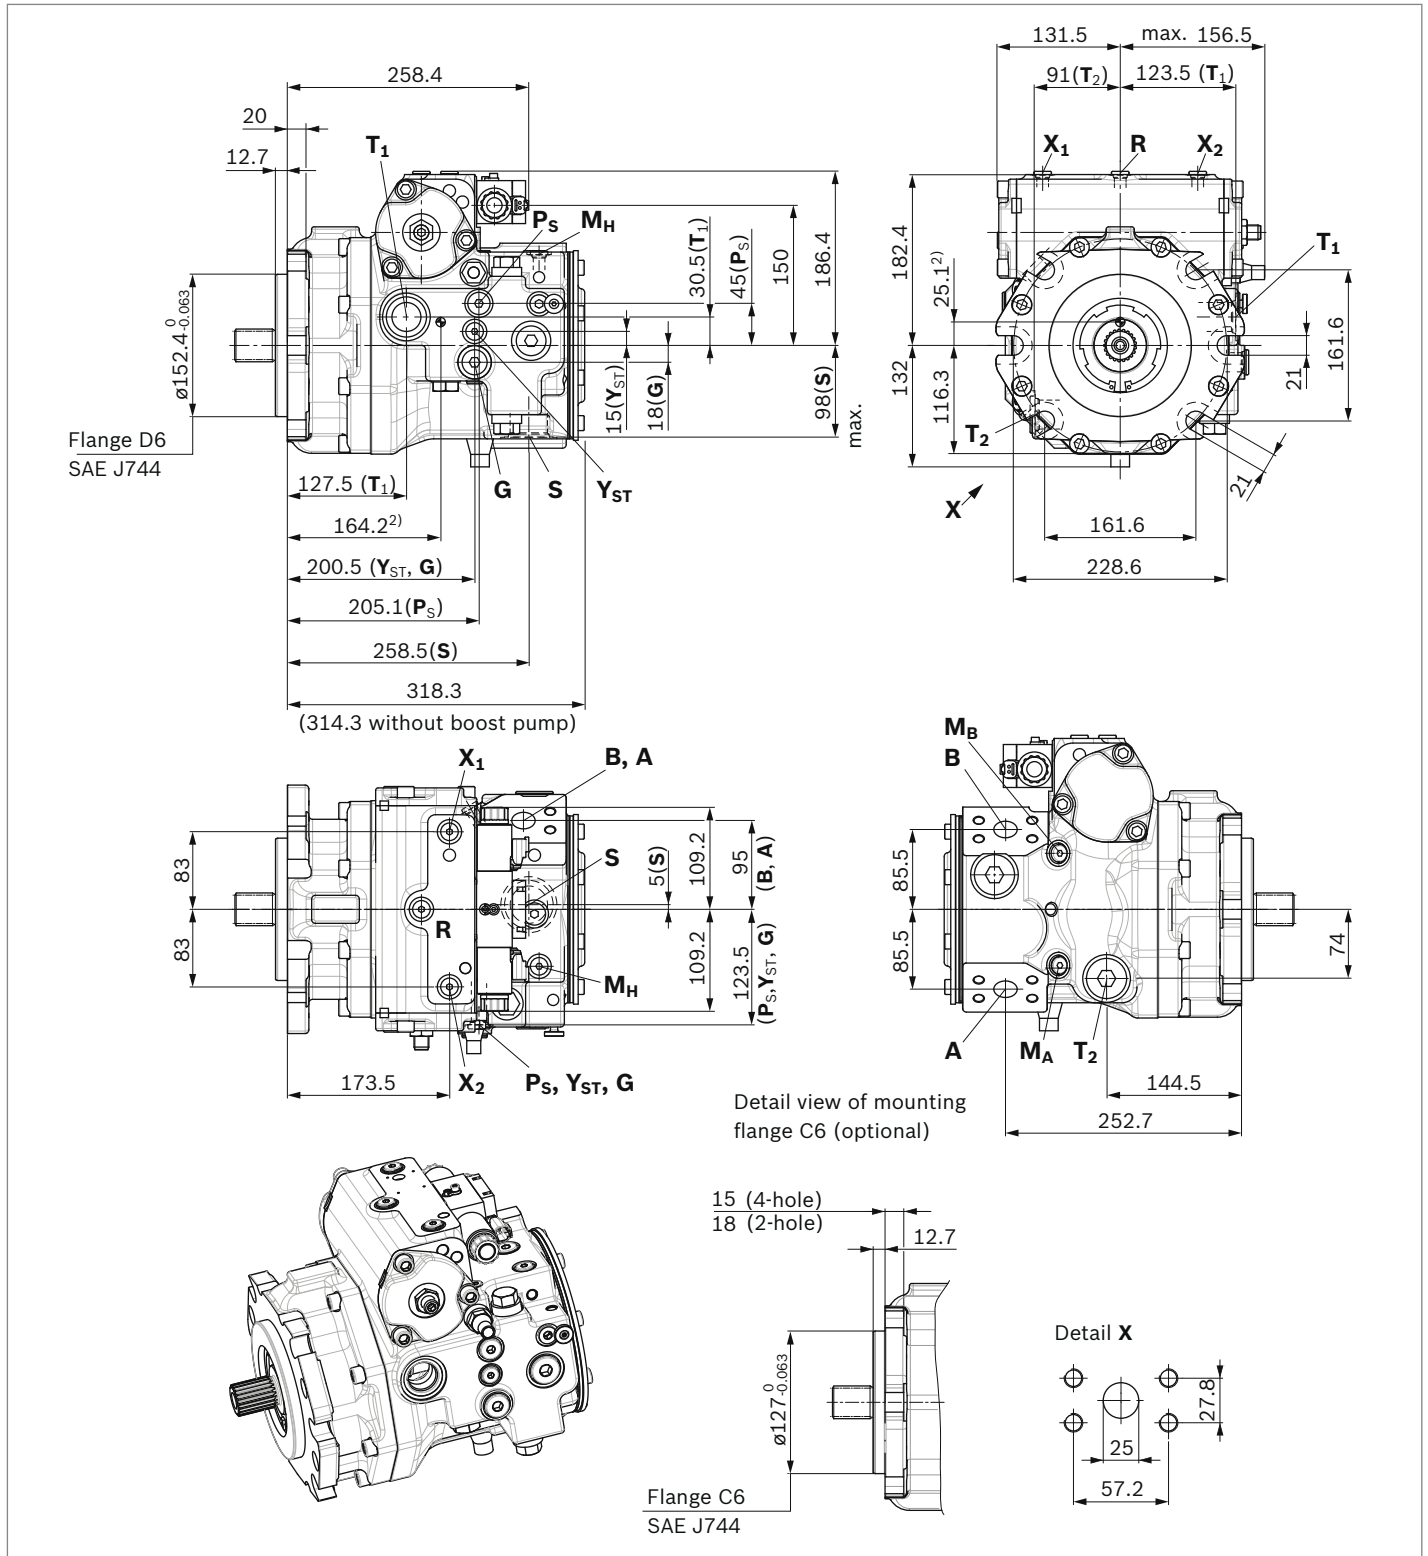


1) For SAE working ports **A** and **B**, 45° right (viewed on drive shaft), the complete case and thus the dimensions are mirrored.  
 2) Center of gravity


▼ Splined shaft ANSI B92.1a-1976

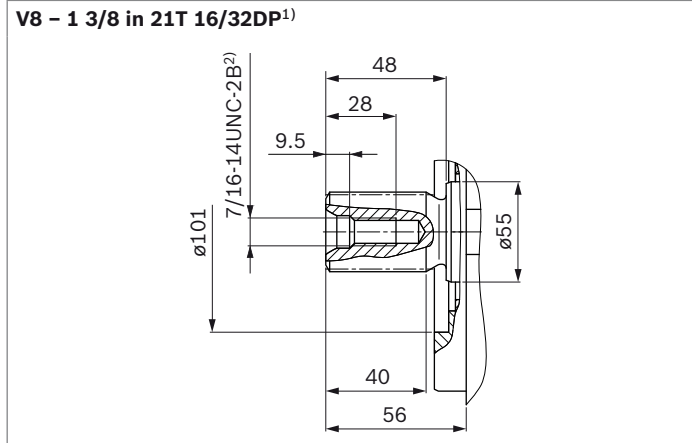


▼ Splined shaft ANSI B92.1a

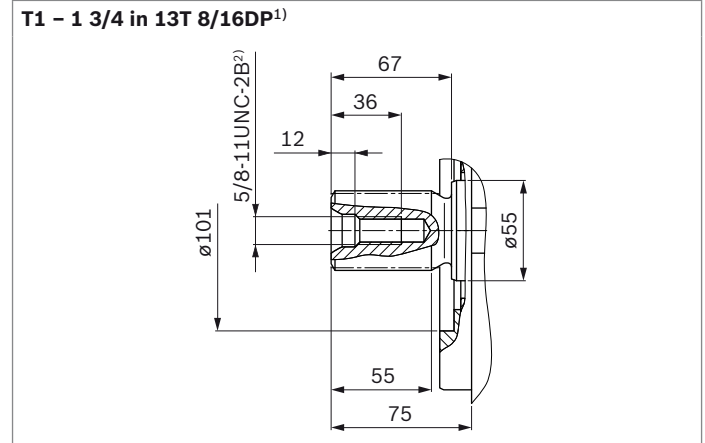


▼ Splined shaft ANSI B92.1a

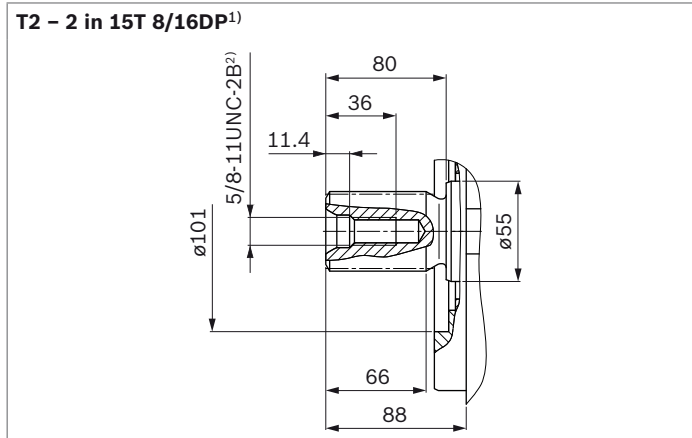

▼ Splined shaft DIN 5480

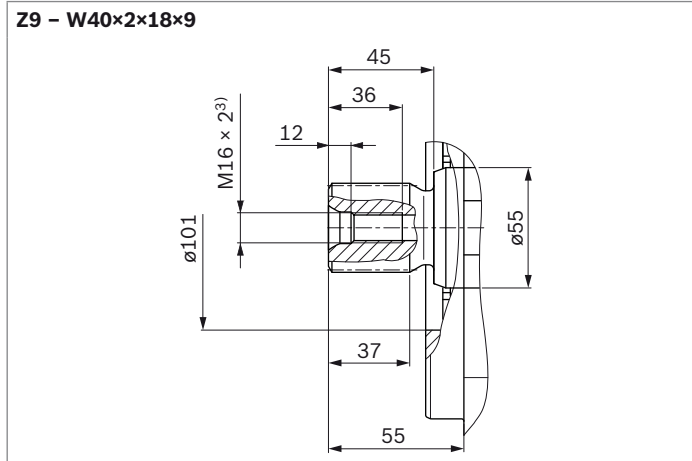

▼ Splined shaft DIN 5480

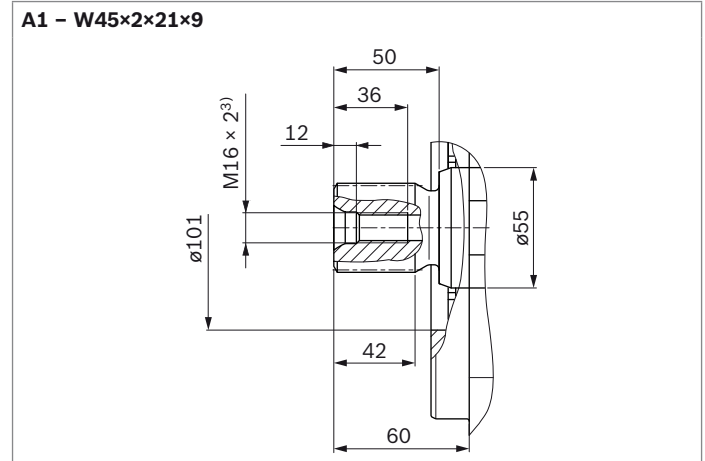

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) Center bore according to DIN 332 (thread according to DIN 13)



Ports		Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>4)</sup>	State <sup>10)</sup>
<b>A, B</b>	Working port	SAEJ518 <sup>5)</sup>	1 in	500	O
	Fastening thread	DIN 13	M12 × 1.75; 17 deep		
<b>S</b>	Suction port	ISO 6149 <sup>8)</sup>	M42 × 2; 19.5 deep	5	O <sup>6)</sup>
<b>T<sub>1</sub></b>	Drain port	ISO 6149 <sup>8)</sup>	M33 × 2; 19 deep	3	O <sup>7)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 6149 <sup>8)</sup>	M33 × 2; 19 deep	3	X <sup>7)</sup>
<b>R</b>	Air bleed port	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	3	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice, HT only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>X<sub>3</sub>, X<sub>4</sub></b> <sup>9)</sup>	Stroking chamber pressure port	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>G</b>	Boost pressure port inlet	ISO 6149 <sup>8)</sup>	M22 × 1.5; 15.5 deep	40	X
<b>P<sub>S</sub></b>	Pilot pressure port inlet	ISO 6149 <sup>8)</sup>	M18 × 1.5; 14.5 deep	40	X
<b>P<sub>S</sub></b>	Pilot pressure port inlet (DA..6 only)	ISO 6149 <sup>8)</sup>	M18 × 1.5; 14.5 deep	40	O
<b>Y<sub>ST</sub></b>	Pilot pressure port outlet	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>Y<sub>ST</sub></b>	Pilot pressure port outlet (DA..6 only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>Y<sub>HT</sub></b>	Pilot pressure port outlet (HT only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring port pressure A, B	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	500	X
<b>M<sub>H</sub></b>	Measuring port, high pressure	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	500	X
<b>Y<sub>1</sub>, Y<sub>2</sub></b>	Pilot pressure port (pilot signal HP only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>Z</b>	Pilot pressure port (inch signal DA..5 only)	ISO 6149 <sup>8)</sup>	M10 × 1; 8 deep	40	O

4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

6) Plugged for external boost pressure supply.

7) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 68).


8) The countersink can be deeper than as specified in the standard.

9) Optional, see page 59


10) O = Must be connected (plugged when delivered)

X = Plugged (in normal operation)


▼ **EZ** – Two-point control, electric

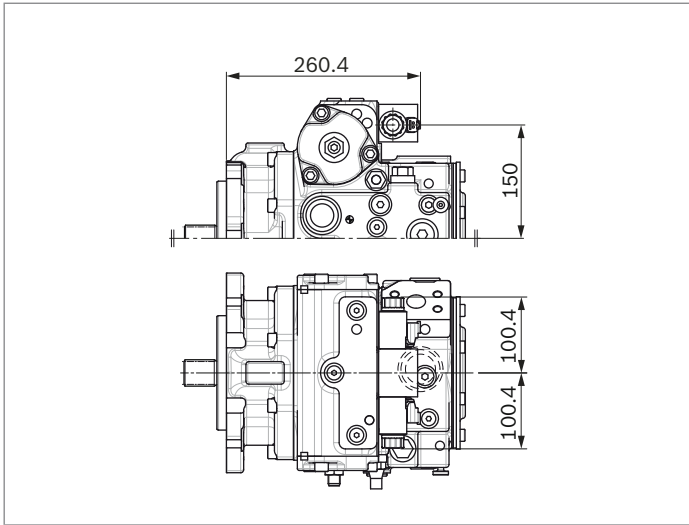

▼ **EV** – Electric control, direct operated, 4/3-way directional valve, one DRE

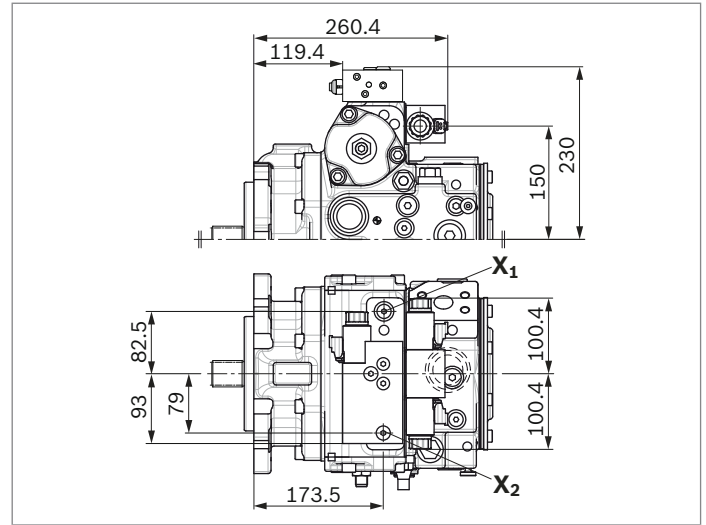


▼ **ET** – Electric control, direct operated, two DRE

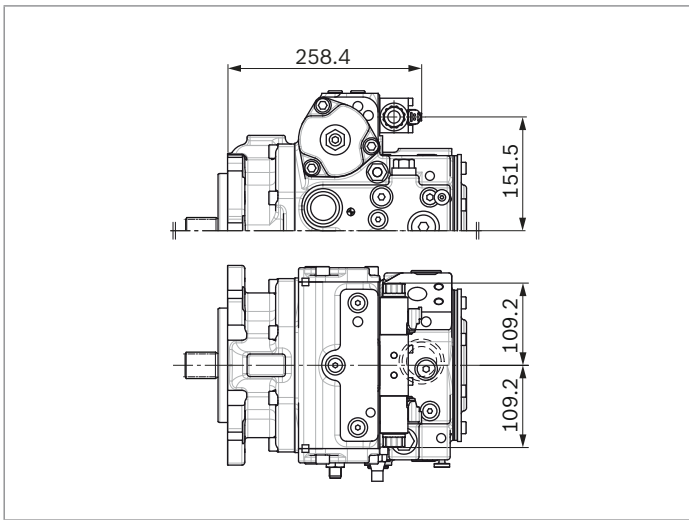


**DA control valve**

▼ **DA..1** – fixed setting

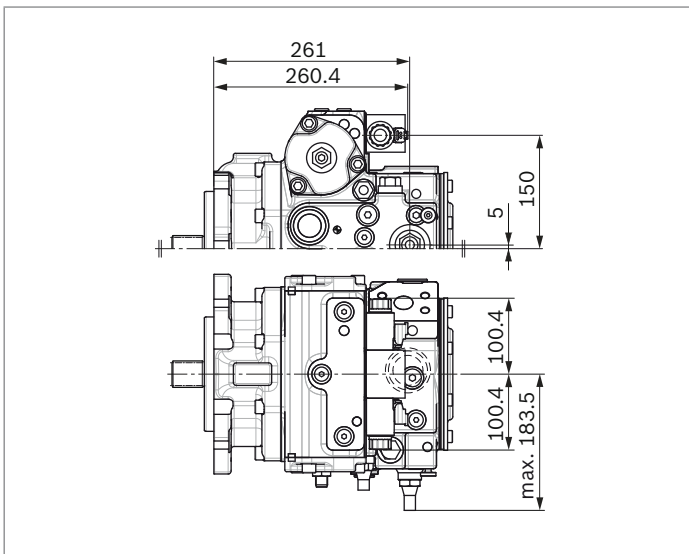


▼ **DA..5** – fixed setting and inch valve mounted

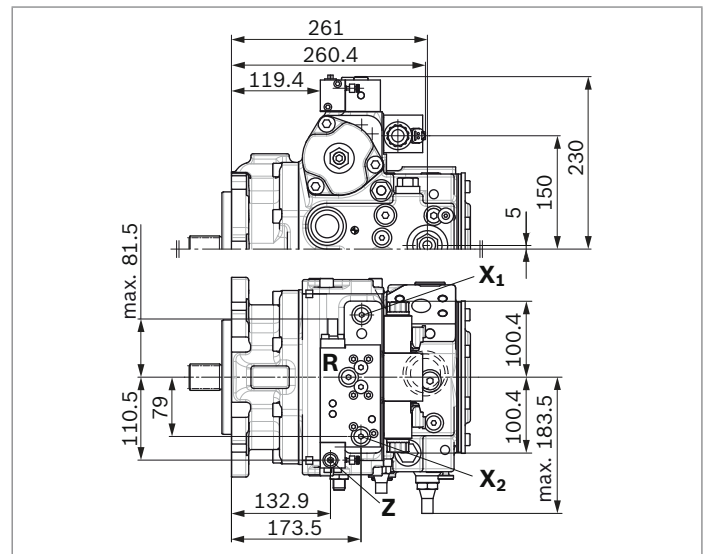

**Dimensions, size 125**

**EP – Proportional control, electric**


SAE working ports **A** and **B**, on left side 45° (viewed on drive shaft)<sup>1)</sup>

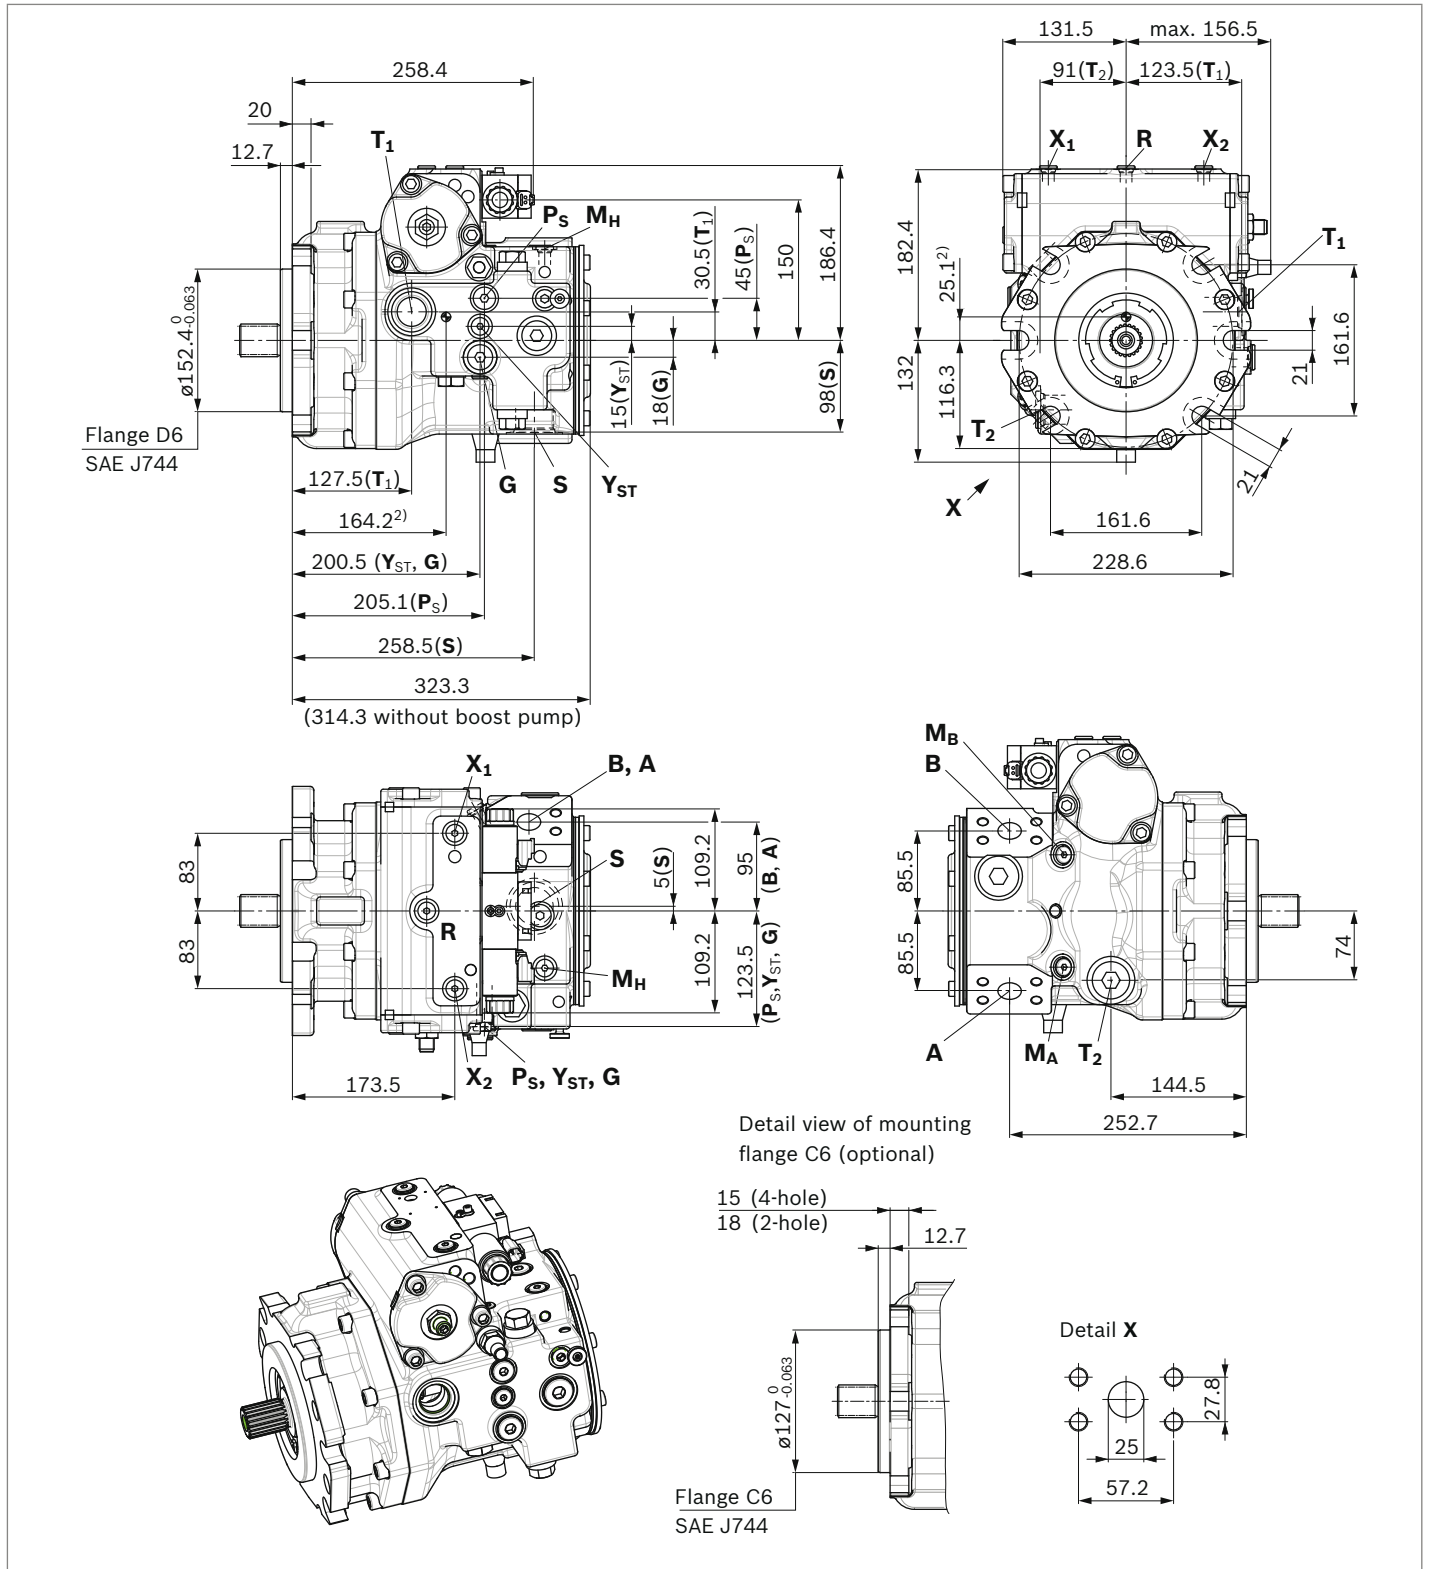


1) For SAE working ports **A** and **B**, 45° right (viewed on drive shaft), the complete case and thus the dimensions are mirrored.

2) Center of gravity


▼ **Splined shaft ANSI B92.1a**

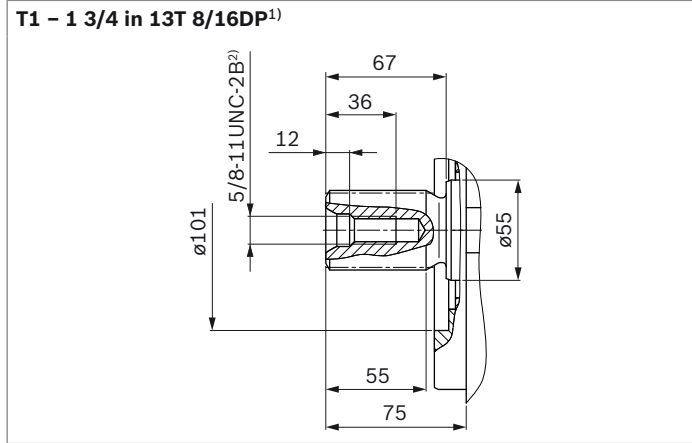

▼ **Splined shaft ANSI B92.1a**

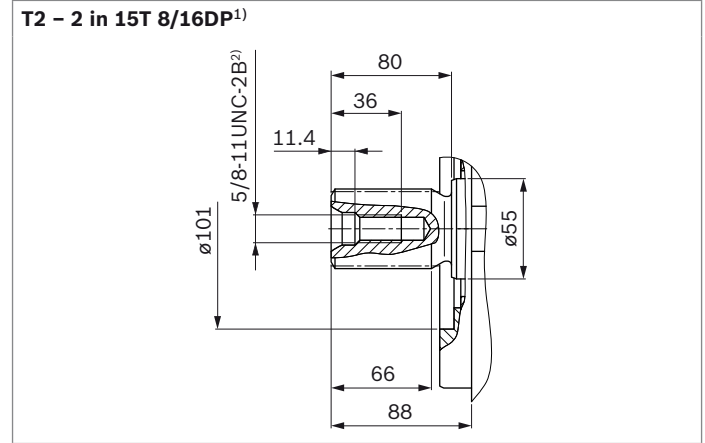

▼ **Splined shaft DIN 5480**

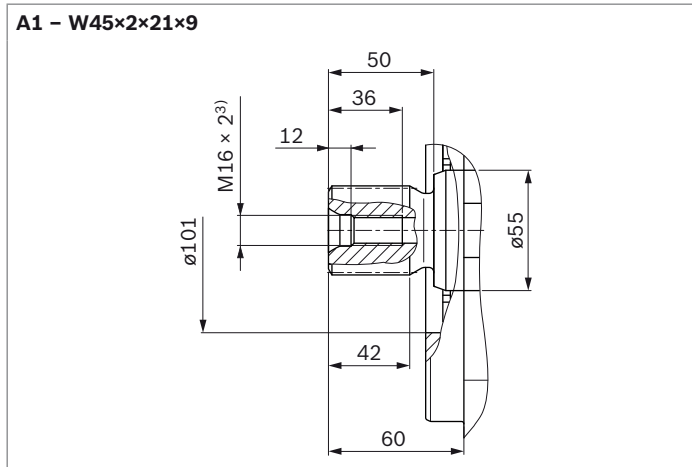

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) Center bore according to DIN 332 (thread according to DIN 13)

Ports		Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>4)</sup>	State <sup>10)</sup>
<b>A, B</b>	Working port	SAEJ518 <sup>5)</sup>	1 in	500	O
	Fastening thread	DIN 13	M12 × 1.75; 17 deep		
<b>S</b>	Suction port	ISO 6149 <sup>8)</sup>	M42 × 2; 19.5 deep	5	O <sup>6)</sup>
<b>T<sub>1</sub></b>	Drain port	ISO 6149 <sup>8)</sup>	M33 × 2; 19 deep	3	O <sup>7)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 6149 <sup>8)</sup>	M33 × 2; 19 deep	3	X <sup>7)</sup>
<b>R</b>	Air bleed port	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	3	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice, HT only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>X<sub>3</sub>, X<sub>4</sub></b> <sup>9)</sup>	Stroking chamber pressure port	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>G</b>	Boost pressure port inlet	ISO 6149 <sup>8)</sup>	M22 × 1.5; 15.5 deep	40	X
<b>P<sub>S</sub></b>	Pilot pressure port inlet	ISO 6149 <sup>8)</sup>	M18 × 1.5; 14.5 deep	40	X
<b>P<sub>S</sub></b>	Pilot pressure port inlet (DA..6 only)	ISO 6149 <sup>8)</sup>	M18 × 1.5; 14.5 deep	40	O
<b>Y<sub>ST</sub></b>	Pilot pressure port outlet	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>Y<sub>ST</sub></b>	Pilot pressure port outlet (DA..6 only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>Y<sub>HT</sub></b>	Pilot pressure port outlet (HT only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring port pressure A, B	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	500	X
<b>M<sub>H</sub></b>	Measuring port, high pressure	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	500	X
<b>Y<sub>1</sub>, Y<sub>2</sub></b>	Pilot pressure port (pilot signal HP only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>Z</b>	Pilot pressure port (inch signal DA..5 only)	ISO 6149 <sup>8)</sup>	M10 × 1; 8 deep	40	O

4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

6) Plugged for external boost pressure supply.

7) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 68).


8) The countersink can be deeper than as specified in the standard.

9) Optional, see page 59


10) O = Must be connected (plugged when delivered)

X = Plugged (in normal operation)


▼ **HP** – Proportional control, hydraulic, pilot-pressure related

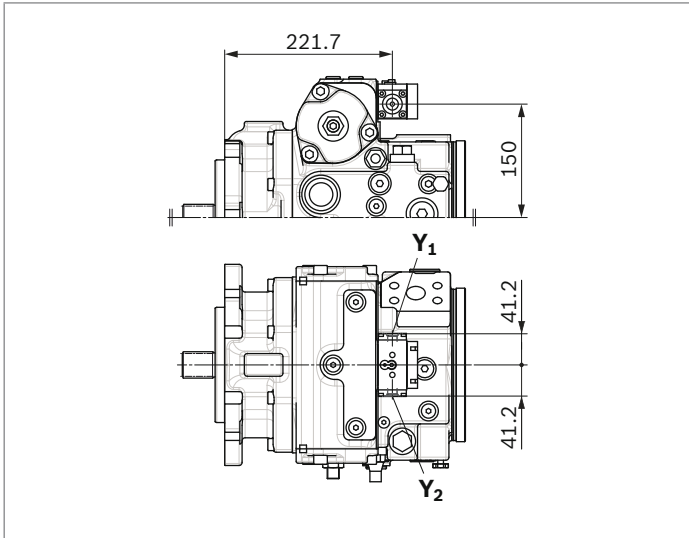


▼ **HW** – Proportional control, hydraulic, mechanical servo

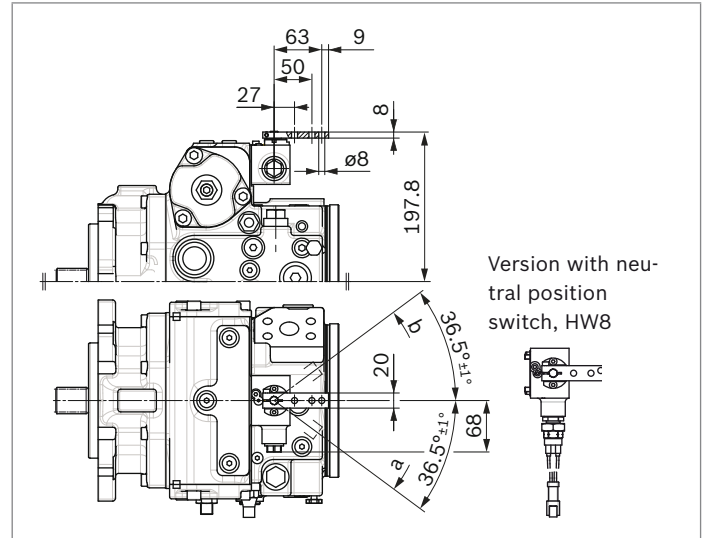


▼ **HT** – Hydraulic control, direct operated

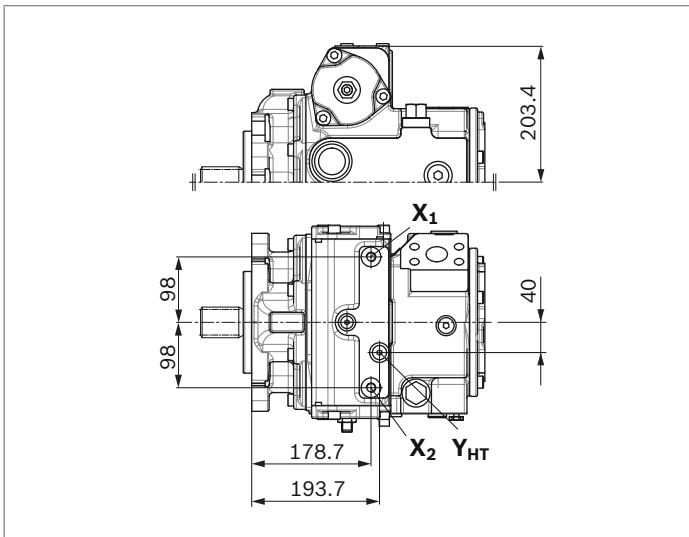


▼ **EZ** – Two-point control, electric

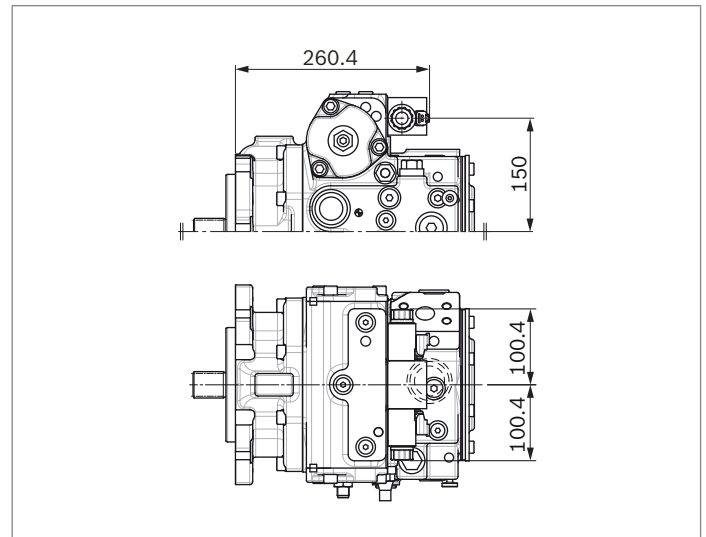

▼ **EV** – Electric control, direct operated, 4/3-way directional valve, one DRE

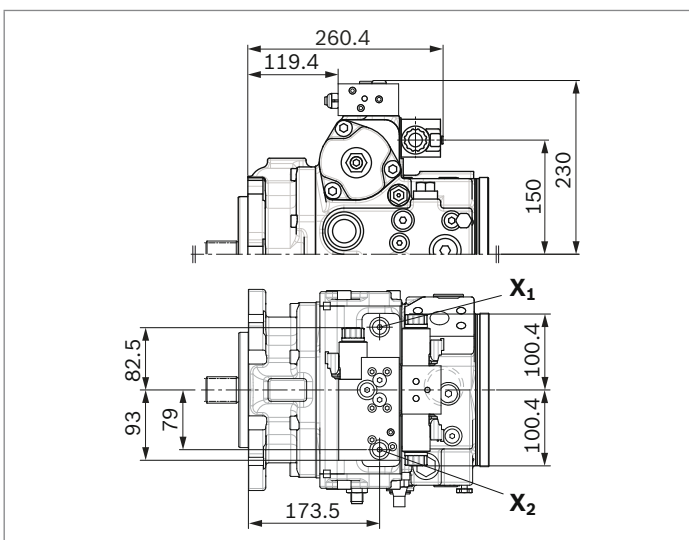


▼ **ET** – Electric control, direct operated, two DRE

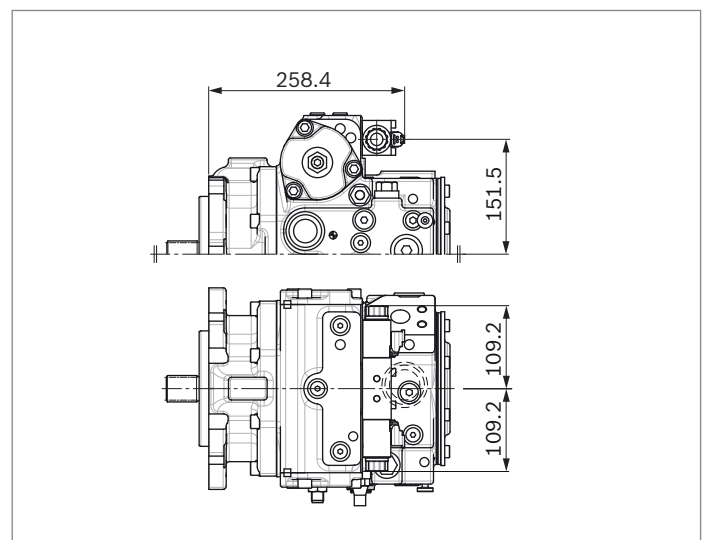

**DA control valve**


▼ **DA..1** – fixed setting

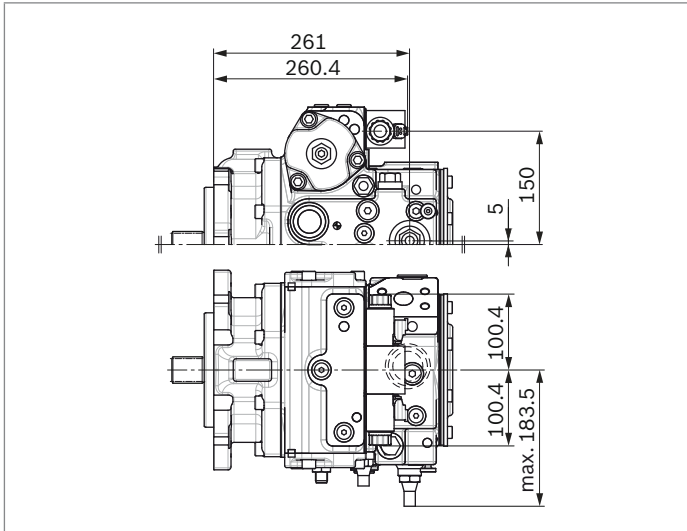

**Dimensions, size 145**

**EP – Proportional control, electric**

SAE working ports **A** and **B**, on left side 45° (viewed on drive shaft)<sup>1)</sup>

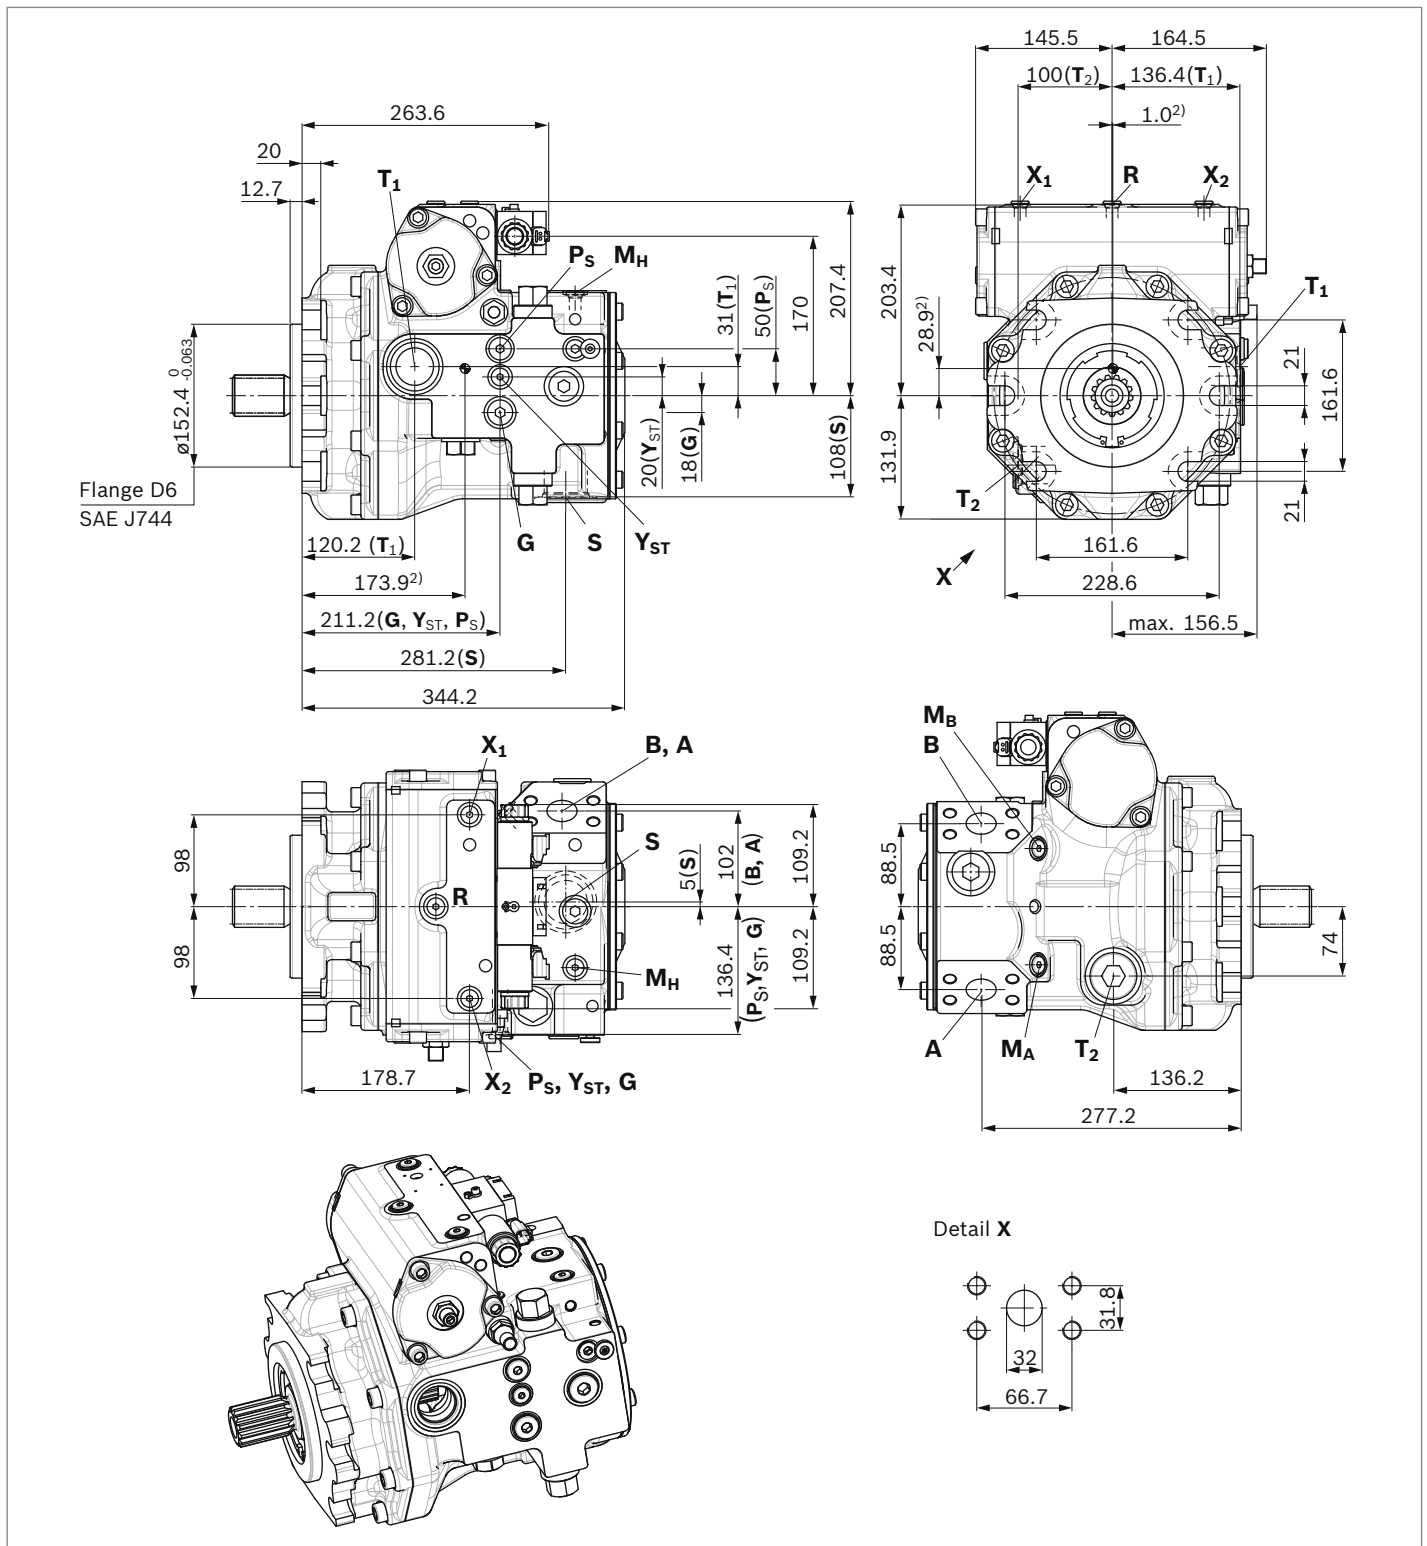


- 1) For SAE working ports **A** and **B**, 45° right (viewed on drive shaft), the complete case and thus the dimensions are mirrored.
- 2) Center of gravity




▼ Splined shaft ANSI B92.1a

T1 – 1 3/4 in 13T 8/16DP<sup>1)</sup>

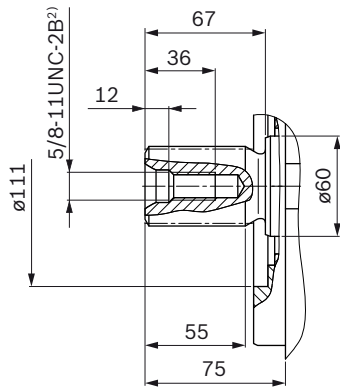


▼ Splined shaft ANSI B92.1a

T2 – 2 in 15T 8/16DP<sup>1)</sup>

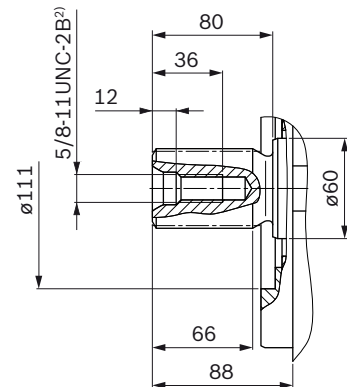


▼ Splined shaft ANSI B92.1a

T3 – 2 1/4 in 17T 8/16DP<sup>1)</sup>

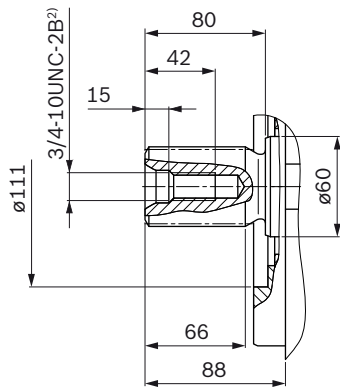


▼ Splined shaft DIN 5480

A1 – W45×2×21×9

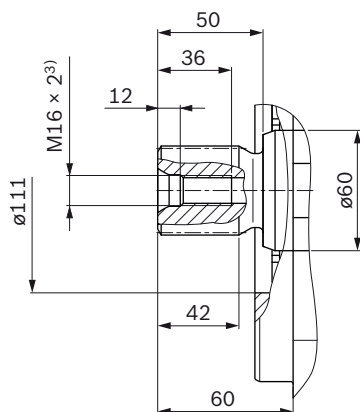

▼ Splined shaft DIN 5480

A2 – W50×2×24×9

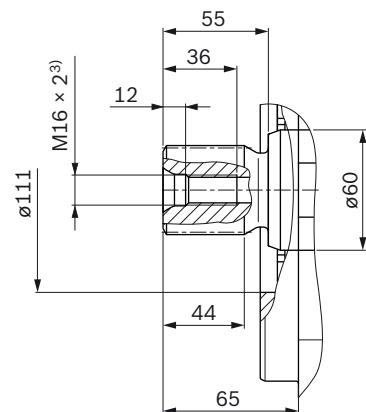

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) Center bore according to DIN 332 (thread according to DIN 13)

Ports		Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>4)</sup>	State <sup>10)</sup>
<b>A, B</b>	Working port	SAEJ518 <sup>5)</sup>	1 1/4 in	500	O
	Fastening thread	DIN 13	M14 × 2; 19 deep		
<b>S</b>	Suction port	ISO 6149 <sup>8)</sup>	M48 × 2; 22 deep	5	O <sup>6)</sup>
<b>T<sub>1</sub></b>	Drain port	ISO 6149 <sup>8)</sup>	M42 × 2; 19.5 deep	3	O <sup>7)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 6149 <sup>8)</sup>	M42 × 2; 19.5 deep	3	X <sup>7)</sup>
<b>R</b>	Air bleed port	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	3	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice, HT only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>X<sub>3</sub>, X<sub>4</sub></b> <sup>9)</sup>	Stroking chamber pressure port	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>G</b>	Boost pressure port inlet	ISO 6149 <sup>8)</sup>	M22 × 1.5; 15.5 deep	40	X
<b>P<sub>s</sub></b>	Pilot pressure port inlet	ISO 6149 <sup>8)</sup>	M18 × 1.5; 14.5 deep	40	X
<b>P<sub>s</sub></b>	Pilot pressure port inlet (DA..6 only)	ISO 6149 <sup>8)</sup>	M18 × 1.5; 14.5 deep	40	O
<b>Y<sub>ST</sub></b>	Pilot pressure port outlet	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>Y<sub>ST</sub></b>	Pilot pressure port outlet (DA..6 only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>Y<sub>HT</sub></b>	Pilot pressure port outlet (HT only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring port pressure A, B	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	500	X
<b>M<sub>H</sub></b>	Measuring port, high pressure	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	500	X
<b>Y<sub>1</sub>, Y<sub>2</sub></b>	Pilot pressure port (pilot signal HP only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>Z</b>	Pilot pressure port (inch signal DA..5 only)	ISO 6149 <sup>8)</sup>	M10 × 1; 8 deep	40	O

4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

6) Plugged for external boost pressure supply.

7) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 68).


8) The countersink can be deeper than as specified in the standard.

9) Optional, see page 59


10) O = Must be connected (plugged when delivered)

X = Plugged (in normal operation)


▼ **HP** – Proportional control, hydraulic, pilot-pressure related

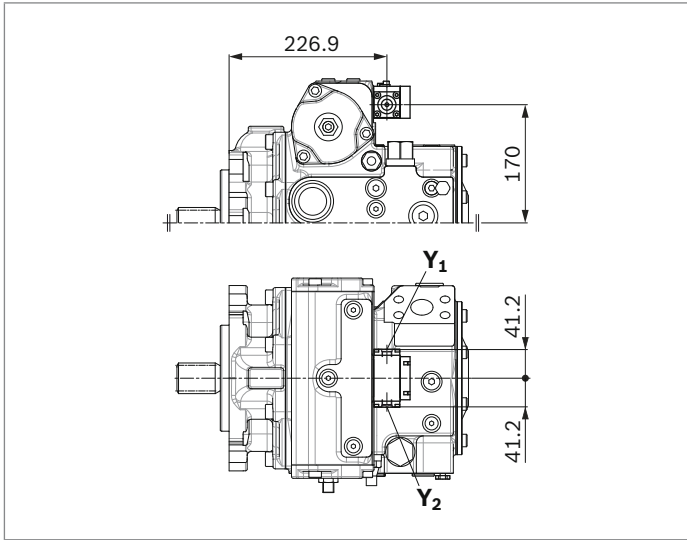


▼ **HW** – Proportional control, hydraulic, mechanical servo

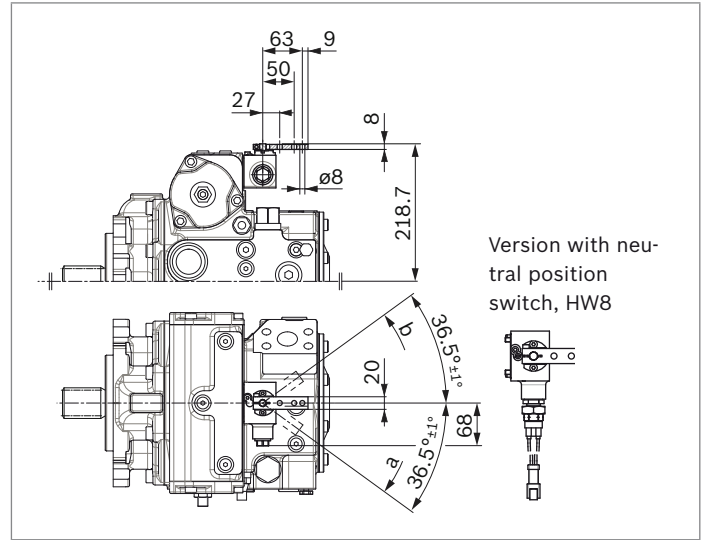


▼ **HT** – Hydraulic control, direct operated

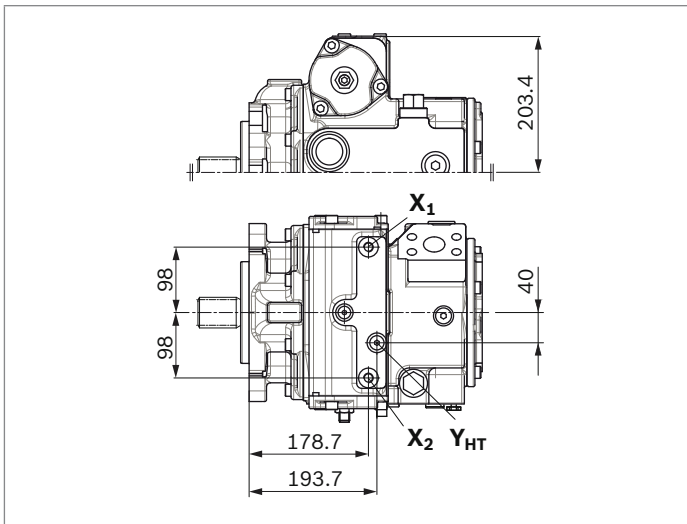


▼ **EZ** – Two-point control, electric

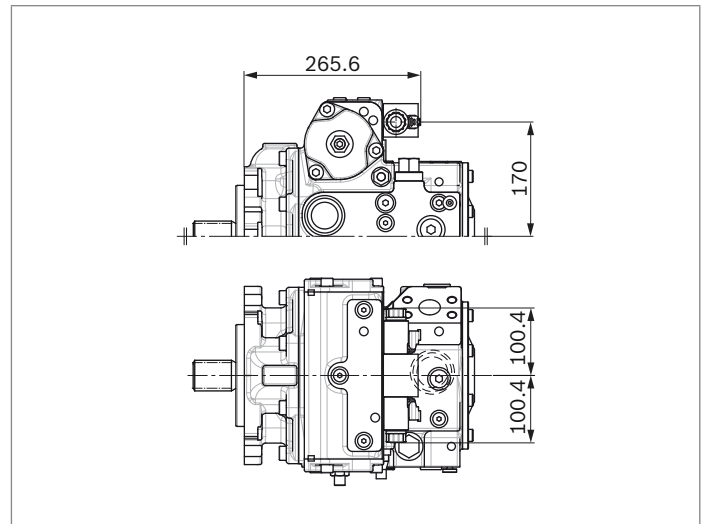

▼ **EV** – Electric control, direct operated, 4/3-way directional valve, one DRE

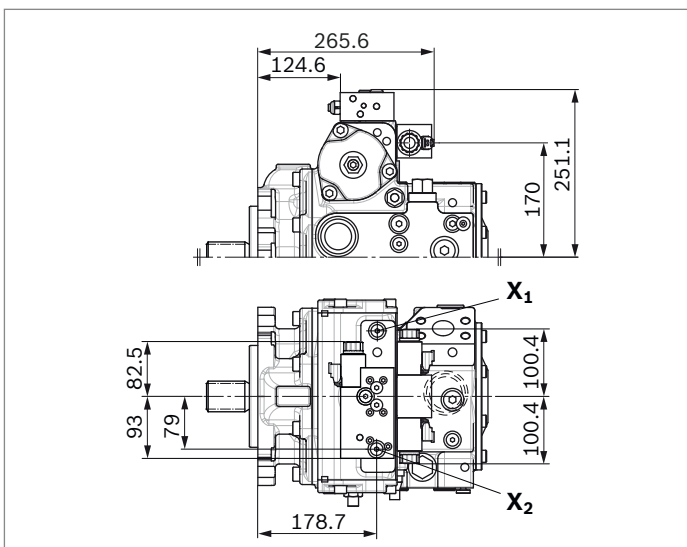


▼ **ET** – Electric control, direct operated, two DRE

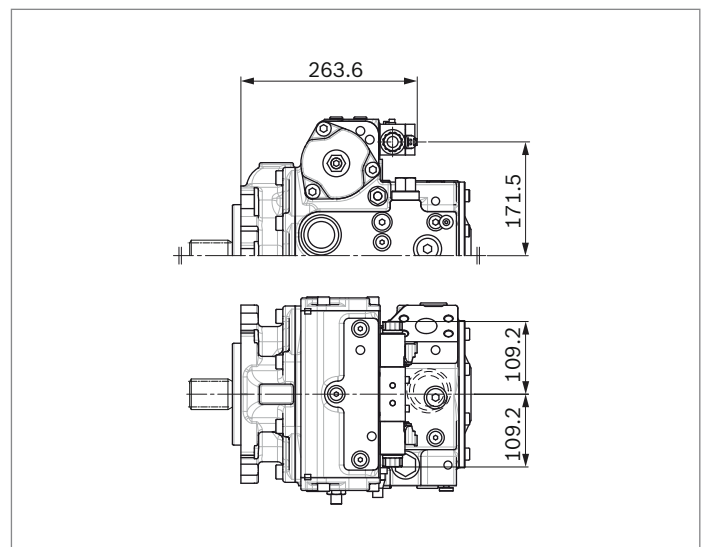


**DA control valve**

▼ **Version 1** – fixed setting

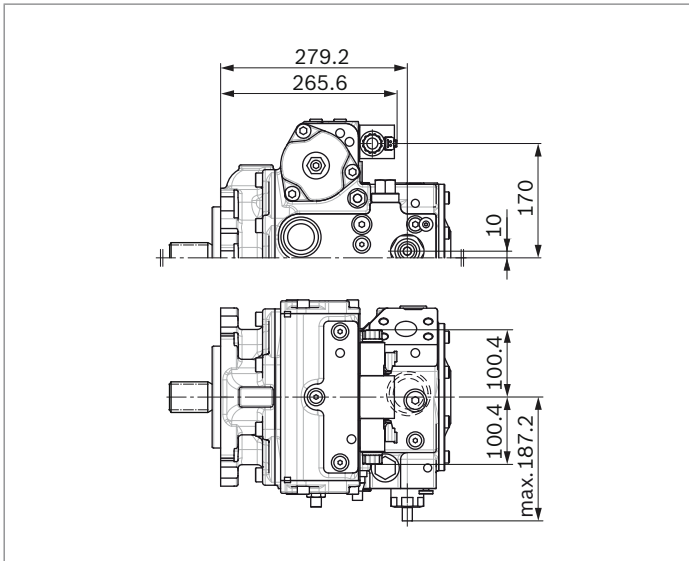


▼ **Version 5** – fixed setting and inch valve mounted

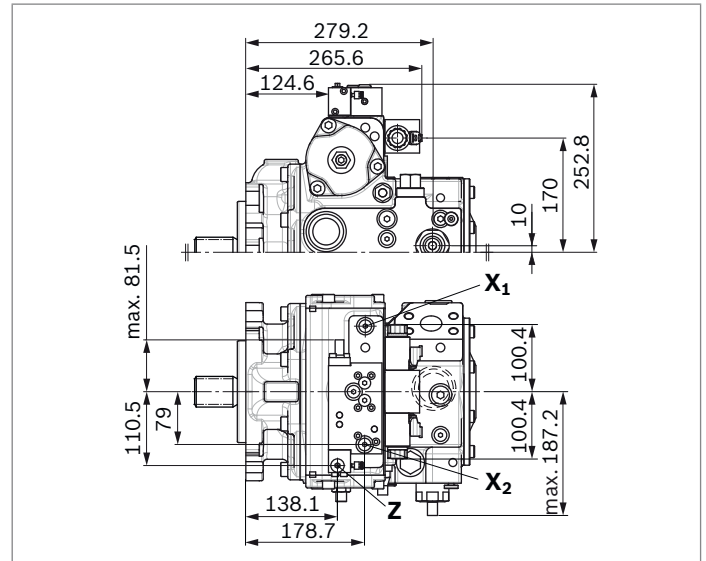

**Dimensions, size 175**

**EP – Proportional control, electric**


SAE working ports **A** and **B**, on left side 45° (viewed on drive shaft)<sup>1)</sup>

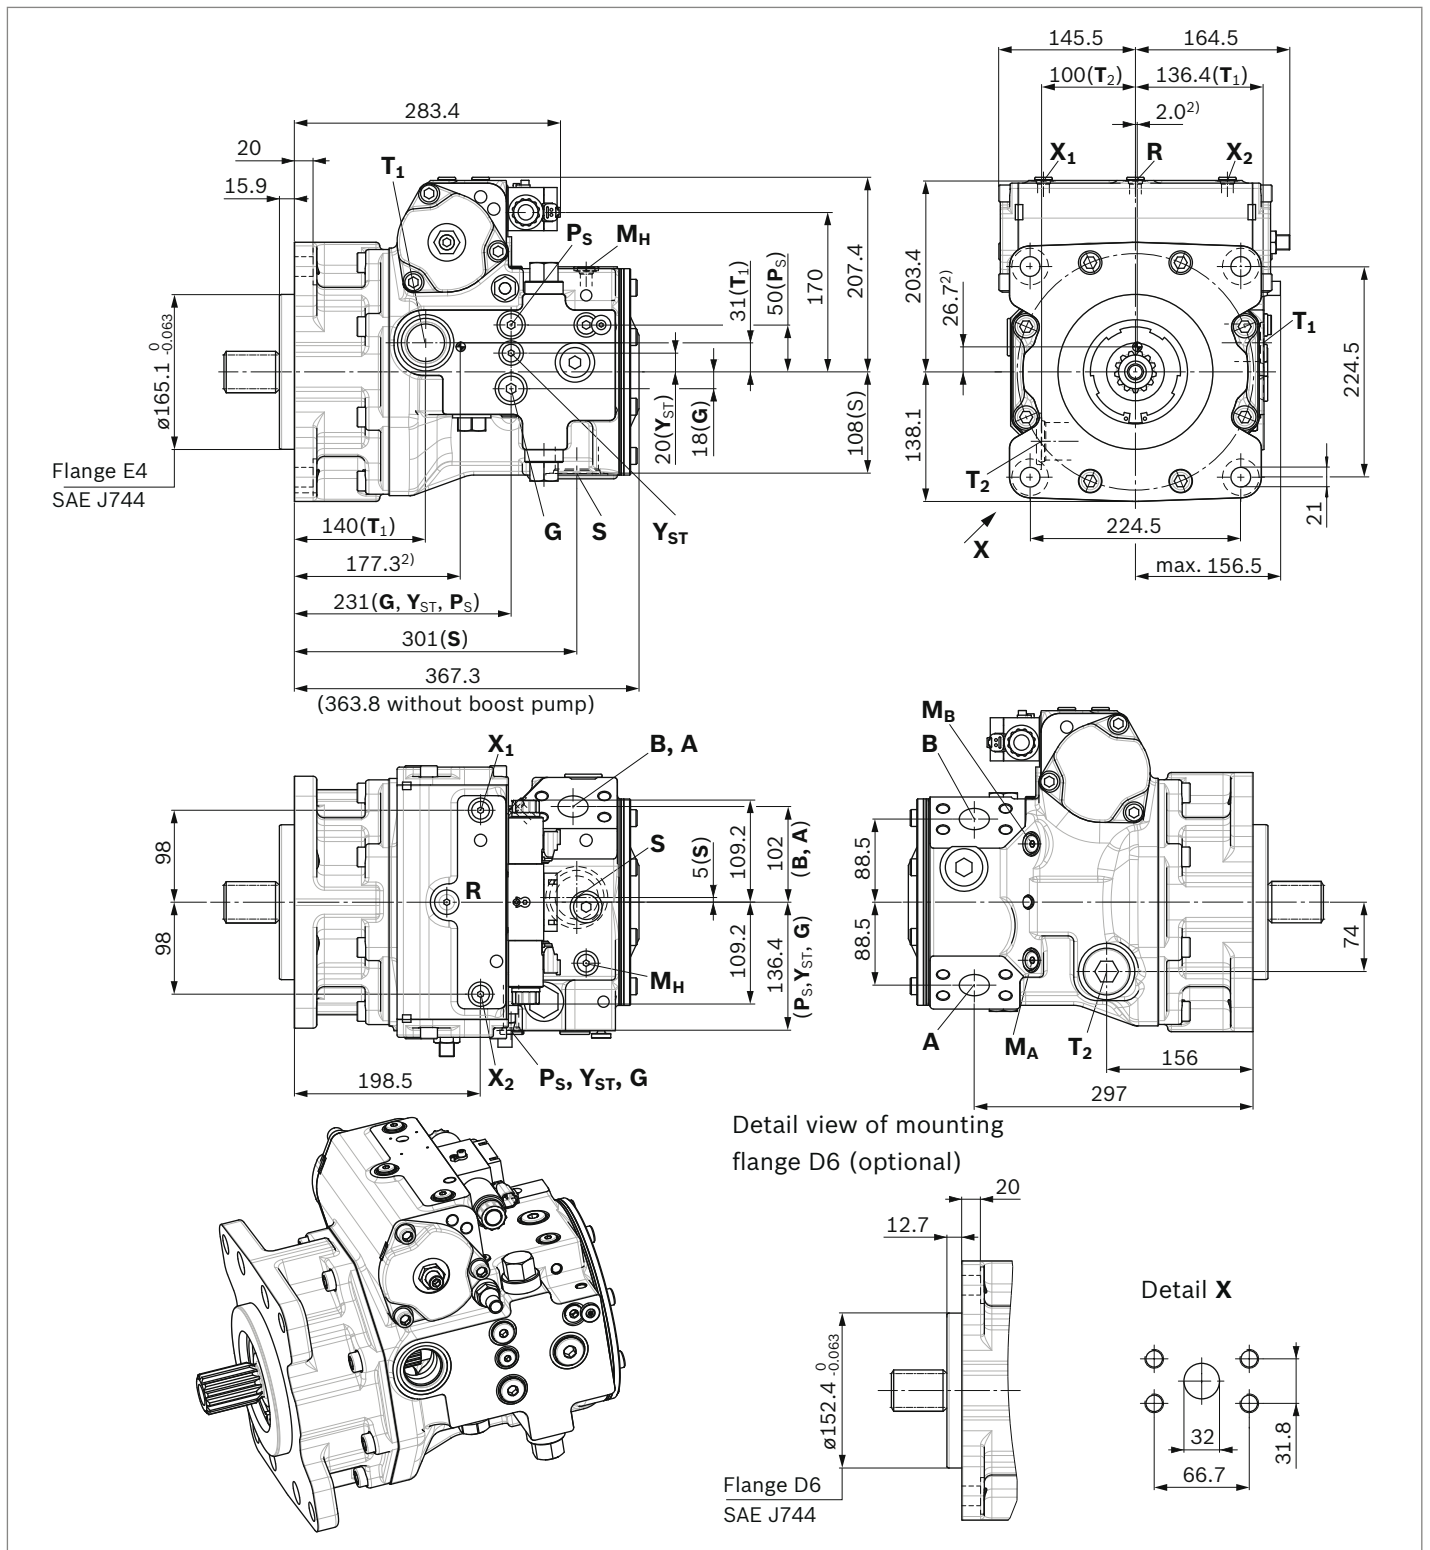


1) For SAE working ports **A** and **B**, 45° right (viewed on drive shaft), the complete case and thus the dimensions are mirrored.

2) Center of gravity


▼ Splined shaft ANSI B92.1a

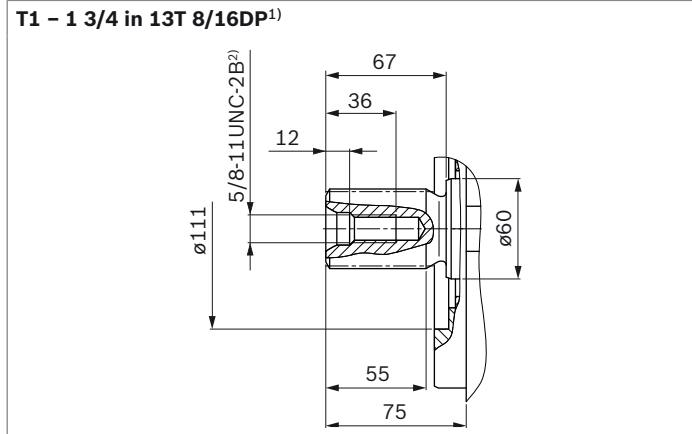


▼ Splined shaft ANSI B92.1a

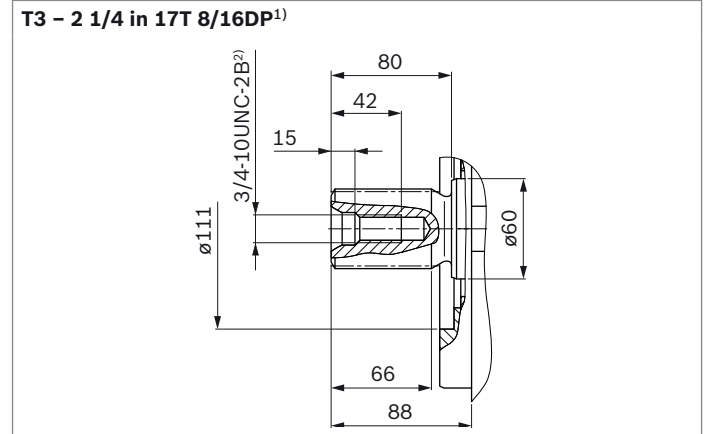

▼ Splined shaft DIN 5480

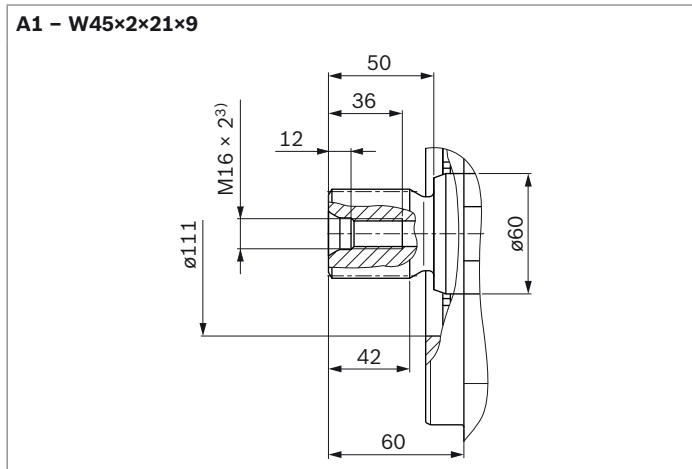

▼ Splined shaft DIN 5480

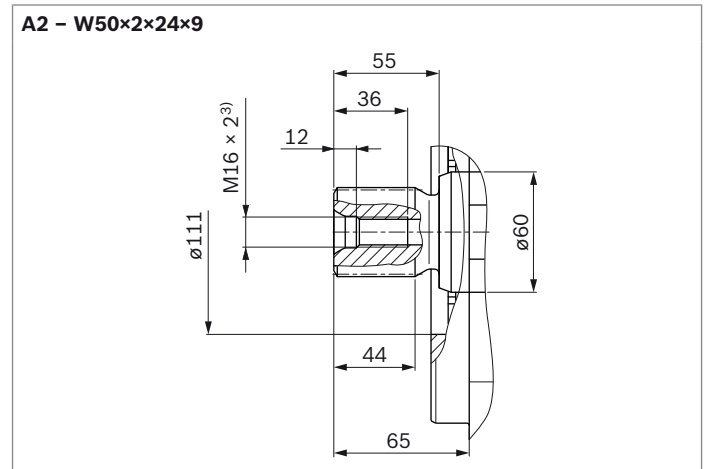

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) Center bore according to DIN 332 (thread according to DIN 13)

Ports		Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>4)</sup>	State <sup>10)</sup>
<b>A, B</b>	Working port	SAEJ518 <sup>5)</sup>	1 1/4 in	500	O
	Fastening thread	DIN 13	M14 × 2; 19 deep		
<b>S</b>	Suction port	ISO 6149 <sup>8)</sup>	M48 × 2; 22 deep	5	O <sup>6)</sup>
<b>T<sub>1</sub></b>	Drain port	ISO 6149 <sup>8)</sup>	M42 × 2; 19.5 deep	3	O <sup>7)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 6149 <sup>8)</sup>	M42 × 2; 19.5 deep	3	X <sup>7)</sup>
<b>R</b>	Air bleed port	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	3	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice, HT only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>X<sub>3</sub>, X<sub>4</sub></b> <sup>9)</sup>	Stroking chamber pressure port	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>G</b>	Boost pressure port inlet	ISO 6149 <sup>8)</sup>	M22 × 1.5; 15.5 deep	40	X
<b>P<sub>S</sub></b>	Pilot pressure port inlet	ISO 6149 <sup>8)</sup>	M18 × 1.5; 14.5 deep	40	X
<b>P<sub>S</sub></b>	Pilot pressure port inlet (DA..6 only)	ISO 6149 <sup>8)</sup>	M18 × 1.5; 14.5 deep	40	O
<b>Y<sub>ST</sub></b>	Pilot pressure port outlet	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>Y<sub>ST</sub></b>	Pilot pressure port outlet (DA..6 only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>Y<sub>HT</sub></b>	Pilot pressure port outlet (HT only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring port pressure A, B	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	500	X
<b>M<sub>H</sub></b>	Measuring port, high pressure	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	500	X
<b>Y<sub>1</sub>, Y<sub>2</sub></b>	Pilot pressure port (pilot signal HP only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>Z</b>	Pilot pressure port (inch signal DA..5 only)	ISO 6149 <sup>8)</sup>	M10 × 1; 8 deep	40	O

4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

6) Plugged for external boost pressure supply.

7) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 68).


8) The countersink can be deeper than as specified in the standard.

9) Optional, see page 59


10) O = Must be connected (plugged when delivered)

X = Plugged (in normal operation)


▼ **HP** – Proportional control, hydraulic, pilot-pressure related

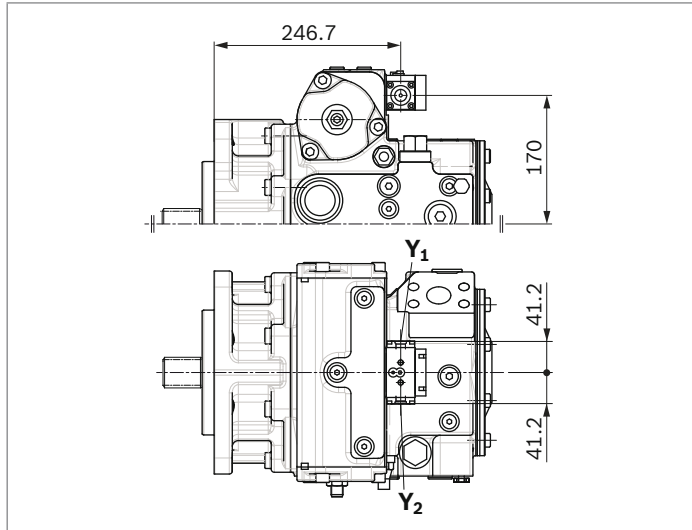


▼ **HW** – Proportional control, hydraulic, mechanical servo

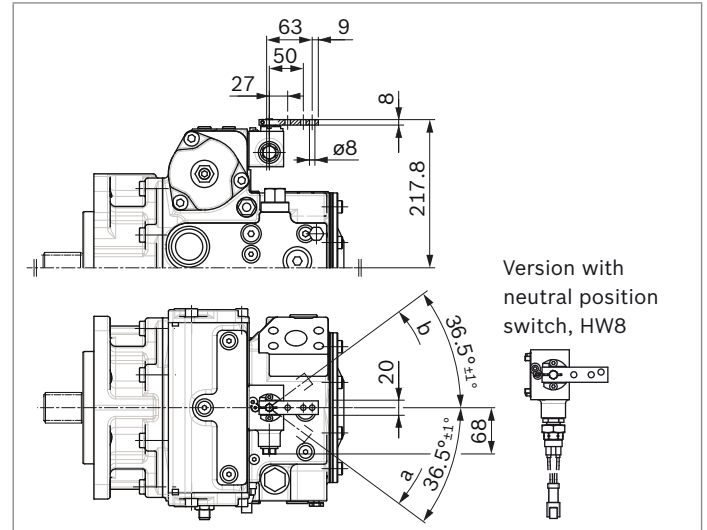


▼ **HT** – Hydraulic control, direct operated

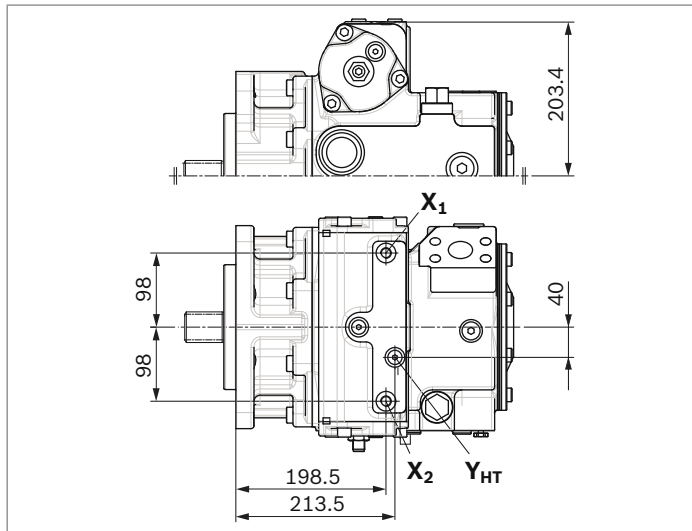


▼ **EZ** – Two-point control, electric

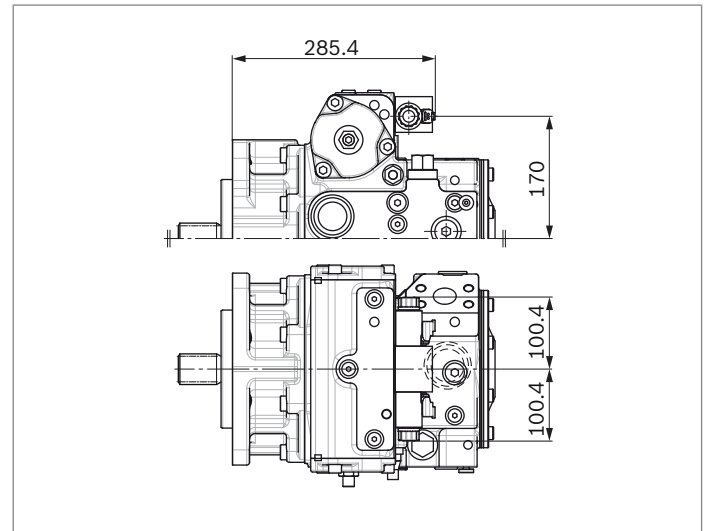

▼ **EV** – Electric control, direct operated, 4/3-way directional valve, one DRE

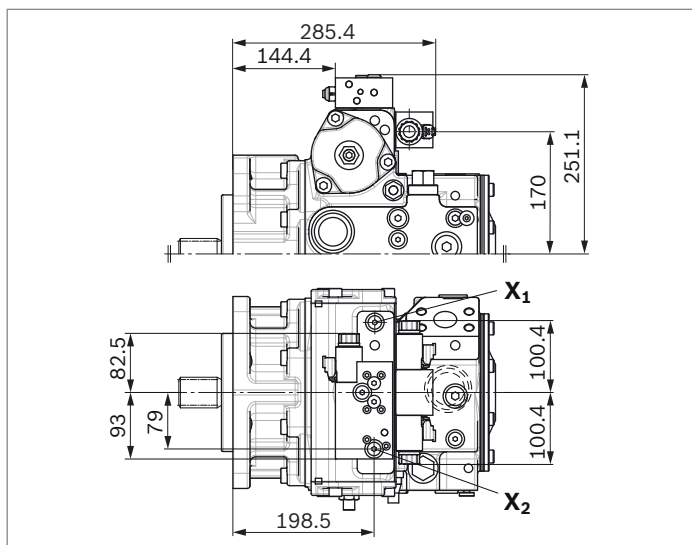


▼ **ET** – Electric control, direct operated, two DRE

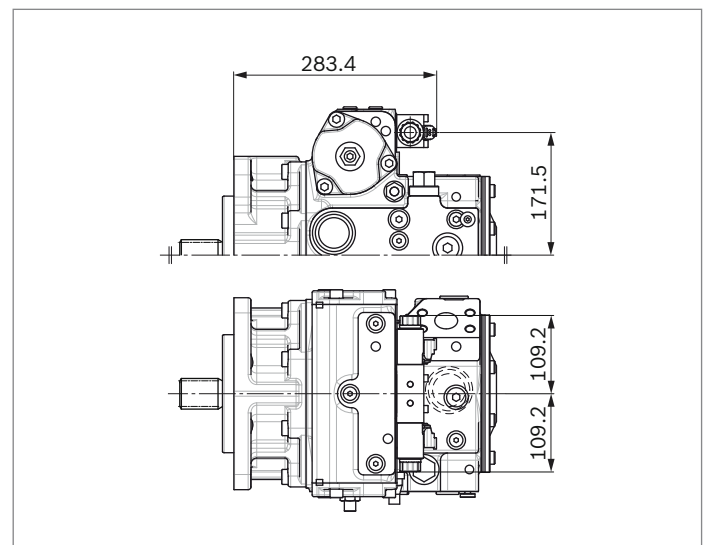




**DA control valve**

▼ **Version 1** – fixed setting

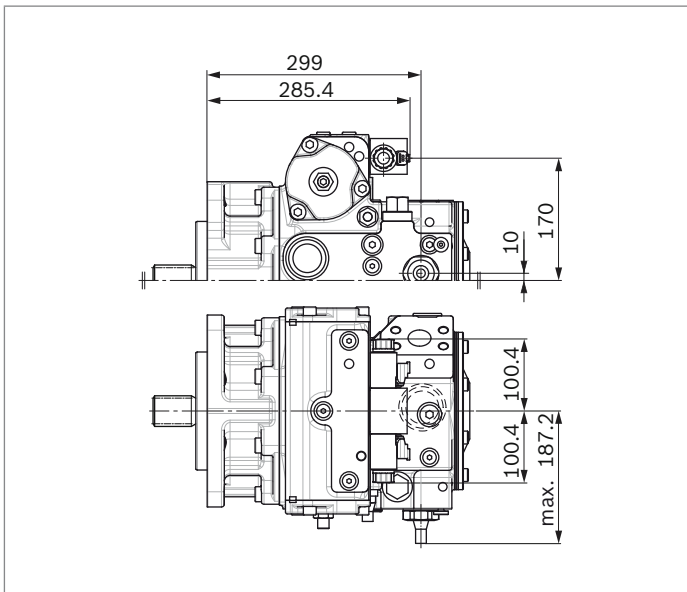


▼ **Version 5** – fixed setting and inch valve mounted

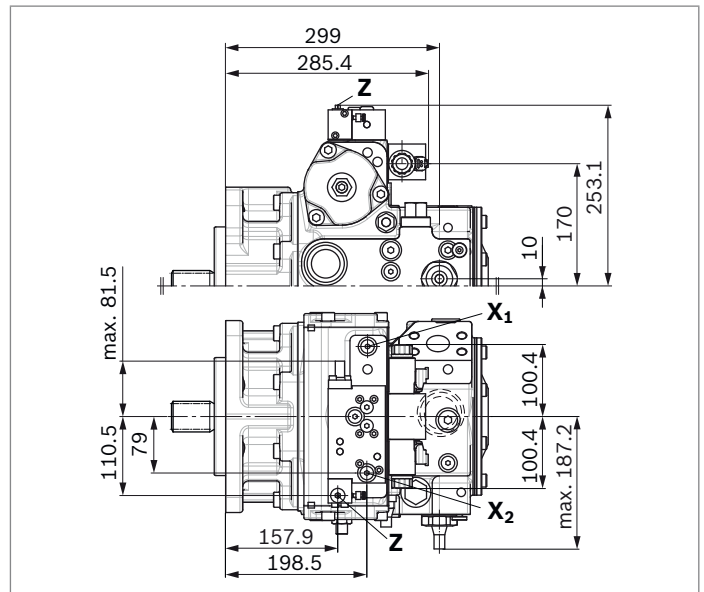

### Dimensions, size 210

#### EP – Proportional control, electric

SAE working ports **A** and **B**, on left side 45° (viewed on drive shaft)<sup>1)</sup>

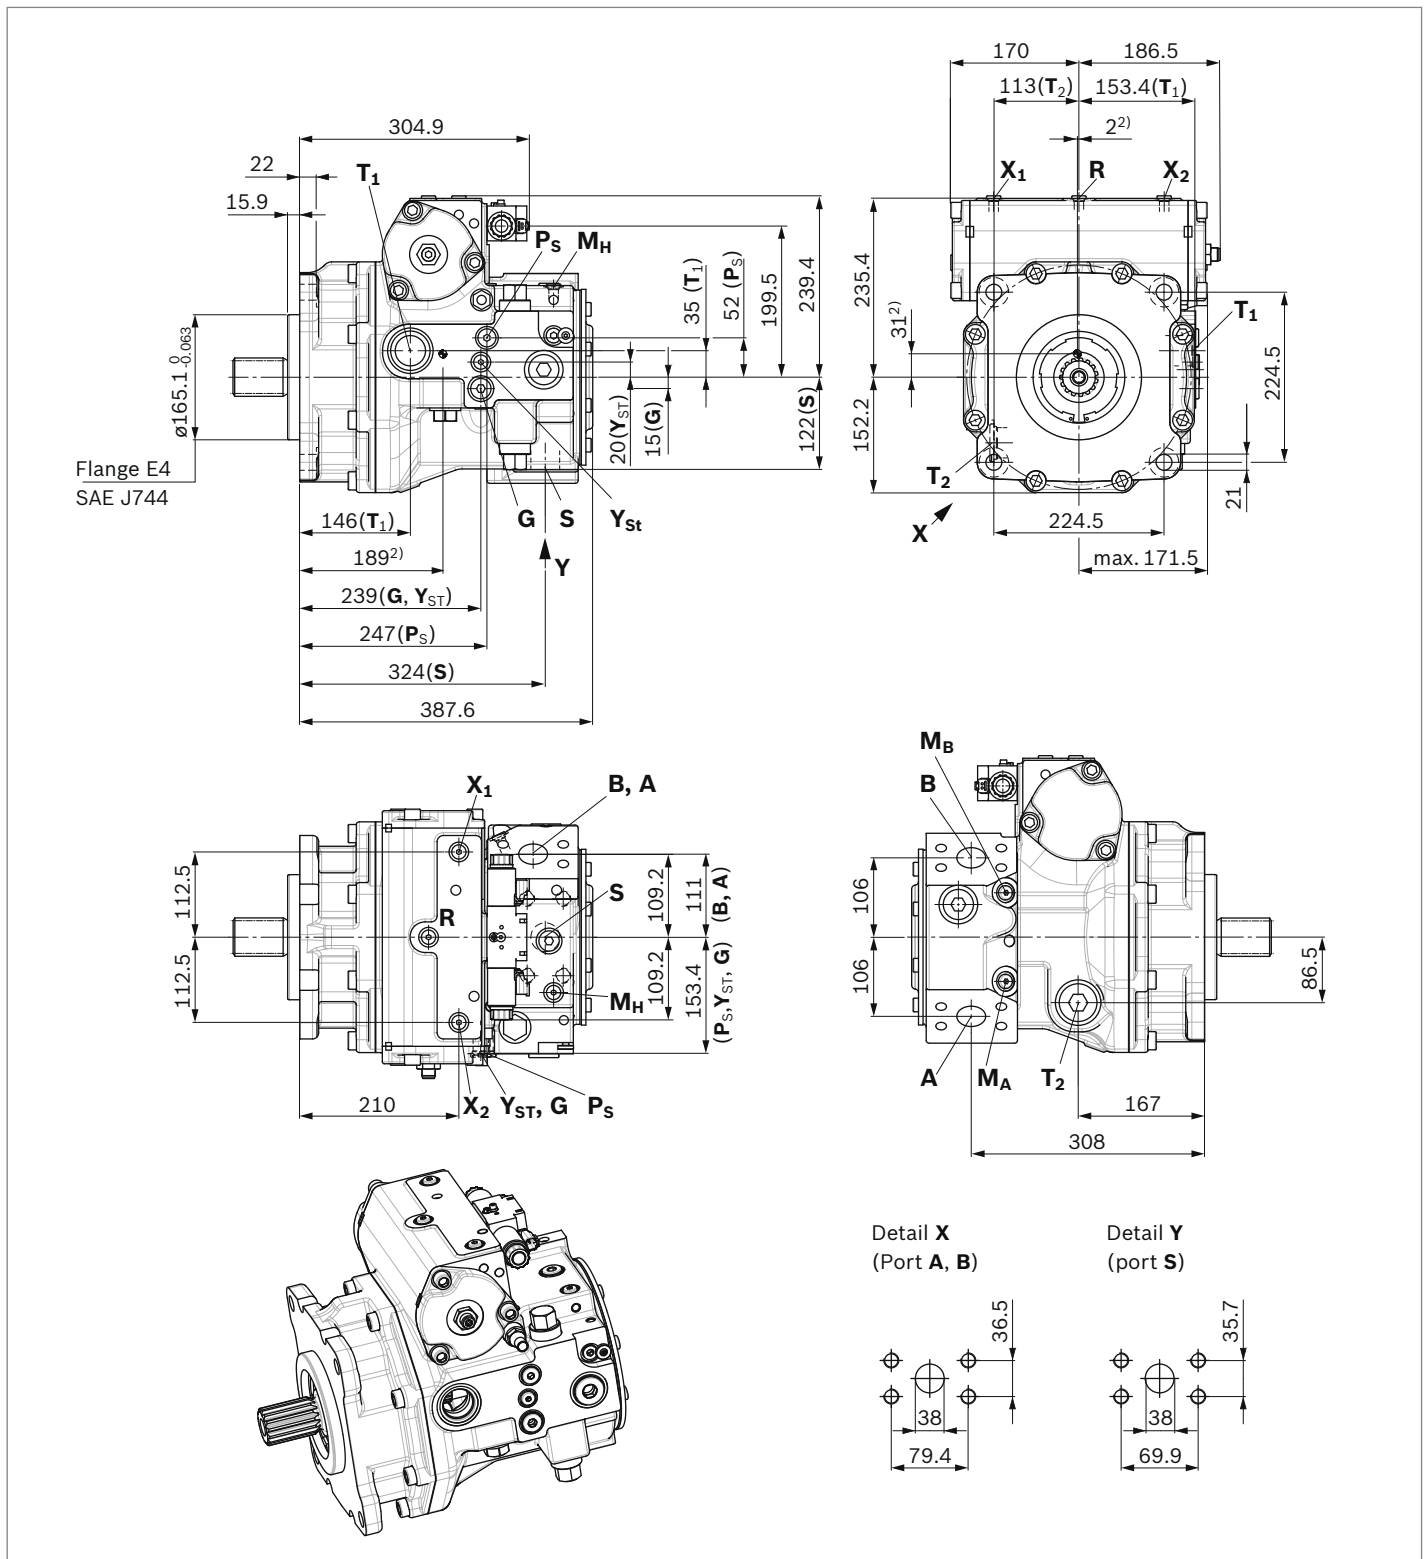


1) For SAE working ports **A** and **B**, 45° right (viewed on drive shaft), the complete case and thus the dimensions are mirrored.

2) Center of gravity


▼ Splined shaft ANSI B92.1a

T2 – 2 in 15T 8/16DP<sup>1)</sup>

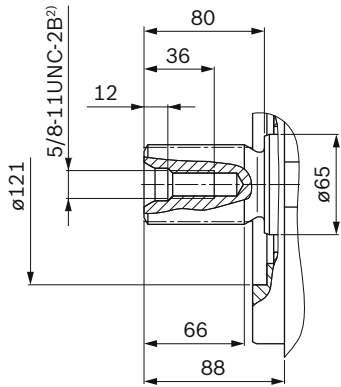


▼ Splined shaft ANSI B92.1a

T3 – 2 1/4 in 17T 8/16DP<sup>1)</sup>

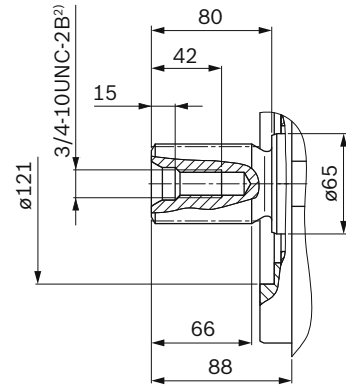


▼ Splined shaft DIN 5480

A1 – W45×2×21×9

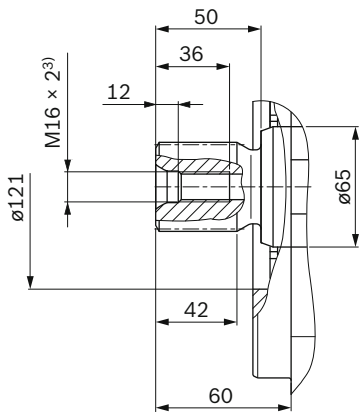

▼ Splined shaft DIN 5480

A3 – W55×2×26×9

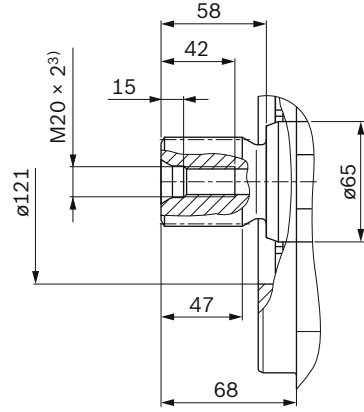

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) Center bore according to DIN 332 (thread according to DIN 13)

Ports		Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>11)</sup>
<b>A, B</b>	Working port	SAEJ518 <sup>5)</sup>	1 1/2 in	500	O
	Fastening thread	DIN 13	M16 × 2; 21 deep		
<b>S</b>	Suction port	SAEJ518 <sup>5)</sup>	1 1/2 in	5	O <sup>7)</sup>
	Fastening thread	DIN 13	M12 × 1.75; 20 deep		
<b>T<sub>1</sub></b>	Drain port	ISO 6149 <sup>8)</sup>	M42 × 2; 19.5 deep	3	O <sup>8)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 6149 <sup>8)</sup>	M42 × 2; 19.5 deep	3	X <sup>8)</sup>
<b>R</b>	Air bleed port	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	3	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice, HT only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>X<sub>3</sub>, X<sub>4</sub></b> <sup>9)</sup>	Stroking chamber pressure port	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>G</b>	Boost pressure port inlet	ISO 6149 <sup>8)</sup>	M22 × 1.5; 15.5 deep	40	X
<b>P<sub>s</sub></b>	Pilot pressure port inlet	ISO 6149 <sup>8)</sup>	M18 × 1.5; 14.5 deep	40	X
<b>P<sub>s</sub></b>	Pilot pressure port inlet (DA..6 only)	ISO 6149 <sup>8)</sup>	M18 × 1.5; 14.5 deep	40	O
<b>Y<sub>ST</sub></b>	Pilot pressure port outlet	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>Y<sub>ST</sub></b>	Pilot pressure port outlet (DA..6 only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>Y<sub>HT</sub></b>	Pilot pressure port outlet (HT only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring port pressure A, B	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	500	X
<b>M<sub>H</sub></b>	Measuring port, high pressure	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	500	X
<b>Y<sub>1</sub>, Y<sub>2</sub></b>	Pilot pressure port (pilot signal HP only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>Z</b>	Pilot pressure port (inch signal DA..5 only)	ISO 6149 <sup>8)</sup>	M10 × 1; 8 deep	40	O

4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.

6) Plugged for external boost pressure supply.

7) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 68).


8) The countersink can be deeper than as specified in the standard.

9) Optional, see page 59


10) O = Must be connected (plugged when delivered)

X = Plugged (in normal operation)


▼ **HP** – Proportional control, hydraulic, pilot-pressure related

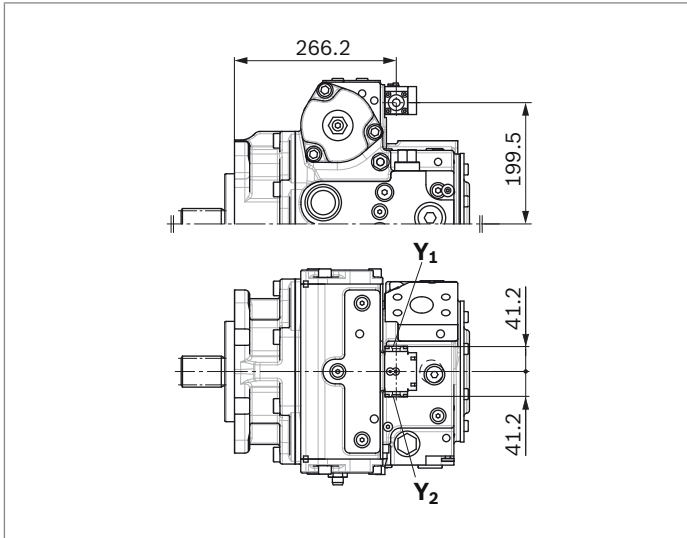

▼ **HW** – Proportional control, hydraulic, mechanical servo

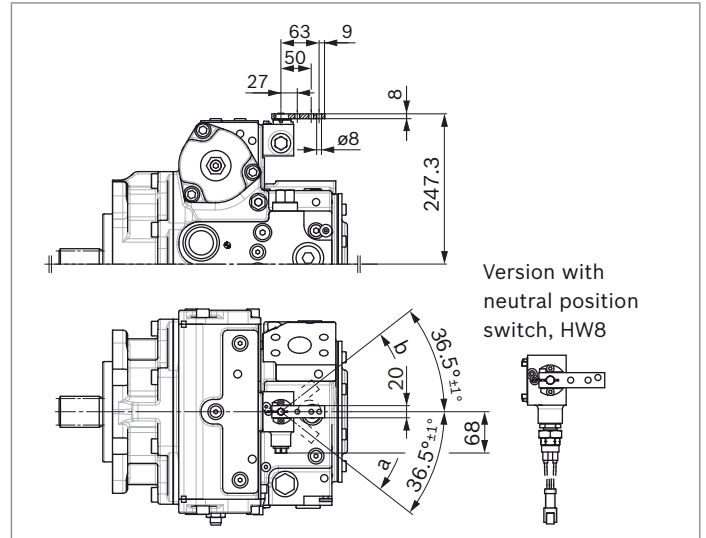


▼ **EZ** – Two-point control, electric

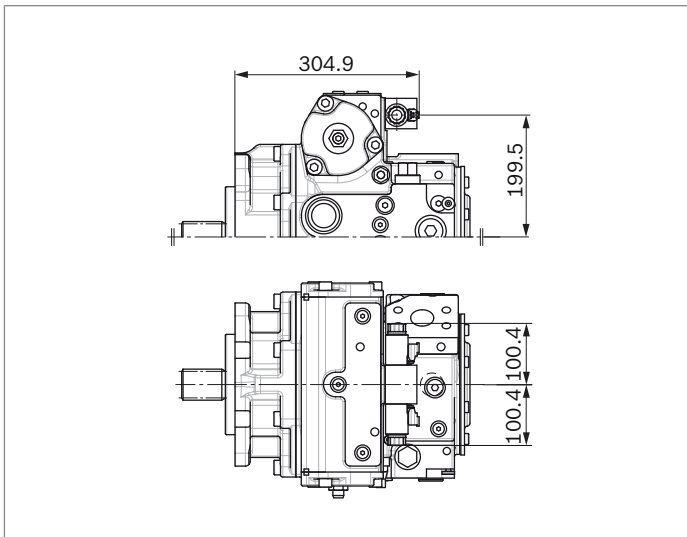

**DA control valve**


▼ **DA..1** – fixed setting

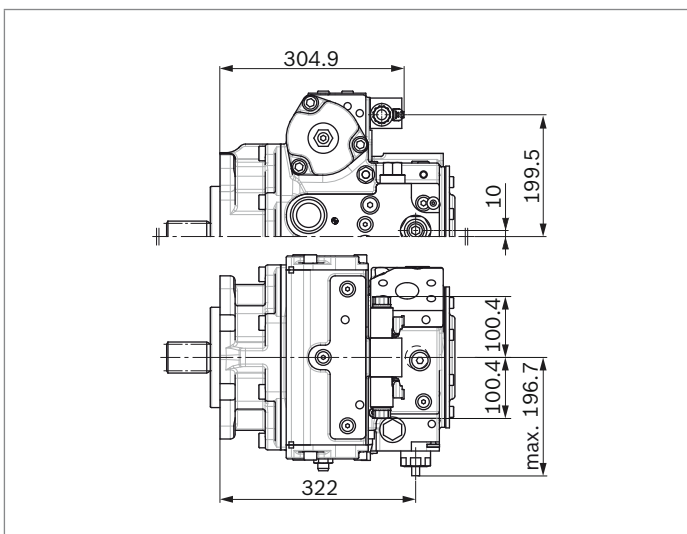

**Dimensions, size 280**

**EP – Proportional control, electric**

SAE working ports **A** and **B**, on left side 45° (viewed on drive shaft)<sup>1)</sup>

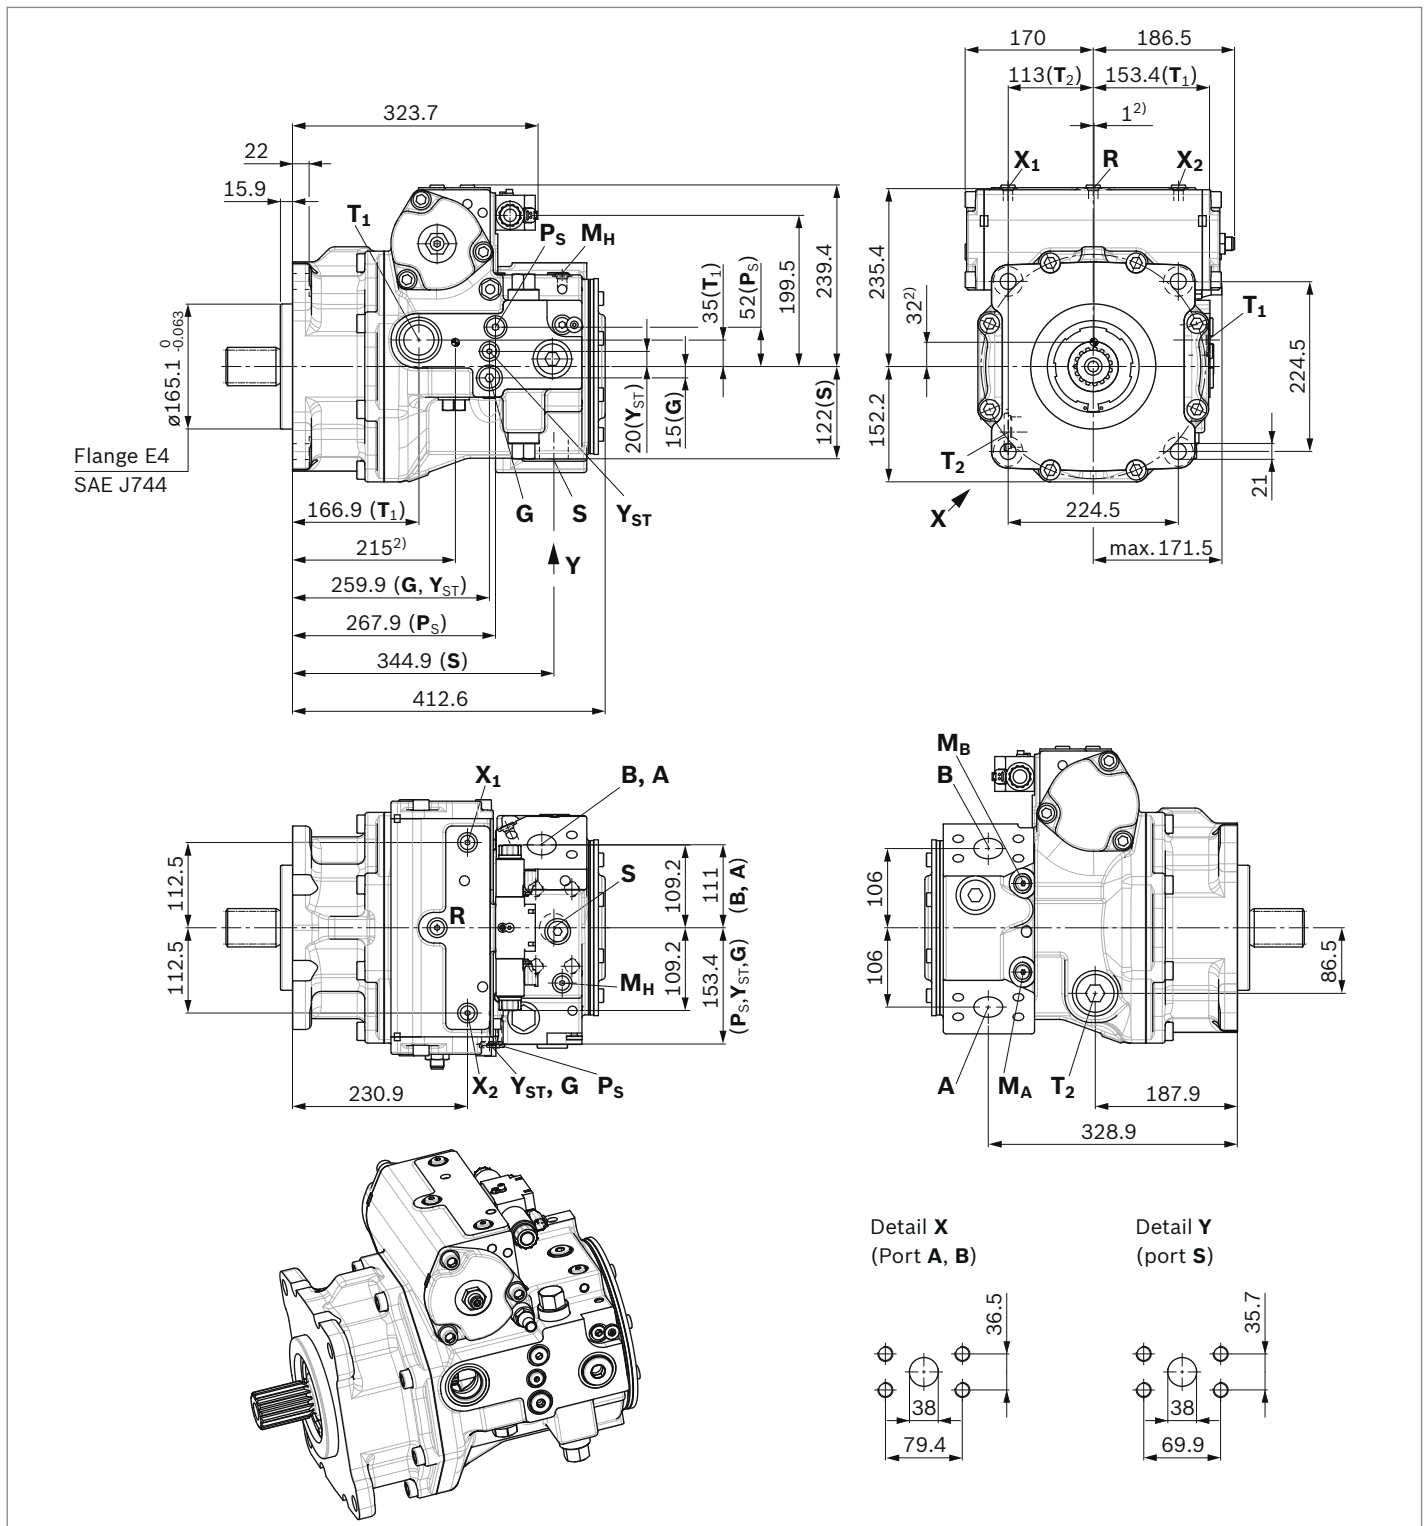


1) For SAE working ports **A** and **B**, 45° right (viewed on drive shaft), the complete case and thus the dimensions are mirrored.

2) Center of gravity


▼ Splined shaft ANSI B92.1a

T2 – 2 in 15T 8/16DP<sup>1)</sup>

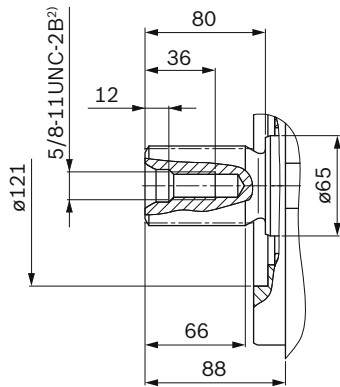


▼ Splined shaft ANSI B92.1a

T3 – 2 1/4 in 17T 8/16DP<sup>1)</sup>

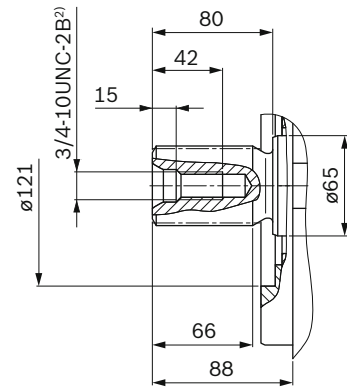

▼ Splined shaft DIN 5480

A3 – W55×2×26×9

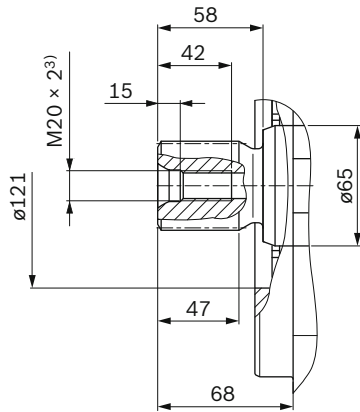

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) Center bore according to DIN 332 (thread according to DIN 13)


Ports		Standard	Size	$p_{\max \text{ abs}}$ [bar] <sup>4)</sup>	State <sup>10)</sup>
<b>A, B</b>	Working port	SAEJ518 <sup>5)</sup>	1 1/2 in	500	O
	Fastening thread	DIN 13	M16 × 2; 21 deep		
<b>S</b>	Suction port fastening thread	SAEJ518 <sup>5)</sup> DIN 13	1 1/2 in M12 × 1.75; 20 deep	5	O <sup>6)</sup>
<b>T<sub>1</sub></b>	Drain port	ISO 6149 <sup>8)</sup>	M42 × 2; 19.5 deep	3	O <sup>7)</sup>
<b>T<sub>2</sub></b>	Drain port	ISO 6149 <sup>8)</sup>	M42 × 2; 19.5 deep	3	X <sup>7)</sup>
<b>R</b>	Air bleed port	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	3	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure port (upstream of orifice, HT only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>X<sub>3</sub>, X<sub>4</sub></b> <sup>9)</sup>	Stroking chamber pressure port	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>G</b>	Boost pressure port inlet	ISO 6149 <sup>8)</sup>	M22 × 1.5; 15.5 deep	40	X
<b>P<sub>s</sub></b>	Pilot pressure port inlet	ISO 6149 <sup>8)</sup>	M18 × 1.5; 14.5 deep	40	X
<b>P<sub>s</sub></b>	Pilot pressure port inlet (DA..6 only)	ISO 6149 <sup>8)</sup>	M18 × 1.5; 14.5 deep	40	O
<b>Y<sub>ST</sub></b>	Pilot pressure port outlet	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	X
<b>Y<sub>ST</sub></b>	Pilot pressure port outlet (DA..6 only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>Y<sub>HT</sub></b>	Pilot pressure port outlet (HT only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring port pressure A, B	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	500	X
<b>M<sub>H</sub></b>	Measuring port, high pressure	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	500	X
<b>Y<sub>1</sub>, Y<sub>2</sub></b>	Pilot pressure port (pilot signal HP only)	ISO 6149 <sup>8)</sup>	M14 × 1.5; 11.5 deep	40	O
<b>Z</b>	Pilot pressure port (inch signal DA..5 only)	ISO 6149 <sup>8)</sup>	M10 × 1; 8 deep	40	O

- 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 5) Only dimensions according to SAE J518, metric fastening thread is a deviation from the standard.
- 6) Plugged for external boost pressure supply.


- 7) Depending on installation position, **T<sub>1</sub>** or **T<sub>2</sub>** must be connected (see also installation instructions on page 68).
- 8) The countersink can be deeper than as specified in the standard.
- 9) Optional, see page 59
- 10) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)




▼ **HP** – Proportional control, hydraulic, pilot-pressure related

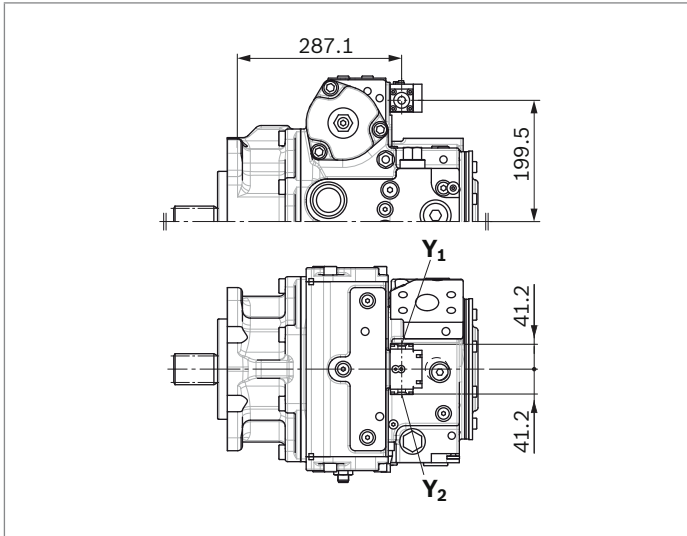

▼ **HW** – Proportional control, hydraulic, mechanical servo

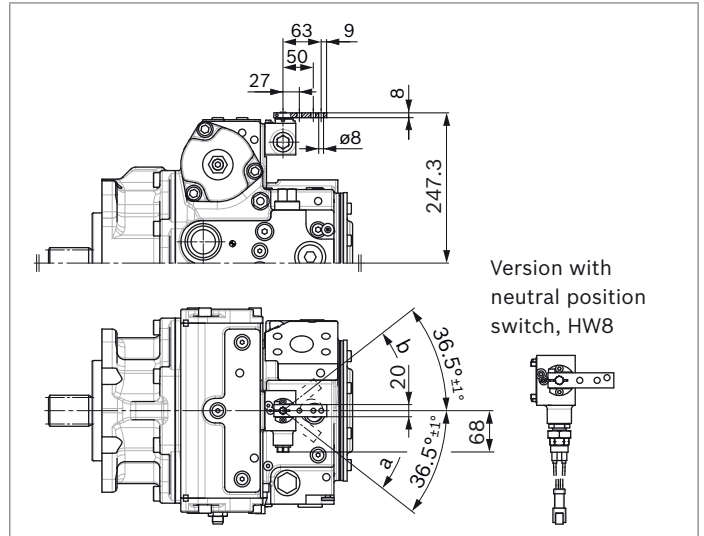


▼ **EZ** – Two-point control, electric

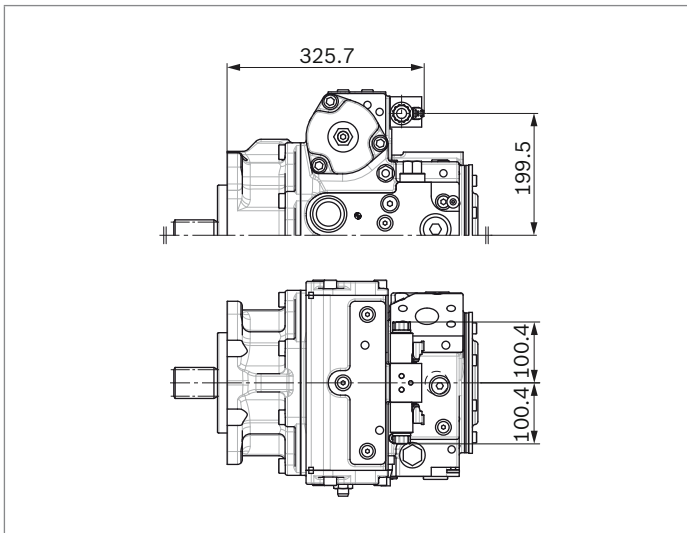

## Dimensions, through drive


Flange SAE J744 <sup>1)</sup>			Hub for splined shaft <sup>2)</sup>									
Diameter	Mounting <sup>3)</sup>	Code	Diameter	Code	110	125	145	175	210	280		
82-2 (A)	⌀	A1	5/8 in	9T 16/32DP	S2	●	-	●	●	-	○	<b>A1S2</b>
		A1	3/4 in	11T 16/32DP	S3	●	-	●	●	●	●	<b>A1S3</b>
	∞	A2	5/8 in	9T 16/32DP	S2	●	●	●	●	○	●	<b>A2S2</b>
		A2	3/4 in	11T 16/32DP	S3	●	-	●	●	●	●	<b>A2S3</b>
101-2 (B)	⌀	B1	7/8 in	13T 16/32DP	S4	●	●	●	●	●	●	<b>B1S4</b>
		B1	1 in	15T 16/32DP	S5	●	-	●	●	●	●	<b>B1S5</b>
	∞	B2	7/8 in	13T 16/32DP	S4	●	●	●	●	●	●	<b>B2S4</b>
		B2	1 in	15T 16/32DP	S5	●	-	●	●	○	○	<b>B2S5</b>
	∅	B5	7/8 in	13T 16/32DP	S4	●	-	●	○	○	○	<b>B5S4</b>
		B5	1 in	15T 16/32DP	S5	○	-	●	○	●	●	<b>B5S5</b>
101-4 (B)	∅	B4	7/8 in	13T 16/32DP	S4	○	-	●	○	●	○	<b>B4S4</b>
		B4	1 in	15T 16/32DP	S5	●	-	●	○	○	○	<b>B4S5</b>

### ▼ 82-2

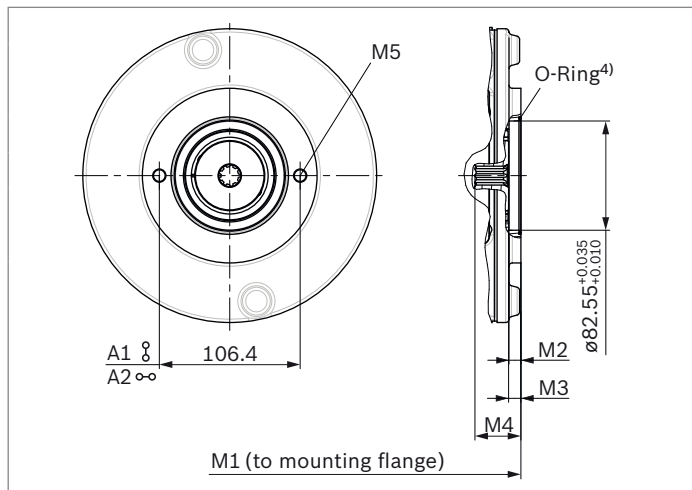

NG	M1 <sup>5)</sup>	M2	M3	M4	M5 <sup>6)</sup>
<b>110</b>	324.3	9	9.4	34.6	M10 × 1.5; 13 deep
<b>125</b>	328.3	9	10	35	
<b>145</b>	346.2	9	9.3	34.7	
<b>175</b>	369.3	9	9.1	33.4	
<b>210</b>	389.6	9	7.3	33	
<b>280</b>	415.6	9.7	9.4	34.1	

### ▼ 101-2, 101-4

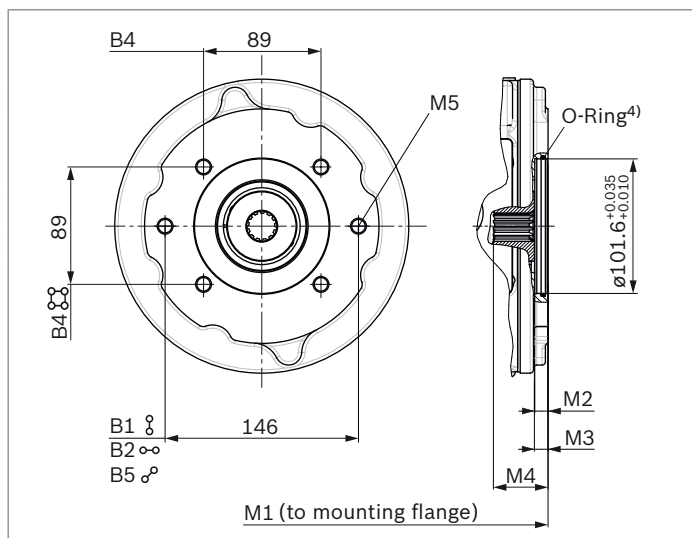


NG	M1 <sup>5)</sup>	M2	M3	M4	M5 <sup>6)</sup>
<b>110</b>	327.3	9	9.4	34.6	M12 × 1.75; 16 deep
<b>125</b>	331.1	10	11	48	
<b>145</b>	349.2	9	9.3	34.7	
<b>175</b>	372.3	9	9.1	33.4	
<b>210</b>	392.6	On request			M12 × 1.75; 13 deep
<b>280</b>	418.6	On request			M12 × 1.75; 13 deep

- 1) The through-drive shaft is only supplied with the fastening thread corresponding to the ordering code designation.
- 2) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 3) Mounting hole pattern viewed on through drive with control at top
- 4) O-ring included in the scope of delivery
- 5) Installation length M1 is valid for standard mounting flange (with integrated boost pump)
- 6) Thread according to DIN 13


Flange SAE J744 <sup>1)</sup>			Hub for splined shaft <sup>2)</sup>									
Diameter	Mounting <sup>3)</sup>	Code	Diameter	Code	110	125	145	175	210	280		
127-2 (C)	⌘	C1	1 in	15T 16/32DP	S5	-	-	○	-	-	-	<b>C1S5</b>
		C1	1 1/4 in	14T 12/24DP	S7	●	-	●	○	○	○	<b>C1S7</b>
	∞	C2	1 1/4 in	14T 12/24DP	S7	●	●	●	●	●	●	<b>C2S7</b>
		C2	1 3/8 in	21T 16/32DP	V8	○	-	●	●	-	-	<b>C2V8</b>
		C2	1 3/4 in	13T 8/16DP	T1	-	-	●	●	-	-	<b>C2T1</b>
♂	C5	1 1/4 in	14T 12/24DP	S7	●	-	●	○	○	○	<b>C5S7</b>	
127-4 (C)	⌘⌘	C4	1 1/4 in	14T 12/24DP	S7	●	-	●	●	○	●	<b>C4S7</b>
		C4	1 3/8 in	21T 16/32DP	V8	●	●	-	-	-	-	<b>C4V8</b>
152-4 (D)	⌘⌘	D4	1 3/4 in	13T 8/16DP	T1	-	-	●	●	●	●	<b>D4T1</b>

▼ 127-2, 127-2/4

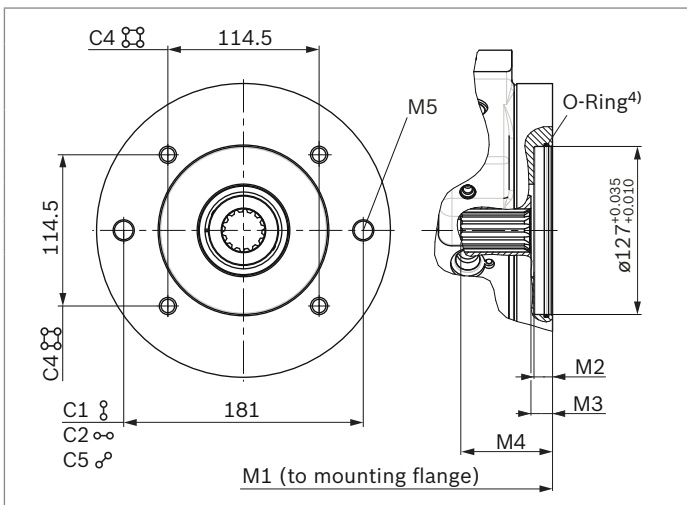

NG	M1 <sup>5)</sup>	M2	M3	M4	M5 <sup>6)</sup> 2-hole	M5 <sup>6)</sup> 4-hole
<b>110</b>	333.3	14	16.9	58.2	M16 × 2; 21 deep	M12 × 1.75; 19 deep
<b>125</b>	On request					
<b>145</b>	355.2	14	16.3	69.6	M16 × 2; 21 deep	M12 × 1.75; 19 deep
<b>175</b>	378.3	14	16.3	62.7		
<b>210</b>	403.7	27	14.2	56.4		
<b>280</b>	424.6	27	14.4	58.6		

▼ 152-4

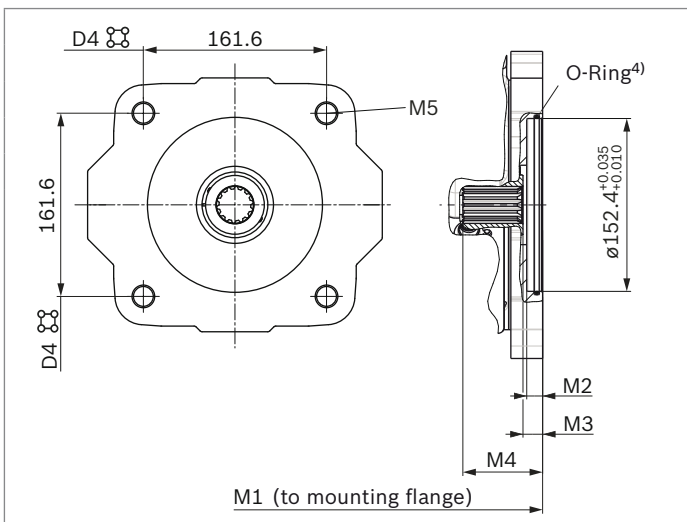


NG	M1 <sup>5)</sup>	M2	M3	M4	M5 <sup>6)</sup>
<b>145</b>	356.2	14	10	74.4	M20 × 2.5; 22 deep
<b>175</b>	379.3	14	17.8	76.3	
<b>210</b>	411.6	26	14.3	78.8	
<b>280</b>	432.5	26	14.5	84	

- 1) The through-drive shaft is only supplied with the fastening thread corresponding to the ordering code designation.
- 2) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 3) Mounting hole pattern viewed on through drive with control at top
- 4) O-ring included in the scope of delivery
- 5) Installation length M1 is valid for standard mounting flange (with integrated boost pump)
- 6) Thread according to DIN 13

Flange SAE J744 <sup>1)</sup>			Hub for splined shaft <sup>2)</sup>								
Diameter	Mounting <sup>3)</sup>	Code	Diameter	Code	110	125	145	175	210	280	
165-4 (E)	☞	E4	1 3/4 in 13T 8/16DP	T1	-	-	-	●	●	-	E4T1
			2 in 15T 8/16DP	T2	-	-	-	-	●	●	E4T2

▼ 165-4

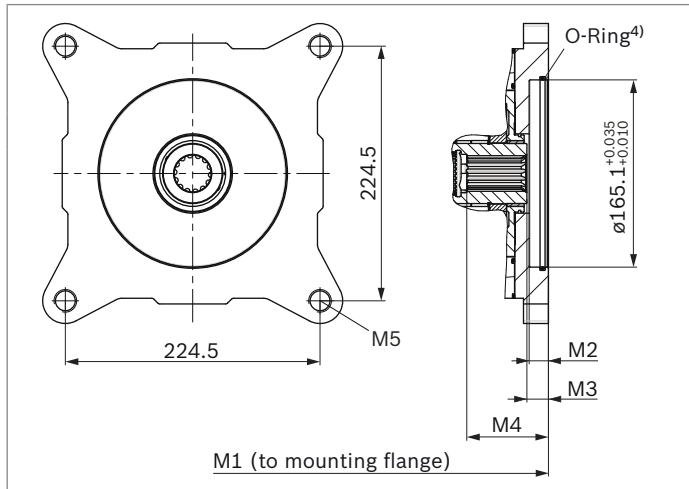

NG	M1 <sup>5)</sup>	M2	M3	M4	M5 <sup>6)</sup>
175	381	17	19.4	77.9	M20 × 2.5; 22 deep
210	407.3	On request			M20 × 2.5; 27 deep
280	447.3	On request			M20 × 2.5; 22 deep

- 1) The through-drive shaft is only supplied with the fastening thread corresponding to the ordering code designation.
- 2) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 3) Mounting hole pattern viewed on through drive with control at top
- 4) O-ring included in the scope of delivery
- 5) Installation length M1 is valid for standard mounting flange (with integrated boost pump)
- 6) Thread according to DIN 13

## Overview of mounting options

Through drive <sup>1)</sup>		Mounting option – 2nd pump							
Flange	Hub for splined shaft	Code	A4VG/40 NG (shaft)	A4VG/32 NG (shaft)	A10VG NG (shaft)	A10VO/3x NG (shaft)	A10V(S)O/5x NG (shaft)	A11VO/1 NG (shaft)	External gear pump <sup>2)</sup>
82-2 (A)	5/8 in	<b>A_S2</b>	–	–	–	18 (U)	10, 18 (U)	–	AZPF NG4 to 22
	3/4 in	<b>A_S3</b>	–	–	–	18 (S)	10, 18 (S)	–	
101-2 (B)	7/8 in	<b>B_S4</b>	–	–	18 (S)	28 (S) 45 (U)	28 (S) 45 (U)	–	AZPN NG20 to 36 AZPG NG32 to 50
	1 in	<b>B_S5</b>	–	28 (S)	28, 45 (S)	45 (S)	45 (S) 60, 63, 72 (U)	40 (S)	–
101-4 (B)	7/8 in	<b>B4S4</b>	–	–	–	–	–	–	
	1 in	<b>B4S5</b>	–	–	–	–	–	–	
127-2 (C)	1 in	<b>C1S5</b>	–	40 (U)	–	71 (U)	–	–	–
	1 1/4 in	<b>C_S7</b>	–	40, 56, 71 (S)	63 (S)	71 (S) 100 (U)	85, 100 (U)	40 (S)	–
	1 3/8 in	<b>C2V8</b>	110 (V8)	56, 71 (T)	63 (T)	–	–	40 (T)	
	1 3/4 in	<b>C2T1</b>	110, 125 (T1)	–	–	–	–	–	
127-4 (C)	1 1/4 in	<b>C4S7</b>	–	–	–	–	60, 63, 72 (S) 85, 100 (U)	–	
	1 3/8 in	<b>C4V8</b>	110 (V8)	–	–	–	–	–	
152-4 (D)	1 3/4 in	<b>D4T1</b>	110, 125, 145, 175 (T1)	90, 125 (S)	–	140, 180 (S)	–	95, 130, 145 (S)	–
165-4 (E)	1 3/4 in	<b>E4T1</b>	175 (T1)	180 (S)	–	–	–	190, 260 (S)	–
	2 in	<b>E4T2</b>	210, 280 (T2)	–	–	–	–	190 (T)	

1) Availability of the individual sizes, see type code on page 4.

2) Bosch Rexroth recommends special versions of the gear pumps.  
Please contact us.

## Combination pumps A4VG + A4VG

### Total length A<sup>1)</sup> with standard mounting flange

A4VG 1st pump	A4VG 2. Pump <sup>2)</sup>					
	NG110	NG125	NG145	NG175	NG210	NG280
NG110	652.6				-	-
NG125	On request	On request			-	-
NG145	674.5	On request	700.4		-	-
NG175	697.6	On request	723.5	748.3	-	-
NG210	729.9	On request	755.8	On request	807.9	-
NG280	755.9	On request	781.8	On request	On request	On request

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes. When ordering combination pumps, the type designations of the 1st and 2nd pumps must be linked by a “+”.


Order example:

**A4VG145EP1DP000/40MRNC6S71FC2S7AS00-0 +  
 A4VG110EP1DP000/40MRNC2S71F0000AS00-0**

A tandem pump, with two pumps of equal size, is permissible without additional supports, assuming that the dynamic acceleration does not exceed maximum 10 g (= 98.1 m/s<sup>2</sup>).

We recommend using the 4-hole mounting flanges.

For combination pumps consisting of more than two pumps, the mounting flange must be rated for the permissible moment of inertia, please contact us.

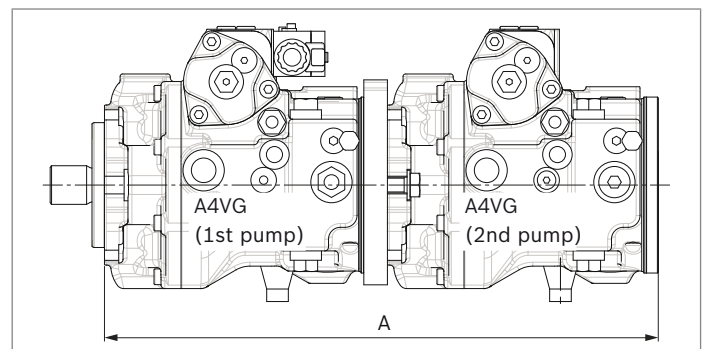

1) Overall length is valid for standard mounting flange and integrated boost pump.

2) 2nd pump without through drive and with boost pump, F0000/V0000

## High-pressure relief valves

The two high-pressure relief valves protect the hydrostatic transmission (pump and motor) from overloading. They limit the maximum pressure in the respective high-pressure line and serve simultaneously as boost valves.

High-pressure relief valves are not working valves and are only suitable for pressure peaks or high rates of pressure change.


### Setting ranges

High-pressure relief valve A and B	Differential pressure setting $\Delta p_{HD}$
Preferred values	400 bar
	410 bar
	420 bar
	430 bar
	440 bar
	450 bar
	460 bar
	470 bar
Optional values	300 bar
	320 bar
	340 bar
	360 bar
	380 bar

Settings on high-pressure relief valve A and B	
Differential pressure setting	$\Delta p_{HD} = \dots$ bar
Cracking pressure of the HD valve (at $q_{V1}$ )	$p_{max} = \dots$ bar ( $p_{max} = \Delta p_{HD} + p_{Sp}$ )

- ▶ The valve settings are made at  $n = 1000$  rpm and at  $V_{g\ max}$  ( $q_{V1}$ ). There may be deviations in the cracking pressures with other operating parameters.
- ▶ When ordering, state differential pressure setting in plain text.

### ▼ Circuit diagram

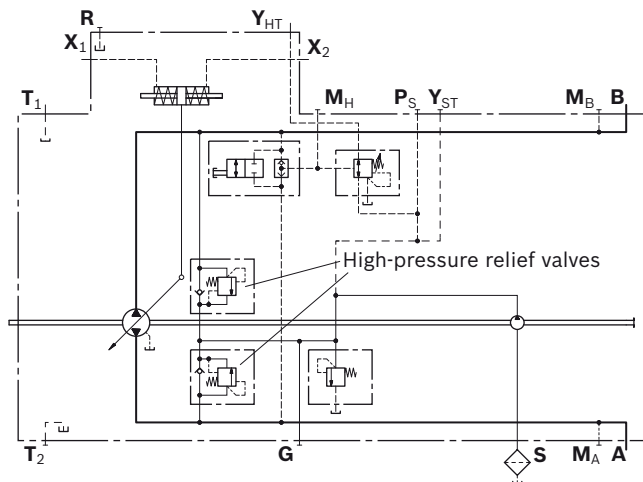


### High-pressure relief valve without pressure cut-off

#### ▼ Example

Working pressure	Boost pressure	Differential pressure
$p_{A,B}$	$p_{Sp}$	$\Delta p_{HD}$
450 bar	20 bar	= 430 bar

#### ▼ Setting diagram

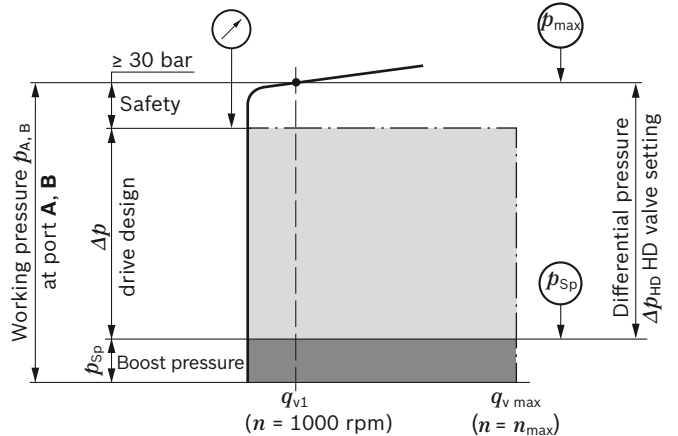


### High-pressure relief valve with pressure cut-off

#### ▼ Example

Working pressure	Boost pressure	Safety	Differential pressure
$p_{A,B}$	$p_{Sp}$		$\Delta p_{HD}$
450 bar	20 bar	+ 30 bar	= 400 bar

#### ▼ Setting diagram

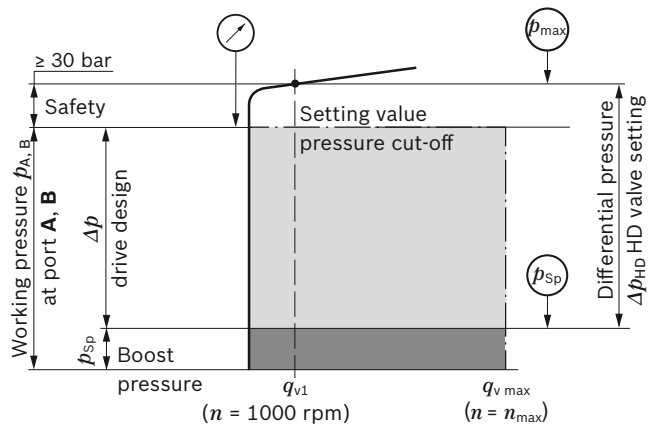

## Pressure cut-off

The pressure cut-off is a pressure control which, after reaching the set pressure, adjusts the displacement of the pump back to  $V_{g \text{ min}}$ .


This valve prevents the operation of the high-pressure relief valves when accelerating or decelerating.

The high-pressure relief valves protect against the pressure peaks which occur during fast swiveling of the swashplate and limit the maximum pressure in the system.

The setting range of the pressure cut-off may be anywhere within the entire working pressure range. However, it must be set 30 bar lower than the setting value of the high-pressure relief valves (see setting diagram, page 55).

Please state the setting value of the pressure cut-off in plain text when ordering.

### ▼ Circuit diagram with pressure cut-off Example: electric control, EP\_D

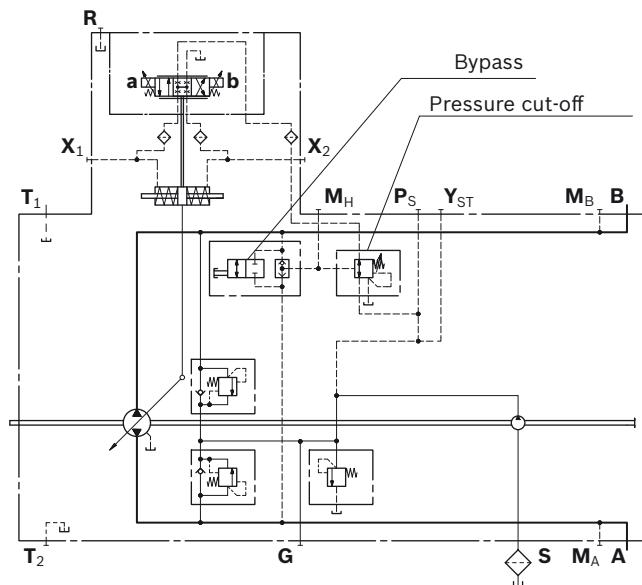

## Bypass function

A connection between the two high-pressure channels **A** and **B** can be established using the bypass valve (e.g. for machine towing).

### Towing speed

The maximum towing speed is dependent on the gear ratio in the vehicle and must be calculated by the vehicle manufacturer. The corresponding flow of  $q_V = 30 \text{ l/min}$  may not be exceeded.

### Towing distance

The vehicle may only be towed out of the immediate danger zone.




### Neutral valve

Actuation of the switching solenoid enables pilot pressure through-flow into the control device of the pump. The pump can be swiveled out. When the solenoid is de-energized, this connection is interrupted and simultaneously the two stroking chambers are connected to each other and relieved to the pump housing. This ensures the pump is torque-free.


The return swivel times can be specifically and precisely adapted to the respective customer application. A second capability for deactivation and therefore making the pump torque-free is therefore realized when the neutral valve is used in safety-critical applications.

Technical data		
Voltage	12 V (±20%)	24 V (±20%)
Neutral position $V_g = 0$	de-energized	de-energized
Position $V_g \text{ max}$	Current switched on	Current switched on
Nominal resistance (at 20 °C)	5.5 Ω	21.7 Ω
Nominal power	26.2 W	26.5 W
Minimum active current required	1.2 A	0.6 A
Duty cycle	100%	100%
Type of protection: see connector version page 65		

#### ▼ Circuit diagram

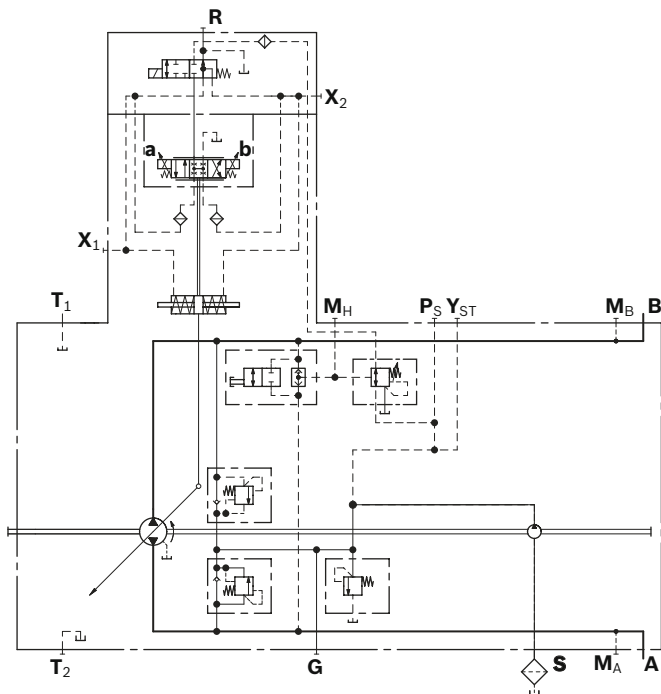

### Dimensions

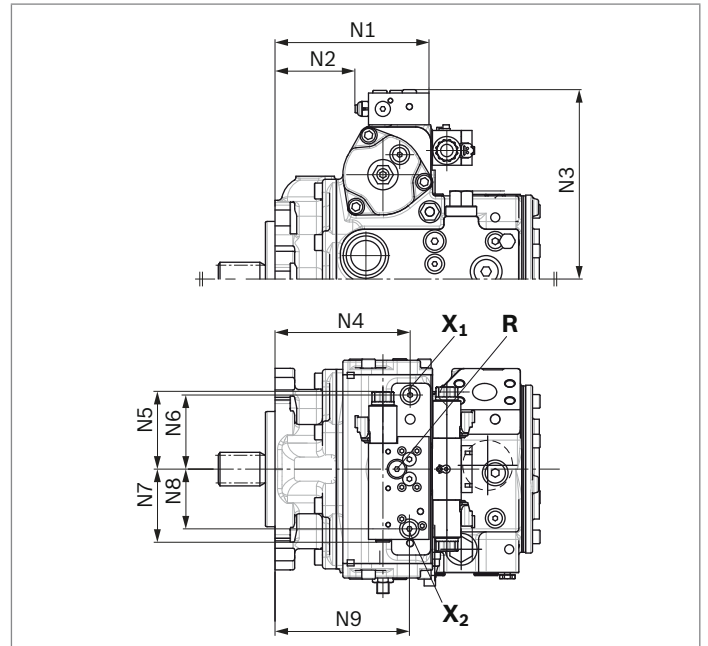


NG	110	125	145	175	210	280
N1	198.4	198.4	203.6	223.4	237.9	258.8
N2	100.7	100.7	105.9	125.7	140.2	161.1
N3	229.8	229.8	250.5	250.5	283	283
N4	173.5	173.5	178.7	198.5	210	230.9
N5	102.5	102.5	102.5	102.5	102.5	102.5
N6	83	83	98	98	112.5	112.5
N7	96.5	96.5	96.5	96.5	96.5	96.5
N8	79	79	79	79	79	79
N9	172.5	172.5	177.7	197.5	212	232.9

## Mechanical stroke limiter


The mechanical stroke limiter is an auxiliary function allowing the maximum displacement of the pump to be steplessly reduced, regardless of the control module used. By means of two threaded pins, the stroke of the stroking piston and thus the maximum swivel angle of the pump can be limited.

### Dimensions

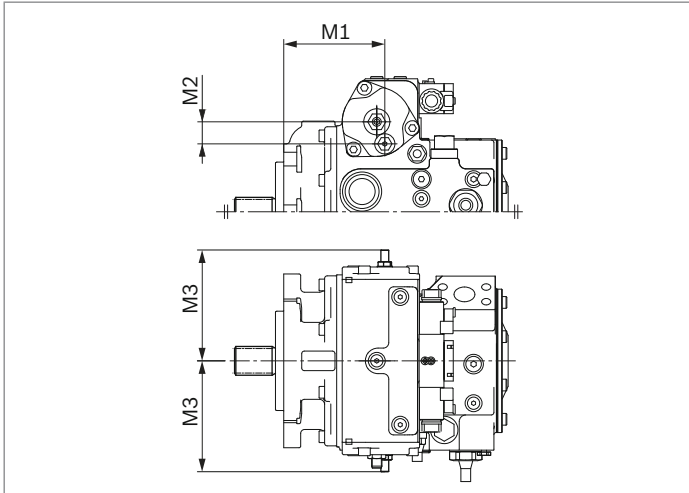


NG	M1	M2	M3
110	153.6	27.7	157.3
125	153.6	27.7	157.3
145	155	33.8	170.1
175	174.8	33.8	170.1
210	183.9	38.1	199.6
280	204.7	38.1	199.6

### ▼ Circuit diagram

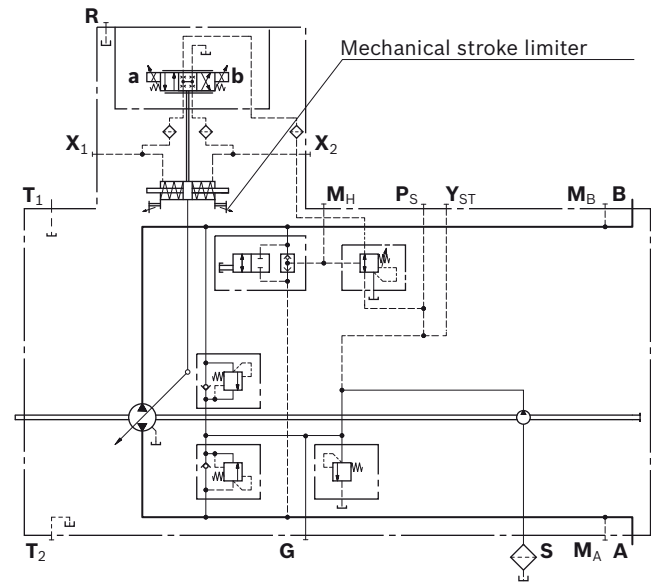


### Stroking chamber pressure port X3 and X4

#### Dimensions

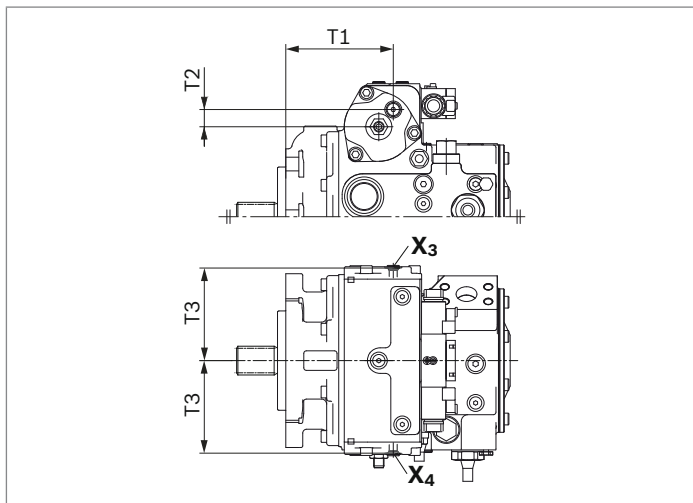

NG	T1	T2	T3
110	161.8	21.8	128
125	161.8	21.8	128
145	164.9	26.4	142
175	184.7	26.4	142
210	195.7	30.6	166
280	216.6	30.6	166

#### ▼ Circuit diagram

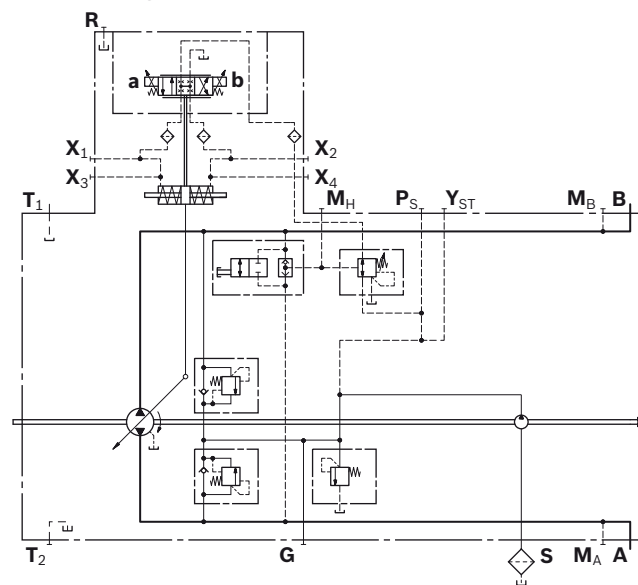

Ports	Standard <sup>1)</sup>	Size	$p_{max}$ [bar] <sup>2)</sup>	State <sup>3)</sup>
X3, X4	ISO 6149	M14 × 1.5; 11.5 deep	40	X

1) The countersink can be deeper than as specified in the standard.  
 2) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.  
 3) X = Plugged (in normal operation)

## Filtration in the boost pump suction line


### Version S

Filter version	Suction filter without bypass
Recommendation	With contamination indicator
Recommended flow resistance at filter element	
At $v = 30 \text{ mm}^2/\text{s}$ , $n = n_{\text{max}}$	$\Delta p \leq 0.1 \text{ bar}$
At $v = 1000 \text{ mm}^2/\text{s}$ , $n = n_{\text{max}}$	$\Delta p \leq 0.3 \text{ bar}$
Pressure at suction port S	
Continuous $p_{S \text{ min}}$ ( $v \leq 30 \text{ mm}^2/\text{s}$ )	$\geq 0.8 \text{ bar absolute}$
Short-term, at a cold start ( $t < 3 \text{ min}$ )	$\geq 0.5 \text{ bar absolute}$
Maximum pressure $p_{S \text{ max}}$	$\leq 5 \text{ bar absolute}$

Use of version S is preferred.

The suction filter is not included in the scope of delivery.

#### ▼ Circuit diagram

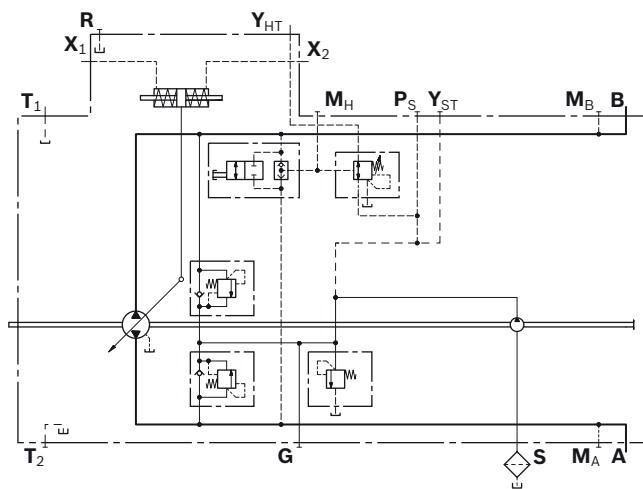

## Filtration in the boost pump pressure line

### Version D

#### Ports for external boost circuit filtration


Ports	
Boost pressure inlet	Port $F_a$
Boost pressure outlet	Port $F_e$
Filter version	Boost pressure filter without bypass
Recommendation	With contamination indicator
Filter arrangement	Separate in the pressure line (inline filter)
Permissible flow resistance at filter element <sup>1)</sup>	
At $v = 30 \text{ mm}^2/\text{s}$	$\Delta p \leq 1 \text{ bar}$
For cold start	$\Delta p \leq 3 \text{ bar}$

#### Notice

- ▶ Filters with a bypass **not recommended**, (exception HT, see below). Please contact us for applications with a bypass.
- ▶ On versions with HT control (with pilot pressure not from a boost circuit), a filter **with** a bypass and **with** a contamination indicator must be used.

The boost pressure filter is not included in the scope of delivery.

#### ▼ Circuit diagram

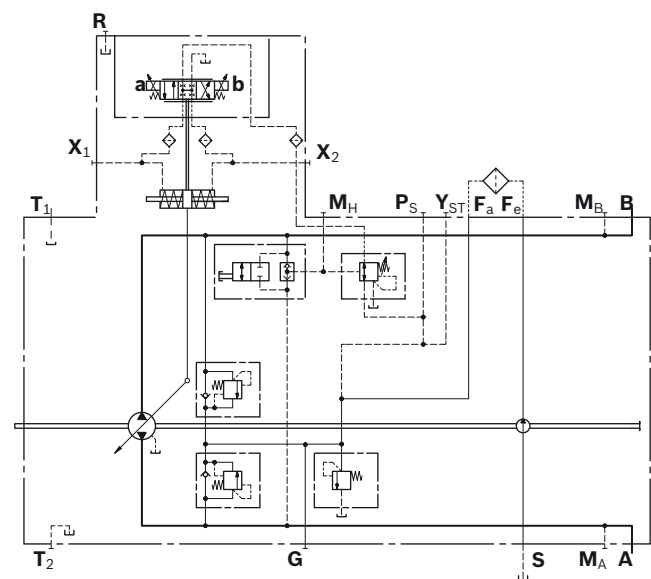

1) Valid for entire speed range  $n_{\text{min}} - n_{\text{max}}$

**Version F<sup>1)</sup>**


**Attachment filter with cold start valve**

Filter version	Attachment filter without bypass
Recommendation	Version with contamination indicator, see B (differential pressure $\Delta p = 5$ bar)
Filter grade (absolute)	20 $\mu\text{m}$
Filter material	Glass fiber
Pressure rating	100 bar
Filter arrangement	Mounted on pump


The attachment filter is equipped with a cold start valve and thereby protects the pump from damage. The valve opens at flow resistance of  $\Delta p \geq 6$  bar.

**▼ Filter characteristics**

Differential pressure/flow characteristics to ISO 3968 (valid for clean filter element).

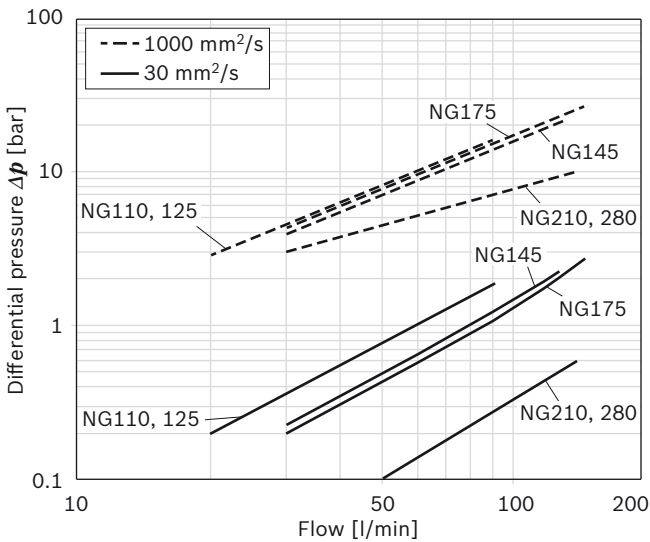

**▼ Circuit diagram**

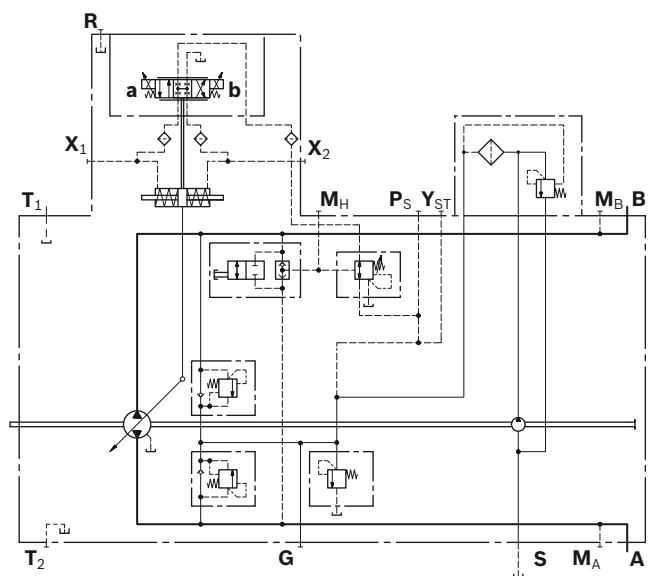


**Version B<sup>1)</sup>**

**Attachment filter with cold start valve and electric contamination indicator**

Filtration similar to version F, however with additional electric contamination indicator.

Technical data	
Display type	electrical
Connector version (mating connector, see page 65)	DEUTSCH DT04-2P-EP04
Differential pressure (switching pressure)	$\Delta p = 5$ bar
Maximum switching capacity	12 V DC 24 W
	24 V DC 48 W
Type of protection	IP67 DIN EN 60529

**▼ Circuit diagram**

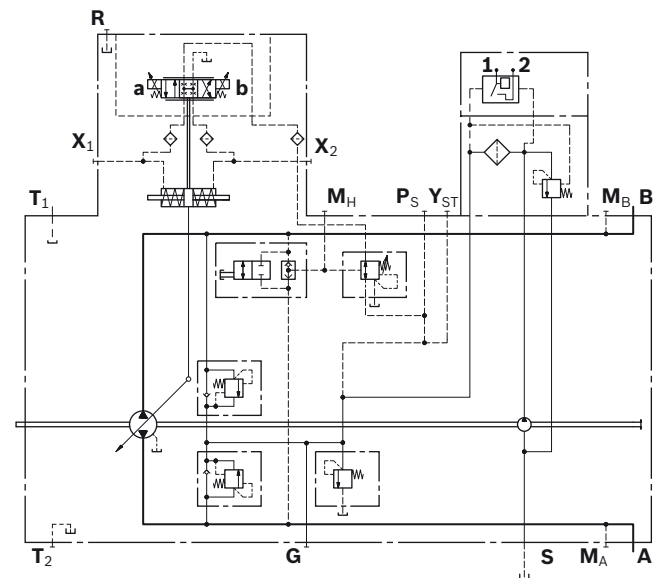

1) If using the filter versions F and B, make sure that a hydraulic fluid with a minimum electrical conductance of 300 pS/m is used. Please contact us if this value cannot be observed.

## External boost pressure supply

### Version E

This variant should be used in versions without integrated boost pump (**U**).


Port **S** is plugged.

The boost pressure supply comes from port **G**.

The filter should be installed separately on port **G** before the boost pressure supply.

To ensure the functional reliability, maintain the required cleanliness level for the boost fluid fed in at port **G** (see page 7).


### ▼ Circuit diagram

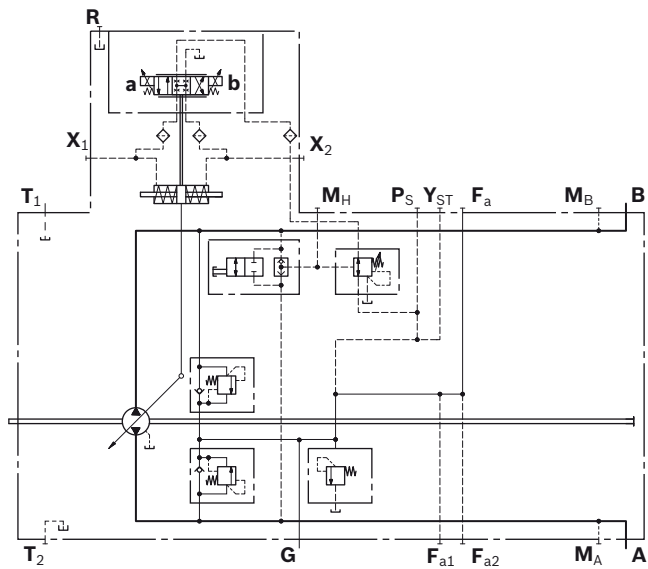

### Dimensions with mounted filter

▼ **Version D**


Ports for external boost circuit filtration

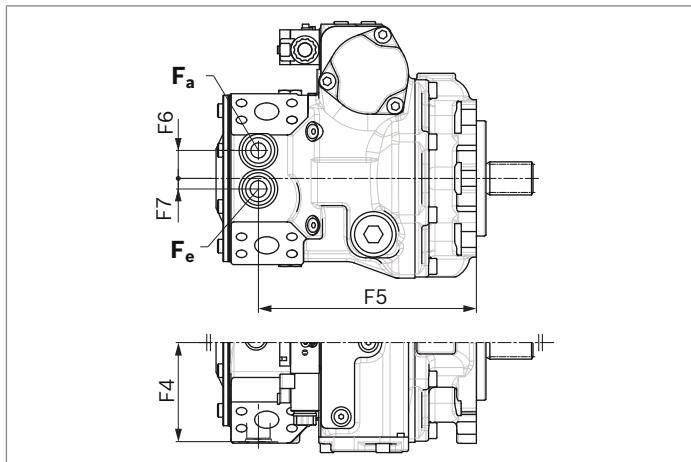

NG	F1	F2	F3	F4	F5	F6	F7	F <sub>a</sub> , F <sub>e</sub> <sup>1)</sup>
<b>110</b>	76.5	229.5	22	121	264.5	37	14	M33 ×2;
<b>125</b>	76.5	229.5	22	121	264.5	37	14	19 deep
<b>145</b>	37.2	239.5	22	131	288.2	37	14	Accord-
<b>175</b>	57	239.5	22	131	308	37	14	ing to
<b>210</b>	69	266.5	22	146.3	325	43	10	ISO6149
<b>280</b>	89.9	266.5	22	146.3	345.9	43	10	


▼ **Version F**

Attachment filter without contamination indicator

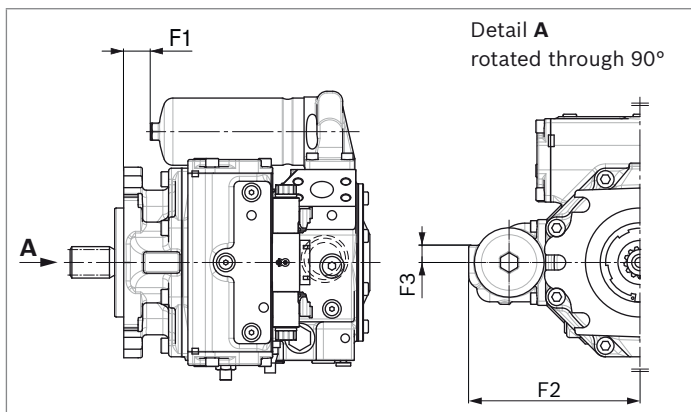

▼ **Version B**

Attachment filter with cold start valve and electric contamination indicator

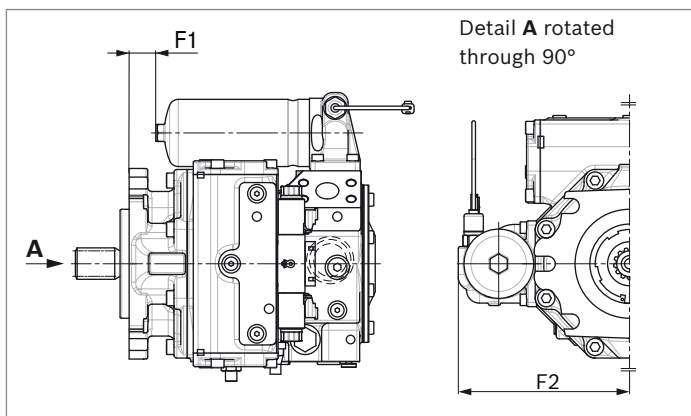

1) The countersink can be deeper than as specified in the standard.



## Swivel angle sensor

The swivel angle sensor is used to detect the swivel angle of axial piston units and thus the displacement using a Hall-effect based sensor IC. The determined measurement value is converted into an analog signal.

Please contact us if the swivel angle sensor is used for control.


Characteristics	
Supply voltage $U_b$	10 to 30 V DC
Output voltage $U_a$	1 V    2.5 V    4 V ( $V_{g \max}$ ) ( $V_{g 0}$ ) ( $V_{g \max}$ )
Reverse polarity protection	Short-circuit resistant
EMC resistance	Details on request
Operating temperature range	-40 °C to +115 °C
Vibration resistance sinusoidal vibration EN 60068-2-6	10 g / 5 to 2000 Hz
Shock resistance: continuous shock IEC 68-2-29	25 g
Salt spray resistance (DIN 50 021-SS)	96 h
Type of protection with installed mating connector	IP67 – DIN EN 60529 IP69K – DIN 40050-9
Housing material	Plastic

### Output voltage


Direction of rotation <sup>1)</sup>	Flow direction	Working pressure	Output voltage at $V_{g 0}$
Clockwise	B to A	$M_A$	>2.5 V
	A to B	$M_B$	<2.5 V
Counter-clockwise	A to B	$M_B$	>2.5 V
	B to A	$M_A$	<2.5 V

### ▼ Circuit diagram

Electric swivel angle sensor

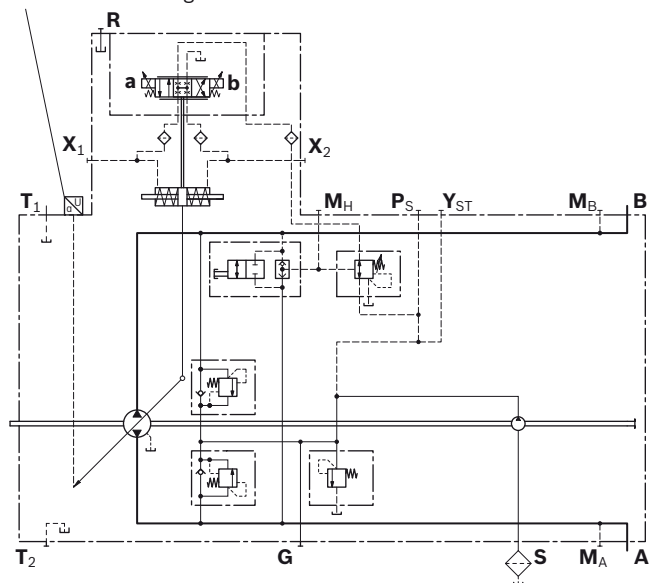

## Dimensions

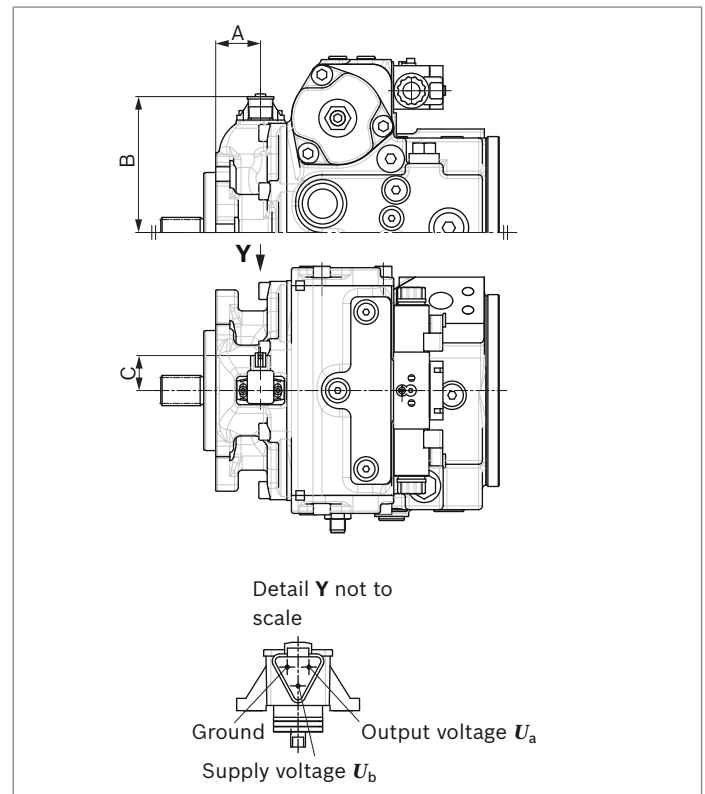

NG	A	B	C
<b>110</b>	51.5	148.8	37
<b>125</b>	51.5	148.8	37
<b>145</b>	53.1	160.8	37
<b>175</b>	64.4	160.8	37
<b>210</b>	69	173.8	37
<b>280</b>	75.1	173.8	37

### Mating connector DEUTSCH DT06-3S-EP04

Consisting of	DT designation
1 housing	DT06-3S-EP04
1 wedge	W3S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902603524).

### Notice

It is not possible to retrofit existing units with a swivel angle sensor.

1) For flow direction, see controls



## Connector for solenoids


### DEUTSCH DT04-2P-EP04

Molded, 2-pin, without bidirectional suppressor diode (standard).

The following type of protection ensues with an installed mating connector:

- ▶ IP67 (DIN EN 60529) and
- ▶ IP69K (DIN 40050-9)

#### ▼ Switching symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).


#### Notice

- ▶ If necessary, you can change the position of the connector by turning the solenoid.
- ▶ The procedure is defined in the instruction manual.

## Speed sensor

With the speed sensor DSA/DSM mounted, a signal proportional to pump speed can be generated. The DSA/DSM sensor measures the speed and direction of rotation. Type code, technical data, dimensions and details on the connector, plus safety instructions about the sensor can be found in the relevant data sheet 95133 – DSA or 95132 – DSM. The sensor is mounted on the port provided for this purpose with a mounting bolt.

### Dimensions

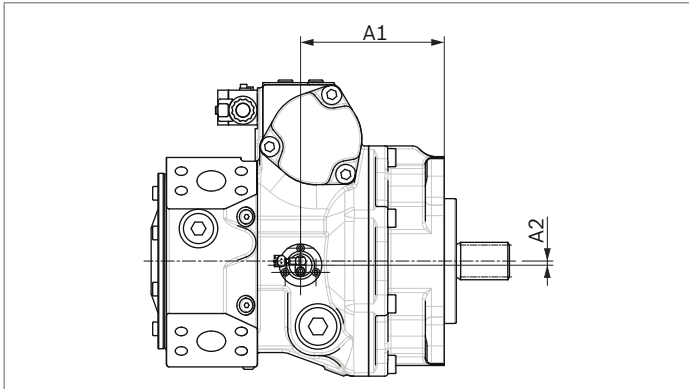

NG	110	125	145	175	210	280
A1	161.5	161.5	181.2	201.0	190	210.9
A2	5.5	5.5	5.5	5.5	5.5	5.5
Number of teeth	53	On request	58	61	64	71


### Installation dimensions for coupling assembly

To ensure that rotating components (coupling hub) and fixed components (housing, snap ring) do not come into contact with each other, the installation conditions described here must be observed. This depends on the pump size and the splined shaft.

#### SAE splined shaft (spline according to ANSI B92.1a)

Splined shaft **V** or **T**


The outer diameter of the coupling hub must be smaller than the inner diameter of the snap ring (dimension  $d_2$ ) in the area near the drive shaft collar (dimension  $x_2 - x_3$ ).

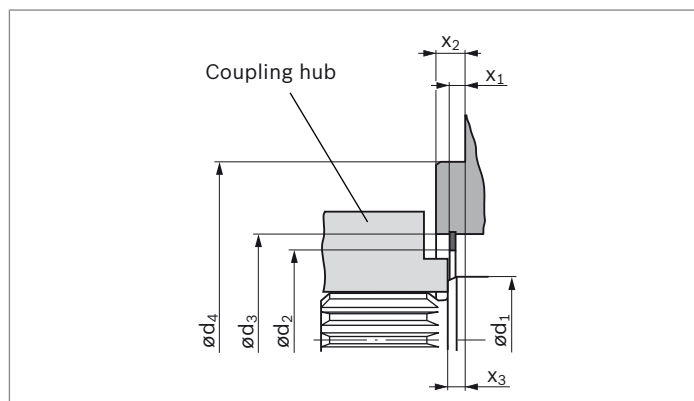

#### DIN splined shaft (spline according to DIN 5480)

Splined shaft **Z** or **A**

The outer diameter of the coupling hub must be smaller than the case diameter  $d_3$  in the area near the drive shaft collar (dimension  $x_2 - x_4$ ).

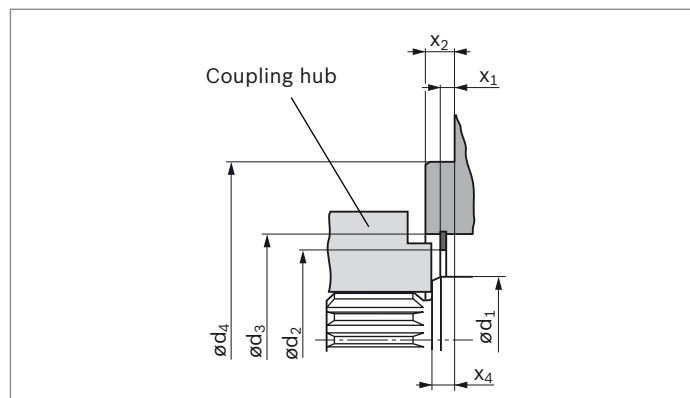

NG	Mounting flange	$\varnothing d_1$	$\varnothing d_{2 \text{ min}}$	$\varnothing d_3$	$\varnothing d_4$	$x_1$	$x_2$	$x_3$	$x_4$
<b>110</b>	127-2/4	55	74.4	101±0.1	127 <sup>0</sup> <sub>-0,063</sub>	4.0	12.7 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
	152-2/4	55	74.4	101±0.1	152.4 <sup>0</sup> <sub>-0,063</sub>	6.0	12.7 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
<b>125</b>	127-2/4	55	74.4	101±0.1	127 <sup>0</sup> <sub>-0,063</sub>	4.0	12.7 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
	152-2/4	55	74.4	101±0.1	152.4 <sup>0</sup> <sub>-0,063</sub>	6.0	12.7 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
<b>145</b>	152-2/4	60	84.4	111±0.1	152.4 <sup>0</sup> <sub>-0,063</sub>	7.4	12.7 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
<b>175</b>	152-2/4	60	84.4	111±0.1	152.4 <sup>0</sup> <sub>-0,063</sub>	7.0	12.7 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
	165-4	60	84.4	111±0.1	165.1 <sup>0</sup> <sub>-0,063</sub>	7.0	15.9 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
<b>210</b>	165-4	65	94.4	121±0.1	165.1 <sup>0</sup> <sub>-0,063</sub>	5.5	15.9 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>
<b>280</b>	165-4	65	94.4	121±0.1	165.1 <sup>0</sup> <sub>-0,063</sub>	7.0	15.9 <sub>-0.5</sub>	8 <sup>+0.9</sup> <sub>-0.6</sub>	10 <sup>+0.9</sup> <sub>-0.6</sub>

## Installation instructions

### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines.

Particularly in the installation position “drive shaft upwards”, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running. The leakage in the housing area must be directed to the reservoir via the highest drain port (**T<sub>1</sub>**, **T<sub>2</sub>**).

For combination pumps, the leakage must be drained off at each pump.

If a shared drain line is used for several units, make sure that the respective case pressure is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operating conditions, specifically on cold start. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

Under all operating conditions, the suction line and drain line must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure. However, it must not be higher than  $h_{s\ max} = 800\ \text{mm}$ .

The suction pressure at port **S** must also not fall below the minimum value of 0.8 bar absolute during operation (cold start 0.5 bar absolute).

### Installation position

See the following examples 1 to 12.

Further installation positions are available upon request.

Recommended installation position: 1 and 2.


### Notice

- ▶ If filling the stroking chambers via **X<sub>1</sub>** to **X<sub>4</sub>** is not possible in the final installation position, then this must take place before installation, e.g. in installation position 2.
- ▶ To prevent unexpected actuation and damage, the stroking chambers must be air bled via the ports **X<sub>1</sub>**, **X<sub>2</sub>**, or **X<sub>3</sub>**, **X<sub>4</sub>** depending on the installation position.
- ▶ In certain installation positions, an influence on the control or closed loop control can be expected. Gravity, dead weight and case pressure can cause minor shifts in control characteristic curves and changes in response time.


### Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir and below the minimum fluid level of the reservoir.

Installation position	Air bleeding the housing	Air bleeding the stroking chamber	Filling
1	R	X <sub>1</sub> , X <sub>2</sub>	S + T <sub>1</sub> + X <sub>1</sub> + X <sub>2</sub>




2	-	-	S + T <sub>2</sub>
---	---	---	--------------------




Installation position	Air bleeding the housing	Air bleeding the stroking chamber	Filling
-----------------------	--------------------------	-----------------------------------	---------


**3**      -      **X<sub>1</sub>, X<sub>2</sub>**      **S + T<sub>2</sub> + X<sub>1</sub> + X<sub>2</sub>**




**4**      **R<sub>1</sub>**      **X<sub>3</sub>, X<sub>4</sub>**      **S + T<sub>1</sub> + X<sub>3</sub> + X<sub>4</sub>**



**5**      -      **X<sub>3</sub>**      **S + T<sub>2</sub> + X<sub>3</sub>**



**6**      -      **X<sub>4</sub>**      **S + T<sub>1</sub> + X<sub>4</sub>**



**Above-reservoir installation**


Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.

Observe the maximum permissible suction height  $h_{S \max} = 800 \text{ mm}$ .


Recommendation for installation position 10 (drive shaft upward): A check valve in the drain line (cracking pressure 0.5 bar) can prevent the housing area from draining.

Installation position	Air bleeding the housing	Air bleeding the stroking chamber	Filling
-----------------------	--------------------------	-----------------------------------	---------


**7**      **F<sub>2</sub> + R**      **X<sub>1</sub>, X<sub>2</sub>**      **F<sub>1</sub> + F<sub>2</sub> + X<sub>1</sub> + X<sub>2</sub>**




**8**      **F<sub>2</sub> (S) + F<sub>1</sub> (T<sub>2</sub>)**      -      **F<sub>2</sub> (S) + F<sub>1</sub> (T<sub>2</sub>)**




**9**      **F<sub>2</sub> (S) + F<sub>1</sub> (T<sub>2</sub>)**      **X<sub>1</sub>, X<sub>2</sub>**      **F<sub>2</sub> (S) + F<sub>1</sub> (T<sub>2</sub>) + X<sub>1</sub> + X<sub>2</sub>**




Installation position	Air bleeding the housing	Air bleeding the stroking chamber	Filling
<b>10</b>	$F_2 + R_1$	$X_3, X_4$	$F_1 + F_2 + X_3 + X_4$



<b>11</b>	$F_2 (S) + F_1 (T_2)$	$X_3$	$F_2 (S) + F_1 (T_2) + X_3$
-----------	-----------------------	-------	-----------------------------



<b>12</b>	$F_2 (S) + F_1 (T_1)$	$X_4$	$F_2 (S) + F_1 (T_1) + X_4$
-----------	-----------------------	-------	-----------------------------



Key	
$F_1, F_2$	Filling / air bleeding
$R$	Air bleed port
$S$	Suction port
$T_1, T_2$	Drain port
$X_1, X_2$	Control pressure port
$X_3, X_4$	Stroking chamber pressure port
$SB$	Baffle (baffle plate)
$h_{t \min}$	Minimum required immersion depth (200 mm)
$h_{\min}$	Minimum required distance to reservoir bottom (100 mm)
$h_{S \max}$	Maximum permissible suction height (800 mm)

#### Notice

Ports  $F_1$  and  $F_2$  are part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

## Project planning notes

- ▶ The pump A4VG is designed to be used in closed circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the instruction manual.
- ▶ Not all versions of the product are approved for use in a safety function according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference.  
Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.
- ▶ The pressure cut-off is not a safeguard against pressure overload. Be sure to add a pressure relief valve to the hydraulic system.
- ▶ Please note the details regarding the tightening torques of port threads and other threaded joints in the instruction manual.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports are only intended to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of getting burnt on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances get stuck in position as a result of contamination (e.g. impure hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filtration) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to set the consumer being driven to a safe position (e.g. safe stop) and if necessary to ensure it is properly implemented.
- ▶ Moving parts in high-pressure relief valves may in certain circumstances become stuck in an undefined position due to contamination (e.g. impure hydraulic fluid). This can result in restriction or loss of the load holding function in lifting winches.

The machine/system manufacturer must check whether additional measures are required on the machine for the relevant application in order to keep the load in a safe position and ensure they are properly implemented.

**Bosch Rexroth AG**  
Mobile Applications  
Glockeraustraße 4  
89275 Elchingen, Germany  
Tel. +49 7308 82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© Bosch Rexroth AG 2016. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.




# Axial Piston Variable Pump A4VTG

RE 92013/06.09  
Replaces: 04.08

1/24

## Data sheet

Series 33  
 Sizes NG71, 90  
 Nominal pressure 400 bar  
 Maximum pressure 450 bar  
 Closed circuit  
 For the drum drive in mobile concrete mixers

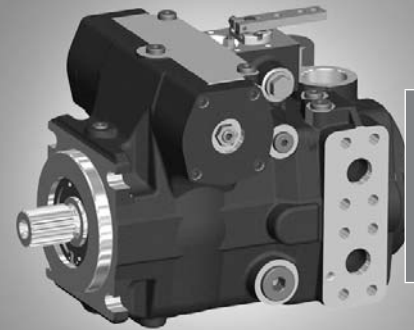

4

## Inhalt

Ordering code for standard program	2
Technical data	4
HW – Proportional control hydraulic, mechanical servo	9
EP – Proportional control electric	10
Dimensions size 71	12
Dimensions size 90	14
Through drive dimensions	16
Overview of attachments	17
High-pressure relief valves	17
Mechanical stroke limiter	18
Ports X <sub>3</sub> and X <sub>4</sub> for stroking chamber pressure	18
Filtration boost circuit	19
Connector for solenoids	20
Installation situation for coupling assembly	21
Installation instructions	22
General instructions	24

## Features

- Variable axial piston pump of swashplate design for hydrostatic drives in closed circuit
- The flow is proportional to the drive speed and displacement.
- The flow increases as the angle of the swashplate is adjusted from zero to its maximum value.
- Flow direction changes smoothly when the swashplate is moved through the neutral position.
- Two pressure-relief valves are provided on the high pressure ports to protect the hydrostatic transmission (pump and motor) from overload.
- The high-pressure relief valves also function as boost valves.
- The integrated boost pump acts as a feed pump and control pressure supply.
- The maximum boost pressure is limited by a built-in boost pressure-relief valve.

# Ordering code for standard program

<b>A4VT</b>	<b>G</b>					/	<b>33</b>	<b>M</b>		<b>N</b>	<b>C4</b>			<b>F</b>		<b>A</b>	<b>S</b>	
01	02	03	04	05	06		07	08	09	10	11	12	13	14	15	16	17	18

## Axial piston unit

01	Swashplate design, variable, nominal pressure 400 bar, maximum pressure 450 bar, mobile concrete mixers																<b>A4VT</b>
----	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	-------------

## Operation mode

02	Pump, closed circuit																<b>G</b>
----	----------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----------

## Size

03	Displacement $V_{g,max}$ in $cm^3$														<b>071</b>	<b>090</b>
----	------------------------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	------------	------------

## Control device

		<b>071</b>	<b>090</b>	
04	Proportional control hydraulic, mechanical servo, hexagon shaft with lever to the rear	●	●	HW1 <sup>1)</sup>
	Proportional control electric, with emergency actuation and spring return	●	●	EP3
		●	●	EP4

## Connector for solenoids<sup>2)</sup>

		<b>071</b>	<b>090</b>	
05	Without	●	●	0
	DEUTSCH - molded connector, 2-pin – without suppressor diode	●	●	P

## Auxiliary functions

		<b>071</b>	<b>090</b>	
06	Without	●	●	0
	With mechanical stroke limiter, externally adjustable	●	●	M
	With ports $X_3$ , $X_4$ for stroking chamber pressure	●	●	T
	With mechanical stroke limiter and ports $X_3$ , $X_4$	●	●	B

## Series

07	Series 3, Index 3																<b>33</b>
----	-------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	-----------

## Version of port and fixing threads

08	Metric																<b>M</b>
----	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----------

## Direction of rotation

09	Viewed from drive shaft	clockwise		<b>R</b>
		counter-clockwise		<b>L</b>

## Seals

10	NBR (nitrile-caoutchouc), shaft seal ring in FKM (fluor-caoutchouc)																<b>N</b>
----	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----------

## Mounting flange

11	SAE J744, 127-4																<b>C4</b>
----	-----------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	-----------

## Drive shaft

		<b>071</b>	<b>090</b>			
12	Splined shaft ANSI B92.1a-1976	1 3/8 in 21T 16/32DP	without coupling flange	●	-	<b>V8</b>
			with coupling flange	●	-	<b>C8</b>
	1 1/2 in 23T 16/32DP	without coupling flange	-	●	<b>V9</b>	
		with coupling flange	-	●	<b>C9</b>	

## Service line ports

		<b>071</b>	<b>090</b>			
13	SAE flange port	left	Suction port S at bottom	○	○	<b>1</b>
	A and B on same side	right	Suction port S at top	●	●	<b>2</b>

● = Available      ○ = On request      - = Not available

1) Mounting position of the lever not specified on delivery, to be aligned by the customer

2) Connectors for other electric components can deviate.

## Ordering code for standard program

<b>A4VT</b>	<b>G</b>					/	<b>33</b>	<b>M</b>		<b>N</b>	<b>C4</b>			<b>F</b>		<b>A</b>	<b>S</b>	
01	02	03	04	05	06		07	08	09	10	11	12	13	14	15	16	17	18

### Boost pump

14	With integrated boost pump	<b>F</b>
----	----------------------------	----------

### Through drive

15	Flange SAE J744			Coupling for splined shaft <sup>1)</sup>			071	090	
	Diameter	Mounting variant		Diameter	Designation				
		Symbol	Designation						
	Without						●	●	0000
	82-2	∞	A2	5/8 in 9T	16/32DP	S2	●	●	A2S2
	101-2	∞	B2	7/8 in 13T	16/32DP	S4	●	●	B2S4

### High-pressure valves

16	With high-pressure relief valve, direct controlled	<b>A</b>
----	--	----------

### Filtration boost circuit

17	Filtration in the boost pump suction line	<b>S</b>
----	---	----------

### Standard / special version

18	Standard version		<b>-0</b>
		combined with attachment part or attachment pump	<b>-K</b>
	Special version		<b>-S</b>
		combined with attachment part or attachment pump	<b>-T</b>

### Note

Short designation X refers to a special version not covered by the ordering code.

● = Available      ○ = On request      – = Not available

<sup>3)</sup> Coupling for splined shaft acc. ANSI B92.1a-1976

# Technical data

## Hydraulic fluid


Before starting project planning, please refer to our data sheets RE 90220 (mineral oil) and RE 90221 (environmentally acceptable hydraulic fluids) for detailed information regarding the choice of hydraulic fluids and application conditions.

The A4VTG variable pump is not suitable for operation with HFA, HFB and HFC. If HFD or environmentally acceptable hydraulic fluids are being used, the limitations regarding technical data and seals must be observed.

Please contact us.

When ordering, indicate the hydraulic fluid that is to be used.

### Selection diagram

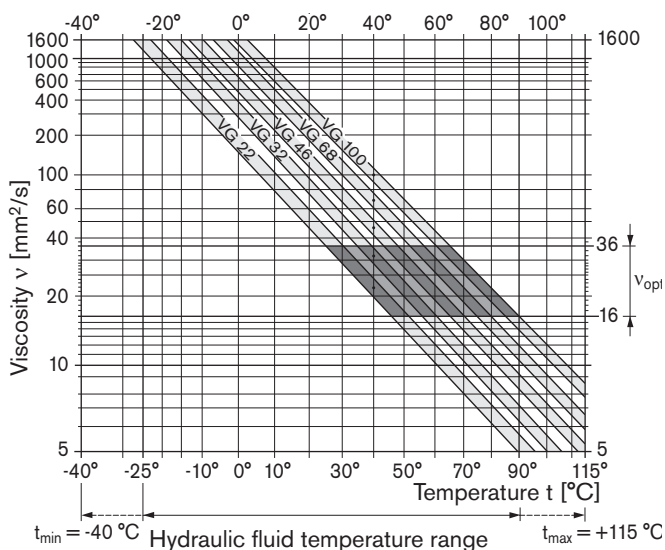

### Details regarding the choice of hydraulic fluid

The correct choice of hydraulic fluid requires knowledge of the operating temperature in relation to the ambient temperature: in a closed circuit the circuit temperature.

The hydraulic fluid should be chosen so that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$ ), see shaded area of the selection diagram. We recommended that the higher viscosity class be selected in each case.

Example: At an ambient temperature of  $X$  °C, an operating temperature of 60 °C is set in the circuit. In the optimum operating viscosity range ( $v_{opt}$ , shaded area), this corresponds to the viscosity classes VG 46 or VG 68; to be selected: VG 68.

### Note

The case drain temperature, which is affected by pressure and speed, is always higher than the circuit temperature. At no point of the component may the temperature be higher than 115 °C, however. The temperature difference specified below is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact us.

### Viscosity and temperature

	Viscosity [mm <sup>2</sup> /s]	Temperature	Comment
Storage		$T_{min} \geq -50$ °C $T_{opt} = +5$ °C to $+20$ °C	up to 12 months with standard factory conservation up to 24 months with long-term factory conservation
(Cold) start-up <sup>1)</sup>	$v_{max} = 1600$	$T_{St} \geq -40$ °C	$t \leq 3$ min, without load ( $p \leq 50$ bar), $n \leq 1000$ rpm
Permissible temperature difference		$\Delta T \leq 25$ K	between axial piston unit and hydraulic fluid
Warm-up phase	$v < 1600$ to 400	$T = -40$ °C to $-25$ °C	at $p_{nom}$ , $0.5 \cdot n_{nom}$ and $t \leq 15$ min
Operating phase		$\Delta T = \text{approx. } 5$ K	The temperature of the hydraulic fluid in the bearing is (depending on pressure and speed) approx. 5 K higher than that of the case drain fluid at port T.
Continuous operation	$v = 400$ to 10 $v_{opt} = 16$ to 36	$T = -25$ °C to $+90$ °C	no restriction within the permissible data
Short-term operation	$v_{min} = < 10$ to 5	$T_{max} = +115$ °C	$t < 3$ min, $p < 0.3 \cdot p_{nom}$
Shaft seal ring FKM <sup>1)</sup>		$T \leq +115$ °C	see page 5

1) At temperatures below  $-25$  °C, an NBR shaft seal ring is required (permissible temperature range:  $-40$  °C to  $+90$  °C)

## Technical data

### Filtration of the hydraulic fluid

Filtration improves the cleanliness level of the hydraulic fluid, which, in turn, increases the service life of the axial piston unit.

To ensure the functional reliability of the axial piston unit, a gravimetric evaluation is necessary for the hydraulic fluid to determine the amount of contamination by solid matter and to determine the cleanliness level according to ISO 4406. A cleanliness level of at least 20/18/15 is to be maintained.

Depending on the system and the application, for the A4VTG, we recommend

Filter cartridges  $\beta_{20} \geq 100$ .

With an increasing differential pressure at the filter cartridges, the  $\beta$ -value must not deteriorate.

At very high hydraulic fluid temperatures (90 °C to maximum 115 °C), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.


If the above classes cannot be achieved, please contact us. For notes on filtration types, see page 16.

### Shaft seal ring

#### Permissible pressure loading

The service life of the shaft seal ring is affected by the speed of the pump and the case drain pressure. It is recommended that the average, continuous case drain pressure 3 bar absolute at operating temperature not be exceeded (maximum permissible case drain pressure 6 bar absolute at reduced speed, see diagram). Short-term ( $t < 0.1$  s) pressure spikes of up to 10 bar absolute are permitted. The service life of the shaft seal ring decreases with an increase in the frequency of pressure spikes.

The case pressure must be equal to or greater than the external pressure on the shaft seal ring.

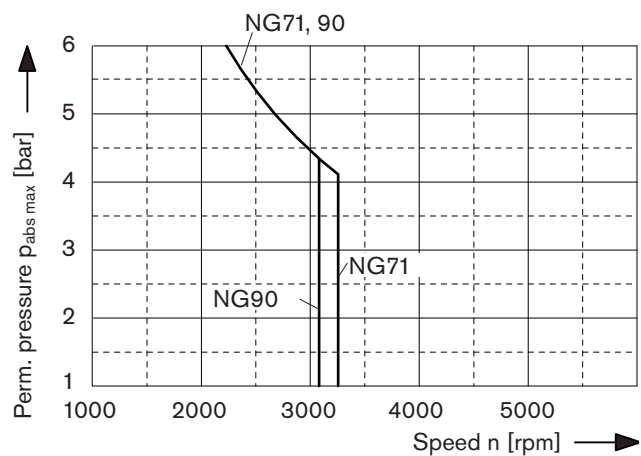

#### Temperature range

The FKM shaft seal ring may be used for case drain temperatures from -25 °C to +115 °C.

#### Note

For application cases below -25 °C, an NBR shaft seal ring is necessary (permissible temperature range: -40 °C to +90 °C). State NBR shaft seal ring in plain text when ordering. Please contact us.

# Technical data

## Operating pressure range

### Pressure at service line port A or B

Nominal pressure  $p_{nom}$  \_\_\_\_\_ 400 bar absolute

Maximum pressure  $p_{max}$  \_\_\_\_\_ 450 bar absolute


Single operating period \_\_\_\_\_ 10 s

Total operating period \_\_\_\_\_ 300 h

Minimum pressure (high-pressure side) \_\_\_\_\_ 25 bar

Minimum pressure (inlet) \_\_\_\_\_ 10 bar  
(boost pressure setting must be higher depending on system)

Rate of pressure change  $R_{A\ max}$  \_\_\_\_\_ 9000 bar/s

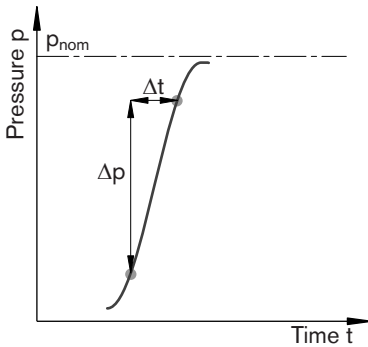

### Boost pump

#### Pressure at suction port S

Duration  $p_{S\ min}$  ( $v \leq 30\ mm^2/s$ ) \_\_\_\_\_  $\geq 0.8$  bar absolute

at cold starts, short-term ( $t < 3\ min$ ) \_\_\_\_\_  $\geq 0.5$  bar absolute

Maximum  $p_{S\ max}$  \_\_\_\_\_  $\leq 5$  bar absolute

Standard adjustment  $p_{Sp}$  (at  $n = 1500\ rpm$ ) \_\_\_\_\_ 22 bar

Nominal pressure  $p_{Sp\ nom}$  \_\_\_\_\_ 30 bar

Maximum pressure  $p_{Sp\ max}$  \_\_\_\_\_ 40 bar

### Control pressure

To ensure the function of the control, the following control pressure is required depending on the speed and operating pressure (measurement point, port  $P_S$ ):

For controls EP and HW

Minimum control pressure  $p_{St\ min}$  (at  $n = 1500\ rpm$ ) \_\_\_\_\_ 22 bar

### Definition

#### Nominal pressure $p_{nom}$

The nominal pressure corresponds to the maximum design pressure.

#### Maximum pressure $p_{max}$

The maximum pressure corresponds the maximum operating pressure within the single operating period. The sum of the single operating period must not exceed the total operating period.

#### Minimum pressure (high-pressure side)


Minimum pressure on the high-pressure side (A or B) that is required in order to prevent damage to the axial piston unit.

#### Minimum pressure (inlet)

Minimum pressure in inlet (A or B) that is required in order to prevent damage to the axial piston unit.

#### Rate of pressure change $R_A$

Maximum permissible rate of pressure build-up and pressure reduction during a pressure change over the entire pressure range.

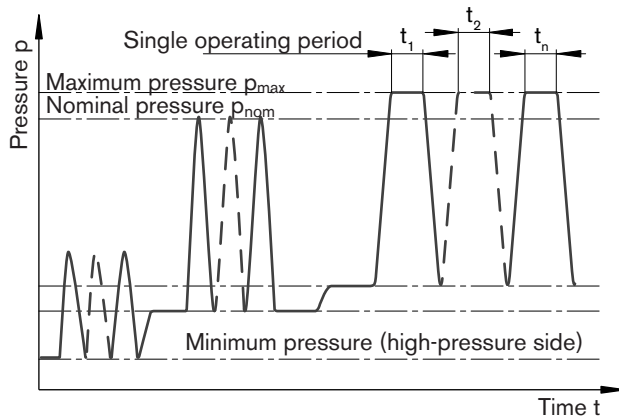

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

# Technical data

**Table of values** (theoretical values, without efficiency levels and tolerances; values rounded)

Size	NG		71	90		
Displacement	variable pump	$V_{g \max}$	cm <sup>3</sup>	71	90	
	boost pump (at p = 20 bar)	$V_{g \text{ Sp}}$	cm <sup>3</sup>	20.5	27	
Speed	at $V_{g \max}$	$n_{\text{nom}}$	rpm	3300	3050	
	minimum	$n_{\text{min}}$	rpm	500	500	
Flow	at $n_{\text{nom}}$ H and $V_{g \max}$	$q_{v \max}$	l/min	234	275	
Power <sup>1)</sup>	at $n_{\text{nom}}$ H, $V_{g \max}$	$\Delta p = 400$ bar	$P_{\max}$	kW	156	183
Torque <sup>1)</sup>	at $V_{g \max}$ and	$\Delta p = 400$ bar	$T_{\max}$	Nm	452	573
		$\Delta p = 100$ bar	T	Nm	113	143
Rotary stiffness	drive shaft V8	c	Nm/rad	120900	–	
	drive shaft V9	c	Nm/rad	–	150896	
Moment of inertia for rotary group		$J_{GR}$	kgm <sup>2</sup>	0.0097	0.0149	
Maximum angular acceleration <sup>2)</sup>		$\alpha$	rad/s <sup>2</sup>	21000	18000	
Filling capacity		V	L	1.3	1.2	
Mass approx. (without through drive)		m	kg	51	53	

1) Without boost pump

2) The area of validity lies between the minimum required and maximum permissible speed.

It applies for external stimuli (e. g. engine 2 to 8 times rotary frequency, cardan shaft twice the rotary frequency).

The limit value applies for a single pump only.

The load capacity of the connection parts must be considered.

## Note



Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. We recommend testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.

## Determining the size

Flow	$q_v = \frac{V_g \cdot n \cdot \eta_v}{1000}$	[L/min]	$V_g$ = Displacement per revolution in cm <sup>3</sup>
			$\Delta p$ = Differential pressure in bar
Torque	$T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{mh}}$	[Nm]	n = Speed in rpm
			$\eta_v$ = Volumetric efficiency
Power	$P = \frac{2 \pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t}$	[kW]	$\eta_{mh}$ = Mechanical-hydraulic efficiency
			$\eta_t$ = Total efficiency ( $\eta_t = \eta_v \cdot \eta_{mh}$ )

# Technical data

## Permissible radial and axial loading on drive shaft

Size		NG		71	90
Drive shaft			in	1 3/8	1 1/2
Radial force maximum at distance a (from shaft collar)		$F_{q \max}$	N	5600	7100
		a	mm	24	24
Axial force maximum		$+F_{ax \max}$	N	4242	4330
		$-F_{ax \max}$	N	2758	2670

### Note

Special requirements apply in the case of belt drives. Please contact us.

Force-transfer direction of the permissible axial force:

+  $F_{ax \max}$  = Increase in service life of bearings

-  $F_{ax \max}$  = Reduction in service life of bearings (avoid)

## Permissible input and through-drive torques

Size		NG		71	90
Torque at $V_{g \max}$ and $\Delta p = 400 \text{ bar}$ ) <sup>1)</sup>		$T_{\max}$	Nm	452	573
Input torque at drive shaft, maximum <sup>2)</sup>	<b>V8</b>	1 3/8 in	$T_{E \max}$	970	-
	<b>V9</b>	1 1/2 in	$T_{E \max}$	-	1305
Maximum through-drive torque		$T_{D \max}$	Nm	250	250

1) Efficiency not considered


2) For drive shafts with no radial force



# HW – Proportional control hydraulic, mechanical servo

The output flow of the pump can be steplessly varied in the range between 0 to 100 %, proportional to the rotation of the control lever between 0° and ±29°.

A feedback lever connected to the stroke piston maintains the pump flow for any given position of the control lever between 0° and 29°.

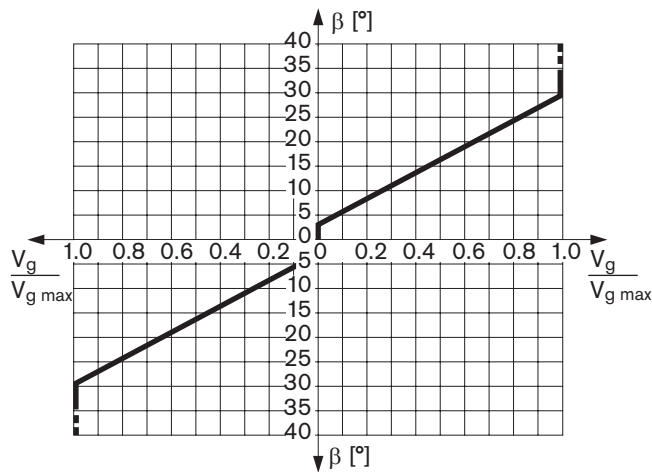

Swivel angle  $\beta$  at the control lever for deflection:

Start of control at  $\beta = 3^\circ$

End of control at  $\beta = 29^\circ$  (maximum displacement  $V_{g\ max}$ )

Mechanical stop for  $\beta: \pm 40^\circ$


The maximum required torque at the lever is 170 Ncm. To prevent damage to the HW control unit, a positive mechanical stop must be provided for the HW control lever.

**Note**


Spring centering enables the pump, depending on pressure and speed, to move automatically to the neutral position ( $V_g = 0$ ) as soon as there is no longer any torque on the control lever of the HW control unit (regardless of deflection angle).

**Assignment**  
Direction of rotation - Control - Flow direction

	Lever direction	Control pressure	Flow direction	Operating pressure
Direction of rotation clock-wise	a	X <sub>2</sub>	B to A	M <sub>A</sub>
	b	X <sub>1</sub>	A to B	M <sub>B</sub>
Direction of rotation counter-clock-wise	a	X <sub>2</sub>	A to B	M <sub>B</sub>
	b	X <sub>1</sub>	B to A	M <sub>A</sub>

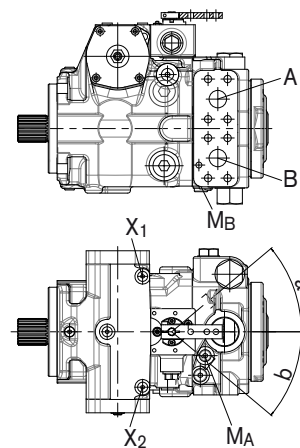

**Circuit diagram**

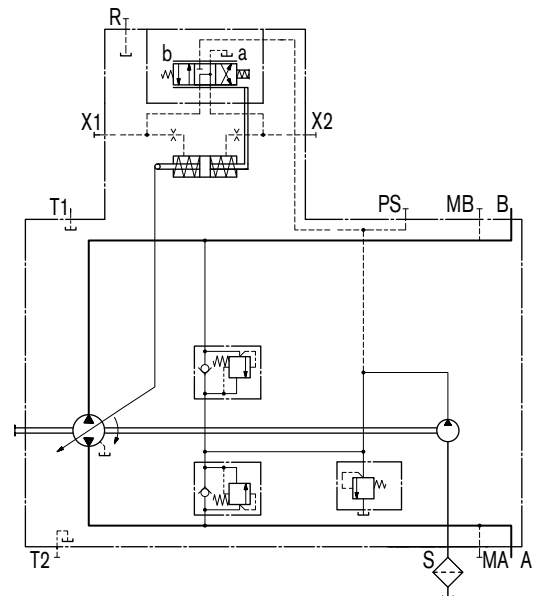


# EP – Proportional control electric

The output flow of the pump can be steplessly varied in the range between 0 to 100 %, proportional to the electrical current supplied to solenoid a or b.

The electrical energy is converted into a force acting on the control piston. This control piston then directs control hydraulic fluid into and out of the stroke cylinder to adjust pump displacement as required.

A feedback lever connected to the stroke piston maintains the pump flow for any given current within the control range.

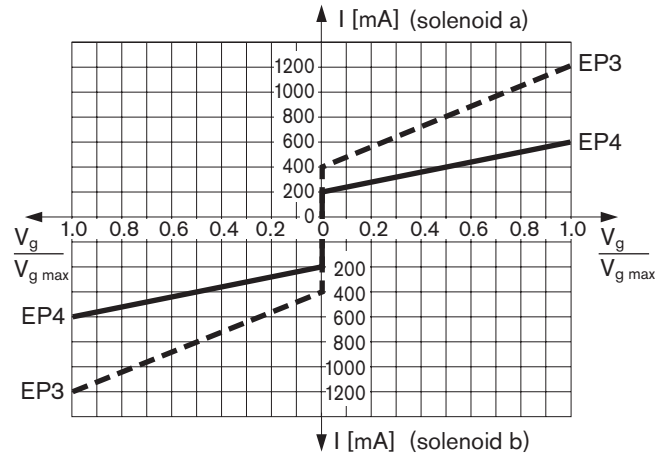

Technical data, solenoid	EP3	EP4
Voltage	12 V (±20 %)	24 V (±20 %)
Start of control at $V_{g0}$	400 mA	200 mA
End of control at $V_{gmax}$	1200 mA	600 mA
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	22.7 Ω
Dither frequency	100 Hz	100 Hz
Actuated time	100 %	100 %

Type of protection see connector design, page 20


The following electronic controllers and amplifiers are available for controlling the proportional solenoids:

- BODAS controller RC
  - Series 20 \_\_\_\_\_ RE 95200
  - Series 21 \_\_\_\_\_ RE 95201
  - Series 22 \_\_\_\_\_ RE 95202
  - Series 30 \_\_\_\_\_ RE 95203
 and application software
- Analog amplifier RA \_\_\_\_\_ RE 95230

Further information can also be found on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics).

**Assignment**  
Direction of rotation – Control – Flow direction

	Actuation of solenoid	Control pressure	Flow direction	Operating pressure
Direction of rotation clockwise	b	$X_2$	B to A	$M_A$
	a	$X_1$	A to B	$M_B$
Direction of rotation counter-clockwise	b	$X_2$	A to B	$M_B$
	a	$X_1$	B to A	$M_A$

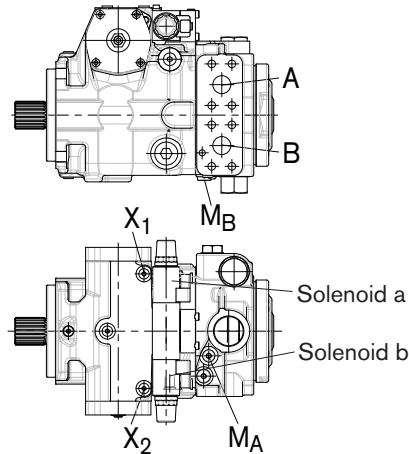




# Dimensions size 71

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## HW – Proportional control hydraulic, mechanical servo

Standard: suction port S at top (02)


Option: suction port S at bottom (01): port plate turned through 180°

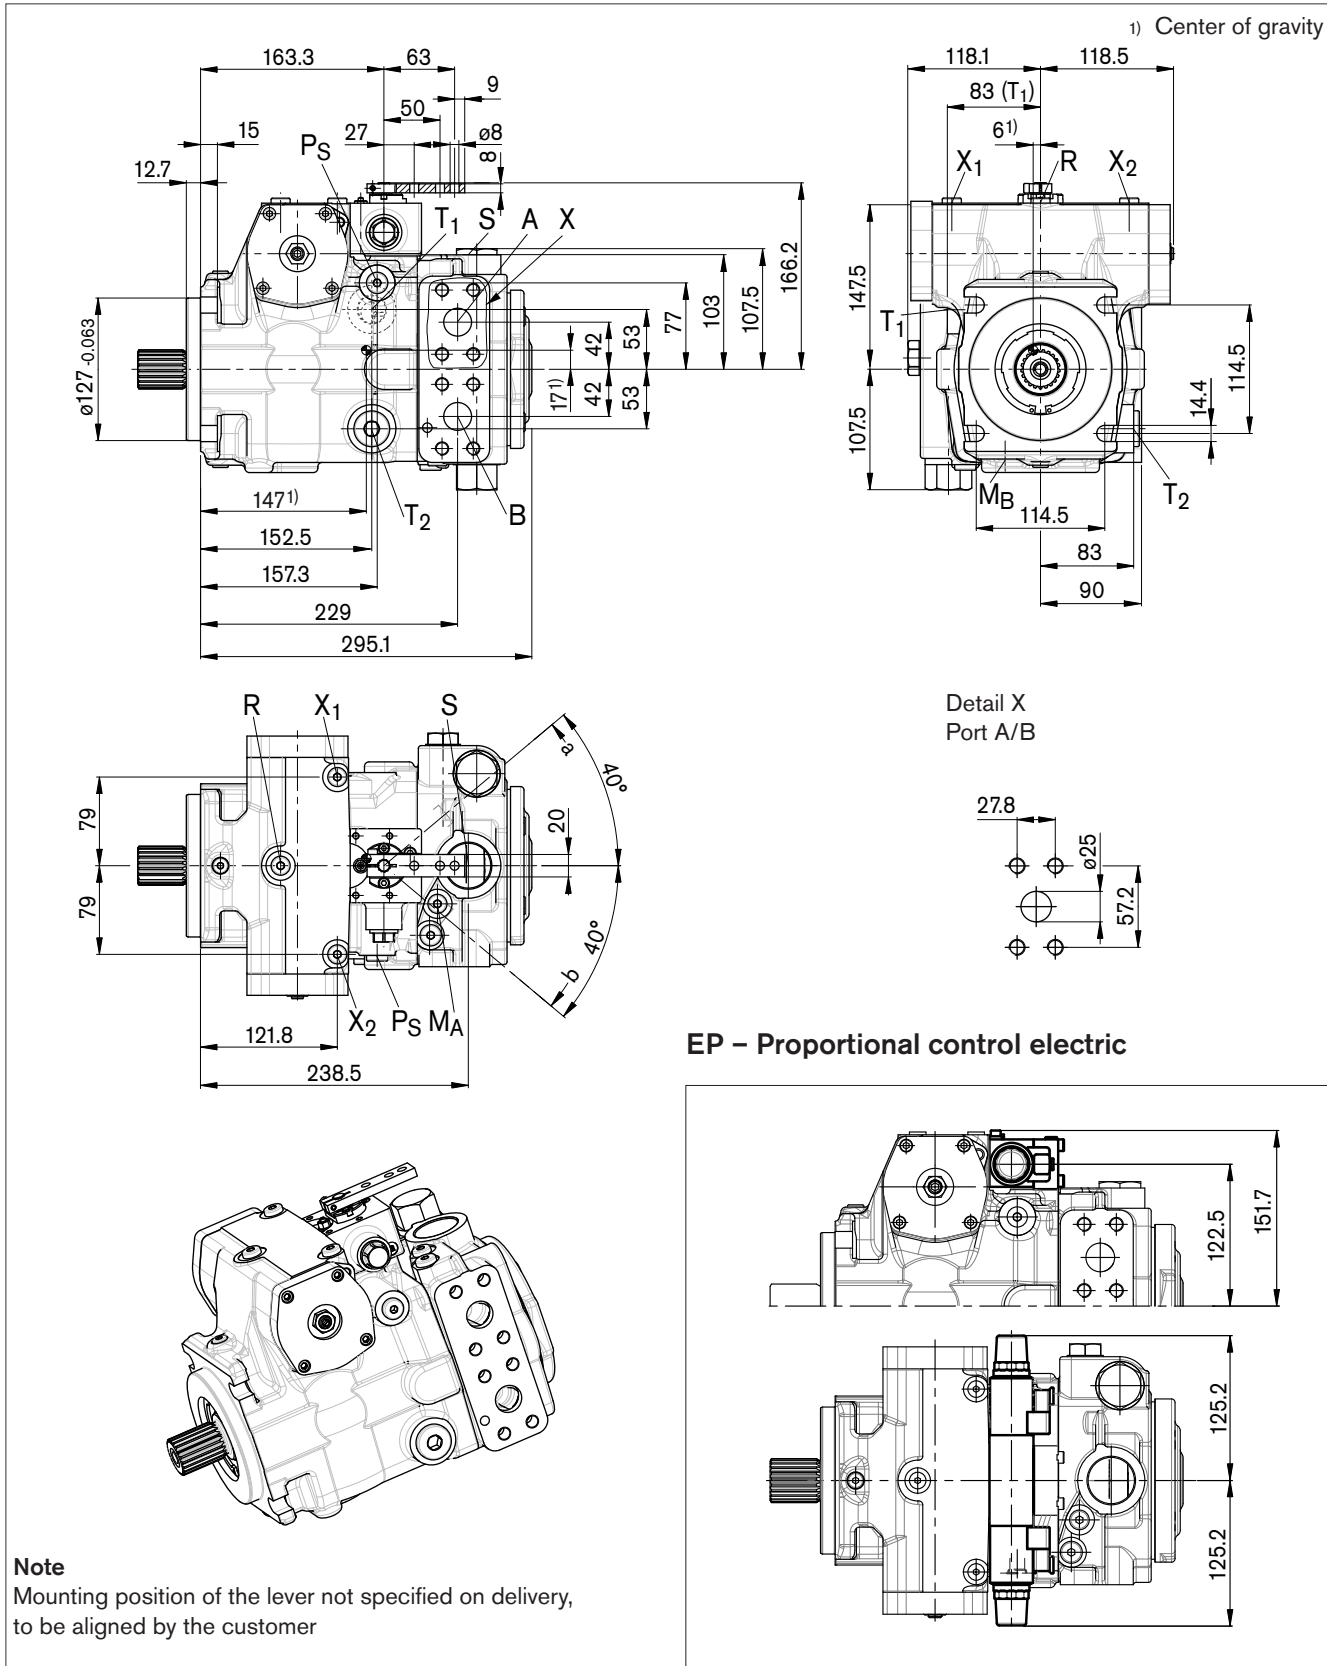

# Dimensions size 71

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shaft

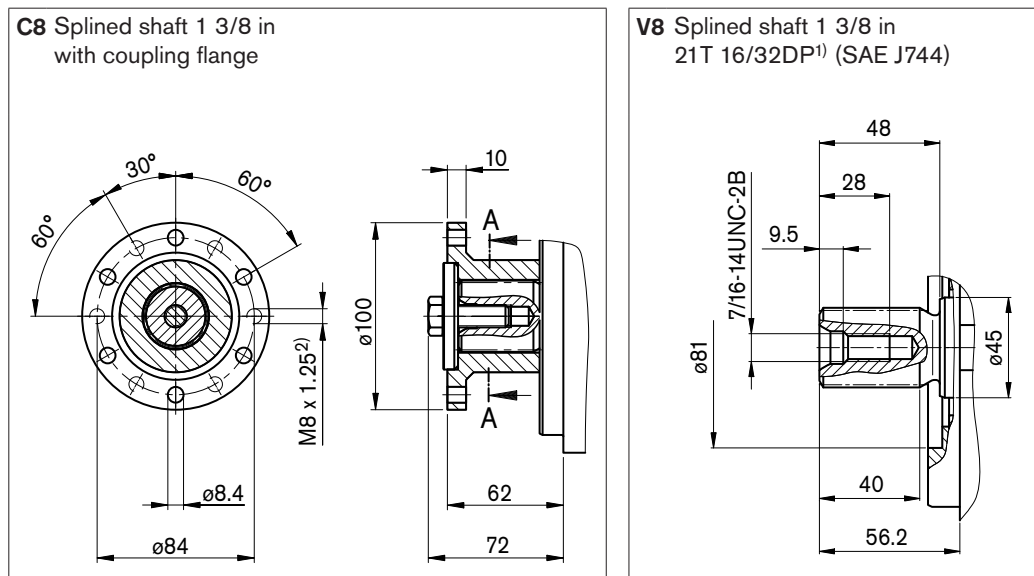

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Maximum pressure [bar] <sup>3)</sup>	State
A, B	Service line Fixing thread A/B	SAE J518 <sup>4)</sup> DIN 13	1 in M12 x 1.75; 17 deep	450	O
S	Suction	DIN 3852	M42 x 2; 20 deep	5	O
T <sub>1</sub>	Tank	DIN 3852	M26 x 1.5; 16 deep	3	O <sup>5)</sup>
T <sub>2</sub>	Tank	DIN 3852	M26 x 1.5; 16 deep	3	X <sup>5)</sup>
R	Air bleed	DIN 3852	M12 x 1.5; 12 deep	3	X
X <sub>1</sub> , X <sub>2</sub>	Control pressure (upstream of orifice)	DIN 3852	M12 x 1.5; 12 deep	40	X
X <sub>3</sub> , X <sub>4</sub> <sup>6)</sup>	Stroking chamber pressure	DIN 3852	M12 x 1.5; 12 deep	40	X
P <sub>S</sub>	Pilot pressure, inlet	DIN 3852	M14 x 1.5; 12 deep	40	X
M <sub>A</sub> , M <sub>B</sub>	Measuring pressure A, B	DIN 3852	M12 x 1.5; 12 deep	450	X

1) ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

2) Observe the general instructions on page 24 for the maximum tightening torques.

3) Short-term pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Only dimensions according to SAE J518

5) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also page 22).

6) Optional, see page 18

O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


# Dimensions size 90

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## HW – Proportional control hydraulic, mechanical servo

Standard: suction port S at top (02)

Option: suction port S at bottom (01): port plate turned through 180°

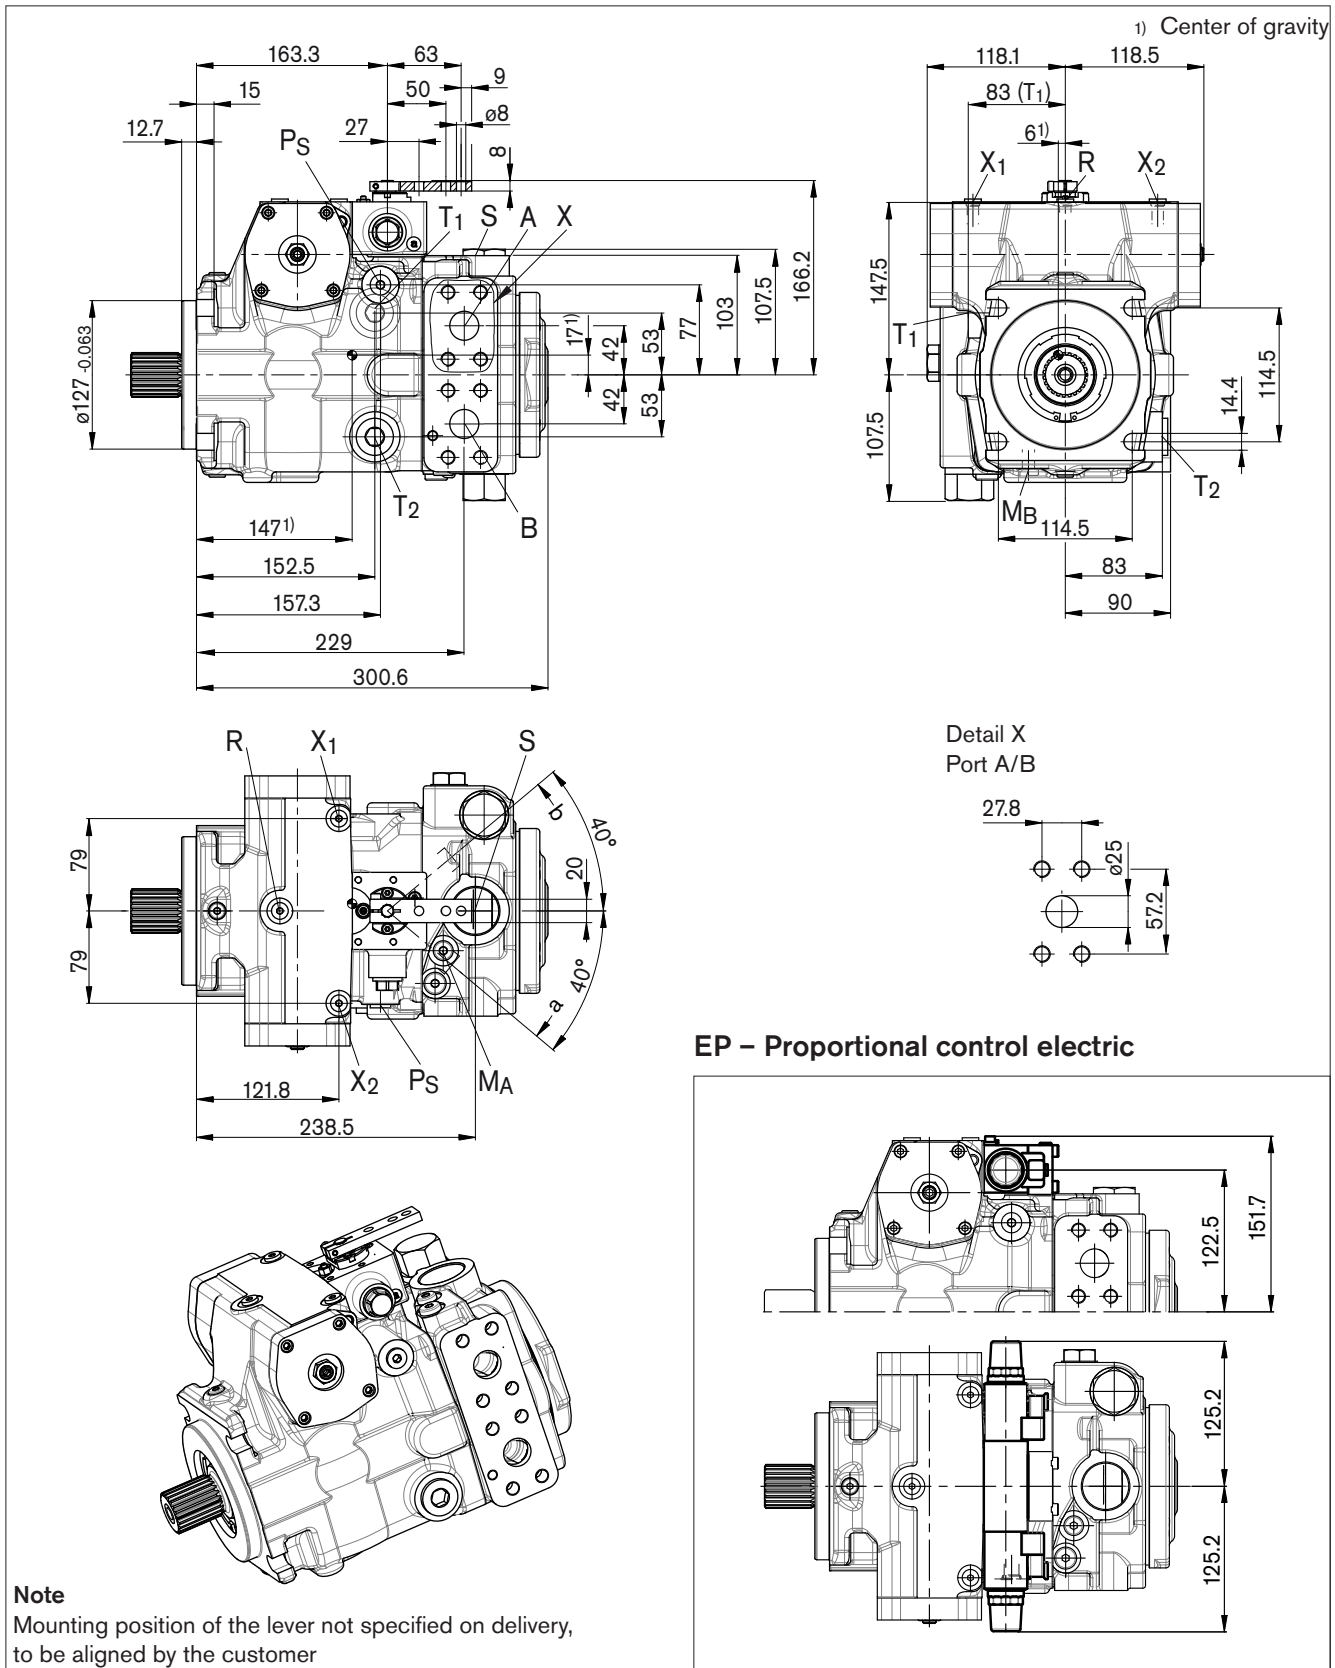


**Note**  
Mounting position of the lever not specified on delivery, to be aligned by the customer

# Dimensions size 90

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shaft

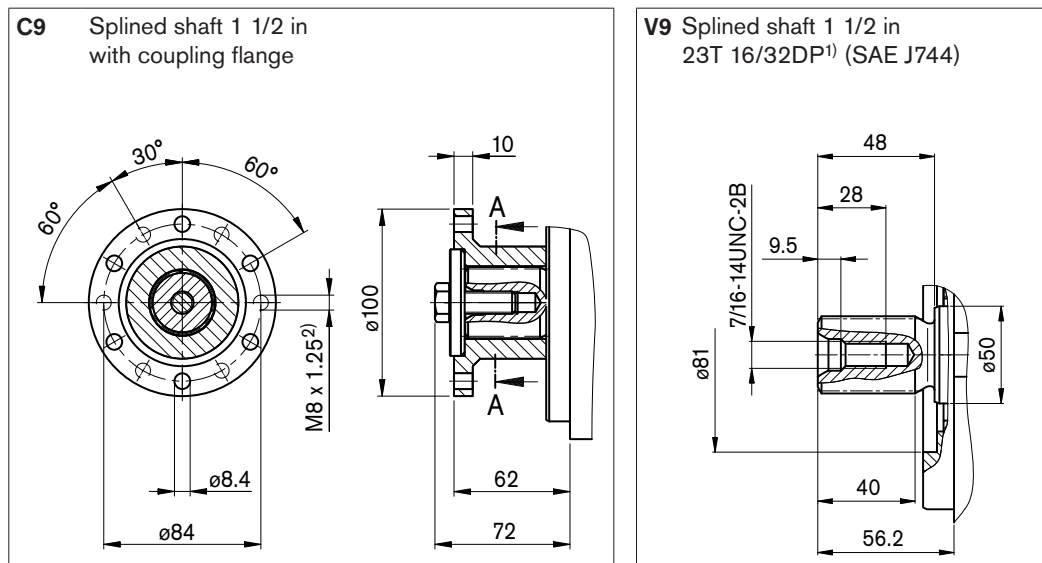

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Maximum pressure [bar] <sup>3)</sup>	State
A, B	Service line Fixing thread A/B	SAE J518 <sup>4)</sup> DIN 13	1 in M12 x 1.75; 17 deep	450	O
S	Suction	DIN 3852	M42 x 2; 20 deep	5	O
T <sub>1</sub>	Tank	DIN 3852	M26 x 1.5; 16 deep	3	O <sup>5)</sup>
T <sub>2</sub>	Tank	DIN 3852	M26 x 1.5; 16 deep	3	X <sup>5)</sup>
R	Air bleed	DIN 3852	M12 x 1.5; 12 deep	3	X
X <sub>1</sub> , X <sub>2</sub>	Control pressure (upstream of orifice)	DIN 3852	M12 x 1.5; 12 deep	40	X
X <sub>3</sub> , X <sub>4</sub> <sup>6)</sup>	Stroking chamber pressure	DIN 3852	M12 x 1.5; 12 deep	40	X
P <sub>S</sub>	Pilot pressure, inlet	DIN 3852	M14 x 1.5; 12 deep	40	X
M <sub>A</sub> , M <sub>B</sub>	Measuring pressure A, B	DIN 3852	M12 x 1.5; 12 deep	450	X

1) ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

2) Observe the general instructions on page 24 for the maximum tightening torques.

3) Short-term pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Only dimensions according to SAE J518

5) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also page 22).

6) Optional, see page 18


O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


# Through drive dimensions

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Flange SAE J744			Coupling for splined shaft <sup>1)</sup>			071	090	
Diameter	Mounting variant		Diameter	Designation				
	Symbol	Designation						
Without						●	●	0000
82-2	∞	A2	5/8 in 9T 16/32DP	S2		●	●	A2S2
101-2	∞	B2	7/8 in 13T 16/32DP	S4		●	●	B2S4

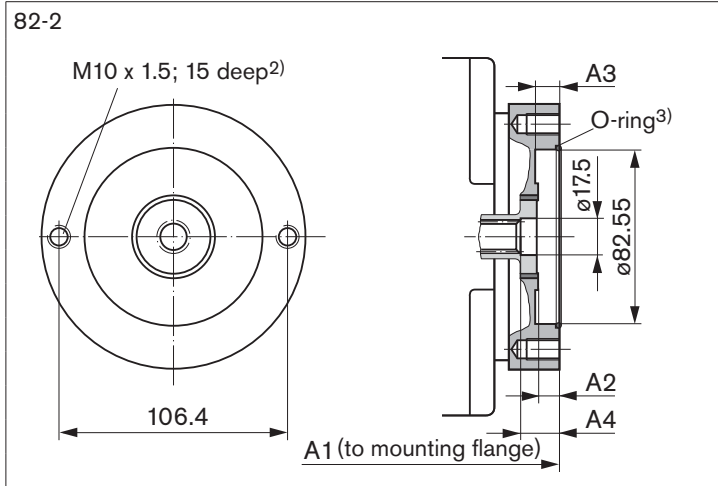

NG	A1	A2	A3	A4
71	300.1	9	10	19.8
90	305.6	9	10	19.8

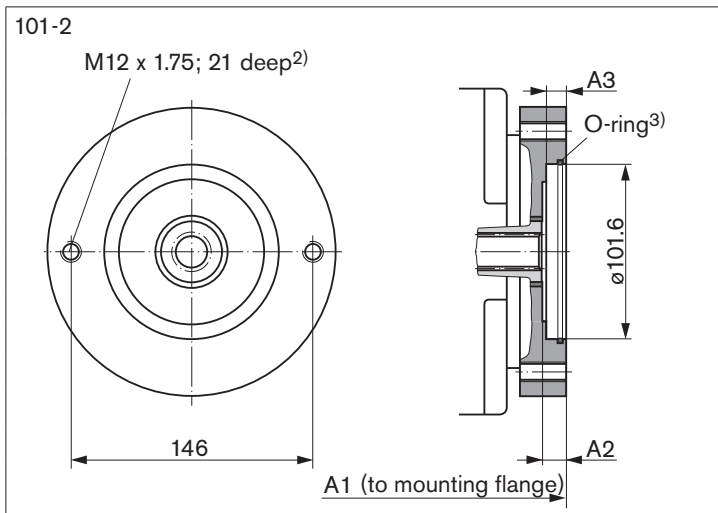

NG	A1	A2	A3
71	305.1	12	9.8
90	310.6	12	9.8

- 1) Coupling for splined shaft according to ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to DIN 13, observe the general instructions on page 24 for the maximum tightening torques.
- 3) O-ring included in the delivery contents



# Overview of attachments

Through drive			Attachment – 2nd pump			
Flange	Coupling for splined shaft	Short code	A10VG NG (shaft)	A10VO/31 NG (shaft)	A10VO/53 NG (shaft)	External gear pump
82-2 (A)	5/8 in	<b>A2S2</b>	–	18 (U)	10 (U)	Size F NG4 to 22 <sup>1)</sup>
101-2 (B)	7/8 in	<b>B2S4</b>	18 (S)	28 (S,R) 45 (U,W)	28 (S,R) 45 (U,W)	Size N NG20 to 32 <sup>1)</sup> Size G NG38 to 45 <sup>1)</sup>

1) Rexroth recommends special versions of the gear pumps. Please contact us.


## High-pressure relief valves

The two high-pressure relief valves protect the hydrostatic transmission (pump and motor) from overload. They limit the maximum pressure in the respective high-pressure line and serve simultaneously as boost valves.

Standard adjustment  $\Delta p_{HD}$  \_\_\_\_\_ 400 bar

Please contact us regarding other pressure settings.


### Setting diagram

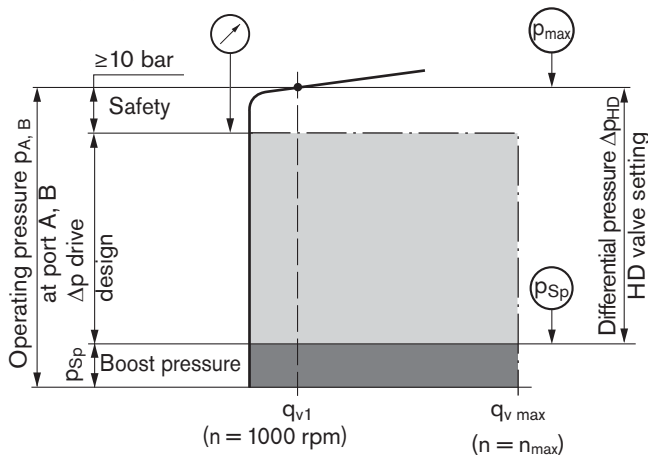

### Note

The valve settings are made at  $n = 1000$  rpm and at  $V_{gmax}$  ( $q_{v1}$ ). There may be deviations in the opening pressures with other operating parameters.


### Circuit diagram

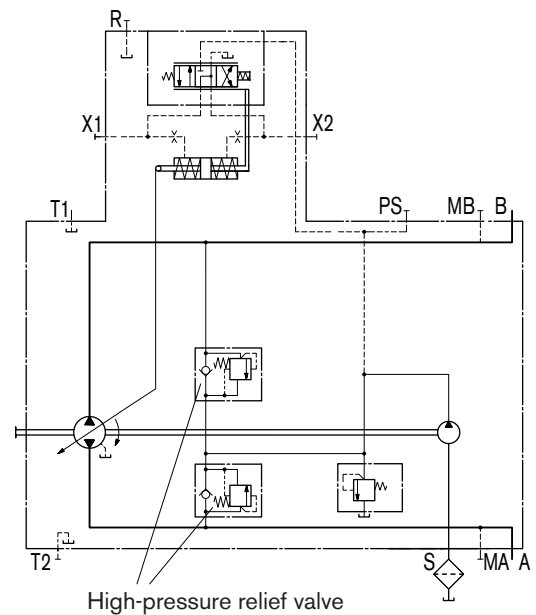


# Mechanical stroke limiter

The mechanical stroke limiter is an auxiliary function allowing the maximum displacement of the pump to be steplessly reduced, regardless of the control unit used.


The stroke of the stroke cylinder and hence the maximum swivel angle of the pump are limited by means of two adjusting screws.

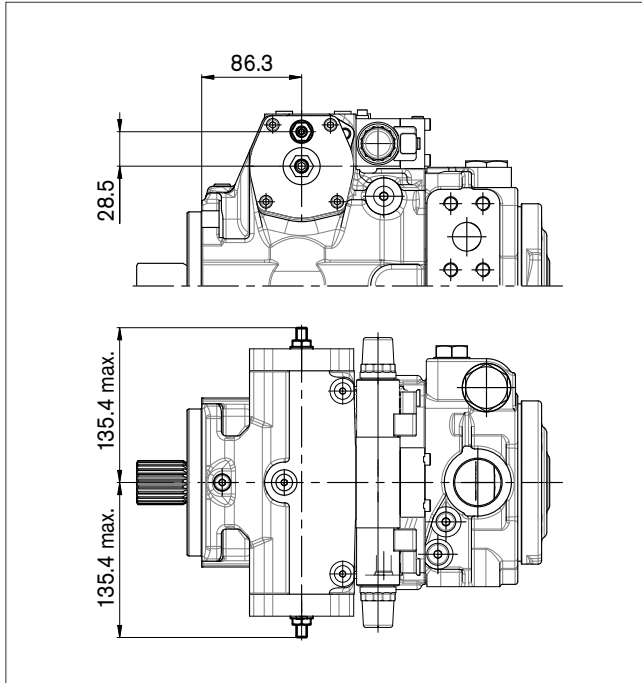


Circuit diagram

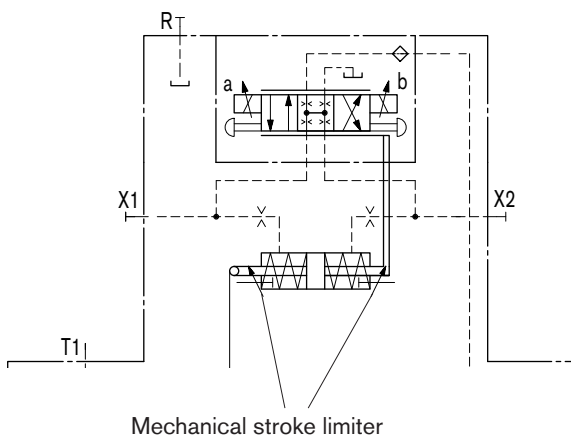

# Ports X<sub>3</sub> and X<sub>4</sub> for stroking chamber pressure

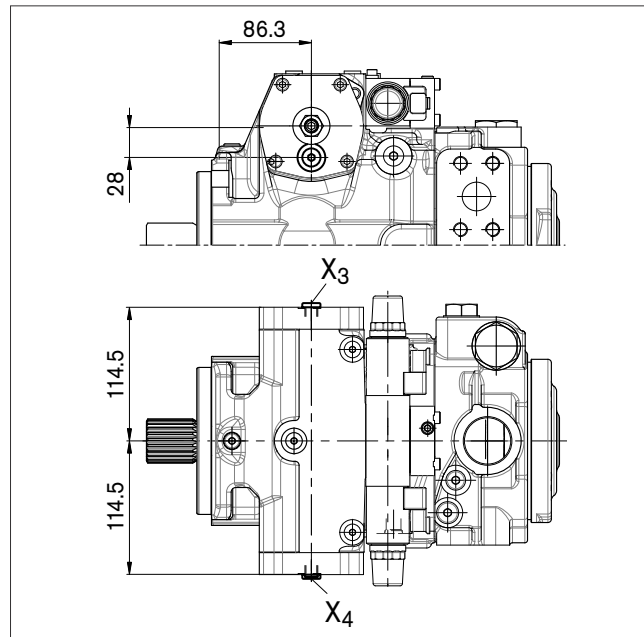

Circuit diagram

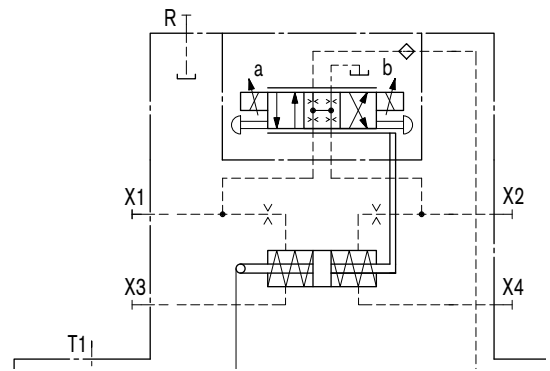

Designation	Port for	Standard	Size <sup>1)</sup>	Maximum pres- sure [bar] <sup>2)</sup>	State
X <sub>3</sub> , X <sub>4</sub>	Stroking chamber pressure	DIN 3852	M12 x 1.5; 12 deep	40	X

1) Observe the general instructions on page 24 for the maximum tightening torques.  
 2) Short-term pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.  
 Before finalizing your design, request a binding installation drawing. Dimensions in mm.

# Filtration boost circuit

## Version S

### Filtration in the suction line of the boost pump

Filter type \_\_\_\_\_ filter without bypass

Recommendation \_\_\_\_\_ with contamination indicator

Flow resistance at the filter cartridge:

With  $v = 30 \text{ mm}^2/\text{s}$ ,  $n = n_{\text{max}}$  \_\_\_\_\_  $\Delta p \leq 0.1 \text{ bar}$

With  $v = 1000 \text{ mm}^2/\text{s}$ ,  $n = n_{\text{max}}$  \_\_\_\_\_  $\Delta p \leq 0.3 \text{ bar}$

Pressure at port S of the boost pump


Suction pressure  $p_{S \text{ min}}$  ( $v \leq 30 \text{ mm}^2/\text{s}$ ) \_\_\_\_\_  $\geq 0.8 \text{ bar absolute}$

At cold start short-term ( $t < 3 \text{ min}$ ) \_\_\_\_\_  $\geq 0.5 \text{ bar absolute}$

Suction pressure  $p_{S \text{ max}}$  \_\_\_\_\_  $\leq 5 \text{ bar absolute}$

The filter is not included in the delivery contents.

### Circuit diagram

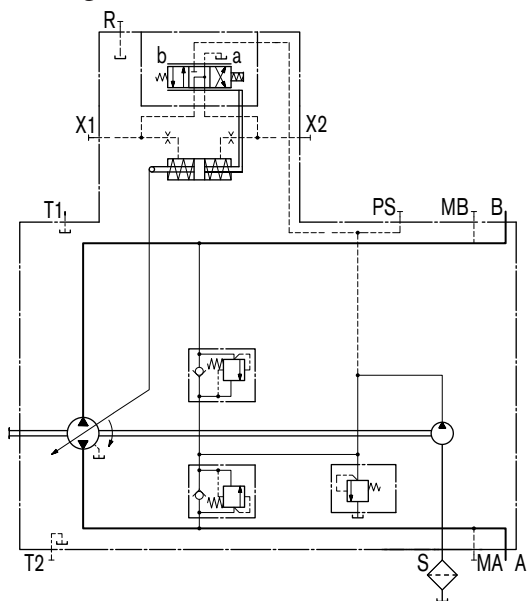

# Connector for solenoids


## DEUTSCH DT04-2P-EP04, 2-pin

Molded, without bidirectional suppressor diode \_\_\_\_\_ P

Type of protection according to DIN/EN 60529:  
IP67 and IP69K

### Circuit symbol

Without bidirectional suppressor diode




### Mating connector

DEUTSCH DT06-2S-EP04  
Rexroth Mat. No. R902601804

Consisting of: \_\_\_\_\_ DT designation  
 – 1 case \_\_\_\_\_ DT06-2S-EP04  
 – 1 wedge \_\_\_\_\_ W2S  
 – 2 female connectors \_\_\_\_\_ 0462-201-16141

The mating connector is not included in the delivery contents.  
This can be supplied by Rexroth on request.

## Solenoid with emergency actuation and spring return

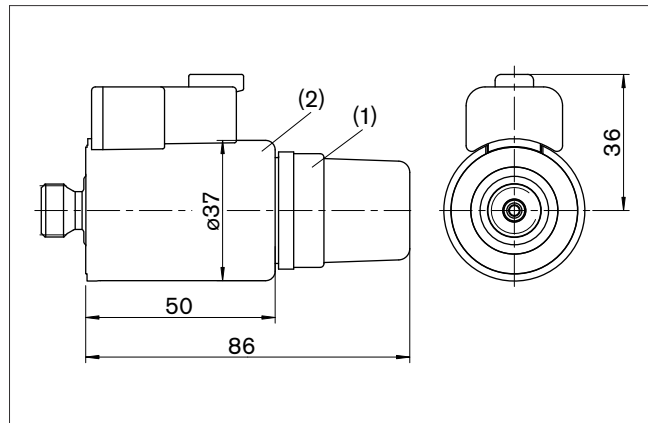

### Note

Manual override (emergency actuation) can be applied in the event of a malfunction in the electrical system.  
Not approved for continuous operation!

### Changing connector position

If necessary, you can change the position of the connector by turning the solenoid.

To do this, proceed as follows:

1. Loosen the fixing nut (1) of the solenoid. To do this, turn the fixing nut (1) one turn counter-clockwise.
2. Turn the solenoid body (2) to the desired position.
3. Retighten the fixing nut. Tightening torque of the fixing nut: 5 +1 Nm (WAF 26, 12-sided DIN 3124)

On delivery, the position of the connector may differ from that shown in the brochure or drawing.

# Installation situation for coupling assembly

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

To ensure that rotating components (coupling hub) and fixed components (case, retaining ring) do not come into contact with each other, the installation conditions described here must be observed. This depends on the size and the splined shaft.


## SAE splined shaft (spline according to ANSI B92.1a-1976)

### – Drive shaft V8, V9

The outer diameter of the coupling hub must be smaller than the inner diameter of the retaining ring  $d_2$  in the area near the drive shaft collar (dimension  $x_2 - x_3$ ).

### – Drive shaft with mounted coupling flange C8, C9

The depicted installation conditions are already taken into account by Rexroth.

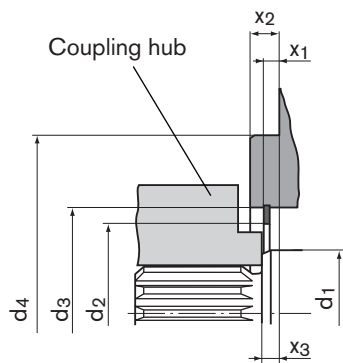

Size	Mounting flange	$\varnothing d_1$	$\varnothing d_{2 \text{ min}}$	$\varnothing d_3$	$\varnothing d_4$	$x_1$	$x_2$	$x_3$
71	127-4	45	66.5	81 $\pm 0.1$	127	7.0 $+0.2$	12.7 $-0.5$	8 $+0.9$ $-0.6$
90	127-4	50	66.5	81 $\pm 0.1$	127	7.0 $+0.2$	12.7 $-0.5$	8 $+0.9$ $-0.6$

# Installation instructions

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This is also to be observed following a relatively long standstill as the system may empty via the hydraulic lines.

The case drain fluid in the case interior must be directed to the tank via the highest tank port ( $T_1$ ,  $T_2$ ). The minimum suction pressure at port S must not fall below 0.8 bar absolute (cold start 0.5 bar absolute).

In all operational states, the suction line and tank line must flow into the tank below the minimum fluid level.

## Installation position

See examples below. Additional installation positions are available upon request.

Recommended installation positions: 1 and 2.

### Below-tank installation (standard)


Pump below minimum fluid level of the tank.

### Above-tank installation

Pump above minimum fluid level of the tank.

Observe the maximum permissible suction height

$h_{S \max} = 800 \text{ mm}$ .

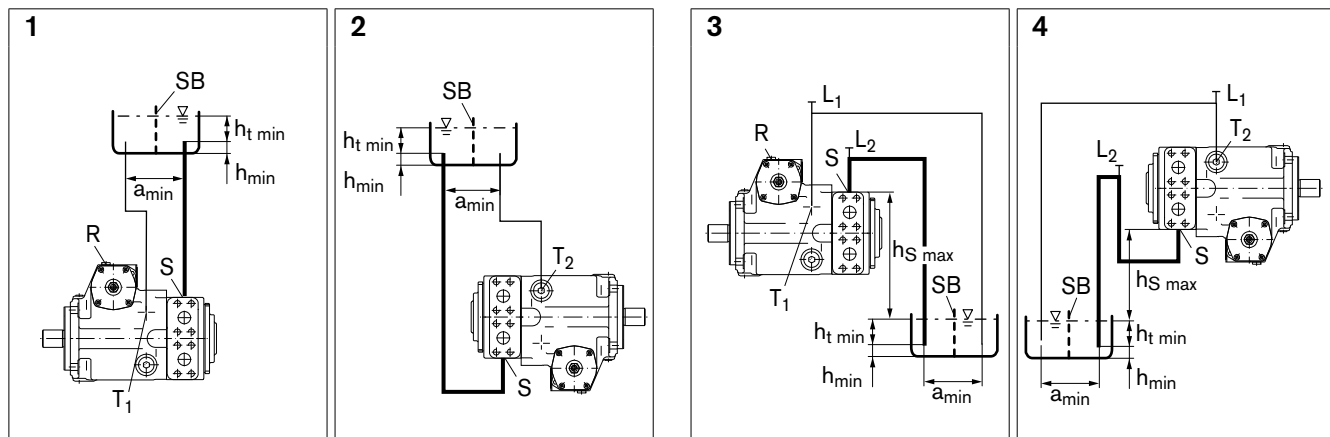

$h_{S \max} = 800 \text{ mm}$ ,  $h_{t \min} = 200 \text{ mm}$ ,  $h_{\min} = 100 \text{ mm}$ , SB = baffle (baffle plate)

When designing the reservoir, ensure adequate distance  $a_{\min}$  between the suction line and the case drain line to prevent the heated, return flow from being drawn directly back into the suction line.

Installation position	Air bleed	Filling
1	R	S + $T_1$
2	-	S + $T_2$

Installation position	Air bleed	Filling
3	$L_2$ (S) + R	$L_2$ (S) + $L_1$
4	$L_2$ + $L_1$ ( $T_2$ )	$L_2$ + $L_1$ ( $T_2$ )

# Notes

# General instructions

- The A4VTG pump is designed to be used in a closed circuit.
- Project planning, assembly and commissioning of the axial piston unit require the involvement of qualified personnel.
- The service line ports and function ports are only designed to accommodate hydraulic lines.
- During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e. g. by wearing protective clothing).
- Depending on the operational state of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- Pressure ports:  
The ports and fixing threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
- The data and notes contained herein must be adhered to.
- The following tightening torques apply:
  - Threaded hole for axial piston unit:  
The maximum permissible tightening torques  $M_{G \max}$  are maximum values for the threaded holes and must not be exceeded. For values, see the following table.
  - Fittings:  
Observe the manufacturer's instruction regarding the tightening torques of the used fittings.
  - Fixing screws:  
For fixing screws according to DIN 13, we recommend checking the tightening torque individually according to VDI 2230.
  - Locking screws:  
For the metal locking screws supplied with the axial piston unit, the required tightening torques of locking screws  $M_V$  apply. For values, see the following table.
- The product is not approved as a component for the safety concept of a general machine according to DIN EN ISO 13849.

Threaded port sizes		Maximum permissible tightening torque of the threaded holes $M_{G \max}$	Required tightening torque of the locking screws $M_V$	WAF hexagon socket for the locking screws
M12 x 1.5	DIN 3852	50 Nm	25 Nm	6 mm
M14 x 1.5	DIN 3852	80 Nm	35 Nm	6 mm
M26 x 1.5	DIN 3852	230 Nm	120 Nm	12 mm
M42 x 2	DIN 3852	720 Nm	360 Nm	22 mm

Bosch Rexroth AG  
 Hydraulics  
 Axial Piston Units  
 Glockeraustraße 2  
 89275 Elchingen, Germany  
 Telephone +49 (0) 73 08 82-0  
 Fax +49 (0) 73 08 72 74  
 info.brm-ak@boschrexroth.de  
 www.boschrexroth.com/axial-piston-pumps

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Subject to change.




# Axial Piston Variable Pump A10VG

**RE 92750/06.09**  
Replaces: 03.09**1/44**

## Data sheet

Series 10  
Sizes 18...63  
Nominal pressure 300 bar  
Peak pressure 350 bar  
Closed circuit

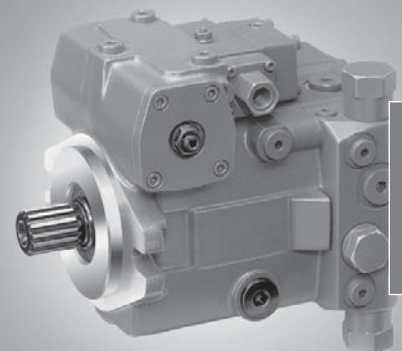

4

## Contents

Ordering Code / Standard Program	2
Technical Data	5
High-Pressure Relief Valves	9
Pressure Cut-Off, D	10
DG - Hydraulic Control, Direct Operated	10
MD - Mechanical Pivot Control (Size 18 only)	11
HD - Hydraulic Control, Pilot-Pressure Related	12
HW - Hydraulic Control, Mechanical Servo	13
DA - Hydraulic Control, Speed Related	14
EP - Electric Control, With Proportional Solenoid	16
EZ - Electric Two-Point Control, With Switching Solenoid	18
Unit Dimensions, Size 18	19
Unit Dimensions, Size 28	22
Unit Dimensions, Size 45	26
Unit Dimensions, Size 63	30
Through Drive Dimensions	34
Overview of Attachments on A10VG	36
Combination Pumps A10VG + A10VG	36
Mechanical Stroke Limiter, M	37
Filtration Types	38
Connector for Solenoids (Only for EP, EZ, DA)	39
Rotary Inch Valve	40
Installation Situation for Coupling Assembly	41
Installation Notes	42
General Notes	44

## Features

- Variable axial piston pump of washplate design for hydrostatic closed circuit transmission
- Flow is proportional to drive speed and displacement and is infinitely variable
- Output flow increases with the swivel angle of the washplate from 0 to its maximum value
- Flow direction changes smoothly when the washplate is moved through the neutral position
- A wide range of highly adaptable control devices is available for different control and regulating functions
- The pump is equipped with two pressure-relief valves on the high pressure ports to protect the hydrostatic transmission (pump and motor) from overload
- The high-pressure relief valves also function as boost valves
- The integrated boost pump acts as a feed and control oil pump
- The maximum boost pressure is limited by a built-in boost pressure relief valve

# Ordering Code / Standard Program

<b>A10V</b>	<b>G</b>								/	<b>10</b>			<b>-</b>	<b>N</b>		<b>C</b>						
01	02	03	04	05	06	07	08	09		10	11		12	13	14	15	16	17	18	19	20	21

## Axial piston unit

01	Variable swashplate design, nominal pressure 300 bar, peak pressure 350 bar	<b>A10V</b>
----	---	-------------

## Operation mode

02	Pump in closed circuit	<b>G</b>
----	------------------------	----------

## Size

03	≈ Displacement $V_{g \max}$ in $\text{cm}^3$	<b>18</b>	<b>28</b>	<b>45</b>	<b>63</b>
----	--	-----------	-----------	-----------	-----------

## Control device

			<b>18</b>	<b>28</b>	<b>45</b>	<b>63</b>	
	Mechanical pivot control		●	-	-	-	<b>MD</b>
04	Hydraulic control	pilot-pressure related, with supply filtration	●	●	●	●	<b>HD3</b>
		mechanical servo	●	●	●	●	<b>HW</b>
		direct operated	●	●	●	●	<b>DG</b>
		speed related					
	(Description DA control valve in Pos. 09)	U = 12 V DC	-	●	●	●	<b>DA1</b>
		U = 24 V DC	-	●	●	●	<b>DA2</b>
Electric control	with proportional solenoid, with supply filtration	U = 12 V DC	●	●	●	●	<b>EP3</b>
		U = 24 V DC	●	●	●	●	<b>EP4</b>
	with switching solenoid	U = 12 V DC	●	●	●	●	<b>EZ1</b>
		U = 24 V DC	●	●	●	●	<b>EZ2</b>

## Pressure cut-off

		<b>18</b>	<b>28</b>	<b>45</b>	<b>63</b>	
05	Without pressure cut-off (not for DA, without code)	●	●	●	●	
	With pressure cut-off	-	●	●	●	<b>D</b>

## Neutral position switch (only for HW)

		<b>18</b>	<b>28</b>	<b>45</b>	<b>63</b>	
06	Without neutral position switch (without code)	●	●	●	●	
	With neutral position switch (with DEUTSCH connector)	●	●	●	●	<b>L</b>

## Mechanical stroke limiter

		<b>18</b>	<b>28</b>	<b>45</b>	<b>63</b>	
07	Without mechanical stroke limiter (without code)	●	●	●	●	
	With mechanical stroke limiter, external variable	●	●	●	●	<b>M</b>

## Spring centering of neutral position (only MD)

		<b>18</b>	<b>28</b>	<b>45</b>	<b>63</b>	
08	Without spring centering of neutral position (without code)	●	-	-	-	
	With spring centering of neutral position	●	-	-	-	<b>N</b>

## Ordering Code / Standard Program

<b>A10V</b>	<b>G</b>									<b>/</b>	<b>10</b>		<b>-</b>	<b>N</b>		<b>C</b>													
01	02	03	04	05	06	07	08	09			10	11		12	13	14	15	16	17	18	19	20	21						

<b>DA control valve</b> (only for size 28-63)		<b>HD</b>	<b>HW</b>	<b>DG</b>	<b>DA</b>	<b>EP</b>	<b>EZ</b>		
09	Without DA control valve	●	●	●	-	●	●	1	
	With DA control valve, fixed setting	●	●	●	●	●	-	2	
	With DA control valve, mech. adjustable with position lever	Actuating direction - clockwise	●	●	●	●	●	-	3R
		Actuating direction - counterclockwise	●	●	●	●	●	-	3L
	With DA control valve, fixed setting and hydraulic inch valve mounted, control with brake fluid according to ISO 4925, <b>no</b> mineral oil	-	-	-	●	-	-	-	4
	With DA control valve, fixed setting and ports for pilot control device	●	●	●	●	●	-	-	7
	With DA control valve, fixed setting and hydraulic inch valve mounted, control with brake fluid based on mineral oil	-	-	-	●	-	-	-	8

**Series**

10	Series 1, Index 0	10
----	-------------------	----

**Direction of rotation**

11	Viewed from shaft end	clockwise	R
		counterclockwise	L

**Seals**

12	NBR (nitrile-caoutchouc), shaft seal ring in FKM (fluor-caoutchouc)	N
----	---	---

**Shaft end** (permissible input torque see page 8)

		<b>18</b>	<b>28</b>	<b>45</b>	<b>63</b>	
13	Splined shaft for single pump	●	●	●	●	S
	ANSI B92.1 a-1976 for combination pump	-	-	●	●	T

**Mounting flange**

14	SAE J744 – 2-bolt	C
----	-------------------	---

**Service line ports** (metric fixing thread)

		<b>18</b>	<b>28</b>	<b>45</b>	<b>63</b>	
15	SAE flange ports A/B, same side left, suction port S bottom	-	●	●	●	10
	A/B threaded ports, same side right, suction port S bottom	●	-	-	-	16

**Boost pump**

		<b>18</b>	<b>28</b>	<b>45</b>	<b>63</b>		
16	Without integrated boost pump	without through drive	●	●	●	●	N00
		with through drive	●	●	●	●	K..
	With integrated boost pump	without through drive	●	●	●	●	F00
		with through drive	●	●	●	●	F..

**Through drive** (mounting options, see page 36)

		<b>18</b>	<b>28</b>	<b>45</b>	<b>63</b>			
17	Flange SAE J744 <sup>1)</sup>	Hub for splined shaft						
	82-2 (A)	5/8 in	9T 16/32DP <sup>2)</sup>	●	●	●	●	.01
	101-2 (B)	7/8 in	13T 16/32DP <sup>2)</sup>	●	●	●	●	.02
		1 in	15T 16/32DP <sup>2)</sup>	-	●	●	●	.04
	127-2 (C)	1 1/4 in	14T 12/24DP <sup>2)</sup>	-	-	-	●	.07



# Technical Data

## Hydraulic fluid

Before starting project planning, please refer to our data sheets RE 90220 (mineral oil), RE 90221 (environmentally acceptable hydraulic fluids) and RE 90223 (HF hydraulic fluids) for detailed information regarding the choice of hydraulic fluid and application conditions.

The variable pump A10VG is unsuitable for operation with HFA, HFB and HFC. If HFD or environmentally acceptable hydraulic fluids are being used, the limitations regarding technical data and seals mentioned in RE 90221 and RE 90223 must be observed.

When ordering, please indicate the used hydraulic fluid.

### Operating viscosity range

For optimum efficiency and service life, select an operating viscosity (at operating temperature) within the optimum range of

$$v_{\text{opt}} = \text{opt. operating viscosity } 16 \dots 36 \text{ mm}^2/\text{s}$$

depending on the circuit temperature (closed circuit).

### Limits of viscosity range

The limiting values for viscosity are as follows:


- $v_{\text{min}} = 5 \text{ mm}^2/\text{s}$   
 short term ( $t < 3 \text{ min}$ )  
 at max. perm. temperature of  $t_{\text{max}} = +115 \text{ }^\circ\text{C}$ .
- $v_{\text{max}} = 1600 \text{ mm}^2/\text{s}$   
 short term ( $t < 3 \text{ min}$ )  
 at cold start ( $p \leq 30 \text{ bar}$ ,  $n \leq 1000 \text{ rpm}$ ,  $t_{\text{min}} = -40 \text{ }^\circ\text{C}$ ).  
 Only for starting up without load. Optimum operating viscosity must be reached within approx. 15 minutes.

Note that the maximum hydraulic fluid temperature of  $115 \text{ }^\circ\text{C}$  must not be exceeded locally either (e.g. in the bearing area). The temperature in the bearing area is - depending on pressure and speed - up to 5 K higher than the average case drain temperature.

Special measures are necessary in the temperature range from  $-40 \text{ }^\circ\text{C}$  to  $-25 \text{ }^\circ\text{C}$  (cold start phase), please contact us.

For detailed information about use at low temperatures, see RE 90300-03-B.

## Selection diagram

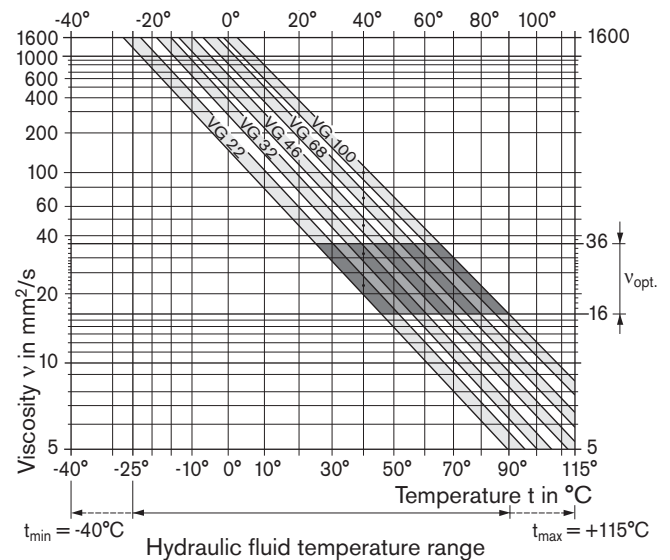

### Details regarding the choice of hydraulic fluid

The correct choice of hydraulic fluid requires knowledge of the operating temperature in relation to the ambient temperature: in a closed circuit the circuit temperature.

The hydraulic fluid should be chosen so that the operating viscosity in the operating temperature range is within the optimum range ( $v_{\text{opt}}$ ) - the shaded area of the selection diagram. We recommended that the higher viscosity class be selected in each case.

Example: At an ambient temperature of  $X \text{ }^\circ\text{C}$  an operating temperature of  $60 \text{ }^\circ\text{C}$  is set. In the optimum operating viscosity range ( $v_{\text{opt}}$ ; shaded area) this corresponds to the viscosity classes VG 46 or VG 68; to be selected: VG 68.

**Please note:** The case drain temperature, which is affected by pressure and speed, is always higher than the circuit temperature. At no point in the system may the temperature be higher than  $115 \text{ }^\circ\text{C}$ .

If the above conditions cannot be maintained due to extreme operating parameters, please consult us.

# Technical Data

## Filtration

The finer the filtration, the higher the cleanliness level of the hydraulic fluid and the longer the service life of the axial piston unit.

To ensure functional reliability of the axial piston unit the hydraulic fluid must have a cleanliness level of at least

20/18/15 according to ISO 4406.

Depending on the system and the application, for the A10VG, we recommend

Filter elements  $\beta_{20} \geq 100$

With a rising differential pressure at the filter elements, the  $\beta$ -value must not deteriorate.

At very high hydraulic fluid temperatures (90 °C to max. 115 °C) at least cleanliness level

19/17/14 according to ISO 4406 is required.

If the above classes cannot be observed, please contact us. For notes on filtration types, see page 38.

## Operating pressure range

### Input

Variable pump (with external supply, E):

For control EP, EZ, HW and HD  
boost pressure (at  $n = 2000$  rpm)  $p_{Sp}$  \_\_\_\_\_ 18 bar

For control DA, DG  
boost pressure (at  $n = 2000$  rpm)  $p_{Sp}$  \_\_\_\_\_ 25 bar

Boost pump:

suction pressure  $p_{s \min}$  ( $v \leq 30$  mm<sup>2</sup>/s) \_\_\_\_\_  $\geq 0.8$  bar absolute  
at cold start short term ( $t < 3$  min) \_\_\_\_\_  $\geq 0.5$  bar absolute

### Output

Variable pump:

pressure at port A or B

Nominal pressure  $p_N$  \_\_\_\_\_ 300 bar

Peak pressure  $p_{max}$  \_\_\_\_\_ 350 bar

Boost pump:

peak pressure  $p_{sp \ max}$  size 18 \_\_\_\_\_ 25 bar

peak pressure  $p_{sp \ max}$  size 28, 45, 63 \_\_\_\_\_ 40 bar

Nominal pressure: Max. design pressure at which fatigue strength is ensured.


Peak pressure: Max. operating pressure which is permissible for short term ( $t < 1$  s).

## Shaft seal ring

### Permissible pressure loading

The service life of the shaft seal ring is affected by the speed of the pump and the case drain pressure. It is recommended that the average, continuous case drain pressure at operating temperature 3 bar absolute not be exceeded (max. permissible case drain pressure 6 bar absolute at reduced speed, see diagram). Short term ( $t < 0.1$  s) pressure spikes of up to 10 bar absolute are permitted. The service life of the shaft seal ring decreases with an increase in the frequency of pressure spikes.

The case pressure must be equal to or greater than the external pressure on the shaft seal ring.

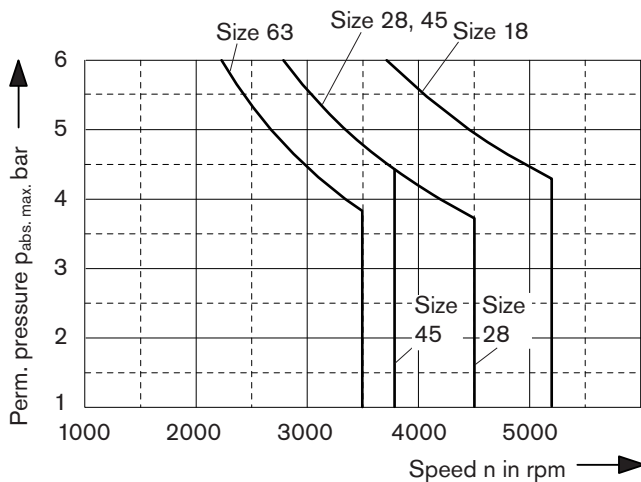

### Temperature range

The FKM shaft seal ring is permissible for case temperatures of -25 °C to +115 °C.

#### Note:

For application cases below -25 °C, an NBR shaft seal ring is necessary (permissible temperature range: -40 °C to +90 °C). Please state NBR shaft seal ring in plain text when ordering. Please contact us.

# Technical Data

**Table of values** (theoretical values, without efficiencies and tolerances; values rounded)

Size			18	28	45	63
Displacement						
variable pump	$V_{g \max}$	cm <sup>3</sup>	18	28	46	63
boost pump (at p = 20 bar)	$V_{g Sp}$	cm <sup>3</sup>	5.5	6.1	8.6	14.9
Speed						
maximum at $V_{g \max}$	$n_{\max \text{ continuous}}$	rpm	4000	3900	3300	3000
limited maximum <sup>1)</sup>	$n_{\max \text{ limited}}$	rpm	4850	4200	3550	3250
intermittent maximum <sup>2)</sup>	$n_{\max \text{ interm.}}$	rpm	5200	4500	3800	3500
minimum	$n_{\min}$	rpm	500	500	500	500
Flow						
at $n_{\max \text{ continuous}}$ and $V_{g \max}$	$q_{v \max}$	l/min	72	109	152	189
Power <sup>3)</sup>						
at $n_{\max \text{ continuous}}$ and $V_{g \max}$ $\Delta p = 300 \text{ bar}$	$P_{\max}$	kW	36	54.6	75.9	94.5
Torque <sup>3)</sup>						
at $V_{g \max}$	$\Delta p = 300 \text{ bar}$ $T_{\max}$	Nm	86	134	220	301
	$\Delta p = 100 \text{ bar}$ $T$	Nm	28.6	44.6	73.2	100.3
Rotary stiffness						
Shaft end S	c	Nm/rad	20284	32143	53404	78370
	Shaft end T	c	Nm/rad	–	–	73804
Moment of inertia for rotary group						
	$J_{RG}$	kgm <sup>2</sup>	0.00093	0.0017	0.0033	0.0056
Angular acceleration, max. <sup>4)</sup>						
	$\alpha$	rad/s <sup>2</sup>	6800	5500	4000	3300
Filling capacity						
	V	L	0.45	0.64	0.75	1.1
Mass approx. (without through drive)						
	m	kg	14(18) <sup>5)</sup>	25	27	39

<sup>1)</sup> Restricted maximum speed: – at half corner power (e.g. at  $V_{g \max}$  and  $p_N / 2$ )

<sup>2)</sup> Intermittent maximum speed: – at high idle speed  
 – at overspeed:  $\Delta p = 70 \dots 150 \text{ bar}$  and  $V_{g \max}$   
 – at reversing peaks:  $\Delta p < 300 \text{ bar}$  and  $t < 0.1 \text{ s}$ .

<sup>3)</sup> Without boost pump

<sup>4)</sup> – The area of validity is situated between the minimum required and maximum permissible speed.

It applies for external stimuli (e.g. engine 2-8 times rotary frequency, cardan shaft twice the rotary frequency).

– The limit value applies for a single pump only.

– The load capacity of the connection parts has to be considered.

<sup>5)</sup> 14kg: MD control, 18kg: HD control

**Caution:** Exceeding the permissible limit values may result in a loss of function, a reduction in service life or in the destruction of the axial piston unit.



A calculation can be performed to determine the permissible values.

## Determining the size

Flow	$q_v = \frac{V_g \cdot n \cdot \eta_v}{1000}$	l/min	$V_g$ = displacement volume per revolution in cm <sup>3</sup>
			$\Delta p$ = differential pressure in bar
			$n$ = speed in rpm
Torque	$T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{mh}}$	Nm	$\eta_v$ = volumetric efficiency
			$\eta_{mh}$ = mechanical-hydraulic efficiency
Power	$P = \frac{2 \pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t}$	kW	$\eta_t$ = total efficiency

# Technical Data

## Permissible axial and radial loading on drive shaft

Size			18	28	45	63	
Radial force, max. at distance (from shaft collar)	$F_{q \max}$	N	1300	2500	3600	5000	
	a	mm	16.5	17.5	17.5	17.5	
		$F_{q \max}$	N	1000	2000	2891	4046
	b	mm	29	30	30	30	
Axial force, max.	$F_{q \max}$	N	880	1700	2416	3398	
	c	mm	41.5	42.5	42.5	42.5	
			N	973	987	1500	2200

Note: special requirements apply in the case of belt drives. Please contact us.


## Permissible input and through-drive torques

Size			18	28	45	63
Torque (at $V_{g \max}$ and $\Delta p = 300 \text{ bar}$ ) <sup>1)</sup>	$T_{\max}$	Nm	86	134	220	301
Input torque, max. <sup>2)</sup>						
at shaft end S	$T_{E \text{ perm.}}$	Nm	192	314	314	602
ANSI B92.1a-1976 (SAE J744)			7/8 in	1 in	1 in	1 1/4 in
at shaft end T	$T_{E \text{ perm.}}$	Nm	–	–	602	970
ANSI B92.1a-1976 (SAE J744)					1 1/4 in	1 3/8 in
Through-drive torque, max.	$T_{D \text{ perm.}}$	Nm	112	220	314	439

<sup>1)</sup> Efficiency not considered

<sup>2)</sup> For drive shafts with no radial force

## Torque distribution

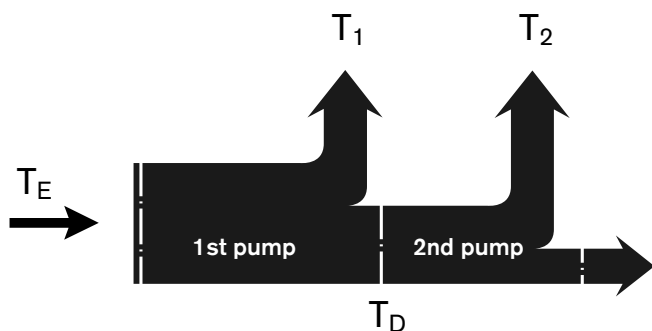



# High-Pressure Relief Valves

## Setting ranges

High-pressure relief valve, direct operated	Differential pressure setting $\Delta p_{HP}$
Setting range for valve <b>3, 5</b> $\Delta p$ 250 - 320 bar (refer to ordering code)	320 bar
	300 bar <sup>1)</sup>
	270 bar
Setting range for valve <b>4, 6</b> $\Delta p$ 100 - 250 bar (refer to ordering code)	250 bar
	230 bar
	200 bar <sup>1)</sup>
	150 bar
	100 bar

<sup>1)</sup> Standard differential pressure setting. The valves will be set to this value if the differential pressure is not specified on ordering.

### Please state in plain text when ordering:

(only the  $\Delta p_{HP}$  values shown in the table are possible)

#### High-pressure relief valve A


Differential pressure setting:  $\Delta p_{HD} = \dots$  bar  
 opening pressure of the HD valve (at  $q_{V1}$ ):  $p_{max} = \dots$  bar  
 ( $p_{max} = \Delta p_{HD} + p_{Sp}$ )

#### High-pressure relief valve B

Differential pressure setting:  $\Delta p_{HD} = \dots$  bar  
 opening pressure of the HD valve (at  $q_{V1}$ ):  $p_{max} = \dots$  bar  
 ( $p_{max} = \Delta p_{HD} + p_{Sp}$ )

## Setting diagram


Version without pressure cut-off

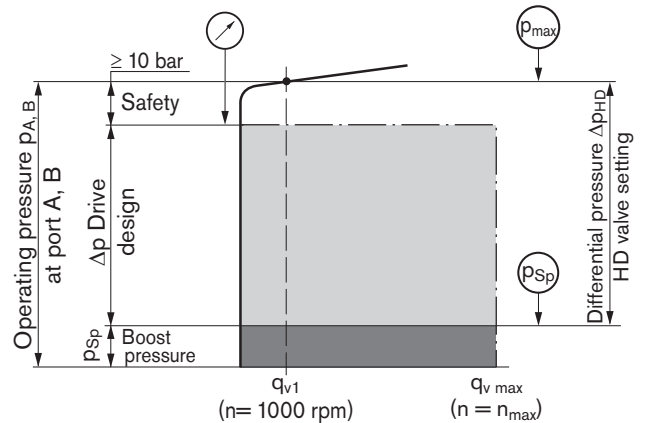

Example: boost pressure 20 bar; operating pressure 290 bar

$$\begin{aligned} \text{Operating pressure } p_{A,B} - \text{boost pressure } p_{Sp} &= \text{differential pressure } \Delta p_{HD} \\ 290 \text{ bar} - 20 \text{ bar} &= 270 \text{ bar} \end{aligned}$$

Version with pressure cut-off

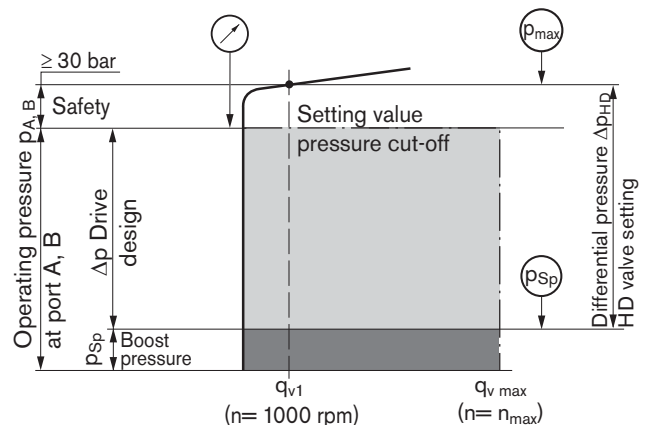

Example: boost pressure 20 bar; operating pressure 290 bar

$$\begin{aligned} \text{Operating pressure } p_{A,B} - \text{boost pressure } p_{Sp} + \text{safety} &= \text{differential pressure } \Delta p_{HD} \\ 290 \text{ bar} - 20 \text{ bar} + 30 \text{ bar} &= 300 \text{ bar} \end{aligned}$$

Note: valve is set at  $n = 1000 \text{ rpm}$  and  $V_{g \max} (q_{V1})$

## Bypass function

The bypass function can only be used for short periods with reduced displacement, e.g. to tow a vehicle out of an immediate danger zone.

### Note:

The bypass function is not shown in these circuit diagrams.

# Pressure Cut-Off, D

The pressure cut-off corresponds to a pressure regulation which, after reaching the set pressure, adjusts the displacement of the pump to  $V_{g \text{ min}}$ .


This valve prevents the operation of the high-pressure relief valves when accelerating or decelerating.

Both the pressure peaks occurring when the swashplate is swiveled rapidly and also the maximum pressure in the system are safeguarded by the high-pressure relief valves.


The setting range of the pressure cut-off may be anywhere within the entire operating pressure range. However, it must be set 30 bar lower than the setting of the high-pressure relief valves (see setting diagram, page 9).

Please state the setting value of the pressure cut-off in plain text when ordering.

**Circuit diagram with pressure cut-off**  
**Hydraulic control, speed related, DA.D3**  
 Size 28 and 45

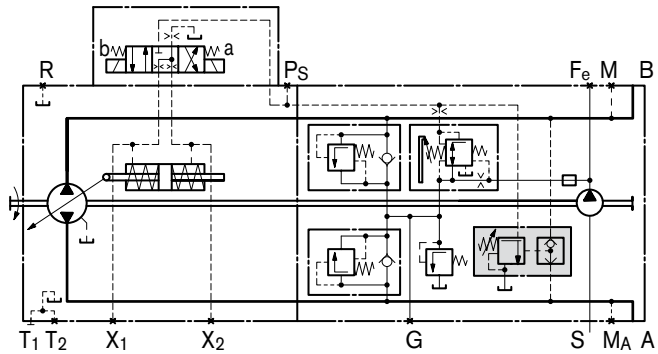

Size 63

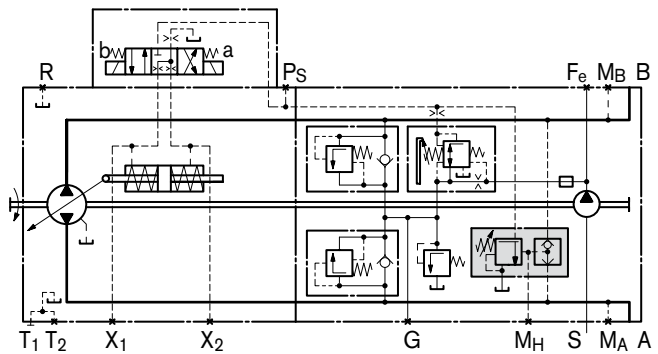

# DG - Hydraulic Control, Direct Operated

With the Direct Operated Hydraulic Control (DG), pump displacement is controlled by a hydraulic control pressure applied directly to the stroke cylinder through either the  $X_1$  or  $X_2$  port. In this way, the swashplate and thus the displacement is switchable from  $V_g = 0$  to  $V_{g \text{ max}}$ . Each direction of through put flow is assigned to a port.

Pilot pressure 0 bar  $\triangleq$  position  $V_g = 0$

The required pilot pressure for position  $V_{g \text{ max}}$  depends on operating pressure and speed.


Max. permissible pilot pressure 40 bar

For project planning, please consult us.


The pressure cut-off and the DA control valve only become effective if the pilot control device used for controlling the DG control is supplied from port  $P_s$ .

Assignment of direction of rotation – control – direction of through put flow refer to HD control, page 12 (control pressure  $X_1$ ;  $X_2$ ).

**Standard version**

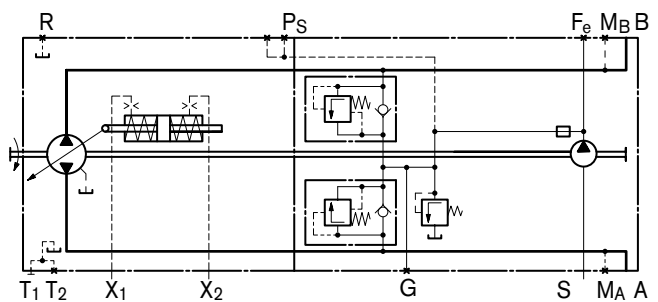


**Version with DA control valve and pressure cut-off**

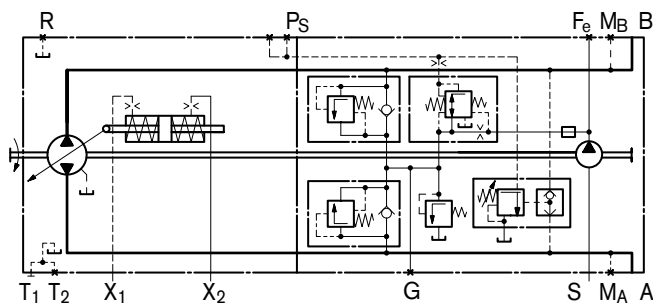

# MD - Mechanical Pivot Control (Size 18 only)

The swashplate is adjusted directly and thus the displacement of the pump is continuously varied depending on the position of the pivot. A swivel direction of the pivot is assigned to each flow direction.

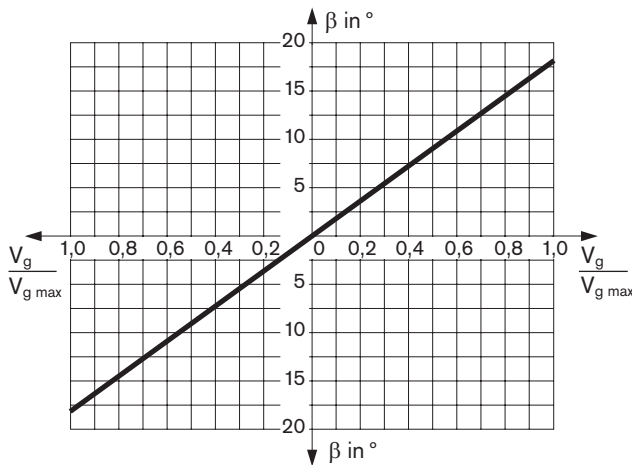

Swivel angle  $\beta$  at the control lever for deflection:


Start of control at  $\beta = 0^\circ$

End of control at  $\beta = 17.79^\circ$  (max. displacement  $V_{g \max}$ )

The required actuating torque is independent of the operating pressure, speed, displacement, design of the control plate and its torsion.


- Higher operating pressure → higher actuating torque
- Higher speed → higher actuating torque
- Larger displacement → lower actuating torque

### Standard version (MD)

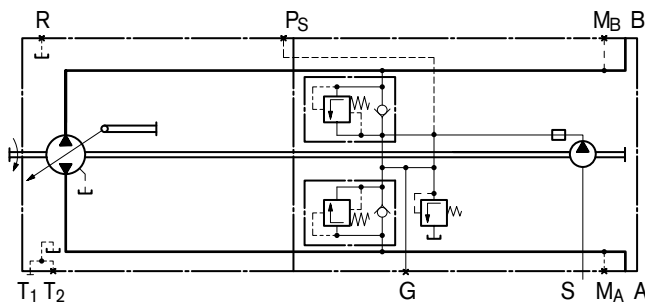

### Variation: Spring neutral position centering (MDN)


Spring neutral position centering automatically sets the pump to swivel angle 0 as soon as there is no actuating torque at the pivot pin.

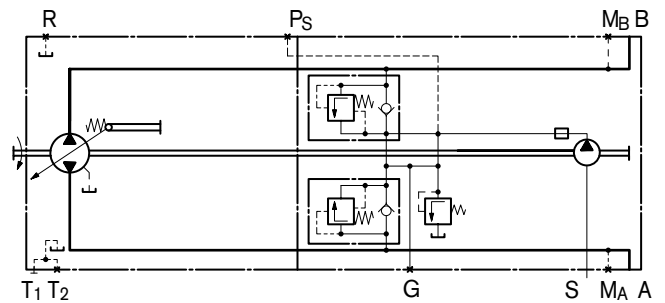

### Assignment

Direction of rotation - Control - Direction of through put flow


	Lever direction	Through put flow	Operating pressure
Direction of rotation CW	a	B to A	$M_A$
	b	A to B	$M_B$
Direction of rotation CCW	a	A to B	$M_B$
	b	B to A	$M_A$

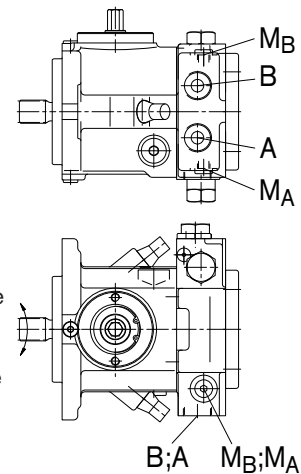

# HD - Hydraulic Control, Pilot-Pressure Related

Depending on the pressure difference of the pilot pressure  $p_{St}$  in the two control lines (ports  $Y_1$  and  $Y_2$ ), the stroke cylinder of the pump is supplied with control pressure via the HD control unit. Thus, the swashplate – and, therefore, the displacement – to be infinitely adjustable. A different through put flow direction is associated with each control line.

If the pump is also equipped with a DA control valve (see page 15), automotive operation is possible for travel drives.

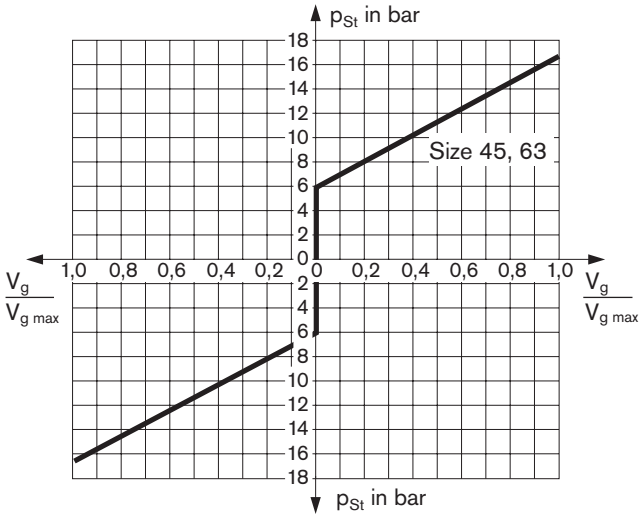

Size	18	28	45	63
Start of control ( $V_{g0}$ ) $p_{St}$ bar	6	6	6	6
End of control ( $V_{gmax}$ ) $p_{St}$ bar	15.7	16	16.7	16.7

$p_{St}$  : pilot pressure at port  $Y_1, Y_2$

Please note:

The external control device must vent the  $Y_1$  and  $Y_2$  ports to tank pressure in neutral.

**Note**


**The spring return feature in the control unit is not a safety device**

The spool valve inside the control unit can get stuck in an undefined position by internal contamination (contaminated hydraulic fluid, abrasion or residual contamination from system components). As a result, the axial piston unit can no longer supply the flow specified by the operator.


Check whether your application requires that remedial measures be taken on your machine in order to bring the driven consumer into a safe position (e.g. immediate stop).

**Assignment**  
Direction of rotation - Control - Direction of through put flow


	Pilot pressure	Control pressure	Through put flow	Operating pressure
Direction of rotation cw	$Y_1$	$X_1$	A to B	$M_B$
	$Y_2$	$X_2$	B to A	$M_A$
Direction of rotation ccw	$Y_1$	$X_1$	B to A	$M_A$
	$Y_2$	$X_2$	A to B	$M_B$

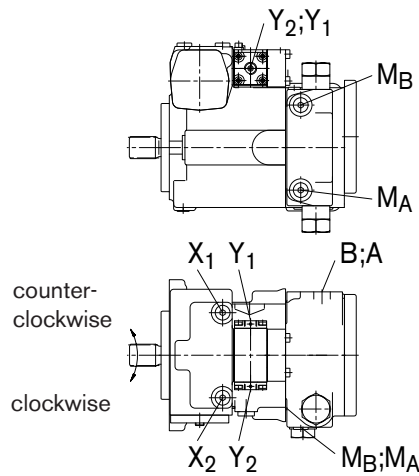

**Standard version**

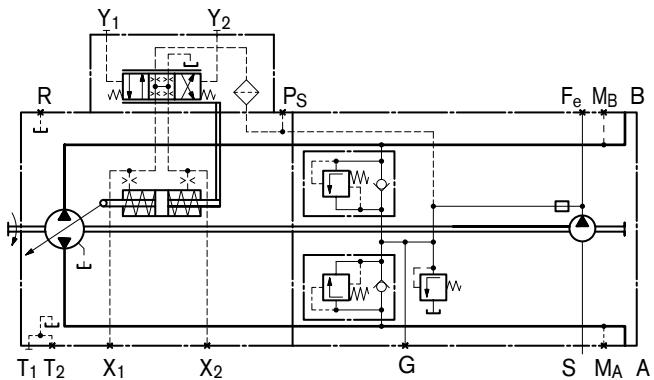


**Version with DA control valve and pressure cut-off**

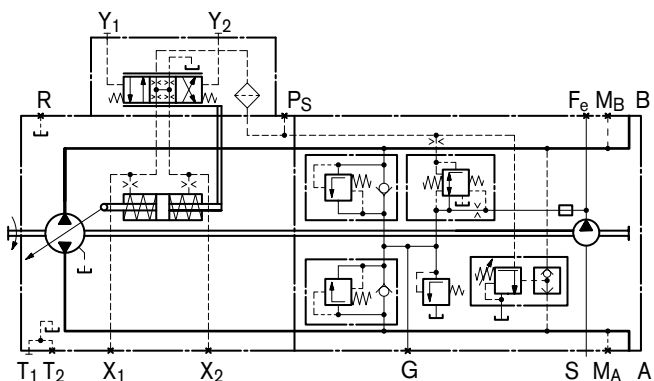

# HW - Hydraulic Control, Mechanical Servo

Depending on the actuation direction a or b of the control lever, the stroke cylinder of the pump is supplied with control pressure via the HW control unit. Thus, the swashplate – and, therefore, the displacement – to be infinitely adjustable. A different through put flow direction is associated with each direction of control lever actuation.

If the pump is also equipped with a DA control valve (see page 15), automotive operation is possible for travel drives.

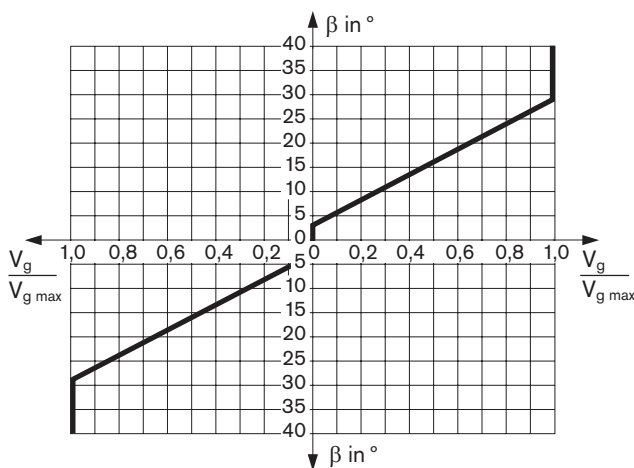

Swivel angle  $\beta$  at the control lever for deflection:

Start of control at  $\beta = 3^\circ$

End of control at  $\beta = 29^\circ$  (max. displacement  $V_{g, max}$ )

Mech. stop:  $\pm 40^\circ$

The maximum required torque at the lever is 170 Ncm. To prevent damage to the HW control module a positive mechanical stop must be provided for the HW control linkage.

**Note:**

Spring centering enables the pump to move automatically into neutral position ( $V_g = 0$ ) as soon as there is no longer any torque on the control lever of the HW control unit (regardless of deflection angle).

**Variation: Neutral position switch, L**


The switch contact in the neutral position switch is closed when the control lever on the HW control unit is in its neutral position. The switch opens if the control lever is moved out of neutral in either direction.

The neutral position switch provides a safety function for drive units that require zero flow under certain operating conditions (e.g. starting engine).


Technical data of neutral position switch	
Load capacity	20 A (continuous), without switching operating
Switching capacity	15 A / 32 V (ohm's load) 4 A / 32 V (inductive load)
Connector version	DEUTSCH connector DT04-2P-EP04 (mating connector see page 39)

**Assignment**  
Direction of rotation - Control - Direction of through put flow


	Lever direction	Control pressure	Through put flow	Operating pressure
Direction of rotation CW	a	$X_2$	B to A	$M_A$
	b	$X_1$	A to B	$M_B$
Direction of rotation CCW	a	$X_2$	A to B	$M_B$
	b	$X_1$	B to A	$M_A$

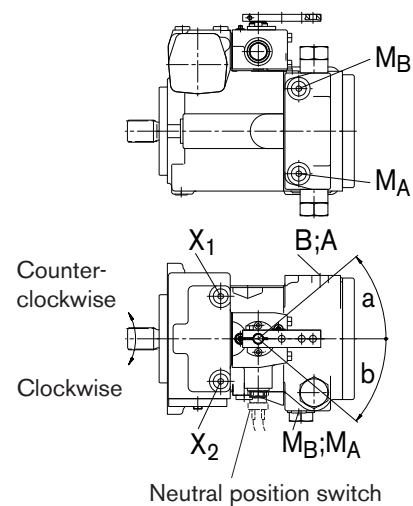

**Standard version**

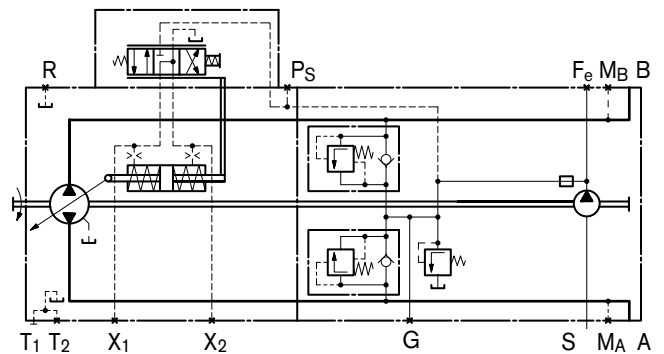

**Version with DA control valve, neutral position switch and pressure cut-off**

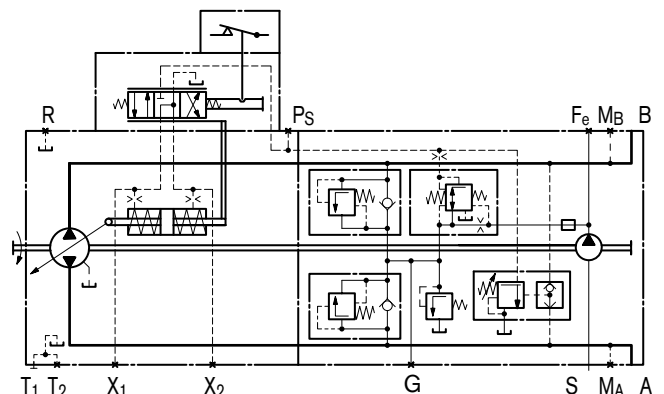

# DA - Hydraulic Control, Speed Related

The DA control is an engine speed-dependent, or automotive, type control system. The built-in DA regulating cartridge generates a pilot pressure that is proportional to pump (engine) drive speed. This pilot pressure is directed to the positioning cylinder of the pump by a solenoid actuated 4/3 way directional valve. Pump displacement is infinitely variable in each direction of flow, and is influenced by both pump drive speed and discharge pressure. Flow direction (i.e. machine forward or reverse) is controlled by energizing solenoid a or b.

Increasing pump drive speed generates a higher pilot pressure from the DA cartridge, with a subsequent increase in pump flow and/or pressure.

Dependent on the selected pump operating characteristics, increasing system pressure (i.e. machine load) causes the pump to swivel back towards a smaller displacement. Engine overload (anti-stall) protection is achieved by the combination of this pressure-related pump de-stroking, and the reduction of pilot pressure as the engine speed drops.

Any additional power requirement, such as implement hydraulics, may result in further engine pull down. This causes a further reduction in pilot pressure and therefore pump displacement. Automatic power division and full utilization of available power is thus achieved for both the vehicle transmission and the implement hydraulics, with priority given to the implement hydraulics.

To provide controllable reduced vehicle speed operation when high engine speeds are required for fast implement hydraulics, various inching options are available.


The DA regulating cartridge can also be used in pumps with conventional control devices, such as EP, HW or HD, to provide an engine anti-stall function, or as a combination of automotive and displacement control functions.

*Application of the DA control is only appropriate on certain types of vehicle drive systems, and requires a review of the engine and vehicle parameters to ensure proper application of the pump, and safe and efficient machine operation. All DA applications must therefore be reviewed by a Rexroth Application Engineer.*


Solenoid technical data	DA1	DA2
Voltage	12 V DC (±20 %)	24 V DC (±20 %)
Neutral position $V_{g0}$	de-energized	de-energized
Position $V_{gmax}$	current energized	current energized
<hr/>		
Nominal resistance (at 20 °C)	5.5 Ω	21.7 Ω
Nominal power	26.2 W	26.5 W
Current required, minimum effective	1.32 A	0.67 A
Actuated time	100 %	100 %
Type of protection	see range of connectors on page 39	

Standard: switching solenoid without manual emergency operation.  
On request: manual emergency operation with spring reset available.

Direction of rotation - Control - Direction of through put flow				
	Actuation of solenoid	Control pressure	Through put flow	Operating pressure
Direction of rotation CW	a	$X_2$	B to A	$M_A$
	b	$X_1$	A to B	$M_B$
Direction of rotation CCW	a	$X_2$	A to B	$M_B$
	b	$X_1$	B to A	$M_A$

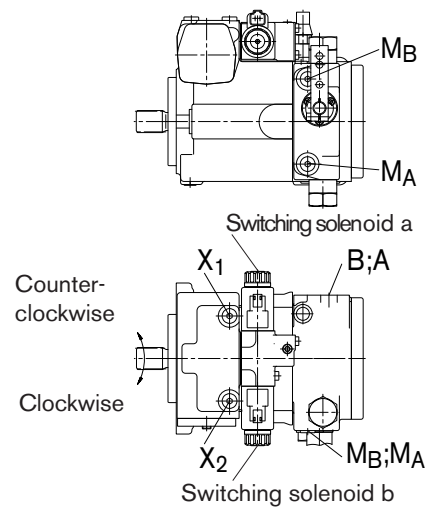

Hydraulic control, speed related, DA control valve, fixed setting, DA1D2/DA2D2

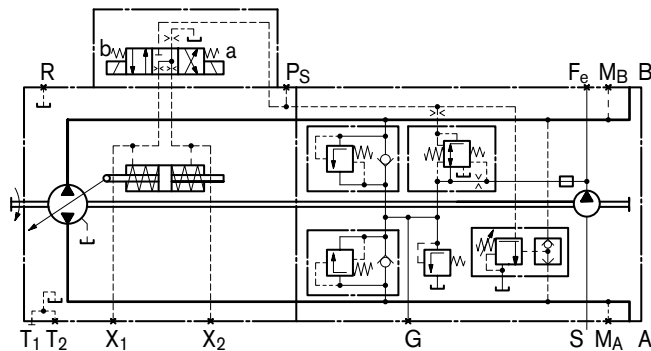

# DA - Hydraulic Control, Speed Related

## Function and control of DA control Valves

### DA control valve, fixed setting (2)

Pilot pressure is generated in relation to drive speed. When ordering, please state in plain text: Start of control (set at factory).

### DA control valve, mechanically adjustable with position lever, (3)

Pilot pressure is generated in relation to drive speed. When ordering, please state in plain text: Start of control (set at factory).

Pilot pressure may be reduced, independently of drive speed, through mechanical operation of the position lever (inch function).

Max. perm. operating torque at the position lever  $T_{max} = 4 \text{ Nm}$

Max. angle of rotation  $70^\circ$ , lever position: any.

**Variation 3R** \_\_\_ actuating direction of the position lever  
- clockwise

**Variation 3L** \_\_\_ actuating direction of the position lever  
- counterclockwise

### DA control valve, fixed setting and hydraulic inch valve mounted, (4, 8)

(only for pumps with DA control unit)

Permits the pilot pressure to be reduced independently of the drive speed via hydraulic control (port Z).

#### Variation 4:

Control at port Z by means of brake fluid according to ISO 4925 (**no** mineral oil) from the vehicle braking system (hydraulically linked with the service brake).

#### Variation 8:

Control at port Z by means of brake fluid based on mineral oil.

### DA control valve with fixed setting, ports for pilot control device as inch valve (7)

Any reduction of pilot pressure, independent from the drive speed through the mechanical operation of the pilot control device.

The pilot control device is installed separately from the pump (for example in the driver's cabin) and connected with the pump by 2 hydraulic control lines via ports  $P_S$  and  $Y$ .

A suitable pilot control device must be ordered separately and is not included in supply.


Detailed information is available from our sales department and on our website [www.boschrexroth.com/da-control](http://www.boschrexroth.com/da-control). Use our computer program to work out the input design that meets your needs. A DA control must be approved by Rexroth.

Note: see page 40 for rotary inch valves.

## Circuit diagrams:


### DA1D3/DA2D3

Hydraulic control, speed related, DA control valve, mech. adjustable with position lever

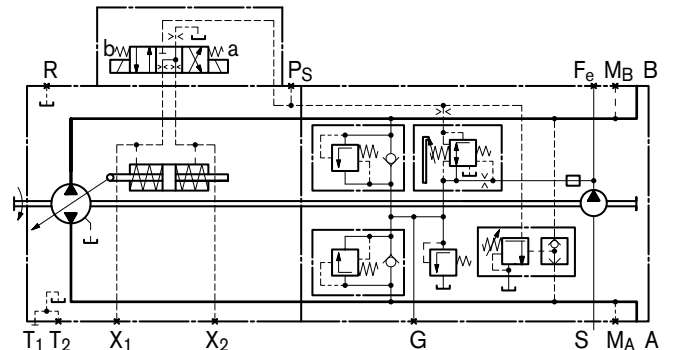


### DA1D4/DA2D4

Hydraulic control, speed related, DA control valve, fixed setting, with hydraulic inch valve

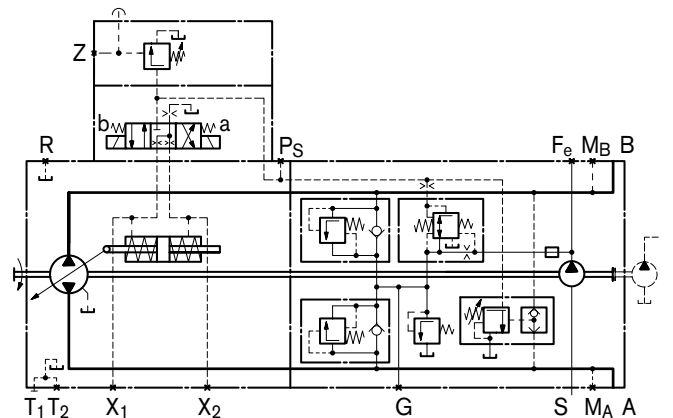

### DA1D7/DA2D7

Hydraulic control, speed related, DA control valve, fixed setting, with separately installed pilot control device as inch valve

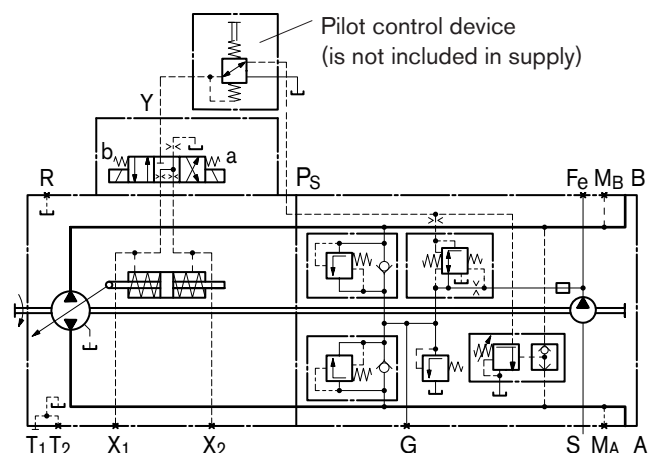




# EP - Electric Control, With Proportional Solenoid

Depending on the preselected current  $I$  at the two proportional solenoids (a and b), the stroke cylinder of the pump is supplied with control pressure via the EP control unit. Thus, the swashplate – and, therefore, the displacement – to be infinitely adjustable. One direction of through put flow is assigned to each proportional solenoid.

If the pump is also equipped with a DA control valve (see page 15), automotive operation is possible for travel drives.

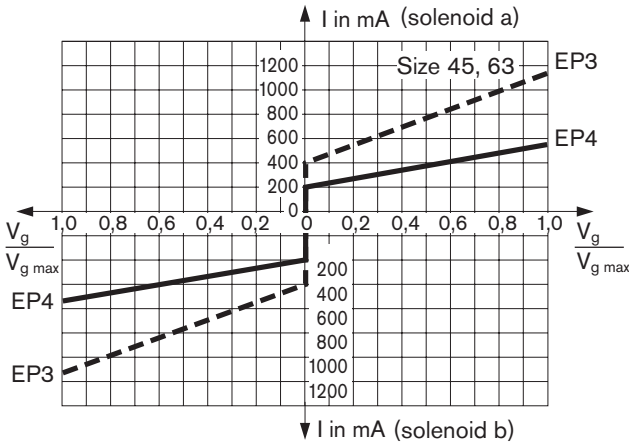

Control current					
EP3	Size	18	28	45	63
Start of control	mA	400	400	400	400
End of control	mA	1050	1060	1115	1115
EP4	Size	18	28	45	63
Start of control	mA	200	200	200	200
End of control	mA	525	530	560	560

Solenoid technical data	EP3	EP4
Voltage	12 V DC ( $\pm 20\%$ )	24 V DC ( $\pm 20\%$ )
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 Hz	100 Hz
Actuated time	100 %	100 %
Type of protection	see range of connectors on page 39	

The following electronic controllers and amplifiers are available for actuating the proportional solenoids (details also available at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics)):

- BODAS controller RC
  - series 20 \_\_\_\_\_ RE 95200
  - series 21 \_\_\_\_\_ RE 95201
  - series 22 \_\_\_\_\_ RE 95202
  - series 30 \_\_\_\_\_ RE 95203
 and application software
- Analog amplifier RA \_\_\_\_\_ RE 95230

### Note

**The spring return feature in the control unit is not a safety device**


The spool valve inside the control unit can get stuck in an undefined position by internal contamination (contaminated hydraulic fluid, abrasion or residual contamination from system components). As a result, the axial piston unit can no longer supply the flow specified by the operator.

Check whether your application requires that remedial measures be taken on your machine in order to bring the driven consumer into a safe position (e.g. immediate stop).

### Assignment

Direction of rotation - Control - Direction of through put flow

	Actuation of solenoid	Control pressure	Through put flow	Operating pressure
Direction of rotation CW	a	X <sub>1</sub>	A to B	M <sub>B</sub>
	b	X <sub>2</sub>	B to A	M <sub>A</sub>
Direction of rotation CCW	a	X <sub>1</sub>	B to A	M <sub>A</sub>
	b	X <sub>2</sub>	A to B	M <sub>B</sub>

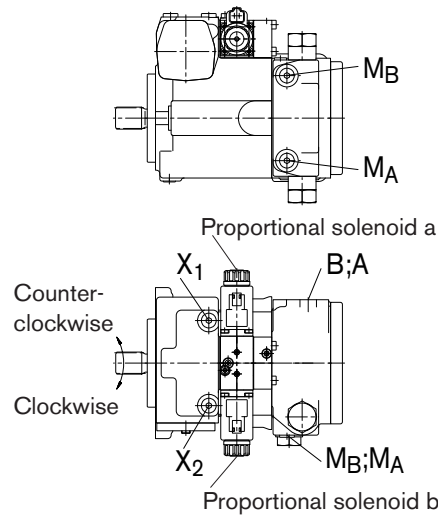


Standard: proportional solenoid without manual emergency operation.  
On request: manual emergency operation with spring reset available.




# EP - Electric Control, With Proportional Solenoid

Standard version

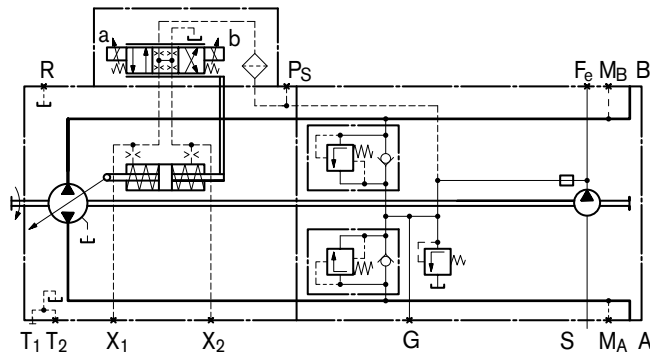

Version with DA control valve and pressure cut-off

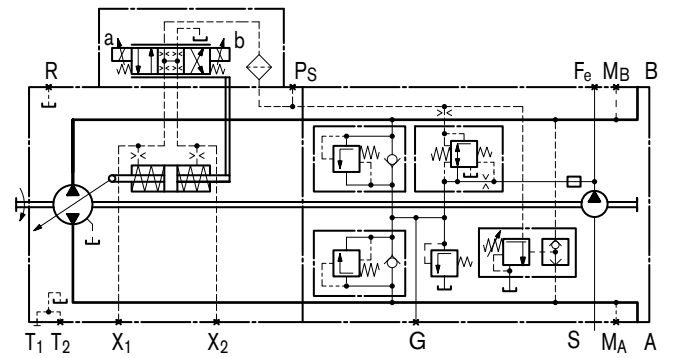

# EZ - Electric Two-Position Control, With Switching Solenoid


By energizing or de-energizing a control current to either switching solenoid a or b, the stroke cylinders of the pump are supplied with control pressure by the EZ control unit. In this way, the swashplate and thus the displacement is switchable without intermediate settings from  $V_g = 0$  to  $V_{g\ max}$ . Each direction of through put flow is assigned to a switching solenoid.

Solenoid technical data	EZ1	EZ2
Voltage	12 V DC ( $\pm 20\%$ )	24 V DC ( $\pm 20\%$ )
Neutral position $V_g = 0$	de-energized	de-energized
Position $V_{g\ max}$	current energized	current energized
Nominal resistance (at 20 °C)	5.5 $\Omega$	21.7 $\Omega$
Nominal power	26.2 W	26.5 W
Current required, minimum effective	1.32 A	0.67 A
Actuated time	100 %	100 %
Type of protection	see range of connectors on page 39	

Standard: switching solenoid without manual emergency operation.  
 On request: manual emergency operation with spring reset available.

Assignment direction of rotation - Control - Direction of through put flow DA control see page 14.


Standard version

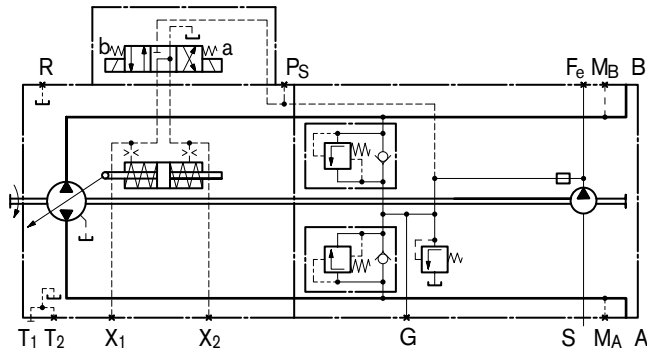

# Unit Dimensions, Size 18

Before finalizing your design, please request a binding installation drawing. Dimensions in mm.

Hydraulic control, direct operated, DG

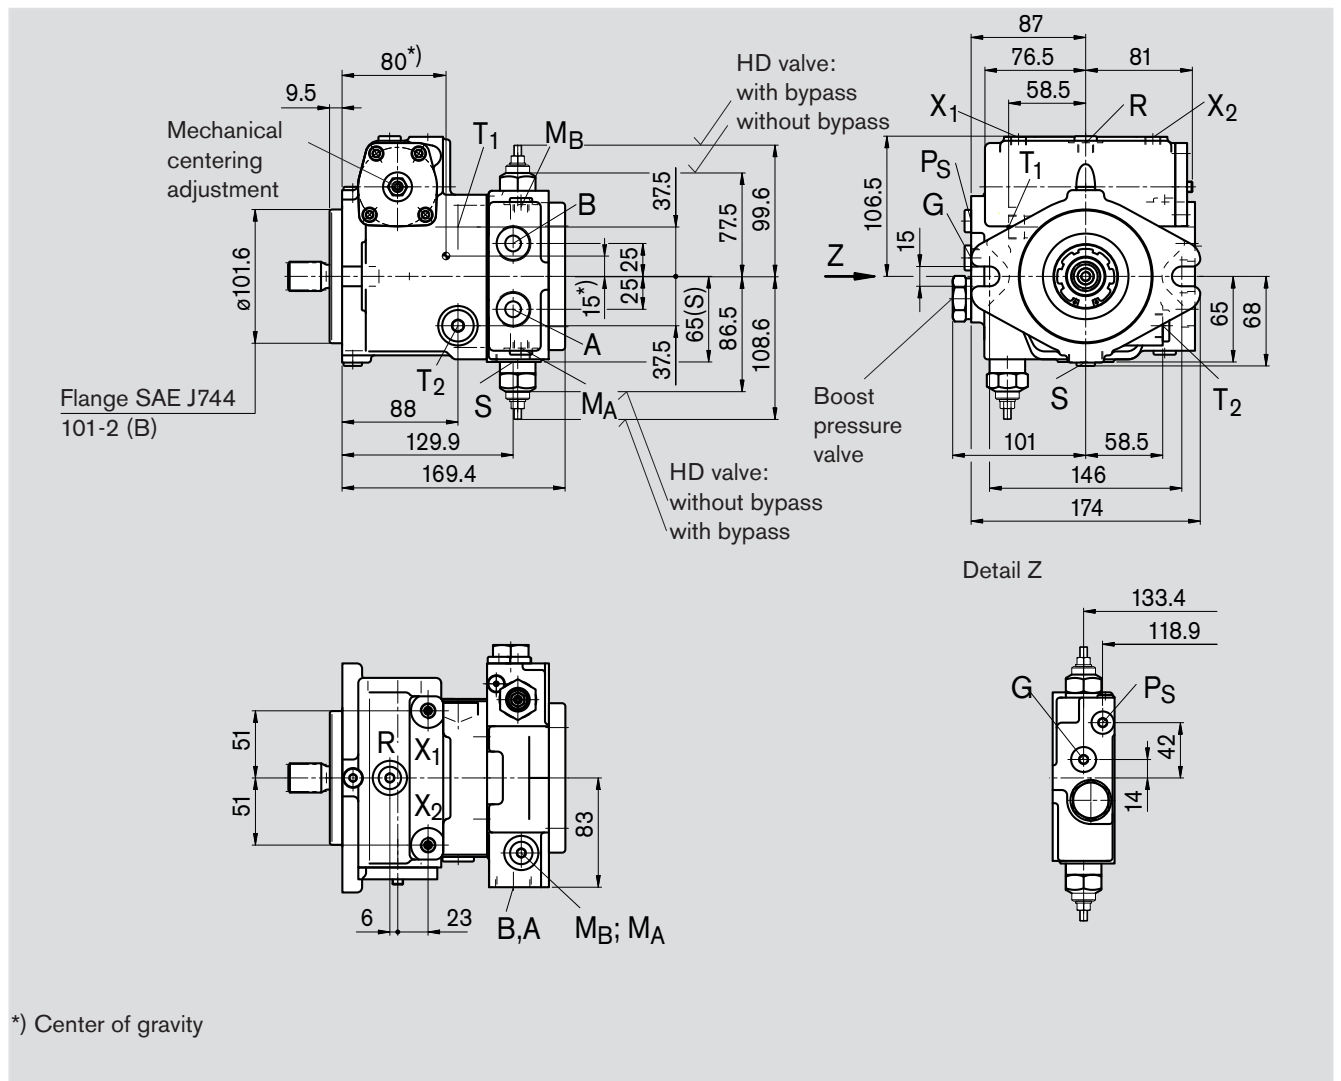


\*) Center of gravity

# Unit Dimensions, Size 18

Before finalizing your design, please request a binding installation drawing. Dimensions in mm.

## Shaft end

**S** Splined shaft 7/8in  
13T 16/32DP <sup>1)</sup>  
(SAE J744 – 22-4 (B))

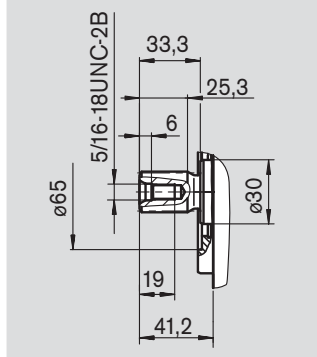

## Ports

A, B	service line ports	DIN 3852	M27x2; 16 deep	330 Nm <sup>2)</sup>
T <sub>1</sub>	case drain or fill	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>2)</sup>
T <sub>2</sub>	case drain <sup>3)</sup>	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>2)</sup>
M <sub>A</sub> , M <sub>B</sub>	pressure gauge - operating pressure A, B <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
R	air bleed <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
S	boost suction port	DIN 3852	M26x1.5; 16 deep	230 Nm <sup>2)</sup>
X <sub>1</sub> , X <sub>2</sub>	ports for control pressure (before orifice) <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
G	pressure port for auxiliary circuit <sup>3)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>2)</sup>
P <sub>S</sub>	control pressure supply <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
Y <sub>1</sub> , Y <sub>2</sub>	remote control ports (only HD)	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>2)</sup>

<sup>1)</sup> ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5


<sup>2)</sup> Please observe the general notes for the max. tightening torques on page 44

<sup>3)</sup> Plugged


# Unit Dimensions, Size 18

Before finalizing your design, please request a binding installation drawing. Dimensions in mm.


Hydraulic control, pilot-pressure related, HD

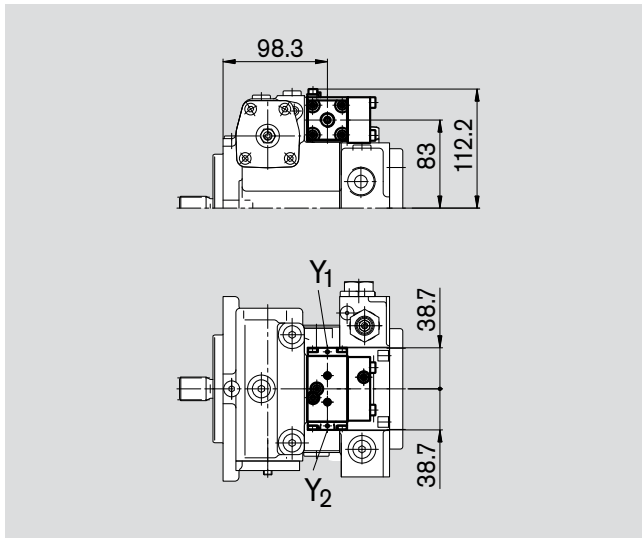


Hydraulic control, mechanical servo, HW

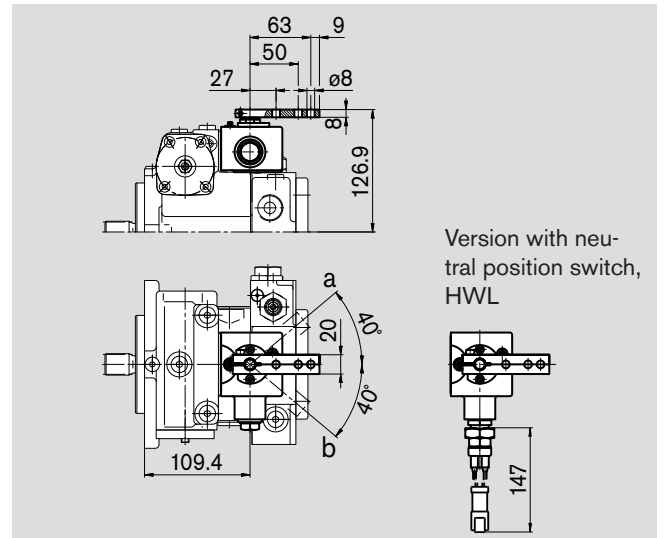


Electric two-position control with switching solenoid, EZ

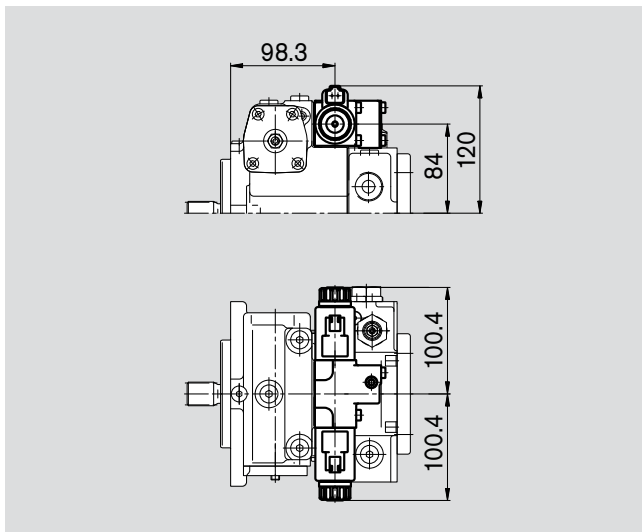


Electric control with proportional solenoid, EP

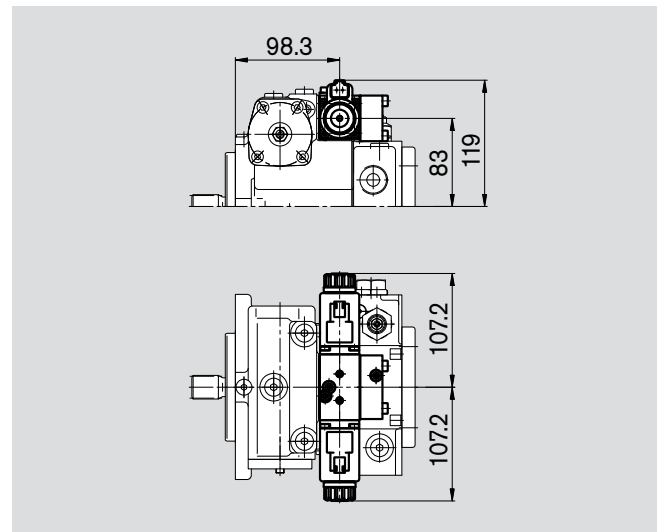

Mechanical pivot control, MD

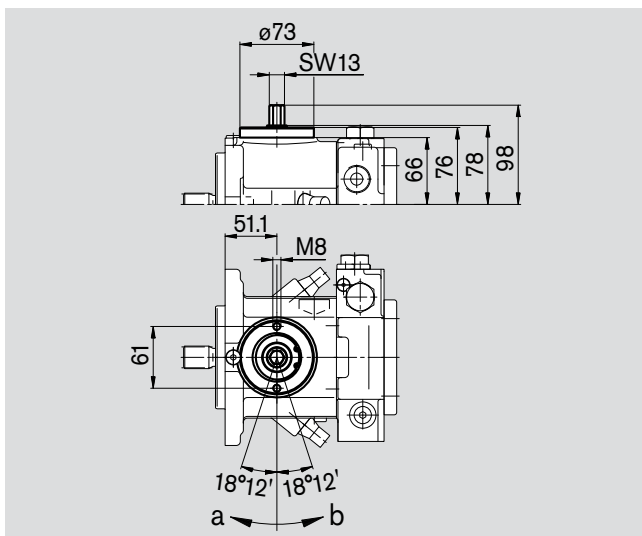


Mechanical pivot control, spring neutral position centering, MDN

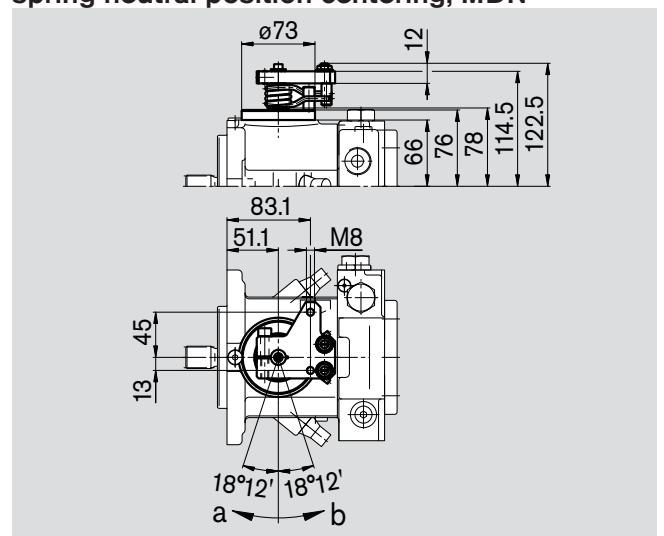

# Unit Dimensions, Size 28

Hydraulic control, direct operated, DG

Before finalizing your design, please request a binding installation drawing. Dimensions in mm.

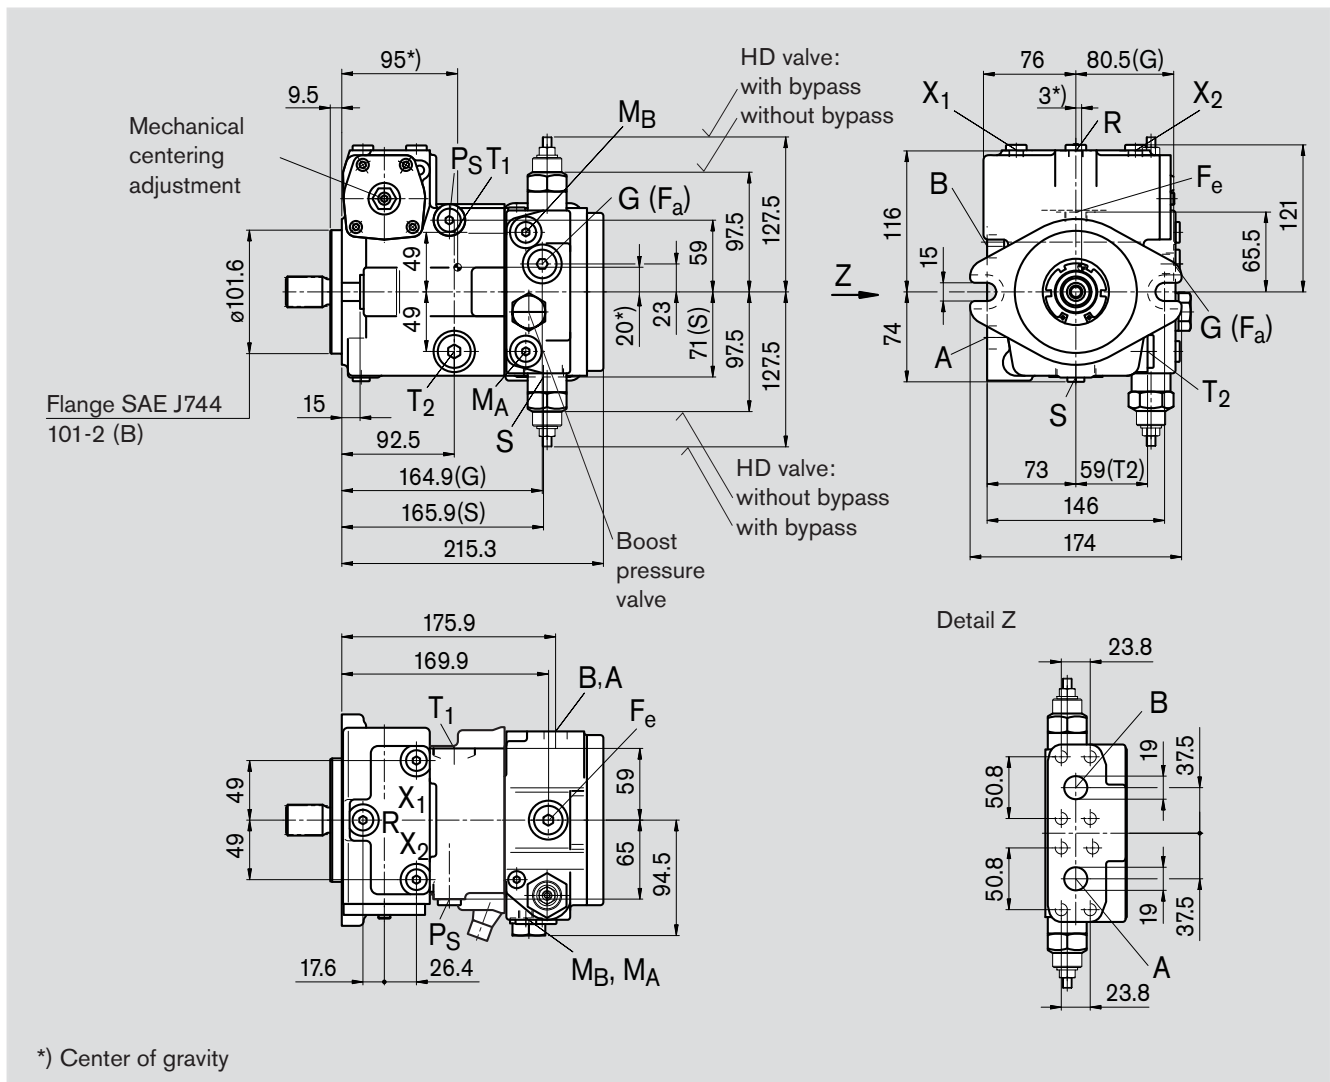


# Unit Dimensions, Size 28

Before finalizing your design, please request a binding installation drawing. Dimensions in mm.

## Shaft end

**S** Splined shaft 1 in  
15T 16/32DP <sup>1)</sup>  
(SAE J744 – 25-4 (B-B))

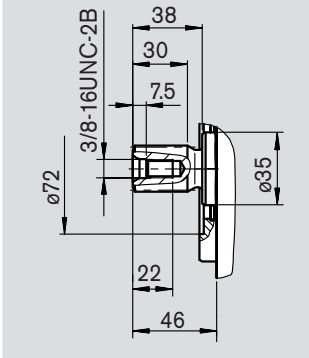

## Ports

A, B	service line ports (high-pressure series) fixing thread A/B	SAE J518 DIN 13	3/4 in M10x1.5; 17 deep <sup>2)</sup>	
T <sub>1</sub>	case drain or fill	DIN 3852	M22x1.5; 14 deep	210 Nm <sup>2)</sup>
T <sub>2</sub>	case drain <sup>3)</sup>	DIN 3852	M22x1.5; 14 deep	210 Nm <sup>2)</sup>
M <sub>A</sub> , M <sub>B</sub>	pressure gauge - operating pressure A, B <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
R	air bleed <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
S	boost suction port	DIN 3852	M33x2; 18 deep	540 Nm <sup>2)</sup>
X <sub>1</sub> , X <sub>2</sub>	ports for control pressure (before orifice) <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
G (F <sub>a</sub> )	pressure port for auxiliary circuits <sup>3)</sup> (without control cartridge)	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>2)</sup>
P <sub>S</sub>	control pressure supply, boost pressure <sup>3)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>2)</sup>
F <sub>e</sub>	filter input <sup>3)</sup>	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>2)</sup>
Y <sub>1</sub> , Y <sub>2</sub>	remote control ports (only HD)	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>2)</sup>
Z	pilot pressure port (only DA4/8) <sup>3)</sup>	DIN 3852	M10x1; 8 deep	30 Nm <sup>2)</sup>
Y	pilot pressure port (only DA7)	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>2)</sup>

<sup>1)</sup> ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5


<sup>2)</sup> Please observe the general notes for the max. tightening torques on page 44

<sup>3)</sup> Plugged


# Unit Dimensions, Size 28

Before finalizing your design, please request a binding installation drawing. Dimensions in mm.


## Hydraulic control, pilot-pressure related, HD

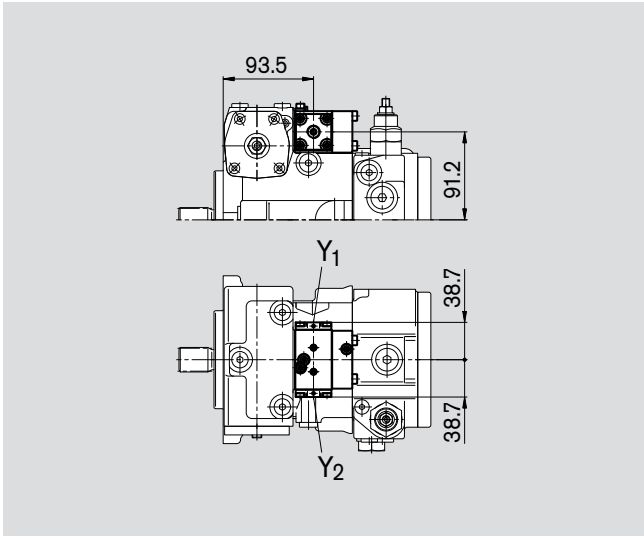


## Hydraulic control, mechanical servo, HW

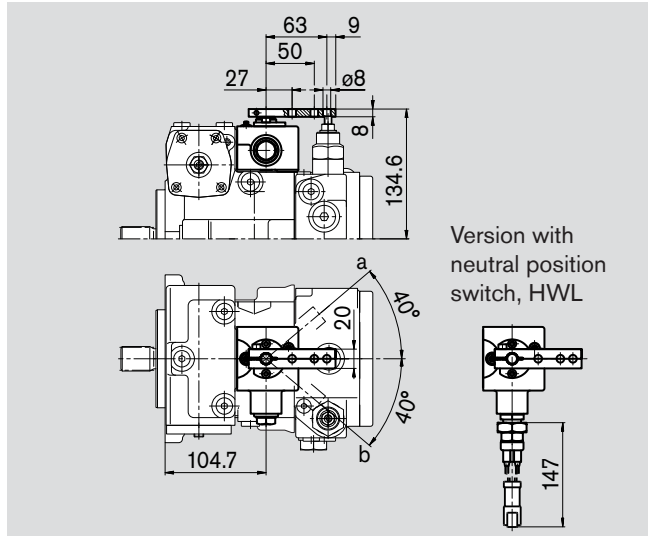


## Electric two-position control with switching solenoid, EZ

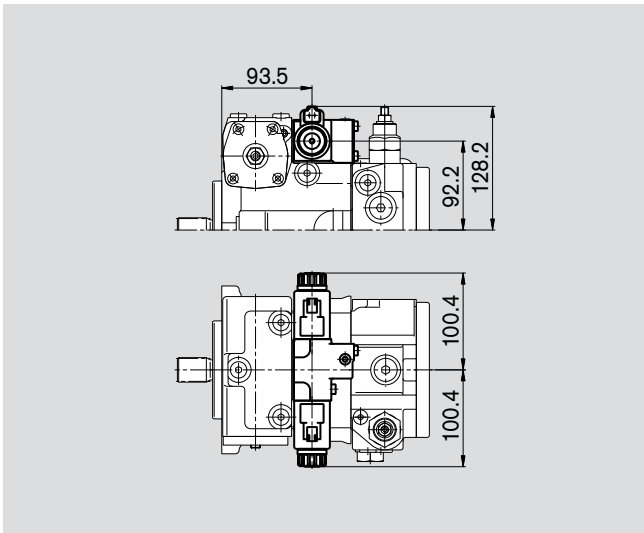

## Electric control with proportional solenoid, EP

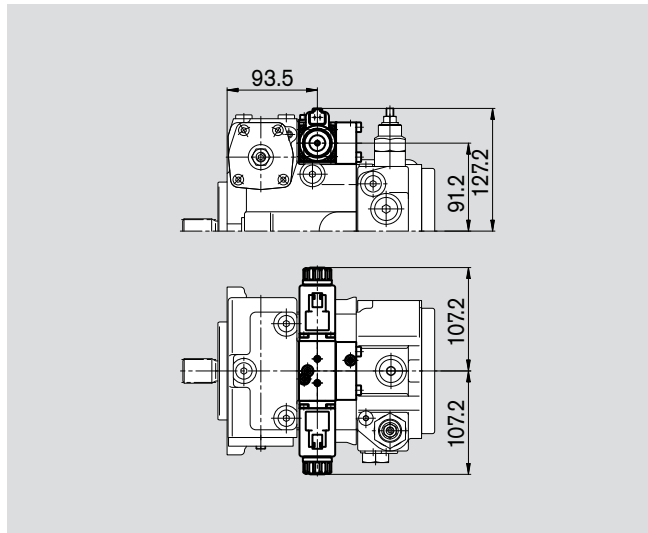

## Pressure cut-off, D

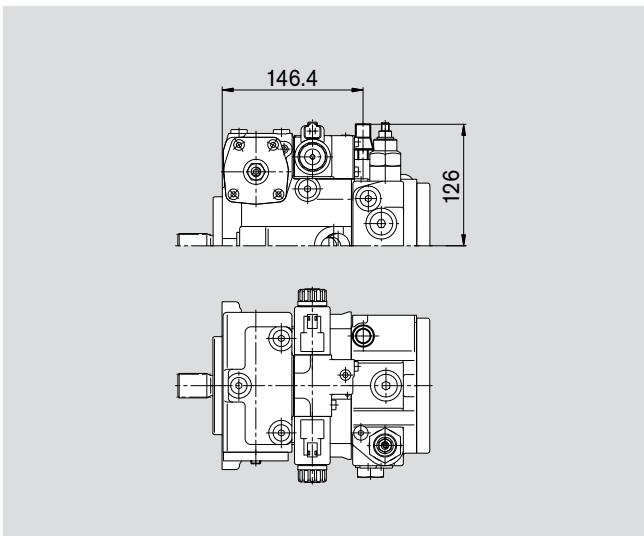






# Unit Dimensions, Size 45

Hydraulic control, direct operated, DG


Before finalizing your design, please request a binding installation drawing. Dimensions in mm.

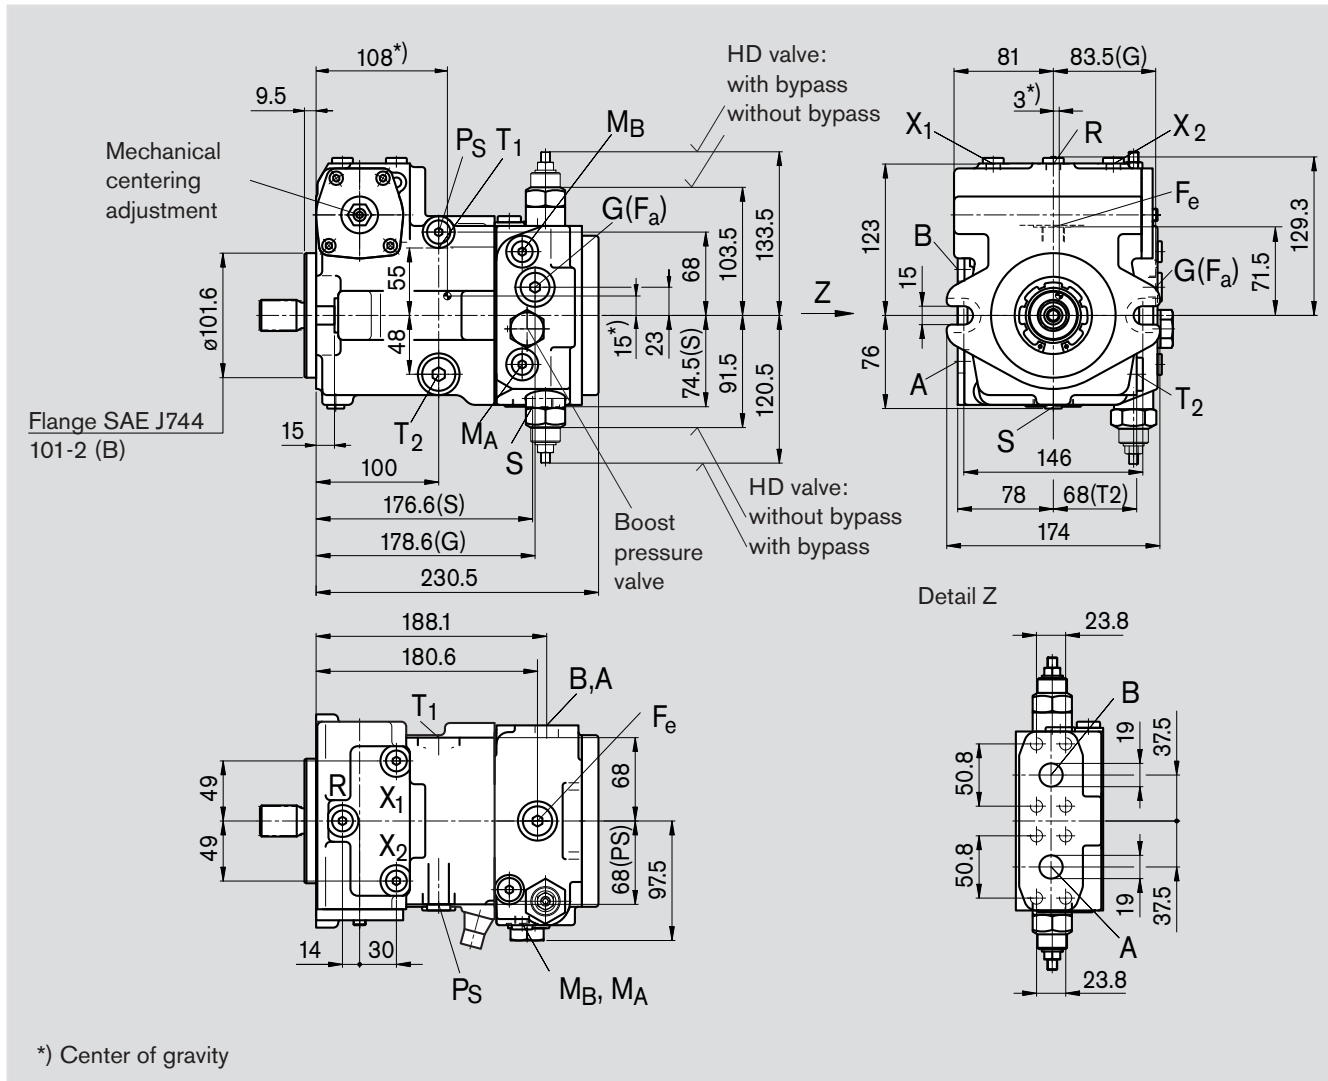

# Unit Dimensions, Size 45

Before finalizing your design, please request a binding installation drawing. Dimensions in mm.

## Shaft ends

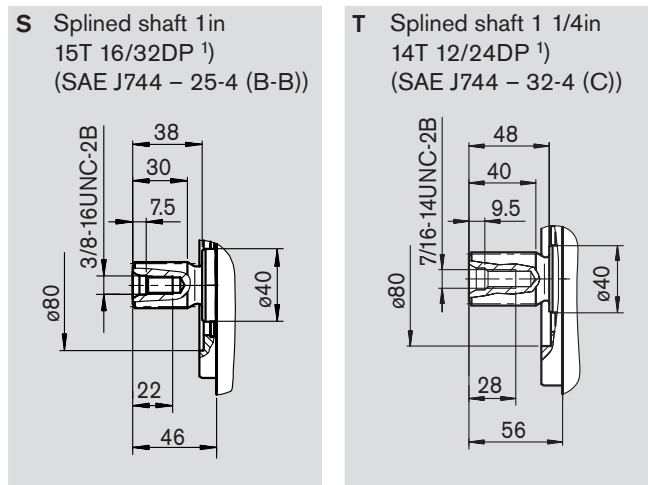

## Ports

A, B	service line ports (high-pressure series) fixing thread A/B	SAE J518	3/4 in	
		DIN 13	M10x1.5; 17 deep <sup>2)</sup>	
T <sub>1</sub>	case drain or fill	DIN 3852	M22x1.5; 14 deep	210 Nm <sup>2)</sup>
T <sub>2</sub>	case drain <sup>3)</sup>	DIN 3852	M22x1.5; 14 deep	210 Nm <sup>2)</sup>
M <sub>A</sub> , M <sub>B</sub>	pressure gauge - operating pressure A, B <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
R	air bleed <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
S	boost suction port	DIN 3852	M33x2; 18 deep	540 Nm <sup>2)</sup>
X <sub>1</sub> , X <sub>2</sub>	ports for control pressure (before orifice) <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
G (F <sub>a</sub> )	pressure port for auxiliary circuits <sup>3)</sup>	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>2)</sup>
P <sub>S</sub>	control pressure supply, boost pressure <sup>3)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>2)</sup>
F <sub>e</sub>	filter input <sup>3)</sup>	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>2)</sup>
Y <sub>1</sub> , Y <sub>2</sub>	remote control ports (only HD)	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>2)</sup>
Z	pilot pressure port (only DA4/8) <sup>3)</sup>	DIN 3852	M10x1; 8 deep	30 Nm <sup>2)</sup>
Y	pilot pressure port (only DA7)	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>2)</sup>

<sup>1)</sup> ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5


<sup>2)</sup> Please observe the general notes for the max. tightening torques on page 44

<sup>3)</sup> Plugged


# Unit Dimensions, Size 45

Before finalizing your design, please request a binding installation drawing. Dimensions in mm.


## Hydraulic control, pilot-pressure related, HD

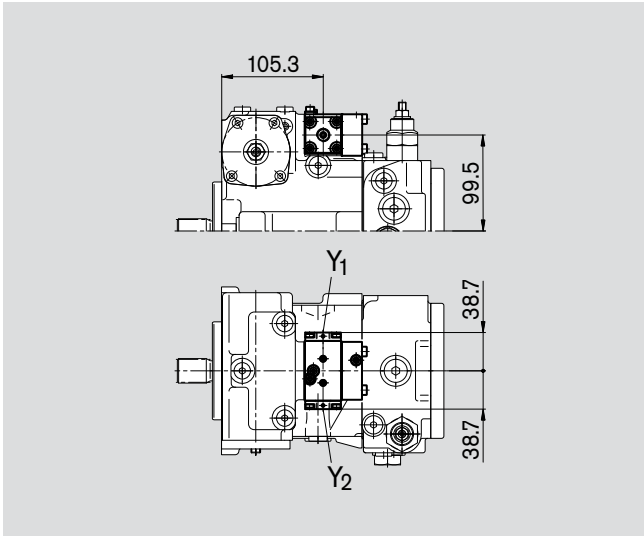


## Hydraulic control, mechanical servo, HW

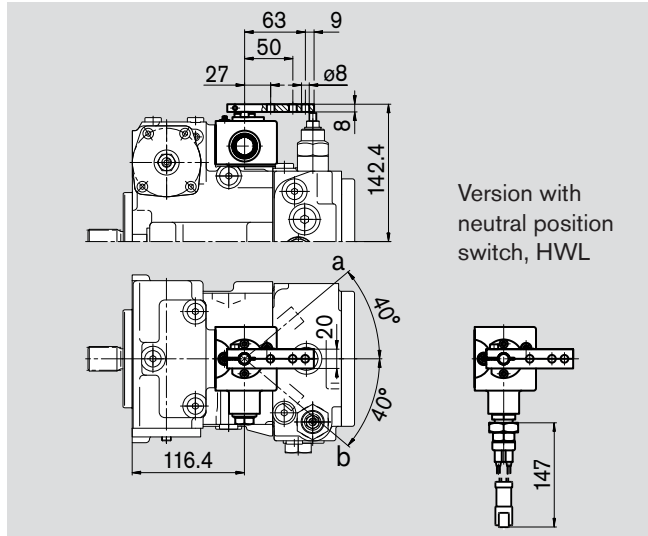


## Electric two-position control with switching solenoid, EZ

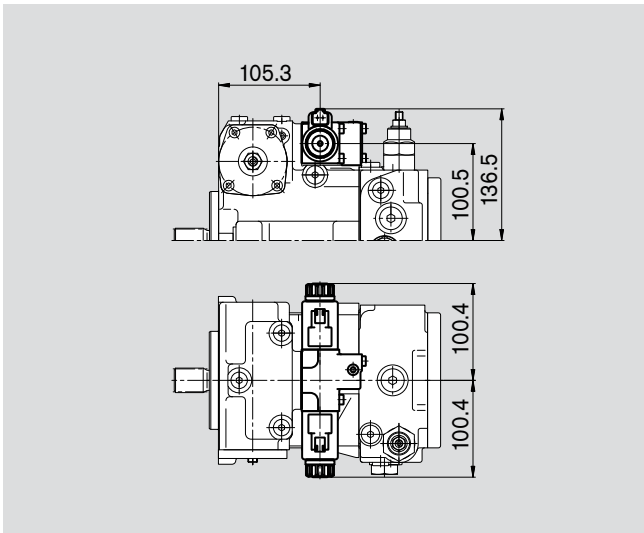

## Electric control with proportional solenoid, EP

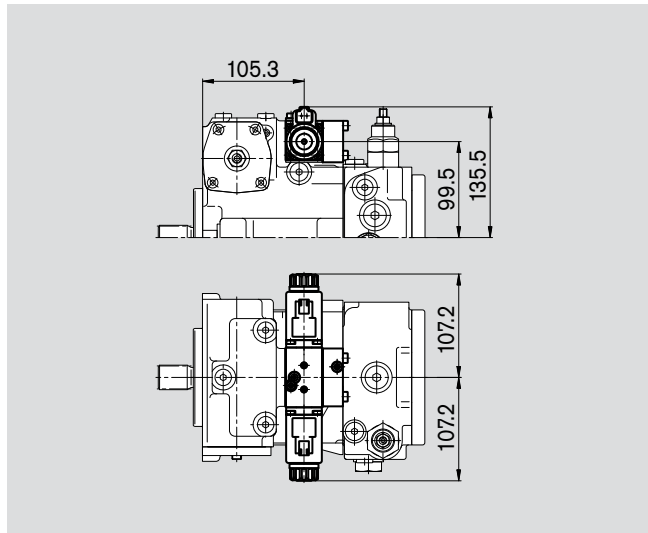

## Pressure cut-off, D

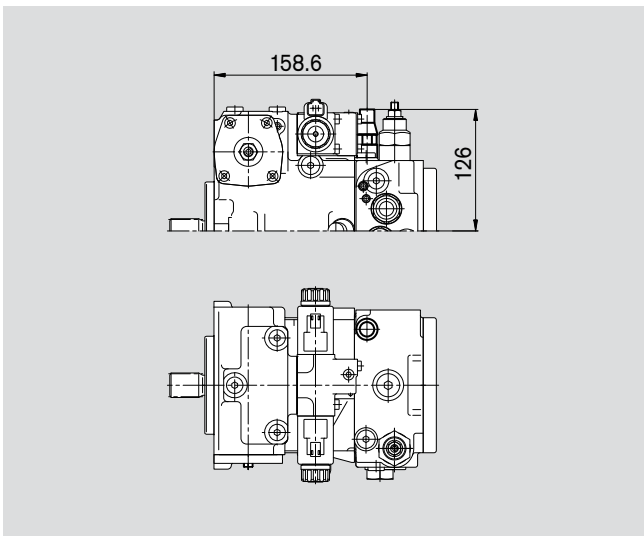


# Unit Dimensions, Size 45


Before finalizing your design, please request a binding installation drawing. Dimensions in mm.

## Hydraulic control, speed related, DA


### Control valve, fixed setting, DA2

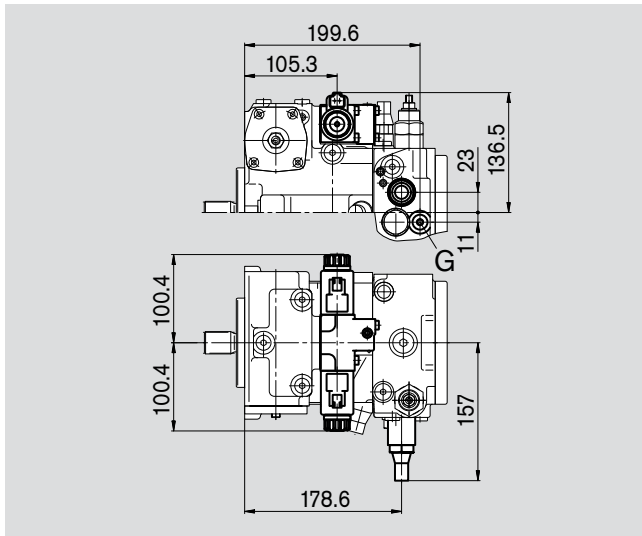


Control valve, fixed setting and hydraulic inch valve mounted, DA4/DA8

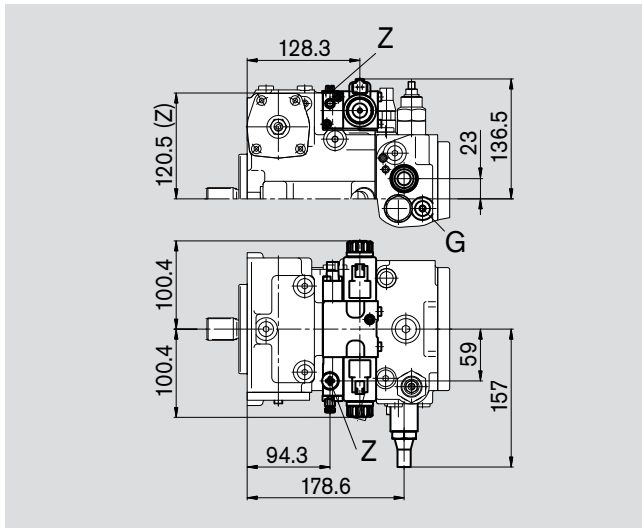

### Control valve, mech. adjustable with position lever, DA3

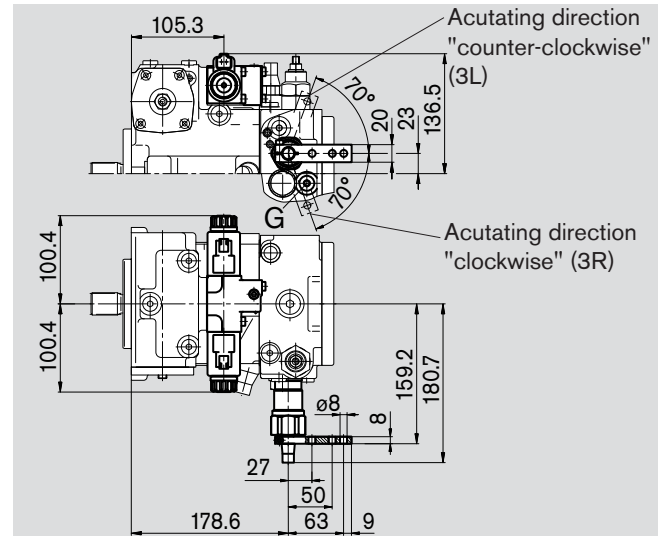

Control valve, fixed setting and ports for pilot control device DA7

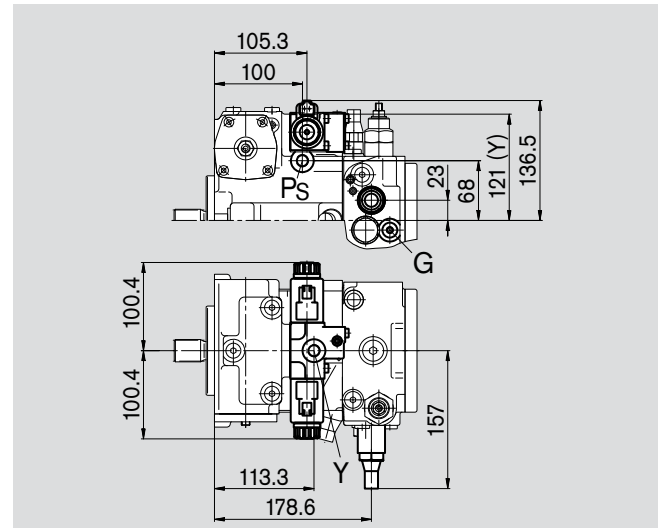

**Important:**

Position and size of port G on version with DA control valve


G     DIN 3852     M12x1.5; 12 deep     50 Nm <sup>1)</sup>

<sup>1)</sup> Please observe the general notes for the max. tightening torques on page 44

# Unit Dimensions, Size 63

Hydraulic control, direct operated, DG

Before finalizing your design, please request a binding installation drawing. Dimensions in mm.

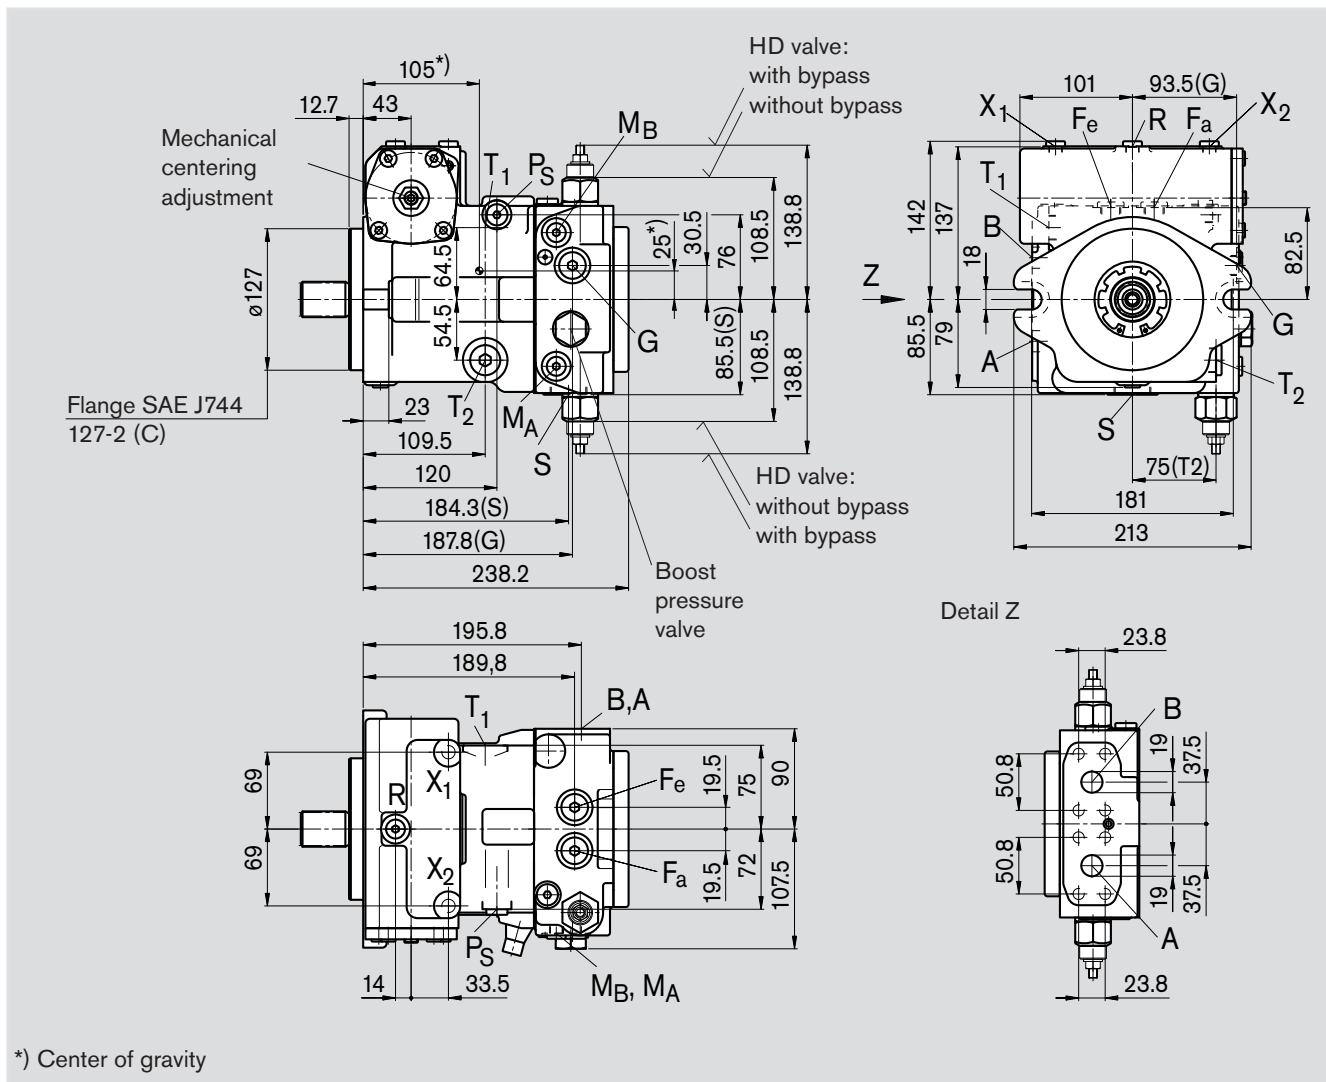


# Unit Dimensions, Size 63


Before finalizing your design, please request a binding installation drawing. Dimensions in mm.

## Shaft ends

**S** Splined shaft 1 1/4in  
14T 12/24DP <sup>1)</sup>  
(SAE J744 – 32-4 (C))



**T** Splined shaft 1 3/8in  
21T 16/32DP <sup>1)</sup>



## Ports

A, B	service line ports (high-pressure series) fixing thread A/B	SAE J518 DIN 13	3/4 in M10x1.5; 17 deep <sup>2)</sup>	
T <sub>1</sub>	case drain or fill	DIN 3852	M22x1.5; 14 deep	210 Nm <sup>2)</sup>
T <sub>2</sub>	case drain <sup>3)</sup>	DIN 3852	M22x1.5; 14 deep	210 Nm <sup>2)</sup>
M <sub>A</sub> , M <sub>B</sub>	pressure gauge - operating pressure A, B <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
R	air bleed <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
S	boost suction port	DIN 3852	M33x2; 18 deep	540 Nm <sup>2)</sup>
X <sub>1</sub> , X <sub>2</sub>	ports for control pressure (before orifice) <sup>3)</sup>	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
G	pressure port for auxiliary circuits <sup>3)</sup>	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>2)</sup>
P <sub>S</sub>	control pressure supply, boost pressure <sup>3)</sup>	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>2)</sup>
F <sub>a</sub>	filter output <sup>3)</sup>	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>2)</sup>
F <sub>e</sub>	filter input <sup>3)</sup>	DIN 3852	M18x1.5; 12 deep	140 Nm <sup>2)</sup>
Y <sub>1</sub> , Y <sub>2</sub>	remote control ports (only HD)	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>2)</sup>
M <sub>H</sub>	port for balanced high pressure <sup>3)</sup> (only with pressure cut-off)	DIN 3852	M12x1.5; 12 deep	50 Nm <sup>2)</sup>
Z	pilot pressure port (only DA4/8) <sup>3)</sup>	DIN 3852	M10x1; 8 deep	30 Nm <sup>2)</sup>
Y	pilot pressure port (only DA7)	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>2)</sup>

<sup>1)</sup> ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5


<sup>2)</sup> Please observe the general notes for the max. tightening torques on 44

<sup>3)</sup> Plugged


# Unit Dimensions, Size 63

Before finalizing your design, please request a binding installation drawing. Dimensions in mm.


## Hydraulic control, pilot-pressure related, HD

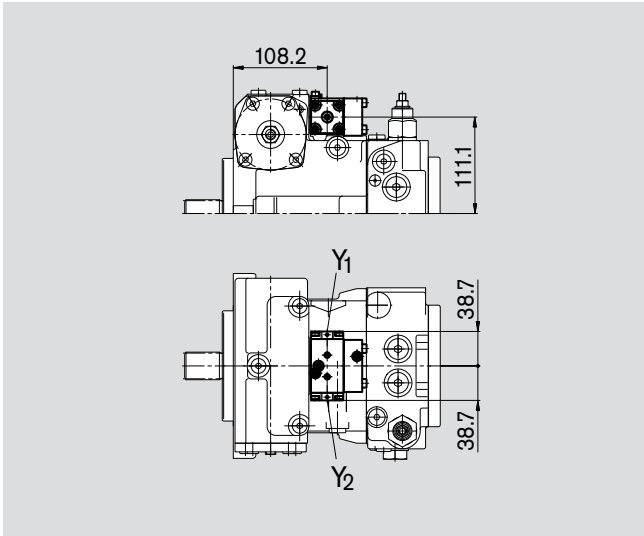


## Hydraulic control, mechanical servo, HW

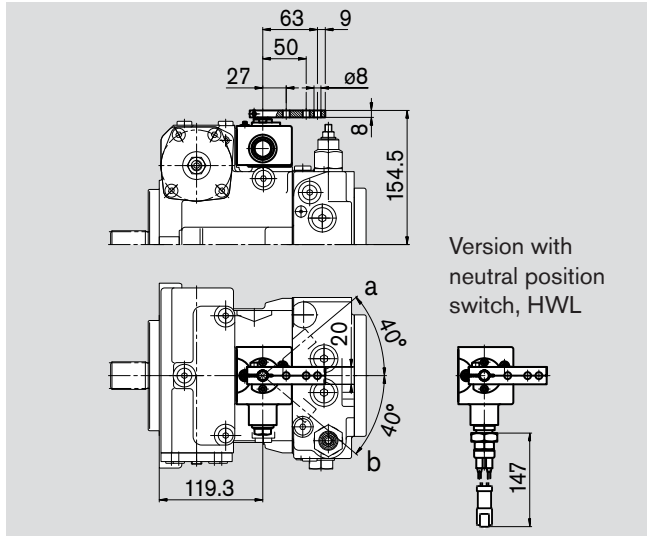


## Electric two-position control with switching solenoid, EZ

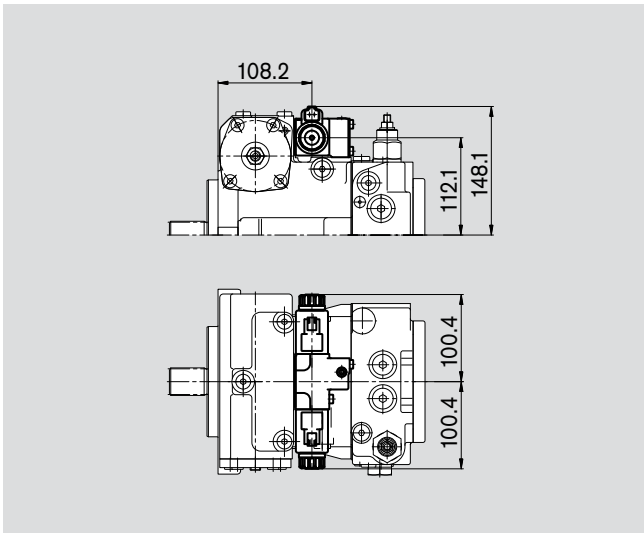

## Electric control with proportional solenoid, EP

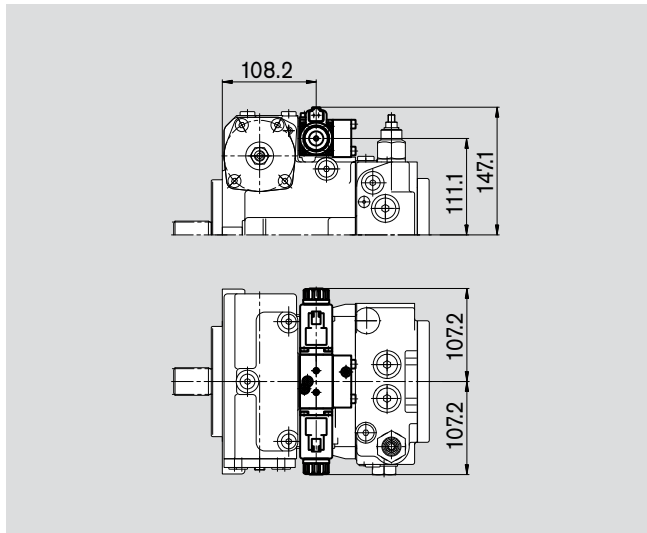

## Pressure cut-off, D

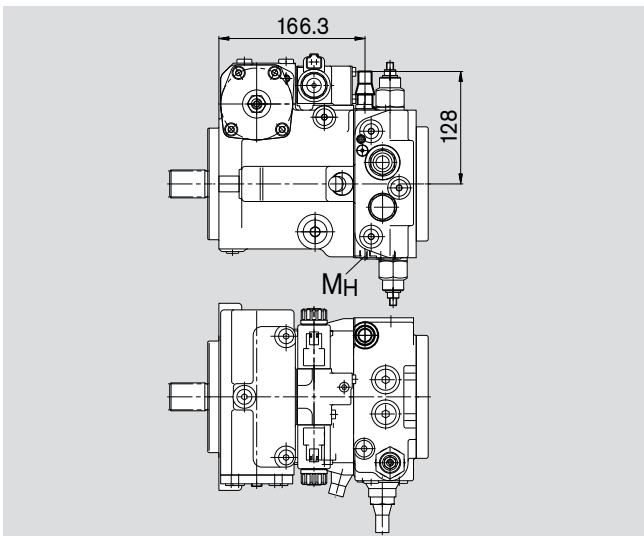




# Unit Dimensions, Size 63


Before finalizing your design, please request a binding installation drawing. Dimensions in mm.

## Hydraulic control, speed related, DA


### Control valve, fixed setting, DA2

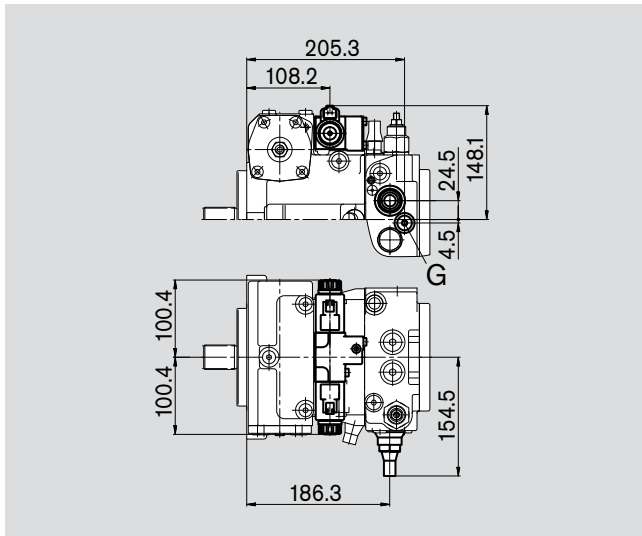


Control valve, fixed setting and hydraulic inch valve mounted, DA4/DA8

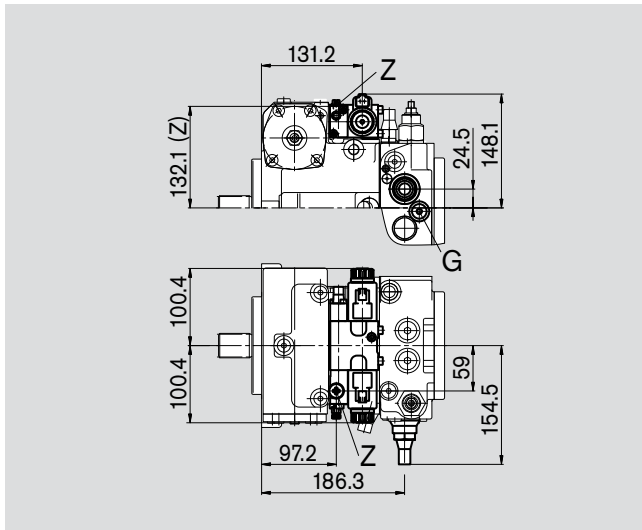

### Control valve, mech. adjustable with position lever, DA3

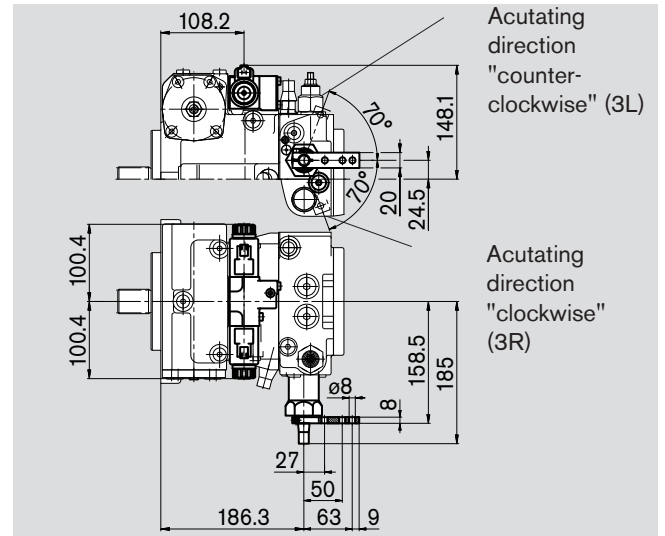

Control valve, fixed setting and ports for pilot control device, DA7

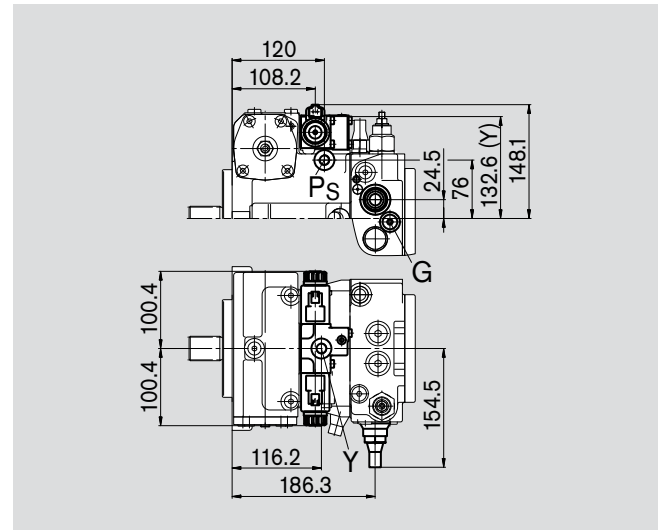

**Important:**

Position and size of port G on version with DA control valve


G     DIN 3852     M14x1.5; 12 deep     80 Nm <sup>1)</sup>

<sup>1)</sup> Please observe the general notes for the max. tightening torques on 44

# Through Drive Dimensions

Before finalizing your design, please request a binding installation drawing. Dimensions in mm.


**N00** Without boost pump, without through drive  
**F00** With boost pump, without through drive

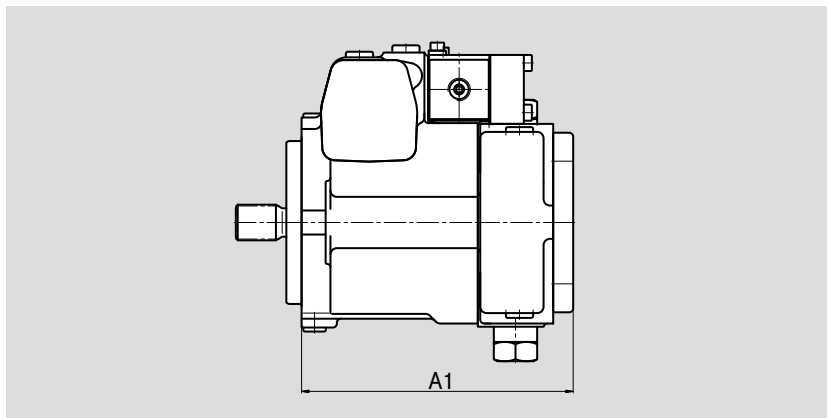

Size	A1 (N00)	A1 (F00)
18	169.4	169.4
28	201.7	215.3
45	216.8	230.5
63	224.5	238.2

**F01/K01** Flange SAE J744 – 82-2 (A)


Hub for splined shaft according to ANSI B92.1a-1976 5/8in 9T 16/32DP<sup>1)</sup> (SAE J744 – 16-4 (A))

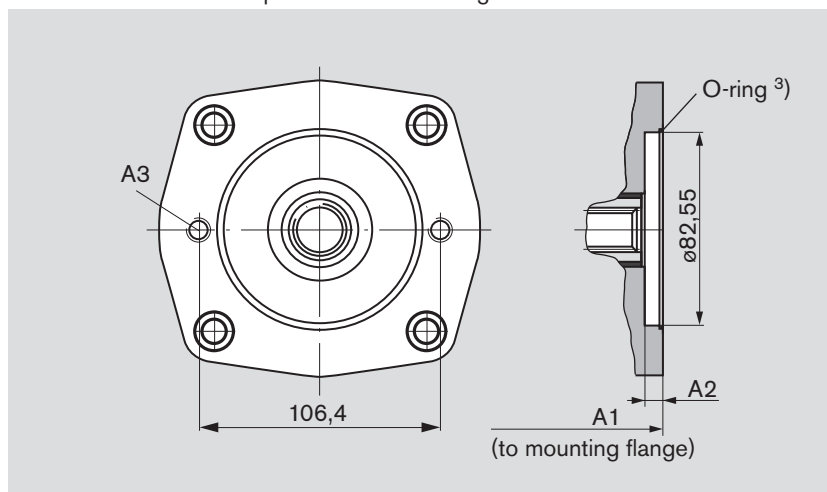

Size	A1	A2	A3 <sup>2)</sup>
18	178.4	9	M10x1.5; 15 deep
28	219.2	9	M10x1.5; 17.5 deep
45	234.5	9	M10x1.5; 17.5 deep
63	242.2	9	M10x1.5; 17.5 deep

**F02/K02** Flange SAE J744 – 101-2 (B)

Hub for splined shaft according to ANSI B92.1a-1976 7/8in 13T 16/32DP<sup>1)</sup> (SAE J744 – 22-4 (B))

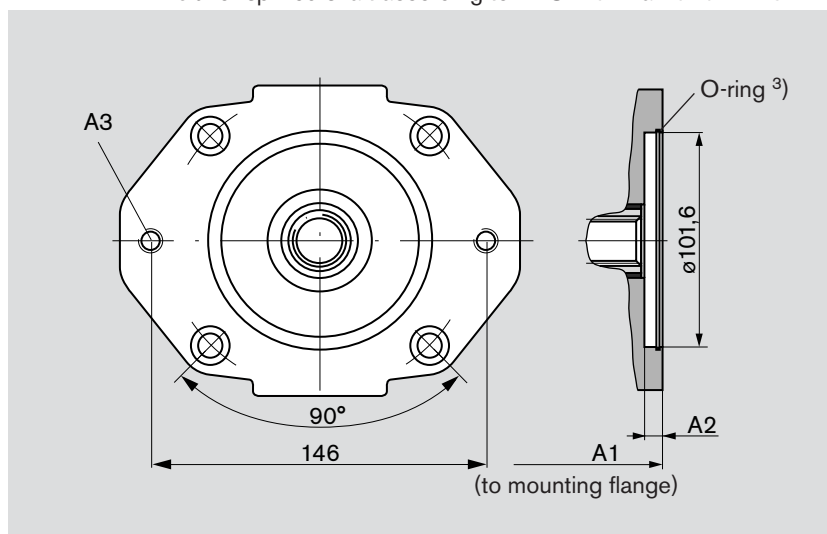

Size	A1	A2	A3 <sup>2)</sup>
18	187.4	10	M12x1.75; 18 deep
28	220.2	10	M12x1.75; 18.5 deep
45	235.5	10	M12x1.75; 18.5 deep
63	243.2	10	M12x1.75; 18.5 deep

<sup>1)</sup> 30° pressure angle, flat root, side fit, tolerance class 5

<sup>2)</sup> Thread acc. to DIN 13, please observe the general notes for the max. tightening torques on 44

<sup>3)</sup> O-ring included in supply


Note: the mounting flange can be turned through 90°. Standard position is shown. Please state in plain text if required.

# Through Drive Dimensions

Before finalizing your design, please request a binding installation drawing. Dimensions in mm.

## F04/K04 Flange SAE J744 – 101-2 (B)


Hub for splined shaft according to ANSI B92.1a-1976 1 in 15T 16/32DP <sup>1)</sup> (SAE J744 – 25-4 (B-B))

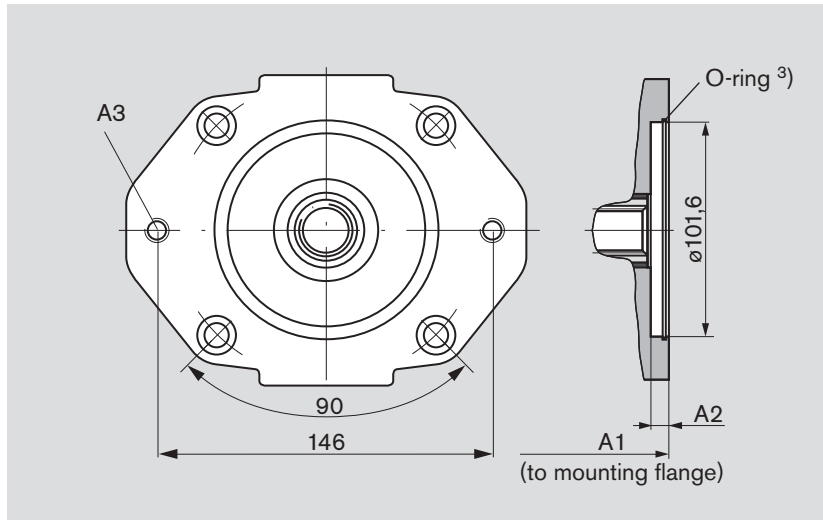

Size	A1	A2	A3 <sup>2)</sup>
28	220.2	10	M12x1.75; 18.5 deep
45	235.5	10	M12x1.75; 18.5 deep
63	243.2	10	M12x1.75; 18.5 deep

## F07/K07 Flange SAE J744 – 127-2 (C)

Hub for splined shaft according to ANSI B92.1a-1976 1 1/4in 14T 12/24DP <sup>1)</sup> (SAE J744 – 32-4 (C))

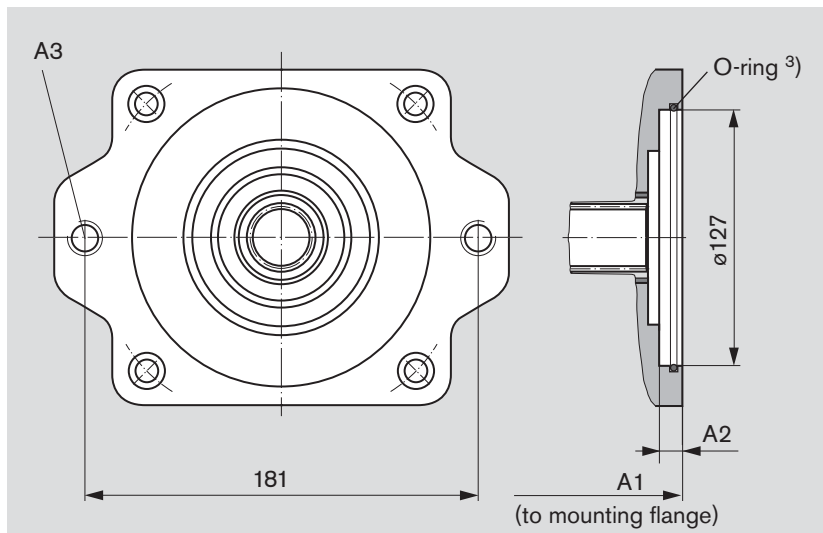

Size	A1	A2	A3 <sup>2)</sup>
63	249.5	14	M16x2; 24.8 deep

<sup>1)</sup> 30° pressure angle, flat root, side fit, tolerance class 5

<sup>2)</sup> Thread acc. to DIN 13, please observe the general notes for the max. tightening torques on 44

<sup>3)</sup> O-ring included in supply

Note: the mounting flange can be turned through 90°. Standard position is shown. Please state in plain text if required.

## Overview of Attachments on A10VG

Through drive – A10VG										Through drive
Flange	Hub for splined shaft	Code	A10VG Size (shaft)	A4VG Size (shaft)	A10V(S)O/31 Size (shaft)	A10V(S)O/53 Size (shaft)	A4FO Size (shaft)	A11VO Size (shaft)	External gear pump	Available for size
82-2 (A)	5/8 in	F/K01	–	–	18 (U)	10 (U)	–	–	size F size 4-22 <sup>1)</sup>	18...63
101-2 (B)	7/8 in	F/K02	18 (S)	–	28 (S,R)	28 (S,R)	16 (S) 22 (S)	–	Size N size 20-32 <sup>1)</sup>	18...63
					45 (U)	45 (U,W)	28 (S)	Size G size 38-45 <sup>1)</sup>		
	1 in	F/K04	28 (S) 45 (S)	28 (S)	45 (S,R)	45 (S,R) 60 (U,W)	–	40 (S)	–	28...63
127-2 (C)	1 1/4 in	F/K07	63 (S)	40 (S), 56 (S) 71 (S)	71 (S,R) 100 (U)	85 (U)	–	60 (S)	–	63

<sup>1)</sup> Rexroth recommends special gear pump versions. Please contact us.

## Combination Pumps A10VG + A10VG

### Overall length A

A10VG (1st pump)	A10VG (2nd pump) <sup>1)</sup>			
	Size 18	Size 28	Size 45	Size 63
Size 18	356.8	–	–	–
Size 28	389.6	435.5	–	–
Size 45	404.9	450.8	466.0	–
Size 63	412.6	458.5	473.7	487.7

<sup>1)</sup> 2nd pump without through drive and with boost pump, F00

Combination pumps make it possible to have independent circuits without the need to fit splitter gearboxes.


When ordering combination pumps, the type designations of the 1st and 2nd pumps must be linked by a "+".

Example of order:

A10VG45HW1/10R-NTC10F04 + A10VG45HW1/10R-NSC10F00

A tandem pump combined of two equal sizes is permissible without additional supports where the dynamic acceleration does not exceed max. 10g (= 98.1 m/s<sup>2</sup>).

For combination pumps consisting of more than two pumps, the mounting flange must be rated for the permissible mass torque.

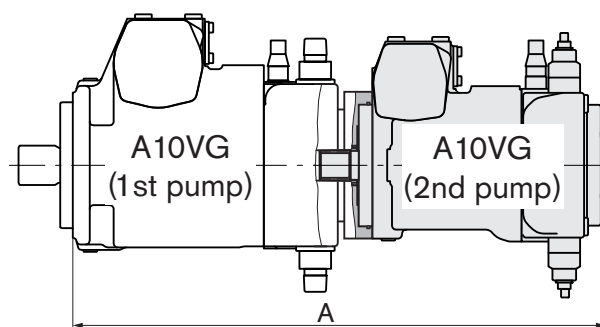

## Mechanical Stroke Limiter, M



The mechanical stroke limiter is an additional function allowing continuous reduction of the maximum displacement of the pump, regardless of the control unit used.

The stroke of the stroke cylinder and hence the maximum swivel angle of the pump are limited by means of two adjusting screws.

### Dimensions

Size	M1	M2	M3	M4
18	94.9	96.9	18	42.1
28	99	99	21.5	35
45	101.6	101.6	22.5	35.5
63	124	124	26.5	43

### Circuit diagram

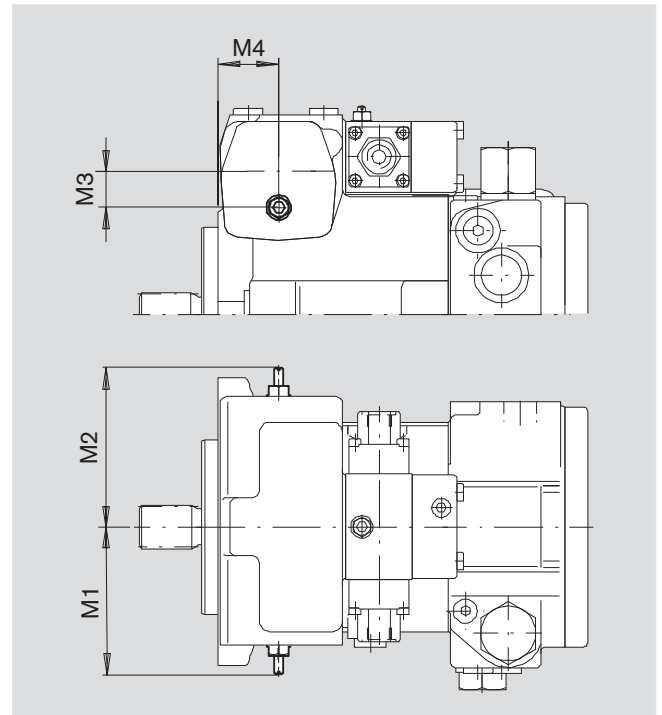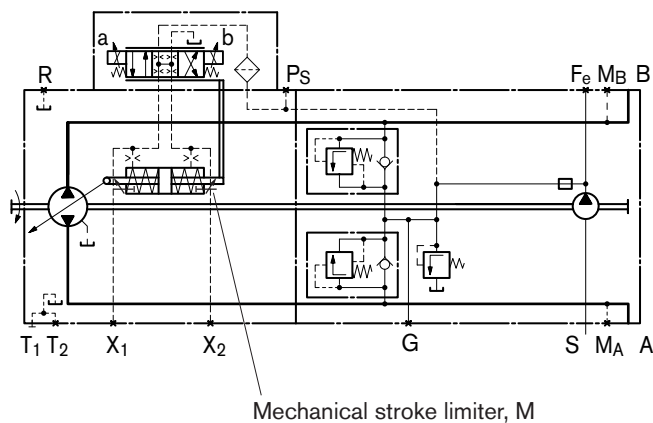

# Filtration Types

## Standard: Filtration in the suction line of the boost pump, S

Standard version (preferred)

Filter type: \_\_\_\_\_ filter **without** bypass

Recommendation: \_\_\_\_\_ **with** contamination indicator

Flow resistance at the filter element:

at  $v = 30 \text{ mm}^2/\text{s}$ ,  $n = n_{\text{max}}$  \_\_\_\_\_  $\Delta p \leq 0.1 \text{ bar}$

at  $v = 1000 \text{ mm}^2/\text{s}$ ,  $n = n_{\text{max}}$  \_\_\_\_\_  $\Delta p \leq 0.3 \text{ bar}$


Pressure at port S of the boost pump:

at  $v = 30 \text{ mm}^2/\text{s}$  \_\_\_\_\_  $p \geq 0.8 \text{ bar}$

at cold start ( $v = 1600 \text{ mm}^2/\text{s}$ ,  $n \leq 1000 \text{ rpm}$ ) \_\_\_\_\_  $p \geq 0.5 \text{ bar}$

Filter is not included in supply.

### Circuit diagram - standard version S

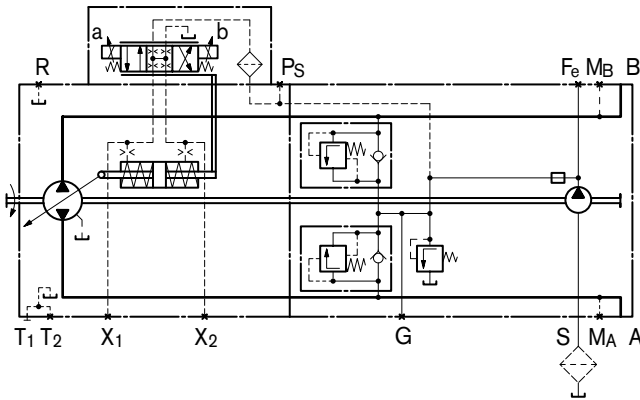

### Variation: External supply, E

This variation should be used in versions **without** integral boost pump (N00 or K..).

The supply is provided as follows:

Size 18 \_\_\_\_\_ port S

Size 28, 45 (without DA control valve) \_\_\_\_\_ port G

Sizes 28, 45 (with DA control valve) \_\_\_\_\_ port Fe


Size 63 \_\_\_\_\_ port Fa

With size 28, 45 and 63, port S is closed.

Filter arrangement: \_\_\_\_\_ separate

For functional reliability ensure required cleanliness level for the boost pressure fluid (see page 6).

### Circuit diagram variation E (external supply)

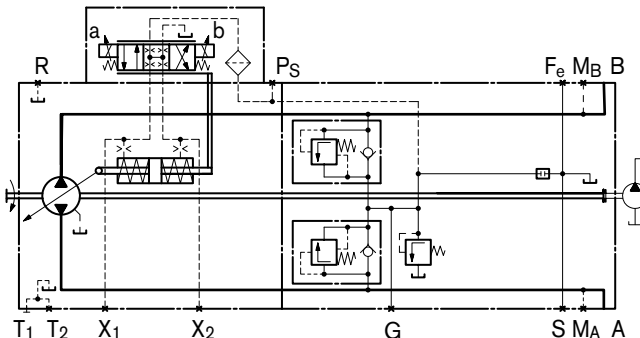

## Variation:

### Filtration in the pressure line of the boost pump, ports for external boost circuit filter, D

Filter input: \_\_\_\_\_ Port Fe

Filter output: Size 63 Port Fa  
Size 28, 45 Port G (Fa)

Filter type: Filter with bypass are **not recommended**.  
When applying with bypass please consult us.

Recommendation: **with** contamination indicator

### Note:

- In conjunction with a DA control valve, no pressure filtration is possible with size 28, 45 (refer to ordering code, page 4).
- With sizes 28, 45, port G serves as "filter output Fa".

### Note:

For versions with **DG** control (with pilot pressure not from boost circuit), the following filter type should be employed:

Filter **with** bypass and **with** contamination indicator

Filter arrangement: separately in the pressure line (line filter)

Flow resistance at the filter element:

at  $v = 30 \text{ mm}^2/\text{s}$  \_\_\_\_\_  $\Delta p \leq 1 \text{ bar}$


for cold start \_\_\_\_\_  $\Delta p \leq 3 \text{ bar}$

(valid for entire speed range  $n_{\text{min}} - n_{\text{max}}$ )


Filter is not included in supply.

### Circuit diagram variation D

Size 28, 45

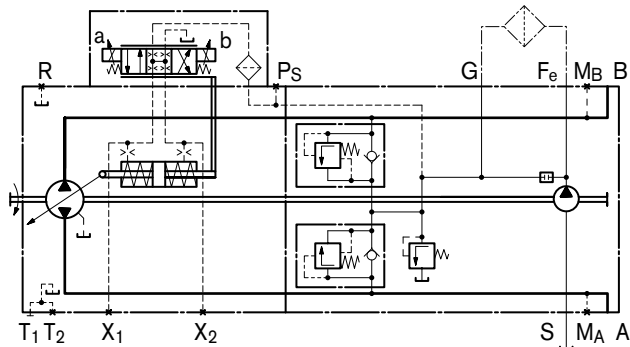

Size 63

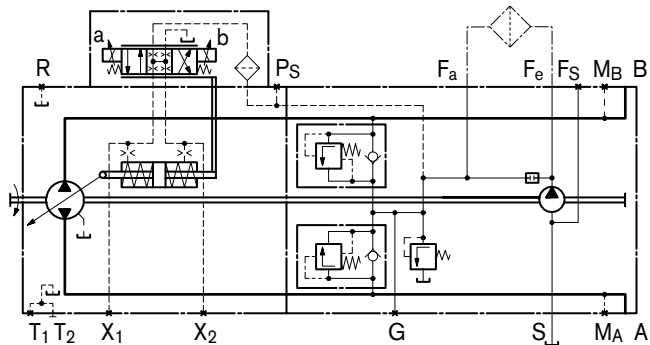

# Connector for Solenoids (Only for EP, EZ, DA)

## DEUTSCH DT04-2P-EP04, 2-pin

Molded, without bi-directional suppressor diode (standard) **\_P**


Molded, with bi-directional suppressor diode  
(only for switching solenoids on control unit EZ1/2, DA) **\_\_\_Q**

Type of protection according to DIN/EN 60529: IP67 and IP69K


The protection circuit with a bi-directional suppressor diode is necessary for limiting overvoltages. Overvoltages are generated by disconnecting the current using switches, relay contacts or by unplugging an energized mating connector.

### Circuit symbol

**without** bi-directional suppressor diode



**with** bi-directional suppressor diode




### Mating connector

DEUTSCH DT06-2S-EP04  
Rexroth Mat. No. R902601804

consisting of: DT designation  
 – 1 case \_\_\_\_\_ DT06-2S-EP04  
 – 1 wedge \_\_\_\_\_ W2S  
 – 2 sockets \_\_\_\_\_ 0462-201-16141

The mating connector is not included in supply.  
This can be supplied by Rexroth on request.

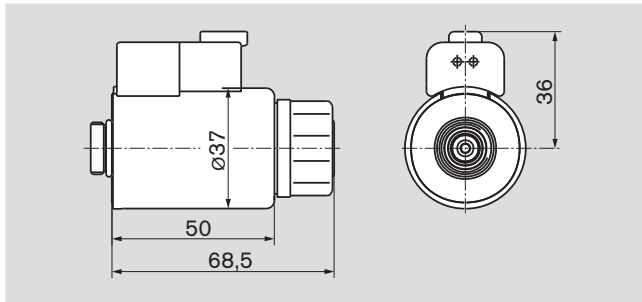

### Note for round solenoids:

The position of the connector can be changed by turning the solenoid body.

Proceed as follows:

1. Loosen the fixing nut (1)
2. Turn the solenoid body (2) to the desired position
3. Tighten the fixing nut  
Tightening torque of the fixing nut: 5<sup>+1</sup> Nm  
(width across flats WAF26, 12-sided DIN 3124)

# Rotary Inch Valve

The rotary inch valve permits the control pressure to be reduced, independent from the drive speed through the mechanical operation of the actuating lever. Maximum rotation angle 90°. The lever may be fixed in any position.

The valve is mounted separately from the pump and connected with a pump by the hydraulic control line at port P<sub>S</sub> (max. line length approximately 2 meters).

The rotary inch valve must be ordered separately.


Size	Material no.	Direction of actuation of position lever
18, 28, 45, 63	R902048734	clockwise
	R902048735	counter-clockwise

### Attention:


The rotary inch valve can be used independently from the control unit.

### Circuit diagram:

hydraulic control, speed related, DA with separate rotary inching valve

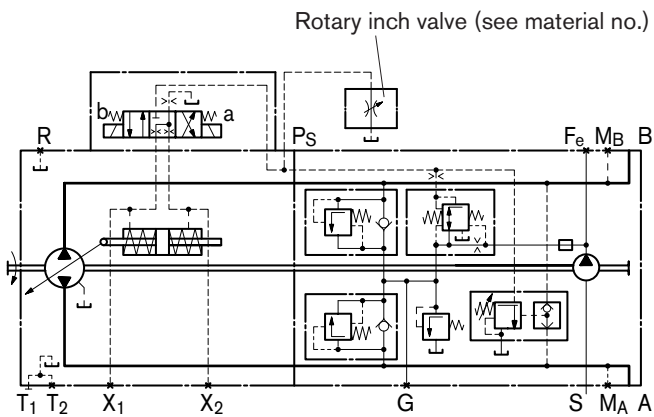

## Unit dimensions

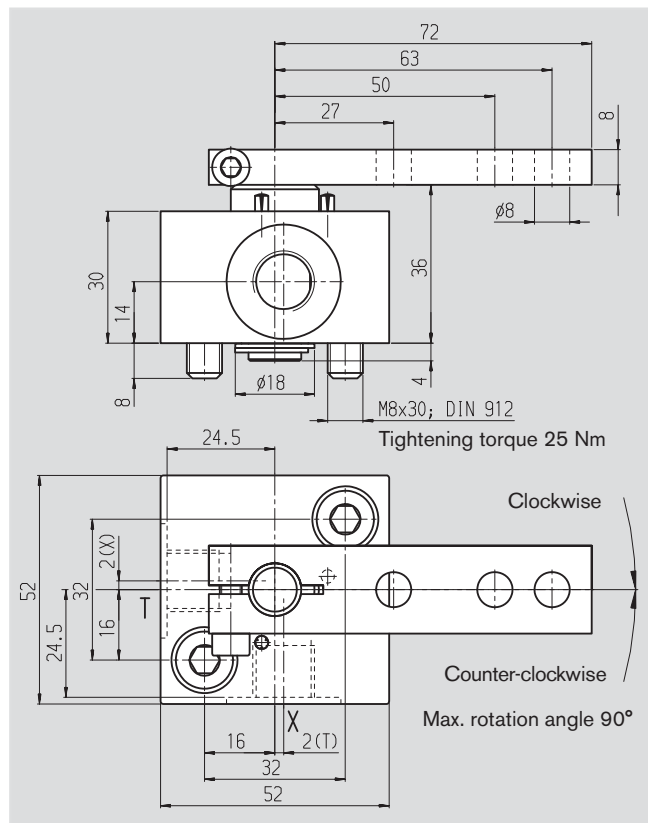

## Ports

X	pressure port	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>1)</sup>
T	drain tank	DIN 3852	M14x1.5; 12 deep	80 Nm <sup>1)</sup>

<sup>1)</sup> Please observe the general notes for the max. tightening torques on page 44



# Installation Situation for Coupling Assembly

To ensure that rotating components (coupling hub) and fixed components (case, retaining ring) do not come into contact with each other, the installation conditions described here must be observed. This depends on the size and the splined shaft.


## Size 18...45 (with free turning):

– Please observe diameter of the free turning.

## Size 63 (without free turning):

– The outer diameter of the coupling hub must be smaller than the inner diameter of the retaining ring  $d_2$  in the zone of the drive shaft collar (dimension  $x_2 - x_4$ ).

## SAE splined shaft (spline acc. to ANSI B92.1 a-1976)

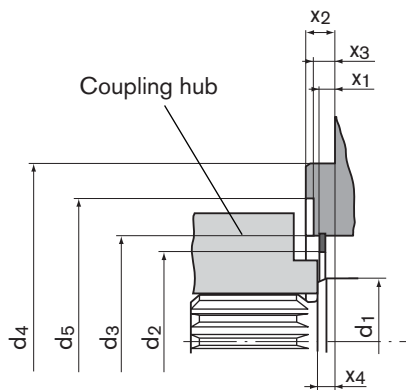

Size	$\varnothing d_1$	$\varnothing d_{2 \text{ min}}$	$\varnothing d_3$	$\varnothing d_4$	$\varnothing d_5$	$x_1$	$x_2$	$x_3$	$x_4$
18	30	36.1	$49 \pm 0.1$	101.6	65	$5.9^{+0.2}$	$9.5_{-0.5}$	7	$8^{+0.9}_{-0.6}$
28	(35)	43.4	$55 \pm 0.1$	101.6	72	$3.9^{+0.2}$	$9.5_{-0.5}$	7	$8^{+0.9}_{-0.6}$
45	40	51.4	$63 \pm 0.1$	101.6	80	$4.3^{+0.2}$	$9.5_{-0.5}$	7	$8^{+0.9}_{-0.6}$
63	40	54.4	$68 \pm 0.1$	127	–	$7.0^{+0.2}$	$12.7_{-0.5}$	–	$8^{+0.9}_{-0.6}$

# Installation Notes

## General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This is also to be observed following a relatively long standstill as the system may empty via the hydraulic lines.

The pump case drain connection (i.e. T<sub>1</sub>/T<sub>2</sub>) must be directed to the tank via the highest case drain port. The minimum suction pressure at port S must not fall below 0.8 bar abs. (cold start 0.5 bar absolute).

In all operating states, the suction line and case drain line must flow into the tank below the minimum fluid level.


## Installation position

See examples below. Additional installation positions are available upon request.

### Below-tank installation (standard)

Pump below the minimum fluid level of the tank.

Recommended installation positions: 1 and 2.

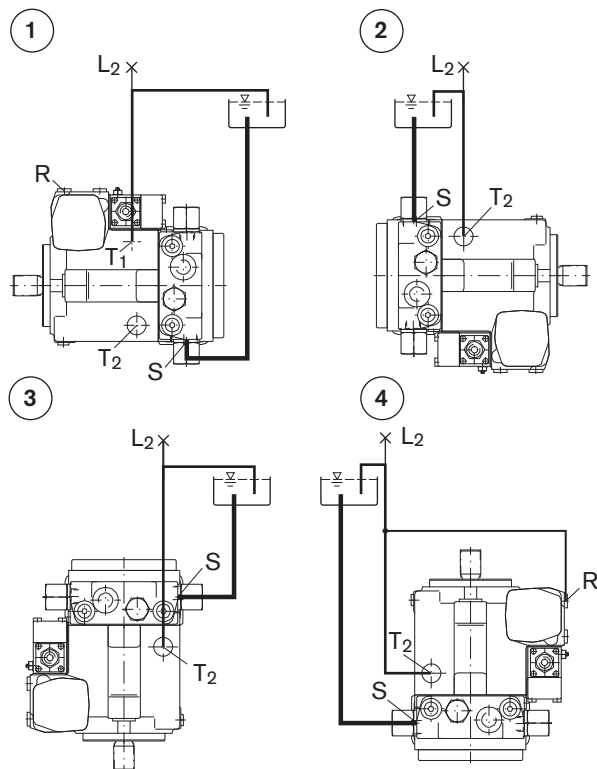


### Above-tank installation

Pump above the min. fluid level of the tank

Observe the maximum permissible suction height  $h_{max} = 800$  mm.

Recommendation for installation position 8 (shaft upwards):

A check valve in the case drain line (opening pressure 0.5 bar) can prevent draining of the case interior.

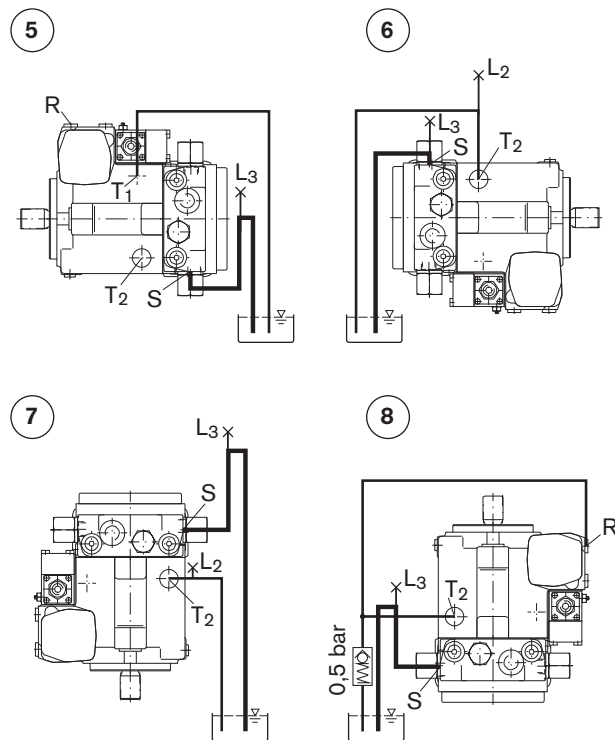

Installation position	Air bleeding	Filling
1	R	S + T <sub>1</sub> (L <sub>2</sub> )
2	L <sub>2</sub>	S + T <sub>2</sub> (L <sub>2</sub> )
3	L <sub>2</sub>	S + T <sub>2</sub> (L <sub>2</sub> )
4	R + L <sub>2</sub>	S + T <sub>2</sub> (L <sub>2</sub> )

Installation position	Air bleeding	Filling
5	R	T <sub>1</sub> + (L <sub>3</sub> )
6	L <sub>2</sub>	S (L <sub>3</sub> ) + T <sub>2</sub> (L <sub>2</sub> )
7	L <sub>2</sub> + L <sub>3</sub>	S (L <sub>3</sub> ) + T <sub>2</sub> (L <sub>2</sub> )
8	R + L <sub>3</sub>	S (L <sub>3</sub> ) + T <sub>2</sub>

# Notice

## General Notes

- The A10VG pump is designed to be used in closed circuits.
- Project planning, assembly and commissioning of the pump require the involvement of qualified personnel.
- The service line ports and function ports are only designed to accommodate hydraulic lines.
- During and shortly after operation, there is a risk of burns on the pump and especially on the solenoids. Take suitable safety precautions, e.g. wear protective clothing
- There may be shifts in the characteristic depending on the operating state of the pump (operating pressure, fluid temperature).
- Tightening torques:
  - The tightening torques specified in this data sheet are maximum values and must not be exceeded (maximum values for screw thread).  
Manufacturer's instruction for the max. permissible tightening torques of the used fittings must be observed!
  - For DIN 13 fixing screws, we recommend checking the tightening torque individually according to VDI 2230 Edition 2003.
- The data and information contained herein must be adhered to.

Bosch Rexroth AG  
Hydraulics  
Axial Piston Units  
Glockeraustraße 2  
89275 Elchingen, Germany  
Telephone +49 (0) 73 08 82-0  
Fax +49 (0) 73 08 72 74  
info.brm-ak@boschrexroth.de  
www.boschrexroth.com/axial-piston-pumps

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.


Subject to change.

# Axial piston variable pump A4CSG Series 3x

**RE 92105**

Edition: 07.2016

Replaces: 11.2003

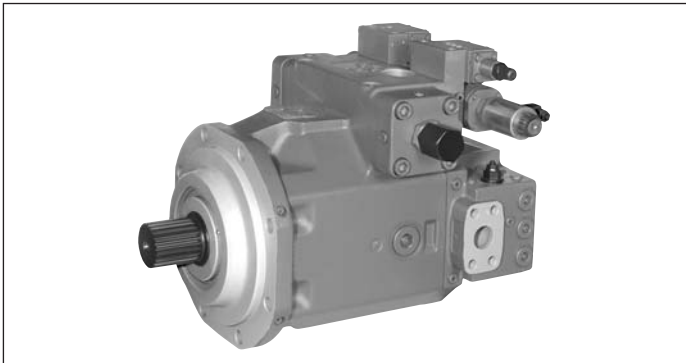

- ▶ Sizes 250 to 750
- ▶ Nominal pressure 350 bar
- ▶ Maximum pressure 400 bar
- ▶ Closed circuit

**Features**

- ▶ Variable pump in axial piston swashplate design for hydrostatic drives in closed circuit.
- ▶ The flow is proportional to the drive speed and displacement.
- ▶ By controlling the swashplate angle, infinitely variable flow is possible.
- ▶ The boost pump required for closed-circuit operation and the corresponding valve technology are integrated in the pump.
- ▶ The integrated boost pump acts as a feed pump and pilot pressure supply.
- ▶ Compact design with extremely short installation length
- ▶ Favorable power/weight ratio
- ▶ Low noise level
- ▶ Long service life
- ▶ High efficiency
- ▶ Electrohydraulic proportional control with neutral position in the event of a power failure
- ▶ Through drive and pump combination also possible with integrated boost pump
- ▶ For descriptions of the control devices, please refer to separate data sheets 92076, 92080, 92084.

**Contents**

Type code for standard program	2
Hydraulic fluids	4
Shaft seal	5
Working pressure range	6
Technical data	7
Overview of control devices	9
Dimensions, size 250	12
Dimensions, size 355	14
Dimensions, size 500	16
Dimensions, size 750	18
Through drive	20
Dimensions through drive	22
Integrated boost pump and valve technology	28
External boost pressure supply	30
Filtration types	31
Installation instructions	33
Project planning notes	36
Safety instructions	36

## Type code for standard program

01	02	03	04	05	06	07	08	09	10	11	12	13	14
<b>A4CS</b>	<b>G</b>		/			<b>-</b>	<b>V</b>		<b>35</b>				

### Axial piston unit

01	Swashplate design, variable, nominal pressure 350 bar, maximum pressure 400 bar	<b>A4CS</b>
----	---	-------------

### Operating mode

02	Pump, closed circuit	<b>G</b>
----	----------------------	----------

### Size

03	Geometric displacement, see technical data on page 7	<b>250</b>	<b>355</b>	<b>500</b>	<b>750</b>
----	--	------------	------------	------------	------------

### Control device

04	Control system hydraulic	with control valve	see 92076	●	●	●	○	<b>HS4</b>
		with proportional valve		○	●	●	○	<b>EO2</b>
	Proportional control	hydraulic control, pilot-pressure related	see 92080	●	●	●	●	<b>HD..</b>
		electrohydraulic	see 92084	●	●	●	●	<b>EP..</b>

### Series

05	Standard version	●	●	●	●	<b>30</b>
	Efficiency-optimized version	○	○	●	○	<b>33</b>

### Directions of rotation

06	Viewed on drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

### Sealing material

07	FKM (fluoroelastomer)	●	●	●	●	<b>V</b>
	NBR (nitrile rubber), shaft seal made of FKM (fluoroelastomer)	○	○	○	○	<b>P</b>

### Drive shaft

08	Parallel keyed shaft DIN 6885	●	●	●	●	<b>P</b>
	Splined shaft DIN 5480	●	●	●	●	<b>Z</b>

### Mounting flange

09	Based on ISO 3019-2 (metric)	4-hole	●	●	-	-	<b>B</b>
		8-hole	-	-	●	●	<b>H</b>

### Working port

10	SAE flange ports A and B, positioned laterally opposite each other, metric fastening thread SAE flange port S, positioned laterally offset from A and B by 90°, metric fastening thread	<b>35</b>
----	--	-----------

### Boost pump

11	With integrated boost pump	●	●	●	●	<b>F</b>
	Without integrated boost pump	●	●	●	●	<b>K</b>

● = Available    ○ = On request    - = Not available

### Notice

► Note the project planning notes on page 36!

01	02	03	04	05	06	07	08	09	10	11	12	13	14
<b>A4CS</b>	<b>G</b>		/			-	<b>V</b>		<b>35</b>				

**Through drive** (for mounting options, see page 23)

		250	355	500	750	
12	With through-drive shaft, without hub, without intermediate flange, closed with cover	●	●	●	●	<b>99</b>
With through drive for mounting a second unit						
Flange ISO 3019-2 (metric)		Hub for splined shaft DIN 5480				
	125, 4-hole	W32×2×14x9 g				<b>31</b>
	140, 4-hole	W40×2×18x9 g				<b>33</b>
	160, 4-hole	W50×2×24x9 g				<b>34</b>
	224, 4-hole	W60×2×28x9 g				<b>35</b>
	224, 4-hole	W70×3×22x9 g				<b>77</b>
	315, 8-hole	W80×3×25x9 g				<b>43</b>
	400, 8-hole	W90×3×28x9 g				<b>76</b>
Flange ISO 3019-2 (metric)		Hub for splined shaft SAE J744				
	80, 2-hole	3/4 in (19-4)				<b>B2</b>
	100, 2-hole	7/8 in (22-4)				<b>B3</b>
	100, 2-hole	1 in (25-4)				<b>B4</b>
	125, 4-hole	1 in (25-4)				<b>E1</b>
	125, 2-hole	1 1/4 in (32-4)				<b>B5</b>
	160, 4-hole	1 1/4 in (32-4)				<b>B8</b>
	125, 2-hole	1 1/2 in (38-4)				<b>B6</b>
	180, 4-hole	1 1/2 in (38-4)				<b>B9</b>
	180, 4-hole	1 3/4 in (44-4)				<b>B7</b>
Flange SAE J744		Hub for splined shaft SAE J744				
	82-2 (A)	5/8 in (16-4)				<b>01</b>
	82-2 (A)	3/4 in (19-4)				<b>52</b>
	101-2 (B)	7/8 in (22-4)				<b>68</b>
	101-2 (B)	1 in (25-4)				<b>04</b>
	127-2 (C)	1 1/4 in (32-4)				<b>07</b>
	127-4 (C)	1 1/4 in (32-4)				<b>15</b>
	127-2 (C)	1 1/2 in (38-4)				<b>24</b>
	152-4 (D)	1 3/4 in (44-4)				<b>17</b>

**Valves**

13	Boost, control pressure relief and flushing valve integrated; direct operated high-pressure relief valve integrated	○	○	○	○	<b>3</b>
	Boost, control pressure relief and flushing valve integrated; pilot-operated high-pressure relief valve integrated	●	●	●	●	<b>4</b>

**Filtration** (see page 31)

14	Without filter	●	●	●	●	<b>N</b>
	With threaded port for filter in the boost circuit	●	●	●	●	<b>D</b>
	With mounted filter (optical/electrical contamination indicator) in the boost circuit	●	●	●	●	<b>M</b>
	With threaded port for filter in the boost circuit (D) and intermediate plate filter for HS control (see data sheet 92076)	○	●	-	-	<b>Z</b>
	With mounted filter in the boost circuit (M) and intermediate plate filter for HS control (see data sheet 92076)	○	○	-	-	<b>U</b>

● = Available    ○ = On request    - = Not available

## Hydraulic fluids

The A4CSG variable pump is designed for operation with HLP mineral oil according to DIN 51524. Application instructions and requirements for hydraulic fluids should be taken from the following data sheets prior to project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids

### Notes on selection of hydraulic fluid

The hydraulic fluid should be selected so that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$ , see selection diagram).

#### Note


At no point on the component may the temperature be higher than 90 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact the responsible member of staff at Bosch Rexroth.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$v_{max} \leq 1000 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -25 \text{ °C}$	$t \leq 3 \text{ min}$ , without load $p \leq 50 \text{ bar}$
Permissible temperature difference		$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid in the system
Warm-up phase	$v = 1000 \text{ to } 100 \text{ mm}^2/\text{s}$	$\theta \geq -25 \text{ °C}$	at $p_{nom}$ , $0.5 \times n_{max}$ and $t \leq 15 \text{ min}$
Continuous operation	$v = 100 \text{ to } 16 \text{ mm}^2/\text{s}$	$\theta = -25 \text{ °C to } +90 \text{ °C}$	Note the permissible temperature range of the shaft seal measured at the drain port
	$v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		Range of optimum operating viscosity and efficiency
Short-term operation	$v_{min} \leq 10 \text{ mm}^2/\text{s}$	$\theta_{max} = +90 \text{ °C}$	$t < 3 \text{ min}$ , $p < 0.3 \times p_{nom}$

#### ▼ Selection diagram

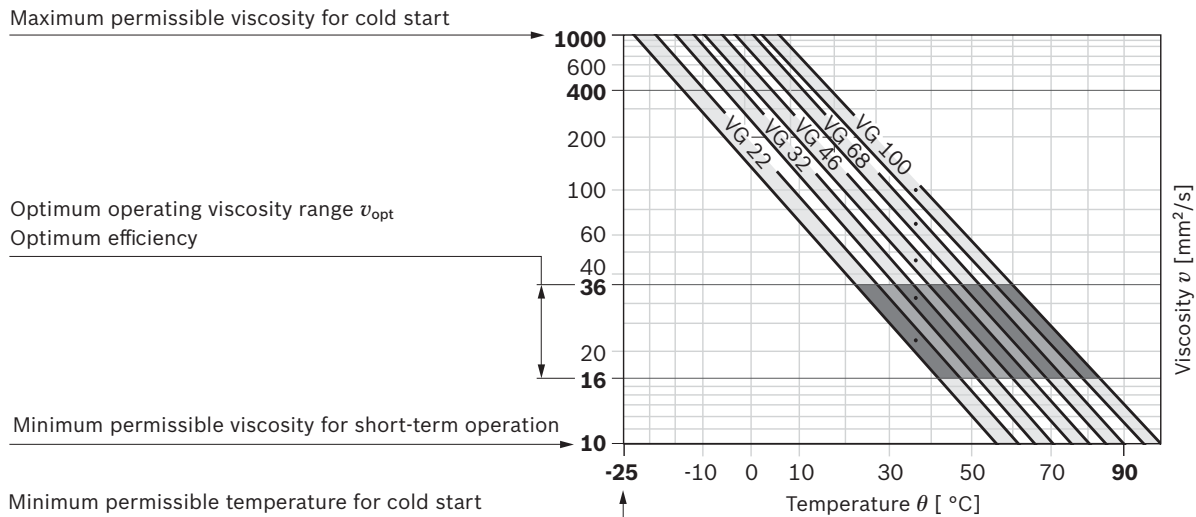



**Filtration of the hydraulic fluid**

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

Depending on the system and application, we recommend for the A4CSG filter cartridges  $\beta_{20} \geq 100$ .

A “threaded port for filter in the boost circuit” is optionally available with order designation **D** or “a filter mounted in the boost circuit” with order designation **M**. For a description, see pages 31 to 32.

**Bearing flushing**

For the following operating conditions bearing flushing is required for a safe, continuous operation:

- ▶ Applications with special fluids (not mineral fluids) due to limited lubricity and narrow operating temperature range
- ▶ Operation with borderline conditions for temperature and viscosity during operation with mineral oil

With vertical installation (drive shaft upwards), bearing flushing is recommended for lubricating the front bearing and the shaft seal, otherwise a reduced service life of the shaft seal is to be expected.

Bearing flushing is realized at port “**U**” in the area of the front flange of the variable pump. The flushing fluid flows through the front bearing and discharges with the pump drain at the drain port.

Depending on the individual sizes, the following flushing flows are recommended:

Size		250	355	500	750
recommended flushing flow	$q_{sp}$ L/min	10	15	20	30

For the flushing flows stated, there is a pressure differential of approximately 3 bar between the port “**U**” (including fitting) and the housing area.

**Note on bearing flushing**


When using bearing flushing on port **U**, the throttle screw in port **U** must be turned in to the end stop.

**Shaft seal**

**Permissible pressure load**

The service life of the shaft seal ring is affected by the rotational speed of the axial piston unit and the leakage pressure (case pressure). Momentary ( $t < 0.1$  s) pressure peaks of up to 10 bar are permitted. The service life of the shaft seal decreases with an increase in the frequency of pressure peaks and an increase in the mean differential pressure.


The pressure in the case must be equal to or greater than the ambient pressure.

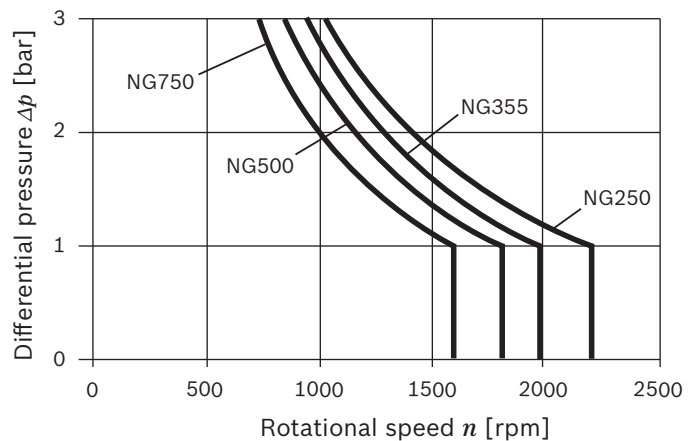



## Working pressure range

Pressure at working ports A or B		Definition	
Nominal pressure $p_{nom}$	350 bar	The nominal pressure corresponds to the maximum design pressure.	
Maximum pressure $p_{max}$	400 bar	The maximum pressure corresponds to the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.	
Single operating period	1 s		
Total operating period	300 h		
Minimum pressure (high-pressure side)	15 bar	Minimum pressure at the high-pressure side (A or B) which is required to prevent damage to the axial piston unit.	
Minimum pressure (low-pressure side)	Speed related (see diagram)	Minimum pressure at the low-pressure side (A or B) which is required in order to prevent damage to the axial piston unit. Boost pressure setting must be higher depending on system. The low pressure is present at port <b>MK4</b> with the flushing slide deflected.	
Rate of pressure change $R_{A\ max}$	16000 bar/s	Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.	
<b>Boost pressure at port E – without integrated boost pump version K..</b>			
Recommended boost pressure $p_{Sp}$	16 bar	NG250 to 500 series 30	
	20 bar	NG750 series 30	
	10 bar	NG250 to 500 series 33	
Minimum static boost pressure $p_{Sp\ min}$	8 bar	Short-term for setting operations: Measuring port <b>MK4</b> (Please contact us for coupled multiple systems)	
Maximum static boost pressure $p_{Sp\ max}$	30 bar		
Permissible pressure peaks in boost pressure	minimum		4 bar
	maximum		40 bar
<b>Suction pressure at suction port S with integrated boost pump version F..</b>			
Minimum pressure $p_{S\ min}$	$\geq 0.8$ bar absolute	Minimum pressure at suction port S (inlet) that is required in order to avoid damage to the axial piston unit.	
Maximum pressure $p_{S\ max}$	30 bar absolute		
<b>Control pressure for EP and HD control.</b>			
Minimum required control pressure $p_{Sr\ min}$	double boost pressure at NG 355 +5 bar	Measuring port <b>M1</b> (small stroking chamber)	

### Required low pressure depending on the speed ratio

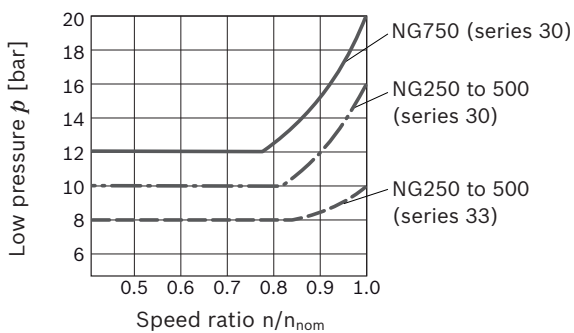

### Rate of pressure change

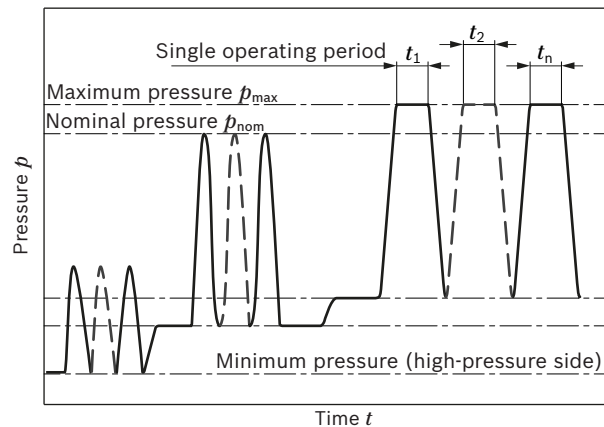

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

### Notice

Working pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.

## Technical data

Size		NG		250	355	500	750
Displacement, geometric, per revolution	Variable pump	$V_{g \max}$	cm <sup>3</sup>	250	355	500	750
	Integrated boost pump	$V_{g \text{ Sp}}$	cm <sup>3</sup>	63	80	98	143
Rotational speed <sup>1)</sup>	maximum at $V_{g \max}$	$n_{\text{nom}}$	rpm	2200	2000	1800	1600
	minimal <sup>2)</sup>	$n_{\text{min}}$	rpm	800	800	800	800
Flow (variable pump) at $V_{g \max}$ and	$n_{\text{max}}$	$q_v$	L/min	550	710	900	1200
	$n_E = 1500$ rpm	$q_{VE}$	L/min	375	533	750	1125
Power <sup>3)</sup> at $V_{g \max}$ , $\Delta p = 350$ bar and	$n_{\text{max}}$	$P$	kW	321	414	525	700
	$n_E = 1500$ rpm	$P_E$	kW	219	311	438	656
Torque <sup>3)</sup> at $V_{g \max}$ and	$\Delta p = 350$ bar	$T$	Nm	1391	1976	2783	4174
	$\Delta p = 100$ bar	$T$	Nm	398	564	795	1193
Rotary stiffness of drive shaft	P	$c$	kNm/rad	527	800	1145	1860
	Z	$c$	kNm/rad	543	770	1209	1812
Moment of inertia for rotary group		$J_{\text{TW}}$	kgm <sup>2</sup>	0.0959	0.19	0.3325	0.66
Maximum angular acceleration <sup>4)</sup>		$a$	rad/s <sup>2</sup>	775	600	540	400
Case volume		$V$	L	10	8	14	19
Weight (pump with EP control and integrated boost pump without filter) approx.		$m$	kg	260	275	390	520

### Determining the characteristics

$$\text{Flow } q_v = \frac{V_g \cdot n \cdot \eta_v}{1000} \quad [\text{l/min}]$$

$$\text{Torque } T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{\text{mh}}} \quad [\text{Nm}]$$

$$\text{Power } P = \frac{2 \pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t} \quad [\text{kW}]$$

Key	
$V_g$	= Displacement per revolution [cm <sup>3</sup> ]
$\Delta p$	= Differential pressure [bar]
$n$	= Rotational speed [rpm]
$\eta_v$	= Volumetric efficiency
$\eta_{\text{mh}}$	= Mechanical-hydraulic efficiency
$\eta_t$	= Total efficiency ( $\eta_t = \eta_v \cdot \eta_{\text{mh}}$ )


### Notice

- ▶ Theoretical values, without efficiency and tolerances; values rounded
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.

### Flow direction

Direction of rotation	Swiveling range*	
clockwise	counter-clockwise	
B to A	A to B	clockwise
A to B	B to A	counter-clockwise

\* cf. swivel angle indicator





- The values are applicable:
  - for the optimum viscosity range from  $\nu_{\text{opt}} = 36$  to  $16 \text{ mm}^2/\text{s}$
  - for hydraulic fluid based on mineral oils
- Lower values on request
- Without boost pump
- The data are valid for values between the minimum required and maximum permissible rotational speed.
 

Valid for external excitation (e.g. diesel engine 2 to 8 times rotary frequency, cardan shaft twice the rotary frequency).

The limit value is only valid for a single pump.

The load capacity of the connecting parts must be considered.

**Permissible radial and axial forces of the drive shafts**


Size	NG	250	355	500	750	
Drive shaft						
Maximum radial force at X/2		$F_{q \max}$ N	2000	2200	2500	3000
Maximum axial force		$+ F_{ax \max}$ N $- F_{ax \max}$ N	1800	2000	2000	2000

**Note**  
Special requirements apply in the case of belt drives.  
Please contact us.

**Permissible input and through-drive torques**

Size	NG	250	355	500	750
Torque at $V_{g \max}$ and $\Delta p = 350 \text{ bar}^1$	$T_{\max}$ Nm	1391	1976	2783	4174
Maximum input torque at drive shaft <sup>2)</sup>					
Splined shaft Z	$T_{E \max}$ Nm	2782	3952	5566	8348
Shaft key P	$T_{E \max}$ Nm	2300	3557	5200	7513
Maximum through-drive torque		$T_{D \max} = T_{E \max}$			

**Distribution of torques**

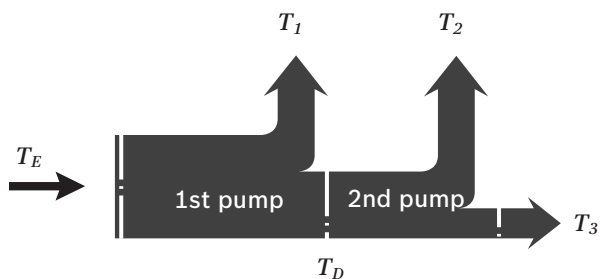

Torque at 1st pump	$T_1$
Torque at 2nd pump	$T_2$
Torque at 3rd pump	$T_3$
Input torque	$T_E = T_1 + T_2 + T_3$ $T_E < T_{E \max}$
Through-drive torque	$T_D = T_2 + T_3$ $T_D < T_{D \max}$

1) Efficiency not considered  
2) For drive shafts free of radial force

## Overview of control devices

### HS4 – control system, hydraulic with proportional valve

(see data sheet 92076)


The stepless displacement control is accomplished by means of a proportional valve and electrical feedback of the swivel angle.

The HS4P control system is equipped with mounted pressure transducers, which means that it can be used for electric pressure and power control.

Optional:


- ▶ With pressure transducer (HS4P)
- ▶ Short circuit valve (HS4K, HS4KP)
- ▶ For oil-immersed use (HS4M)

#### ▼ Characteristic curve



#### ▼ Circuit diagram

Example: A4CSG 250/355 HS4...F..4D

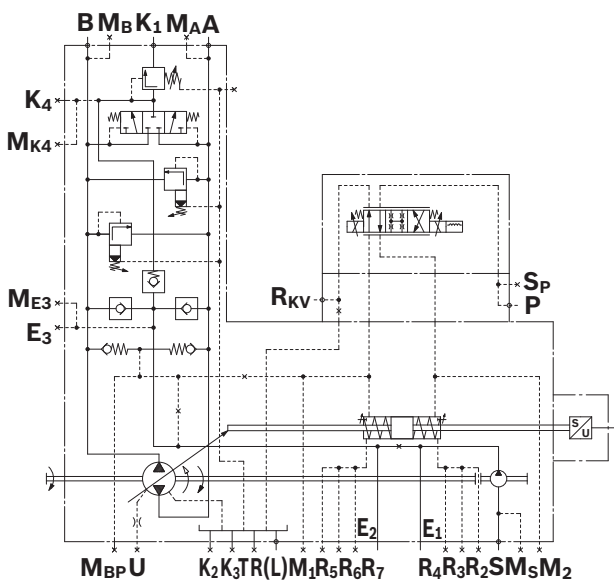

### EO2 – control system, hydraulic with proportional valve

(see data sheet 92076)


The stepless control of the displacement flow is accomplished by means of a proportional valve and electrical feedback of the swivel angle.

Thus, the control can be used as an electric displacement control.

Optional:


- ▶ Short circuit valve (EO2K)

#### ▼ Characteristic curve

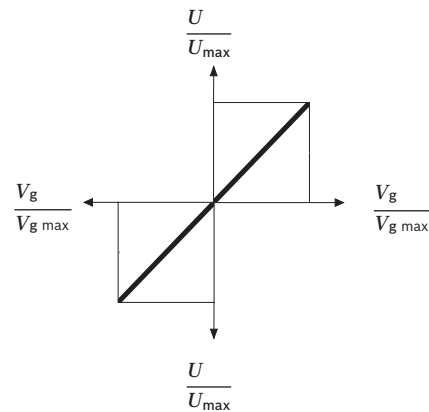

#### ▼ Circuit diagram

Example: A4CSG 500/750 EO2...F..4D

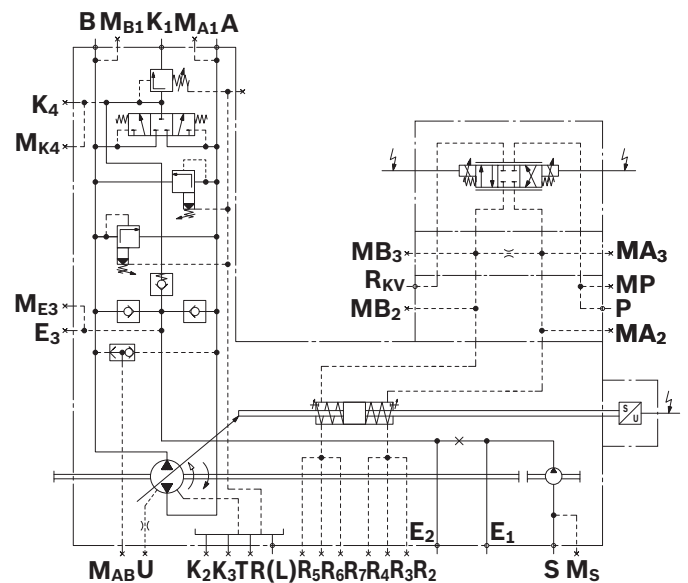

**HD – Proportional control, hydraulic, pilot-pressure related** (see data sheet 92080)


Stepless adjustment of the pump displacement according to the pilot pressure. The control is proportional to the specified pilot pressure setpoint value (difference between **X<sub>1</sub>**, **X<sub>2</sub>**).

For version **F** with integrated boost pump, the control is supplied internally with the control pressure from the boost circuit. This saves using a separate control pressure pump.

Optional:


- ▶ Control characteristics (HD1, HD2, HD3)
- ▶ Pressure control (HD.A, HD.B, HD.D)
- ▶ Remote pressure control (HD.GA, HD.GB, HD.G)
- ▶ Power control (HD1P)
- ▶ Electrical control of pilot pressure (HD1T)

▼ **Characteristic curve**

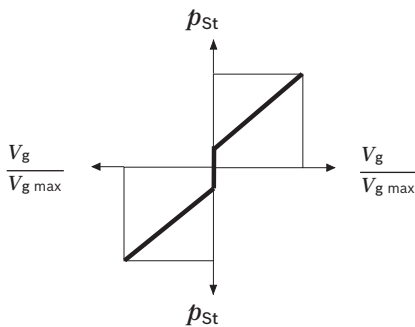

▼ **Circuit diagram**

Example: A4CSG 500/750 HD1...F..4M

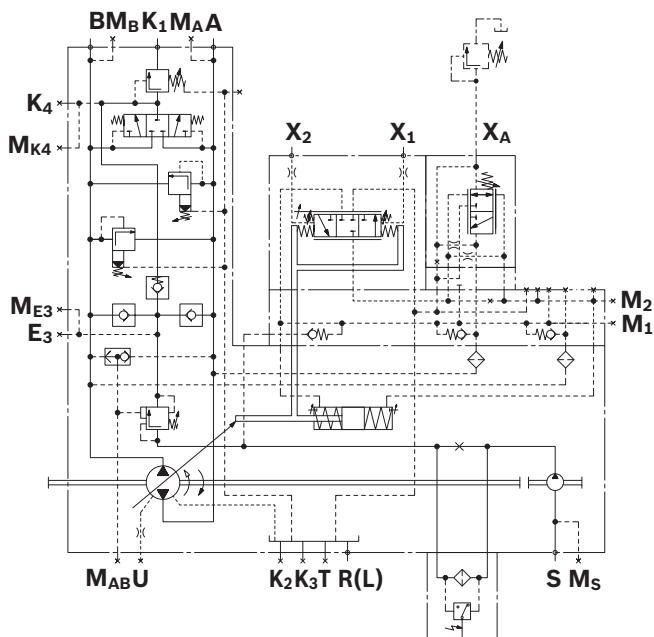

**EP – proportional control, electrohydraulic**

(see data sheet 92084)


The EP control adjusts the pump displacement proportionally to the current at the solenoid. Current-regulated control units with pulse-width modulation are recommended for controlling the solenoids.

For version **F** with integrated boost pump, the control is supplied internally with the control pressure from the boost circuit. This saves using a separate control pressure pump.

Optional:


- ▶ Pressure control (EPA, EPB, EPD)
- ▶ Remote pressure control (EPGA, EPGB, EPG)

▼ **Characteristic curve**

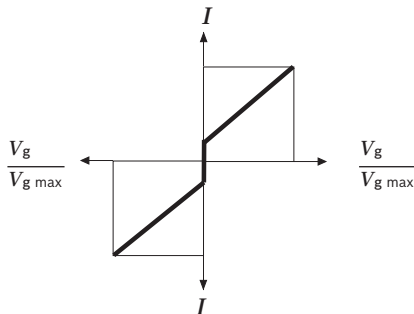

▼ **Circuit diagram**

Example: A4CSG 500/750 EPD...F..4D<sup>1)</sup>

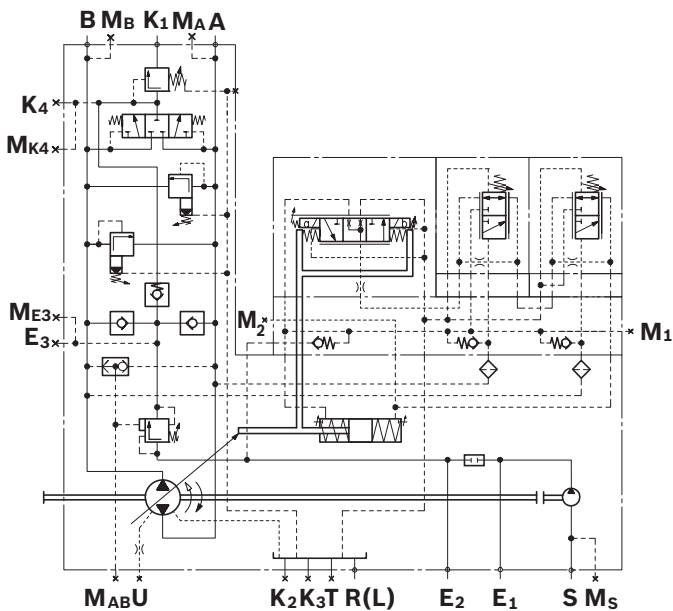


1) Version M with filter, see page 30






## ▼ Parallel keyed shaft DIN 6885

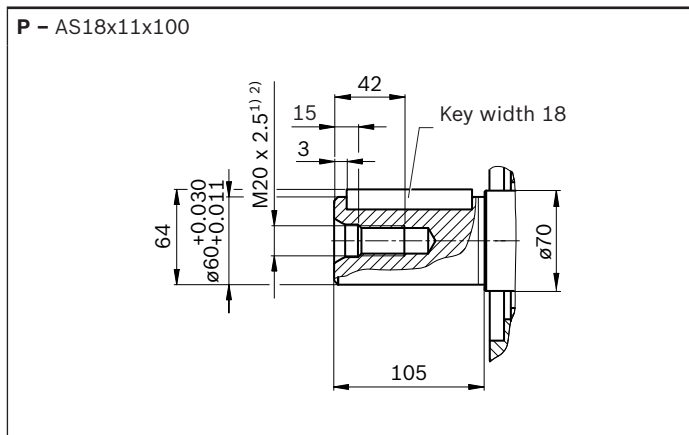

## ▼ Splined shaft DIN 5480

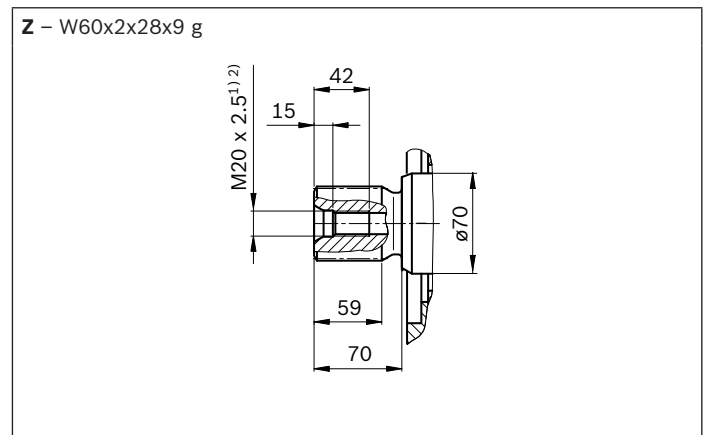


Ports	Standard	Size <sup>2)</sup>	$p_{\max}$ [bar] <sup>3)</sup>	State <sup>7)</sup>	
<b>A, B</b>	Working line (high-pressure series)	SAE J518 <sup>4)</sup>	1 1/2 in	400	O
	Fastening thread A/B	DIN 13	M16 × 2; 21 deep		
<b>S</b>	Suction port (standard pressure series)	SAE J518 <sup>4)</sup>	2 1/2 in	30	O
	Fastening thread S	DIN 13	M12 × 1.75; 17 deep		
<b>M<sub>A</sub>, M<sub>B</sub>, M<sub>ABP</sub></b>	Measuring working pressure A/B	DIN 3852	M14 × 1.5; 12 deep	400	X
<b>M<sub>S</sub></b>	Measuring suction	DIN 3852	M14 × 1.5; 12 deep	30	X
<b>T</b>	Fluid drain	DIN 3852 <sup>5)</sup>	M42 × 2; 20 deep	4	X <sup>6)</sup>
<b>E<sub>1</sub></b>	Filter, supply	DIN 3852	M33 × 2; 18 deep	40	X
<b>E<sub>2</sub></b>	Filter, return	DIN 3852	M33 × 2; 18 deep	40	X
<b>K<sub>1</sub></b>	Flushing port	DIN 3852	M33 × 2; 18 deep	5	O
<b>K<sub>2</sub>, K<sub>3</sub></b>	Fluid filling + air bleeding	DIN 3852 <sup>5)</sup>	M42 × 2; 20 deep	4	X <sup>6)</sup>
<b>R(L)</b>	Return flow (drain port)			4	O <sup>6)</sup>
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M14 × 1.5; 12 deep	7	X
<b>E<sub>3</sub></b>	Boost pressure supply	DIN 3852	M33 × 2; 18 deep	40	X
<b>M<sub>E3</sub></b>	Measuring boost pressure	DIN 3852	M14 × 1.5; 12 deep	40	X
<b>K<sub>4</sub></b>	Accumulator port	DIN 3852	M33 × 2; 18 deep	40	X
<b>M<sub>K4</sub></b>	Measuring boost pressure	DIN 3852	M14 × 1.5; 12 deep	40	X
<b>M<sub>1</sub>, M<sub>2</sub></b>	Measuring control pressure	DIN 3852	M18 × 1.5; 12 deep	400	X
<b>X<sub>A</sub>, X<sub>B</sub></b>	Pilot pressure, remote control pressure controller	DIN 3852	M14 × 1.5; 12 deep	350	O

- Center bore according to DIN 332 (thread according to DIN 13)
- For notes on tightening torques, see the instruction manual
- Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.


- The countersink can be deeper than that specified in the standard.
- Depending on the installation position, T, K<sub>2</sub>, K<sub>3</sub> or R(L) must be connected (see also pages 33 to 35)
- O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)



## ▼ Parallel keyed shaft DIN 6885

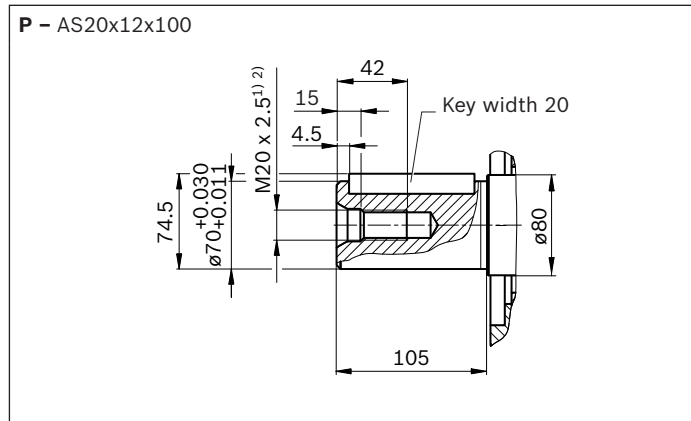

## ▼ Splined shaft DIN 5480

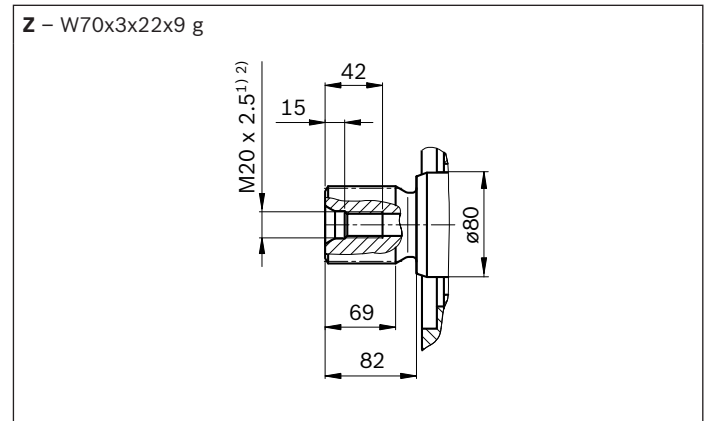


Ports	Standard	Size <sup>2)</sup>	$p_{\max}$ [bar] <sup>3)</sup>	State <sup>7)</sup>	
<b>A, B</b>	Working line (high-pressure series)	SAE J518 <sup>4)</sup>	1 1/2 in	400	O
	Fastening thread A/B	DIN 13	M16 × 2; 21 deep		
<b>S</b>	Suction port (standard pressure series)	SAE J518 <sup>4)</sup>	2 1/2 in	30	O
	Fastening thread S	DIN 13	M12 × 1.75; 17 deep		
<b>M<sub>A</sub>, M<sub>B</sub>, M<sub>ABP</sub></b>	Measuring working pressure A/B	DIN 3852	M14 × 1.5; 12 deep	400	X
<b>M<sub>S</sub></b>	Measuring suction	DIN 3852	M14 × 1.5; 12 deep	30	X
<b>T</b>	Fluid drain	DIN 3852 <sup>5)</sup>	M42 × 2; 20 deep	4	X <sup>6)</sup>
<b>E<sub>1</sub></b>	Filter, supply	DIN 3852	M33 × 2; 18 deep	40	X
<b>E<sub>2</sub></b>	Filter, return	DIN 3852	M33 × 2; 18 deep	40	X
<b>K<sub>1</sub></b>	Flushing port	DIN 3852	M33 × 2; 18 deep	5	O
<b>K<sub>2</sub>, K<sub>3</sub></b>	Fluid filling + air bleeding	DIN 3852 <sup>5)</sup>	M42 × 2; 20 deep	4	X <sup>6)</sup>
<b>R(L)</b>	Return flow (drain port)			4	O <sup>6)</sup>
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M18 × 1.5; 12 deep	7	X
<b>E<sub>3</sub></b>	Boost pressure supply	DIN 3852	M33 × 2; 18 deep	40	X
<b>M<sub>E3</sub></b>	Measuring boost pressure	DIN 3852	M14 × 1.5; 12 deep	40	X
<b>K<sub>4</sub></b>	Accumulator port	DIN 3852	M33 × 2; 18 deep	40	X
<b>M<sub>K4</sub></b>	Measuring boost pressure	DIN 3852	M14 × 1.5; 12 deep	40	X
<b>M<sub>1</sub>, M<sub>2</sub></b>	Measuring control pressure	DIN 3852	M18 × 1.5; 12 deep	400	X
<b>X<sub>A</sub>, X<sub>B</sub></b>	Pilot pressure, remote control pressure controller	DIN 3852	M14 × 1.5; 12 deep	350	O

- Center bore according to DIN 332 (thread according to DIN 13)
- For notes on tightening torques, see the instruction manual
- Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

- The countersink can be deeper than that specified in the standard.
- Depending on the installation position, T, K<sub>2</sub>, K<sub>3</sub> or R(L) must be connected (see also pages 33 to 35)
- O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)

**Dimensions, size 500**


A4CSG500EPD/30R-XXH35F994N

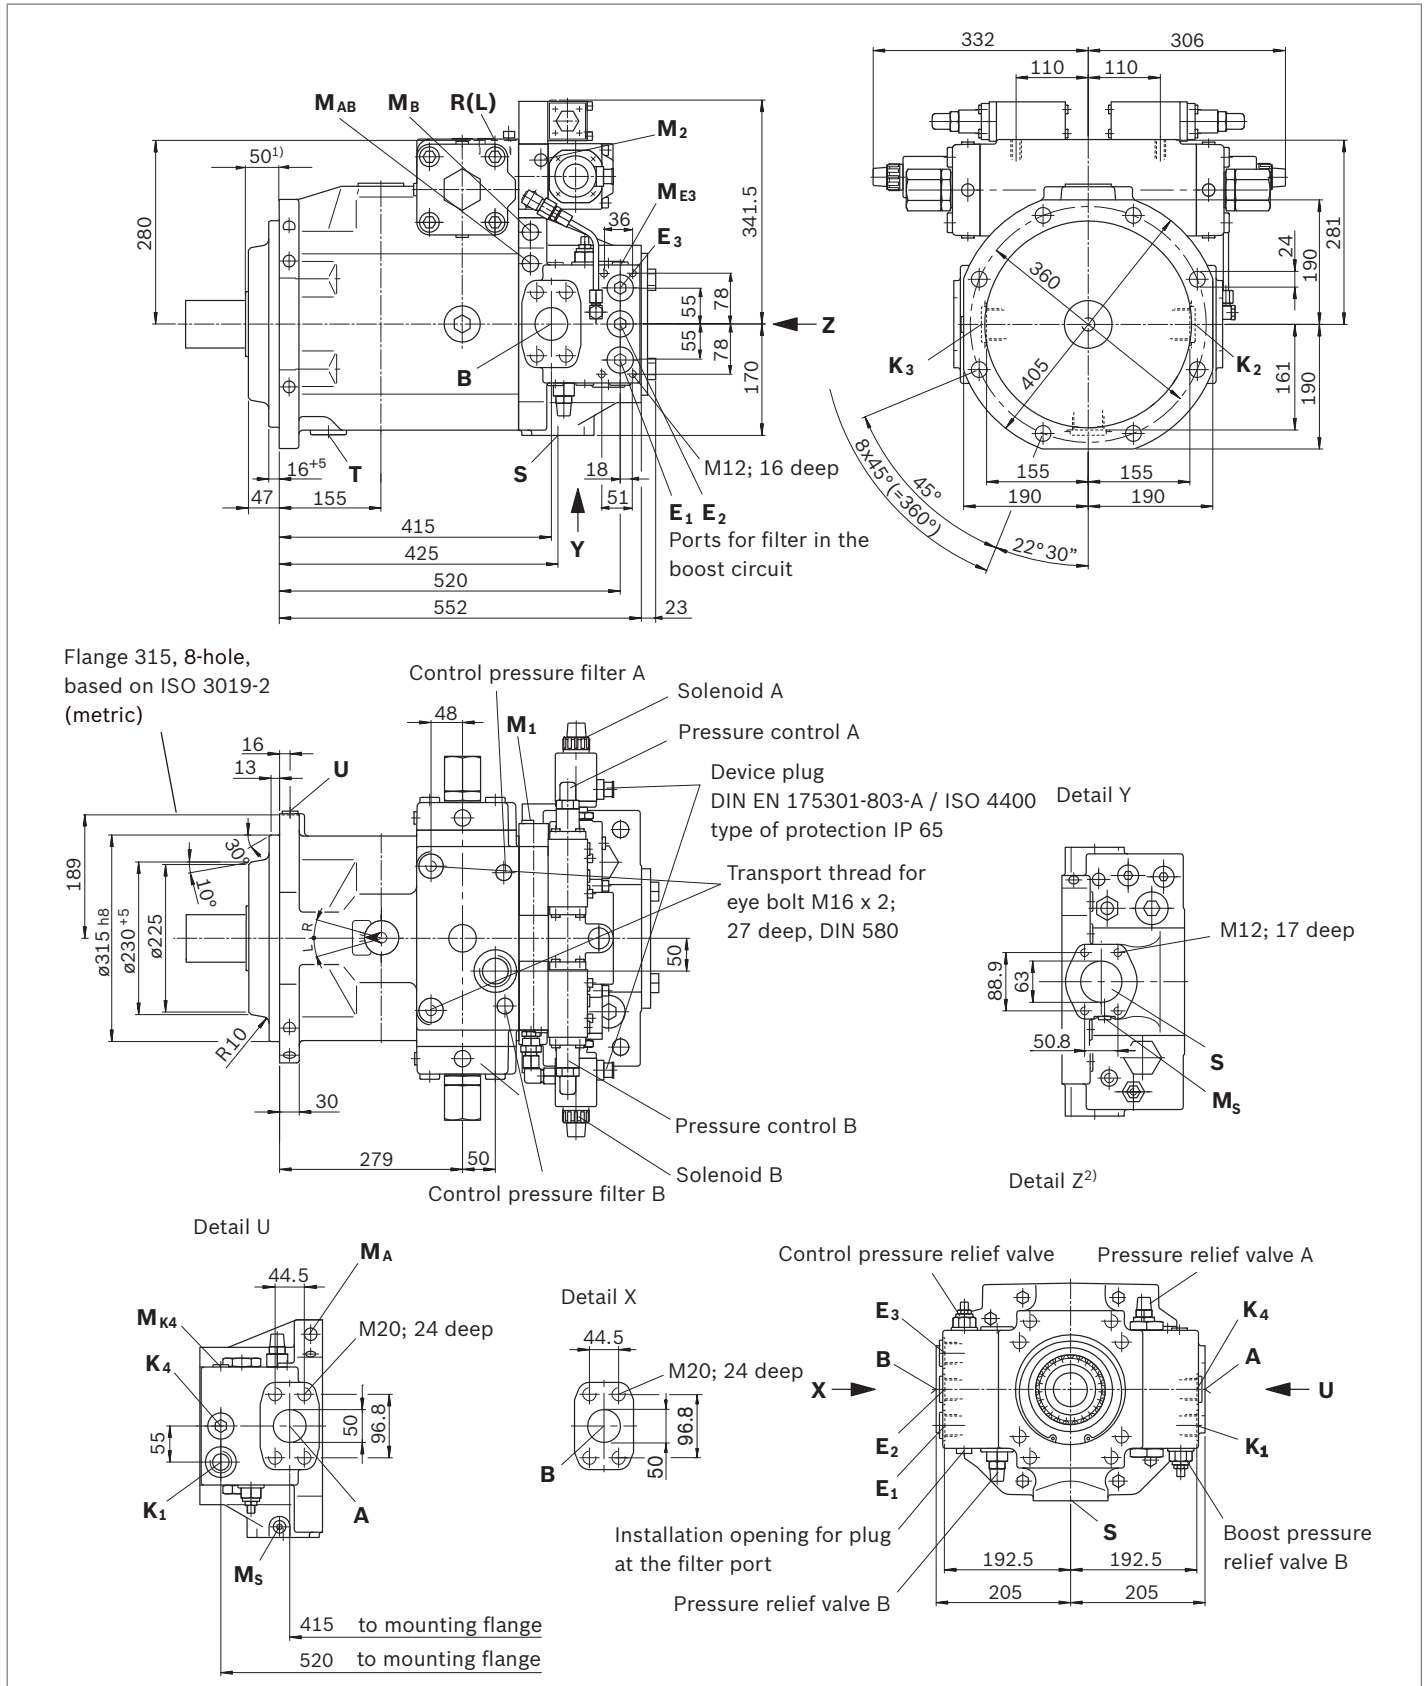


1) Up to shaft collar

2) Through drive F99 shown without cover, for dimensions see page 22

## ▼ Parallel keyed shaft DIN 6885

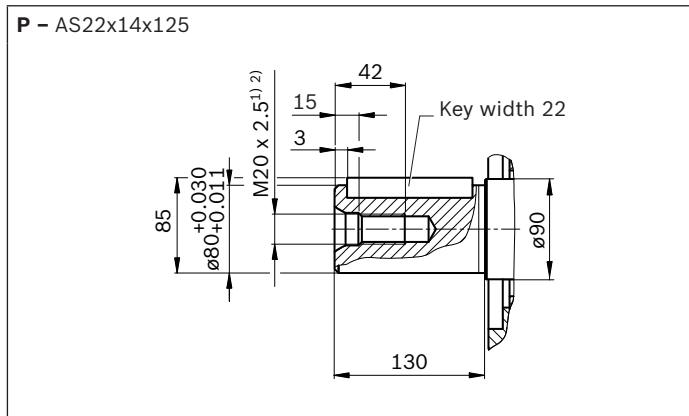

## ▼ Splined shaft DIN 5480

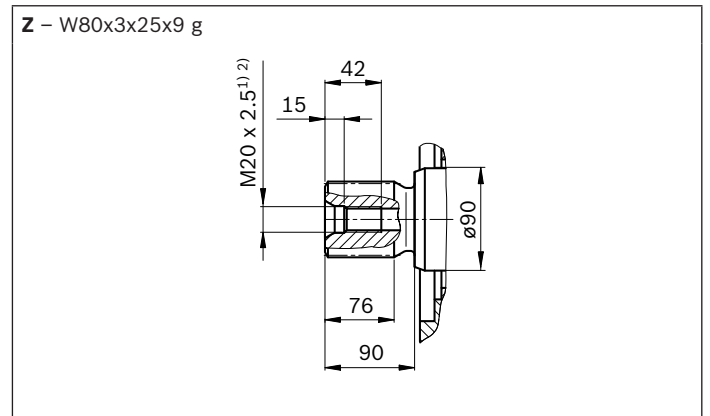


Ports	Standard	Size <sup>2)</sup>	$p_{\max}$ [bar] <sup>3)</sup>	State <sup>7)</sup>	
<b>A, B</b>	Working line (high-pressure series)	SAE J518 <sup>4)</sup>	2 in	400	O
	Fastening thread A/B	DIN 13	M20 × 2.5; 24 deep		
<b>S</b>	Suction port (standard pressure series)	SAE J518 <sup>4)</sup>	2 1/2 in	30	O
	Fastening thread S	DIN 13	M12 × 1.75; 17 deep		
<b>M<sub>A</sub>, M<sub>B</sub>, M<sub>ABP</sub></b>	Measuring working pressure A/B	DIN 3852	M14 × 1.5; 12 deep	400	X
<b>M<sub>S</sub></b>	Measuring suction	DIN 3852	M14 × 1.5; 12 deep	30	X
<b>T</b>	Fluid drain	DIN 3852 <sup>5)</sup>	M48 × 2; 22 deep	4	X <sup>6)</sup>
<b>E<sub>1</sub></b>	Filter, supply	DIN 3852	M33 × 2; 18 deep	40	X
<b>E<sub>2</sub></b>	Filter, return	DIN 3852	M33 × 2; 18 deep	40	X
<b>K<sub>1</sub></b>	Flushing port	DIN 3852	M33 × 2; 18 deep	5	O
<b>K<sub>2</sub>, K<sub>3</sub></b>	Fluid filling + air bleeding	DIN 3852 <sup>5)</sup>	M48 × 2; 22 deep	4	X <sup>6)</sup>
<b>R(L)</b>	Return flow (drain port)			4	O <sup>6)</sup>
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M18 × 1.5; 12 deep	7	X
<b>E<sub>3</sub></b>	Boost pressure supply	DIN 3852	M33 × 2; 18 deep	40	X
<b>M<sub>E3</sub></b>	Measuring boost pressure	DIN 3852	M14 × 1.5; 12 deep	40	X
<b>K<sub>4</sub></b>	Accumulator port	DIN 3852	M33 × 2; 18 deep	40	X
<b>M<sub>K4</sub></b>	Measuring boost pressure	DIN 3852	M14 × 1.5; 12 deep	40	X
<b>M<sub>1</sub></b>	Measuring stroking chamber pressure	DIN 3852	M22 × 1.5; 14 deep	400	X
<b>M<sub>2</sub></b>	Measuring stroking chamber pressure	DIN 3852	M14 × 1.5; 12 deep	400	X
<b>X<sub>A</sub>, X<sub>B</sub></b>	Pilot pressure, remote control pressure controller	DIN 3852	M14 × 1.5; 12 deep	350	O

- 1) Center bore according to DIN 332 (thread according to DIN 13)
- 2) For notes on tightening torques, see the instruction manual
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 4) Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.


- 5) The countersink can be deeper than that specified in the standard.
- 6) Depending on the installation position, T, K<sub>2</sub>, K<sub>3</sub> or R(L) must be connected (see also pages 33 to 35)
- 7) O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)

**Dimensions, size 750**


A4CSG750EPG/30R-XXH35F994N

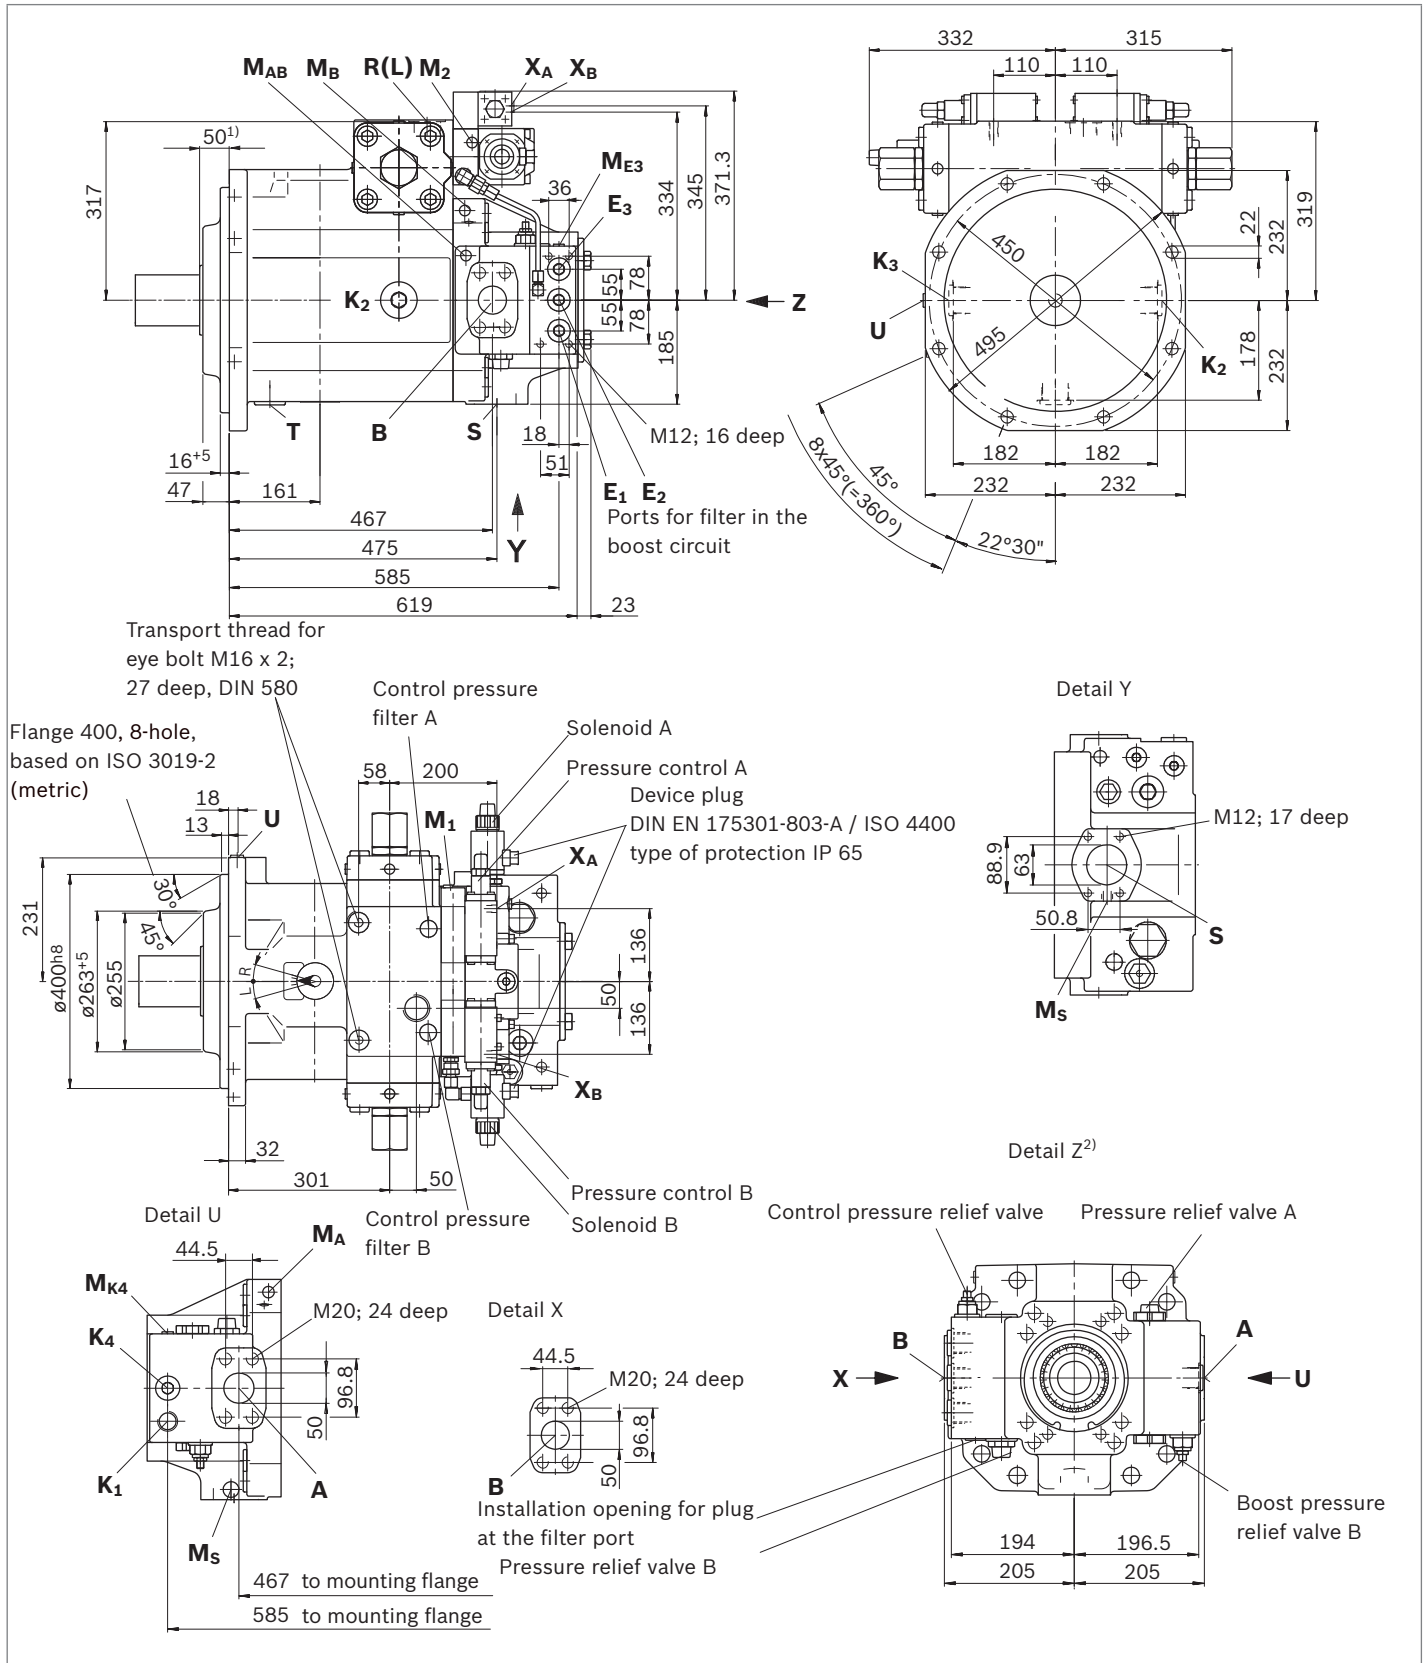

## ▼ Parallel keyed shaft DIN 6885

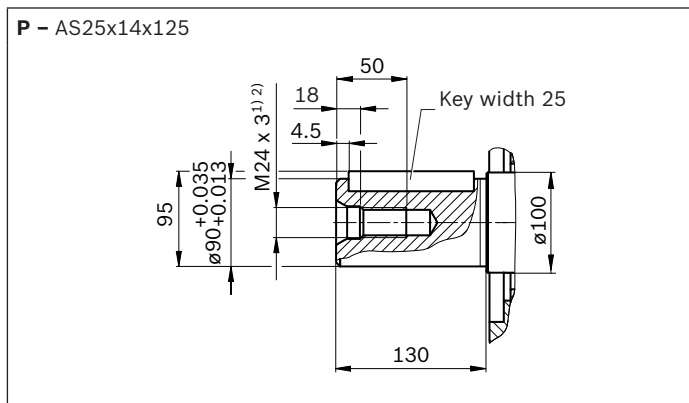

## ▼ Splined shaft DIN 5480

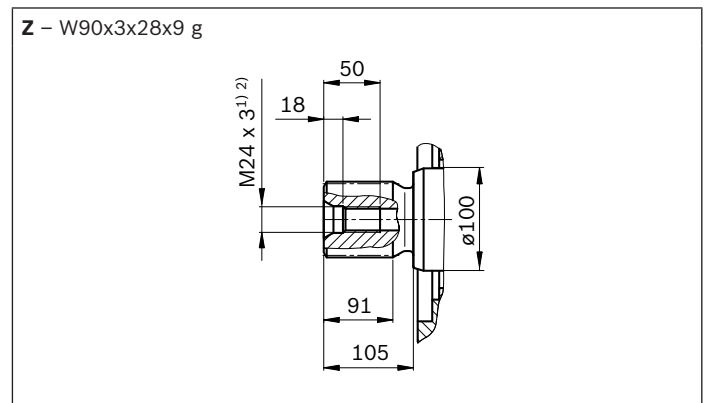

Ports	Standard	Size <sup>2)</sup>	$p_{\max}$ [bar] <sup>3)</sup>	State <sup>7)</sup>	
<b>A, B</b>	Working line (high-pressure series)	SAE J518 <sup>4)</sup>	2 in	400	O
	Fastening thread A/B	DIN 13	M20 × 2.5; 24 deep		
<b>S</b>	Suction port (standard pressure series)	SAE J518 <sup>4)</sup>	2 1/2 in	30	O
	Fastening thread S	DIN 13	M12 × 1.75; 17 deep		
<b>M<sub>A</sub>, M<sub>B</sub>, M<sub>ABP</sub></b>	Measuring working pressure A/B	DIN 3852	M14 × 1.5; 12 deep	400	X
<b>M<sub>S</sub></b>	Measuring suction	DIN 3852	M14 × 1.5; 12 deep	30	X
<b>T</b>	Fluid drain	DIN 3852 <sup>5)</sup>	M48 × 2; 22 deep	4	X <sup>6)</sup>
<b>E<sub>1</sub></b>	Filter, supply	DIN 3852	M33 × 2; 18 deep	40	X
<b>E<sub>2</sub></b>	Filter, return	DIN 3852	M33 × 2; 18 deep	40	X
<b>K<sub>1</sub></b>	Flushing port	DIN 3852	M33 × 2; 18 deep	5	O
<b>K<sub>2</sub>, K<sub>3</sub></b>	Fluid filling + air bleeding	DIN 3852 <sup>5)</sup>	M48 × 2; 22 deep	4	X <sup>6)</sup>
<b>R(L)</b>	Return flow (drain port)			4	O <sup>6)</sup>
<b>U</b>	Bearing flushing	DIN 3852 <sup>5)</sup>	M18 × 1.5; 12 deep	7	X
<b>E<sub>3</sub></b>	Boost pressure supply	DIN 3852	M33 × 2; 18 deep	40	X
<b>M<sub>E3</sub></b>	Measuring boost pressure	DIN 3852	M14 × 1.5; 12 deep	40	X
<b>K<sub>4</sub></b>	Accumulator port	DIN 3852	M33 × 2; 18 deep	40	X
<b>M<sub>K4</sub></b>	Measuring boost pressure	DIN 3852	M14 × 1.5; 12 deep	40	X
<b>M<sub>1</sub></b>	Measuring stroking chamber pressure	DIN 3852	M22 × 1.5; 14 deep	400	X
<b>M<sub>2</sub></b>	Measuring stroking chamber pressure	DIN 3852	M14 × 1.5; 12 deep	400	X
<b>X<sub>A</sub>, X<sub>B</sub></b>	Pilot pressure, remote control pressure controller	DIN 3852	M14 × 1.5; 12 deep	350	O

- Center bore according to DIN 332 (thread according to DIN 13)
- For notes on tightening torques, see the instruction manual
- Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- Only dimensions according to SAE J518, metric fastening thread is a deviation from standard.

- The countersink can be deeper than that specified in the standard.
- Depending on the installation position, T, K<sub>2</sub>, K<sub>3</sub> or R(L) must be connected (see also pages 33 to 35)
- O = Must be connected (plugged when delivered)  
X = Plugged (in normal operation)


## Through drive

The variable pump A4CSG can be supplied with through drive despite the integrated boost pump, in accordance with the type code on page 3.

If no further pumps are to be mounted at the factory, then the simple type designation is sufficient.

### The scope of delivery then includes

- ▶ for all through drives except F/K99:
  - hub, mounting bolts, seal and, if applicable, an intermediate flange
- ▶ for F/K99:
  - with through-drive shaft, without hub, without intermediate flange; unit with closed fluid-tight, pressure-tight cover

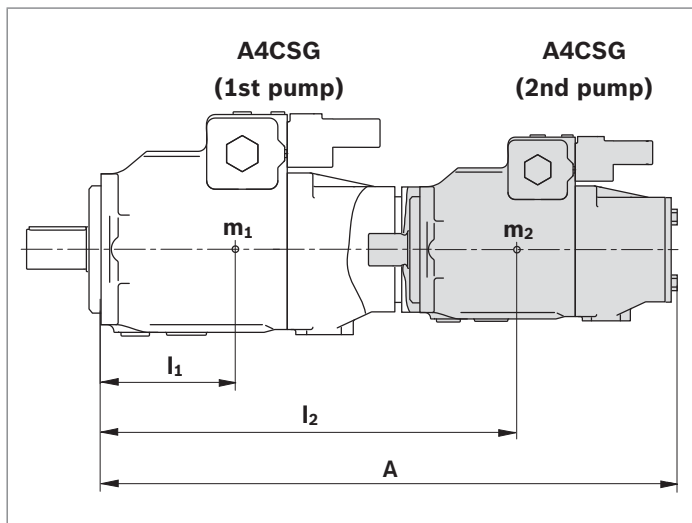

## Combination pumps

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes.

When ordering combination pumps, the type designations of the 1st and 2nd pump must be connected by a “+”.

### ▶ Order example:

**A4CSG 500 EPG / 30 R – VPH35F434M +  
A4CSG 500 EPG / 30 R – VZH35F994M**

For through drives **F/K01, 04, 07, 24, 52, 68** and **B6**, various possible attachment angle positions are available. As standard, the second pump is attached at the same angle as the supplied screws, as shown in the drawing on pages 26 and 27. If this angle differs, please contact us.

If a gear pump is to be mounted at the factory as an attachment pump, please contact us.

For maximum permissible drive and through-drive torques, see page 8.

$$m_1, m_2 \text{ [kg]}$$

$$l_1, l_2 \text{ [mm]}$$

$$T_m = (m_1 \cdot l_1 + m_2 \cdot l_2 + m_3 \cdot l_3) \frac{1}{102} \text{ [Nm]}$$

### Total length A

A4CSG (1st pump)	A4CSG (2nd pump with through drive F/k99, without filter)			
	NG250	NG355	NG500	NG750
NG250	1079	–	–	–
NG355	1086	1114	–	–
NG500	1143	1150	1235	–
NG750	1210	1217	1302	1396

### Permissible mass torque

Size			250	355	500	750
Permissible mass torque	$T_m$	Nm	9300	9300	15600	19500
Permissible mass torque for dynamic mass acceleration $10g \approx 98.1 \text{ m/s}^2$	$T_m$	Nm	930	930	1560	1950
Weight	$m_1$	kg	260	275	390	520
Distance from center of gravity	$l_1$	mm	270	280	300	330



**Overview of mounting options on A4CSG**

Through drive - A4CSG			Mounting option 2nd pump				
Flange	Hub for splined shaft <sup>1)</sup>	Code	A4CSG NG (shaft)	A4VSO/G NG (shaft)	A10V(S)O/31/32 <sup>4)</sup> NG (shaft)	A10V(S)O/52/53 NG (shaft)	External/internal gear pump
<b>Flange ISO 3019-2 (metric)</b>							
80, 2-hole	3/4 in (19-4)	<b>F/KB2</b>	–	–	18 (S)/31	10 (S)	–
100, 2-hole	7/8 in (22-4)	<b>F/KB3</b>	–	–	28 (S)/31	–	–
	1 in (25-4)	<b>F/KB4</b>	–	–	45 (S)/31	–	–
125, 2-hole	1 1/4 in (32-4)	<b>F/KB5</b>	–	–	71 (S)/31	–	–
	1 1/2 in (38-4)	<b>F/KB6</b>	–	–	100 (S)/31	–	–
125, 4-hole	W32	<b>F/K31</b>	–	40 (Z)	–	–	–
125, 4-hole	1 in (25-4)	<b>F/KE1</b>	–	–	45 (S)/32	–	–
140, 4-hole	W40	<b>F/K33</b>	–	71 (Z)	–	–	–
160, 4-hole	W50	<b>F/K34</b>	–	125, 180 (Z)	–	–	–
	1 1/4 in (32-4)	<b>F/KB8</b>	–	–	71 (S)/32	–	–
180, 4-hole	1 1/2 in (38-4)	<b>F/KB9</b>	–	–	100 (S)/32	–	–
	1 3/4 in (44-4)	<b>F/KB7</b>	–	–	140 (S)/31/32	–	–
224, 4-hole	W60	<b>F/K35</b>	250 (Z)	250 (Z)	–	–	–
	W70	<b>F/K77</b>	355 (Z)	355 (Z)	–	–	–
315, 8-hole	W80	<b>F/K43</b>	500 (Z)	500 (Z)	–	–	–
400, 8-hole	W90	<b>F/K76</b>	750 (Z)	750 (Z)	–	–	–
<b>Flange SAE J744 (ISO 3019-1)<sup>2)</sup></b>							
82-2 (A)	5/8 in (16-4)	<b>F/K01</b>	–	–	–	–	AZPF-1X-004 to 022 <sup>3)</sup>
	3/4 in (19-4)	<b>F/K52</b>	–	–	18 (S)/31	10 (S)	–
101-2 (B)	7/8 in (22-4)	<b>F/K68</b>	–	–	28 (S)/31	28 (S)	AZPN-1X-020 to 032 <sup>3)</sup>
	1 in (25-4)	<b>F/K04</b>	–	–	45 (S)/31	45 (S)	PGH4
127-2 (C)	1 1/4 in (32-4)	<b>F/K07</b>	–	–	71 (S)/31	–	–
	1 1/2 in (38-4)	<b>F/K24</b>	–	–	100 (S)/31	85 (S)	PGH5
127-4 (C)	1 1/4 in (32-4)	<b>F/KE15</b>	–	–	71 (S)/32	–	–
152-4 (D)	1 3/4 in (44-4)	<b>F/K17</b>	–	–	140 (S)/31	–	–

1) According to DIN 5480 (e.g. W32) or according to SAE J744 (e.g. 3/4 in)

2) 2 = 2-hole, 4 = 4-hole

3) Bosch Rexroth recommends special versions of the gear pumps. Please contact us.


4) If a through drive for an A10V(S)O with R-shaft is desired, please contact us.



Flange ISO 3019-2 Diameter	Hub for splined shaft DIN 5480	Availability over sizes				Code F/K
		250	355	500	750	
125, 4-hole	W32x2x14x9 g	○	●	●	○	<b>31</b>
140, 4-hole	W40x2x18x9 g	○	○	●	○	<b>33</b>
160, 4-hole	W50x2x24x9 g	●	●	●	●	<b>34</b>
224, 4-hole	W60x2x28x9 g	●	○	○	○	<b>35</b>


● = Available    ○ = On request

▼ F/K31

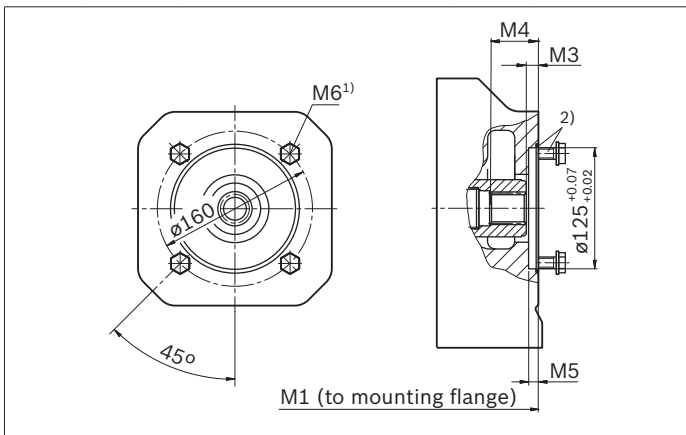


31	NG	M1	M3	M4	M5	M6
<b>355</b>	539	11.5	46	10	M12; 18 deep	
<b>500</b>	575	12.5	51	10		

▼ F/K33

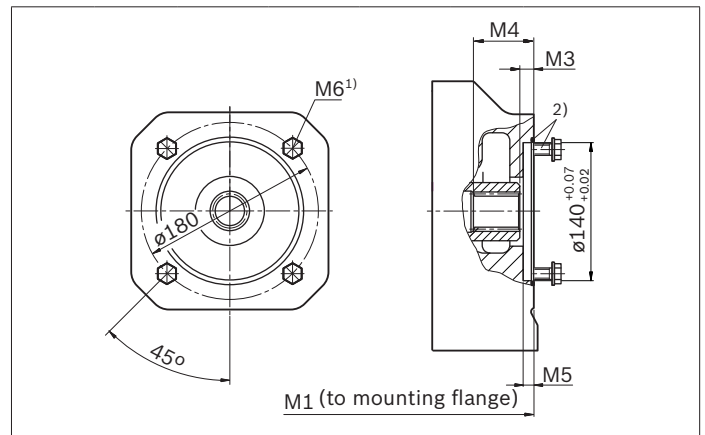


33	NG	M1	M3	M4	M5	M6
<b>355</b>	541	12.5	60	10	M12; 14.5 deep	
<b>500</b>	577	14.5	50	10		

▼ F/K34

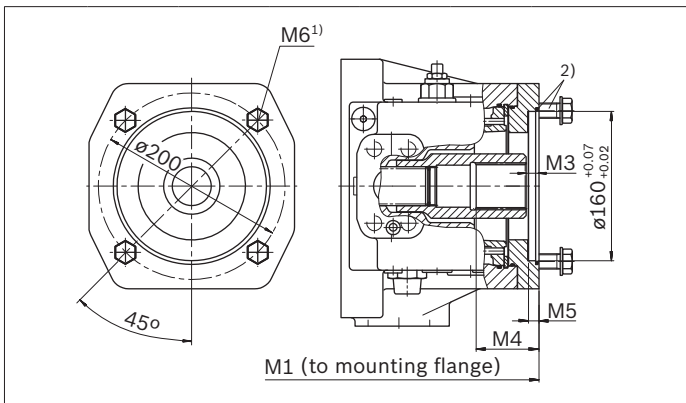

34	NG	M1	M3	M4	M5	M6
<b>250</b>	531	12.5	66	10	M16; 22 deep	
<b>355</b>	538	12.5	66	10		
<b>500</b>	574	12.5	67	10		
<b>750</b>	641	12.5	67	10		

▼ F/K35

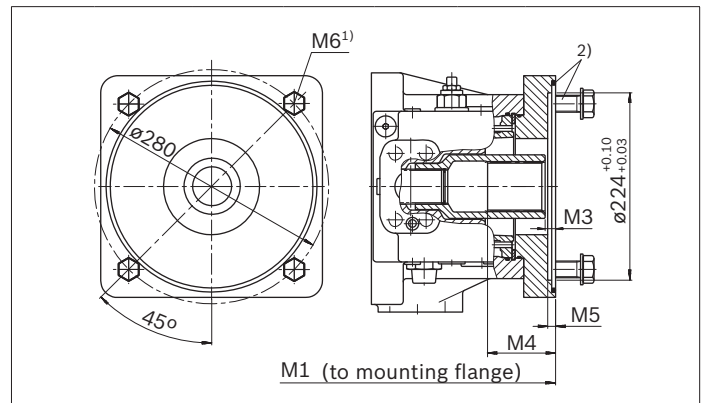

35	NG	M1	M3	M4	M5	M6
<b>250</b>	547	12.5	81	8	M20; 30 deep	
<b>355</b>	554	12.5	81	8		
<b>500</b>	611	12.5	81	8		
<b>750</b>	678	12.5	81	8		


1) Thread according to DIN 13, see instruction manual for details on tightening torques

2) 4 mounting bolts and O-ring seal are included in the scope of delivery.

Flange ISO 3019-2 Diameter	Hub for splined shaft DIN 5480	Availability over sizes				Code
		250	355	500	750	F/K
224, 4-hole	W70x3x22x9 g	○	●	●	○	<b>77</b>
315, 8-hole	W80x3x25x9 g	○	○	●	○	<b>43</b>


● = Available    ○ = On request

▼ F/K77

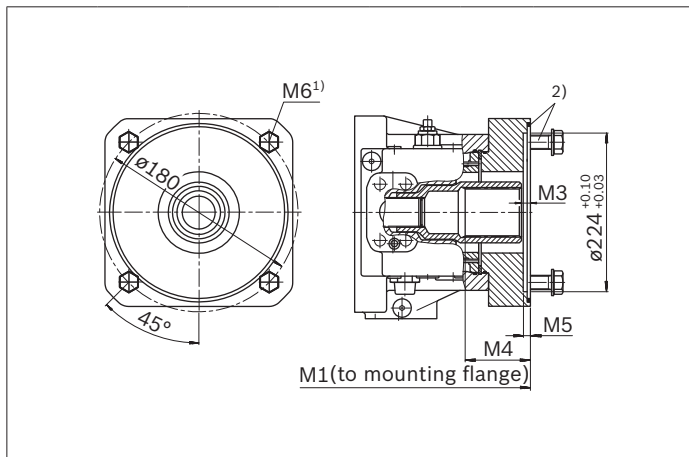

77	NG	M1	M3	M4	M5	M6
355	575	12.4	92	8	M20; 30 deep	
500	611	12.5	94.5	8		

▼ F/K43

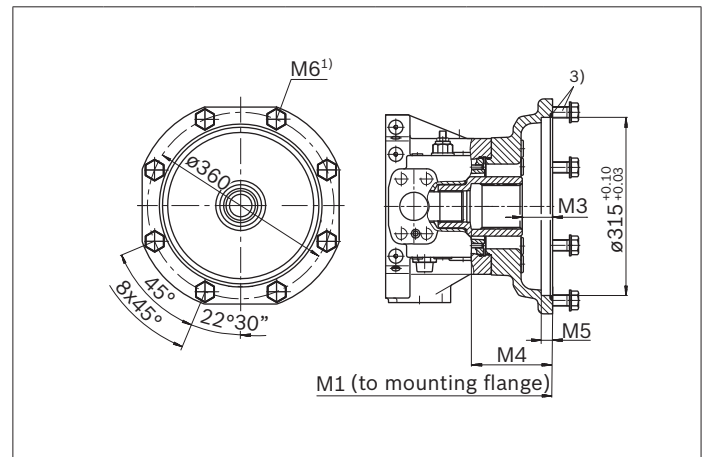

43	NG	M1	M3	M4	M5	M6
500	660	53.5	143	19	M20; 26 deep	


1) Thread according to DIN 13, see instruction manual for details on tightening torques  
2) 4 mounting bolts and O-ring seal are included in the scope of delivery.

3) 8 mounting bolts and O-ring seal are included in the scope of delivery.

Flange ISO 3019-2		Availability over sizes				Code
Diameter	Hub for splined shaft SAE J744	250	355	500	750	F/K
100, 2-hole	7/8 in 13T 16/32DP	●	●	○	○	<b>B3</b>
125, 2-hole	1 1/4 in 14T 12/24DP	●	○	○	○	<b>B5</b>
125, 2-hole	1 1/2 in 17T 12/24DP	○	●	○	○	<b>B6</b>


● = Available    ○ = On request

▼ **F/KB3**

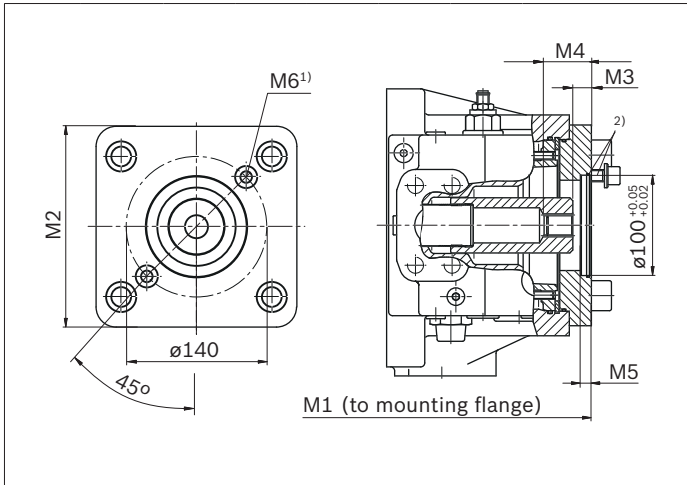


B3	NG	M1	M2	M3	M4	M5	M6
<b>250</b>	531	200	18.5	43.5	10	M12; 18 deep	
<b>355</b>	538	200	18.5	43.5	10		

▼ **F/KB5**

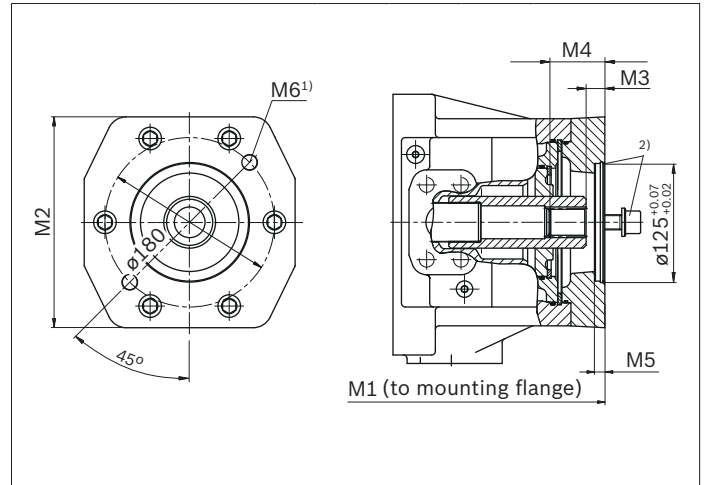

B5	NG	M1	M2	M3	M4	M5	M6
<b>250</b>	545	224	19.9	58	10	M16; 24 deep	
<b>355</b>	552	224	19.9	58	10		

▼ **F/KB6**

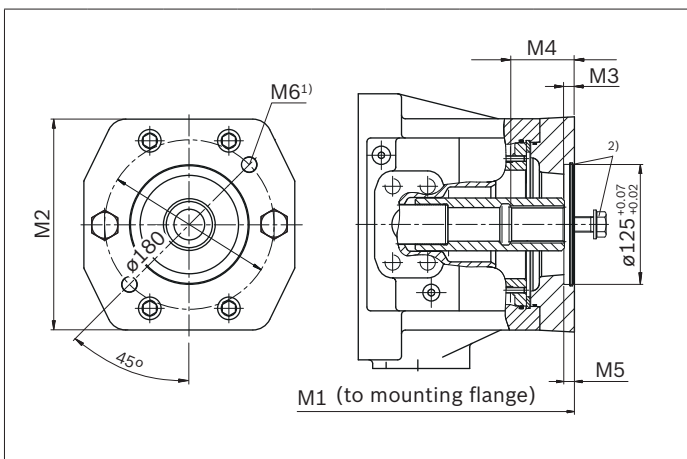

B6	NG	M1	M2	M3	M4	M5	M6
<b>355</b>	552	224	10	66	10.4	M16; 24 deep	


1) Thread according to DIN 13, see instruction manual for details on tightening torques

2) 2 mounting bolts and O-ring seal are included in the scope of delivery.

Flange SAE J744 (ISO 3019-1) Diameter	Hub for splined shaft SAE J744	Availability over sizes				Code
		250	355	500	750	F/K
82-2 (A)	5/8 in 9T 16/32DP	●	●	●	●	<b>01</b>
82-2 (A)	3/4 in 11T 16/32DP	○	●	●	○	<b>52</b>
101-2 (B)	7/8 in 13T 16/32DP	●	●	●	○	<b>68</b>
101-2 (B)	1 in 15T 16/32DP	○	●	●	○	<b>04</b>

● = Available    ○ = On request


▼ **F/K01; F/K52**

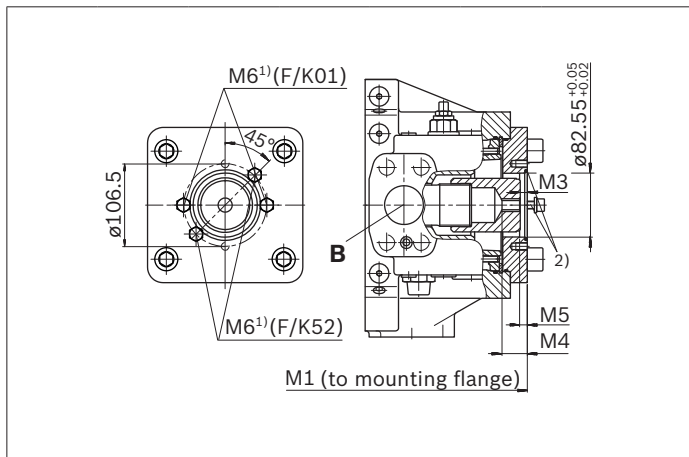

01	NG	M1	M3	M4	M5	M6
250	531	10.5	33	10	M10; 15 deep	
355	538	10.5	33	10		
500	574	9.3	33	10		
750	641	9.3	33	10		

52	NG	M1	M3	M4	M5	M6
355	531	19.5	40.5	10	M10; 15 deep	
500	574	19.5	40.5	10		

▼ **F/K68; F/K04**

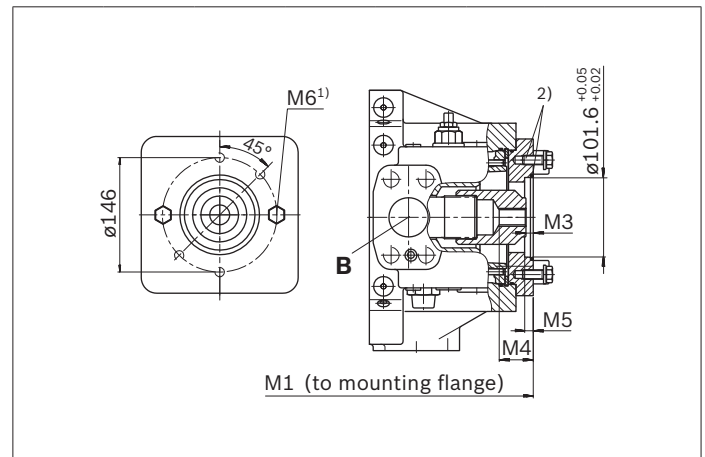

68	NG	M1	M3	M4	M5	M6
250	531	18.5	43.5	10	M12; 15 deep	
355	538	18.5	43.5	10		
500	574	18.5	43.5	10		

04	NG	M1	M3	M4	M5	M6
355	538	18.9	48.4	10	M12; 15 deep	
500	574	19.4	48.4	10		


1) Thread according to DIN 13, see instruction manual for details on tightening torques

2) 2 mounting bolts and O-ring seal are included in the scope of delivery.

Flange SAE J744 (ISO 3019-1) Diameter	Hub for splined shaft SAE J744	Availability over sizes				Code F/K
		250	355	500	750	
127-2 (C)	1 1/4 in 14T 12/24DP	●	●	●	○	<b>07</b>
127-2 (C)	1 1/2 in 17T 12/24DP	○	●	●	○	<b>24</b>
152-4 (D)	1 3/4 in 13T 8/16DP	●	●	●	●	<b>17</b>

● = Available    ○ = On request


▼ F/K07; F/K24

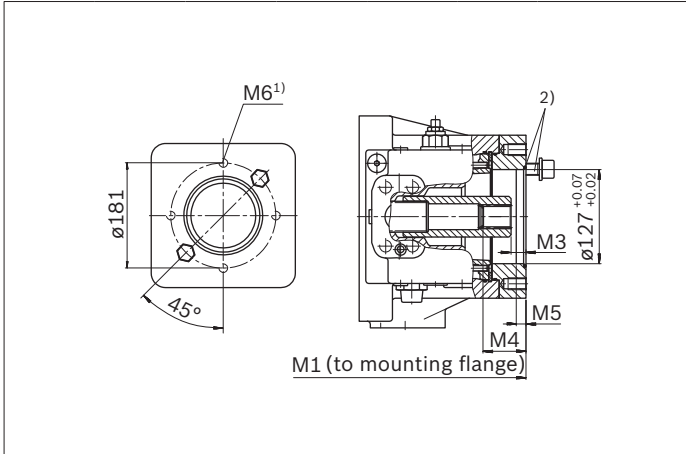

07	NG	M1	M3	M4	M5	M6
250	545	19.9	58	13	M16; 24 deep	
355	552	19.9	58	13	M16; 24 deep	
500	588	18.3	58	13	M16; 24 deep	

24	NG	M1	M3	M4	M5	M6
250	545	10.4	75	13	M16; 24 deep	
355	552	10.4	75	13	M16; 24 deep	
500	588	10.3	67	13	M16; 24 deep	

▼ F/K17

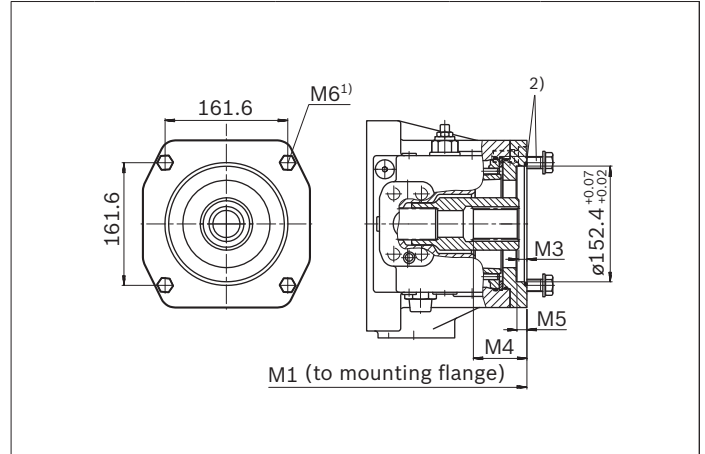

17	NG	M1	M3	M4	M5	M6
250	531	10.4	73	13	M16; 22 deep	
355	538	10.4	73	13	M16; 22 deep	
500	600	10.4	73	13	M16; 32 deep	
750	667	10.4	73	13	M16; 32 deep	

1) Thread according to DIN 13, see instruction manual for details on tightening torques  
2) 2 mounting bolts and O-ring seal are included in the scope of delivery.

3) 4 mounting bolts and O-ring seal are included in the scope of delivery.

## Integrated boost pump and valve technology (version F..)

### High-pressure relief valve (Pos. 5)

Two pilot-operated pressure relief valves use pressure limitation to prevent damage to the hydraulic pump resulting from overpressure. A pressure relief valve is assigned to each pressure side.

Protection is provided by reducing the high pressure to the low pressure side.

Pressure limitation is set by default to 350 bar. If another setting is required, please state this in plain text.

### Boost-pressure relief valve (Pos. 3)

direct operated

The boost pressure can be set on the boost-pressure relief valve.

### Boost pressure

To prevent damage to the system, low pressure protection is recommended, which monitors the static pressure component. The ports **M<sub>E3</sub>** or **M<sub>K4</sub>**, for example, are suitable for low pressure monitoring. To prevent any impermissible drop in boost pressure a low pressure accumulator can be connected to the ports **E<sub>2</sub>**, **E<sub>3</sub>** or **K<sub>4</sub>**. The design of the accumulator and the choice of the optimum connection location must be selected according to the hydraulic transmission behavior of the system and the operating conditions, taking the available boost volume into account. Depending on the quantity of system case drain fluid, it may be necessary to increase the boost volume with a larger or additional boost pump.

### Integrated boost pump (Pos. 9)

Standard size

NG	250	355	500	750
cm <sup>3</sup>	63 <sup>1)</sup>	80 <sup>1)</sup>	98	143

1) Larger boost pumps available on request

### Control pressure relief valve (for EP and HD) (Pos. 8)

Direct operated, high-pressure-related relief

At low working pressure, the auxiliary pump pressure is regulated to the set value (e.g. 32 bar). This pressure is needed by the HD and EP controls to swivel out reliably. Using this valve saves the use of a separate control pressure pump.

If the working pressure exceeds the pressure of the boost pump, control is provided by the check valve via the high pressure. At the same time, the increase in working pressure relieves the control pressure relief valve.

The boost pump pressure is hereby reduced to the set boost pressure (e.g. 16 bar).

This function leads to energy savings, improved efficiency and a longer service life of the auxiliary pump.

For setting values, see page 6.

The control pressure relief valve is not required for the other control devices and is replaced with a threaded plug.


### Control fluid filter (Pos. 10)

The HD and EP controls of the sizes 500 and 750 with internal control pressure supply from the high pressure are equipped with 0.2 mm coarse dirt filters as standard (regardless of the filtration order designation)

The dimensions are as show on pages 12 to 19. See circuit diagram on page 29.

### Flushing valve (Pos. 4)


To open the flushing valve safely, the pressure differential between **A** and **B** is required, as shown in the diagram. The required pressure differential depends on the rotational speed and the size. The circuit temperature needs to be monitored to avoid any damage to the system.

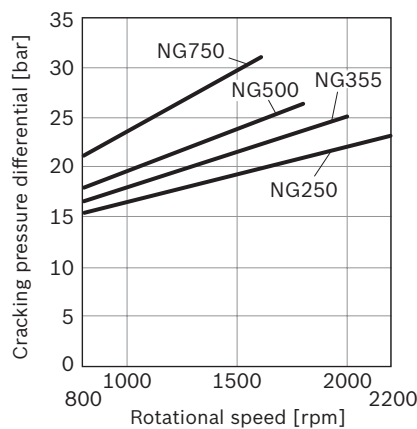



▼ **Circuit diagram****Example: A4CSG...EPG...F..4N (without filter)**

Sizes 500 and 750. Additional sizes available on request.

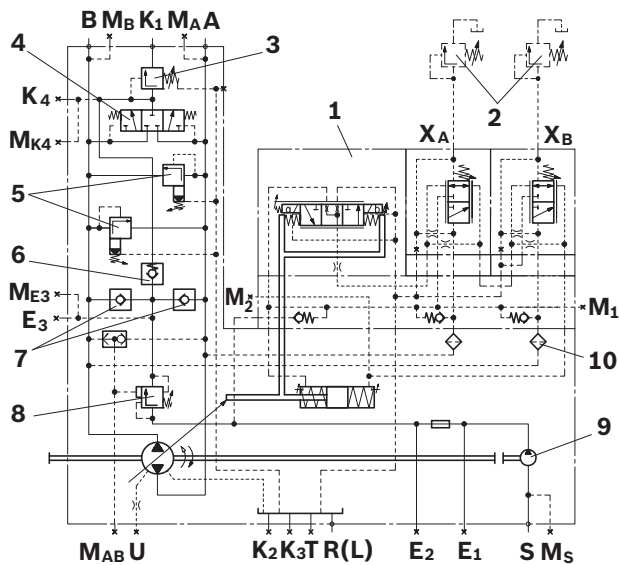**Components**

- |    |  |
|----|--|
| 1  | EPG control  |
| 2  | Pressure relief valves (not included in the scope of delivery) |
| 3  | Boost-pressure relief valve                                    |
| 4  | Flushing valve   |
| 5  | High-pressure relief valves                                    |
| 6  | Bypass valve   |
| 7  | Boost check valves   |
| 8  | Control pressure relief valve                                  |
| 9  | Integrated boost pump  |
| 10 | Control fluid filter for HD and EP (sizes 500 and 750)         |

**Circuit diagram NG 500/750 with filter**, see page 32;  
**without** integrated boost pump, see page 30


Ports		$P_{max}$ [bar]	State
A, B	Working line (pressure port)	400	O
S	Suction port	30	O
M <sub>A</sub> , M <sub>B</sub> , M <sub>AB</sub>	Measuring working pressure A/B	400	X
M <sub>S</sub>	Measuring suction	30	X
T	Fluid drain	4	X
E <sub>1</sub>	Filter, supply	40	X
E <sub>2</sub>	Filter, return	40	X
K <sub>1</sub>	Flushing port	5	O
K <sub>2</sub> , K <sub>3</sub>	Fluid filling + air bleeding	4	X
R(L)	Return flow (drain port)	4	O
U	Bearing flushing	7	X
E <sub>3</sub>	Boost pressure supply	40	X
M <sub>E3</sub>	Measuring boost pressure	40	X
K <sub>4</sub>	Accumulator port	40	X
M <sub>K4</sub>	Measuring boost pressure	40	X
M <sub>1</sub>	Measuring stroking chamber pressure	400	X
M <sub>2</sub>	Measuring stroking chamber pressure	400	X
X <sub>A</sub> , X <sub>B</sub>	Pilot pressure, remote control pressure controller	350	O

## External boost pressure supply

### Without integrated boost pump (version K..)

Port **E** (or **E<sub>2</sub>** for version K...N/D without filter) is intended as an external boost pressure supply and must be connected. To ensure functional reliability, maintain the required cleanliness level for the boost fluid fed in at port **E/E<sub>2</sub>** (see page 5), and observe the boost pressure values (see page 6).

### Dimensions, size 500

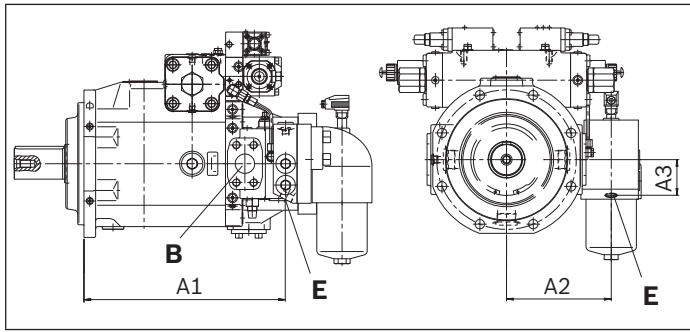

For the location and dimensions of the port **E<sub>2</sub>**, see page 31


NG	A1	A2	A3	Port E	Standard
250	477	270	92	M33 × 2; 18 deep	DIN 3852
355	484	270	92	M33 × 2; 18 deep	DIN 3852
500	520	270	92	M33 × 2; 18 deep	DIN 3852
750	585	270	92	M33 × 2; 18 deep	DIN 3852

Ports		$P_{max}$ [bar]	State
<b>E</b>	Boost pressure supply for version with filter	40	○
<b>E<sub>2</sub></b>	Boost pressure supply for version without filter	40	○
<b>A, B</b>	Working line (pressure port)	400	○
<b>S</b>	Suction port (only for version F)	30	○
<b>M<sub>A</sub>, M<sub>B</sub>, M<sub>AB</sub></b>	Measuring working pressure A/B	400	X
<b>M<sub>S</sub></b>	Measuring suction	30	X
<b>T</b>	Fluid drain	4	X
<b>E<sub>1</sub></b>	Filter, supply	40	X
<b>E<sub>2</sub></b>	Filter, return (for version with filter)	40	X
<b>K<sub>1</sub></b>	Flushing port	5	○
<b>K<sub>2</sub>, K<sub>3</sub></b>	Fluid filling + air bleeding	4	X
<b>R(L)</b>	Return flow (drain port)	4	○
<b>U</b>	Bearing flushing	7	X
<b>E<sub>3</sub></b>	Boost pressure supply	40	X
<b>M<sub>E3</sub></b>	Measuring boost pressure	40	X
<b>K<sub>4</sub></b>	Accumulator port	40	X
<b>M<sub>K4</sub></b>	Measuring boost pressure	40	X
<b>M<sub>1</sub></b>	Measuring stroking chamber pressure	400	X
<b>M<sub>2</sub></b>	Measuring stroking chamber pressure	400	X

### Circuit diagram

#### Example: A4CSG...EPD...K..4M

Sizes 500 and 750. Additional sizes available on request.

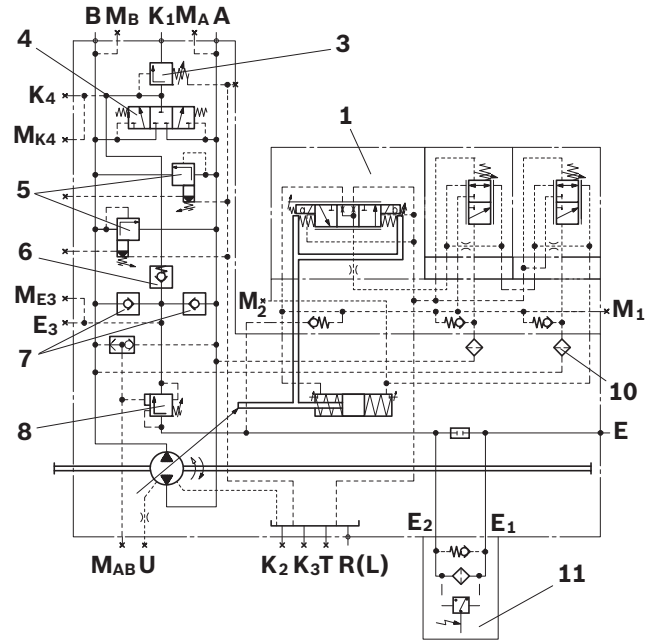

### Components

- 1 EP control
- 3 Boost-pressure relief valve
- 4 Flushing valve
- 5 High-pressure relief valves
- 6 Bypass valve
- 7 Boost check valves
- 8 Control pressure relief valve
- 10 Control fluid filter for HD and EP (sizes 500 and 750)
- 11 Filter with bypass

**Filtration types<sup>1)</sup>**

Regardless of the selected boost circuit filtration, the HD and EP controls in sizes 500 and 750 are equipped with 0.2 mm control fluid coarse dirt filters as standard (see circuit diagram).

**Without filter in the boost circuit (version N)**

Ports E<sub>1</sub> and E<sub>2</sub> are delivered plugged, pressure-proof and internally connected.

A boost circuit filter can be connected to these ports later on. The internal passage between E<sub>1</sub> and E<sub>2</sub> must be plugged for this purpose (please contact us).

For unit dimensions, see pages 12 to 19.


See circuit diagram on page 29.

**Ports for external boost circuit filtration (version D)**

Ports E<sub>1</sub> and E<sub>2</sub> are intended for a filter port.

These ports are open and are only plugged with plastic screws for transportation.

The internal passage between E<sub>1</sub> and E<sub>2</sub> is plugged.

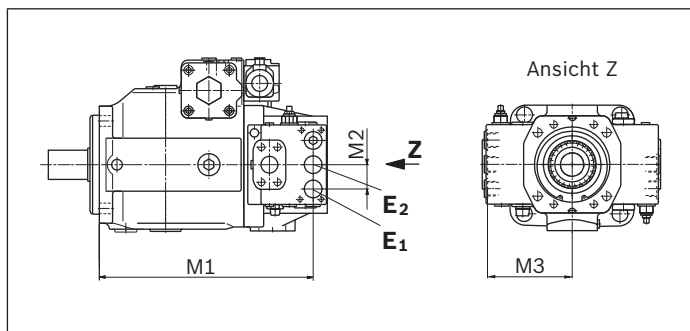


NG	M1	M2	M3	Port E1/E2	Standard
250	477	55	193	M33 × 2; 18 deep	DIN 3852
355	484	55	193	M33 × 2; 18 deep	DIN 3852
500	520	55	193	M33 × 2; 18 deep	DIN 3852
750	585	55	194	M33 × 2; 18 deep	DIN 3852

Ports		p <sub>max</sub> [bar]	State
E <sub>1</sub>	Filter, supply	50	○
E <sub>2</sub>	Filter, return	50	○

**Circuit diagram<sup>1)</sup>**

**Example: A4CSG...EPD...F.4D**

Sizes 500 and 750. Additional sizes available on request.

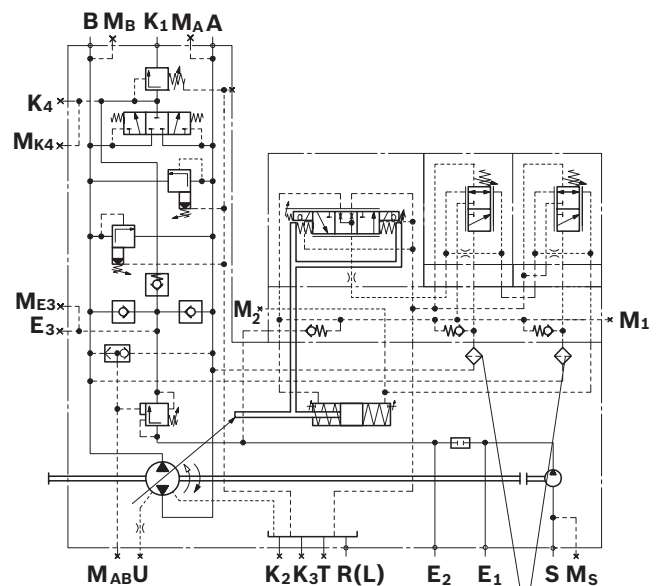

Control fluid filter for HD and EP (sizes 500 and 750)

<sup>1)</sup> For components and ports, see page 30

**With mounted filter in the boost circuit (version M)**


A filter is mounted directly on the pump in the pressure line of the boost pump, thus plugging the internal connection between E1 and E2.

Filter version: Type DFBN/HC330QE10D1.X/V-L24

Filter with bypass and visual-electrical contamination indicator  
Response pressure of the contamination indicator

$$\Delta p_a = 5 \text{ bar} - 0.5 \text{ bar}$$

$$\text{Cracking pressure of the bypass valve } \Delta p_{\delta} = 6 \text{ bar} + 0.6 \text{ bar}$$

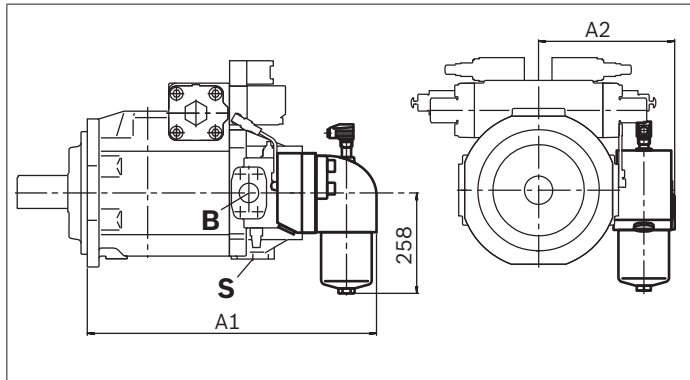


Size	A1	A2
250	699.5	200
355	706.5	347
500	742.5	
750		

Ports		$p_{\max}$ [bar]	State
<b>A, B</b>	Working line (pressure port)	400	O
<b>S</b>	Suction port	30	O
<b>M<sub>A</sub>, M<sub>B</sub>, M<sub>AB</sub></b>	Measuring working pressure A/B	400	X
<b>M<sub>S</sub></b>	Measuring suction	30	X
<b>T</b>	Fluid drain	4	X
<b>E<sub>1</sub></b>	Filter, supply	50	X
<b>E<sub>2</sub></b>	Filter, return	50	X
<b>K<sub>1</sub></b>	Flushing port	5	O
<b>K<sub>2</sub>, K<sub>3</sub></b>	Fluid filling + air bleeding	4	X
<b>R(L)</b>	Return flow (drain port)	4	O
<b>U</b>	Bearing flushing	7	X
<b>E<sub>3</sub></b>	Boost pressure supply	40	X
<b>M<sub>E3</sub></b>	Measuring boost pressure	40	X
<b>K<sub>4</sub></b>	Accumulator port	40	X
<b>M<sub>K4</sub></b>	Measuring boost pressure	40	X
<b>M<sub>1</sub></b>	Measuring stroking chamber pressure	400	X
<b>M<sub>2</sub></b>	Measuring stroking chamber pressure	400	X

**Example: A4CSG...EPD...F.4M**

Sizes 250 and 355. Additional sizes available on request.

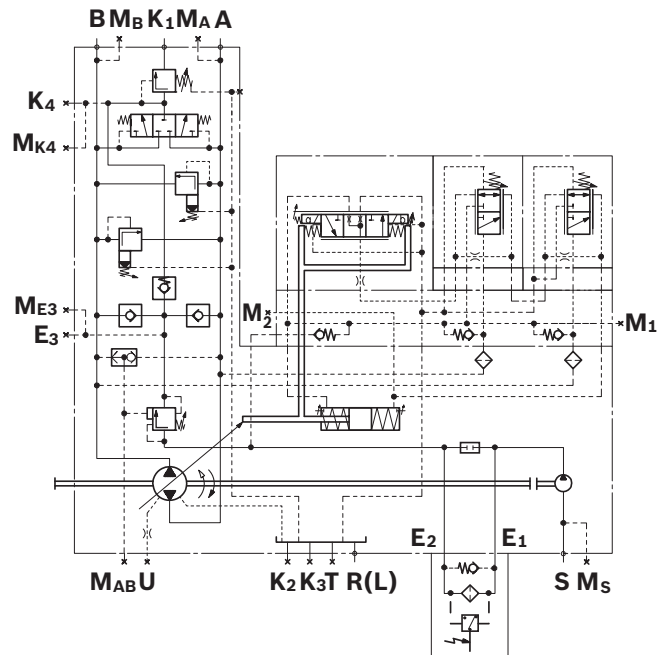

## Installation instructions

### General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines.

With particular regard to the “drive shaft upwards” installation position, we recommend bearing flushing to lubricate the front bearing and shaft seal at port **U**. See page 5.

The leakage in the housing area must be directed to the reservoir via the highest drain port (**T**, **R(L)**, **K<sub>2</sub>**, **K<sub>3</sub>**).

If a shared drain line is used for several units, make sure that the respective case pressure is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operational conditions, particularly at cold start. If this is not possible, separate reservoir lines must be installed if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction lines and the drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure, it must not, however, be higher than  $h_{s\ max} = 800\ \text{mm}$ . The minimum suction pressure at port **S** must also not fall below 0.8 bar absolute during operation. For external boost pressure supply (version **K..**) please refer to the attachment pump data sheet for details on the minimum suction pressure.

When designing the reservoir, ensure that there is adequate spacing between the suction line and the drain line. This minimizes oil turbulence and carries out degassing, which prevents the heated hydraulic fluid from being sucked directly back in again.

### Installation position

See the following examples **1** to **8**.

Further installation positions are available upon request.

Recommended installation position: **1st**

#### Notice

- ▶ To achieve an optimum control function, the stroking chambers must be air bled via the highest air bleed port **R2** to **R7** depending on the installation positions for HS4 and EO.
- ▶ You can expect installation positions **2**, **3**, **6** and **7** to affect the closed loop control. Due to gravity, dead weight and case pressure, minor characteristic shifts and actuating time changes may occur.


#### Key

<b>S</b>	Suction port
<b>T, K<sub>2</sub>, K<sub>3</sub>, R(L)</b>	Fluid filling + air bleeding (drain port)
<b>A, B</b>	Pressure port
<b>U</b>	Bearing flushing port
<b>SB</b>	Baffle (baffle plate)
<b><math>h_{t\ min}</math></b>	Minimum required immersion depth (200 mm)
<b><math>h_{min}</math></b>	Minimum required distance to the reservoir bottom (100 mm)
<b><math>h_{s\ max}</math></b>	Maximum permissible suction height 800 mm for version F. For version K, observe the external boost pump specification.


**Below-reservoir installation (recommended)**

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir and below the minimum fluid level of the reservoir.


Installation position	Air bleeding <sup>1)</sup>	Filling
<b>1</b>	<b>R(L)</b>	<b>R(L)</b>

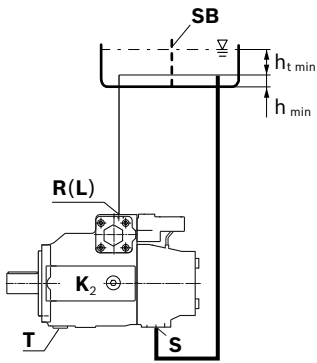


<b>2</b>	<b>K<sub>2</sub>; R(L) plug</b>	<b>K<sub>2</sub></b>
----------	---------------------------------	----------------------

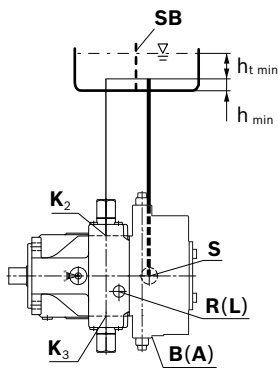

Installation position	Air bleeding <sup>1)</sup>	Filling
<b>3</b>	<b>K<sub>3</sub>; R(L) plug</b>	<b>K<sub>3</sub></b>

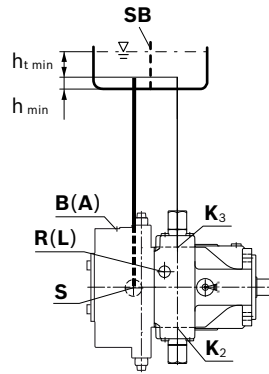

<b>4</b>	<b>T; R(L) plug</b>	<b>T</b>
----------	---------------------	----------

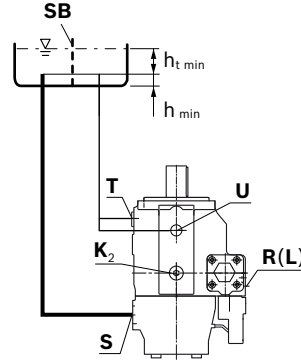


Key, see page 33.

1) To air bleed the stroking chamber, use the highest port on the control (see control data sheet)


**Above-reservoir installation**

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir. A check valve in the drain line is to be avoided. Exceptions may be permissible, please consult us first.


Installation position	Air bleeding <sup>1)</sup>	Filling
5	R(L)	R(L)




6	K <sub>2</sub> ; R(L) plug	K <sub>2</sub>
---	----------------------------	----------------



Installation position	Air bleeding <sup>1)</sup>	Filling
7	K <sub>3</sub> ; R(L) plug	K <sub>3</sub>



8	T; R(L) plug	T
---	--------------	---

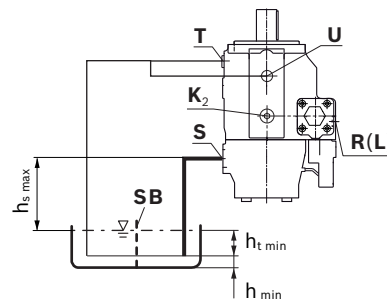

Key, see page 33.

1) To air bleed the stroking chamber, use the highest port on the control (see control data sheet)

## Project planning notes

- ▶ The pump A4CSG is designed to be used in closed circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, this can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or in the instruction manual.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Not all versions of the product are approved for use in a safety function according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Pressure controllers are not safeguards against pressure overload. Be sure to add a pressure relief valve to the hydraulic system.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports are only intended to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of getting burnt on the axial piston unit and especially on the solenoids. Take the appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances, get stuck in position as a result of contamination (e.g. impure hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filtration) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to bring the driven consumer into a safe position (e.g. safe stop) and ensure any measures are properly implemented.

**Bosch Rexroth AG**  
Mobile Applications  
An den Kelterwiesen 14  
72160 Horb a. N., Germany  
Tel. +49 7451 92-0  
info.ma@boschrexroth.de  
www.boschrexroth.com/brm

© Bosch Rexroth AG 2016. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.




# Axial piston variable double pump

## A22VG series 40

**RE 93221**

Edition: 05.2014

Replaces: 06.2012

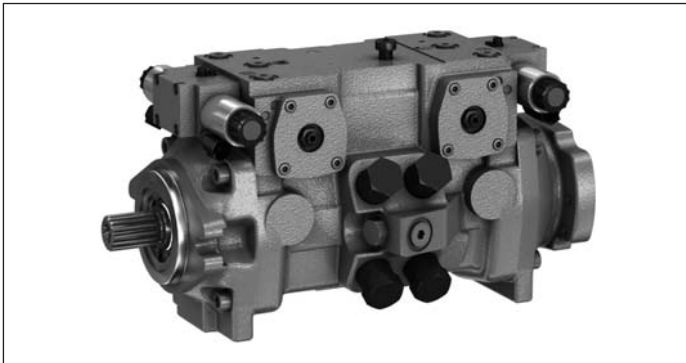

- ▶ Size 45
- ▶ Nominal pressure 380 bar
- ▶ Maximum pressure 420 bar
- ▶ Closed circuit

### Features

- ▶ Variable double pump with two axial piston rotary groups of swashplate design for hydrostatic drives in a closed circuit
- ▶ The flow is proportional to the drive speed and displacement.
- ▶ The flow can be infinitely varied by adjusting the swashplate angle.
- ▶ Flow direction changes smoothly when the swashplate is moved through the neutral position.
- ▶ Only one shared port for case drain fluid for both circuits
- ▶ Compact design for tight installation conditions

### Note

Only for series no smaller than 200 units per year.  
Please contact us regarding smaller series.

### Contents

Ordering code	2
Hydraulic fluids	4
Shaft seal	5
Operating pressure range	6
Technical data	7
HW – proportional hydraulic control, mechanical servo	9
EP – proportional electric control	11
HT – hydraulic control, direct controlled	13
ET – electric control, direct controlled	14
DA – control valve, fixed setting	15
Dimensions, size 45	16
Through drive dimensions	19
Overview of attachment options	19
Boost pump	20
High-pressure relief valves	20
Mechanical stroke limiter	21
Ports X <sub>3</sub> and X <sub>4</sub> for stroking chamber pressure	21
Swivel angle sensor	22
Connector for solenoids	23
Installation dimensions for coupling assembly	23
Installation instructions	24
Project planning notes	26
Safety instructions	26

## Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	
<b>A22V</b>	<b>G</b>	<b>045</b>							<b>/</b>	<b>40</b>	<b>A</b>		<b>N</b>	<b>B2</b>	<b>S7</b>	<b>3</b>		<b>A</b>	<b>-</b>	

### Axial piston unit

01	Swashplate design, variable, nominal pressure 380 bar, maximum pressure 420 bar	<b>A22V</b>
----	---	-------------

### Operating mode

02	Double pump, closed circuit	<b>G</b>
----	-----------------------------	----------

### Size (NG)

03	Geometric displacement, see technical data on page 7	<b>045</b>
----	--	------------

### Control device

04	Proportional control hydraulic mechanical servo, hexagon shaft with lever, free position <sup>1)</sup>	without neutral position switch	<b>HW2</b>
		with neutral position switch	<b>HW8</b>
	Proportional control electric	U = 12 V DC	<b>EP1</b>
		U = 24 V DC	<b>EP2</b>
	Hydraulic control, direct operated		<b>HT1</b>
	Electric control, direct operated; two pressure reducing valves per circuit	U = 12 V DC	<b>ET1</b>
U = 24 V DC		<b>ET2</b>	

### Connector for solenoids<sup>2)</sup> (see page 23)

05	Without connector (without solenoid, only for hydraulic control)	<b>0</b>
	DEUTSCH – molded connector, 2-pin – without suppressor diode	<b>P</b>

### Swivel angle sensor (see page 22)

06	Without swivel angle sensor	<b>0</b>
	Electric swivel angle sensor mounted <sup>3)</sup>	<b>R</b>

### Pilot pressure ports

		HW	HT	EP	ET	
07	Ports X <sub>1</sub> and X <sub>2</sub>	●	-	●	●	<b>1</b>
	Ports X <sub>3</sub> and X <sub>4</sub>	-	●	-	-	<b>3</b>
	Ports X <sub>1</sub> , X <sub>2</sub> and X <sub>3</sub> , X <sub>4</sub>	●	-	●	●	<b>4</b>
	Ports X <sub>5</sub> and X <sub>6</sub>	-	●	-	-	<b>5</b>

### Mechanical stroke limiter (see page 22)

08	Without mechanical stroke limiter	<b>0</b>
	One-sided mechanical stroke limiter, externally adjustable, on opposite side to service line ports	<b>F</b>

### DA control valve (see page 15)

		HW	HT	EP	ET	
09	Without DA control valve	●	●	●	●	<b>0</b>
	DA control valve fixed setting	●	●	●	-	<b>1</b>

### Series

10	Series 4, index 0	<b>40</b>
----	-------------------	-----------

### Configuration of ports and fastening threads

11	ANSI, port threads with O-ring seal according to ISO 11926	<b>A</b>
----	--	----------

● = Available    - = Not available

1) On delivery, the position of the lever may differ from that shown in the brochure or drawing. If necessary, the position of the lever can be adjusted by the customer.

2) Connectors for other electric components can deviate.

3) Please contact us if the swivel angle sensor is used for control

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20		
<b>A22V</b>	<b>G</b>	<b>045</b>							<b>/</b>	<b>40</b>	<b>A</b>		<b>N</b>	<b>B2</b>	<b>S7</b>	<b>3</b>			<b>A</b>	<b>-</b>	

**Direction of rotation**

12	Viewed on drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

**Sealing material**

13	NBR (nitrile-rubber), shaft seal in FKM (fluoroelastomer)	<b>N</b>
----	---	----------

**Mounting flange**

14	SAE J744, 101-2	<b>B2</b>
----	-----------------	-----------

**Drive shaft** (permissible input torque, see page 17)

15	Splined shaft ANSI B92.1a, 1 1/4 in 14T 12/24DP	<b>S7</b>
----	---	-----------

**Service line ports**

16	Threaded ports A and B, left (viewed on drive shaft)	<b>3</b>
----	--	----------

**Boost pump<sup>4)</sup>**

17	Without boost pump (standard)	<b>U</b>
	Boost pump	<b>F</b>

**Through drive** (mounting options, see page 19)

18	Flange SAE J744			Hub for splined shaft <sup>5)</sup>			
	Diameter	Mounting <sup>6)</sup>	Designation	Diameter	Designation		
	101-2 (B)	∞	B2	7/8 in	13T 16/32DP	S4	
			1 in	15T 16/32DP	S5	<b>B2S5</b>	

**Pressure-relief valve**

19	High-pressure relief valve, direct operated, without bypass (for values, see page 20)	<b>A</b>
----	---	----------

**Standard / special version**

20	Standard version	<b>0</b>
	Standard version with installation variants, e.g. T ports against standard open or closed	<b>Y</b>
	Special version	<b>S</b>

● = Available    - = Not available

**Notes**

- ▶ Observe the project planning notes on page 26!
- ▶ A pressure cut-off is not available for this unit.
- ▶ Preservation:
  - up to 12 months as standard
  - up to 24 months long-term  
(state in plain text when ordering)

<sup>4)</sup> Pressure or suction filtration required. To be supplied by customer. Boost pressure inlet at port G, a DA control valve is used at port G1.  
<sup>5)</sup> Hub for splined shaft according to ANSI B92.1a  
<sup>6)</sup> Mounting drillings pattern viewed on through drive with control at top

## Hydraulic fluids

The A22VG variable double pump is designed for operation with HLP mineral oil according to DIN 51524.

Application notes and requirements for hydraulic fluids should be taken from the following data sheets before the start of project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFDU)

### Details regarding the selection of hydraulic fluid

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$  see selection diagram).

#### Note


At no point of the component may the temperature be higher than 115 °C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact the responsible member of staff at Bosch Rexroth.

### Viscosity and temperature of hydraulic fluids

	Viscosity	Temperature	Comment
Cold start	$v_{max} \leq 1600 \text{ mm}^2/\text{s}$	$\theta_{St} \geq -40 \text{ °C}$	$t \leq 3 \text{ min}$ , $n \leq 1000 \text{ rpm}$ , without load $p \leq 50 \text{ bar}$
Permissible temperature difference		$\Delta T \leq 25 \text{ K}$	between axial piston unit and hydraulic fluid in the system
Warm-up phase	$v < 1600 \text{ to } 400 \text{ mm}^2/\text{s}$	$\theta = -40 \text{ °C to } -25 \text{ °C}$	At $p \leq 0.7 \times p_{nom}$ , $n \leq 0.5 \times n_{nom}$ and $t \leq 15 \text{ min}$
Continuous operation	$v = 400 \text{ to } 10 \text{ mm}^2/\text{s}$		This corresponds, for example on the VG 46, to a temperature range of +5 °C to +85 °C (see selection diagram)
		$\theta = -25 \text{ °C to } +110 \text{ °C}$	measured at port T Note the permissible temperature range of the shaft seal ( $\Delta T = \text{approx. } 5 \text{ K}$ between the bearing/shaft seal and port T)
	$v_{opt} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$		Range of optimum operating viscosity and efficiency
Short-term operation	$v_{min} \geq 7 \text{ mm}^2/\text{s}$		$t < 3 \text{ min}$ , $p < 0.3 \times p_{nom}$

#### ▼ Selection diagram

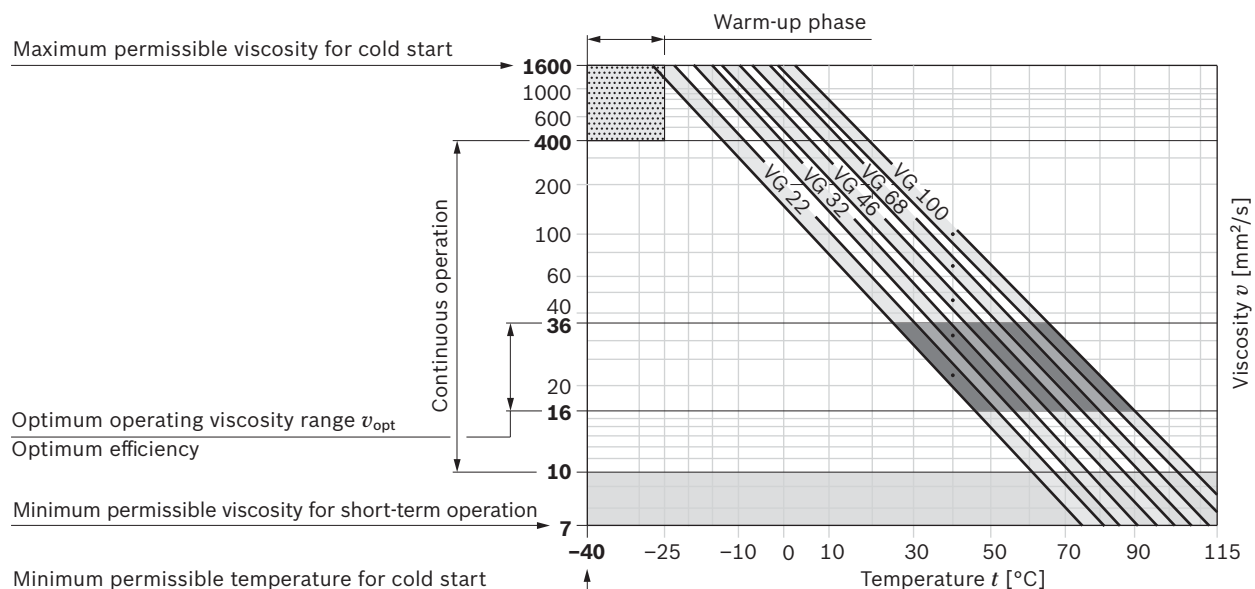

**Filtration of the hydraulic fluid**

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.


We recommend, depending on the system and application, for the A22VG: filter cartridges  $\beta_{20} \geq 100$ .

At very high hydraulic fluid temperatures (90 °C to maximum 110 °C, measured at port T), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.

**Shaft seal**

**Permissible pressure loading**

The service life of the shaft seal is influenced by the speed of the axial piston unit and the leakage pressure in the housing (case pressure). Momentary pressure spikes ( $t < 0.1$  s) of up to 10 bar are permitted. The service life of the shaft seal decreases with increasing frequency of pressure spikes and increasing mean differential pressure. The case pressure must be equal to or higher than the ambient pressure.

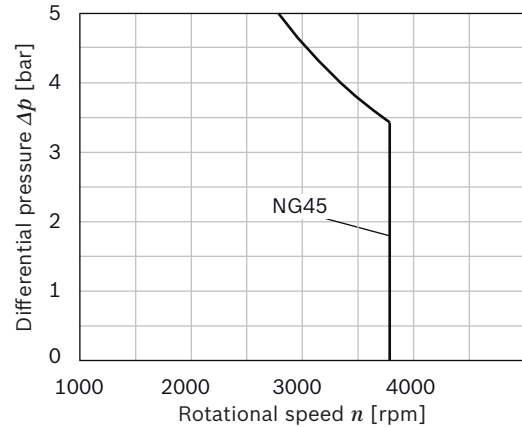


The FKM shaft seal may be used for leakage temperatures from -25 °C to +115 °C. For application cases below -25 °C, an NBR shaft seal is required (permissible temperature range: -40 °C to +90 °C).


## Operating pressure range

Pressure at service line port A or B		Definition
Nominal pressure $p_{nom}$	380 bar absolute	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure $p_{max}$	420 bar absolute	The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	10 s	
Total operating period	300 h	
Minimum pressure (high-pressure side)	25 bar absolute	Minimum pressure at the high-pressure side (A or B) which is required in order to prevent damage to the axial piston unit.
Minimum pressure (low-pressure side)	10 bar above case pressure	Minimum pressure at the low-pressure side (A or B) which is required in order to prevent damage to the axial piston unit. Boost pressure setting must be higher depending on system.
Rate of pressure change $R_{A\ max}$	9000 bar/s	Maximum permissible rate of pressure build-up and reduction during a pressure change over the entire pressure range.
Boost pump		
Nominal pressure $p_{Sp\ nom}$	25 bar absolute	
Maximum pressure $p_{Sp\ max}$	30 bar absolute	
Pressure at suction port S (inlet)		
Continuous $p_{S\ min}$ ( $v \leq 30\ mm^2/s$ )	$\geq 0.8$ bar absolute	
Short-term, on cold start ( $t < 3\ min$ )	$\geq 0.5$ bar absolute	
Maximum pressure $p_{S\ max}$	$\leq 5$ bar absolute	
Control pressure		
Minimum control pressure $p_{St\ min}$		To ensure the function of the control, a minimum control pressure $p_{St\ min}$ at $n = 2000\ rpm$ is required depending on the rotational speed and operating pressure.
Controls EP and HW	18 bar above case pressure	
Controls ET and HT	25 bar above case pressure	

### ▼ Rate of pressure change $R_{A\ max}$

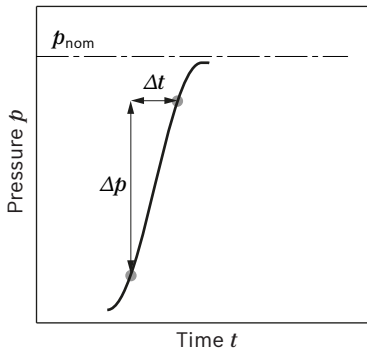

### ▼ Pressure definition

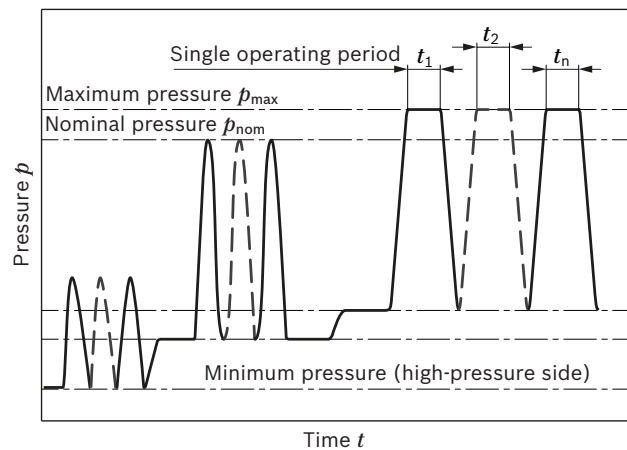

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

#### Note

Operating pressure range valid when using hydraulic fluids based on mineral oils. Values for other hydraulic fluids, please contact us.

**Technical data**


Size		NG	45
Displacement geometric, per revolution	variable pump (for each rotary group)	$V_{g \max}$	cm <sup>3</sup> 2 x 46
	boost pump (at $p = 25$ bar)	$V_{g \text{ Sp}}$	cm <sup>3</sup> 14.9
Rotational speed <sup>1)</sup>	maximum at $V_{g \max}$	$n_{\text{nom}}$	rpm 3300 <sup>6)</sup>
	limited maximum <sup>2)</sup>	$n_{\text{max1}}$	rpm 3550
	intermittent maximum <sup>3)</sup>	$n_{\text{max2}}$	rpm 3800
	minimum	$n_{\text{min}}$	rpm 500
Flow	at $V_{g \max}$ and $n_{\text{nom}}$	$q_v$	l/min 2 x 152
Power <sup>4)</sup>	at $V_{g \max}$ , $n_{\text{nom}}$ and $\Delta p = 380$ bar	$P$	kW 192
Torque <sup>4)</sup>	at $V_{g \max}$ and	$\Delta p = 300$ bar	$T$ Nm 556
		$\Delta p = 100$ bar	$T$ Nm 146
Rotary stiffness drive shaft	1 1/4 in S7	Pump 1	$c_1$ Nm/rad 73804
		Pump 2	$c_2$ Nm/rad 23066
Moment of inertia (see graphic below)	rotary group 1	$J_{TW1}$	kgm <sup>2</sup> 0.003327
	rotary group 2	$J_{TW2}$	kgm <sup>2</sup> 0.003293
Maximum angular acceleration for each rotary group <sup>5)</sup>		$a$	rad/s <sup>2</sup> 4000
Case volume		$V$	L 1.7
Weight with HT control (approx.)		$m$	kg 53

**Determination the operating characteristics**

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$T = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{mh}}$	[Nm]
Power	$P = \frac{2 \pi \times T \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

Key	
$V_g$	= Displacement per revolution [cm <sup>3</sup> ]
$\Delta p$	= Differential pressure [bar]
$n$	= Rotational speed [rpm]
$\eta_v$	= Volumetric efficiency
$\eta_{mh}$	= Mechanical-hydraulic efficiency
$\eta_t$	= Total efficiency ( $\eta_t = \eta_v \times \eta_{mh}$ )

▼ **Spring-mass system with moment of inertia**

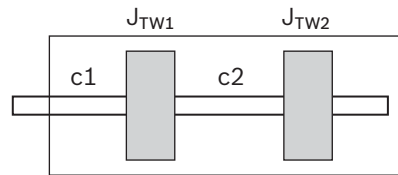



**Notes**

- ▶ Theoretical values, without efficiency levels and tolerances; values rounded
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends checking the loading by means of testing or calculation / simulation and comparison with the permissible values.
- ▶ Transport and storage
  - $\theta_{\text{min}} \geq -50$  °C
  - $\theta_{\text{opt}} = +5$  °C to  $+20$  °C

- 1) The values are valid:
  - for the optimum viscosity range of  $\nu_{\text{opt}} = 36$  to  $16$  mm<sup>2</sup>/s
  - with hydraulic fluid based on mineral oil
- 2) limited maximum speed:  
 At half corner power (e.g., at  $V_{g \max}$  and  $p_{\text{nom}}/2$ )
- 3) Intermittent maximum speed at:
  - high idle
  - overspeed:  $\Delta p = 70$  to  $150$  bar and  $V_{g \max}$
  - reversing peaks:  $\Delta p < 300$  bar and  $t < 0.1$  s.

- 4) Without boost pump
- 5) The data are valid for values between the minimum required and maximum permissible rotational speed. Valid for external excitation (e. g. diesel engine 2 to 8 times rotary frequency; cardan shaft twice the rotary frequency). The limit value applies for a single pump only. The load capacity of the connection parts must be considered.
- 6) When using a boost pump, please consult with the responsible plant.

**Permissible radial and axial forces of the drive shaft**


Size		NG	45
Drive shaft		in	1 1/4
Maximum radial force at distance a (from shaft collar)		$F_{q \max}$	N 3190
		a	mm 24
Maximum axial force		$\pm F_{ax \max}$	N 1500

**Note**  
 Special requirements apply in the case of belt drive and cardan shaft. Please contact us.

**Permissible input and through-drive torques**

Size		NG	45
Torque at $V_{g \max}$ and $\Delta p = 380 \text{ bar}^1$		$T$	Nm 556
Maximum input torque at drive shaft <sup>2)</sup>	S7	1 1/4 in	$T_{E \max}$ Nm 602
Maximum through-drive torque		$T_{D1 \max}$	Nm 300
		$T_{D2 \max}$	Nm $T_{D2 \text{ perm}} = 300 - T_2$

▼ **Torque distribution**

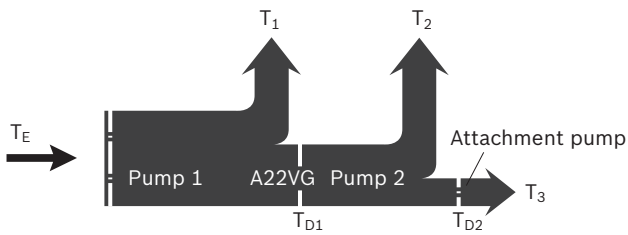

Torque – A22VG	1st pump	$T_1$
	2nd pump	$T_2$
Torque – attachment pump		$T_3$
Input torque		$T_E = T_1 + T_2 + T_3$
		$T_E < T_{E \max}$
Through-drive torque		$T_{D1}$
		$T_{D2}$


1) Efficiency not considered  
 2) For drive shafts without radial force



## HW – proportional control hydraulic, mechanical servo

The output flow of the pump is infinitely variable between 0 to 100%, proportional to the swivel angle of the control lever.

A feedback lever, connected to the stroking piston maintains the pump flow for a given position of the control lever. If the pump is also equipped with a DA control valve (see page 15), automotive operation is possible for travel drives.

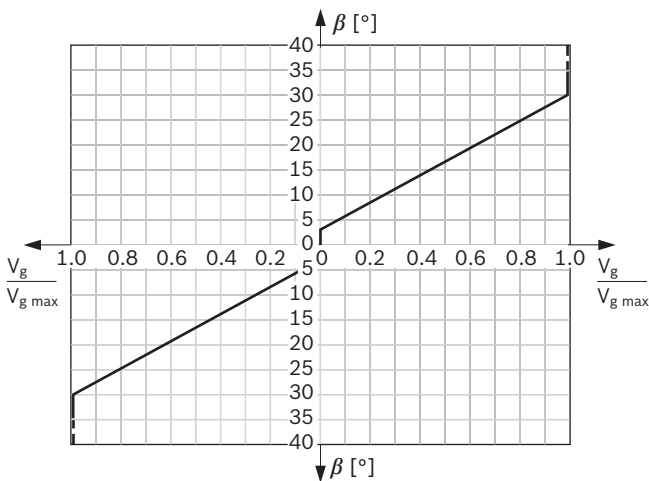

Swivel angle  $\beta$  at the control lever for pump displacement change:

- ▶ Start of control at  $\beta = \pm 3^\circ$
- ▶ End of control at  $\beta$  (max. displacement  $V_{g \max}$ ) at  $\pm 30^\circ$
- ▶ Rotation limiting  $\beta$  of the control lever (internal)  $\pm 38^\circ$

The maximum required torque at the lever is 170 Ncm. To prevent damage to the HW control module, a mechanical stop must be provided by the customer for the HW control lever.

### Note

Spring centering enables the pump, depending on pressure and rotational speed, to move automatically to the neutral position ( $V_g = 0$ ) as soon as there is no longer any torque on the control lever of the HW control module (regardless of deflection angle).

### Variation: Neutral position switch


The switch contact in the neutral position switch is closed when the control lever on the HW control module is in its neutral position. The switch opens when the control lever is moved out of neutral in either direction.

Thus, the neutral position switch provides a monitoring function for drive units that require the pump to be in the neutral position during certain operating conditions (e.g. starting diesel engines).


### Technical data

Load capacity	20 A (continuous), without switching operations
Switching capacity	15 A / 32 V (resistive load) 4 A / 32 V (inductive load)
Connector version	DEUTSCH DT04-2P-EP04 (Mating connector, see page 23)

### ▼ Schematic

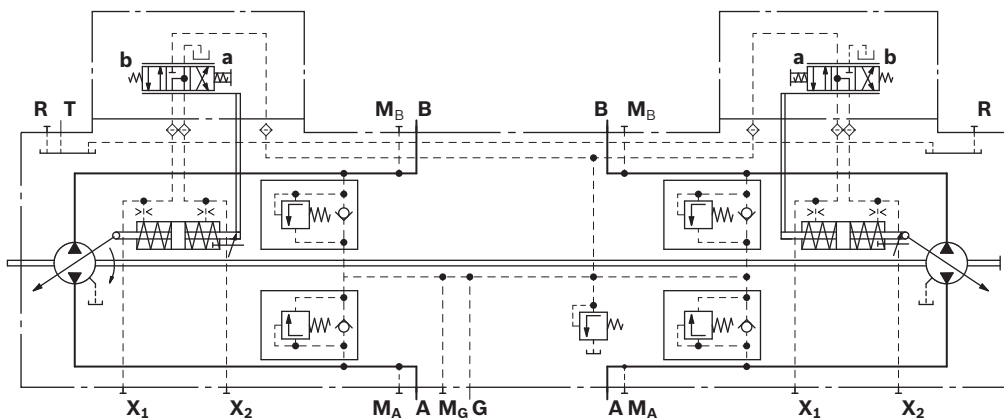

<b>Assignment of direction of rotation, control and flow direction</b>									
Direction of rotation	clockwise				counter-clockwise				
	Pump 1		Pump 2		Pump 1		Pump 2		
Lever direction	a	b	a	b	a	b	a	b	
Control pressure (X <sub>3</sub> , X <sub>4</sub> optional, see page 21)	X <sub>2</sub>	X <sub>1</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>1</sub>	X <sub>2</sub>	
	X <sub>4</sub>	X <sub>3</sub>	X <sub>3</sub>	X <sub>4</sub>	X <sub>4</sub>	X <sub>3</sub>	X <sub>3</sub>	X <sub>4</sub>	
Flow direction	A to B	B to A	B to A	A to B	B to A	A to B	A to B	B to A	
Operating pressure	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>	

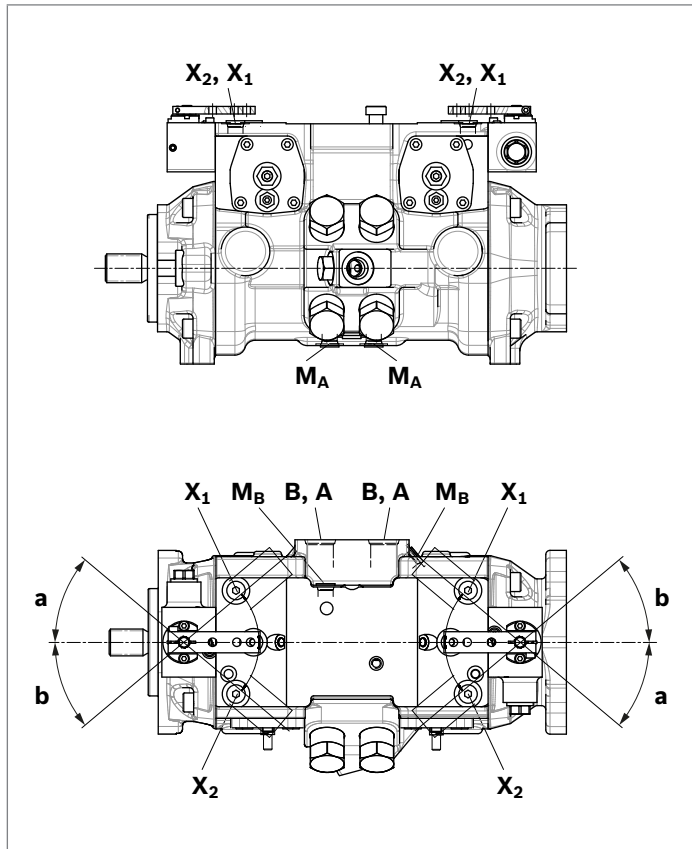

### EP – Proportional control electric

The output flow of the pump is infinitely variable between 0 to 100%, proportional to the electrical current supplied to solenoid **a** or **b**.


The electrical energy is converted into a force acting on the control spool.

This valve spool then directs control oil into and out of the stroking cylinder to adjust pump displacement as required. A feedback lever, connected to the stroking piston maintains the pump flow for a given current within the control range. If the pump is also equipped with a DA control valve (see page 15), automotive operation is possible for travel drives.


Technical data, solenoid	EP1	EP2
Voltage	12 V (±20%)	24 V (±20%)
Control current		
Beginning of control at $V_g = 0$	400 mA	200 mA
End of control at $V_{g \max}$	1115 mA	560 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	22.7 Ω
Dither frequency	100 Hz	100 Hz
Duty cycle	100 %	100 %
Type of protection, see connector version on page 23		

Various BODAS controllers with application software and amplifiers are available for controlling the proportional solenoids.


Further information can also be found on the internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics).

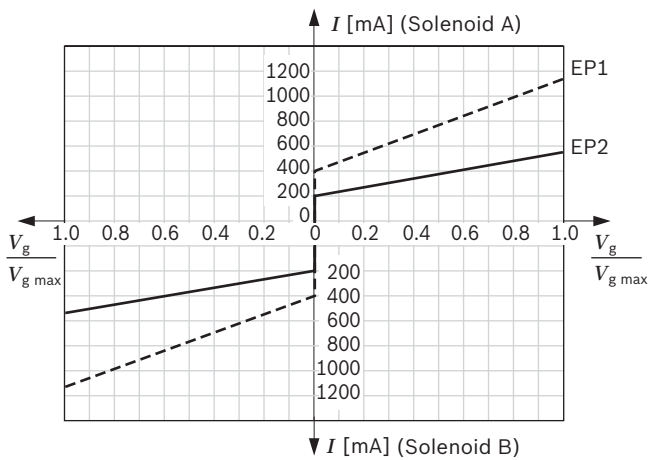

#### ▼ Schematic

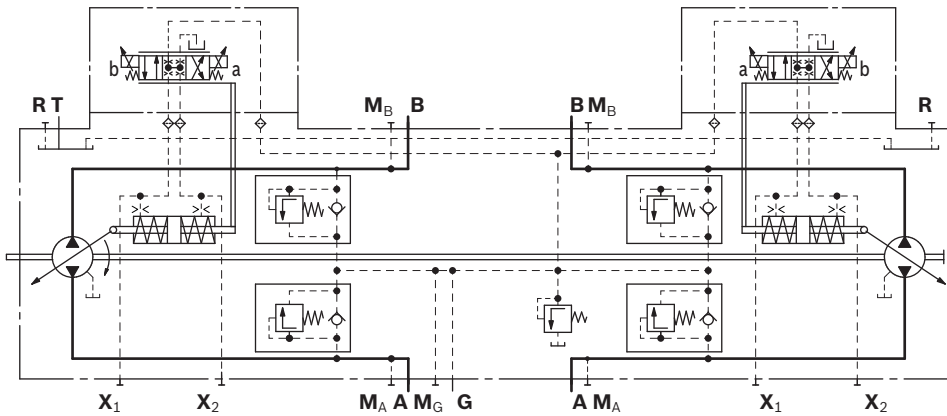

<b>Assignment of direction of rotation, control and flow direction</b>									
Direction of rotation	clockwise				counter-clockwise				
Pump	Pump 1		Pump 2		Pump 1		Pump 2		
Actuation of solenoid	a	b	a	b	a	b	a	b	
Control pressure (X <sub>3</sub> , X <sub>4</sub> optional, see page 21)	X <sub>2</sub>	X <sub>1</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>1</sub>	X <sub>2</sub>	
	X <sub>4</sub>	X <sub>3</sub>	X <sub>3</sub>	X <sub>4</sub>	X <sub>4</sub>	X <sub>3</sub>	X <sub>3</sub>	X <sub>4</sub>	
Flow direction	A to B	B to A	B to A	A to B	B to A	A to B	A to B	B to A	
Operating pressure	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>	

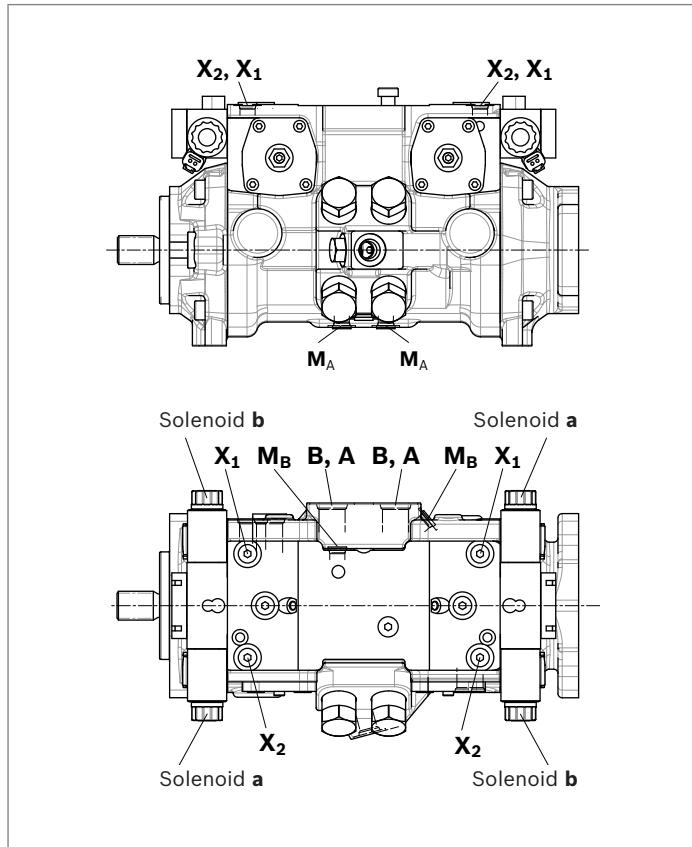

### HT – Hydraulic control, direct operated

With the direct hydraulic control, the flow of the pump is influenced by a hydraulic control pressure that is applied directly to the stroking piston through **X<sub>5</sub>** or **X<sub>6</sub>**.


Flow direction is determined by which control pressure port is pressurized (refer to table below).

Pump displacement is infinitely variable and proportional to the applied control pressure, but is also influenced by system pressure and pump drive speed.


Maximum permissible control pressure: 30 bar

Use of the HT control requires a review of the engine and vehicle parameters to ensure that the pump is set up correctly. We recommend that all HT applications be reviewed by a Bosch Rexroth application engineer.

The DA control valve only becomes effective if the pilot control device used for controlling the HT control is supplied from port **Y**.

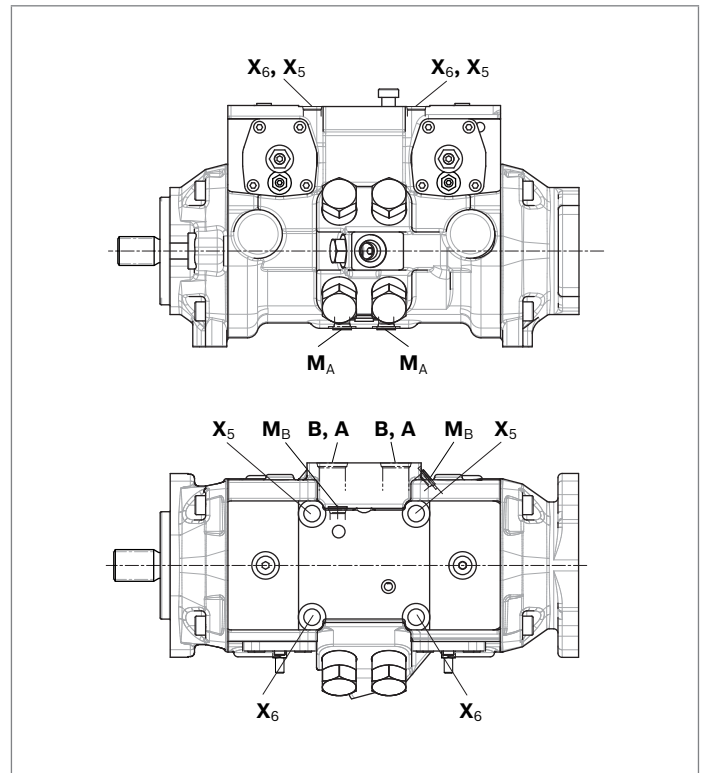

▼ Schematic

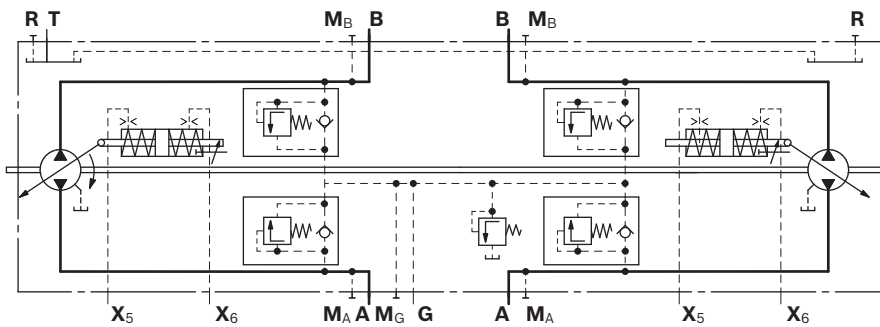


Assignment of direction of rotation, control and flow direction								
Direction of rotation	clockwise				counter-clockwise			
	Pump 1		Pump 2		Pump 1		Pump 2	
Control pressure (X <sub>3</sub> , X <sub>4</sub> optional, see page 21)	X <sub>6</sub>	X <sub>5</sub>	X <sub>5</sub>	X <sub>6</sub>	X <sub>6</sub>	X <sub>5</sub>	X <sub>5</sub>	X <sub>6</sub>
	X <sub>4</sub>	X <sub>3</sub>	X <sub>3</sub>	X <sub>4</sub>	X <sub>4</sub>	X <sub>3</sub>	X <sub>3</sub>	X <sub>4</sub>
Flow direction	A to B	B to A	B to A	A to B	B to A	A to B	A to B	B to A
Operating pressure	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>


### ET – Electric control, direct operated

The output flow of the pump is infinitely variable in the range 0 to 100%. Depending on the preselected current  $I$  (mA) at solenoids **a** and **b** of the pressure reducing valves, the stroking cylinder of the pump is proportionally supplied with control pressure. The pump displacement that arises at a certain control current is dependent on the rotational speed and operating pressure of the pump. A different flow direction is associated with each pressure reducing valve. Maximum permissible control pressure: 30 bar

Technical data, solenoid	ET1	ET2
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 Hz	100 Hz
Duty cycle	100 %	100 %
Type of protection, see connector version on page 23		

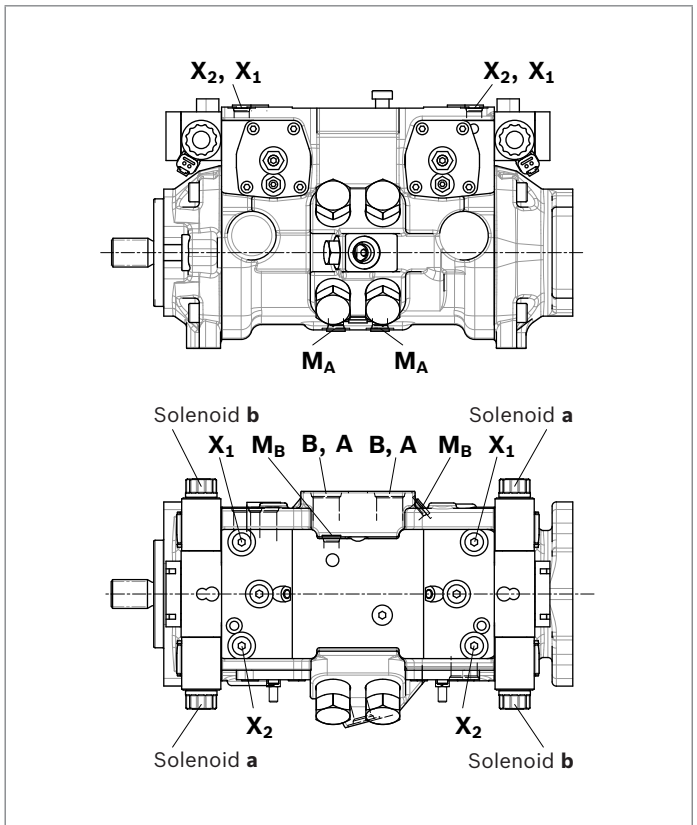

#### ▼ Schematic

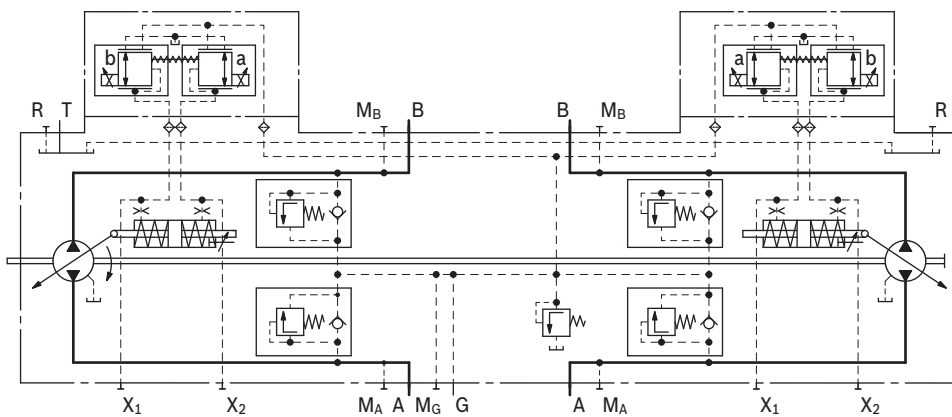

Assignment of direction of rotation, control and flow direction								
Direction of rotation	clockwise				counter-clockwise			
	Pump 1		Pump 2		Pump 1		Pump 2	
Actuation of solenoid	a	b	a	b	a	b	a	b
Control pressure (X <sub>3</sub> , X <sub>4</sub> optional, see page 21)	X <sub>2</sub>	X <sub>1</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>1</sub>	X <sub>2</sub>
	X <sub>4</sub>	X <sub>3</sub>	X <sub>3</sub>	X <sub>4</sub>	X <sub>4</sub>	X <sub>3</sub>	X <sub>3</sub>	X <sub>4</sub>
Flow direction	A to B	B to A	B to A	A to B	B to A	A to B	A to B	B to A
Operating pressure	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>

## DA – Control valve, fixed setting

### Speed related pilot pressure supply

The DA closed loop control is an engine speed-dependent system for travel drives. The built-in DA control valve generates a pilot pressure which is proportional to pump (engine) drive speed. The pump displacement is infinitely variable in each flow direction and is influenced by both pump drive speed and system pressure.

Increasing the pump drive speed causes the DA control valve to generate a higher pilot pressure with a resulting increase in the flow from the pump.

Depending on the selected pump operating characteristics, increasing system pressure (e.g. machine load) causes the pump to swivel back towards a smaller displacement.


Diesel engine overload protection (anti-stall) is achieved by the combination of this pressure-related pump de-stroking, and the reduction of pilot pressure as the engine speed drops.

Any additional power requirement, e.g. for hydraulic functions from attachments, could cause the engine speed to drop further. This would cause a further reduction in pilot pressure and thus of pump displacement. Automatic power distribution and full exploitation of the available power are achieved in this way, both for the travel drive and for the implement hydraulics, with priority given to the implement hydraulics.

The DA control valve can also be used in pumps with EP, HT and HW control modules to protect the combustion engine against overload.


DA closed loop control is only suitable for certain types of drive systems and requires review of the engine and vehicle parameters to ensure that the pump is used correctly and that machine operation is safe and efficient. We recommend that all DA applications be reviewed by a Bosch Rexroth application engineer.

### ▼ Schematic

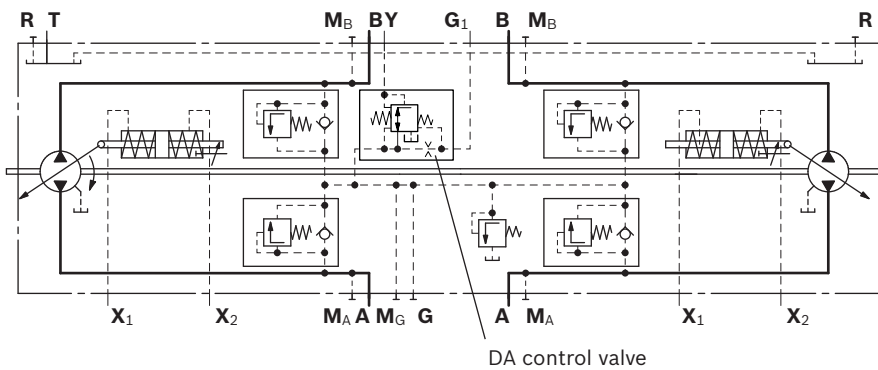


**Dimensions size 45**

**EP – Proportional control electric**  
**ET – Electric control, direct operated**

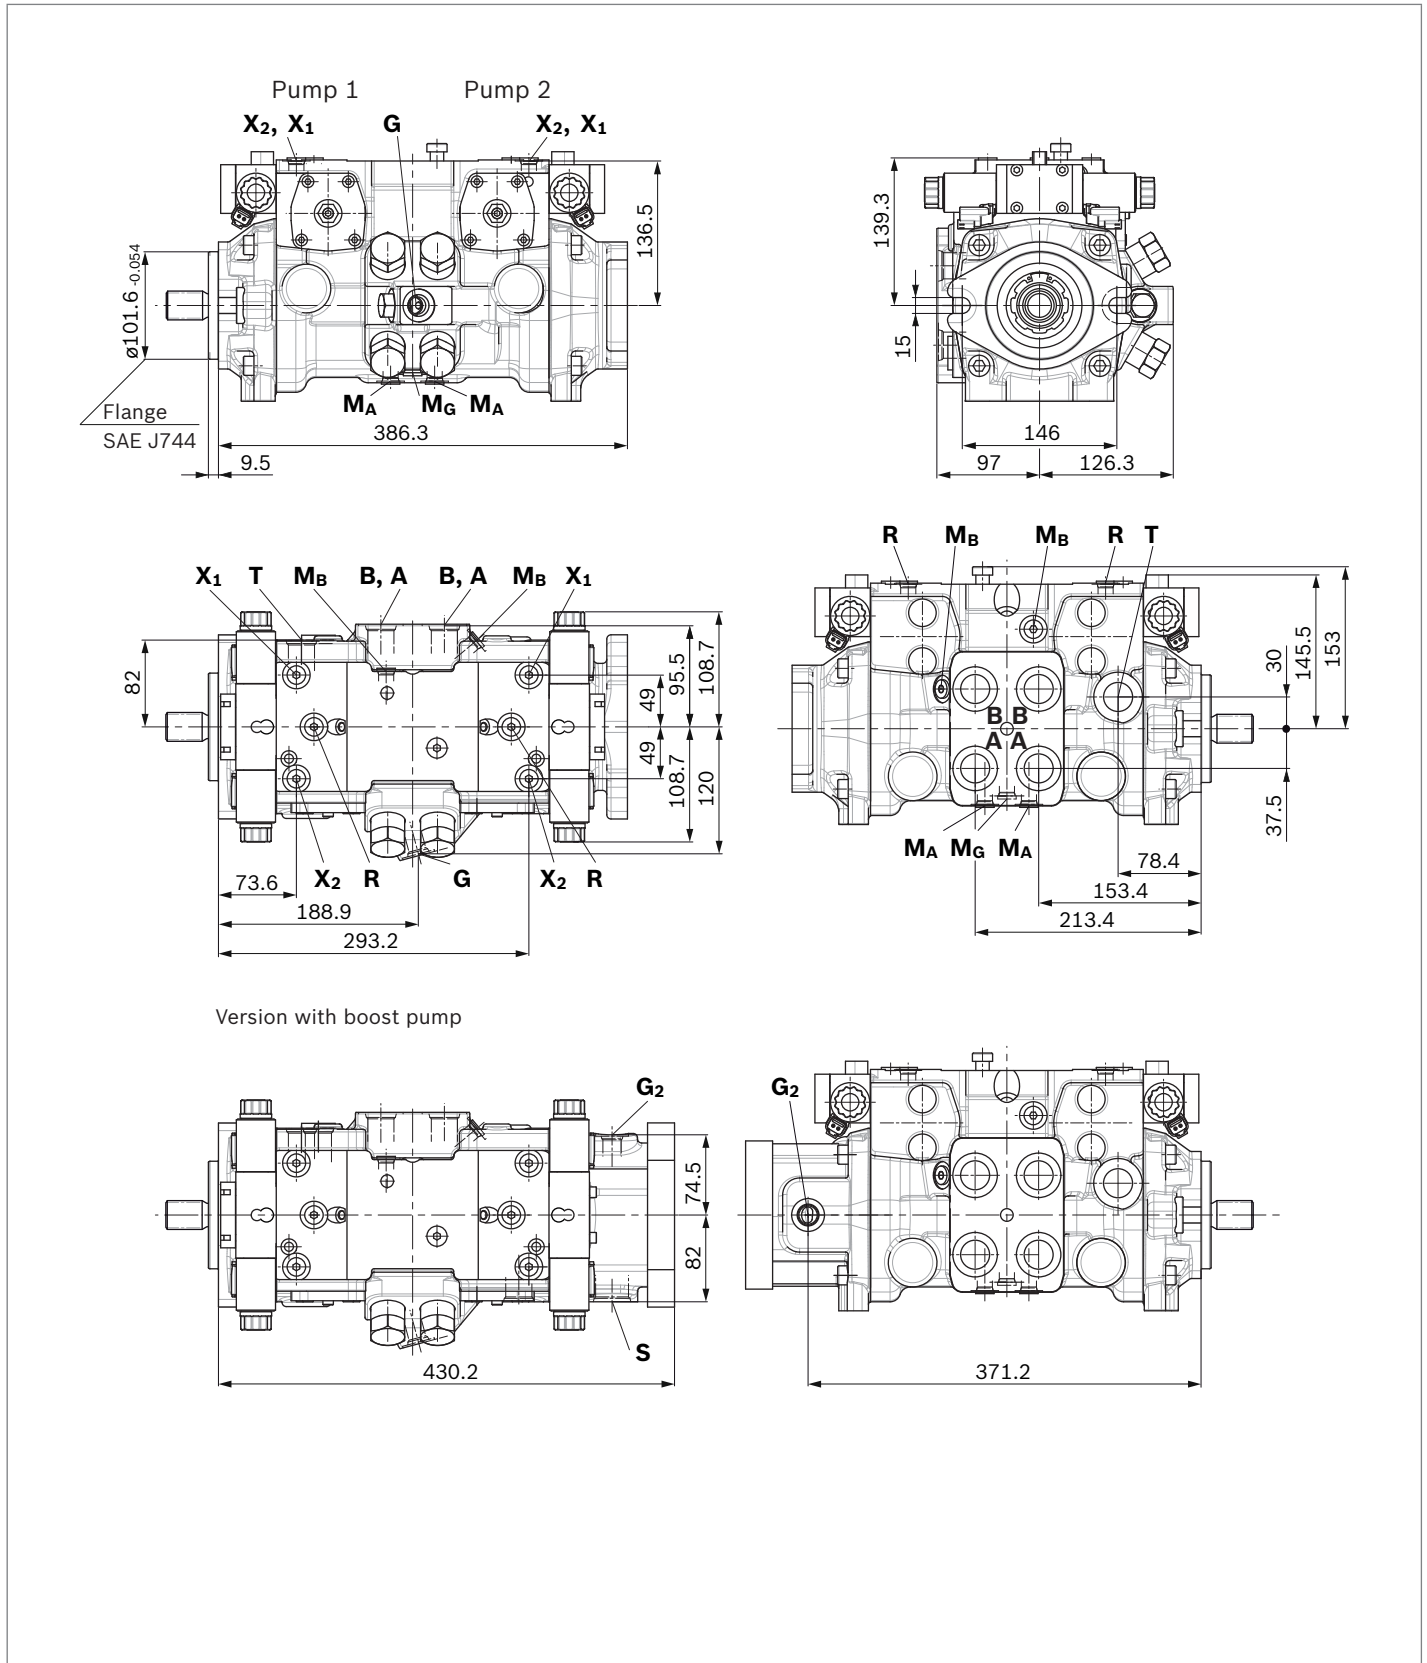



## ▼ Splined shaft SAE J744

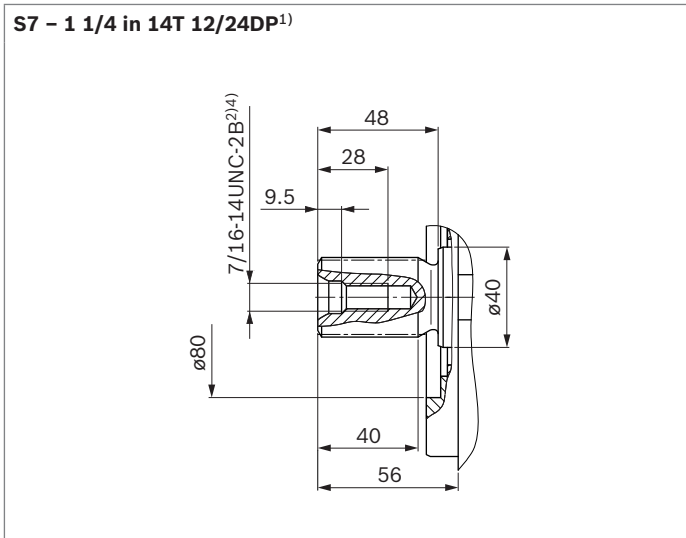


Ports		Standard <sup>3)</sup>	Size [in] <sup>4)</sup>	$p_{\max \text{ abs}}$ [bar] <sup>5)</sup>	State <sup>7)</sup>
<b>A, B</b>	Working port	ISO 11926	1 1/16-12 UN-2B; 20 deep	420	O
<b>S</b>	Suction port (only for boost pump)	ISO 11926	1 5/16-12 UN-2B; 20 deep	5	O
<b>T</b>	Drain port	ISO 11926	1 1/16-12 UN-2B; 20 deep	3	O
<b>R</b>	Air bleed	ISO 11926	9/16-18 UNF-2B; 13 deep	3	X
<b>X<sub>1</sub>, X<sub>2</sub></b>	Control pressure (upstream of orifice, only HP, HW, EP, ET)	ISO 11926	9/16-18 UNF-2B; 13 deep	30	X
<b>X<sub>5</sub>, X<sub>6</sub></b>	Control pressure (upstream of orifice, HT only)	ISO 11926	9/16-18 UNF-2B; 13 deep	30	O
<b>X<sub>3</sub>, X<sub>4</sub></b> <sup>6)</sup>	Stroking chamber pressure	ISO 11926	7/16-20 UNF-2B; 12 deep	30	X
<b>Y</b>	Pilot pressure, outlet (only for DA control valve)	ISO 11926	9/16-18 UNF-2B; 13 deep	30	O
<b>G</b>	Boost pressure, inlet	ISO 11926	3/4-16 UNF-2B; 15 deep	30	O
<b>G<sub>1</sub></b>	Boost pressure, inlet (only for DA control valve)	ISO 11926	3/4-16 UNF-2B; 13 deep	30	O
<b>G<sub>2</sub></b>	Boost pressure, outlet (only for boost pump)	ISO 11926	3/4-16 UNF-2B; 15 deep	30	O
<b>M<sub>G</sub></b>	Measuring boost pressure G	ISO 11926	9/16-18 UNF-2B; 13 deep	30	X
<b>M<sub>A</sub>, M<sub>B</sub></b>	Measuring pressure A, B	ISO 11926	9/16-18 UNF-2B; 13 deep	420	X


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) The spot face can be deeper than specified in the appropriate standard.
- 4) For notes on tightening torques, see instruction manual

- 5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 6) Optional, see page 21
- 7) O = Must be connected (plugged on delivery)  
X = Plugged (normal operation)

▼ HT – Hydraulic control, direct operated

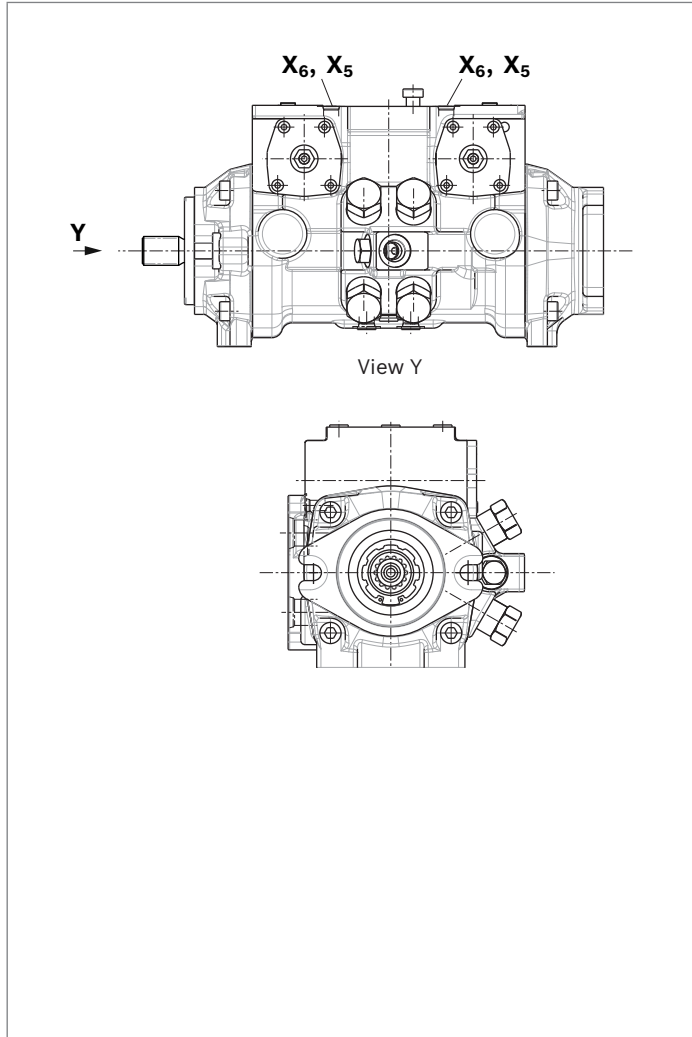


▼ DA control valve

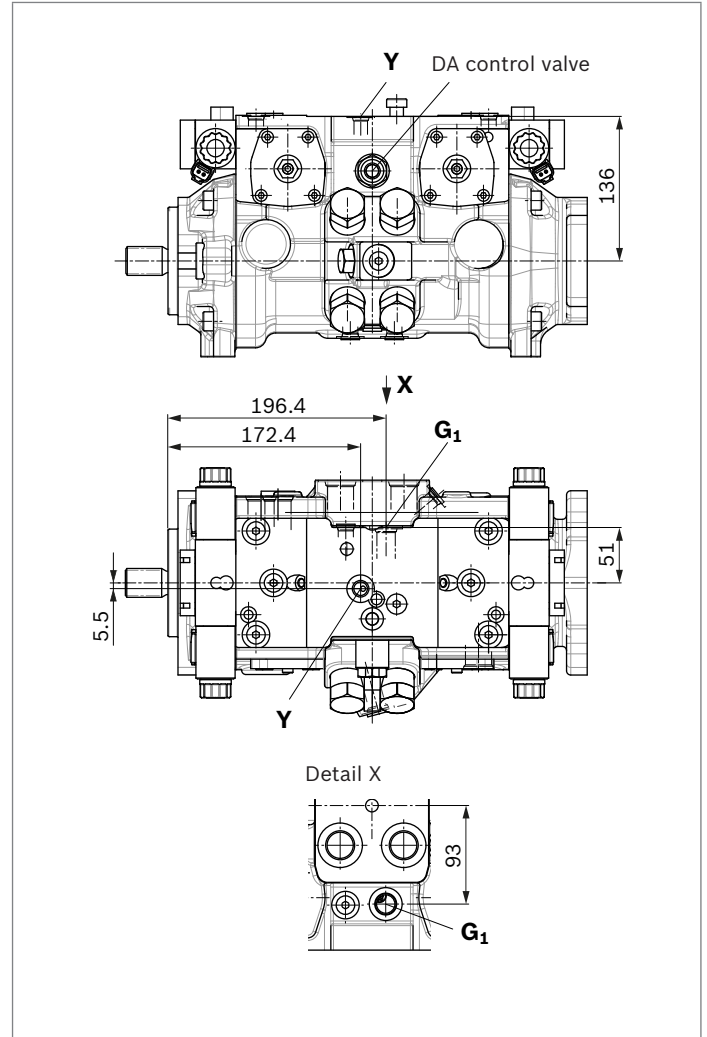

## Through drive dimensions

Flange SAE J744 <sup>1)</sup>			Hub for splined shaft <sup>2)</sup>			Availability	Short code
Diameter	attachment <sup>3)</sup>	Designation	Diameter	Designation	045		
101-2 (B)	∞	B2	7/8 in	13T 16/32DP	S4	●	B2S4
			1 in	15T 16/32DP	S5	●	B2S5

### ▼ 101-2

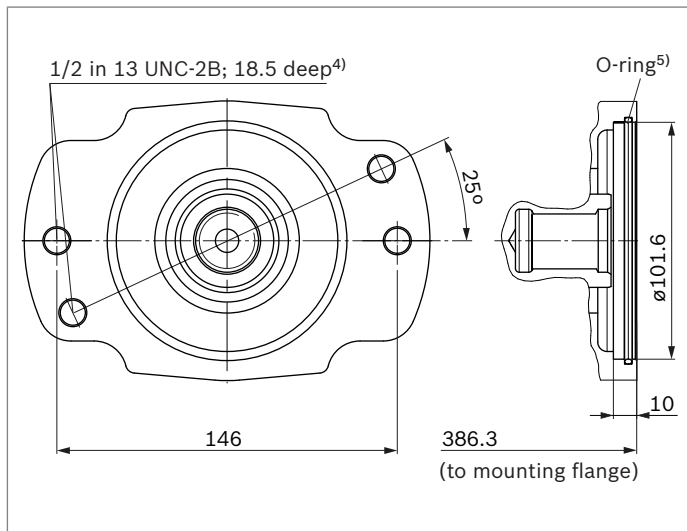

## Overview of attachment options

Through drive	Attachment option – additional pumps				
	Flange	Hub for splined shaft	Short code	A10VG NG (shaft)	A10V(S)O/53 NG (shaft)
101-2 (B)	7/8 in	B2S4	18 (S)	28 (S) 45 (U)	Series N, NG20 to 36 Series G, NG32 to 50
	1 in	B2S5	28, 45 (S)	45 (S) 60 (U)	-

### Combination pumps

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes. When ordering combination pumps, the type designations of the 1st and 2nd pump must be linked by a "+".

### Ordering example

#### **A22VG045HT100100/40AR + AZPN....**

The A22VG variable double pump is permissible without additional supports where the dynamic mass acceleration does not exceed maximum 10 g (= 98.1 m/s<sup>2</sup>). When mounting another pump on the A22VG, the mounting flange must be rated for the permissible mass torque.

1) The through-drive flange is only supplied with the fastening thread corresponding to the ordering code designation.

2) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

3) Mounting drillings pattern viewed on through drive, with control at top

4) Thread according to ASME B1.1,

for notes on tightening torques, see instruction manual

5) O-ring included in the scope of delivery


6) Bosch Rexroth recommends special versions of the external gear pumps. Please contact us.

## Boost pump

The boost pump continuously supplies a volume of fluid (boost volume) from a reservoir to the low-pressure side of the closed circuit via a check valve to replenish the internal leakage of the variable double pump and consumer.

The boost pump is an internal gear pump that is driven directly via the drive shaft. The pressure port **G<sub>2</sub>** of the boost pump must be externally piped up to port **G** (or **G<sub>1</sub>** by the customer for version with DA control valve) (see example circuit diagram below). Suction or pressure filtration is to be provided by the customer.

### ▼ Schematic

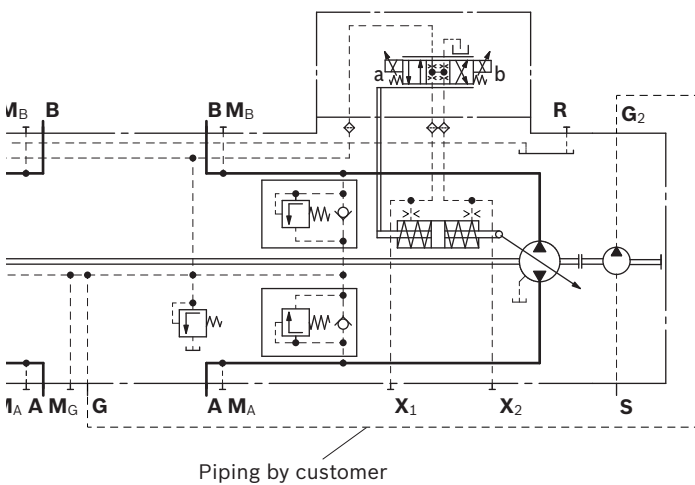


## High-pressure relief valves

The four high-pressure relief valves protect the hydrostatic transmission (pump and motor) from overload. They limit the maximum pressure in the respective high-pressure line and serve simultaneously as boost valves.

High-pressure relief valves are not working valves and are only suitable for pressure spikes or high rates of pressure change.

### Setting the valves

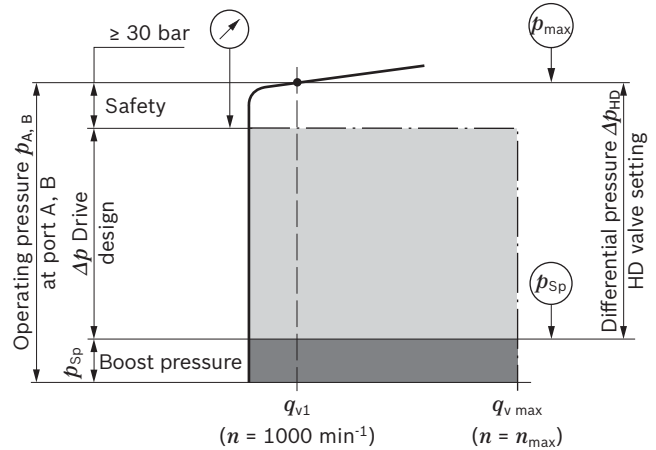

- ▶ The valve settings are made at  $n = 1000$  rpm and at  $V_{g \max}$  ( $q_{v1}$ ). There may be deviations in the cracking pressures with other operating parameters.
- ▶ The differential pressure setting is preset in the range  $\Delta p = 250$  to  $390$  bar in increments of  $10$  bar.
- ▶ When ordering, state differential pressure setting in plain text.


#### Settings on high-pressure relief valve A and B (Pump 1 and 2)

Differential pressure setting	$\Delta p_{HD} = \dots$ bar
Cracking pressure of the HD valve (at $q_{v1}$ ) ( $p_{max} = \Delta p_{HD} + p_{Sp}$ )	$p_{max} = \dots$ bar


### Mechanical stroke limiter

The mechanical stroke limiter is an additional function allowing the maximum displacement of the pump to be steplessly reduced, regardless of the control module used. With one threaded pin per pump, the stroke of the stroking piston and thus the maximum swivel angle per pump is limited on one side.

#### Dimensions

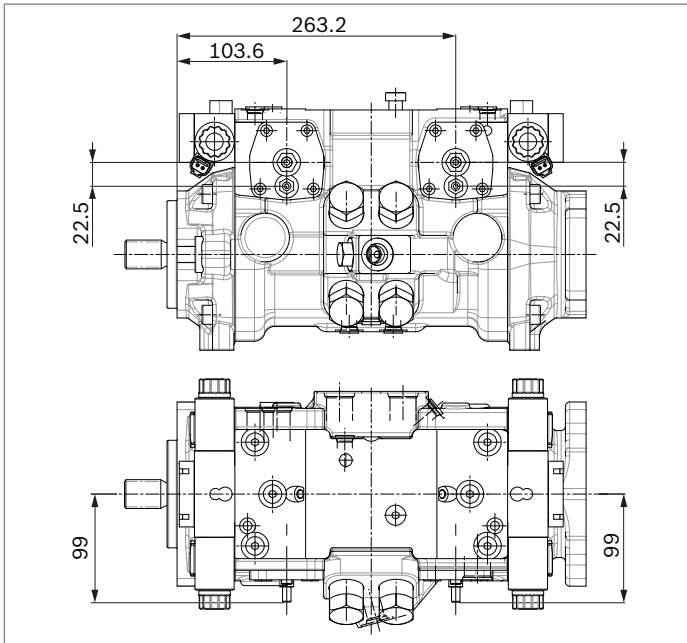


#### ▼ Schematic

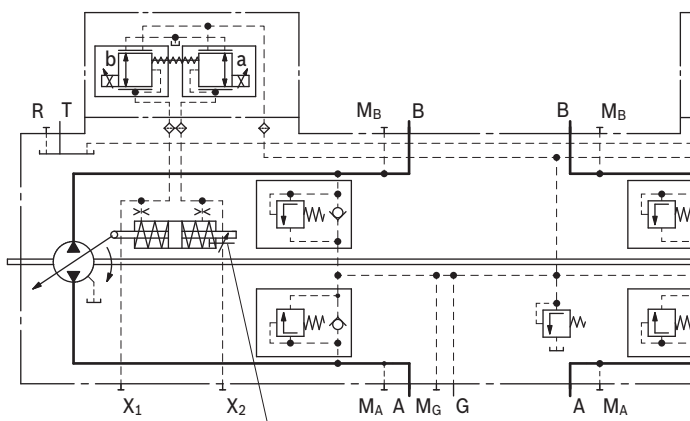


Mechanical stroke limiter, on one side

### Ports X<sub>3</sub> and X<sub>4</sub> for stroking chamber pressure

#### Dimensions

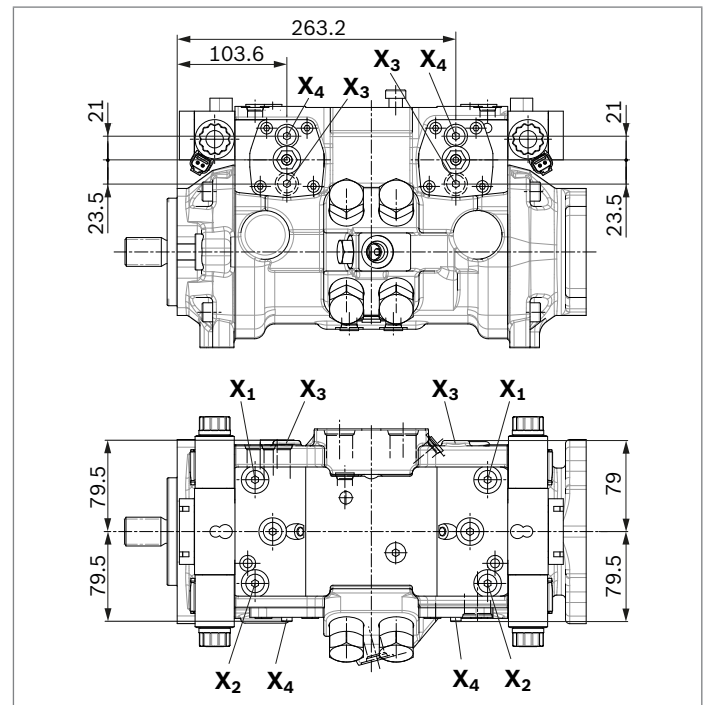

#### ▼ Schematic

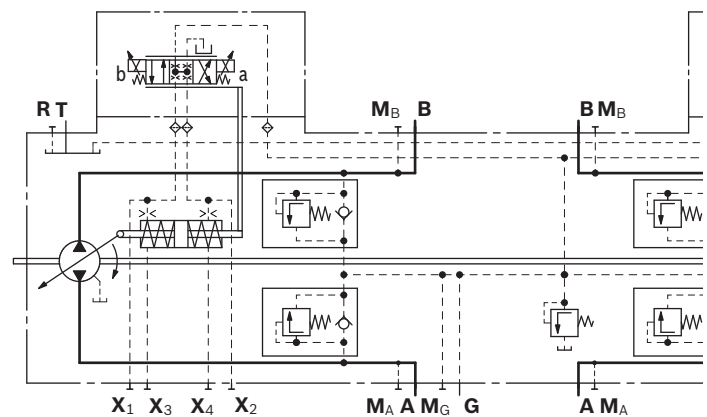

Ports	Standard <sup>1)</sup>	Size [in] <sup>2)</sup>	p <sub>max abs</sub> [bar] <sup>3)</sup>	State <sup>4)</sup>
X <sub>3</sub> , X <sub>4</sub> Stroking chamber pressure	ISO 11926	7/16-20 UNF-2B; 12 deep	30	X

1) The spot face can be deeper than specified in the appropriate standard.  
2) For notes on tightening torques, see instruction manual

3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.  
4) X = Plugged (in normal operation)

## Swivel angle sensor

For the swivel angle indicator, the pump swivel angle is measured by an electric swivel angle sensor.

As an output parameter, the Hall-effect swivel angle sensor delivers a voltage proportional to the swivel angle (see table of output voltages).


Please contact us if the swivel angle sensor is used for control.

Characteristics	
Supply voltage $U_b$	10 to 30 V DC
Output voltage $U_a$	1 V $(V_{g \max})$ 2.5 V $(V_{g 0})$ 4 V $(V_{g \max})$
Reverse polarity protection	Short circuit-resistant
EMC resistance	Details on request
Operating temperature range	-40 °C to +115 °C
Vibration resistance sinusoidal vibration EN 60068-2-6	10 g / 5 to 2000 Hz
Shock resistance continuous shock IEC 68-2-29	25 g
Salt spray resistance DIN 50 021-SS	96h
Type of protection with mounted mating connector	IP67 (DIN/EN 60529) and IP69K (DIN 40050-9)
Housing material	Plastic

### Output voltage


Direction of rotation	Flow direction <sup>1)</sup>	Operating pressure	Output voltage
cw	B to A	$M_A$	> 2.5 V
	A to B	$M_B$	< 2.5 V
ccw	A to B	$M_B$	> 2.5 V
	B to A	$M_A$	< 2.5 V

### ▼ Schematic

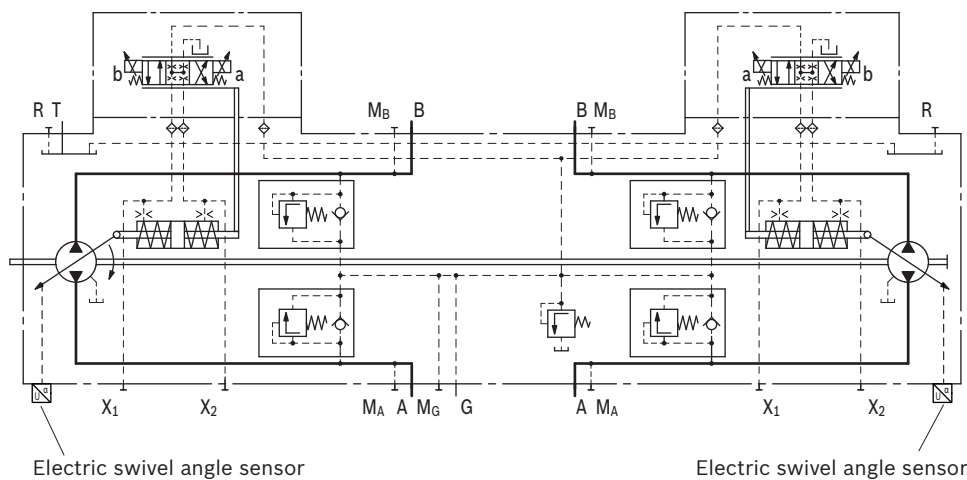

1) For flow direction, see controls

### Dimensions

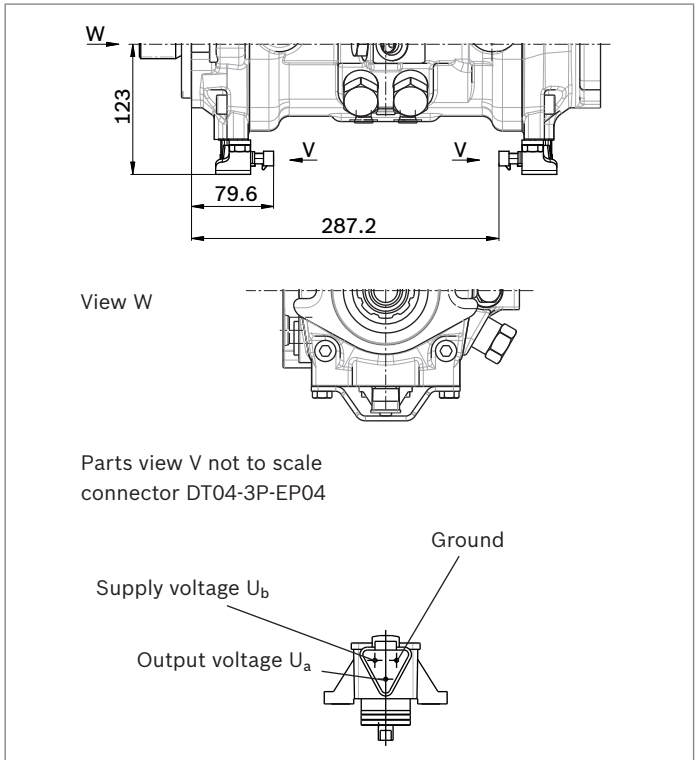

### ▼ Mating connector DEUTSCH DT06-3S-EP04

Consisting of	DT designation
1 housing	DT06-3S-EP04
1 wedge	W3S
3 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902603524).


## Connector for solenoids

### DEUTSCH DT04-2P-EP04

Molded, 2-pin, without bidirectional suppressor diode. There is the following type of protection with mounted mating connector:

- ▶ IP67 (DIN/EN 60529) and
- ▶ IP69K (DIN 40050-9)

#### ▼ Circuit symbol



#### ▼ Mating connector DEUTSCH DT06-2S-EP04

Consisting of	DT designation
1 housing	DT06-2S-EP04
1 wedge	W2S
2 sockets	0462-201-16141

The mating connector is not included in the scope of delivery. This can be supplied by Bosch Rexroth on request (material number R902601804).

#### Note


- ▶ If necessary, you can change the connector orientation by turning the solenoid housing.
- ▶ Refer to the instruction manual for the procedure.

## Installation dimensions for coupling assembly

To ensure that rotating components (coupling hub) and fixed components (housing, snap ring) do not come into contact with each other, the installation conditions described here must be observed. This depends on the size and the splined shaft.

### SAE splined shaft (spline according to ANSI B92.1a)

The outer diameter of the coupling hub must be smaller than the inner diameter of the snap ring (dimension  $d_2$ ) in the area near the drive shaft collar (dimension  $x_2 - x_3$ ). Please observe diameter  $d_5$  of the free turning.

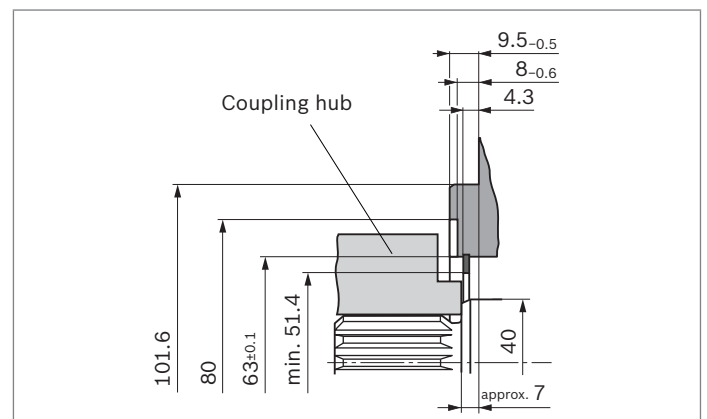

## Installation instructions

### General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This must also be observed following a relatively long standstill as the axial piston unit may drain back to the reservoir via the hydraulic lines.

The leakage in the housing must be directed to the reservoir via the highest drain port **T**.

For combinations of multiple units, the leakage must be drained at each pump. If a shared drain line is used for this purpose, make certain that the respective case pressure is not exceeded. In the event of pressure differences at the drain ports of the units, the shared drain line must be changed so that the minimum permissible case pressure of all connected units is not exceeded in any situation. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction and drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure; it must not, however, be higher than  $h_{s \max} = 800$  mm. The minimum suction pressure at port **S** must also not fall below 0.8 bar absolute during operation (cold start 0.5 bar absolute).

When designing the reservoir, ensure adequate space between the suction line and the drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

### Installation position

See the following examples 1 to 4.

Further installation positions are possible upon request.

#### Notes

- ▶ If it is not possible to fill the stroking chambers via **X<sub>1</sub>** to **X<sub>4</sub>** in the final installation position, this must be done prior to installation.
- ▶ To prevent unexpected actuation and damage, the stroking chambers must be air bled via ports **X<sub>1</sub>**, **X<sub>2</sub>** or **X<sub>3</sub>**, **X<sub>4</sub>** depending on the installation position.
- ▶ For HT control, **X<sub>1</sub>**, **X<sub>2</sub>** are not present and are replaced by **X<sub>5</sub>**, **X<sub>6</sub>**.
- ▶ In certain installation positions, an influence on the control characteristics can be expected. Gravity, dead weight and case pressure can cause minor shifts in control characteristics and changes in response time.

#### Key


L	Filling / air bleed
R	Air bleed port
S	Suction port
T	Drain port
SB	Baffle (baffle plate)
$h_{t \min}$	Minimum required immersion depth (200 mm)
$h_{\min}$	Minimum required distance to reservoir bottom (100 mm)
$h_{s \max}$	Maximum permissible suction height (800 mm)




**Below-reservoir installation (standard)**

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.


Installation position	Air bleed the housing	Air bleed the stroking chamber	Filling
1 Without boost pump	R	X <sub>1</sub> , X <sub>2</sub>	T + X <sub>1</sub> + X <sub>2</sub>




2 Without boost pump	-	-	T
----------------------	---	---	---



3 With boost pump	R	X <sub>1</sub> , X <sub>2</sub>	S + T + X <sub>1</sub> + X <sub>2</sub>
-------------------	---	---------------------------------	---



4 With boost pump	-	-	S + T
-------------------	---	---	-------




**Above-reservoir installation**

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.


Observe the maximum permissible suction height

$h_{S \max} = 800 \text{ mm}$ .


Installation position	Air bleed the housing	Air bleed the stroking chamber	Filling
5 Without boost pump	R	X <sub>1</sub> , X <sub>2</sub>	L <sub>1</sub> + X <sub>1</sub> + X <sub>2</sub>




6 Without boost pump	L <sub>1</sub>	-	L <sub>1</sub>
----------------------	----------------	---	----------------



7 With boost pump	R + L <sub>2</sub> (S)	X <sub>1</sub> , X <sub>2</sub>	L <sub>1</sub> + L <sub>2</sub> (S) + X <sub>1</sub> + X <sub>2</sub>
-------------------	------------------------	---------------------------------	---

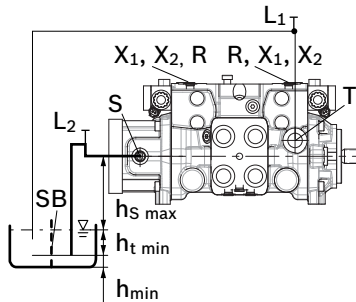

8 With boost pump	L <sub>1</sub> + L <sub>2</sub> (S)	-	L <sub>1</sub> + L <sub>2</sub> (S)
-------------------	-------------------------------------	---	-------------------------------------

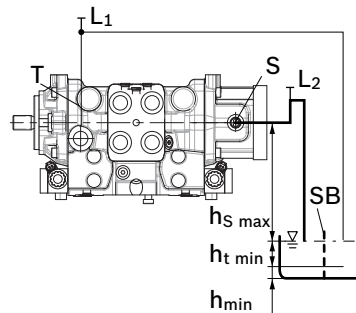

For legend and notes, see page 24.

## Project planning notes

- ▶ The pump A22VG is designed to be used in closed circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified skilled person.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, request a binding installation drawing.
- ▶ The data and notes contained herein must be adhered to.
- ▶ Depending on the operating conditions of the axial piston unit (operating pressure, fluid temperature), the characteristic curve may shift.
- ▶ Not all variants of the product are approved for use in safety functions according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g.  $MTTF_d$ ) for functional safety.
- ▶ Working ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The working ports and function ports can only be used to accommodate hydraulic lines.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control and regulation systems (e.g. valve spools) may in certain circumstances become stuck in an undefined position due to contamination (e.g. contaminated hydraulic fluid, abrasion or residual dirt from components). As a result, the hydraulic fluid flow or build-up of torque of the axial piston unit will no longer respond correctly to the operator's commands. Even the use of different filter cartridges (external or internal inlet filter) will not rule out a fault but merely minimize the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to set the consumer being driven to a safe position (e.g. safe stop) and if necessary to ensure it is properly implemented.

**Bosch Rexroth Corporation**  
Mobile Applications  
8 Southchase Court  
Fountain Inn, SC 29644-9018, USA  
Telephone (864) 967-2777  
Facsimile (864) 967-8900  
[www.boschrexroth-us.com](http://www.boschrexroth-us.com)

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.


# Axial Piston Variable Double Pump A24VG

RE 93240/06.12

1/38

## Data sheet

Series 10  
Size 045-045 / 065-045 / 065-065  
Nominal pressure 450 bar  
Maximum pressure 500 bar  
Closed circuit

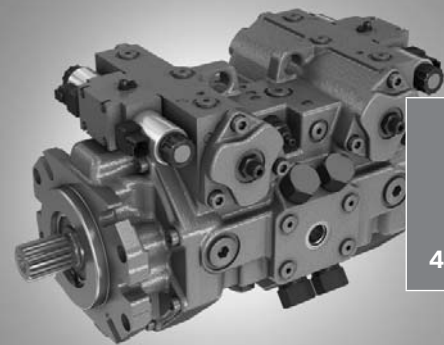

4

## Contents

Ordering code for standard program	2
Technical data	6
HT – Hydraulic control, direct controlled	11
HP – Proportional control hydr., pilot-pressure related	12
HW – Proportional control hydraulic, mechanical servo	14
EP – Proportional control electric	16
EZ – Two-point control electric	18
EV – Electric control, direct controlled	19
Dimensions size 045-045	20
Dimensions size 065-045	22
Dimensions size 065-065	24
Through drive dimensions	26
Overview of mounting options	28
Pressure cut-off	29
High-pressure relief valves	30
Mechanical stroke limiter	31
Ports X <sub>3</sub> and X <sub>4</sub> for stroking chamber pressure	31
Filtration boost circuit / external supply	32
Connector for solenoids	33
Speed sensor	33
Swivel angle sensor	34
Installation dimensions for coupling assembly	35
Installation instructions	36
General instructions	38

## Features

- Variable double pump with two axial piston rotary groups of swashplate design for hydrostatic drives in closed circuit
- The flow is proportional to the drive speed and displacement
- Two flows independent of each other
- The flow can be infinitely varied by adjusting the swashplate angle
- Flow direction changes smoothly when the swashplate is moved through the neutral position
- A wide range of highly adaptable control devices with different control and regulating functions, for all important applications
- Four pressure relief valves are provided on the high-pressure side to protect the hydrostatic transmission (pump and motor) from overload
- The high-pressure relief valves also function as boost valves
- The maximum boost pressure is limited by a built-in low-pressure relief valve
- High pressure level for high power density and good efficiency
- Compact design for tight installation conditions
- Optional through drive for mounting additional pumps

# Ordering code for standard program

<b>A24V</b>	<b>G</b>								<b>0</b>	<b>/</b>	<b>10</b>	<b>M</b>						<b>-</b>	
01	02	03	04	05	06	07	08	09	10		11	12	13	14	15	16	17		18

## Axial piston unit

01	Swashplate design, variable, nominal pressure 450 bar, maximum pressure 500 bar	<b>A24V</b>
----	---	-------------

## Operating mode

02	Double pump, closed circuit	<b>G</b>
----	-----------------------------	----------

## Sizes (NG)

Geometric displacement, see table of values on page 9		
1st pump		2nd pump
03	NG045	NG045
	NG065	NG045
	NG065	NG065
		<b>045-045</b>
		<b>065-045</b>
		<b>065-065</b>

## Control devices, 1st pump

04	Proportional control hydraulic	pilot-pressure related	p = 6 to 18 bar	●	<b>HP1</b>
		mechanical servo,		●	<b>HW2</b>
		hexagon shaft with lever, free position <sup>1)</sup>	with neutral position switch	●	<b>HW8</b>
	Proportional control electric		U = 12 V DC	●	<b>EP1</b>
			U = 24 V DC	●	<b>EP2</b>
	Two-point control electric		U = 12 V DC	●	<b>EZ1</b>
			U = 24 V DC	●	<b>EZ2</b>
		Hydraulic control, direct controlled		●	<b>HT1</b>
	Electric control, direct controlled, with one pressure reducing valve (DRE) and 4/3-directional valve		U = 12 V DC	○	<b>EV1</b>
			U = 24 V DC	○	<b>EV2</b>

## Control devices, 2nd pump

05	Proportional control hydraulic	pilot-pressure related	p = 6 to 18 bar	●	<b>HP1</b>
		mechanical servo,		●	<b>HW2</b>
		hexagon shaft with lever, free position <sup>1)</sup>	with neutral position switch	●	<b>HW8</b>
	Proportional control electric		U = 12 V DC	●	<b>EP1</b>
			U = 24 V DC	●	<b>EP2</b>
	Two-point control electric		U = 12 V DC	●	<b>EZ1</b>
			U = 24 V DC	●	<b>EZ2</b>
		Hydraulic control, direct controlled		●	<b>HT1</b>
	Electric control, direct controlled, with one pressure reducing valve (DRE) and 4/3-directional valve		U = 12 V DC	○	<b>EV1</b>
			U = 24 V DC	○	<b>EV2</b>

● = Available      ○ = On request      - = Not available

<sup>1)</sup> On delivery, the position of the lever may differ from that shown in the brochure or drawing. If necessary, the position of the lever can be adjusted by the customer.

## Ordering code for standard program

<b>A24V</b>	<b>G</b>								<b>0</b>	/	<b>10</b>	<b>M</b>						<b>-</b>	
01	02	03	04	05	06	07	08	09	10		11	12	13	14	15	16	17		18

### Pressure cut-off (see page 31)

		Pump 1	Pump 2	045...065	
06		Without pressure cut-off	Without pressure cut-off	●	<b>0</b>
		1x pressure cut-off, jointly for pump 1 and pump 2		●	<b>W</b>
		With pressure cut-off	Without pressure cut-off	●	<b>P</b>
		Without pressure cut-off	With pressure cut-off	●	<b>L</b>

### Swivel angle sensor (see page 34)

07	Without swivel angle sensor	<b>0</b>
	Electric swivel angle sensor mounted to pumps 1 and 2 <sup>2)</sup>	<b>T</b>

### Additional function for pump 1 (see page 31)

08	Without additional function	<b>0</b>
	Mechanical stroke limiter, externally adjustable	<b>M</b>
	Ports X <sub>3</sub> , X <sub>4</sub> for stroking chamber pressure	<b>T</b>
	Mechanical stroke limiter and ports X <sub>3</sub> , X <sub>4</sub>	<b>B</b>

### Additional function for pump 2 (see page 31)

09	Without additional function	<b>0</b>
	Mechanical stroke limiter, externally adjustable	<b>M</b>
	Ports X <sub>3</sub> , X <sub>4</sub> for stroking chamber pressure	<b>T</b>
	Mechanical stroke limiter and ports X <sub>3</sub> , X <sub>4</sub>	<b>B</b>

### DA control valve

10	Without DA control valve	<b>0</b>
----	--------------------------	----------

### Series

11	Series 1, index 0	<b>10</b>
----	-------------------	-----------

### Configuration of ports and fastening threads

12	Metric, port threads with O-ring seal according to ISO 6149	<b>M</b>
----	---	----------

### Directions of rotation

13	Viewed on drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

### Mounting flanges (pump 1)

		045	065	
14	SAE J744	127-2	●	<b>C2</b>
		127-2/4	-	<b>C6</b>

### Drive shafts (pump 1) (permissible input torques see page 10)

		045	065	
15	Splined shaft	1 3/8 in 21T 16/32DP	●	<b>V8</b>
	ANSI B92.1a	1 1/2 in 17T 12/24DP	●	<b>S9</b>

● = Available    ○ = On request    - = Not available

■ = Preferred program

<sup>2)</sup> Please contact us if the swivel angle sensor is used for control.

# Ordering code for standard program

<b>A24V</b>	<b>G</b>								<b>0</b>	<b>/</b>	<b>10</b>	<b>M</b>					<b>-</b>	
01	02	03	04	05	06	07	08	09	10		11	12	13	14	15	16	17	18

## Through drives (mounting options see page 28)

Flange SAE J744			Coupling for splined shaft <sup>3)</sup>					
Diameter	Mounting variant		Diameter	Designation		045	065	
	Symbol <sup>4)</sup>	Designation						
Without through drive								
82-2 (A)	⌘	A1	5/8 in 9T 16/32DP S2			○	○	<b>A1S2</b>
			3/4 in 11T 16/32DP S3			○	○	<b>A1S3</b>
	∞	A2	5/8 in 9T 16/32DP S2			○	○	<b>A2S2</b>
			3/4 in 11T 16/32DP S3			○	○	<b>A2S3</b>
101-2 (B)	⌘	B1	7/8 in 13T 16/32DP S4			○	○	<b>B1S4</b>
			1 in 15T 16/32DP S5			○	○	<b>B1S5</b>
	∞	B2	7/8 in 13T 16/32DP S4			●	○	<b>B2S4</b>
			1 in 15T 16/32DP S5			●	○	<b>B2S5</b>
	⌘	B5	7/8 in 13T 16/32DP S4			○	○	<b>B5S4</b>
			1 in 15T 16/32DP S5			○	○	<b>B5S5</b>
101-4 (B)	⌘	B4	7/8 in 13T 16/32DP S4			○	○	<b>B4S4</b>
			1 in 15T 16/32DP S5			○	○	<b>B4S5</b>
127-2 (C)	⌘	C1	1 in 15T 16/32DP S5			○	○	<b>C1S5</b>
			1 1/4 in 14T 12/24DP S7			-	○	<b>C1S7</b>
	∞	C2	1 in 15T 16/32DP S5			○	○	<b>C2S5</b>
			1 1/4 in 14T 12/24DP S7			-	○	<b>C2S7</b>
	⌘	C5	1 in 15T 16/32DP S5			○	○	<b>C5S5</b>
			1 1/4 in 14T 12/24DP S7			-	○	<b>C5S7</b>
127-4 (C)	⌘	C4	1 in 15T 16/32DP S5			○	○	<b>C4S5</b>
			1 1/4 in 14T 12/24DP S7			-	○	<b>C4S7</b>

## Selection of other features

17	See table on page 5	
----	---------------------	--

## Standard / special version

18	Standard version	<b>0</b>
	Standard version with installation variants, e. g. T ports against standard open or closed	<b>Y</b>
	Special version	<b>S</b>

● = Available      ○ = On request      - = Not available

<sup>3)</sup> Coupling for splined shaft according to ANSI B92.1a

<sup>4)</sup> Mounting drillings pattern viewed on through drive with control at top

## Ordering code for standard program

<b>A24V</b>	<b>G</b>								<b>0</b>	<b>/</b>	<b>10</b>	<b>M</b>						<b>-</b>	
01	02	03	04	05	06	07	08	09	10		11	12	13	14	15	16	17		18

Selection of other features			A1	A2	A3	A4	B1	B2
Connector control module <sup>5)</sup> pump 1	Without connector (only for hydraulic control)					X	X	
	DEUTSCH - molded connector, 2-pin – without suppressor diode		X	X	X			X
Connector control module <sup>5)</sup> pump 2	Without connector (only for hydraulic control)					X	X	
	DEUTSCH - molded connector, 2-pin – without suppressor diode		X	X	X			X
Seals	NBR (nitrile-caoutchouc), shaft seal in FKM (fluor-caoutchouc)		X	X	X	X	X	X
Service line ports	Threaded ports A and B, on left side		X	X			X	
	Threaded ports A and B, on right side				X			
Boost pump	Without boost pump		X	X	X	X	X	X
High-pressure relief valve HD	Pump 1	Direct controlled, fixed setting, without bypass	X	X	X		X	X
	Pump 2	Direct controlled, fixed setting, without bypass	X	X	X		X	X
Low-pressure relief valve ND	Fixed setting		X	X	X		X	X
Pressure sensor	Pump 1	Without pressure sensor	X	X	X	X	X	X
		At measuring port M <sub>A</sub>						
		At measuring port M <sub>B</sub>						
	Pump 2	Without pressure sensor	X	X	X	X	X	X
		At measuring port M <sub>A</sub>						
		At measuring port M <sub>B</sub>						
Speed sensor	Without speed sensor			X	X	X	X	X
	DSA speed sensor mounted <sup>6)</sup>		X					
Other sensors	Pump 1	Without sensors	X	X	X	X	X	X
	Pump 2	Without sensors	X	X	X	X	X	X

5) Connectors for other electric components can deviate.

6) Specify ordering code of sensor according to data sheet (DSA – RE 95133) separately and observe the requirements on the electronics.


# Technical data

## Hydraulic fluid

Before starting project planning, please refer to our data sheets RE 90220 (mineral oil), RE 90221 (environmentally acceptable hydraulic fluids) and RE 90222 (HFD hydraulic fluids) for detailed information regarding the choice of hydraulic fluid and application conditions.

The variable double pump A24VG is not suitable for operation with HFA, HFB and HFC hydraulic fluids. If HFD or environmentally acceptable hydraulic fluids are used, the limitations regarding technical data or other seals must be observed. Please contact us.

### Selection diagram

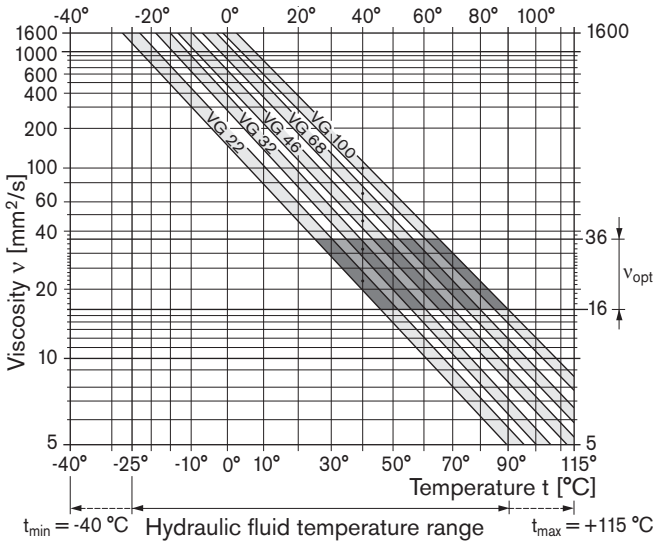

## Details regarding the choice of hydraulic fluid

The correct choice of hydraulic fluid requires knowledge of the operating temperature in relation to the ambient temperature: in a closed circuit, the circuit temperature.

The hydraulic fluid should be chosen so that the operating viscosity in the operating temperature range is within the optimum range ( $v_{\text{opt}}$  see shaded area of the selection diagram). We recommended that the higher viscosity class be selected in each case.

Example: At an ambient temperature of  $X^\circ\text{C}$ , an operating temperature of  $60^\circ\text{C}$  is set in the circuit. In the optimum operating viscosity range ( $v_{\text{opt}}$ , shaded area), this corresponds to the viscosity classes VG 46 or VG 68; to be selected: VG 68.

### Note

The case drain temperature, which is affected by pressure and speed, can be higher than the circuit temperature. At no point of the component may the temperature be higher than  $115^\circ\text{C}$ . The temperature difference specified below is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact us.

## Viscosity and temperature of hydraulic fluid

	Viscosity [ $\text{mm}^2/\text{s}$ ]	Temperature	Comment
Transport and storage at ambient temperature		$T_{\text{min}} \geq -50^\circ\text{C}$ $T_{\text{opt}} = +5^\circ\text{C}$ to $+20^\circ\text{C}$	factory preservation: up to 12 months with standard, up to 24 months with long-term
(Cold) start-up <sup>1)</sup>	$v_{\text{max}} = 1600$	$T_{\text{St}} \geq -40^\circ\text{C}$	$t \leq 3$ min, without load ( $p \leq 50$ bar), $n \leq 1000$ rpm
Permissible temperature difference		$\Delta T \leq 25$ K	between axial piston unit and hydraulic fluid
Warm-up phase	$v < 1600$ to 400	$T = -40^\circ\text{C}$ to $-25^\circ\text{C}$	at $p \leq 0.7 \cdot p_{\text{nom}}$ , $n \leq 0.5 \cdot n_{\text{nom}}$ and $t \leq 15$ min
Operating phase			
Temperature difference		$\Delta T =$ approx. 5 K	between hydraulic fluid in the bearing and at port T.
Maximum temperature		$115^\circ\text{C}$ $110^\circ\text{C}$	in the bearing measured at port T
Continuous operation	$v = 400$ to 10 $v_{\text{opt}} = 36$ to 16	$T = -25^\circ\text{C}$ to $+90^\circ\text{C}$	measured at port T, no restriction within the permissible data
Short-term operation	$v_{\text{min}} \geq 7$	$T_{\text{max}} = +110^\circ\text{C}$	measured at port T, $t < 3$ min, $p < 0.3 \cdot p_{\text{nom}}$
FKM shaft seal <sup>1)</sup>		$T \leq +115^\circ\text{C}$	see page 7

<sup>1)</sup> At temperatures below  $-25^\circ\text{C}$ , an NBR shaft seal is required (permissible temperature range:  $-40^\circ\text{C}$  to  $+90^\circ\text{C}$ ).



## Technical data

### Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

To ensure the functional reliability of the axial piston unit, a gravimetric analysis of the hydraulic fluid is necessary to determine the amount of solid contaminant and to determine the cleanliness level according to ISO 4406. A cleanliness level of at least 20/18/15 is to be maintained.

Depending on the system and the application, for the A24VG, we recommend

Filter cartridges  $\beta_{20} \geq 100$ .

With an increasing differential pressure at the filter cartridges, the  $\beta$  value must not deteriorate.

At very high hydraulic fluid temperatures (90 °C to maximum 115 °C), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.


If the above classes cannot be achieved, please contact us.

### Shaft seal

#### Permissible pressure loading

The service life of the shaft seal is influenced by the speed of the axial piston unit and the case drain pressure (case pressure  $p_G$ ). The mean differential pressure of 2 bar between the case and the ambient pressure may not be enduringly exceeded at normal operating temperature. For a higher differential pressure at reduced speed, see diagram. Momentary pressure spikes ( $t < 0.1$  s) of up to 10 bar are permitted. The service life of the shaft seal decreases with an increase in the frequency of pressure spikes.

The case pressure must be equal to or higher than the ambient pressure.

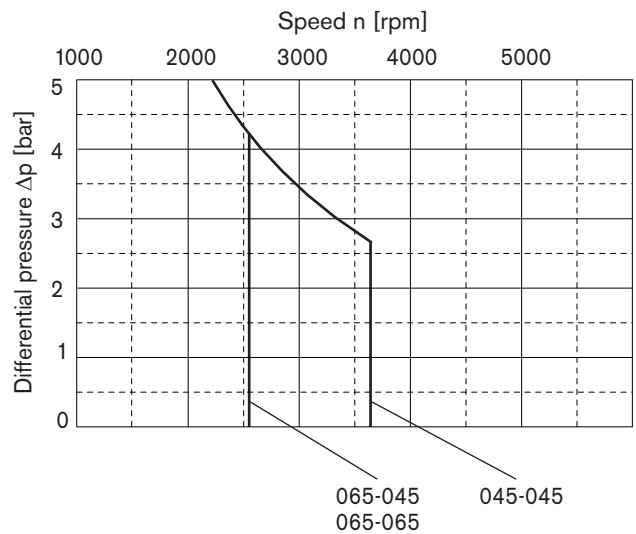

These values are valid for an ambient pressure  $p_{abs} = 1$  bar.

#### Temperature range

The FKM shaft seal may be used for case drain temperatures from -25 °C to +115 °C.

#### Note

For application cases below -25 °C, an NBR shaft seal is required (permissible temperature range: -40 °C to +90 °C). State NBR shaft seal in plain text when ordering. Please contact us.

# Technical data

## Operating pressure range

(operating with mineral oil)

Pressure at service line port **A<sub>1</sub>, A<sub>2</sub> or B<sub>1</sub>, B<sub>2</sub>**

Nominal pressure  $p_{nom}$  \_\_\_\_\_ 450 bar absolute

Maximum pressure  $p_{max}$  \_\_\_\_\_ 500 bar absolute


Single operating period \_\_\_\_\_ 10 s

Total operating period \_\_\_\_\_ 300 h

Minimum pressure (high-pressure side) \_\_\_\_\_ 25 bar absolute

Minimum pressure (low-pressure side) \_\_\_\_\_ 10 bar above  $p_G$   
(boost pressure setting must be higher depending on system)

Rate of pressure change  $R_{A\ max}$  \_\_\_\_\_ 9000 bar/s

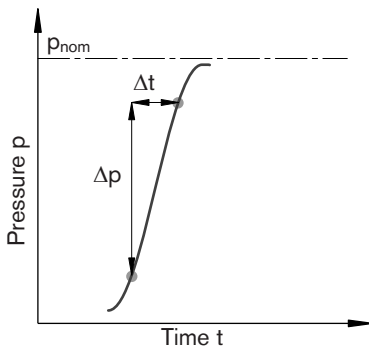

## Control pressure

To ensure the function of the control, the following control pressure is required depending on the speed and operating pressure (measuring point, port P<sub>S</sub>):

For controls EP, HW and HP

Minimum control pressure

$p_{St\ min}$  (at  $n = 2000$  rpm) \_\_\_\_\_ 20 bar above  $p_G$

For controls HT, EV, EZ

Minimum control pressure

$p_{St\ min}$  (at  $n = 2000$  rpm) \_\_\_\_\_ 25 bar above  $p_G$

## Note

Values for other hydraulic fluids, please contact us

$p_G$  = case pressure

## Definition

### Nominal pressure $p_{nom}$

The nominal pressure corresponds to the maximum design pressure.

### Maximum pressure $p_{max}$

The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.

### Minimum pressure (high-pressure side)


Minimum pressure at the high-pressure side (A or B) which is required in order to prevent damage to the axial piston unit.

### Minimum pressure (low-pressure side)

Minimum pressure at the low-pressure side (A or B) which is required in order to prevent damage to the axial piston unit.

### Rate of pressure change $R_A$

Maximum permissible rate of pressure rise and reduction during a pressure change over the entire pressure range.

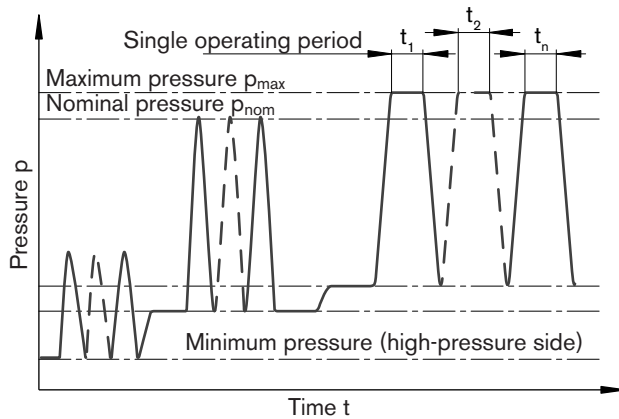

Total operating period =  $t_1 + t_2 + \dots + t_n$

# Technical data

**Table of values** (theoretical values, without efficiency and tolerances; values rounded)


Size	NG		045-045	065-045	065-065		
Displacement geometric, per revolution							
variable double pump	$V_{g \max}$	cm <sup>3</sup>	2 x 45.3	1 x 65.2 + 1 x 45.3	2 x 65.2		
Speed <sup>1)</sup>							
maximum at $V_{g \max}$	$n_{\text{nom}}$	rpm	3700	2600	2600		
at $\Delta p \geq 40$ bar ( $t < 15$ s)	$n_{\text{max } 40}$	rpm	3900	2800	2800		
minimum	$n_{\text{min}}$	rpm	500	500	500		
Flow							
at $n_{\text{nom}}$ and $V_{g \max}$	$q_v$	L/min	2 x 168	1 x 170 + 1 x 118	2 x 170		
Power <sup>2)</sup>							
at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 430$ bar	P	kW	240	206	243		
Torque <sup>2)</sup>							
at $V_{g \max}$ and $\Delta p = 430$ bar	T	Nm	620	756	892		
at $V_{g \max}$ and $\Delta p = 100$ bar	T	Nm	144	176	208		
Rotary stiffness <sup>3)</sup>							
drive shaft	1 3/8 V8	pump 1	c1	kNm/rad	97	–	–
		pump 2	c2	kNm/rad	20	–	–
	1 1/2 S9	pump 1	c1	kNm/rad	–	133	133
		pump 2	c2	kNm/rad	–	21	22
Moment of inertia <sup>3)</sup>							
		rotary group 1	$J_{\text{TW}1}$	kgm <sup>2</sup>	0.0048	0.0089	0.0089
		rotary group 2	$J_{\text{TW}2}$	kgm <sup>2</sup>	0.0048	0.0048	0.0089
Maximum angular acceleration <sup>4)</sup>		$\alpha$	rad/s <sup>2</sup>	28000	22000	22000	
Case Volume		V	L	2.8	2.9	3.0	
Mass approx. (without through drive)		m	kg	90	93	97	

1) The values are valid:

- for the optimum viscosity range from  $\nu_{\text{opt}} = 36$  to  $16$  mm<sup>2</sup>/s
- with hydraulic fluid based on mineral oils.

2) Without boost pump

3) Illustration of spring mass system:

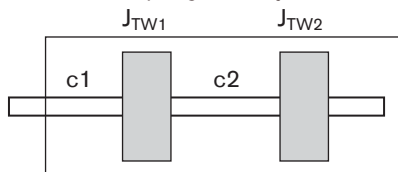

4) The data are valid for values between the minimum required and maximum permissible speed.

Valid for external excitation (e. g. engine 2 to 8 times rotary frequency; cardan shaft twice the rotary frequency).

The limit value applies for a single pump only.



The load capacity of the connection parts must be considered.

## Note

Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. We recommend testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.

# Technical data

## Permissible radial and axial forces of the drive shafts

Size	NG		045-045	045-045	065-045	065-065
Drive shaft		in	1 3/8	1 1/2	1 1/2	1 1/2
Maximum radial force at distance a (from shaft collar)	 $F_{q \max}$	N	3474	2970	4670	4670
		mm	24	27	27	27
Maximum axial force	 $+ F_{ax \max}$ $- F_{ax \max}$	N	3490	3490	4300	4300
		N	2310	2310	2700	2700

### Note

Special requirements apply in the case of belt drive and cardan shaft. Please contact us.

### Determining the operating characteristics

Flow	$q_v = \frac{V_g \cdot n \cdot \eta_v}{1000}$	[L/min]	$V_g$ = Displacement per revolution in $cm^3$
			$\Delta p$ = Differential pressure in bar
Torque	$T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{mh}}$	[Nm]	$n$ = Speed in rpm
			$\eta_v$ = Volumetric efficiency
Power	$P = \frac{2 \pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t}$	[kW]	$\eta_{mh}$ = Mechanical-hydraulic efficiency
			$\eta_t$ = Total efficiency ( $\eta_t = \eta_v \cdot \eta_{mh}$ )


### Permissible input and through-drive torques

Size	NG		045-045	065-045	065-065
Torque at $V_{g \max}$ and $\Delta p = 430 \text{ bar}^1$	T	Nm	620	756	892
Input torque at drive shaft, maximum <sup>2)</sup>					
V8	1 3/8 in	$T_{E \max}$	Nm	970	–
S9	1 1/2 in	$T_{E \max}$	Nm	1125	1125
Maximum through-drive torque		$T_{D1 \max}$	Nm	495	495
		$T_{D2 \max}$	Nm	$T_{D2 \text{ perm}} = T_{D1 \max} - T_2$	$T_{D2 \text{ perm}} = T_{D1 \max} - T_2$

1) Efficiency not considered

2) For drive shafts without radial force

### Torque distribution

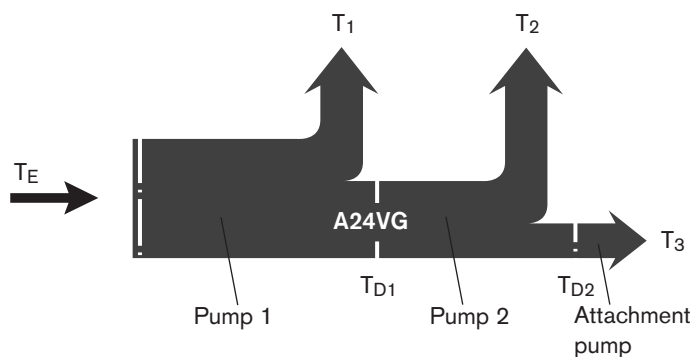

$T_E$  consists as follows:

$$T_E = T_1 + T_2 + T_3$$

$$T_E < T_{E \max}$$

# HT – Hydraulic control, direct controlled

With the direct hydraulic control (HT), the output flow of the pump is controlled by a hydraulic control pressure, applied directly to the stroking piston through either port X<sub>1</sub> or X<sub>2</sub>.

*Use of the HT control requires a review of the engine and vehicle parameters to ensure that the pump is set up correctly. We recommend that all HT applications be reviewed by a Bosch Rexroth application engineer.*

Flow direction is determined by which control pressure port is pressurized (refer to table below).


Pump displacement is infinitely variable and proportional to the applied control pressure, but is also influenced by system pressure and pump drive speed.

In order to use the optional built-in pressure cut-off valve, port Y<sub>HT</sub> must be used as the control pressure source for the selected control module. See page 29 for a description of the pressure cut-off function.

Maximum permissible control pressure: 40 bar


**Correlation**  
**Direction of rotation - Control - Flow direction**

Direction of rotation	clockwise				counter-clockwise			
	Pump 1		Pump 2		Pump 1		Pump 2	
Control pressure	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
Flow direction	B to A	A to B	A to B	B to A	A to B	B to A	B to A	A to B
Operating pressure	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>

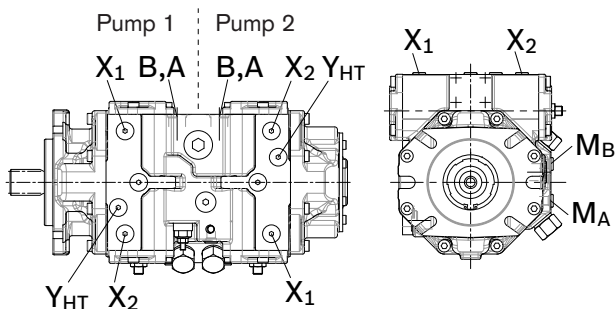

**Schematic**

Illustration with service line ports on left side

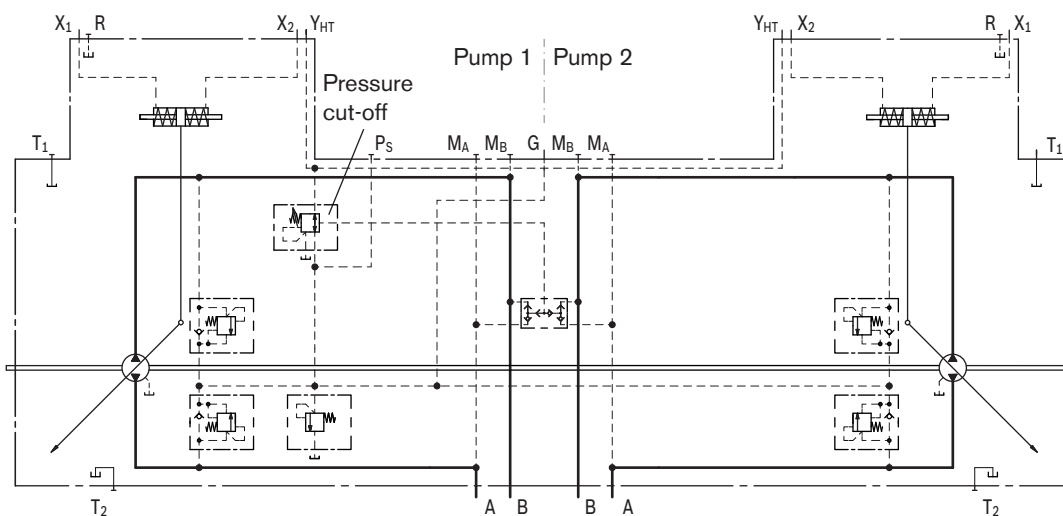

**Note**

The combination and operation of all controls must be considered in the complete system!

4


## HP – Proportional control hydraulic, pilot-pressure related

The output flow of the pump is infinitely variable between 0 to 100 %, proportional to the difference in pilot pressure applied to the two control ports ( $Y_1$  and  $Y_2$ ).

The pilot signal, coming from an external source, is a pressure signal. Flow is negligible, as the pilot signal acts only on the spool of the control valve.

This valve spool then directs control oil into and out of the stroking cylinder to adjust pump displacement as required.

A feedback lever, connected to the stroking piston maintains the pump flow for any given pilot signal within the control range.

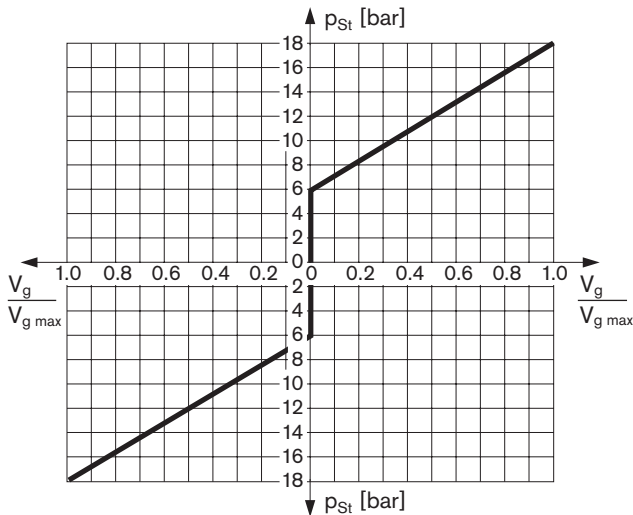

$V_g$  = Displacement at  $p_{St}$

$V_{g\ max}$  = Displacement at  $p_{St} = 18$  bar

Pilot signal  $p_{St} = 6$  to 18 bar (at port  $Y_1, Y_2$ )

Beginning of control at 6 bar

End of control at 18 bar (maximum displacement  $V_{g\ max}$ )

### Note

In the neutral position, the HP control module must be vented to reservoir via the external pilot control device.

### Note

**The spring return feature in the control module is not a safety device**

The control module can stick in an undefined position by internal contamination (contaminated hydraulic fluid, abrasion or residual contamination from system components). As a result, the control will no longer respond correctly to the operator's commands.

Check whether the application on your machine requires additional safety measures, in order to bring the driven actuator into a controlled and safe position (immediate stop). If necessary, make sure these are properly implemented.

### Note


**The combination and operation of all controls must be considered in the complete system!**

# HP – Proportional control hydraulic, pilot-pressure related

**Correlation**


**Direction of rotation - Control - Flow direction**

Direction of rotation	clockwise				counter-clockwise			
	Pump 1		Pump 2		Pump 1		Pump 2	
Pilot signal	Y <sub>1</sub>	Y <sub>2</sub>	Y <sub>1</sub>	Y <sub>2</sub>	Y <sub>1</sub>	Y <sub>2</sub>	Y <sub>1</sub>	Y <sub>2</sub>
Control pressure	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>
Flow direction	A to B	B to A	B to A	A to B	B to A	A to B	A to B	B to A
Operating pressure	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>

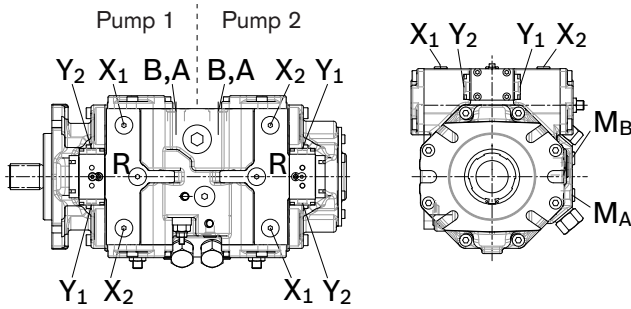

**Schematic**

Illustration with service line ports on left side

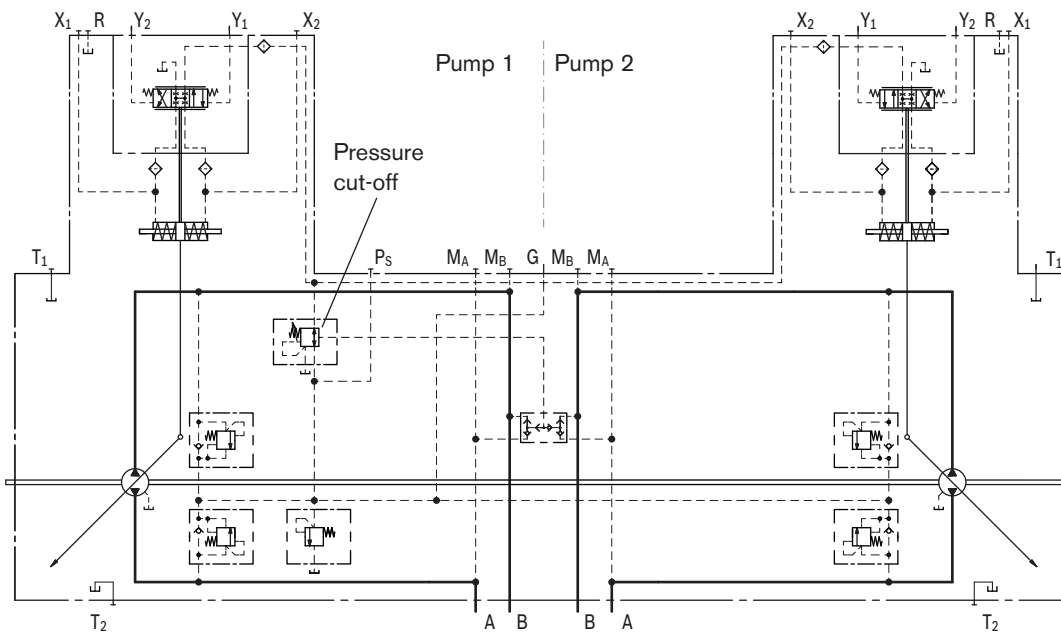


4

## HW – Proportional control hydraulic, mechanical servo

The output flow of the pump is infinitely variable between 0 to 100 %, proportional to the swivel angle of the control lever between 0° and ±29° from the spring centered zero flow position.

A feedback lever, connected to the stroking piston maintains the pump flow for any given position of the control lever between 0° and 29°.

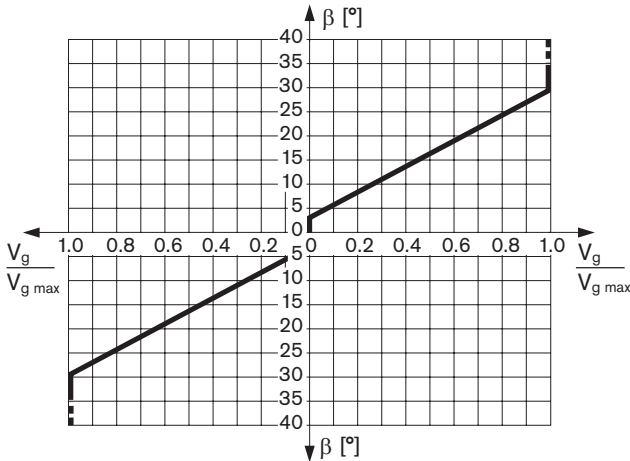

Swivel angle  $\beta$  at the control lever for pump displacement change:

Start of control at  $\beta = 3^\circ$

End of control  $\beta = 29^\circ$  (maximum displacement  $V_{g \max}$ )

Mechanical stop for  $\beta: \pm 40^\circ$

The maximum required torque at the lever is 170 Ncm. To prevent damage to the HW control module, a positive mechanical stop must be provided for the HW control lever.

### Note

Spring centering enables the pump, depending on pressure and speed, to move automatically to the neutral position ( $V_g = 0$ ) as soon as there is no longer any torque on the control lever of the HW control module (regardless of deflection angle).

### Variation: neutral position switch


The switch contact in the neutral position switch is closed when the control lever on the HW control module is in its neutral position. The switch opens when the control lever is moved out of neutral in either direction.

Thus, the neutral position switch provides a monitoring function for drive units that require the pump to be in the neutral position during certain operating conditions (e. g. starting diesel engines).

### Technical data, neutral position switch

Load capacity	20 A (continuous), without switching operating
Switching capacity	15 A / 32 V (resistive load) 4 A / 32 V (inductive load)
Connector design	DEUTSCH DT04-2P-EP04 (mating connector, see page 33)

### Schematic with neutral position switch



### Note

The combination and operation of all controls must be considered in the complete system!




# HW – Proportional control hydraulic, mechanical servo

**Correlation**


**Direction of rotation - Control - Flow direction**

Direction of rotation	clockwise				counter-clockwise			
	Pump 1		Pump 2		Pump 1		Pump 2	
Pump	a	b	a	b	a	b	a	b
Lever direction	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>
Control pressure	A to B	B to A	A to B	B to A	B to A	A to B	B to A	A to B
Flow direction	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>

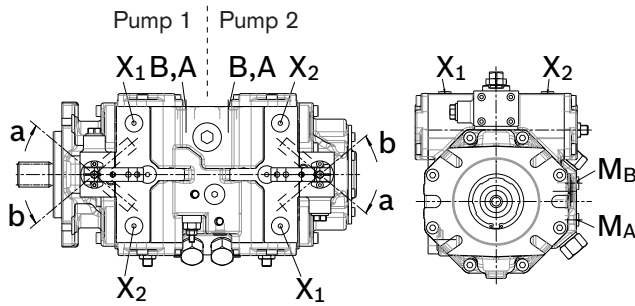

**Schematic**

Illustration with service line ports on left side

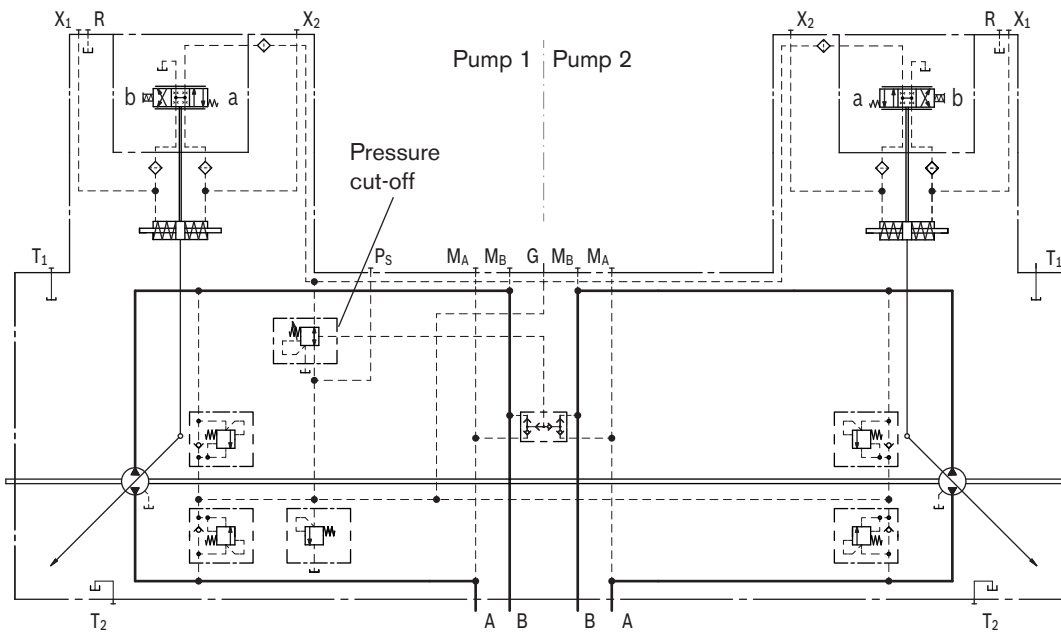

4


## EP – Proportional control electric

The output flow of the pump is infinitely variable between 0 to 100 %, proportional to the electrical current supplied to solenoid a or b.

The electrical energy is converted into a force acting on the spool of the control valve.

This valve spool then directs control oil into and out of the stroking cylinder to adjust pump displacement as required.

A feedback lever, connected to the stroking piston maintains the pump flow for any given current within the control range.

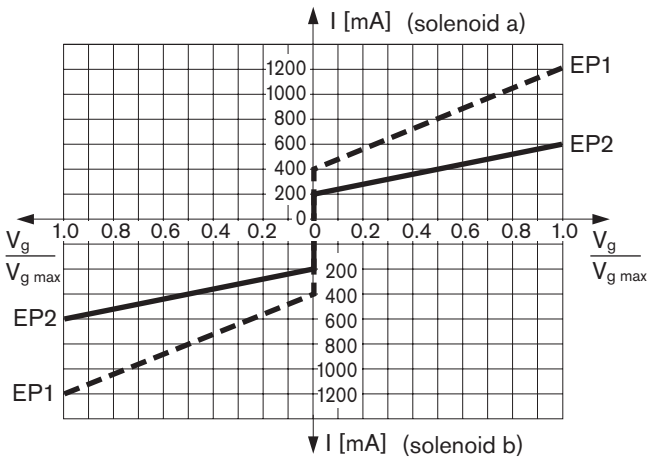

### Standard

Proportional solenoid without manual override.

### On request

Proportional solenoid with manual override and spring return.

### Technical data, solenoid

	EP1	EP2
Voltage	12 V ( $\pm 20$ %)	24 V ( $\pm 20$ %)
Control current		
Beginning of control at $V_g = 0$	400 mA	200 mA
End of control at $V_{g \max}$	1200 mA	600 mA
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 Hz	100 Hz
Duty cycle	100 %	100 %
Type of protection, see connector design on page 33		

The following electronic controllers and amplifiers are available for controlling the proportional solenoids:

- BODAS controller RC
  - Series 20 \_\_\_\_\_ RE 95200
  - Series 21 \_\_\_\_\_ RE 95201
  - Series 22 \_\_\_\_\_ RE 95202
  - Series 30 \_\_\_\_\_ RE 95203, RE 95204
 and application software
- Analog amplifier RA \_\_\_\_\_ RE 95230

Further information can also be found on the Internet at [www.boschrexroth.com/mobileelektronik](http://www.boschrexroth.com/mobileelektronik).

### Note

**The spring return feature in the control module is not a safety device**

The control module can stick in an undefined position by internal contamination (contaminated hydraulic fluid, abrasion or residual contamination from system components). As a result, the control will no longer respond correctly to the operator's commands.

Check whether the application on your machine requires additional safety measures, in order to bring the driven actuator into a controlled and safe position (immediate stop). If necessary, make sure these are properly implemented.

### Note


**The combination and operation of all controls must be considered in the complete system!**

# EP – Proportional control electric

## Correlation


### Direction of rotation - Control - Flow direction

Direction of rotation	clockwise				counter-clockwise			
	Pump 1		Pump 2		Pump 1		Pump 2	
Pump	Pump 1		Pump 2		Pump 1		Pump 2	
Actuation of solenoid	a	b	a	b	a	b	a	b
Control pressure	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>
Flow direction	A to B	B to A	B to A	A to B	B to A	A to B	A to B	B to A
Operating pressure	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>

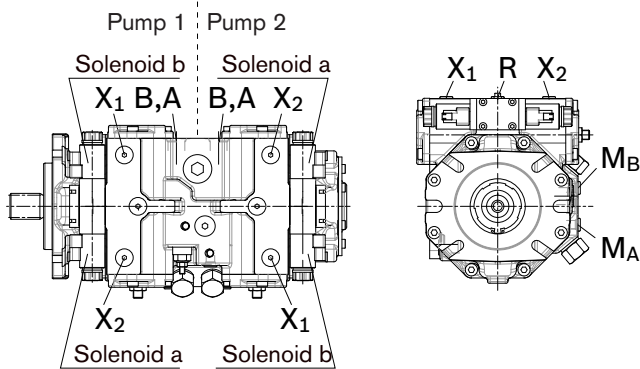

## Schematic

Illustration with service line ports on left side

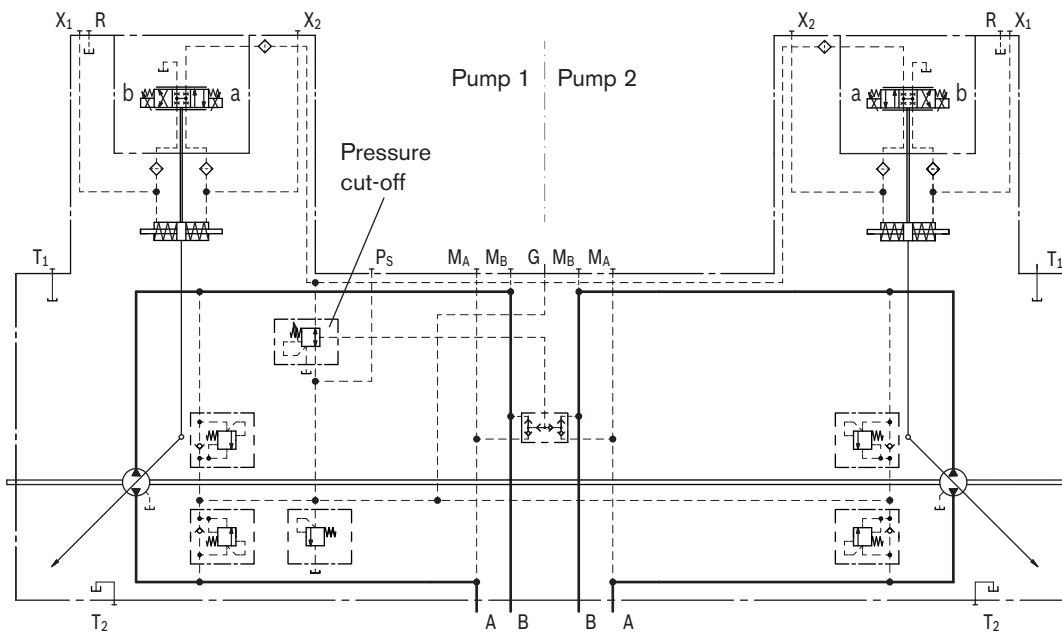

# EZ – Two-point control electric

By energizing either switching solenoid a or b, internal control pressure is connected directly to the stroking piston and the pump swivels to maximum displacement. With the EZ control, pump flow is switchable between  $V_g = 0$  and  $V_{g \max}$ . Flow direction is determined by which solenoid is energized.

### Standard

Switching solenoid without manual override.

### On request

Switching solenoid with manual override and spring return.


### Technical data, solenoid

	EZ1	EZ2
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Neutral position $V_g = 0$	de-energized	de-energized
Displacement $V_{g \max}$	energized	energized
Nominal resistance (at 20 °C)	5.5 $\Omega$	21.7 $\Omega$
Nominal power	26.2 W	26.5 W
Minimum required current	1.32 A	0.67 A
Duty cycle	100 %	100 %
Type of protection see connector design on page 33		

### Correlation


#### Direction of rotation - Control - Flow direction

Direction of rotation	clockwise				counter-clockwise			
	Pump 1		Pump 2		Pump 1		Pump 2	
Actuation of solenoid	a	b	a	b	a	b	a	b
Control pressure	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
Flow direction	B to A	A to B	A to B	B to A	A to B	B to A	B to A	A to B
Operating pressure	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>

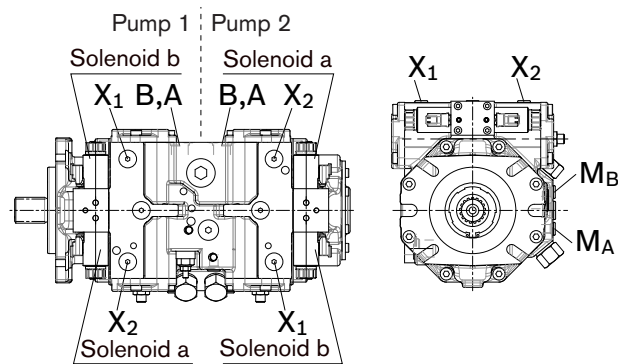

### Schematic

Illustration with service line ports on left side

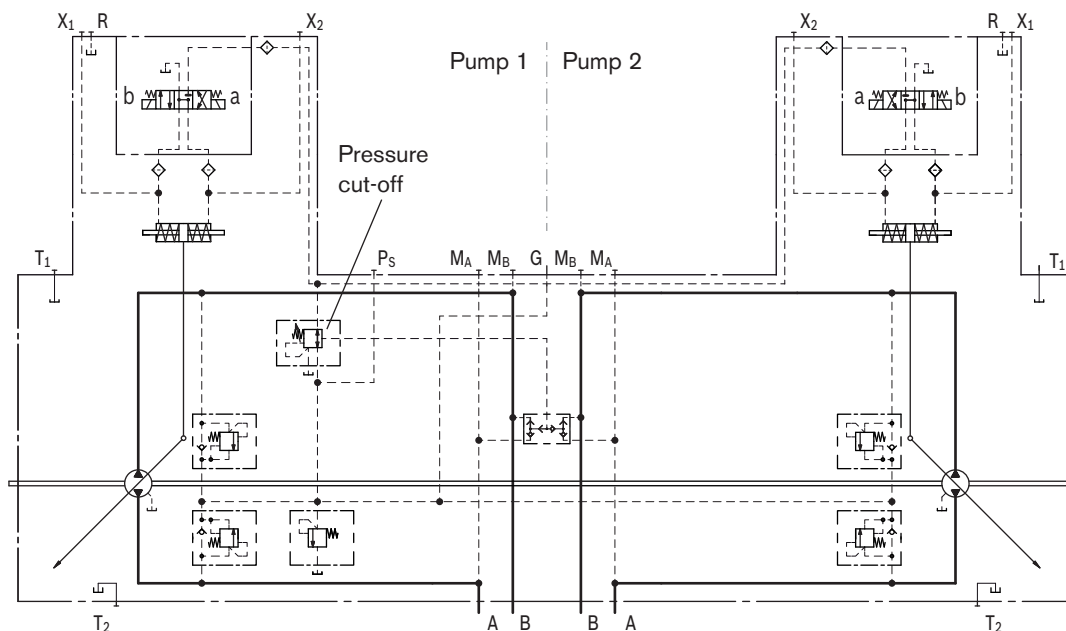

### Note

The combination and operation of all controls must be considered in the complete system!

## EV – Electric control, direct controlled

With the direct electric control (EV), the output flow of the pump is infinitely variable between 0 to 100 %, controlled by the control pressure of the pressure reducing valve. This control pressure level is proportional to the electric current, applied to the solenoid of the pressure reducing valve. This control pressure is then connected directly to the stroking cylinder of the pump by energizing either switching solenoid a or b on the EV control module, which determines the direction of the pump flow. The resulting pump displacement at a certain control pressure is also influenced by pump drive speed and operating pressure.

### Technical data, pressure reducing valve

	EV1	EV2
Voltage	12 V	24 V
Control current		
Beginning of control at $V_g = 0$	515 mA	255 mA
End of control at $V_{g \max}$	990 mA	495 mA
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 Hz	100 Hz
Duty cycle	100%	100%

Type of protection see connector design on page 33

Depending on the operating point, the specified values may vary slightly.

The following electronic controllers and amplifiers are available for controlling the proportional solenoids:

- BODAS controller RC
  - Series 20 \_\_\_\_\_ RE 95200
  - Series 21 \_\_\_\_\_ RE 95201
  - Series 22 \_\_\_\_\_ RE 95202
  - Series 30 \_\_\_\_\_ RE 95203, RE 95204
 and application software
- Analog amplifier RA \_\_\_\_\_ RE 95230

Further information can also be found on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics).

### Technical data, solenoid

	EV1	EV2
Voltage	12 V ( $\pm 20$ %)	24 V ( $\pm 20$ %)
Neutral position $V_g = 0$	de-energized	de-energized
Displacement $V_g$	energized	energized
Nominal resistance (at 20 °C)	5.5 $\Omega$	21.7 $\Omega$
Nominal power	26.2 W	26.5 W
Minimum required current	1.32 A	0.67 A
Duty cycle	100%	100%
Type of protection see connector design on page 33		

### Standard

Switching solenoid without manual override.

### On request

Switching solenoid with manual override and spring return.

### Correlation

#### Direction of rotation - Control - Flow direction

Direction of rotation	clockwise				counter-clockwise			
	Pump 1		Pump 2		Pump 1		Pump 2	
Actuation of solenoid	a	b	a	b	a	b	a	b
Control pressure	$X_1$	$X_2$	$X_1$	$X_2$	$X_1$	$X_2$	$X_1$	$X_2$
Flow direction	B to A	A to B	A to B	B to A	A to B	B to A	B to A	A to B
Operating pressure	$M_A$	$M_B$	$M_B$	$M_A$	$M_B$	$M_A$	$M_A$	$M_B$

### Note


The combination and operation of all controls must be considered in the complete system!

# Dimensions size 045-045

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## EP – Proportional control electric

Threaded ports A and B, on left side (viewed on drive shaft)<sup>1)</sup>


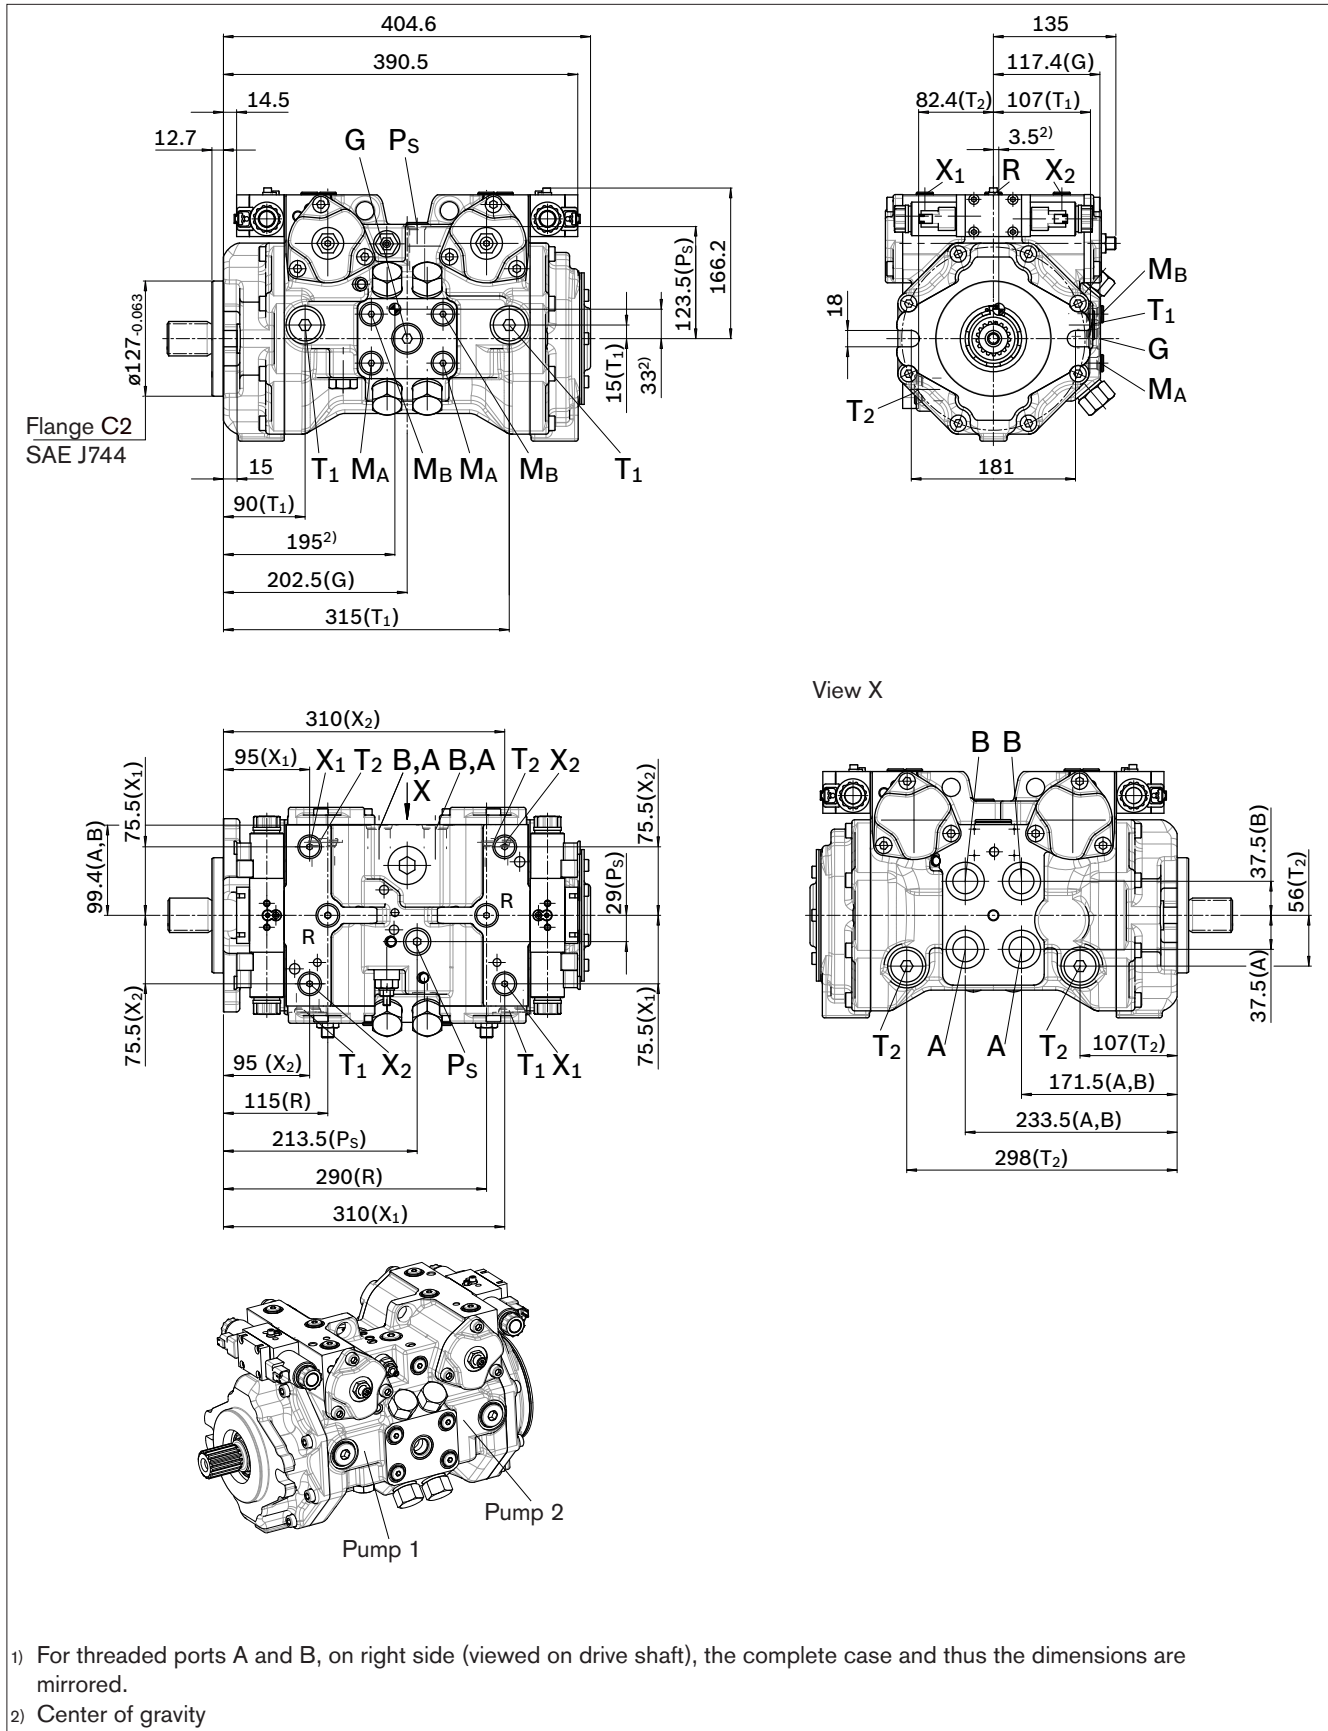


1) For threaded ports A and B, on right side (viewed on drive shaft), the complete case and thus the dimensions are mirrored.  
 2) Center of gravity

# Dimensions size 045-045

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shafts

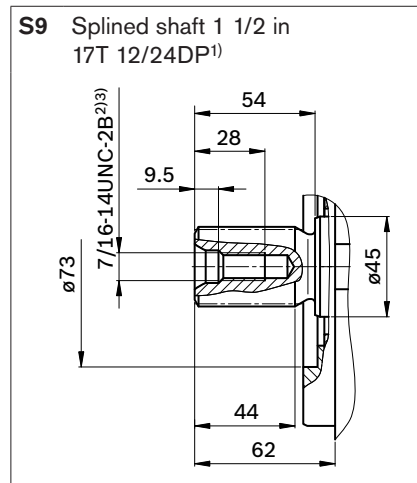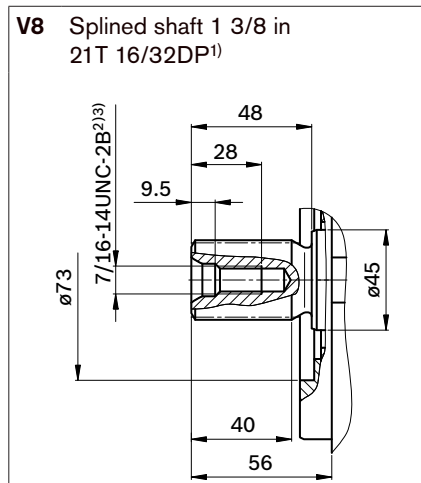

## Ports

Designation	Port for	Standard <sup>4)</sup>	Size <sup>3)</sup>	Maximum pressure [bar] <sup>5)</sup>	State <sup>8)</sup>	
					Pump 1	Pump 2
A, B	Service line	ISO 6149	M27 x 2; 19 deep	500	O	O
T <sub>1</sub>	Drain line	ISO 6149	M27 x 2; 19 deep	3	X <sup>6)</sup>	X <sup>6)</sup>
T <sub>2</sub>	Drain line	ISO 6149	M27 x 2; 19 deep	3	X <sup>6)</sup>	O <sup>6)</sup>
R	Air bleed	ISO 6149	M14 x 1.5; 11.5 deep	3	X	X
X <sub>1</sub> , X <sub>2</sub>	Control pressure (upstream of orifice)	ISO 6149	M14 x 1.5; 11.5 deep	40	X	X
X <sub>1</sub> , X <sub>2</sub>	Control pressure (upstream of orifice, HT only)	ISO 6149	M14 x 1.5; 11.5 deep	40	O	O
X <sub>3</sub> , X <sub>4</sub> <sup>7)</sup>	Stroking chamber pressure	ISO 6149	M14 x 1.5; 11.5 deep	40	X	X
G	Boost pressure	ISO 6149	M22 x 1.5; 17 deep	40		O
P <sub>S</sub>	Pilot pressure, inlet	ISO 6149	M18 x 1.5; 14.5 deep	40		X
Y <sub>HT</sub>	Pilot pressure, outlet (HT only)	ISO 6149	M14 x 1.5; 11.5 deep	40	O	O
M <sub>A</sub> , M <sub>B</sub>	Measuring pressure A, B	ISO 6149	M14 x 1.5; 11.5 deep	500	X	X
Y <sub>1</sub> , Y <sub>2</sub>	Pilot signal (HP only)	ISO 6149	M14 x 1.5; 11.5 deep	40	O	O

1) ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) Observe the general instructions on page 38 for the maximum tightening torques.

4) The spot face can be deeper than specified in the appropriate standard.

5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

6) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 36 and 37).

7) Optional, see page 31

8) O = Must be connected (plugged on delivery)


X = Plugged (in normal operation)

# Dimensions size 065-045

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## EP – Proportional control electric

Threaded ports A and B, on left side (viewed on drive shaft)<sup>1)</sup>

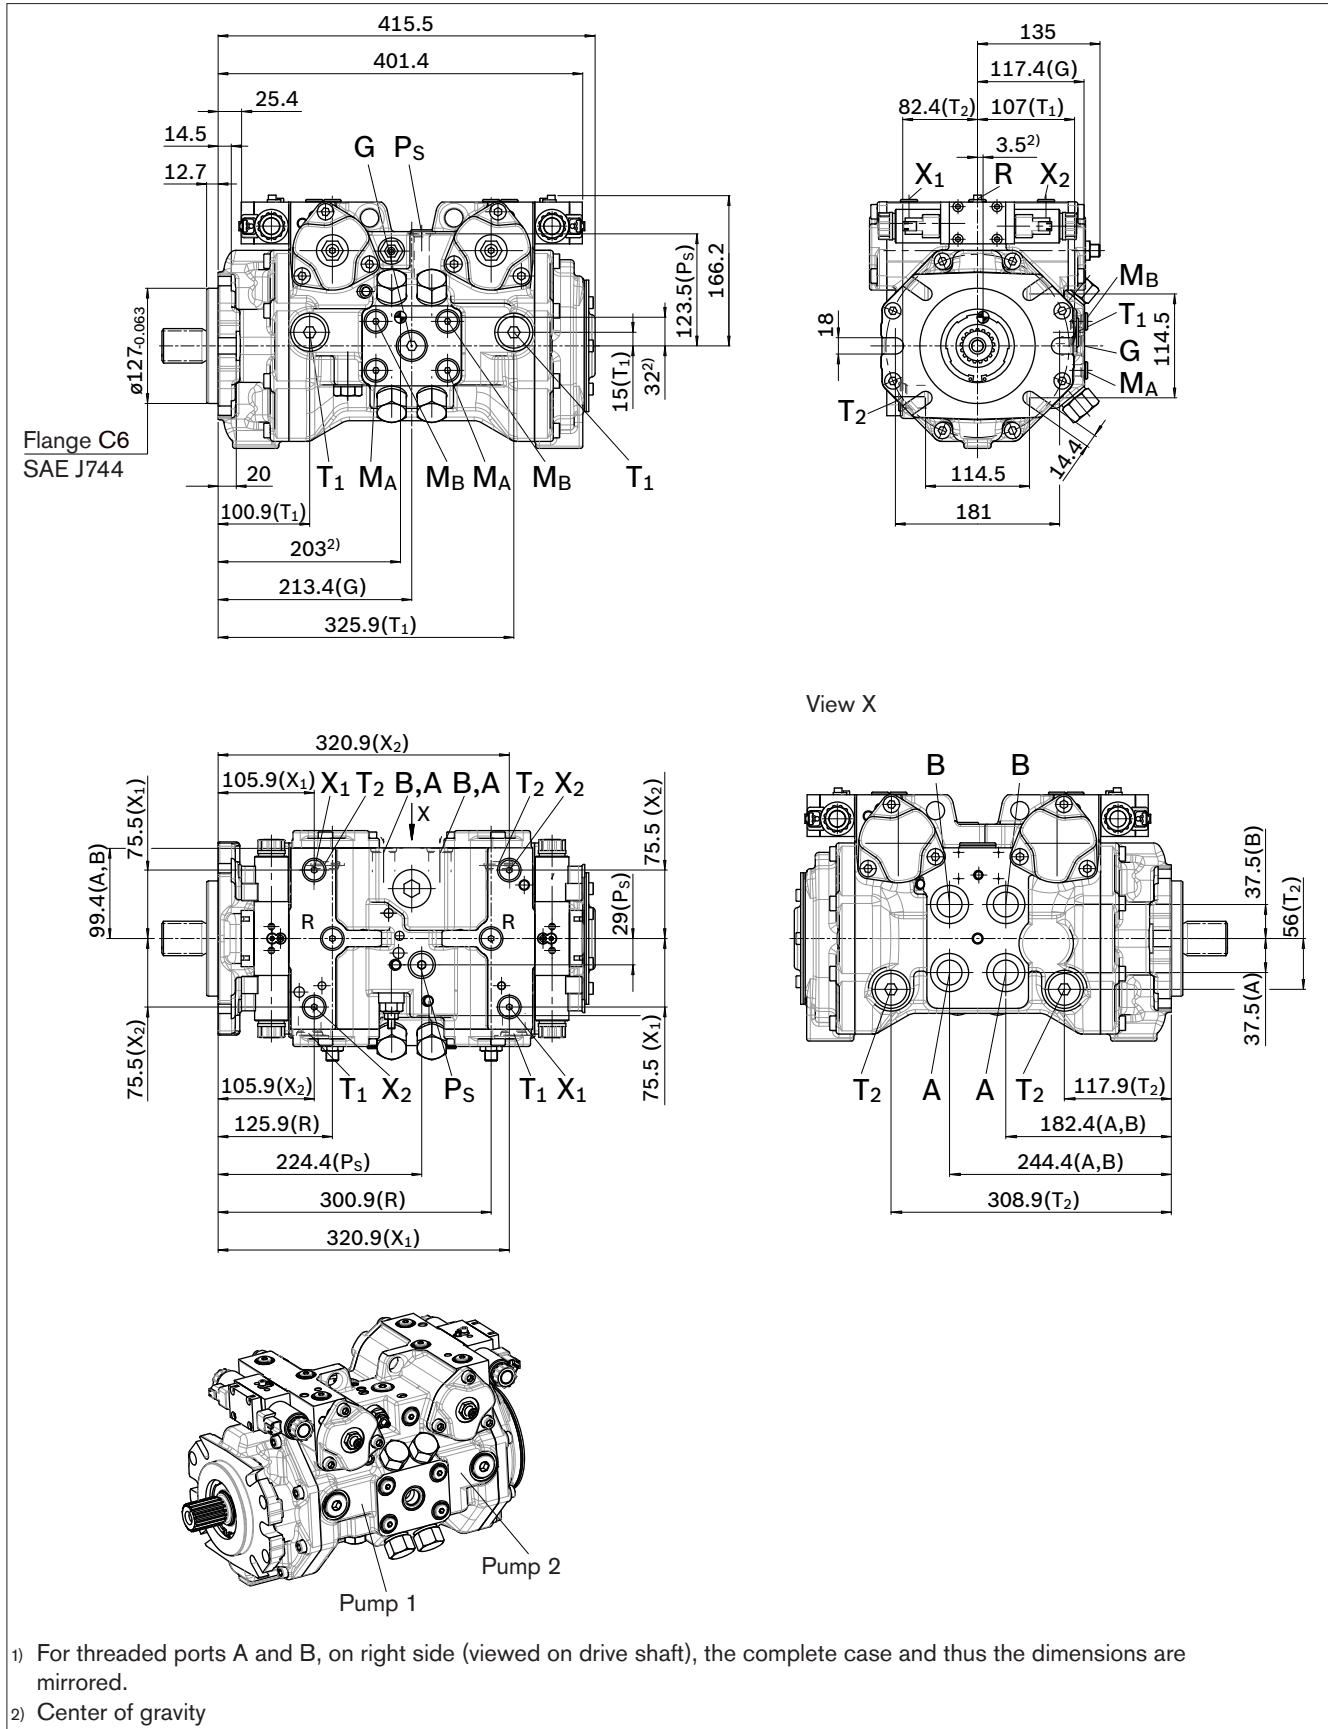

1) For threaded ports A and B, on right side (viewed on drive shaft), the complete case and thus the dimensions are mirrored.


2) Center of gravity



# Dimensions size 065-045

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shaft

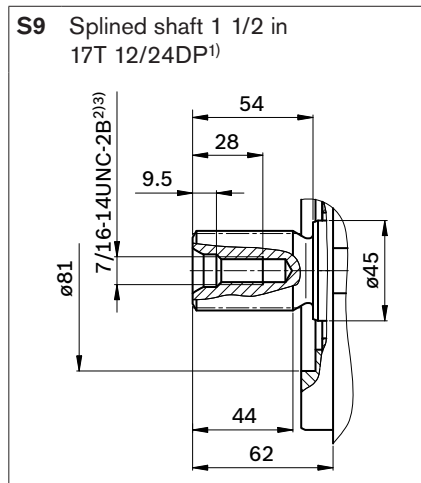

## Ports

Designation	Port for	Standard <sup>4)</sup>	Size <sup>3)</sup>	Maximum pressure [bar] <sup>5)</sup>	State <sup>8)</sup>	
					Pump 1	Pump 2
A, B	Service line	ISO 6149	M27 x 2; 19 deep	500	O	O
T <sub>1</sub>	Drain line	ISO 6149	M27 x 2; 19 deep	3	X <sup>6)</sup>	X <sup>6)</sup>
T <sub>2</sub>	Drain line	ISO 6149	M27 x 2; 19 deep	3	X <sup>6)</sup>	O <sup>6)</sup>
R	Air bleed	ISO 6149	M14 x 1.5; 11.5 deep	3	X	X
X <sub>1</sub> , X <sub>2</sub>	Control pressure (upstream of orifice)	ISO 6149	M14 x 1.5; 11.5 deep	40	X	X
X <sub>1</sub> , X <sub>2</sub>	Control pressure (upstream of orifice, HT only)	ISO 6149	M14 x 1.5; 11.5 deep	40	O	O
X <sub>3</sub> , X <sub>4</sub> <sup>7)</sup>	Stroking chamber pressure	ISO 6149	M14 x 1.5; 11.5 deep	40	X	X
G	Boost pressure	ISO 6149	M22 x 1.5; 17 deep	40		O
P <sub>S</sub>	Pilot pressure, inlet	ISO 6149	M18 x 1.5; 14.5 deep	40		X
Y <sub>HT</sub>	Pilot pressure, outlet (HT only)	ISO 6149	M14 x 1.5; 11.5 deep	40	O	O
M <sub>A</sub> , M <sub>B</sub>	Measuring pressure A, B	ISO 6149	M14 x 1.5; 11.5 deep	500	X	X
Y <sub>1</sub> , Y <sub>2</sub>	Pilot signal (HP only)	ISO 6149	M14 x 1.5; 11.5 deep	40	O	O

1) ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) Observe the general instructions on page 38 for the maximum tightening torques.

4) The spot face can be deeper than specified in the appropriate standard.

5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

6) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 36 and 37).

7) Optional, see page 31

8) O = Must be connected (plugged on delivery)


X = Plugged (in normal operation)

# Dimensions size 065-065

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## EP – Proportional control electric

Threaded ports A and B, on left side (viewed on drive shaft)<sup>1)</sup>

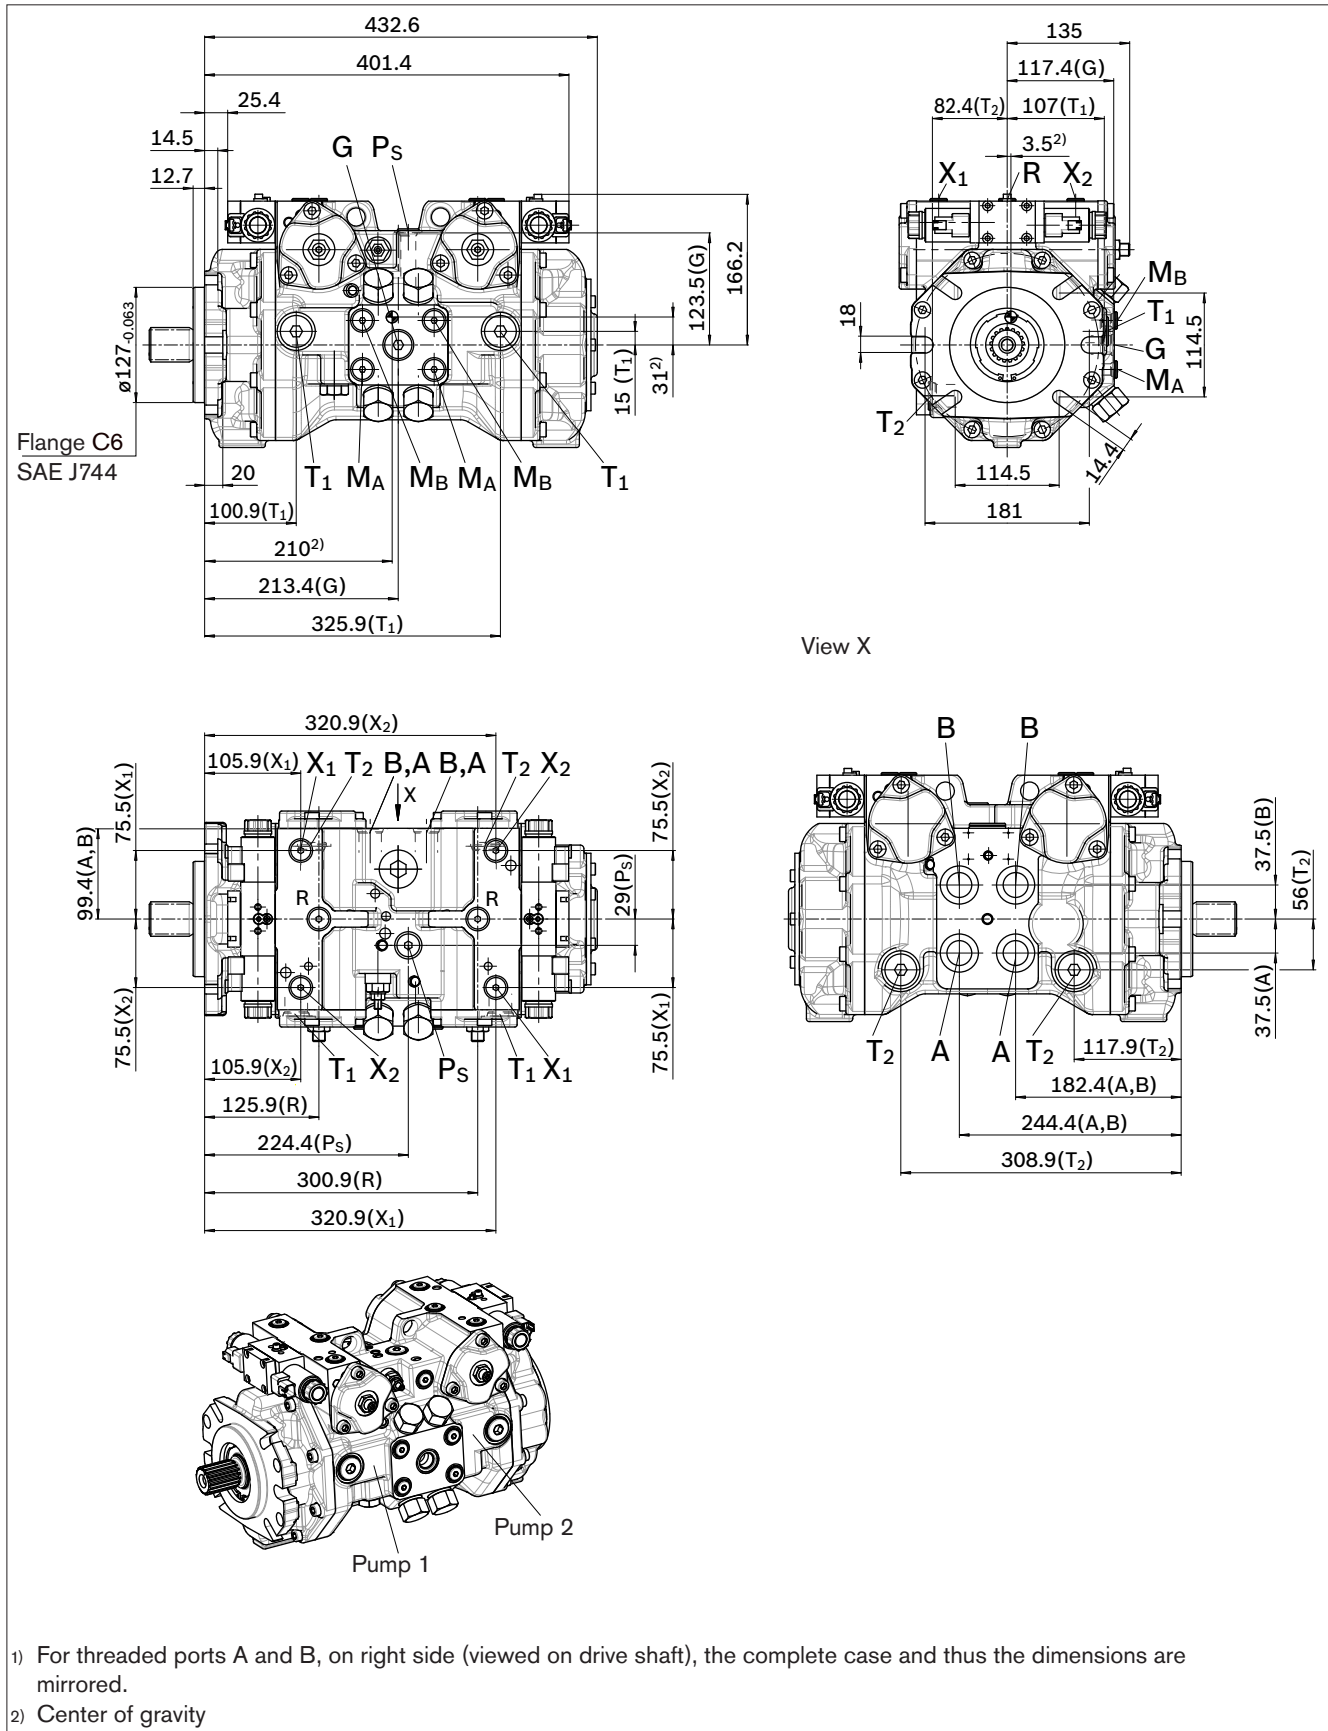


1) For threaded ports A and B, on right side (viewed on drive shaft), the complete case and thus the dimensions are mirrored.  
 2) Center of gravity

# Dimensions size 065-065

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shaft

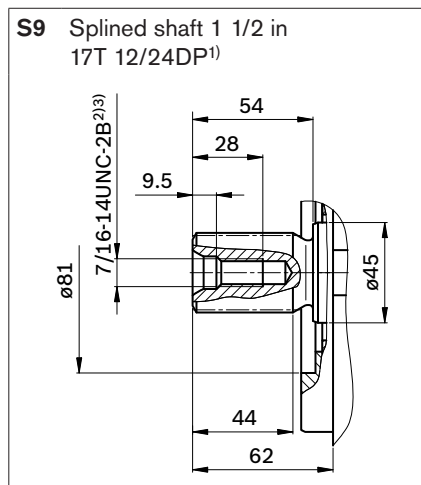

## Ports

Designation	Port for	Standard <sup>4)</sup>	Size <sup>3)</sup>	Maximum pressure [bar] <sup>5)</sup>	State <sup>8)</sup>	
					Pump 1	Pump 2
A, B	Service line	ISO 6149 <sup>7)</sup>	M27 x 2; 19 deep	500	O	O
T <sub>1</sub>	Drain line	ISO 6149 <sup>7)</sup>	M27 x 2; 19 deep	3	X <sup>6)</sup>	X <sup>6)</sup>
T <sub>2</sub>	Drain line	ISO 6149 <sup>7)</sup>	M27 x 2; 19 deep	3	X <sup>6)</sup>	O <sup>6)</sup>
R	Air bleed	ISO 6149 <sup>7)</sup>	M14 x 1.5; 11.5 deep	3	X	X
X <sub>1</sub> , X <sub>2</sub>	Control pressure (upstream of orifice)	ISO 6149 <sup>7)</sup>	M14 x 1.5; 11.5 deep	40	X	X
X <sub>1</sub> , X <sub>2</sub>	Control pressure (upstream of orifice, HT only)	ISO 6149 <sup>7)</sup>	M14 x 1.5; 11.5 deep	40	O	O
X <sub>3</sub> , X <sub>4</sub> <sup>7)</sup>	Stroking chamber pressure	ISO 6149 <sup>7)</sup>	M14 x 1.5; 11.5 deep	40	X	X
G	Boost pressure	ISO 6149 <sup>7)</sup>	M22 x 1.5; 17 deep	40		O
P <sub>S</sub>	Pilot pressure, inlet	ISO 6149 <sup>7)</sup>	M18 x 1.5; 14.5 deep	40		X
Y <sub>HT</sub>	Pilot pressure, outlet (HT only)	ISO 6149 <sup>7)</sup>	M14 x 1.5; 11.5 deep	40	O	O
M <sub>A</sub> , M <sub>B</sub>	Measuring pressure A, B	ISO 6149 <sup>7)</sup>	M14 x 1.5; 11.5 deep	500	X	X
Y <sub>1</sub> , Y <sub>2</sub>	Pilot signal (HP only)	ISO 6149 <sup>7)</sup>	M14 x 1.5; 11.5 deep	40	O	O

1) ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ASME B1.1

3) Observe the general instructions on page 38 for the maximum tightening torques.

4) The spot face can be deeper than specified in the appropriate standard.

5) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

6) Depending on installation position, T<sub>1</sub> or T<sub>2</sub> must be connected (see also installation instructions on pages 36 and 37).

7) Optional, see page 31


8) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


# Through drive dimensions

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Flange SAE J744 <sup>1)</sup>			Coupling for splined shaft <sup>2)</sup>					
Diameter	Mounting variant		Diameter	Designation	045	065		
	Symbol <sup>3)</sup>	Designation						
Without through drive								
82-2 (A)	⌀	A1	5/8 in 9T 16/32DP	S2	○	○	0000	A1S2
			3/4 in 11T 16/32DP	S3	○	○	A1S3	
	∞	A2	5/8 in 9T 16/32DP	S2	○	○	A2S2	
			3/4 in 11T 16/32DP	S3	○	○	A2S3	
101-2 (B)	⌀	B1	7/8 in 13T 16/32DP	S4	○	○	B1S4	
			1 in 15T 16/32DP	S5	○	○	B1S5	
	∞	B2	7/8 in 13T 16/32DP	S4	●	○	B2S4	
			1 in 15T 16/32DP	S5	●	○	B2S5	
	∅	B5	7/8 in 13T 16/32DP	S4	○	○	B5S4	
			1 in 15T 16/32DP	S5	○	○	B5S5	
101-4 (B)	⊗	B4	7/8 in 13T 16/32DP	S4	○	○	B4S4	
			1 in 15T 16/32DP	S5	○	○	B4S5	

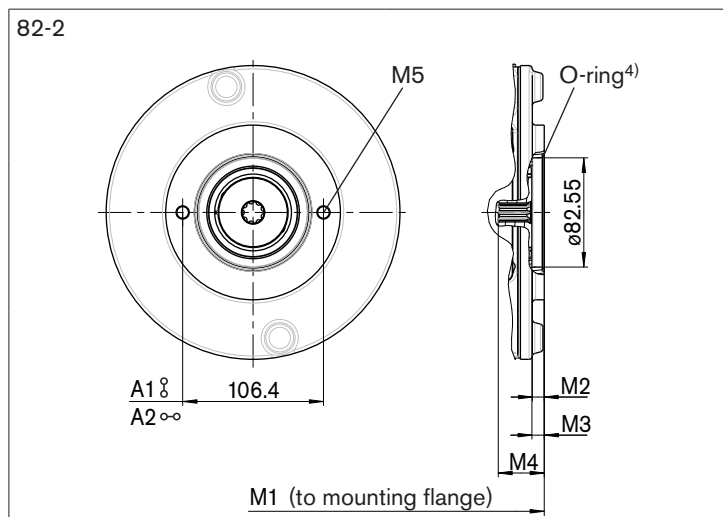

NG	M1 <sup>5)</sup>	M2	M3	M4	M5 <sup>6)</sup>
045-045	412.6	9	9.4	35	M10 x 1.5; 13 deep
065-065	447.4	9	9.4	35	
065-045	423.5	9	9.4	35	

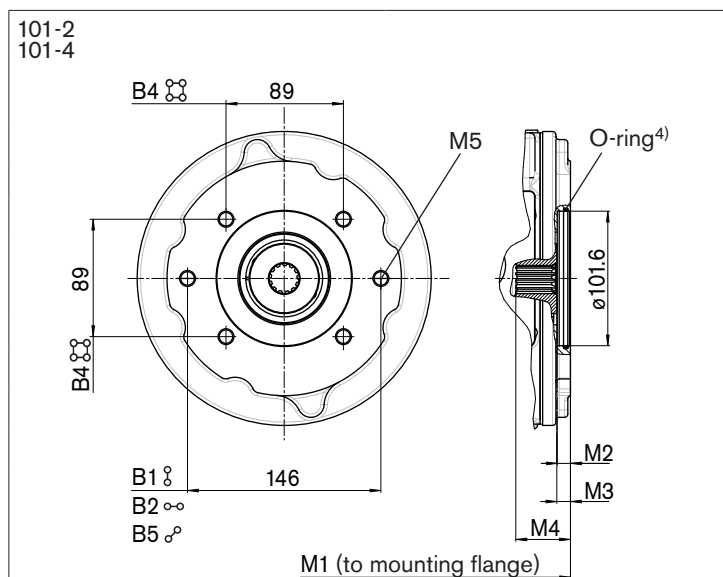


NG	M1 <sup>5)</sup>	M2	M3	M4	M5 <sup>6)</sup>
045-045	412.6	10	15	38	M12 x 1.75; 16 deep
065-065	447.4	10	15	38	
065-045	423.5	10	15	38	

- 1) The through-drive flange is only supplied with the fastening thread corresponding to the ordering code designation.
- 2) Coupling for splined shaft according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 3) Mounting drillings pattern viewed on through drive with control at top
- 4) O-ring included in the delivery contents
- 5) Installation length M1 is valid for standard mounting flange (without integrated boost pump).
- 6) Thread according to DIN 13, observe the general instructions on page 38 for the maximum tightening torques.

# Through drive dimensions

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Flange SAE J744 <sup>1)</sup>			Coupling for splined shaft <sup>2)</sup>					
Diameter	Mounting variant		Diameter	Designation		045	065	
	Symbol <sup>3)</sup>	Designation						
127-2 (C)	⊗	C1	1 in	15T 16/32DP	S5	○	○	<b>C1S5</b>
			1 1/4 in	14T 12/24DP	S7	-	○	<b>C1S7</b>
	∞	C2	1 in	15T 16/32DP	S5	○	○	<b>C2S5</b>
			1 1/4 in	14T 12/24DP	S7	-	○	<b>C2S7</b>
	⊘	C5	1 in	15T 16/32DP	S5	○	○	<b>C5S5</b>
			1 1/4 in	14T 12/24DP	S7	-	○	<b>C5S7</b>
127-4 (C)	⊗	C4	1 in	15T 16/32DP	S5	○	○	<b>C4S5</b>
			1 1/4 in	14T 12/24DP	S7	-	○	<b>C4S7</b>

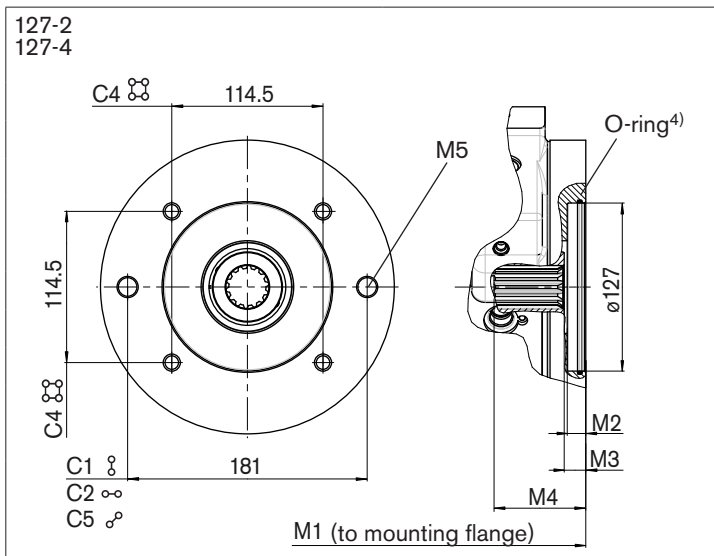

NG	M1 <sup>5)</sup>	M2	M3	M4
045-045	427.6	14	13	53
065-065	462.4	14	13	53
065-045	438.5	14	13	53

M5 <sup>6)</sup>	2-hole	4-hole
045-045	M16 x 2;	M12 x 1.75;
065-065	19 deep	19 deep
065-045		

- 1) The through-drive flange is only supplied with the fastening thread corresponding to the ordering code designation.
- 2) Coupling for splined shaft according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 3) Mounting drillings pattern viewed on through drive with control at top
- 4) O-ring included in the delivery contents
- 5) Installation length M1 is valid for standard mounting flange (without integrated boost pump).
- 6) Thread according to DIN 13, observe the general instructions on page 38 for the maximum tightening torques.

## Overview of mounting options

Through drive <sup>1)</sup>			Mounting option – additional pump						
Flange	Coupling for splined shaft	Short code	A4VG/40 NG (shaft)	A4VG/32 NG (shaft)	A10VG NG (shaft)	A10VO/31 NG (shaft)	A10VO/53 NG (shaft)	A11VO NG (shaft)	External gear pump <sup>2)</sup>
82-2 (A)	5/8 in	<b>A_S2</b>	–	–	–	18 (U)	10 (U)	–	Series F Size 4 to 22
	3/4 in	<b>A_S3</b>	–	–	–	18 (S, R)	10 (S) 18 (S, R)	–	–
101-2 (B)	7/8 in	<b>B_S4</b>	–	–	18 (S)	28 (S, R) 45 (U, W)	28 (S, R) 45 (U, W)	–	Series N Size 20 to 36 Series G Size 32 to 50
	1 in	<b>B_S5</b>	–	28 (S)	28,45 (S)	45 (S, R)	45 (S,R) 60 (U,W)	40 (S)	–
101-4 (B)	7/8 in	<b>B4S4</b>	–	–	–	–	–	–	–
	1 in	<b>B4S5</b>	–	–	–	–	–	–	–
127-2 (C)	1 in	<b>C_S5</b>	–	40 (U)	–	71 (U, W)	–	–	–
	1 1/4 in	<b>C_S7</b>	45 (S7) 65 (S7)	40, 56, 71 (S)	63 (S)	71 (S,R) 100 (U,W)	85 (U, W)	60 (S)	–
127-4 (C)	1 1/4 in	<b>C4S7</b>	65 (S7)	71 (S)	–	–	60 (S, R)	–	–

1) Availability of the individual sizes, see ordering code on page 4.

2) Bosch Rexroth recommends special versions of the gear pumps. Please contact us.

## Pressure cut-off

The pressure cut-off is a pressure control which, after reaching the set pressure, adjusts the displacement of the pump back to  $V_{g \text{ min}}$ .


This valve prevents the operation of the high-pressure relief valves when accelerating or decelerating.

The high-pressure relief valves protect against the pressure spikes which occur during fast swiveling of the swashplate and limit the maximum pressure in the system.


The setting range of the pressure cut-off may be anywhere within the entire operating pressure range. However, it must be set 30 bar lower than the setting of the high-pressure relief valves (see setting diagram, page 30).

Please state the setting value of the pressure cut-off in plain text when ordering.

### Schematic with pressure cut-off Example: electric control, EP\_D

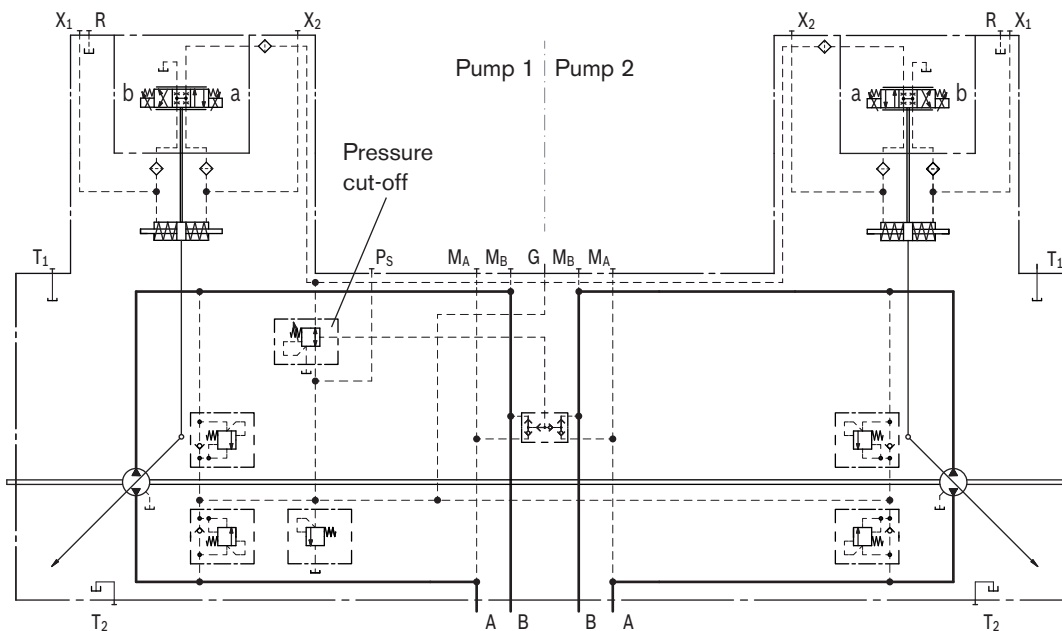

### Schematic without pressure cut-off

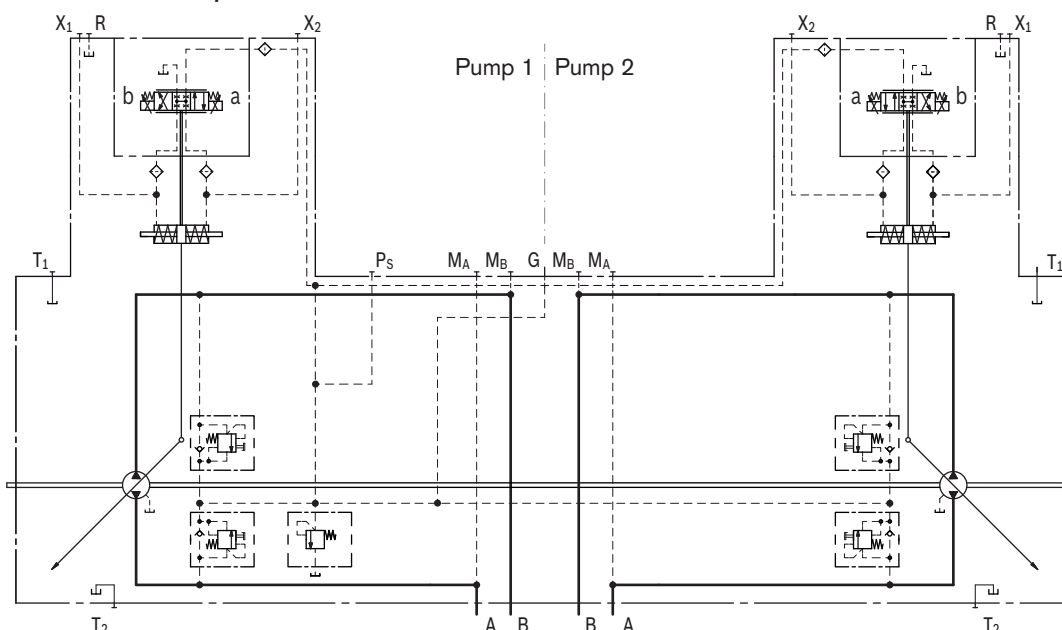

Illustrations with service line ports on left side


# High-pressure relief valves

The four high-pressure relief valves protect the hydrostatic transmission (pump and motor) from overload. They limit the maximum pressure in the respective high-pressure line and serve simultaneously as boost valves.

High-pressure relief valves are not working valves and are only suitable for pressure spikes or high rates of pressure change.

## Setting diagram

Version without pressure cut-off

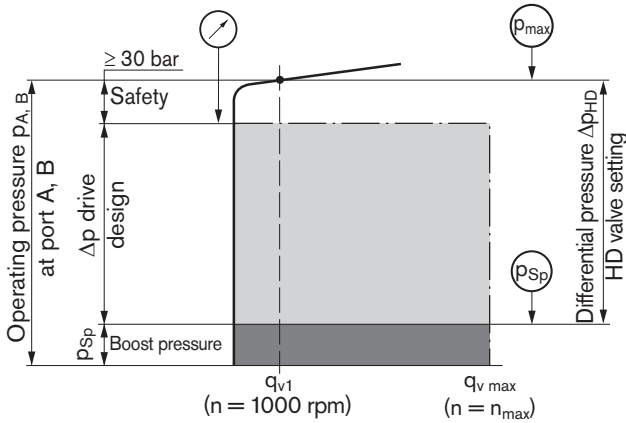


Example:

Operating pressure  $p_{A,B}$  \_\_\_\_\_ 450 bar  
 Boost pressure  $p_{Sp}$  \_\_\_\_\_ 20 bar  
 Differential pressure  $\Delta p_{HD}$  \_\_\_\_\_ 430 bar

$$p_{A,B} - p_{Sp} = \Delta p_{HD}$$

$$450 \text{ bar} - 20 \text{ bar} = \mathbf{430 \text{ bar}}$$

Version with pressure cut-off

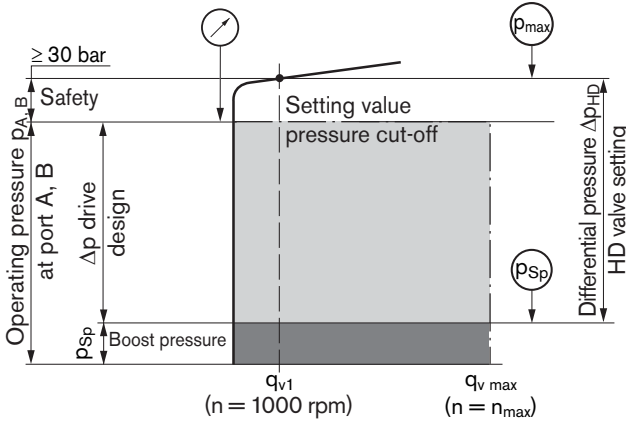

Example:

Operating pressure  $p_{A,B}$  \_\_\_\_\_ 450 bar  
 Boost pressure  $p_{Sp}$  \_\_\_\_\_ 20 bar  
 Differential pressure  $\Delta p_{HD}$  \_\_\_\_\_ 460 bar

$$p_{A,B} - p_{Sp} + \text{Safety} = \Delta p_{HD}$$

$$450 \text{ bar} - 20 \text{ bar} + 30 \text{ bar} = \mathbf{460 \text{ bar}}$$

## When ordering, state differential pressure setting in plain text:

The following values are available for selection of the differential pressure setting (fixed setting):

Preferred values [bar]: 400, 410, 420, 430, 440, 450, 460, 470

Optional values [bar]: 300, 320, 340, 360, 380

If not specified in the order, valves will be set to the differential pressure  $\Delta p = 420$  bar.

## High-pressure relief valve A

Differential pressure setting \_\_\_\_\_  $\Delta p_{HD} = \dots$  bar

Cracking pressure of the HD valve (at  $q_{v1}$ ) \_\_\_\_\_  $p_{max} = \dots$  bar  
 ( $p_{max} = \Delta p_{HD} + p_{Sp}$ )

## High-pressure relief valve B

Differential pressure setting \_\_\_\_\_  $\Delta p_{HD} = \dots$  bar


Cracking pressure of the HD valve (at  $q_{v1}$ ) \_\_\_\_\_  $p_{max} = \dots$  bar  
 ( $p_{max} = \Delta p_{HD} + p_{Sp}$ )

## Note

The valve settings are made at  $n = 1000$  rpm and at  $V_{g max} (q_{v1})$ . There may be deviations in the cracking pressures with other operating parameters.

## Schematic

Illustration with service line ports on left side

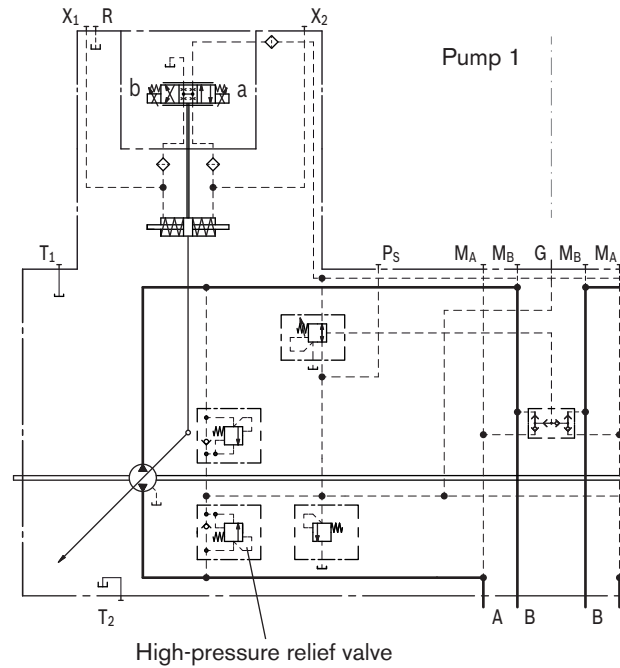




# Mechanical stroke limiter

The mechanical stroke limiter is an auxiliary function allowing the maximum displacement of the pump to be steplessly reduced, regardless of the control module used.

With two threaded pins per pump, the stroke of the stroke piston and thus the maximum swivel angle of each pump is limited.


### Dimensions

NG	M1	M2	M3	M4
045-045	285.4	119.6	26.1	143
065-065	296.3	130.6	26.1	143
065-045	296.3	130.6	26.1	143

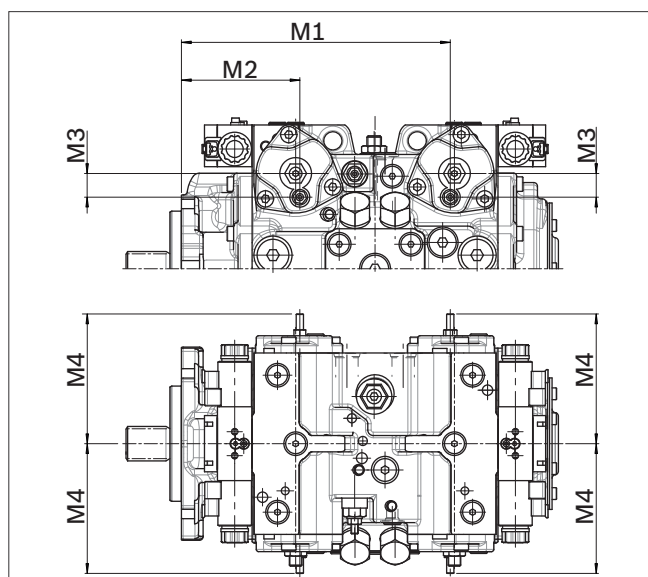

### Schematic


Illustration with service line ports on left side

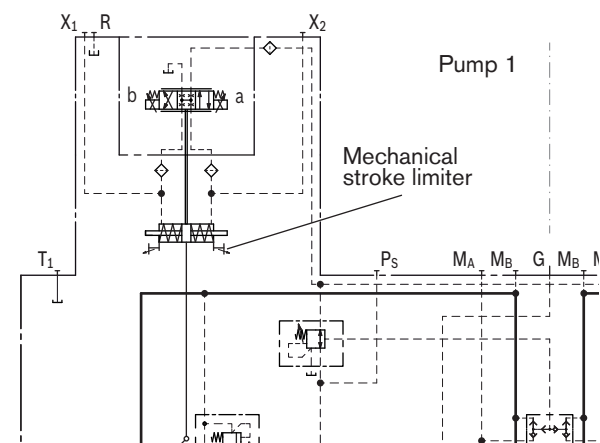

# Ports X<sub>3</sub> and X<sub>4</sub> for stroking chamber pressure


### Dimensions

NG	T1	T2	T3	T4	T5
045-045	316.8	136.8	18.3	117	9.7
065-065	327.7	147.7	18.3	117	9.7
065-045	327.7	147.7	18.3	117	9.7

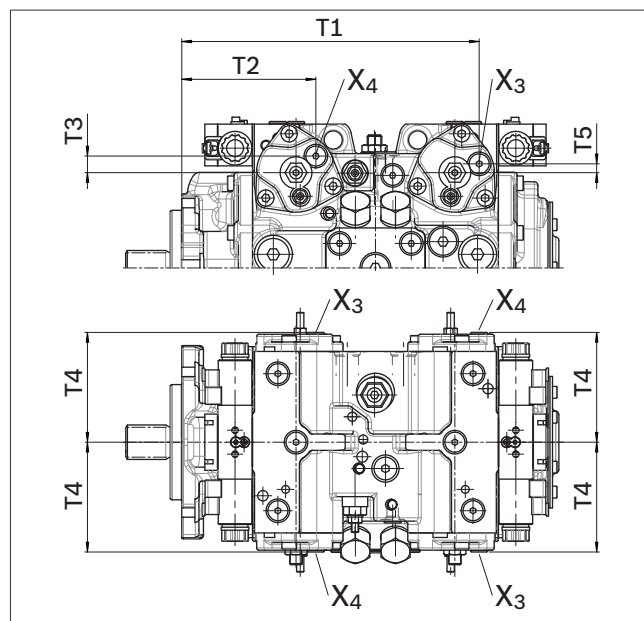

### Schematic

Illustration with service line ports on left side

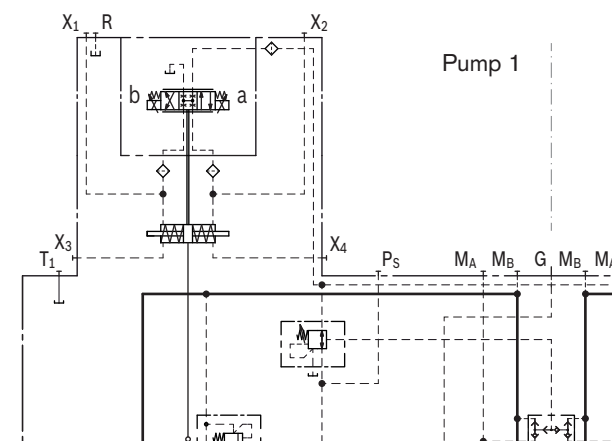

Designation	Port for	Standard <sup>1)</sup>	Size <sup>2)</sup>	Maximum pressure [bar] <sup>3)</sup>	State <sup>4)</sup>	
					Pump 1	Pump 2
X <sub>3</sub> , X <sub>4</sub>	Stroking chamber pressure	ISO 6149	M14 x 1.5; 11.5 deep	40	X	X

- 1) The spot face can be deeper than specified in the appropriate standard.
- 2) Observe the general instructions on page 38 for the maximum tightening torques.
- 3) Momentary pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.
- 4) X = Plugged (in normal operation)

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

# Filtration boost circuit / external supply

## Version E

### External supply

This variation should be used in versions **without** integrated boost pump.


Supply comes from port G.

Filter arrangement \_\_\_\_\_ separate

To ensure the functional reliability, maintain the required cleanliness level for the boost fluid fed in at port G (see page 7).

### Schematic version E

Illustration shows service line ports on left side

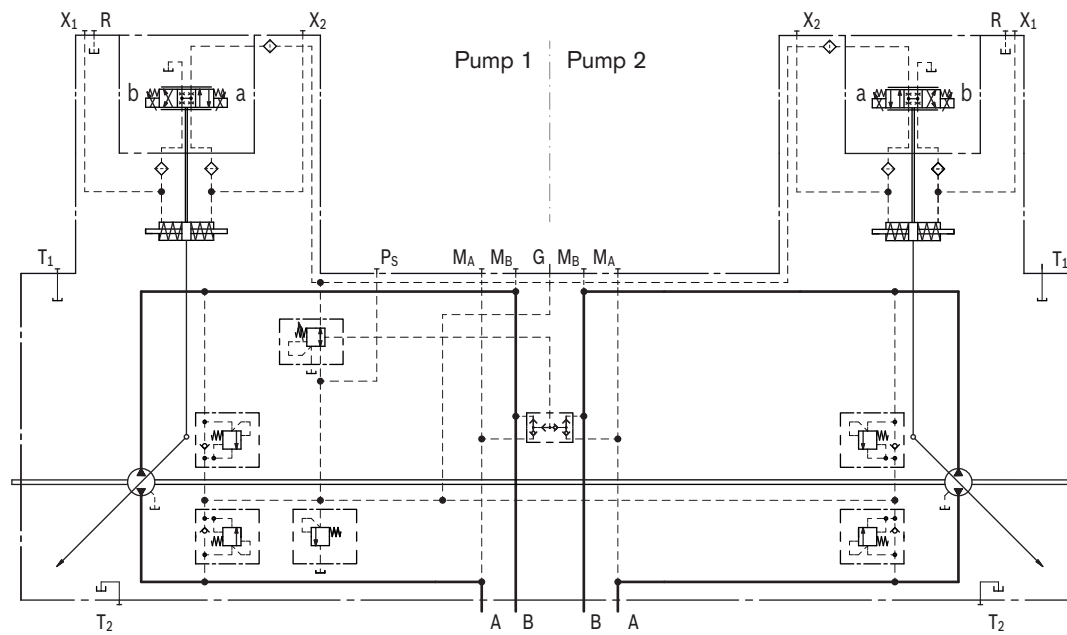

## Connector for solenoids

### DEUTSCH DT04-2P-EP04


Molded , 2-pin, without bidirectional suppressor diode

There is the following type of protection with mounted mating connector:

IP67 \_\_\_\_\_ DIN/EN 60529

and IP69K \_\_\_\_\_ DIN 40050-9

#### Circuit symbol



#### Mating connector

DEUTSCH DT06-2S-EP04

Bosch Rexroth Mat. No. R902601804


Consisting of: \_\_\_\_\_ DT designation

– 1 housing \_\_\_\_\_ DT06-2S-EP04

– 1 wedge \_\_\_\_\_ W2S

– 2 sockets \_\_\_\_\_ 0462-201-16141

The mating connector is not included in the delivery contents. This can be supplied by Bosch Rexroth on request.

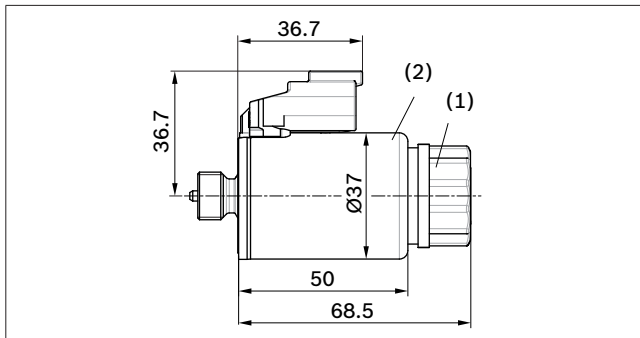

#### Changing connector orientation

If necessary, you can change the connector orientation by turning the solenoid housing.

To do this, proceed as follows:

1. Loosen the mounting nut (1) of the solenoid. To do this, turn the mounting nut (1) one turn counter-clockwise.
2. Turn the solenoid body (2) to the desired orientation.
3. Retighten the mounting nut. Tightening torque: 5+1 Nm. (size WAF 26, 12kt DIN 3124)

On delivery, the connector orientation may differ from that shown in the brochure or drawing.

Before finalizing your design, request a binding installation drawing. Dimensions in mm.


## Speed sensor

With the speed sensor DSA mounted, a signal proportional to pump speed can be generated. The DSA sensor measures the speed and direction of rotation.

Ordering code, technical data, dimensions and details on the connector, plus safety instructions about the sensor can be found in the relevant data sheet (DSA – RE 95133).

The sensor is mounted on the port provided for this purpose with a mounting bolt.

#### Dimensions

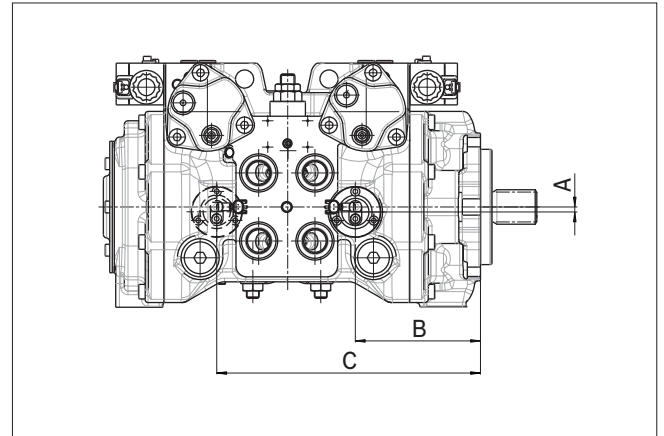

#### Service line ports on left side

NG	A	B	Number of teeth
045-045	5.5	127	32
065-065	5.5	137.9	45
065-045	5.5	137.9	45

#### Service line ports on right side

NG	A	C	Number of teeth
045-045	5.5	278	32
065-065	5.5	288.9	45
065-045	5.5	288.9	32

# Swivel angle sensor

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

For the swivel angle indicator, the pump swivel angle is measured by an electric swivel angle sensor.

As an output parameter, the Hall-effect swivel angle sensor delivers a voltage proportional to the swivel angle (see table of output voltages).

Please contact us if the swivel angle sensor is used for control.


Characteristics	
Supply voltage $U_b$	10 to 30 V DC
Output voltage $U_a$	1 V ( $V_{g\ max}$ )    2.5 V ( $V_{g\ 0}$ )    4 V ( $V_{g\ max}$ )
Reverse voltage protection	Short circuit-resistant
EMC resistance	Details on request
Operating temperature range	-40 °C to +115 °C
Vibration resistance sinusoidal vibration EN 60068-2-6	10 g / 5 to 2000 Hz
Shock resistance continuous shock IEC 68-2-29	25 g
Resistance to salt spray DIN 50 021-SS	96 h
Type of protection with mounted mating connector	IP67 – DIN/EN 60529 IP69K – DIN 40050-9
Housing material	Plastic

## Output voltage

	Flow direction <sup>1)</sup>	Operating pressure	Output voltage
Direction of rotation CW	B to A	$M_A$	> 2.5 V
	A to B	$M_B$	< 2.5 V
Direction of rotation CCW	A to B	$M_B$	> 2.5 V
	B to A	$M_A$	< 2.5 V

1) For flow direction, see controls

## Dimensions

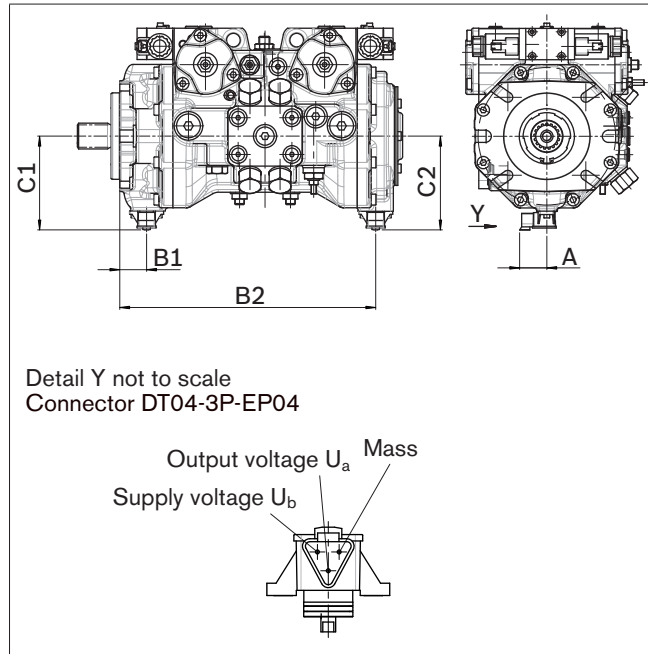

NG	A	B1	B2	C1	C2
045-045	37	35.9	325.2	134.8	134.8
065-065	37	39.4	348	134.8	134.8
065-045	37	39.4	336.6	134.8	134.8

## Mating connector


DEUTSCH DT06-3S-EP04  
Bosch Rexroth Mat. No. R902603524

- Consisting of:
- 1 housing \_\_\_\_\_ DT designation
  - 1 wedge \_\_\_\_\_ W3S
  - 3 sockets \_\_\_\_\_ 0462-201-16141

The mating connector is not included in the delivery contents. This can be supplied by Bosch Rexroth on request.

## Schematic

Illustration with service line ports on left side

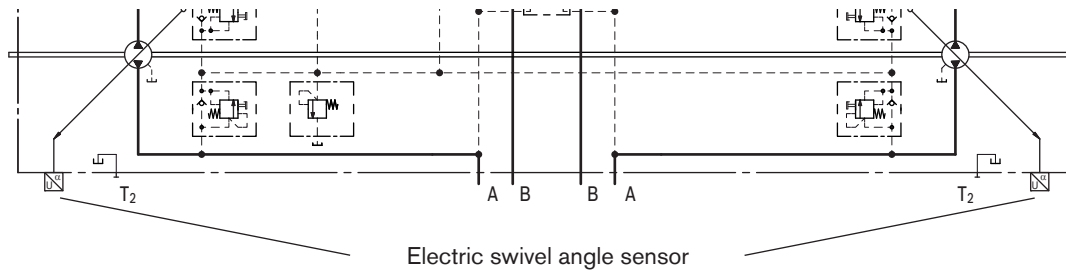


## Installation dimensions for coupling assembly

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

To ensure that rotating components (coupling hub) and fixed components (housing, circlip) do not come into contact with each other, the installation conditions described here must be observed. This depends on the pump size and the splined shaft.

**SAE splined shaft** (spline according to ANSI B92.1a)

The outer diameter of the shoulder on coupling hub must be smaller than the inner diameter of the circlip  $d_2$  in the area near the drive shaft collar (dimension  $x_2 - x_3$ ).

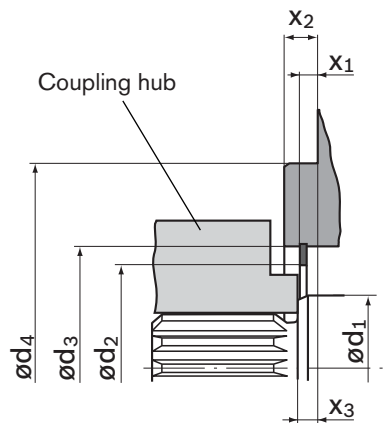

NG	Mounting flange	$\phi d_1$	$\phi d_{2 \text{ min}}$	$\phi d_3$	$\phi d_4$	$x_1$	$x_2$	$x_3$ (approx.)
45	127-2 (C)	45	50.5	$73 \pm 0.1$	127	0.1	$12.7_{-0.5}$	8
65	127-2/4 (C)	45	58.5	$81 \pm 0.1$	127	6.4	$12.7_{-0.5}$	8

# Installation instructions

## General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This must also be observed following a relatively long standstill as the axial piston unit may drain back to the reservoir via the hydraulic lines.

The case drain fluid in the pump housing must be directed to the reservoir via the highest available drain port ( $T_1$ ,  $T_2$ ).

For combinations of multiple units, make sure that the respective case pressure in each unit is not exceeded. In the event of pressure differences at the drain ports of the units, the shared drain line must be changed so that the minimum permissible case pressure of all connected units is not exceeded in any situation. If this is not possible, separate drain lines must be laid if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the drain line must flow into the reservoir below the minimum fluid level.

## Connection of the drain line

Besides the actual case drain fluid, an additional cooling fluid flow is needed in the housing for lubricating and cooling the rotary group in the housing. To guarantee the flushing of both rotary groups, the connection specifications for the T-ports must be observed.

**Internal flushing:** If the integrated boost pressure valve is used, internal flushing is guaranteed.

**External flushing:** If the boost pressure is backed up with an external pressure-relief valve, external flushing of the pump housing via the T-ports will be necessary.

	Internal flushing	External flushing
Threaded ports A and B, on left side (viewed on drive shaft)		
Threaded ports A and B, on right side (viewed on drive shaft)		

# Installation instructions

## Installation position

See the following examples 1 to 8  
Further installation positions are possible upon request.


Recommended installation position: 1

### Notes

- If it is not possible to fill the stroking chambers via X<sub>1</sub> to X<sub>4</sub> in the final installation position, this must be done prior to installation.
- To prevent unexpected actuation and damage, the stroking chambers must be bled via the ports X<sub>1</sub>, X<sub>2</sub> or X<sub>3</sub>, X<sub>4</sub> depending on the installation position.
- In certain installation positions, an influence on the control characteristics can be expected. Gravity, dead weight and case pressure can cause minor shifts in control characteristics and changes in response time.

### Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.

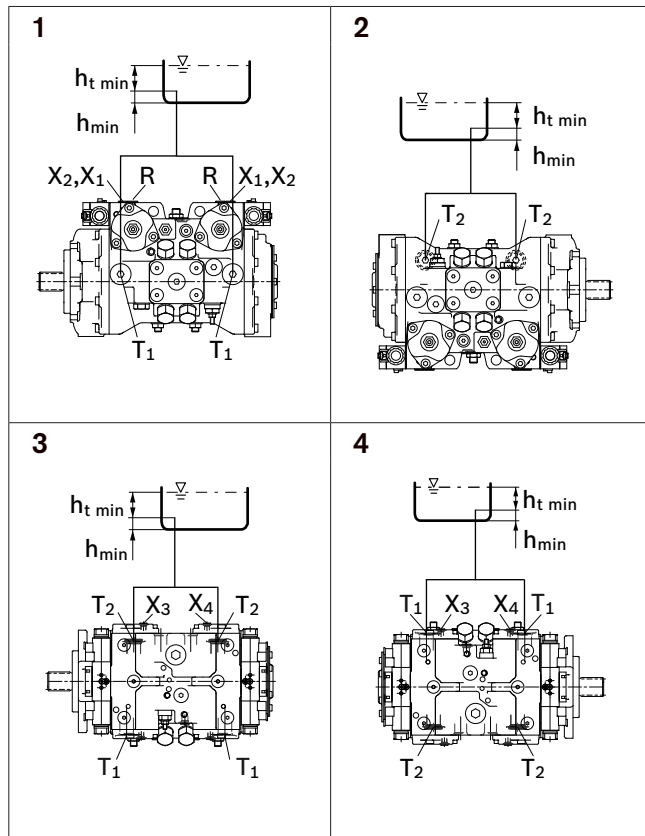


Installation position	Bleeding the case	Bleeding the stroking chamber	Filling
1	R	X <sub>1</sub> , X <sub>2</sub>	T <sub>1</sub> + X <sub>1</sub> + X <sub>2</sub>
2	-	-	T <sub>2</sub>
3	-	X <sub>3</sub> , X <sub>4</sub>	T <sub>2</sub> + X <sub>3</sub> + X <sub>4</sub>
4	-	X <sub>3</sub> , X <sub>4</sub>	T <sub>1</sub> + X <sub>3</sub> + X <sub>4</sub>

Note instructions!

### Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir.

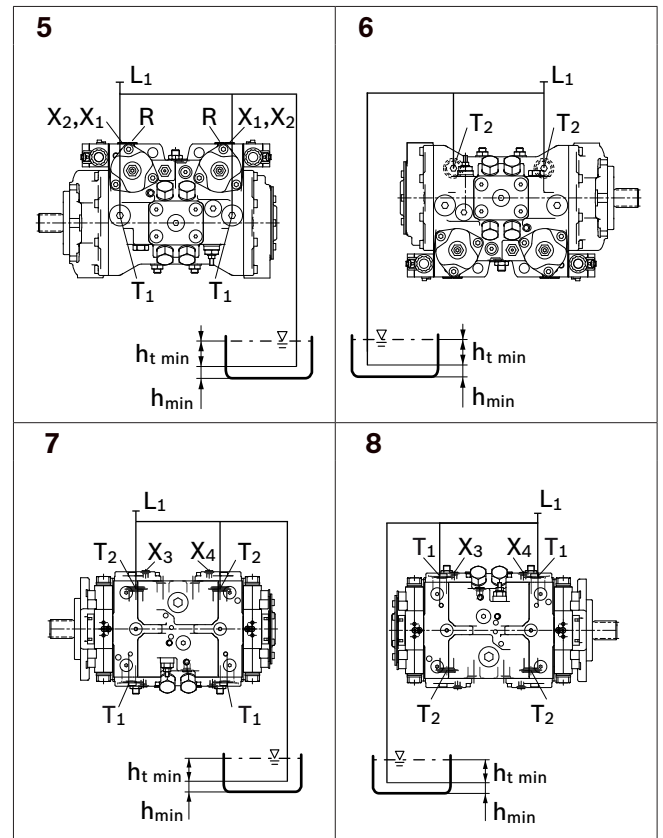

Installation position	Bleeding the case	Bleeding the stroking chamber	Filling
5	R	X <sub>1</sub> , X <sub>2</sub>	L <sub>1</sub> + X <sub>1</sub> + X <sub>2</sub>
6	L <sub>1</sub> (T <sub>2</sub> )	-	L <sub>1</sub> (T <sub>2</sub> )
7	L <sub>1</sub> (T <sub>2</sub> )	X <sub>3</sub> , X <sub>4</sub>	L <sub>1</sub> (T <sub>2</sub> ) + X <sub>3</sub> + X <sub>4</sub>
8	L <sub>1</sub> (T <sub>1</sub> )	X <sub>3</sub> , X <sub>4</sub>	L <sub>1</sub> (T <sub>1</sub> ) + X <sub>3</sub> + X <sub>4</sub>

Note instructions!

- L<sub>1</sub>, L<sub>2</sub> Filling / air bleed
- R Air bleed port
- T<sub>1</sub>, T<sub>2</sub> Drain port
- h<sub>t min</sub> Minimum required immersion depth (200 mm)
- h<sub>min</sub> Minimum required spacing to reservoir bottom (100 mm)

## General instructions

- The pump A24VG is designed to be used in closed circuit.
- The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified personnel.
- Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Bosch Rexroth.
- During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e. g. by wearing protective clothing).
- Depending on the operating conditions of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- Service line ports:
  - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The service line ports and function ports can only be used to accommodate hydraulic lines.
- The data and notes contained herein must be adhered to.
- The product is not approved as a component for the safety concept of a general machine according to ISO 13849.
- The following tightening torques apply:
  - Fittings:
    - Observe the manufacturer's instruction regarding tightening torques for the used fittings.
  - Mounting bolts:
    - For mounting bolts with metric ISO thread according to DIN 13 or with thread according to ASME B1.1, we recommend checking the tightening torque in individual cases in accordance with VDI 2230.
  - Female threads in the axial piston unit:
    - The maximum permissible tightening torques  $M_{G \max}$  are maximum values of the female threads and must not be exceeded. For values, see the following table.
  - Threaded plugs:
    - For the metallic threaded plugs supplied with the axial piston unit, the required tightening torques of threaded plugs  $M_V$  apply. For values, see the following table.

Ports		Maximum permissible tightening torque of the female threads $M_{G \max}$	Required tightening torque of the threaded plugs $M_V$	WAF hexagon socket of the threaded plugs
Standard	Size of thread			
ISO 6149	M14 x 1.5	80 Nm	45 Nm	6 mm
	M18 x 1.5	140 Nm	70 Nm	8 mm
	M22 x 1.5	210 Nm	100 Nm	10 mm
	M27 x 2	330 Nm	170 Nm	12 mm

Bosch Rexroth AG  
 Mobile Applications  
 GlockeraustraÙe 4  
 89275 Elchingen, Germany  
 Tel. +49 7308 82-0  
 Fax +49 7308 7274  
 info.brm@boschrexroth.de  
 www.boschrexroth.com/axial-piston-pumps

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Subject to change.



# 2-Circuit Axial Piston Variable Pump A30VG

**RE 93430/06.09** 1/20  
Replaces: 04.08

## Data sheet

Series 10  
Size NG28  
Nominal pressure 300 bar  
Maximum pressure 350 bar  
Closed circuit



## Contents

Ordering code for standard program	2
Technical data	4
HW – Proportional control hydraulic, mechanical servo	9
EP – Proportional control electric	10
Connector for solenoids	11
DA control valve	11
Dimensions size 28	12
Through drive dimensions	14
Overview of attachments	15
High-pressure relief valves	16
Installation situation for coupling assembly	16
Mechanical stroke limiter	17
Ports X <sub>3</sub> and X <sub>4</sub> for stroking chamber pressure	17
Filtration boost circuit / external supply	18
Installation instructions	19
General instructions	20

## Features

- Compact 2-circuit variable pump of swashplate design for hydrostatic drives in closed circuit
- Two equal flows from one pump to supply two separate circuits
- All functions needed to achieve a differential lock effect are integrated in the pump.
- The flow increases as the angle of the swashplate is adjusted from zero to its maximum value.
- A wide range of highly adaptable control devices with different control and regulating functions, for all important applications.
- Single control for both circuits
- Two pressure-relief valves are provided on the high pressure ports to protect the hydrostatic transmission (pump and motor) from overload.
- The high-pressure relief valves also function as boost valves.
- The integrated boost pump acts as a feed pump and control pressure supply.
- The maximum boost pressure is limited by a built-in boost pressure-relief valve.
- All types of hydraulic motor can be used as drive units
- Short, compact design makes installation and wiring easier in tight spaces

# Ordering code for standard program

<b>A30V</b>	<b>G</b>	<b>028</b>			<b>0</b>			/	<b>10</b>	<b>M</b>		-	<b>N</b>	<b>C2</b>		<b>1</b>					
01	02	03	04	05	06	07	08		09	10	11		12	13	14	15	16	17	18	19	20

## Axial piston unit

01	Swashplate design, variable, nominal pressure 300 bar, maximum pressure 350 bar															<b>A30V</b>
----	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	-------------

## Operation mode

02	Pump, closed circuit															<b>G</b>
----	----------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----------

## Size

03	Displacement $V_{g,max}$ in $cm^3$															<b>028</b>
----	------------------------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	------------

## Control device

028

04	Proportional control hydraulic	mechanical servo, hexagon shaft with lever	●	<b>HW1</b>
	Proportional control electric, with supply filtration	U = 12 V DC	●	<b>EP3</b>
		U = 24 V DC	●	<b>EP4</b>

## Connector for solenoids<sup>1)</sup>

05	Without	<b>0</b>
	DEUTSCH - molded connector, 2-pin – without suppressor diode	<b>P</b>

## Auxiliary function 1

06	Without	<b>0</b>
----	---------	----------

## Auxiliary function 2

07	Without	<b>0</b>
	With mechanical stroke limiter, externally adjustable	<b>M</b>
	With ports X <sub>3</sub> , X <sub>4</sub> for stroking chamber pressure	<b>T</b>
	With mechanical stroke limiter and ports X <sub>3</sub> , X <sub>4</sub>	<b>B</b>

## DA control valve

HW EP

08	Without	●	●	<b>0</b>
	With DA control valve, fixed setting	○	○	<b>1</b>

## Series

09	Series 1, Index 0	<b>10</b>
----	-------------------	-----------

## Version of port and fixing threads

10	Metric	<b>M</b>
----	--------	----------

## Direction of rotation

11	Viewed from drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

## Seals

12	NBR (nitrile-caoutchouc), shaft seal ring in FKM (fluor-caoutchouc)	<b>N</b>
----	---	----------

## Mounting flange

13	SAE J744	127-2 (C)	<b>C2</b>
----	----------	-----------	-----------

● = Available      ○ = On request

<sup>1)</sup> Connectors for other electric components can deviate.

## Ordering code for standard program

<b>A30V</b>	<b>G</b>	<b>028</b>							/	<b>10</b>	<b>M</b>		-	<b>N</b>	<b>C2</b>		<b>1</b>					
01	02	03	04	05	06	07	08			09	10	11		12	13	14	15	16	17	18	19	20

### Drive shaft

14	Splined shaft ANSI B92.1a-1976	1 1/4 in 14T 12/24DP	<b>S7</b>
		1 3/8 in 21T 16/32DP	<b>V8</b>

### Service line ports

15	Circuit 1: double SAE flange port, left; Circuit 2: single SAE flange port at top and bottom; suction port at bottom (viewed from drive shaft)	<b>1</b>
----	---	----------

### Boost pump

16	With integrated boost pump (standard)	<b>F</b>
	Without integrated boost pump (no pressure filtration possible)	<b>U</b>

### Through drive

	Flange SAE J744		Coupling for splined shaft <sup>2)</sup>			
	Diameter	Mounting variant Symbol    Designation	Diameter	Designation		
17	Without					<b>0000</b>
	82-2 (A)	∞	A1	5/8 in 9T	16/32DP S2	<b>A1S2</b>
			A2	5/8 in 9T	16/32DP S2	<b>A2S2</b>
	101-2 (B)	∞	B1	7/8 in 13T	16/32DP S4	<b>B1S4</b>
				1 in 15T	16/32DP S5	<b>B1S5</b>
		∞	B2	7/8 in 13T	16/32DP S4	<b>B2S4</b>
				1 in 15T	16/32DP S5	<b>B2S5</b>
	127-2 (C)	∞	C2	1 1/4 in 14T	12/24DP S7	<b>C2S7</b>

### High-pressure valves

18	With high-pressure relief valve, direct controlled	without bypass	<b>3</b>
		with bypass	<b>5</b>

### Filtration boost circuit / external supply

19	Filtration in the boost pump suction line	<b>S</b>
	Filtration in the boost pump pressure line: Ports for external boost circuit filtration (F <sub>e</sub> and F <sub>a</sub> )	<b>D</b>
	External supply (on version without integrated boost pump)	<b>E</b>

### Standard / special version

20	Standard version		<b>-O</b>
		combined with attachment part or attachment pump	<b>-K</b>
	Special version		<b>-S</b>
		combined with attachment part or attachment pump	<b>-T</b>

### Note

Short designation X refers to a special version not covered by the ordering code.

● = Available      ○ = On request

2) Coupling for splined shaft acc. to ANSI B92.1a-1976

# Technical data


## Hydraulic fluid

Before starting project planning, please refer to our data sheets RE 90220 (mineral oil) and RE 90221 (environmentally acceptable hydraulic fluids) for detailed information regarding the choice of hydraulic fluid and application conditions.

The variable pump A30VG is not suitable for operation with HFA, HFB and HFC. If HFD or environmentally acceptable hydraulic fluids are being used, the limitations regarding technical data and seals must be observed. Please contact us.

When ordering, indicate the hydraulic fluid that is to be used.

### Selection diagram

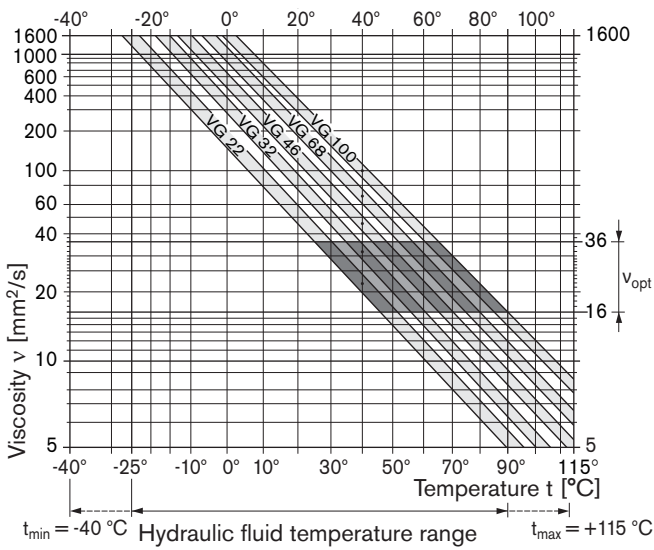

### Details regarding the choice of hydraulic fluid

The correct choice of hydraulic fluid requires knowledge of the operating temperature in relation to the ambient temperature: in a closed circuit the circuit temperature.

The hydraulic fluid should be chosen so that the operating viscosity in the operating temperature range is within the optimum range ( $v_{opt}$ ), see shaded area of the selection diagram. We recommended that the higher viscosity class be selected in each case.

Example: At an ambient temperature of X °C, an operating temperature of 60 °C is set in the circuit. In the optimum operating viscosity range ( $v_{opt}$ , shaded area), this corresponds to the viscosity classes VG 46 or VG 68; to be selected: VG 68.

### Note

The case drain temperature, which is affected by pressure and speed, is always higher than the circuit temperature. At no point of the component may the temperature be higher than 115 °C, however. The temperature difference specified below is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact us.

### Viscosity and temperature

	Viscosity [mm <sup>2</sup> /s]	Temperature	Comment
Storage		$T_{min} \geq -50 \text{ °C}$ $T_{opt} = +5 \text{ °C to } +20 \text{ °C}$	up to 12 months with standard factory conservation up to 24 months with long-term factory conservation
(Cold) start-up <sup>1)</sup>	$v_{max} = 1600$	$T_{St} \geq -40 \text{ °C}$ $\Delta T \leq 25 \text{ K}$	$t \leq 3 \text{ min}$ , without load ( $p \leq 50 \text{ bar}$ ), $n \leq 1000 \text{ rpm}$ between axial piston unit and hydraulic fluid
Warm-up phase	$v < 1600 \text{ to } 400$	$T = -40 \text{ °C to } -25 \text{ °C}$	at $p_{nom}$ , $0.5 \cdot n_{nom}$ and $t \leq 15 \text{ min}$
Operating phase		$\Delta T = \text{approx. } 5 \text{ K}$	The temperature of the hydraulic fluid in the bearing is (depending on pressure and speed) approx. 5 K higher than that of the case drain fluid at port T.
Continuous operation	$v = 400 \text{ to } 10$ $v_{opt} = 16 \text{ to } 36$	$T = -25 \text{ °C to } +90 \text{ °C}$	no restriction within the permissible data
Short-term operation	$v_{min} = < 10 \text{ to } 5$	$T_{max} = +115 \text{ °C}$	$t < 3 \text{ min}$ , $p < 0.3 \cdot p_{nom}$
Shaft seal ring FKM <sup>1)</sup>		$T \leq +115 \text{ °C}$	See page 5

1) At temperatures below -25°C, an NBR shaft seal ring is required (permissible temperature range: -40 °C to +90 °C).

## Technical data

### Filtration of the hydraulic fluid

Filtration improves the cleanliness level of the hydraulic fluid, which, in turn, increases the service life of the axial piston unit.

To ensure the functional reliability of the axial piston unit, a gravimetric evaluation is necessary for the hydraulic fluid to determine the amount of contamination by solid matter and to determine the cleanliness level according to ISO 4406. A cleanliness level of at least 20/18/15 is to be maintained.

Depending on the system and the application, for the A30VG, we recommend

Filter cartridges  $\beta_{20} \geq 100$ .

With an increasing differential pressure at the filter cartridges, the  $\beta$ -value must not deteriorate.

At very high hydraulic fluid temperatures (90 °C to maximum 115 °C), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.


If the above classes cannot be achieved, please contact us. For notes on filtration types, see page 18.

### Shaft seal ring

#### Permissible pressure loading

The service life of the shaft seal ring is affected by the speed of the pump and the case drain pressure. It is recommended that the average, continuous case drain pressure 3 bar absolute at operating temperature not be exceeded (maximum permissible case drain pressure 6 bar absolute at reduced speed, see diagram). Short-term ( $t < 0.1$  s) pressure spikes of up to 10 bar absolute are permitted. The service life of the shaft seal ring decreases with an increase in the frequency of pressure spikes.

The case pressure must be equal to or greater than the external pressure on the shaft seal ring.

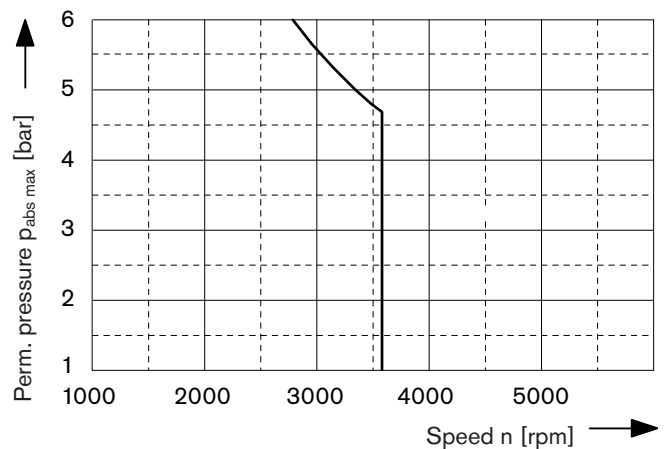

#### Temperature range

The FKM shaft seal ring may be used for case drain temperatures from -25 °C to +115 °C.

#### Note

For application cases below -25 °C, an NBR shaft seal ring is necessary (permissible temperature range: -40 °C to +90 °C). State NBR shaft seal ring in plain text when ordering. Please contact us.

# Technical data

## Operating pressure range

### Pressure at service line port A or B

**Nominal pressure**  $p_{nom}$  \_\_\_\_\_ 300 bar absolute

**Maximum pressure**  $p_{max}$  \_\_\_\_\_ 350 bar absolute


Single operating period \_\_\_\_\_ 10 s

Total operating period \_\_\_\_\_ 300 h

**Minimum pressure (high-pressure side)** \_\_\_\_\_ 25 bar

**Minimum pressure (inlet)** \_\_\_\_\_ 10 bar  
(boost pressure setting must be higher depending on system)

**Rate of pressure change**  $R_{A\ max}$  \_\_\_\_\_ 9000 bar/s

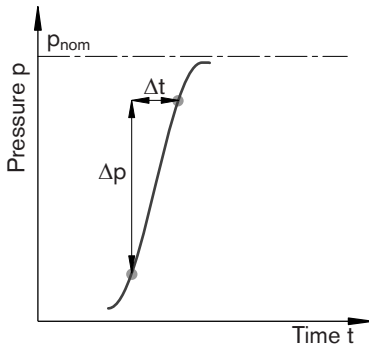

### Boost pump

#### Pressure at suction port S

Duration  $p_{S\ min}$  ( $v \leq 30\ mm^2/s$ ) \_\_\_\_\_  $\geq 0.8$  bar absolute

at cold starts, short-term ( $t < 3\ min$ ) \_\_\_\_\_  $\geq 0.5$  bar absolute

Maximum  $p_{S\ max}$  \_\_\_\_\_  $\leq 5$  bar absolute

**Nominal pressure**  $p_{Sp\ nom}$  \_\_\_\_\_ 25 bar

**Maximum pressure**  $p_{Sp\ max}$  \_\_\_\_\_ 40 bar

### Control pressure

To ensure the function of the control, the following control pressure is required depending on the speed and operating pressure (measurement point, port P<sub>S</sub>):

For controls EP and HW

Minimum control pressure  $p_{St\ min}$  (at  $n = 2000\ rpm$ ) \_\_\_\_\_ 20 bar

## Definition

### Nominal pressure $p_{nom}$

The nominal pressure corresponds to the maximum design pressure.

### Maximum pressure $p_{max}$

The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.

### Minimum pressure (high-pressure side)


Minimum pressure on the high-pressure side (A or B) that is required in order to prevent damage to the axial piston unit.

### Minimum pressure (inlet)

Minimum pressure in inlet (A or B) that is required in order to prevent damage to the axial piston unit.

### Rate of pressure change $R_A$

Maximum permissible rate of pressure build-up and pressure reduction during a pressure change over the entire pressure range.

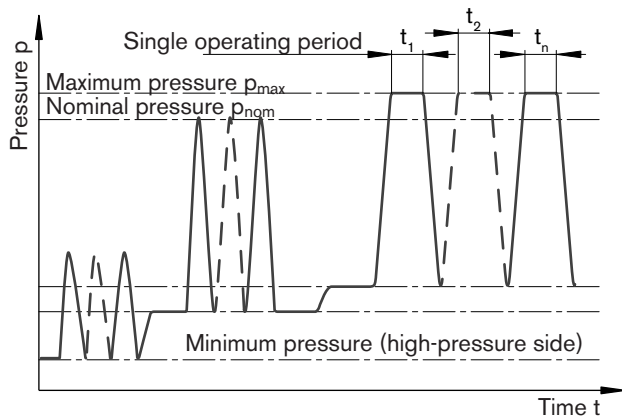

Total operating period =  $t_1 + t_2 + \dots + t_n$

# Technical data

**Table of values** (theoretical values, without efficiency and tolerances; values rounded)

Size	NG		28
Displacement			
variable pump for each circuit	$V_{g \max}$	cm <sup>3</sup>	28
boost pump (at p = 20 bar)	$V_{g \max}$	cm <sup>3</sup>	15.1
Speed			
at $V_{g \max}$	$n_{\text{nom}}$	rpm	3600
minimum	$n_{\text{min}}$	rpm	500
Flow for each circuit			
at $n_{\text{nom}}$ and $V_{g \max}$	$q_{v \max}$	l/min	101
Power <sup>1)</sup>			
at $n_{\text{nom}}$ , $V_{g \max}$ and $\Delta p = 300 \text{ bar}$	$P_{\max}$	kW	101
Torque <sup>1)</sup>			
at $V_{g \max}$ and $\Delta p = 300 \text{ bar}$	$T_{\max}$	Nm	267
at $V_{g \max}$ and $\Delta p = 100 \text{ bar}$	T	Nm	89
Rotary stiffness			
drive shaft S7	c	Nm/rad	89793
drive shaft V8	c	Nm/rad	91445
Moment of inertia for rotary group	$J_{GR}$	kgm <sup>2</sup>	0.0083
Maximum angular acceleration <sup>2)</sup>	$\alpha$	rad/s <sup>2</sup>	16660
Filling capacity	V	L	1.1
Mass approx. (without through drive)	m	kg	51.5

1) Without boost pump

2) The area of validity lies between the minimum required and maximum permissible speed.

It applies for external stimuli (e. g. engine 2 to 8 times rotary frequency, cardan shaft twice the rotary frequency).

The limit value applies for a single pump only.

The load capacity of the connection parts must be considered.

## Note



Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. We recommend testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.

## Determining the size

Flow	$q_v = \frac{V_g \cdot n \cdot \eta_v}{1000}$	[L/min]	$V_g$ = Displacement per revolution in cm <sup>3</sup>
			$\Delta p$ = Differential pressure in bar
Torque	$T = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{mh}}$	[Nm]	n = Speed in rpm
			$\eta_v$ = Volumetric efficiency
Power	$P = \frac{2 \pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t}$	[kW]	$\eta_{mh}$ = Mechanical-hydraulic efficiency
			$\eta_t$ = Total efficiency ( $\eta_t = \eta_v \cdot \eta_{mh}$ )

# Technical data

## Permissible radial and axial loading on drive shaft

Size	NG		28	28	
Drive shaft		in	1 1/4	1 3/8	
Radial force maximum at distance a (from shaft collar)		$F_{q\ max}$	N	4505	7000
		a	mm	24	24
Axial force maximum		$+ F_{ax\ max}$	N	2910	2910
		$- F_{ax\ max}$	N	1490	1490

### Note

Special requirements apply in the case of belt drives. Please contact us.

Force-transfer direction of the permissible axial force:

+  $F_{ax\ max}$  = Increase in service life of bearings

-  $F_{ax\ max}$  = Reduction in service life of bearings (avoid)


## Permissible input and through-drive torques

Size	NG		28		
Torque at $V_{g\ max}$ and $\Delta p = 300\ bar^1$		$T_{max}$	Nm	267	
Input torque at drive shaft, maximum <sup>2)</sup>					
	<b>S7</b>	1 1/4 in	$T_{E\ max}$	Nm	602
	<b>V8</b>	1 3/8 in	$T_{E\ max}$	Nm	970
Maximum through-drive torque		$T_{D\ max}$	Nm	521	

1) Efficiency not considered

2) For drive shafts with no radial force

### Torque distribution

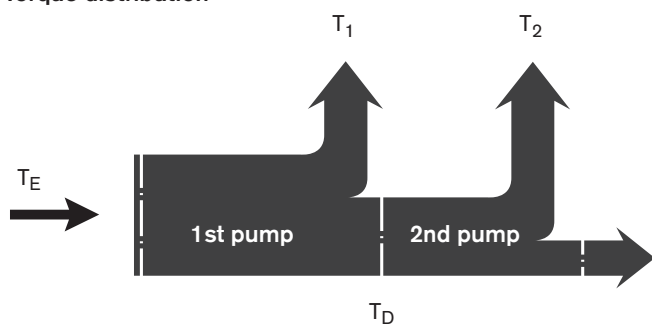




# HW – Proportional control hydraulic, mechanical servo

The output flow of the pump can be steplessly varied in the range between 0 to 100 %, proportional to the rotation of the control lever between 0° and ±29°.

A feedback lever connected to the stroke piston maintains the pump flow for any given position of the control lever between 0° and 29°.

If the pump is also equipped with a DA control valve (see page 11), automotive operation is possible for travel drives.

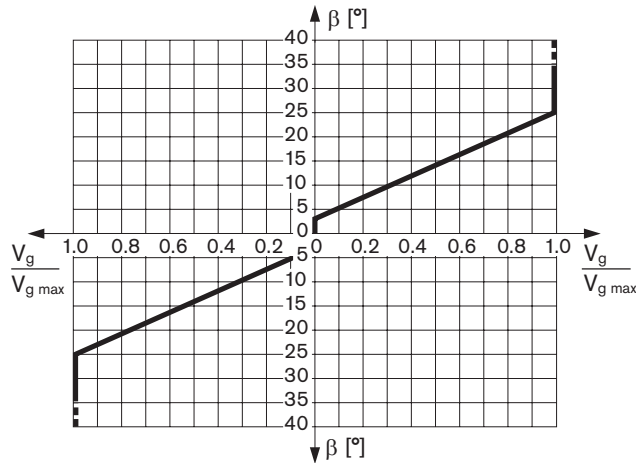

Swivel angle  $\beta$  at the control lever for deflection:

Start of control at  $\beta = 3^\circ$

End of control at  $\beta = 25^\circ$  (max. displacement  $V_{g \max}$ )

Mechanical stop for  $\beta: \pm 40^\circ$


The maximum required torque at the lever is 170 Ncm. To prevent damage to the HW control unit, a positive mechanical stop must be provided for the HW control lever.

**Note**


Spring centering enables the pump, depending on pressure and speed, to move automatically to the neutral position ( $V_g = 0$ ) as soon as there is no longer any torque on the control lever of the HW control unit (regardless of deflection).

**Assignment**

Direction of rotation - Control - Flow direction				
Direction of rotation	Lever direction	Control pressure	Flow direction	Operating pressure
	cw	a	$X_2$	$B_1$ to $A_1$
		$B_2$ to $A_2$		$M_{A2}$
ccw	b	$X_1$	$A_1$ to $B_1$	$M_{B1}$
			$A_2$ to $B_2$	$M_{B2}$
ccw	a	$X_2$	$A_1$ to $B_1$	$M_{B1}$
			$A_2$ to $B_2$	$M_{B2}$
ccw	b	$X_1$	$B_1$ to $A_1$	$M_{A1}$
			$B_2$ to $A_2$	$M_{A2}$

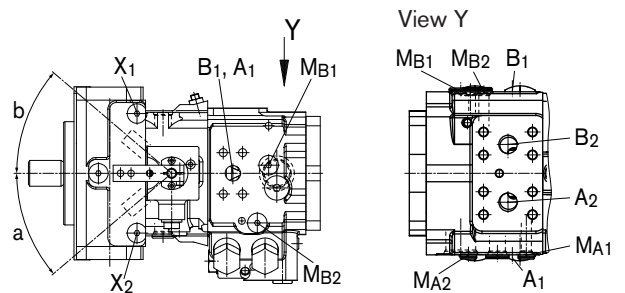

**Circuit diagram**

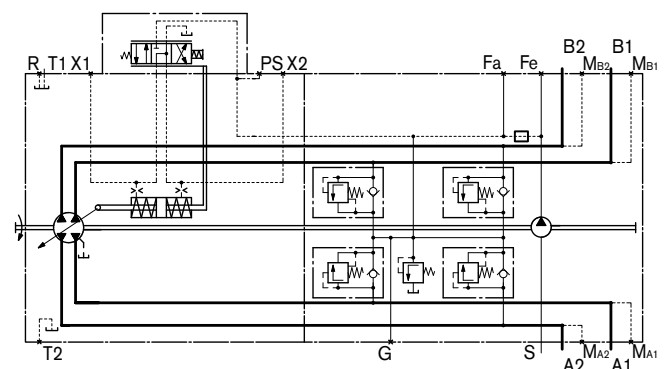


# EP – Proportional control electric

The output flow of the pump can be steplessly varied in the range between 0 to 100 %, proportional to the electrical current supplied to solenoid a or b.

The electrical energy is converted into a force acting on the control piston. This control piston then directs control hydraulic fluid into and out of the stroke cylinder to adjust pump displacement as required.

A feedback lever connected to the stroke piston maintains the pump flow for any given current within the control range.

If the pump is also equipped with a DA control valve (see page 11), automotive operation is possible for travel drives.

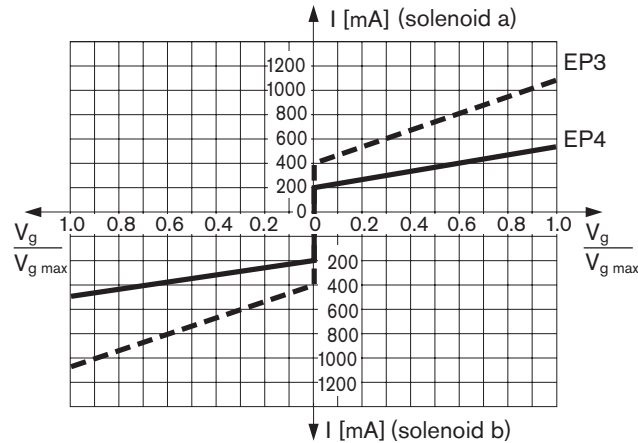

### Standard

Proportional solenoid without emergency actuation.

### On request

Proportional solenoid with emergency actuation and spring return.

Technical data, solenoid	EP3	EP4
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Start of control at $V_{g,0}$	400 mA	200 mA
End of control at $V_{g,max}$	1090 mA	540 mA
Limiting current	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 Hz	100 Hz
Actuated time	100 %	100 %

Type of protection see connector design page 11

The following electronic controllers and amplifiers are available for controlling the proportional solenoids:

- BODAS controller RC
  - Series 20 \_\_\_\_\_ RE 95200
  - Series 21 \_\_\_\_\_ RE 95201
  - Series 22 \_\_\_\_\_ RE 95202
  - Series 30 \_\_\_\_\_ RE 95203
 and application software
- Analog amplifier RA \_\_\_\_\_ RE 95230

Further information can also be found on the Internet at [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics).

### Note


**The spring return feature in the control unit is not a safety device**

The spool valve inside the control unit can get stuck in an undefined position by internal contamination (contaminated hydraulic fluid, abrasion or residual contamination from system components). As a result, the axial piston unit can no longer supply the flow specified by the operator.


Check whether your application requires that remedial measures be taken on your machine in order to bring the driven consumer into a safe position (e. g. immediate stop).

### Assignment

Direction of rotation - Control - Flow direction				
	Actuation of solenoid	Control pressure	Flow direction	Operating pressure
Direction of rotation ccw	a	$X_1$	$A_1$ to $B_1$	$M_{B1}$
			$A_2$ to $B_2$	$M_{B2}$
Direction of rotation cw	b	$X_2$	$B_1$ to $A_1$	$M_{A1}$
			$B_2$ to $A_2$	$M_{A2}$
Direction of rotation ccw	a	$X_1$	$B_1$ to $A_1$	$M_{A1}$
			$B_2$ to $A_2$	$M_{A2}$
Direction of rotation cw	b	$X_2$	$A_1$ to $B_1$	$M_{B1}$
			$A_2$ to $B_2$	$M_{B2}$

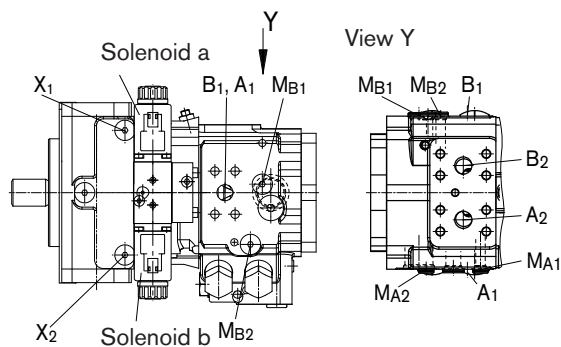

### Circuit diagram

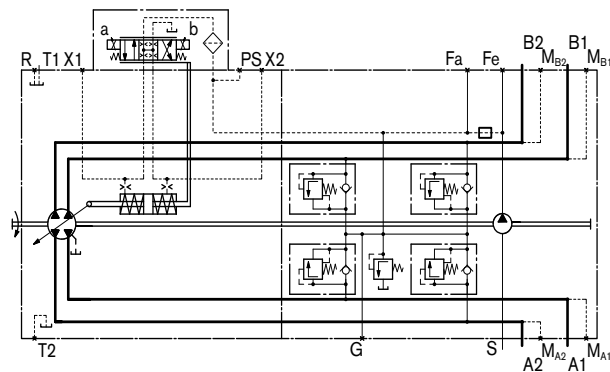

# Connector for solenoids


## DEUTSCH DT04-2P-EP04, 2-pin

Molded, without bidirectional suppressor diode \_\_\_\_\_ P

Type of protection according to DIN/EN 60529:  
IP67 and IP69K

### Circuit symbol

Without bidirectional suppressor diode




### Mating connector

DEUTSCH DT06-2S-EP04  
Rexroth Mat. No. R902601804

Consisting of: \_\_\_\_\_ DT designation  
 – 1 case \_\_\_\_\_ DT06-2S-EP04  
 – 1 wedge \_\_\_\_\_ W2S  
 – 2 female connectors \_\_\_\_\_ 0462-201-16141

The mating connector is not included in the delivery contents.  
This can be supplied by Rexroth on request.

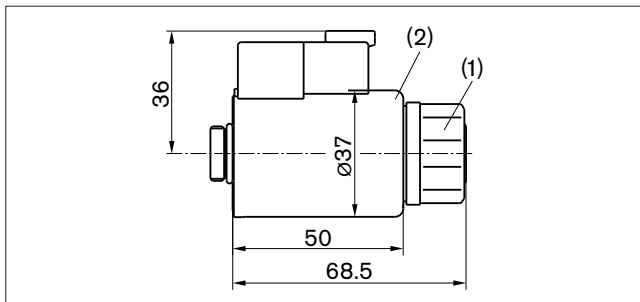

### Changing connector position

If necessary, you can change the position of the connector by turning the solenoid.

To do this, proceed as follows:

- Loosen the fixing nut (1) of the solenoid. To do this, turn the fixing nut (1) one turn counter-clockwise.
- Turn the solenoid body (2) to the desired position.
- Retighten the fixing nut.  
Tightening torque of the fixing nut:  $5 \pm 1$  Nm  
(size SW 26, 12 kt DIN 3124).

On delivery, the position of the connector may differ from that shown in the brochure or drawing.

# DA control valve

## Fixed setting, speed related control pressure supply

The DA closed loop control is an engine speed-dependent system for travel drives. The built-in DA control valve generates a pilot pressure that is proportional to pump (engine) drive speed. This pilot pressure is directed to the stroke cylinder of the pump by an electromagnetically actuated 4/3-directional valve. The pump displacement can be steplessly varied in each flow direction and is influenced by both the speed of the pump drive and the system pressure. The flow direction (i. e. machine moving forward or backward) is determined by either solenoid a or b being activated.

Increasing the speed of the pump drive generates a higher pilot pressure by the DA control valve with the resulting flow and/or delivery pressure from the pump.

Depending on the selected operating characteristics of the pump, increasing the system pressure (i. e. machine load) will have the effect of swiveling the pump back to a smaller displacement. An overload protection circuit for the engine (against stalling) is achieved by combining this pressure-dependent reduction in pump stroke with a reduction in pilot pressure as the engine speed drops.

Any additional power requirement, e. g. hydraulic functions from attachments, could cause the speed of the engine to drop further. This will cause a further reduction in pilot pressure and thus of the pump displacement. Automatic power distribution and full exploitation of the available power are achieved in this way, both for the travel drive and for the implement hydraulics, with priority given to the implement hydraulics.

Various override options are available for DA control function to allow controlled operation of the implement hydraulics with high rpm at reduced vehicle speed.

The DA control valve can be used in pumps with EP and HW control units to protect the combustion engine against overload.

*DA closed loop control is only suitable for certain types of drive system and requires review of the engine and vehicle parameters to ensure that the pump is used correctly and that machine operation is safe and efficient. We recommend that all DA applications be reviewed by a Rexroth application engineer.*

### Standard

Switching solenoid without emergency actuation.

### On request

Switching solenoid with emergency actuation and spring return.



Technical data, solenoid	DA1	DA2
Voltage	12 V DC ( $\pm 20$ %)	24 V DC ( $\pm 20$ %)
Neutral position $V_{g0}$	de-energized	de-energized
Position $V_{gmax}$	current energized	current energized
Nominal resistance (at 20 °C)	5.5 $\Omega$	21.7 $\Omega$
Nominal power	26.2 W	26.5 W
Active current, minimum required	1.32 A	0.67 A
Actuated time	100 %	100 %
Type of protection see connector design page 11		



# Dimensions size 28

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Drive shafts

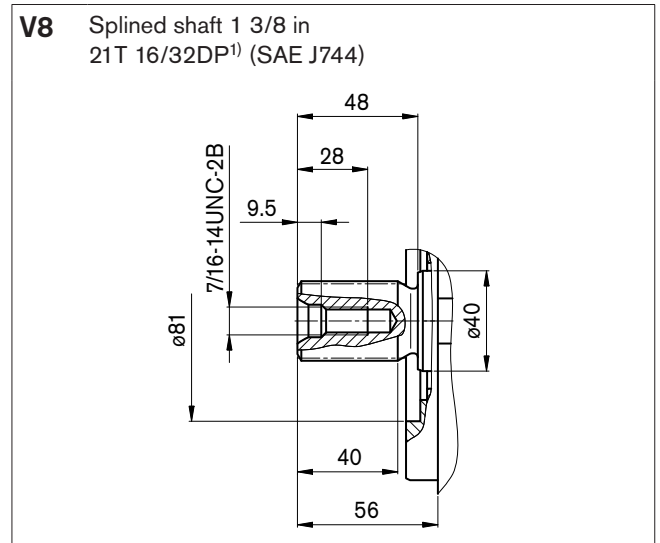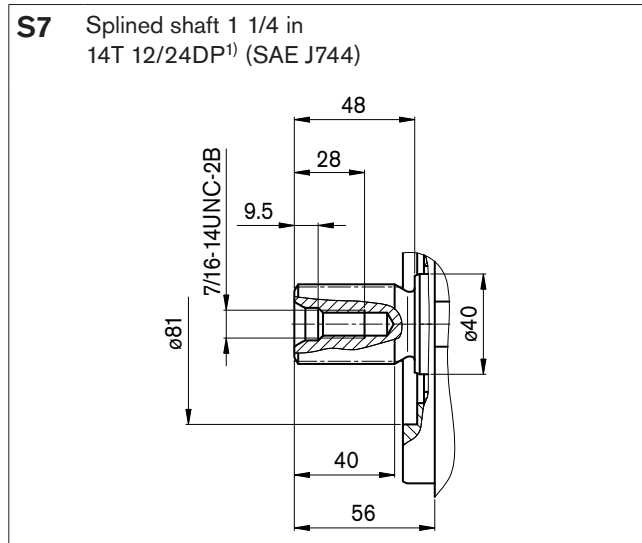

## Ports

Designation	Port for	Standard	Size <sup>2)</sup>	Maximum pressure [bar] <sup>3)</sup>	State
A, B	Service line	SAE J518 <sup>4)</sup>	3/4 in	350	O
	Fixing thread A/B	DIN 13	M10 x 1.5; 17 deep		O
S	Suction	ISO 6149	M33 x 2; 18 deep	5	O <sup>5)</sup>
T <sub>1</sub>	Tank	ISO 6149	M22 x 1.5; 14 deep	3	O <sup>6)</sup>
T <sub>2</sub>	Tank	ISO 6149	M22 x 1.5; 14 deep	3	X <sup>6)</sup>
R	Air bleed	ISO 6149	M12 x 1.5; 12 deep	3	X
X <sub>1</sub> , X <sub>2</sub>	Control pressure (upstream of orifice)	ISO 6149	M12 x 1.5; 12 deep	40	X
X <sub>3</sub> , X <sub>4</sub> <sup>7)</sup>	Stroking chamber pressure	ISO 6149	M12 x 1.5; 12 deep	40	X
G	Auxiliary pressure	ISO 6149	M18 x 1.5; 14.5 deep	40	X
P <sub>S</sub>	Control pressure supply	ISO 6149	M14 x 1.5; 13 deep	40	X
M <sub>A</sub> , M <sub>B</sub>	Measuring pressure A, B	ISO 6149	M12 x 1.5; 11,5 deep	350	X
F <sub>a</sub>	Filter outlet	ISO 6149	M18 x 1.5; 14.5 deep	40	X
F <sub>e</sub>	Filter inlet	ISO 6149	M18 x 1.5; 14.5 deep	40	X

1) ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

2) Observe the general instructions on page 20 for the maximum tightening torques.

3) Short-term pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

4) Only dimensions according to SAE J518

5) Plugged for external supply

6) Depending on installation position, T1 or T2 must be connected (see also page 19).

7) Optional, see page 17


O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


# Through drive dimensions

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Flange SAE J744			Coupling for splined shaft <sup>1)</sup>		
Diameter	Mounting variant		Diameter	Designation	
	Symbol	Designation			
Without					<b>0000</b>
82-2 (A)	⌀	A1	5/8 in	9T 16/32DP S2	<b>A1S2</b>
	∞	A2	5/8 in	9T 16/32DP S2	<b>A2S2</b>
101-2 (B)	⌀	B1	7/8 in	13T 16/32DP S4	<b>B1S4</b>
			1 in	15T 16/32DP S5	<b>B1S5</b>
	∞	B2	7/8 in	13T 16/32DP S4	<b>B2S4</b>
			1 in	15T 16/32DP S5	<b>B2S5</b>

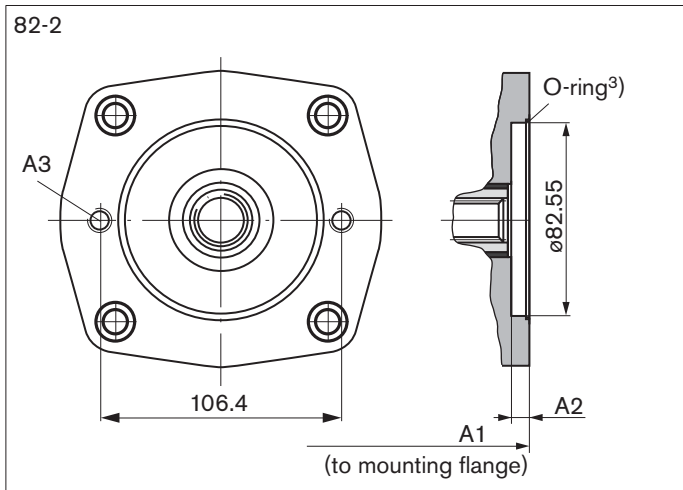

NG	A1	A2	A3 <sup>2)</sup>
28	302.8	9	M10 x 1.5; 17.5 deep

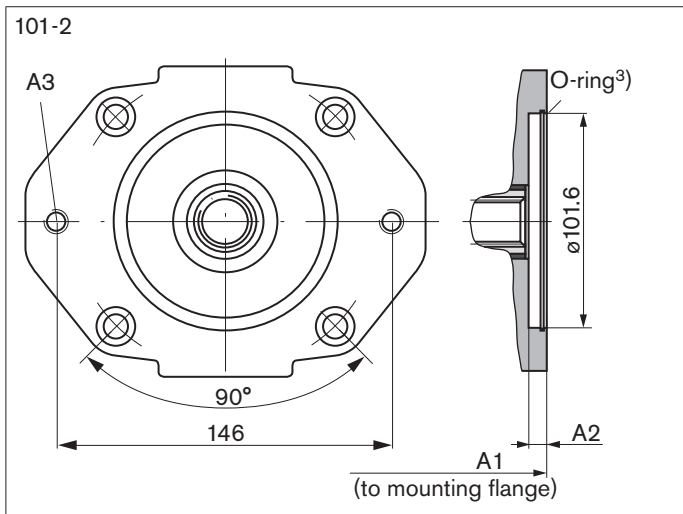


NG	A1	A2	A3 <sup>2)</sup>
28	303.8	10	M12 x 1.75; 18.5 deep

- 1) Coupling for splined shaft according to ANSI B92.1 a-1976, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to DIN 13, observe the general instructions on page 20 for the maximum tightening torques.
- 3) O-ring included in the delivery contents

# Through drive dimensions

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

Flange SAE J744			Coupling for splined shaft <sup>1)</sup>		
	Mounting variant				
Diameter	Symbol	Designation	Diameter	Designation	
127-2 (C)	∞	C2	1 1/4 in 14T 12/24DP S7		<b>C2S7</b>

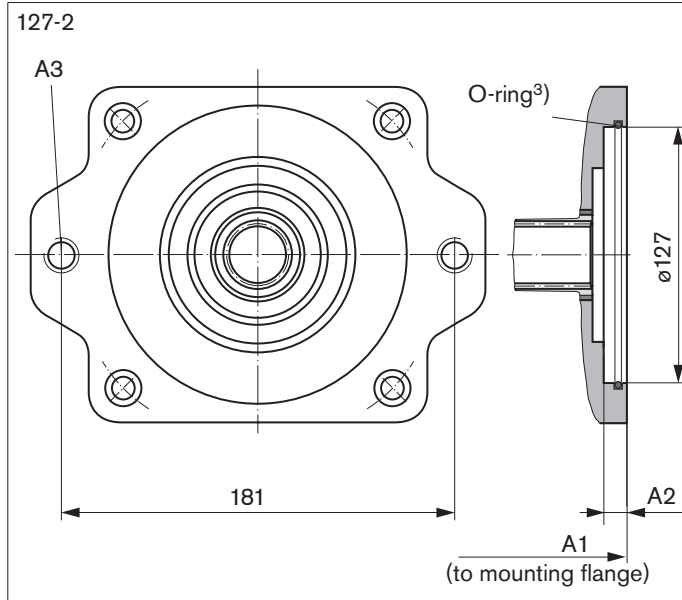

NG	A1	A2	A3 <sup>2)</sup>
28	310.1	14	M16 x 2; 24.8 deep

**Note**

For the mounting of a pump at the through drive, a pump support is recommended. Please contact us.

- 1) Coupling for splined shaft according to ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to DIN 13, observe the general instructions on page 20 for the maximum tightening torques.
- 3) O-ring included in the delivery contents

## Overview of attachments

Through drive			Attachment for 2nd pump						
Flange	Coupling for splined shaft	Short code	A4VG/32 NG (shaft)	A10VG NG (shaft)	A10V(S)O/31 NG (shaft)	A10V(S)O/53 NG (shaft)	A4FO NG (shaft)	A11VO NG (shaft)	External gear pump
82-2 (A)	5/8 in	A_S2	-	-	18 (U)	10 (U)	-	-	Size F NG4 to 22 <sup>1)</sup>
101-2 (B)	7/8 in	B_S4	-	18 (S)	28 (S, R)	28 (S,R)	16 (S), 22 (S)	-	Size N NG20 to 32 <sup>1)</sup>
					45 (U)	45 (U,W)	28 (S)	Size G NG38 to 45 <sup>1)</sup>	
	1 in	B_S5	28 (S)	28 (S), 45 (S)	45 (S,R)	45 (S,R) 60 (U,W)	-	40 (S)	-
127-2 (C)	1 1/4 in	C_S7	40 (S), 56 (S), 71 (S)	63 (S)	71 (S, R) 100 (U)	85 (U)	-	60 (S)	-

1) Rexroth recommends special versions of the gear pumps. Please contact us.

# High-pressure relief valves


Before finalizing your design, request a binding installation drawing. Dimensions in mm.

The two high-pressure relief valves protect the hydrostatic transmission (pump and motor) from overload. They limit the maximum pressure in the respective high-pressure line and serve simultaneously as boost valves.

Standard setting  $\Delta p_{HD}$  \_\_\_\_\_ 280 bar

For other pressure settings in the  $p_{abs} = 250$  to 330 bar range, please contact us.

## Setting diagram

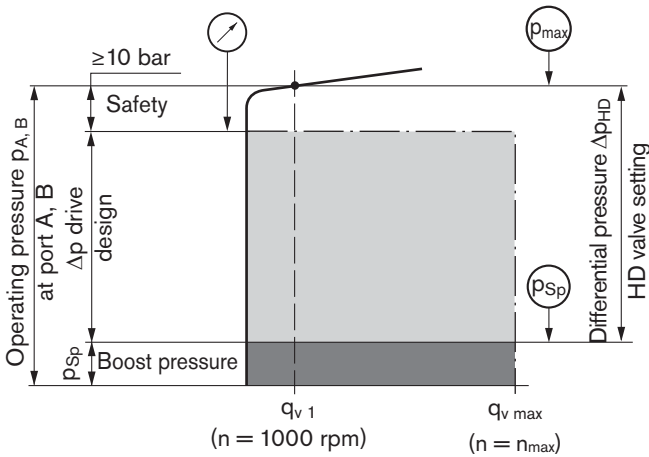

### Note

The valve settings are made at  $n = 1000$  rpm and at  $V_{gmax}$  ( $q_{v1}$ ). There may be deviations in the opening pressures with other operating parameters.


For reasons of simplification, the bypass function is not shown in these circuit diagrams.

## Installation situation for coupling assembly

To ensure that rotating components (coupling hub) and fixed components (case, retaining ring) do not come into contact with each other, the installation conditions described here must be observed. This depends on the size and the splined shaft.

### SAE splined shaft (spline according to ANSI B92.1a-1976)

The outer diameter of the coupling hub must be smaller than the inner diameter of the retaining ring  $d_2$  in the area near the drive shaft collar (dimension  $x_2 - x_3$ ).

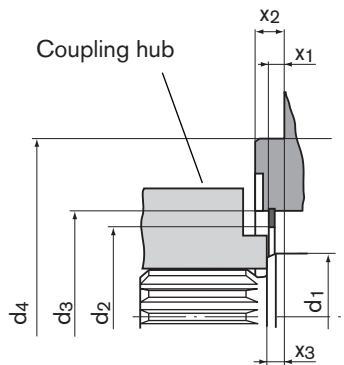

NG	Mounting flange	$\text{ø}d_1$	$\text{ø}d_{2 \text{ min}}$	$\text{ø}d_3$	$\text{ø}d_4$	$x_1$	$x_2$	$x_3$
28	127-2 (C)	40	54.4	$68 \pm 0.1$	127	$7.0^{+0.2}$	$12.7_{-0.5}$	$8^{+0.9}_{-0.6}$




# Mechanical stroke limiter

The mechanical stroke limiter is an auxiliary function allowing the maximum displacement of the pump to be steplessly reduced, regardless of the control unit used.


The stroke of the stroke cylinder and hence the maximum swivel angle of the pump are limited by means of two adjusting screws.

### Dimensions

NG	M1	M2	M3
28	130.5 maximum	44	25.5

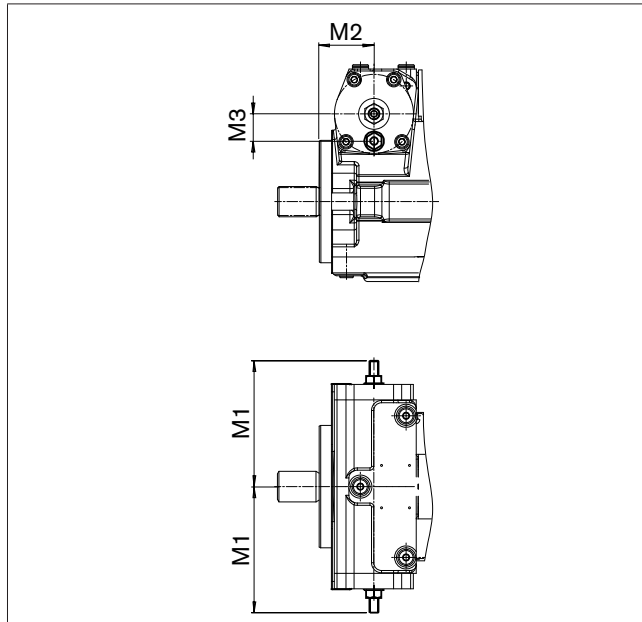


### Circuit diagram

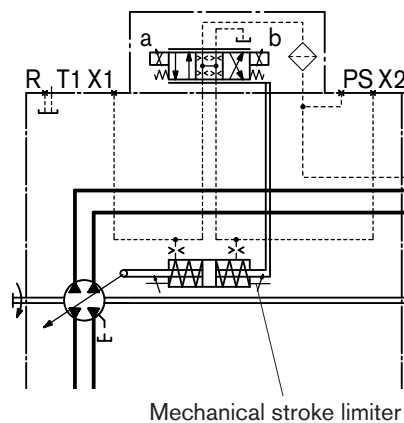


# Ports X<sub>3</sub> and X<sub>4</sub> for stroking chamber pressure

### Dimensions

NG	T1	T2	T4
28	104.5	44	25

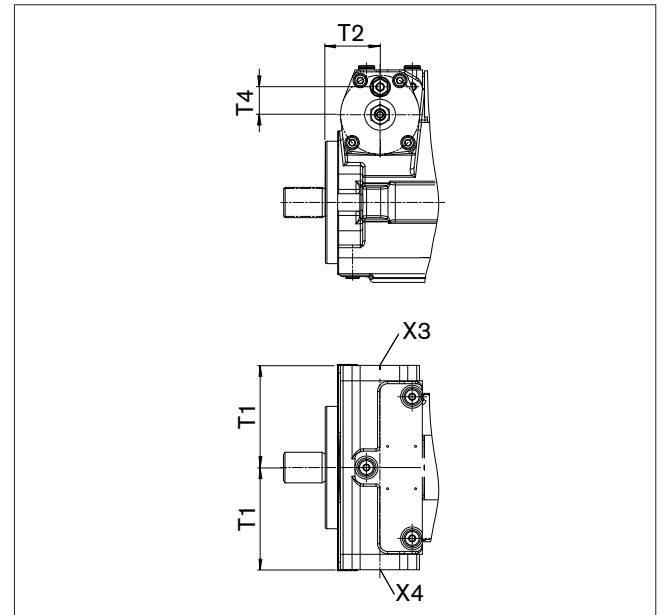

### Circuit diagram

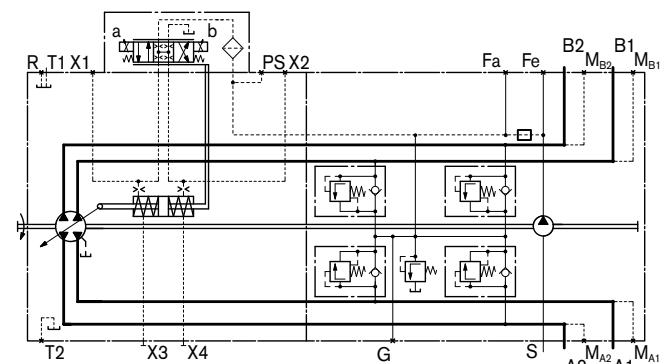

Designation	Port for	Standard	Size <sup>1)</sup>	Maximum pressure [bar] <sup>2)</sup>	State
X <sub>3</sub> , X <sub>4</sub>	Stroking chamber pressure	ISO 6149	M12 x 1.5; 12 deep	40	X

1) Observe the general instructions on page 20 for the maximum tightening torques.

2) Short-term pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

# Filtration boost circuit / external supply

## Version S (standard)

### Filtration in the suction line of the boost pump

Standard version (preferred)

Filter type \_\_\_\_\_ filter **without** bypass

Recommendation \_\_\_\_\_ **with** contamination indicator

Flow resistance at filter cartridge

With  $v = 30 \text{ mm}^2/\text{s}$ ,  $n = n_{\text{max}}$  \_\_\_\_\_  $\Delta p \leq 0.1 \text{ bar}$

With  $v = 1000 \text{ mm}^2/\text{s}$ ,  $n = n_{\text{max}}$  \_\_\_\_\_  $\Delta p \leq 0.3 \text{ bar}$

Pressure at port S of the boost pump


Suction pressure  $p_{S \text{ min}}$  ( $v \leq 30 \text{ mm}^2/\text{s}$ ) \_\_\_\_\_  $\geq 0.8 \text{ bar absolute}$

At cold start, short-term ( $t < 3 \text{ min}$ ) \_\_\_\_\_  $\geq 0.5 \text{ bar absolute}$

Suction pressure  $p_{S \text{ max}}$  \_\_\_\_\_  $\leq 5 \text{ bar absolute}$

The filter is not included in the delivery contents.

### Circuit diagram - standard version S

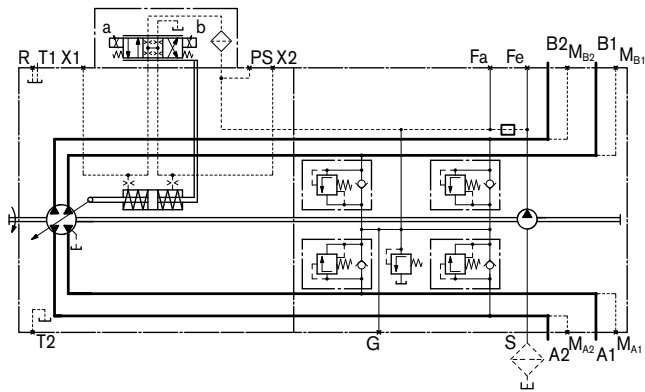

## Version E

### External supply

This variation should be used in versions **without** integrated boost pump (U).


Port S is plugged.

Supply comes from port  $F_a$ .

Filter arrangement \_\_\_\_\_ separate

To ensure the functional reliability, maintain the required cleanliness level for the boost pressure fluid fed in at port  $F_a$  (see page 5).

### Circuit diagram - version E

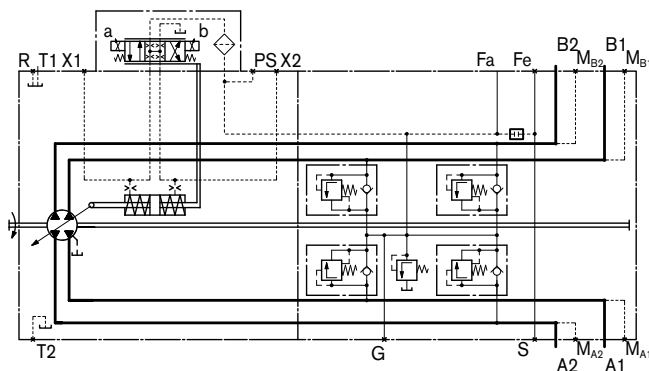

## Version D

### Filtration in the pressure line of the boost pump, ports for external boost circuit filter

Filter inlet \_\_\_\_\_ port  $F_e$

Filter outlet: \_\_\_\_\_ port  $F_a$

Filter type \_\_\_\_\_

Filters with bypass are **not recommended**. For applications with bypass please contact us.

Recommendation \_\_\_\_\_ **with** contamination indicator

Flow resistance at filter cartridge


With  $v = 30 \text{ mm}^2/\text{s}$  \_\_\_\_\_  $\Delta p \leq 1 \text{ bar}$

On cold start \_\_\_\_\_  $\Delta p \leq 3 \text{ bar}$

(valid for entire speed range  $n_{\text{min}} - n_{\text{max}}$ )

The filter is not included in the delivery contents.

### Circuit diagram - version D

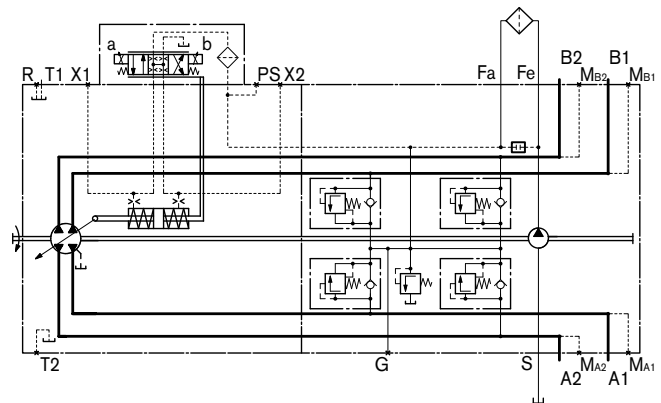

# Installation instructions

## General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This is also to be observed following a relatively long standstill as the system may empty via the hydraulic lines.

The case drain fluid in the case interior must be directed to the tank via the highest tank port ( $T_1$ ,  $T_2$ ). The minimum suction pressure at port S must not fall below 0.8 bar absolute (cold start 0.5 bar absolute).

In all operational states, the suction line and tank line must flow into the tank below the minimum fluid level.

## Installation position

See examples below. Additional installation positions are available upon request.

Recommended installation positions: 1 and 2.


### Below-tank installation (standard)

Pump below minimum fluid level of the tank.

### Above-tank installation

Pump above minimum fluid level of the tank

Observe the maximum permissible suction height  $h_{S \max} = 800$  mm.

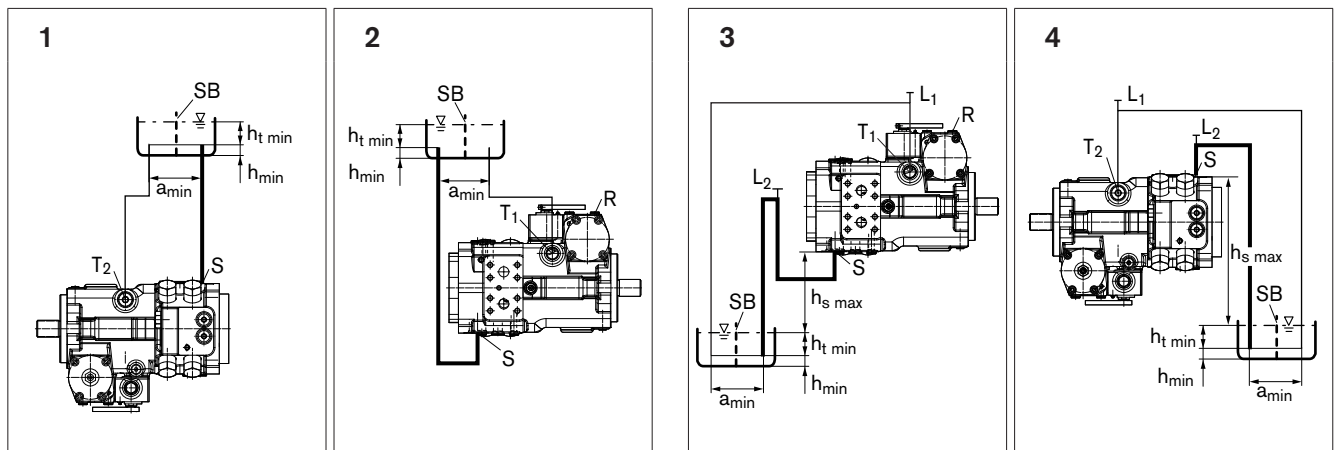

$h_{S \max} = 800$  mm,  $h_{t \min} = 200$  mm,  $h_{\min} = 100$  mm, SB = baffle (baffle plate)

When designing the tank, ensure adequate distance  $a_{\min}$  between the suction line and the case drain line to prevent the heated, return flow from being drawn directly back into the suction line.

Installation position	Air bleed	Filling
1	-	S + $T_2$
2	R	S + $T_1$

Installation position	Air bleed	Filling
3	$L_2 + R$	$L_1 + L_2$
4	$L_2 (S) + L_1 (T_2)$	$L_2 (S) + L_1 (T_2)$

# General instructions

- The A30VG pump is designed to be used in closed circuit.
- Project planning, assembly and commissioning of the axial piston unit require the involvement of qualified personnel.
- The service line ports and function ports are only designed to accommodate hydraulic lines.
- During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e. g. by wearing protective clothing).
- Depending on the operational state of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- Pressure ports:  
The ports and fixing threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
- The data and notes contained herein must be adhered to.
- The following tightening torques apply:
  - Threaded hole for axial piston unit:  
The maximum permissible tightening torques  $M_{G \max}$  are maximum values for the threaded holes and must not be exceeded. For values, see the following table.
  - Fittings:  
Observe the manufacturer's instruction regarding the tightening torques of the used fittings.
  - Fixing screws:  
For fixing screws according to DIN 13, we recommend checking the tightening torque individually according to VDI 2230.
  - Locking screws:  
For the metal locking screws supplied with the axial piston unit, the required tightening torques of locking screws  $M_V$  apply. For values, see to the following table.
- The product is not approved as a component for the safety concept of a general machine according to DIN EN ISO 13849.

Threaded port sizes		Maximum permissible tightening torque of the threaded holes $M_{G \max}$	Required tightening torque of the locking screws $M_V$	WAF hexagon socket of the locking screws
M10 x 1.5	ISO 6149	30 Nm	20 Nm	5 mm
M12 x 1.5	ISO 6149	50 Nm	35 Nm	6 mm
M14 x 1.5	ISO 6149	80 Nm	45 Nm	6 mm
M18 x 1.5	ISO 6149	140 Nm	70 Nm	8 mm
M22 x 1.5	ISO 6149	210 Nm	100 Nm	10 mm
M33 x 2	ISO 6149	540 Nm	310 Nm	17 mm <sup>1)</sup>

1) Different from ISO 6149

Bosch Rexroth AG  
Hydraulics  
Axial Piston Units  
Glockeraustraße 2  
89275 Elchingen, Germany  
Telephone +49 (0) 73 08 82-0  
Fax +49 (0) 73 08 72 74  
info.brm-ak@boschrexroth.de  
www.boschrexroth.com/axial-piston-pumps

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Subject to change.

# Axial piston pumps

## Accessories

<b>Designation</b>	<b>Type</b>	<b>Size</b>	<b>Series</b>	<b>Data sheet</b>	<b>Page</b>
Flushing valve with pressure holding valve	SV	40...90	10	95512	1221
Power valve	LA	6	10	95514	1229
Universal through drive for axial piston variable pump A10VSO, A4VSO, A15VSO/A15VLO and A11V(L)O	A10VSO/32, A4VSO/30, A15VSO/10, A11VO/40			95581	1233
Hydraulic tank made of polymer or steel	TMP, TMS	8	10	95721	1249




# Flushing valve with pressure holding valve SV

**RE 95512/05.10** 1/8  
Replaces: 12.98

## Data sheet

Series 10  
Nominal pressure 400 bar  
Maximum pressure 450 bar  
Closed circuit

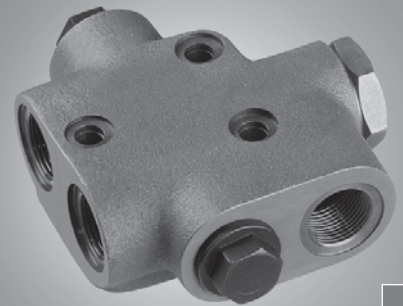

## Contents

Ordering code for standard program	2
Technical data	3
Functional description	4
Line valve dimensions	5
Flange valve dimensions, size 75	6
Flange valve dimensions, size 90	7
General instructions	8

## Features

- The flushing valve is used to flush heated hydraulic fluid from the closed circuit, and, thus, dirt particles as well.
- The integrated pressure holding valve is used to prevent drops in the boost pressure.
- The flushing valve with pressure holding valve is available in two basic versions:
  - Line valve for universal use
  - Flange valve for reduced piping and installation costs and effort

## Ordering code for standard program

<b>SV</b>				/	<b>10</b>	<b>M</b>	<b>V</b>							-	
01	02	03	04		05	06	07	08	09	10	11	12			13

## Valve type

01	Flushing valve with pressure holding valve	<b>SV</b>
----	--	-----------

## Mounting variant

02	Flange valve for flange-mounting to the pump, e.g. A10VG	Standard	<b>F</b>
		Heightened (NG75G only)	<b>H</b>
	Line valve		<b>L</b>

## Size

	Mounting variant	Flange valve		Line valve		
		<b>F</b> (standard)	<b>H</b> (heightened)			
03	Spacing, port A to B	40 mm	-	-	●	<b>40</b>
		75 mm (e.g. for A4VG/32 NG28; A10VG NG28, 45, 63)	●	●	-	<b>75</b>
		90 mm	●	-	-	<b>90</b>

## Port versions

	Mounting variant	Flange valve		Line valve	
		<b>F</b> (standard)	<b>H</b> (heightened)		
04	Threaded port	●	●	●	<b>G</b>
	SAE flange port	●	-	-	<b>S</b>

## Series

05	Series 1, index 0	<b>10</b>
----	-------------------	-----------

## Version of port thread

06	Metric	<b>M</b>
----	--------	----------

## Seals

07	FKM (fluor-caoutchouc)	<b>V</b>
----	------------------------	----------

## Orifices

	Orifice dia.	Flange valve		Line valve	
08	Without				<b>00</b>
Flushing flow $q_v$ (L/min) with $\Delta p = p_{ND} - p_G = 25$ bar and $\nu = 10$ mm <sup>2</sup> /s $p_{ND}$ = low pressure $p_G$ = case pressure $\nu$ = viscosity	2.2 L/min	1.0 mm	-	●	<b>10</b>
	3.2 L/min	1.2 mm	●	●	<b>12</b>
	4.3 L/min	1.4 mm	●	●	<b>14</b>
	5.5 L/min	1.6 mm	●	●	<b>16</b>
	7 L/min	1.8 mm	●	●	<b>18</b>
	8.8 L/min	2.0 mm	●	●	<b>20</b>
	11.5 L/min	2.3 mm	●	-	<b>23</b>
	12.5 L/min	2.4 mm	●	-	<b>24</b>
	13.7 L/min	2.5 mm	-	●	<b>25</b>
	17.2 L/min	2.8 mm	-	●	<b>28</b>
	20 L/min	3.0 mm	●	-	<b>30</b>
	27 L/min	3.5 mm	-	●	<b>35</b>
	35 L/min	4.0 mm	-	●	<b>40</b>
55 L/min	5.0 mm	-	●	<b>50</b>	

● = Available      ○ = On request      - = Not available



## Ordering code for standard program

<b>SV</b>				/	<b>10</b>	<b>M</b>	<b>V</b>						-	
01	02	03	04		05	06	07	08	09	10	11	12		13

Flushing side (low-pressure side)				Flange valve	Line valve	
09	A (one sided)			●	●	A
	B (one sided)			●	●	B
	A and B (alternating, standard)			●	●	C

Switching pressure				Flange valve	Line valve	
10	Differential pressure $\Delta p = 3$ to 5 bar (standard)			●	●	3
	Differential pressure $\Delta p = 8$ to 12 bar			-	●	8

Flushing-piston damping				
11	Low			D2
	Medium			D4
	Medium-strong			D6
	Strong			D8

Minimum holding pressure				
12	16 bar (standard)			H16
	20 bar			H20
	25 bar			H25

Standard / special version				
13	Standard version			0
	Special version			S

### Note

Short designation X on a feature refers to a special version not covered by the ordering code.

● = Available      ○ = On request      - = Not available

## Technical data

### Table of values

Distance between axes NG		Line valve	Flange valve	Flange valve	Flange valve
		40 (SVL40G...)	75, standard (SVF75G/S...)	75, heightened (SVH75G...)	90, standard (SVF90G/S...)
Holding pressure	bar	16, 20, 25	16, 20, 25	16, 20, 25	16, 20, 25
Switching pressure $\Delta p$ of the flushing piston	bar	3 to 5 or 8 to 12	3 to 5	3 to 5	3 to 5
Temperature range	°C	-40 °C to +115 °C	-40 °C to +115 °C	-40 °C to +115 °C	-40 °C to +115 °C
Installation position		arbitrary	arbitrary	arbitrary	arbitrary
Mass	kg	1.5	1.9	3.0	2.1

### Hydraulic fluid

For the choice of hydraulic fluid, the used axial piston unit is decisive. For further information, please refer to our data sheets during project planning.

## Functional description

The flushing valve is used to flush heated hydraulic fluid from the closed circuit, and, thus, dirt particles as well.

Via the flushing piston, the respective low-pressure side of the closed circuit is detected and, at a pressure difference exceeding approx. 5 bar, flushed out of this line.

During this process, it is necessary that the flushed quantity and the case drain fluid of the axial piston unit be replaced via an infeed. The infeed with filtered and cooled hydraulic fluid decreases the circuit temperature. The flushed quantity is determined by an orifice in the tank canal. This is dependent on the orifice size, the pressure difference between low pressure and tank line as well as the current viscosity.


A pressure holding valve is also installed in the tank canal. As soon as the pressure level drops below the set holding pressure, e.g. due to an excessive flush quantity, the pressure holding valve reduces the flush quantity, thereby preventing an impermissible pressure drop.

The flushing valve with pressure holding valve is available in two basic versions:

- As a line valve which is connected to the two lines of the closed circuit via the piping. Fixing to the device frame is by means of three through-holes. The separate arrangement enables universal use.
- As a flange valve which is flanged onto the adjacent high-pressure ports of the variable pumps A10VG and A4VG series 32. Fixing is by means of the screws for the SAE flange port. This arrangement eliminates the piping and reduces installation costs and effort.

The tank ports of the flushing valves are directed to the tank via the cooler.

## Characteristic

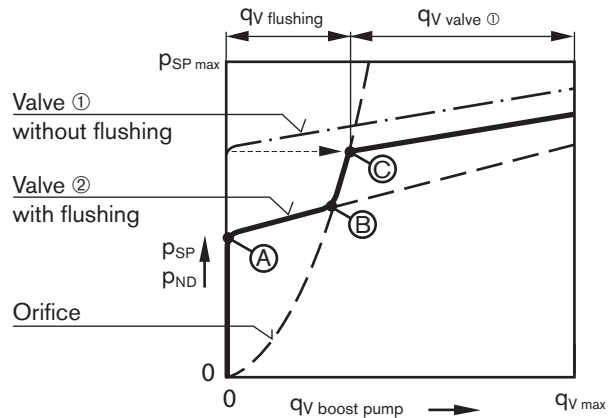

— · — Flushing valve in middle position, without flushing

— Flushing valve switched

Point A: Pressure holding valve ② opens (16 bar). Start of flushing.

Point B: Limiting of flushing quantity by orifice.


Point C:  $qV_{max\ flushing}$  (boost pressure valve with adjustment  $> 16$  bar of variable pump ① opens). Flushing flow increases only according to the pressure-relief valve characteristic.

$qV_{flushing}$ : Flushing flow; flows to the tank via the pressure holding valve ②.

$qV_{valve\ 1}$ : Residual quantity of the boost pump is flushed out via valve ① into the case of the variable pump.


## Circuit diagram examples

### Line valve

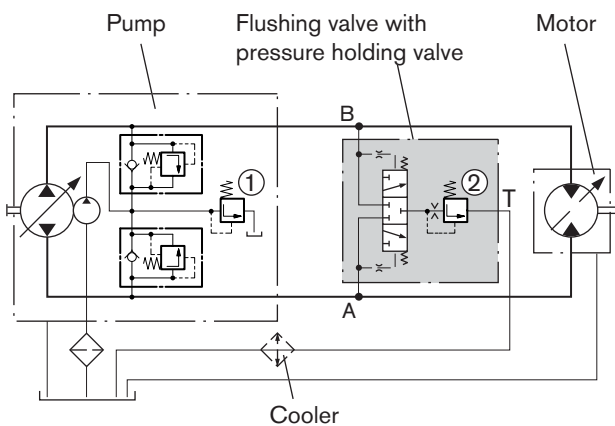

- ① Boost pressure-relief valve in the pump
- ② Pressure holding valve in the flushing valve

### Flange valve

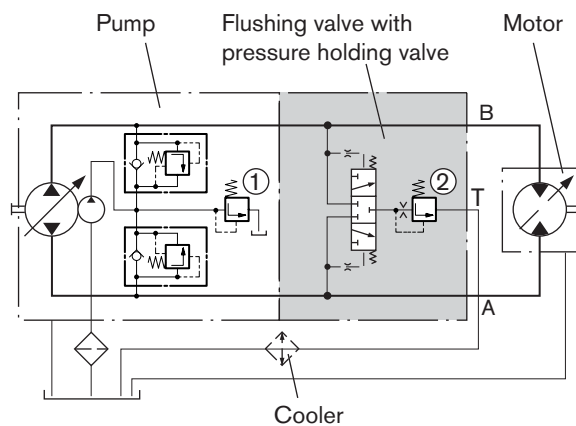





# Flange valve dimensions, size 75

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Port version G

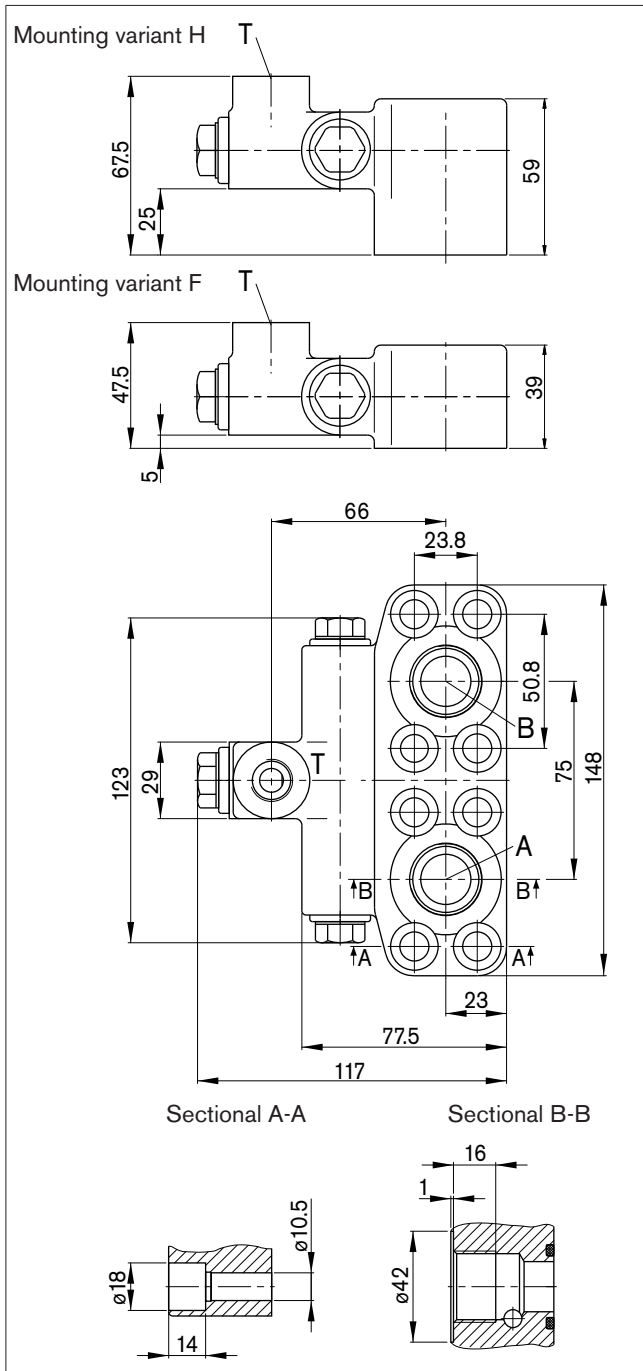

## Port version S

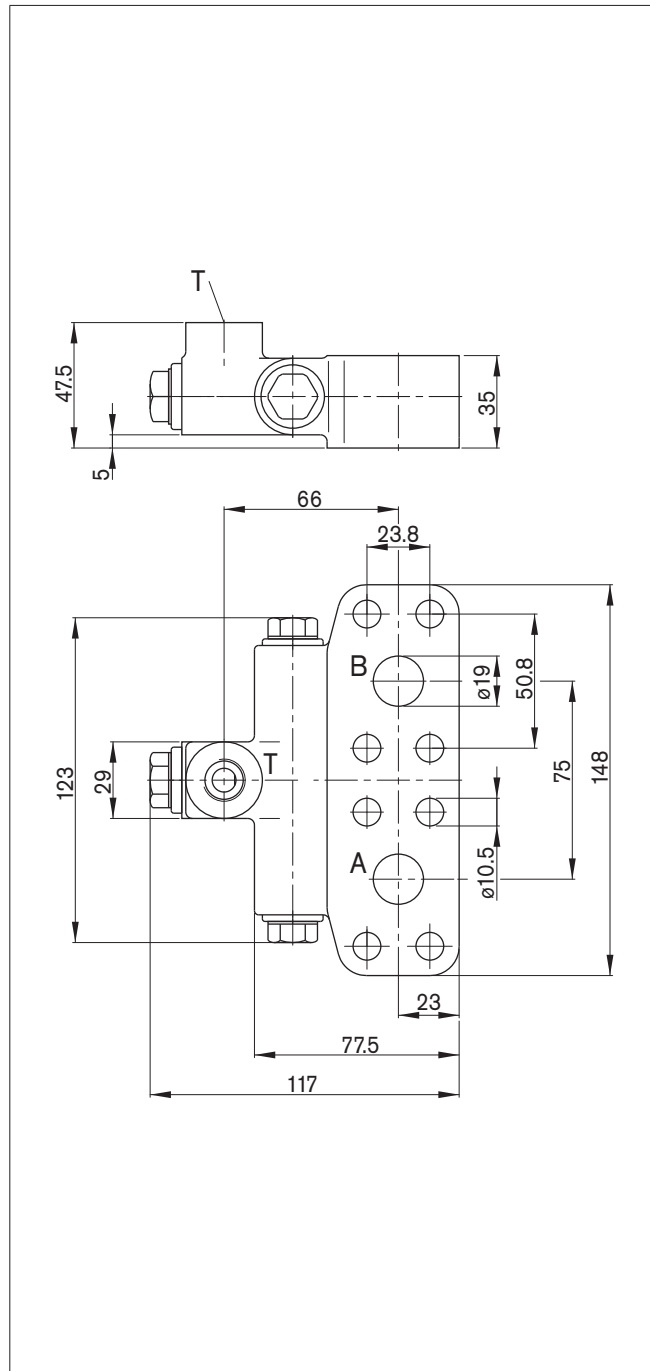

## Ports

Designation	Port for	Port version	Standard	Size <sup>1)</sup>	Maximum pressure [bar] <sup>2)</sup>	State
A, B	Service line (high-pressure series)	G	DIN 3852	M27 x 2; 16 deep	450	O
A, B	Service line (high-pressure series)	S	SAE J518	3/4 in	450	O
T	Tank		DIN 3852 <sup>3)</sup>	M16 x 1.5; 12 deep	30	O

1) Observe the general instructions on page 8 for the maximum tightening torques.

2) Short-term pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.


3) The spot face can be deeper than specified in the appropriate standard.

O = Must be connected (plugged on delivery)


# Flange valve dimensions, size 90

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

### Port version G

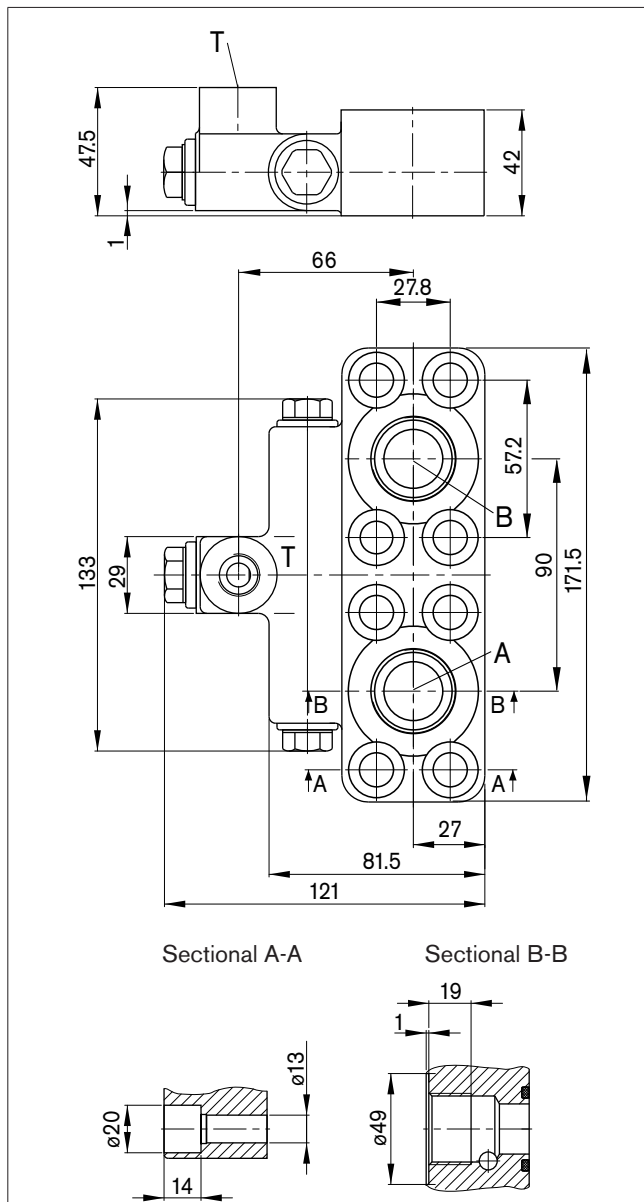

### Port version S

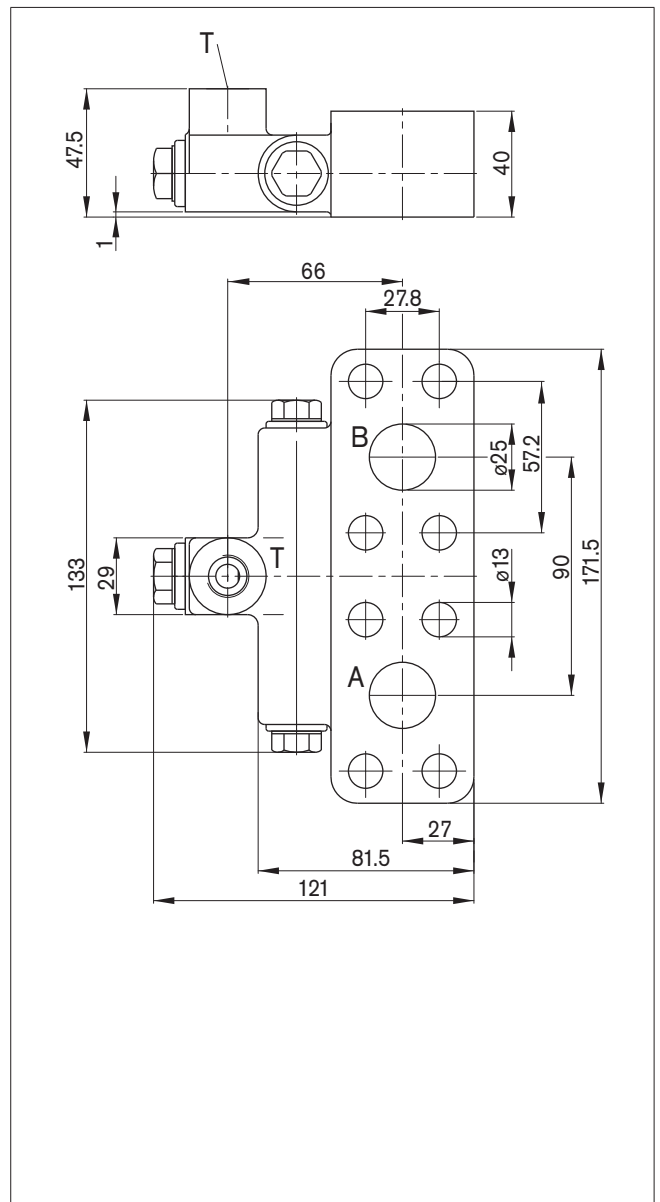

## Ports

Designation	Port for	Port version	Standard	Size <sup>1)</sup>	Maximum pressure [bar] <sup>2)</sup>	State
A, B	Service line (high-pressure series)	G	DIN 3852	M33 x 2; 19 deep	450	O
A, B	Service line (high-pressure series)	S	SAE J518	1 in	450	O
T	Tank		DIN 3852 <sup>3)</sup>	M16 x 1.5; 12 deep	30	O

1) Observe the general instructions on page 8 for the maximum tightening torques.

2) Short-term pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

3) The spot face can be deeper than specified in the appropriate standard.

O = Must be connected (plugged on delivery)

## General instructions

- The SV flushing valve with pressure holding valve is designed to be used in closed circuits.
- Project planning, assembly and commissioning of components for the axial piston unit require the involvement of qualified personnel.
- The service line ports and function ports are only designed to accommodate hydraulic lines.
- During and shortly after operation, there is a risk of burns on the flushing valve. Take appropriate safety measures (e. g. by wearing protective clothing).
- Depending on the operational state of the axial piston unit or flushing valve (operating pressure, fluid temperature), the characteristic may shift.
- Pressure ports:  
The ports and fixing threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
- The data and notes contained herein must be adhered to.
- The product is not approved as a component for the safety concept of a general machine according to DIN EN ISO 13849.
- The following tightening torques apply:
  - Fittings:  
Observe the manufacturer's instruction regarding the tightening torques of the used fittings.
  - Threaded hole of the flushing valve:  
The maximum permissible tightening torques  $M_{G \max}$  are maximum values of the threaded holes and must not be exceeded. For values, see the following table.

Ports		Maximum permissible tightening torque of the threaded holes $M_{G \max}$	Required tightening torque of the locking screws $M_V$	WAF hexagon socket of the locking screws
Standard	Threaded size			
DIN 3852	M16 x 1.5	100 Nm	50 Nm	8 mm
	M22 x 1.5	210 Nm	80 Nm	10 mm
	M27 x 2	330 Nm	135 Nm	12 mm
	M33 x 2	540 Nm	225 Nm	17 mm

Bosch Rexroth AG  
 Hydraulics  
 Axial piston units  
 Glockeraustraße 2  
 89275 Elchingen, Germany  
 Phone +49 73 08 82-0  
 Fax +49 73 08 72 74  
 info.brm-ak@boschrexroth.de  
 www.boschrexroth.com/axial-piston-pumps

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.


Subject to change.

# Power Valve LA

**RE 95514/04.10** 1/4  
Replaces: 09.99

## Data sheet

Series 10  
Size 6  
Nominal pressure 350 bar  
Maximum pressure 400 bar  
External power limiting of variable pumps

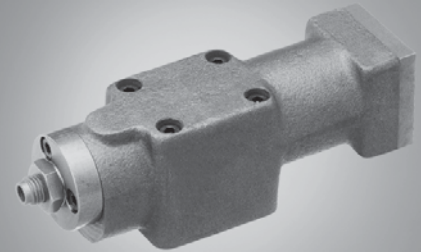

## Contents

Ordering code for standard program	2
Technical data	2
Dimensions	3
General instructions	4

## Description

The LA power valve is used for the external power limiting of variable pumps with hydraulic proportional control (pilot-pressure related, HD or HP).

It controls variable pump displacement depending on the operating pressure so that a specified drive power is not exceeded at a constant speed. The power characteristic is tangentially approximated to the hyperbolic characteristic by adjusting the pre-tension of 2 springs in the power valve.

Via a piston, the springs act on the valve spring of a pressure reduction valve. Operating pressure is applied at the opposite end of the piston. Below the start of control the variable pump's pilot pressure-actuated control unit is supplied with max. 18 bar pilot pressure via port A of the power valve. If the operating pressure exceeds the start of control specified by the power characteristic, the pilot pressure is reduced on port A and the pump swiveled back. At constant drive speed, this is the equivalent of power controlling.

Optionally, the pilot pressure can be reduced again via a separate pressure reduction valve and the pump swiveled to a lower displacement volume (stroke limiter).

# Ordering code for standard program


<b>LA</b>	<b>6</b>	<b>/</b>	<b>10</b>	<b>M</b>	<b>P</b>		<b>-</b>	
01	02		03	04	05	06		07

<b>Valve type</b>	
01 Power valve	<b>LA</b>
<b>Control range</b>	
02 Pilot pressure $6 < p_{St} < 18$ bar	<b>6</b>
<b>Series</b>	
03 Series 1, index 0	<b>10</b>
<b>Version of port and fixing threads</b>	
04 Metric	<b>M</b>
<b>Seals</b>	
05 NBR (nitrile-caoutchouc)	<b>P</b>
<b>Port plate</b>	
06 Without	<b>0</b>
with port plate	<b>A</b>
<b>Standard / special version</b>	
07 Standard version	<b>0</b>
Special version	<b>S</b>

When ordering, state in clear text:


- Type name and size of the implemented axial piston variable pump from Rexroth with pilot-pressure related adjustment HD or HP
- Pump operating speed
- Specified drive power

### Characteristic

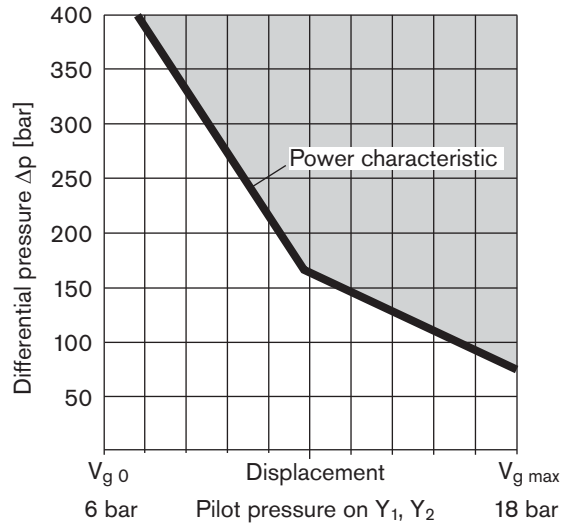

### Circuit diagram

Example:  
LA power valve with axial piston variable pump A4VG...HD (version with pressure reduction valve)

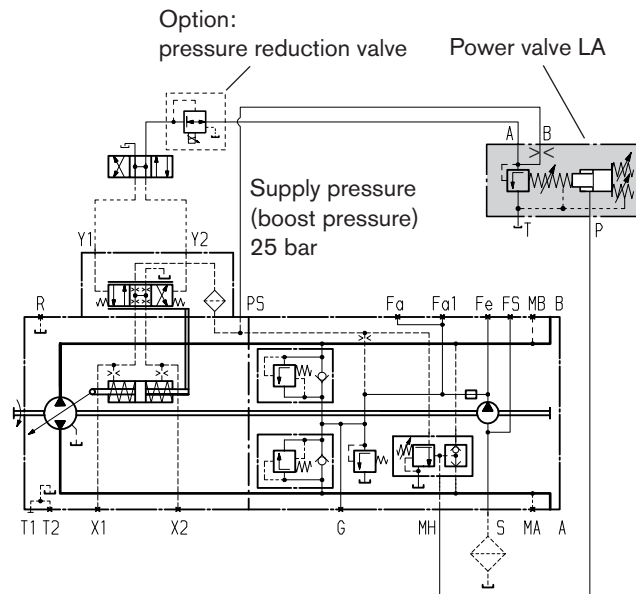

# Technical data

### Table of values

	NG	6
Nominal pressure $p_{nom}$	bar	350
Maximum pressure $p_{max}$	bar	400
Pilot pressure range on port A	bar	$6 < p_{St} < 18$ bar
Supply pressure on port B	bar	25
Minimum start of control high-pressure variable pump	bar	70
Maximum flow on LA with orifice $\varnothing 1.2$ and 18 bar	l/min	4
Hydraulic fluid temperature range	$^{\circ}C$	-20 to +80
Viscosity range	$mm^2/s$	5 to 1600
Installation position		any
Mass	without plate	kg 2.0
	with plate	kg 2.6

### Note

The power valve is always supplied with an orifice ( $\varnothing 1.2$ ) in port B. If the orifice is outside the power valve, port B is plugged.


Full functional capability of the power valve is achieved in the viscosity range from 10 to 30  $mm^2/s$ .




# Dimensions

Before finalizing your design, request a binding installation drawing. Dimensions in mm.

## Version with port plate

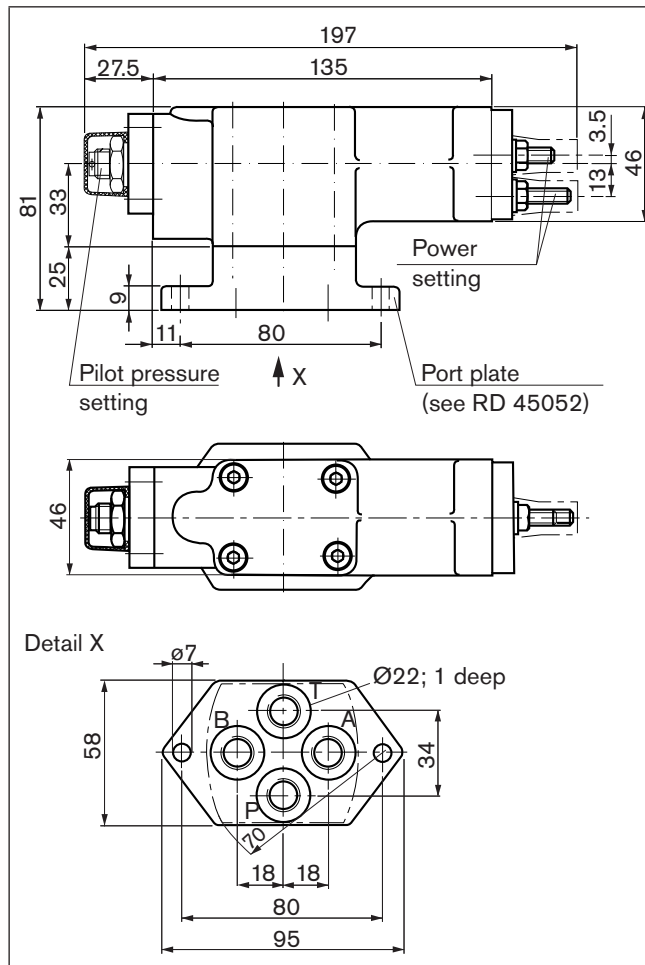

## Version without port plate

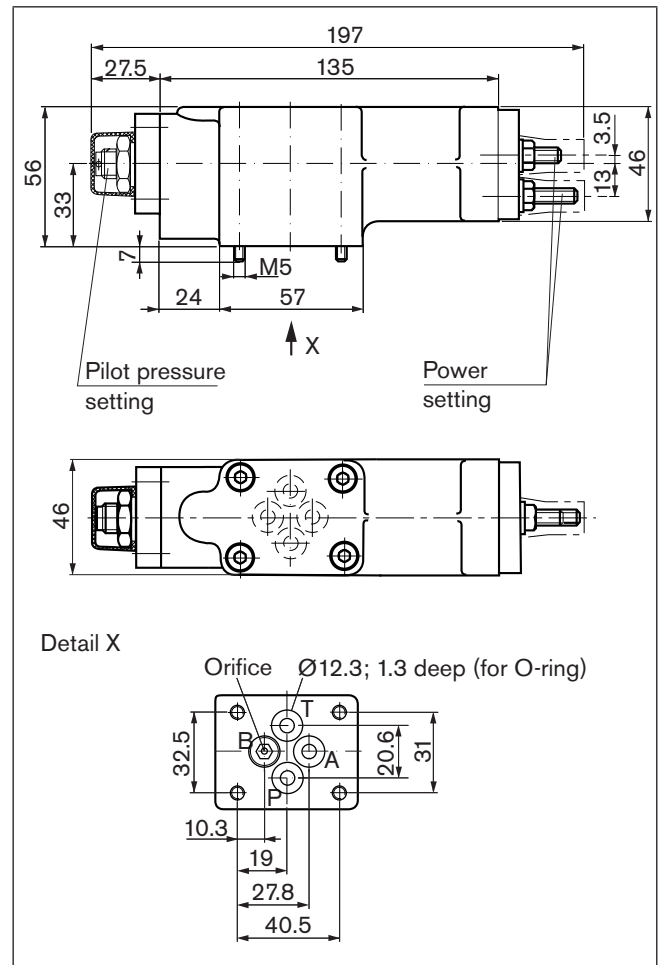

## Ports

### Version with port plate

Designation	Port for	Standard	Size <sup>1)</sup>	Maximum pressure [bar] <sup>2)</sup>	State
A	Pilot pressure output	DIN ISO 228	G1/4 in; 13 deep	30	O
B	Pilot pressure input (in front of orifice)	DIN ISO 228	G1/4 in; 13 deep	30	O <sup>3)</sup>
P	Pump operating pressure	DIN ISO 228	G1/4 in; 13 deep	400	O
T	Tank	DIN ISO 228	G1/4 in; 13 deep	5	O

1) Observe the general instructions on page 8 for the maximum tightening torques.

2) Short-term pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

3) If the orifice is outside the power valve, port B is plugged.

O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)

### Version without port plate

Designation	Port for	Size	Maximum pressure [bar]	State
A	Pilot pressure output	Ø6	30	O
B	Pilot pressure input (in front of orifice) (fitted with orifice, thread M6)	Ø6	30	O
P	Pump operating pressure	Ø6	400	O
T	Tank	Ø6	5	O

## General instructions

- The LA power valve is designed to be used in open and closed circuits.
- Project planning, assembly and commissioning of the components for the axial piston unit require the involvement of qualified personnel.
- The service line ports and function ports are only designed to accommodate hydraulic lines.
- During and shortly after operation, there is a risk of burns on the power valve. Take appropriate safety measures (e.g. by wearing protective clothing).
- Depending on the operational state of the axial piston unit or power valve (operating pressure, fluid temperature) the characteristic may shift.
- Pressure ports:  
The ports and fixing threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
- The data and notes contained herein must be adhered to.
- The following tightening torques apply:
  - Threaded hole of the power valve:  
The maximum permissible tightening torques  $M_{G \max}$  are maximum values of the threaded holes and must not be exceeded. For values, see the following table.
  - Fittings:  
Observe the manufacturer's instruction regarding the tightening torques of the used fittings.
- The product is not approved as a component for the safety concept of a general machine according to DIN EN ISO 13849.

Ports		Maximum permissible tightening torque of the threaded holes $M_{G \max}$	Required tightening torque of the locking screws $M_V$	WAF hexagon socket of the locking screws
Standard	Threaded size			
DIN ISO 228	G1/4	70 Nm	–	–

Bosch Rexroth AG  
 Hydraulics  
 Axial piston units  
 Glockeraustraße 2  
 89275 Elchingen, Germany  
 Phone +49 73 08 82-0  
 Fax +49 73 08 72 74  
 info.brm-ak@boschrexroth.de  
 www.boschrexroth.com/axial-piston-pumps

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Subject to change.

# Universal through drive for axial piston variable pump A10VSO, A4VSO, A15VSO/A15VLO and A11V(L)O

**RE 95581**

Issue: 04.2015

Replaces: 11.2012



- ▶ For A10VSO series 32  
size 45 to 180
- ▶ For A4VSO Series 30  
Size 125 to 355
- ▶ For A15VSO/A15VLO series 10  
size 110 to 280
- ▶ For A11VO/A11VLO series 40  
size 110 to 280

**Features**

- ▶ Flexibel unioversal through drive
- ▶ The through drive are exchangeable without machining the port plate


Informations and possible through drives you will find in the data sheets:

- ▶ 92714 variable pump A10VSO series 32
- ▶ 92050 variable pump A4VSO
- ▶ 92800 variable pump A15VSO/A15VLO
- ▶ 92510 variable pumpe A11VO/A11VLO

**Contents**

Adapter kits	2
Material number for U00 at A10VSO series 32	2
Material number at A4VSO series 30	4
Material number at A15VSO; A15VLO series 10	8
Material number at A11V(L)O series 40	12
Project planning notes	16
Safety instructions	16

## Adapter kits

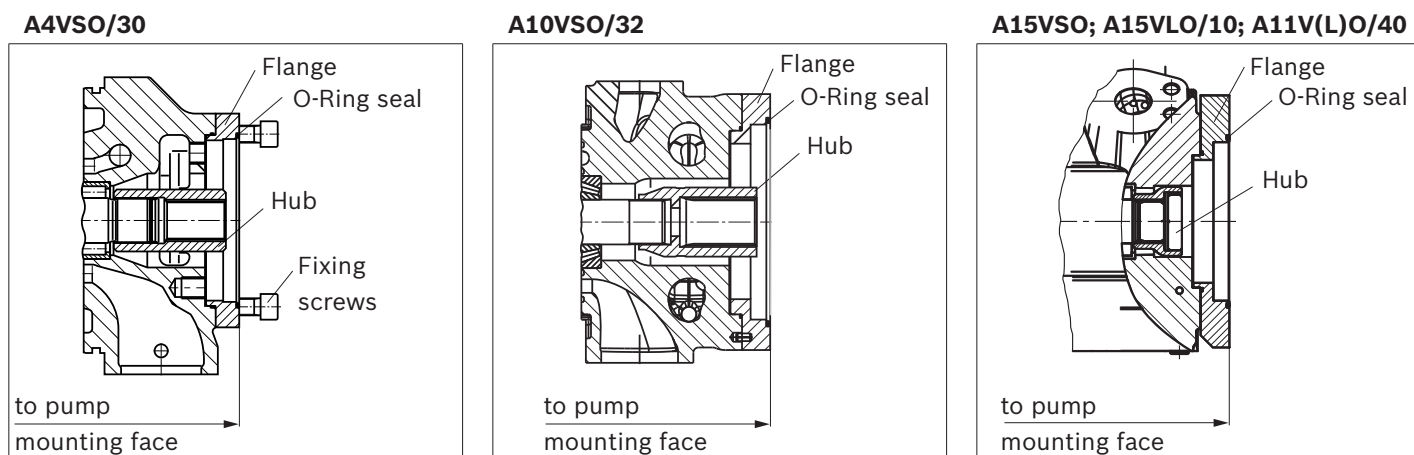

### Assembly group

The through drive come as assembly group. The assembly group „flange and hub“ includes flange, hub, cylinder head screws and O-ring seal.

Fixing screws for the 2. pump will be delivered only for universal through drives of the A4VSO.

### Material number for U00 at A10VSO series 32

Code	Available for pump	Length to pump mounting flange [mm]	Assembly group „Cover“ with cover, cylinder screw
U00	A10VSO45	254	R902496168
	A10VSO71	289	R902496186
	A10VSO100	350	R902496173
	A10VSO140	367	
	A10VSO180	377	
ISO 3019-2			Assembly group „Flange and hub“ with Flange, hub, cylinder screw
UB2	A10VSO45	264	R902496439
	A10VSO71	299	R902496440
	A10VSO100	360	R902496441
	A10VSO140	377	R902496442
	A10VSO180	387	R902496443
UB3	A10VSO45	264	R902492531
	A10VSO71	299	R902512434
	A10VSO100	360	R902496445
	A10VSO140	377	R902496446
	A10VSO180	387	R902496447
UE1	A10VSO 45	264	R902510125
	A10VSO 71	299	R902510126
	A10VSO 100	360	R902510127
	A10VSO 140	377	R902510128
	A10VSO 180	387	R902510129
UB8	A10VSO71	299	R902496458
	A10VSO100	360	R902496459
	A10VSO140	377	R902496460
	A10VSO180	387	R902496461

<b>ISO 3019-2</b>	<b>Available for pump</b>	<b>Length to pump mounting flange [mm]</b>	<b>Assembly group „Flange and Hub“ with flange, hub, cylinder screw</b>
UB9	A10VSO100	360	R902496462
	A10VSO140	377	R902496463
	A10VSO180	387	R902496464
UB7	A10VSO140	377	R902496465
	A10VSO180	387	R902496466
<b>ISO 3019-1 (SAE J744)</b>	<b>Assembly group „Flange and Hub“ with flange, hub, cylinder screw</b>		
U01	A10VSO45	264	R902496467
	A10VSO71	299	R902496468
	A10VSO100	360	R902496469
	A10VSO140	377	R902496470
	A10VSO180	387	R902496471
U52	A10VSO45	264	R902496472
	A10VSO71	299	R902496473
	A10VSO100	360	R902496474
	A10VSO140	377	R902496475
	A10VSO180	387	R902496476
U68	A10VSO45	264	R902496477
	A10VSO71	299	R902496478
	A10VSO100	360	R902496479
	A10VSO140	377	R902496480
	A10VSO180	387	R902496481
U04	A10VSO45	264	R902496482
	A10VSO71	299	R902496663
	A10VSO100	360	R902496664
	A10VSO140	377	R902496665
	A10VSO180	387	R902496666
UE2	A10VSO 45	264	R902510131
	A10VSO 71	299	R902510132
	A10VSO 100	360	R902510133
	A10VSO 140	377	R902510134
	A10VSO 180	387	R902510135
U24	A10VSO 100	360	R902510136
	A10VSO 140	377	R902510137
	A10VSO 180	387	R902510138
U15	A10VSO 71	299	R902510139
	A10VSO 100	360	R902510140
	A10VSO 140	377	R902510141
	A10VSO 180	387	R902510142
U96	A10VSO100	360	R902496667
	A10VSO140	377	R902496668
	A10VSO180	387	R902496669
U17	A10VSO140	377	R902496670
	A10VSO180	387	R902496671

### Material number at A4VSO series 30

<b>Code</b>	<b>Available for pump</b>	<b>Length to pump mounting flange [mm]</b>	<b>Assembly group „Cover“ with cover, cylinder screw</b>
U99	A4VSO125	359	R902438778
	AA4VSO125	361	
	A4VSO180	383	
	AA4VSO180	385	
	A4VSO250	443	R902444736
	AA4VSO 250	445	
	A4VSO355	472	
	AA4VSO 355	474	
<b>ISO 3019-2</b>			<b>Assembly group „Flange and Hub“ with cover, hub, cylinder screw</b>
UB2	A4VSO125	369	R902446991
	A4VSO180	393	
	A4VSO250	453	R902446993
	A4VSO355	482	
UB3	A4VSO125	369	R902446996
	A4VSO180	393	
	A4VSO250	453	R902446998
	A4VSO355	482	
UB4	A4VSO125	369	R902447001
	A4VSO180	393	
	A4VSO250	453	R902447003
	A4VSO355	482	
UB5	A4VSO125	369	R902447006
	A4VSO180	393	
	A4VSO250	453	R902447007
	A4VSO355	482	
UB6	A4VSO125	369	R902447008
	A4VSO180	393	
	A4VSO250	453	R902447009
	A4VSO355	482	
U31	A4VSO125	369	R902447010
	A4VSO180	393	
	A4VSO250	453	R902447011
	A4VSO355	482	
U33	A4VSO125	369	R902447012
	A4VSO180	393	
	A4VSO250	453	R902447013
	A4VSO355	482	
UB8	A4VSO125	369	R902447014
	A4VSO180	393	
	A4VSO250	453	R902447016
	A4VSO355	482	

<b>ISO 3019-2</b>			<b>Assembly group „Flange and Hub“</b> with cover, hub, cylinder screw
U34	A4VSO125	369	R902447019
	A4VSO180	393	
	A4VSO250	453	R902447020
	A4VSO355	482	
UB9	A4VSO125	382	R902447021
	A4VSO180	406	
	A4VSO250	453	R902447022
	A4VSO355	482	
UB7	A4VSO180	406	R902447025
	A4VSO250	453	R902447026
	A4VSO355	482	
U35	A4VSO250	469	R902447028
	A4VSO355	498	
U77	A4VSO355	498	R902447029

<b>ISO 3019-1 (SAE J744)</b>			
(The lengths to the pump mounting face are valid for the SAE version. The metric pumps are 2 mm shorter)			
<b>Code</b>	<b>Available for pump</b>	<b>Length to pump mounting flange [mm]</b>	<b>Assembly group „Flange and Hub“</b> with flange, hub, cylinder screw
U01	A4VSO125	369	R902447030
	AA4VSO125	371	
	A4VSO180	393	R902447032
	AA4VSO180	395	
	A4VSO250	453	R902447032
	AA4VSO250	455	
	A4VSO355	482	R902447035
	AA4VSO355	484	
U52	A4VSO125	369	R902447035
	AA4VSO125	371	
	A4VSO180	393	R902447037
	AA4VSO180	395	
	A4VSO250	453	R902447037
	AA4VSO250	455	
	A4VSO355	482	R902447042
	AA4VSO355	484	
U68	A4VSO125	369	R902447040
	AA4VSO125	371	
	A4VSO180	393	R902447042
	AA4VSO180	395	
	A4VSO250	453	R902447042
	AA4VSO250	455	
	A4VSO355	482	R902447042
	AA4VSO355	484	

<b>ISO 3019-1 (SAE J744)</b>			
(The lengths to the pump mounting face are valid for the SAE version. The metric pumps are 2 mm shorter)			
<b>Code</b>	<b>Available for pump</b>	<b>Length to pump mounting flange [mm]</b>	<b>Assembly group „Flange and Hub“ with flange, hub, cylinder screw</b>
U04	A4VSO125	369	R902447045
	AA4VSO125	371	
	A4VSO180	393	
	AA4VSO180	395	
	A4VSO250	453	R902447047
	AA4VSO250	455	
	A4VSO355	482	
	AA4VSO355	484	
U07	A4VSO125	369	R902447050
	AA4VSO125	371	
	A4VSO180	393	
	AA4VSO180	395	
	A4VSO250	453	R902447051
	AA4VSO250	455	
	A4VSO355	482	
	AA4VSO355	484	
U24	A4VSO125	369	R902447052
	AA4VSO125	371	
	A4VSO180	393	
	AA4VSO180	395	
	A4VSO250	453	R902447053
	AA4VSO250	455	
	A4VSO355	482	
	AA4VSO355	484	
U15	A4VSO125	369	R902447054
	AA4VSO125	371	
	A4VSO180	393	
	AA4VSO180	395	
	A4VSO250	453	R902447055
	AA4VSO250	455	
	A4VSO355	482	
	AA4VSO355	484	
U16	A4VSO125	369	R902447056
	AA4VSO125	371	
	A4VSO180	393	
	AA4VSO180	395	
	A4VSO250	453	R902447057
	AA4VSO250	455	
	A4VSO355	482	
	AA4VSO355	484	



<b>ISO 3019-1 (SAE J744)</b>			
(The lengths to the pump mounting face are valid for the SAE version. The metric pumps are 2 mm shorter)			
<b>Code</b>	<b>Available for pump</b>	<b>Length to pump mounting flange [mm]</b>	<b>Assembly group „Flange and Hub“ with flange, hub, cylinder screw</b>
U96	A4VSO125	369	R902447058
	AA4VSO125	371	
	A4VSO180	393	
	AA4VSO180	395	
	A4VSO250	453	R902447059
	AA4VSO250	455	
	A4VSO355	482	
	AA4VSO355	484	
U17	A4VSO125	382	R902447062
	AA4VSO125	384	
	A4VSO180	406	
	AA4VSO180	408	
	A4VSO250	453	R902447063
	AA4VSO250	455	
	A4VSO355	482	
	AA4VSO355	484	
U18	A4VSO250	479	R902447067
	AA4VSO250	481	
	A4VSO355	508	
	AA4VSO355	510	
U72	A4VSO250	479	R902453019
	AA4VSO250	481	
	A4VSO355	508	
	AA4VSO355	510	

### Material number at A15VSO; A15VLO series 10

Code	Available for pump	Length to pump mounting flange [mm]	Assembly group „Cover“	
			with cover, O-Ring, cylinder screw	
U000	A15VSO 110	285	R902473330	
	A15VSO 145	310	R902473330	
	A15VLO 145	375	R902496066	
	A15VSO 175	328	R902473330	
	A15VLO 175	395	R902514110	
	A15VSO 210	345	R902473330	
	A15VLO 210	412	R902514110	
	A15VSO 280	387	R902473330	
A15VLO 280	443	R902514110		
ISO 3019-2			Assembly group „Flange and Hub“	
			with flange, hub, cylinder screw	
			metric	ANSI
K3S3	A15VSO 110	301	R902534268	On request
	A15VSO 145	326	R902534268	On request
	A15VLO 145	375	R902534268	On request
	A15VSO 175	On request	On request	On request
	A15VLO 175	On request	On request	On request
	A15VSO 210	On request	On request	On request
	A15VLO 210	On request	On request	On request
	A15VSO 280	On request	On request	On request
A15VLO 280	On request	On request	On request	
K5S3	A15VSO 110	301	R902535194	On request
	A15VSO 145	326	R902535194	On request
	A15VLO 145	375	R902535194	On request
	A15VSO 175	341	R902497161	On request
	A15VLO 175	390	R902497161	On request
	A15VSO 210	358	R902497161	On request
	A15VLO 210	407	R902497161	On request
	A15VSO 280	On request	On request	On request
A15VLO 280	On request	On request	On request	
L5S4	A15VSO 110	312	R902545964	On request
	A15VSO 145	337	R902545964	On request
	A15VLO 145	386	R902545964	On request
	A15VSO 175	On request	On request	On request
	A15VLO 175	On request	On request	On request
	A15VSO 210	On request	On request	On request
	A15VLO 210	On request	On request	On request
	A15VSO 280	On request	On request	On request
A15VLO 280	On request	On request	On request	

<b>ISO 3019-2</b>			<b>Assembly group „Flange and Hub“</b> with flange, hub, cylinder screw	
			<b>metric</b>	<b>ANSI</b>
P4S7	A15VSO 110	On request	On request	On request
	A15VSO 145	On request	On request	On request
	A15VLO 145	On request	On request	On request
	A15VSO 175	On request	On request	On request
	A15VLO 175	On request	On request	On request
	A15VSO 210	On request	On request	On request
	A15VLO 210	On request	On request	On request
	A15VSO 280	414	R902512007	On request
	A15VLO 280	452	R902512007	On request
N4Z9	A15VSO 110	On request	On request	On request
	A15VSO 145	On request	On request	On request
	A15VLO 145	On request	On request	On request
	A15VSO 175	On request	On request	On request
	A15VLO 175	On request	On request	On request
	A15VSO 210	On request	On request	On request
	A15VLO 210	On request	On request	On request
	A15VSO 280	414	R902544243	On request
	A15VLO 280	452	R902544243	On request
R4S9	A15VSO 110	On request	On request	On request
	A15VSO 145	On request	On request	On request
	A15VLO 145	On request	On request	On request
	A15VSO 175	360	R902488851	On request
	A15VLO 175	409	R902488851	On request
	A15VSO 210	377	R902488851	On request
	A15VLO 210	426	R902488851	On request
	A15VSO 280	419	R902514299	On request
	A15VLO 280	457	R902514299	On request

ISO 3019-1 (SAE J744)			Assembly group „Flange and Hub“ with flange, hub, cylinder screw	
			metric	ANSI
A3S2	A15VSO 110	301	R902542364	R902543056
	A15VSO 145	326	R902542364	R902543056
	A15VLO 145	375	R902542364	R902543056
	A15VSO 175	341	R902535272	R902542470
	A15VLO 175	390	R902535272	R902542470
	A15VSO 210	358	R902535272	R902542470
	A15VLO 210	407	R902535272	R902542470
	A15VSO 280	400	R902541607	On request
	A15VLO 280	438	R902541607	On request
B3S4	A15VSO 110	312	R902516812	R902541079
	A15VSO 145	337	R902516812	R902541079
	A15VLO 145	386	R902516812	R902541079
	A15VSO 175	355	R902510920	On request
	A15VLO 175	404	R902510920	On request
	A15VSO 210	372	R902510920	On request
	A15VLO 210	421	R902510920	On request
	A15VSO 280	414	R902512054	R902542488
	A15VLO 280	452	R902512054	R902542488
B3S5	A15VSO 110	312	R902512157	On request
	A15VSO 145	337	R902512157	On request
	A15VLO 145	386	R902512157	On request
	A15VSO 175	355	R902517320	R902545124
	A15VLO 175	404	R902517320	R902545124
	A15VSO 210	372	R902517320	R902545124
	A15VLO 210	421	R902517320	R902545124
	A15VSO 280	414	R902517267	On request
	A15VLO 280	452	R902517267	On request
B5S4	A15VSO 110	312	On request	R902543104
	A15VSO 145	337	On request	R902543104
	A15VLO 145	386	On request	R902543104
	A15VSO 175	On request	On request	On request
	A15VLO 175	On request	On request	On request
	A15VSO 210	On request	On request	On request
	A15VLO 210	On request	On request	On request
	A15VSO 280	414	R902541685	On request
	A15VLO 280	452	R902541685	On request
B5S5	A15VSO 110	On request	On request	On request
	A15VSO 145	On request	On request	On request
	A15VLO 145	On request	On request	On request
	A15VSO 175	355	R902536089	On request
	A15VLO 175	404	R902536089	On request
	A15VSO 210	372	R902536089	On request
	A15VLO 210	421	R902536089	On request
	A15VSO 280	On request	On request	On request
	A15VLO 280	On request	On request	On request

ISO 3019-1 (SAE J744)			Assembly group „Flange and Hub“ with flange, hub, cylinder screw	
			metric	ANSI
C3S7	A15VSO 110	323	R902511033	R902543544
	A15VSO 145	348	R902511033	R902543544
	A15VLO 145	397	R902511033	R902543544
	A15VSO 175	355	R902514325	On request
	A15VLO 175	404	R902514325	On request
	A15VSO 210	372	R902514325	On request
	A15VLO 210	421	R902514325	On request
	A15VSO 280	414	R902515215	On request
	A15VLO 280	452	R902515215	On request
C3S9	A15VSO 110	323	R902545065	On request
	A15VSO 145	348	R902545065	On request
	A15VLO 145	397	R902545065	On request
	A15VSO 175	360	R902531105	On request
	A15VLO 175	409	R902531105	On request
	A15VSO 210	377	R902531105	On request
	A15VLO 210	426	R902531105	On request
	A15VSO 280	414	R902514098	R902539947
	A15VLO 280	452	R902514098	R902539947
D4A1	A15VSO 110	325	R902512707	On request
	A15VSO 145	350	R902512707	On request
	A15VLO 145	399	R902512707	On request
	A15VSO 175	364	R902533134	On request
	A15VLO 175	413	R902533134	On request
	A15VSO 210	381	R902533134	On request
	A15VLO 210	430	R902533134	On request
	A15VSO 280	414	R902515220	On request
	A15VLO 280	452	R902515220	On request
D4A2	A15VSO 145	350	R902542404	On request
	A15VLO 145	399	R902542404	On request
	A15VSO 175	364	R902542402	On request
	A15VLO 175	413	R902542402	On request
	A15VSO 210	381	R902542402	On request
	A15VLO 210	430	R902542402	On request
	A15VSO 280	423	R902519158	On request
	A15VLO 280	461	R902519158	On request
E4A2	A15VSO 175	364	R902495006	On request
	A15VLO 175	413	R902495006	On request
	A15VSO 210	381	R902495006	On request
	A15VLO 210	430	R902495006	On request
	A15VSO 280	423	R902495955	On request
	A15VLO 280	461	R902495955	On request
E4A4	A15VSO 280	423	R902495953	On request
	A15VLO 280	461	R902495953	On request

**Material number at A11V(L)O series 40**

Code	Available for pump	Length to pump mounting flange [mm]	Assembly group „Cover“	
			with cover, O-Ring, cylinder screw	
U000	A11VO 110	285	R902473330	
	A11VO 145	310	R902473330	
	A11VLO 145	375	R902496066	
	A11VO 175	328	R902473330	
	A11VLO 175	395	R902514110	
	A11VO 210	345	R902473330	
	A11VLO 210	412	R902514110	
	A11VO 280	387	R902473330	
	A11VLO 280	443	R902514110	
<b>ISO 3019-1</b> (SAE J744)			Assembly group „Flange and Hub“	
			metric	ANSI
A3S2	A11VO 110	301	R902542364	R902543056
	A11VO 145	326	R902542364	R902543056
	A11VLO 145	375	R902542364	R902543056
	A11VO 175	341	R902535272	R902542470
	A11VLO 175	390	R902535272	R902542470
	A11VO 210	358	R902535272	R902542470
	A11VLO 210	407	R902535272	R902542470
	A11VO 280	400	R902541607	On request
	A11VLO 280	438	R902541607	On request
A3S3	A11VO 110	301	On request	R902546963
	A11VO 145	326	On request	R902546963
	A11VLO 145	375	On request	R902546963
	A11VO 175	341	On request	R902542454
	A11VLO 175	390	On request	R902542454
	A11VO 210	358	On request	R902542454
	A11VLO 210	407	On request	R902542454
	A11VO 280	400	On request	R902543060
	A11VLO 280	438	On request	R902543060
B3S4	A11VO 110	312	R902516812	R902541079
	A11VO 145	337	R902516812	R902541079
	A11VLO 145	386	R902516812	R902541079
	A11VO 175	355	R902510920	On request
	A11VLO 175	404	R902510920	On request
	A11VO 210	372	R902510920	On request
	A11VLO 210	421	R902510920	On request
	A11VO 280	414	R902512054	R902542488
A11VLO 280	452	R902512054	R902542488	

<b>ISO 3019-1</b> (SAE J744)			<b>Assembly group „Flange and Hub“</b> with flange, hub, cylinder screw	
			<b>metric</b>	<b>ANSI</b>
B3S5	A11VO 110	312	R902512157	On request
	A11VO 145	337	R902512157	On request
	A11VLO 145	386	R902512157	On request
	A11VO 175	355	R902517320	R902545124
	A11VLO 175	404	R902517320	R902545124
	A11VO 210	372	R902517320	R902545124
	A11VLO 210	421	R902517320	R902545124
	A11VO 280	414	R902517267	On request
	A11VLO 280	452	R902517267	On request
B5S4	A11VO 110	312	On request	R902543104
	A11VO 145	337	On request	R902543104
	A11VLO 145	386	On request	R902543104
	A11VO 175	On request	On request	On request
	A11VLO 175	On request	On request	On request
	A11VO 210	On request	On request	On request
	A11VLO 210	On request	On request	On request
	A11VO 280	414	R902541685	On request
	A11VLO 280	452	R902541685	On request
B5S5	A11VO 110	On request	On request	On request
	A11VO 145	On request	On request	On request
	A11VLO 145	On request	On request	On request
	A11VO 175	355	R902536089	On request
	A11VLO 175	404	R902536089	On request
	A11VO 210	372	R902536089	On request
	A11VLO 210	421	R902536089	On request
	A11VO 280	On request	On request	On request
	A11VLO 280	On request	On request	On request
C3S7	A11VO 110	323	R902511033	R902543544
	A11VO 145	348	R902511033	R902543544
	A11VLO 145	397	R902511033	R902543544
	A11VO 175	355	R902514325	On request
	A11VLO 175	404	R902514325	On request
	A11VO 210	372	R902514325	On request
	A11VLO 210	421	R902514325	On request
	A11VO 280	414	R902515215	On request
	A11VLO 280	452	R902515215	On request
C3S9	A11VO 110	323	R902545065	On request
	A11VO 145	348	R902545065	On request
	A11VLO 145	397	R902545065	On request
	A11VO 175	360	R902531105	On request
	A11VLO 175	409	R902531105	On request
	A11VO 210	377	R902531105	On request
	A11VLO 210	426	R902531105	On request
	A11VO 280	414	R902514098	R902539947
	A11VLO 280	452	R902514098	R902539947



14 **Universal through drive for A10VSO, A4VSO, A15VSO, A11V(L)O** | axial piston variable pump  
 Material number at A11V(L)O series 40

<b>ISO 3019-1</b> (SAE J744)			<b>Assembly group „Flange and Hub“</b> with flange, hub, cylinder screw	
			<b>metric</b>	<b>ANSI</b>
C5S7	A11VO 110	On request	On request	On request
	A11VO 145	On request	On request	On request
	A11VLO 145	On request	On request	On request
	A11VO 175	355	R902497179	On request
	A11VLO 175	404	R902497179	On request
	A11VO 210	372	R902497179	On request
	A11VLO 210	421	R902497179	On request
	A11VO 280	414	On request	R902542469
	A11VLO 280	452	On request	R902542469
C4S7	A11VO 110	323	R902542207	R902543105
	A11VO 145	348	R902542207	R902543105
	A11VLO 145	397	R902542207	R902543105
	A11VO 175	355	R902497177	On request
	A11VLO 175	404	R902497177	On request
	A11VO 210	372	R902497177	On request
	A11VLO 210	421	R902497177	On request
	A11VO 280	414	R902543496	On request
	A11VLO 280	452	R902543496	On request
C4V8	A11VO 110	323	R902545504	On request
	A11VO 145	348	R902545504	On request
	A11VLO 145	397	R902545504	On request
	A11VO 175	On request	On request	On request
	A11VLO 175	On request	On request	On request
	A11VO 210	On request	On request	On request
	A11VLO 210	On request	On request	On request
	A11VO 280	On request	On request	On request
	A11VLO 280	On request	On request	On request
D4T1	A11VO 110	336	R902516670	R902543106
	A11VO 145	361	R902516670	R902543106
	A11VLO 145	410	R902516670	R902543106
	A11VO 175	373	R902495015	R902546266
	A11VLO 175	422	R902495015	R902546266
	A11VO 210	390	R902495015	R902546266
	A11VLO 210	439	R902495015	R902546266
	A11VO 280	432	R902497428	R902539862
	A11VLO 280	470	R902497428	R902539862
D4S7	A11VO 110	On request	On request	On request
	A11VO 145	On request	On request	On request
	A11VLO 145	On request	On request	On request
	A11VO 175	On request	On request	On request
	A11VLO 175	On request	On request	On request
	A11VO 210	On request	On request	On request
	A11VLO 210	On request	On request	On request
	A11VO 280	On request	On request	On request
	A11VLO 280	On request	On request	On request



<b>ISO 3019-1</b> (SAE J744)			<b>Assembly group „Flange and Hub“</b> with flange, hub, cylinder screw	
			<b>metric</b>	<b>ANSI</b>
D4V8	A11VO 110	On request	On request	On request
	A11VO 145	On request	On request	On request
	A11VLO 145	On request	On request	On request
	A11VO 175	On request	On request	On request
	A11VLO 175	On request	On request	On request
	A11VO 210	On request	On request	On request
	A11VLO 210	On request	On request	On request
	A11VO 280	On request	On request	On request
	A11VLO 280	On request	On request	On request
E4T1	A11VO 175	373	R902536130	On request
	A11VLO 175	422	R902536130	On request
	A11VO 210	390	R902536130	On request
	A11VLO 210	439	R902536130	On request
	A11VO 280	432	On request	R902542451
	A11VLO 280	470	On request	R902542451
E4T2	A11VO 175	386	R902543051	R902542482
	A11VLO 175	435	R902543051	R902542482
	A11VO 210	403	R902543051	R902542482
	A11VLO 210	452	R902543051	R902542482
	A11VO 280	445	R902545123	R902542449
	A11VLO 280	483	R902545123	R902542449
E4T3	A11VO 280	445	R902545886	R902535350
	A11VLO 280	483	R902545886	R902535350
E4A4	A11VO 280	423	R902495953	On request
	A11VLO 280	461	R902495953	On request

## Project planning notes

- ▶ The A10VSO, A4VSO, A15VSO und A11V(L)O pumps are designed to be used in open circuits.
- ▶ Project planning, installation and commissioning of the axial piston units requires the involvement of skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual thoroughly and completely. If necessary, request these from Bosch Rexroth.
- ▶ Before finalizing your design, request a binding installation drawing.
- ▶ The data and notes contained herein must be adhered to. For further informations see the data sheets of the products on page 1.

## Safety instructions

- ▶ During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g., by wearing protective clothing).

**Bosch Rexroth AG**  
Mobile Applications  
An den Kelterwiesen 14  
72160 Horb a.N., Germany  
Tel. +49 7451 92-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from this information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# Hydraulic reservoir

## TMP (polymer reservoir)

## TMS (steel reservoir)

**RE 95721**

Issue: 06.2015

Replaces: July 2013



- ▶ Hydraulic reservoir for rotary drives
- ▶ Steel or polymer versions
- ▶ Total volume 8 liters
- ▶ Flow rate up to 90 l/min

**Features**

- ▶ Power supply for one pump and optional second pump
- ▶ 6.5 l filling volume for up to 75 l/min throughput (steel reservoir)
- ▶ 6 l filling volume for up to 90 l/min throughput (polymer reservoir)
- ▶ Robust design for mobile applications with rotary drives
- ▶ Light weight (polymer reservoir)
- ▶ Compact dimensions
- ▶ Reservoir cap with air bleed
- ▶ Oil level gauge
- ▶ Integrated return line filter

**Contents**

Type code	2
Description	3
Technical Data	3
Dimensions of polymer reservoir	4
Dimensions of steel reservoir	8
Oil level sensor	9
Oil level check	9
Maintenance	9
Installation instructions	9
General instructions for project planning	10

2 **TMP (polymer reservoir), TMS (steel reservoir) | Hydraulic reservoir**  
Type code

**Type code**

01	02	03	04	05	06	07	08
TM		/	10	-			

**Design**

01	Hydraulic reservoir for mobile applications	TM
----	---	----

**Version**

02	Polymer reservoir	P
	Steel reservoir	S

**Total volume**

03	8 liters	TMP	TMS	08
		●	●	

**Series**

04		10
----	--	----

**Filtration**

05	Glass fiber filter, filter grade 10 µm / dirt absorption capacity 12 g	●	-	G1012
	Glass fiber filter, filter grade 10 µm / dirt absorption capacity 60 g	-	●	G1060

**Oil level gauge**

06	Visual	●	●	V
	Visual and electrical (optional)	●	○	E

**Suction port for second pump**

07	Not available	●	-	S0
	Fitted	●	●	S1

**Ports**

08	Plugged (with plastic plug to protect against dirt)	●	●	L1
----	---	---	---	----

● = Available    ○ = On request    - = Not available

**Preferred series**

Type code	Material number
TMP08/10-G1012VS0L1	R902651116
TMP08/10-G1012ES0L1	R902476412
TMP08/10-G1012ES1L1	R902484689
TMP08/10-G1012VS1L1	R902492164
TMS08/10-G1060VS1L1	R902519518

## Description

The robust hydraulic reservoirs are designed for rotary drives in open circuits with no or very low differential volumes. Polymer and steel versions are available. Light weight and compact dimensions mean that Rexroth hydraulic reservoirs are optimally adapted to requirements of hydraulics for rotary drives.

The hydraulic reservoir allows the optional supply of a second pump.

An automatic air bleed is integrated into the reservoir cap.

The hydraulic reservoirs are fitted as standard with a visual oil level indicator. The polymer reservoir can also be equipped as necessary with electrical level monitoring.

A return line filter is installed in the reservoir.

### Hydraulic fluid


Prior to project planning, please see our data sheets RE 90220 (mineral oil) and RE 90221 (environmentally acceptable hydraulic fluids) for detailed information regarding the selection of hydraulic fluid and application conditions. For operation with environmentally acceptable hydraulic fluids, restrictions of the technical data are required. Please contact us. When ordering, indicate the hydraulic fluid that is to be used.

## Technical Data

Hydraulic reservoir	Polymer reservoir TMP	Steel reservoir TMS
Material	Polymer, PA66GF25 (UV-stabilized)	Steel, S235JR
Wall thickness	2.5 mm	2 mm
Color	white	Black (painted), RAL 9005
Weight (empty)	1.6 kg	5.6 kg
Maximum flow rate	90 l/min	75 l/min
Total volume	8 l	8 l
Filling volume	6 l	6.5 l
Reservoir air bleed	Fitted	Fitted
Pressure, maximum permissible		
Port B (return line)	2.0 bar absolute	2.5 bar absolute
Port L (drain line)	2.0 bar absolute	2.0 bar absolute
Temperature range	-30 °C to 90 °C	-30 °C to 90 °C
Maximum operating temperature, short-term < 3 min	120 °C	120 °C
Filter		
Filter material	Glass fiber filter	Glass fiber filter
Retention rate (ISO 16889)	$\beta_{10} > 100$ Separation rate > 99% for 10 $\mu\text{m}$ particles	$\beta_{10} > 100$ Separation rate > 99% for 10 $\mu\text{m}$ particles
Contamination retention capacity (ISO 16889)	12 g	60 g

### Dimensions of polymer reservoir


With oil level sensor, without suction port for second pump

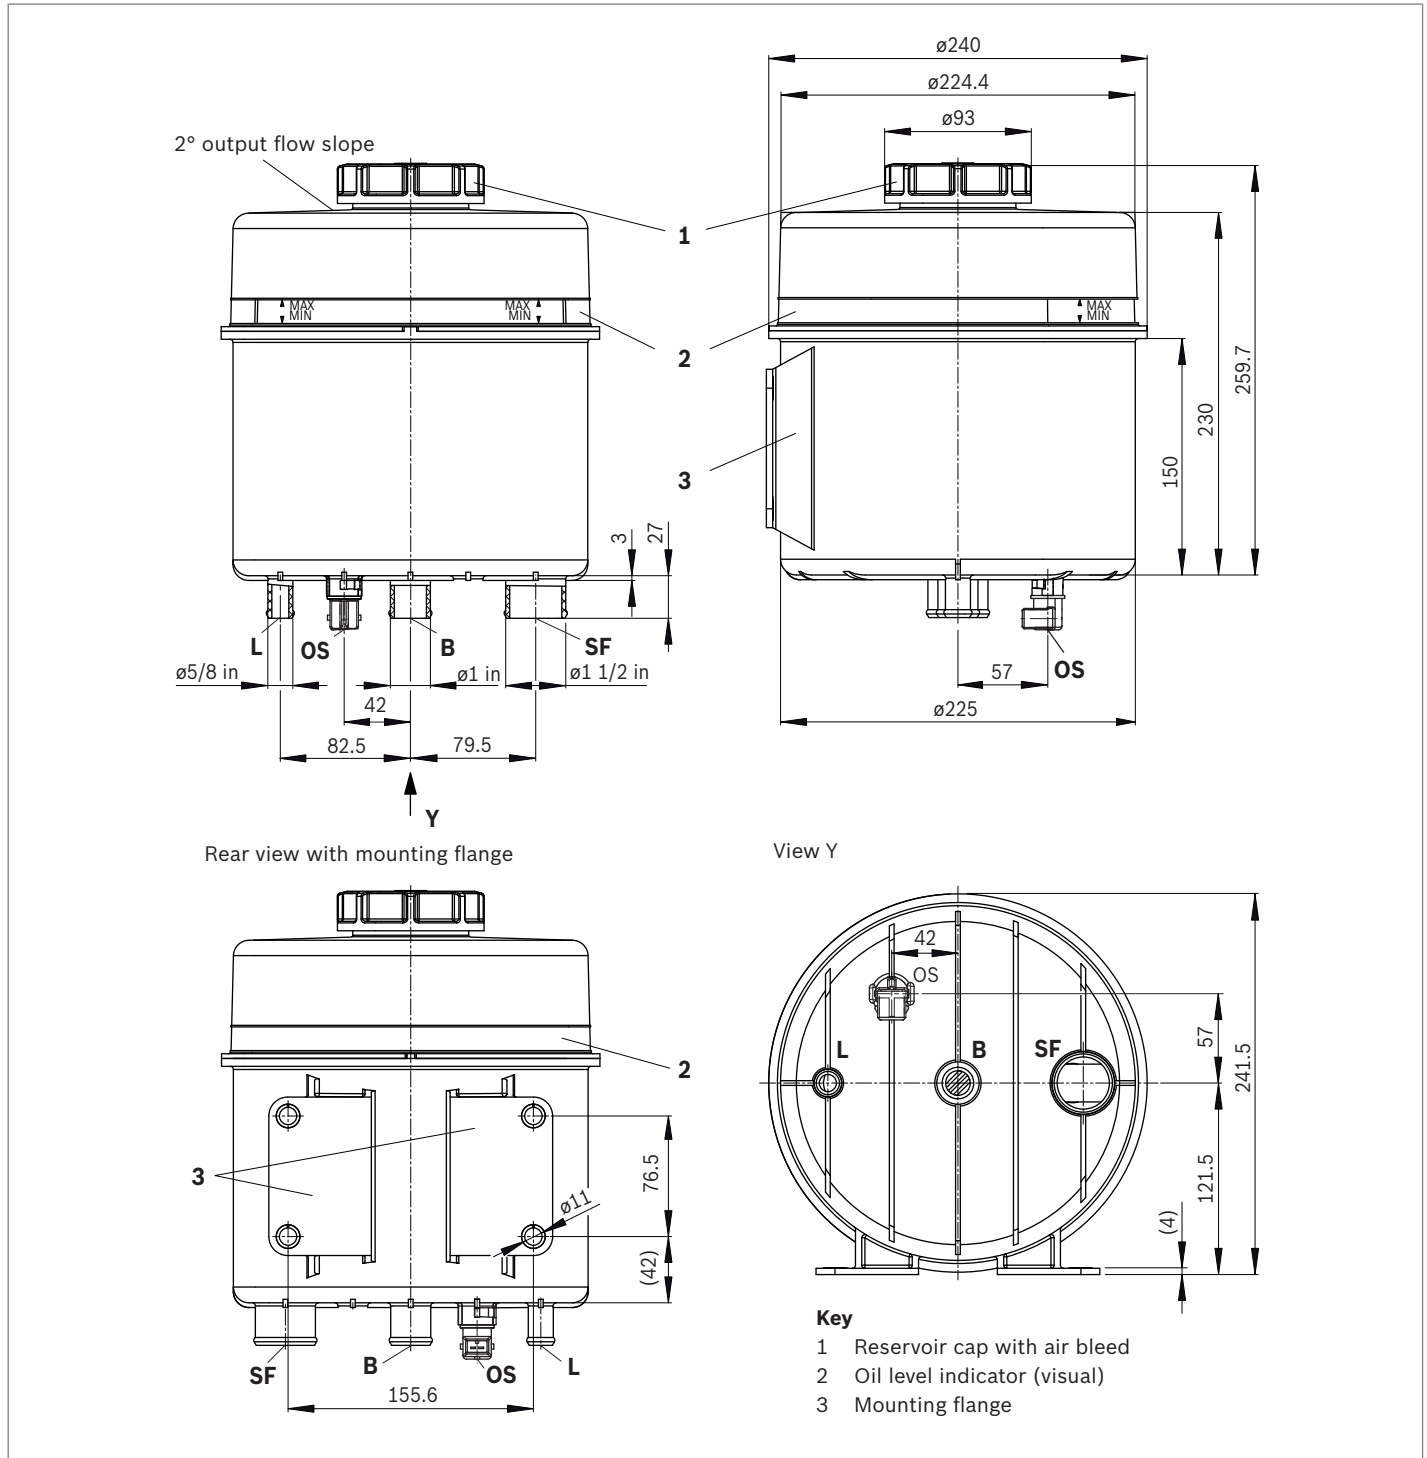

Ports	Socket piece, outer diameter <sup>1)</sup>	Recommended hose clamp			
		Standard	Width	Tightening torque	
L	Drain port	5/8 in	DIN 3017-1	9 mm	3 Nm +0.5
B	Return port	1 in	DIN 3017-1	13 mm	5 Nm +0.5
SF	Suction port for fan pump	1 1/2 in	DIN 3017-3	20 mm	7 Nm
OS	Oil level sensor, electric	-	-	-	-

1) For these socket pieces, hose corresponding to the SAE J 517 standard are recommended


**Without oil level sensor, without suction port for second pump**

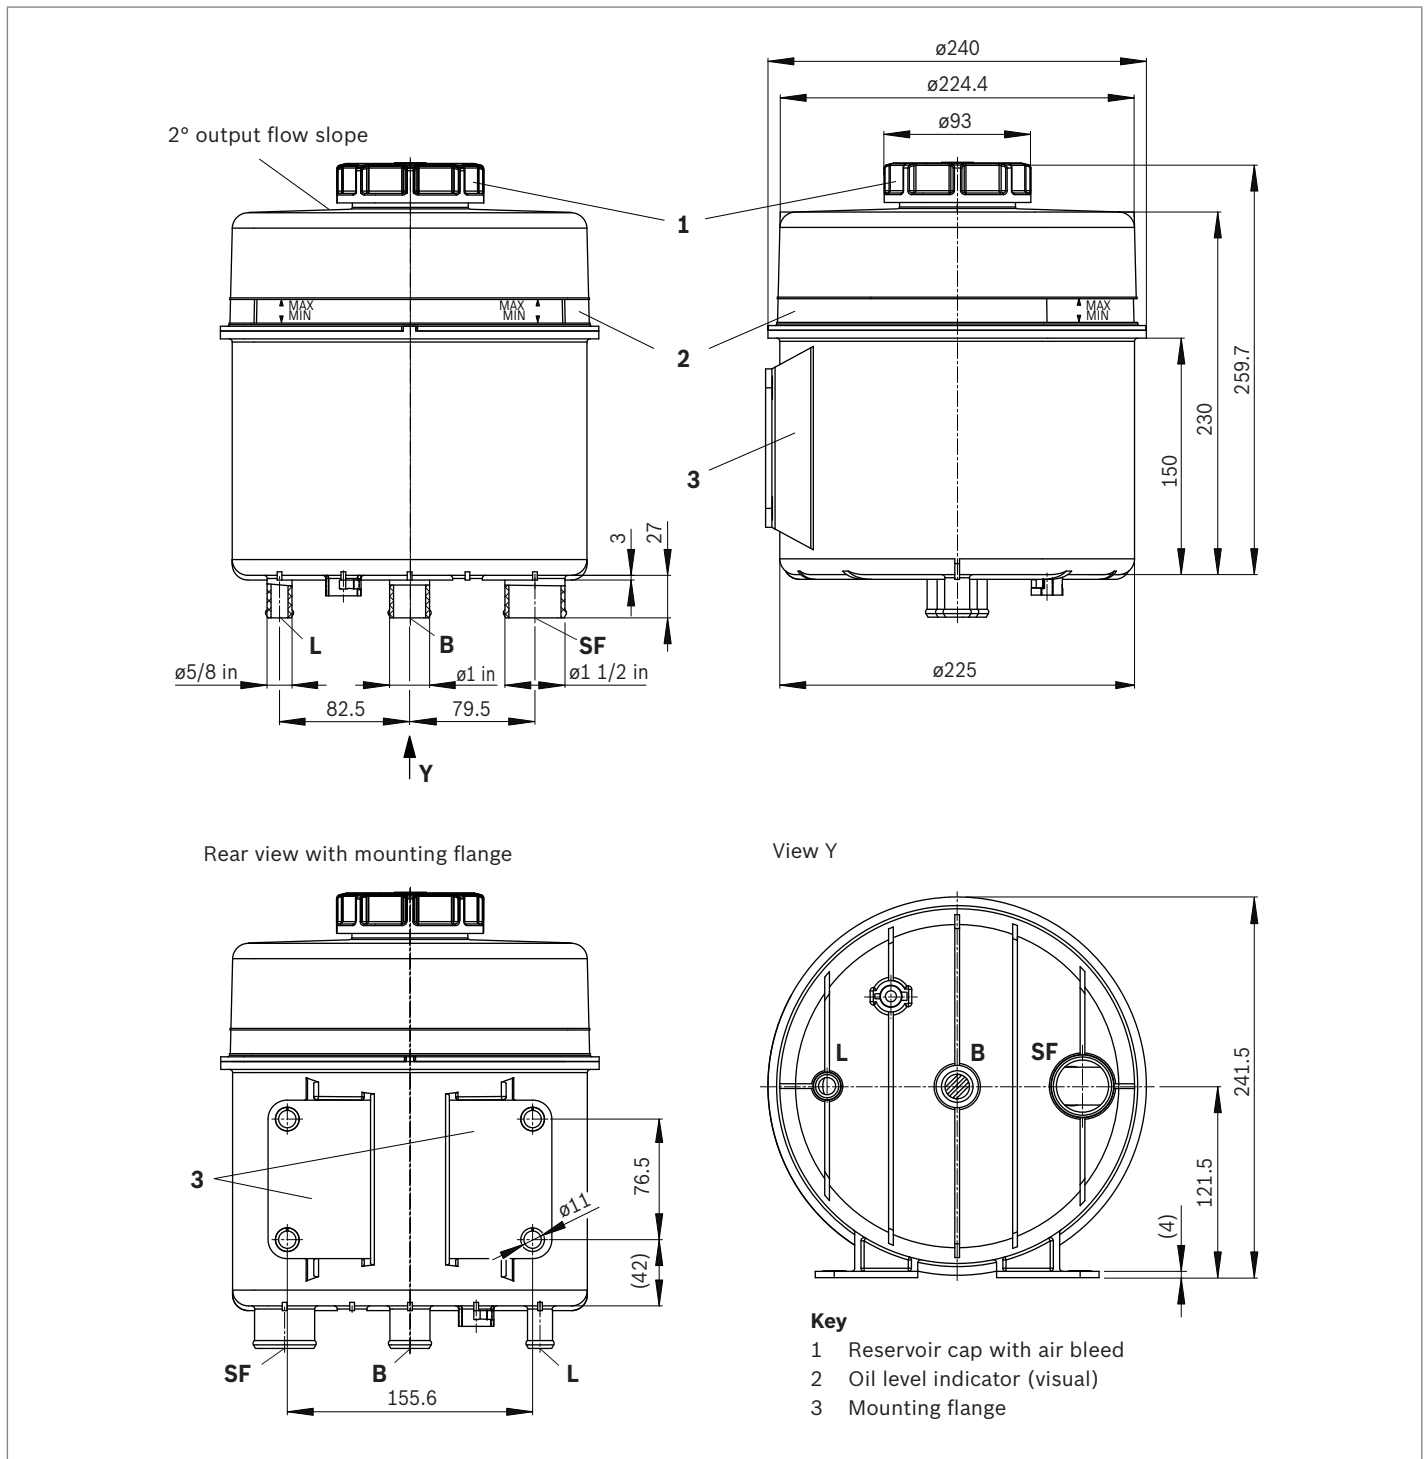

Ports		Socket piece, outer diameter <sup>1)</sup>	Recommended hose clamp		Tightening torque
			Standard	Width	
<b>L</b>	Drain port	5/8 in	DIN 3017-1	9 mm	3 Nm +0.5
<b>B</b>	Return port	1 in	DIN 3017-1	13 mm	5 Nm +0.5
<b>SF</b>	Suction port for fan pump	1 1/2 in	DIN 3017-3	20 mm	7 Nm

1) For these socket pieces, hose corresponding to the SAE J 517 standard are recommended

**With oil level sensor, with suction port for second pump**

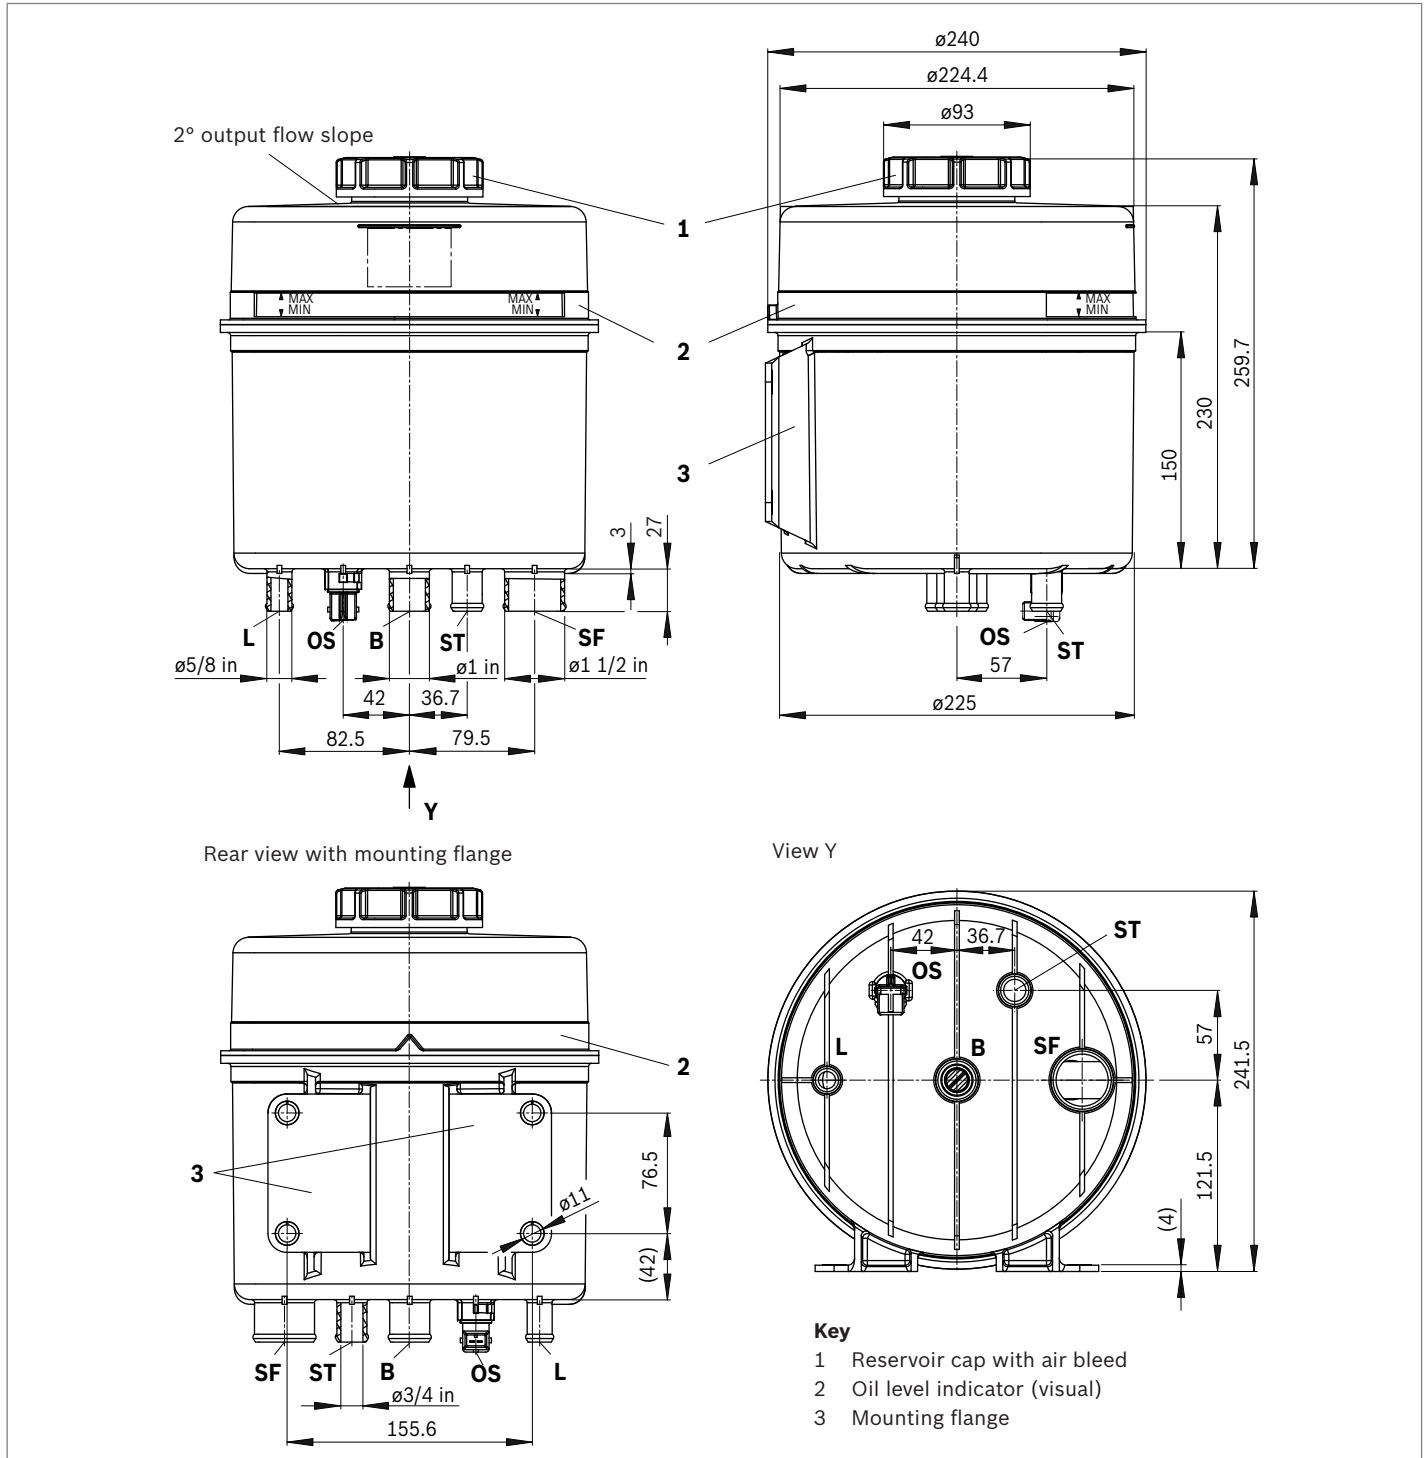


Ports		Socket piece, outer diameter <sup>1)</sup>	Recommended hose clamp Standard	Width	Tightening torque
L	Drain port	5/8 in	DIN 3017-1	9 mm	3 Nm +0.5
B	Return port	1 in	DIN 3017-1	13 mm	5 Nm +0.5
SF	Suction port for fan pump	1 1/2 in	DIN 3017-3	20 mm	7 Nm
ST	Suction port, second pump	3/4 in	DIN 3017-3	18 mm	4 Nm
OS	Oil level sensor, electric	-	-	-	-

1) For these socket pieces, hose corresponding to the SAE J 517 standard are recommended




**Without oil level sensor, without suction port for second pump**

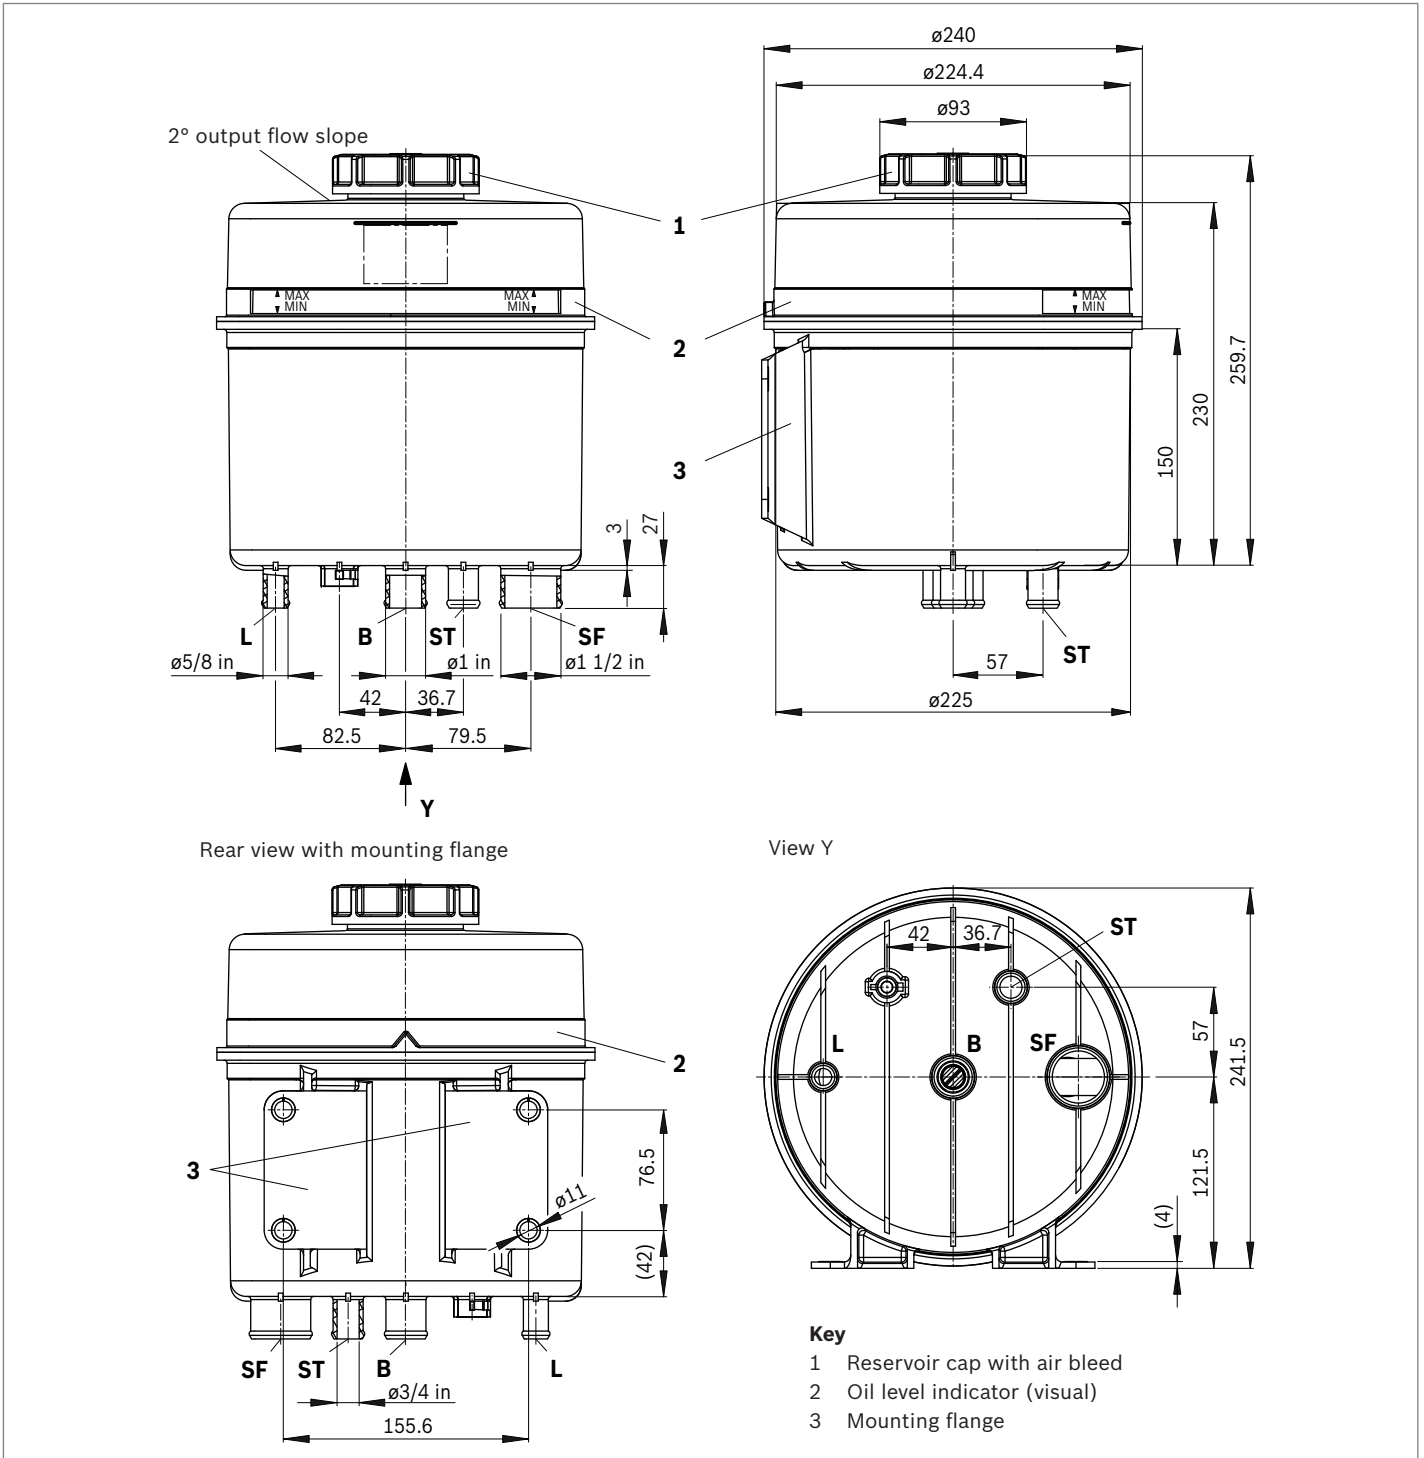

Ports	Socket piece, outer diameter <sup>1)</sup>	Recommended hose clamp			
		Standard	Width	Tightening torque	
<b>L</b>	Drain port	5/8 in	DIN 3017-1	9 mm	3 Nm +0.5
<b>B</b>	Return port	1 in	DIN 3017-1	13 mm	5 Nm +0.5
<b>SF</b>	Suction port for fan pump	1 1/2 in	DIN 3017-3	20 mm	7 Nm
<b>ST</b>	Suction port, second pump	3/4 in	DIN 3017-3	18 mm	4 Nm

1) For these socket pieces, hose corresponding to the SAE J 517 standard are recommended

**Dimensions of steel reservoir**

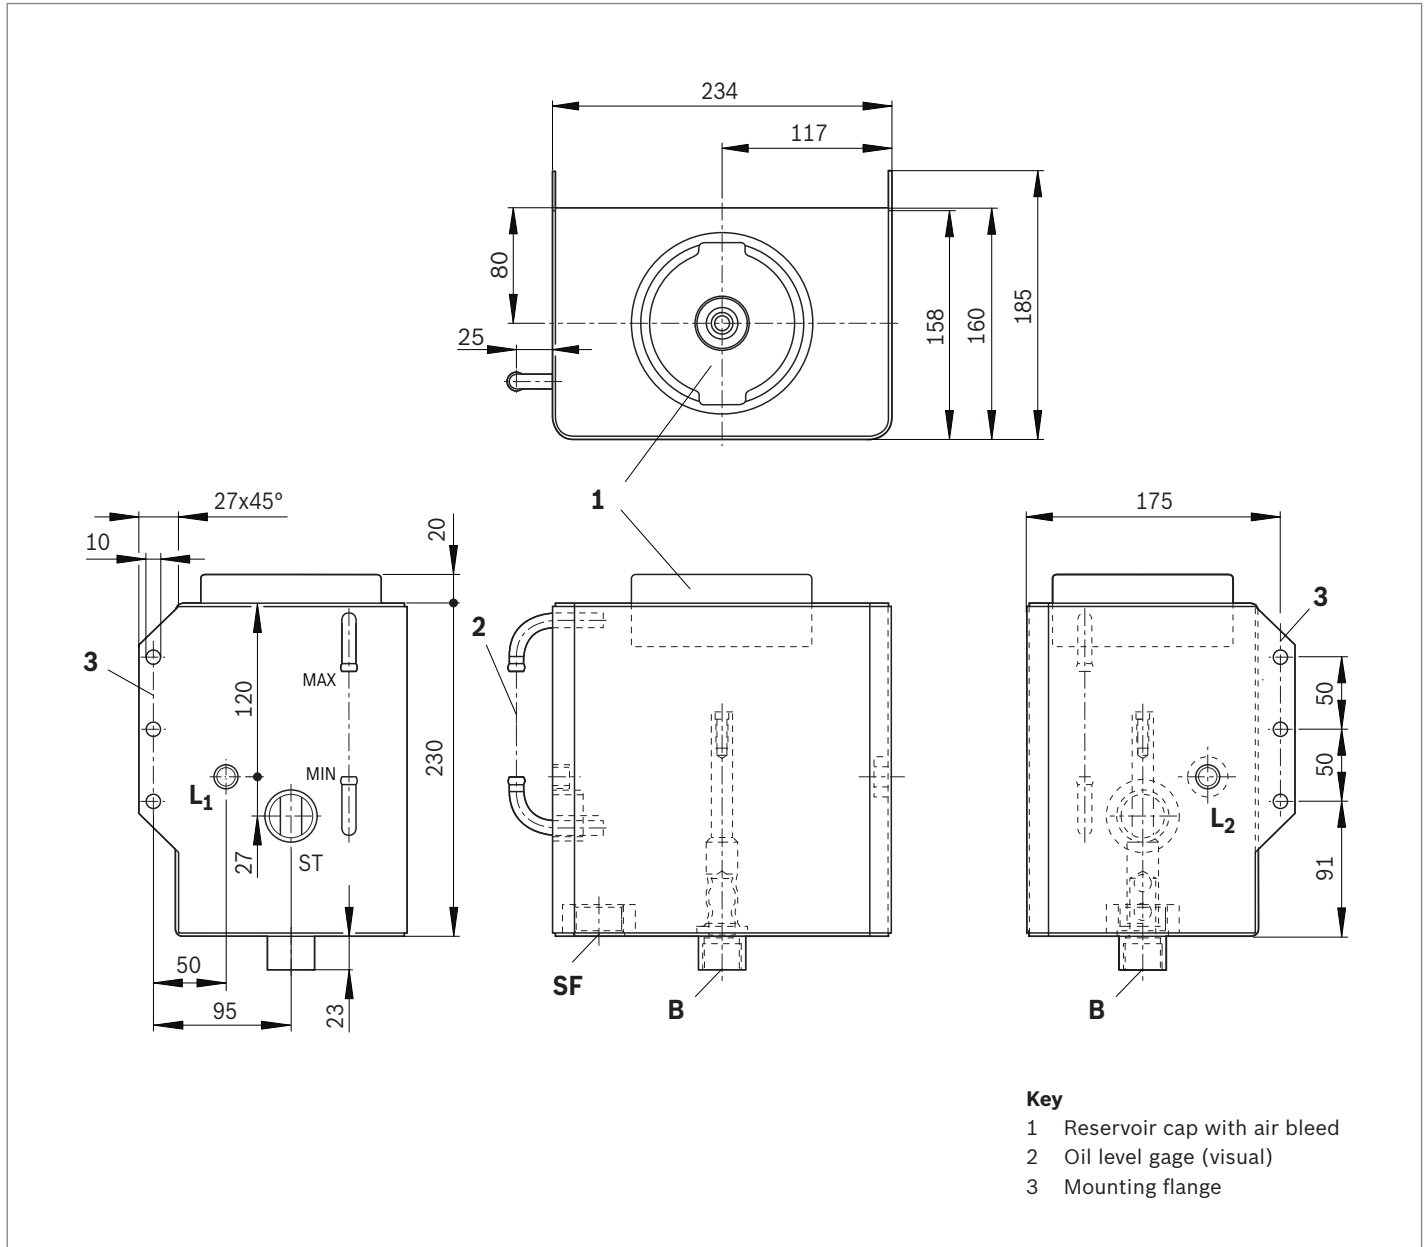

Ports	Standard	Thread
L <sub>1</sub>	ISO 6149	M14 × 1.5
L <sub>2</sub>	ISO 6149	M14 × 1.5
B	ISO 6149	M26 × 1.5
SF	ISO 6149	M33 × 2
ST	ISO 6149	M33 × 2


## Oil level sensor

### Function

The oil level sensor opens as the level drops.

Nominal voltage	Breakdown voltage
12 V / 24 V	≥ 200 V (DC)

### ▼ Circuit diagram



Indicator light not included in the scope of delivery.

### Note

Contact protection measures recommended for non-resistive loads.

### Mating Connector

On the version with electrical oil level sensor, the mating connector is not included in the scope of delivery.

### ▼ Order designation:

Material number	R900313533	R901022127
Litz wire cross-section	0.5 to 1 mm <sup>2</sup>	0.5 to 1 mm <sup>2</sup>
Insulation diameter of individual seals	1.2 to 2.1 mm	2.2 to 3 mm

## Oil level check

Regular visual inspection of the oil level by means of a light source is recommended.

## Maintenance

The service life of the hydraulic pump is heavily dependent on the quality of the hydraulic fluid in the reservoir. Our advice is to have the hydraulic fluid and the filter changed after every 2000 operating hours or at least once per year.

### Spare part filter:

Hydraulic reservoir	Material number
TMP08/10-G1012. . .	R928019283
TMS08/10-G1060. . .	R928018948

## Installation instructions


### Piping of hydraulic reservoir to pump:

Connection Hydraulic reservoir	Connection Pump/oil cooler
L, L <sub>1</sub> /L <sub>2</sub>	Highest positioned case drain port for pump
SF	Suction line for pump
B	Return line for oil cooler

If using the reservoir with a second pump, its suction line can be connected to the **ST** port.

### Installation position (recommended)

The minimum oil level in the reservoir should always be above the pump. In order to guarantee optimum suction properties for the pump, the suction line must always be routed so that it is descending from the reservoir to the pump.



### Notes

- ▶ The polymer reservoir TMP must be protected against external strains (e.g. rock fall or climbing aid) and chemical contamination.
- ▶ The installation position must be selected so that the reservoir will not be damaged in an accident (crash-proof installation).
- ▶ The reservoir mounting must withstand all foreseeable loads.
- ▶ Except at the mounting points, no mechanical loads are to be exerted on the reservoir.
- ▶ The permissible temperatures must not be exceeded.
- ▶ It must be ensured that escaping hydraulic fluid is unable to come into contact with ignition sources (hot vehicle components, sparks).
- ▶ For example, the reservoir could be dropped and damaged during transportation. Reservoirs that have been dropped are not approved for operation.

## General instructions for project planning

- ▶ The project planning, installation and commissioning of a hydraulic reservoir require the involvement of qualified skilled persons.
- ▶ The working ports and function ports can only be used to accommodate hydraulic lines.
- ▶ Manufacturer's instructions for the tightening torques of the used fittings must be observed!
- ▶ No faulty components are to be used. If the components should fail or demonstrate faulty operation, repairs must be performed immediately.
- ▶ During and for a short time after operation, the case temperature of the reservoir may increase. Take suitable safety measures (e.g. wear protective clothing).
- ▶ The product is not approved as a component for the safety concept of a general machine according to DIN EN ISO 13849.
- ▶ The sensor for electrical level monitoring cannot be retrofitted.
- ▶ Surge movements of the oil can cause oil to leak via the reservoir air bleed, which can cause an oil film on the reservoir surface.

### Intended use

- ▶ Rexroth hydraulic reservoirs are designed for rotary drives in an open circuit.
- ▶ When designing the system, make sure the maximum oil level is not exceeded even at high temperatures (e.g. by temperature expansion of the oil).
- ▶ When cleaning the reservoir (e.g. by water jet), make sure no water enters the reservoir through the reservoir air bleed.
- ▶ In case of continuous irradiation with UV light (e.g. sunlight), UV protection for the reservoir is necessary.
- ▶ The warranty by Rexroth only applies to the delivered configuration. In case of extensions or conversions, the warranty will become void.

**Bosch Rexroth AG**  
Mobile Applications  
An den Kelterwiesen 14  
72160 Horb, Germany  
Tel.: +49-7451-92-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without our consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# External gear pumps

## Standard Performance / High Performance

Designation	Type	Size	Series	Data sheet	Page
<b>Standard Performance</b>					
External gear pump Standard-Performance	AZPW	4...22	1x/2x	10090	1261
<b>High Performance</b>					
External gear pump High Performance	AZPB	1...7.1	3x	10088	1297
External gear pump High Performance	AZPF	4...28	1x/2x	10089	1329
External gear pump High Performance	AZPN	20...36	1x/2x	10091	1397
External gear pump High Performance	AZPG	22...100	2x/3x	10093	1421



# External gear pump Standard performance AZPW

**RE 10090**

Edition: 06.2016



- ▶ Platform F
- ▶ Fixed displacement
- ▶ Sizes 4 to 22
- ▶ Continuous pressure up to 190 bar
- ▶ Intermittent pressure up to 210 bar

**Features**

- ▶ Consistently high quality due to high-volume series production
- ▶ Long service life
- ▶ Slide bearings for high loads
- ▶ Drive shafts conform to ISO or SAE and customer-specific solutions
- ▶ Line connections: Connection flange or screw-in thread

**Contents**

Functional description	2
Product overview AZPW preferred types	3
Type code single pump	4
Technical data	6
Flow and power characteristic curves	8
Drives	11
Dimensions – drive shaft	13
Dimensions – front cover	14
Dimensions – line connection	15
Dimensions – preferred series	16
Accessories	29
Spare parts	31
Notes on commissioning	32
Order number overview	33
AZ configurator	35
Fit4SILENCE app	35
Your notes	36

## Functional description

### General


Rexroth external gear pumps are available as standard performance gear pumps in the series W. The displacements are graded by different gear widths. Further configuration variants are given by different flanges, shafts, valve arrangements and multiple pump combinations.

### Construction


The external gear pump consists essentially of a pair of gear wheels supported in bearing bushes and the housing with a front and a rear cover. The drive shaft protrudes from the front cover where it is usually sealed by the shaft seal. The bearing forces are absorbed by slide bearings.

These were designed for high pressures and have excellent emergency running properties, especially at low rotational speeds. The gear wheels have 12 teeth. This keeps both flow pulsation and noise emission to a minimum. The internal sealing of the pressure chambers is achieved by delivery pressure-dependent forces. This ensures optimum efficiency. On the rear side, the movable bearing bushes are pressurized with working pressure and pressed as seals against the gear wheels. The pressurized compression springs are limited by special seals. The seal on the area between the gear teeth and the housing is ensured by the smallest of gaps that adjust depending on the pressure between the gear teeth and housing.

### ▼ Axial compensation standard performance

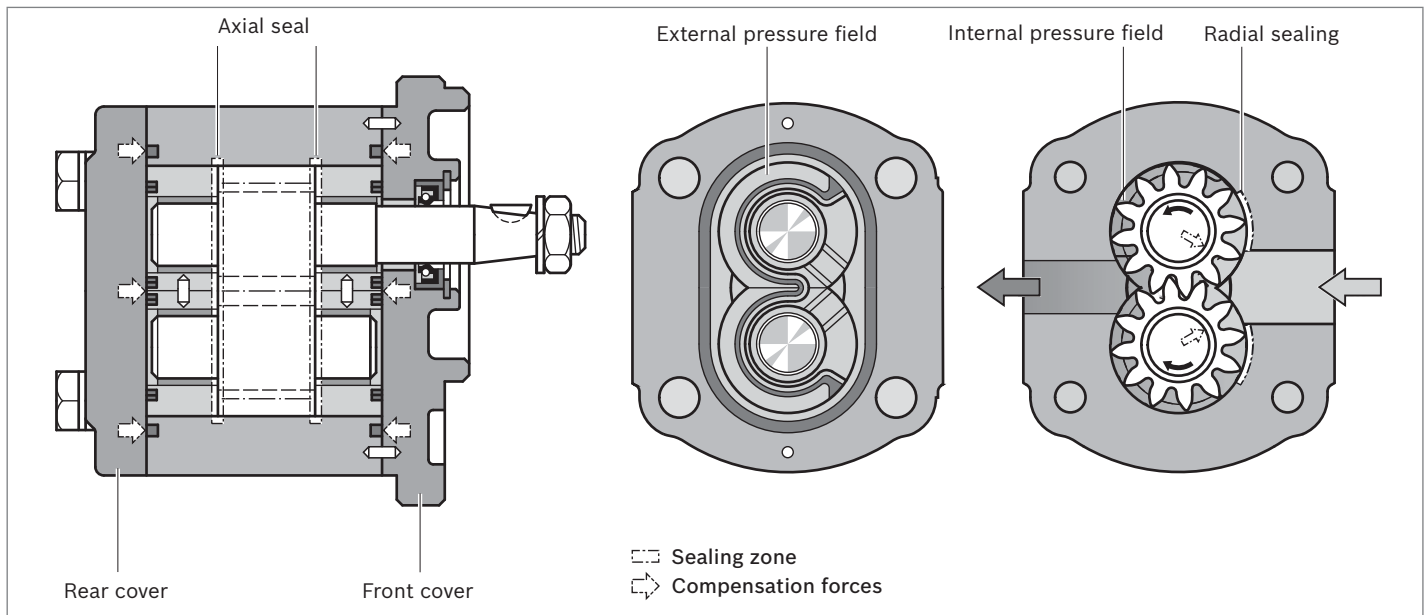














### ▼ Layout AZPW (schematic diagram)

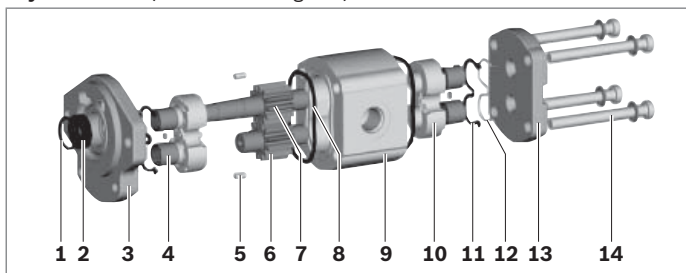

- |                  |                     |
|------------------|---------------------|
| 1 Snap ring      | 8 Housing seal ring |
| 2 Shaft seal     | 9 Pump housing      |
| 3 Front cover    | 10 Bearing bushing  |
| 4 Slide bearings | 11 Axial field seal |
| 5 Centering pin  | 12 Support element  |
| 6 Gear wheel     | 13 Rear cover       |
| 7 Drive shaft    | 14 Hexagon screw    |



**Product overview AZPW preferred types**

Version	Page	Version	Page	Version	Page
	16		20		24
				Suction port in the front cover	
	17		21		25
	18		22		26
				Suction port in the front cover	
	19		23		27
	28				
Line connections in Non-standard version					

4 **AZPW Standard performance** | External gear pump  
Type code single pump

### Type code single pump

01	02	03	04	05	06	07	08	09	10	11	12	
<b>AZP</b>	<b>W</b>	-	<b>1</b>	-						<b>B</b>	-	

#### External gear unit

01	External gear pump	<b>AZP</b>
----	--------------------	------------

#### Series

02	Standard performance, platform F	<b>W</b>
----	----------------------------------	----------

#### Series

03	Standard housing	<b>1</b>
	Stronger housing	<b>2</b>

#### Version

04	Phosphated	<b>1</b>
----	------------	----------

#### Size (NG)

05	Geometric displacement $V_g$ [cm <sup>3</sup> ], see "Technical data" on page 6	<b>004</b>	<b>005</b>	<b>008</b>	<b>011</b>	<b>014</b>	<b>016</b>	<b>019</b>	<b>022</b>
----	---	------------	------------	------------	------------	------------	------------	------------	------------

#### Direction of rotation

06	Viewed on drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

#### Drive shaft



07	Tapered shaft	1 : 5	<b>B, P</b>	<b>C</b>
		1 : 8	<b>O</b>	<b>H</b>
	Dihedral, claw		<b>T</b>	<b>N</b>
	Splined shaft	SAE J744 16-4 9T	<b>R</b>	<b>R</b>
		DIN 5482 B17 × 14	<b>B, P</b>	<b>F</b>
	Parallel keyed shaft	SAE J744 16-1 A	<b>R</b>	<b>Q</b>

#### Suitable front cover

#### Front cover

08	Rectangular flange	Ø80 mm	<b>B</b>	
		Ø36.47 mm	<b>O</b>	
	2-bolt flange	Ø82.55 mm	SAE J744 82-2 A	<b>R</b>
		Ø50 mm	connection variant 1	<b>N</b>
		Ø50 mm	connection variant 2	<b>P</b>
	4-bolt mounting	Ø52 mm	with O-ring	<b>T</b>

#### Line connection

09	Thread UNF-2B, SAE O-ring		<b>12</b>
	Square flange		<b>20</b>
	Square flange		<b>30</b>
	Non-standard size		<b>XX</b>

#### Sealing material

10	NBR (nitrile rubber)	<b>M</b>
	FKM (fluoroelastomer)	<b>P</b>

01	02	03	04	05	06	07	08	09	10	11	12	
<b>AZP</b>	<b>W</b>	-		<b>1</b>	-					<b>B</b>	-	

**Rear cover**

11	Without valve (standard)	<b>B</b>
----	--------------------------	----------

**Special version**

12	Serial number, e.g., S0001	<b>SXXXX</b>
	Without nut and washer	<b>S0007</b>
	For mounting on an axial piston unit and suction port in the front cover	<b>S0036</b>
	For mounting on an axial piston unit	<b>S0081</b>
	For mounting on an axial piston unit and line connections in Non-standard version	<b>S0593</b>

**Note**

- ▶ Not all of the variants according to the type code are possible.
- ▶ Please select the desired pump with the help of the selection table (preferred types) or after consultation with Bosch Rexroth.
- ▶ Further options are available on request.


## Technical data

General			
Installation position	Any		
Mounting type	See proposal drawing		
Line connections	See proposal drawing The screw threads for the suction and pressure port, that are manufactured true to gauge, are deformed slightly due to the pump assembly. The mounting of conventional screw fittings in accordance with DIN EN ISO 1179, 6149, 9974 etc. is easily possible.		
Direction of rotation (viewed on drive shaft)	Clockwise or counter-clockwise, the pump may only be driven in the direction indicated		
Drive shaft loading	Radial and axial forces only after consultation		
Ambient temperature range $\theta$	°C	-30 to +80 with NBR seals -20 to +110 with FKM seals	
Hydraulic			
Hydraulic fluid	Mineral oil according to DIN 51524, 1-3, however under higher load at least HLP compliant with DIN 51524 Part 2 is recommended. Please observe data sheet 90220. Other hydraulic fluids on request		
Hydraulic fluid temperature range	$\theta$	°C	-30 to +80 with NBR seals (NBR = nitrile rubber) -20 to +110 with FKM seals (FKM = fluoroelastomer)
Viscosity range	Permissible in continuous operation	$\nu$	mm <sup>2</sup> /s 12 to 800
	Recommended in continuous operation	$\nu_{opt}$	mm <sup>2</sup> /s 20 to 100
	Permissible for cold start	$\nu_{max}$	mm <sup>2</sup> /s $\leq 2000$
Maximum admissible degree of contamination of the hydraulic fluid Cleanliness level according to ISO 4406 (c)	20/18/15 <sup>1)</sup>		

### Note

- ▶ Safety requirements pertaining to the whole system are to be observed.
- ▶ Please contact us for applications with frequent load changes.
- ▶ The dimensions represent pumps for clockwise rotation. The position of the drive shaft or suction and pressure port changes for counter-clockwise rotation.


### ▼ Direction of rotation, viewed on drive shaft

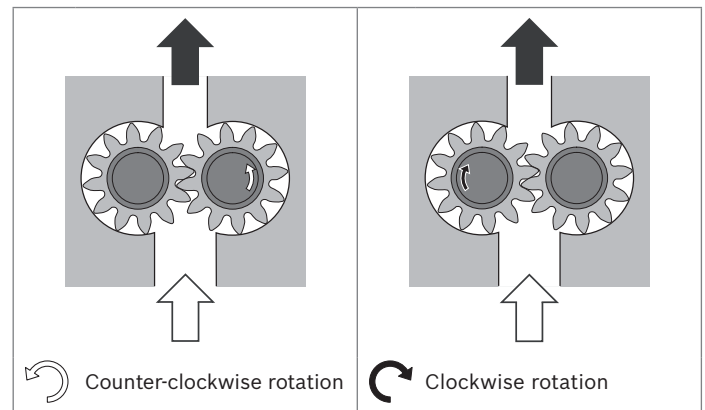

1) For hydraulic systems or devices with function-related, critical failure effects, such as steering and brake valves, the type of filtration selected must be adapted to the sensitivity of these devices.

AZPW-1x		NG	004	005	008	011	014	016	019	022		
Displacement, geometric, per revolution	$V_g$	cm <sup>3</sup>	4.0	5.5	8.0	11.0	14.0	16.0	19.0	22.5		
Pressure in suction port	absolute	$p_e$	bar 0.7 to 3									
Maximum continuous pressure		$p_1$	bar	190	190	190	190	190	180	170		
Maximum intermittent pressure		$p_2$	bar	210	210	210	210	210	200	190		
Maximum pressure peak		$p_3$	bar	230	230	230	230	230	220	210		
Minimum speed	at 12 mm <sup>2</sup> /s and	$n_{min}$	rpm	< 100 bar	700	700	700	700	700	700	700	
				100 to 180 bar	1200	1200	1000	1000	800	800	800	800
				180 bar to $p_2$	1400	1400	1400	1200	1000	1000	1000	1000
				at 25 mm <sup>2</sup> /s and $p_2$	700	700	700	700	700	700	700	700
Maximum speed	at $p_2$	$n_{max}$	rpm	3500	3500	3500	3500	3000	3000	2500		

▼ Pressure definition

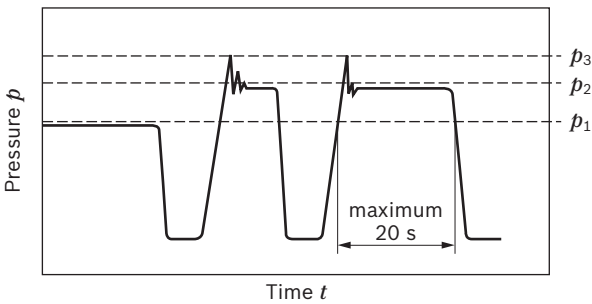


- $p_1$  Maximum continuous pressure
- $p_2$  Maximum intermittent pressure
- $p_3$  Maximum pressure peak

Design calculations for pumps		
Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$M = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$	[Nm]
Power	$P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]
Pressure	$\Delta p = \frac{M \times 20 \times \pi \times \eta_{hm}}{V_g}$	[bar]
	$\Delta p = \frac{P \times 600 \times \eta_t}{q_v}$	[bar]
Displacement	$V_g = \frac{q_v \times 1000}{n \times \eta_v}$	[cm <sup>3</sup> ]
	$V_g = \frac{M \times 20 \times \pi \times \eta_{hm}}{\Delta p}$	[cm <sup>3</sup> ]
Rotational speed	$n = \frac{q_v \times 1000}{V_g \times \eta_v}$	[rpm]

Key

- $V_g$  Displacement per revolution [cm<sup>3</sup>]
- $\Delta p$  Differential pressure [bar] ( $\Delta p = p - p_e$ )
- $n$  Rotational speed [rpm]
- $q_v$  Flow [l/min]
- $M$  Torque [Nm]
- $P$  Power [kW]
- $\eta_v$  Volumetric efficiency<sup>1</sup>
- $\eta_{hm}$  Hydraulic-mechanical efficiency<sup>1</sup>
- $\eta_t$  Total efficiency ( $\eta_t = \eta_v \times \eta_{hm}$ )<sup>1</sup>

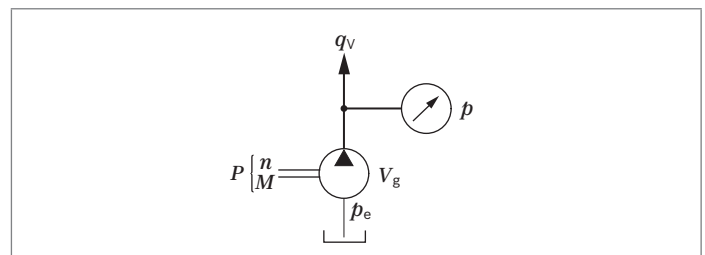


Note

On the following pages you can find diagrams for a rough calculation.


1) Parameter as a decimal, e.g. 0.9

### Flow and power characteristic curves


▼ **Flow**

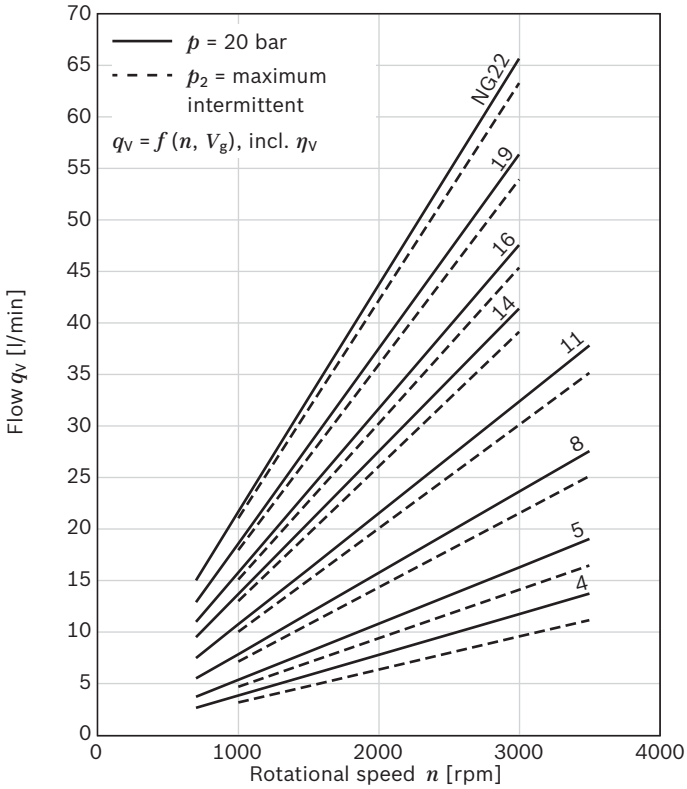


▼ **Size 4**

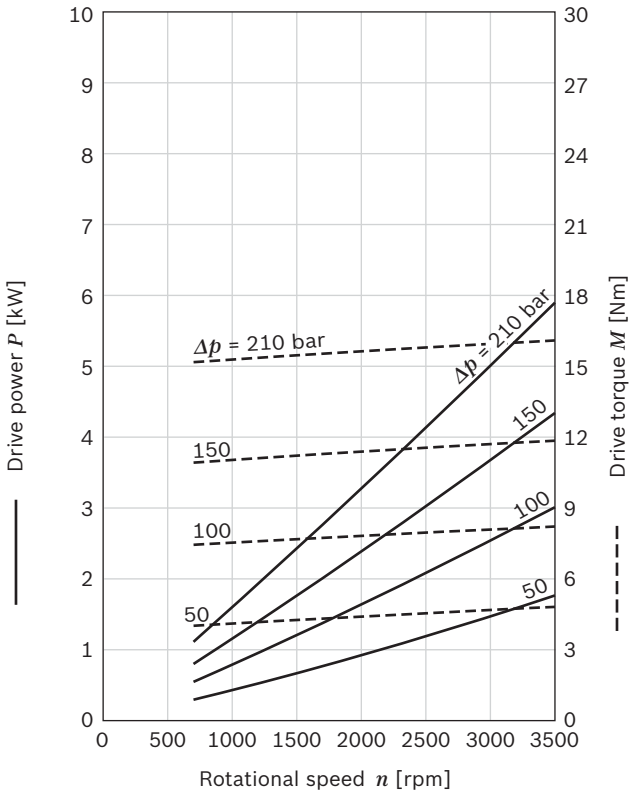


▼ **Size 5**

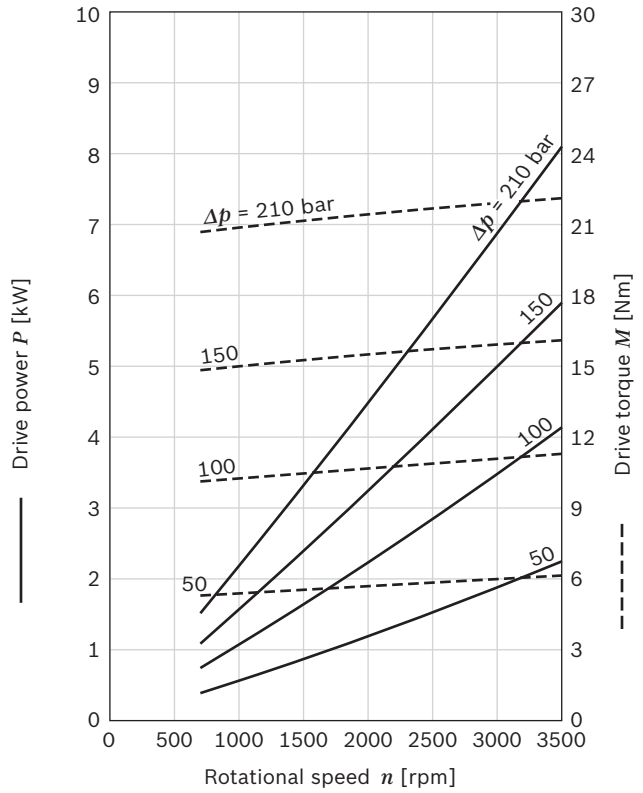


▼ Size 8

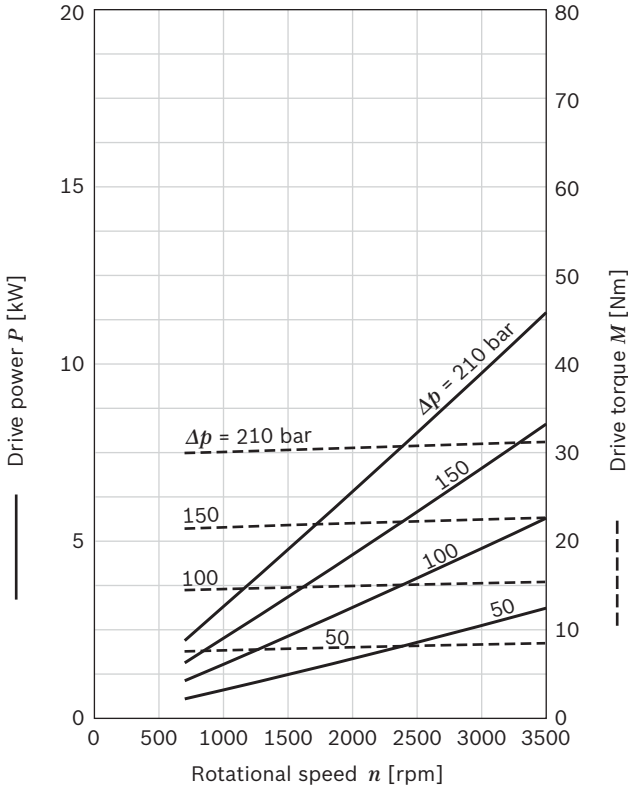


▼ Size 11

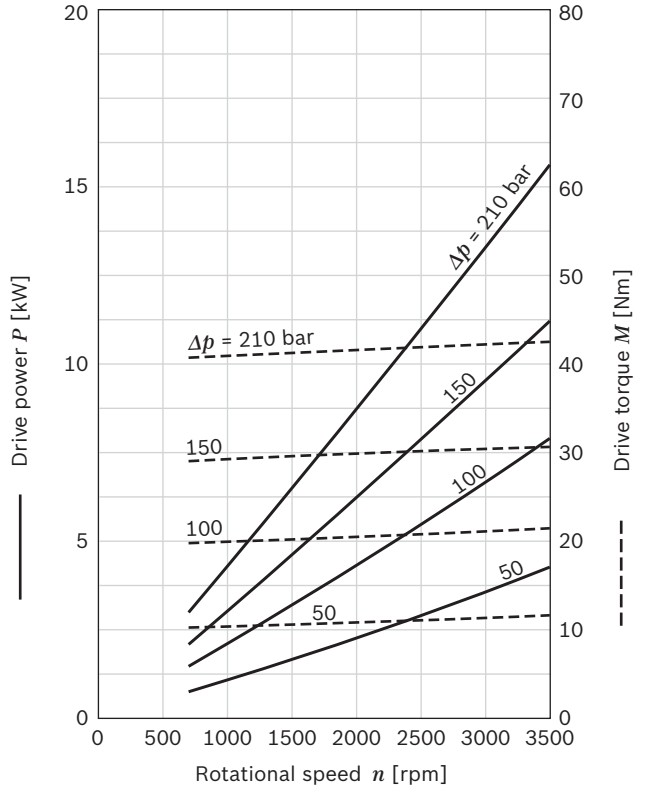


▼ Size 14

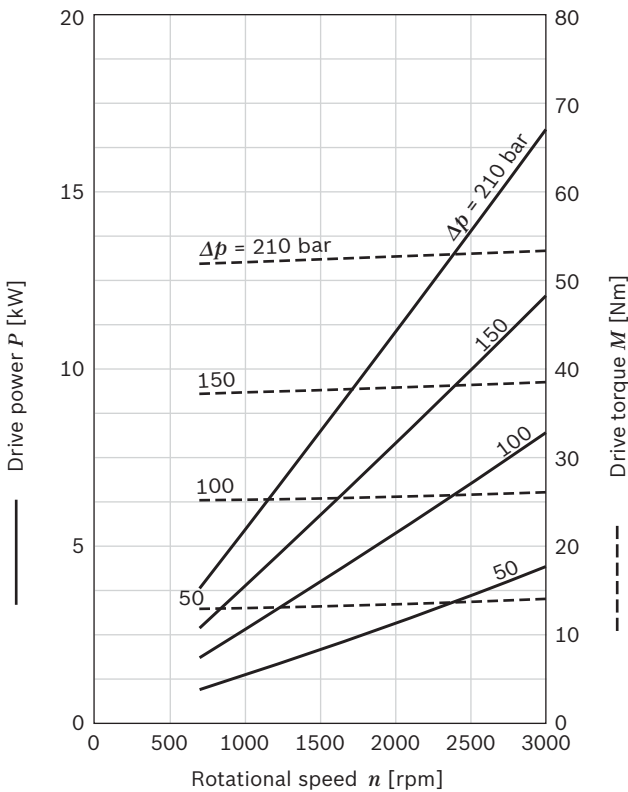


▼ Size 16

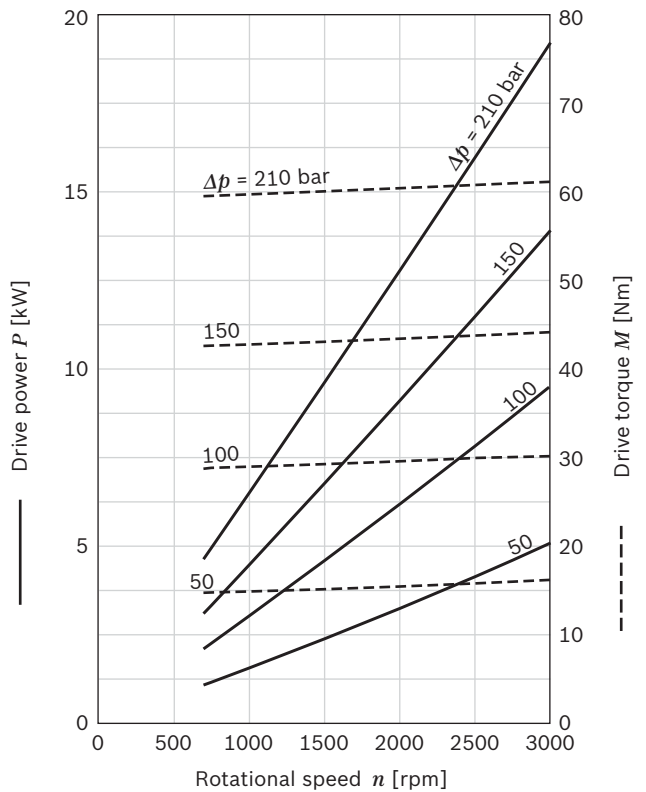

▼ **Size 19**

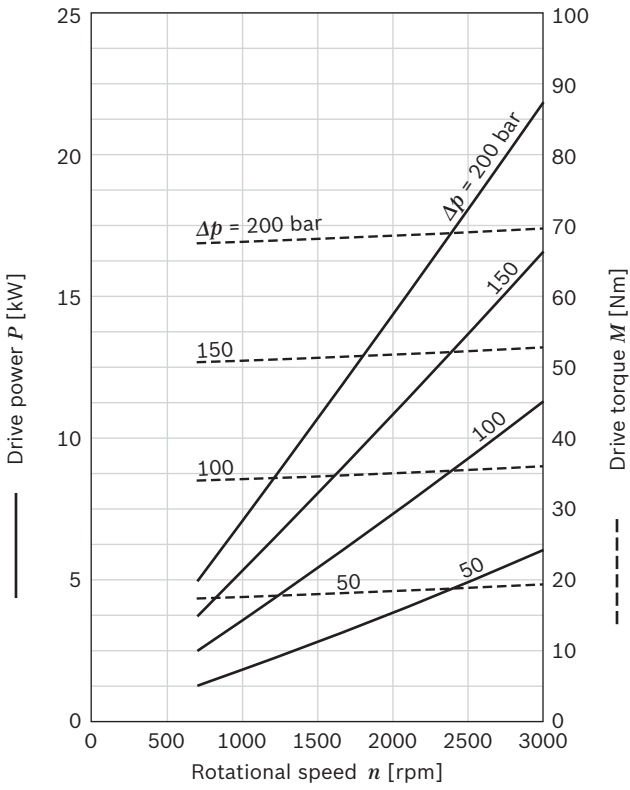

▼ **Size 22**

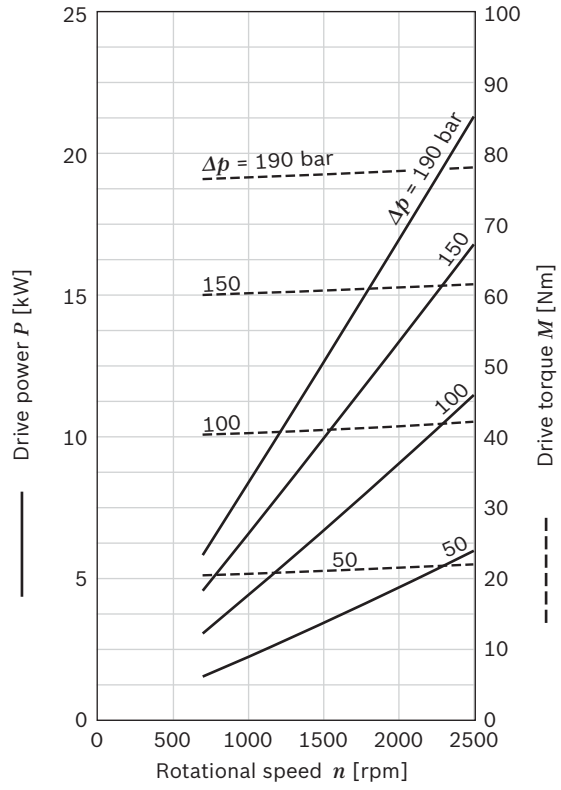

**Note**

Characteristic curves measured at  $v = 32 \text{ mm}^2/\text{s}$  and  $\theta = 50 \text{ }^\circ\text{C}$ .


$P = f(n, p)$ , incl.  $\eta_t$  ———  
 $M = f(n, p)$ , incl.  $\eta_{hm}$  - - - - -



## Drives


### 1. Elastic coupling

- ▶ The coupling must not transfer any radial or axial forces to the pump.
- ▶ The maximum radial runout from the shaft to the spigot may not exceed 0.3 mm.
- ▶ See the coupling manufacturer's assembly instructions for acceptable shaft misalignments.

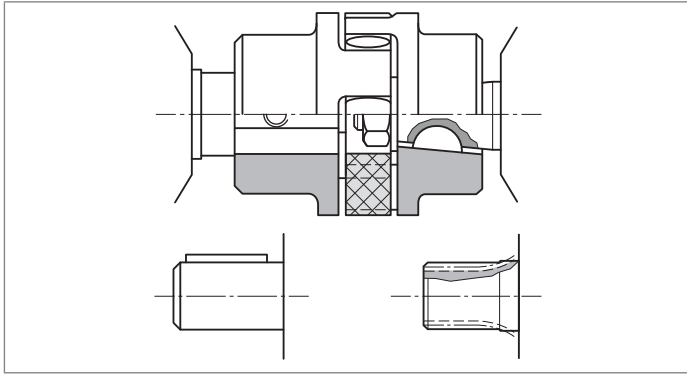

### 2. Coupling sleeve


- ▶ To be used on splined shaft profile according to DIN and SAE
- ▶ Attention: No radial or axial forces are permitted on the pump shaft or coupling sleeve. The coupling sleeve must be free to move axially.
- ▶ The distance between the pump drive shaft and drive shaft on the customer side must be  $2^{+1}$  mm
- ▶ Oil-bath or oil-mist lubrication is required

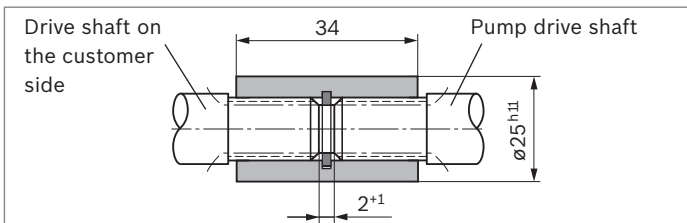

Drive shaft	$M_{max}$ [Nm]	Size	$p_{max}$ [bar]
<b>F</b>	100	4 to 16	210
		19	200
		22	190
<b>R</b>	110	4 to 16	210
		19	200
		22	190

### 3. Coupling dog

- ▶ For attaching the pump directly to an electric motor or combustion engine, gear, etc.
- ▶ The pump shaft has a special coupling dog and driver (3)
- ▶ No shaft seal
- ▶ Drive-side installation and sealing according to the following recommendations and dimensions

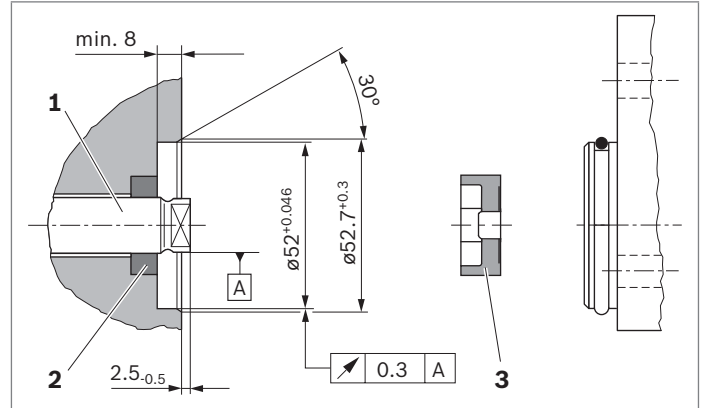

Drive shaft	$M_{max}$ [Nm]	Size	$p_{max}$ [bar]
<b>N</b>	52	4 to 14	210
		16	180
		19	150
		22	130

#### ▶ Drive shaft on the customer side (1)

- Case-hardening steel DIN 17210 e.g., 20 MnCrS 5 case-hardened 0.6 deep; HRC 60<sup>±3</sup>
  - Seal ring running surface ground without rifling
- $R_{max} \leq 4 \mu m$

#### ▶ Radial shaft seal on the customer side (2)


- Provide with rubber cover (see DIN 3760, type AS, or double-lipped ring)
- Provide installation edge with 15° slant or install shaft seal with protection sleeve

#### 4. Tapered and keyed shafts

Drive shaft	$M_{\max}$ [Nm] <sup>1)</sup>	Size	$p_{\max}$ [bar]
<b>C</b>	130	4 to 16	210
		19	200
		22	190
<b>H</b>	130	4 to 16	210
		19	200
		22	190
<b>Q</b>	55	4 to 14	210
		16	190
		19	165
		22	140

#### 5. V-belts and straight gear wheels or helical toothed gear drives without outboard bearing


For V-belt or gear wheel drives, please contact us specifying the application and mounting conditions (dimensions  $a$ ,  $d_m$ ,  $d_w$  and angle  $\alpha$ ). For helical toothed gear drives, details of the helix angle  $\beta$  are also required.

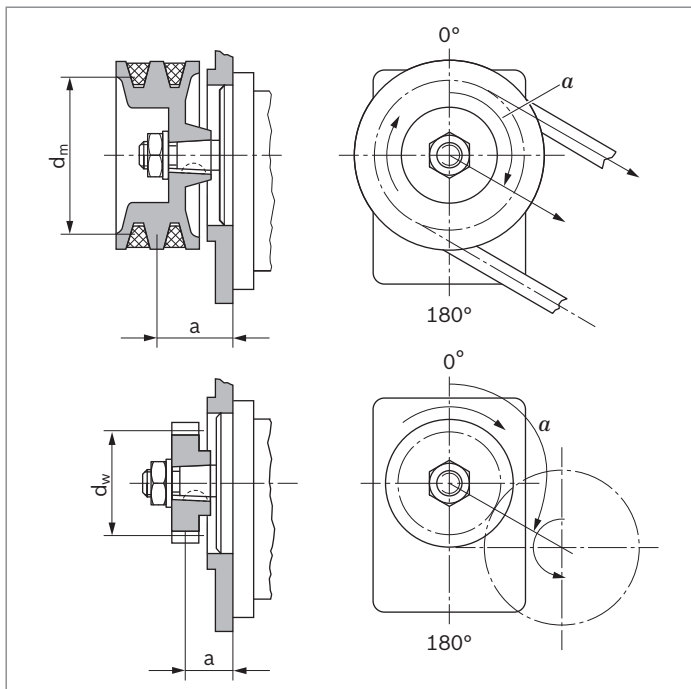


1) These values only apply while adhering to the defined conditions on page 6. Please consult Bosch Rexroth if the specified values are to be exceeded.

**Dimensions – drive shaft**


▼ **Tapered shaft 1:5**

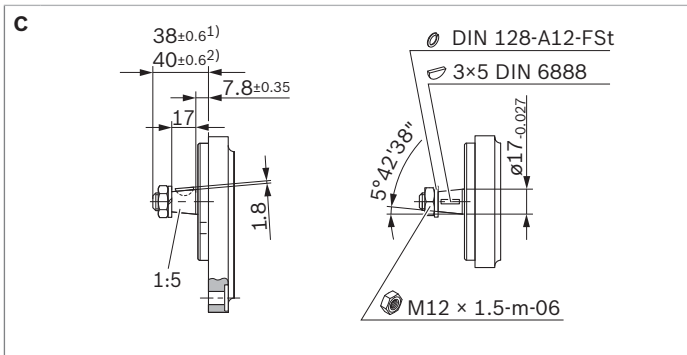


▼ **Splined shaft (SAE J744 16-4 9T)<sup>3)</sup>**

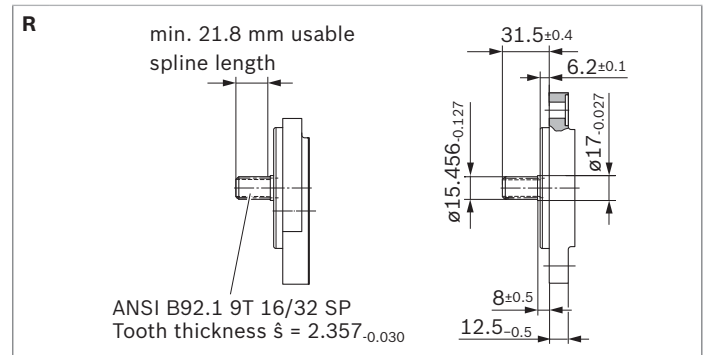


▼ **Tapered shaft 1:8**

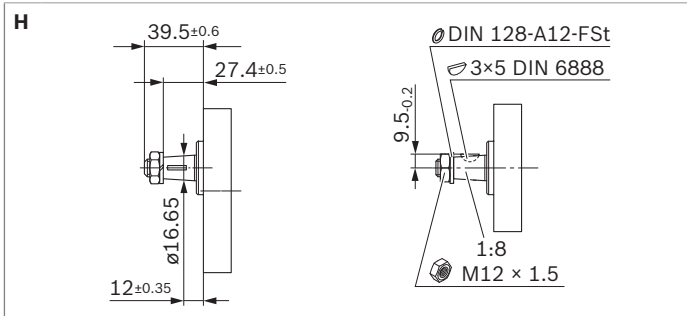


▼ **Splined shaft (DIN 5482 B17 x 14)**

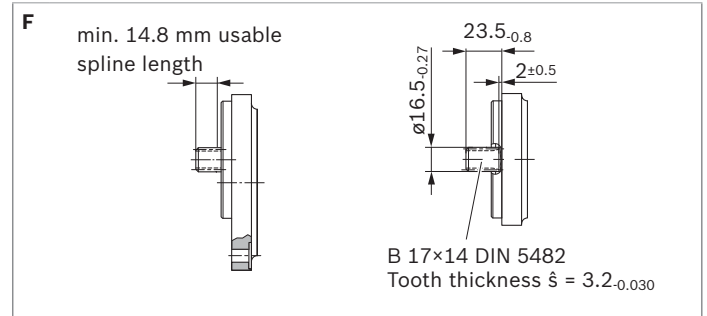

▼ **Dihedral claw**

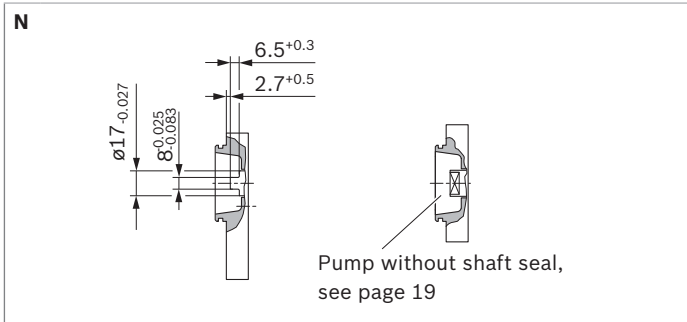


▼ **Parallel keyed shaft (SAE J744 16-1 A)**

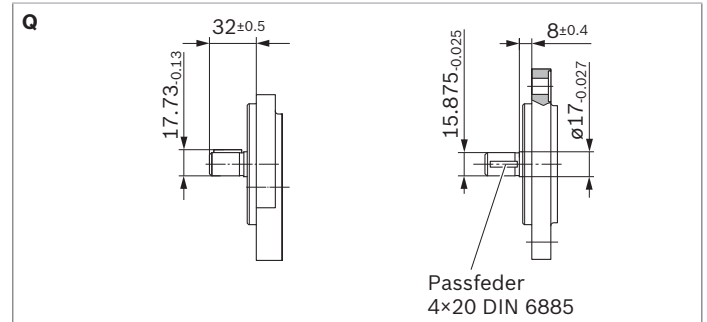


1) In combination with front cover B  
 2) In combination with front cover P and front cover N  
 3) For combination with an axial piston unit, see page 24 to 28

**Dimensions – front cover**


▼ Rectangular flange  $\varnothing 80$  mm

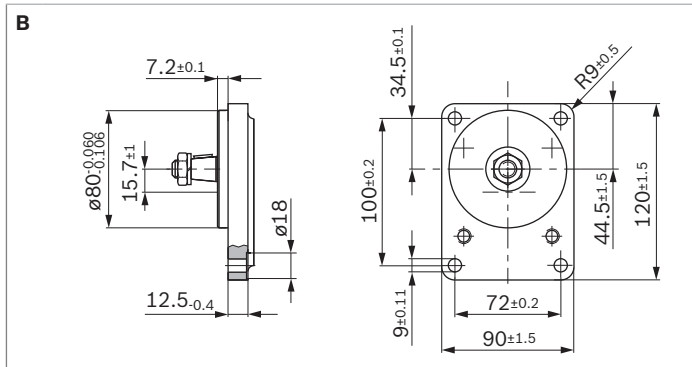


▼ 2-bolt mounting  $\varnothing 50$  mm, connection variant 1

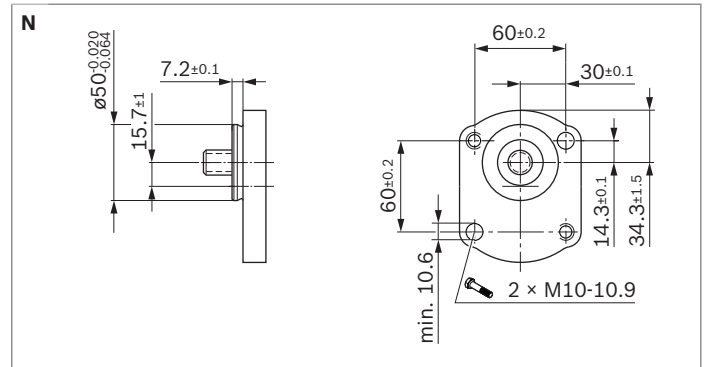


▼ Rectangular flange  $\varnothing 36.47$  mm

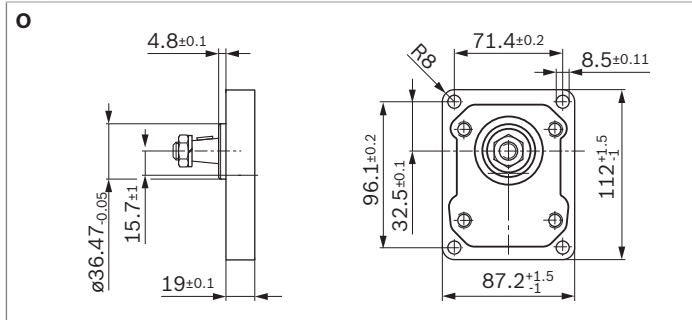


▼ 2-bolt mounting  $\varnothing 50$  mm, connection variant 2

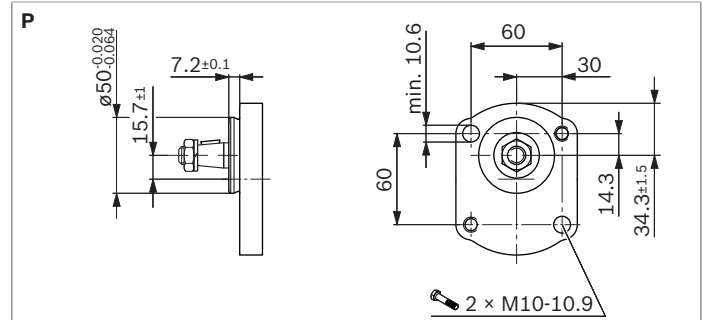

▼ 2-bolt flange  $\varnothing 82.55$  mm, SAE J744 82-2 A<sup>1)</sup>

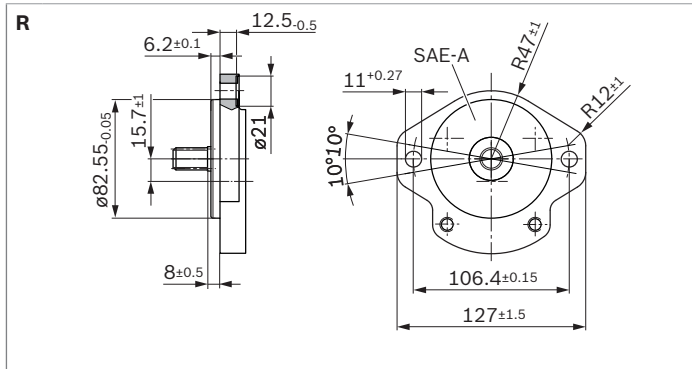


▼ 4-bolt mounting  $\varnothing = 52$  mm with O-ring

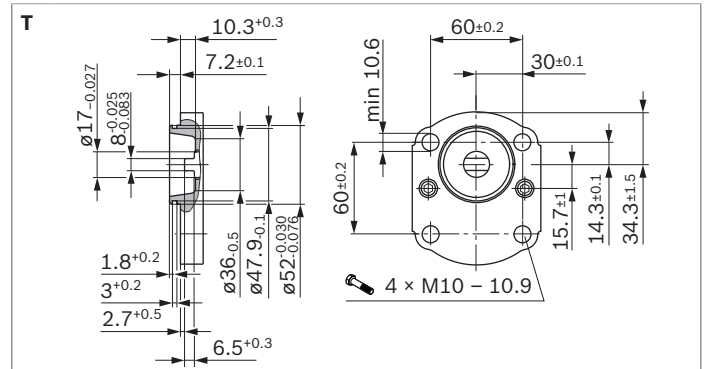

1) For combination with an axial piston unit, see page 24 to 28


### Dimensions – line connection

▼ Thread UNF-2B, SAE with O-ring

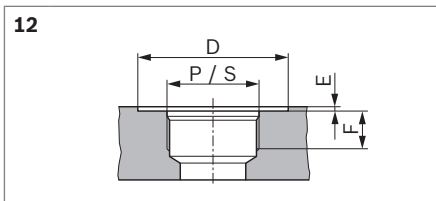


Size	Pressure side			Suction side				
	P	D	E	F	S	D	E	F
4 to 5	3/4-16 UNF-2B	30.2	0.5	14	7/8-14 UNF-2B	35	0.5	17
8 to 22	7/8-14 UNF-2B	35	0.5	17	1 1/16-12 UN-2B	45	0.5	19

▼ Square flange

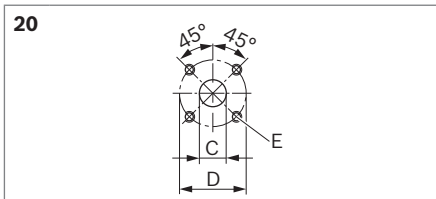

Size	Pressure side			Suction side		
	C	D	E	C	D	E
4 to 5	15	35	M6; 13 deep	15	40	M6; 13 <sup>+1</sup> deep
8 to 22	15	35	M6; 13 deep	20	40	M6; 13 <sup>+1</sup> deep

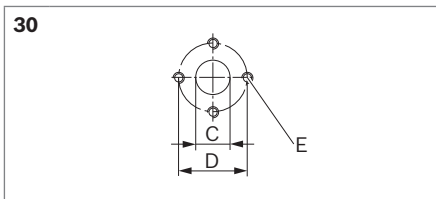

Size	Pressure side			Suction side		
	C	D	E	C	D	E
4 to 8	13.5	30.2	M6; 13 deep	13.5	30.2	M6; 13 <sup>+1</sup> deep
11 to 22	13.5	30.2	M6; 13 deep	20	39.7	M8; 13 <sup>+1</sup> deep











▼ Dihedral claw with 4-bolt mounting  $\varnothing 52$  mm  
AZPW-11 – ... NT20MB

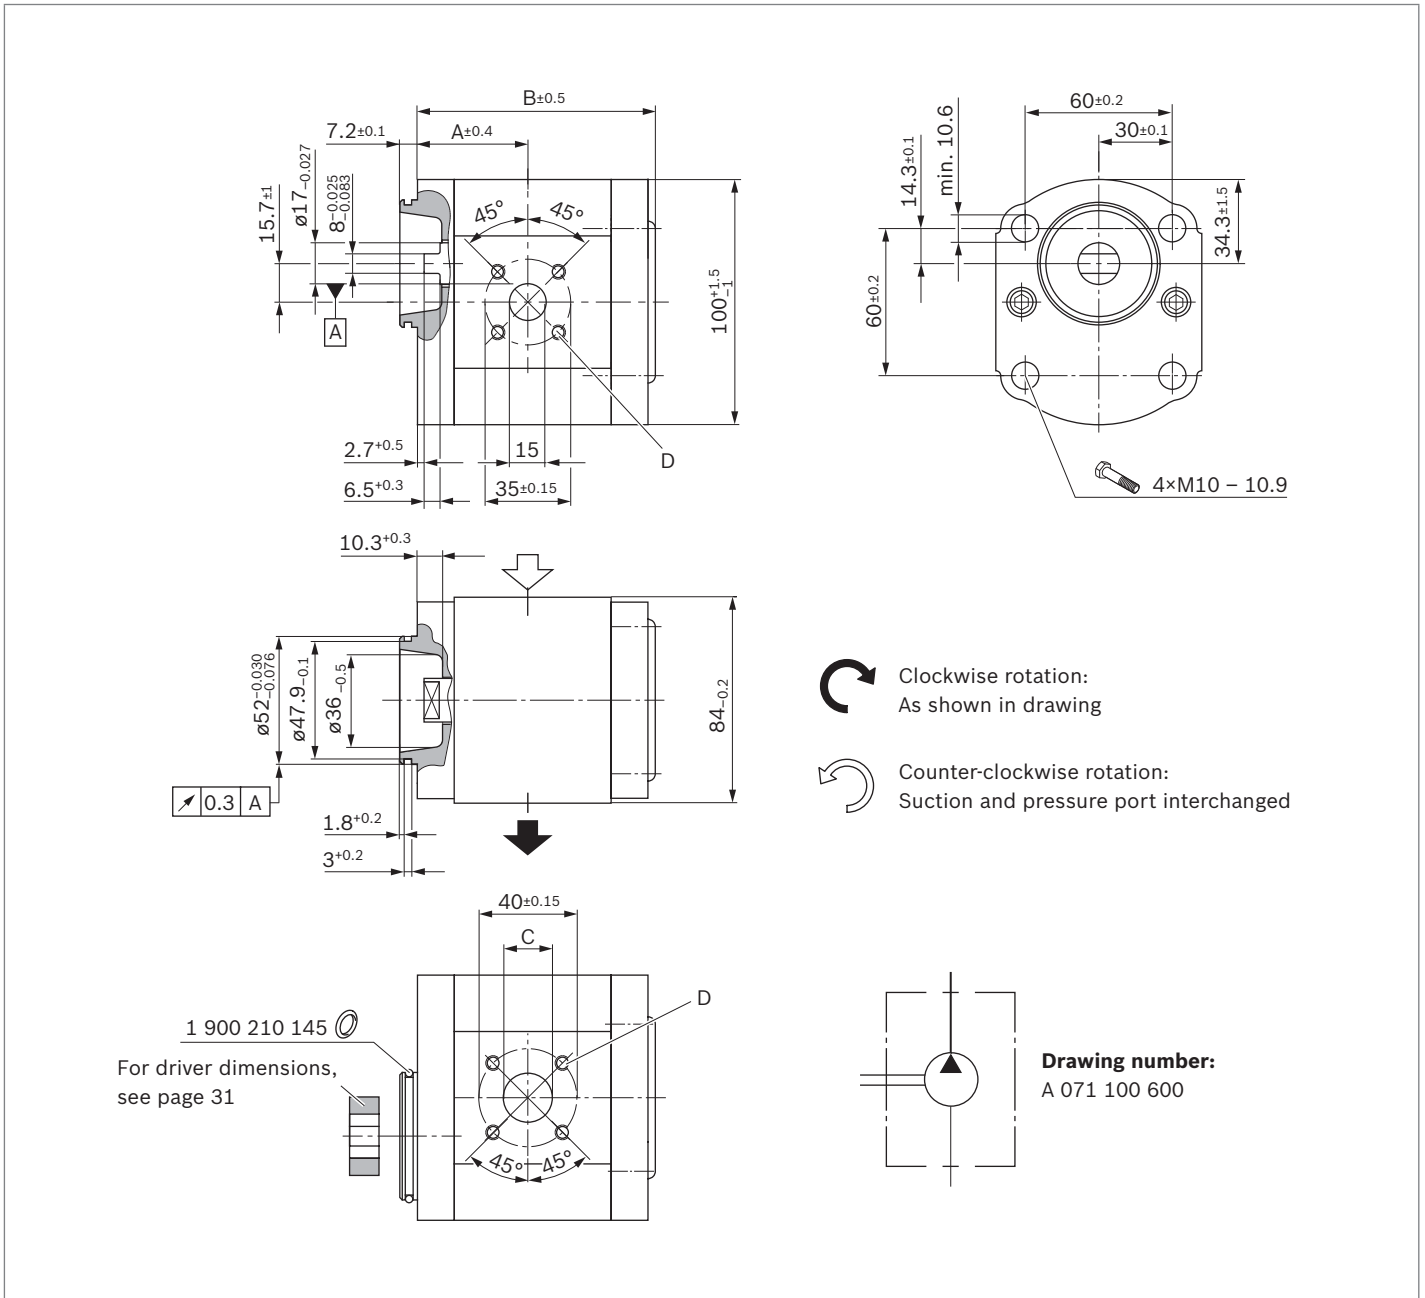

NG	Order number		Maximum intermittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Dimensions			
	Direction of rotation Counter-clockwise	Counter-clockwise			A	B	C	D
4	R983072863	R983072856	210	3500	37.4	75	15	M6; 13 $\pm 1$ deep
5	R983072864	R983076112	210	3500	38.6	77.5	15	
8	R983072865	R983072857	210	3500	40.7	81.6	20	
11	R983072866	R983072858	210	3500	44.5	86.6	20	
14	R983072867	R983072859	210	3000	45	91.6	20	
16	R983072868	R983072860	180	3000	45	95	20	
19	R983072869	R983072861	150	3000	45	100	20	
22	R983072870	R983072862	130	2500	52.6	105.4	20	




▼ **Tapered shaft 1:5 with 2-bolt flange Ø50 mm**  
AZPW-11 – ... CN20MB

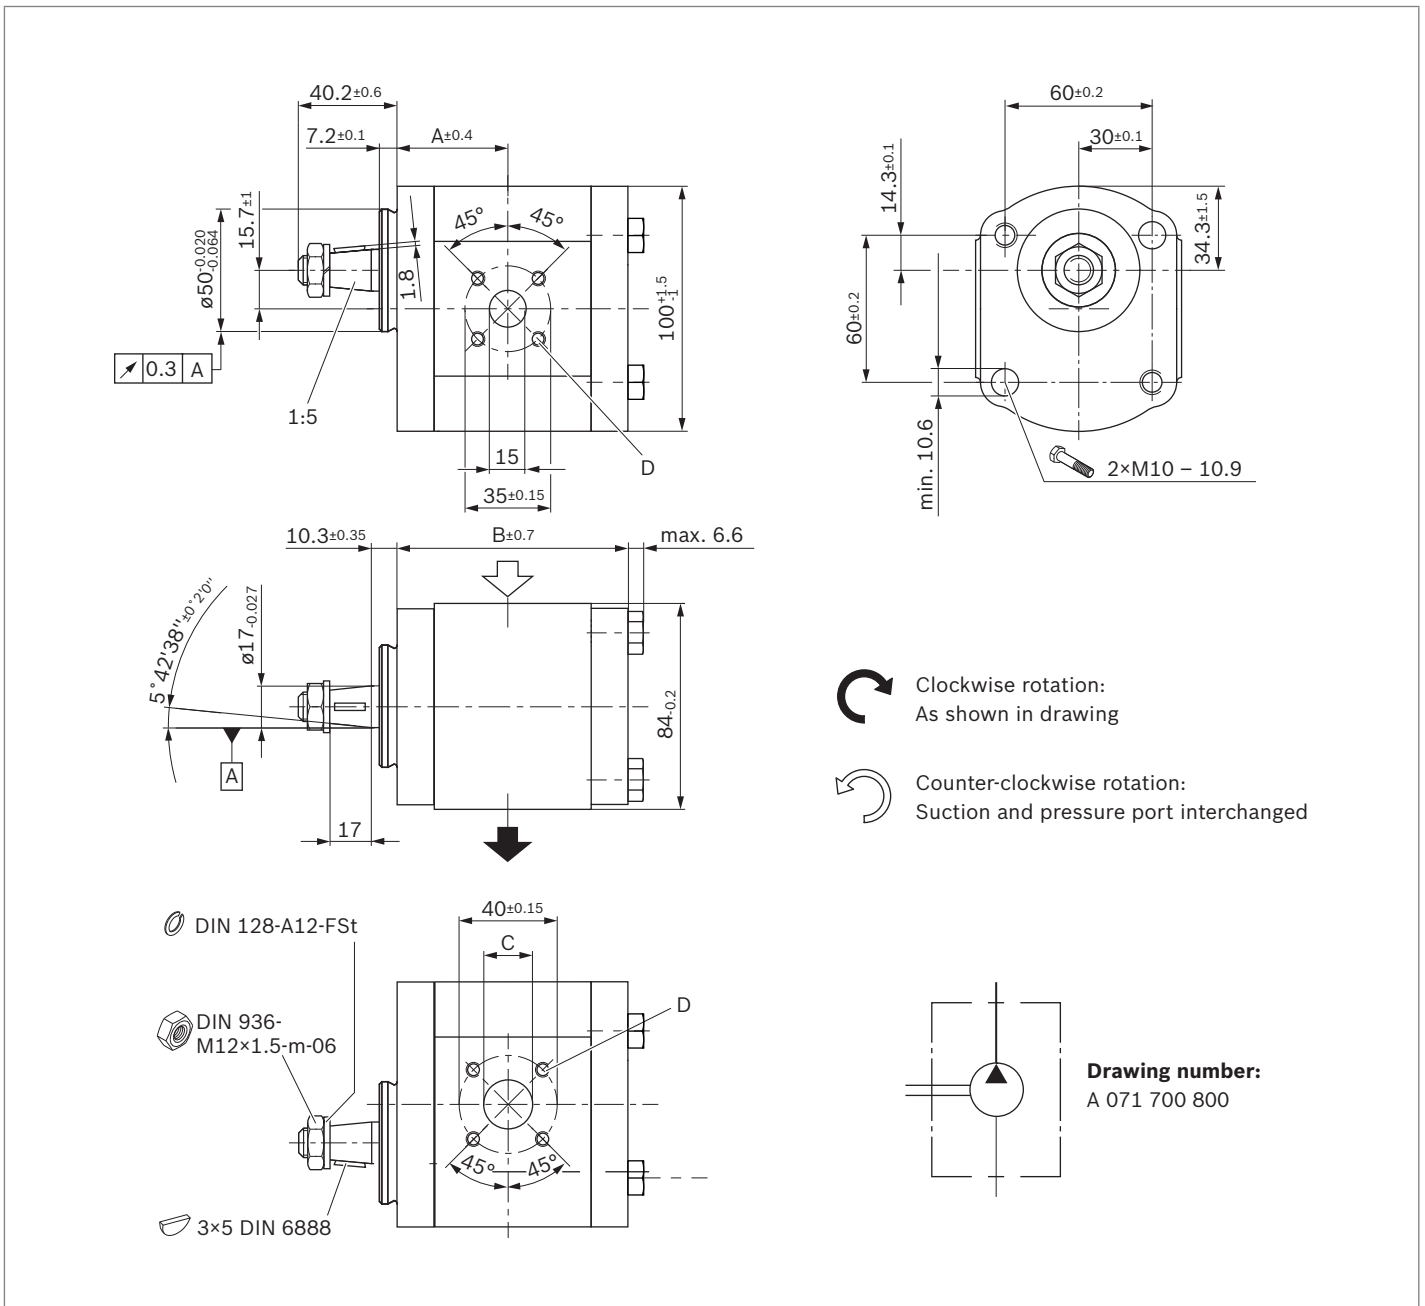


NG	Order number		Maximum intermittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Dimensions			
	Direction of rotation Counter-clockwise	Clockwise			A	B	C	D
4	R983072886	R983072878	210	3500	37.3	75	15	M6; 13 <sup>+1</sup> deep
5	R983072887	R983072879	210	3500	38.6	77.5	15	
8	R983072888	R983072880	210	3500	40.6	81.6	20	
11	R983072889	R983072881	210	3500	44.5	86.6	20	
14	R983072890	R983072882	210	3000	45	91.6	20	
16	R983072891	R983072883	210	3000	45	95	20	
19	R983072892	R983072884	200	3000	45	100	20	
22	R983072893	R983072885	190	2500	52.6	105.4	20	

▼ **Parallel keyed shaft (SAE J744 16-1 A) with 2-bolt flange Ø82.55 mm (SAE J744 82-2 A)**  
 AZPW-11 – ... QR12MB

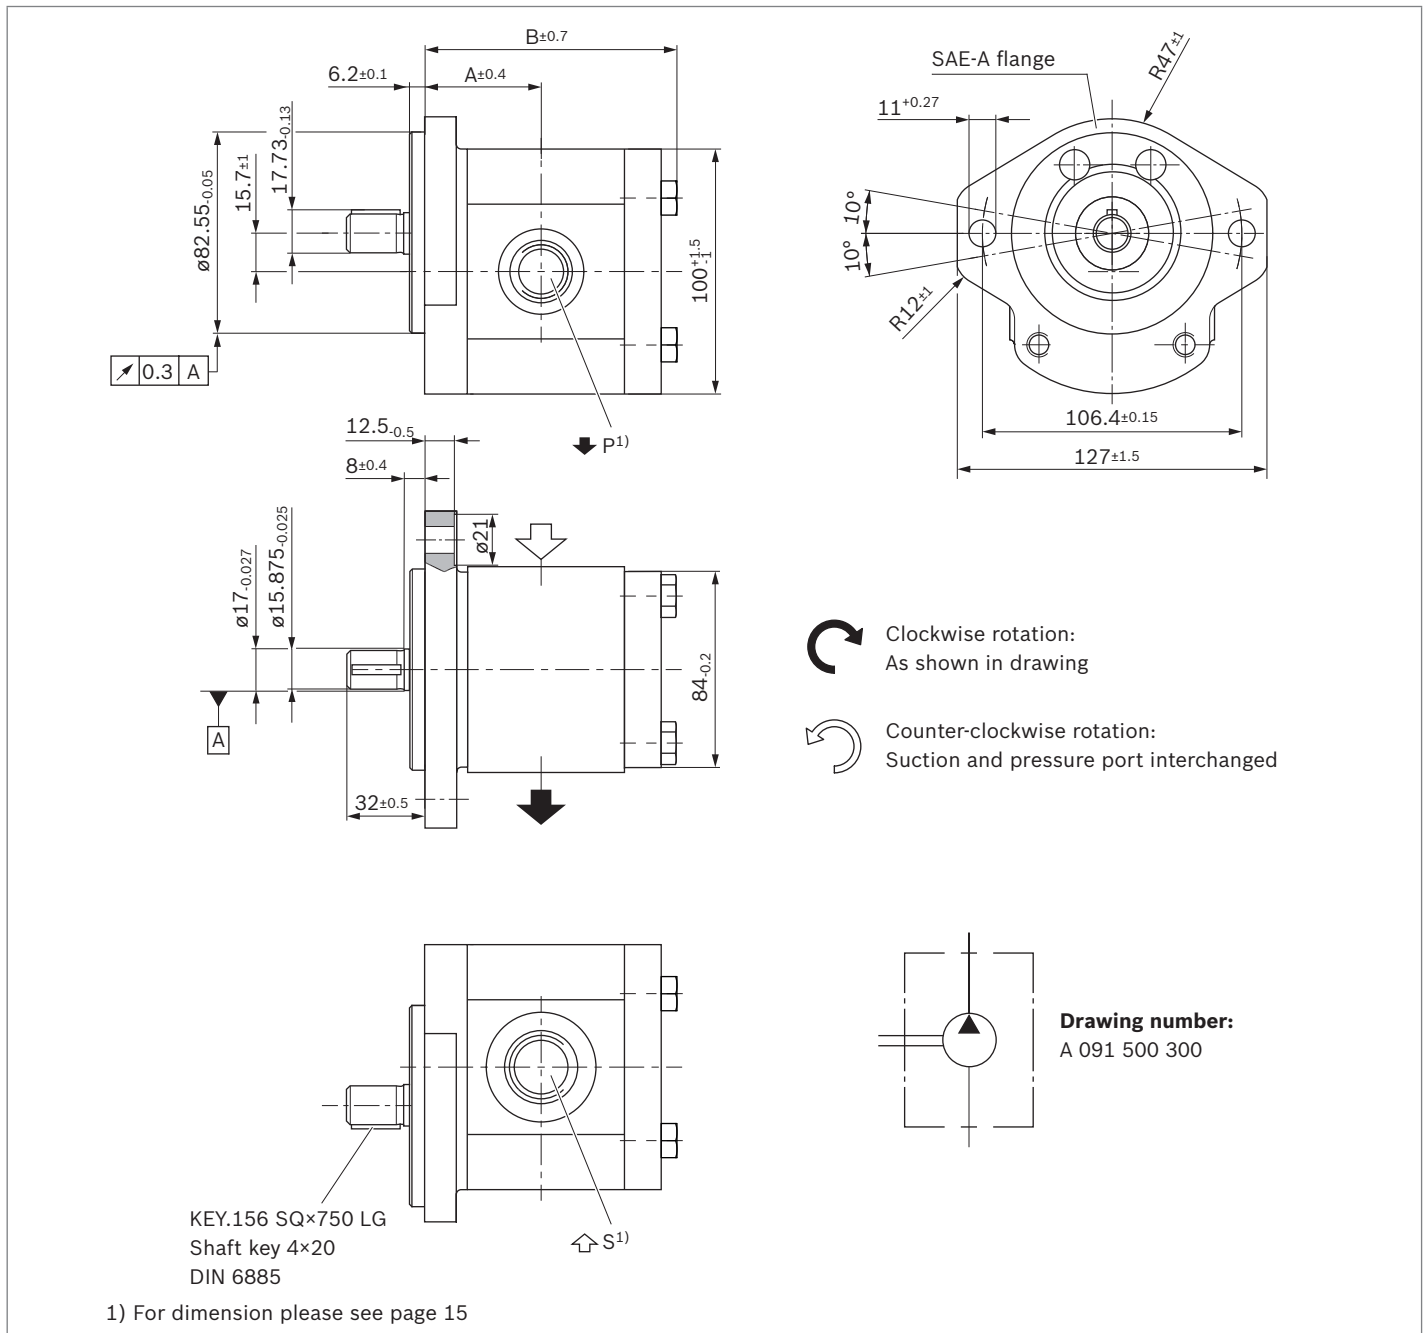

NG	Order number	Direction of rotation		Maximum intermittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Dimensions			
		Counter-clockwise	Clockwise			A	B	P	S
4	R983072763	R983072755	210	3500	39.9	83.8	3/4-16 UNF-2B	7/8-14 UNF-2B	
5	R983072765	R983072756	210	3500	41.1	86.3	3/4-16 UNF-2B	7/8-14 UNF-2B	
8	R983072766	R983072757	210	3500	43.2	90.4	7/8-14 UNF-2B	1 1/16-12 UN-2B	
11	R983072767	R983072758	210	3500	47	95.4	7/8-14 UNF-2B	1 1/16-12 UN-2B	
14	R983072768	R983072759	210	3000	47.5	100.4	7/8-14 UNF-2B	1 1/16-12 UN-2B	
16	R983072769	R983072760	190	3000	47.5	103.8	7/8-14 UNF-2B	1 1/16-12 UN-2B	
19	R983072770	R983072761	165	3000	47.5	108.8	7/8-14 UNF-2B	1 1/16-12 UN-2B	
22	R983072772	R983072762	140	2500	55.1	114.2	7/8-14 UNF-2B	1 1/16-12 UN-2B	


▼ **Splined shaft (SAE J744 16-4 9T) with 2-bolt flange Ø82.55 mm (SAE J744 82-2 A)**  
AZPW-11 – ... RR12MB

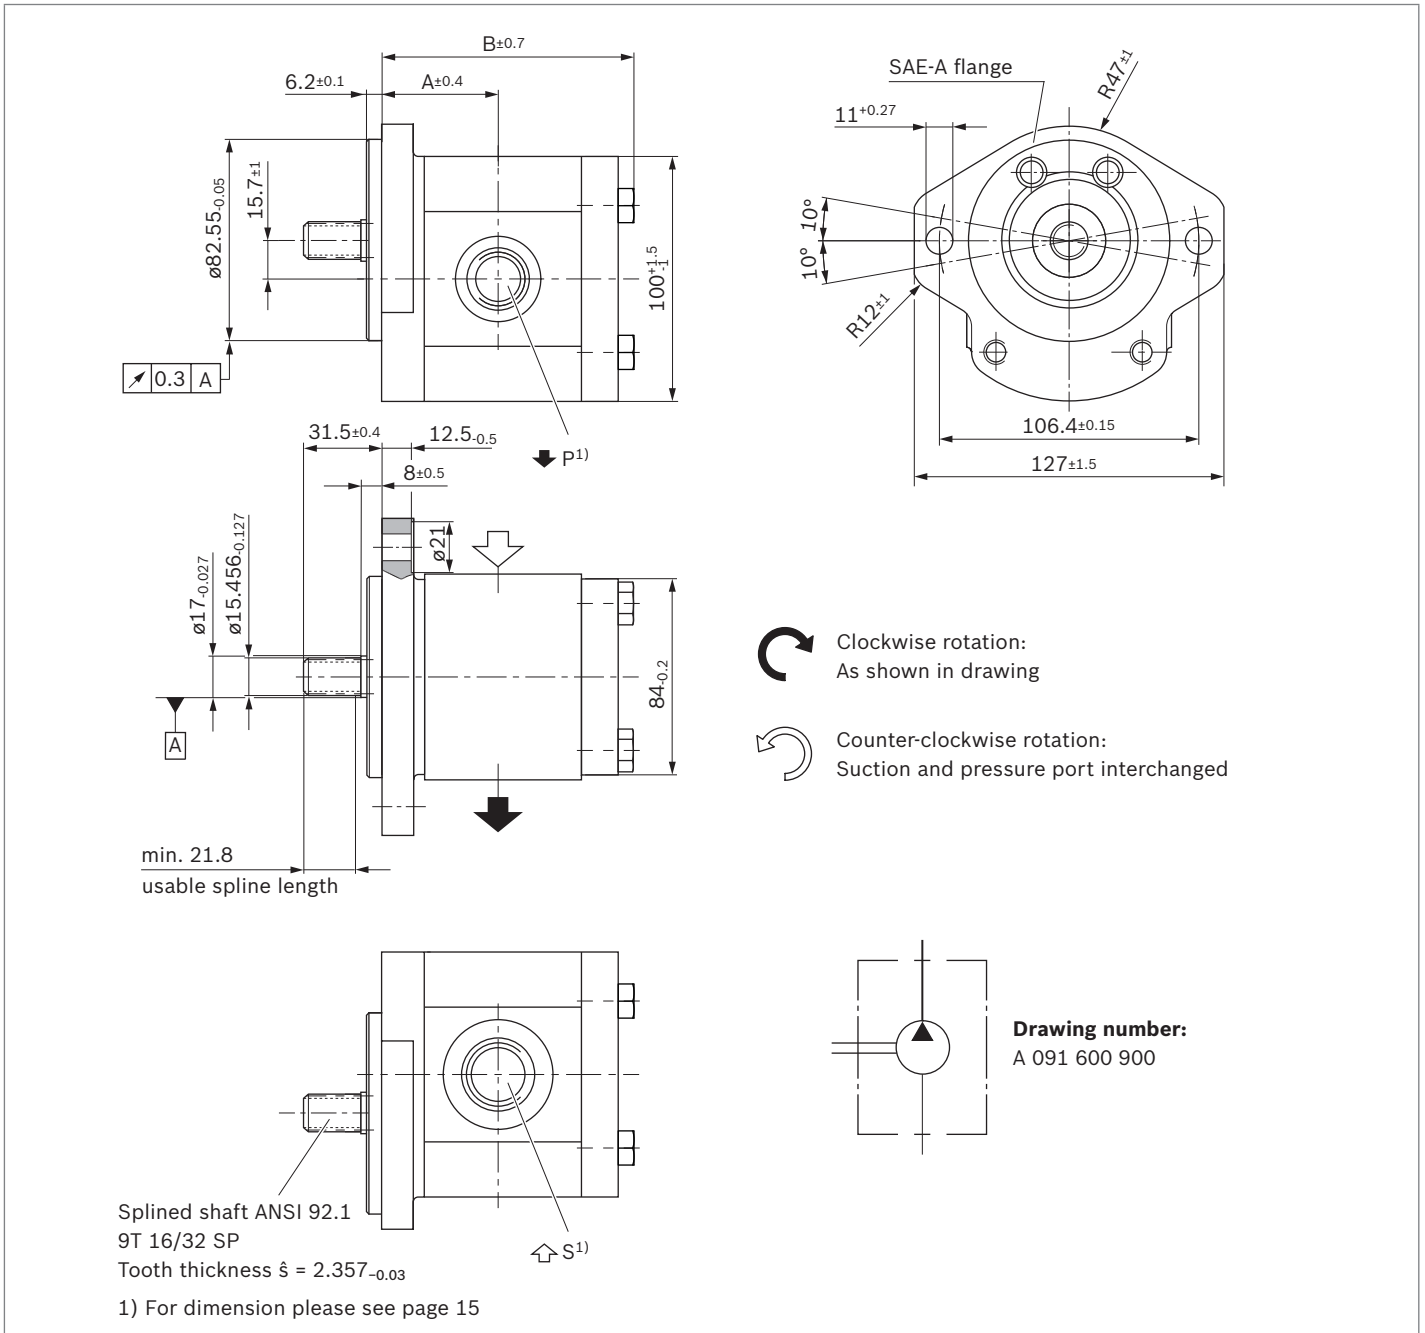

NG	Order number	Direction of rotation		Maximum inter- mittent pressure $p_2$ [bar]	Maximum rota- tional speed [rpm]	Dimensions			
		Counter-clockwise	Clockwise			A	B	P	S
4	R983075416	R983075404		210	3500	39.9	83.8	3/4-16 UNF-2B	7/8-14 UNF-2B
5	R983075417	R983075405		210	3500	41.1	86.3	3/4-16 UNF-2B	7/8-14 UNF-2B
8	R983075418	R983075406		210	3500	43.2	90.4	7/8-14 UNF-2B	1 1/16-12 UN-2B
11	R983075419	R983075409		210	3500	47	95.4	7/8-14 UNF-2B	1 1/16-12 UN-2B
14	R983075420	R983075412		210	3000	47.5	100.4	7/8-14 UNF-2B	1 1/16-12 UN-2B
16	R983075421	R983075413		210	3000	47.5	103.8	7/8-14 UNF-2B	1 1/16-12 UN-2B
19	R983075422	R983075414		200	3000	47.5	108.8	7/8-14 UNF-2B	1 1/16-12 UN-2B
22	R983075423	R983075415		190	2500	55.1	114.2	7/8-14 UNF-2B	1 1/16-12 UN-2B


▼ **Splined shaft (SAE J744 16-4 9T) with 2-bolt flange  $\varnothing 82.55$  mm (SAE J744 82-2 A) for mounting on an axial piston unit and suction port in the front cover**

AZPW-11 – ... **RR12PB-S0036**

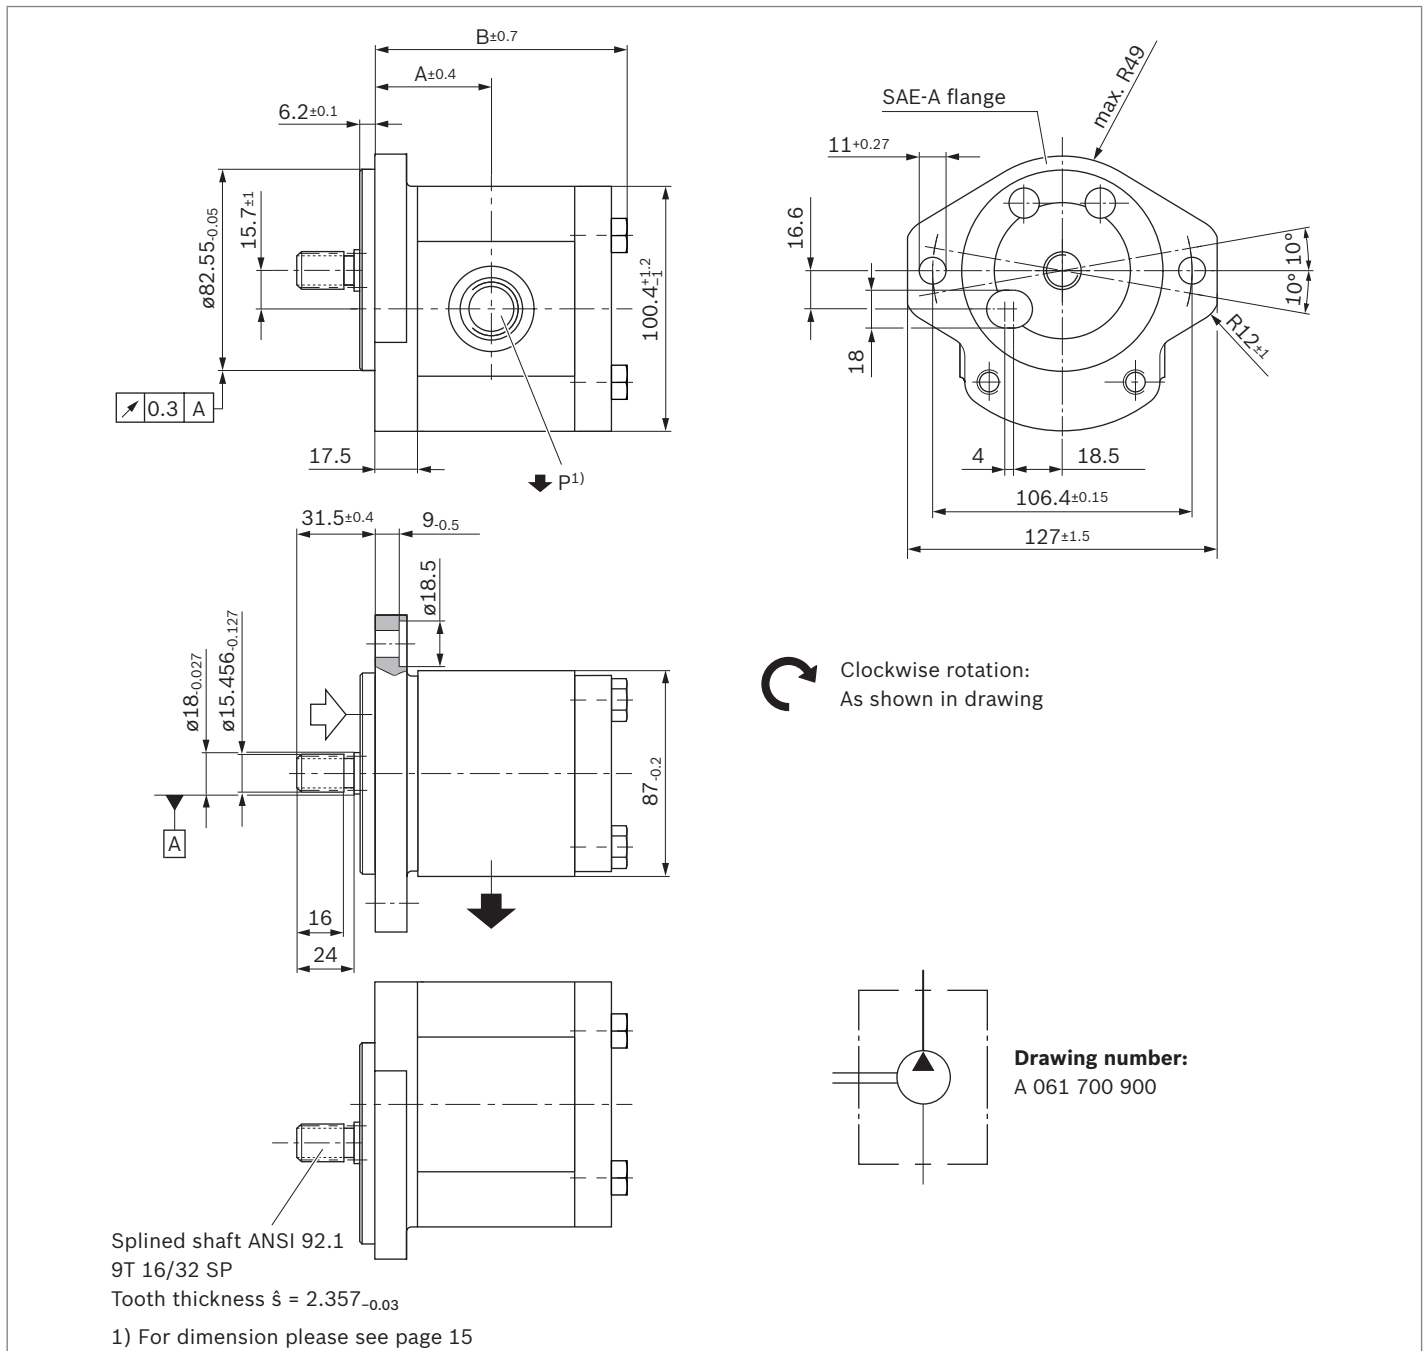

NG	Order number	Maximum intermittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Dimensions		
				A	B	P
5	R983074188	210	3500	41.2	86.3	3/4-16 UNF-2B
8	R983067892	210	3500	43.2	90.4	7/8-14 UNF-2B
11	R983074189	210	3500	45.6	95.4	7/8-14 UNF-2B
14	R983070537	210	3000	48.4	100.4	7/8-14 UNF-2B
16	R983074190	210	3000	49.9	103.8	7/8-14 UNF-2B
19	R983064536	200	2900	53.9	108.8	7/8-14 UNF-2B
22	R983074191	190	2400	55	114.2	7/8-14 UNF-2B


▼ **Splined shaft (SAE J744 16-4 9T) with 2-bolt flange Ø82.55 mm (SAE J744 82-2 A) for mounting on an axial piston unit**  
 AZPW-11 – ... **RR12PB-S0081**

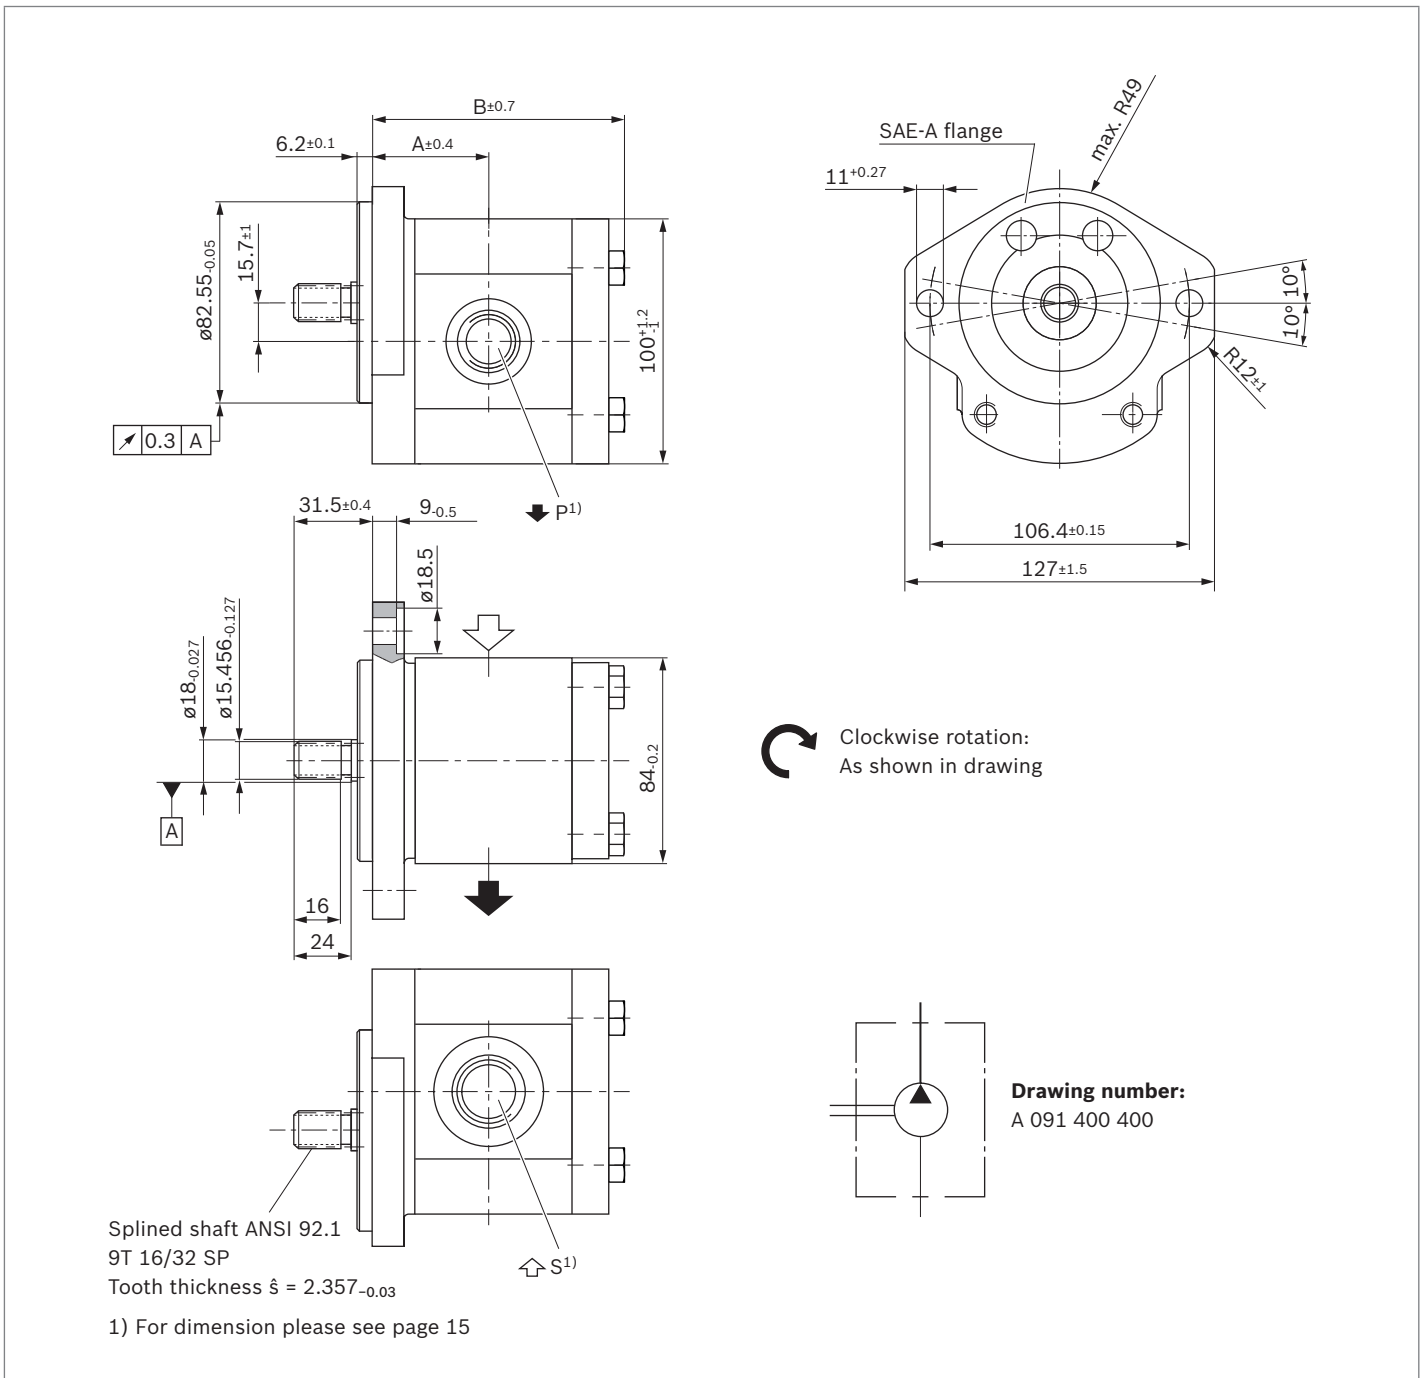

NG	Order number	Maximum intermittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Dimensions			
				A	B	P	S
5	R983072871	210	3500	41.1	86.4	3/4-16 UNF-2B	7/8-14 UNF-2B
8	R983072872	210	3500	43.2	90.5	7/8-14 UNF-2B	1 1/16-12 UN-2B
11	R983072873	210	3500	45.7	95.5	7/8-14 UNF-2B	1 1/16-12 UN-2B
14	R983072874	210	3000	48.2	100.5	7/8-14 UNF-2B	1 1/16-12 UN-2B
16	R983072875	210	3000	49.9	103.9	7/8-14 UNF-2B	1 1/16-12 UN-2B
19	R983072876	200	3000	52.4	108.9	7/8-14 UNF-2B	1 1/16-12 UN-2B
22	R983072877	190	2500	55.1	114.3	7/8-14 UNF-2B	1 1/16-12 UN-2B

▼ **Splined shaft (SAE J744 16-4 9T) with 2-bolt flange  $\varnothing 82.55$  mm (SAE J744 82-2 A) for mounting on an axial piston unit and suction port in the front cover**


AZPW-11 – ... **RR20PB-S0036**

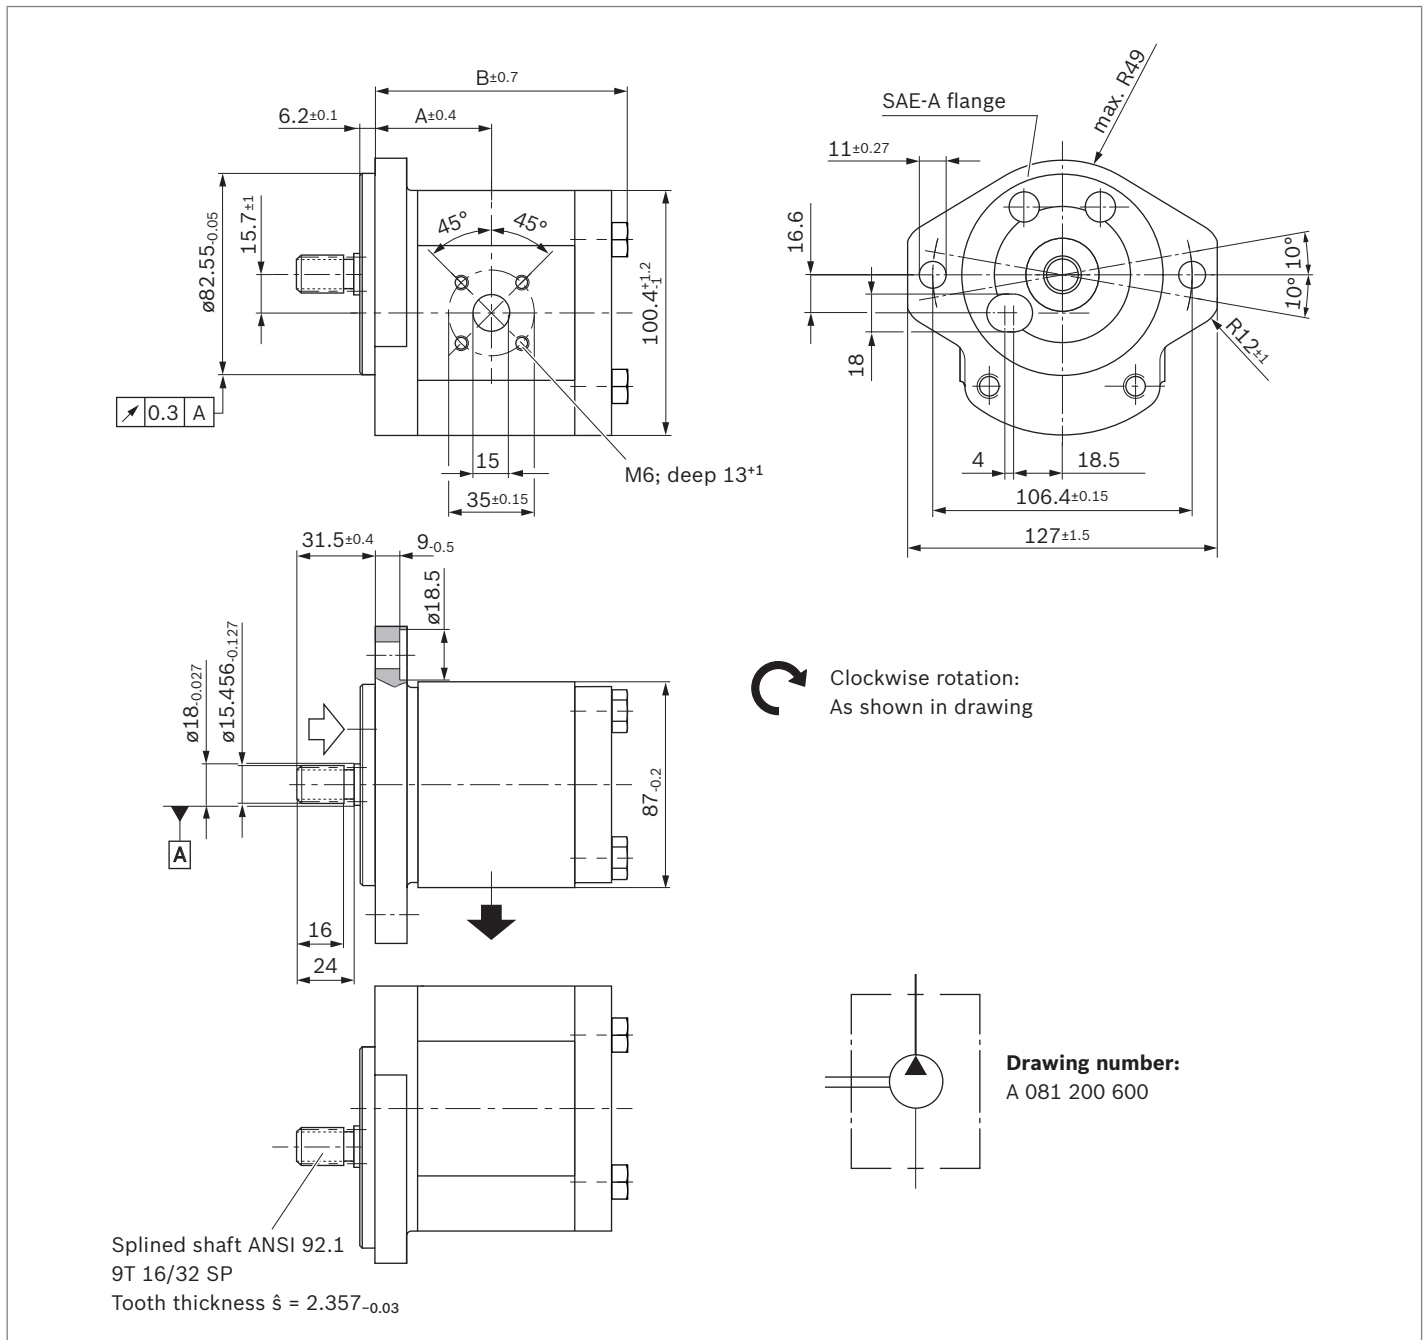

NG	Order number	Maximum intermittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Dimensions	
	Direction of rotation Clockwise			A	B
5	R983072894	210	3500	41.1	86.3
8	R983072895	210	3500	43.2	90.4
11	R983072896	210	3500	47	95.4
14	R983072897	210	3500	47.5	100.4
16	R983072898	210	3500	47.5	103.8
19	R983072899	200	2900	47.5	108.8
22	R983072900	190	2400	55.1	114.2




▼ Splined shaft (SAE J744 16-4 9T) with 2-bolt flange Ø82.55 mm (SAE J744 82-2 A) for mounting on an axial piston unit  
 AZPW-11 – ... RR20PB-S0081

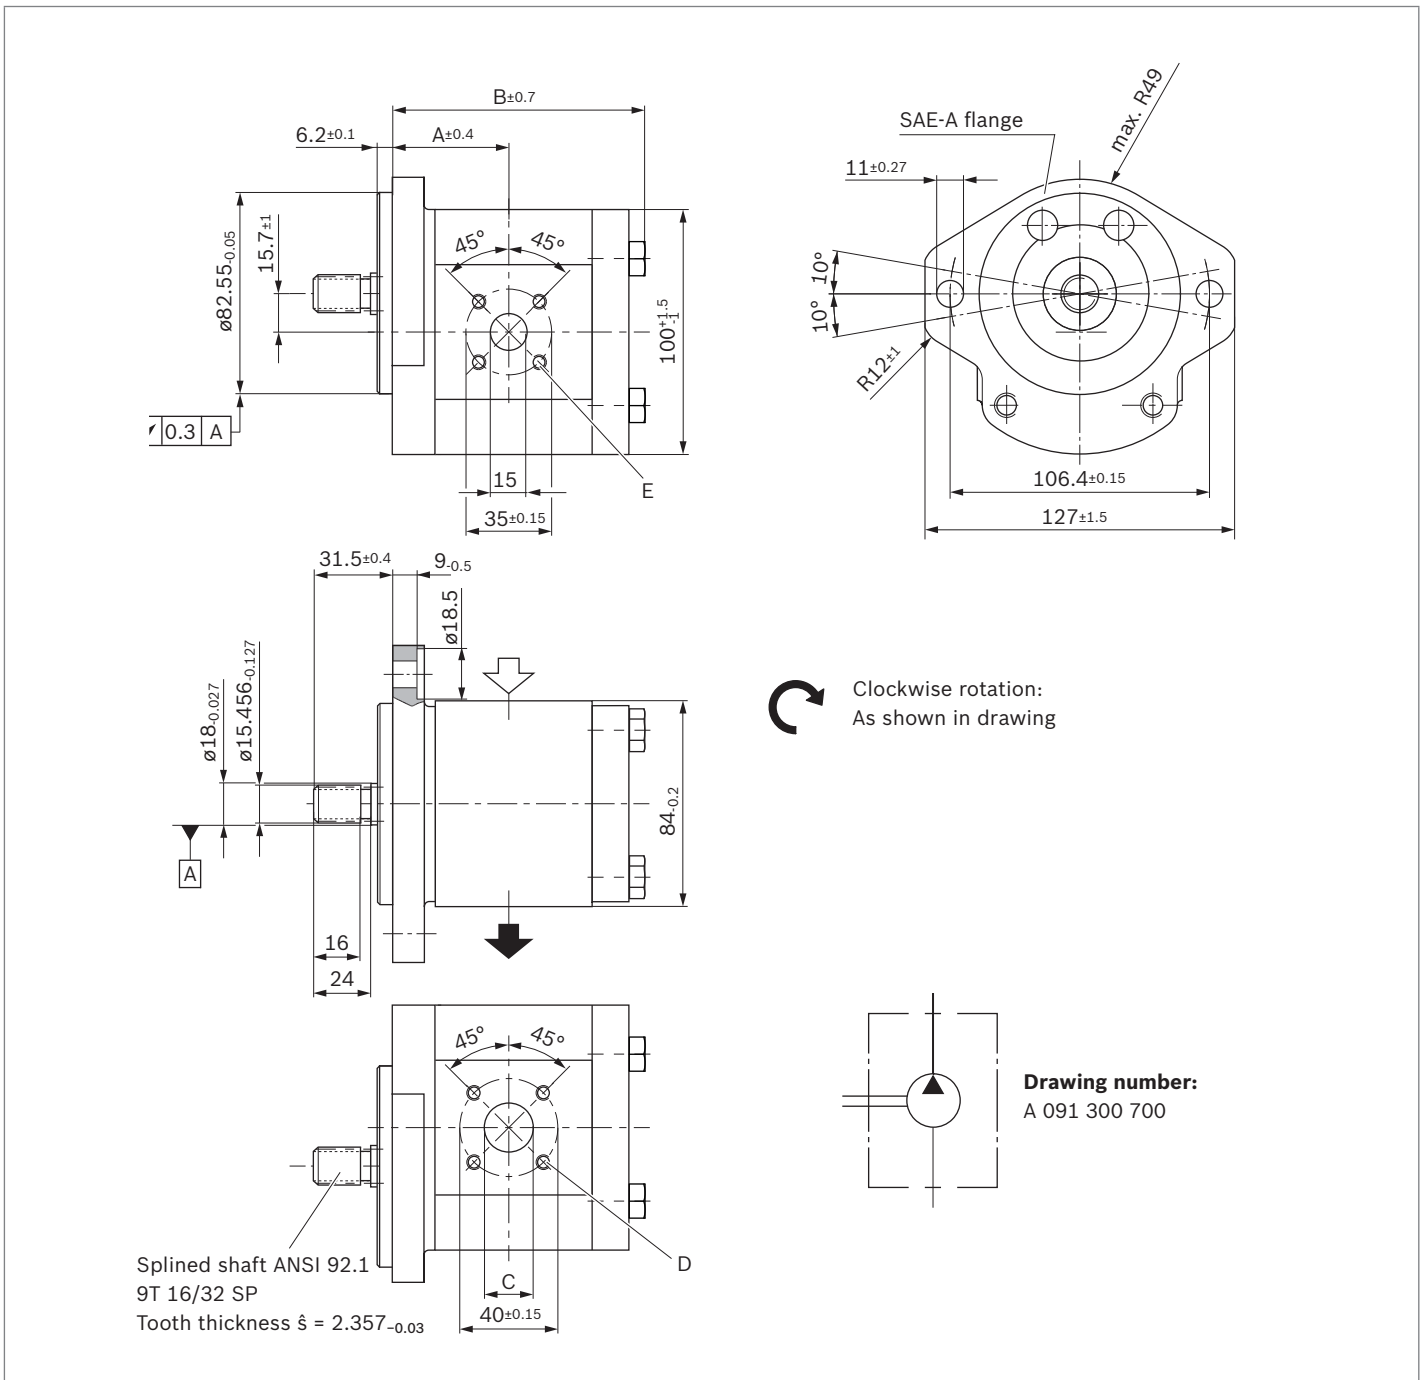

NG	Order number	Maximum inter-mittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Dimensions				
				A	B	C	D	E
5	R983077585	210	3500	41.1	86.3	15	M6;	M6;
8	R983077586	210	3500	43.2	90.4	20	13 <sup>+1</sup> deep	13 <sup>+1</sup> deep
11	R983077587	210	3500	47	95.4	20		
14	R983077588	210	3500	47.5	100.4	20		
16	R983077589	210	3500	47.5	103.8	20		
19	R983077590	200	3300	47.5	108.8	20	M8;	
22	R983077591	190	3200	55.1	114.2	20	13 <sup>+1</sup> deep	

▼ **Splined shaft (SAE J744 16-4 9T) with 2-bolt flange  $\varnothing 82.55$  mm (SAE J744 82-2 A) for mounting on an axial piston unit and line connections in Non-standard version**

AZPW-21 – ... RRXXMB-S0593

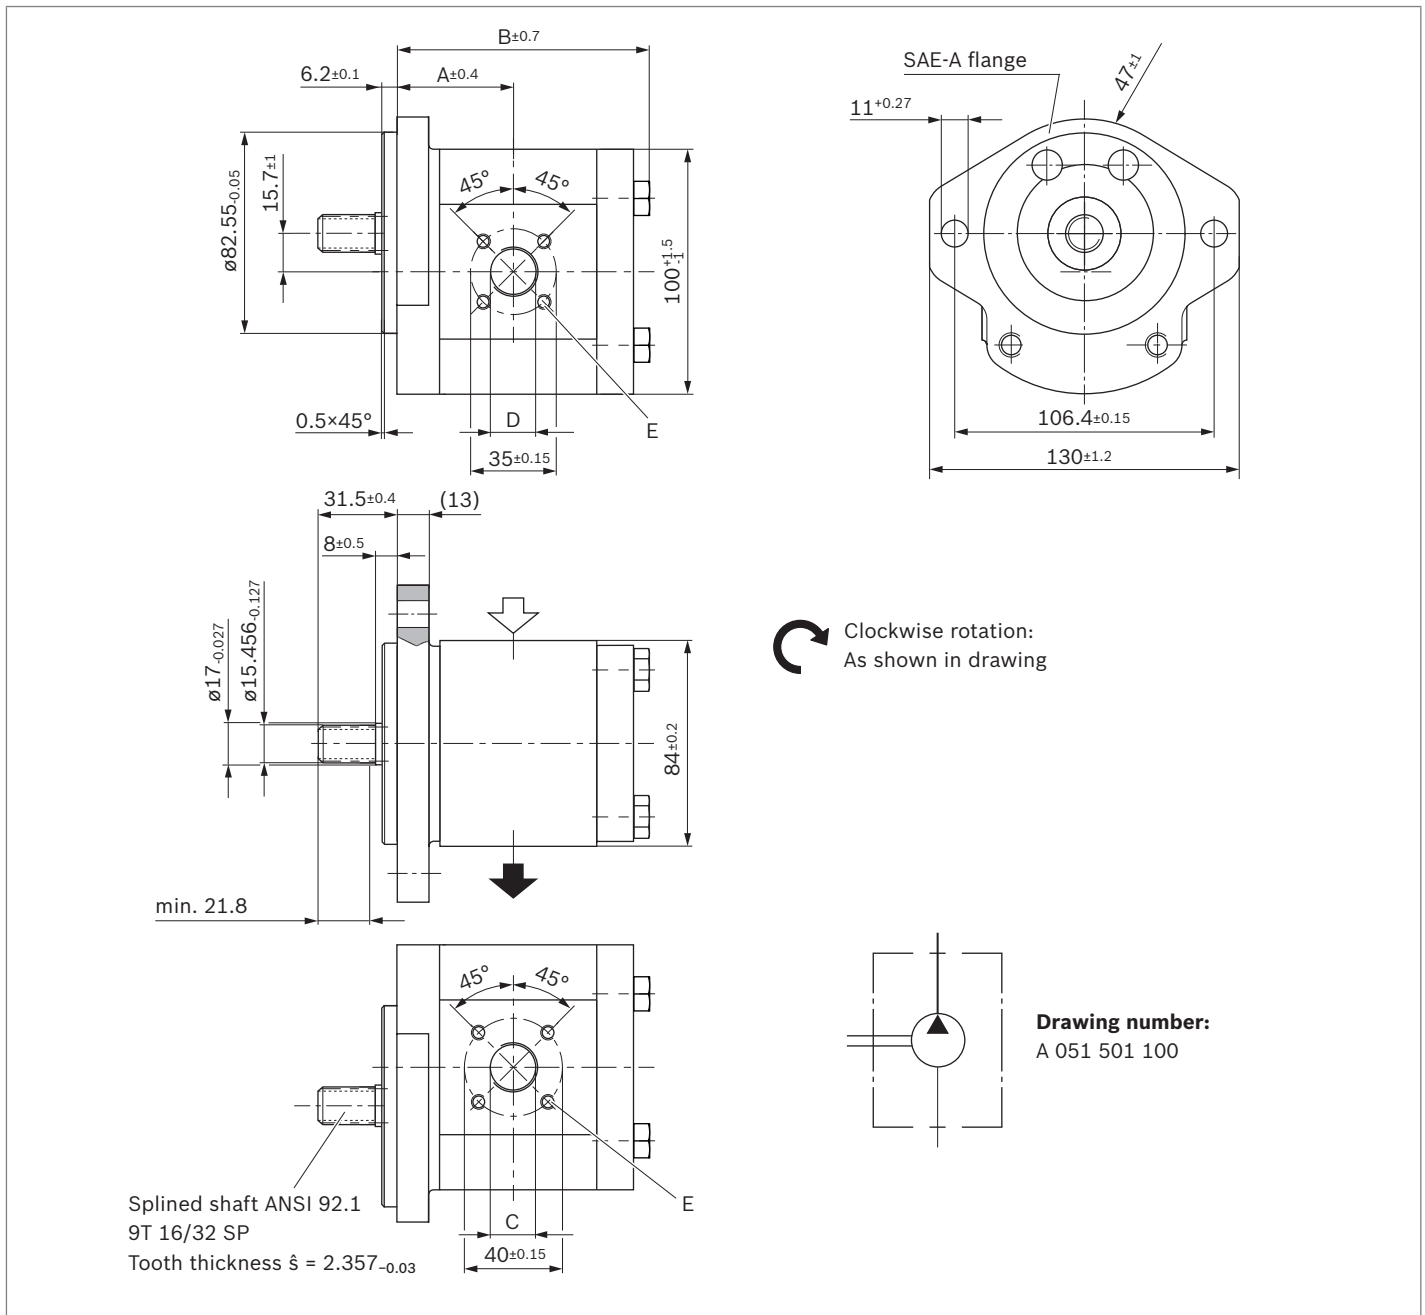


NG	Order number	Maximum intermittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Dimensions				
				A	B	C	D	E
4	R983035496	210	3500	39.9	84.7	3/8; 15 deep	3/8; 15 deep	M6; min. 13 deep
5	R983035497	210	3500	41.1	87.3	3/8; 15 deep	3/8; 15 deep	
8	R983035498	210	3500	43.2	91.4	1/2; 15 deep	1/2; 15 deep	
11	R983035499	210	3500	47	95.7	1/2; 19 deep	1/2; 15 deep	
14	R983035500	210	3500	47.5	101.4	3/4; 19 deep	1/2; 15 deep	
16	R983035501	210	3500	47.5	104.8	3/4; 19 deep	1/2; 15 deep	
19	R983035502	200	3300	47.5	109.8	3/4; 19 deep	1/2; 15 deep	
22	R983035503	190	3200	55.1	115.2	3/4; 19 deep	1/2; 15 deep	

**Accessories**

**Gear pump flanges, straight, for square flange 20 (see page 14)**


Complete fitting with O-ring, metric screw set, nuts and olive.

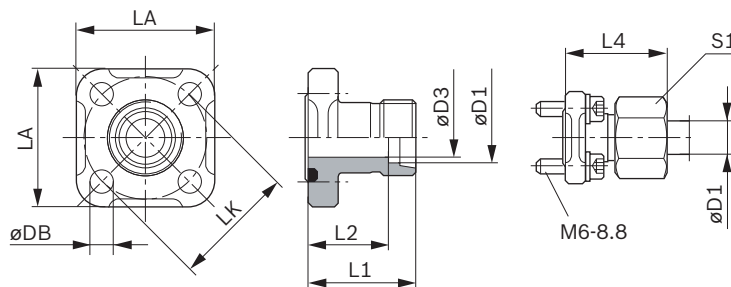

LK	D1	D3	L1	L2	L4	LA	1	DB	Screws 4 pcs.	O-ring NBR	Weight [kg]	Order number	p [bar]
35	10L	8	30	23.0	39.0	40	19	6.4	M6 × 22	20 × 2.5	0.09	1 515 702 064	315
35	12L	10	30	23.0	39.0	40	22	6.4	M6 × 22	20 × 2.5	0.10	1 515 702 065	315
35	15L	12	30	23.0	38.0	40	27	6.4	M6 × 22	20 × 2.5	0.10	1 515 702 066	250
40	15L	12	35	28.0	43.0	42	27	6.4	M6 × 22	24 × 2.5	0.12	1 515 702 067	100
40	18L	15	35	27.5	44.0	42	32	6.4	M6 × 22	24 × 2.5	0.13	1 515 702 068	100
40	22L	19	35	27.5	44.5	42	36	6.4	M6 × 22	24 × 2.5	0.12	1 515 702 069	100
40	28L	24	42	27.5	34.5	42	41	6.4	M6 × 22	24 × 2.5	0.15	1 515 702 008	100


**Gear pump flanges, 90° angle, for square flange 20 (see page 14)**

Complete fitting with O-ring, metric screw set, nuts and olive.

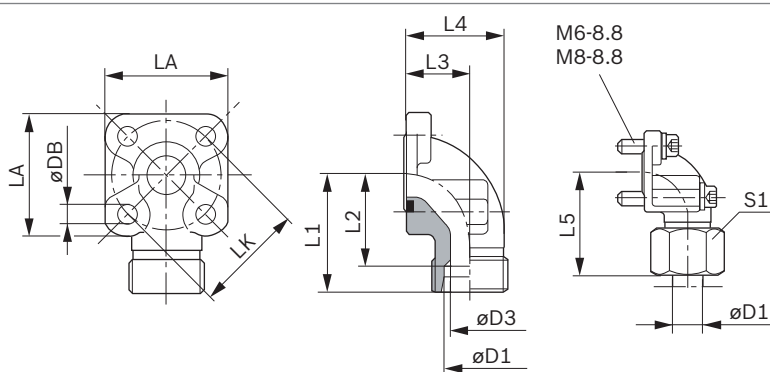

LK	D1	D3	L1	L2	L3	L4	L5	LA	1	DB	Screws 2 pcs.	O-ring NBR	Weight [kg]	Order number	p [bar]	
35	10L	8	38	31.0	16.5	26.5	47.0	40	19	6.4	M6 × 22	M6 × 35	20 × 2.5	0.16	1 515 702 070	315
35	12L	10	38	31.0	16.5	26.5	47.0	40	22	6.4	M6 × 22	M6 × 35	20 × 2.5	0.16	1 515 702 071	315
35	15L	12	38	31.0	16.5	26.5	46.0	40	27	6.4	M6 × 22	M6 × 35	20 × 2.5	0.15	1 515 702 072	250
35	16S	12	38	29.5	20.0	31.0	48.0	40	30	6.4	M6 × 22	M6 × 40	20 × 2.5	0.18	1 515 702 002	315
35	18L	15	38	29.5	20.0	31.0	47.0	40	32	6.4	M6 × 22	M6 × 40	20 × 2.5	0.18	1 545 702 006	250
35	20S	16	45	34.5	25.0	38.0	56.0	40	36	6.4	M6 × 22	M6 × 45	20 × 2.5	0.24	1 515 702 017	315
40	15L	12	38	31.0	22.5	36.5	46.0	42	27	6.4	M6 × 22	M6 × 22	24 × 2.5	0.15	1 515 702 073	100
40	18L	15	38	30.5	22.5	36.5	47.0	42	32	6.4	M6 × 22	M6 × 22	24 × 2.5	0.17	1 515 702 074	100
40	20S	16	40	29.5	22.5	35.5	50.0	42	36	6.4	M6 × 22	M6 × 45	24 × 2.5	0.20	1 515 702 011	250
40	22L	19	38	30.5	22.5	36.5	47.5	42	36	6.4	M6 × 22	M6 × 22	24 × 2.5	0.17	1 515 702 075	100
40	28L	22	40	32.5	28.0	43.0	49.0	42	41	6.4	M6 × 20	M6 × 50	24 × 2.5	0.24	1 515 702 010	100
40	35L	31	41	30.5	34.0	55.0	52.0	42	50	6.4	M6 × 22	M6 × 60	24 × 2.5	0.33	1 515 702 018	100

**Gear pump flange, 3-hole, 90° angle, for square flange 30 (see page 14)**

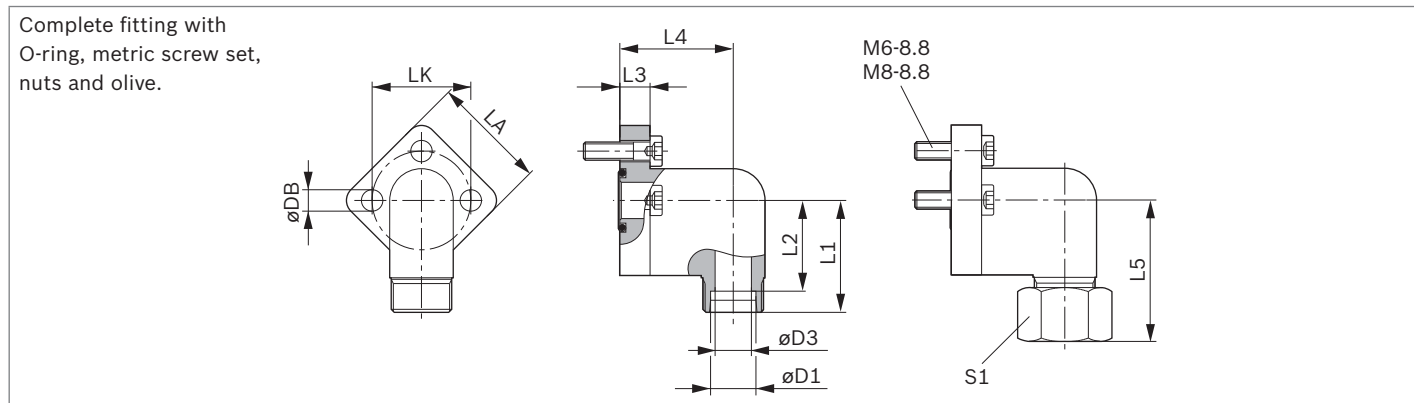


LK	D1	D3	L1	L2	L3	L4	L5	LA	1	DB	Screws 3 pcs.	O-ring NBR	Weight [kg]	Order number	$p$ [bar]
30	12L	10	37	30.0	10	37.5	46	38	22	6.4	M6 × 22	16 × 2.5	0.13	1 515 702 146	250
30	15L	12	37	30.0	10	37.5	47	38	27	6.4	M6 × 22	16 × 2.5	0.14	1 515 702 147	250
30	18L	15	37	30.0	10	37.5	47	38	32	6.4	M6 × 22	16 × 2.5	0.17	1 515 702 148	160
40	22L	19	43	35.5	14	41.0	53	48	36	8.4	M8 × 30	24 × 2.5	0.29	1 515 702 149	160
40	28L	24	43	35.5	14	41.0	53	48	41	8.4	M8 × 30	24 × 2.5	0.40	1 515 702 150	160

**Note**

You can find the permissible tightening torques in our publication 07012-B1 “General Instruction Manual for External Gear Units”.


## Spare parts

### ▼ Schematic diagram

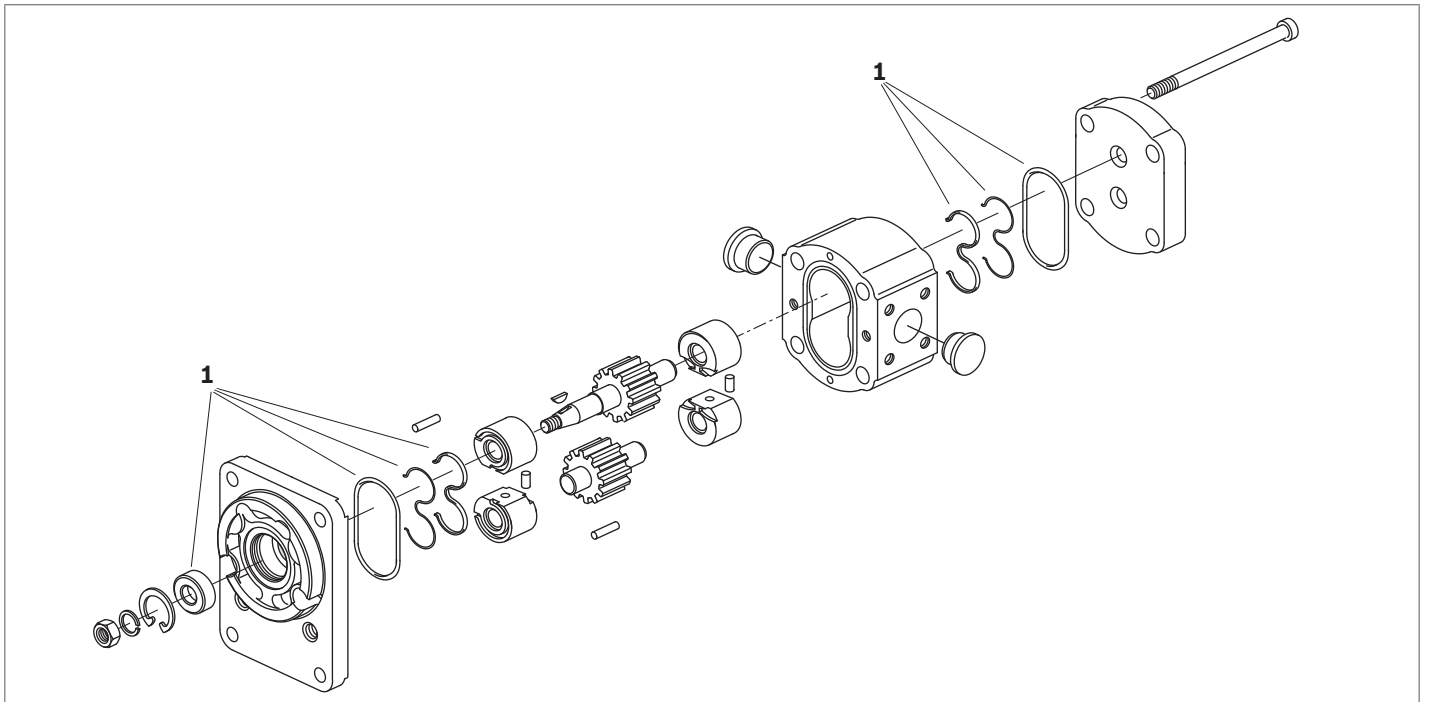


Item	Designation	Order number	Material	AZPW-22 - ...									
				CB...	FB...	HO...	NT...	CP...	CN...	QR...	RR12	RR20	
1	Seal kit	R 983 032 388	NBR	x	x	x	x	x	x	x	x		
		R 983 069 216	FKM									x	x

### ▼ Driver for sizes 4 to 11

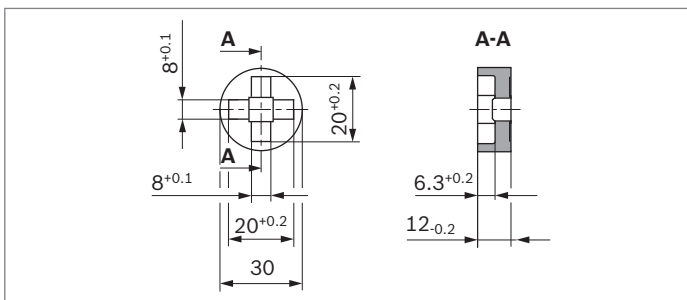

### ▼ Driver for sizes 14 to 22

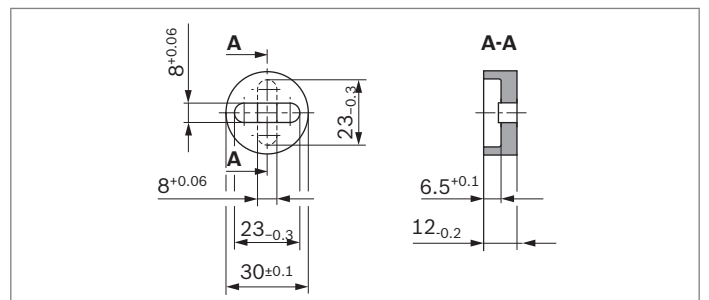

Designation	Order number EU	Order number APA / US
Driver for sizes 4 to 11	1 510 240 009	R 002 G11 025
Driver for sizes 14 to 22	1 510 240 011	F 000 511 445

#### Note

Spare parts can be found online at [www.boschrexroth.com/spc](http://www.boschrexroth.com/spc)

## Notes on commissioning

### General

Pumps delivered by Bosch Rexroth are tested for function and performance. No changes of any nature may be made, otherwise the warranty is rendered void.

The pump may only be operated with the permissible data (see page 6).

### Technical data

All mentioned technical data are dependent on manufacturing tolerances and are applicable for certain boundary conditions. Note that certain deviations are therefore possible and that technical data may vary when certain boundary conditions (e.g., viscosity) change.

### Characteristic curves

When dimensioning the gear pump, observe the maximum possible application data on the basis of the characteristic curves shown starting on page 8.

### Scope of delivery

The scope of delivery includes the components with the characteristics described under type codes and dimensions starting on page 16.

### Further information

- ▶ Further information on installation, commissioning, and operation can be found in the publication 07012-B1: "General Operating Instructions for External Gear Units".
- ▶ Extensive notes and suggestions can be found in the Hydraulic Trainer, volume 3: "Planning and Design of Hydraulic Power Systems", order number R900018547.

### Filter recommendation

Since the majority of premature failures in gear pumps occur due to contaminated hydraulic fluid, filtration should maintain a cleanliness level of 20/18/15 as defined by ISO 4406.

Cleanliness level 20/18/15 can reduce contamination to an acceptable degree in terms of particle size and concentration.

Bosch Rexroth generally recommends full-flow filtration. Basic contamination of the hydraulic fluid used may not exceed class 20/18/15 according to ISO 4406. New fluids are often above this value. In such instances, a filling device with a special filter should be used.

Bosch Rexroth is not liable for wear due to contamination.

## Order number overview

Order number	Type	Page
R983074473	AZPW-11- 004LCB20MB	16
R983074474	AZPW-11- 005LCB20MB	16
R983074475	AZPW-11- 008LCB20MB	16
R983074476	AZPW-11- 011LCB20MB	16
R983074477	AZPW-11- 014LCB20MB	16
R983074478	AZPW-11- 016LCB20MB	16
R983074479	AZPW-11- 019LCB20MB	16
R983074480	AZPW-11- 022LCB20MB	16
R983074465	AZPW-11- 004RCB20MB	16
R983074466	AZPW-11- 005RCB20MB	16
R983074467	AZPW-11- 008RCB20MB	16
R983074468	AZPW-11- 011RCB20MB	16
R983074469	AZPW-11- 014RCB20MB	16
R983074470	AZPW-11- 016RCB20MB	16
R983074471	AZPW-11- 019RCB20MB	16
R983074472	AZPW-11- 022RCB20MB	16
R983072848	AZPW-11 - 004LFB20MB	17
R983072849	AZPW-11 - 005LFB20MB	17
R983072850	AZPW-11 - 008LFB20MB	17
R983072851	AZPW-11 - 011LFB20MB	17
R983072852	AZPW-11 - 014LFB20MB	17
R983072853	AZPW-11 - 016LFB20MB	17
R983072854	AZPW-11 - 019LFB20MB	17
R983072855	AZPW-11 - 022LFB20MB	17
R983072840	AZPW-11 - 004RFB20MB	17
R983072841	AZPW-11 - 005RFB20MB	17
R983072842	AZPW-11 - 008RFB20MB	17
R983072843	AZPW-11 - 011RFB20MB	17
R983072844	AZPW-11 - 014RFB20MB	17
R983072845	AZPW-11 - 016RFB20MB	17
R983072846	AZPW-11 - 019RFB20MB	17
R983072847	AZPW-11 - 022RFB20MB	17
R983072831	AZPW-11 - 004LHO30MB	18
R983072832	AZPW-11 - 005LHO30MB	18
R983072833	AZPW-11 - 008LHO30MB	18
R983072834	AZPW-11 - 011LHO30MB	18
R983072835	AZPW-11 - 014LHO30MB	18
R983072836	AZPW-11 - 016LHO30MB	18
R983072837	AZPW-11 - 018LHO30MB	18
R983072838	AZPW-11 - 022LHO30MB	18
R983072823	AZPW-11 - 004RHO30MB	18
R983072824	AZPW-11 - 005RHO30MB	18
R983072825	AZPW-11 - 008RHO30MB	18
R983072826	AZPW-11 - 011RHO30MB	18
R983072827	AZPW-11 - 014RHO30MB	18
R983072828	AZPW-11 - 016RHO30MB	18
R983072829	AZPW-11 - 018RHO30MB	18

Order number	Type	Page
R983072830	AZPW-11 - 022RHO30MB	18
R983072863	AZPW-11 - 004LNT20MB	19
R983072864	AZPW-11 - 005LNT20MB	19
R983072865	AZPW-11 - 008LNT20MB	19
R983072866	AZPW-11 - 011LNT20MB	19
R983072867	AZPW-11 - 014LNT20MB	19
R983072868	AZPW-11 - 016LNT20MB	19
R983072869	AZPW-11 - 019LNT20MB	19
R983072870	AZPW-11 - 022LNT20MB	19
R983072856	AZPW-11 - 004RNT20MB	19
R983076112	AZPW-11 - 005RNT20MB	19
R983072857	AZPW-11 - 008RNT20MB	19
R983072858	AZPW-11 - 011RNT20MB	19
R983072859	AZPW-11 - 014RNT20MB	19
R983072860	AZPW-11 - 016RNT20MB	19
R983072861	AZPW-11 - 019RNT20MB	19
R983072862	AZPW-11 - 022RNT20MB	19
R983072788	AZPW-11 - 004LCP20MB-S0007	20
R983072789	AZPW-11 - 005LCP20MB-S0007	20
R983072790	AZPW-11 - 008LCP20MB-S0007	20
R983072791	AZPW-11 - 011LCP20MB-S0007	20
R983072792	AZPW-11 - 014LCP20MB-S0007	20
R983072793	AZPW-11 - 016LCP20MB-S0007	20
R983072794	AZPW-11 - 019LCP20MB-S0007	20
R983072795	AZPW-11 - 022LCP20MB-S0007	20
R983072780	AZPW-11 - 004RCP20MB-S0007	20
R983072781	AZPW-11 - 005RCP20MB-S0007	20
R983072782	AZPW-11 - 008RCP20MB-S0007	20
R983072783	AZPW-11 - 011RCP20MB-S0007	20
R983072784	AZPW-11 - 014RCP20MB-S0007	20
R983072785	AZPW-11 - 016RCP20MB-S0007	20
R983072786	AZPW-11 - 019RCP20MB-S0007	20
R983072787	AZPW-11 - 022RCP20MB-S0007	20
R983072886	AZPW-11 - 004LCN20MB	21
R983072887	AZPW-11 - 005LCN20MB	21
R983072888	AZPW-11 - 008LCN20MB	21
R983072889	AZPW-11 - 011LCN20MB	21
R983072890	AZPW-11 - 014LCN20MB	21
R983072891	AZPW-11 - 016LCN20MB	21
R983072892	AZPW-11 - 019LCN20MB	21
R983072893	AZPW-11 - 022LCN20MB	21
R983072878	AZPW-11 - 004RCN20MB	21
R983072879	AZPW-11 - 005RCN20MB	21
R983072880	AZPW-11 - 008RCN20MB	21
R983072881	AZPW-11 - 011RCN20MB	21
R983072882	AZPW-11 - 014RCN20MB	21
R983072883	AZPW-11 - 016RCN20MB	21





## AZ configurator


With our practical product selector, it will take you next to no time to find the right solution for your applications, no matter whether it is Standard Performance or another external gear unit.

The selector guides you through a selection of features to all of the products available for order. By clicking on the order number, you can view and download the following product information: Data sheet, dimension sheet, instruction manual, operating conditions, and tightening torques. You can order your selection directly via our online shop and at the same time benefit from an additional discount of 2%. And if you need something really quickly, simply use our fast delivery and preferred programs (GoTo). Then the goods will be sent within 10 business days.

You also have the possibility to easily and conveniently configure your individual external gear unit with our AZ configurator. All the necessary data that you need for the project planning of external gear units is requested by means of the menu navigation.

For an already existing configuration you receive as a result the order number, the type code, as well as further information. If your configuration does not lead to a product that is available for order, our online tools provide you with the possibility of sending a project request directly to Bosch Rexroth. We will then get in contact with you.

Link: [www.boschrexroth.com/az-configurator](http://www.boschrexroth.com/az-configurator)

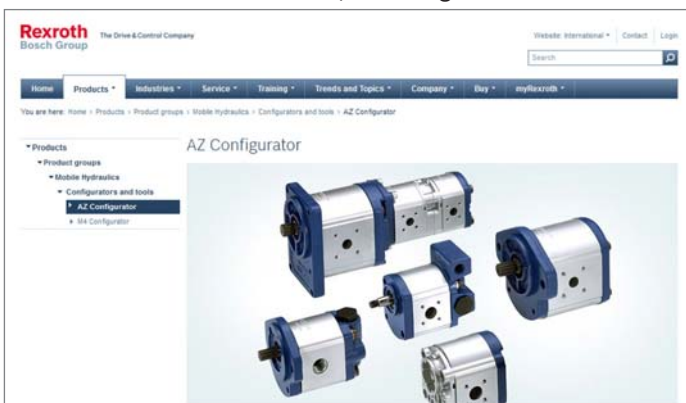

## Fit4SILENCE app

You want to quickly determine the noise level of an application but don't have a measuring device at hand? No problem with Fit4SILENCE! Our new noise measurement app for all Android devices can be immediately downloaded free of charge. After calibration, you can start using it straight away and conduct fast, accurate noise measurements with different weightings in no time at all. An additional measuring device is no longer necessary, because calibrated smartphones using the app can achieve an accuracy that approximates professional measuring devices. Last but not least, the app contains interesting information about the SILENCE PLUS technology, including an audio sample.

Link: [www.boschrexroth.com/silence-plus](http://www.boschrexroth.com/silence-plus)

### ▼ Download the Android app:



## Your notes

**Bosch Rexroth AG**

Mobile Applications  
Robert-Bosch-Straße 2  
71701 Schwieberdingen,  
Germany  
Tel. +49 711 811-10063  
brm-az.info@boschrexroth.de  
www.boschrexroth.com

**Bosch Rexroth (India) Private Limited**

Head Office, Plant and Service Centre,  
Near Village Iyava, Sanand Viramgam  
Highway, Taluka Sanand, Ahmedabad –  
382170, India  
Tel. +91 (2717) 67-8000  
info@boschrexroth.co.in  
www.boschrexroth.co.in


© Bosch Rexroth AG 2016. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# External gear pump Series B

**RE 10 088/09.13**  
Replaces: RE 10 088/09.12

**AZPB-3x**

Fixed pumps  
 $V = 1.0 \dots 7.1 \text{ cm}^3/\text{rev}$

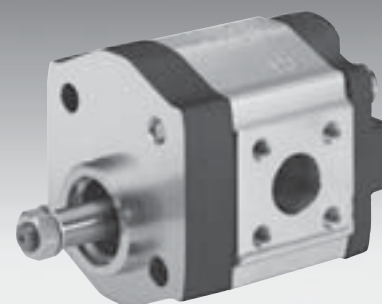

## Overview of contents

Contents	Page
General	2
Product overview	3
Ordering code single pumps	4
Ordering code multiple pumps	5
Drive shaft	6
Front cover	6
Line ports	7
Gear pumps with integrated pressure-relief valve	7
Performance charts	8
Noise charts	11
Design calculations for pumps	12
Specifications	13
Drive Arrangements	14
Multiple gear pumps	15
Dimensions	16
Fittings	26
Notes on commissioning and maintenance	27
Spare parts	28
The AZ configurator	29
Ordering-No.	30

## Features

- Nominal pressure 250 bar (up to  $6.3 \text{ cm}^3/\text{rev}$ )
- Slide bearings for heavy duty applications
- Standardized drive shafts
- Line ports:
  - Connection flange or internal thread
- Long service life through reinforced design of shafts and cast iron cover
- Consistent high quality through mass production
- Numerous configuration variants available
- Same mounting dimensions as the AZPB-1x



# General

Rexroth external gear pumps are available as standard gear pumps in the 4 series of B, F, N and G and as SILENCE gear pumps in the S, T and U series, and as the SILENCE PLUS version in the J series, in which the displacements are graded by different gear widths. Further configuration variants are given by different flanges, shafts, valve arrangements and multiple pump combinations.











## Construction

The external gear pump consists essentially of a pair of gears supported in bearing bushings and the housing with a front and a rear cover. The drive shaft protrudes from the front cover where it is sealed by the shaft seal ring. The bearing forces are absorbed by special slide bearings with sufficient elasticity to produce surface contact instead of line contact. They also ensure excellent resistance to galling – especially at low speed. The gear wheels of the standard and SILENCE pumps have 12 teeth and the gear wheels of the SILENCE PLUS have 7 non-evolute teeth. This keeps both flow pulsation and noise emission to a minimum.

The internal sealing is achieved by forces which are proportional to delivery pressure. This ensures optimum efficiency. The bearings provide the seal at the ends of the gaps between the teeth which carry the pressurized oil. The sealing zone between the gear teeth and the bearings is controlled by the admission of operating pressure to the rear of the bearings. Special seals form the boundary of the zone. The radial clearance at the tips of the gear teeth is sealed by internal forces pushing them against the case.

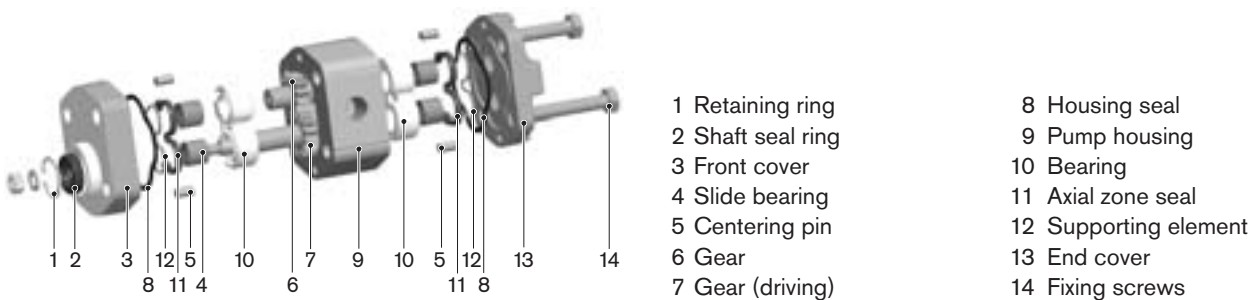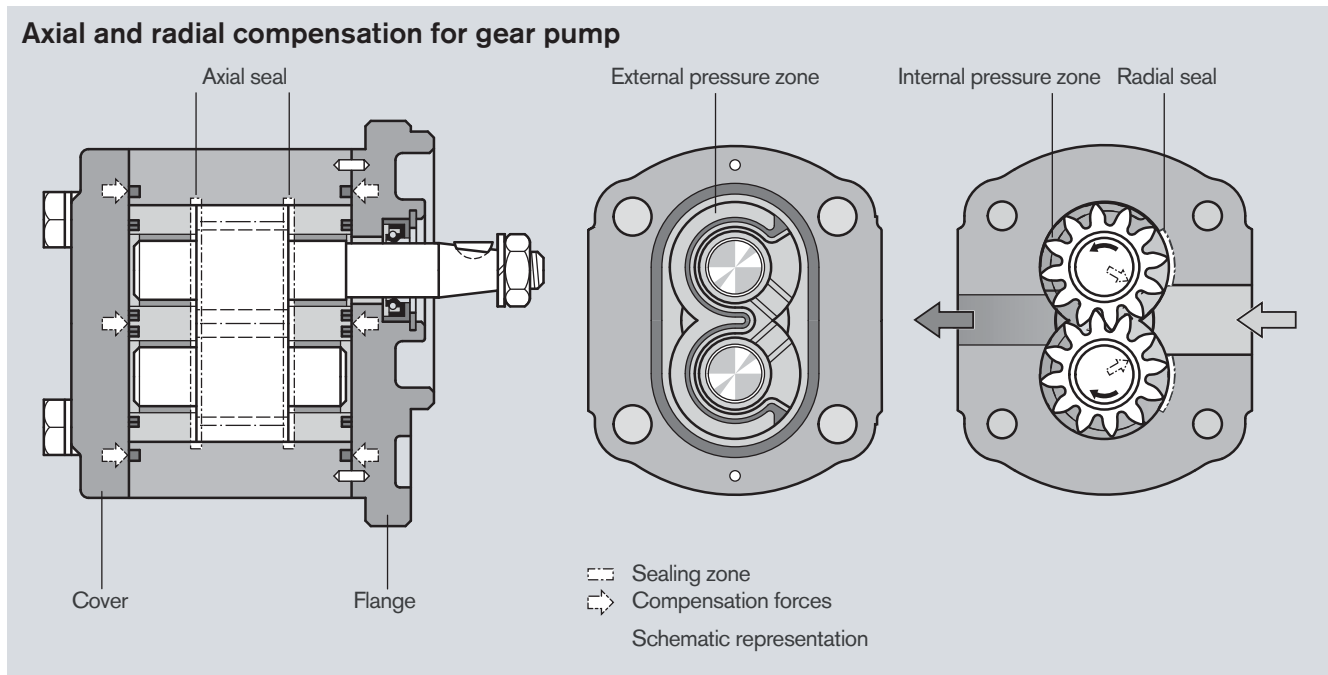

Overview of "Series B" standard program











Version	Page	Version	Page	Version	Page
	16		20		24
	17		21		25
	18		22		
	19		23		

# Ordering code

## External gear units Single pumps Standard

<b>AZ</b>	<b>P</b>	<b>B</b>	-	<b>x</b>	<b>x</b>	-	<b>4.0</b>	<b>R</b>	<b>C</b>	<b>P</b>	<b>02</b>	<b>M</b>	<b>D</b>	<b>200 xx</b>	<b>S xxxx</b>
<b>Function</b> P = Pump <b>Series</b> 3 = 3rd generation <b>Version</b> 2 = corrosion-resistant, pinned <b>Size (B)</b> 1.0 = 1.00 cm <sup>3</sup> /rev 2.0 = 2.00 cm <sup>3</sup> /rev 2.5 = 2.50 cm <sup>3</sup> /rev 3.1 = 3.15 cm <sup>3</sup> /rev 4.0 = 4.00 cm <sup>3</sup> /rev 4.5 = 4.50 cm <sup>3</sup> /rev 5.0 = 5.00 cm <sup>3</sup> /rev 6.3 = 6.30 cm <sup>3</sup> /rev 7.1 = 7.10 cm <sup>3</sup> /rev <b>Direction of rotation</b> R = Clockwise L = Counterclockwise							Special design *)		Valve adjustment 200 xx = PRV 200 bar		<b>Rear cover</b> B = Standard A = Axial inlet and outlet port		<b>Seals</b> M = NBR K = NBR, shaft seal ring in FKM P = FKM		



























\*) Some of the special designs shown on pages 16–25 are not covered in the illustration of the ordering code.

Drive shafts				Front cover				Line ports	
<b>C</b>	Tapered key shaft 1:5		<b>P</b>	<b>P</b>	2-bolt mounting Centering Ø 32 mm		<b>01</b>	Pipe thread ISO 228/1	
<b>H</b>	Tapered key shaft 1:8		<b>O</b>	<b>O</b>	Square flange Centering Ø 25.28 mm		<b>02</b>	Thread, metric ISO 9974-1	
<b>N</b>	Dihedral Claw		<b>M</b>	<b>Y</b>	<b>M</b> 2-bolt mounting Centering Ø 32 mm, with seal ring		<b>20</b>	Rectangular flange	
				<b>Y</b>	2-bolt mounting Centering Ø 32 mm, with seal ring, mounting on series F				

Not all variants can be selected by using the ordering code!  
 Please select the required pump by using the selection tables (standard types from standard range, see pages 16...25)  
 or after consultation with Bosch Rexroth!  
 Special options are possible upon request.

# Ordering code

## External gear units, Multiple pumps, Standard


AZ	P	BB	-	x	x	-	4.0/4.0	R	H	O	20	20	K	B
<b>Function</b> P = Pump <b>Series</b> B = 1.0...7.1 cm <sup>3</sup> /rev S = 4.0...28 cm <sup>3</sup> /rev F = 4.0...28 cm <sup>3</sup> /rev J = 12.0...16 cm <sup>3</sup> /rev T = 20.0...36 cm <sup>3</sup> /rev N = 20.0...36 cm <sup>3</sup> /rev U = 22.5...63 cm <sup>3</sup> /rev G = 22.5...63 cm <sup>3</sup> /rev <b>Series, relates to pump section 1</b> 2 = Housing width 110 mm <b>Version, relates to pump section 1</b> 2 = corrosion-resistant, pinned <b>Size</b> as per individual Series <b>Direction of rotation</b> R = Clockwise L = Counterclockwise							<b>Rear cover</b> relates to last pump stage B = Standard <b>Seals</b> M = NBR K = NBR, shaft seal ring pump stage 1 in FKM P = FKM							
<b>Drive shafts</b> relates to pump stage 1							<b>Front cover</b> relates to pump stage 1				<b>Line ports</b> every pump stage			
Series B: <b>H</b> Tapered key shaft 1:8  <b>O</b> Suitable front cover <b>O</b>							<b>O</b> Square flange Centering Ø 25.38 mm				<b>01</b> Pipe thread ISO 228/1  <b>20</b> Rectangular flange 			
Series F, S, J: <b>C</b> Tapered key shaft 1:5  <b>B</b> <b>H</b> Tapered key shaft 1:8  <b>O</b> <b>R</b> Splined shaft SAE J 744 16-4 9T  <b>R</b>							<b>B</b> Square flange Centering Ø 80 mm  <b>O</b> Square flange Centering Ø 36.47 mm  <b>R</b> SAE J 744 82-2 A Centering Ø 82.55 mm 2-hole mounting 				<b>20</b> Rectangular flange  <b>30</b> Rectangular flange 			
Series N, T: <b>C</b> Tapered key shaft 1:5  <b>B</b> <b>D</b> Splined shaft SAE J 744 22-4 13T  <b>C</b>							<b>B</b> Square flange Centering Ø 100 mm  <b>C</b> SAE J 744 101-2 B Centering Ø 101.6 mm 2-hole mounting 				<b>07</b> Square flange SAE thread, metric  <b>20</b> Rectangular flange 			
Series G, U: <b>C</b> Tapered key shaft 1:5  <b>B</b> <b>D</b> Splined shaft SAE J 744 22-4 13T  <b>C</b> <b>H</b> Tapered key shaft 1:8  <b>O</b>							<b>B</b> Square flange Centering Ø 105 mm  <b>C</b> SAE J 744 101-2 B Centering Ø 101.6 mm 2-hole mounting  <b>O</b> Square flange Centering Ø 50.78 mm 				<b>07</b> Square flange SAE thread, metric  <b>20</b> Rectangular flange  <b>30</b> Rectangular flange 			

Not all variants can be selected by using the ordering code!


Please select the required pump by using the selection tables (standard types from standard range, see pages 16...25) or after consultation with Bosch Rexroth!

Special options are possible upon request.

Drive shafts

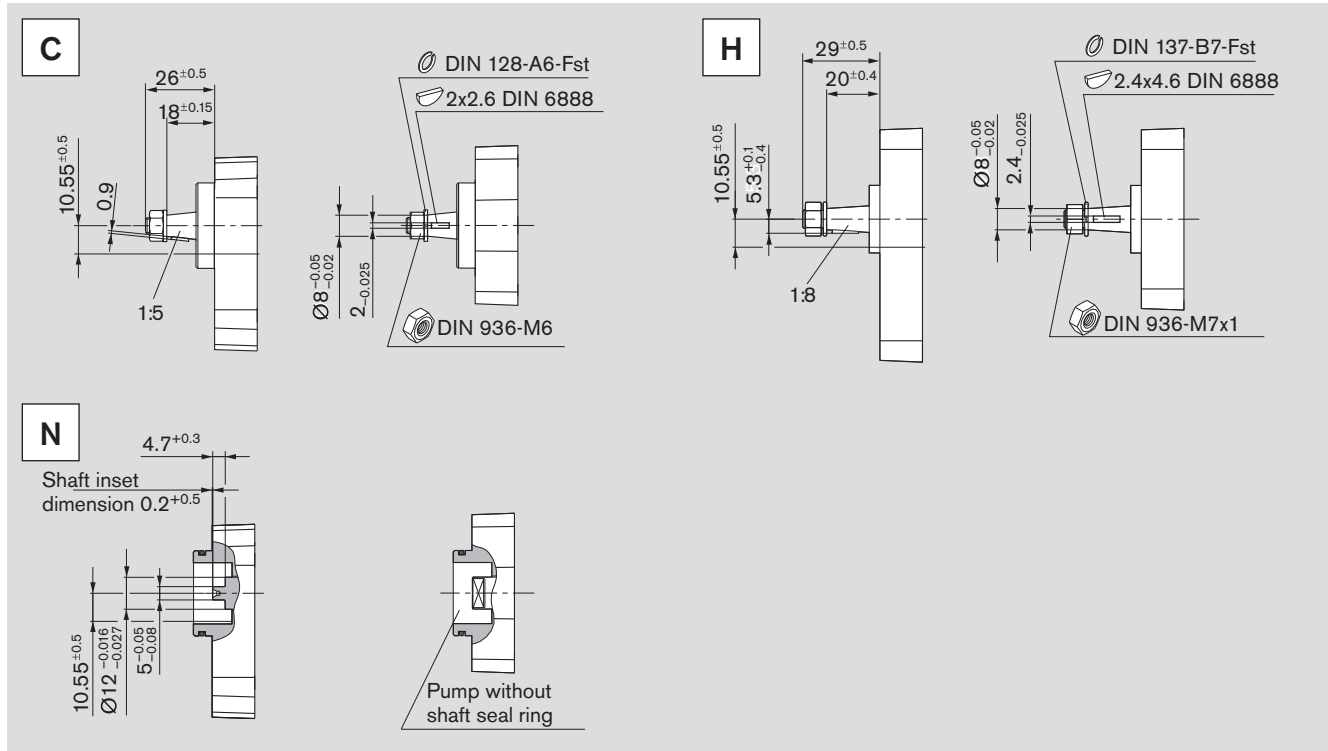


Front cover

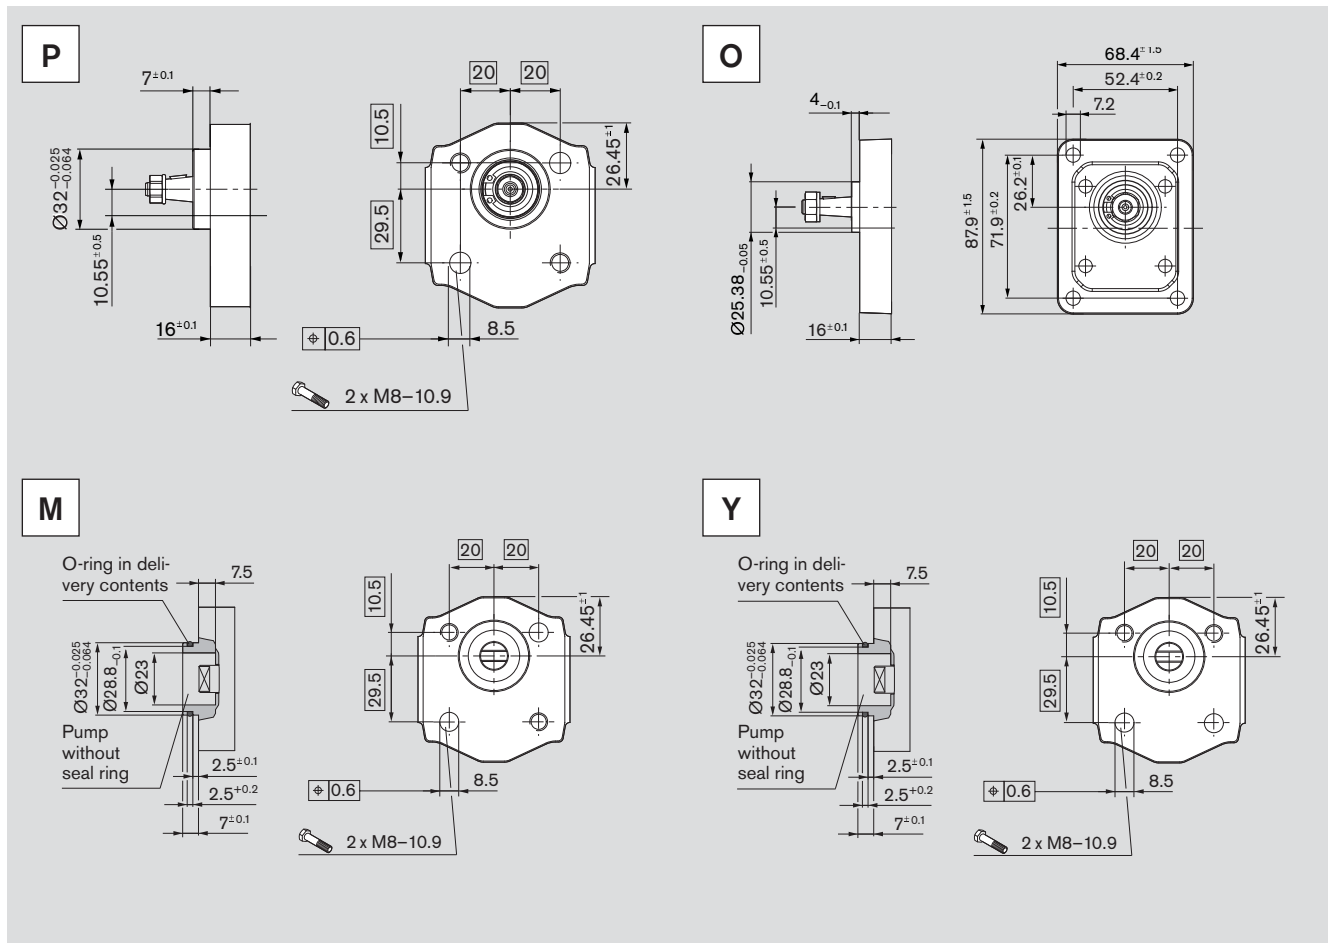




## Line ports



**01** Pipe thread  
ISO 228/1

Limited service life  
compared to line port **20**


Ordering code	Size	Pressure side		Suction side	
		G	F	G	F
01	1...3.15 cm <sup>3</sup>	G 3/8	13	G 3/8	13
	4.0...7.1 cm <sup>3</sup>	G 3/8		G 1/2	



**02** Pipe thread  
ISO 9974-1

Limited service life  
compared to line port **20**

Ordering code	Size	Pressure side		Suction side	
		M	F	M	F
02	1...3.15 cm <sup>3</sup>	14 x 1.5	13	M18 x 1.5	13
	4...7.1 cm <sup>3</sup>			M22 x 1,5	




**20** Rectangular flange

Ordering code	Size	Pressure side			Suction side		
		C	D	E	C	D	E
20	2...2.5 cm <sup>3</sup>	12	30	M 6 depth 13	12	30	M 6 depth 11.5
	3.15...7.1 cm <sup>3</sup>	15	35		15	35	

## Gear pumps with integrated pressure-relief valve


In order to reduce external pipework it is possible to incorporate a pressure-relief valve in the cover of the gear pump.





Pressure-relief valve.  
Discharge returned to suction line  
 $p_1 = 5...250$  bar

# Performance charts





$\nu = 35 \text{ mm}^2/\text{s}$ ,  $\vartheta = 50^\circ\text{C}$

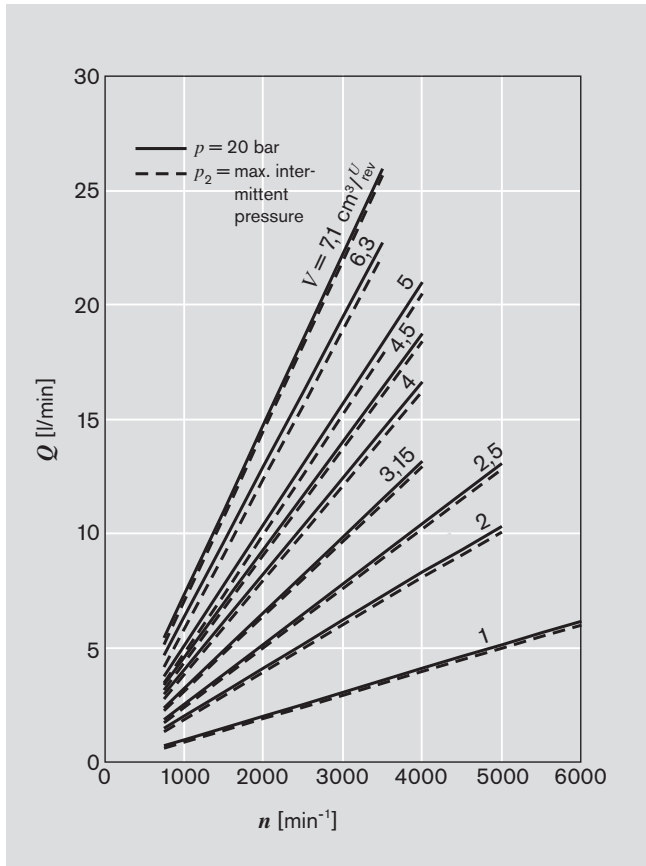




$Q = f(n, V)$  incl.  $\eta_v$   
 $P = f(n, p)$  — incl.  $\eta_t$   
 $M = f(n, p)$  - - - incl.  $\eta_{hm}$

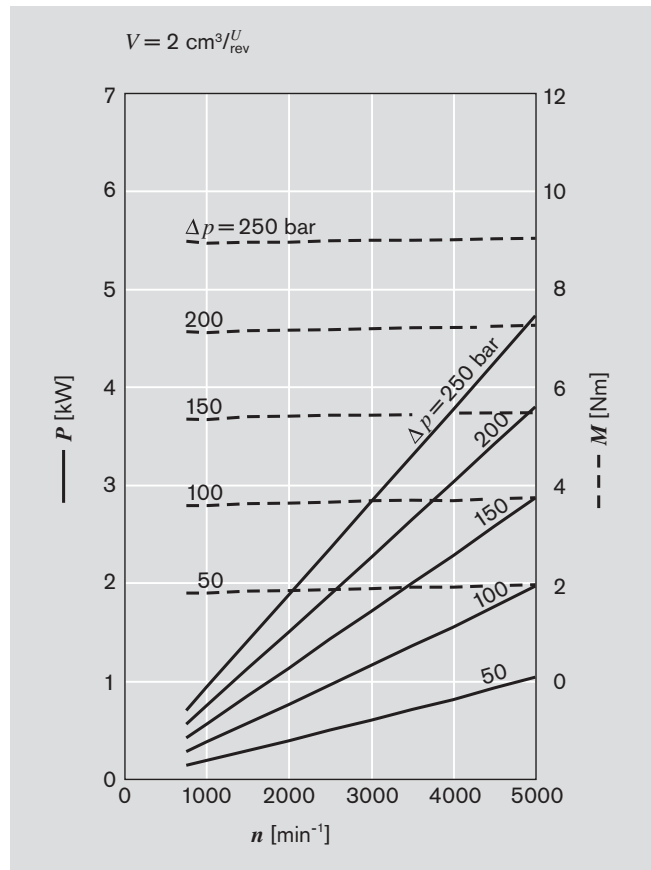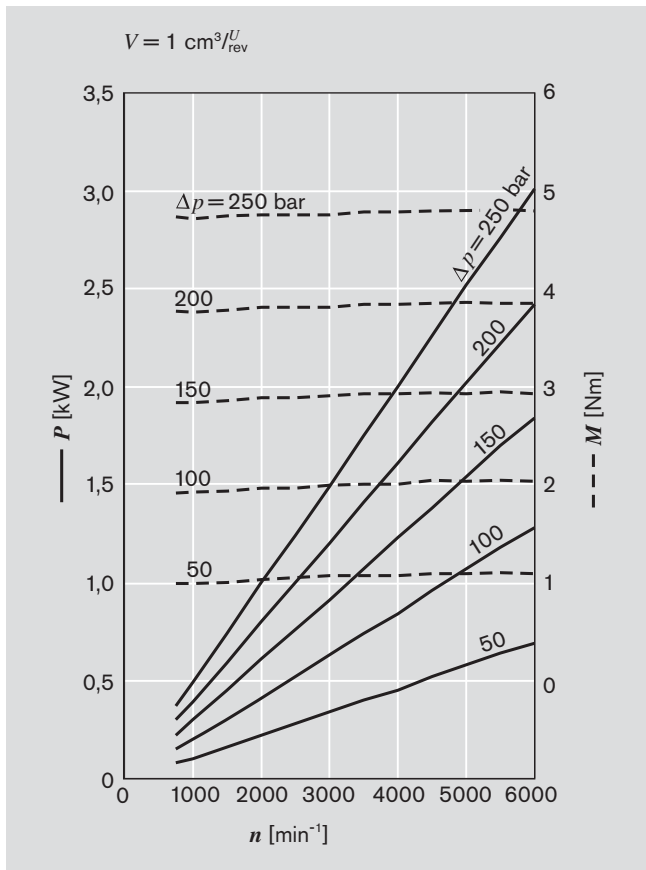

Performance charts (continued)

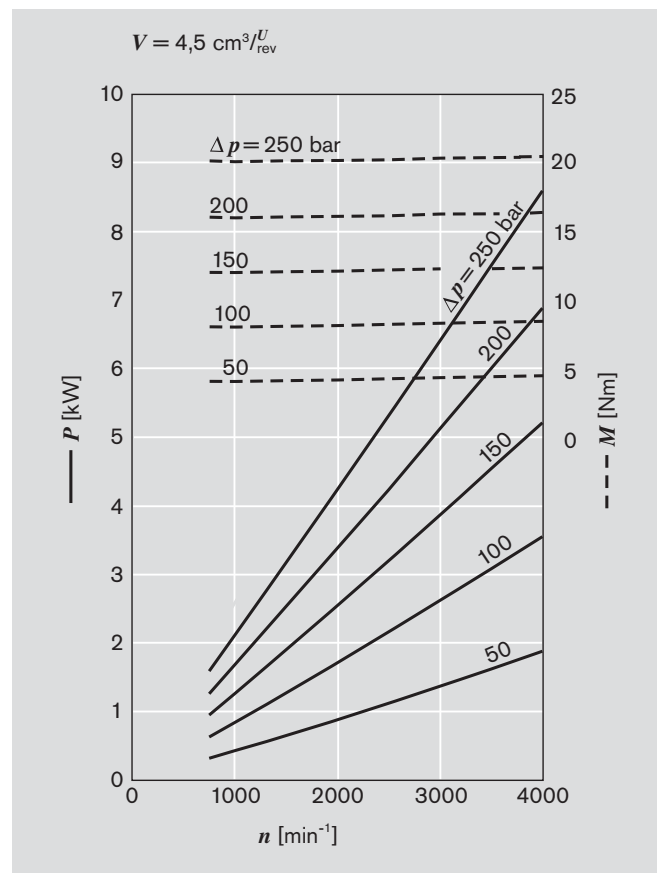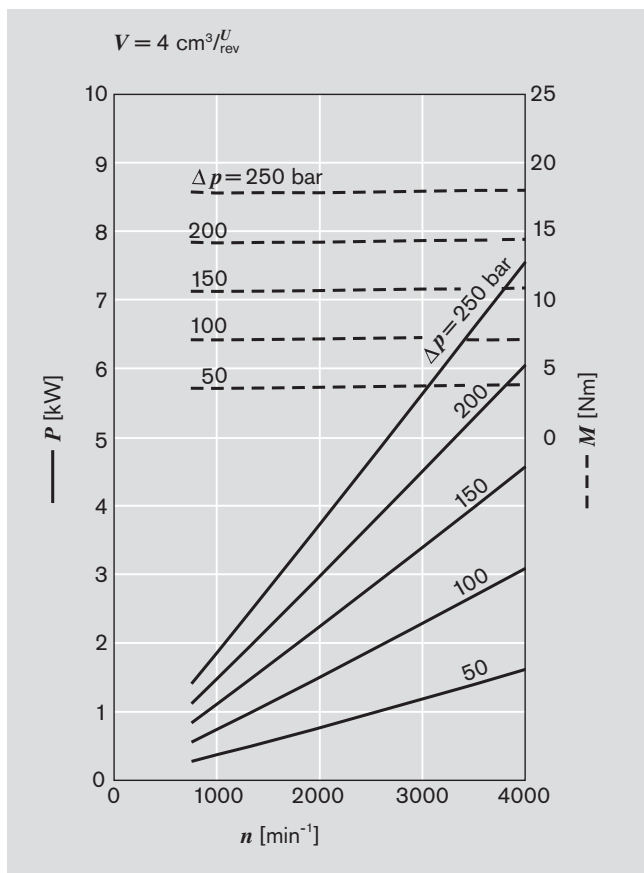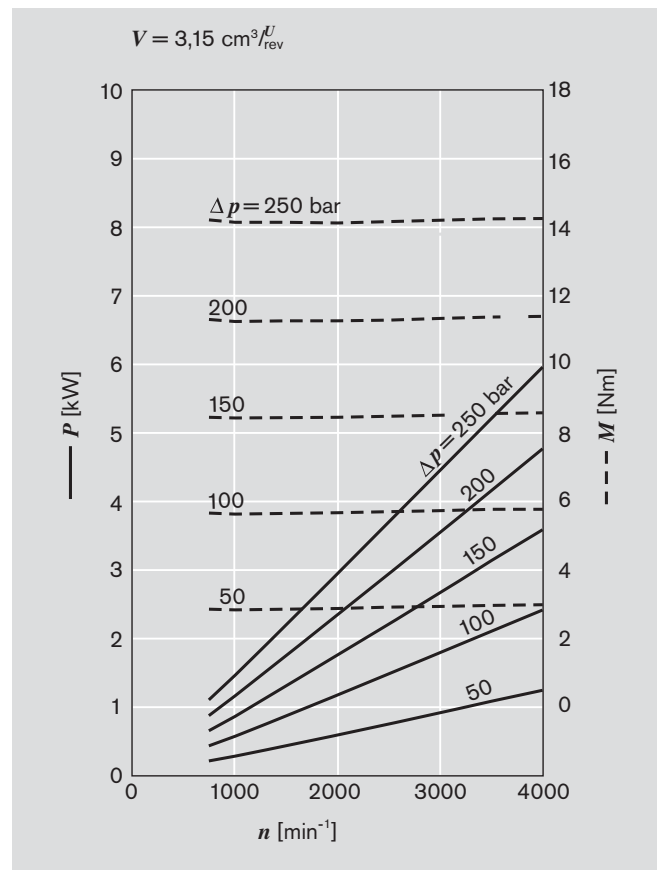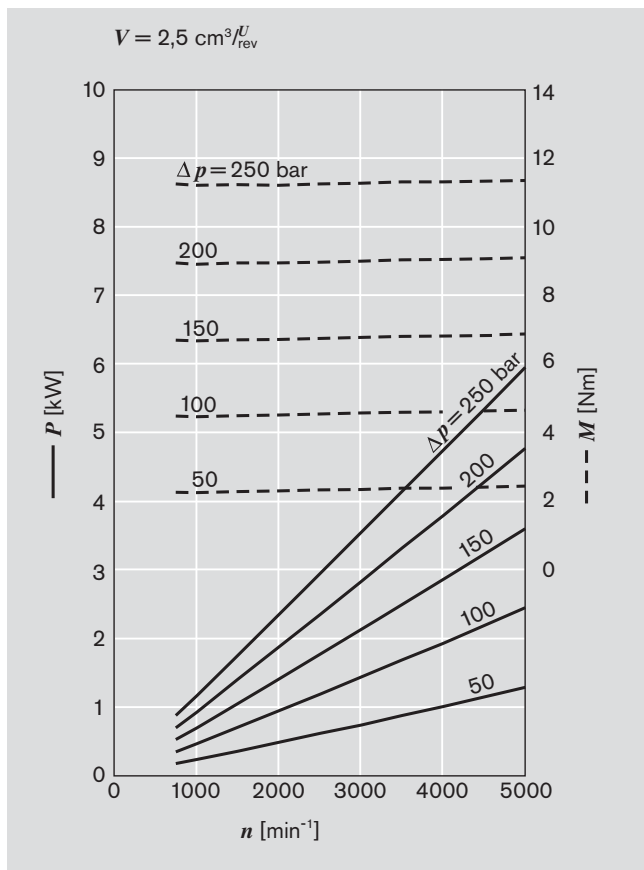

Performance charts (continued)

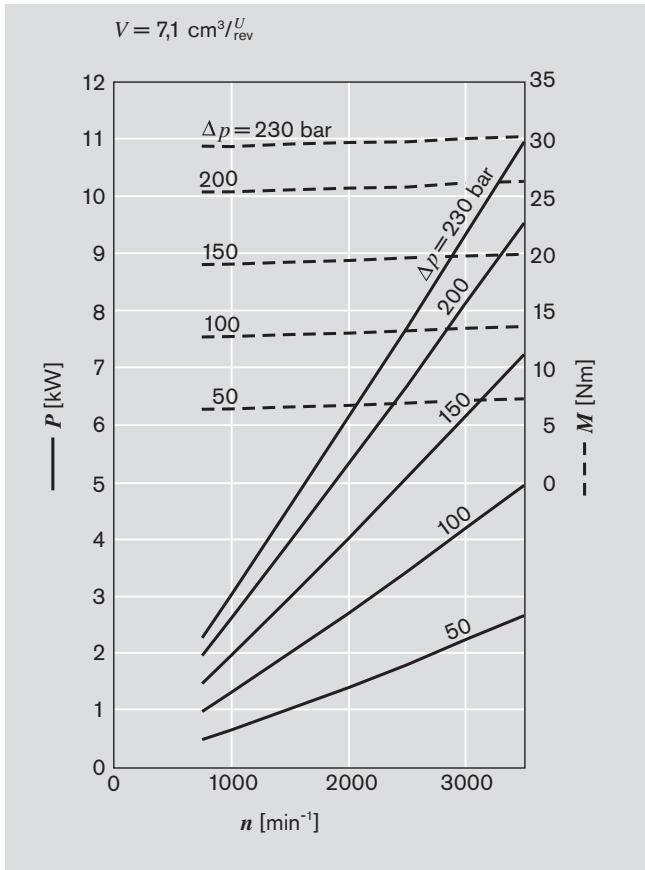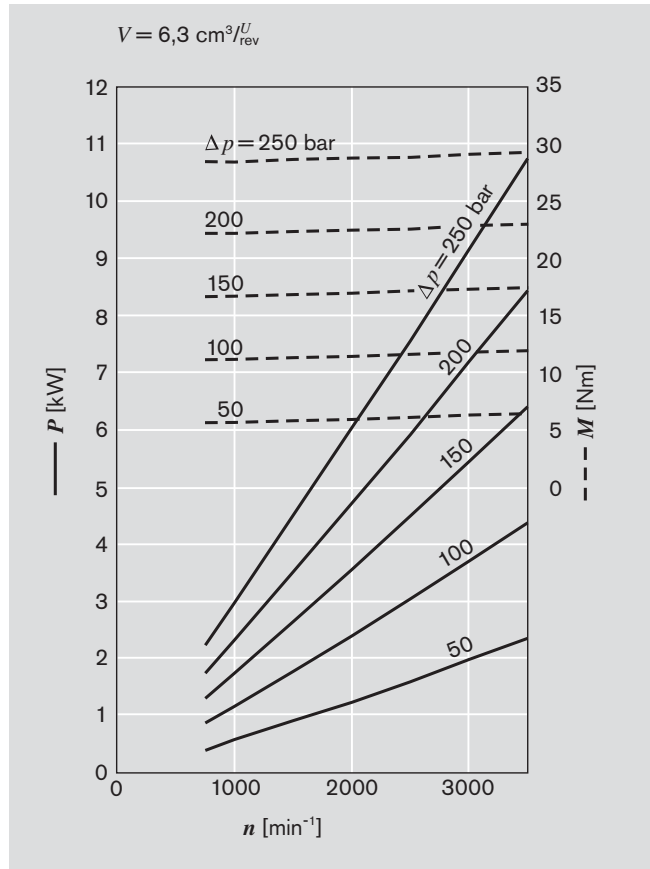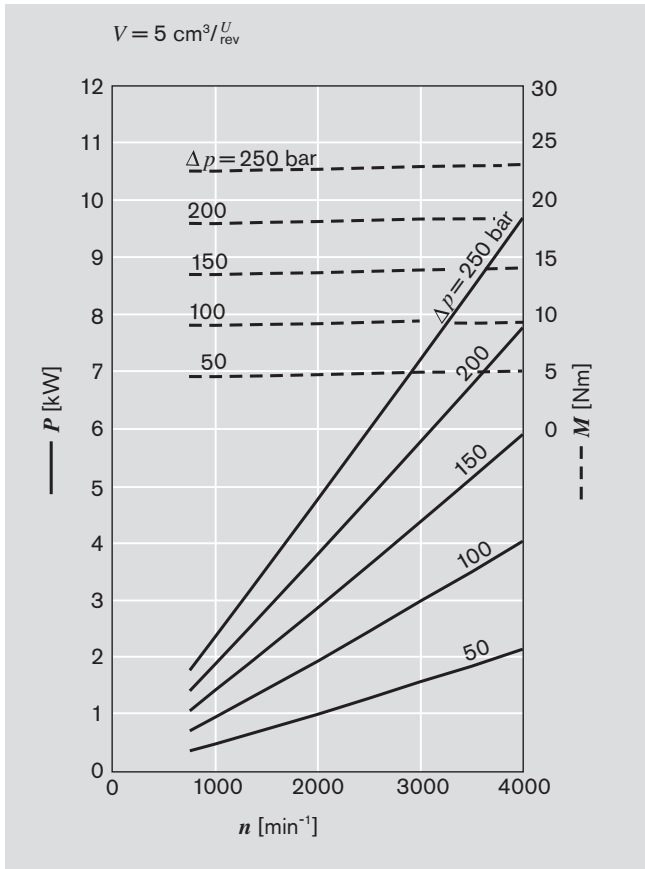

# Noise charts

**Noise level** depending on the rotational speed, pressure range between 10 bar and pressure value  $p_2$  (see page 13 Specifications table).







Oil data:  $\nu = 32 \text{ mm}^2/\text{s}$ ,  $\vartheta = 50^\circ\text{C}$ .

Sound pressure level calculated from noise measurements made in the sound absorbent measuring room compliant with DIN 45635, Part 26.




Distance between measuring instrument – pump: 1 m.

These are typical characteristic values for the respective pump size.

They describe the airborne sound emitted solely by the pump. Environmental influences (installation site, piping, further system components) are not taken into consideration. Each value applies for a single pump.

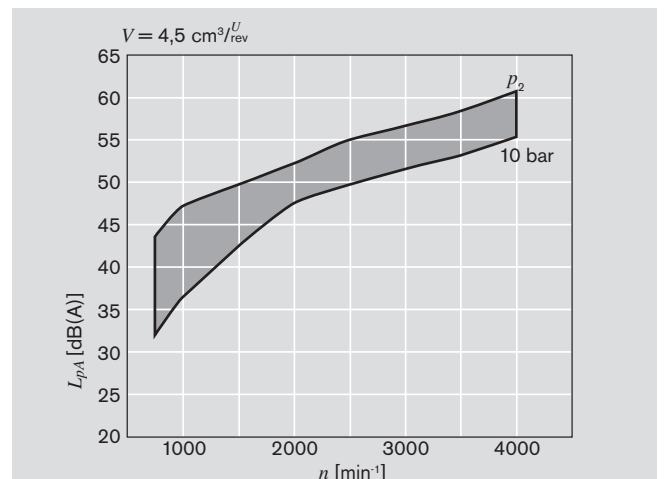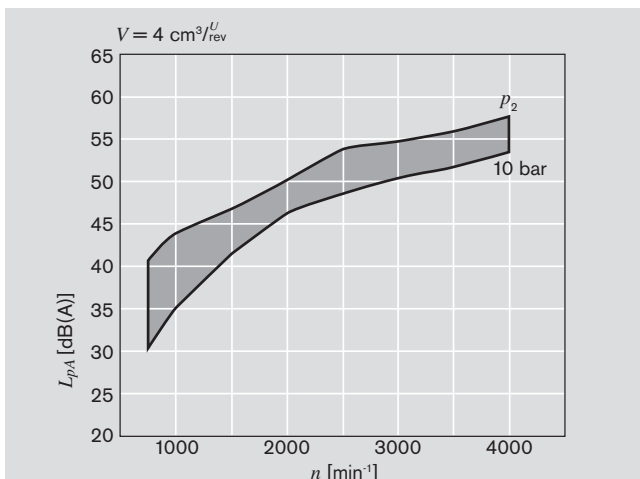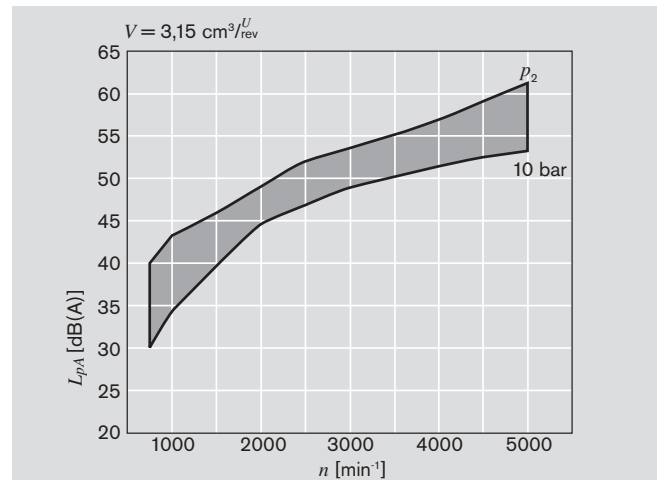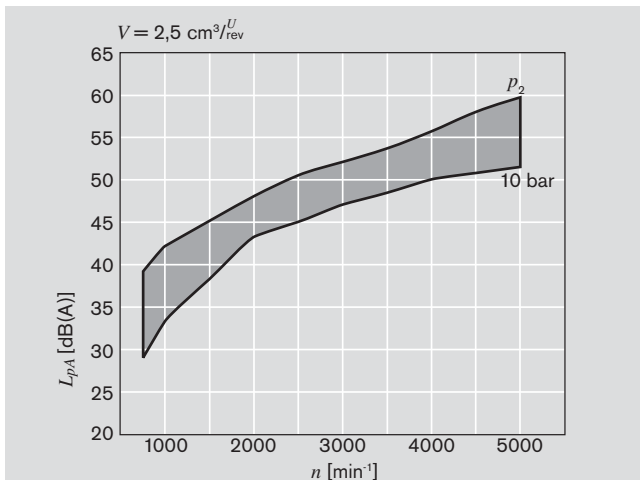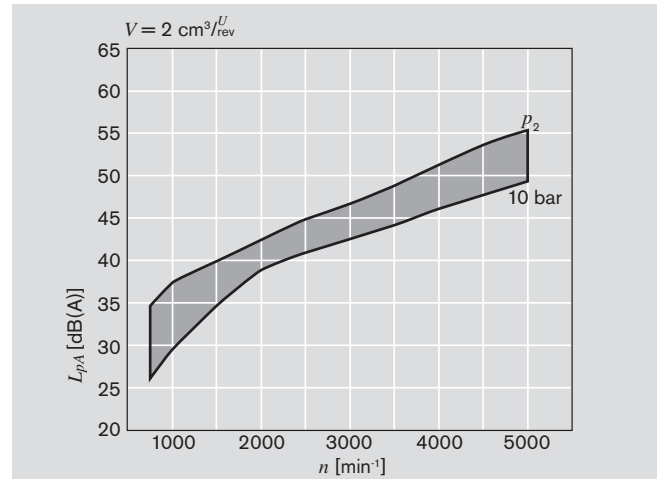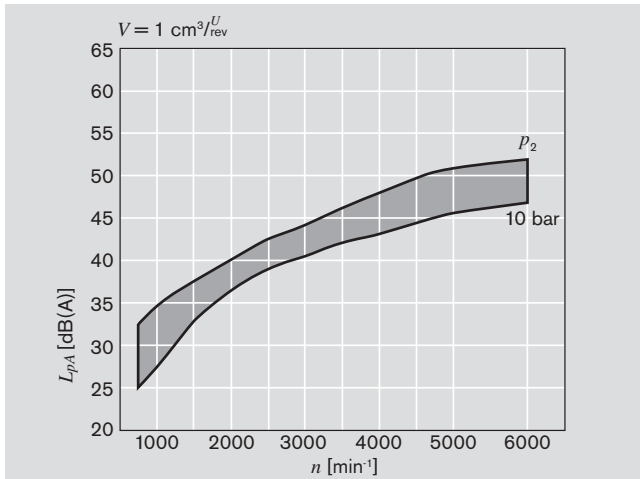

Noise charts (continued)

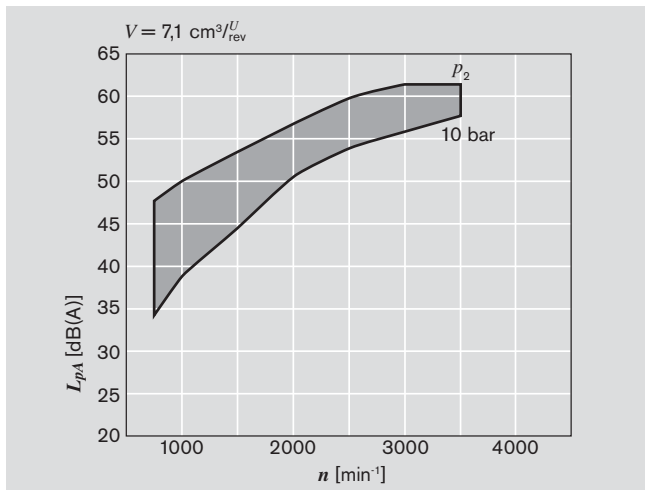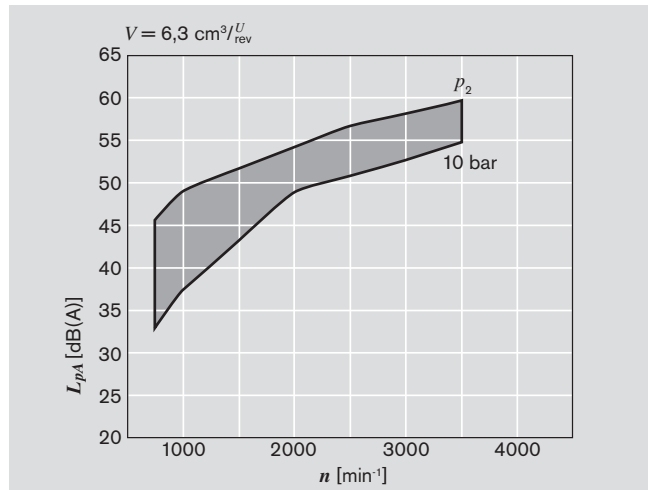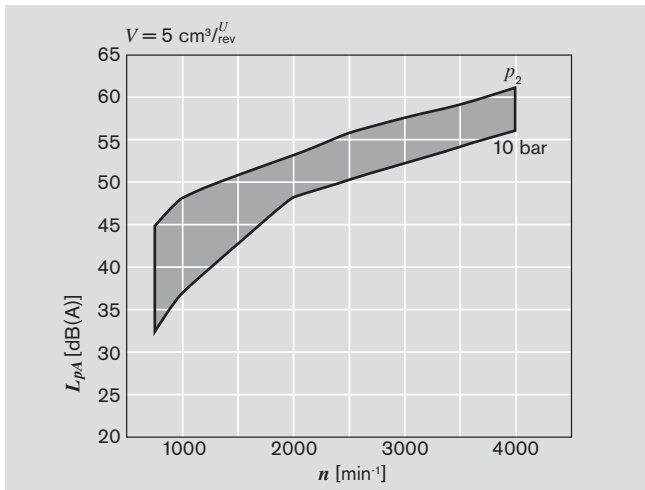

Design calculations for pumps

The design calculations for pumps are based on the following parameters:

- V [cm³/rev] Displacement
- Q [l/min] Delivery
- p [bar] Pressure
- M [Nm] Drive torque
- n [rev/min] Drive speed
- P [kW] Drive power

It is also necessary to allow for different efficiencies such as:

- $\eta_v$  Volumetric efficiency
- $\eta_{hm}$  Hydraulic-mechanical efficiency
- $\eta_t$  Overall efficiency

The following formulas describe the various relationships.

They include correction factors for adapting the parameters to the usual units encountered in practice.

**Caution:** Diagram for approximate selection data can be found on pages 8...10.

$$Q = V \cdot n \cdot \eta_v \cdot 10^{-5}$$

$$p = \frac{M \cdot \eta_{hm}}{1.59 \cdot V}$$

$$P = \frac{p \cdot Q}{6 \cdot \eta_t}$$

$$V = \frac{Q}{n \cdot \eta_v} \cdot 10^5$$

$$V = \frac{M \cdot \eta_{hm}}{159 \cdot p}$$

$$Q = \frac{6 \cdot P \cdot \eta_t}{p}$$

$$n = \frac{Q}{V \cdot \eta_v} \cdot 10^5$$

$$M = \frac{1.59 \cdot V \cdot p}{\eta_{hm}}$$

$$p = \frac{6 \cdot P \cdot \eta_t}{Q}$$

	[ % ]				
n	$\eta_v$	→	Q	V [cm³/rev]	Q [l/min]
M	$\eta_{hm}$	→	p	p [bar]	
P	$\eta_t$	→	p · Q	n [rev/min]	P [kW]
				M [Nm]	

**Caution:**  $\eta$  [%] e.g. 95 [%]

# Specification

General	
Construction	External gear pump
Mounting	Flange or through-bolting with spigot
Line ports	Flange or thread
Direction of rotation (looking on shaft)	Clockwise or counter-clockwise; the pump may only be driven in the direction indicated
Installation position	Any
Load on shaft	Radial and axial forces only after consulting
Ambient temperature range	-30°C...+80°C with NBR seals or -20°C...+110°C with FKM seals
Hydraulic fluid	- Mineral oil compliant with DIN 51 524, 1-3, however under higher load at least HLP compliant with DIN 51 524 Part 2 recommended. - Comply with RE 90220 - Further operating fluids possible after consultation
Viscosity	12...800 mm <sup>2</sup> /s permitted range 20...100 mm <sup>2</sup> /s recommended range ...2000 mm <sup>2</sup> /s range permitted for starting
Hydraulic fluid temperature range	max. +80°C with NBR seals *) max. +110°C with FKM seals **)
Filtration ***)	At least cleanliness level 20/18/15 compliant with ISO 4406 (1999)
Efficiency	on request, depending on load cycle
Service life	on request, depending on load cycle

\*) NBR = Perbunan®  
 \*\*) FKM = Viton®  
 \*\*\*) On hydraulic systems or devices with critical counter-reaction, such as steering and counterbalance valves, the type of filtration selected must be adapted to the sensitivity of these devices/systems.


Safety requirements pertaining to the whole systems are to be observed.

In the case of applications with high numbers of load cycles please consult Bosch Rexroth.


## Definition of direction of rotation

Always look on the drive shaft.

**Caution:** Dimensional drawings always show clockwise-rotating pumps. For counterclockwise-rotating pumps the positions of the drive shaft and the suction and pressure ports are different.

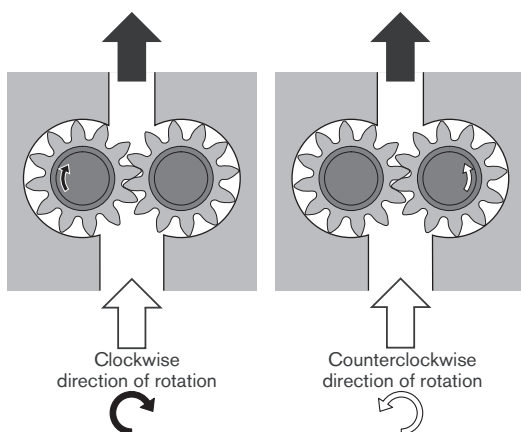

## Definitions of pressures

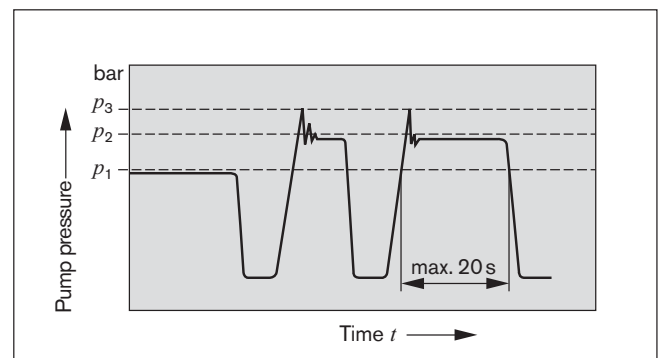

$p_1$  max. continuous pressure  
 $p_2$  max. intermittent pressure  
 $p_3$  max. peak pressure

## AZPB-3x

Displacement	V	cm <sup>3</sup> /rev	1	2	2.5	3.15	4	4.5	5	6.3	7.1
Suction pressure	$p_e$	bar	0.7...3 (absolute)								
max. continuous pressure	$p_1$		220	220	220	220	220	220	220	220	200
max. intermittent pressure	$p_2$		250	250	250	250	250	250	250	250	230
max. peak pressure	$p_3$		270	270	270	270	270	270	270	270	250
min. rotational speed		rpm	750	750	750	750	750	750	750	750	750
max. rotational speed at	$p_2$		6,000	5,000	5,000	4,000	4,000	4,000	4,000	3,500	3,500

Project planning up to 280 bar ( $p_2$ ) possible in agreement with Product Management, External Gear Units.

## Drive arrangement

The coupling must not transfer any radial or axial forces to the pump.

### 1. Flexible couplings

Refer to the fitting instructions provided by the coupling manufacturer for details of the maximum permitted shaft misalignment.

The maximum radial runout from the pump shaft to the spigot is 0.2 mm.

### 2. Drive shaft with tang

For directly mounting the pump to an electric motor or an internal-combustion engine, gear, etc. the pump shaft has a special tang and driver ③ (not included in delivery).

There is no shaft sealing.

The recommended arrangements and dimensions for the drive end and sealing are as follows.

Transferrable torque:

AZPB-3x = 25 Nm.

Suitable couplings for AZPB-3x:

1 510 001 002 for AZPFB,

1 510 240 001 for AZPBB.

#### ① Drive shaft

Case-hardening steel DIN 17 210

e.g. 20 MnCrS 5



case-hardened 1.0 deep; HRA 83 $\pm$ 2

Surface for sealing ring  
ground without rifling  $R_t \leq 4\mu\text{m}$

#### ② Radial shaft seal

with rubber covered seal  
(see DIN 3760, Type AS, or  
double-lipped ring).

Please take note of the seal ring  
manufacturer's guidelines for arrange-  
ment of the installation space.

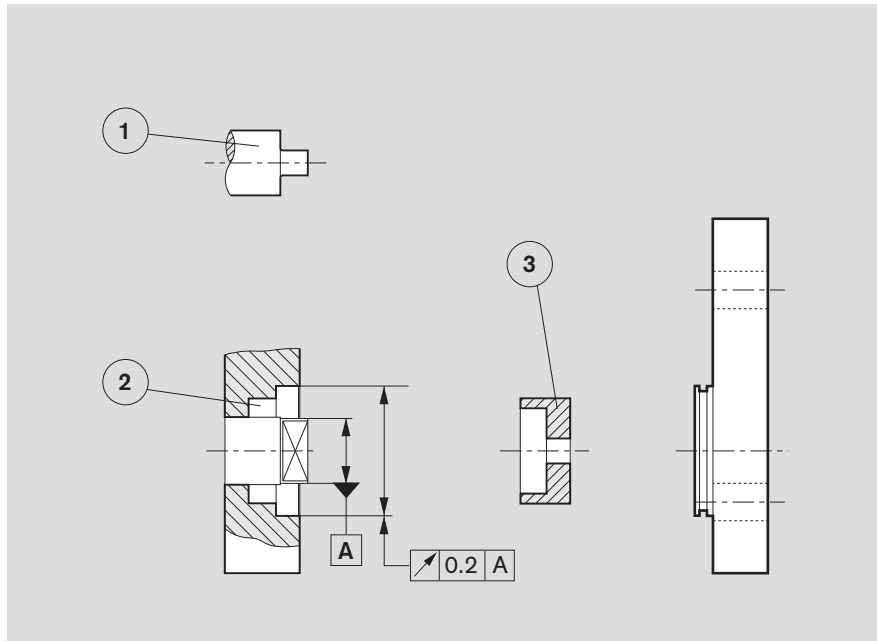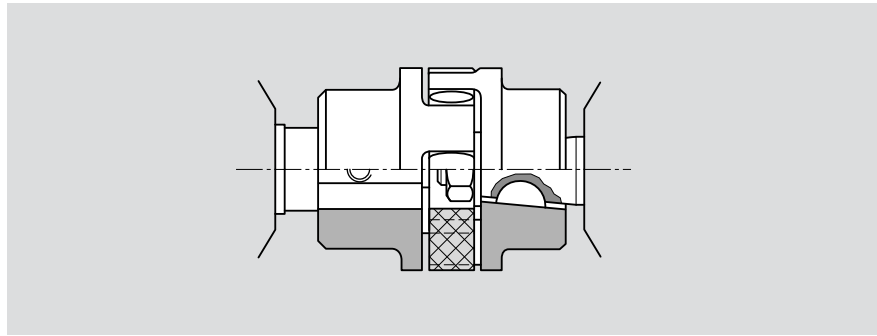



## Multiple gear pumps

Gear pumps are suitable for multiple setups, whereby the drive shaft for the 1<sup>st</sup> pump is extended to a second and even a 3<sup>rd</sup> pump. A coupling is fitted between each pair of pumps.

In most cases each pump is isolated from its neighbor, i.e. the suction ports are separate from one another. A common suction port is also possible as an option.

**Caution:** Basically, the specifications for the single pumps apply, but with certain restrictions:

**Max. speed:** This is determined by the highest rated pump speed in use.

**Pressures:** These are restricted by the strength of the drive shaft, the through drives and the drivers. Appropriate data is given in the dimensional drawings.

### Pressure restrictions


In the case of series B (AZPB-3x), the driver for the second pumping stage can carry a load of up to  $M_{max.} = 25 \text{ Nm}$ , i.e. there is a pressure restriction for the second stage and any further stages.

Drive shaft		max. transferrable drive torque * [Nm]
C	1:5	26
H	1:8	30
N	Claw	25

\* These values only apply when the conditions described above are complied with. Bosch Rexroth is to be consulted if the stated values are exceeded.

If the first stage is driven through a tang (driver) or outboard bearing type 1, pressure restrictions apply as indicated in the formula below.


Reinforced through drives are available for applications with higher transfer torques and/or rotational vibrations. Customized designs available on request.

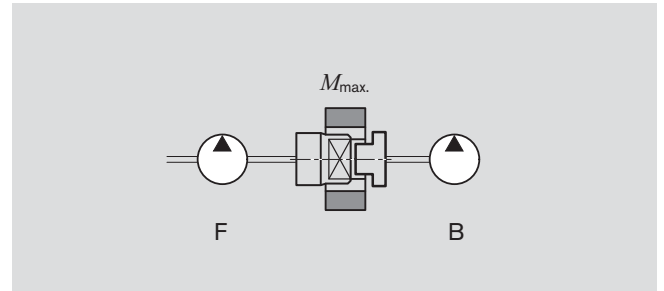

### Combinations

Series Pump 1	$M_{max.}$ [Nm]	Series Pump 2
F	25	B
B	25	B

When configuring multiple pumps, the pumps are to be ordered according to the largest displacement on the drive side, e.g. BB, FB, SB, JB as double, FBB, SBB, JBB, NFB, GFB, TSB, USB as triple.

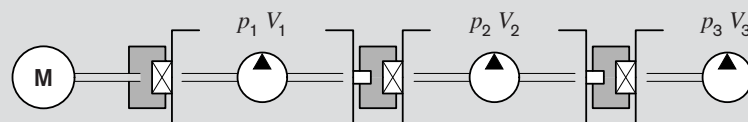


$$M_{max.} \cong \Delta p_1 \cdot V_1 \cdot 0,0177 + \Delta p_2 \cdot V_2 \cdot 0,0177 + \Delta p_3 \cdot V_3 \cdot 0,0177$$

$\Delta p$  [bar]  $V$  [cm<sup>3</sup>/rev]

# Dimensions

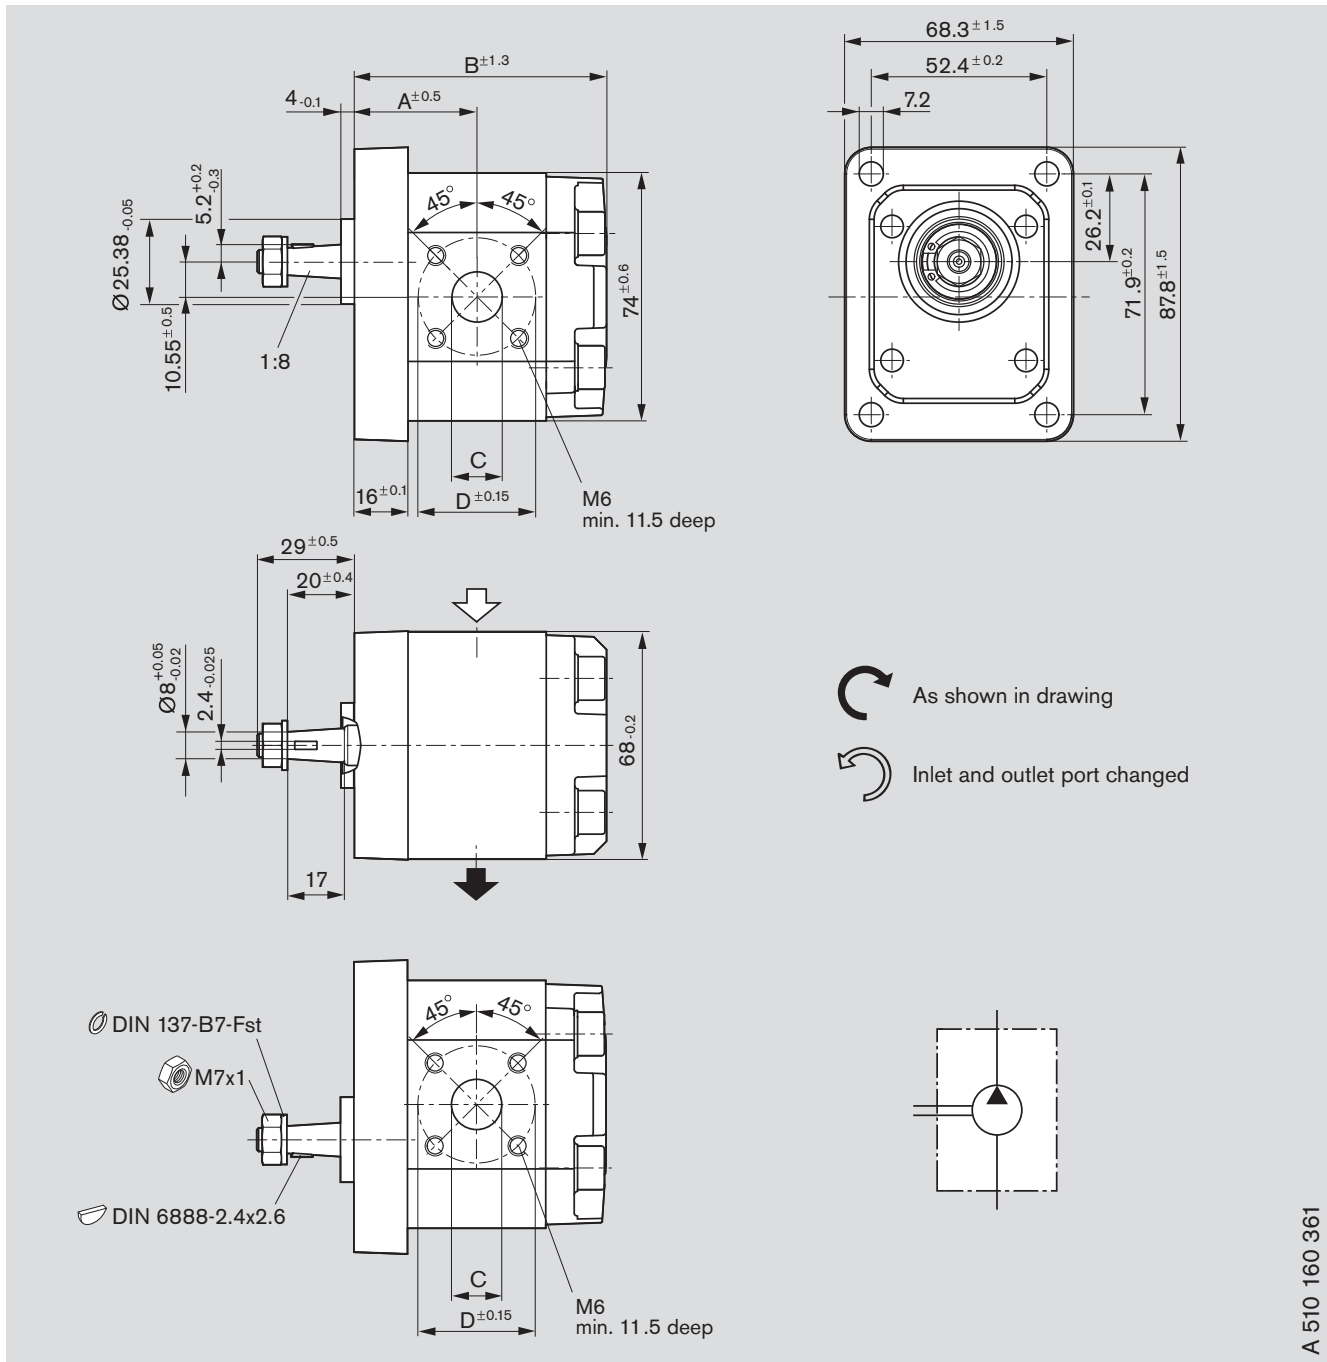

## Standard range



A 510 160 361


**Ordering code:**

AZPB - 32 -     H O 20 M B

Displacement [cm³/rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]			
	 L	 R				A	B	C	D
2	0 510 120 326	0 510 120 028	250	5,000		32.8	67.9	12	30
2.5	0 510 120 327	0 510 120 029	250	5,000		33.8	69.8	12	30
3.15	0 510 120 328	0 510 120 030	250	4,000		35.0	72.3	15	35
4	0 510 120 329	0 510 120 031	250	4,000		36.6	75.5	15	35
4.5	0 510 120 330	0 510 120 032	250	4,000		37.6	77.4	15	35
5	0 510 120 331	0 510 120 033	250	4,000		38.6	79.5	15	35
6.3	0 510 120 332	0 510 120 034	250	3,500		41.0	84.2	15	35
7.1	0 510 120 333	0 510 120 035	230	3,500		42.5	87.3	15	35

# Dimensions

## Standard range

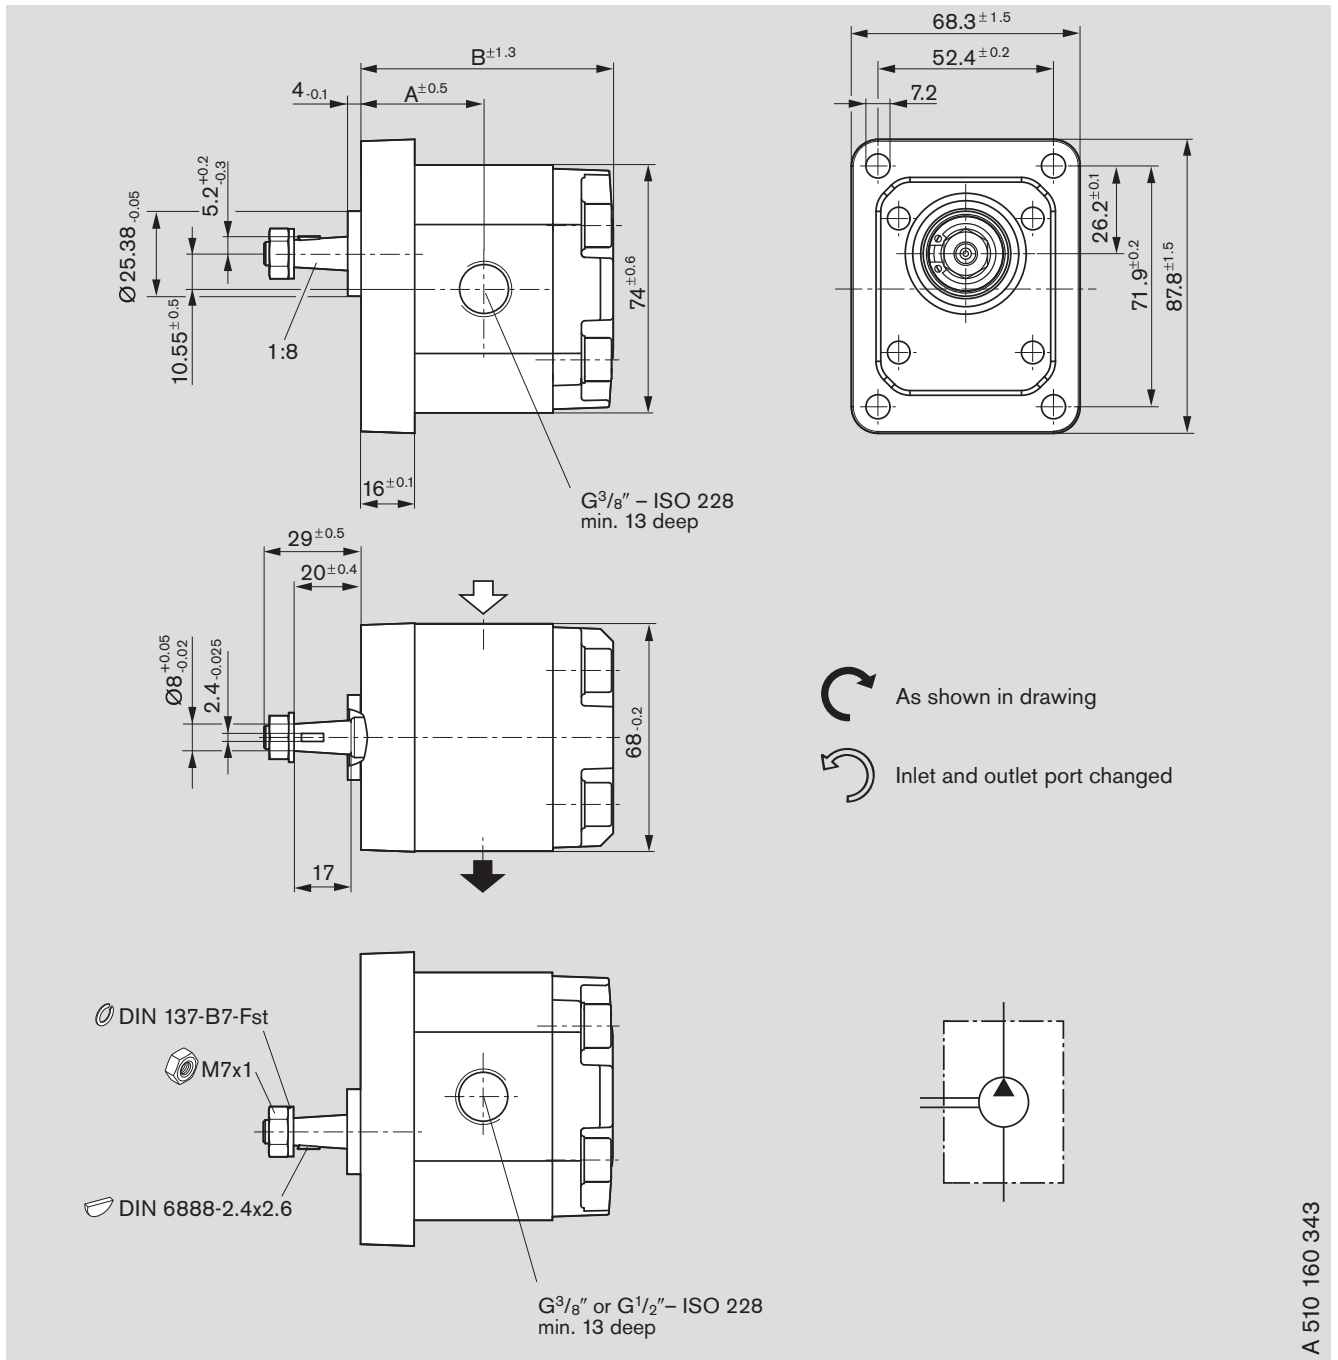

A 510 160 343


**Ordering code:**

AZPB - 32 -     H O 01 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]		
	L	R				A	B	Version
1	0 510 020 303	0 510 020 003	250	6,000		30.9	64.1	<sup>3</sup> / <sub>8</sub>
2	0 510 120 318	0 510 120 020	250	5,000		32.8	67.9	<sup>3</sup> / <sub>8</sub>
2.5	0 510 120 319	0 510 120 021	250	5,000		33.8	69.8	<sup>3</sup> / <sub>8</sub>
3.15	0 510 120 320	0 510 120 022	250	4,000		35.0	72.3	<sup>3</sup> / <sub>8</sub>
4	0 510 120 321	0 510 120 023	250	4,000		36.6	75.5	<sup>1</sup> / <sub>2</sub>
4.5	0 510 120 322	0 510 120 024	250	4,000		37.6	77.4	<sup>1</sup> / <sub>2</sub>
5	0 510 120 323	0 510 120 025	250	4,000		38.6	79.5	<sup>1</sup> / <sub>2</sub>
6.3	0 510 120 324	0 510 120 026	250	3,500		41.0	84.2	<sup>1</sup> / <sub>2</sub>
7.1	0 510 120 325	0 510 120 027	230	3,500		42.5	87.3	<sup>1</sup> / <sub>2</sub>

# Dimensions

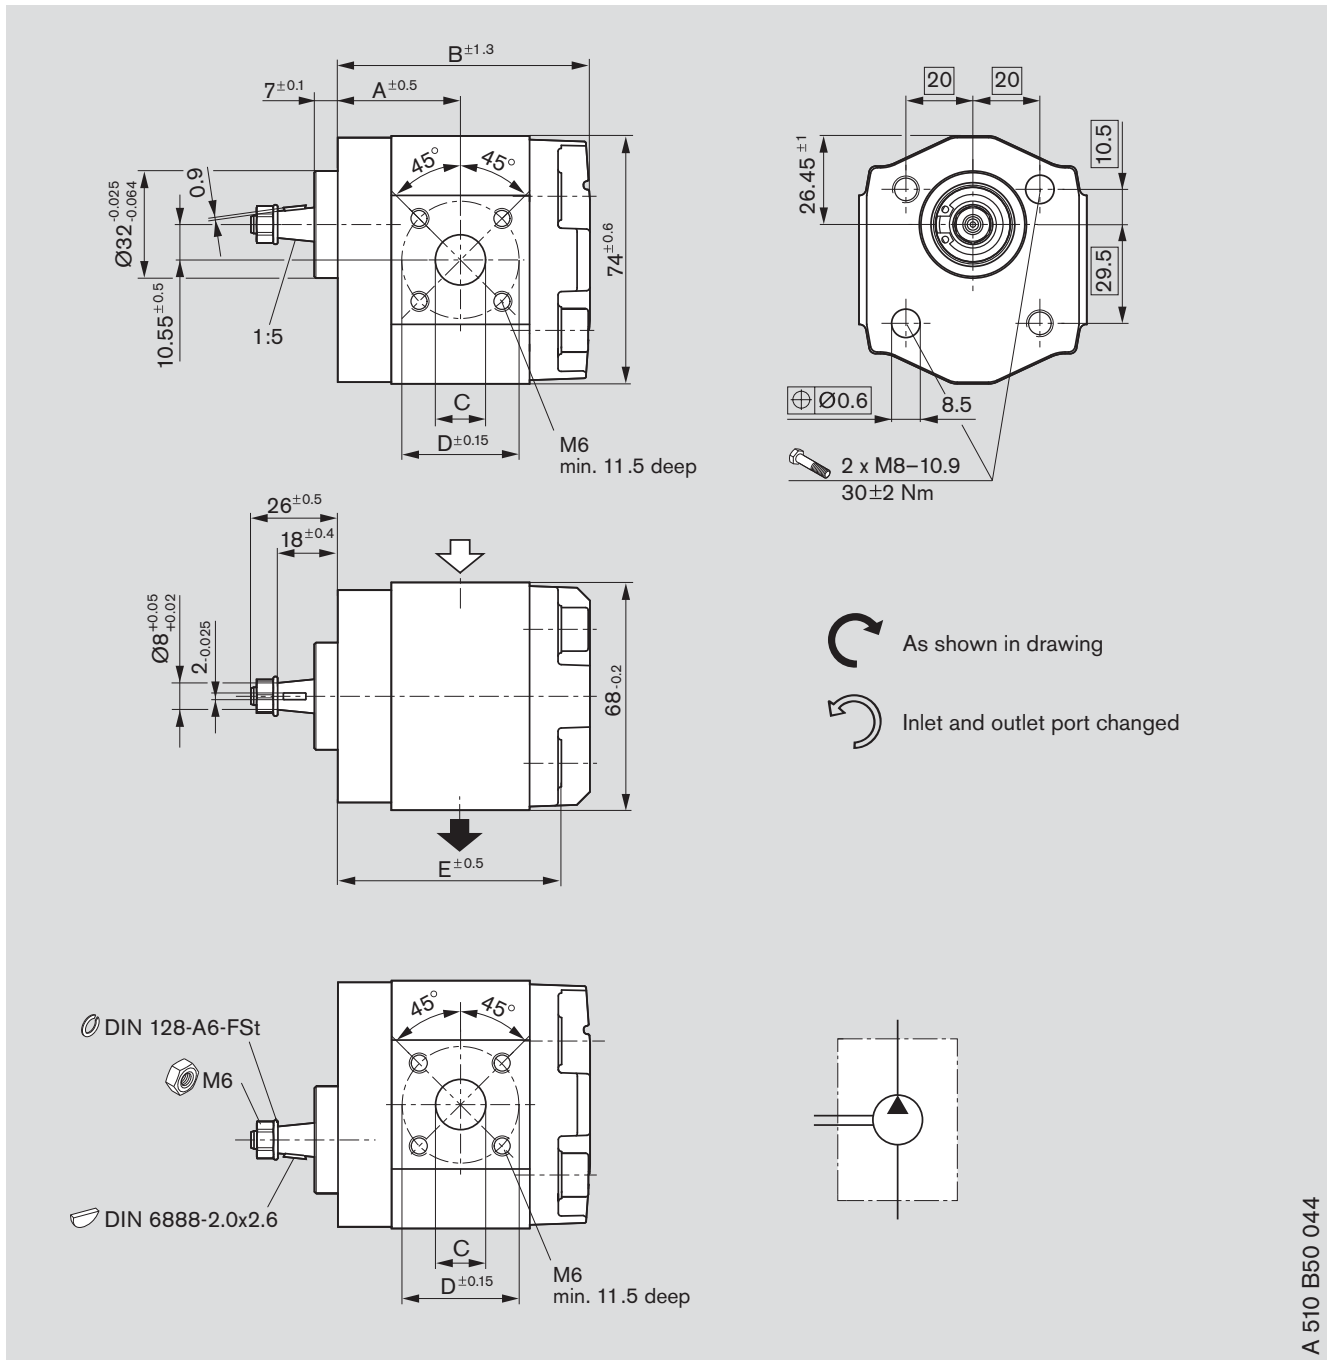

## Standard range



A 510 B50 044


**Ordering code:**

**AZPB - 32 -**     **C P 20 M B**

Displacement [cm³/rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]				
	 L	 R				A	B	C	D	E
2	<b>0 510 110 332</b>	<b>0 510 110 025</b>	250	5,000		32.8	67.9	12	30	59.0
2.5	<b>0 510 110 333</b>	<b>0 510 110 026</b>	250	5,000		33.8	69.8	12	30	60.9
3.15	<b>0 510 112 325</b>	<b>0 510 112 019</b>	250	4,000		35.0	72.3	15	35	63.4
4	<b>0 510 114 336</b>	<b>0 510 114 030</b>	250	4,000		36.6	75.5	15	35	66.6
4.5	<b>0 510 114 337</b>	<b>0 510 114 031</b>	250	4,000		37.6	77.4	15	35	68.5
5	<b>0 510 114 338</b>	<b>0 510 114 032</b>	250	4,000		38.6	79.5	15	35	70.6
6.3	<b>0 510 122 324</b>	<b>0 510 122 020</b>	250	3,500		41.0	84.2	15	35	75.3
7.1	<b>0 510 122 325</b>	<b>0 510 122 021</b>	230	3,500		42.5	87.3	15	35	78.4

# Dimensions

## Standard range

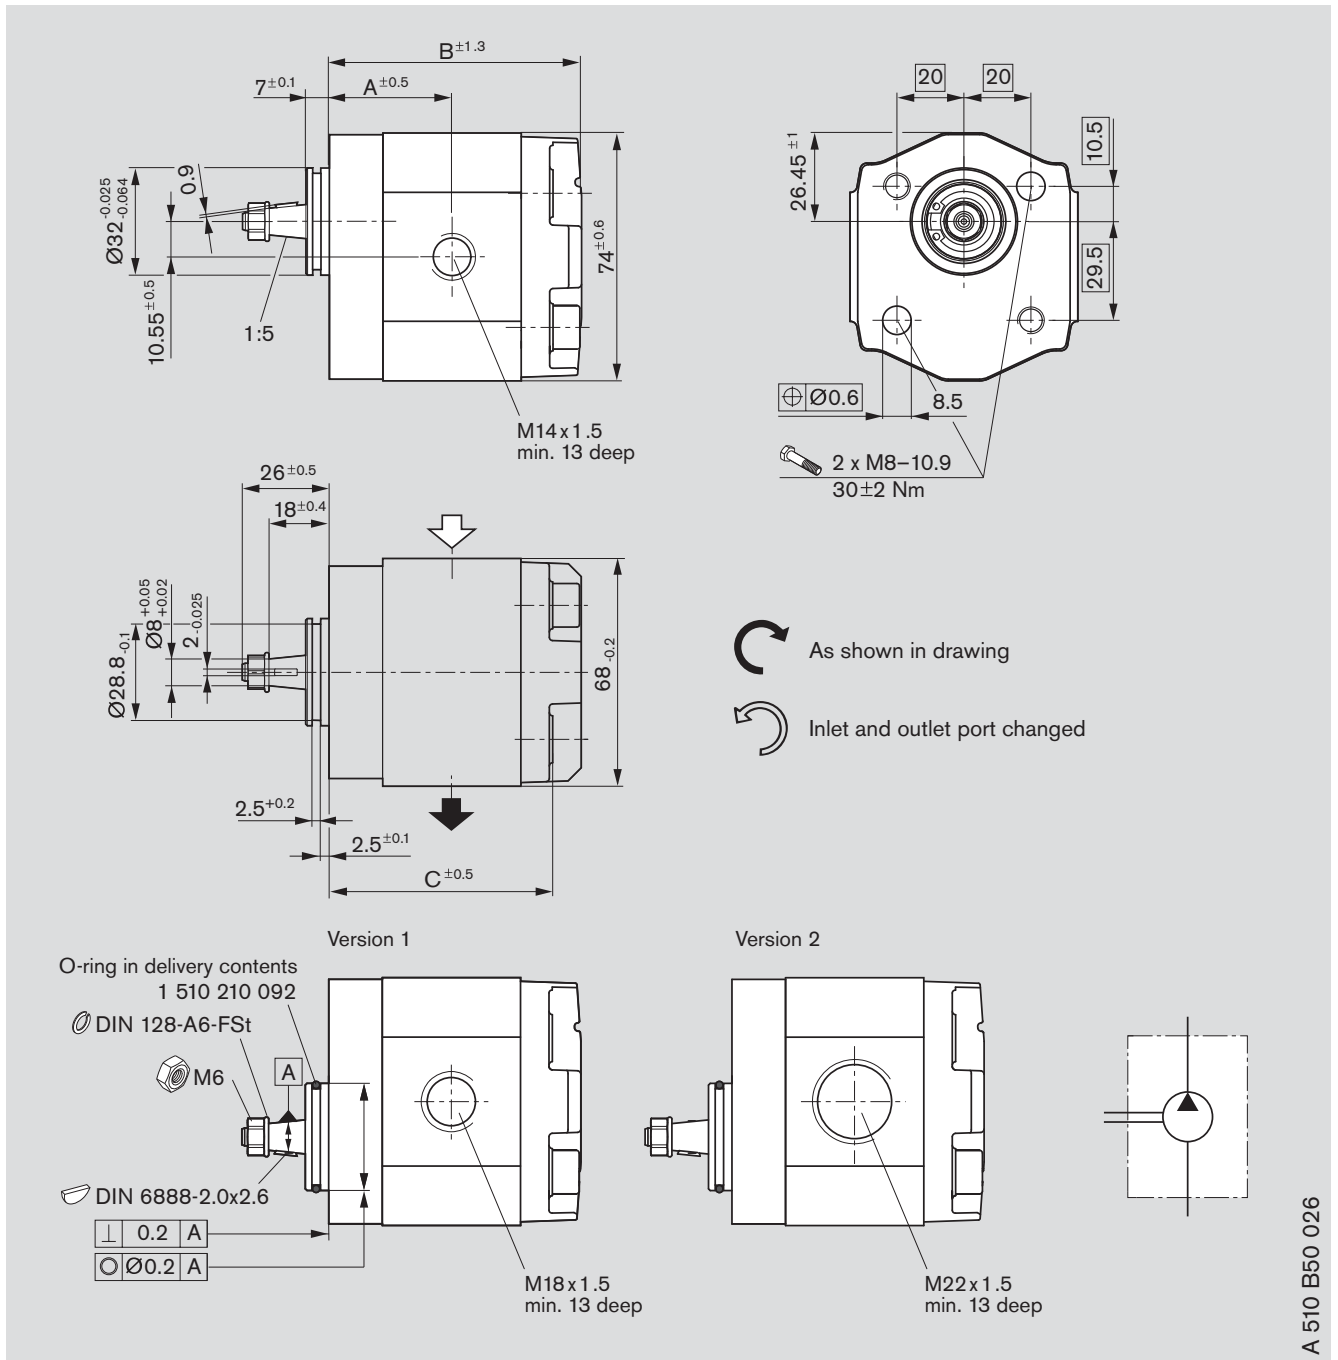


**Ordering code:**

AZPB - 32 -     C P 02 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]			
	L	R				A	B	C	Version
1	0 510 010 315	0 510 010 010	250	6,000		30.9	64.1	55.2	1
2	0 510 110 328	0 510 110 022	250	5,000		32.8	67.9	59.0	1
2.5	0 510 110 329	0 510 110 023	250	5,000		33.8	69.8	60.9	1
3.15	0 510 112 323	0 510 112 018	250	4,000		35.0	72.3	63.4	1
4	0 510 114 330	0 510 114 025	250	4,000		36.6	75.5	66.6	2
4.5	0 510 114 331	0 510 114 026	250	4,000		37.6	77.4	68.5	2
5	0 510 114 332	0 510 114 027	250	4,000		38.6	79.5	70.6	2
6.3	0 510 122 320	0 510 122 016	250	3,500		41.0	84.2	75.3	2
7.1	0 510 122 321	0 510 122 017	230	3,500		42.5	87.3	78.4	2

# Dimensions

## Standard range

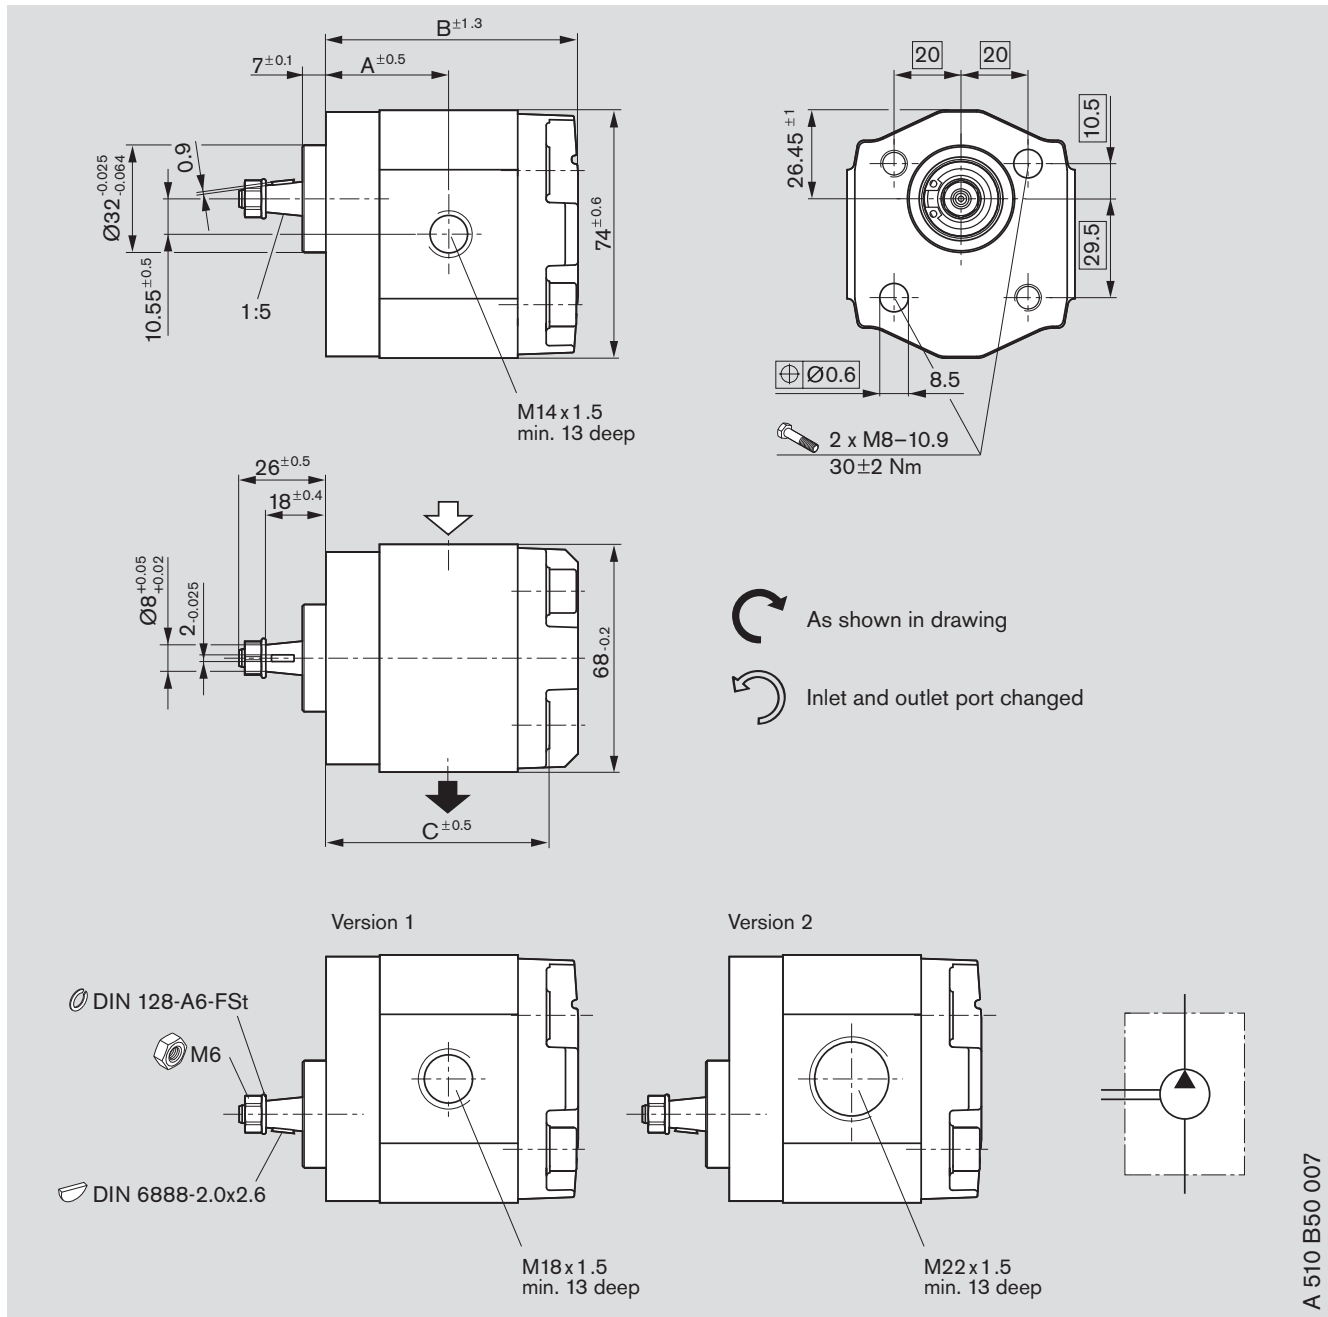


**Ordering code:**

AZPB - 32 -     C P 02 M B  
 AZPB - 32 -     C P 02 K B\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]			Version
	L	R				A	B	C	
1	0 510 010 313	0 510 010 008	250	6,000		30.9	64.1	55.2	1
2	0 510 110 324	0 510 110 017	250	5,000		32.8	67.9	59.0	1
2.5	0 510 110 325	0 510 110 018	250	5,000		33.8	69.8	60.9	1
3.15		0 510 112 015*	250	4,000		35.0	72.3	63.4	1
3.15	0 510 112 321	0 510 112 014	250	4,000		35.0	72.3	63.4	1
4	0 510 114 324	0 510 114 018	250	4,000		36.6	75.5	66.5	2
4.5	0 510 114 325	0 510 114 019	250	4,000		37.6	77.4	68.5	2
5	0 510 114 326	0 510 114 020	250	4,000		38.6	79.5	70.6	2
6.3	0 510 122 316	0 510 122 012	250	3,500		41.0	84.2	75.3	2
7.1	0 510 122 317	0 510 122 013	230	3,500		42.5	87.3	78.4	2



# Dimensions
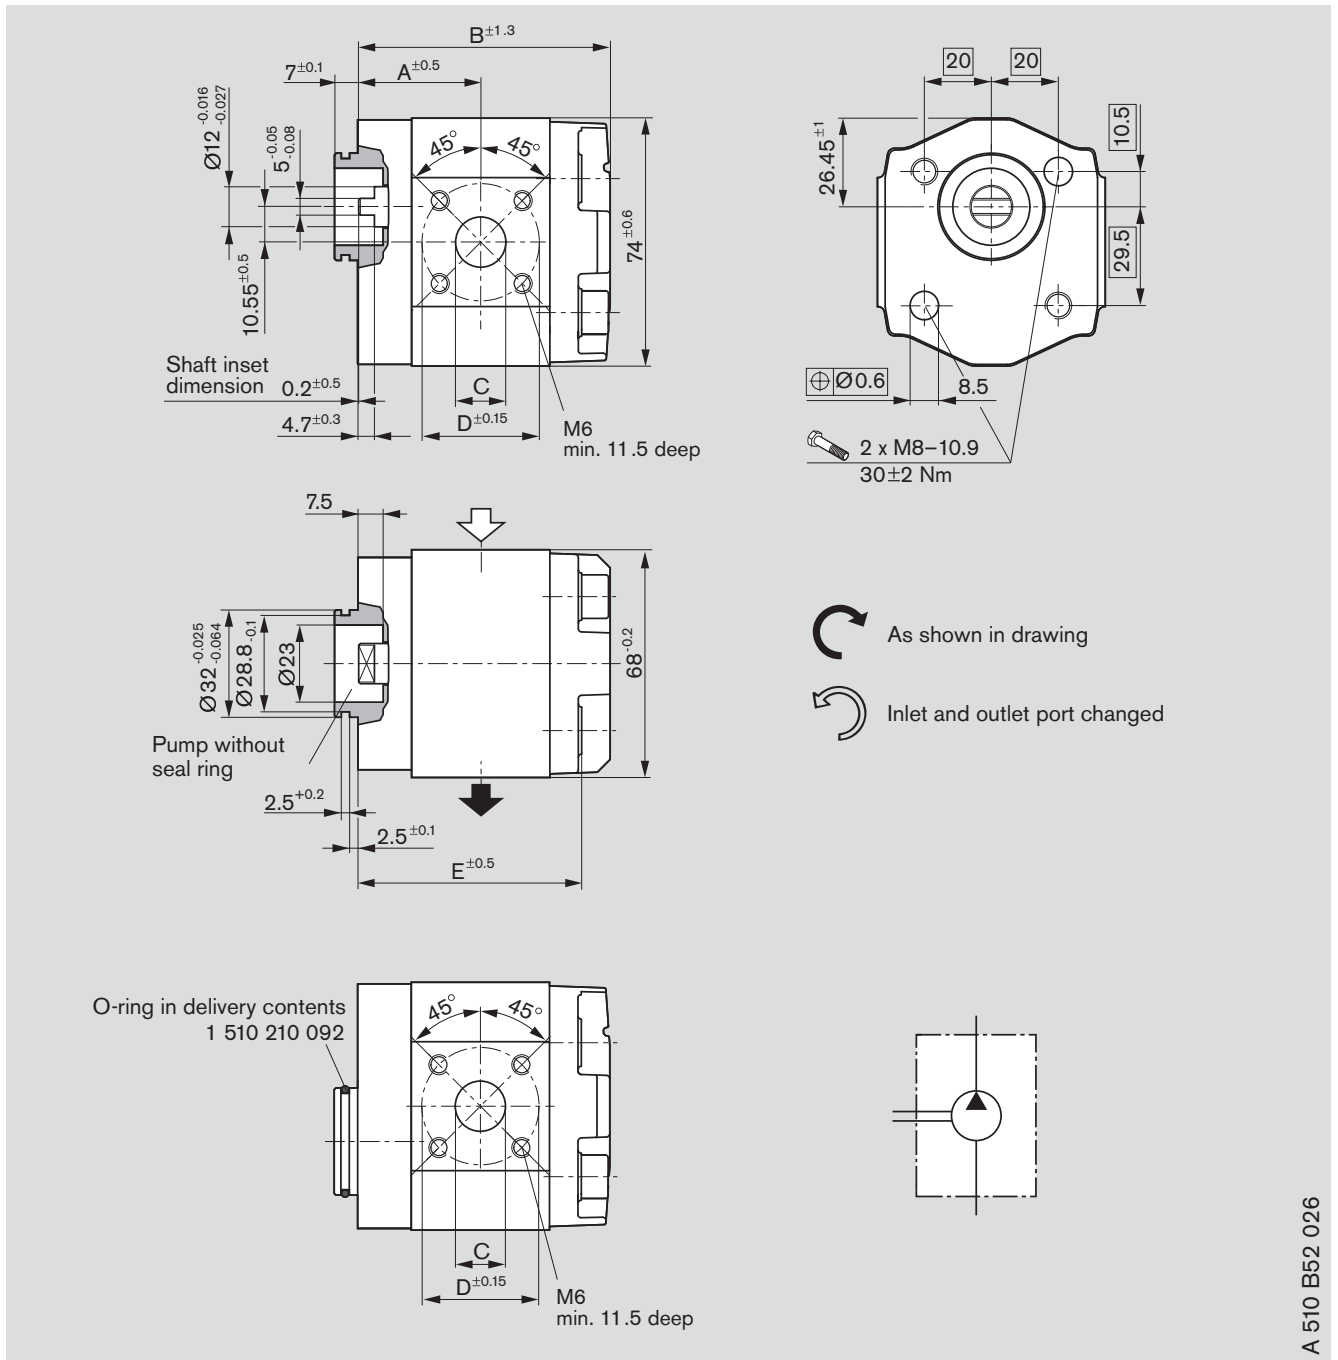
## Standard range



**Ordering code:**

AZPB - 32 -     N M 20 M B

Displacement [cm³/rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]				
	 L	 R				A	B	C	D	E
2	0 510 110 334	0 510 110 027	250	5,000		32.8	67.9	12	30	59.0
2.5	0 510 110 335	0 510 110 028	250	5,000		33.8	69.8	12	30	60.9
3.15	0 510 112 326	0 510 112 020	250	4,000		35.0	72.3	15	35	63.4
4	0 510 114 339	0 510 114 033	250	4,000		36.6	75.5	15	35	66.6
4.5	0 510 114 340	0 510 114 034	250	4,000		37.6	77.4	15	35	68.5
5	0 510 114 341	0 510 114 035	250	4,000		38.6	79.5	15	35	70.6
6.3	0 510 122 326	0 510 122 022	250	3,500		41.0	84.2	15	35	75.3
7.1	0 510 122 327	0 510 122 023	230	3,500		42.5	87.3	15	35	78.4


A 510 B52 026







# Dimensions
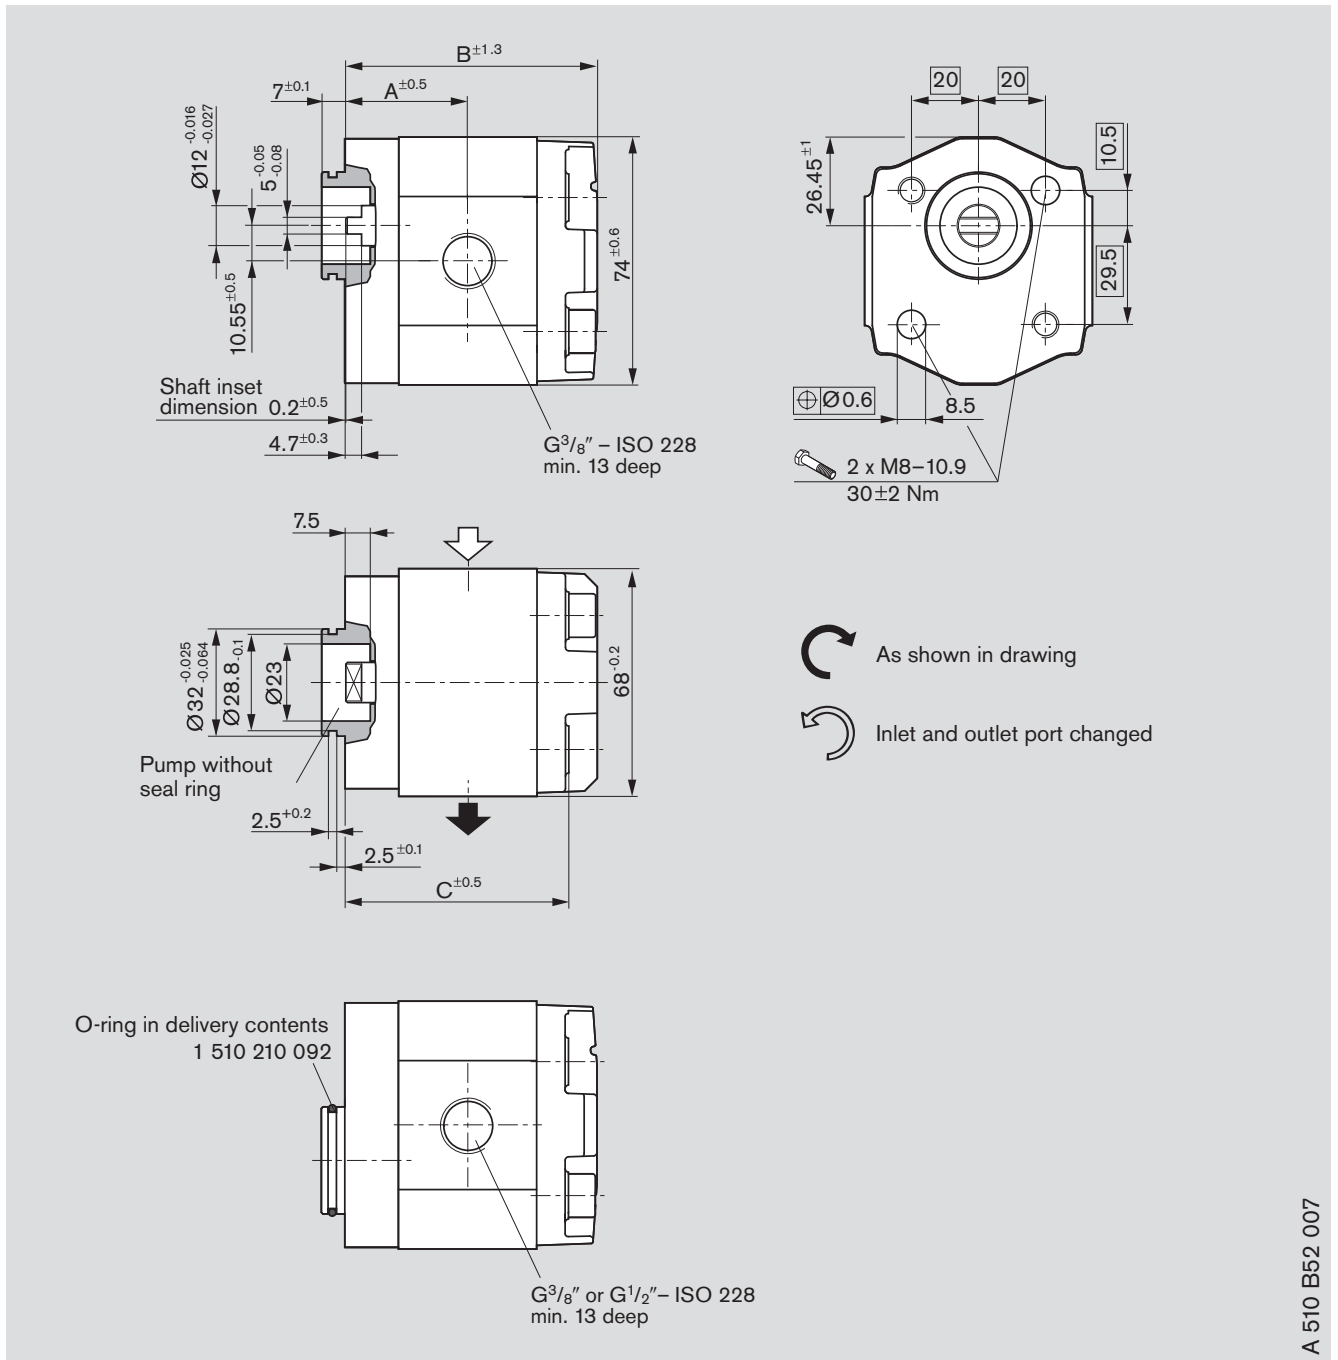
## Standard range



**Ordering code:**


AZPB - 32 -    N M 01 M B

Displacement [cm³/rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]			Version
	 L	 R				A	B	C	
1	0 510 010 316	0 510 010 011	250	6,000		30.9	64.1	55.2	3/8
2	0 510 110 330	0 510 110 021	250	5,000		32.8	67.9	59.0	3/8
2.5	0 510 110 331	0 510 110 024	250	5,000		33.8	69.8	60.9	3/8
3.15	0 510 112 324	0 510 112 017	250	4,000		35.0	72.3	63.4	3/8
4	0 510 114 333	0 510 114 028	250	4,000		36.6	75.5	66.6	1/2
4.5	0 510 114 334	0 510 114 024	250	4,000		37.6	77.4	68.5	1/2
5	0 510 114 335	0 510 114 029	250	4,000		38.6	79.5	70.6	1/2
6.3	0 510 122 322	0 510 122 018	250	3,500		41.0	84.2	75.3	1/2
7.1	0 510 122 323	0 510 122 019	230	3,500		42.5	87.3	78.4	1/2

A 510 B52 007

# Dimensions

## Standard range

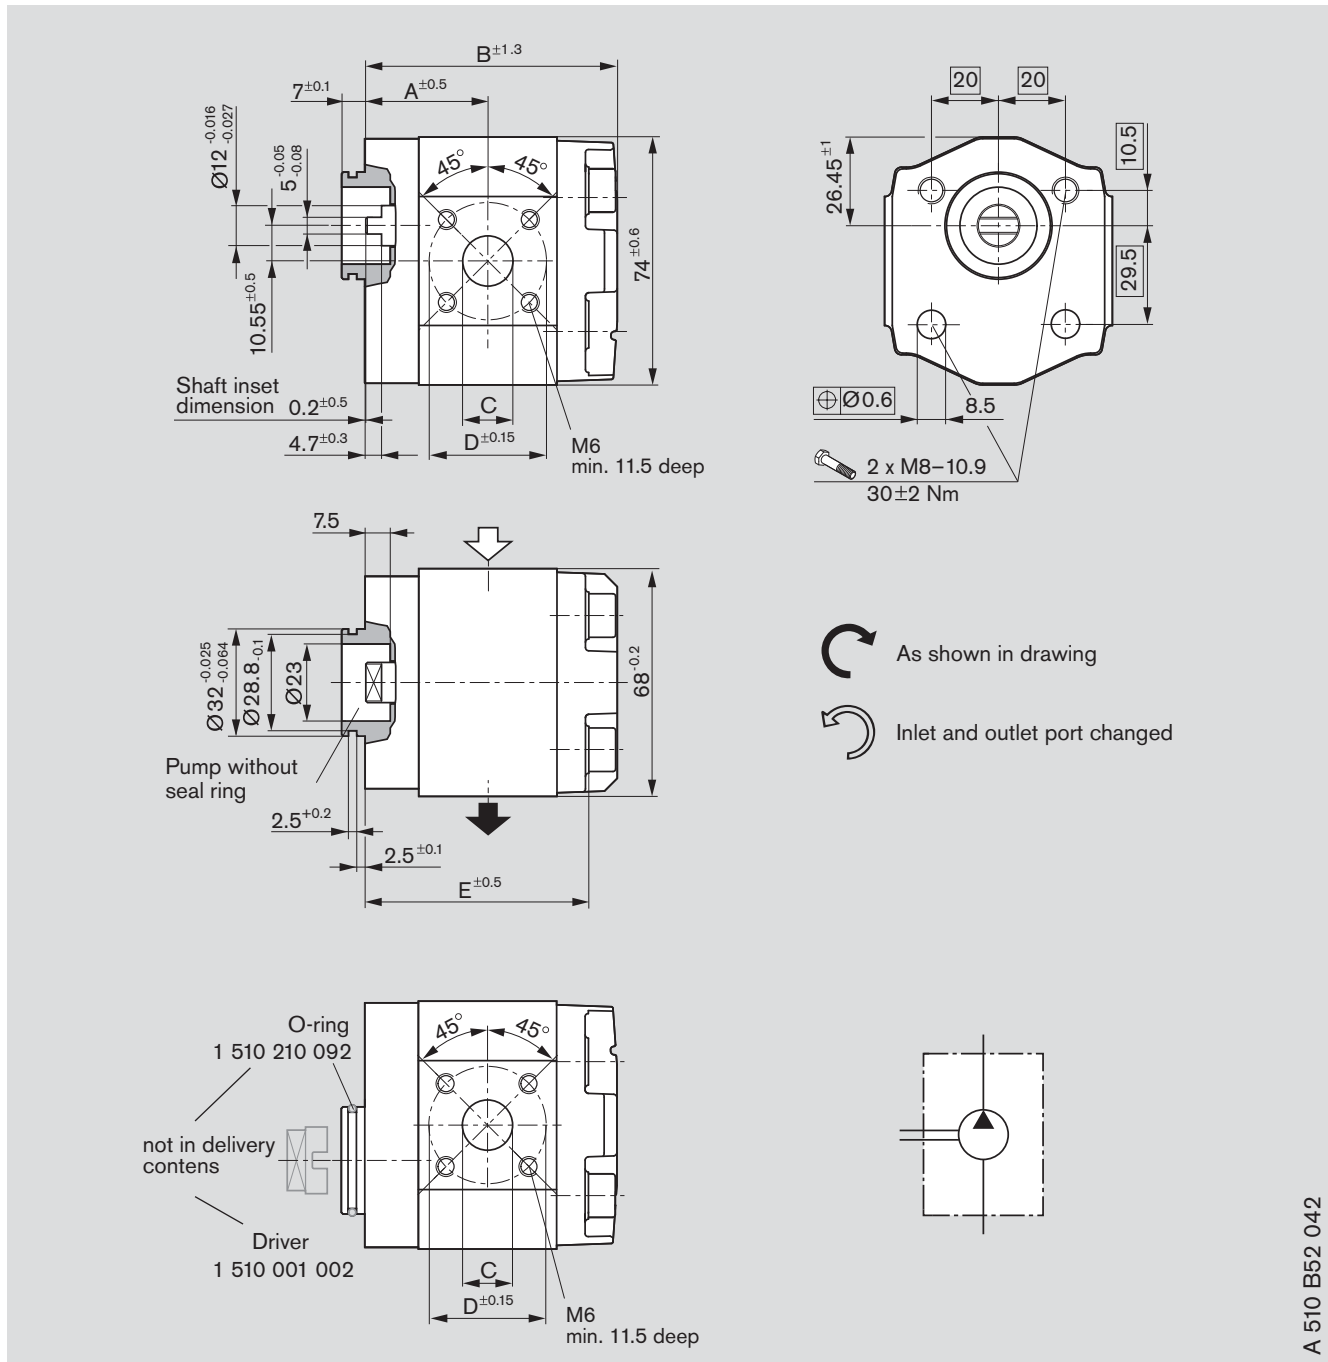

A 510 B52 042


**Ordering code:**

AZPB - 32 -     N Y 20 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]				
	L	R				A	B	C	D	E
2	1 519 222 469	1 519 222 468	250	5,000		32.8	67.9	12	30	59.0
2.5	1 519 222 471	1 519 222 470	250	5,000		33.8	69.8	12	30	60.9
3.15	1 519 222 473	1 519 222 472	250	4,000		35.0	72.3	15	35	63.4
4	1 519 222 475	1 519 222 474	250	4,000		36.6	75.5	15	35	66.6
4.5	1 519 222 477	1 519 222 476	250	4,000		37.6	77.4	15	35	68.5
5	1 519 222 479	1 519 222 478	250	4,000		38.6	79.5	15	35	70.6
6.3	1 519 222 481	1 519 222 480	250	3,500		41.0	84.2	15	35	75.3
7.1	1 519 222 483	1 519 222 482	230	3,500		42.5	87.3	15	35	78.4

# Dimensions

## Standard range

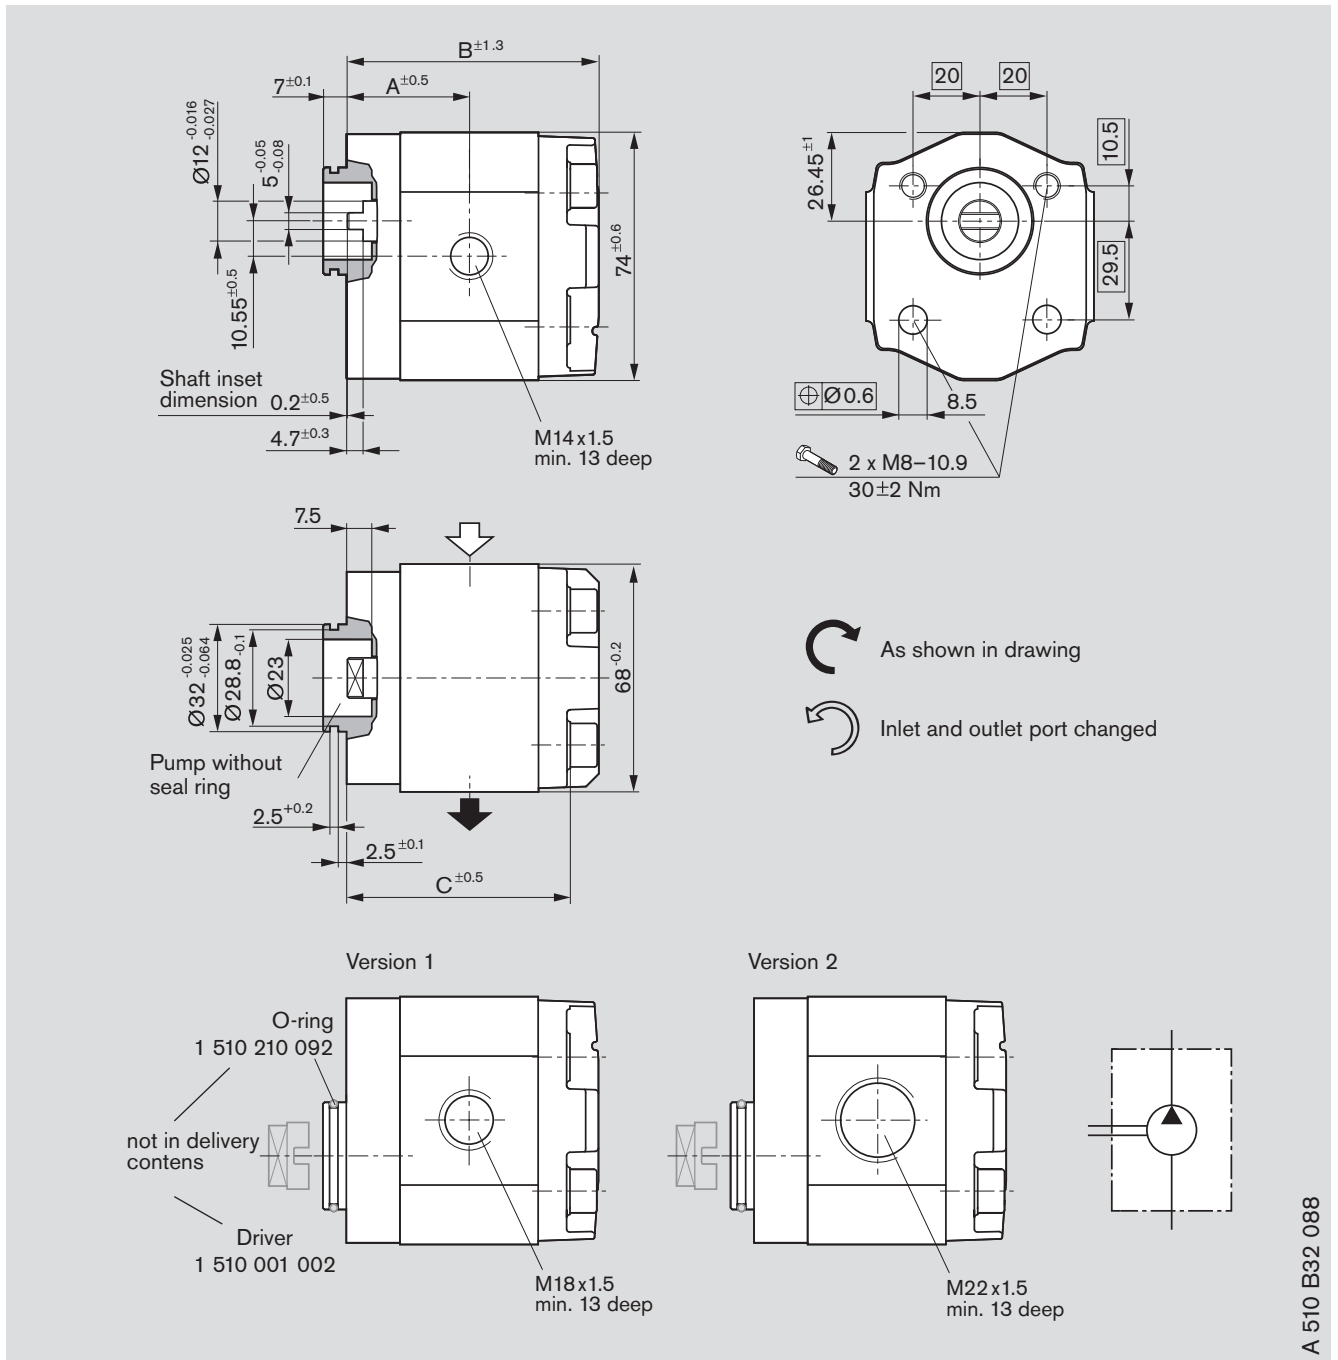

**Ordering code:**


AZPB - 32 -     N Y 02 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]			Version
	L	R				A	B	C	
1	1 519 222 444	1 519 222 443	250	6,000		30.9	64.1	55.2	1
2	1 519 222 446	1 519 222 445	250	5,000		32.8	67.9	59.0	1
2.5	1 519 222 448	1 519 222 447	250	5,000		33.8	69.8	60.9	1
3.15	1 519 222 450	1 519 222 449	250	4,000		35.0	72.3	63.4	1
4	1 519 222 452	1 519 222 451	250	4,000		36.6	75.5	66.6	2
4.5	1 519 222 454	1 519 222 453	250	4,000		37.6	77.4	68.5	2
5	1 519 222 456	1 519 222 455	250	4,000		38.6	79.5	70.6	2
6.3	1 519 222 458	1 519 222 457	250	3,500		41.0	84.2	75.3	2
7.1	1 519 222 460	1 519 222 459	230	3,500		42.5	87.3	78.4	2

A 510 B32 088

# Fittings


Gear pump flange, straight, for rectangular flange **20** see page 7

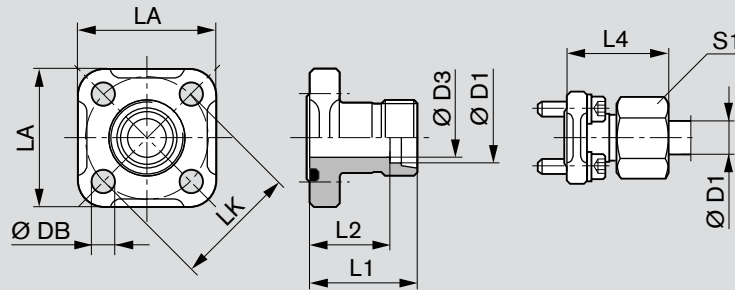

LK	D1	D3	L1	L2	L4	LA	S1	DB	Screws (metr.) 4 pieces	Seal ring	Mass kg	Part number	<i>p</i> (bar)
35	10L	8	30	23.0	39.0	40	19	6.4	M 6x22	20x2.5	0.09	<b>1 515 702 064</b>	315
35	12L	10	30	23.0	39.0	40	22	6.4	M 6x22	20x2.5	0.10	<b>1 515 702 065</b>	315
35	15L	12	30	23.0	38.0	40	27	6.4	M 6x22	20x2.5	0.10	<b>1 515 702 066</b>	250

Complete fittings with seal ring, metric screw set, nuts and olive.

Gear pump flange, 90° angle, for rectangular flange **20** see page 7

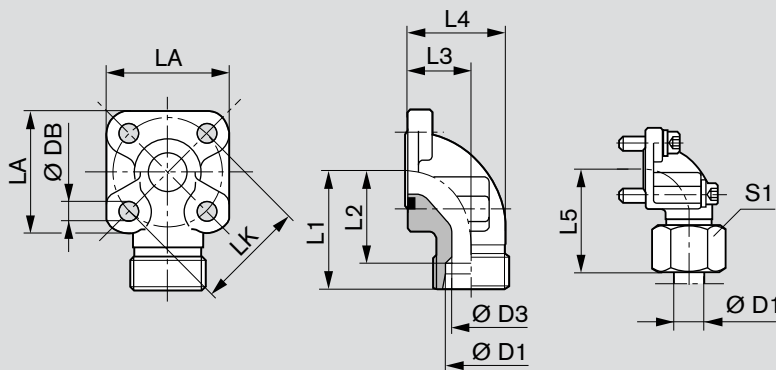

LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws 2 pieces	Seal ring	Mass kg	Part number	<i>p</i> (bar)
35	10L	8	38	31.0	16.5	26.5	47.0	40	19	6.4	M 6x22	20x2.5	0.16	<b>1 515 702 070</b>	315
35	12L	10	38	31.0	16.5	26.5	47.0	40	22	6.4	M 6x22	20x2.5	0.16	<b>1 515 702 071</b>	315
35	15L	12	38	31.0	16.5	26.5	46.0	40	27	6.4	M 6x22	20x2.5	0.15	<b>1 515 702 072</b>	250
35	16S	12	38	29.5	20.0	31.0	48.0	40	30	6.4	M 6x22	20x2.5	0.18	<b>1 515 702 002</b>	315
35	18L	15	38	29.5	20.0	31.0	47.0	40	32	6.4	M 6x22	20x2.5	0.18	<b>1 545 702 006</b>	250
35	20S	16	45	34.5	25.0	38.0	56.0	40	36	6.4	M 6x22	20x2.5	0.24	<b>1 515 702 017</b>	315

Complete fittings with seal ring, metric screw set, nuts and olive.

# Notes on commissioning and maintenance

## Filter recommendation

The major share of premature failures in external gear pumps is caused by contaminated hydraulic fluid.

Since a warranty cannot be issued for wear caused by dirt, we recommended filtration compliant with cleanliness level 20/18/15 ISO 4406, which reduces the degree of contamination to a permissible limit in terms of the size and concentration of dirt particles:

Operating pressure [bar ]	>160	<160
Contamination class ISO 4406	18/15	19/16
To be reached with $\beta_x = 75$	20	25

We recommend that a full-flow filter always be used. Basic contamination of the hydraulic fluid used may not exceed class 20/18/15 according to ISO 4406. Experience has shown that new fluid quite often lies above this value. In such instances a filling device with special filter should be used.

## General

- The pumps supplied by us have been checked for function and performance. No modifications of any kind may be made to the pumps; any such changes will render the warranty null and void!
- Pump may only be operated in compliance with permitted data (see page 12).

## Project planning notes

Where external gear pumps are used we recommend that the following note be adhered to.

## Technical data

All stated technical data is dependent on production tolerances and is valid for specific marginal conditions.

Note that, as a consequence, variance is possible, and at certain marginal conditions (e.g. viscosity) **the technical data may change**.

## Characteristics

When designing the external gear pump, note the maximum possible service data based on the characteristics shown on pages 8 – 10.


Additional information on the proper handling of hydraulic products from Bosch Rexroth is available in our document: "General product information for hydraulic products" RE 07 008.

## Contained in delivery

The components with characteristics as described under ordering code and device measurements, pages 16 – 25, are contained in delivery.

**You can find further information in our publication: "General Operating Instructions for External Gear Units" RE 07 012-B1.**

# Spare parts

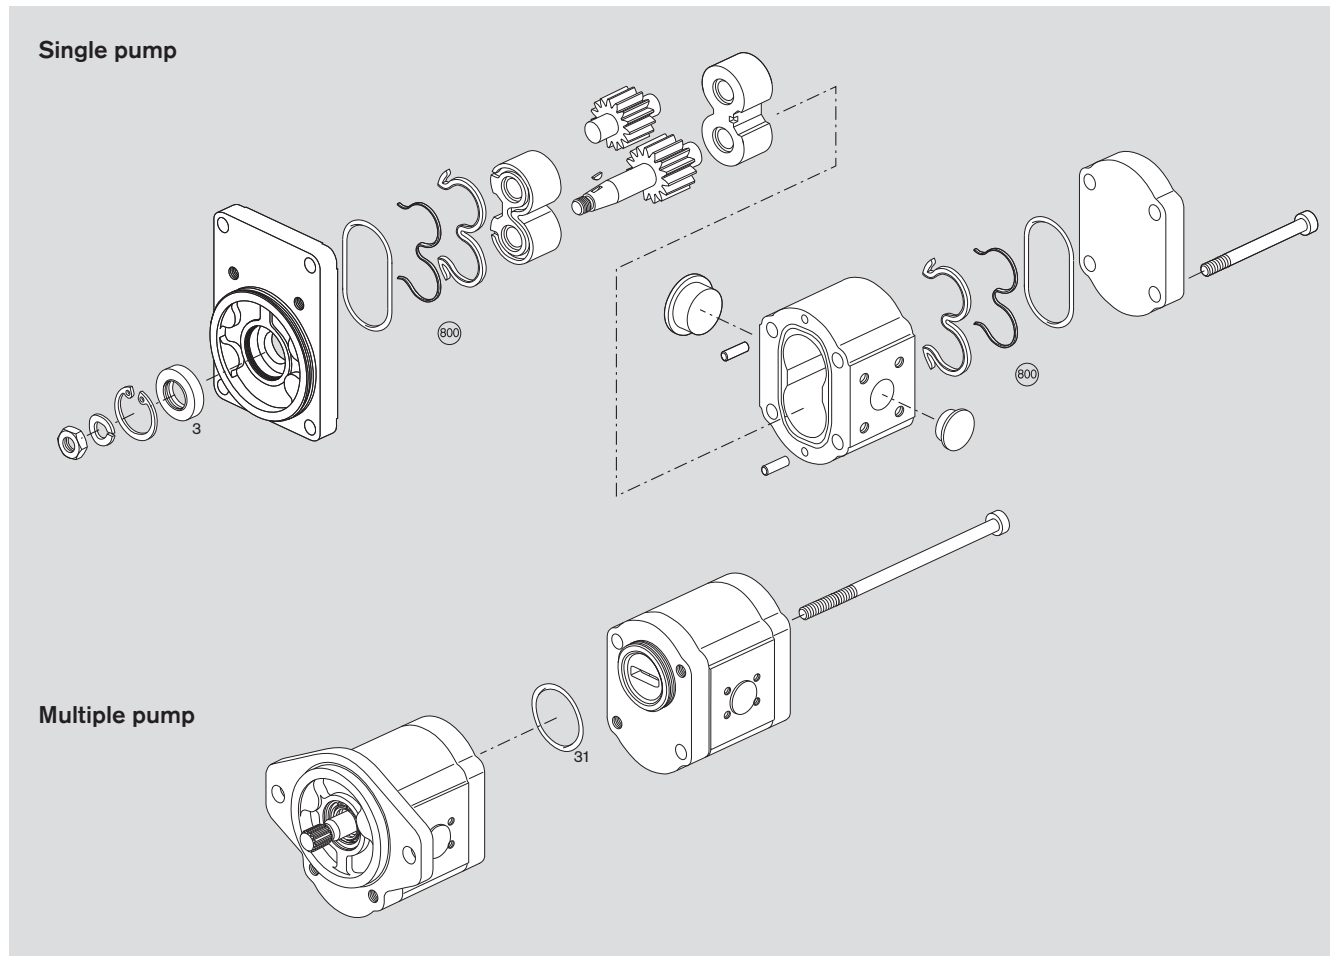

Page	Ordering code	Figure	Seal kit "B" Item 800 NBR	Shaft seal ring Item 3	Dimension	Material
16	AZPB - 32 - □□□□ H O 20 M B	A510160361	1517010248	1510283074	22 x 12 x 6	NBR
17	AZPB - 32 - □□□□ H O 01 M B	A510160343	1517010248	1510283074	22 x 12 x 6	NBR
18	AZPB - 32 - □□□□ C P 20 M B	A510B50044	1517010248	1510283074	22 x 12 x 6	NBR
19	AZPB - 32 - □□□□ C P 02 M B	A510B50026	1517010248	1510283074	22 x 12 x 6	NBR
20	AZPB - 32 - □□□□ C P 02 K B	A510B50007	1517010248	1510283071	22 x 12 x 6	FKM
21	AZPB - 32 - □□□□ N M 20 M B	A510B52026	1517010248	-	-	-
22	AZPB - 32 - □□□□ N M 02 M B	A510B32070	1517010248	-	-	-
23	AZPB - 32 - □□□□ N M 01 M B	A510B52007	1517010248	-	-	-
24	AZPB - 32 - □□□□ N Y 20 M B	A510B52042	1517010248	-	-	-
25	AZPB - 32 - □□□□ N Y 02 M B	A510B32088	1517010248	-	-	-

NBR = Perbunan®

FKM = Viton®

**For multiple pumps**


Seal ring Item 31 NBR	1 900 210 127
-----------------------------	---------------

## The AZ configurator at [www.boschrexroth.com/azconfigurator](http://www.boschrexroth.com/azconfigurator)

The AZ configurator assists you to easily configure your individual external gear unit. You only need to specify your requirements: from the displacement, direction of rotation, drive shaft, connection flange right up to the required rear cover. You immediately receive a project drawing (PDF format) if a configuration already exists. You receive the price of the configured external gear unit upon request.



The AZ configurator assists you to easily configure your individual external gear unit – all data needed for project planning are acquired through menu guidance.

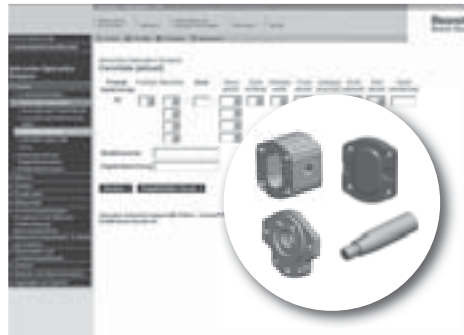

Selection is made either by an ordering code or your technical requirements. This means that you can search for external gear units that have already been configured, or you can specify the configuration variant of the external gear unit based upon the operating parameters you require.



If the external gear unit you selected has been released you will receive the part number, ordering code and a detailed installation drawing. If your special configuration is not available please send your specification to Rexroth. One of our employees will then contact you.

# Ordering-No.

Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page
0 510 010 008	20	0 510 114 021	22	0 510 120 319	17
0 510 010 009	22	0 510 114 022	22	0 510 120 320	17
0 510 010 010	19	0 510 114 023	22	0 510 120 321	17
0 510 010 011	23	0 510 114 024	23	0 510 120 322	17
0 510 010 313	20	0 510 114 025	19	0 510 120 323	17
0 510 010 314	22	0 510 114 026	19	0 510 120 324	17
0 510 010 315	19	0 510 114 027	19	0 510 120 325	17
0 510 010 316	23	0 510 114 028	23	0 510 120 326	16
0 510 020 003	17	0 510 114 029	23	0 510 120 327	16
0 510 020 303	17	0 510 114 030	18	0 510 120 328	16
0 510 110 017	20	0 510 114 031	18	0 510 120 329	16
0 510 110 018	20	0 510 114 032	18	0 510 120 330	16
0 510 110 019	22	0 510 114 033	21	0 510 120 331	16
0 510 110 020	22	0 510 114 034	21	0 510 120 332	16
0 510 110 021	23	0 510 114 035	21	0 510 120 333	16
0 510 110 022	19	0 510 114 324	20	0 510 122 012	20
0 510 110 023	19	0 510 114 325	20	0 510 122 013	20
0 510 110 024	23	0 510 114 326	20	0 510 122 014	22
0 510 110 025	18	0 510 114 327	22	0 510 122 015	22
0 510 110 026	18	0 510 114 328	22	0 510 122 016	19
0 510 110 027	21	0 510 114 329	22	0 510 122 017	19
0 510 110 028	21	0 510 114 330	19	0 510 122 018	23
0 510 110 324	20	0 510 114 331	19	0 510 122 019	23
0 510 110 325	20	0 510 114 332	19	0 510 122 020	18
0 510 110 326	22	0 510 114 333	23	0 510 122 021	18
0 510 110 327	22	0 510 114 334	23	0 510 122 022	21
0 510 110 328	19	0 510 114 335	23	0 510 122 023	21
0 510 110 329	19	0 510 114 336	18	0 510 122 316	20
0 510 110 330	23	0 510 114 337	18	0 510 122 317	20
0 510 110 331	23	0 510 114 338	18	0 510 122 318	22
0 510 110 332	18	0 510 114 339	21	0 510 122 319	22
0 510 110 333	18	0 510 114 340	21	0 510 122 320	19
0 510 110 334	21	0 510 114 341	21	0 510 122 321	19
0 510 110 335	21	0 510 120 020	17	0 510 122 322	23
0 510 112 014	20	0 510 120 021	17	0 510 122 323	23
0 510 112 015	20	0 510 120 022	17	0 510 122 324	18
0 510 112 016	22	0 510 120 023	17	0 510 122 325	18
0 510 112 017	23	0 510 120 024	17	0 510 122 326	21
0 510 112 018	19	0 510 120 025	17	0 510 122 327	21
0 510 112 019	18	0 510 120 026	17	1 519 222 443	25
0 510 112 020	21	0 510 120 027	17	1 519 222 444	25
0 510 112 321	20	0 510 120 028	16	1 519 222 445	25
0 510 112 322	22	0 510 120 029	16	1 519 222 446	25
0 510 112 323	19	0 510 120 030	16	1 519 222 447	25
0 510 112 324	23	0 510 120 031	16	1 519 222 448	25
0 510 112 325	18	0 510 120 032	16	1 519 222 449	25
0 510 112 326	21	0 510 120 033	16	1 519 222 450	25
0 510 114 018	20	0 510 120 034	16	1 519 222 451	25
0 510 114 019	20	0 510 120 035	16	1 519 222 452	25
0 510 114 020	20	0 510 120 318	17	1 519 222 453	25



## Ordering-No.

Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page
1 519 222 454	25	1 519 222 469	24	1 519 222 477	24
1 519 222 455	25	1 519 222 470	24	1 519 222 478	24
1 519 222 456	25	1 519 222 471	24	1 519 222 479	24
1 519 222 457	25	1 519 222 472	24	1 519 222 480	24
1 519 222 458	25	1 519 222 473	24	1 519 222 481	24
1 519 222 459	25	1 519 222 474	24	1 519 222 482	24
1 519 222 460	25	1 519 222 475	24	1 519 222 483	24
1 519 222 468	24	1 519 222 476	24		

# Notes

Bosch Rexroth AG  
External Gear Units  
Robert-Bosch-Straße 2  
D-71701 Schwieberdingen  
Telefon +49 (0) 711-811 10 63  
Telefax +49 (0) 711-811 17 98  
brm-az.info@boschrexroth.de  
www.boschrexroth.com/brm

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.  
The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# External Gear Pumps Series F

**RE 10 089/02.12**  
Replaces:  
RE 10 089/12.10

AZPF-...

Fixed pumps  
 $V = 4.0 \dots 28 \text{ cm}^3/\text{rev}$



## Overview of contents

Contents	Page
General	2
Product overview	3
Ordering code single pumps	4
Ordering code multiple pumps	5
Drive shaft	6
Front cover	7
Line ports	9
Pumps with integral valves	10
Design calculations for pumps	10
Performance charts	11
Noise charts	14
Specifications	16
Drive arrangements	17
Multiple pumps through drives	19
Dimensions	20
Notes for commissioning and maintenance	59
Service parts	60
Fittings	62
Ordering-No.	64

## Features

- Nominal pressure 280 bar
- Slide bearings for heavy duty applications
- Drive shafts to ISO or SAE
- Combination of several pumps possible
- Line ports:
  - connection flange or screw thread
- Consistent high quality thru mass production
- Numerous configuration variants available

# General



Rexroth external gear pumps are available as standard gear pumps in the 4 series of B, F, N and G and as SILENCE gear pumps in the series of S, T and U, in which the displacements are graded by different gear widths. Further configuration variants are given by different flanges, shafts, valve arrangements and multiple pump combinations.

## Construction

The external gear pump consists essentially of a pair of gears supported in bearing bushings and the case with a front and a rear cover. The drive shaft protrudes from the front cover where it is sealed by the shaft seal ring. The bearing forces are absorbed by special bearing bushings with sufficient elasticity to produce surface contact instead of line contact. They also ensure excellent resistance to galling – especially at low speed. The gears have 12 teeth. This keeps both flow pulsation and noise emission to a minimum.

The internal sealing is achieved by forces which are proportional to delivery pressure. This ensures optimum efficiency. The bearings provide the seal at the ends of the gaps between the teeth which carry the pressurized oil. The sealing zone between the gear teeth and the bearing is controlled by the admission of operating pressure to the rear of the bearing bushings. Special seals form the boundary of the zone. The radial clearance at the tips of the gear teeth is sealed by internal forces pushing them against the case.

### Gear pump axial compensation

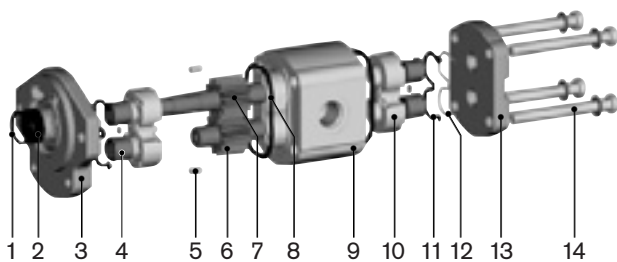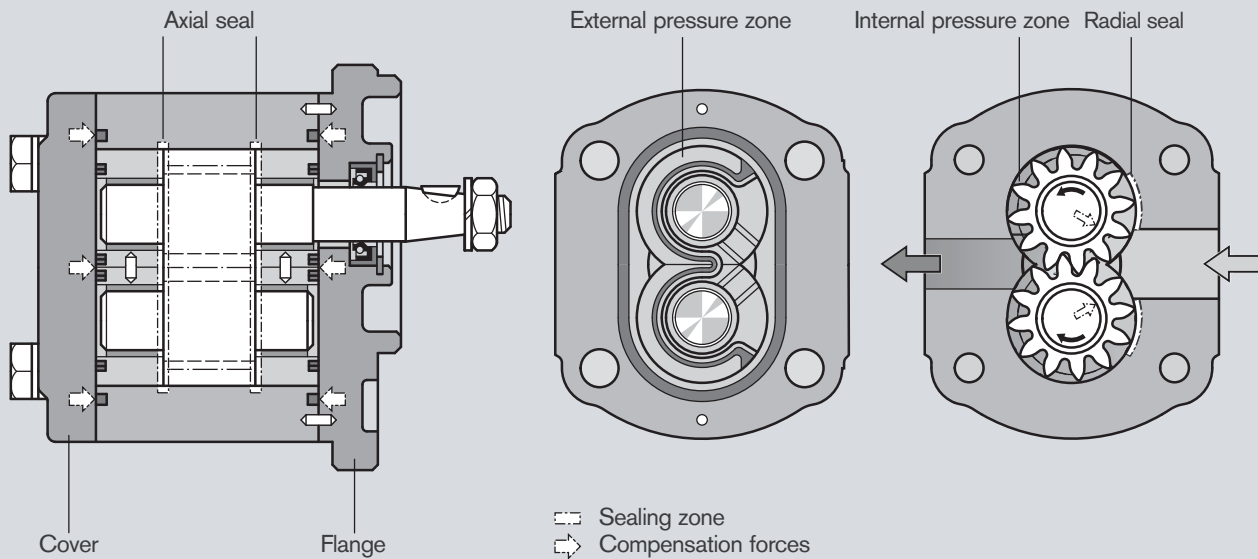

- |                     |                    |
|---------------------|--------------------|
| 1 Retaining ring    | 8 Case seal        |
| 2 Shaft seal ring   | 9 Pump case        |
| 3 Front cover       | 10 Bearing         |
| 4 Slide bearing     | 11 Axial zone seal |
| 5 Centering pin     | 12 Support         |
| 6 Gear              | 13 End cover       |
| 7 Gear (frictional) | 14 Fixing screws   |

Product overview of "Series F" standard types

Version	Page	Version	Page	Version	Page	Version	Page
	20		29		38		52
	21		30		40		53
	22		31		42		54
	23		32		44		55
	24		33		46		56
	25		34		48		57
	26		35		49		58
	27		36		50		
	28		37		51		

# Ordering code

## External gear units, single pumps, standard

<b>AZ</b>	<b>P</b>	<b>F</b>	<b>-</b>	<b>x</b>	<b>x</b>	<b>-</b>	<b>016</b>	<b>R</b>	<b>C</b>	<b>B</b>	<b>20</b>	<b>M</b>	<b>B</b>	<b>18009</b>	<b>S xxx</b>																						
<table border="1"> <tr> <td><b>Function</b></td> <td rowspan="2">Special design *)</td> </tr> <tr> <td><b>P = Pump</b></td> </tr> <tr> <td><b>Series</b></td> <td rowspan="2"> <b>1 = Standard bearing</b>  <b>2 = Reinforced bearing</b> </td> </tr> <tr> <td><b>Version</b></td> </tr> <tr> <td><b>0 = Phosphatized</b></td> <td rowspan="3"> <b>004 = 4.0 cm<sup>3</sup>/rev</b>  <b>005 = 5.5 cm<sup>3</sup>/rev</b>  <b>008 = 8.0 cm<sup>3</sup>/rev</b>  <b>011 = 11.0 cm<sup>3</sup>/rev</b>  <b>014 = 14.0 cm<sup>3</sup>/rev</b>  <b>016 = 16.0 cm<sup>3</sup>/rev</b>  <b>019 = 19.0 cm<sup>3</sup>/rev</b>  <b>022 = 22.5 cm<sup>3</sup>/rev</b>  <b>025 = 25.0 cm<sup>3</sup>/rev</b>  <b>028 = 28.0 cm<sup>3</sup>/rev</b> </td> </tr> <tr> <td><b>1 = Phosphatized, pinned</b></td> </tr> <tr> <td><b>2 = Chromatized, pinned</b></td> </tr> <tr> <td><b>Size (F)</b></td> <td rowspan="2"> <b>200 xx = PRV 200 bar</b>  <b>xxx 11 = FCV 11 l/min</b>  <b>18009 = PRV + FCV</b>                      180 bar, 9 l/min                 </td> </tr> <tr> <td><b>Direction of rotation</b></td> </tr> <tr> <td><b>R = Clockwise</b></td> <td rowspan="2"> <b>Rear cover</b>  <b>B = Standard</b>  <b>D = PRV residual flow internal</b>  <b>E = FCV residual flow external</b>  <b>S = FCV residual flow internal</b>  <b>V = PRV + FCV</b> </td> </tr> <tr> <td><b>L = Counterclockwise</b></td> </tr> <tr> <td colspan="2"><b>Seals</b></td> </tr> <tr> <td colspan="2"><b>M = NBR</b></td> </tr> <tr> <td colspan="2"><b>P = FKM</b></td> </tr> <tr> <td colspan="2"><b>K = NBR, SSR in FKM</b></td> </tr> </table>														<b>Function</b>	Special design *)	<b>P = Pump</b>	<b>Series</b>	<b>1 = Standard bearing</b> <b>2 = Reinforced bearing</b>	<b>Version</b>	<b>0 = Phosphatized</b>	<b>004 = 4.0 cm<sup>3</sup>/rev</b> <b>005 = 5.5 cm<sup>3</sup>/rev</b> <b>008 = 8.0 cm<sup>3</sup>/rev</b> <b>011 = 11.0 cm<sup>3</sup>/rev</b> <b>014 = 14.0 cm<sup>3</sup>/rev</b> <b>016 = 16.0 cm<sup>3</sup>/rev</b> <b>019 = 19.0 cm<sup>3</sup>/rev</b> <b>022 = 22.5 cm<sup>3</sup>/rev</b> <b>025 = 25.0 cm<sup>3</sup>/rev</b> <b>028 = 28.0 cm<sup>3</sup>/rev</b>	<b>1 = Phosphatized, pinned</b>	<b>2 = Chromatized, pinned</b>	<b>Size (F)</b>	<b>200 xx = PRV 200 bar</b> <b>xxx 11 = FCV 11 l/min</b> <b>18009 = PRV + FCV</b> 180 bar, 9 l/min	<b>Direction of rotation</b>	<b>R = Clockwise</b>	<b>Rear cover</b> <b>B = Standard</b> <b>D = PRV residual flow internal</b> <b>E = FCV residual flow external</b> <b>S = FCV residual flow internal</b> <b>V = PRV + FCV</b>	<b>L = Counterclockwise</b>	<b>Seals</b>		<b>M = NBR</b>		<b>P = FKM</b>		<b>K = NBR, SSR in FKM</b>	
<b>Function</b>	Special design *)																																				
<b>P = Pump</b>																																					
<b>Series</b>	<b>1 = Standard bearing</b> <b>2 = Reinforced bearing</b>																																				
<b>Version</b>																																					
<b>0 = Phosphatized</b>	<b>004 = 4.0 cm<sup>3</sup>/rev</b> <b>005 = 5.5 cm<sup>3</sup>/rev</b> <b>008 = 8.0 cm<sup>3</sup>/rev</b> <b>011 = 11.0 cm<sup>3</sup>/rev</b> <b>014 = 14.0 cm<sup>3</sup>/rev</b> <b>016 = 16.0 cm<sup>3</sup>/rev</b> <b>019 = 19.0 cm<sup>3</sup>/rev</b> <b>022 = 22.5 cm<sup>3</sup>/rev</b> <b>025 = 25.0 cm<sup>3</sup>/rev</b> <b>028 = 28.0 cm<sup>3</sup>/rev</b>																																				
<b>1 = Phosphatized, pinned</b>																																					
<b>2 = Chromatized, pinned</b>																																					
<b>Size (F)</b>	<b>200 xx = PRV 200 bar</b> <b>xxx 11 = FCV 11 l/min</b> <b>18009 = PRV + FCV</b> 180 bar, 9 l/min																																				
<b>Direction of rotation</b>																																					
<b>R = Clockwise</b>	<b>Rear cover</b> <b>B = Standard</b> <b>D = PRV residual flow internal</b> <b>E = FCV residual flow external</b> <b>S = FCV residual flow internal</b> <b>V = PRV + FCV</b>																																				
<b>L = Counterclockwise</b>																																					
<b>Seals</b>																																					
<b>M = NBR</b>																																					
<b>P = FKM</b>																																					
<b>K = NBR, SSR in FKM</b>																																					
*) Some of the special designs shown on pages 18–55 are not covered in the illustration of the ordering code.																																					

Drive shafts			Front cover			Line ports		
<b>C</b>	Tapered key shaft 1:5		<b>B</b>	Suitable front cover		<b>20</b>	Rectangular flange	
<b>H</b>	Tapered key shaft 1:8		<b>O</b>			<b>12</b>	Thread (UNF-2B) SAE Seal ring BOSS	
<b>N</b>	Dihedral claw		<b>M</b>			<b>30</b>	Rectangular flange	
<b>Q</b>	Straight keyed shaft SAE J 744 16-1 A		<b>R</b>			<b>01</b>	Pipe thread ISO 228/1	
<b>R</b>	Splined shaft SAE J 744 16-4 9T		<b>R</b>	<b>C</b>		<b>03</b>	Thread, metric ISO 6149 with seal ring	
<b>P</b>	Splined shaft SAE J 744 19-4 11T		<b>R</b>	<b>C</b>				
<b>F</b>	Splined shaft DIN 5482 B 17 x 14		<b>B</b>	<b>P</b>				
<b>S</b>	Tapered key shaft 1:5 for flange A		<b>A</b>					
<b>A</b>	Straight keyed shaft ISO Ø 18 mm		<b>B</b>					



























Not all variants can be selected by using ordering code!

Please select the required pump by using the selection tables (standard types) or after consultation with Bosch Rexroth!

Special options are possible upon request.

# Ordering code

## External gear units, multiple pumps, standard

<b>AZ</b>	<b>P</b>	<b>GGFF</b>	<b>-</b>	<b>x</b>	<b>x</b>	<b>-</b>	<b>032/022/016/005</b>	<b>R</b>	<b>C</b>	<b>B</b>	<b>20</b>	<b>20</b>	<b>20</b>	<b>20</b>	<b>K</b>	<b>B</b>	
<b>Function</b>														<b>Rear cover</b> relates to last pump section			
P = Pump														B = Standard			
<b>Series</b>														<b>Seals</b>			
B = 1.0...7.1 cm <sup>3</sup> /rev														M = NBR			
S = 4.0...28 cm <sup>3</sup> /rev														P = FKM			
F = 4.0...28 cm <sup>3</sup> /rev														K = NBR, SSR in FKM			
T = 20.0...36 cm <sup>3</sup> /rev														Shaft seal relate to pump section 1			
N = 20.0...36 cm <sup>3</sup> /rev																	
U = 22.5...63 cm <sup>3</sup> /rev																	
G = 22.5...63 cm <sup>3</sup> /rev																	
<b>Series, relates to pump section 1</b>																	
1x = Standard bearing																	
2x = Reinforced bearing																	
<b>Version, relates to pump section 1</b>																	
1 = Phosphatized, pinned																	
2 = Chromatized, pinned																	
<b>Size</b>																	
corresponding to each series																	
<b>Direction of rotation</b>																	
R = Clockwise,																	
L = Counter-clockwise																	
<b>Drive shafts</b> relates to pump part 1							<b>Front cover</b> relates to pump part 1							<b>Line ports</b> every pump parts			
Series B:							Suitable front cover										
<b>H</b>	Tapered key shaft 1: 8			<b>O</b>	<b>O</b>	Square flange Centering Ø 25.38 mm			<b>02</b>	Thread, metric DIN 3852 T1							
Series F, S:																	
<b>C</b>	Tapered key shaft 1: 5			<b>B</b>	<b>B</b>	Square flange Centering Ø 80 mm			<b>20</b>	Rectangular flange							
<b>H</b>	Tapered key shaft 1: 8			<b>O</b>	<b>O</b>	Square flange Centering Ø 36.47 mm											
<b>R</b>	Splined shaft SAE J 744 16-4 9T			<b>R</b>	<b>R</b>	SAE J 744 82-2 A Centering Ø 82.55 mm 2-bolt mounting											
Series N, T:																	
<b>C</b>	Tapered key shaft 1: 5			<b>B</b>	<b>B</b>	Square flange Centering Ø 100 mm			<b>07</b>	Square flange SAE Thread, metric							
<b>D</b>	Splined shaft SAE J 744 22-4 13T			<b>C</b>	<b>C</b>	SAE J 744 101-2 B Centering Ø 101.6 mm 2-bolt mounting			<b>20</b>	Rectangular flange							
<b>N</b>	Dihedral claw			<b>M</b>	<b>M</b>	Centering Ø 52 mm with seal ring											
Series G, U:																	
<b>C</b>	Tapered key shaft 1: 5			<b>B</b>	<b>B</b>	Square flange Centering Ø 105 mm			<b>07</b>	Square flange SAE Thread, metric							
<b>D</b>	Splined shaft SAE J 744 22-4 13T			<b>C</b>	<b>C</b>	SAE J 744 101-2 B Centering Ø 101.6 mm 2-bolt mounting			<b>20</b>	Rectangular flange							
<b>H</b>	Tapered key shaft 1: 8			<b>O</b>	<b>O</b>	Square flange Centering Ø 50.78 mm											


Not all variants can be selected by using ordering code!

Please select the required pump by using the selection tables (standard types) or after consultation with Bosch Rexroth!


Special options are possible upon request.

Drive shafts


C

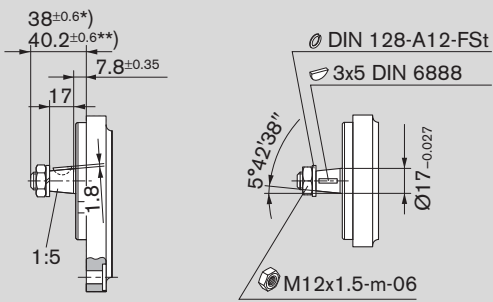

H

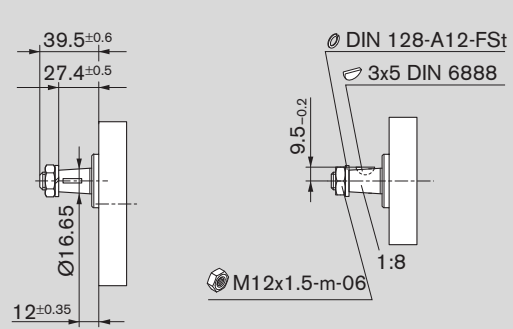


N




Pump without shaft seal, see page 14


Q

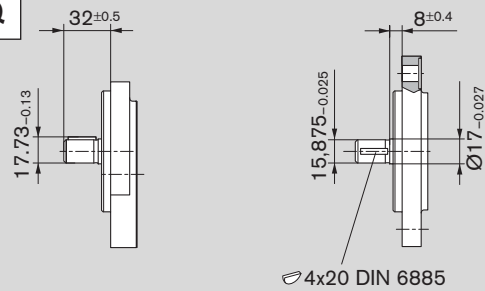


R

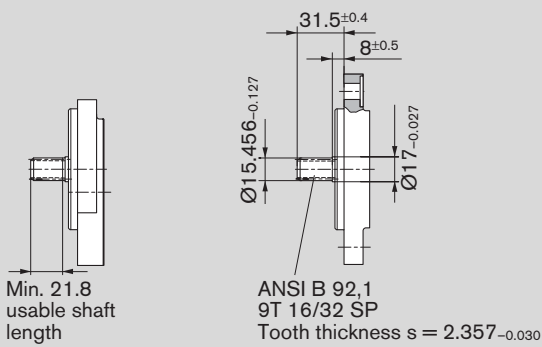


P

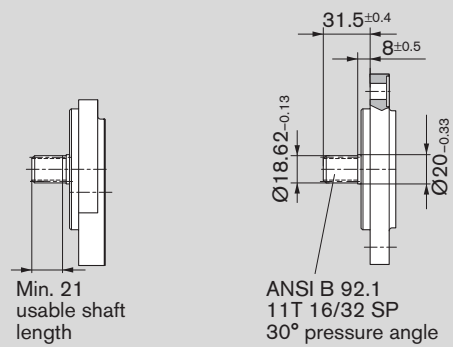


F

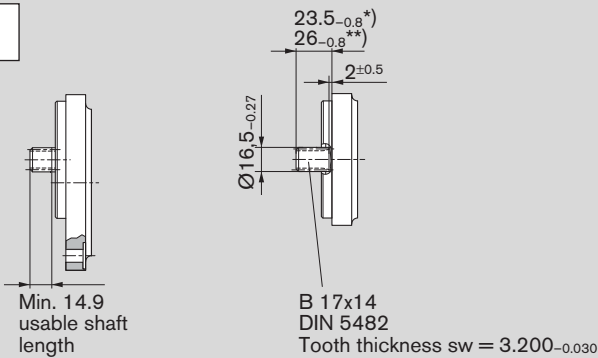

S

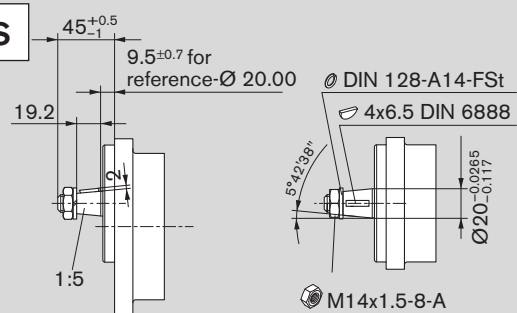

A

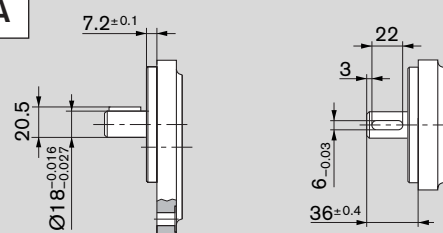


\*) in combination with front cover **B**


\*\*\*) in combination with front cover **P**




Front cover

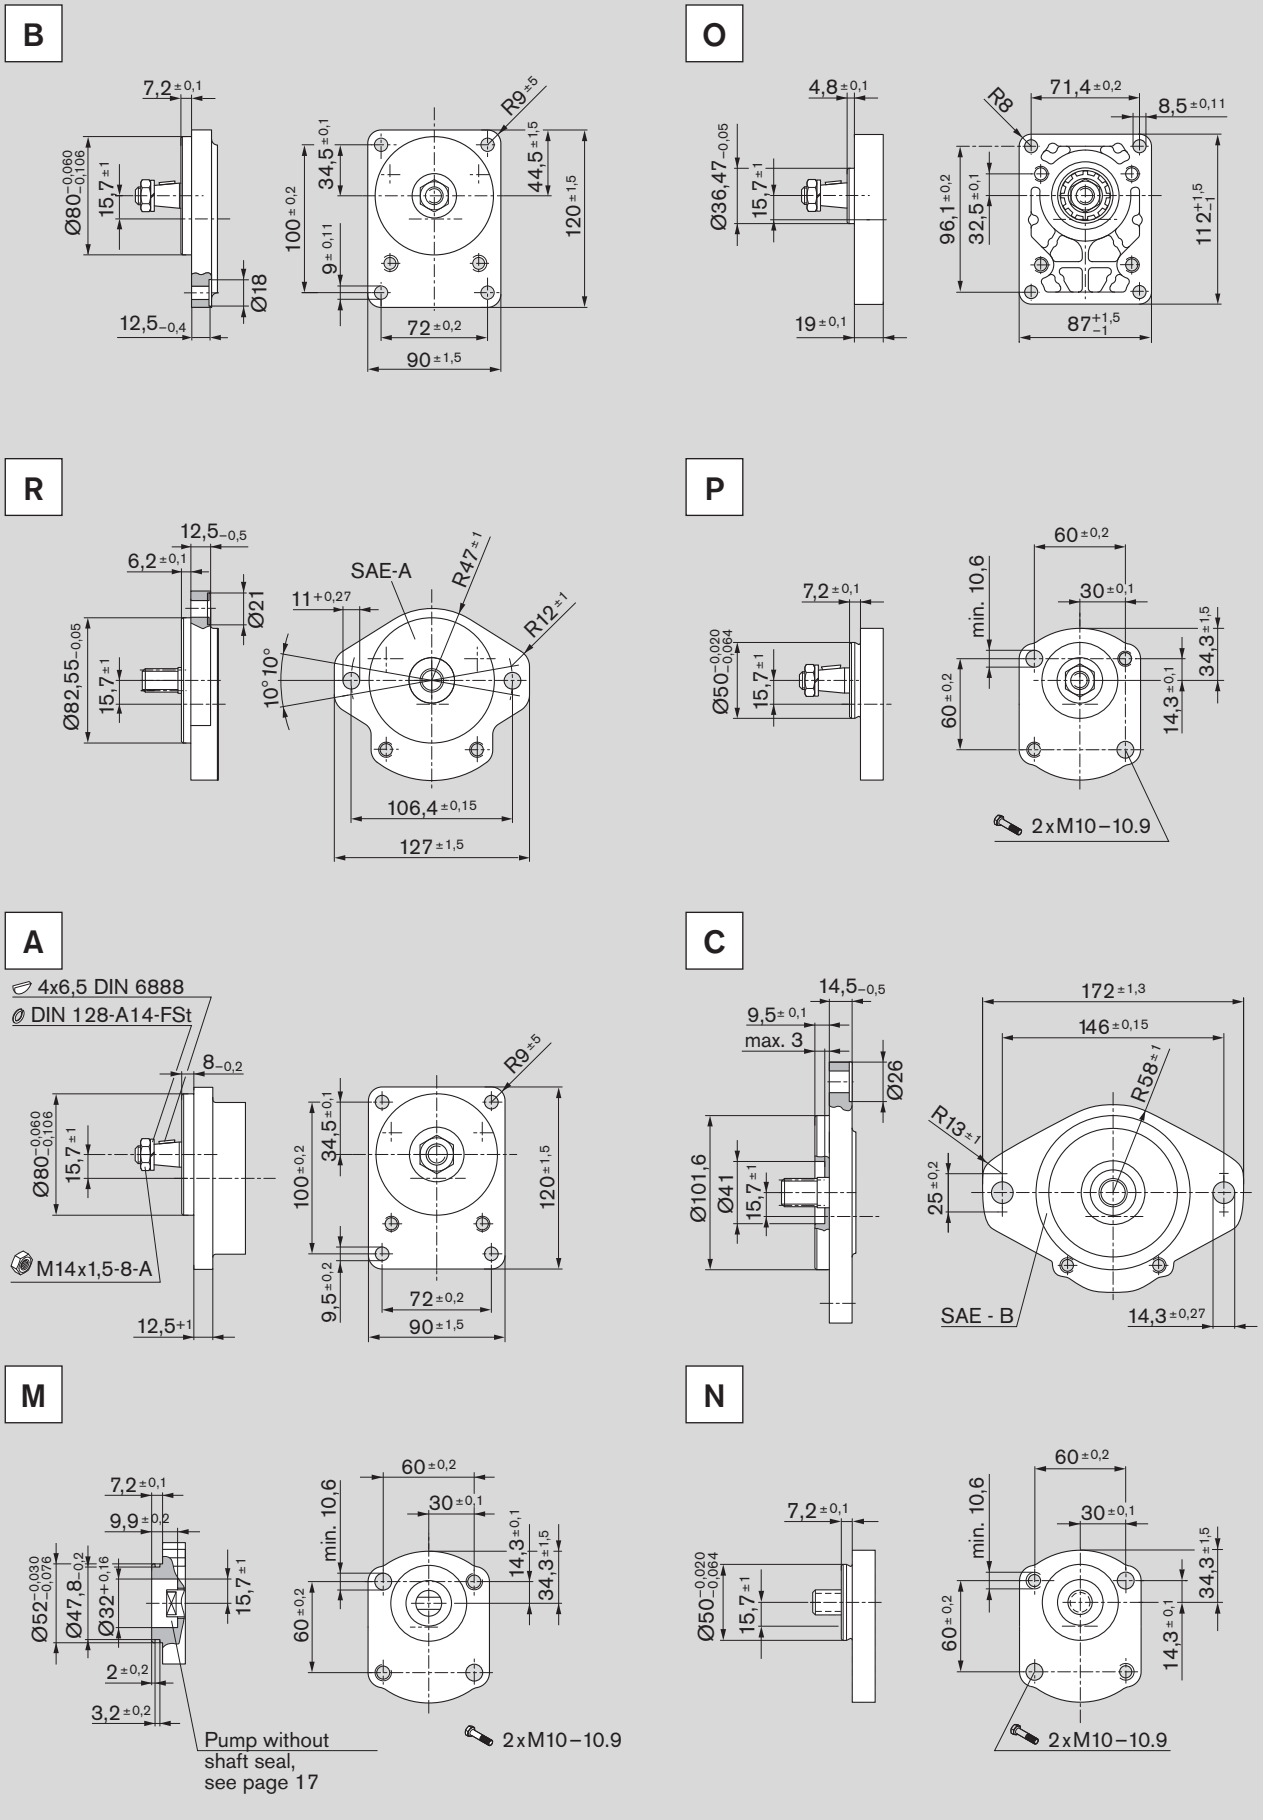

Front cover (continued)

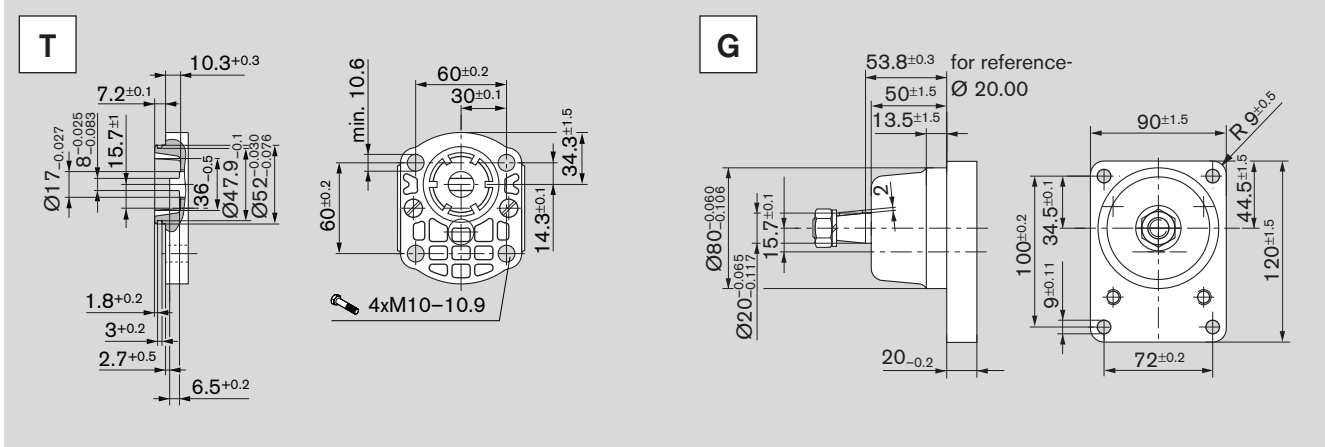


Line ports



**01** Pipe thread  
ISO 228/1

At pressures  $p_2 > 210$  bar  
limited fatigue strength


Ordering code	Size	Pressure side		Suction side	
		G	F	G	F
01	4...16 cm <sup>3</sup>	G 1/2	16	G 3/4	16
	19...28 cm <sup>3</sup>	G 3/4		G 1	19



**03** Thread, metric  
ISO 6149  
with seal ring

At pressures  $p_2 > 210$  bar  
limited service life


Ordering code	Size	Pressure side				Suction side			
		M	D	E	F	M	D	E	F
03	4...5.5 cm <sup>3</sup>	M 18 x 1.5	29	0.5	16	M 18 x 1.5	29	0.5	16
	8...16 cm <sup>3</sup>	M 22 x 1.5	34		18	M 27 x 2	40		19
	19...28 cm <sup>3</sup>			M 33 x 2	46	22			



**12** Thread  
(UN-2B, UNF-2B) SAE  
seal ring BOSS

At pressures  $p_2 > 210$  bar  
limited service life


Ordering code	Size	Pressure side				Suction side			
		G	D	E	F	G	D	E	F
12	4...5.5 cm <sup>3</sup>	9/16-18 UNF-2B	25	0.5	13	9/16-18 UNF-2B	25	0.5	13
	8 cm <sup>3</sup>	7/8-14 UNF-2B	35		16	7/8-14 UNF-2B	35		16
	11...28 cm <sup>3</sup>			1 1/16-12 UN-2B	45	19			



**20** Rectangular flange

\*) Dimension of Series 2

Ordering code	Size	Pressure side			Suction side		
		C	D	E	C	D	E
20	4...5.5 cm <sup>3</sup>	15	35	M 6, depth 13	15	40	M 6, depth 13
	8...22.5 cm <sup>3</sup>				20		
	19...28 cm <sup>3</sup> *)	26	55	M 8, depth 13			





**30** Rectangular flange


Ordering code	Size	Pressure side			Suction side		
		C	D	E	C	D	E
30	4...8 cm <sup>3</sup>	13.5	30.2	M 6, depth 13	13.5	30.2	M 6, depth 13
	11...28 cm <sup>3</sup>				20.0	39.7	M 8, depth 13

# Gear pumps with integral valves


In order to reduce external pipework it is possible to incorporate a flow-control valve or pressure-relief valve in the rear supply of the gear pump. A typical application of this is in the supply of hydraulic oil in power steering systems. The pump delivers a constant flow irrespective of the speed at which it is driven. The excess flow is either returned internally to the suction port or distributed externally to other items of equipment.

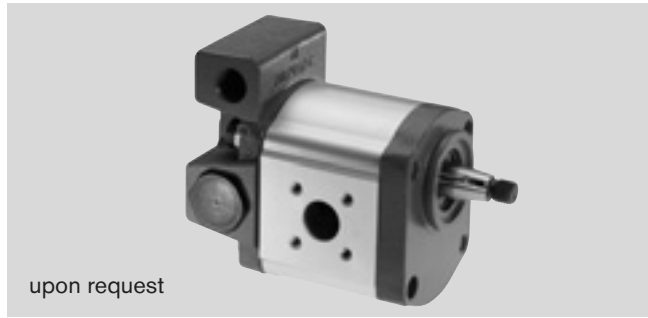


3-way flow-control valve.  
Excess flow returned to suction line  
 $Q_{const.} = 2...30 \text{ l/min}$



3-way flow-control valve.  
Excess flow distributed externally; loadable  
 $Q_{const.} = 2...30 \text{ l/min}$



3-way flow-control valve with pressure-relief valve.  
Excess flow returned to suction line  
 $Q_{const.} = 2...30 \text{ l/min}$   
 $p_1 = 100...180 \text{ bar}$



Pressure-relief valve.  
Discharge returned to suction line  
 $p_1 = 5...250 \text{ bar}$

## Ordering code

S	xxx17
---	-------

E	xxx12
---	-------

V	15011
---	-------

D	180xx
---	-------

# Design calculations for pumps

The design calculations for pumps are based on the following parameters:

- $V$  [ $\text{cm}^3/\text{rev}$ ] Displacement
- $Q$  [ $\text{l}/\text{min}$ ] Delivery
- $p$  [ $\text{bar}$ ] Pressure
- $M$  [ $\text{Nm}$ ] Drive torque
- $n$  [ $\text{rev}/\text{min}$ ] Drive speed
- $P$  [ $\text{kW}$ ] Drive power

It is also necessary to allow for different efficiencies such as:

- $\eta_v$  Volumetric efficiency
- $\eta_{hm}$  Hydraulic-mechanical efficiency
- $\eta_t$  Overall efficiency

The following formulas describe the various relationships.

They include correction factors for adapting the parameters to the usual units encountered in practice.

**Caution:** Diagrams providing approximate selection data will be found on subsequent pages.

$$Q = V \cdot n \cdot \eta_v \cdot 10^{-5}$$

$$p = \frac{M \cdot \eta_{hm}}{1.59 \cdot V}$$

$$P = \frac{p \cdot Q}{6 \cdot \eta_t}$$

$$V = \frac{Q}{n \cdot \eta_v} \cdot 10^5$$

$$V = \frac{M \cdot \eta_{hm}}{159 \cdot p}$$

$$Q = \frac{6 \cdot P \cdot \eta_t}{p}$$

$$n = \frac{Q}{V \cdot \eta_v} \cdot 10^5$$

$$M = \frac{1.59 \cdot V \cdot p}{\eta_{hm}}$$

$$p = \frac{6 \cdot P \cdot \eta_t}{Q}$$

[%]


$n$  —  $\eta_v$  —  $Q$       $V$  [ $\text{cm}^3/\text{rev}$ ]    $Q$  [ $\text{l}/\text{min}$ ]    $p$  [ $\text{bar}$ ]

$M$  —  $\eta_{hm}$  —  $p$



$P$  —  $\eta_t$  —  $P \cdot Q$       $n$  [ $\text{rev}/\text{min}$ ]    $P$  [ $\text{kW}$ ]    $M$  [ $\text{Nm}$ ]

**Caution:**  $\eta$  [%] e.g. 95 [%]





# Performance charts




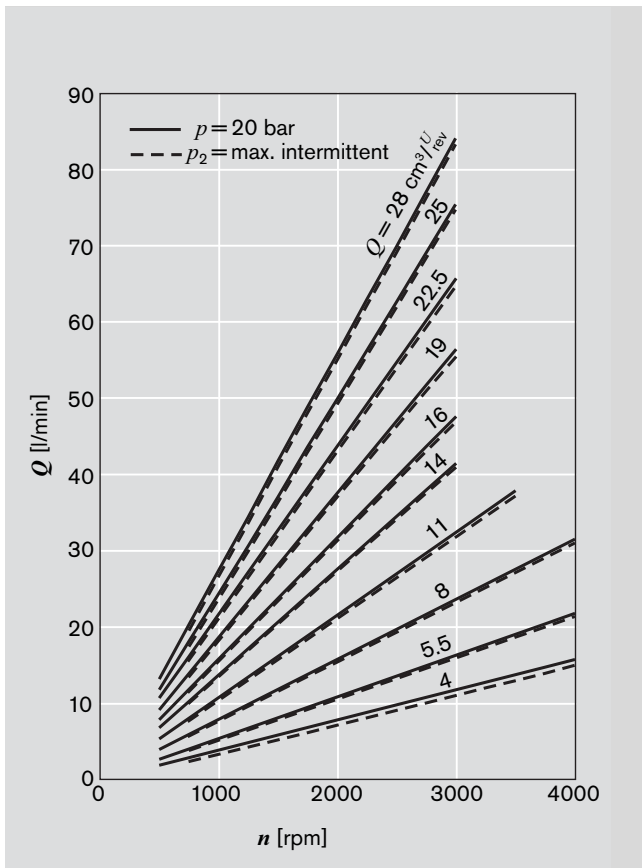


$\nu = 32 \text{ mm}^2/\text{s}, \vartheta = 50^\circ\text{C}$

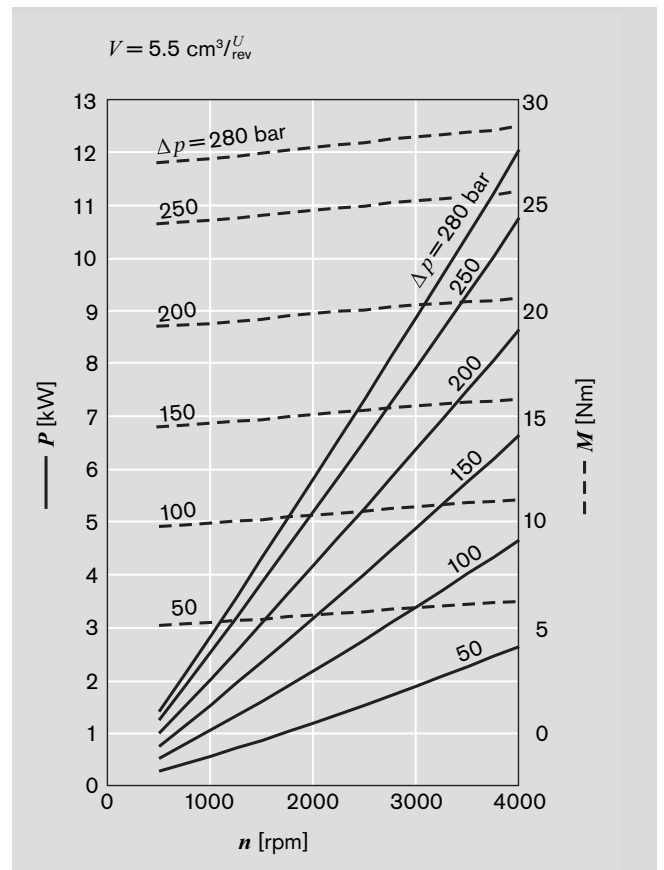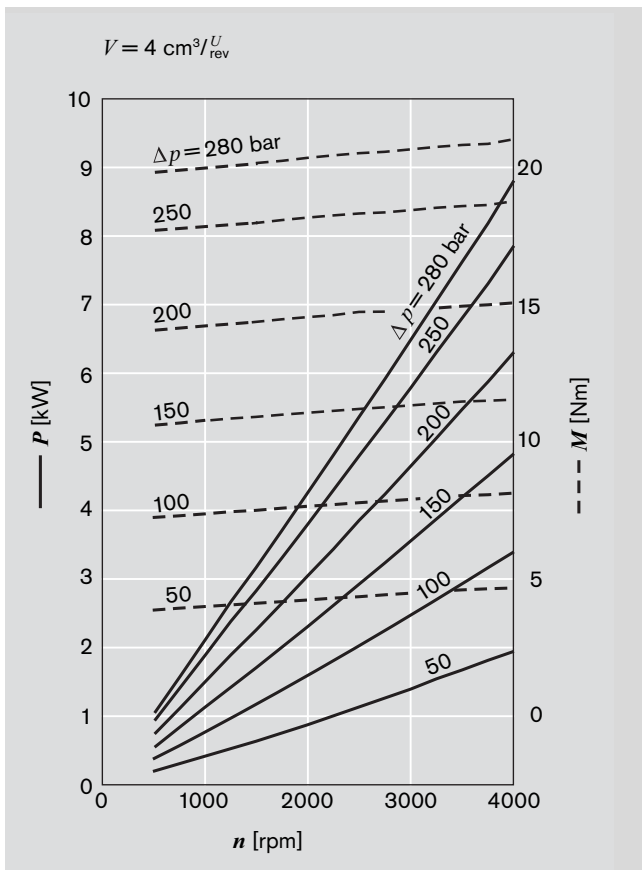

Performance charts (continued)

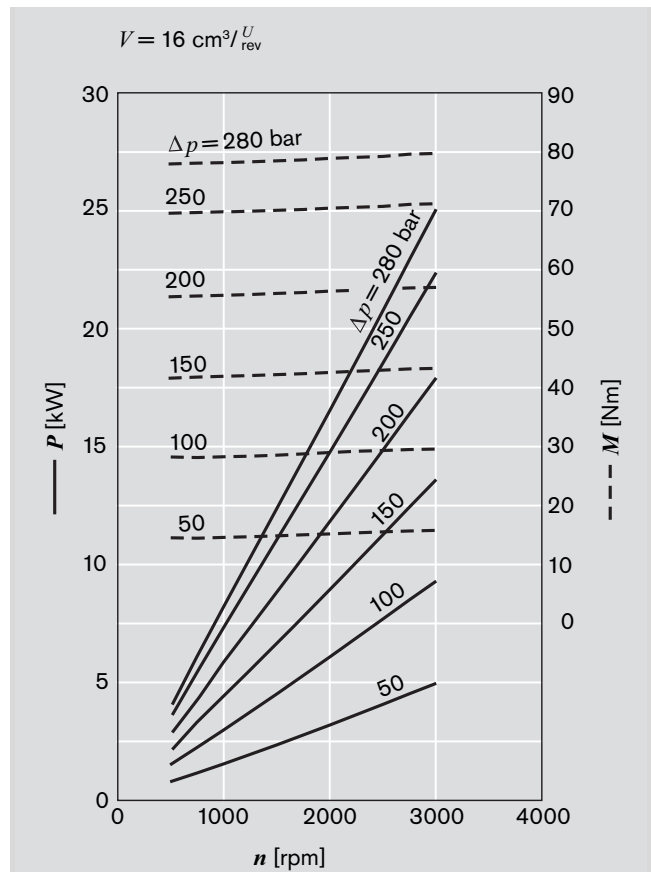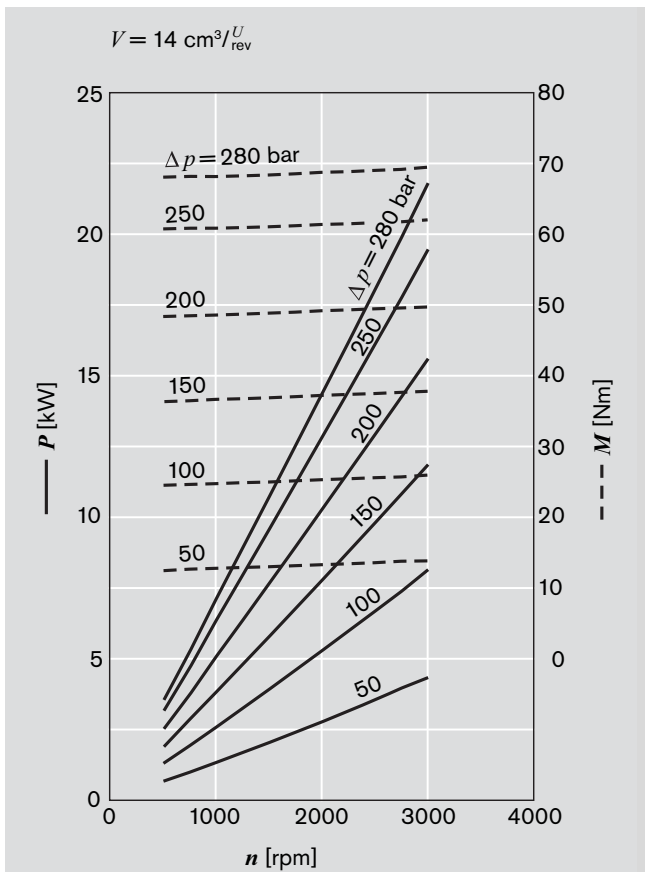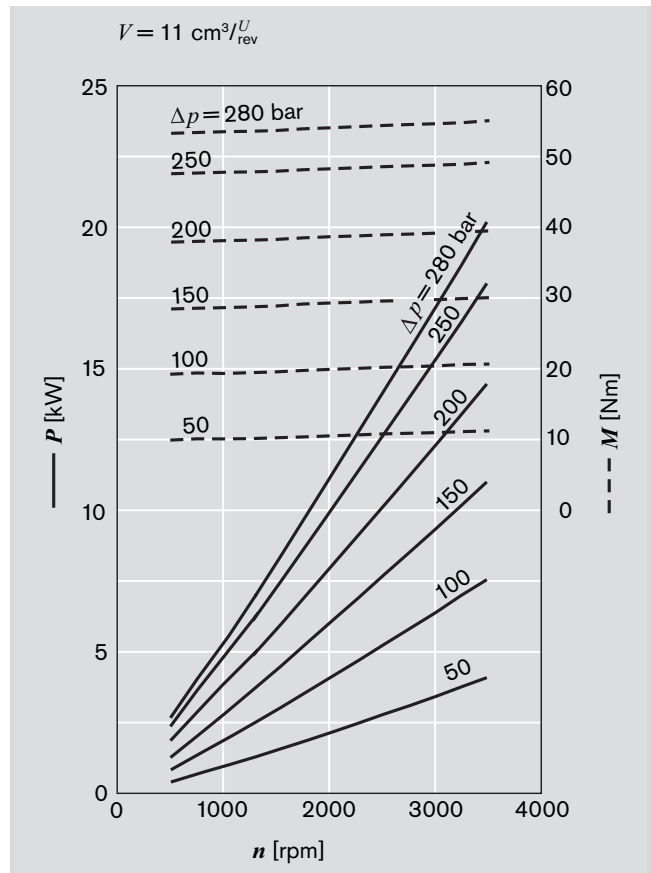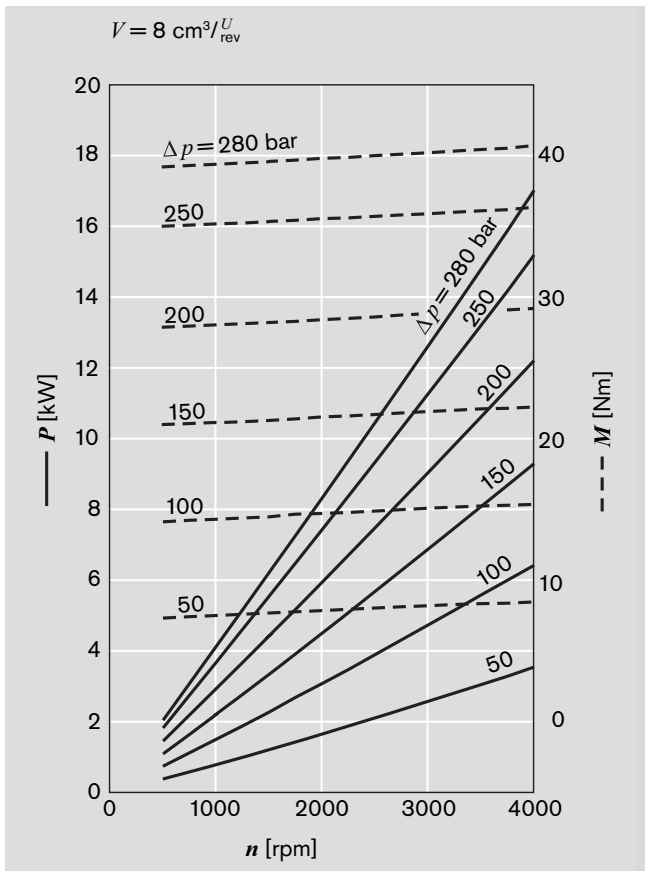

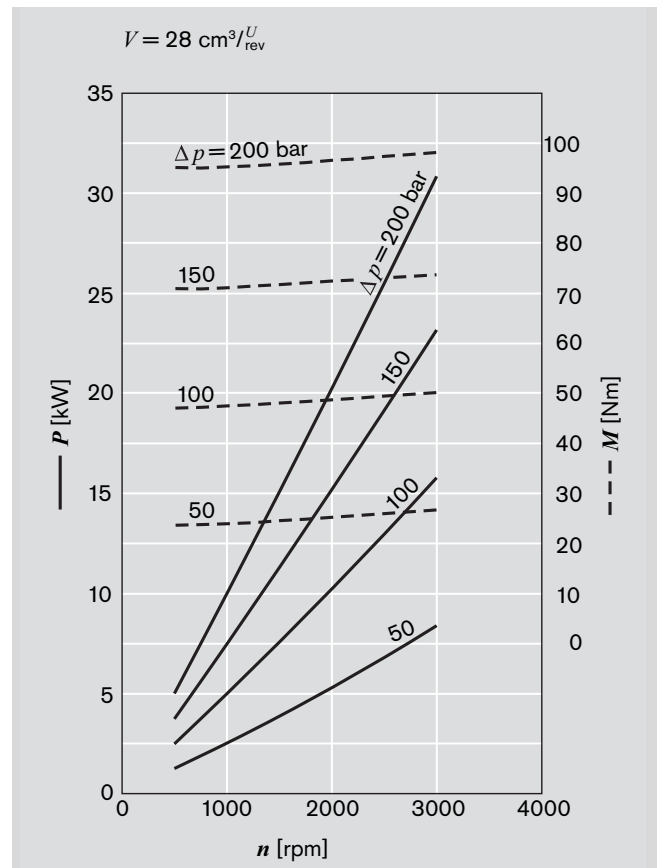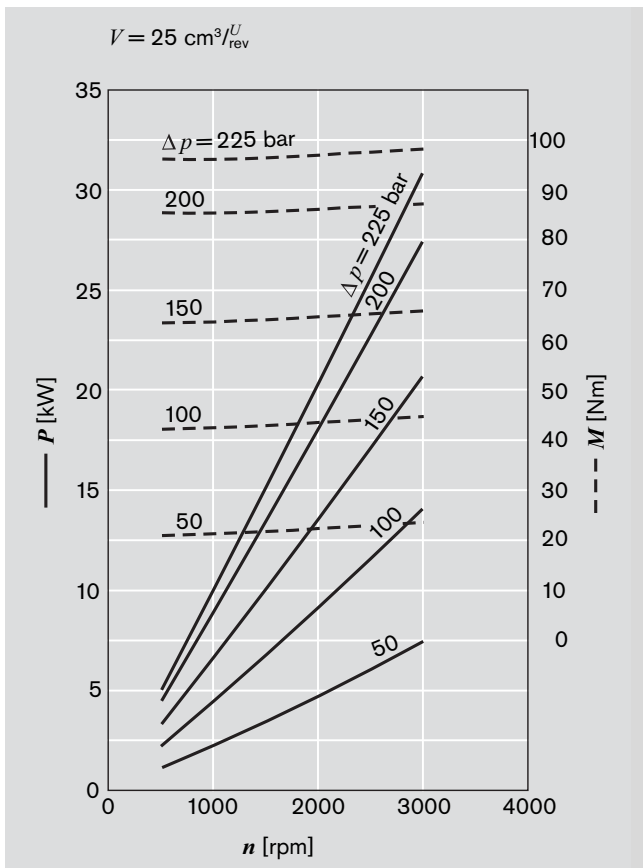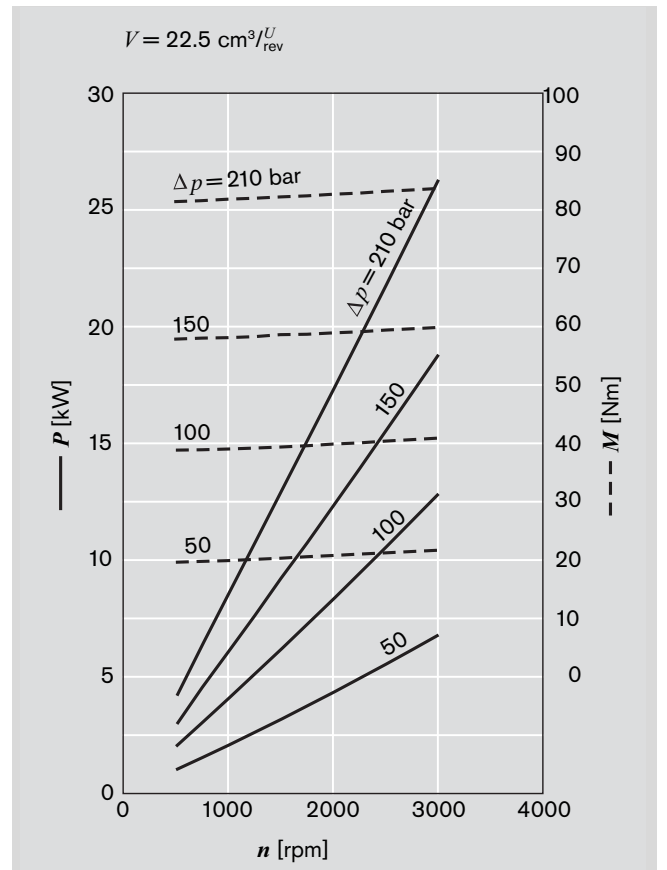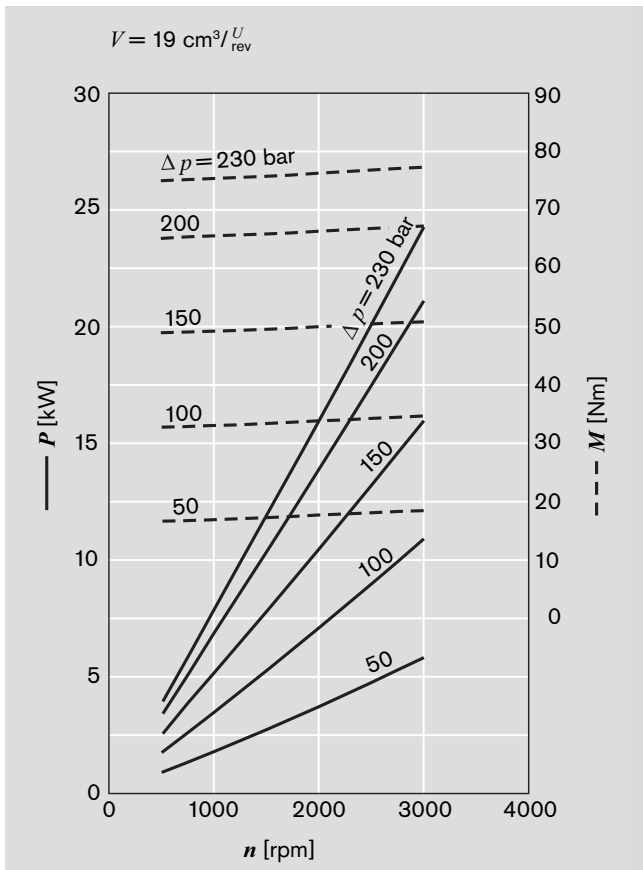

6

# Noise charts





**Noise level** dependent on rotational speed, pressure range between 10 bar and pressure value  $p_2$  (see page 16 Specifications table).

Oil data:  $\nu = 32 \text{ mm}^2/\text{s}$ ,  $\vartheta = 50^\circ\text{C}$ .

Sound pressure level calculated from noise measurements made in the sound absorbent measuring room compliant with DIN 45 635, Part 26.







Spacing between measuring sensor – pump: 1 m.

These are typical characteristic values for the respective model. They describe the airborne sound emitted solely by the pump. Environmental influences (installation site, piping, further system components) are not taken into consideration. Each value applies for a single pump.

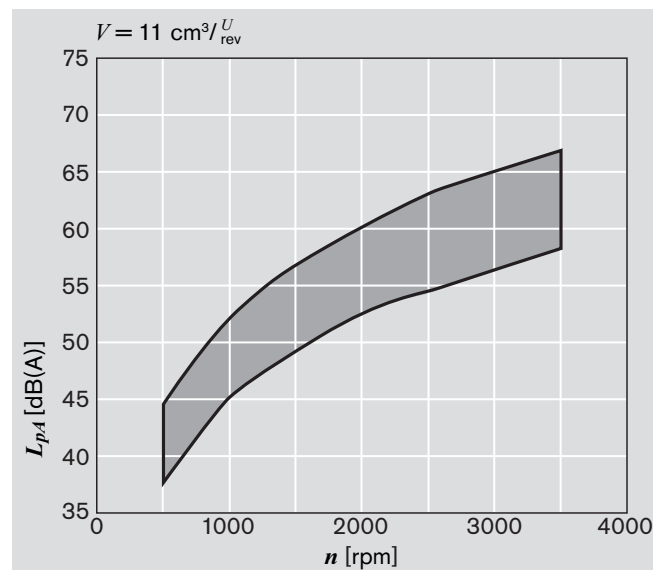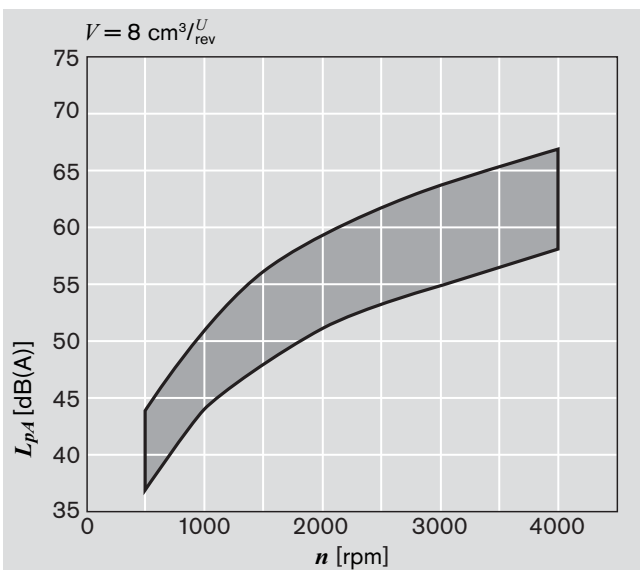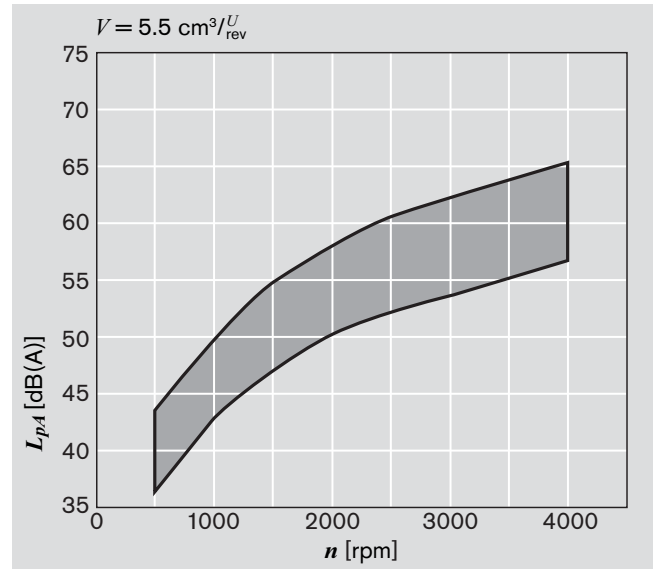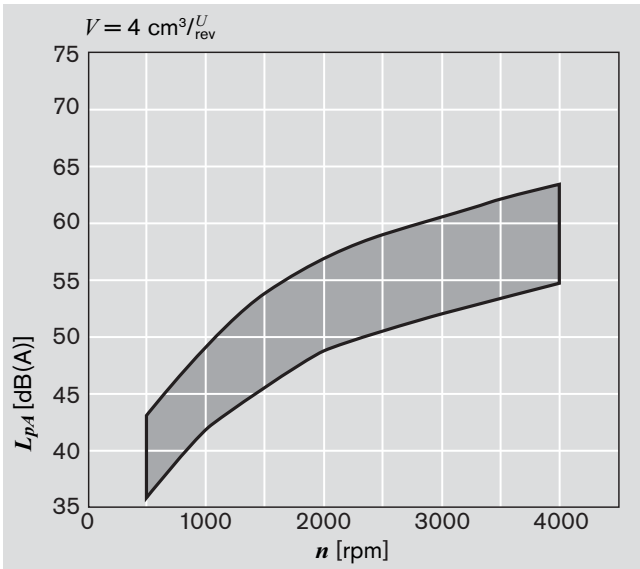



Noise charts (continued)

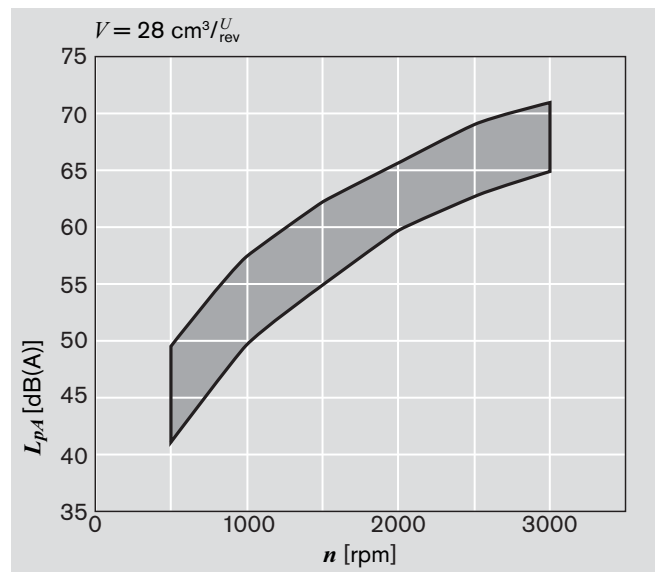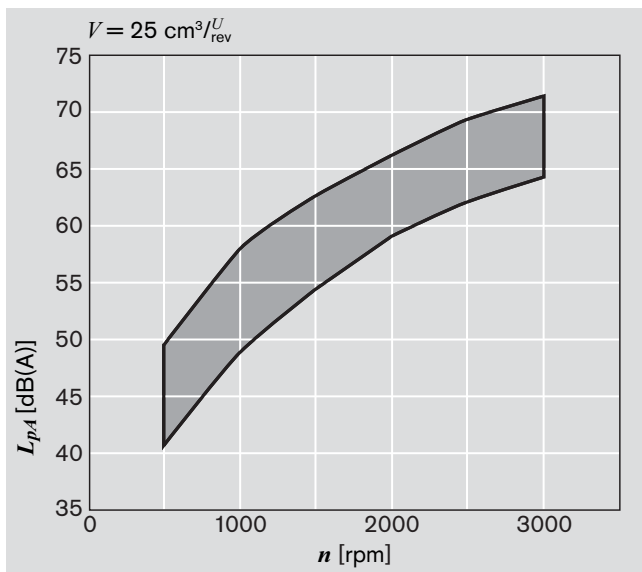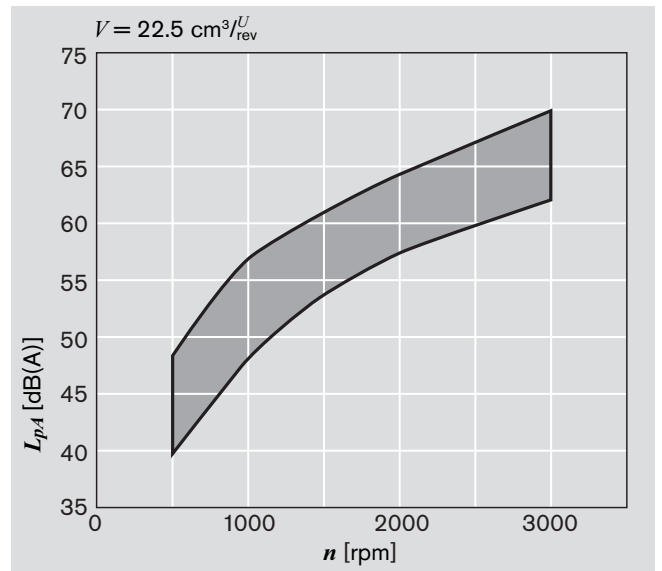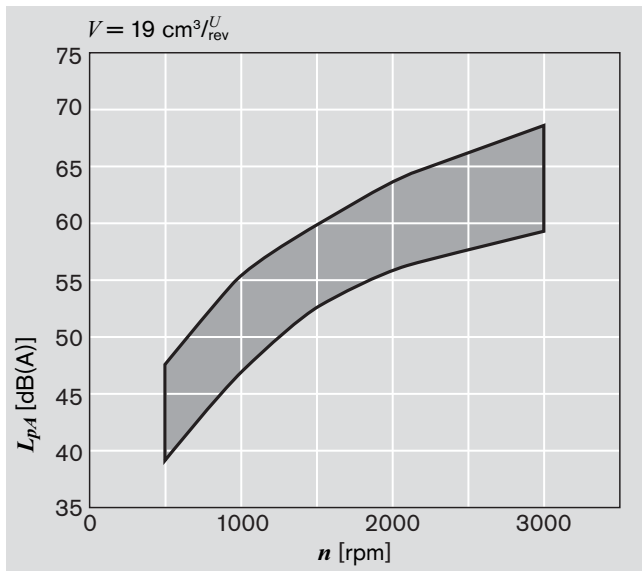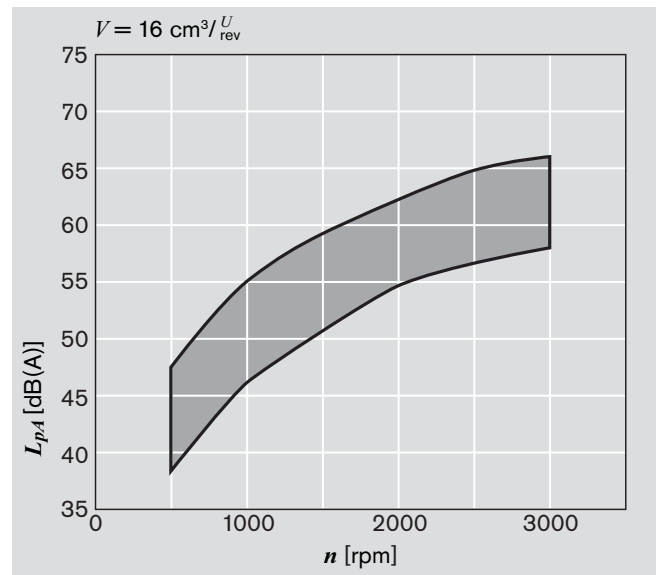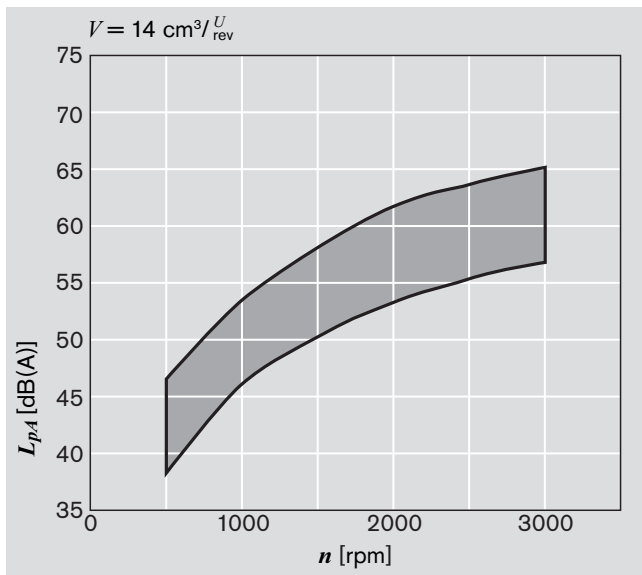

# Specification

General	
Construction	External gear pump
Mounting	Flange or through-bolting with spigot
Line ports	Screw, flange
Direction of rotation (looking on shaft)	Clockwise or counter-clockwise, the pump may only be driven in the direction indicated
Installation position	Any
Load on shaft	Radial and axial forces after consulting
Ambient temperature range	-30°C...+80°C or max. 110°C with FKM seal
Hydraulic fluid	- Mineral oil compliant with DIN 51 524, 1-3, however under higher load at least HLP compliant with DIN 51 524 Part 2 recommended. - Comply with RE 90220 - Further operating fluids possible after consultation
Viscosity	12...800 mm <sup>2</sup> /s permitted range 20...100 mm <sup>2</sup> /s recommended range ...2000 mm <sup>2</sup> /s range permitted for starting
Hydraulic fluid temperature range	max. +80°C with NBR seals*) max. +110°C with FKM seals**)
Filtration ***)	At least cleanliness level 20/18/15 compliant with ISO 4406 (1999)

\*) NBR = Perbunan®  
 \*\*) FKM = Viton®  
 \*\*\*) During the application of control systems or devices with critical counter-reaction, such as steering and brake valves, the type of filtration selected must be adapted to the sensitivity of these devices/systems.


Safety requirements pertaining to the whole systems are to be observed.

In the case of applications with high numbers of load cycles please consulting.


## Definition of direction of rotation

Always look on the drive shaft.

**Caution:** Dimensions drawings always show clockwise-rotation pumps. On counter-clockwise-rotation pumps the positions of the drive shaft and the suction and pressure ports are different.

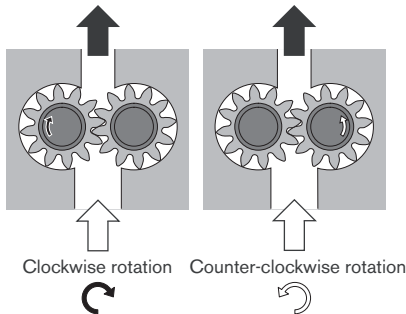

## Definitions of pressures

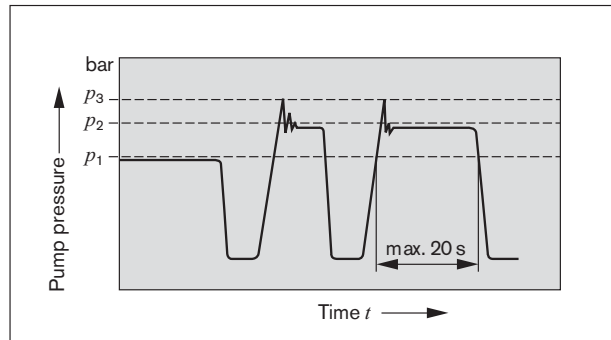

$p_1$  max. continuous pressure  
 $p_2$  max. intermittent pressure  
 $p_3$  max. peak pressure

### AZPF-1x

Displacement	V	cm <sup>3</sup> /rev	4	5.5	8	11	14	16	19	22.5	22.5
Suction pressure	$p_e$	bar	0.7...3 (absolute), with tandem pumps: $p_e (p_2) = \max. 0.5 > p_e (p_1)$								
Max. continuous pressure	$p_1$		250						210	180	210
Max. intermittent pressure	$p_2$		280						230	210	230
Max. peak pressure	$p_3$		300						250	230	250
Min. rotational speed	< 100	rpm	600	500	500	500	500	500	500	500	500
at bar	12 mm <sup>2</sup> /s		100...180	1200	1200	1000	1000	800	800	800	800
			180... $p_2$	1400	1400	1400	1200	1000	1000	1000	1000
	25 mm <sup>2</sup> /s		$p_2$	700	700	700	600	500	500	500	500
Max. rotational speed at	$p_2$		4000			3500	3000	3000	3000	2500	3000

\*) Version with extended bearings

### AZPF-2x

Displacement	V	cm <sup>3</sup> /rev	4	5.5	8	11	14	16	19	22.5	25	28
Suction pressure	$p_e$	bar	0.7...3 (absolute), with tandem pumps: $p_e (p_2) = \max. 0.5 > p_e (p_1)$									
Max. continuous pressure	$p_1$		250						220	195	170	
Max. intermittent pressure	$p_2$		280						250	225	200	
Max. peak pressure	$p_3$		300						290	265	240	
Min. rotational speed	< 100	rpm	600	500	500	500	500	500	500	500	500	
at bar	12 mm <sup>2</sup> /s		100...180	1200	1200	1000	1000	800	800	800	800	
			180... $p_2$	1400	1400	1400	1200	1000	1000	1000	1000	
	25 mm <sup>2</sup> /s		$p_2$	700	700	700	600	500	500	500	500	
Max. rotational speed at	$p_2$		4000			3500	3000	3000	3500	3500	3000	3000


# Drive arrangements

## 1. Flexible couplings

The coupling must not transfer any radial or axial forces to the pump.


The maximum radial runout of shaft spigot is 0.2 mm.

Refer to the fitting instructions provided by the coupling manufacturer for details of the maximum permitted shaft misalignment.

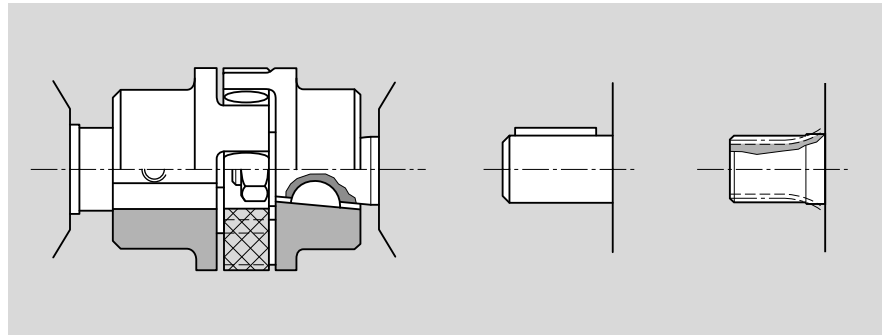

## 2. Coupling sleeve

Used on shafts with DIN or SAE splining. Caution: There must be no radial or axial forces exerted on the pump shaft or coupling sleeve. The coupling sleeve must be free to move axially. The distance between the pump shaft and drive shaft must be  $2^{+1}$ . Oil-bath or oil-mist lubrications is necessary.

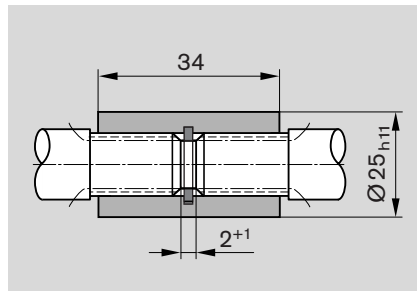

Splined shaft	$M_{max}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{max}$ [bar]
DIN	100	4...28	$p_{max}$
SAE 9t	110		
SAE 11t	180		

## 3. Drive shaft with tang

For the close-coupling of the pumps to electric motor or internal-combustion engine, gear, etc.

The pump shaft has a special tang and driver ③ (not included in supply). There is no shaft sealing.


The recommended arrangements and dimensions for the drive end and sealing are as follows.

### ① Drive shaft

Case-hardening steel DIN 17 210  
e.g. 20 MnCrS 5  
case-hardened 0.6 deep; HRC 60 ±3.  
Surface for sealing ring  
ground without rifling  $R_{max.} \leq 4\mu\text{m}$

### ② Radial shaft seal ring

Rubber-covered seal (see DIN 3760, Type AS or double-lipped ring).  
Cut 15° chamfer or fit shaft seal ring with protection sleeve.

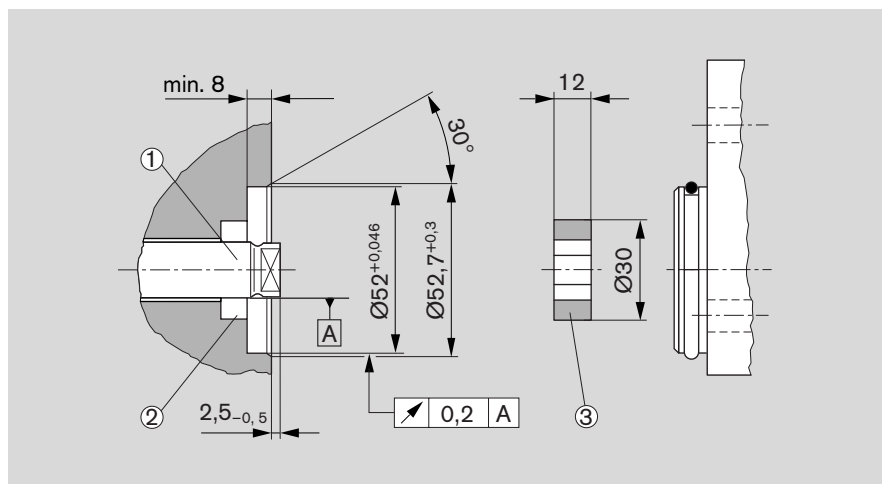

## Drive with tang

### AZPF-1x


$M_{max.}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{max.}$ [bar]
65	4...14	280
	16	230
65	19	190
	22.5	160

### AZPF-2x

$M_{max.}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{max.}$ [bar]
85	4...14	280
	16	280
85	19	250
	22.5	210
	25	190
	28	170

**4. V-belts and straight gearwheels or helical toothed gear drives without outboard bearing**





When proposing to use V-belt or gear drive, please submit details of the application for our comments (especially dimensions  $a$ ,  $d_m$ ,  $d_w$  and angle  $\alpha$ ). For helical toothed gear drives, details of the helix angle  $\beta$  are also required.

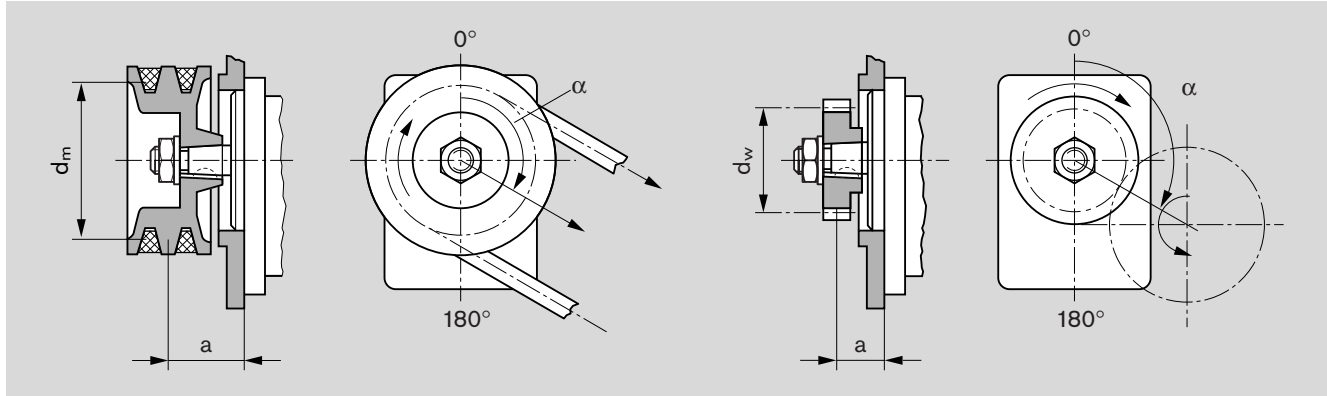

**5. Outboard bearing**

Outboard bearing eliminate possible problems when the pumps are driven by V-belts or gearwheels. The diagrams below show the maximum radial and axial loads that can be tolerated based on a bearing life of  $L_H = 1000$  hours.

$M_{max.}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{max.}$ [bar]
65	16	230
	19	190
	22.5	160

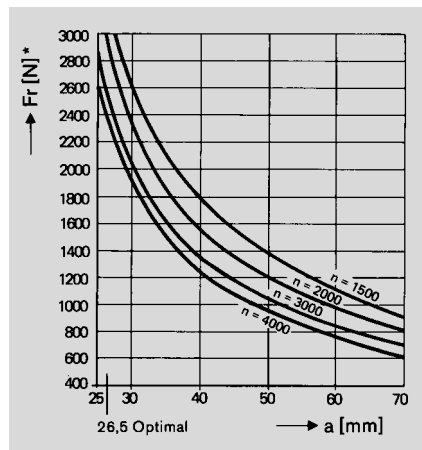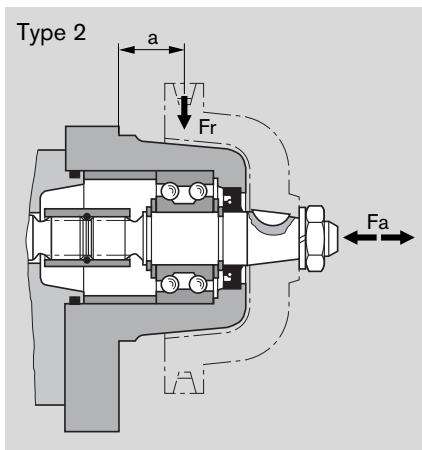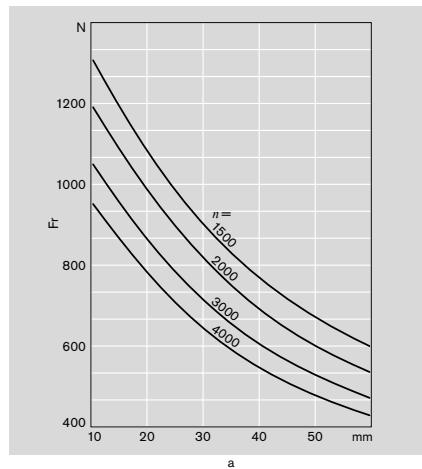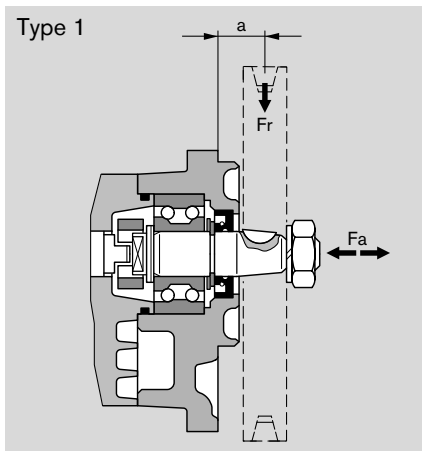

## Multiple gear pumps

Gear pumps are well-suited to tandem combinations of pumps in which the drive shaft of the first pump is extended to drive a second pump and sometimes a third pump in the same manner. A coupling is fitted between each pair of pumps. In most cases each pump is isolated from its neighbor, i.e. the suction ports are separate from one another. A common suction port is also possible as an option.

**Caution:** Basically, the specifications for the single pumps apply, but with certain restrictions:

**Max. speed:** This is determined by the highest rated pump speed in use.

**Pressures:** These are restricted by the strength of the drive shaft, the through drives and the drivers. Appropriate data is given in the dimensional drawings.

### Pressure restrictions during standard through drive


In the case of series S, the driver for the second pumping stage can carry a load of up to  $M_{max.} = 65 \text{ Nm}$ , i.e. there is a pressure restriction for the second stage and any further stages.

$M_{max.}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{max.}$ [bar]
65	16	230
	19	190
	22.5	160
	25	140
	28	130


If the first stage is driven through a tang (driver) or outboard bearing type 1, pressure restrictions apply as indicated in the formula below.

Reinforced through drives are available for applications with higher transfer torques and/or rotational vibrations. Customized designs available on request.

### Reinforced through drive

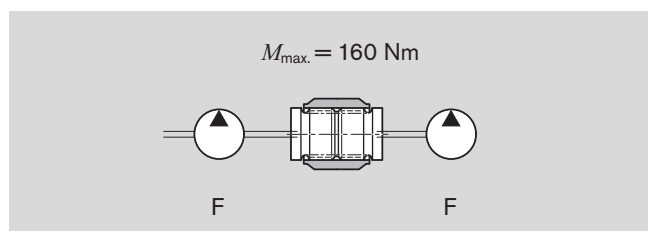

### Standard through drive

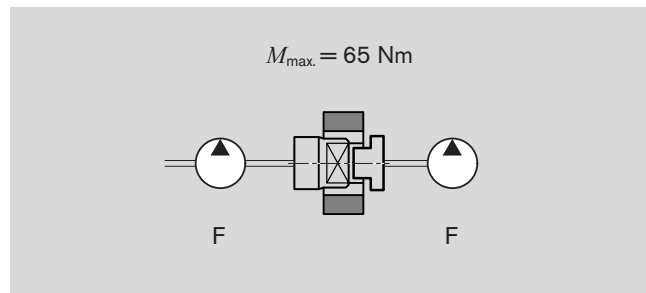


### Combinations

Series pump 1	$M_{max.}$ [Nm]	Series pump 2
F	65	F
F	65	S
F	12	B

### Max. transferrable drive torque \*


Function	Code letter	Designation	Max. transferrable drive torque * [Nm]
Spined shafts	R	SAE J744 16-4 9T	110
	P	SAE J744 19-4-11T	180
Tapered key shaft	C	1:5	155
	H	1:8	160
Cylinder shafts	G	Shafts Ø 15.875	55
	A	Shafts Ø 18	75
Claw	N	Dihedral claw	65

\* These values only apply when the conditions described on page 16 are complied with. Bosch Rexroth is to be consulted if the stated values are exceeded.

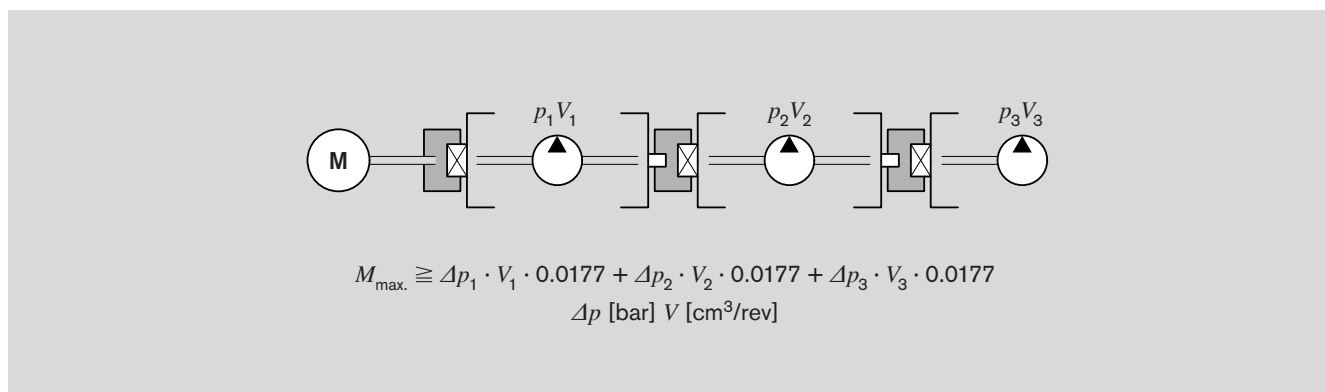

# Dimensions

## Standard range

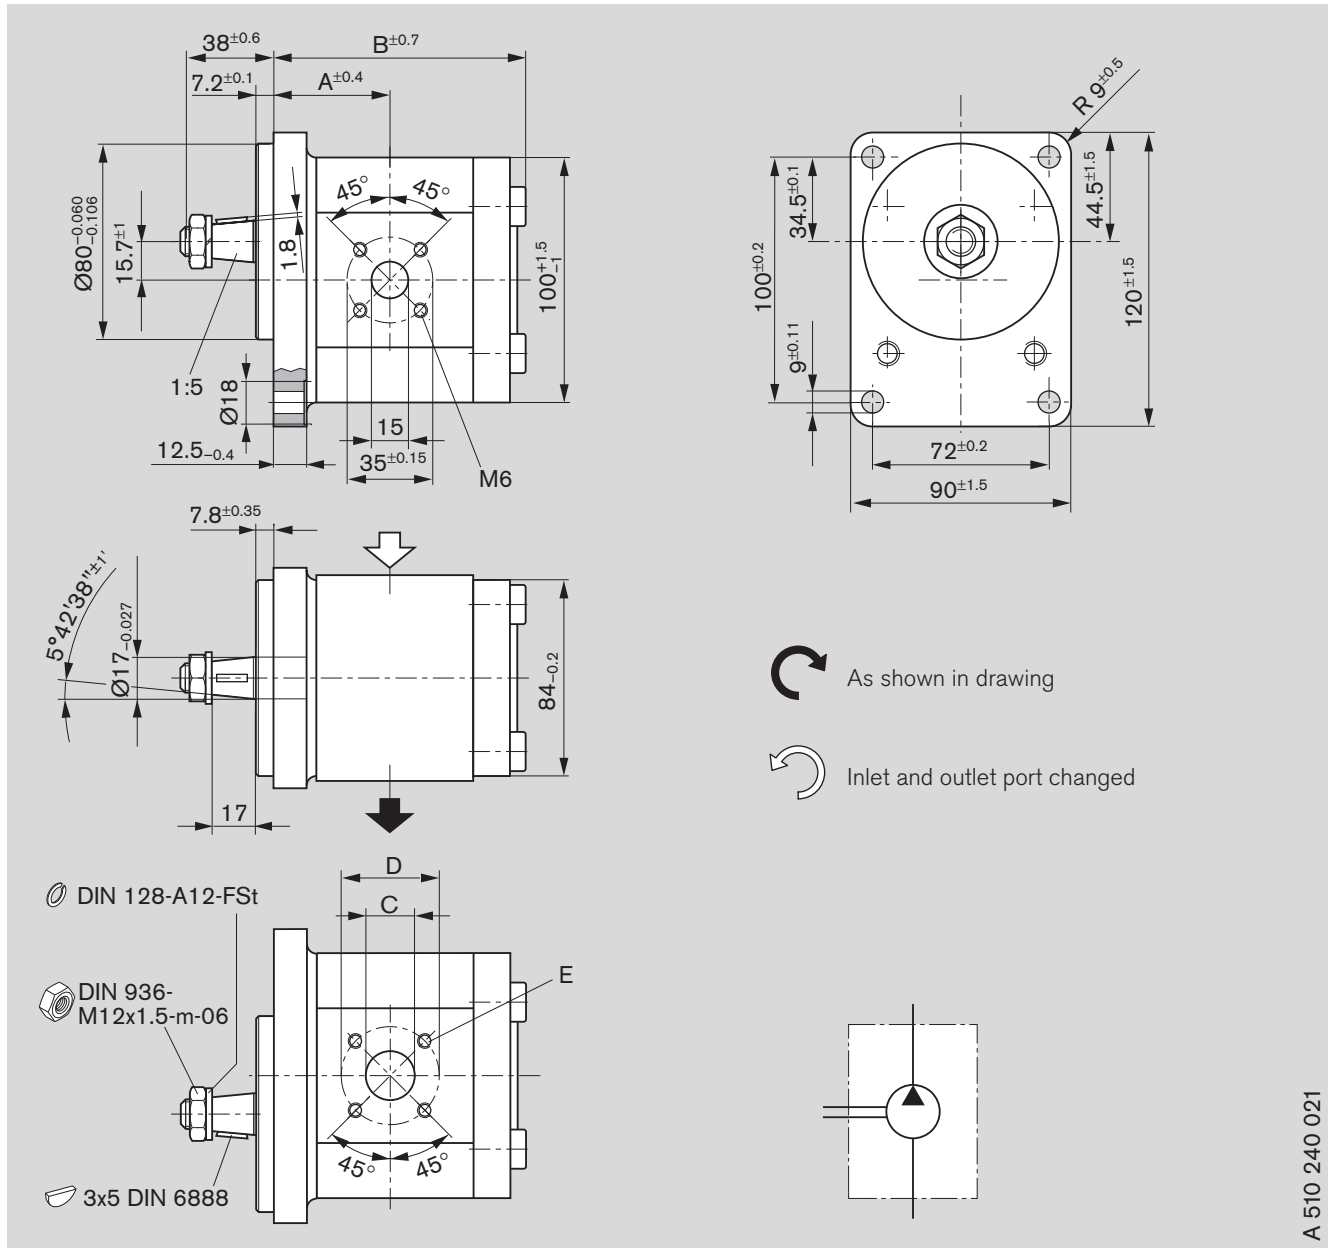

### Ordering code


AZPF - 10 -     C B 20 M B

AZPF - 11 -     C B 20 M B\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	L	R				A	B	C	D	E
4	0 510 225 306	0 510 225 006	280	4000	3.2	39.9	85.0	15	40	M6
5.5	0 510 325 306	0 510 325 006	280	4000	3.2	41.1	87.5	15	40	depth 13
8	0 510 425 307	0 510 425 009	280	4000	3.3	43.2	91.6	20	40	
11	0 510 525 311	0 510 525 009	280	3500	3.5	47.0	96.6	20	40	
14	0 510 525 319	0 510 525 018	280	3000	3.7	47.5	101.6	20	40	
16	0 510 625 315	0 510 625 022	280	3000	3.7	47.5	105.0	20	40	
19	0 510 625 314	0 510 625 013	230	3500	3.8	47.5	110.0	20	40	
22.5	0 510 725 330*	0 510 725 030	210	2500	3.8	55.1	115.4	20	40	

# Dimensions

## Standard range

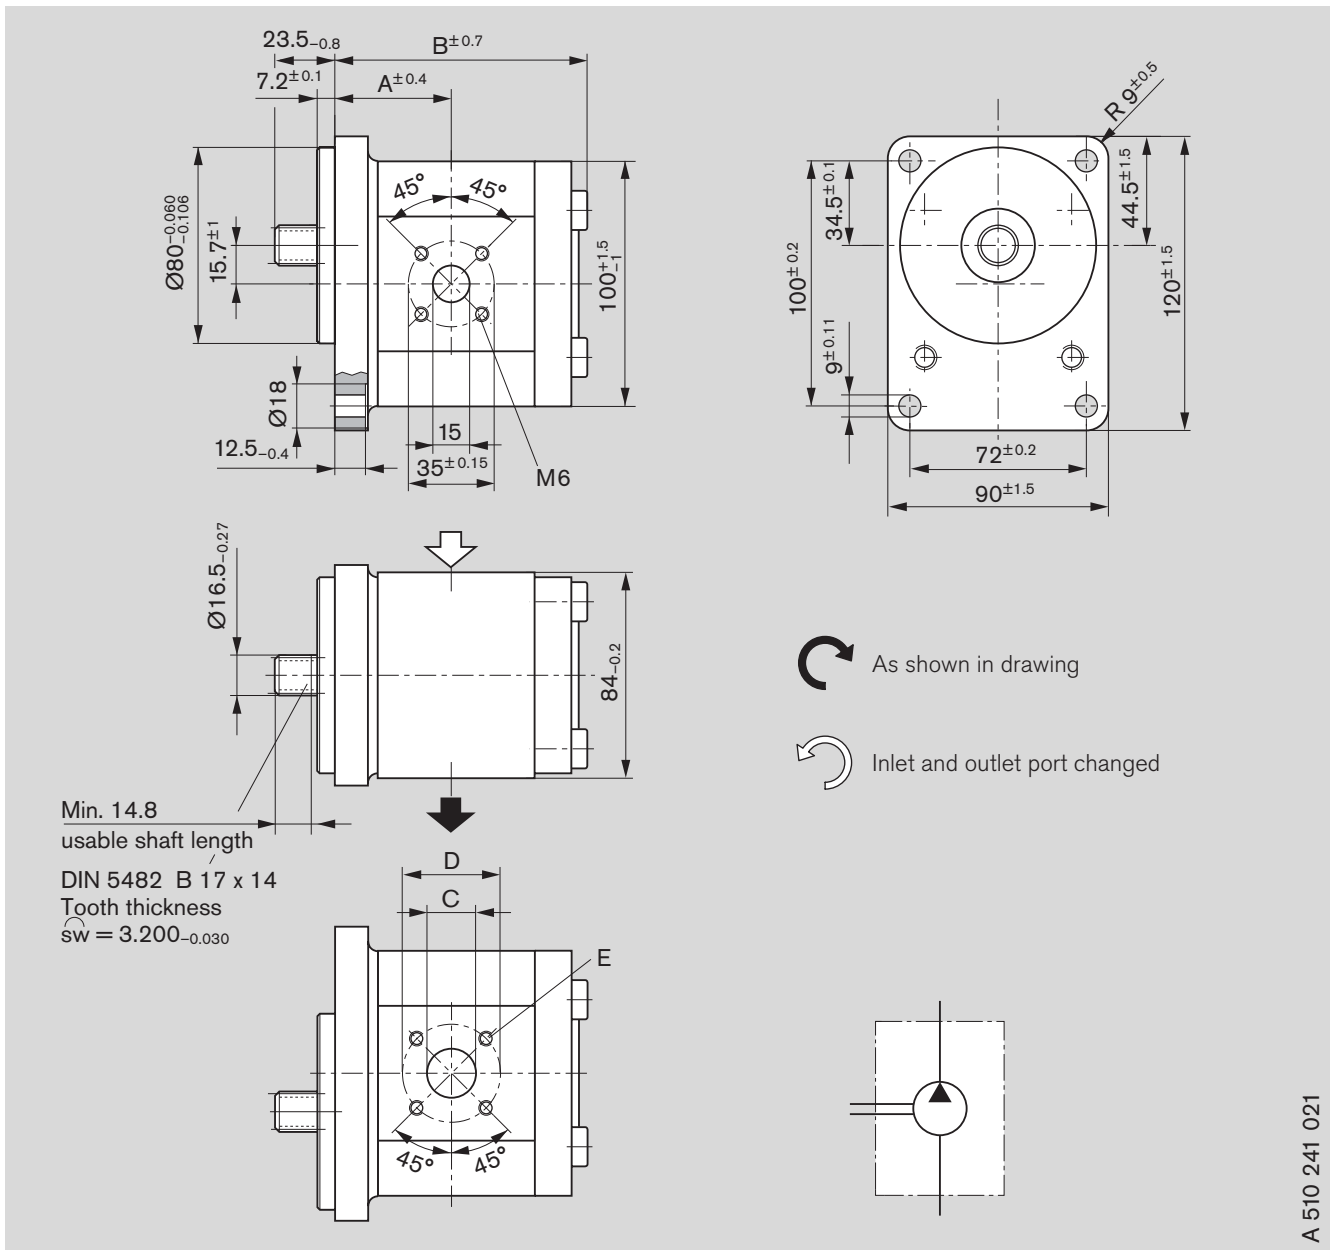

A 510 241 021

### Ordering code


AZPF - 10 -     F B 20 M B

AZPF - 11 -     F B 20 M B\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	L	R				A	B	C	D	E
4	0 510 225 307	0 510 225 007	280	4000	3.1	39.9	85.0	15	40	M6
5.5	0 510 325 307	0 510 325 007	280	4000	3.2	41.1	87.5	15	40	depth 13
8	0 510 425 308	0 510 425 010	280	4000	3.3	43.2	91.6	20	40	
9	0 510 425 336*	-	280	4000	3.4	43.7	92.4	20	40	
11	0 510 525 312	0 510 525 010	280	3500	3.5	47.0	96.6	20	40	
14	0 510 525 328	0 510 525 030	280	3000	3.6	47.5	101.6	20	40	
16	0 510 625 317	0 510 625 015	280	3000	3.65	47.5	105.0	20	40	
19	0 510 625 316	0 510 625 014	230	3000	3.8	47.5	110.0	20	40	
22.5	0 510 725 349	-	230	3000	4.4	61.1	127.4	20	40	
22.5	-	0 510 725 062	210	2500	4.0	55.1	115.4	20	40	

# Dimensions

## Standard range

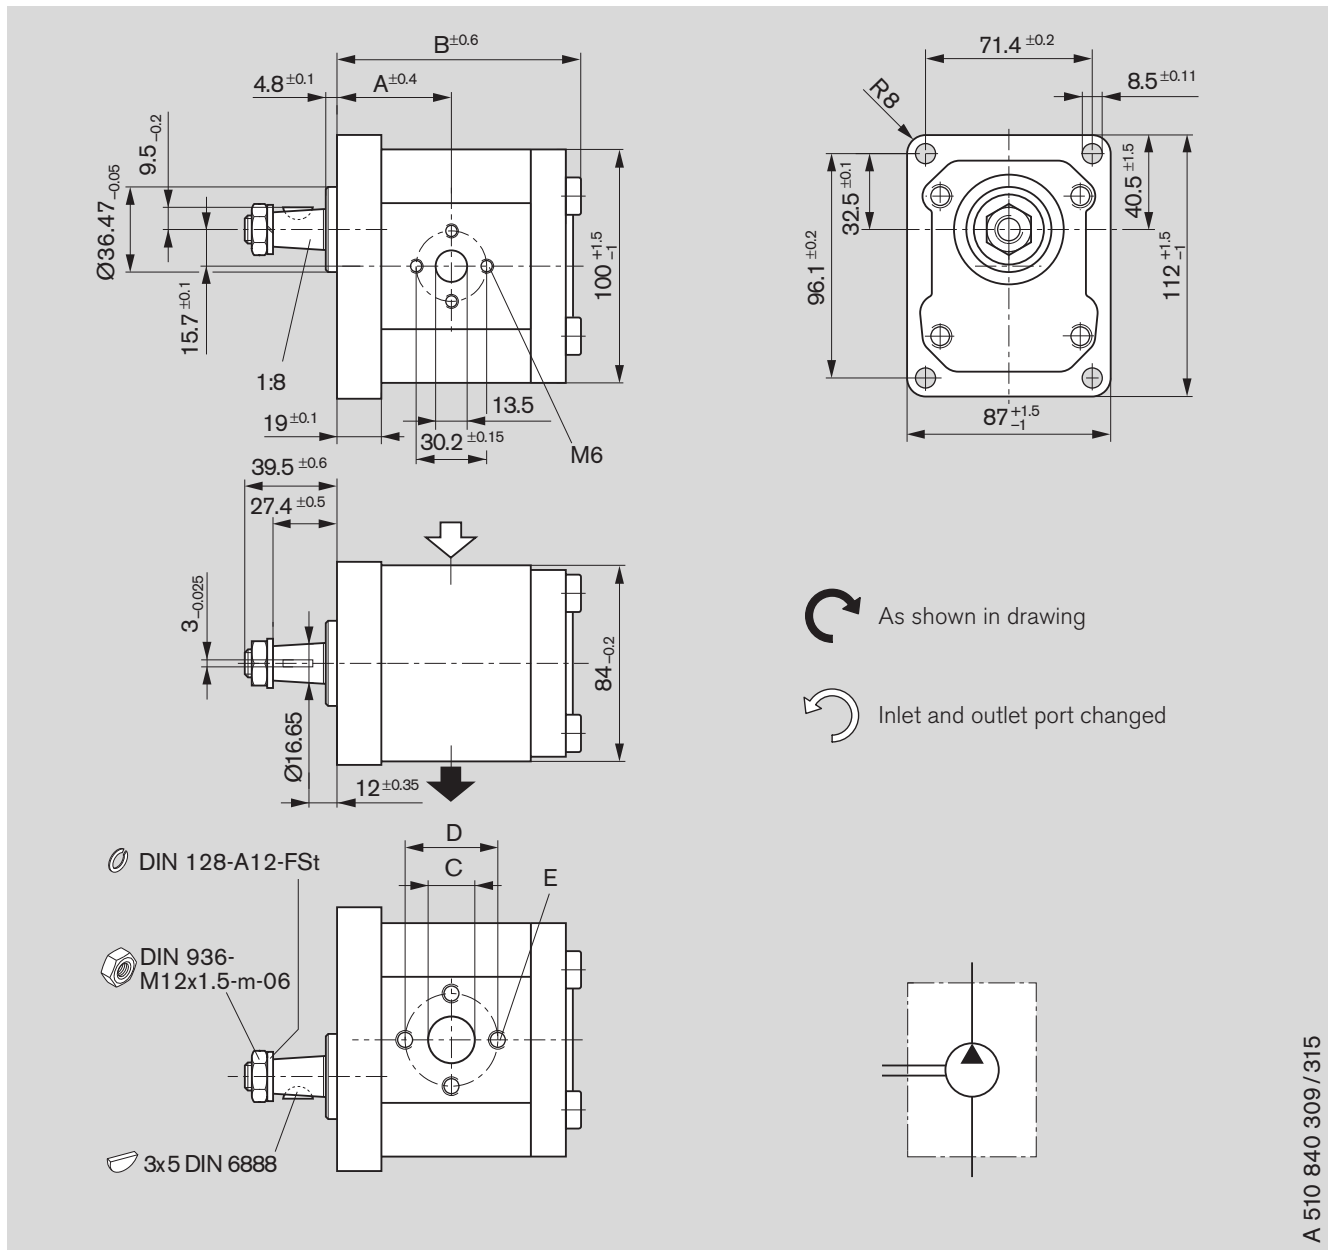



A 510 840 309 / 315

### Ordering code

AZPF - 12 -     H O 30 K B


AZPF - 22 -     H O 30 K B\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	 L	 R				A	B	C	D	E
4	0 510 225 317	0 510 225 022	280	4000	3.1	41.4	84.1	13.5	30.2	M6
5.5	0 510 325 320	0 510 325 025	280	4000	3.2	42.6	86.6	13.5	30.2	depth 13
8	0 510 425 334	0 510 425 043	280	4000	3.3	44.7	92.5	13.5	30.2	
11	0 510 525 374	0 510 525 074	280	3500	3.4	48.5	97.5	13.5	30.2	M8
14	0 510 525 375	0 510 525 075	280	3000	3.6	49.0	102.5	13.5	30.2	depth 13
16	0 510 625 381	0 510 625 075	280	3000	3.6	49.0	105.9	13.5	30.2	
19	0 510 625 386*	0 510 625 076*	280	3500	4.1	59.9	121.1	20.0	39.7	
22.5	0 510 725 410*	0 510 725 112*	250	3500	4.2	62.6	126.5	20.0	39.7	
25	0 510 725 411*	0 510 725 113*	225	3000	4.4	64.7	132.5	20.0	39.7	
28	0 510 725 412*	0 510 725 114*	200	3000	4.5	67.1	137.3	20.0	39.7	



# Dimensions

## Standard range

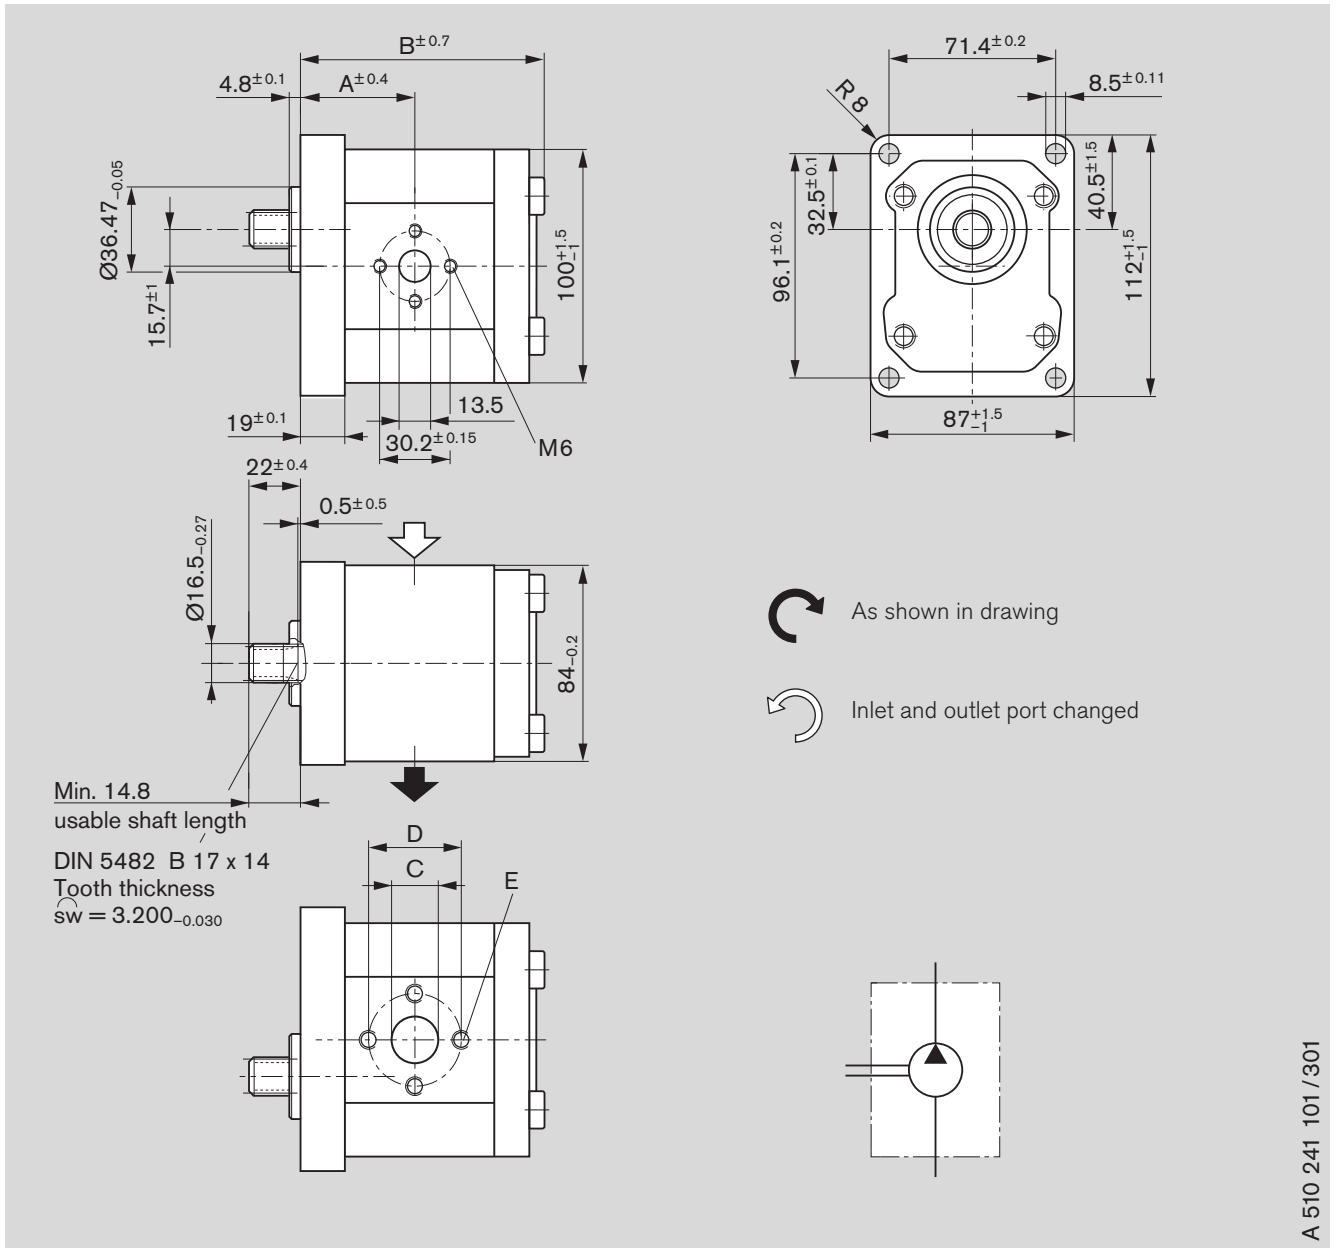

### Ordering code

AZPF - 10 -     F O 30 M B


AZPF - 10 -     F O 30 P B\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	L	R				A	B	C	D	E
8	0 510 425 315	0 510 425 021	280	4000	3.3	44.7	93.1	13.5	30.2	M6, depth 13
11	0 510 525 323	0 510 525 024	280	3500	3.4	48.5	98.1	20.0	39.7	M8, depth 13
11	0 510 525 331*	-	210	3500	3.3	48.5	98.1	20.0	39.7	
14	-	0 510 525 034*	210	3000	3.4	49.0	103.1	20.0	39.7	
16	0 510 625 327*	0 510 625 039*	210	3000	3.5	49.0	106.5	20.0	39.7	
19	-	0 510 625 049*	210	3000	3.7	49.0	111.5	20.0	39.7	
19	0 510 625 332*	-	210	3000	4.0	59.9	123.5	20.0	39.7	
22.5	0 510 725 348*	0 510 725 076*	210	3000	4.2	62.6	127.8	20.0	39.7	

A 510 241 101 / 301

# Dimensions

## Standard range

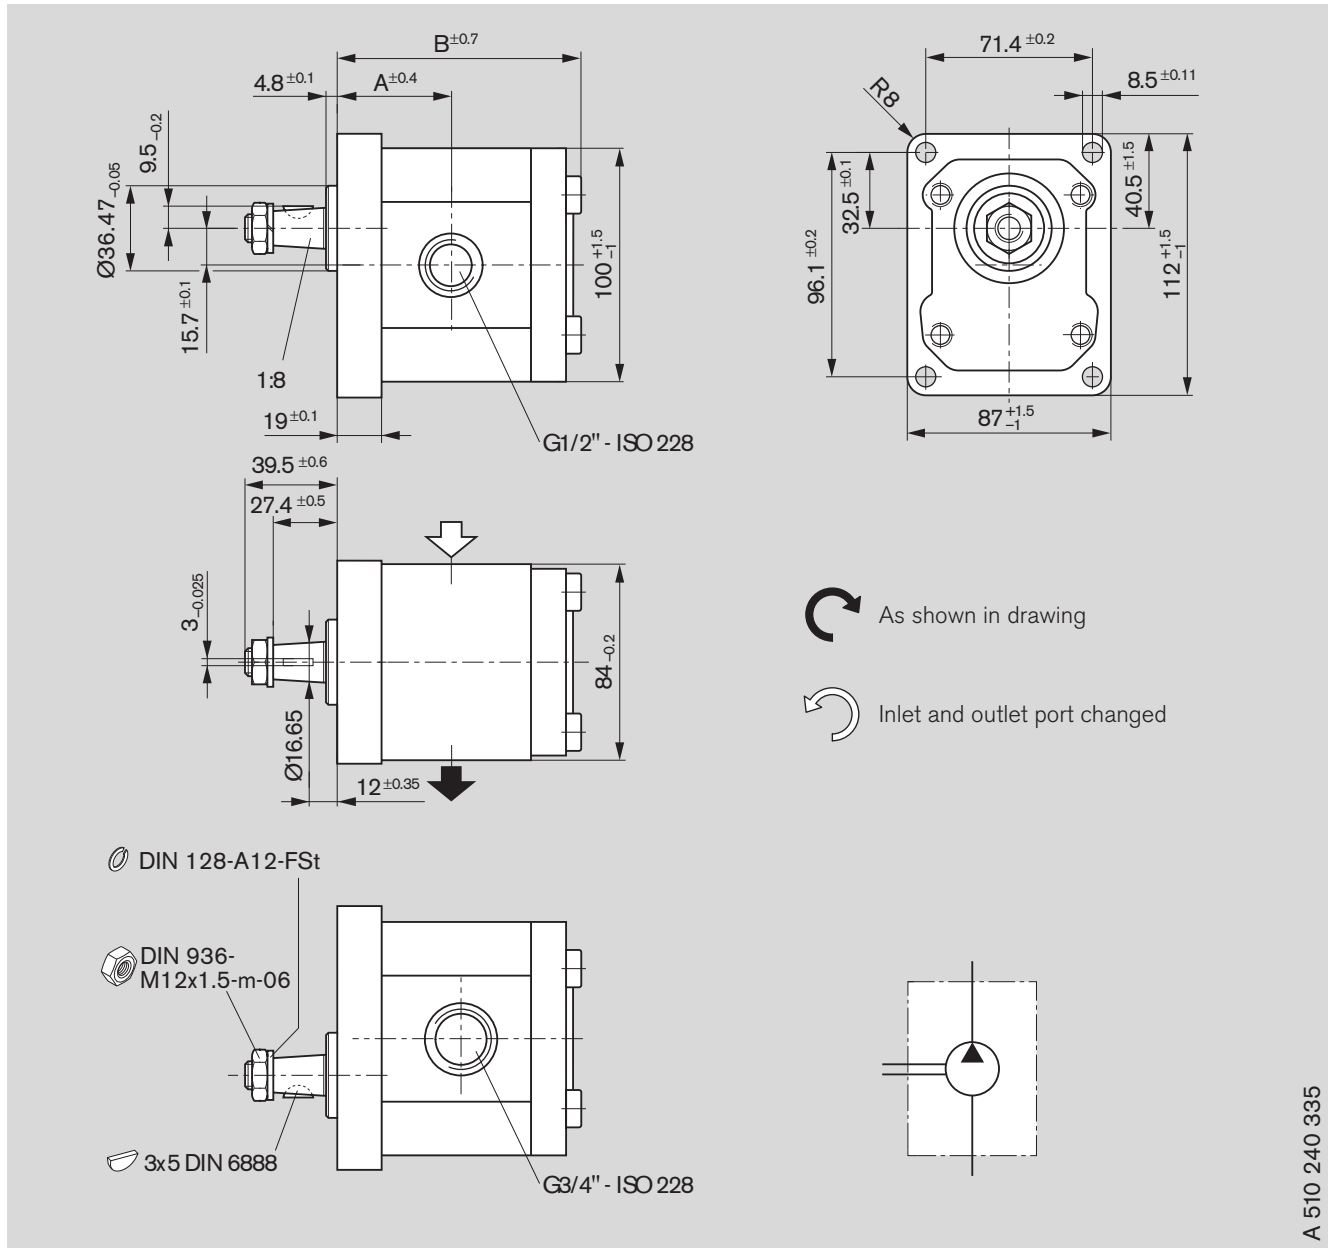


### Ordering code

AZPF - 10 -     H O 01 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]		
	L	R				A	B	G
4	-	-	-	-	-	-	-	ISO 228
5.5	-	<b>0 510 325 018</b>	280	4000	3.1	42.6	89.0	depth 16
8	-	<b>0 510 425 027</b>	280	4000	3.15	44.7	93.1	
11	-	<b>0 510 525 039</b>	280	3500	3.3	48.5	98.1	
14	-	<b>0 510 525 040</b>	280	3000	3.4	49.0	103.1	
16	-	<b>0 510 625 047</b>	280	3000	3.58	49.0	106.5	
19	-	<b>0 510 625 052</b>	230	3000	3.6	49.0	111.5	
22.5	-	<b>0 510 725 084</b>	210	2500	3.8	56.6	116.4	

# Dimensions

## Standard range

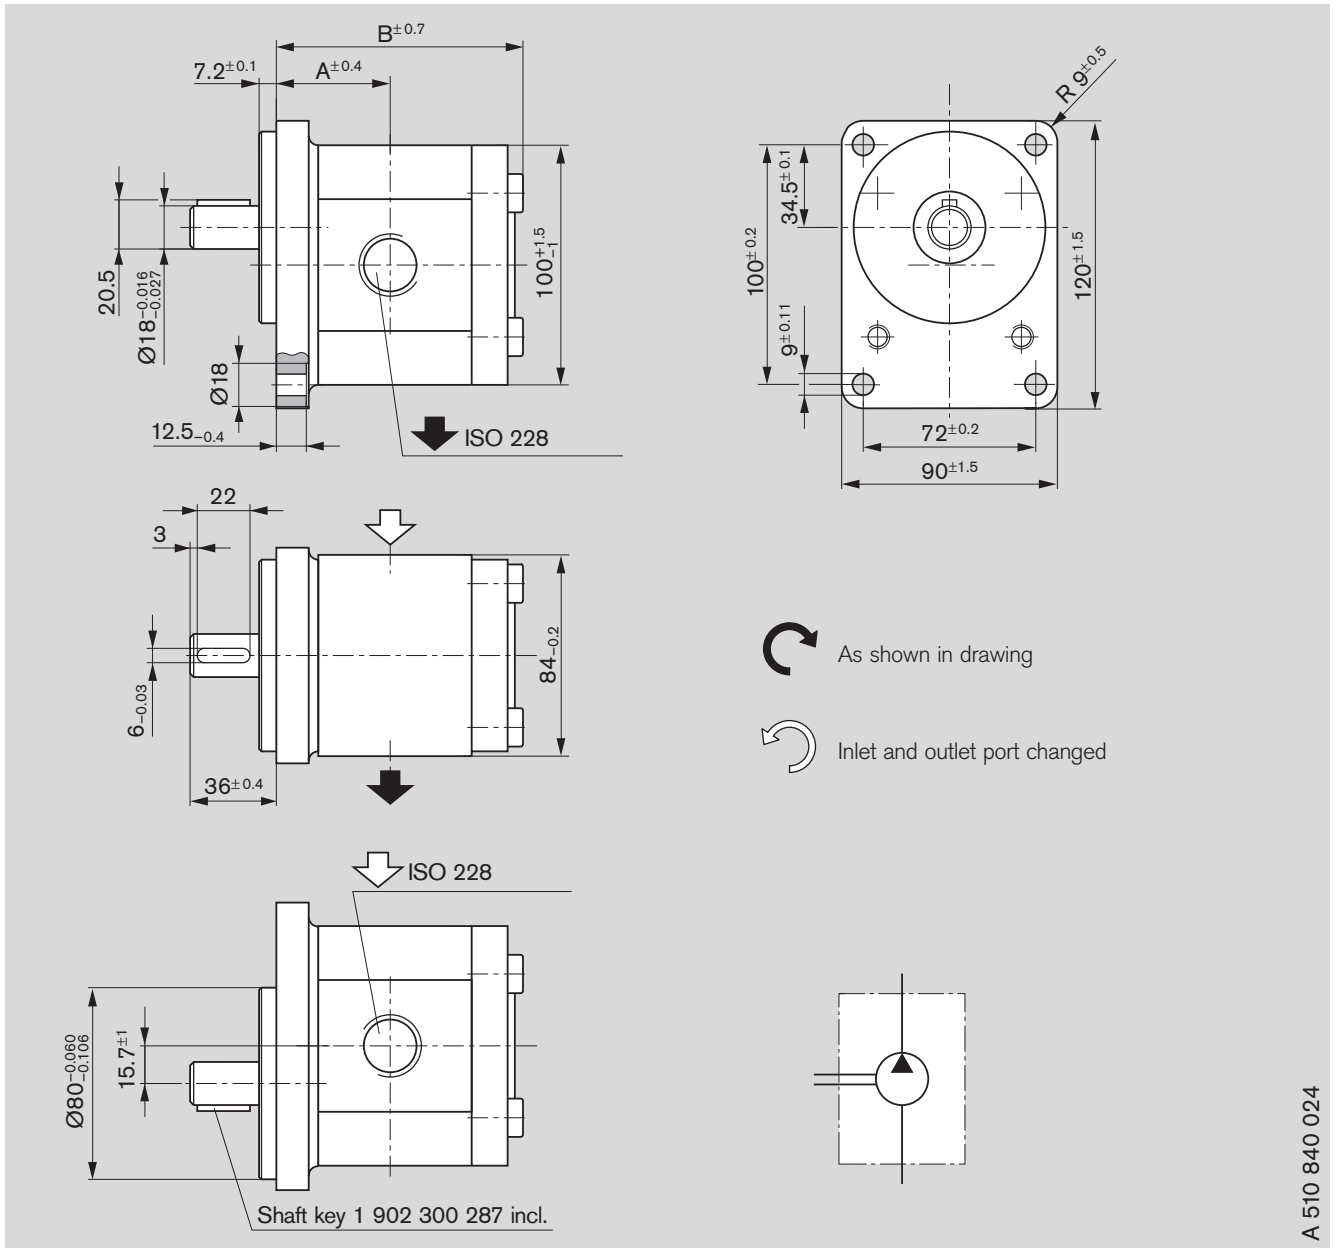

A 510 840 024

### Ordering code


AZPF - 11 -     A B 01 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]		
	L	R				A	B	G
4	0 510 225 318	0 510 225 023	280	4000	3.3	39.9	84.3	G 1/2 - ISO 228
5.5	0 510 325 321	0 510 325 026	280	4000	3.3	41.1	85.2	depth 16
8	0 510 425 335	0 510 425 044	280	4000	3.4	43.2	89.3	G 3/4 - ISO 228 depth 16
11	0 510 525 376	0 510 525 076	280	3500	3.6	45.6	94.3	
14	-	-	-	-	-	-	-	
16	0 510 625 382	0 510 625 077	250	3000	3.8	49.9	102.7	
19	-	-	-	-	-	-	-	
22.5	0 510 725 418	0 510 725 120	180	2500	4.1	55.1	114.7	



# Dimensions

## Standard range

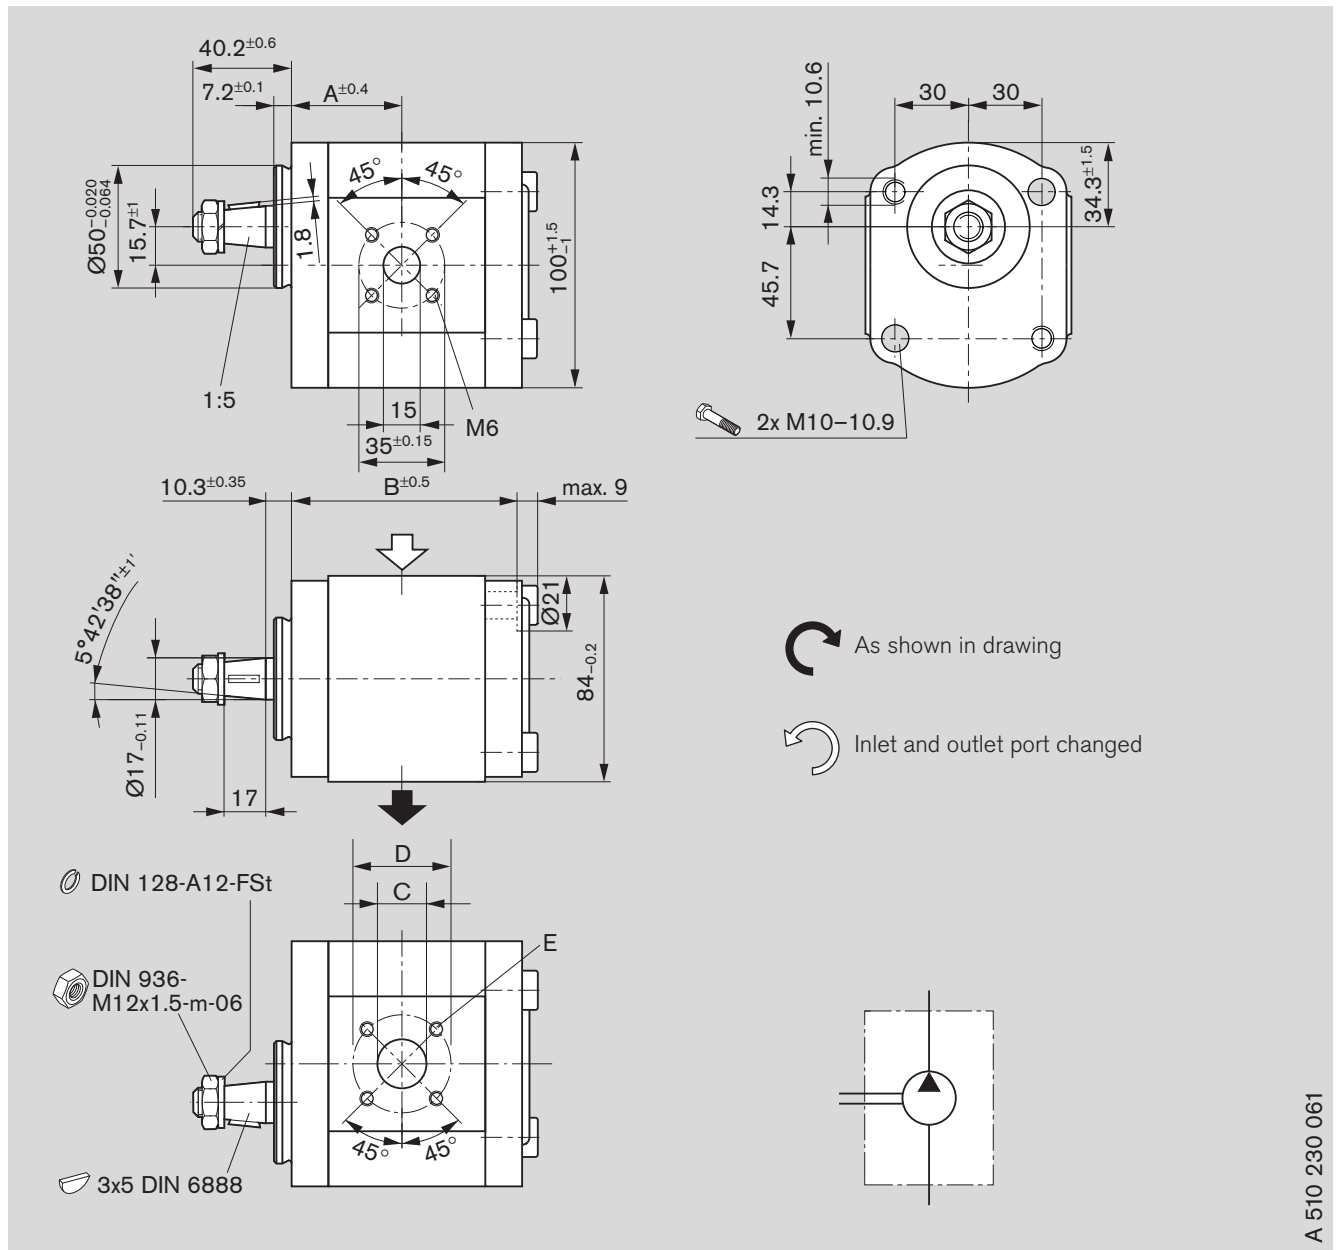

### Ordering code

AZPF - 10 -     C N 20 M B


AZPF - 11 -     C N 20 M B\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	L	R				A	B	C	D	E
4	0 510 215 306	0 510 215 006	280	4000	2.6	37.4	73.7	15	40	M6
5.5	0 510 315 304	0 510 315 004	280	4000	2.6	38.6	76.2	15	40	depth 13
8	0 510 415 313	0 510 415 005	280	4000	2.8	40.7	80.3	20	40	
11	0 510 515 310	0 510 515 004	280	3500	2.9	44.5	85.3	20	40	
14	-	0 510 515 015*	280	3000	3.0	45.0	90.3	20	40	
16	0 510 615 314	0 510 615 006	280	3000	3.1	45.0	93.7	20	40	
19	0 510 615 341	-	230	3000	3.2	45.0	98.7	20	40	

A 510 230 061



# Dimensions
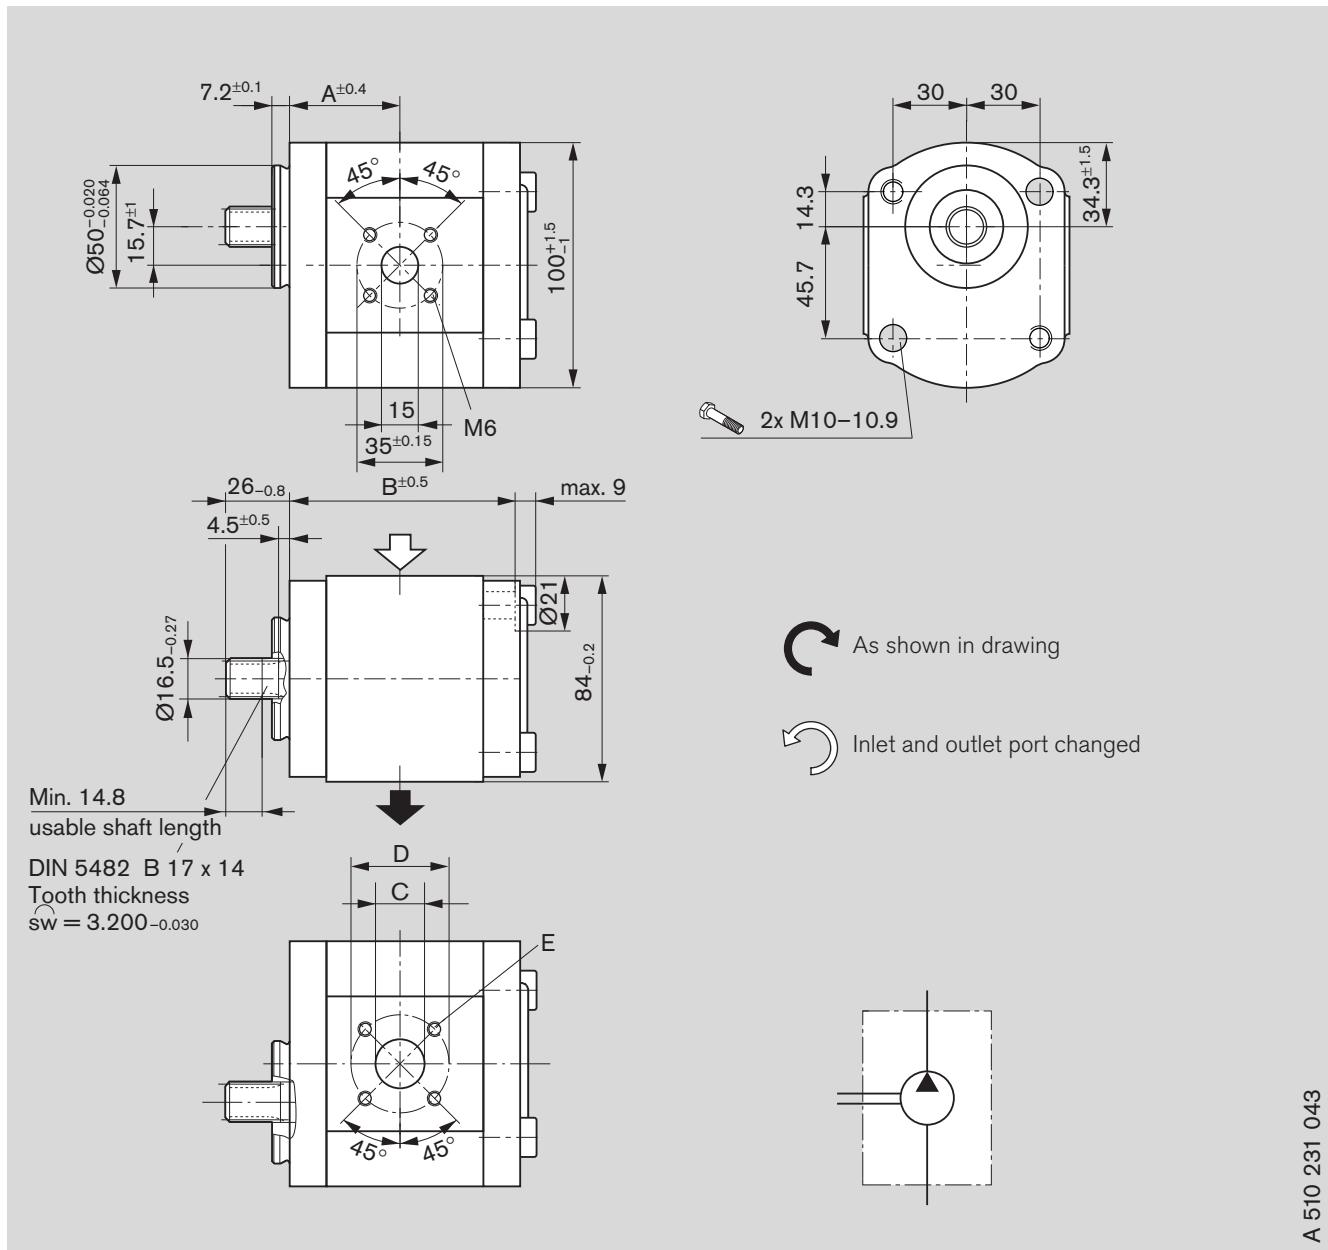
## Standard range




### Ordering code

AZPF - 10 -     F N 20 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	 L	 R				A	B	C	D	E
5.5	-	<b>0 510 315 007</b>	280	4000	2.55	38.6	76.2	15	40	M6 depth 13
8	-	-	-	-	-	-	-	-	-	
11	-	<b>0 510 515 011</b>	280	3500	2.85	44.5	85.3	20	40	
14	-	-	-	-	-	-	-	-	-	
16	-	-	-	-	-	-	-	-	-	
19	-	<b>0 510 615 009</b>	230	3000	3.2	45.0	98.7	20	40	
19	-	-	-	-	-	-	-	-	-	
22.5	-	-	-	-	-	-	-	-	-	

# Dimensions

## Standard range

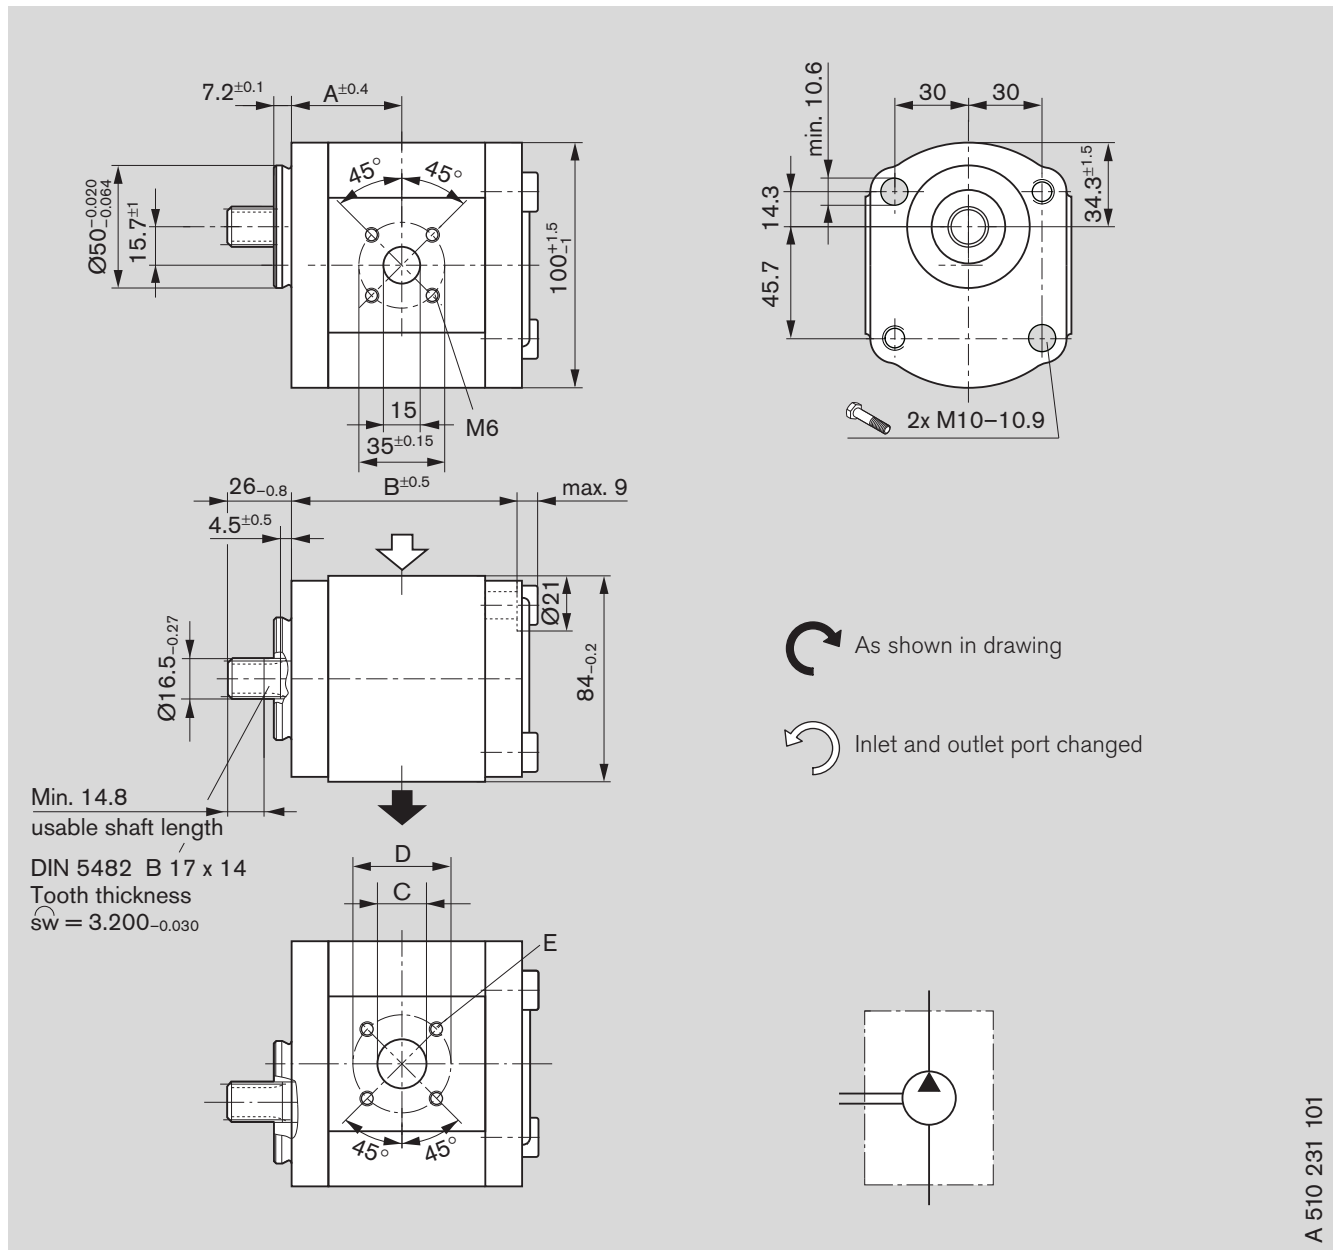

A 510 231 101


### Ordering code

AZPF - 10 -     F P 20 P B  
 AZPF - 12 -     F P 20 P B\*  
 AZPF - 12 -     F P 20 P B S xxxx\*\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	L	R				A	B	C	D	E
5.5	-	-	-	-	-	-	-	-	-	M6
8	0 510 415 328	-	210	4000	2.7	40.7	80.3	20	15	depth 13
11	0 510 515 337*	0 510 515 012	280	3500	2.8	44.5	85.3	20	15	
14	0 510 515 338	0 510 515 013	210	3000	3.0	45.0	90.3	20	15	
16	-	-	-	-	-	-	-	-	-	
19	-	-	-	-	-	-	-	-	-	
22.5	0 510 715 320**	0 510 715 008**	210	3000	3.6	58.6	116.1	20	15	

# Dimensions

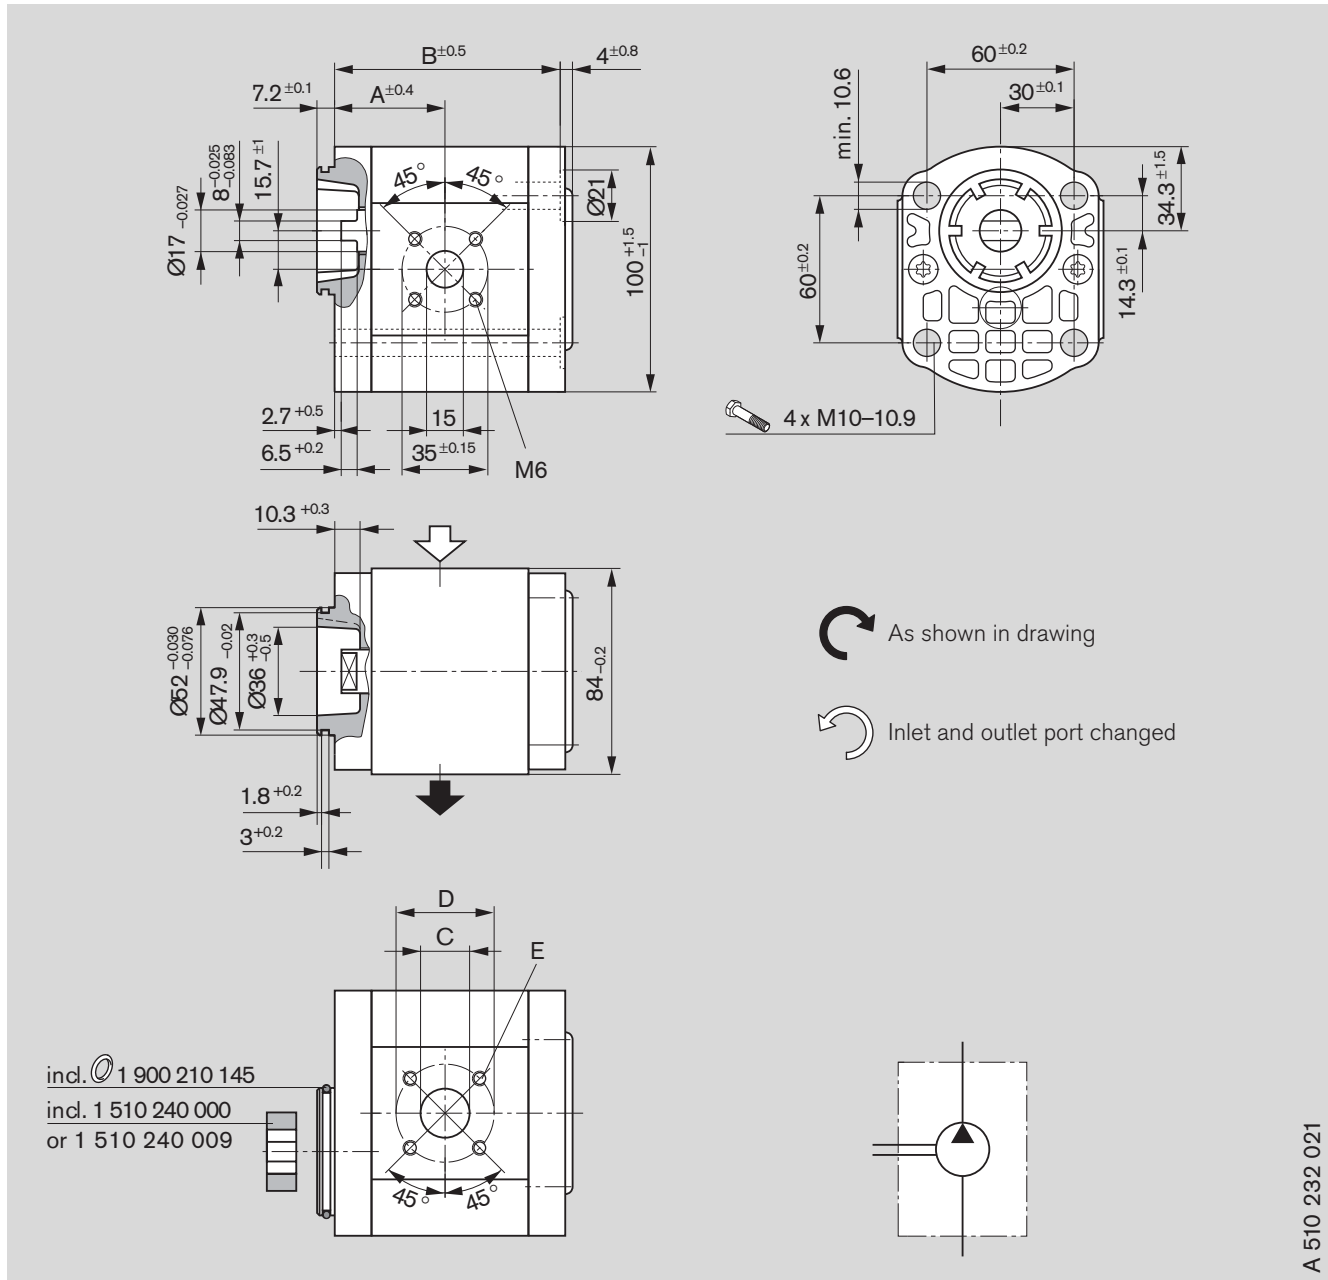

## Standard range



A 510 232 021

### Ordering code


AZPF - XX -     N T 20 M B

Displacement [cm³/rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	 L	 R				A	B	C	D	E
4	0 510 215 307	0 510 215 007	280	4000	2.5	37.4	73.7	15	40	M6 depth 13
5.5	0 510 315 305	0 510 315 005	280	4000	2.5	38.6	76.2	15	40	
8	0 510 415 314	0 510 415 006	280	4000	2.5	40.7	80.3	20	40	
11	0 510 515 311	0 510 515 005	280	3500	2.6	44.5	85.3	20	40	
14	0 510 515 340	0 510 515 019	280	3000	2.38	45.0	90.3	20	40	
16	0 510 615 315	0 510 615 007	230	3000	3.0	45.0	93.7	20	40	
19	0 510 615 321	0 510 615 008	190	3000	3.0	45.0	98.7	20	40	
22.5	0 510 715 307	0 510 715 004	160	2500	3.2	52.6	104.1	20	40	



# Dimensions

## Standard range

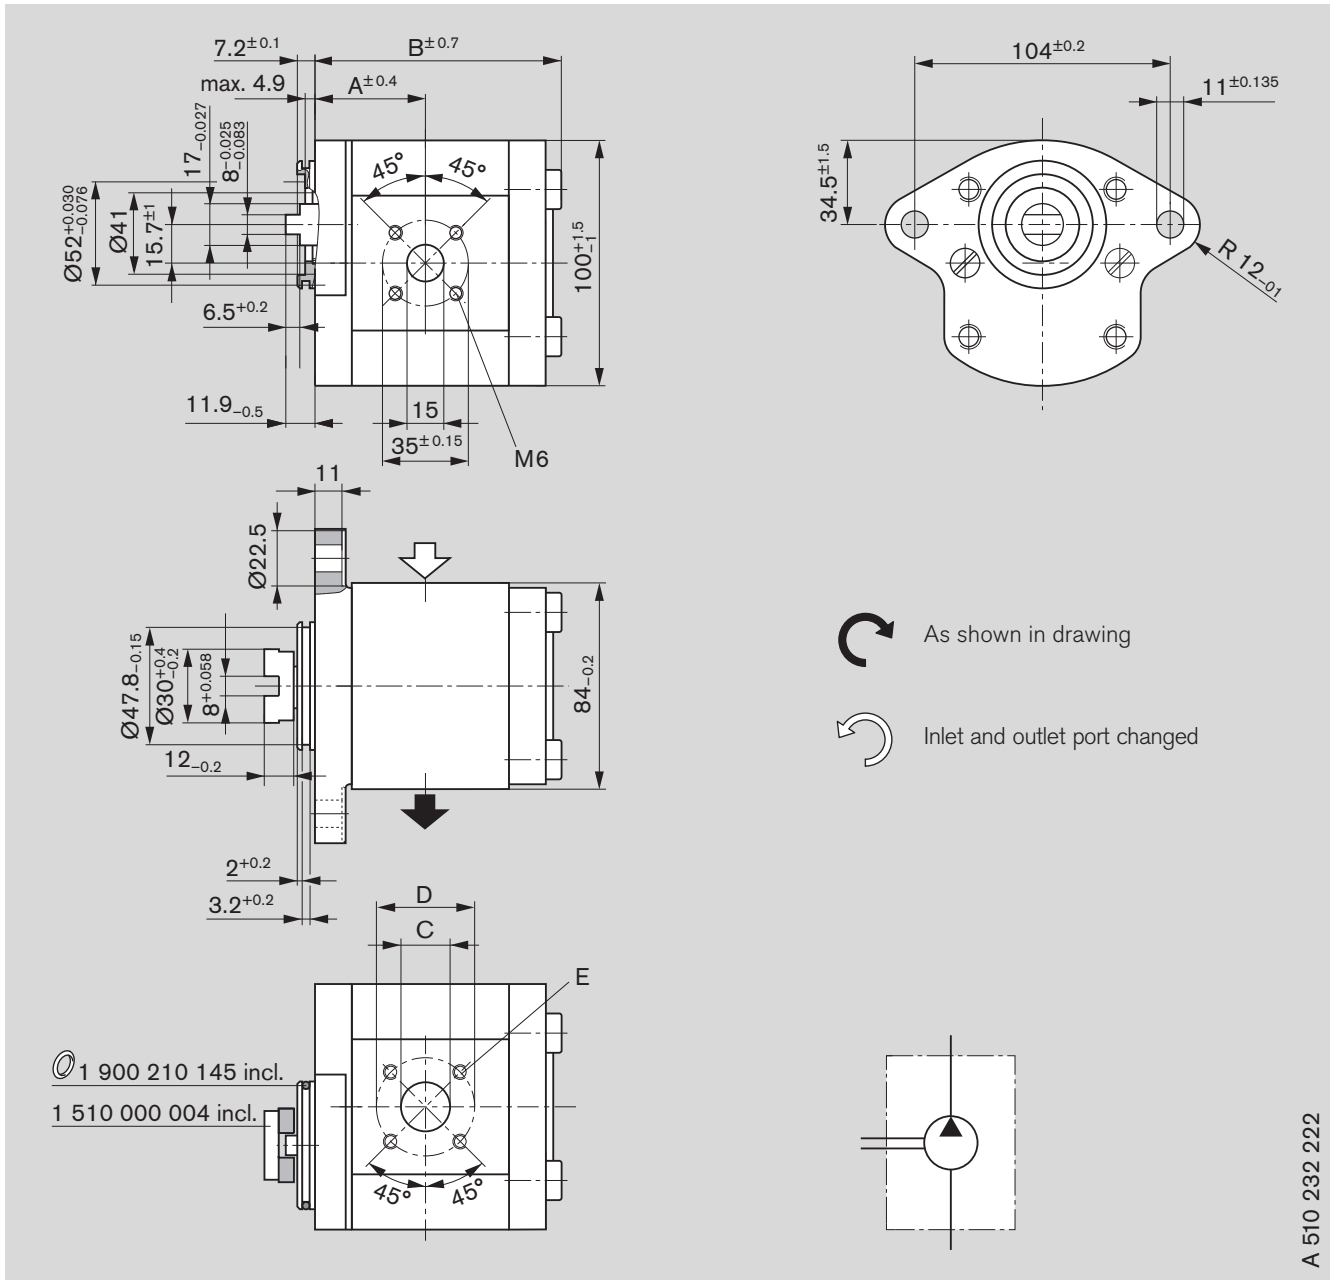

### Ordering code

AZPF - 10 -     N L 20 K B


AZPF - 11 -     N L 20 K B\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	L	R				A	B	C	D	E
4	-	<b>0 510 225 012</b>	280	4000	2.8	37.4	81.7	15	40	M6
5.5	<b>0 510 325 312</b>	<b>0 510 325 012</b>	280	4000	2.82	38.6	84.4	15	40	depth 13
8	<b>0 510 425 331*</b>	<b>0 510 425 019</b>	280	4000	3.0	40.7	88.5	20	40	
11	-	<b>0 510 525 025</b>	280	3500	3.1	44.5	93.3	20	40	
16	<b>0 510 625 358*</b>	<b>0 510 625 027*</b>	230	3000	3.3	45.0	101.9	20	40	
19	<b>0 510 625 368</b>	<b>0 510 625 032</b>	190	3000	3.5	45.0	106.9	20	40	
22.5	-	<b>0 510 725 044*</b>	160	3000	4.0	58.6	122.5	20	40	

A 510 232 222

# Dimensions

## Standard range

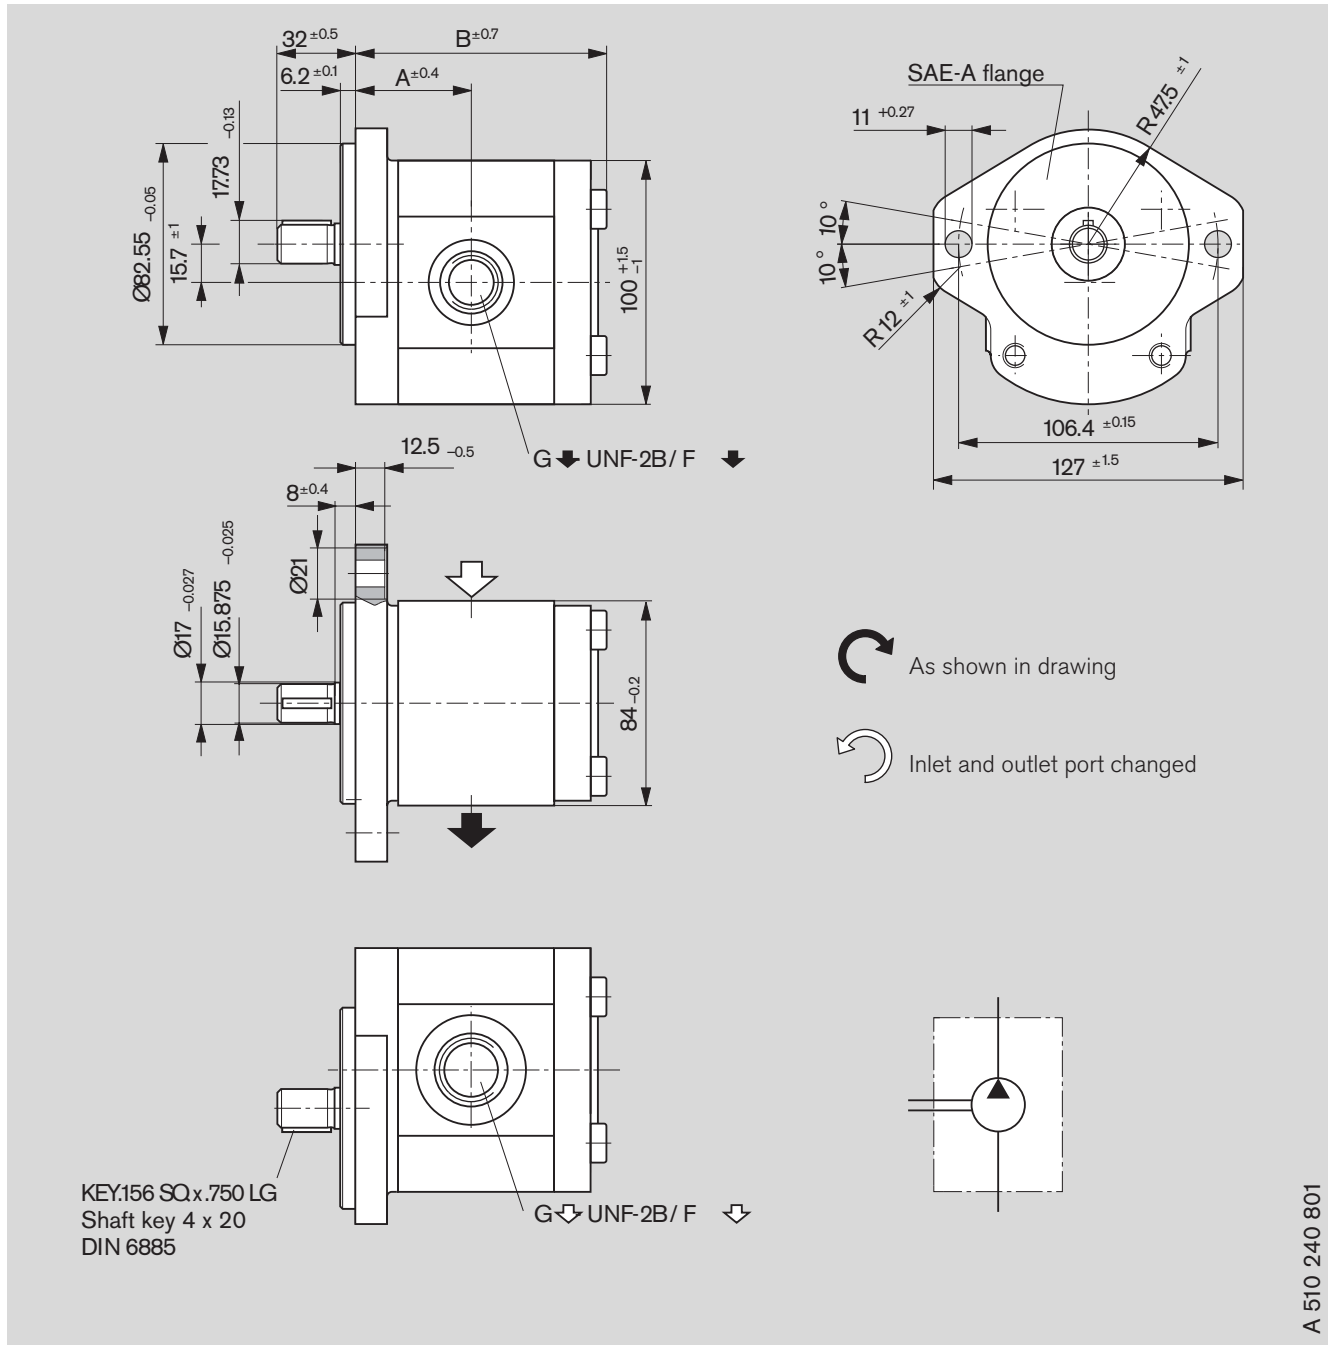

A 510 240 801


### Ordering code

AZPF - 10 -     Q R 12 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]					
	L	R				A	B	G	G	F	F
4	-	0 510 225 011	260	4000	3.3	39.9	85.0	9/16-18	9/16-18	13	13
5.5	-	0 510 325 011	260	4000	3.3	41.1	87.5	9/16-18	9/16-18	13	13
8	-	0 510 425 016	260	4000	3.4	43.2	91.6	7/8-14	7/8-14	16	16
11	-	0 510 525 015	260	3500	3.6	47.0	96.6	7/8-14	7/8-14	16	16
14	-	0 510 525 031	230	3000	3.65	47.5	101.6	11/16-12	7/8-14	19	16
16	-	0 510 625 021	200	3000	3.7	47.5	105.0	11/16-12	7/8-14	19	16
19	-	0 510 625 041	170	3500	3.9	47.5	110.0	11/16-12	7/8-14	19	16
22.5	-	0 510 725 059	140	2500	4.0	55.1	115.4	11/16-12	7/8-14	19	16

# Dimensions

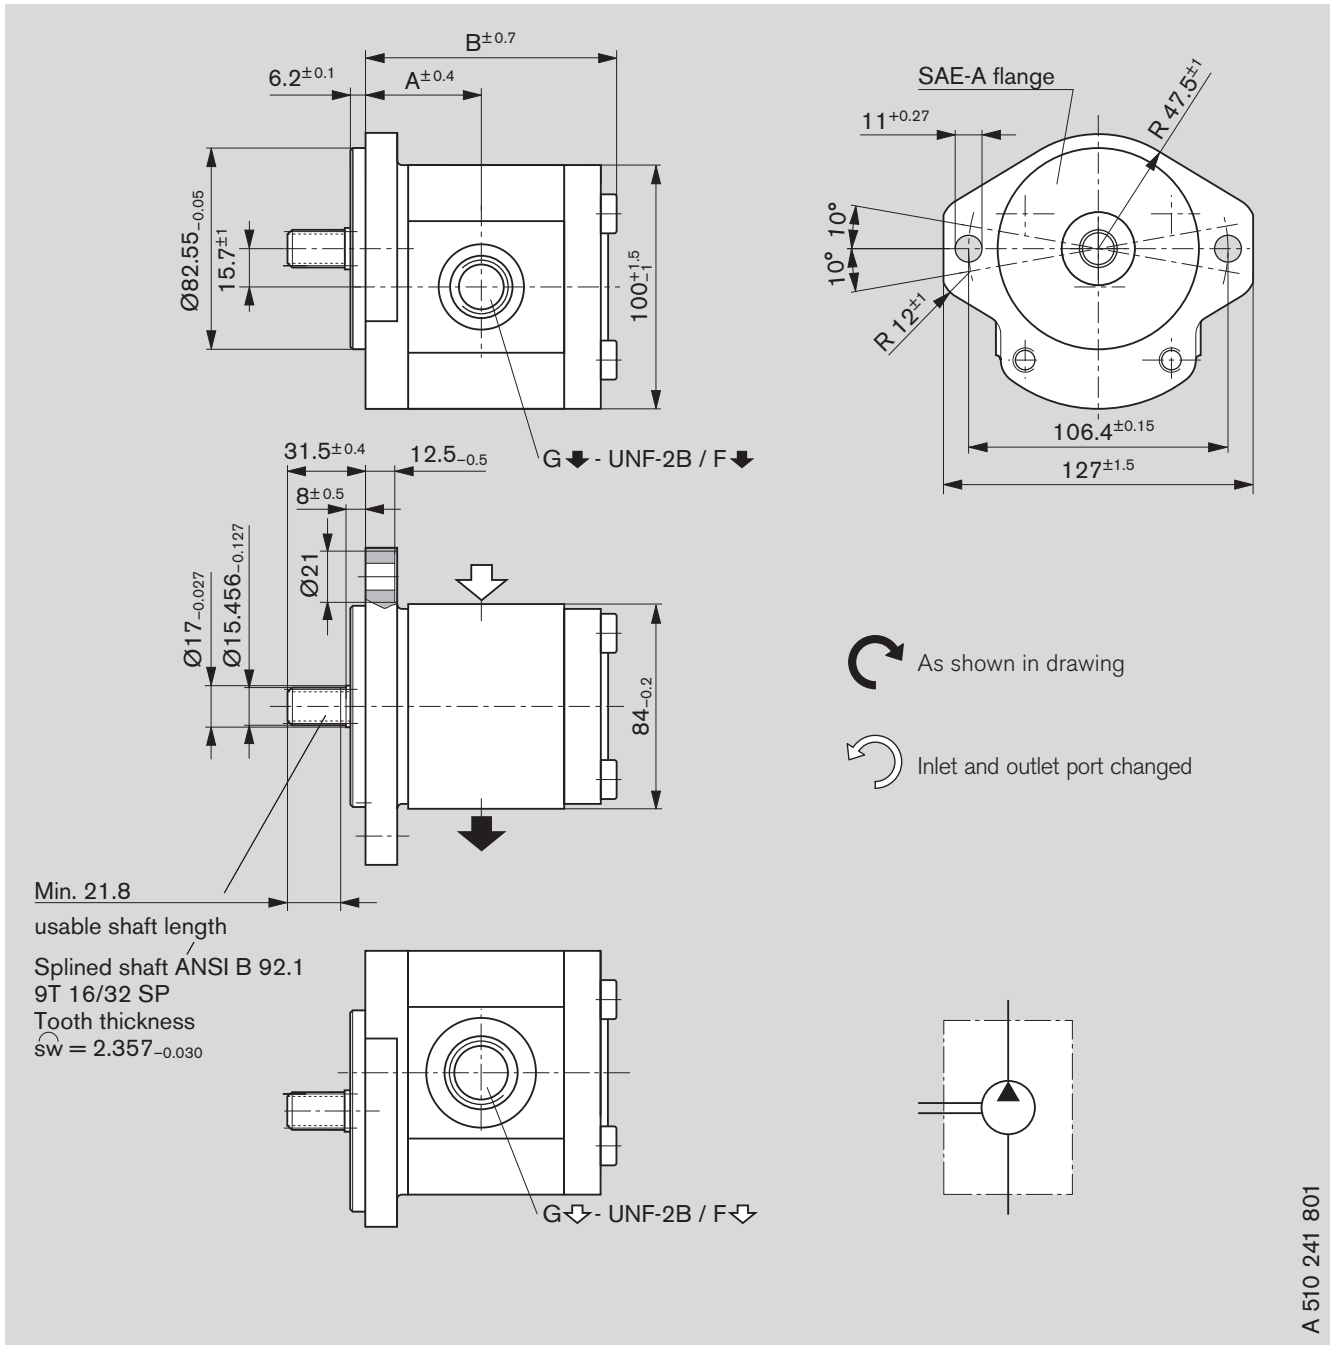

## Standard range



A 510 241 801


### Ordering code

AZPF - 10 -     R R 12 M B

Dis- place- ment [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]					
	 L	 R				A	B	G $\downarrow$	G $\leftarrow$	F $\downarrow$	F $\leftarrow$
4	-	<b>0 510 225 010</b>	280	4000	3.15	39.9	82.7	9/16-18	9/16-18	13	13
5.5	-	<b>0 510 325 010</b>	280	4000	3.2	41.4	85.2	9/16-18	9/16-18	13	13
8	-	<b>0 510 425 015</b>	280	4000	3.3	43.2	91.1	7/8-14	7/8-14	16	16
11	<b>0 510 525 315</b>	<b>0 510 525 014</b>	280	3500	3.4	47.0	96.1	11/16-12	7/8-14	19	16
14	-	<b>0 510 525 041</b>	280	3000	3.5	47.5	101.1	11/16-12	7/8-14	19	16
16	-	<b>0 510 625 020</b>	280	3000	3.75	47.5	104.5	11/16-12	7/8-14	19	16
19	<b>0 510 625 346</b>	<b>0 510 625 048</b>	230	3000	3.9	47.5	109.5	11/16-12	7/8-14	19	16
22.5	-	<b>0 510 725 063</b>	210	2500	4.0	55.1	114.9	11/16-12	7/8-14	19	16

# Dimensions

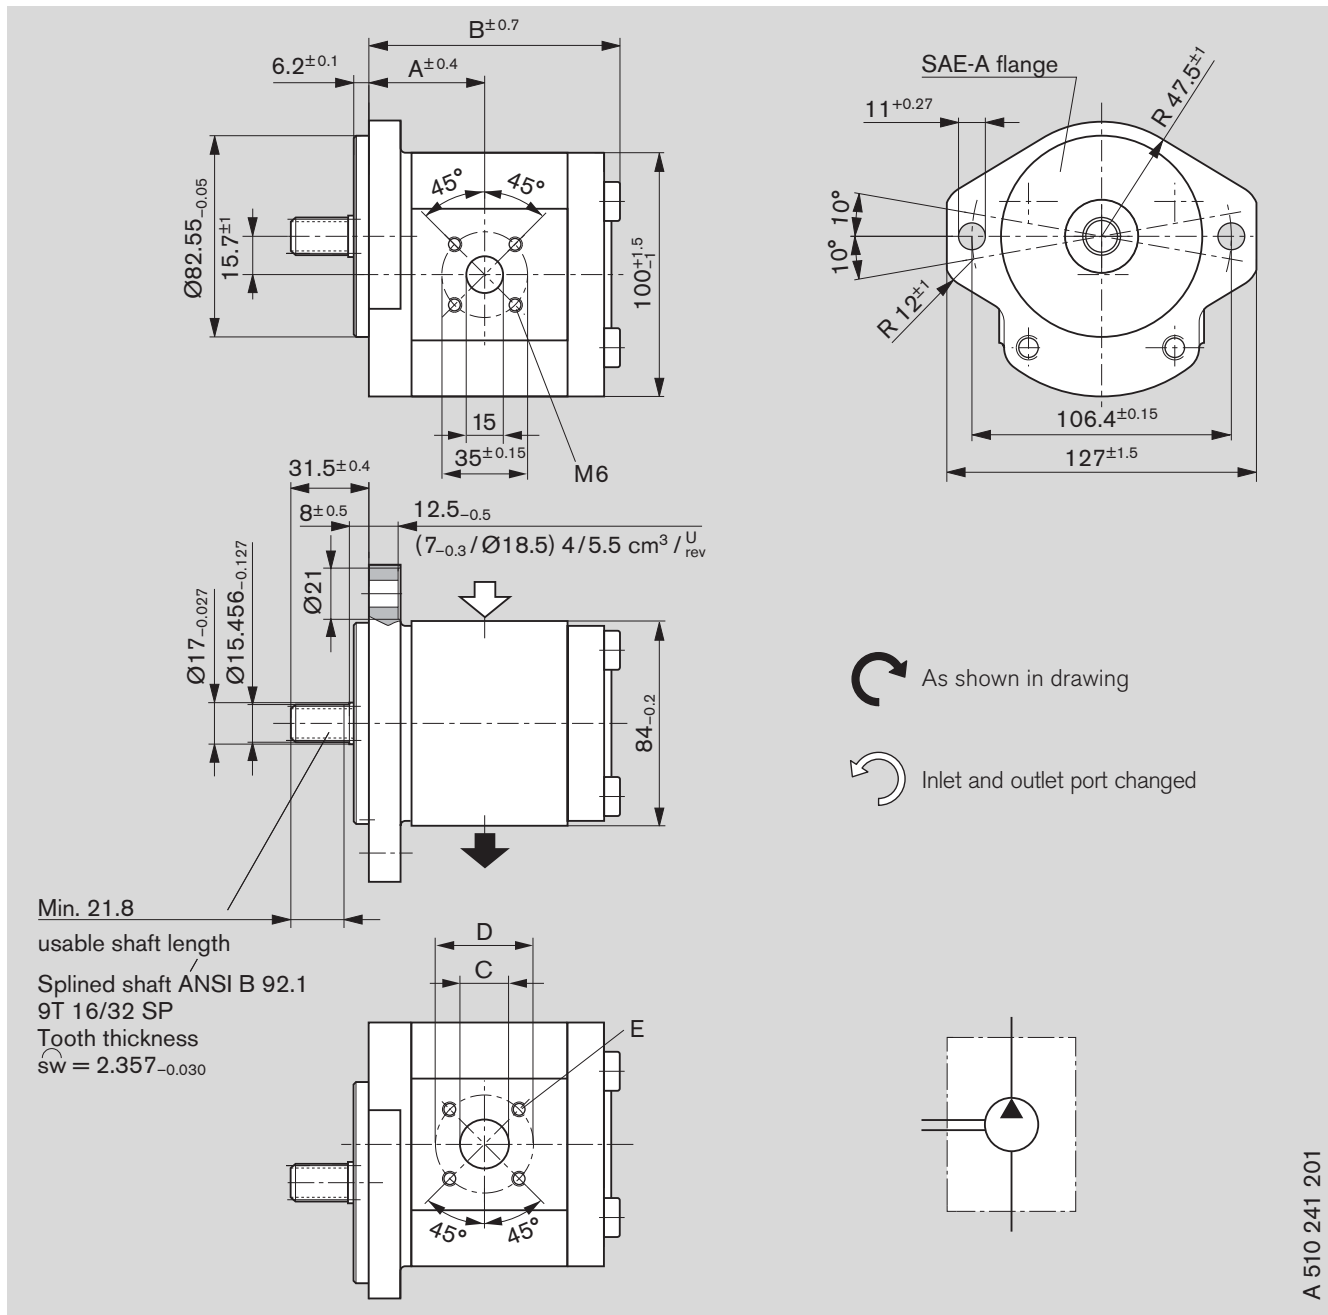

## Standard range



### Ordering code


AZPF - 10 -     R R 20 M B

AZPF - 11 -     R R 20 K B\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	 L	 R				A	B	C	D	E
4	0 510 225 314	0 510 225 013	280	4000	3.15	39.9	85.0	15	40	M6
5.5	0 510 325 313	0 510 325 013	280	4000	3.2	41.1	87.5	15	40	depth 13
8	0 510 425 314	0 510 425 020	280	4000	3.3	43.2	91.6	20	40	
11	0 510 525 324*	0 510 525 019	280	3500	3.5	47.0	96.6	20	40	
14	0 510 525 325	0 510 525 020	280	3000	3.6	47.5	101.6	20	40	
16	0 510 625 329	0 510 625 028	280	3000	3.8	47.5	105.0	20	40	
19	0 510 625 330*	0 510 625 029*	230	3000	3.9	47.5	110.0	20	40	
22.5	0 510 725 361	0 510 725 077*	210	2500	4.1	55.1	115.4	20	40	



# Dimensions
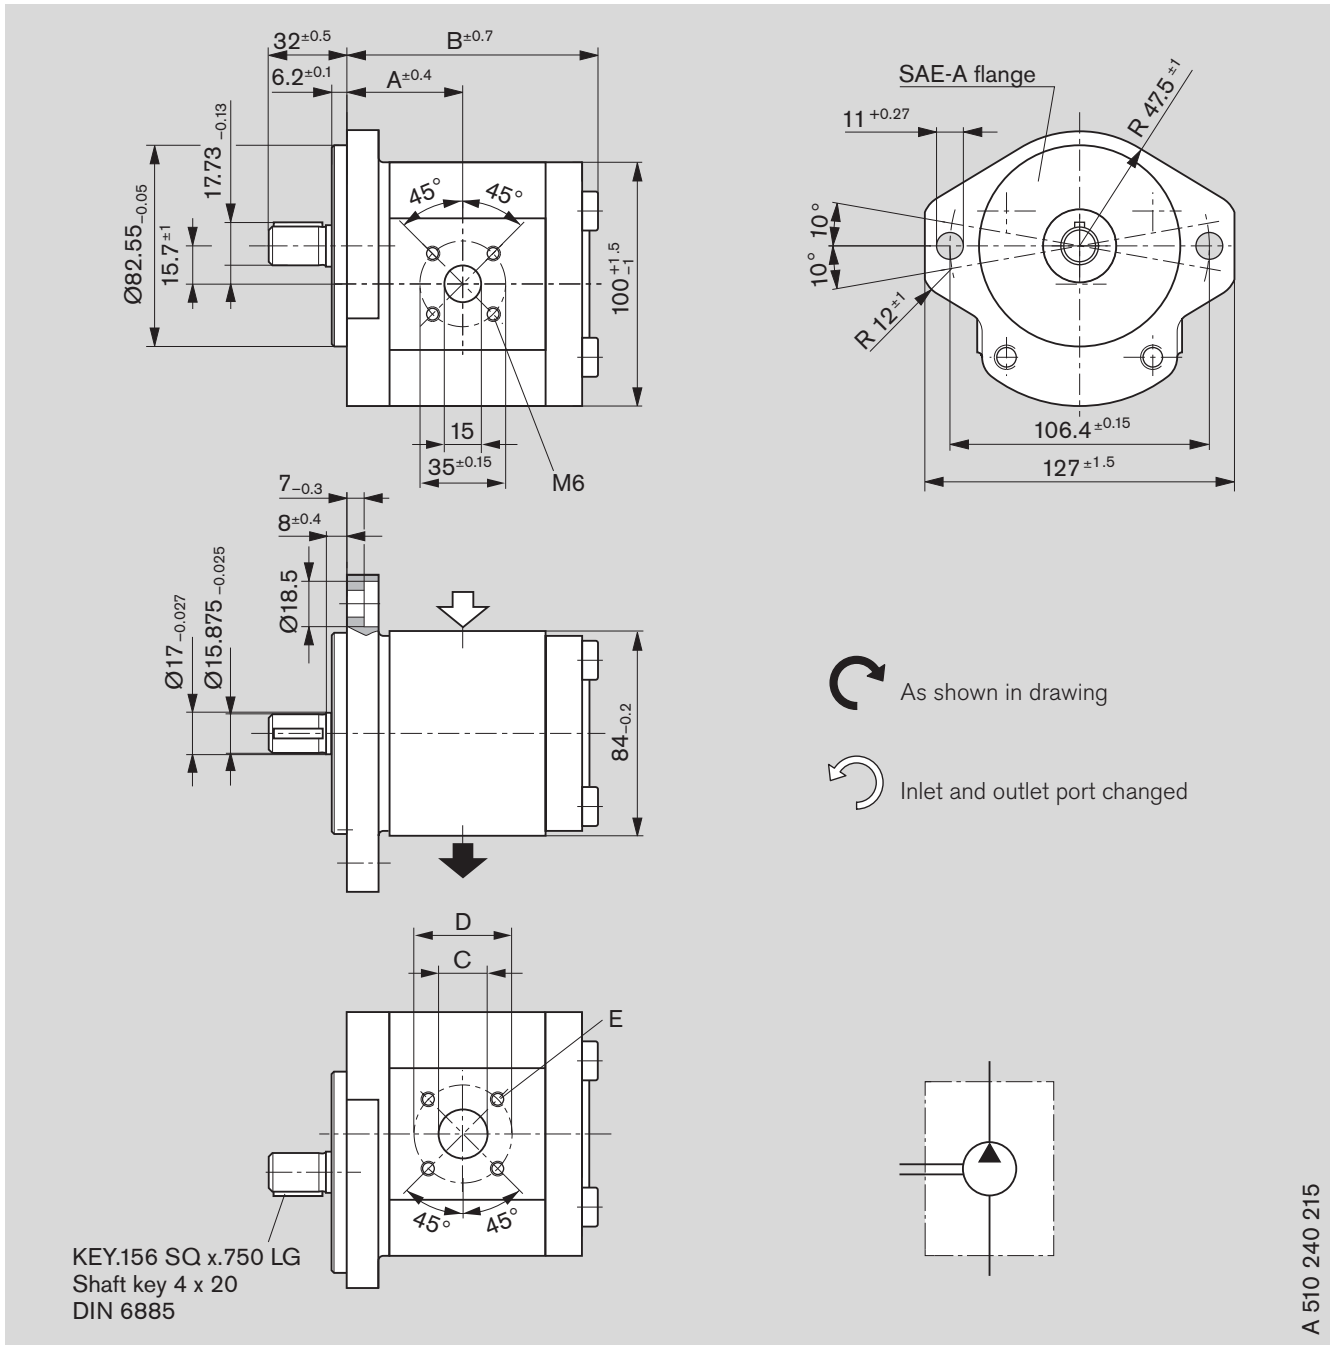
## Standard range




### Ordering code

AZPF - 10 -     Q R 20 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	 L	 R				A	B	C	D	E
4	-	0 510 225 014	280	4000	3.2	39.9	84.5	15	40	M6 depth 13
5.5	-	0 510 325 016	280	4000	3.3	41.1	87.0	15	40	
8	-	0 510 425 025	280	4000	3.3	43.2	91.1	20	40	
11	-	0 510 525 033	280	3500	3.5	47.0	96.1	20	40	
16	-	0 510 625 042	200	3000	3.8	47.5	104.5	20	40	
19	-	0 510 625 043	170	3000	3.9	47.5	109.5	20	40	
22.5	0 510 725 396	0 510 725 060	140	2500	3.9	55.1	114.9	20	40	

# Dimensions

## Standard range

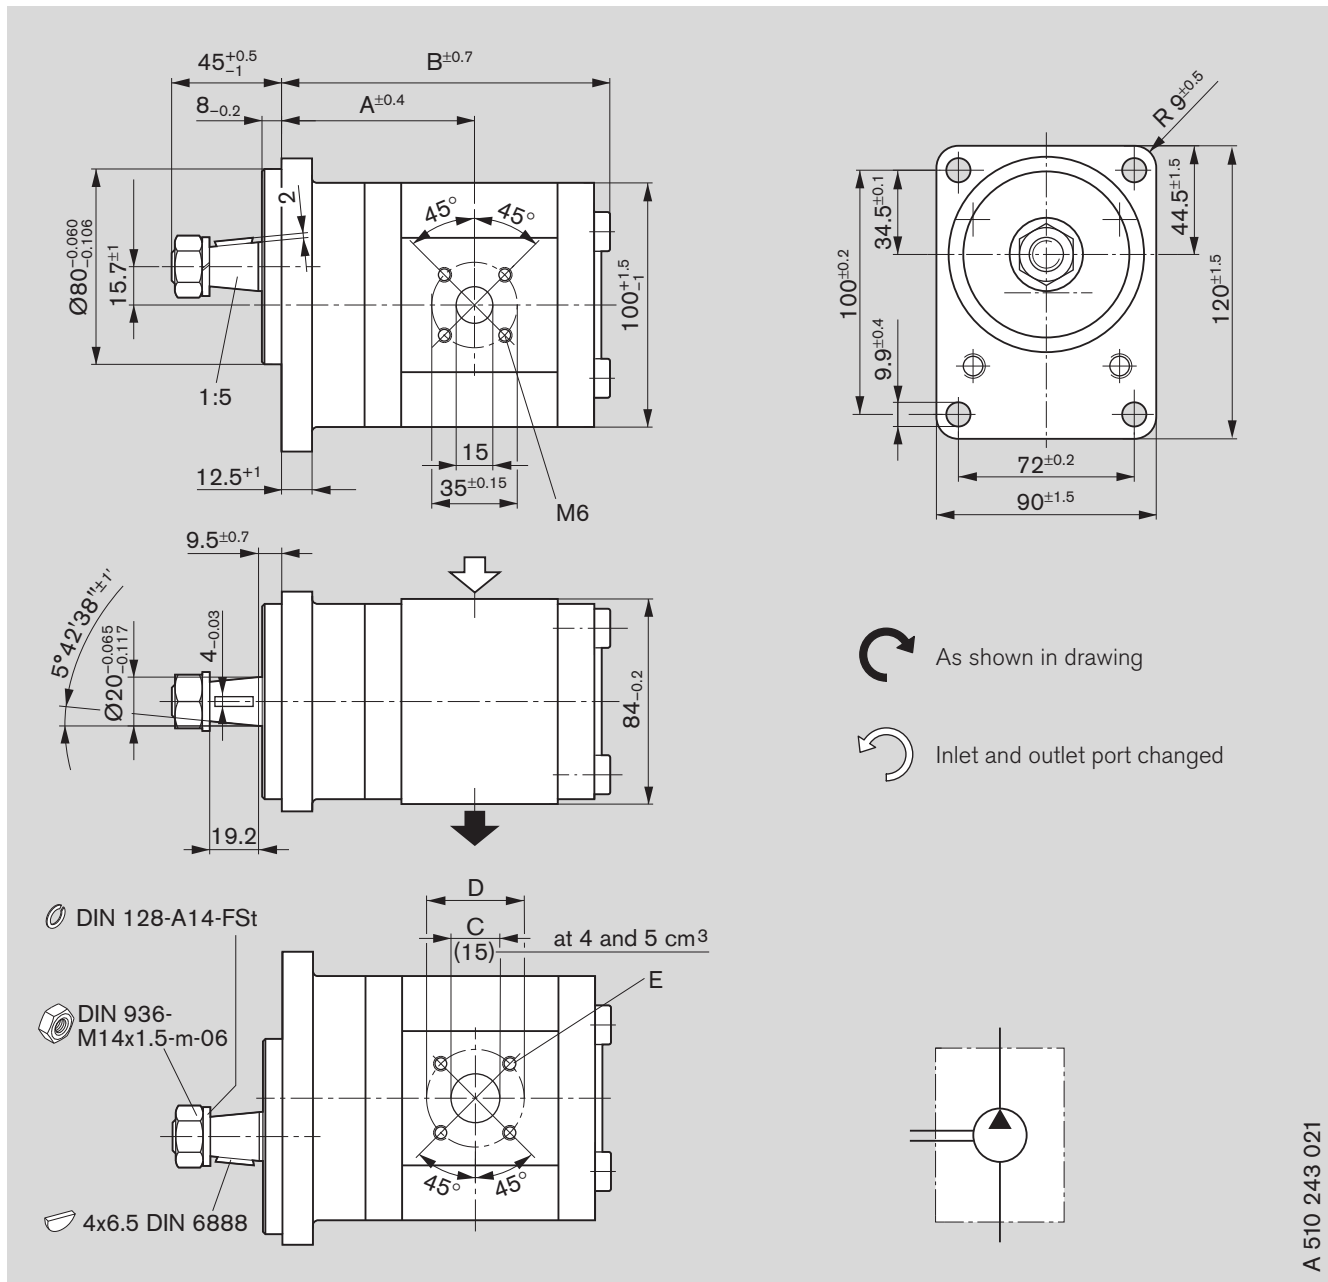

### Ordering code


AZPF - 11 -     S A 20 M B

AZPF - 11 -     S A 20 K B\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	L	R				A	B	C	D	E
4	0 510 245 300	0 510 245 001	280	4000	3.1	71.1	114.2	15	40	M6
5.5	0 510 345 300	0 510 345 001	280	4000	3.1	72.3	116.7	15	40	depth 13
8	0 510 445 300	0 510 445 001*	280	4000	3.3	74.4	120.8	20	40	
11	0 510 545 300	0 510 545 001	280	3500	3.5	78.2	125.8	20	40	
14			280	3000		78.7	130.8	20	40	
16	0 510 645 300	0 510 645 004	230	3000	3.6	78.7	134.2	20	40	
19		0 510 645 002	190	3000	3.9	78.7	139.2	20	40	
22.5			160	2500		92.3	156.6	20	40	

# Dimensions

## Standard range

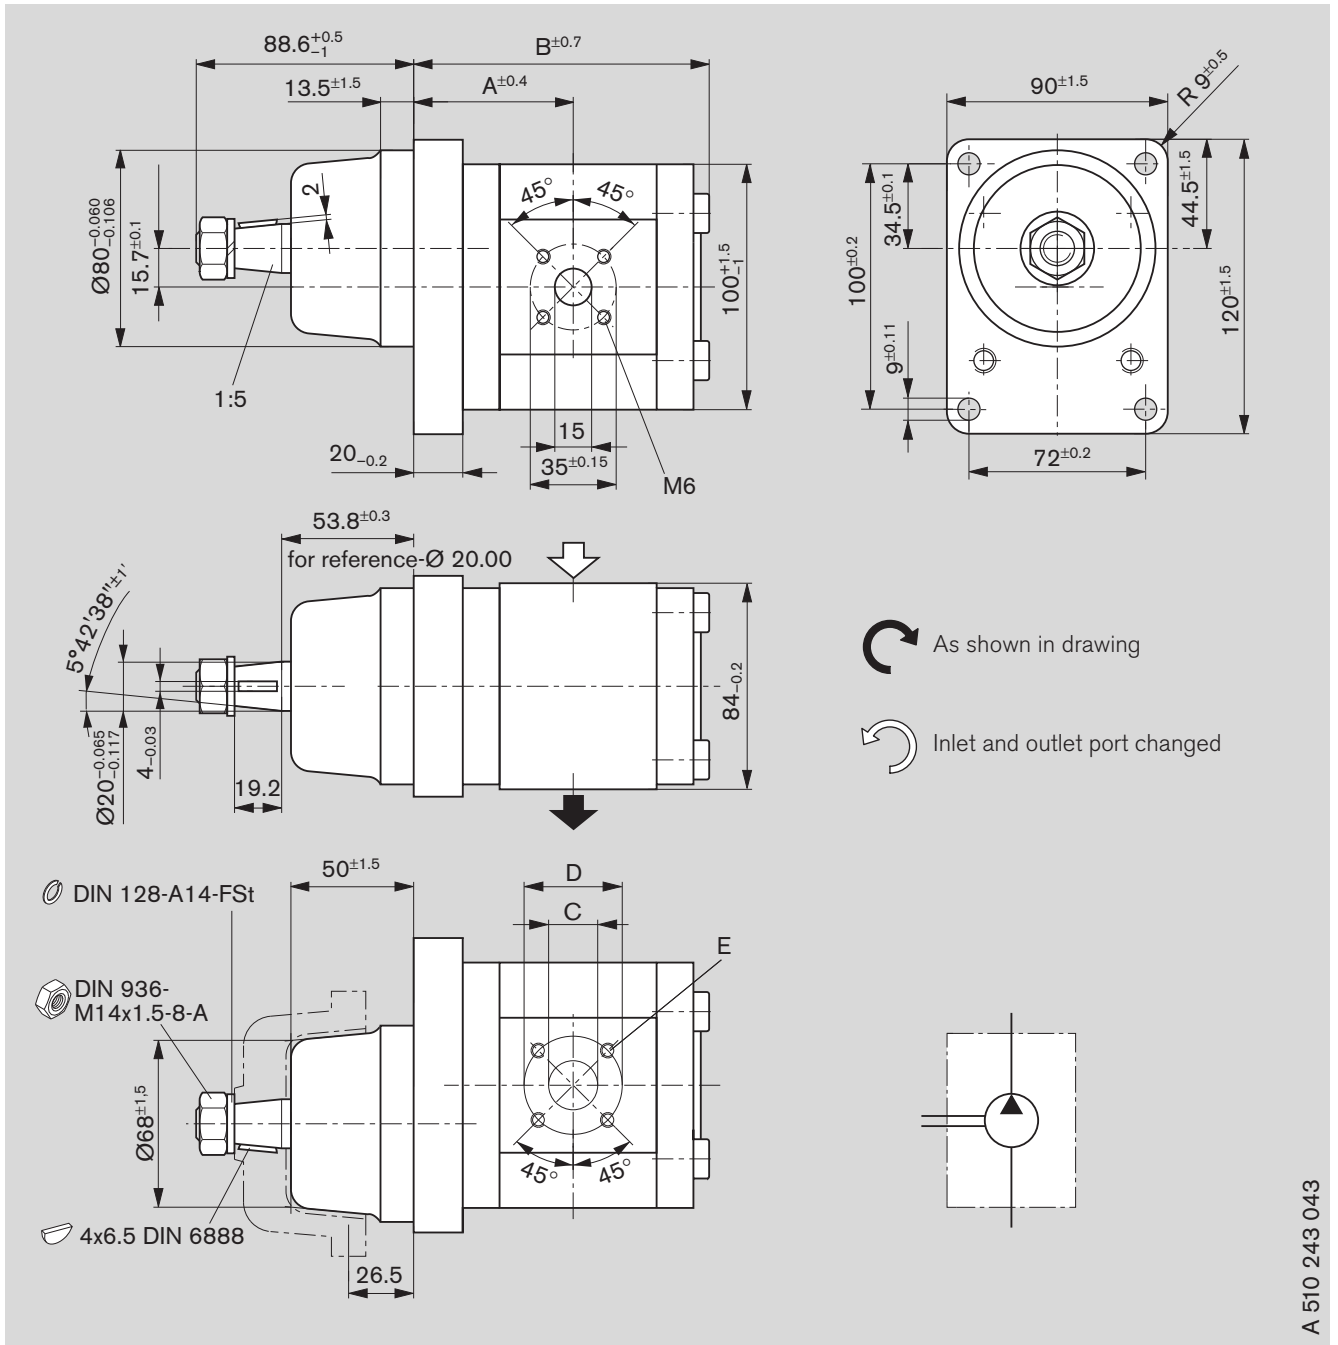

A 510 243 043


### Ordering code

AZPF - 10 -     S G 20 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
						A	B	C	D	E
11	-	0 510 545 003	280	3500	3.8	64.5	113.8	20	40	M6
14		0 510 545 302	280	3000	4.0	65.0	118.8	20	40	depth 13
16	-	0 510 645 005	230	3000	4.1	65.0	122.0	20	40	
19	-	0 510 645 003	230	3000	4.3	65.0	127.0	20	40	

# Dimensions

## Standard range

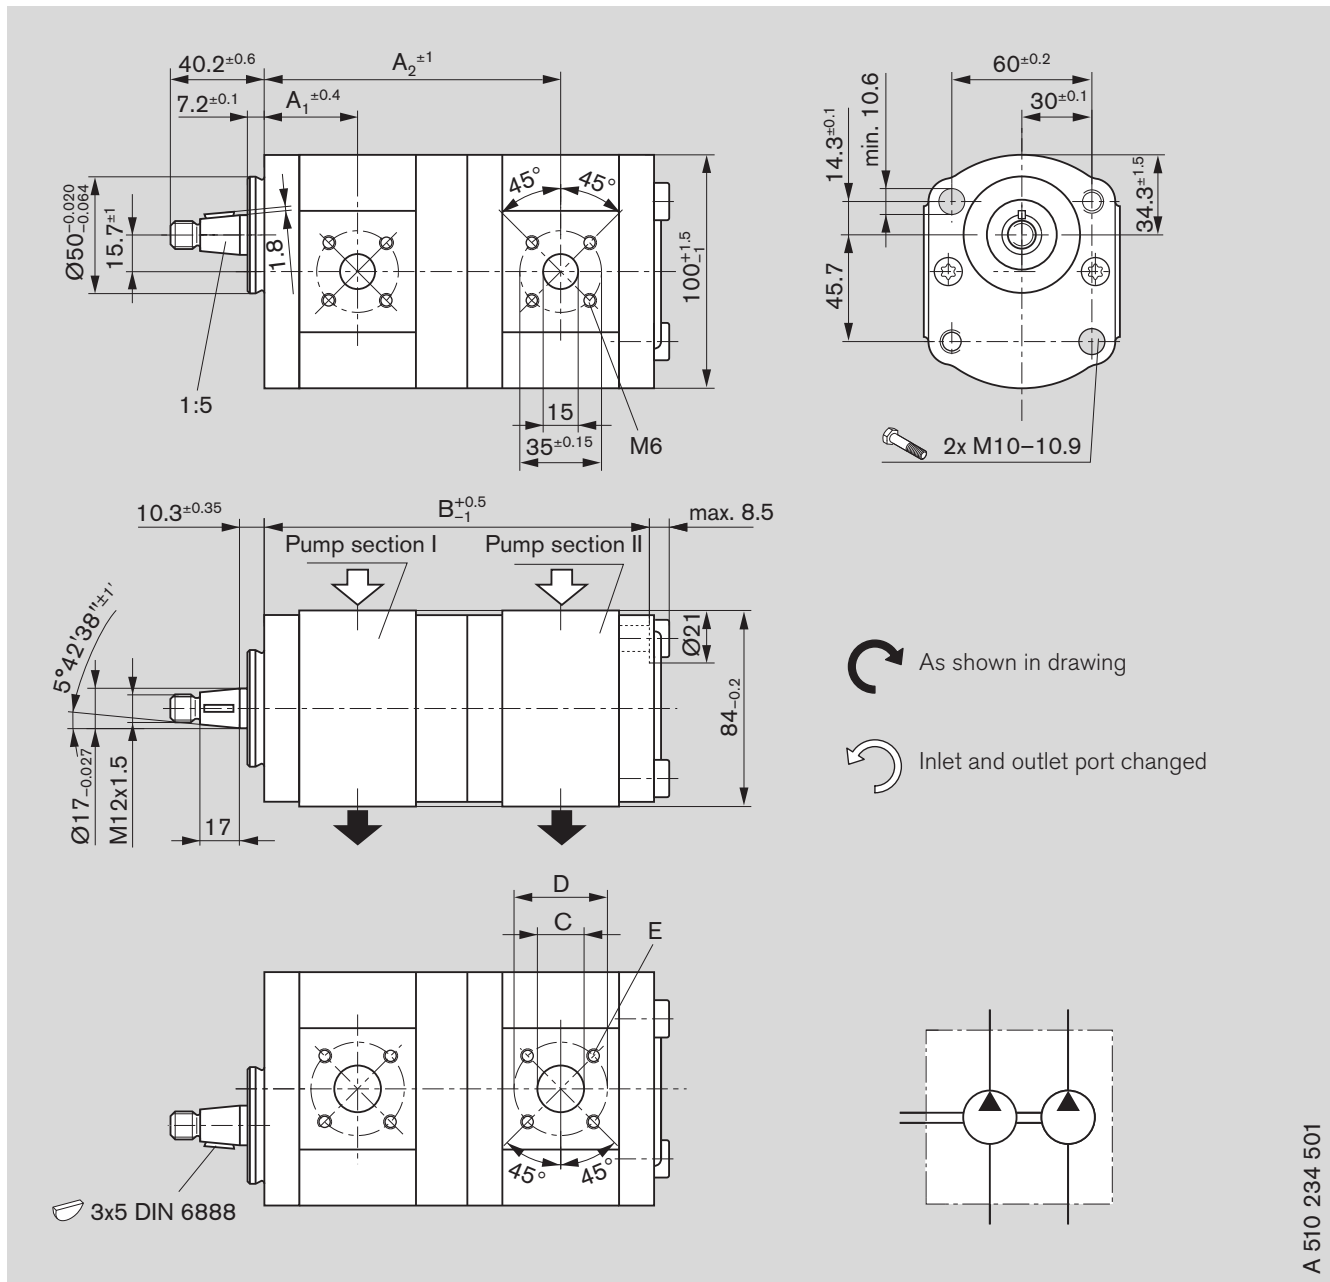



A 510 234 501



## Ordering code


AZPFF – 12 –    /     C P 20 20 K B

Displacement [cm <sup>3</sup> /rev] P <sub>I</sub>   P <sub>II</sub>	Ordering-No.		Max. operating pressure [bar] P <sub>I</sub>   P <sub>II</sub>		Max. rotation speed [rpm]	kg	Dimension [mm]					
	 L	 R					A <sub>1</sub>	A <sub>2</sub>	B	C <sup>1)</sup>	D	E
5.5   4	0 510 365 305	–	280	280	4000	4.8	38.6	121.6	157.9	15	40	M6 depth 13
8   4	0 510 465 324	0 510 465 011	280	280	4000	4.4	40.7	125.7	162.0	20	40	
8   5.5	0 510 465 344	0 510 465 032	280	280	4000	4.4	40.7	126.9	164.5	20	40	
8   8	0 510 465 320	0 510 465 023	280	280	4000	5.4	40.7	129.0	168.6	20	40	
11   4	0 510 565 387	–	280	280	3500	4.5	44.5	130.7	167.0	20	40	
11   5.5	0 510 565 319	0 510 565 095	280	280	3500	4.5	44.5	131.9	169.5	20	40	
11   8	0 510 565 389	0 510 565 014	280	280	3500	4.6	44.5	134.0	173.6	20	40	
11   11	0 510 565 376	0 510 565 061	280	280	3500	4.8	44.5	137.8	178.6	20	40	
14   4	0 510 565 406	–	280	280	3000	4.6	45.0	135.7	172.0	20	40	
14   8	0 510 565 335	0 510 565 072	280	280	3000	4.8	45.0	139.0	178.6	20	40	
14   11	0 510 565 393	–	280	280	3000	5.0	45.0	142.8	183.6	20	40	
14   14	–	0 510 565 417	280	280	3000	5.0	45.0	143.3	188.6	20	40	
16   4	0 510 665 348	–	280	280	3000	4.75	45.0	139.1	175.4	20	40	
16   5.5	0 510 665 337	–	280	280	3000	4.8	45.0	140.3	177.9	20	40	
16   8	0 510 665 328	0 510 665 135	280	280	3000	6.0	45.0	142.4	182.0	20	40	
16   11	0 510 665 382	0 510 665 152	280	280	3000	5.0	45.0	146.2	187.0	20	40	
16   14	0 510 665 381	0 510 665 144	280	280	3000	5.1	45.0	146.7	192.0	20	40	
16   16	0 510 665 330	0 510 665 052	280	230	3000	6.4	45.0	146.7	195.4	20	40	
19   4	0 510 665 369	–	230	280	3000	4.9	45.0	144.1	180.4	20	40	
19   5	0 510 665 442	–	230	280	3000	4.8	45.0	145.3	183.2	20	40	
19   11	0 510 665 368	–	230	280	3000	5.2	45.0	146.2	192.0	20	40	
19   14	0 510 665 418	–	230	280	3000	5.0	45.0	151.7	197.0	20	40	
19   19	0 510 665 336	–	230	190	3000	6.6	45.0	151.7	205.4	20	40	
22   8	0 510 765 345	0 510 765 045	210	280	2500	5.1	52.6	152.8	192.4	20	40	
22   11	0 510 765 309	0 510 765 049	210	280	2500	5.2	52.6	156.7	197.7	20	40	
22   16	0 510 765 343	0 510 765 028	210	230	2500	5.5	52.6	157.1	205.8	20	40	

1) 4 and 5.5 cm<sup>3</sup> Ø 15



# Dimensions
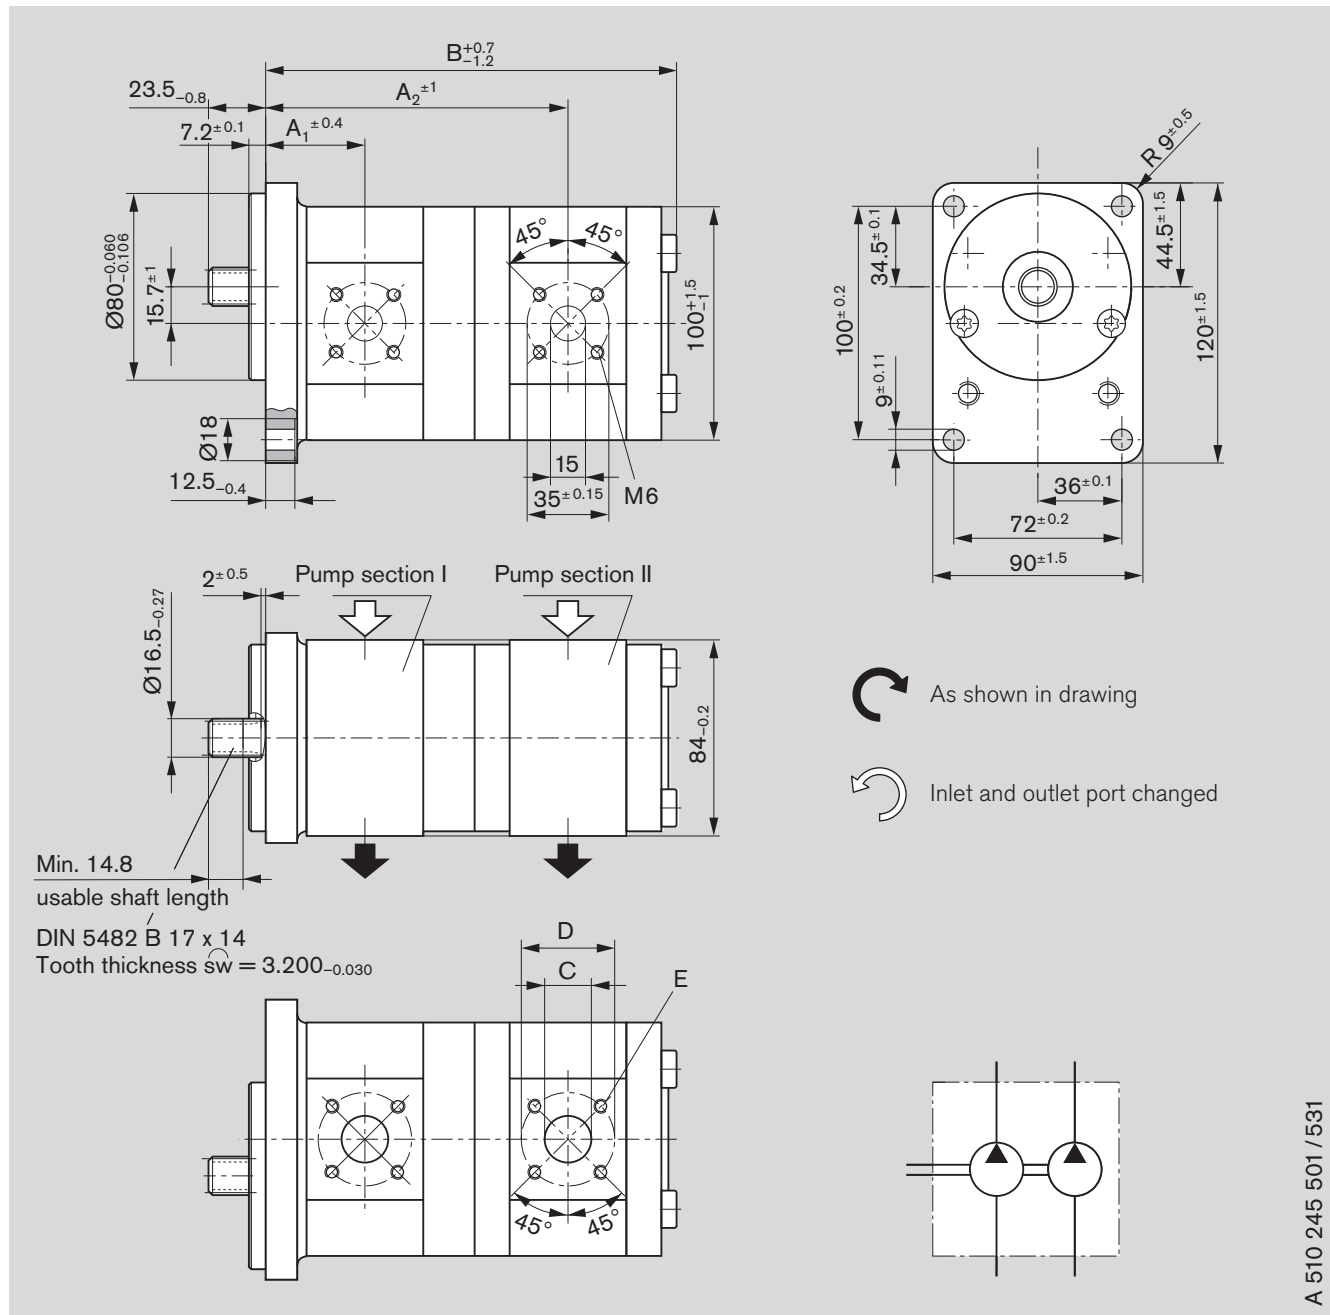
## Standard range



## Ordering code

AZPFF – 10 –    /     F B 20 20 M BAZPFF – 11 –    /     F B 20 20 M B\*

Displacement [cm <sup>3</sup> /rev] P <sub>I</sub>   P <sub>II</sub>	Ordering-No.		Max. operating pressure [bar] P <sub>I</sub>   P <sub>II</sub>		Max. rotation speed [rpm]	kg	Dimension [mm]					
	 L	 R					A <sub>1</sub>	A <sub>2</sub>	B	C <sup>1)</sup>	D	E
8   5.5	0 510 465 345	–	280	280	4000	5.1	43.2	129.4	174.0	20	40	M6 depth 13
8   8	0 510 465 326*	–	280	280	4000	5.1	43.2	131.5	178.1	20	40	
11   4	–	0 510 565 032	280	280	3500	6.3	47.0	133.2	176.5	20	40	
11   5.5	0 510 565 332	0 510 565 034	280	280	3500	6.35	47.0	134.4	179.0	20	40	
11   8	0 510 565 334*	0 510 565 018	280	280	3500	6.4	47.0	136.5	183.1	20	40	
11   11	0 510 565 328	0 510 565 035	280	280	3500	6.5	47.0	140.3	188.1	20	40	
14   4	0 510 565 367	–	280	280	3000	6.4	47.5	138.2	181.5	20	40	
14   5.5	0 510 565 069	–	280	280	3500	6.5	47.5	139.4	183.7	20	40	
14   8	0 510 565 356	0 510 565 019	280	280	3000	6.5	47.5	141.5	188.1	20	40	
16   4	–	0 510 665 058	280	280	3000	6.7	47.5	141.6	184.9	20	40	
16   8	0 510 665 333	0 510 665 064	280	280	3000	6.8	47.5	144.9	191.5	20	40	
16   11	0 510 665 347	0 510 665 036	280	280	3000	6.9	47.5	148.7	196.5	20	40	
16   16	0 510 665 334	0 510 665 029	280	230	3000	7.3	47.5	149.2	204.9	20	40	
19   4	–	0 510 665 115	230	280	3000	5.5	47.5	146.6	189.0	20	40	
19   11	0 510 665 375*	–	230	280	3000	5.9	47.5	153.7	201.5	20	40	
19   19	0 510 665 420	0 510 665 097	230	190	3000	6.3	47.5	154.2	214.9	20	40	
22.5   5.5	0 510 765 317	0 510 765 022	210	280	2500	5.8	61.1	165.2	209.8	20	40	
22.5   8	0 510 765 331	–	210	280	2500	6.18	61.1	167.3	213.9	20	40	
22.5   16	0 510 765 341	–	210	230	2500	6.4	61.1	171.6	227.3	20	40	
22.5   22.5	0 510 765 338	–	210	160	2500	7.05	61.1	185.2	249.7	20	40	

1) 4 and 5.5 cm<sup>3</sup> Ø 15



## Ordering code


AZPFF – 10 –    /     C B 20 20 M BAZPFF – 11 –    /     C B 20 20 M B\*

Displacement [cm <sup>3</sup> /rev]	P <sub>I</sub>	P <sub>II</sub>	Ordering-No.		Max. operating pressure [bar]		Max. rotation speed [rpm]	kg	Dimension [mm]					
			L	R	P <sub>I</sub>	P <sub>II</sub>			A <sub>1</sub>	A <sub>2</sub>	B	C <sup>1)</sup>	D	E
4	4		0 510 900 002*	0 510 900 001*	280	280	4000	4.5	39.9	121.6	164.4	15	40	M6 depth 13
5.5	4		0 510 900 005*	–	280	280	4000	4.9	41.1	124.1	166.9	15	40	
5.5	5.5		0 510 900 004*	0 510 900 003*	280	280	4000	5.0	41.1	125.3	169.4	15	40	
8	16		–	0 510 900 042*	280	230	3000	5.6	43.2	135.8	191.0	20	40	
8	4		0 510 900 008*	0 510 900 051*	280	280	4000	5.1	43.2	128.2	171.0	20	40	
8	5.5		0 510 900 009*	0 510 900 007*	280	280	4000	5.1	43.2	129.4	173.5	20	40	
8	8		0 510 900 010*	0 510 900 006*	280	280	4000	5.2	43.2	131.5	177.6	20	40	
11	4		0 510 900 015*	0 510 900 012*	280	280	3500	5.2	47.0	133.2	176.0	20	40	
11	5.5		0 510 900 017*	0 510 900 046*	280	280	3500	5.2	47.0	134.4	178.5	20	40	
11	8		0 510 900 016*	0 510 900 044*	280	280	3500	5.4	47.0	136.5	182.6	20	40	
11	11		0 510 900 018*	0 510 900 039*	280	280	3500	5.5	47.0	140.3	187.6	20	40	
14	4		0 510 900 036*	–	280	280	3000	5.3	47.5	138.2	181	20	40	
14	5.5		–	0 510 900 060*	280	280	3000	5.4	47.5	139.4	183.5	20	40	
14	8		0 510 900 020*	0 510 900 011*	280	280	3000	5.5	47.5	141.5	187.6	20	40	
14	8		0 510 565 364	0 510 565 012	280	280	3000	5.6	47.5	141.5	188.1	20	40	
14	11		0 510 900 019*	0 510 900 013*	280	280	3000	5.6	47.5	145.3	192.6	20	40	
14	11		0 510 565 353	0 510 565 033	280	280	3000	5.7	47.5	145.3	193.1	20	40	
14	14		–	0 510 900 014*	280	280	3000	5.8	47.5	145.8	197.6	20	40	
14	14		–	0 510 565 037	280	280	3000	5.9	47.5	145.8	198.1	20	40	
16	4		0 510 900 059*	0 510 900 021*	280	280	3000	5.5	47.5	141.6	184.4	20	40	
16	5.5		0 510 900 028*	–	280	280	3000	5.5	47.5	142.8	186.9	20	40	
16	8		0 510 900 035*	0 510 900 022*	280	280	3000	5.6	47.5	144.9	191.0	20	40	
16	11		0 510 900 029*	0 510 900 023*	280	280	3000	5.7	47.5	148.7	196.0	20	40	
16	14		–	0 510 900 061*	280	280	3000	5.9	47.5	149.2	201.0	20	40	
16	16		0 510 900 030*	0 510 900 024*	280	230	3000	6.0	47.5	149.2	204.4	20	40	
19	4		0 510 900 043*	0 510 900 049*	230	280	3000	5.6	47.5	146.6	189.4	20	40	
19	5.5		–	0 510 665 067	230	280	3000	5.6	47.5	147.8	192.4	20	40	
19	5.5		–	0 510 900 027*	230	280	3000	5.6	47.5	147.8	191.9	20	40	
19	8		0 510 900 031*	0 510 900 047*	230	280	3000	5.8	47.5	149.9	196.0	20	40	
19	8		0 510 665 325*	0 510 665 024	230	280	3000	6.7	47.5	149.9	196.5	20	40	
19	11		0 510 900 032*	0 510 900 052*	230	280	3000	5.9	47.5	153.7	201.0	20	40	
19	11		0 510 665 326	–	230	280	3000	6.9	47.5	153.9	201.5	20	40	
19	14		0 510 900 053*	–	230	280	3000	6.0	47.5	154.2	206.0	20	40	
19	16		0 510 665 327	0 510 665 053	230	230	3000	7.1	47.5	154.2	209.9	20	40	
19	16		0 510 900 033*	0 510 900 026*	230	230	3000	6.1	47.5	154.2	209.4	20	40	
19	19		0 510 900 034*	0 510 900 025*	230	210	3000	6.2	47.5	154.2	214.4	20	40	
19	19		0 510 665 400	0 510 665 025	230	190	3000	6.2	47.5	154.2	214.9	20	40	
22.5	4		–	0 510 900 050*	210	280	2500	5.8	55.1	152.0	194.8	20	40	
22.5	5.5		0 510 900 055*	0 510 900 045*	210	280	2500	5.8	55.1	153.2	197.3	20	40	
22.5	8		0 510 900 057*	0 510 900 040*	210	280	2500	5.9	55.1	155.3	201.4	20	40	
22.5	8		–	0 510 765 023	230	280	3000	5.9	61.0	167.3	213.9	20	40	
22.5	11		–	0 510 900 054*	210	280	2500	6.0	55.1	159.1	206.4	20	40	
22.5	11		0 510 765 320	–	210	250	3000	6.3	61.0	171.1	218.9	20	40	
22.5	14		0 510 900 048*	0 510 900 058*	210	280	2500	6.2	55.1	159.6	211.4	20	40	
22.5	16		0 510 900 041*	0 510 900 037*	210	230	2500	6.2	55.1	159.6	214.8	20	40	
22.5	16		0 510 765 340	–	210	230	3000	6.55	61.0	171.6	227.3	20	40	
22.5	22.5		0 510 900 056*	0 510 900 038*	210	180	2500	6.5	55.1	167.2	225.2	20	40	
22.5	22.5		–	0 510 765 012	210	160	3000	6.5	61.0	185.2	249.7	20	40	

1) 4 and 5.5 cm<sup>3</sup> Ø 15

# Dimensions

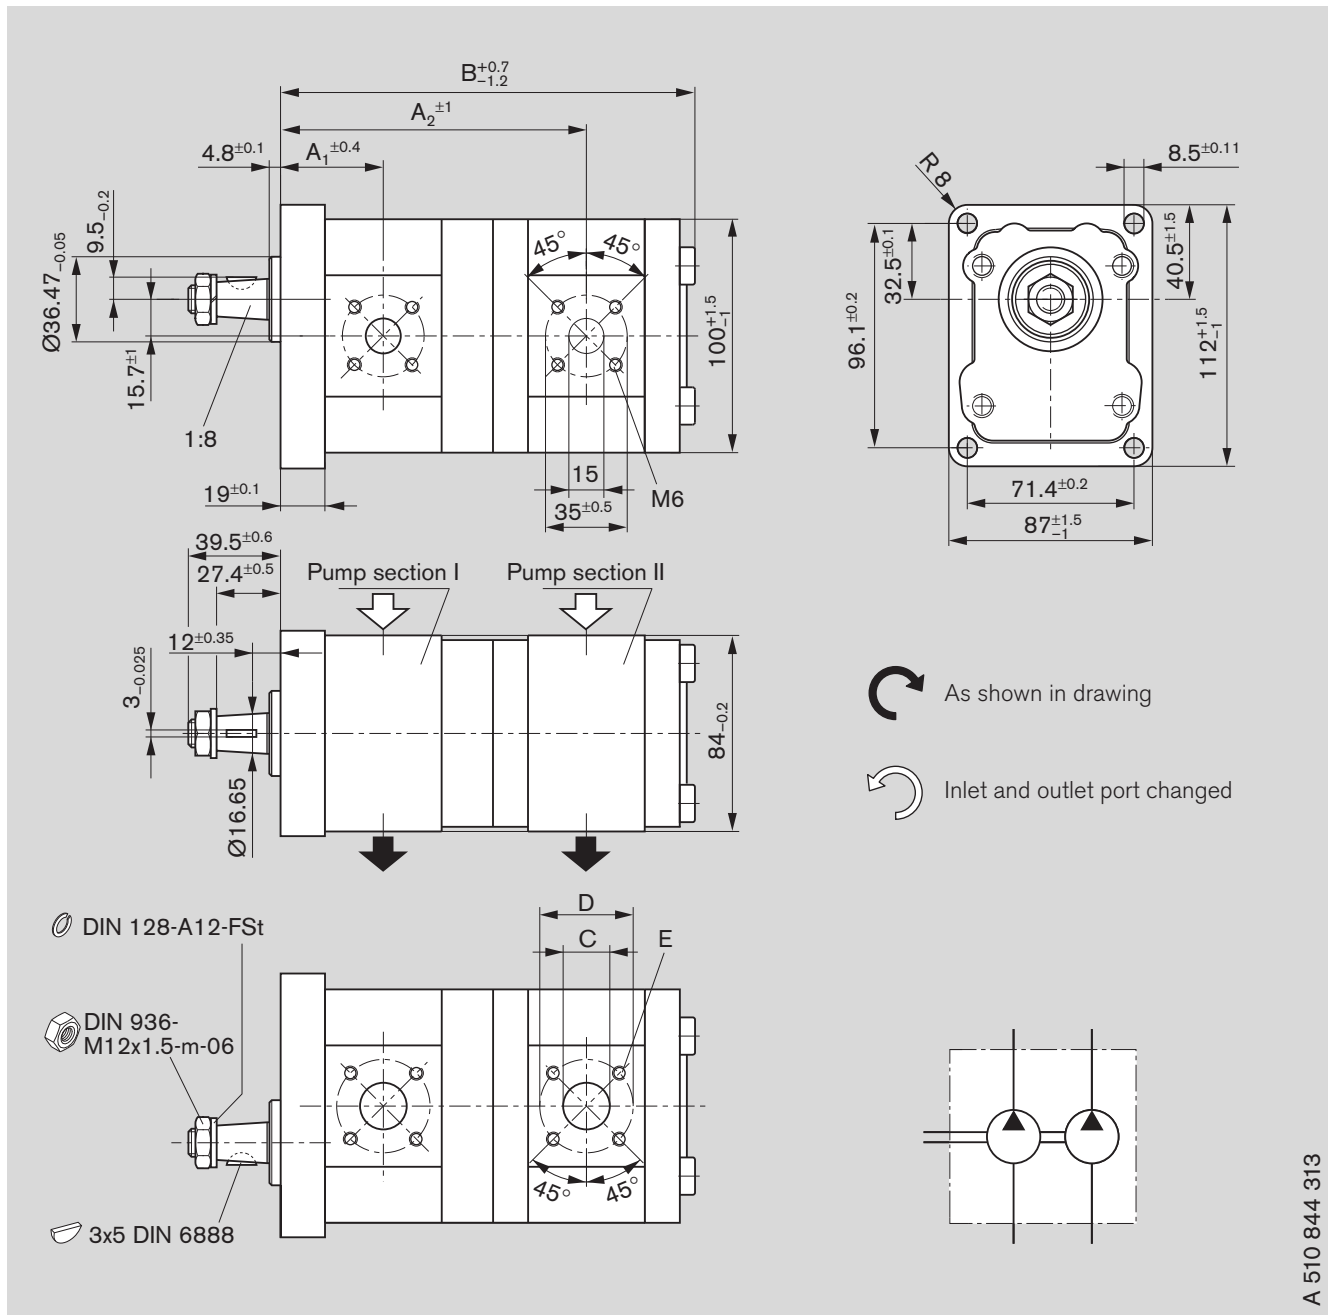

## Standard range



A 510 844 313

## Ordering code


AZPFF - 10 -  /  H O 20 20 M BAZPFF - 10 -  /  H O 20 20 K B\*

Displacement [cm <sup>3</sup> /rev] P <sub>I</sub>   P <sub>II</sub>	Ordering-No.		Max. operating pressure [bar]		Max. rotation speed [rpm]	kg	Dimension [mm]					
	 L	 R	P <sub>I</sub>	P <sub>II</sub>			A <sub>1</sub>	A <sub>2</sub>	B	C <sup>1)</sup>	D	E
4   4	-	<b>0 510 901 500</b>	280	280	4000	4.7	41.4	123.1	165.9	15	40	M6 depth 13
8   5.5	<b>0 510 901 512</b>		280	280	4000	4.9	44.7	130.9	175.0	20	40	
8   8	-	<b>0 510 901 504</b>	280	280	4000	5.0	44.7	133.0	179.1	20	40	
11   4	-	<b>0 510 901 509</b>	280	280	3500	5.0	48.5	134.7	177.5	20	40	
11   5.5	<b>0 510 565 436*</b>	<b>0 510 901 503</b>	280	280	3500	5.1	48.5	135.9	180.0	20	40	
14   5.5	<b>0 510 565 435*</b>	-	280	280	3000	5.2	49.0	140.9	185.0	20	40	
14   11	-	<b>0 510 901 513</b>	280	280	3000	5.5	49.0	146.8	194.1	20	40	
16   5.5	-	<b>0 510 901 510</b>	280	280	3000	5.3	49.0	144.3	188.4	20	40	
16   8	<b>0 510 901 514</b>	-	280	280	3000	5.4	49.0	146.4	192.5	20	40	
16   14	-	<b>0 510 901 515</b>	280	280	3000	5.7	49.0	150.7	202.5	20	40	
16   16	-	<b>0 510 901 501</b>	280	230	3000	5.8	49.0	150.7	205.9	20	40	
19   8	-	<b>0 510 901 507</b>	230	280	3000	5.5	49.0	151.4	197.5	20	40	
19   11	-	<b>0 510 901 508</b>	230	280	3000	5.6	49.0	155.2	202.5	20	40	
19   16	-	<b>0 510 901 502</b>	230	230	3000	5.9	49.0	155.7	210.9	20	40	
19   19	<b>0 510 901 506</b>	-	230	190	3000	6.0	49.0	155.7	215.9	20	40	
22.5   16	<b>0 510 901 511</b>	-	210	230	2500	6.1	56.6	161.1	216.3	20	40	
22.5   19	-	<b>0 510 901 505</b>	210	190	2500	6.2	56.6	161.7	220.3	20	40	

1) 4 and 5.5 cm<sup>3</sup> Ø 15

# Dimensions

## Standard range

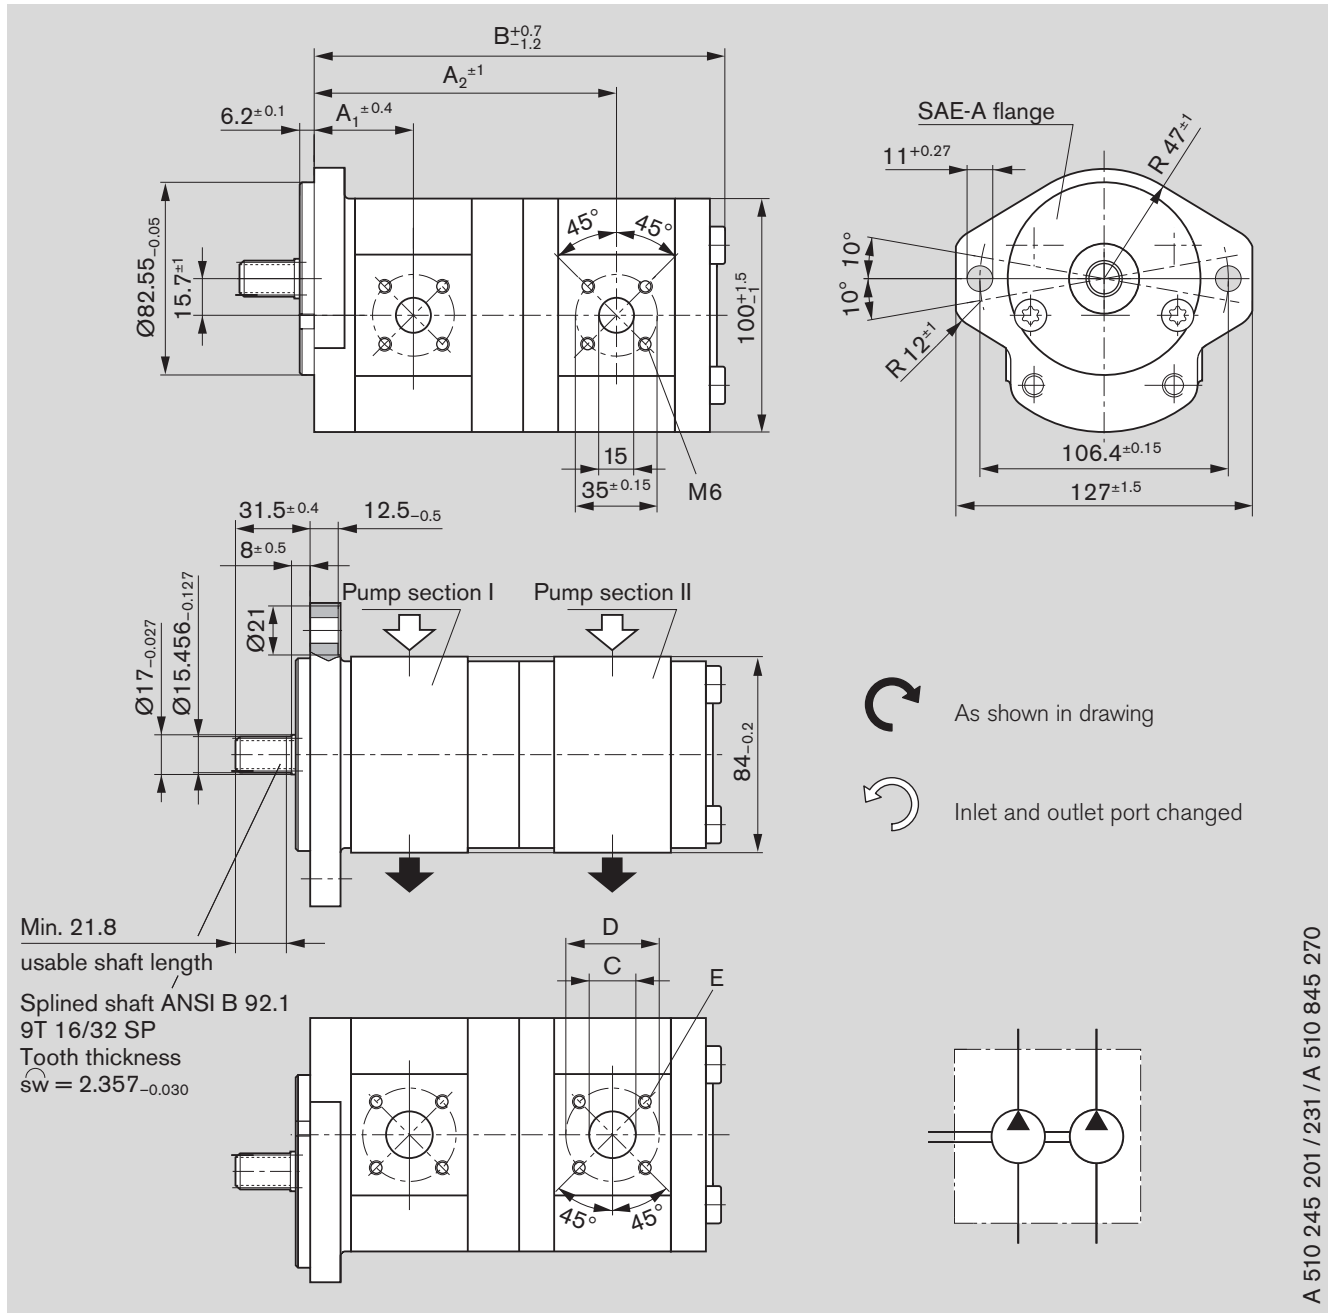

A 510 245 201 / 231 / A 510 845 270



## Ordering code


AZPFF - 10 -    /     R R 20 20 M BAZPFF - 11 -    /     R R 20 20 M B\*AZPFF - 11 -    /     R R 20 20 K B\*\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]		Max. rotation speed [rpm]	kg	Dimension [mm]							
	P <sub>I</sub>	P <sub>II</sub>	L	R			P <sub>I</sub>	P <sub>II</sub>	A <sub>1</sub>	A <sub>2</sub>	B	C <sup>1)</sup>	D	E
5.5	4	0 510 901 029*	-		280	280	4000	4.9	41.1	124.1	166.9	15	40	M6 depth 13
5.5	5.5	-	0 510 901 042*		280	280	4000	5.0	41.1	125.3	169.4	15	40	
8	4	0 510 901 032*	0 510 901 034*		280	280	4000	5.0	43.2	128.2	171.0	20	40	
8	5.5	0 510 901 018*	0 510 901 030*		280	280	4000	5.1	43.2	129.4	173.5	20	40	
8	8	-	0 510 901 021*		280	280	4000	5.1	43.2	131.5	177.6	20	40	
11	4	-	0 510 901 024*		280	280	3500	5.1	47.0	133.2	176.0	20	40	
11	4	-	0 510 565 022		280	280	3500	5.2	47.0	133.2	176.5	20	40	
11	5.5	0 510 901 015*	0 510 901 000*		280	280	3500	5.2	47.0	134.4	178.5	20	40	
11	5.5	-	0 510 565 023		280	280	3500	5.2	47.0	134.4	179.0	20	40	
11	8	0 510 901 031*	0 510 901 037*		280	280	3500	5.3	47.0	136.5	182.6	20	40	
11	11	0 510 901 009*	0 510 901 035**		280	280	3500	5.5	47.0	140.3	187.6	20	40	
14	5.5	0 510 901 033*	-		280	280	3000	5.4	47.5	139.4	183.5	20	40	
14	8	-	0 510 901 016*		280	280	3000	5.5	47.5	141.5	187.6	20	40	
14	11	0 510 565 346	-		280	280	3000	5.7	47.5	145.3	193.1	20	40	
14	11	0 510 901 001*	0 510 901 011*		280	280	3000	5.6	47.5	145.3	192.6	20	40	
14	14	-	0 510 901 036*		280	280	3000	5.7	47.5	145.8	197.6	20	40	
16	4	-	0 510 901 028*		280	280	3000	5.4	47.5	141.6	184.4	20	40	
16	5.5	0 510 901 014*	0 510 901 008*		280	280	3000	5.4	47.5	142.8	186.9	20	40	
16	8	0 510 901 006*	0 510 901 005*		280	280	3000	5.5	47.5	144.9	191.0	20	40	
16	11	0 510 901 012*	0 510 901 002*		280	280	3000	5.7	47.5	148.7	196.0	20	40	
16	11	0 510 665 354	0 510 665 042		280	280	3000	5.8	47.5	148.7	196.0	20	40	
16	16	0 510 901 027*	0 510 901 022*		280	280	3000	5.9	47.5	149.2	204.4	20	40	
19	4	-	0 510 901 044*		230	280	3000	5.5	47.5	146.6	189.4	20	40	
19	5.5	0 510 901 041*	0 510 901 043*		230	280	3000	5.6	47.5	147.8	191.9	20	40	
19	8	0 510 901 017*	0 510 901 003*		230	280	3000	5.7	47.5	149.9	196.0	20	40	
19	8	-	0 510 665 126**		230	280	3000	5.6	47.5	149.9	196.0	20	40	
19	8	-	0 510 665 047		230	280	3000	5.8	47.5	149.9	196.0	20	40	
19	11	0 510 665 435	0 510 901 004*		230	280	3000	5.8	47.5	153.7	201.0	20	40	
19	14	0 510 901 040*	0 510 901 025*		230	280	3000	5.9	47.5	154.2	206.0	20	40	
19	16	0 510 901 039*	0 510 901 045*		230	230	3000	6.0	47.5	154.2	209.4	20	40	
19	19	0 510 901 010*	-		230	190	3000	6.2	47.5	154.2	214.4	20	40	
19	19	-	0 510 665 132		230	190	3000	6.1	47.5	154.2	214.4	20	40	
22.5	4	-	0 510 901 023*		210	280	2500	5.7	55.1	152.0	194.8	20	40	
22.5	5.5	-	0 510 901 020*		210	280	2500	5.7	55.1	153.2	197.3	20	40	
22.5	8	-	0 510 765 016		180	280	2500	7.6	55.1	155.3	201.4	20	40	
22.5	11	0 510 901 019*	0 510 901 026*		210	280	2500	5.9	55.1	159.1	206.4	20	40	
22.5	14	0 510 901 013*	0 510 901 007*		210	280	2500	6.1	55.1	159.6	211.4	20	40	
22.5	22.5	0 510 901 038*	-		210	180	2500	6.4	55.1	167.2	225.2	20	40	

1) 4 and 5.5 cm<sup>3</sup> Ø 15

# Dimensions

## Standard range

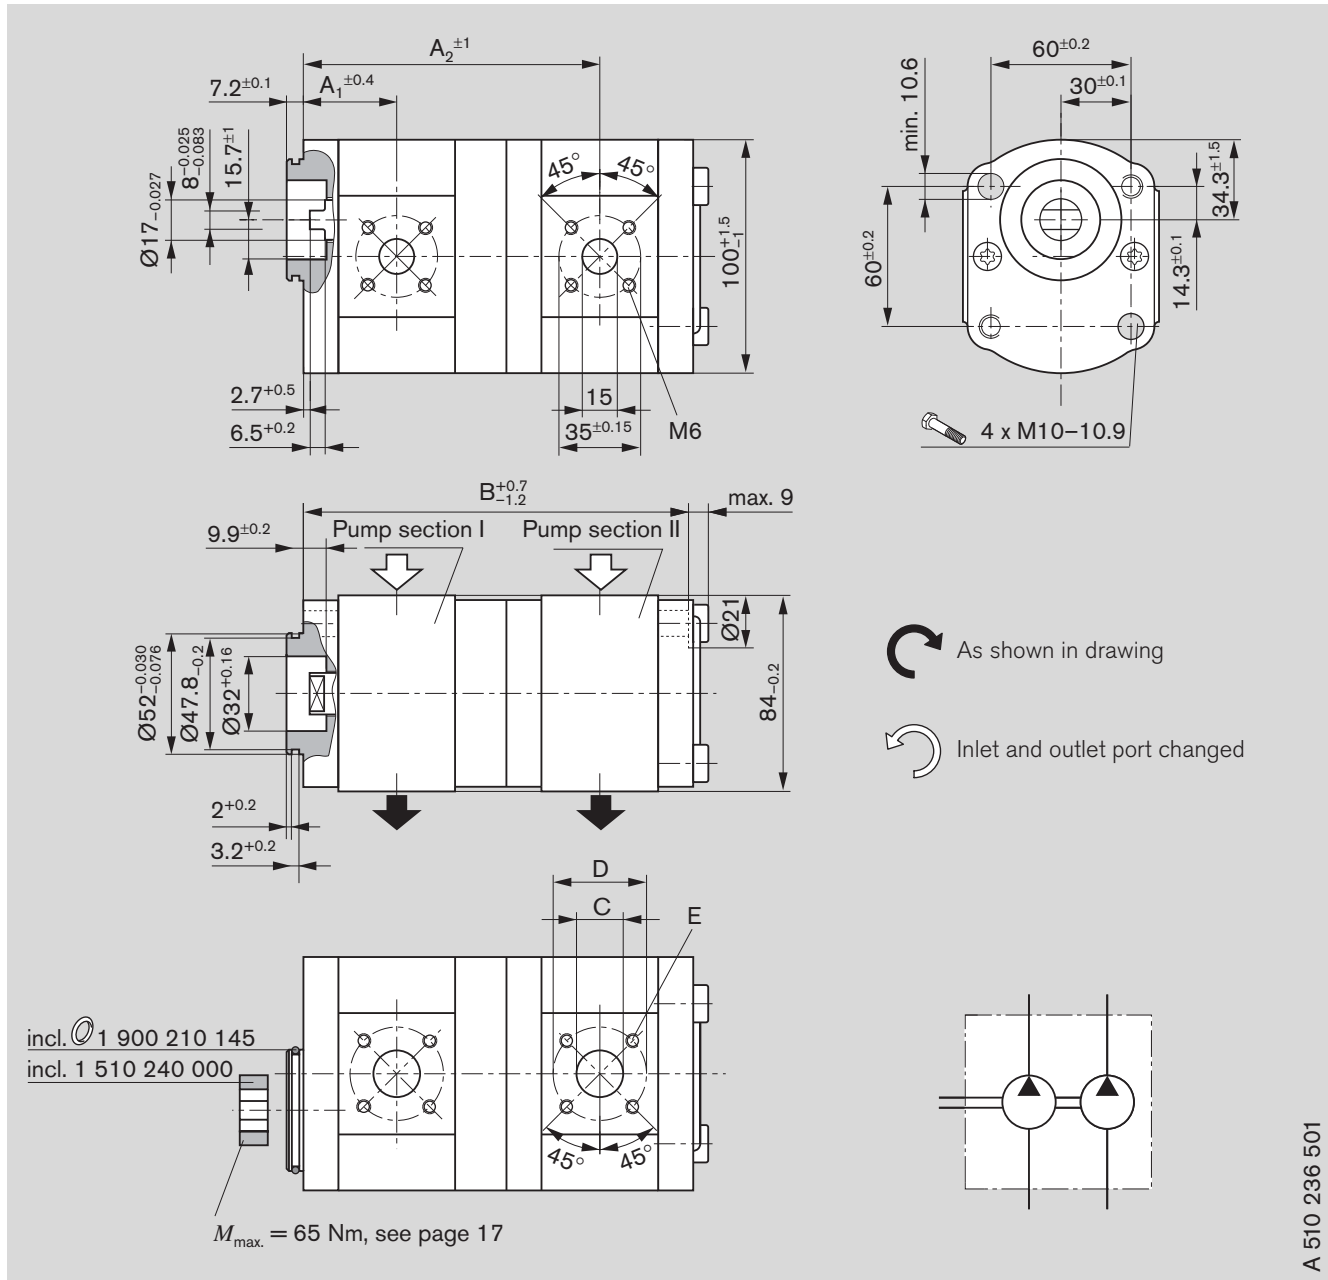

### Ordering code


AZPFF - 10 -    /     N M 20 20 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]							
	L	R				A <sub>1</sub>	A <sub>2</sub>	B	C <sup>1)</sup>	D	E		
P <sub>I</sub>	P <sub>II</sub>		P <sub>I</sub>	P <sub>II</sub>									
5.5	4	0 510 365 314	0 510 365 010	280	280	4000	4.2	38.6	121.6	157.9	15	40	M6
8	4	-	0 510 465 012	280	280	4000	4.4	40.7	125.7	162.0	20	40	depth 13
8	5.5	0 510 465 346	-	280	280	4000	4.4	40.7	126.9	164.5	20	40	
8	8	-	0 510 465 008	280	380	4000	5.6	40.7	129.0	168.6	20	40	
11	4	0 510 565 329	0 510 565 015	280	280	3500	4.5	44.5	130.7	167.0	20	40	
11	5.5	-	0 510 565 016	280	280	3500	4.6	44.5	131.9	169.5	20	40	
11	8	0 510 565 379	0 510 565 078	280	280	3500	4.65	44.5	134.0	173.6	20	40	
16	16	0 510 665 339	0 510 665 030	280	230	3000	5.2	45.0	146.7	195.4	20	40	
22.5	8	0 510 765 312	-	210	280	2500	5.2	52.5	152.8	192.4	20	40	

<sup>1)</sup> 4 and 5.5 cm<sup>3</sup>  $\varnothing 15$

# Dimensions

## Standard range

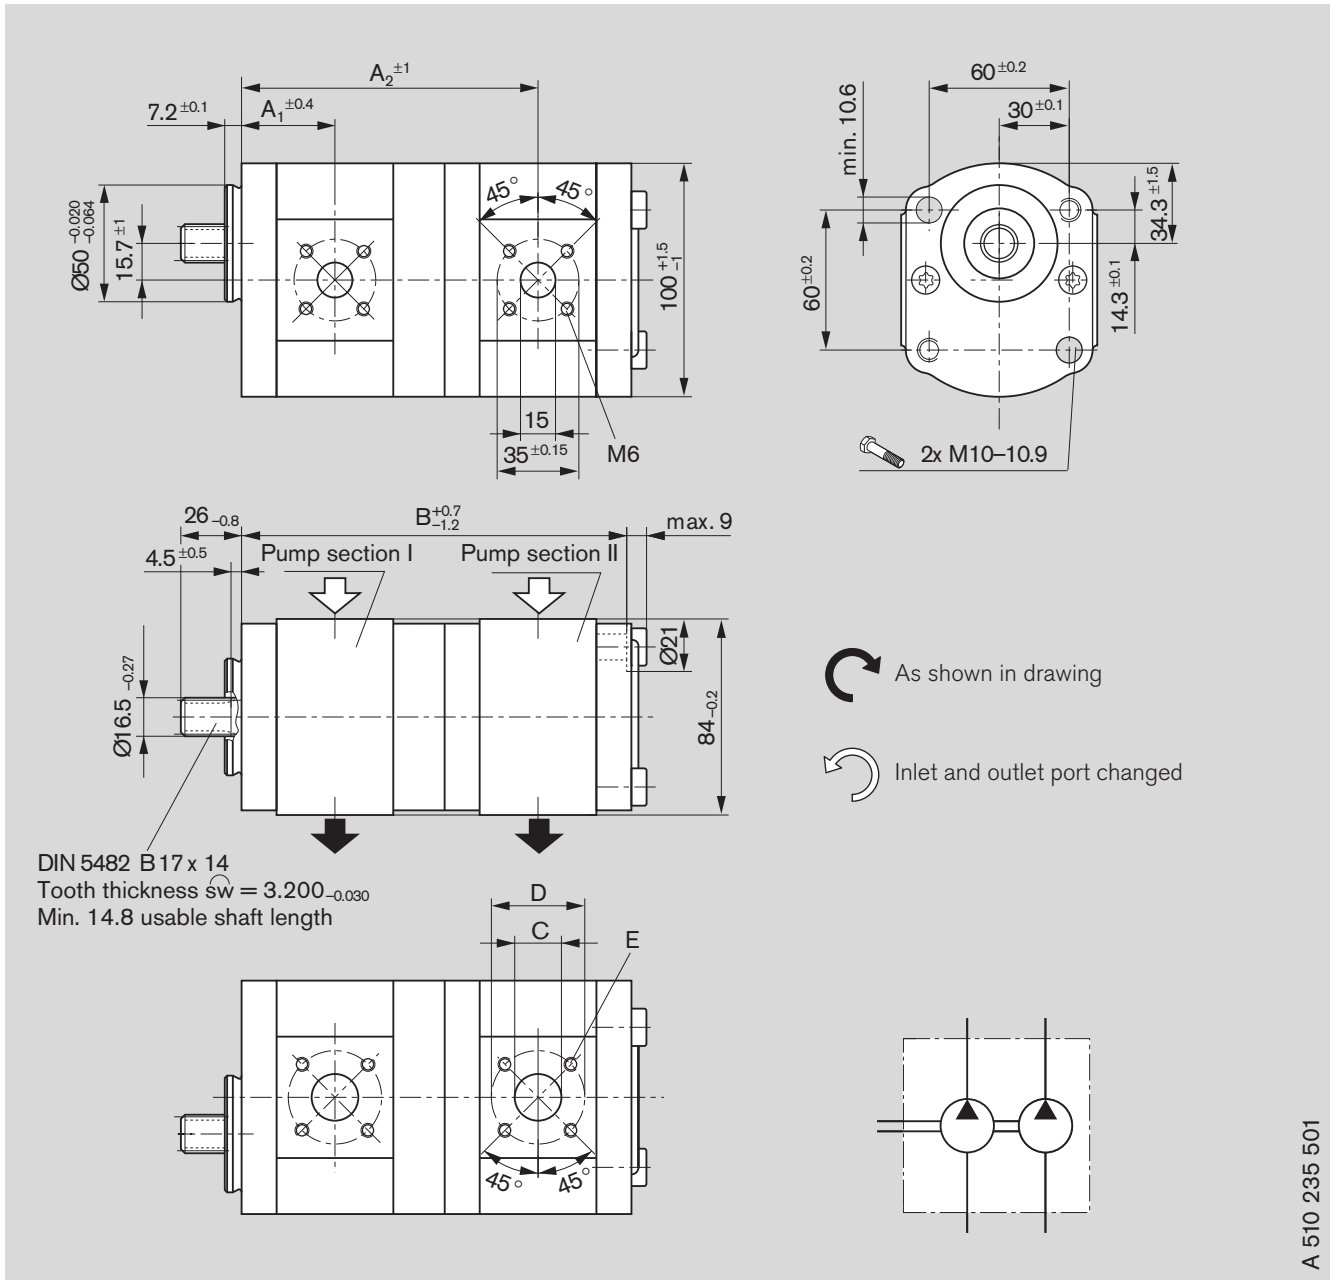

### Ordering code

AZPFF - 10 -    /     F P 20 20 M B


AZPFF - 10 -    /     F P 20 20 K B\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]						
	L	R				A <sub>1</sub>	A <sub>2</sub>	B	C <sup>1)</sup>	D	E	
P <sub>I</sub> 8	P <sub>II</sub> 4	0 510 465 355	-	280	280	4.4	40.7	125.7	162.0	20	40	M6
11	8	0 510 565 385	-	280	280	4.6	44.5	134.0	173.6	20	40	depth 13
16	8	-	0 510 665 071	280	280	4.85	45.0	142.4	182.0	20	40	
16	11	-	0 510 665 076	280	280	4.98	45.0	146.2	187.0	20	40	
16	14	0 510 665 404*	-	280	280	5.12	45.0	146.7	192.0	20	40	
16	16	0 510 665 376	0 510 665 062	280	230	5.2	45.0	146.7	195.4	20	40	
16	16	0 510 665 376	0 510 665 062	280	230	5.2	45.0	146.7	195.4	20	40	

<sup>1)</sup> 4 and 5.5 cm<sup>3</sup> Ø 15

# Dimensions

## Standard range

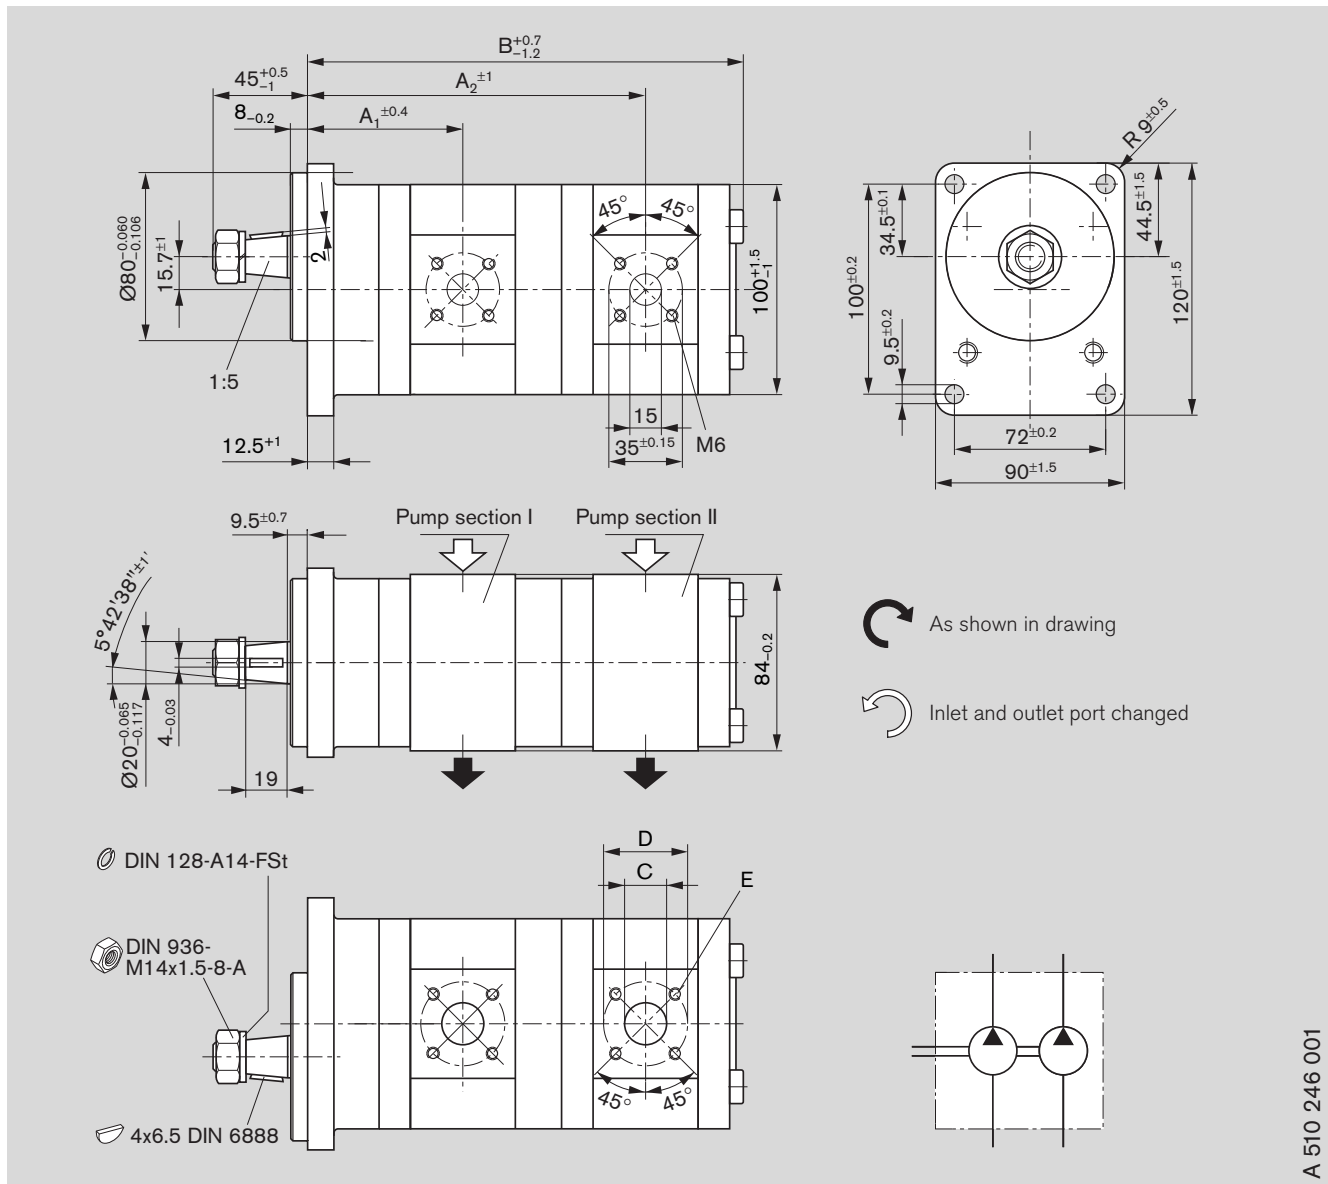

A 510 246 001

### Ordering code

AZPFF - 10 -  /  S A 20 20 M B


Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]								
	L	R				A <sub>1</sub>	A <sub>2</sub>	B	C <sup>1)</sup>	D	E			
P <sub>I</sub>	P <sub>II</sub>		P <sub>I</sub>	P <sub>II</sub>										
4	4	0 510 255 300	-		280	280	4000	4.8	71.3	153.0	197.0	15	40	M6 depth 13
5.5	4	0 510 355 301	-		280	280	4000	5.0	72.6	155.5	199.5	15	40	
8	5.5	0 510 455 300	0 510 455 001		280	280	4000	5.2	74.6	160.8	206.1	20	40	
8	8	0 510 455 301	0 510 455 002		280	280	4000	5.3	74.6	163.0	210.2	20	40	
11	5.5	0 510 555 300	0 510 555 001		280	280	3500	5.3	79.0	165.8	211.1	20	40	
11	8	0 510 555 301	0 510 555 002		280	280	3500	5.4	79.0	168.0	215.2	20	40	
11	11	0 510 555 302	0 510 555 003		280	280	3500	5.5	79.0	172.3	220.2	20	40	
16	4	0 510 655 300	0 510 655 001		280	280	3000	6.4	79.0	173.0	217.0	20	40	
16	5.5	0 510 655 301	0 510 655 002		280	280	3000	5.5	79.0	174.2	219.5	20	40	
16	8	0 510 655 302	0 510 655 003		280	280	3000	5.6	79.0	176.3	223.6	20	40	
16	11	0 510 655 303	0 510 655 004		280	280	3000	5.7	79.0	180.7	228.6	20	40	
16	16	0 510 655 304	0 510 655 005		280	230	3000	6.0	79.0	180.7	237.0	20	40	

<sup>1)</sup> 4 and 5.5 cm<sup>3</sup> Ø 15



# Dimensions

## Standard range

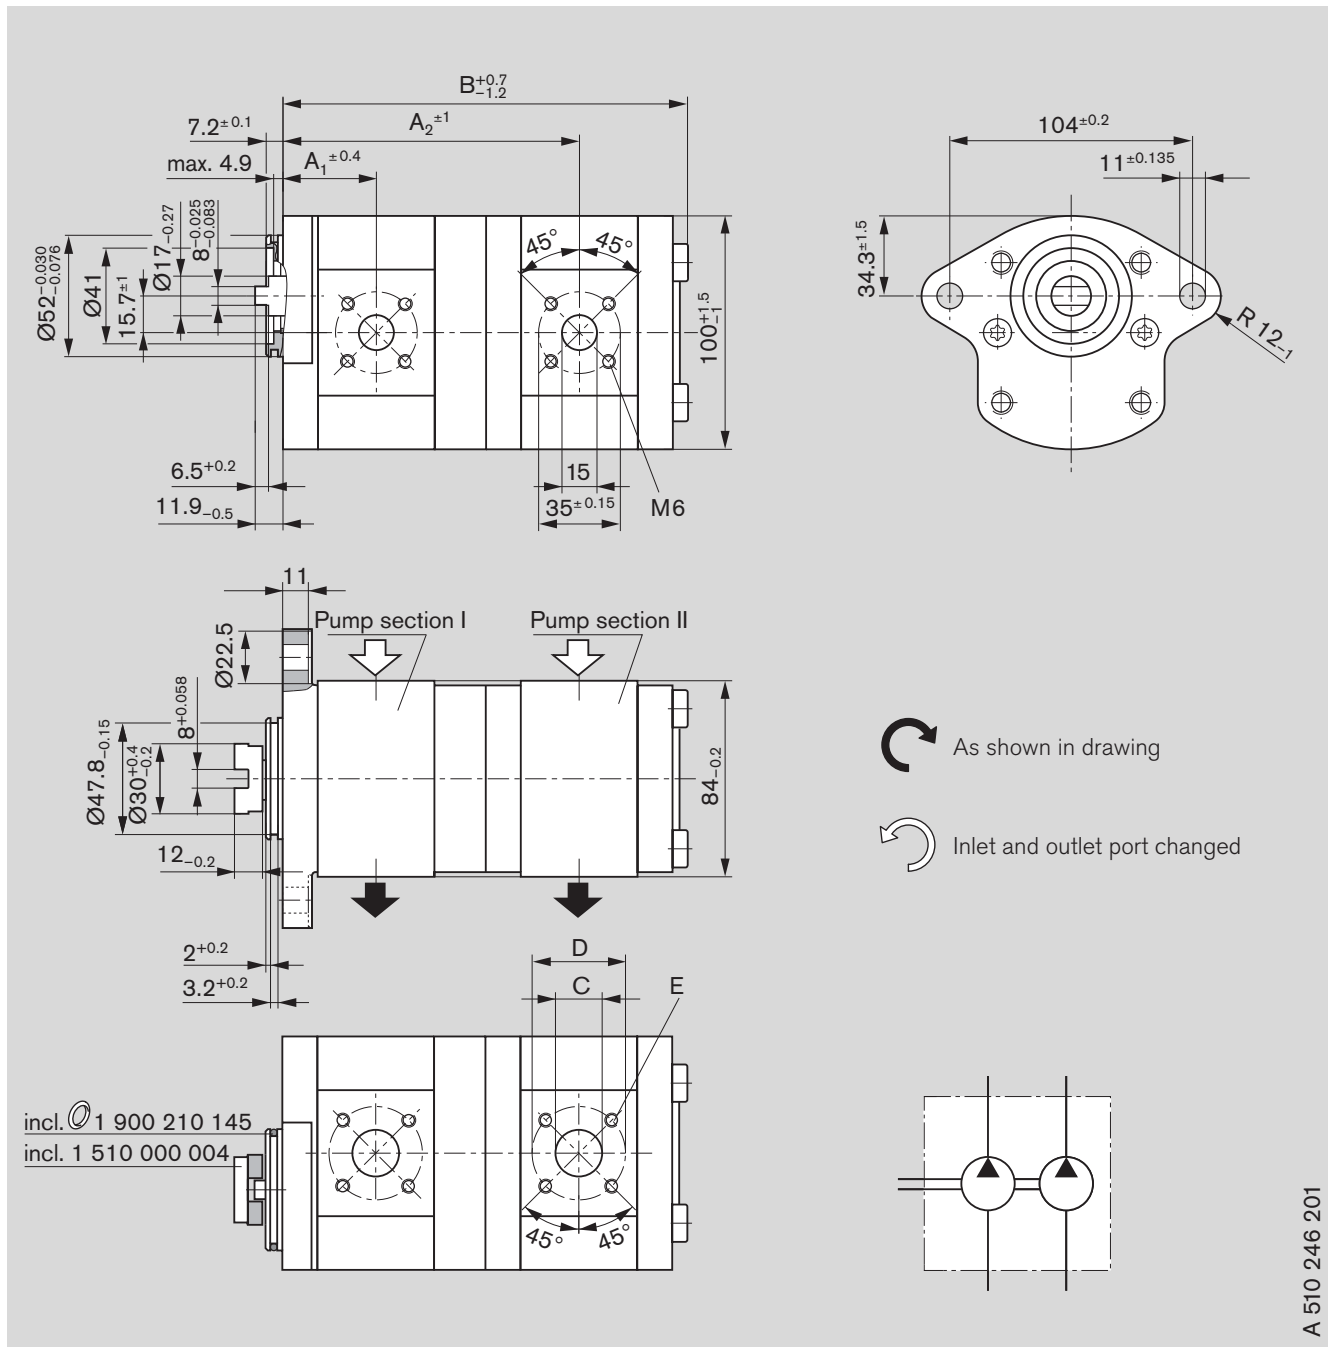

### Ordering code


AZPFF - 10 -    /     N L 20 20 K B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]							
						P <sub>I</sub>	P <sub>II</sub>	A <sub>1</sub>	A <sub>2</sub>	B	C <sup>1)</sup>	D	E
5.5	5.5	-	<b>0 510 365 009</b>	280	280	4000	4.65	38.6	122.8	169.2	15	40	M6 depth 13
11	11	-	<b>0 510 565 043</b>	280	280	3500	5.2	44.5	137.5	187.4	20	40	
16	8	<b>0 510 665 449</b>	-	280	280	3000	5.2	45.0	142.4	188.4	20	40	
16	22.5	<b>0 510 665 068</b>	-	280	160	2500	6.17	45.0	160.3	226.6	20	40	

<sup>1)</sup> 4 and 5.5 cm<sup>3</sup> Ø 15

# Dimensions

## Standard range

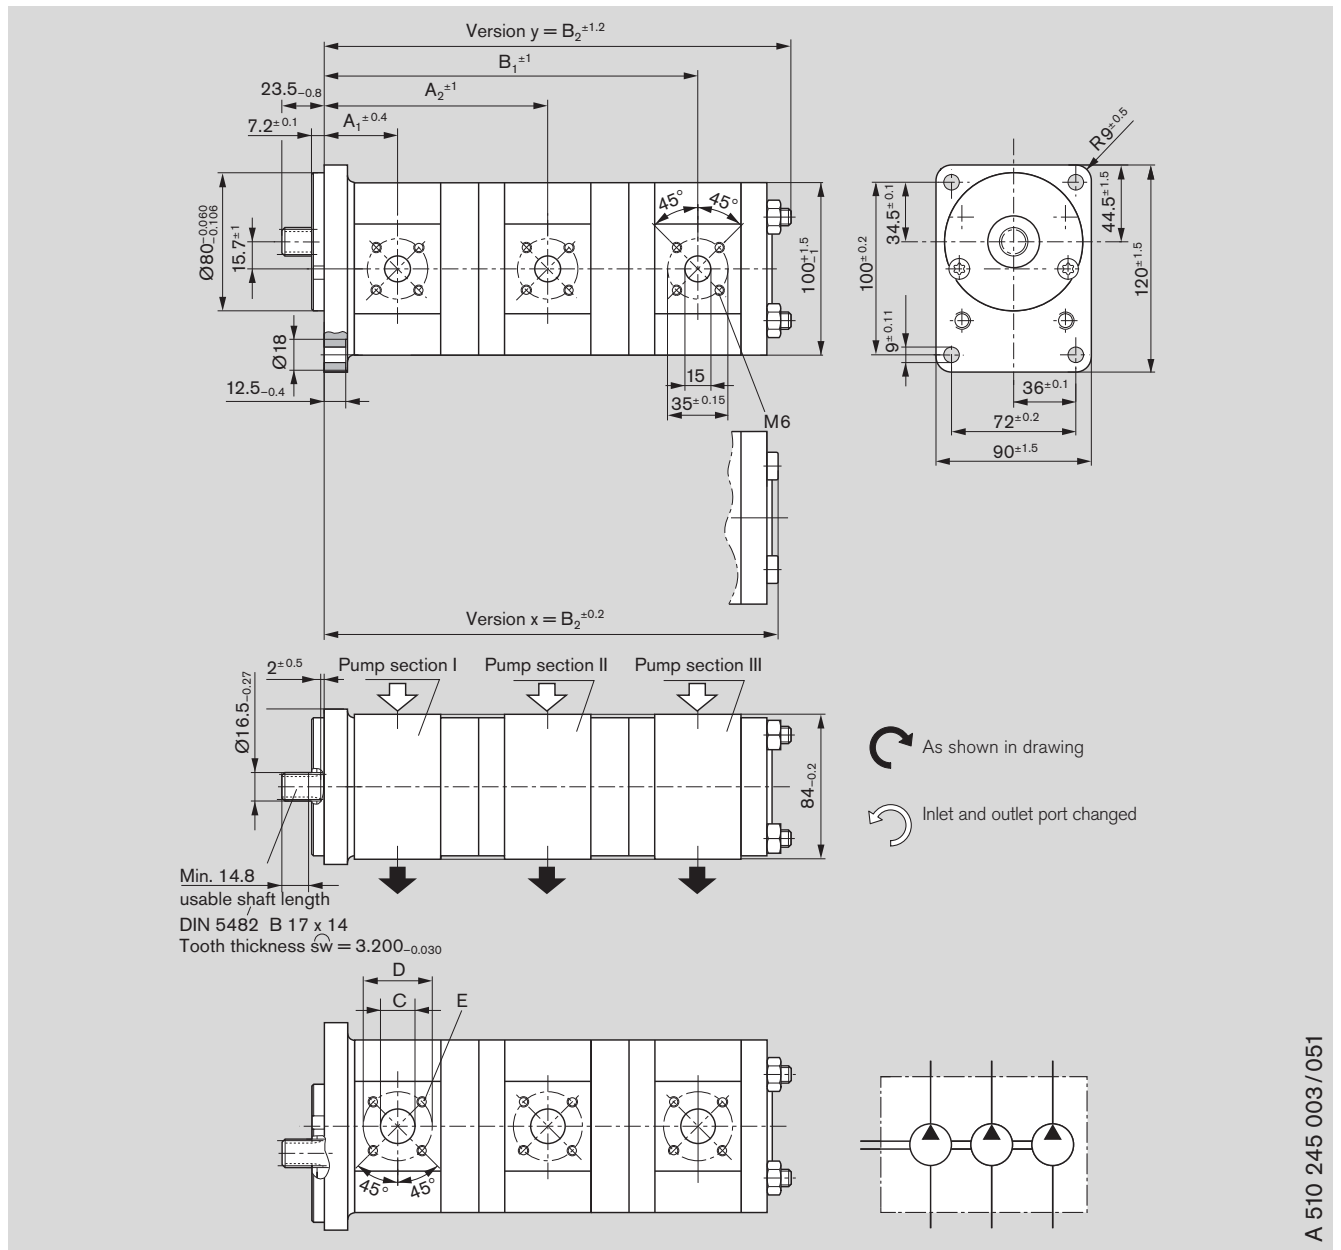

### Ordering code

AZPFFF - 10 -  /  /  F B 20 20 20 M B

AZPFFF - 11 -  /  /  F B 20 20 20 M B\*

Displacement [cm <sup>3</sup> /rev] P <sub>I</sub> P <sub>II</sub> P <sub>III</sub>	Ordering-No.		Max. operating pressure [bar] P <sub>I</sub> P <sub>II</sub> P <sub>III</sub>	Max. rotation speed [rpm]	kg	Dimension [mm]						Version	
						A <sub>1</sub>	A <sub>2</sub>	B <sub>1</sub>	B <sub>2</sub>	C <sup>1)</sup>	D		E
11 4 4	0 510 565 371	-	280 280 280	3500	6.9	47.0	133.2	214.9	259.0	20	40	M6	y
14 4 8	0 510 565 408	-	280 280 280	3000	7.2	47.5	138.2	223.2	270.6	20	40	depth 13	x
14 8 8	0 510 565 422	-	280 280 280	3000	7.3	47.5	141.5	229.8	275.9	20	40		x
16 4 4	0 510 665 379	-	280 280 280	3000	7.2	47.5	141.6	223.3	267.4	20	40	x	
16 5.5 5.5	0 510 665 416	0 510 665 061	280 280 280	3000	7.4	47.5	142.8	227.0	272.4	20	40	x	
16 11 4	0 510 665 372	-	280 210 210	3000	7.5	47.5	148.7	234.9	276.5	20	40	x	
16 11 5.5	-	0 510 665 092*	280 210 120	3000	7.6	47.5	148.7	236.1	280.2	20	40	x	
16 16 11	0 510 665 371	-	280 120 120	3000	8.1	47.5	149.2	250.4	302.5	20	40	x	
19 8 5.5	-	0 510 665 111*	230 250 160	3000	7.5	47.5	149.2	236.1	280.2	20	40	x	
19 11 5.5	-	0 510 665 112*	230 230 230	3000	7.6	47.5	153.7	241.1	285.2	20	40	x	


1) 4 and 5.5 cm<sup>3</sup> Ø 15





# Dimensions

## Standard range

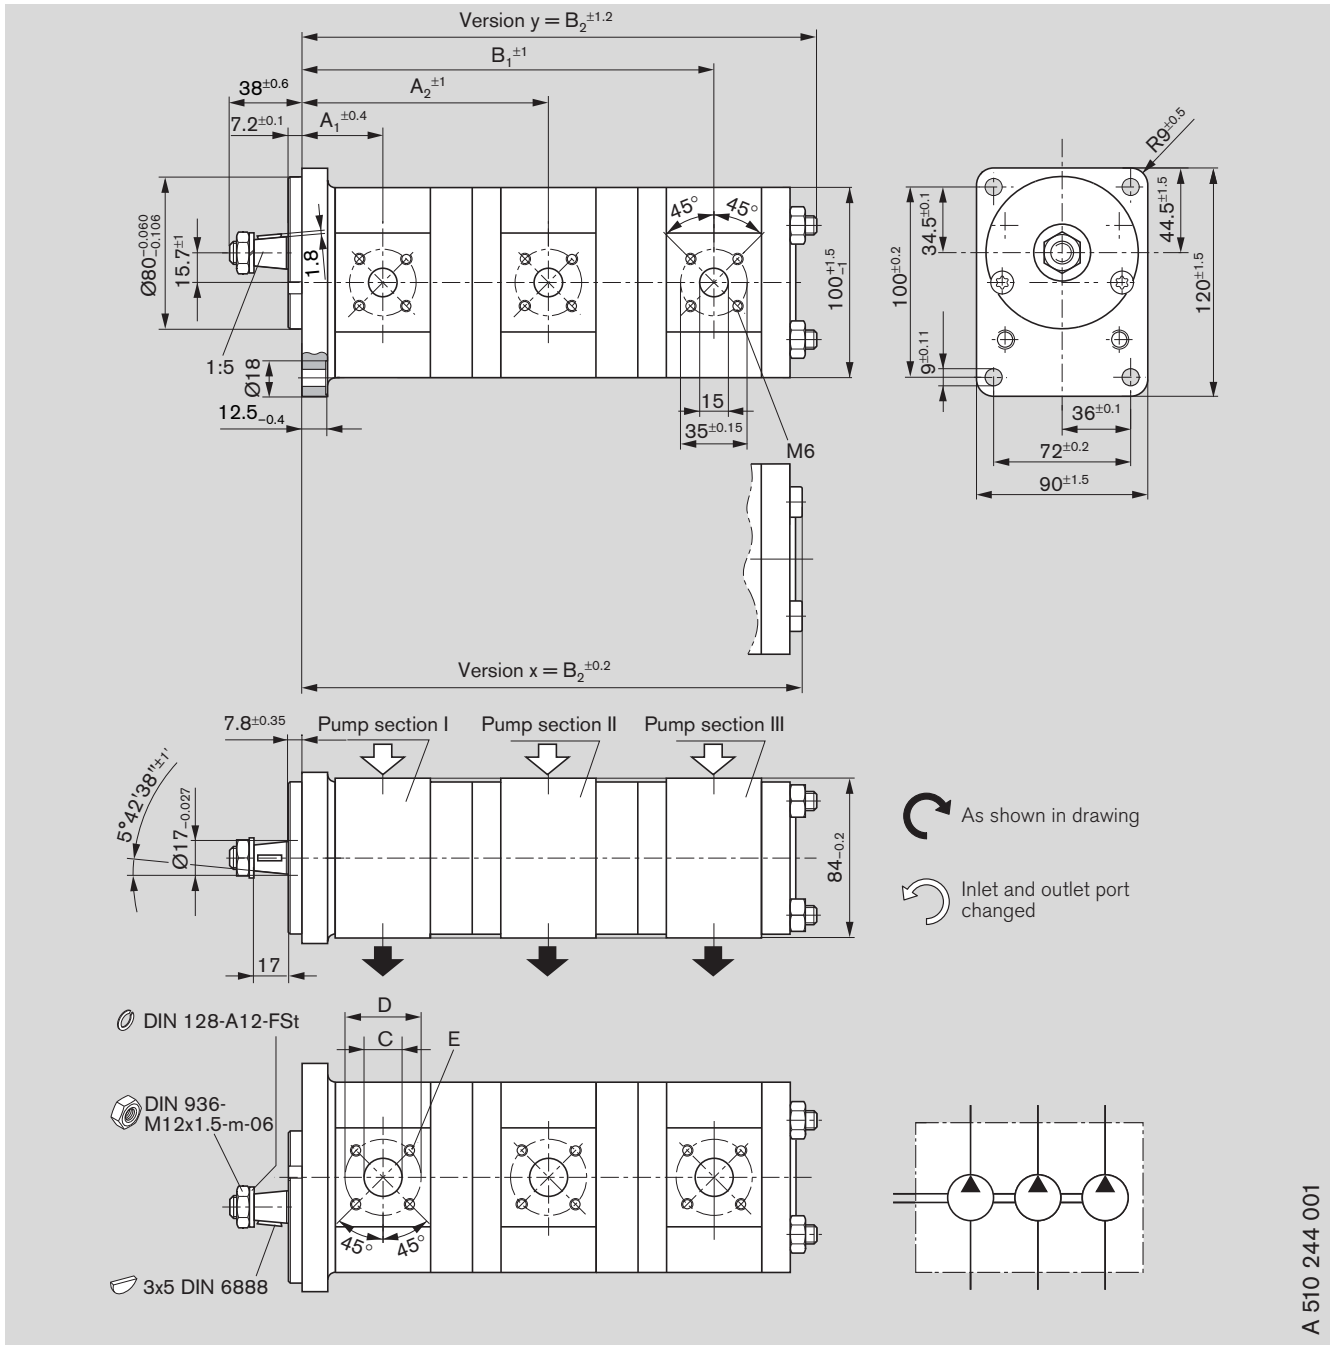

### Ordering code

AZPFFF - 10 -    /    /     C B 20 20 20 M B

AZPFFF - 11 -    /    /     C B 20 20 20 K B\*


Displacement [cm <sup>3</sup> /rev]	Ordering-No.			Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]						Version				
	P <sub>I</sub>	P <sub>II</sub>	P <sub>III</sub>				L	R	A <sub>1</sub>	A <sub>2</sub>	B <sub>1</sub>	B <sub>2</sub>		C <sup>1)</sup>	D	E	
8	8	4	-	0 510 465 027	280	280	280	4000	7.0	43.2	131.5	216.5	260.6	20	40	M6	x
11	8	8	-	0 510 565 081	280	230	230	3500	7.2	47.0	136.5	224.8	272.2	20	40	depth 13	x
16	4	4	0 510 665 419*	-	280	280	280	3000	7.1	47.5	141.6	223.3	267.4	20	40		x
16	8	4	-	0 510 665 134	280	280	280	3000	7.3	47.5	144.9	229.9	272.7	20	40		x
22.5	8	9	0 510 765 334*	-	230	210	210	3000	8.15	61.6	167.3	255.6	307.5	20	40		y

1) 4 and 5.5 cm<sup>3</sup> Ø 15



# Dimensions

## Standard range

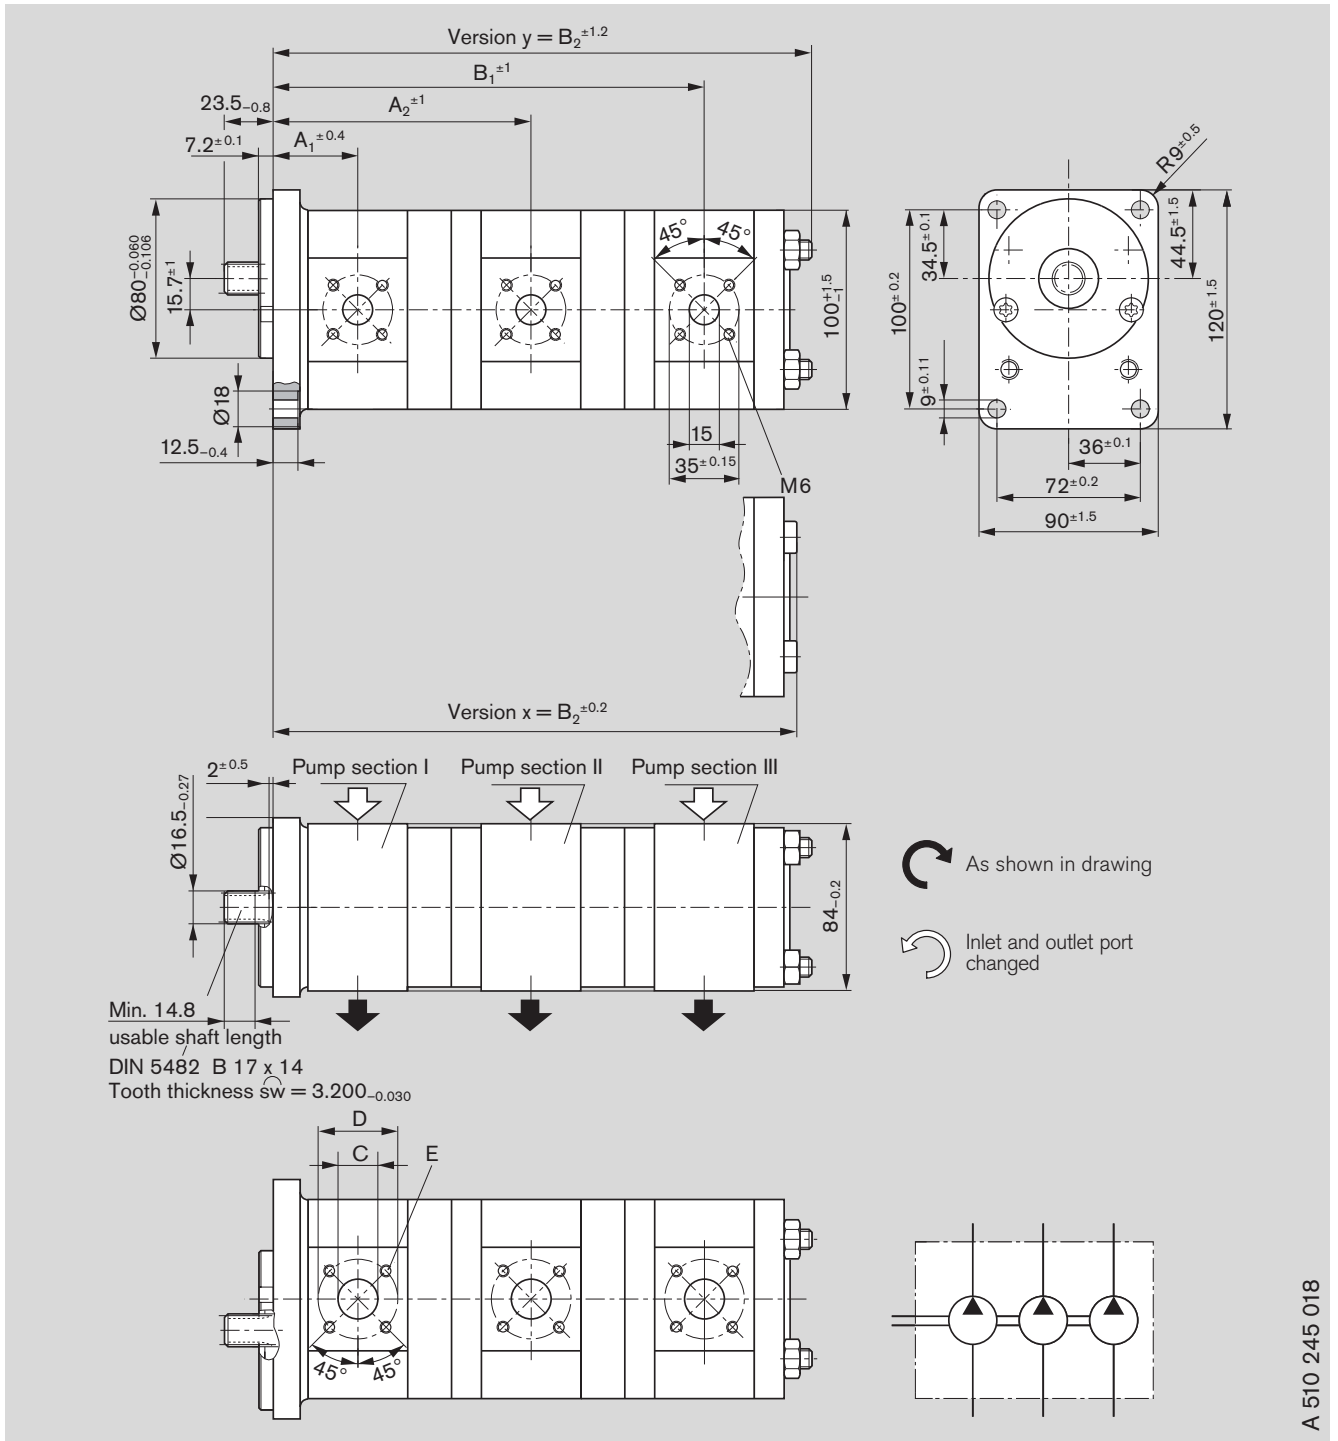

### Ordering code

AZPFFF - 10 - □ □ □ / □ □ □ / □ □ □ □ F B 20 20 20 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.			Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]						Version				
	P <sub>I</sub>	P <sub>II</sub>	P <sub>III</sub>				L	R	P <sub>I</sub>	P <sub>II</sub>	P <sub>III</sub>	A <sub>1</sub>		A <sub>2</sub>	B <sub>1</sub>	B <sub>2</sub>	C <sup>1)</sup>
8	8	4	-	0 510 465 019	280	280	280	4000	7.0	43.2	131.5	216.5	260.8	20	40	M6	x
19	16	4	0 510 665 380	-	230	190	190	3000	7.8	47.5	154.2	248.3	297.5	20	40	depth 13	y

1) 4 and 5.5 cm<sup>3</sup> Ø 15



# Notes for commissioning

## Filter recommendation

The major share of premature failures in external gear pumps is caused by contaminated hydraulic fluid.

As a warranty cannot be issued for dirt-specific wear, we recommend filtration compliant with cleanliness level 20/18/15 ISO 4406, which reduces the degree of contamination to a permissible dimension in terms of the size and concentration of dirt particles:

Operating pressure [bar ]	>160	<160
Contamination class ISO 4406	18/15	19/16
To be reached with $\beta_x = 75$	20	25

We recommend that a full-flow filter always be used. Basic contamination of the hydraulic fluid used may not exceed class 20/18/15 according to ISO 4406. Experience has shown that new fluid quite often lies above this value. In such instances a filling device with special filter should be used.

## General

- The pumps supplied by us have been checked for function and performance. No modifications of any kind may be made to the pumps; any such changes will render the warranty null and void!
- Pump may only be operated in compliance with permitted data (see pages 15 – 18).

## Project planning notes

Comprehensive notes and suggestions are available in Hydraulics Trainer, Volume 3 RE 00 281, "Project planning notes and design of hydraulic systems". Where external gear pumps are used we recommend that the following note be adhered to.

## Technical data

All stated technical data is dependent on production tolerances and is valid for specific marginal conditions.

Note that, as a consequence, scattering is possible, and at certain marginal conditions (e.g. viscosity) **the technical data may change**.

## Characteristics

When designing the external gear pump, note the maximum possible service data based on the characteristics displayed on pages 10 to 12.

Additional information on the proper handling of hydraulic products from Bosch Rexroth is available in our document: "General product information for hydraulic products" RE 07 008.

## Contained in delivery

The components with characteristics as described under ordering code and device measurements, pages 20 – 58, are contained in delivery.


**You can find further information in our publication:**  
**"General Operating Instructions for External Gear Units"**  
**RE 07 012-B1.**

## Service parts

Page	Ordering code	Seal kit Pos. 800 1 517 010 ...	Shaft seal ring Pos. 3 1 510 283 ...	Material	Dimension	Seal ring Pos. 31 1 900 210 ...	Material	Dimension
20	AZPF - 1x - □□□ □ CB 20 MB	152 NBR	008	NBR	17 x 30 x 7			
21	AZPF - 1x - □□□ □ FB 20 MB	152 NBR	008	NBR	17 x 30 x 7			
22	AZPF - 1x - □□□ □ HO 30 KB	152 NBR	044	FKM	18 x 30 x 7			
23	AZPF - 1x - □□□ □ FO 30 MB	152 NBR	008	NBR	17 x 30 x 7			
23	AZPF - 1x - □□□ □ FO 30 PB	193 FKM	027	FKM	17 x 30 x 7			
24	AZPF - 1x - □□□ □ HO 01 MB	152 NBR	008	NBR	17 x 30 x 7			
25	AZPF - 1x - □□□ □ AB 01 MB	208 FKM	037	NBR	18 x 30 x 6			
26	AZPF - 1x - □□□ □ CP 20 MB	152 NBR	008	NBR	17 x 30 x 7			
26	AZPF - 1x - □□□ □ CP 20 KB	152 NBR	027	FKM	17 x 30 x 7			
27	AZPF - 1x - □□□ □ CN 20 MB	152 NBR	008	NBR	17 x 30 x 7	145	NBR	45 x 2.5
28	AZPF - 1x - □□□ □ FN 20 MB	152 NBR	008	NBR	17 x 30 x 7			
29	AZPF - 1x - □□□ □ FP 20 PB	193 FKM	027	FKM	17 x 30 x 7			
30	AZPF - 1x - □□□ □ NT 20 MB	152 NBR	008	NBR	17 x 30 x 7	145	NBR	45 x 2.5
31	AZPF - 1x - □□□ □ NL 20 KB	152 NBR	027	FKM	17 x 30 x 7	145	NBR	45 x 2.5
32	AZPF - 1x - □□□ □ QR 12 MB	152 NBR	008	NBR	17 x 30 x 7			
33	AZPF - 1x - □□□ □ RR 12 MB	152 NBR	008	NBR	17 x 30 x 7			
34	AZPF - 1x - □□□ □ RR 20 MB	152 NBR	008	NBR	17 x 30 x 7			
34	AZPF - 1x - □□□ □ RR 20 KB	152 NBR	027	FKM	17 x 30 x 7			
35	AZPF - 1x - □□□ □ QR 20 MB	152 NBR	008	NBR	17 x 30 x 7			
36	AZPF - 1x - □□□ □ SA 20 MB	152 NBR	008	NBR	17 x 30 x 7	145	NBR	45 x 2.5
36	AZPF - 1x - □□□ □ SA 20 KB	152 NBR	015	FKM	17 x 30 x 7	145	NBR	45 x 2.5
37	AZPF - 1x - □□□ □ SG 20 MB	152 NBR	009	NBR	20 x 40 x 7	145	NBR	45 x 2.5
39	AZPF - 1x - □□□ □ CP 20 20 KB	152 NBR	027/008	NBR	17 x 30 x 7	145	NBR	45 x 2.5
41	AZPFF - 1x - □□□ / □□□ □ FB 20 20 MB	152 (2x) NBR	008 (2x)	NBR	17 x 30 x 7	145	NBR	45 x 2.5
43	AZPFF - 1x - □□□ / □□□ □ CB 20 20 MB	152 (2x) NBR	008 (2x)	NBR	17 x 30 x 7	145	NBR	45 x 2.5
45	AZPFF - 1x - □□□ / □□□ □ HO 20 20 MB	152 (2x) NBR	008 (2x)	NBR	17 x 30 x 7	145	NBR	45 x 2.5
45	AZPFF - 1x - □□□ / □□□ □ HO 20 20 KB	152 (2x) NBR	027/008	FKM/ NBR	17 x 30 x 7	145	NBR	45 x 2.5
47	AZPFF - 1x - □□□ / □□□ □ RR 20 20 MB	152 (2x) NBR	008 (2x)	NBR	17 x 30 x 7	145	NBR	45 x 2.5
47	AZPFF - 1x - □□□ / □□□ □ RR 20 20 KB	152 (2x) NBR	027 (2x)	FKM	17 x 30 x 7	145	NBR	45 x 2.5
48	AZPFF - 1x - □□□ / □□□ □ NM 20 20 MB	152 (2x) NBR	008	NBR	17 x 30 x 7	145	NBR	45 x 2.5
49	AZPFF - 1x - □□□ / □□□ □ FP 20 20 MB	152 NBR	008 (2x)	NBR	17 x 30 x 7	145	NBR	45 x 2.5
49	AZPFF - 1x - □□□ / □□□ □ FP 20 20 KB	152 (2x) NBR	027	FKM	17 x 30 x 7	145	NBR	45 x 2.5
50	AZPFF - 1x - □□□ / □□□ □ SA 20 20 MB	152 (2x) NBR	008/009	NBR	17 x 30 x 7	145	NBR	45 x 2.5
51	AZPFF - 1x - □□□ / □□□ □ SG 20 20 PB	193 (2x) FKM	015/027	FKM	17 x 30 x 7	1 520 210 101	FKM	45 x 2.5
52	AZPFF - 1x - □□□ / □□□ □ NL 20 20 KB	152 (2x) NBR	027 (2x)	FKM	17 x 30 x 7	145	NBR	45 x 2.5
53	AZPFFF - 1x - □□□ / □□□ / □□□ □ FB 20 20 20 MB	152 (3x) NBR	008 (3x)	NBR	17 x 30 x 7	145 (2x)	NBR	45 x 2.5
54	AZPFFF - 1x - □□□ / □□□ / □□□ □ CB 20 20 20 MB	152 (3x) NBR	008 (3x)	NBR	17 x 30 x 7	145 (2x)	NBR	45 x 2.5
55	AZPFFF - 1x - □□□ / □□□ / □□□ □ CB 20 20 20 MB	152 (3x) NBR	008 (3x)	NBR	17 x 30 x 7	145 (2x)	NBR	45 x 2.5
55	AZPFFF - 1x - □□□ / □□□ / □□□ □ CB 20 20 20 KB	152 (3x) NBR	027/008 (2x)	FKM/ NBR	17 x 30 x 7	145	NBR	45 x 2.5
56	AZPFFF - 1x - □□□ / □□□ / □□□ □ SG 20 20 20 MB	152 (3x) NBR	008 (3x)	NBR	17 x 30 x 7	145 (2x)	NBR	45 x 2.5
57	AZPFFF - 1x - □□□ / □□□ / □□□ □ FB 20 20 20 MB	152 (3x) NBR	008 (3x)	NBR	17 x 30 x 7	145 (2x)	NBR	45 x 2.5
58	AZPFFF - 1x - □□□ / □□□ / □□□ □ RR 20 20 20 MB	152 (3x) NBR	008 (3x)	NBR	17 x 30 x 7	145 (2x)	NBR	45 x 2.5


NBR = Perbunan® FKM = Viton®

For further service parts refer to CD-ROM HYparts 1 987 760 010

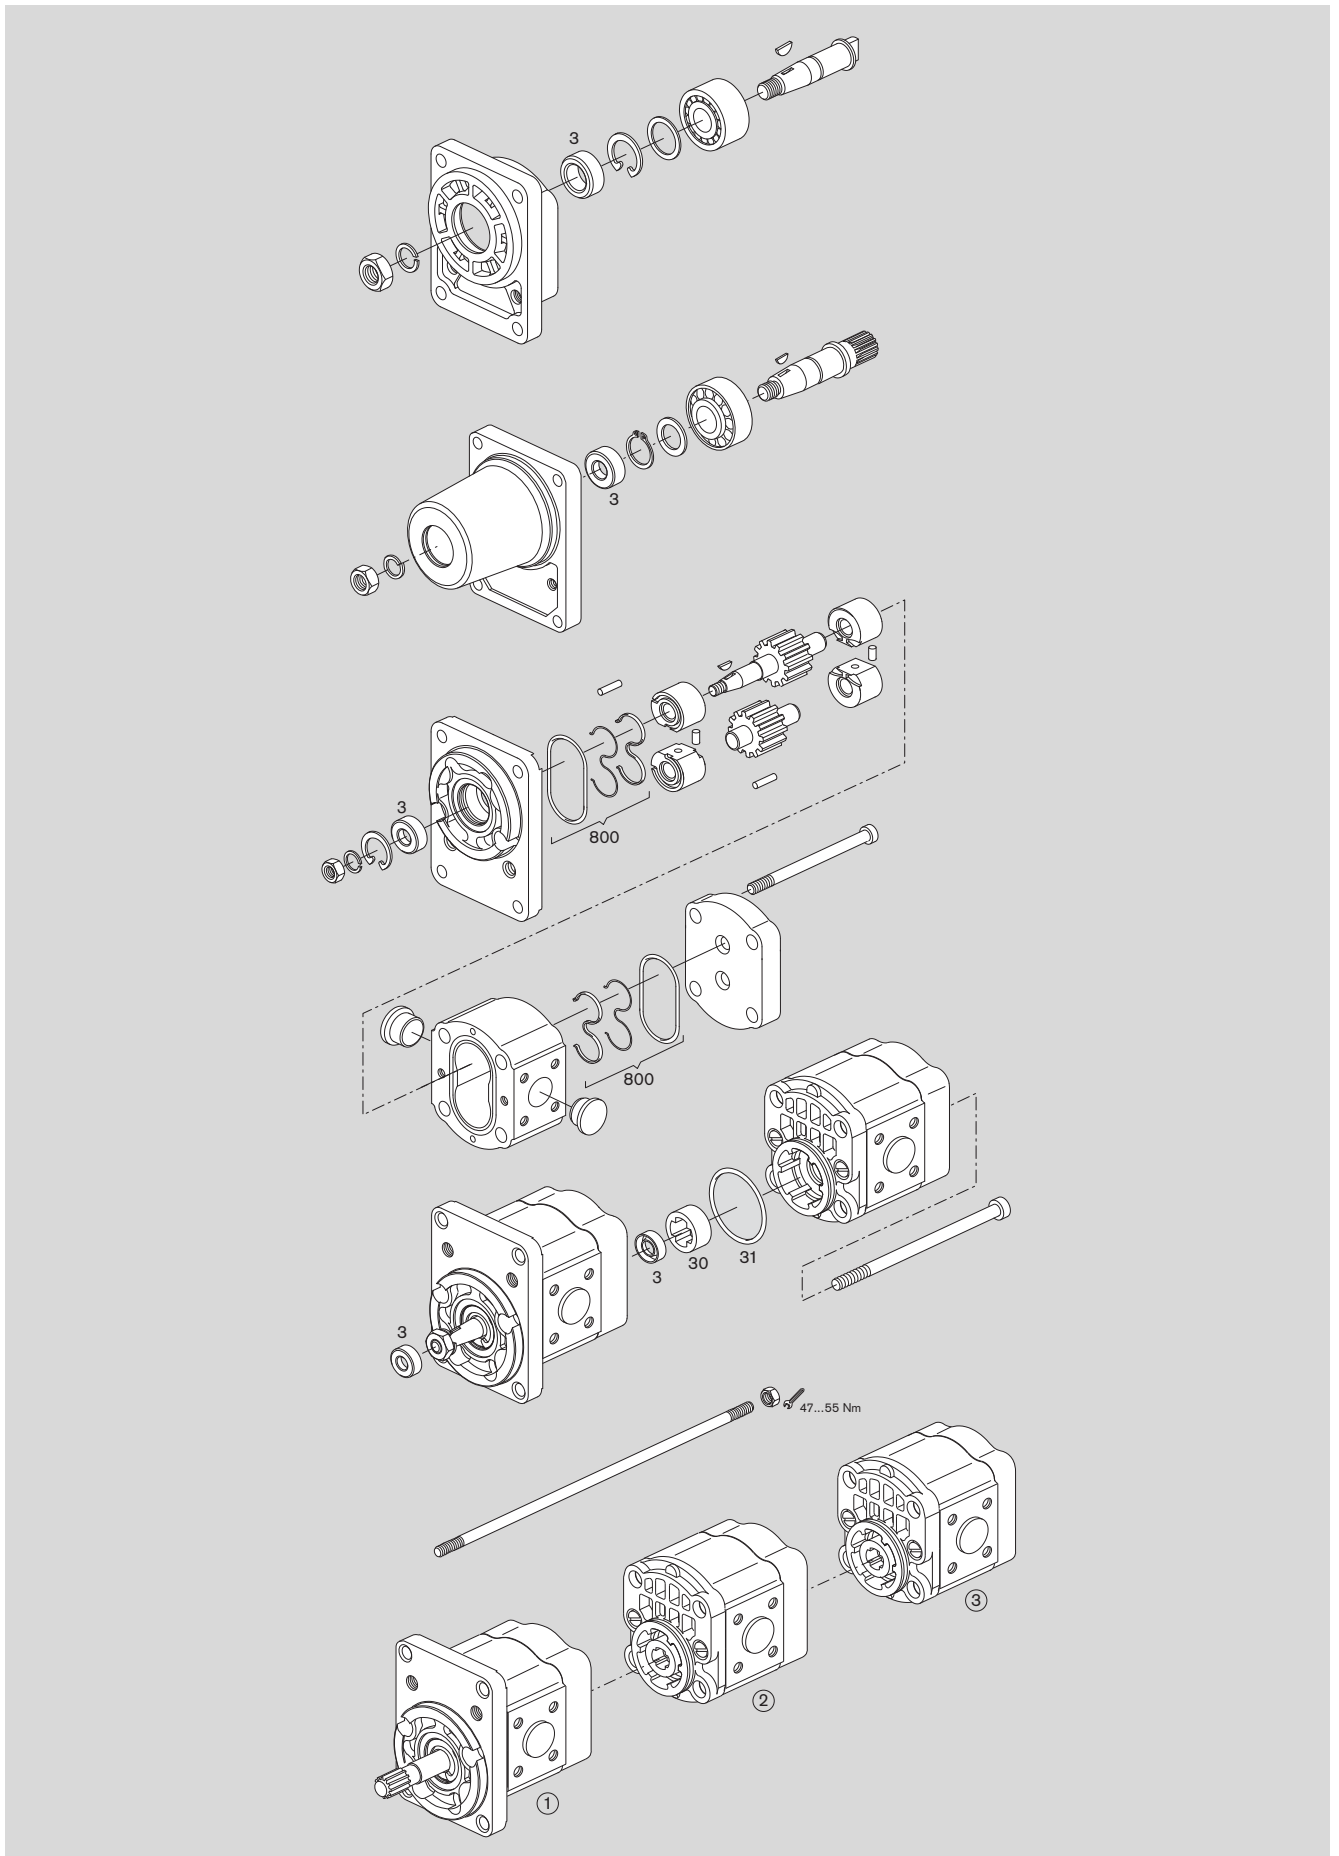

# Fittings


Gear pump flange, straight, for rectangular flange **20** see page 9

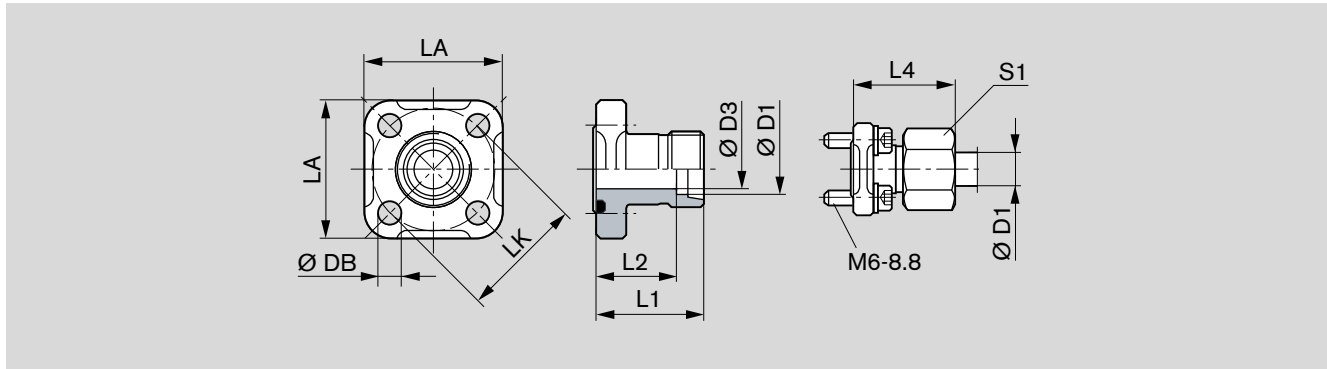

LK	D1	D3	L1	L2	L4	LA	S1	DB	Screws 4x	Seal ring NBR *)	Mass [kg]	Part number	p [bar]
35	10L	8	30	23.0	39.0	40	19	6.4	M 6x22	20x2.5	0.09	<b>1 515 702 064</b>	315
35	12L	10	30	23.0	39.0	40	22	6.4	M 6x22	20x2.5	0.10	<b>1 515 702 065</b>	315
35	15L	12	30	23.0	38.0	40	27	6.4	M 6x22	20x2.5	0.10	<b>1 515 702 066</b>	250
40	15L	12	35	28.0	43.0	42	27	6.4	M 6x22	24x2.5	0.12	<b>1 515 702 067</b>	100
40	18L	15	35	27.5	44.0	42	32	6.4	M 6x22	24x2.5	0.13	<b>1 515 702 068</b>	100
40	22L	19	35	27.5	44.5	42	36	6.4	M 6x22	24x2.5	0.12	<b>1 515 702 069</b>	100
40	28L	24	42	27.5	34.5	42	41	6.4	M 6x22	24x2.5	0.15	<b>1 515 702 008</b>	100

Complete fittings with seal ring, metric screw set, nuts and olive. \*) NBR = Perbunan®


Gear pump flange, 90° angle, for rectangular flange **20** see page 9

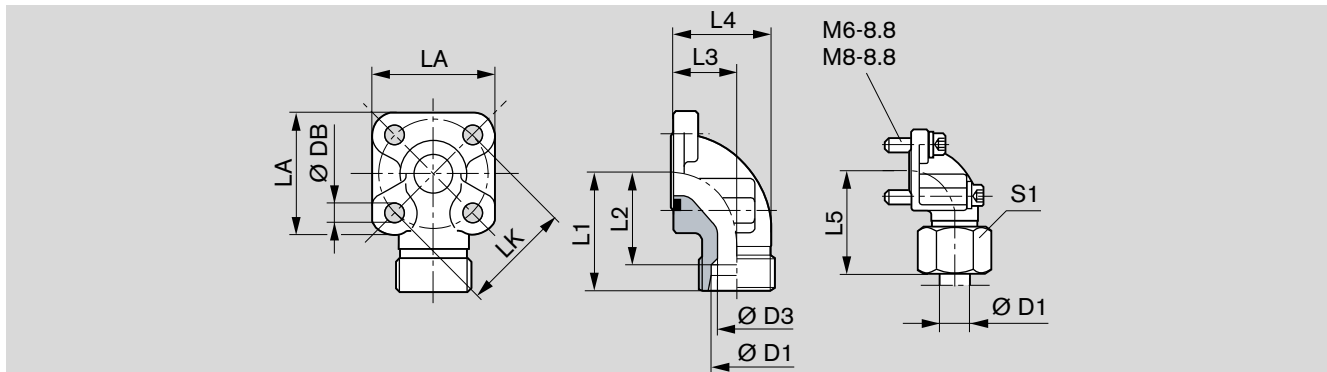

LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws		Seal ring NBR *)	Mass [kg]	Part number	p (bar)
											2x	2x				
35	10L	8	38	31.0	16.5	26.5	47.0	40	19	6.4	M 6x22	M 6x35	20x2.5	0.16	<b>1 515 702 070</b>	315
35	12L	10	38	31.0	16.5	26.5	47.0	40	22	6.4	M 6x22	M 6x35	20x2.5	0.16	<b>1 515 702 071</b>	315
35	15L	12	38	31.0	16.5	26.5	46.0	40	27	6.4	M 6x22	M 6x35	20x2.5	0.15	<b>1 515 702 072</b>	250
35	16S	12	38	29.5	20.0	31.0	48.0	40	30	6.4	M 6x22	M 6x40	20x2.5	0.18	<b>1 515 702 002</b>	315
35	18L	15	38	29.5	20.0	31.0	47.0	40	32	6.4	M 6x22	M 6x40	20x2.5	0.18	<b>1 545 702 006</b>	250
35	20S	16	45	34.5	25.0	38.0	56.0	40	36	6.4	M 6x22	M 6x45	20x2.5	0.24	<b>1 515 702 017</b>	315
40	15L	12	38	31.0	22.5	36.5	46.0	42	27	6.4	M 6x22	M 6x22	24x2.5	0.15	<b>1 515 702 073</b>	100
40	18L	15	38	30.5	22.5	36.5	47.0	42	32	6.4	M 6x22	M 6x22	24x2.5	0.17	<b>1 515 702 074</b>	100
40	20S	16	40	29.5	22.5	35.5	50.0	42	36	6.4	M 6x22	M 6x45	24x2.5	0.20	<b>1 515 702 011</b>	250
40	22L	19	38	30.5	22.5	36.5	47.5	42	36	6.4	M 6x22	M 6x22	24x2.5	0.17	<b>1 515 702 075</b>	100
40	28L	22	40	32.5	28.0	43.0	49.0	42	41	6.4	M 6x20	M 6x50	24x2.5	0.24	<b>1 515 702 010</b>	100
40	35L	31	41	30.5	34.0	55.0	52.0	42	50	6.4	M 6x22	M 6x60	24x2.5	0.33	<b>1 515 702 018</b>	100

Complete fittings with seal ring, metric screw set, nuts and olive. \*) NBR = Perbunan®

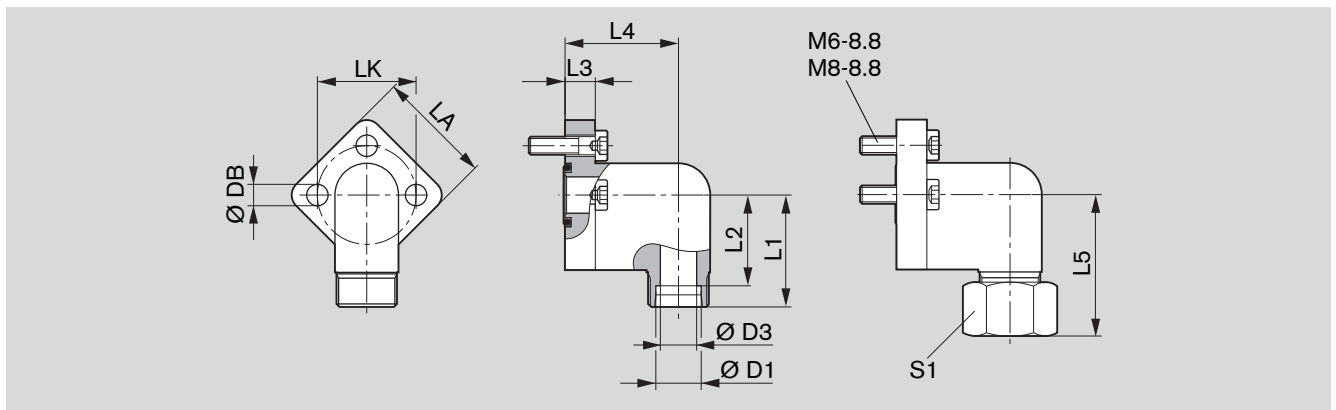

**Gear pump flange, 3-hole, 90° angle, for rectangular flange 30 see page 9**


LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws 3x	Seal ring NBR *)	Mass [kg]	Part number	$p$ [bar]
30	12L	10	37	30.0	10	37.5	46	38	22	6.4	M6x22	16x2.5	0.13	<b>1 515 702 146</b>	250
30	15L	12	37	30.0	10	37.5	47	38	27	6.4	M6x22	16x2.5	0.14	<b>1 515 702 147</b>	250
30	18L	15	37	30.0	10	37.5	47	38	32	6.4	M6x22	16x2.5	0.17	<b>1 515 702 148</b>	160
40	22L	19	43	35.5	14	41.0	53	48	36	8.4	M8x30	24x2.5	0.29	<b>1 515 702 149</b>	160
40	28L	24	43	35.5	14	41.0	53	48	41	8.4	M8x30	24x2.5	0.40	<b>1 515 702 150</b>	160

Complete fittings with seal ring, metric screw set, nuts and olive. \*) NBR = Perbunan®

**Note**

You can find the permissible tightening torques in our publication:

“General Operating Instructions for External Gear Units”

RE 07 012-B1.

# Ordering-No.


Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page
0 510 215 006	27	0 510 365 305	39	0 510 515 007	26	0 510 555 007	56
0 510 215 007	30	0 510 365 314	48	0 510 515 011	28	0 510 555 300	50
0 510 215 009	26	0 510 415 005	27	0 510 515 015	27	0 510 555 301	50
0 510 215 306	27	0 510 415 006	30	0 510 515 018	26	0 510 555 302	50
0 510 215 307	30	0 510 415 313	27	0 510 515 019	30	0 510 565 012	43
0 510 215 309	26	0 510 415 314	30	0 510 515 309	26	0 510 565 014	39
0 510 225 006	20	0 510 415 316	26	0 510 515 310	27	0 510 565 015	48
0 510 225 007	21	0 510 425 009	20	0 510 515 311	30	0 510 565 016	48
0 510 225 010	33	0 510 425 010	21	0 510 515 316	26	0 510 565 018	41
0 510 225 011	32	0 510 425 015	33	0 510 515 317	26	0 510 565 019	41
0 510 225 012	31	0 510 425 016	32	0 510 515 337	29	0 510 565 022	47
0 510 225 013	34	0 510 425 019	31	0 510 515 340	30	0 510 565 023	47
0 510 225 014	35	0 510 425 020	34	0 510 525 009	20	0 510 565 032	41
0 510 225 022	22	0 510 425 021	23	0 510 525 010	21	0 510 565 033	43
0 510 225 023	25	0 510 425 025	35	0 510 525 014	33	0 510 565 034	41
0 510 225 306	20	0 510 425 027	24	0 510 525 015	32	0 510 565 035	41
0 510 225 307	21	0 510 425 043	22	0 510 525 018	20	0 510 565 037	43
0 510 225 314	34	0 510 425 044	25	0 510 525 019	34	0 510 565 043	52
0 510 225 317	22	0 510 425 307	20	0 510 525 020	34	0 510 565 061	39
0 510 225 318	25	0 510 425 308	21	0 510 525 024	23	0 510 565 065	54
0 510 245 001	36	0 510 425 314	34	0 510 525 025	31	0 510 565 069	41
0 510 245 300	36	0 510 425 315	23	0 510 525 030	21	0 510 565 072	39
0 510 255 300	50	0 510 425 331	31	0 510 525 031	32	0 510 565 078	48
0 510 315 004	27	0 510 425 334	22	0 510 525 033	35	0 510 565 080	54
0 510 315 005	30	0 510 425 335	25	0 510 525 034	23	0 510 565 081	55
0 510 315 006	26	0 510 425 336	21	0 510 525 039	24	0 510 565 095	39
0 510 315 007	28	0 510 445 001	36	0 510 525 040	24	0 510 565 319	39
0 510 315 304	27	0 510 445 300	36	0 510 525 041	33	0 510 565 328	41
0 510 315 305	30	0 510 455 001	50	0 510 525 074	22	0 510 565 329	48
0 510 315 307	26	0 510 455 002	50	0 510 525 075	22	0 510 565 332	41
0 510 325 006	20	0 510 455 004	56	0 510 525 076	25	0 510 565 334	41
0 510 325 007	21	0 510 455 300	50	0 510 525 311	20	0 510 565 335	39
0 510 325 010	33	0 510 455 301	50	0 510 525 312	21	0 510 565 346	47
0 510 325 011	32	0 510 465 008	48	0 510 525 315	33	0 510 565 353	43
0 510 325 012	31	0 510 465 011	39	0 510 525 319	20	0 510 565 356	41
0 510 325 013	34	0 510 465 012	48	0 510 525 323	23	0 510 565 364	43
0 510 325 016	35	0 510 465 019	57	0 510 525 324	34	0 510 565 367	41
0 510 325 018	24	0 510 465 023	39	0 510 525 325	34	0 510 565 371	53
0 510 325 025	22	0 510 465 025	58	0 510 525 328	21	0 510 565 376	39
0 510 325 026	25	0 510 465 027	55	0 510 525 331	23	0 510 565 379	48
0 510 325 306	20	0 510 465 031	54	0 510 525 374	22	0 510 565 385	49
0 510 325 307	21	0 510 465 032	39	0 510 525 375	22	0 510 565 387	39
0 510 325 312	31	0 510 465 320	39	0 510 525 376	25	0 510 565 389	39
0 510 325 313	34	0 510 465 324	39	0 510 545 001	36	0 510 565 393	39
0 510 325 320	22	0 510 465 326	41	0 510 545 002	37	0 510 565 406	39
0 510 325 321	25	0 510 465 344	39	0 510 545 003	37	0 510 565 408	53
0 510 345 001	36	0 510 465 345	41	0 510 545 300	36	0 510 565 417	39
0 510 345 300	36	0 510 465 346	48	0 510 545 302	37	0 510 565 422	53
0 510 355 301	50	0 510 465 355	49	0 510 555 001	50	0 510 565 435	45
0 510 365 009	52	0 510 515 004	27	0 510 555 002	50	0 510 565 436	45
0 510 365 010	48	0 510 515 005	30	0 510 555 003	50	0 510 615 005	26

Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page
0 510 615 006	27	0 510 655 004	50	0 510 665 372	53	0 510 765 320	43
0 510 615 007	30	0 510 655 005	50	0 510 665 375	41	0 510 765 331	41
0 510 615 008	30	0 510 655 007	51	0 510 665 376	49	0 510 765 334	55
0 510 615 009	28	0 510 655 011	51	0 510 665 379	53	0 510 765 338	41
0 510 615 010	26	0 510 655 300	50	0 510 665 380	57	0 510 765 340	43
0 510 615 314	27	0 510 655 301	50	0 510 665 381	39	0 510 765 341	41
0 510 615 315	30	0 510 655 302	50	0 510 665 382	39	0 510 765 343	39
0 510 615 318	26	0 510 655 303	50	0 510 665 400	43	0 510 765 345	39
0 510 615 321	30	0 510 655 304	50	0 510 665 404	49	0 510 900 001	43
0 510 615 341	27	0 510 665 024	43	0 510 665 416	53	0 510 900 002	43
0 510 625 013	20	0 510 665 025	43	0 510 665 418	39	0 510 900 003	43
0 510 625 014	21	0 510 665 029	41	0 510 665 419	55	0 510 900 004	43
0 510 625 015	21	0 510 665 030	48	0 510 665 420	41	0 510 900 005	43
0 510 625 020	33	0 510 665 036	41	0 510 665 435	47	0 510 900 006	43
0 510 625 021	32	0 510 665 042	47	0 510 665 442	39	0 510 900 007	43
0 510 625 022	20	0 510 665 047	47	0 510 665 449	52	0 510 900 008	43
0 510 625 027	31	0 510 665 052	39	0 510 715 004	30	0 510 900 009	43
0 510 625 028	34	0 510 665 053	43	0 510 715 008	29	0 510 900 010	43
0 510 625 029	34	0 510 665 058	41	0 510 715 306	26	0 510 900 011	43
0 510 625 032	31	0 510 665 061	53	0 510 715 307	30	0 510 900 012	43
0 510 625 039	23	0 510 665 062	49	0 510 715 320	29	0 510 900 013	43
0 510 625 041	32	0 510 665 064	41	0 510 725 030	20	0 510 900 014	43
0 510 625 042	35	0 510 665 067	43	0 510 725 044	31	0 510 900 015	43
0 510 625 043	35	0 510 665 068	52	0 510 725 059	32	0 510 900 016	43
0 510 625 047	24	0 510 665 071	49	0 510 725 060	35	0 510 900 017	43
0 510 625 048	33	0 510 665 076	49	0 510 725 062	21	0 510 900 018	43
0 510 625 049	23	0 510 665 092	53	0 510 725 063	33	0 510 900 019	43
0 510 625 052	24	0 510 665 097	41	0 510 725 076	23	0 510 900 020	43
0 510 625 075	22	0 510 665 111	53	0 510 725 077	34	0 510 900 021	43
0 510 625 076	22	0 510 665 112	53	0 510 725 084	24	0 510 900 022	43
0 510 625 077	25	0 510 665 115	41	0 510 725 112	22	0 510 900 023	43
0 510 625 314	20	0 510 665 126	47	0 510 725 113	22	0 510 900 024	43
0 510 625 315	20	0 510 665 132	47	0 510 725 114	22	0 510 900 025	43
0 510 625 316	21	0 510 665 134	55	0 510 725 120	25	0 510 900 026	43
0 510 625 317	21	0 510 665 135	39	0 510 725 330	20	0 510 900 027	43
0 510 625 327	23	0 510 665 144	39	0 510 725 348	23	0 510 900 028	43
0 510 625 329	34	0 510 665 152	39	0 510 725 349	21	0 510 900 029	43
0 510 625 330	34	0 510 665 325	43	0 510 725 361	34	0 510 900 030	43
0 510 625 332	23	0 510 665 326	43	0 510 725 396	35	0 510 900 031	43
0 510 625 346	33	0 510 665 327	43	0 510 725 410	22	0 510 900 032	43
0 510 625 358	31	0 510 665 328	39	0 510 725 411	22	0 510 900 033	43
0 510 625 368	31	0 510 665 330	39	0 510 725 412	22	0 510 900 034	43
0 510 625 381	22	0 510 665 333	41	0 510 725 418	25	0 510 900 035	43
0 510 625 382	25	0 510 665 334	41	0 510 765 012	43	0 510 900 036	43
0 510 625 386	22	0 510 665 336	39	0 510 765 016	47	0 510 900 037	43
0 510 645 002	36	0 510 665 337	39	0 510 765 022	41	0 510 900 038	43
0 510 645 003	37	0 510 665 339	48	0 510 765 023	43	0 510 900 039	43
0 510 645 004	36	0 510 665 347	41	0 510 765 028	39	0 510 900 040	43
0 510 645 005	37	0 510 665 348	39	0 510 765 045	39	0 510 900 041	43
0 510 645 300	36	0 510 665 354	47	0 510 765 049	39	0 510 900 042	43
0 510 655 001	50	0 510 665 368	39	0 510 765 309	39	0 510 900 043	43
0 510 655 002	50	0 510 665 369	39	0 510 765 312	48	0 510 900 044	43
0 510 655 003	50	0 510 665 371	53	0 510 765 317	41	0 510 900 045	43


Ordering-No.	Page	Ordering-No.	Page
0 510 900 046	43	0 510 901 038	47
0 510 900 047	43	0 510 901 039	47
0 510 900 048	43	0 510 901 040	47
0 510 900 049	43	0 510 901 041	47
0 510 900 050	43	0 510 901 042	47
0 510 900 051	43	0 510 901 043	47
0 510 900 052	43	0 510 901 044	47
0 510 900 053	43	0 510 901 045	47
0 510 900 054	43	0 510 901 500	45
0 510 900 055	43	0 510 901 501	45
0 510 900 056	43	0 510 901 502	45
0 510 900 057	43	0 510 901 503	45
0 510 900 058	43	0 510 901 504	45
0 510 900 059	43	0 510 901 505	45
0 510 900 060	43	0 510 901 506	45
0 510 900 061	43	0 510 901 507	45
0 510 901 000	47	0 510 901 508	45
0 510 901 001	47	0 510 901 509	45
0 510 901 002	47	0 510 901 510	45
0 510 901 003	47	0 510 901 511	45
0 510 901 004	47	0 510 901 512	45
0 510 901 005	47	0 510 901 513	45
0 510 901 006	47	0 510 901 514	45
0 510 901 007	47	0 510 901 515	45
0 510 901 008	47		
0 510 901 009	47		
0 510 901 010	47		
0 510 901 011	47		
0 510 901 012	47		
0 510 901 013	47		
0 510 901 014	47		
0 510 901 015	47		
0 510 901 016	47		
0 510 901 017	47		
0 510 901 018	47		
0 510 901 019	47		
0 510 901 020	47		
0 510 901 021	47		
0 510 901 022	47		
0 510 901 023	47		
0 510 901 024	47		
0 510 901 025	47		
0 510 901 026	47		
0 510 901 027	47		
0 510 901 028	47		
0 510 901 029	47		
0 510 901 030	47		
0 510 901 031	47		
0 510 901 032	47		
0 510 901 033	47		
0 510 901 034	47		
0 510 901 035	47		
0 510 901 036	47		
0 510 901 037	47		

# The AZ configurator at [www.boschrexroth.com/azconfigurator](http://www.boschrexroth.com/azconfigurator)


The AZ configurator assists you to configure your individual external gear unit easily and user-friendly. You only need to specify your requirements: From the displacement, direction of rotation, drive shaft, connection flange right up to the required rear cover. You immediately receive a project drawing (PDF format) if a configuration already exists. You receive the price of the configured external gear unit upon request.



The AZ configurator assists you to configure your individual external gear unit easily and user-friendly – all data needed for project planning are acquired thru menu guidance.

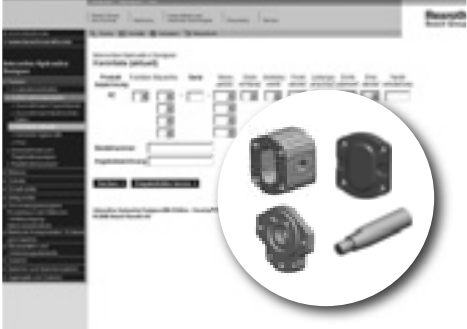

Selection is made either on an ordering code or your technical requirements. This means that you can search for external gear units that have already been configured, or you specify the configuration variant of the external gear unit based upon the operating parameters you require.



If the external gear unit you selected has been released you will receive the part number, ordering code and a detailed installation drawing. If your special configuration is not available please send your specification to Rexroth. One of our employees will then contact you.

Bosch Rexroth AG  
External Gear Units  
Robert-Bosch-Straße 2  
D-71701 Schwieberdingen  
Fax +49 (0) 711-811 5 11 18 14  
info.brh-stf@boschrexroth.de  
www.boschrexroth.com/brm

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.  
The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# External Gear Pumps Series N

**RE 10 091/02.12**  
Replaces:  
RE 10 091/11 .10

AZPN-...

Fixed pumps  
 $V = 20...36 \text{ cm}^3/\text{rev}$



## Overview of contents

Contents	Page
General	2
Product overview	3
Ordering code single pumps	4
Ordering code multiple pumps	5
Drive shaft	6
Front cover	6
Line ports	7
Gear pumps with integral valves	8
Design calculations for pumps	8
Performance charts	9
Noise charts	11
Specifications	12
Drive arrangements	13
Multiple gear pumps	15
Dimensions	16
Fittings	21
Service parts	22
Notes for commissioning	23
Ordering-No.	23

## Features

- Nominal pressure 250 bar
- Slide bearings for heavy duty applications
- Drive shafts to ISO or SAE
- Combination of several pumps possible
- Line ports: connection flanges
- Consistent high quality thru mass production
- Numerous configuration variants available



# General

Rexroth external gear pumps are available as standard gear pumps in the 4 series of B, F, N and G and as SILENCE gear pumps in the series of S, T and U, in which the displacements are graded by different gear widths. Further configuration variants are given by different flanges, shafts, valve arrangements and multiple pump combinations.

## Construction

The external gear pump consists essentially of a pair of gears supported in bearing bushings or bearing, dependent on the series, and the case with a front and rear cover. The drive shaft protrudes from the front cover where it is sealed by the shaft seal ring. The bearing forces are absorbed by special bearing bushings with sufficient elasticity to produce surface contact instead of line contact. They also ensure excellent resistance to galling – especially at low speed. The gears have 12 teeth. This keeps both flow pulsation and noise emission to a minimum.






The internal sealing is achieved by forces which are proportional to delivery pressure. This ensures optimum efficiency. The bearings provide the seal at the ends of the gaps between the teeth which carry the pressurized oil. The sealing zone between the gear teeth and the bearings is controlled by the admission of operating pressure to the rear of the bearing bushings. Special seals form the boundary of the zone. The radial clearance at the tips of the gear teeth is sealed by internal forces pushing them against the case.

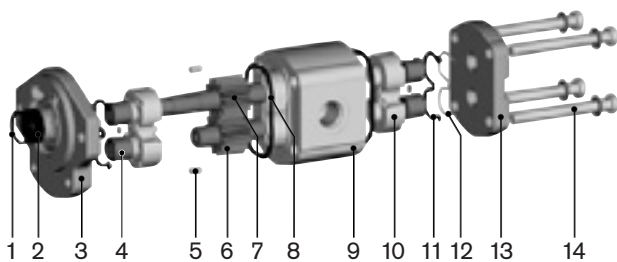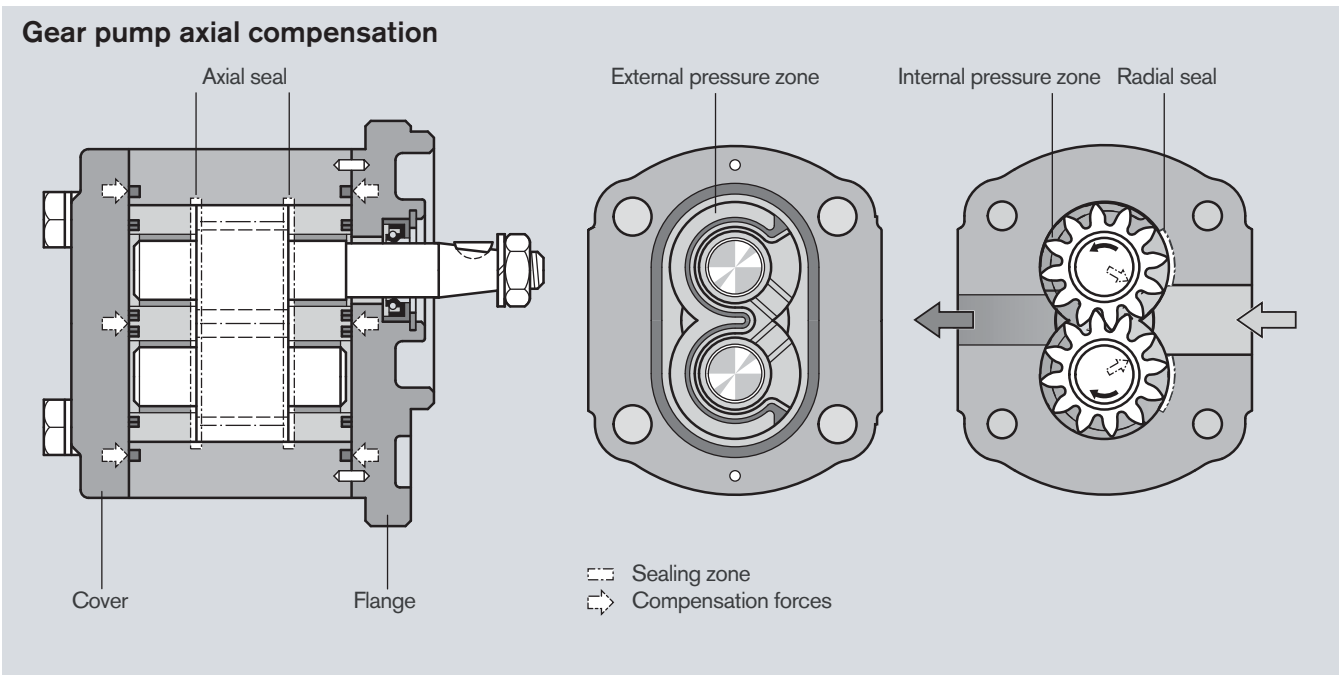

- |                     |                    |
|---------------------|--------------------|
| 1 Retaining ring    | 8 Case seal        |
| 2 Shaft seal ring   | 9 Pump case        |
| 3 Front cover       | 10 Bearing         |
| 4 Slide bearing     | 11 Axial zone seal |
| 5 Centering pin     | 12 Support         |
| 6 Gear              | 13 End cover       |
| 7 Gear (frictional) | 14 Fixing screws   |




Overview of "Series N" standard types


Version	Page	Version	Page	Version	Page
	16		18		20
	17		19		

The AZ configurator at [www.boschrexroth.com/azconfigurator](http://www.boschrexroth.com/azconfigurator)


The AZ configurator assists you to configure your individual external gear unit easily and user-friendly. You only need to specify your requirements: From the displacement, direction of rotation, drive shaft, connection flange right up to the required rear cover. You immediately receive a project drawing (PDF format) if a configuration already exists. You receive the price of the configured external gear unit upon request.



The AZ configurator assists you to configure your individual external gear unit easily and user-friendly – all data needed for project planning are acquired thru menu guidance.

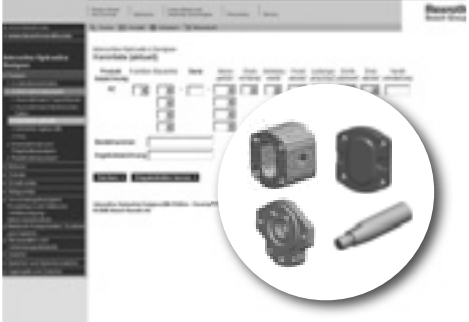










Selection is made either on an ordering code or your technical requirements. This means that you can search for external gear units that have already been configured, or you specify the configuration variant of the external gear unit based upon the operating parameters you require.



If the external gear unit you selected has been released you will receive the part number, ordering code and a detailed installation drawing. If your special configuration is not available please send your specification to Rexroth. One of our employees will then contact you.

# Ordering code




























## External gear units, single pumps, standard

AZ	P	N	-	x	x	-	020	R	C	B	20	M	B	18009	S xxxx																									
<table border="1"> <tr> <td><b>Function</b></td> <td rowspan="2">Special design *)</td> </tr> <tr> <td>P = Pump</td> </tr> <tr> <td><b>Series</b></td> <td rowspan="2"></td> </tr> <tr> <td>1 = Case width 92 mm 2 = Case width 110 mm</td> </tr> <tr> <td><b>Version</b></td> <td rowspan="2"></td> </tr> <tr> <td>1 = Phosphatized, pinned 2 = Chromatized, pinned</td> </tr> <tr> <td><b>Size N</b></td> <td rowspan="6"></td> </tr> <tr> <td>020 = 20.0 cm<sup>3</sup>/rev</td> </tr> <tr> <td>022 = 22.5 cm<sup>3</sup>/rev</td> </tr> <tr> <td>025 = 25.0 cm<sup>3</sup>/rev</td> </tr> <tr> <td>028 = 28.0 cm<sup>3</sup>/rev</td> </tr> <tr> <td>032 = 32.0 cm<sup>3</sup>/rev 036 = 36.0 cm<sup>3</sup>/rev</td> </tr> <tr> <td><b>Direction of rotation</b></td> <td rowspan="2"></td> </tr> <tr> <td>R = Clockwise L = Counterclockwise</td> </tr> </table>															<b>Function</b>	Special design *)	P = Pump	<b>Series</b>		1 = Case width 92 mm 2 = Case width 110 mm	<b>Version</b>		1 = Phosphatized, pinned 2 = Chromatized, pinned	<b>Size N</b>		020 = 20.0 cm <sup>3</sup> /rev	022 = 22.5 cm <sup>3</sup> /rev	025 = 25.0 cm <sup>3</sup> /rev	028 = 28.0 cm <sup>3</sup> /rev	032 = 32.0 cm <sup>3</sup> /rev 036 = 36.0 cm <sup>3</sup> /rev	<b>Direction of rotation</b>		R = Clockwise L = Counterclockwise	<table border="1"> <tr> <td><b>Valve adjustment</b></td> </tr> <tr> <td>200 xx = PRV 200 bar xxx 11 = FCV 11 l/min 18009 = PRV + FCV 180 bar, 9 l/min</td> </tr> <tr> <td><b>Rear cover</b></td> </tr> <tr> <td>B = Standard D = PRV residual flow internal E = FCV residual flow external S = FCV residual flow internal V = PRV + FCV</td> </tr> <tr> <td><b>Seals</b></td> </tr> <tr> <td>M = NBR K = NBR, SSR in FKM</td> </tr> </table>	<b>Valve adjustment</b>	200 xx = PRV 200 bar xxx 11 = FCV 11 l/min 18009 = PRV + FCV 180 bar, 9 l/min	<b>Rear cover</b>	B = Standard D = PRV residual flow internal E = FCV residual flow external S = FCV residual flow internal V = PRV + FCV	<b>Seals</b>	M = NBR K = NBR, SSR in FKM
<b>Function</b>	Special design *)																																							
P = Pump																																								
<b>Series</b>																																								
1 = Case width 92 mm 2 = Case width 110 mm																																								
<b>Version</b>																																								
1 = Phosphatized, pinned 2 = Chromatized, pinned																																								
<b>Size N</b>																																								
020 = 20.0 cm <sup>3</sup> /rev																																								
022 = 22.5 cm <sup>3</sup> /rev																																								
025 = 25.0 cm <sup>3</sup> /rev																																								
028 = 28.0 cm <sup>3</sup> /rev																																								
032 = 32.0 cm <sup>3</sup> /rev 036 = 36.0 cm <sup>3</sup> /rev																																								
<b>Direction of rotation</b>																																								
R = Clockwise L = Counterclockwise																																								
<b>Valve adjustment</b>																																								
200 xx = PRV 200 bar xxx 11 = FCV 11 l/min 18009 = PRV + FCV 180 bar, 9 l/min																																								
<b>Rear cover</b>																																								
B = Standard D = PRV residual flow internal E = FCV residual flow external S = FCV residual flow internal V = PRV + FCV																																								
<b>Seals</b>																																								
M = NBR K = NBR, SSR in FKM																																								
<p>*) Some of the special designs shown on pages 16–21 are not covered in the illustration of the ordering code.</p>																																								
Drive shafts							Front cover						Line ports																											
Suitable front cover																																								
<b>C</b>	Tapered key shaft 1 : 5		<b>B</b>	<b>B</b>	Square flange Centering Ø 100 mm		<b>07</b>	Square flange SAE Thread, metric																																
<b>N</b>	Dihedral claw		<b>M</b>	<b>C</b>	SAE J 744 101-2 B 2-bolt flange Ø 101.6 mm		<b>20</b>	Rectangular flange																																
<b>D</b>	Splined shaft SAE J 744 22-4 13T		<b>C</b>	<b>M</b>	2-bolt mounting Centering Ø 52 mm with seal ring																																			
<b>P</b>	Splined shaft SAE J 744 19-4 11T		<b>C</b>																																					

Not all variants can be selected by using ordering code!  
Please select the required pump by using the selection tables (standard types) or after consultation with Bosch Rexroth!  
Special options are possible upon request.

# Ordering code

## External gear units, multiple pumps, standard


<b>AZ</b>	<b>P</b>	<b>NNFF</b>	<b>-</b>	<b>x</b>	<b>x</b>	<b>-</b>	<b>032/022/016/005</b>	<b>R</b>	<b>C</b>	<b>B</b>	<b>20</b>	<b>20</b>	<b>20</b>	<b>20</b>	<b>K</b>	<b>B</b>
<b>Function</b> P = Pump <b>Series</b> B = 1.0... 7.1 cm <sup>3</sup> /rev S = 4.0...28.0 cm <sup>3</sup> /rev F = 4.0...28.0 cm <sup>3</sup> /rev N = 20.0...36.0 cm <sup>3</sup> /rev G = 22.5...56.0 cm <sup>3</sup> /rev <b>Series,</b> relates to pump section 1 1 = Case width 92 mm 2 = Case width 110 mm <b>Version,</b> relates to pump section 1 1 = Phosphatized, pinned 2 = Chromatized, pinned <b>Size</b> corresponding to each series <b>Direction of rotation</b> R = Clockwise L = Counterclockwise							<b>Rear cover</b> relates to last pump section B = Standard <b>Seals</b> M = NBR P = FKM K = NBR, SSR in FKM Shaft seal relate to pump section 1									
<b>Drive shafts</b> relates to pump part 1 Series B: <b>H</b> Tapered key shaft 1:8  <b>O</b> Suitable front cover 				<b>Front cover</b> relates to pump part 1 <b>O</b> Square flange Centering Ø 25.38 mm 				<b>Line ports</b> every pump parts <b>02</b> Thread, metric DIN 3852 T1 								
Series F, S: <b>C</b> Tapered key shaft 1:5  <b>B</b>				<b>B</b> Square flange Centering Ø 80 mm 				<b>20</b> Rectangular flange 								
<b>H</b> Tapered key shaft 1:8  <b>O</b>				<b>O</b> Square flange Centering Ø 36.47 mm 												
<b>R</b> Splined shaft SAE J 744 16-4 9T  <b>R</b>				<b>R</b> SAE J 744 82-2 A Centering Ø 82.55 mm 2-bolt mounting 												
Series N, T: <b>C</b> Tapered key shaft 1:5  <b>B</b>				<b>B</b> Square flange Centering Ø 100 mm 				<b>07</b> Square flange SAE Thread, metric 								
<b>D</b> Splined shaft SAE J 744 22-4 13T  <b>C</b>				<b>C</b> SAE J 744 101-2 B Centering Ø 101.6 mm 2-bolt mounting 				<b>20</b> Rectangular flange 								
<b>N</b> Dihedral claw  <b>M</b>				<b>M</b> Centering Ø 52 mm with seal ring 												
Series G, U: <b>C</b> Tapered key shaft 1:5  <b>B</b>				<b>B</b> Square flange Centering Ø 105 mm 				<b>07</b> Square flange SAE Thread, metric 								
<b>D</b> Splined shaft SAE J 744 22-4 13T  <b>C</b>				<b>C</b> SAE J 744 101-2 B Centering Ø 101.6 mm 2-bolt mounting 				<b>20</b> Rectangular flange 								
<b>H</b> Tapered key shaft 1:8  <b>O</b>				<b>O</b> Square flange Centering Ø 50.78 mm 												

Not all variants can be selected by using ordering code!


Please select the required pump by using the selection tables (standard types) or after consultation with Bosch Rexroth!

Special options are possible upon request.


Drive shafts

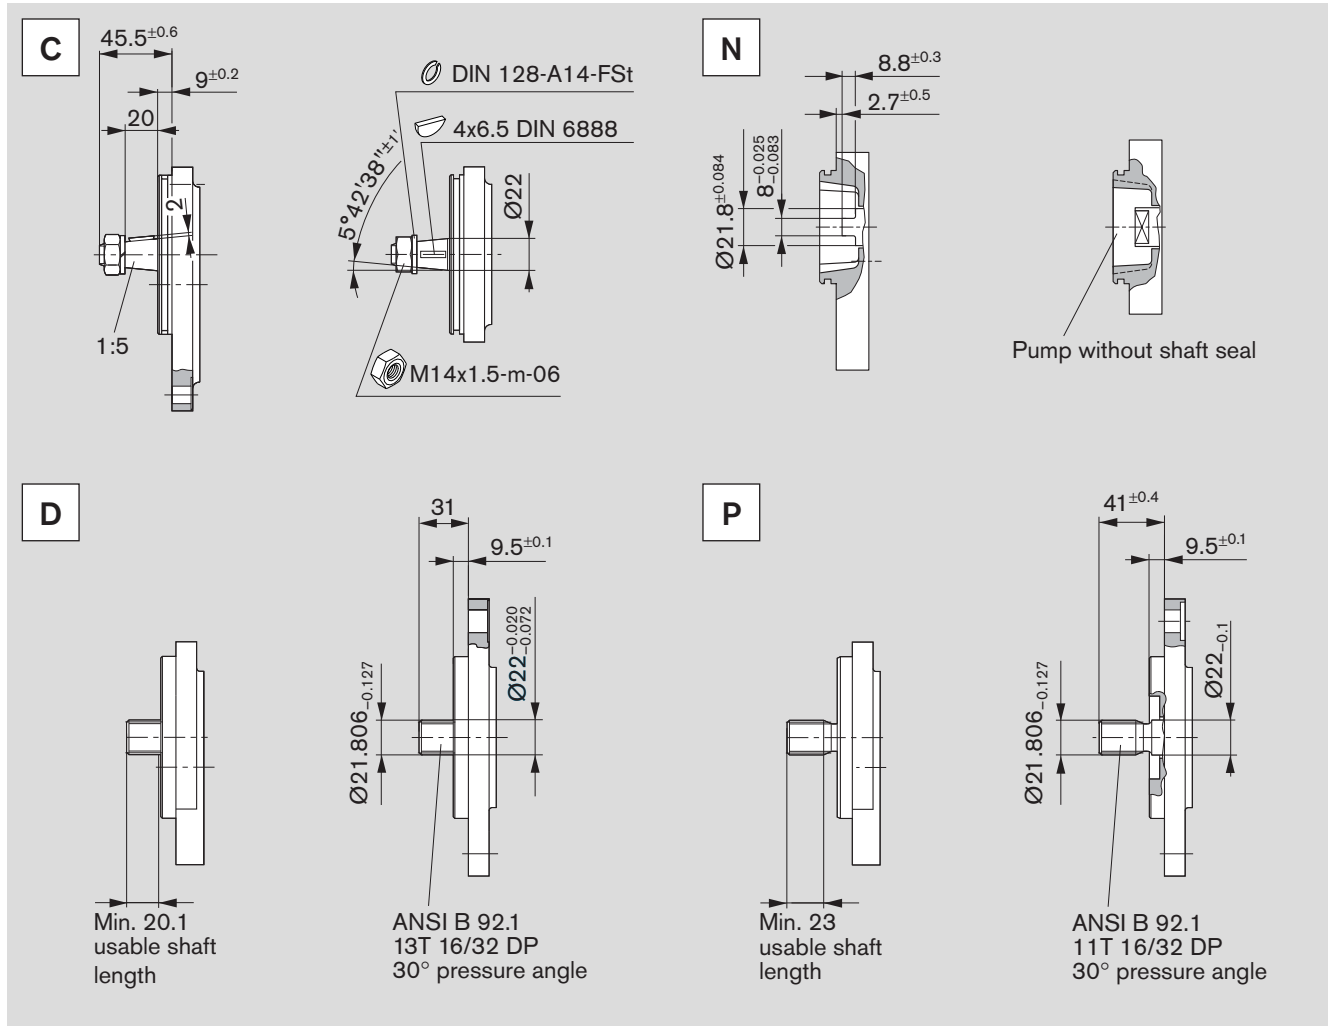


Front cover

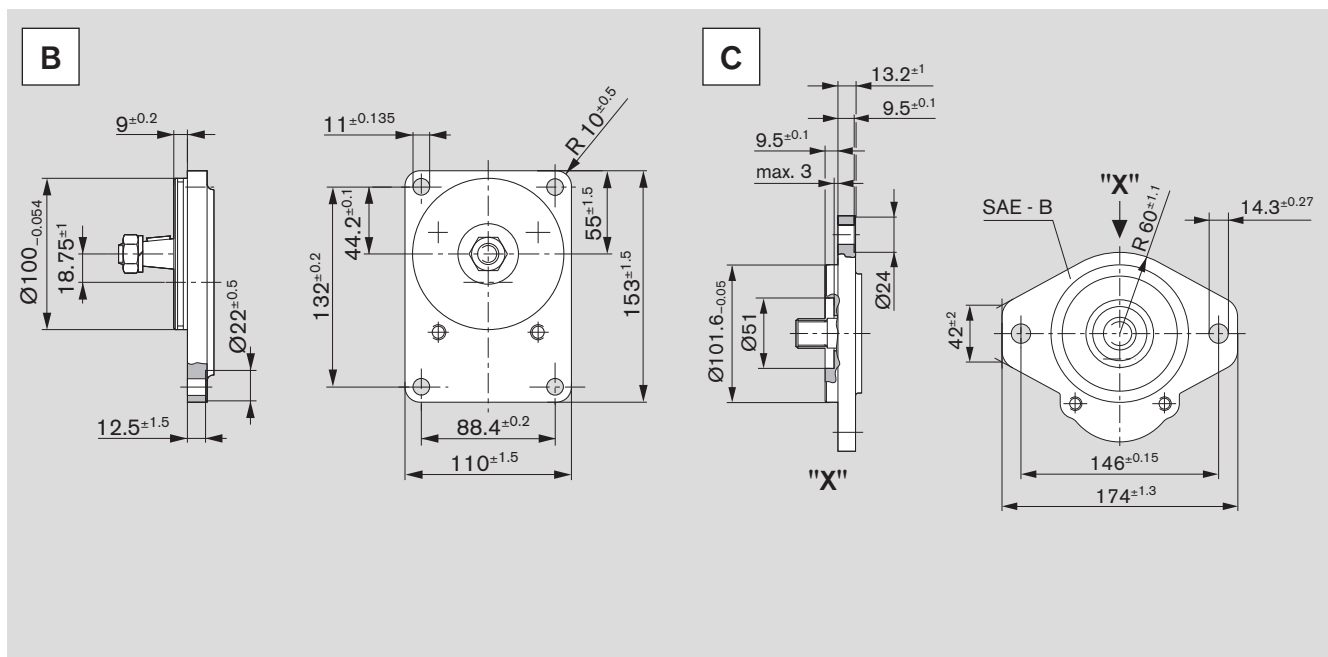

Front cover (continued)

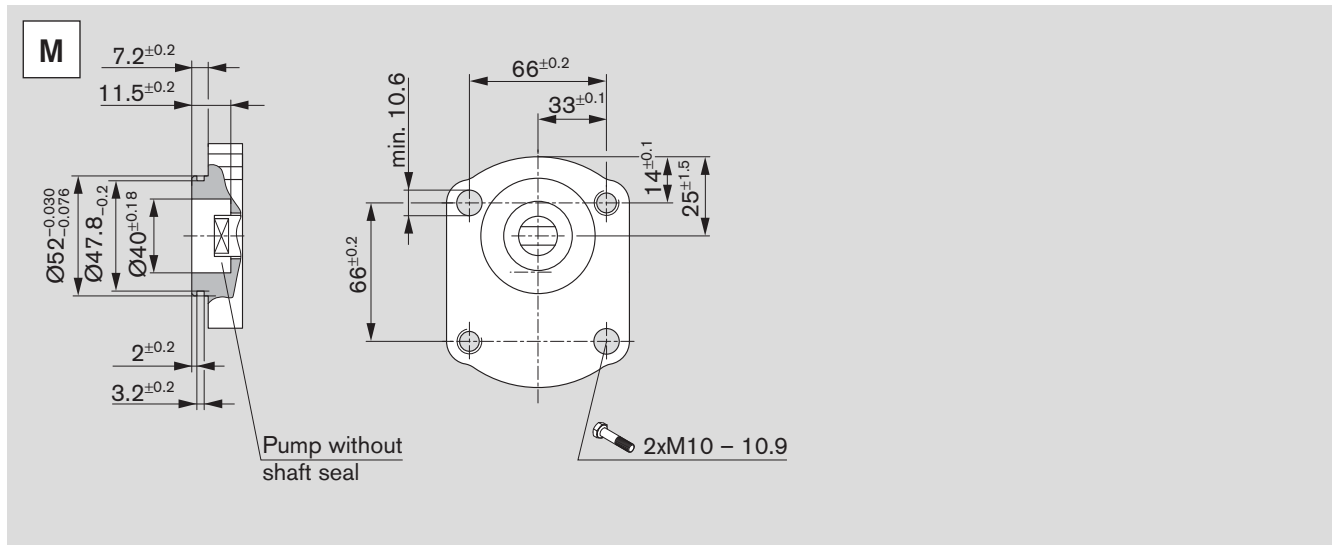


Line ports



07

Square flange SAE, thread, metric

Ordering code	Size	Pressure side				Suction side			
		C	D	E	F	C	D	E	F
07	20 cm <sup>3</sup>	18	47.6	M10 depth 14	22.2	18	47.6	M10 depth 14	22.2
	26.2				26				26.2




20

Rectangular flange


Ordering code	Size	Pressure side			Suction side		
		C	D	E	C	D	E
20	20...36 cm <sup>3</sup>	18	55	M8 depth 13	26	55	M8 depth 13

# Gear pumps with integral valves


In order to reduce external pipework it is possible to incorporate a flow-control valve or pressure-relief valve in the cover of the gear pump. A typical application of this is in the supply of hydraulic oil in power steering systems. The pump delivers a constant flow irrespective of the speed at which it is driven. The excess flow is either returned internally to the suction port or distributed externally to other items of equipment.

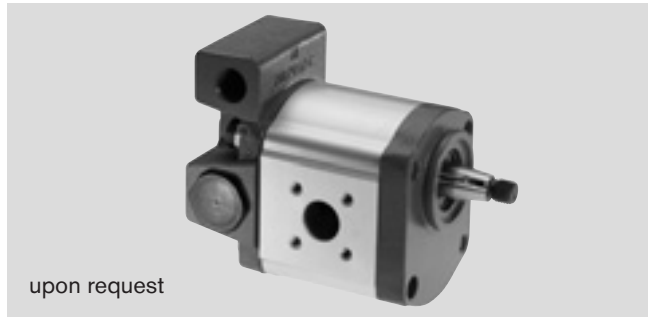


upon request




3-way flow-control valve.  
Excess flow returned to suction line  
 $Q_{const.} = 2...30 \text{ l/min}$



3-way flow-control valve.  
Excess flow distributed externally; loadable  
 $Q_{const.} = 2...30 \text{ l/min}$



3-way flow-control valve with pressure-relief valve.  
Excess flow returned to suction line  
 $Q_{const.} = 2...30 \text{ l/min}$   
 $p_1 = 100...180 \text{ bar}$



Pressure-relief valve.  
Discharge returned to suction line  
 $p_1 = 5...250 \text{ bar}$

## Ordering code

S	xxx17
---	-------

E	xxx12
---	-------

V	15011
---	-------

D	180xx
---	-------

# Design calculations for pumps

The design calculations for pumps are based on the following parameters:

- $V$  [cm<sup>3</sup>/rev] Displacement
- $Q$  [l/min] Delivery
- $p$  [bar] Pressure
- $M$  [Nm] Drive torque
- $n$  [rev/min] Drive speed
- $P$  [kW] Drive power

It is also necessary to allow for different efficiencies such as:

- $\eta_v$  Volumetric efficiency
- $\eta_{hm}$  Hydraulic-mechanical efficiency
- $\eta_t$  Overall efficiency

The following formulas describe the various relationships.

They include correction factors for adapting the parameters to the usual units encountered in practice.

**Caution:** Diagrams providing approximate selection data will be found on subsequent pages.

$$Q = V \cdot n \cdot \eta_v \cdot 10^{-5}$$

$$p = \frac{M \cdot \eta_{hm}}{1.59 \cdot V}$$

$$P = \frac{p \cdot Q}{6 \cdot \eta_t}$$

$$V = \frac{Q}{n \cdot \eta_v} \cdot 10^5$$

$$V = \frac{M \cdot \eta_{hm}}{159 \cdot p}$$

$$Q = \frac{6 \cdot P \cdot \eta_t}{p}$$

$$n = \frac{Q}{V \cdot \eta_v} \cdot 10^5$$

$$M = \frac{1.59 \cdot V \cdot p}{\eta_{hm}}$$

$$p = \frac{6 \cdot P \cdot \eta_t}{Q}$$

[%]


$n$  —  $\eta_v$  —  $Q$       $V$  [cm<sup>3</sup>/rev]    $Q$  [l/min]    $p$  [bar]

$M$  —  $\eta_{hm}$  —  $p$

$P$  —  $\eta_t$  —  $P \cdot Q$       $n$  [rev/min]    $P$  [kW]    $M$  [Nm]



**Caution:**  $\eta$  [%] e.g. 95 [%]

# Performance charts




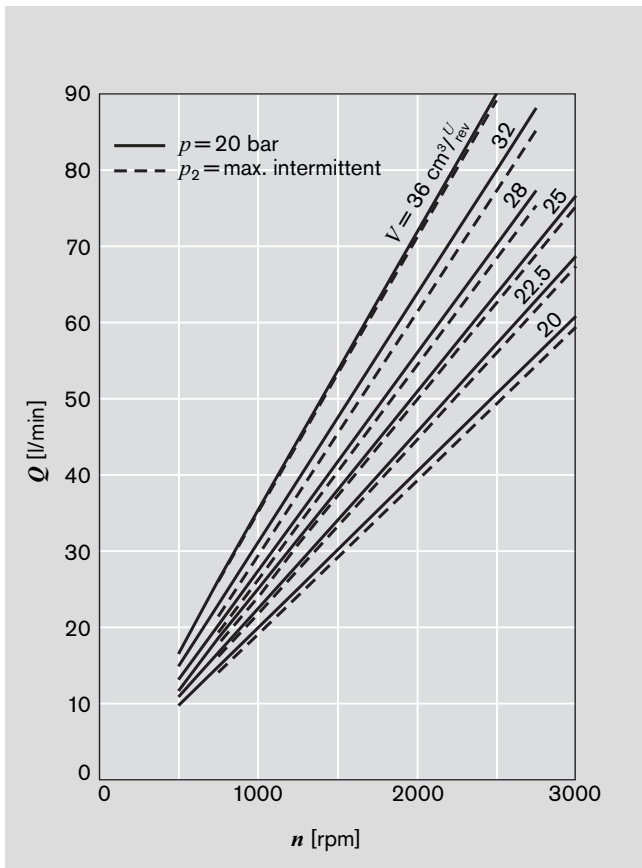


$\nu = 35 \text{ mm}^2/\text{s}, \vartheta = 50^\circ\text{C}$

$Q = f(n, V)$  incl.  $\eta_v$   
 $P = f(n, p)$  — incl.  $\eta_t$   
 $M = f(n, p)$  - - - incl.  $\eta_{hm}$

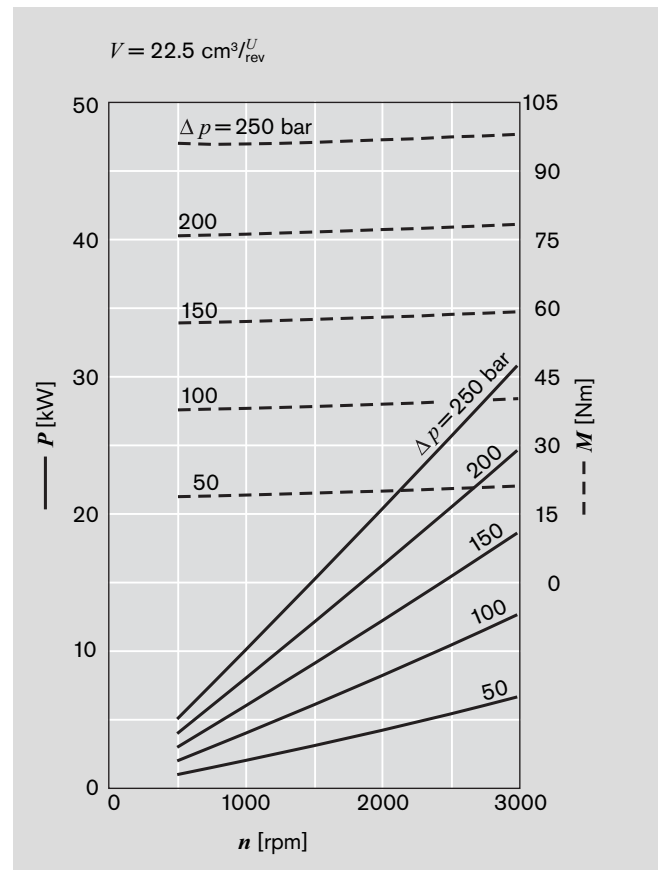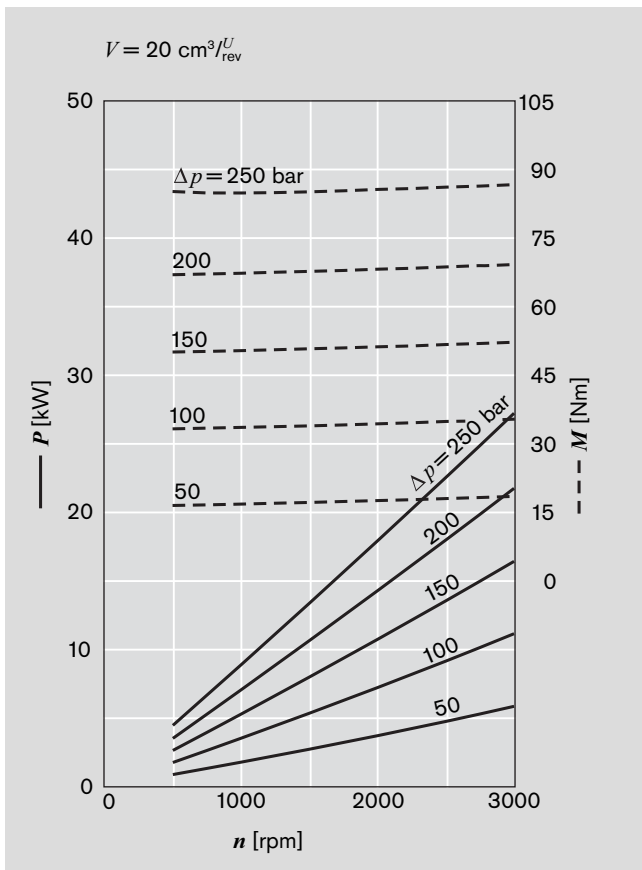

Performance charts (continued)

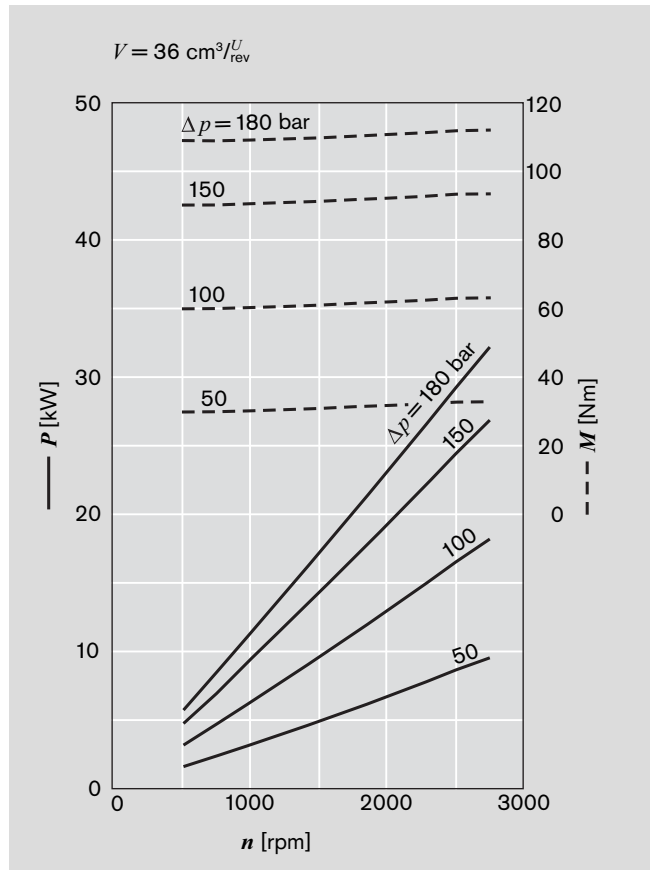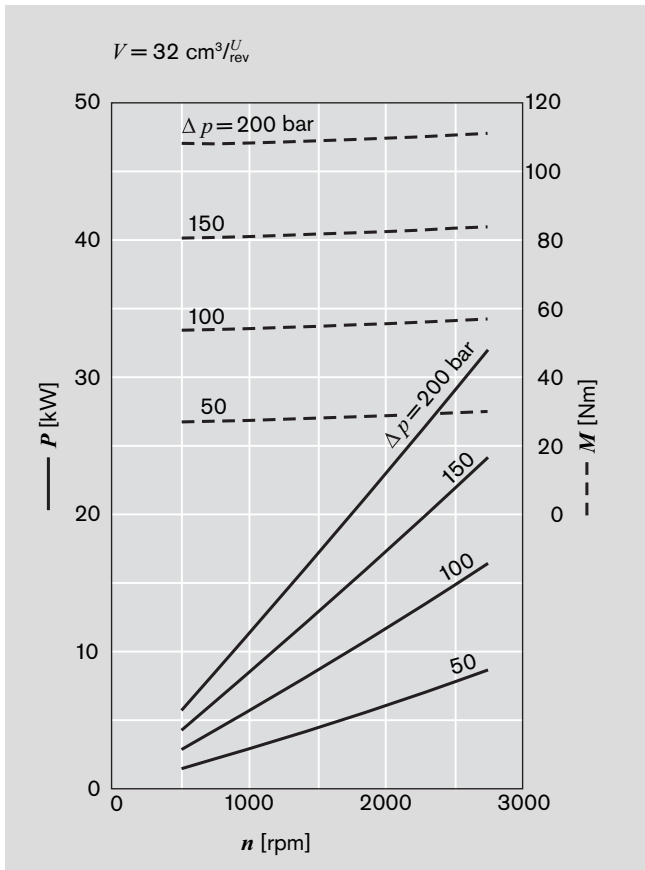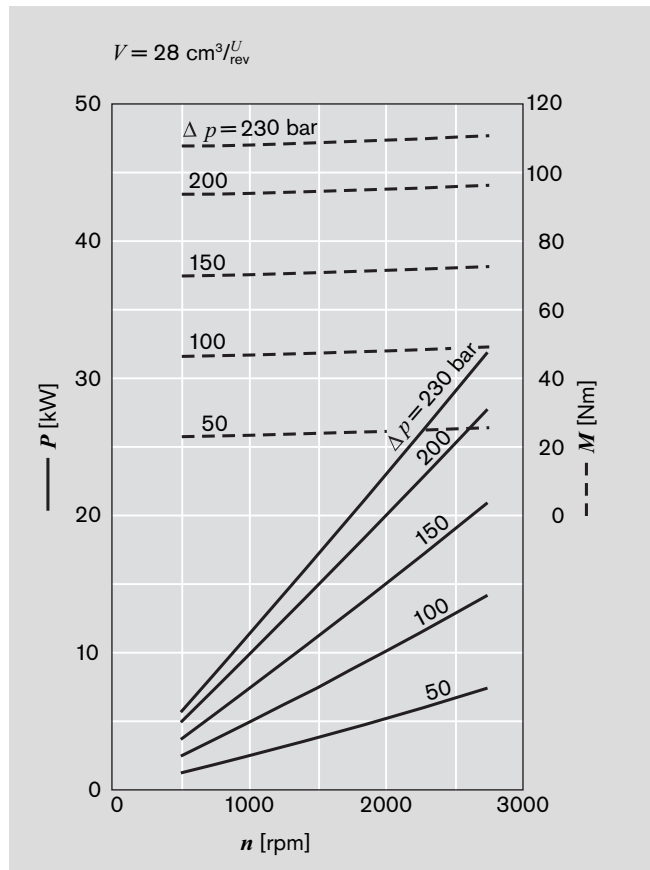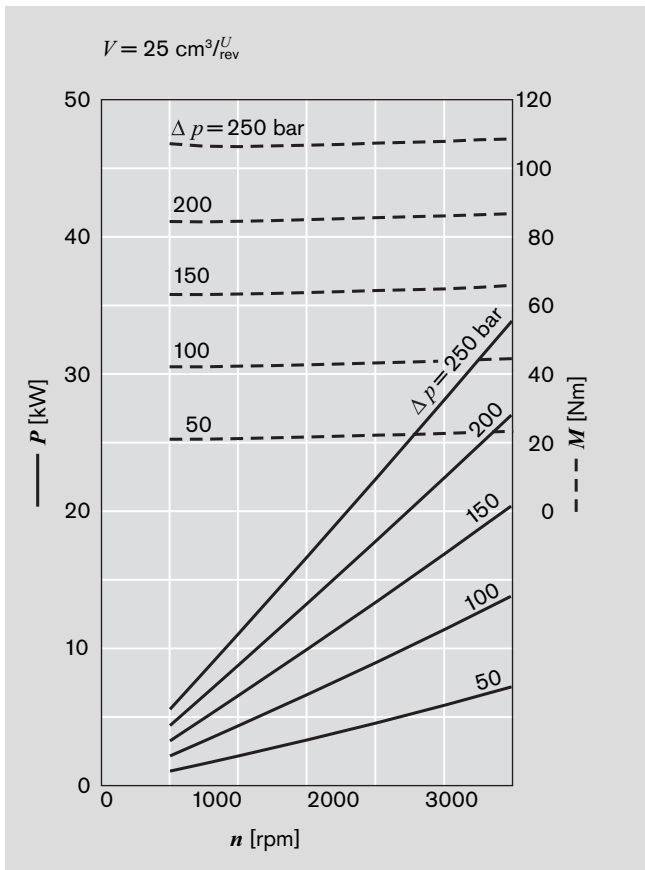



# Noise charts







**Noise level** dependent on rotational speed, pressure range between 10 bar and pressure value  $p_2$  (see page 12/13 Specifications table).

Oil data:  $\nu = 32 \text{ mm}^2/\text{s}$ ,  $\vartheta = 50^\circ\text{C}$ .

Sound pressure level calculated from noise measurements made in the sound absorbent measuring room compliant with DIN 45635, Part 26.

Spacing between measuring sensor – pump: 1 m.

These are typical characteristic values for the respective model. They describe the airborne sound emitted solely by the pump. Environmental influences (installation site, piping, further system components) are not taken into consideration. Each value applies for a single pump.

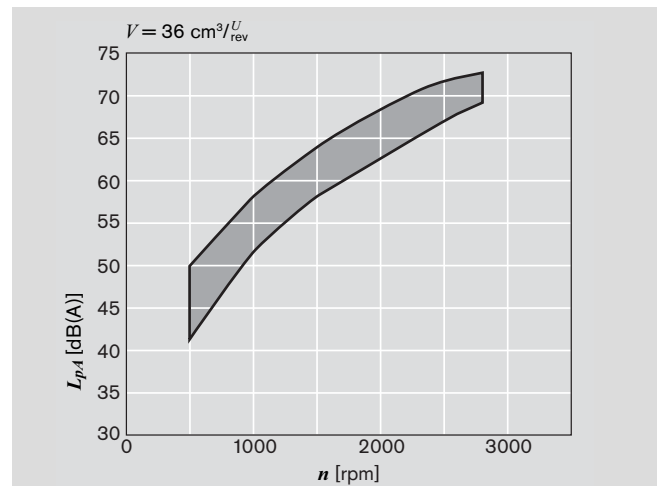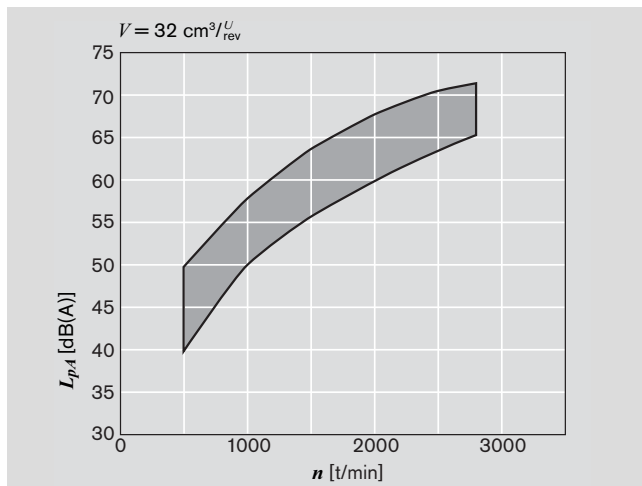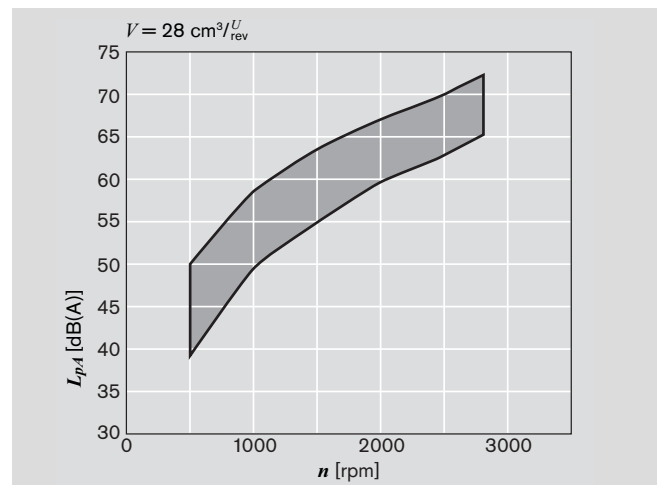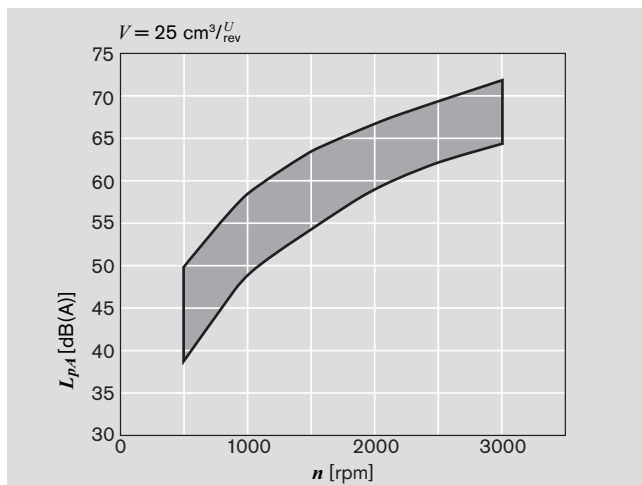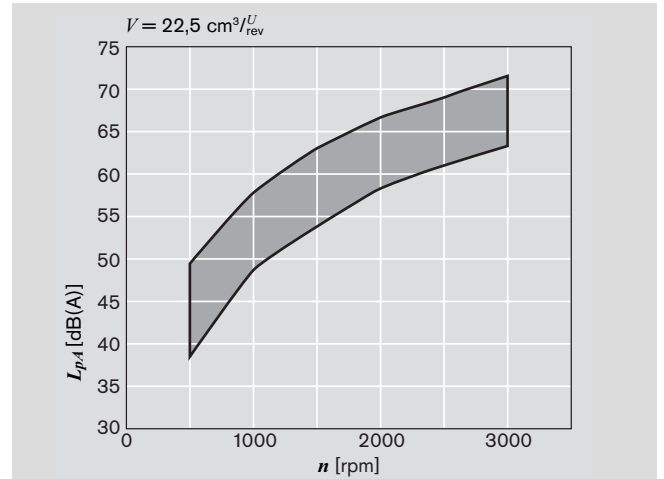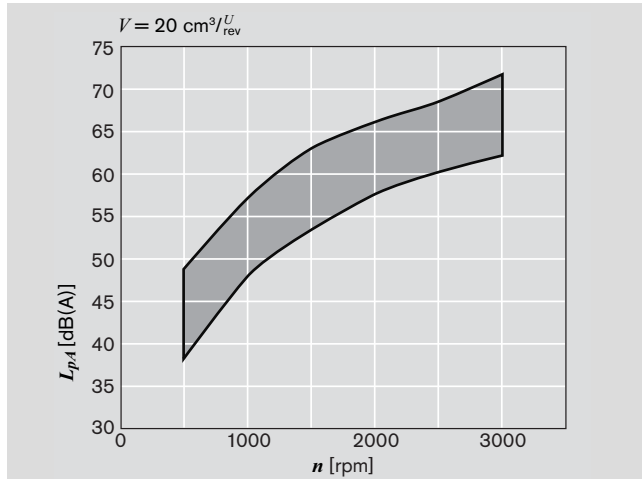

# Specifications

General	
Construction	External gear pump
Mounting	Flange or through-bolting with spigot
Line ports	Flange
Direction of rotation (looking on shaft)	Clockwise or counterclockwise, the pump may only be driven in the direction indicated
Installation position	Any
Load on shaft	Radial and axial forces after consulting
Ambient temperature range	-30°C...+80°C or max. 110°C with FKM seals
Hydraulic fluid	- Mineral oil compliant with DIN 51 524, 1-3, however under higher load at least HLP compliant with DIN 51 524 Part 2 recommended. - Comply with RE 90220 - Further operating fluids possible after consultation
Viscosity	12...800 mm <sup>2</sup> /s permitted range 20...100 mm <sup>2</sup> /s recommended range ...2000 mm <sup>2</sup> /s range permitted for starting
Hydraulic fluid temperature range	max. +80°C with NBR seals *) max. +110°C with FKM seals **)
Filtration ***)	At least cleanliness level 20/18/15 compliant with ISO 4406 (1999)

\*) NBR = Perbunan®  
 \*\*) FKM = Viton®  
 \*\*\*) During the application of hydraulic systems or devices with critical counter-reaction, such as steering and counterbalance valves, the type of filtration selected must be adapted to the sensitivity of these devices.


Safety requirements pertaining to the whole systems are to be observed.

In the case of applications with high numbers of load cycles please consulting.


## Definition of direction of rotation

Always look on the drive shaft.

**Caution:** Dimensions drawings always show clockwise-rotation pumps. On counter-clockwise-rotation pumps the positions of the drive shaft and the suction and pressure ports are different.

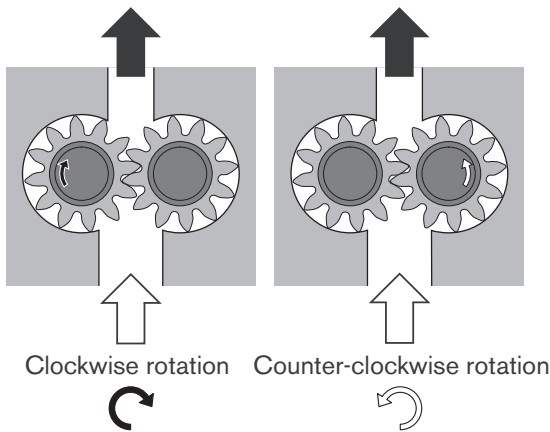

## Definitions of pressures

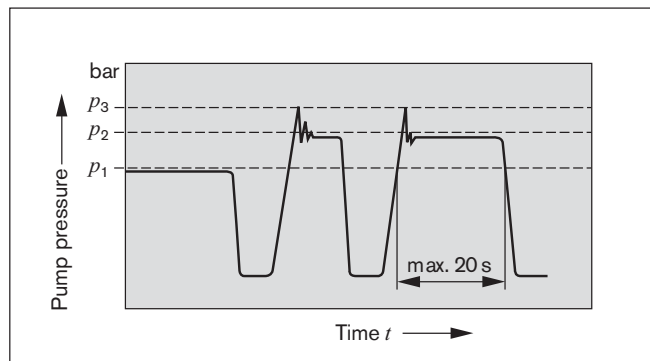

$p_1$  max. continuous pressure  
 $p_2$  max. intermittent pressure  
 $p_3$  max. peak pressure

## AZPN-1x

Displacement	V	cm <sup>3</sup> /rev	20	22.5	25	28	32	36
Suction pressure	$p_e$	0.7...3 (absolute), with tandem pumps $p_e (p_2) = \max. 0.5 p_e (p_1)$						
Max. continuous pressure	$p_1$	bar	230	230	230	210	180	160
Max. intermittent pressure	$p_2$		250	250	250	230	200	180
Max. peak pressure	$p_3$		270	270	270	250	220	200
Min. rotational speed	< 100	rpm	500	500	500	500	500	500
at bar	12 mm <sup>2</sup> /s		600	600	600	600	600	600
	180... $p_2$		800	800	800	800	800	800
	25 mm <sup>2</sup> /s		500	500	500	400	400	400
	$p_2$		3000	3000	3000	2800	2800	2800
Max. rotational speed at	$p_2$							

**AZPN-2x** (only upon request)

Displacement	$V$	cm <sup>3</sup> /rev	20	22.5	25	28	32	36
Suction pressure	$p_e$	bar	0.7...3 (absolute), with tandem pumps $p_e(p_2) = \max. 0.5 p_e(p_1)$					
Max. continuous pressure	$p_1$		250	250	250	230	210	180
Max. intermittent pressure	$p_2$		280	280	280	260	240	210
Max. peak pressure	$p_3$		300	300	300	280	260	230
Min. rotational speed	< 100	rpm	500	500	500	500	500	500
at bar	12 mm <sup>2</sup> /s		600	600	600	600	600	600
	100...180		800	800	800	800	800	800
	180... $p_2$		500	500	500	500	500	500
	25 mm <sup>2</sup> /s		3000	3000	3000	2800	2800	2800
Max. rotational speed at	$p_2$							


## Drive arrangements

### 1. Flexible couplings

The coupling must not transfer any radial or axial forces to the pump.


The maximum radial runout of shaft spigot is 0.2 mm.

Refer to the fitting instructions provided by the coupling manufacturer for details of the maximum permitted shaft misalignment.

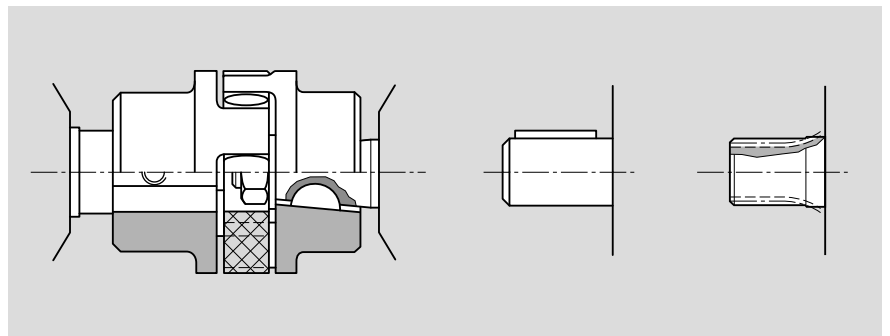

### 2. Coupling sleeve

Used on shafts with DIN or SAE splining. Caution: There must be no radial or axial forces exerted on the pump shaft or coupling sleeve. The coupling sleeve must be free to move axially. The distance between the pump shaft and drive shaft must be 2<sup>+1</sup>. Oil-bath or oil-mist lubrications is necessary.

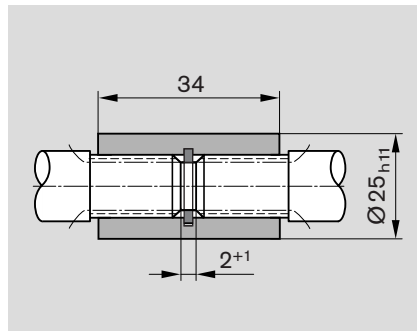

Splined shaft profile	Ordering code	$M_{max}$ [Nm]
SAE-B 13 teeth	D	300
SAE-C 11 teeth	P	n. n.

**3. Drive shaft with tang**

For the close-coupling of the pumps to electric motor or internal-combustion engine, gear, etc. The pump shaft has a special tang and driver © (not included in supply).

There is no shaft sealing.


The recommended arrangements and dimensions for the drive end and sealing are as follows.

**Ⓐ Drive shaft**

Case-hardening steel DIN 17 210  
 e.g. 20 MnCrS 5  
 case-hardened 1.0 deep; HRA 83±2  
 Surface for sealing ring  
 ground without rifling  $R_t \leq 4\mu\text{m}$

**Ⓑ Radial shaft seal ring**


Rubber-covered seal (see DIN 3760, Type AS, or double-lipped ring).  
 Cut 15° chamfer or fit shaft seal ring with protection sleeve.

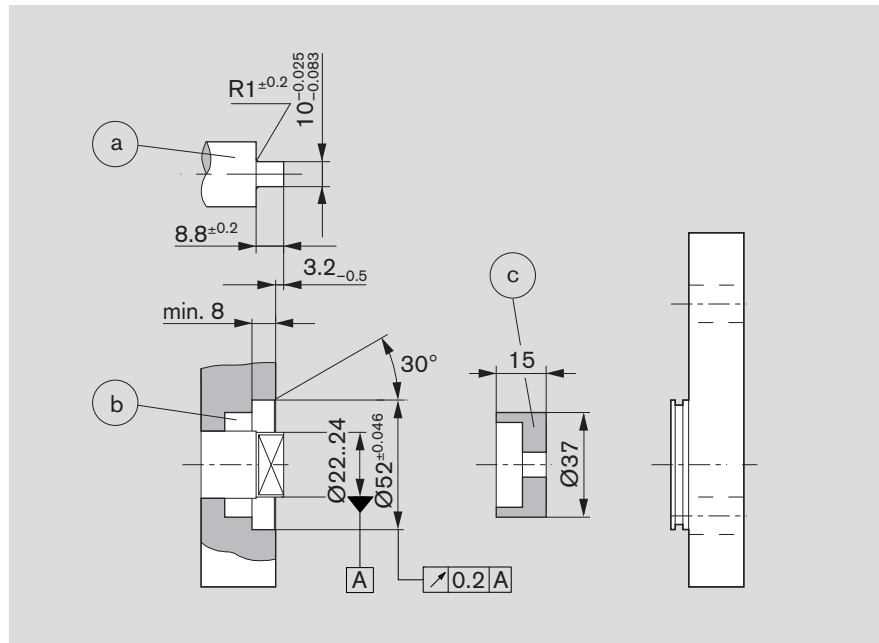

$M_{\text{max}}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{\text{max}}$ [bar]
95	20	270
	22.5	240
	25	220
	28	190
	32	170
	36	150

**4. V-belts and straight gearwheels or helical toothed gear drives without outboard bearing**

When proposing to use V-belt or gear drive, please submit details of the application for our comments (especially dimensions  $a$ ,  $d_m$ ,  $d_w$  and angle  $\alpha$ ).  
 For helical toothed gear drives, details of the helix angle  $\beta$  are also required.

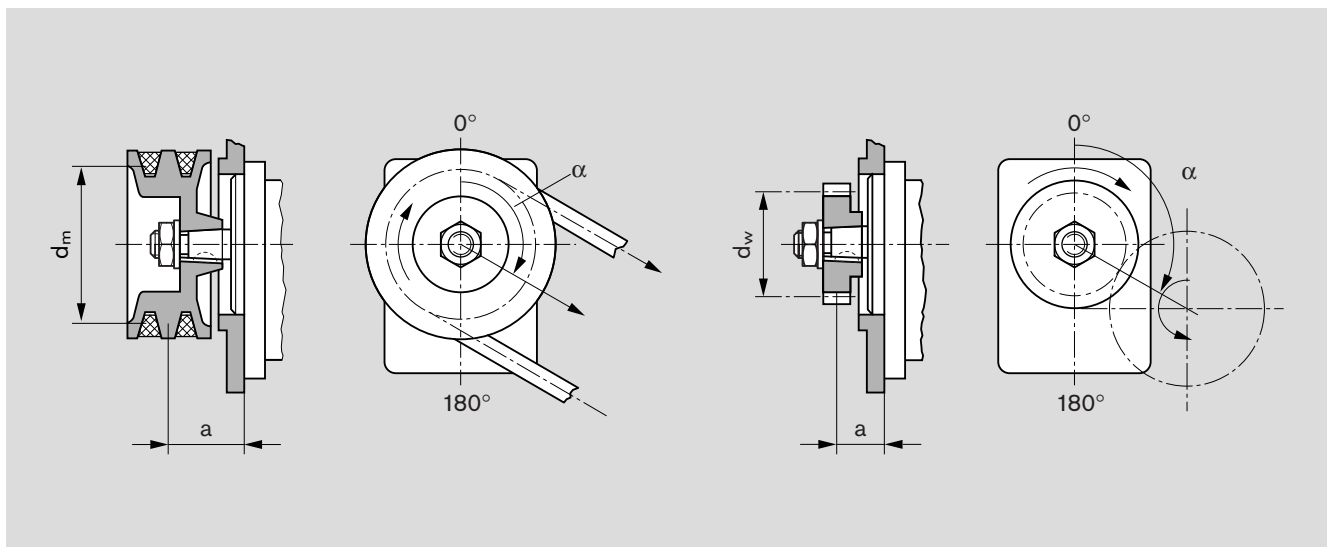

# Multiple gear pumps

Gear pumps are well-suited to tandem combinations of pumps in which the drive shaft of the first pump is extended to drive a second pump and sometimes a third pump in the same manner. A coupling is fitted between each pair of pumps. In most cases each pump is isolated from its neighbor, i.e. the suction ports are separate from one another. A common suction port is also possible as an option.

**Caution:** Basically, the specifications for the single pumps apply, but with certain restrictions:

**Max. speed:** This is determined by the highest rated pump speed in use.

**Pressures:** These are restricted by the strength of the drive shaft, the through drives and the drivers. Appropriate data is given in the dimensional drawings.

### Pressure restrictions during standard through drive


In the case of series N, the driver for the second pumping stage can carry a load of up to  $M_{max.} = 95 \text{ Nm}$ , i.e. there is a pressure restriction for the second stage and any further stages.

Drive shaft		Max. transferrable drive torque * [Nm]
C	1:5	200
N	Claw	95
D	SAE 13t	320
P	SAE 11t	180

\* These values only apply when the conditions described above are complied with. Bosch Rexroth is to be consulted if the stated values are exceeded.

If the first stage is driven through a tang (driver) or outboard bearing type 1, pressure restrictions apply as indicated in the formula below.


Reinforced through drives are available for applications with higher transfer torques and/or rotational vibrations. Customized designs available on request.

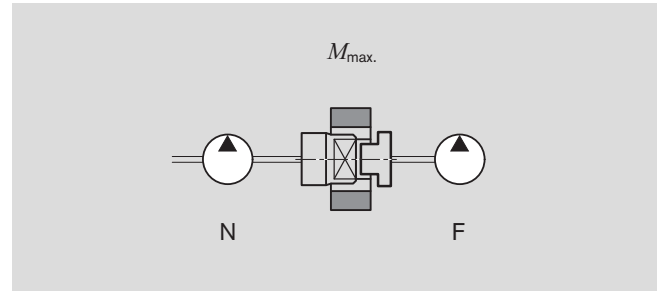

### Combinations

Series pump 1	$M_{max.}$ [Nm]	Series pump 2
N	95	N
N	65	F

For configuration of multiple pumps we recommend the pump is positioned with the largest displacement on the drive side.

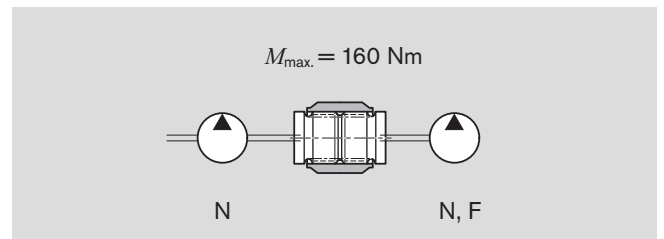


6

$$M_{max.} \cong \Delta p_1 \cdot V_1 \cdot 0.0177 + \Delta p_2 \cdot V_2 \cdot 0.0177 + \Delta p_3 \cdot V_3 \cdot 0.0177$$

$\Delta p$  [bar]  $V$  [cm<sup>3</sup>/rev]

# Dimensions

## Standard range

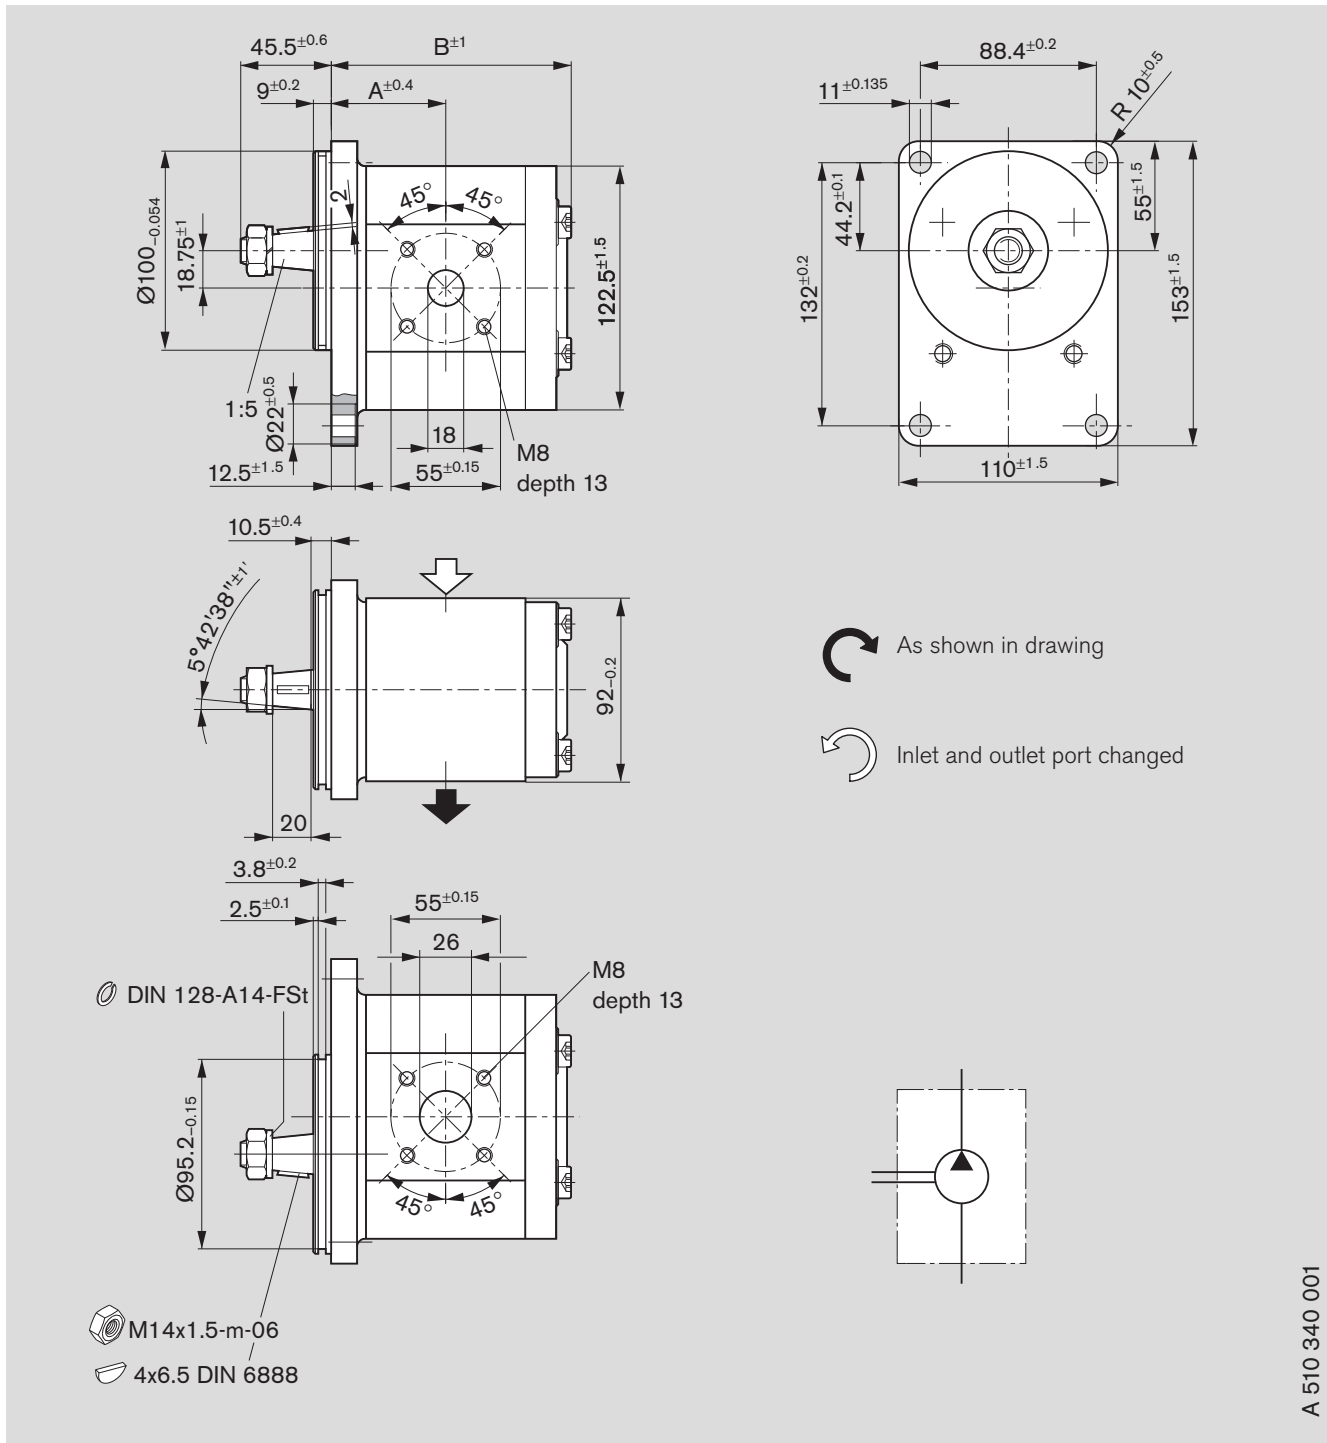


**Ordering code:**

AZPN - 11 -     C B 20 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]	
	L	R				A	B
20	0 510 625 335	0 510 625 035	250	3000	5.4	52	109.8
22.5			250	3000		53.5	112.8
25	0 510 725 352	0 510 725 047	250	3000	5.6	55	115.8
28	0 510 725 364	0 510 725 055	230	2800	5.7	56.5	118.8
32	0 510 725 353	0 510 725 048	200	2800	5.9	59	123.3

# Dimensions

## Standard range

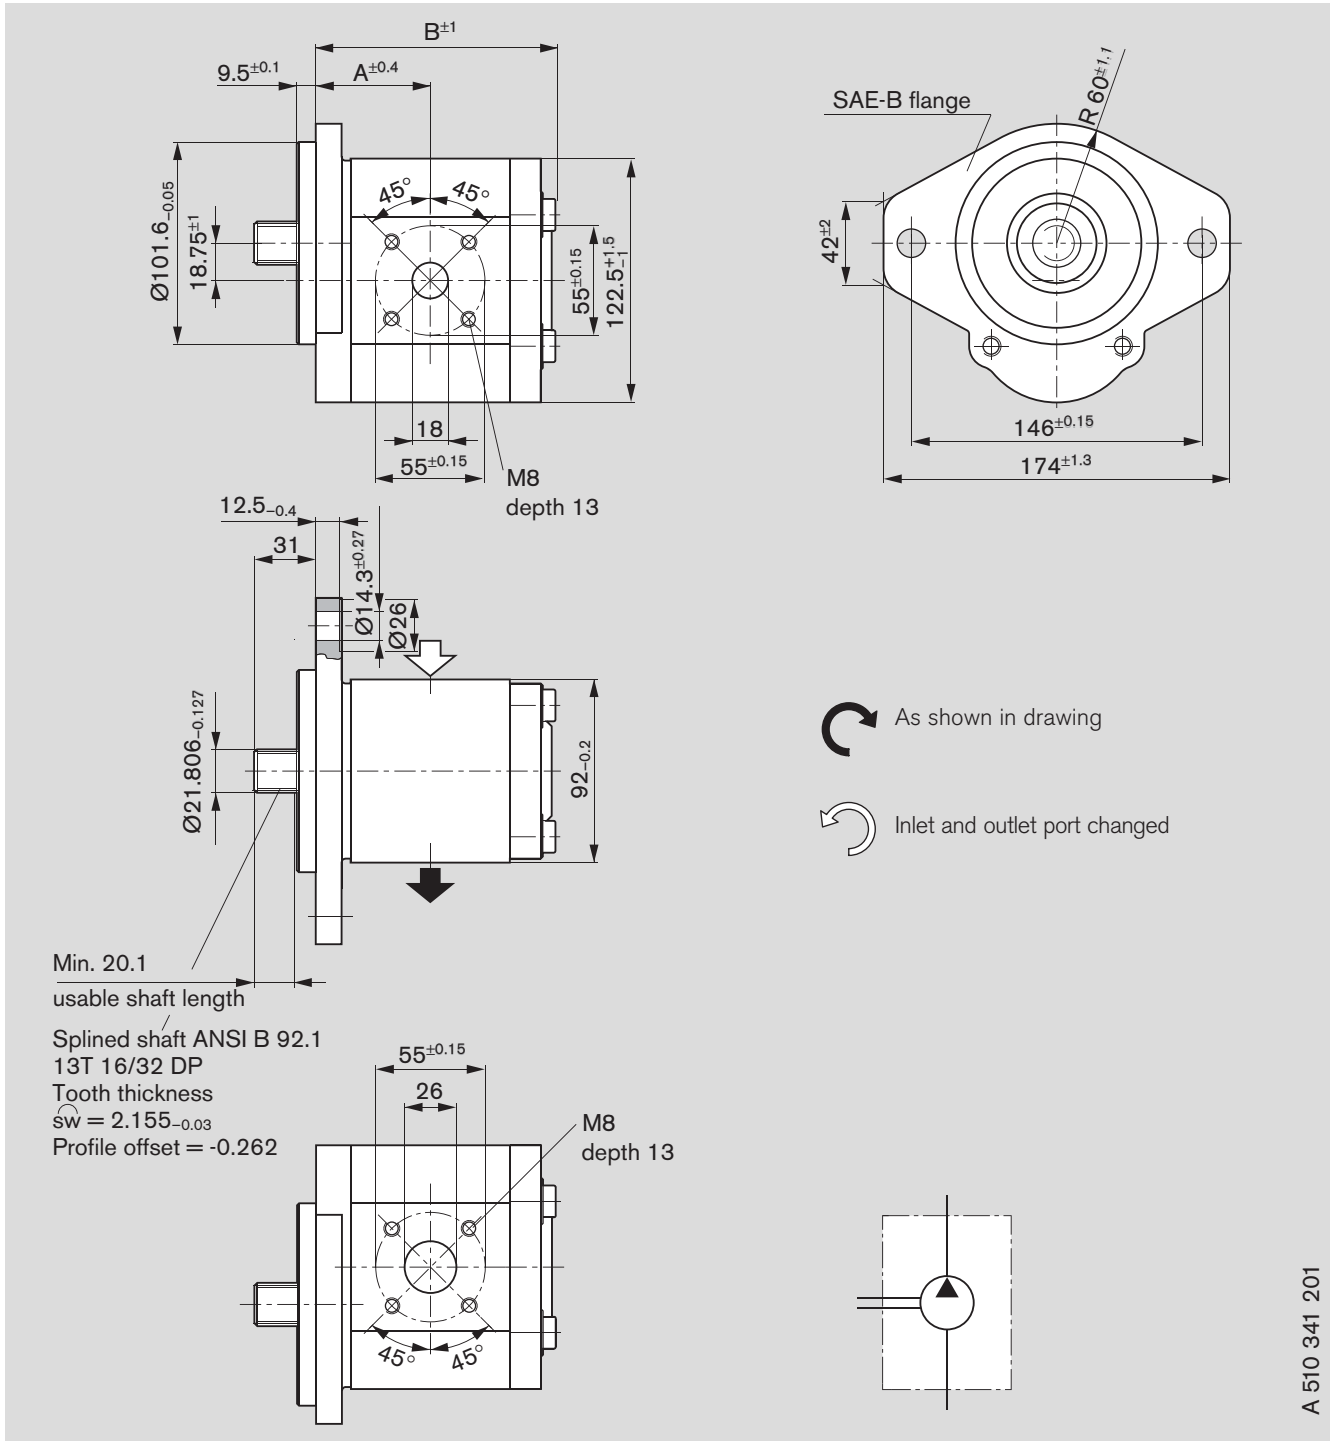

**Ordering code:**


AZPN - 1X -     D C 20 M B

AZPN - 1X -     D C 20 K B\*

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]	
	L	R				A	B
20			3000	250		52	110.1
22.5			3000	250		53.5	112.6
25	0 510 725 377	0 510 725 057	3000	250	5.5	55	115.3
25		0 510 725 094*	3000	250	5.5	55	115.3
28	0 510 725 431	0 510 725 058*	2800	230	5.7	56.5	118.3
36	0 510 725 363	0 510 725 155	2600	180	6.0	61	127.3

# Dimensions

## Standard range

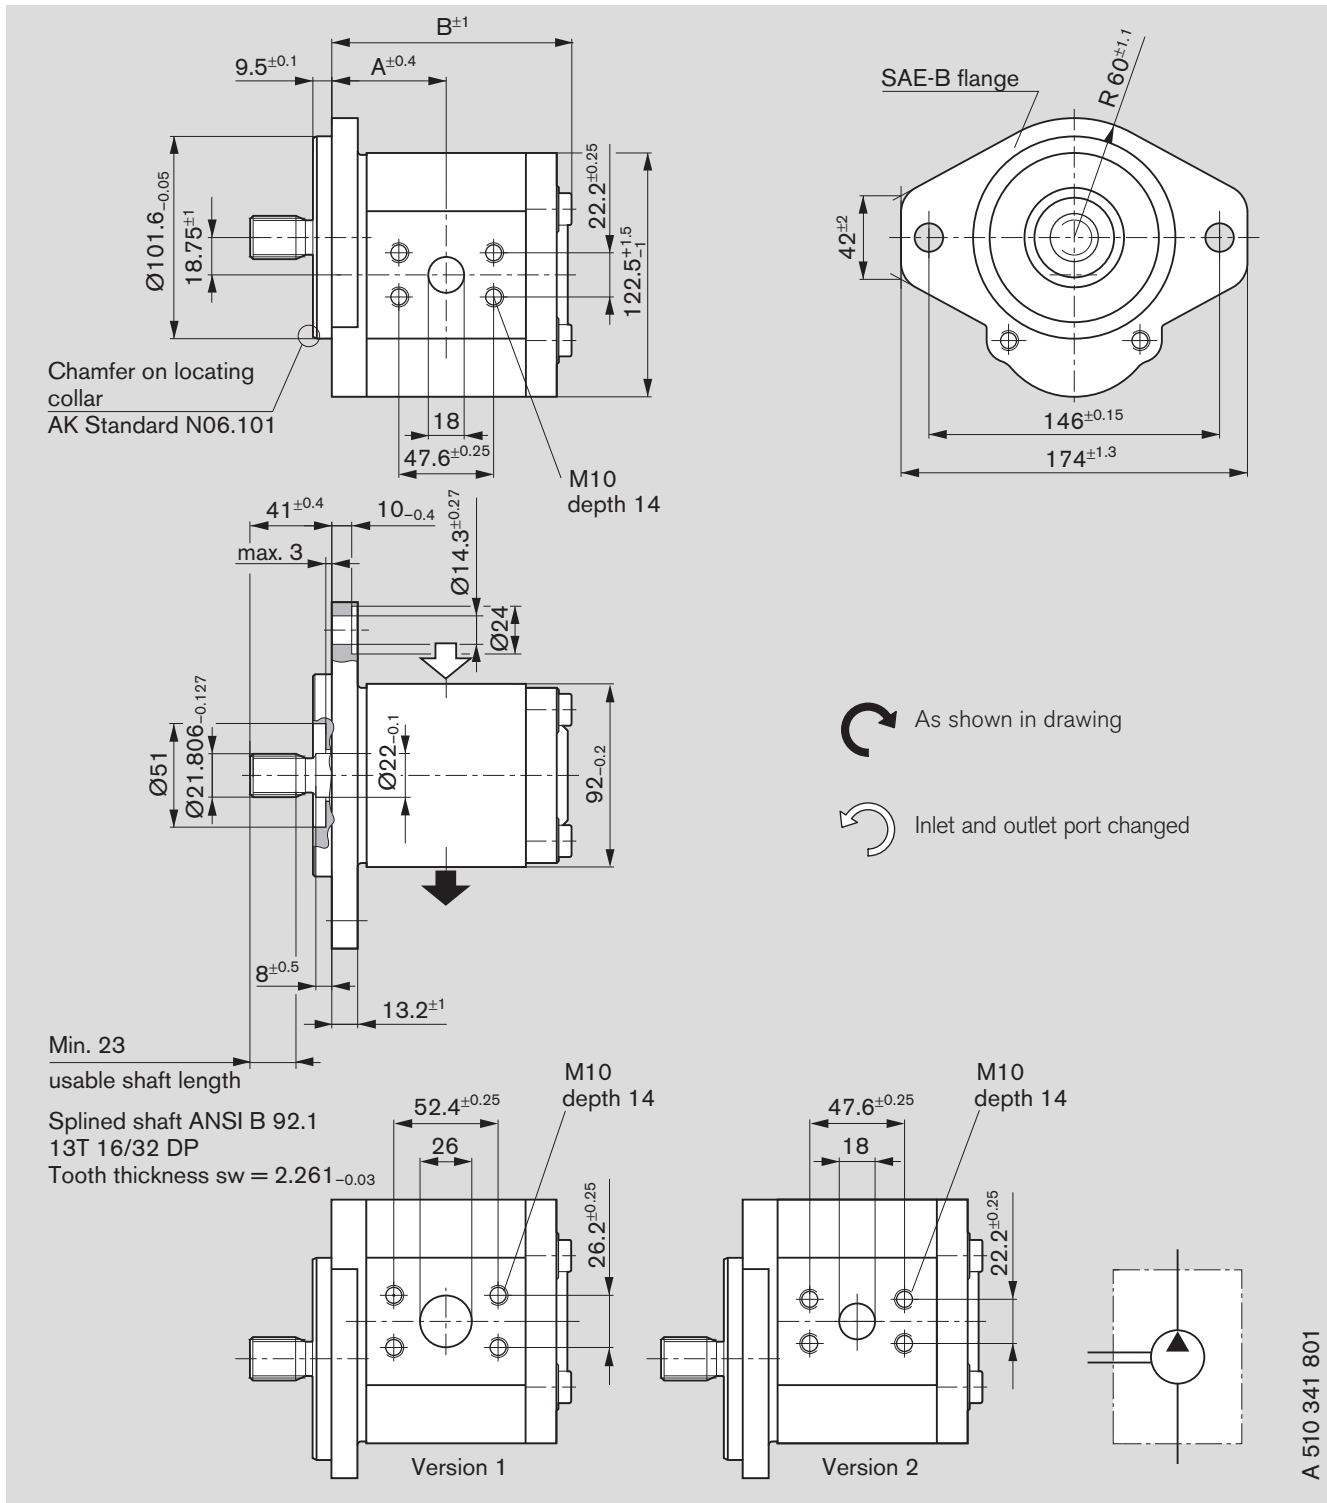

**Ordering code:**

AZPN - 11 -      D C 07 K B S0023


Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]		Version
	L	R				A	B	
20	0 510 625 380	0 510 625 073	250	3000	5.3	52	109.8	2
22.5	0 510 725 404	0 510 725 103	250	3000	5.4	52	112.8	1
25	0 510 725 405	0 510 725 104	250	3000	5.5	55	115.8	1
28	0 510 725 406	0 510 725 105	230	2800	5.7	56.5	118.8	1
32	0 510 725 407	0 510 725 106	200	2800	5.8	59	123.3	1
36			180	2600		61	127.8	1





# Dimensions

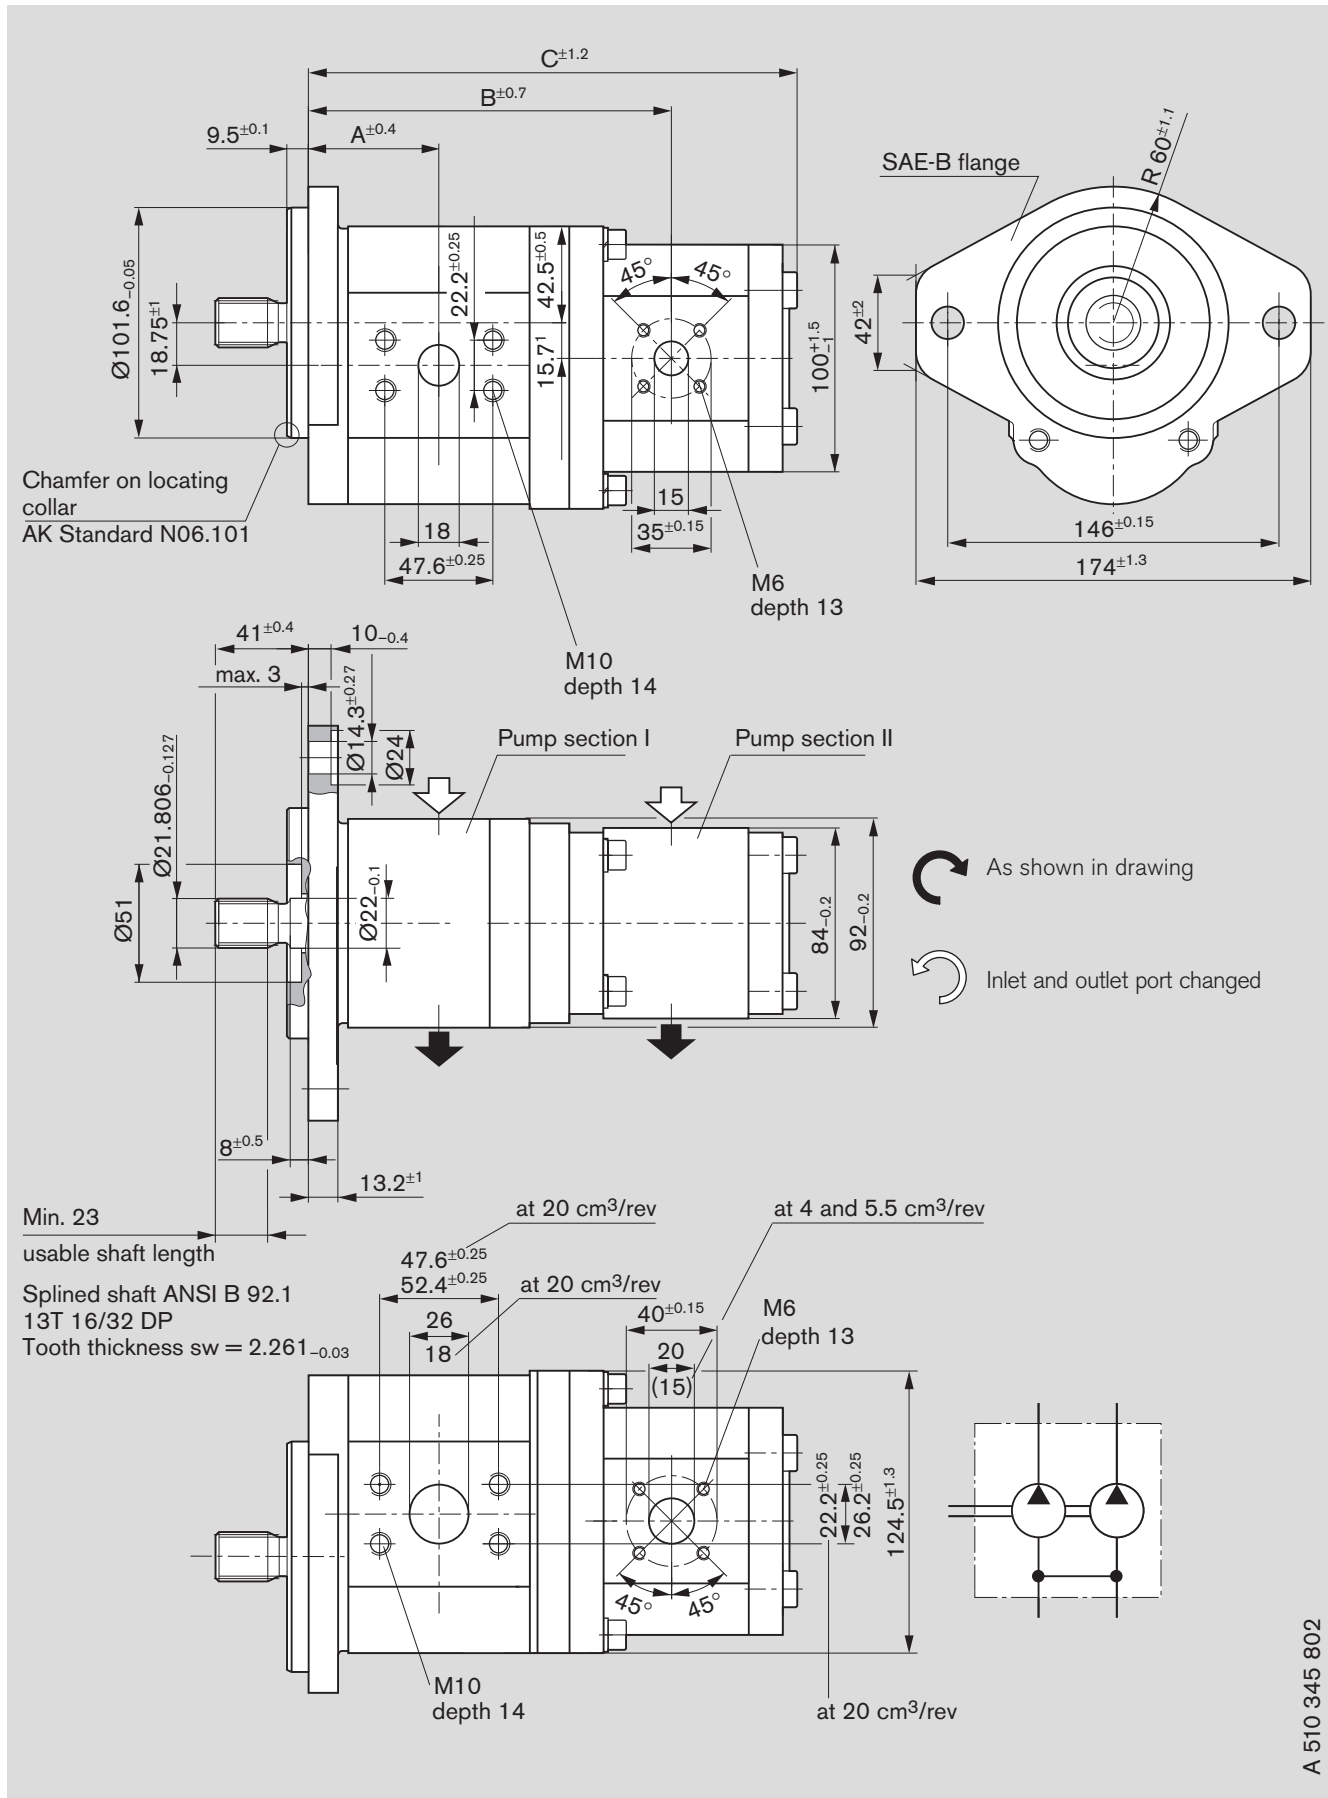

## Standard range



A 510 345 802

## Ordering code:


AZPNF - 1X -     D C 07 20 K B S0023AZPNF - 1X -     D C 07 20 K B S0081\*AZPNF - 1X -     D C 07 20 M B S0081\*\*

Displacement [cm <sup>3</sup> /rev] P I	Displacement [cm <sup>3</sup> /rev] P II	Ordering-No.		Max. operating pressure [bar] P I	Max. operating pressure [bar] P II	Max. rotation speed [rpm]	kg	Dimension [mm]		
								A	B	C
20	4		0 510 665 181	250	280	3000	-	52.0	141.5	184.2
22.5	8	0 510 765 387*	0 510 765 078	250	280	3000	8.4	53.5	147.9	193.8
22.5	11	0 510 765 381	0 510 765 062	250	280	3000	8.5	53.5	151.7	200.6
25	4	0 510 766 316		250	280	3000	-	55.0	147.6	190.2
25	11	0 510 765 377	0 510 765 079	250	280	3000	8.6	55.0	154.7	203.6
25	14		0 510 766 014**	250	250	3000	8.7	55.0	155.2	206.8
25	16		0 510 765 080	250	230	3000	8.8	55.0	155.2	210.2
28	11		0 510 765 092	230	280	2800	8.7	56.5	157.7	206.6
28	16	0 510 765 384	0 510 765 063	230	230	2800	8.9	56.5	158.2	213.2
28	19	0 510 766 314	0 510 767 058	200	200	2800	9.0	56.5	158.2	219.8
28	22.5		0 510 767 045	230	200	2100	9.2	56.5	165.8	223.6
28	22.5	0 510 767 322*		230	150	2100	9.3	56.5	165.8	223.6
32	8		0 510 765 064	200	280	2500	8.8	59.0	158.4	204.3
32	11	0 510 768 320	0 510 765 065	200	280	2500	8.9	59.0	162.2	211.1
32	14	0 510 765 378		200	250	2500	9.0	59.0	162.7	216.1
32	16		0 510 765 066	200	230	2500	9.1	59.0	162.7	217.7
32	22.5	0 510 768 318*		200	150	2100	-	59.0	170.3	229.9

## Fittings

Fittings can be used for rectangular flange 20 see page 7

Gear pump flange, 90° angle

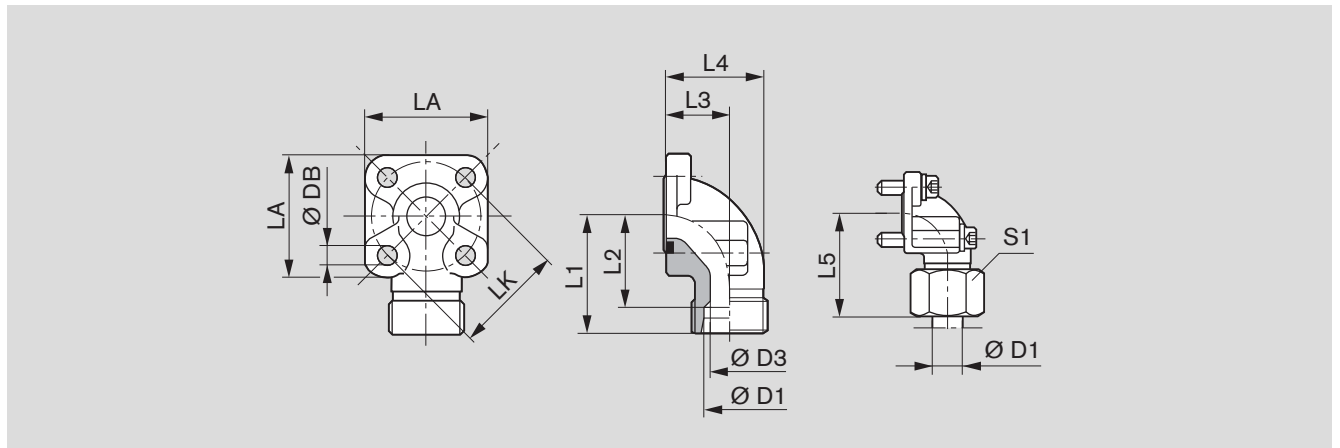

LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws		Seal ring	Mass kg	Part number	p (bar)
											2x	2x				
55	20S	17	45	34.5	24.0	40.0	56.0	58	36	8.4	M 8x25	M 8x50	33x2.5	0.44	1 515 702 004	250
55	30S	26	49	35.5	32.0	50.0	62.0	58	50	8.4	M 8x25	M 8x50	33x2.5	0.50	1 515 702 006	250
55	35L	31	49	38.5	32.0	51.5	62.0	58	50	8.4	M 8x25	M 8x60	32x2.5	0.47	1 515 702 005	100
55	42 L	38	49	38.0	40.0	64.5	61.0	58	60	8.4	M 8x25	M 8x70	32x2.5	0.60	1 515 702 019	100

Complete fittings with seal ring, metric screw set, nuts and olive.


### Note

You can find the permissible tightening torques in our publication:

“General Operating Instructions for External Gear Units”

RE 07 012-B1.

# Service parts

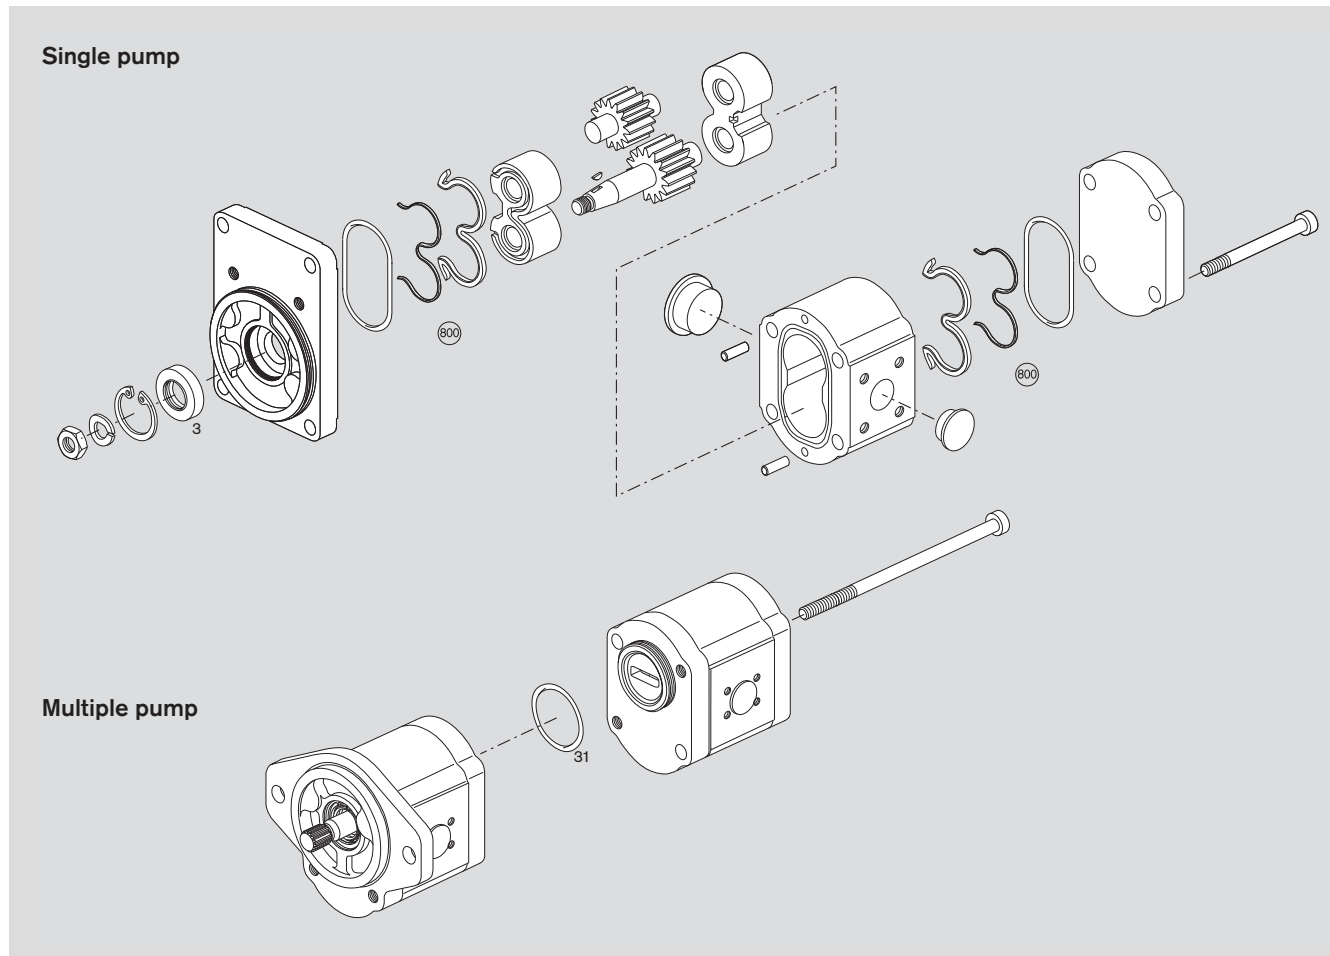

Page	Ordering code	Seal kit "N" Pos. 800 NBR	Seal kit "F" Pos. 800 NBR	Shaft seal ring Pos. 3	Dimen- sion	Seal ring Pos. 3.1	Material	Dimension
16	AZPN - 1X - □□□ □ C B 20 M B	1517010226		1510283023	40x22x7		NBR	
17	AZPN - 1X - □□□ □ D C 20 M B	1517010226		1510283023	40x22x7		NBR	
17	AZPN - 1X - □□□ □ D C 20 K B	1517010226		1510283028	40x22x7		FKM (SSR)	
18	AZPN - 1X - □□□ □ D C 07 K B S0023	1517010226		1510283028	40x22x7		FKM (SSR)	
19	AZPNF - 1X - □□□ □ D C 07 07 K B S0023	1517010226	1517010208	1510283028	40x22x7	1510210043	FKM (SSR)	60x2.5 FPM
20	AZPNF - 1X - □□□ □ D C 07 20 K B S0081	1517010226	1517010208	1510283028	40x22x7	1510210043	FKM (SSR)	60x2.5 FPM
20	AZPNF - 1X - □□□ □ D C 07 20 M B S0081	1517010226	1517010208	1510283028	40x22x7	1510210043	FKM (SSR)	60x2.5 FPM
20	AZPNN - 1X - □□□ □ D C 07 20 K B S0023	1517010226	1517010226	1510283028	40x22x7	1900210145	FKM (SSR)	45x2.5 NBR

NBR = Perbunan® FKM = Viton®

## Notes for commissioning

### Filter recommendation

The major share of premature failures in external gear pumps is caused by contaminated hydraulic fluid.

As a warranty cannot be issued for dirt-specific wear, we recommend filtration compliant with cleanliness level 20/18/15 ISO 4406, which reduces the degree of contamination to a permissible dimension in terms of the size and concentration of dirt particles:

Operating pressure [bar ]	>160	<160
Contamination class ISO 4406	18/15	19/16
To be reached with $\beta_x = 75$	20	25

We recommend that a full-flow filter always be used. Basic contamination of the hydraulic fluid used may not exceed class 20/18/15 according to ISO 4406. Experience has shown that new fluid quite often lies above this value. In such instances a filling device with special filter should be used.

### General

- The pumps supplied by us have been checked for function and performance. No modifications of any kind may be made to the pumps; any such changes will render the warranty null and void!
- Pump may only be operated in compliance with permitted data (see pages 15 – 18).

### Project planning notes

Comprehensive notes and suggestions are available in Hydraulics Trainer, Volume 3 RE 00 281, "Project planning notes and design of hydraulic systems". Where external gear pumps are used we recommend that the following note be adhered to.

### Technical data

All stated technical data is dependent on production tolerances and is valid for specific marginal conditions.

Note that, as a consequence, scattering is possible, and at certain marginal conditions (e.g. viscosity) **the technical data may change.**

### Characteristics

When designing the external gear pump, note the maximum possible service data based on the characteristics displayed on pages 10 to 12.

Additional information on the proper handling of hydraulic products from Bosch Rexroth is available in our document: "General product information for hydraulic products" RE 07 008.

### Contained in delivery

The components with characteristics as described under ordering code and device measurements, pages 16 – 20, are contained in delivery.

**You can find further information in our publication: "General Operating Instructions for External Gear Units" RE 07 012-B1.**

## Ordering-No.


Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page
0 510 625 035	16	0 510 725 105	18	0 510 765 064	21	0 510 765 380	19
0 510 625 073	18	0 510 725 106	18	0 510 765 065	21	0 510 765 381	21
0 510 625 335	16	0 510 725 155	17	0 510 765 066	21	0 510 765 384	21
0 510 625 380	18	0 510 725 352	16	0 510 765 067	19	0 510 765 387	21
0 510 665 149	19	0 510 725 353	16	0 510 765 068	19	0 510 766 014	21
0 510 665 181	21	0 510 725 363	17	0 510 765 069	19	0 510 766 314	21
0 510 665 461	19	0 510 725 364	16	0 510 765 078	21	0 510 766 315	19
0 510 725 047	16	0 510 725 377	17	0 510 765 079	21	0 510 766 316	21
0 510 725 048	16	0 510 725 404	18	0 510 765 080	21	0 510 767 045	21
0 510 725 055	16	0 510 725 405	18	0 510 765 086	19	0 510 767 058	21
0 510 725 057	17	0 510 725 406	18	0 510 765 092	21	0 510 767 322	21
0 510 725 058	17	0 510 725 407	18	0 510 765 369	19	0 510 768 034	19
0 510 725 094	17	0 510 725 431	17	0 510 765 370	19	0 510 768 318	21
0 510 725 103	18	0 510 765 062	21	0 510 765 377	21	0 510 768 320	21
0 510 725 104	18	0 510 765 063	21	0 510 765 378	21		

## The AZ configurator at [www.boschrexroth.com/azconfigurator](http://www.boschrexroth.com/azconfigurator)

The AZ configurator assists you to configure your individual external gear unit easily and user-friendly. You only need to specify your requirements: From the displacement, direction of rotation, drive shaft, connection flange right up to the required rear cover. You immediately receive a project drawing (PDF format) if a configuration already exists. You receive the price of the configured external gear unit upon request.



The AZ configurator assists you to configure your individual external gear unit easily and user-friendly – all data needed for project planning are acquired through menu guidance.

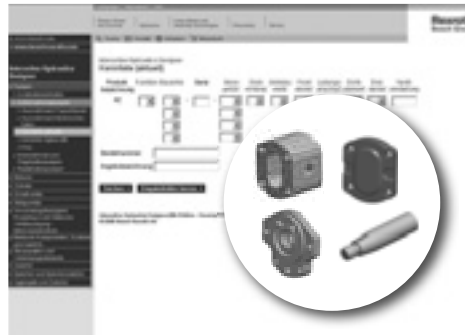

Selection is made either on an ordering code or your technical requirements. This means that you can search for external gear units that have already been configured, or you specify the configuration variant of the external gear unit based upon the operating parameters you require.



If the external gear unit you selected has been released you will receive the part number, ordering code and a detailed installation drawing. If your special configuration is not available please send your specification to Rexroth. One of our employees will then contact you.

Bosch Rexroth AG  
 External Gear Units  
 Robert-Bosch-Straße 2  
 D-71701 Schwieberdingen  
 Phone +49 (0) 711-811 10 63  
 Fax +49 (0) 711-811 17 98  
[brm-az.info@boschrexroth.de](mailto:brm-az.info@boschrexroth.de)  
[www.boschrexroth.com/brm](http://www.boschrexroth.com/brm)

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# External gear pump Series G

**RE 10 093/04.14**  
Replace  
RE 10 093/06.13

**AZPG-22**

Fixed pumps  
 $V = 22.5 \dots 100 \text{ cm}^3/\text{rev}$



## Overview of contents

Contents	Page
General	2
Product overview	3
Ordering code single pumps	4
Ordering code multiple pumps	5
Drive shafts	6
Front cover	6
Line ports	7
Pumps with integral valves	8
Design calculations for pumps	8
Performance charts	9
Noise charts	12
Specifications	14
Drive arrangements	15
Multiple pumps through drives	17
Dimensions	18
Fittings	58
Spare parts	59
Notes on commissioning and maintenance	60
Ordering-No.	61
The AZ configurator at <a href="http://www.boschrexroth.com/azconfigurator">www.boschrexroth.com/azconfigurator</a>	63

## Features

- Nominal pressure 280 bar
- Slide bearings for heavy duty applications
- Drive shafts to ISO or SAE
- Combination of several pumps possible
- Line ports: connection flanges
- Consistent high quality thru mass production
- Numerous configuration variants available
- Cast case available on request



# General

Rexroth external gear pumps are available as standard gear pumps in the 4 series of B, F, N and G, as SILENCE gear pumps in the S, T and U series, and as the SILENCE PLUS version in the J series in which the displacements are graded by different gear widths. Further configuration variants are given by different flanges, shafts, valve arrangements and multiple pump combinations.

## Construction

The external gear pump consists essentially of a pair of gears supported in bearing bushings or bearing, dependent on the series, and the case with a front and rear cover. The drive shaft protrudes from the front cover where it is sealed by the shaft seal ring. The bearing forces are absorbed by special slide bearings with sufficient elasticity to produce surface contact instead of line contact. They also ensure excellent resistance to galling – especially at low speed. The gears have 12 teeth. This keeps both flow pulsation and noise emission to a minimum.
















The internal sealing is achieved by forces which are proportional to delivery pressure. This ensures optimum efficiency. This ensures optimum efficiency. The sealing zone between the gear teeth and the bearings is controlled by the admission of operating pressure to the rear of the bearing bushings. Special seals form the boundary of the zone. The radial clearance at the tips of the gear teeth is sealed by internal forces pushing them against the case.

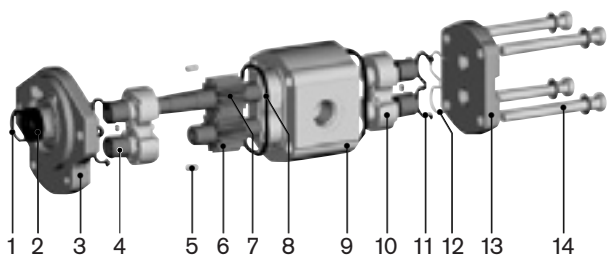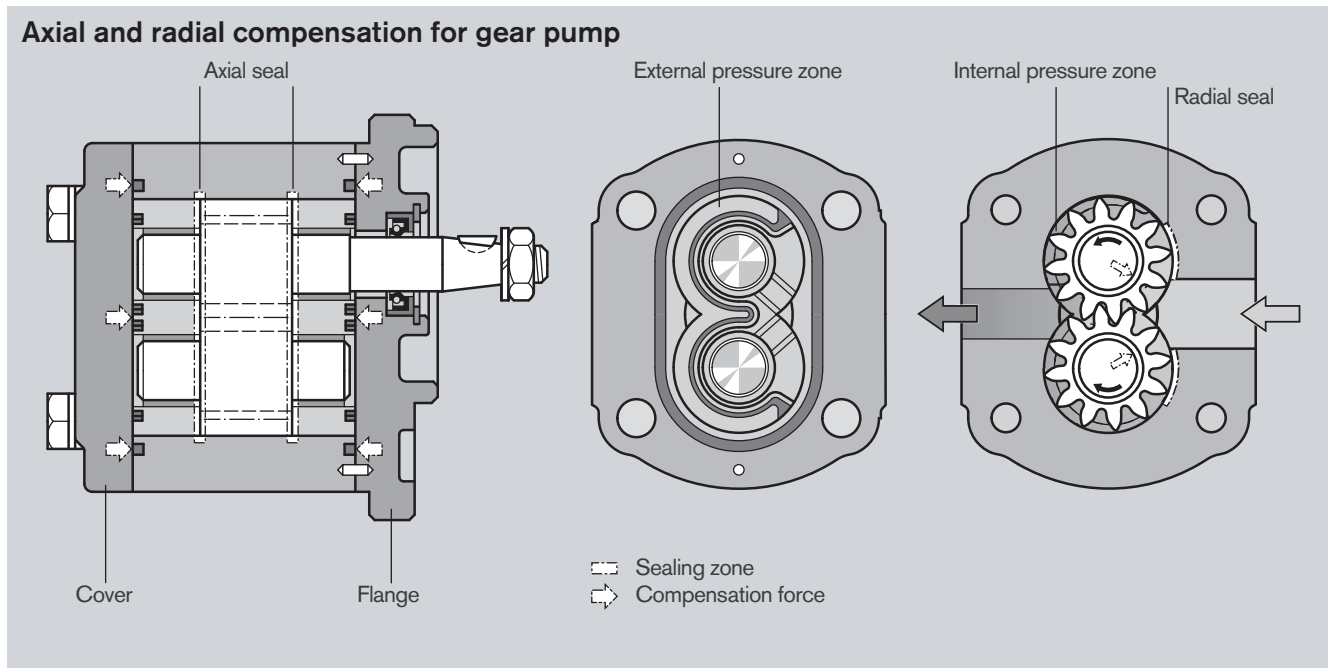

- |                     |                    |
|---------------------|--------------------|
| 1 Retaining ring    | 8 Case seal        |
| 2 Shaft seal ring   | 9 Pump case        |
| 3 Front cover       | 10 Bearing         |
| 4 Slide bearing     | 11 Axial zone seal |
| 5 Centering pin     | 12 Support         |
| 6 Gear              | 13 End cover       |
| 7 Gear (frictional) | 14 Fixing screws   |



Overview of "Series G" standard program














Version	Page	Version	Page	Version	Page
	18		19		20 21 22
	23 24 25		26 27 28		29 30 31
	32 33 34		35 36 37		38 39
	40 41 42 43 44 45		46 47 48 49 50 51		52 53
	54		55 57		56

# Ordering code

## External gear units Single pumps Standard

<b>AZ</b>	<b>P</b>	<b>G</b>	<b>-</b>	<b>2</b>	<b>2</b>	<b>-</b>	<b>063</b>	<b>R</b>	<b>C</b>	<b>B</b>	<b>20</b>	<b>M</b>	<b>B</b>	<b>18009</b>	<b>S xxxx</b>																															
<table border="1"> <tr> <td><b>Function</b></td> <td rowspan="3">Special design *)</td> </tr> <tr> <td><b>P = Pump</b></td> </tr> <tr> <td><b>Series</b></td> </tr> <tr> <td><b>1 = Reinforced bearing</b></td> <td rowspan="3"> <b>Valve adjustment</b>  <b>200 xx</b> = PRV 200 bar  <b>xxx 11</b> = FCV 11 l/min  <b>18009</b> = PRV + FCV                  180 bar, 9 l/min             </td> </tr> <tr> <td><b>2 = Standard bearing</b></td> </tr> <tr> <td><b>3 = in GJS-400 execution</b></td> </tr> <tr> <td><b>Version</b></td> <td rowspan="2"> <b>Rear cover</b>  <b>A</b> = with inlet and outlet port  <b>B</b> = Standard  <b>D</b> = PRV residual flow internal  <b>E</b> = FCV residual flow external  <b>S</b> = FCV residual flow internal  <b>V</b> = PRV + FCV             </td> </tr> <tr> <td><b>2 = corrosion-resistant, pinned</b></td> </tr> <tr> <td><b>Size G</b></td> <td rowspan="7"> <b>Seals</b>  <b>M</b> = NBR  <b>P</b> = FKM  <b>K</b> = NBR, SSR in FKM             </td> </tr> <tr> <td><b>022 = 22.5 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>025 = 25.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>028 = 28.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>032 = 32.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>036 = 36.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>040 = 40.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>045 = 45.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>050 = 50.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>056 = 56.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>063 = 63.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>070 = 70.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>080 = 80.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>100 = 100.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>Direction of rotation</b></td> <td></td> </tr> <tr> <td><b>R = Clockwise</b></td> <td></td> </tr> <tr> <td><b>L = Counterclockwise</b></td> <td></td> </tr> </table>															<b>Function</b>	Special design *)	<b>P = Pump</b>	<b>Series</b>	<b>1 = Reinforced bearing</b>	<b>Valve adjustment</b> <b>200 xx</b> = PRV 200 bar <b>xxx 11</b> = FCV 11 l/min <b>18009</b> = PRV + FCV 180 bar, 9 l/min	<b>2 = Standard bearing</b>	<b>3 = in GJS-400 execution</b>	<b>Version</b>	<b>Rear cover</b> <b>A</b> = with inlet and outlet port <b>B</b> = Standard <b>D</b> = PRV residual flow internal <b>E</b> = FCV residual flow external <b>S</b> = FCV residual flow internal <b>V</b> = PRV + FCV	<b>2 = corrosion-resistant, pinned</b>	<b>Size G</b>	<b>Seals</b> <b>M</b> = NBR <b>P</b> = FKM <b>K</b> = NBR, SSR in FKM	<b>022 = 22.5 cm<sup>3</sup>/rev</b>	<b>025 = 25.0 cm<sup>3</sup>/rev</b>	<b>028 = 28.0 cm<sup>3</sup>/rev</b>	<b>032 = 32.0 cm<sup>3</sup>/rev</b>	<b>036 = 36.0 cm<sup>3</sup>/rev</b>	<b>040 = 40.0 cm<sup>3</sup>/rev</b>	<b>045 = 45.0 cm<sup>3</sup>/rev</b>	<b>050 = 50.0 cm<sup>3</sup>/rev</b>	<b>056 = 56.0 cm<sup>3</sup>/rev</b>	<b>063 = 63.0 cm<sup>3</sup>/rev</b>	<b>070 = 70.0 cm<sup>3</sup>/rev</b>	<b>080 = 80.0 cm<sup>3</sup>/rev</b>	<b>100 = 100.0 cm<sup>3</sup>/rev</b>	<b>Direction of rotation</b>		<b>R = Clockwise</b>		<b>L = Counterclockwise</b>	
<b>Function</b>	Special design *)																																													
<b>P = Pump</b>																																														
<b>Series</b>																																														
<b>1 = Reinforced bearing</b>	<b>Valve adjustment</b> <b>200 xx</b> = PRV 200 bar <b>xxx 11</b> = FCV 11 l/min <b>18009</b> = PRV + FCV 180 bar, 9 l/min																																													
<b>2 = Standard bearing</b>																																														
<b>3 = in GJS-400 execution</b>																																														
<b>Version</b>	<b>Rear cover</b> <b>A</b> = with inlet and outlet port <b>B</b> = Standard <b>D</b> = PRV residual flow internal <b>E</b> = FCV residual flow external <b>S</b> = FCV residual flow internal <b>V</b> = PRV + FCV																																													
<b>2 = corrosion-resistant, pinned</b>																																														
<b>Size G</b>	<b>Seals</b> <b>M</b> = NBR <b>P</b> = FKM <b>K</b> = NBR, SSR in FKM																																													
<b>022 = 22.5 cm<sup>3</sup>/rev</b>																																														
<b>025 = 25.0 cm<sup>3</sup>/rev</b>																																														
<b>028 = 28.0 cm<sup>3</sup>/rev</b>																																														
<b>032 = 32.0 cm<sup>3</sup>/rev</b>																																														
<b>036 = 36.0 cm<sup>3</sup>/rev</b>																																														
<b>040 = 40.0 cm<sup>3</sup>/rev</b>																																														
<b>045 = 45.0 cm<sup>3</sup>/rev</b>																																														
<b>050 = 50.0 cm<sup>3</sup>/rev</b>																																														
<b>056 = 56.0 cm<sup>3</sup>/rev</b>																																														
<b>063 = 63.0 cm<sup>3</sup>/rev</b>																																														
<b>070 = 70.0 cm<sup>3</sup>/rev</b>																																														
<b>080 = 80.0 cm<sup>3</sup>/rev</b>																																														
<b>100 = 100.0 cm<sup>3</sup>/rev</b>																																														
<b>Direction of rotation</b>																																														
<b>R = Clockwise</b>																																														
<b>L = Counterclockwise</b>																																														




























\*) Some of the special designs shown on pages 18–57 are not covered in the illustration of the ordering code.

Drive shafts			Front cover			Line ports		
Suitable front cover								
<b>C</b>	Tapered key shaft 1 : 5		<b>B</b>	Rectangular flange Centering Ø 105 mm		<b>07</b>	Square flange SAE thread, metric	
<b>H</b>	Tapered key shaft 1 : 8		<b>O</b>	SAE J 744 101-2 B 2-bolt flange Ø 101.6 mm		<b>20</b>	Rectangular Flange	
<b>D</b>	Splined shaft SAE J 744 22-4 13T		<b>O</b>	Rectangular flange Centering Ø 50.78 mm		<b>30</b>	Rectangular Flange	
<b>E</b>	Splined shaft SAE J 744 15T		<b>C</b>			<b>40</b>	Square flange SAE thread, UNC	
<b>Q</b>	Straight keyed shaft SAE J 744 22-1		<b>C</b>			<b>12</b>	Thread (UN-2B) SAE seal ring BOSS	

Not all variants can be selected by using ordering code!  
 Please select the required pump by using the selection tables (standard types) or after consultation with Bosch Rexroth!  
 Special options are possible upon request.


# Ordering code

## External gear units Multiple pumps


<b>AZ</b>	<b>P</b>	<b>GGSS</b>	<b>-</b>	<b>x</b>	<b>x</b>	<b>-</b>	<b>032/022/016/005</b>	<b>R</b>	<b>C</b>	<b>B</b>	<b>20</b>	<b>20</b>	<b>20</b>	<b>20</b>	<b>K</b>	<b>B</b>
<b>Function</b> P = Pump <b>Series</b> B = 1.0...7.1 cm <sup>3</sup> /rev *) F = 4.0...28 cm <sup>3</sup> /rev N = 20.0...36 cm <sup>3</sup> /rev G = 22.5...100 cm <sup>3</sup> /rev S = 4.0...28 cm <sup>3</sup> /rev **) T = 20.0...36 cm <sup>3</sup> /rev U = 22.5...63 cm <sup>3</sup> /rev J = 12.0...16 cm <sup>3</sup> /rev ***) <b>Series</b> , relates to pump section 1 1x = Standard bearing 2x = Reinforced bearing <b>Version</b> , relates to pump section 1 1 = Phosphatized, pinned 2 = Chromatized, pinned <b>Size</b> corresponding to each series <b>Direction of rotation</b> R = cw, L = ccw							*) Standard  **) SILENCE  ***) SILENCE PLUS			<b>Rear cover</b> relates to last pump section B = Standard <b>Seals</b> M = NBR P = FKM K = NBR, SSR in FKM Shaft seal relate to pump section 1						
<b>Drive shafts</b> relates to pump part 1							<b>Front cover</b> relates to pump part 1				<b>Line ports</b> every pump parts					
Series B:							Suitable front cover									
<b>H</b>	Tapered key shaft 1:8			<b>O</b>	<b>O</b>	Square flange Centering Ø 25.38 mm			<b>02</b>	Thread, metric DIN 3852 T1						
Series F, S, J:																
<b>C</b>	Tapered key shaft 1:5			<b>B</b>	<b>B</b>	Square flange Centering Ø 80 mm			<b>20</b>	Rectangular flange						
<b>H</b>	Tapered key shaft 1:8			<b>O</b>	<b>O</b>	Square flange Centering Ø 36.47 mm			<b>30</b>	Rectangular flange						
<b>R</b>	Splined shaft SAE J 744 16-4 9T			<b>R</b>	<b>R</b>	SAE J 744 82-2 A Centering Ø 82.55 mm 2-bolt mounting										
Series N, T:																
<b>C</b>	Tapered key shaft 1:5			<b>B</b>	<b>B</b>	Square flange Centering Ø 100 mm			<b>07</b>	Square flange SAE Thread, metric						
<b>D</b>	Splined shaft SAE J 744 22-4 13T			<b>C</b>	<b>C</b>	SAE J 744 101-2 B Centering Ø 101.6 mm 2-bolt mounting			<b>20</b>	Rectangular flange						
<b>N</b>	Dihedral claw			<b>M</b>	<b>M</b>	Centering Ø 52 mm with seal ring										
Series G, U:																
<b>C</b>	Tapered key shaft 1:5			<b>B</b>	<b>B</b>	Square flange Centering Ø 105 mm			<b>07</b>	Square flange SAE Thread, metric						
<b>D</b>	Splined shaft SAE J 744 22-4 13T			<b>C</b>	<b>C</b>	SAE J 744 101-2 B Centering Ø 101.6 mm 2-bolt mounting			<b>20</b>	Rectangular flange						
<b>H</b>	Tapered key shaft 1:8			<b>O</b>	<b>O</b>	Square flange Centering Ø 50.78 mm										

Not all variants can be selected by using ordering code! Please select the required pump by using the selection tables (standard types) or after consultation with Bosch Rexroth! Special options are possible upon request.


Drive shafts

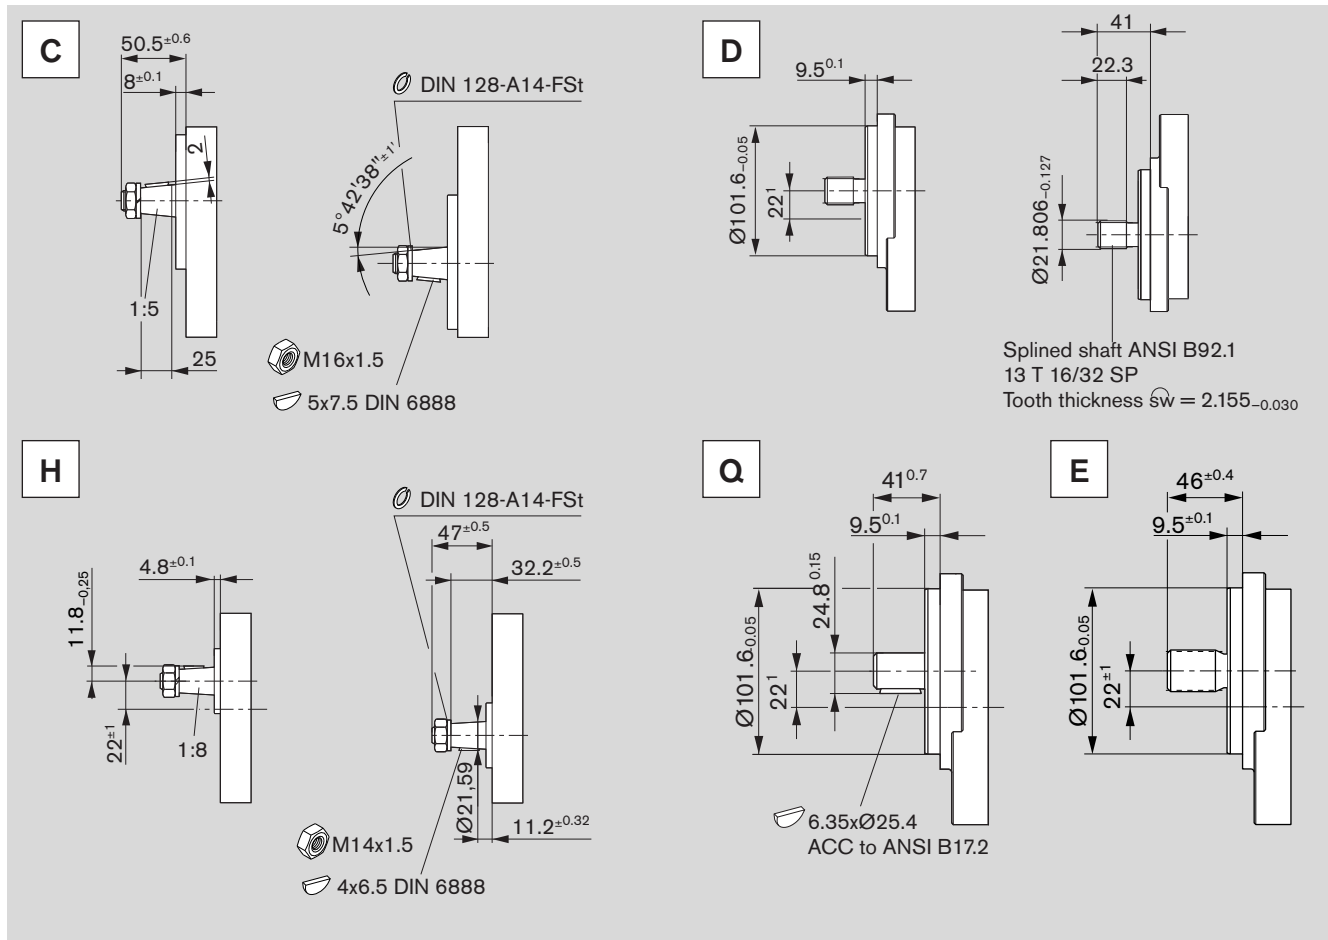

Front cover

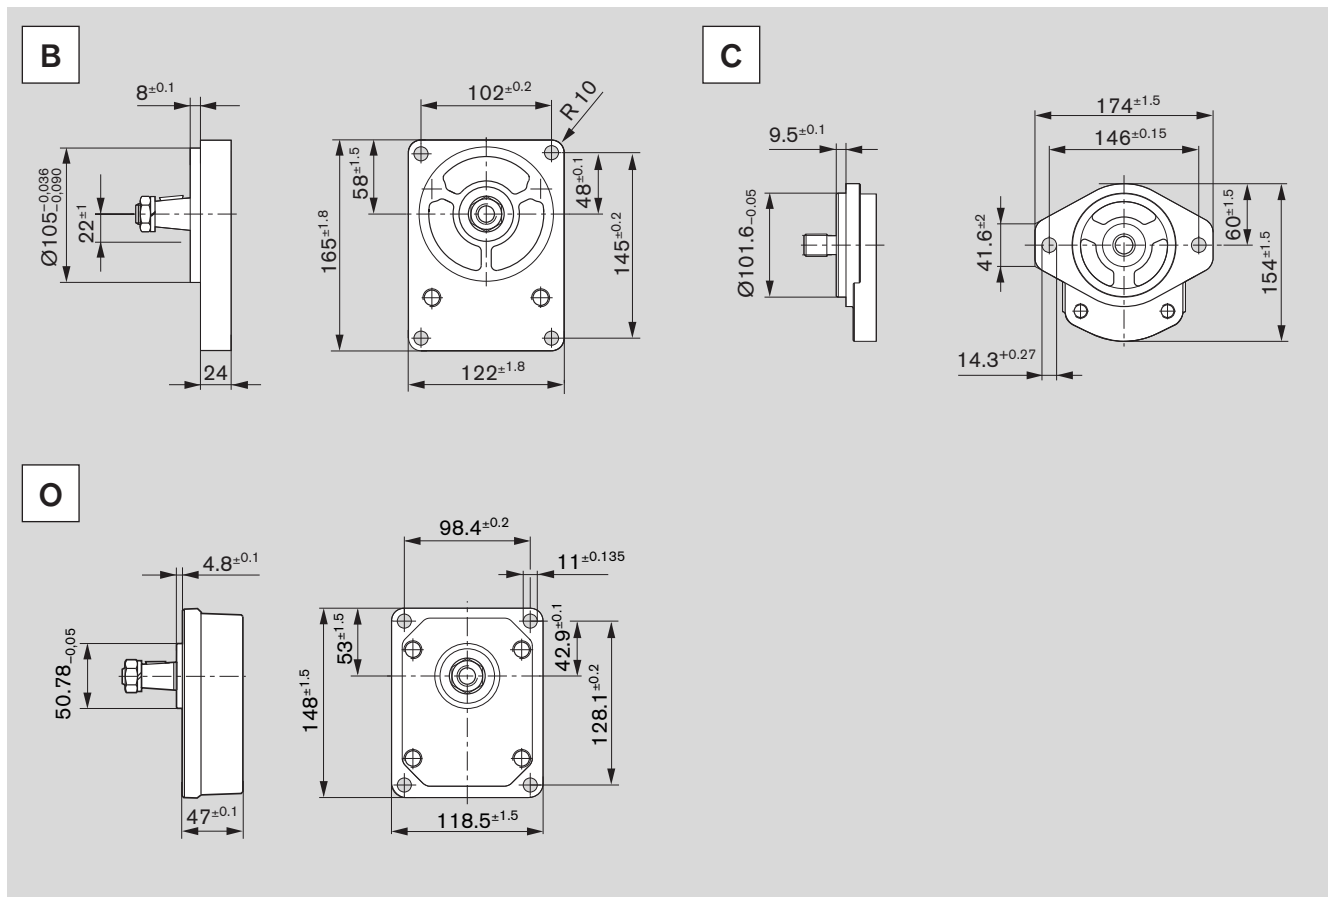


Line port



**07** Square flange SAE, thread metric


Ordering code	Size	Delivery side				Suction side			
		C	D	E	F	C	D	E	F
07	22.5...28 cm <sup>3</sup>	18	47.6	M 10 depth 18	22.2	25	52.4	M 10 depth 18	26.2
	32.0...50 cm <sup>3</sup>	25	52.4		26.2	32	58.7		30.2
	56.0...63 cm <sup>3</sup>	32	58.7		30.2	38	69.8	M 12 depth 23	35.8



**12** Thread (UN-2B, UNF-2B) SAE O Ring BOSS


At pressures  $p_2 > 210$  bar limited service life

Ordering code	Size	Delivery side			Suction side				
		G	D	E	F	G	D	E	F
07	022...028	11/16"-12 UN-2B	45	0.5	19	15/16"-12 UN-2B	50	0.5	19
	032...045	15/16"-12 UN-2B	50			15/18"-12 UN-2B	58		
	050...063	15/18"-12 UN-2B	58			17/18"-12 UN-2B	68		




**20** Rectangular flange

Ordering code	Size	Delivery side			Suction side		
		C	D	E	C	D	E
20	22.5...63 cm <sup>3</sup>	18	55	M 8 depth 13	26	55	M 8 depth 13



**30** Rectangular flange

Ordering code	Size	Delivery side			Suction side		
		C	D	E	C	D	E
30	22.5...56 cm <sup>3</sup>	18	39.7	M 8 depth 13	26	50.8	M 10 depth 13
30	63 cm <sup>3</sup>	26	50.8	M 10 depth 13	36	62	M 10 depth 13





**40** Rectangular flange SAE, thread UNC


Ordering code	Size	Delivery side				Suction side			
		C	D	E	F	C	D	E	F
40	22.5...36 cm <sup>3</sup>	19	47.6	3/8"-16 UNC- 2B depth	22.2	25	52.4	3/8"-16 UNC- 2B depth	26.2
	32.0...50 cm <sup>3</sup>	25	52.4		26.2	32	58.7		30.2
	56.0...63 cm <sup>3</sup>	32	58.7		30.2	38	69.8		35.8

# Gear pumps with integral valves


In order to reduce external pipework it is possible to incorporate a flow-control valve or pressure-relief valve in the cover of the gear pump. A typical application of this is in the supply of hydraulic oil in power steering systems. The pump delivers a constant flow irrespective of the speed at which it is driven. The excess flow is either returned internally to the suction port or distributed externally to other items of equipment.

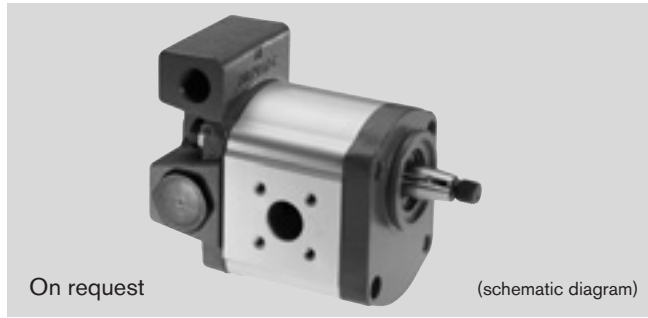


3-way flow-control valve.  
Excess flow returned to suction line  
 $Q_{const.} = 2...30 \text{ l/min}$



3-way flow-control valve.  
Excess flow distributed externally; loadable  
 $Q_{const.} = 2...30 \text{ l/min}$



3-way flow-control valve with pressure-relief valve.  
Excess flow returned to suction line  
 $Q_{const.} = 2...30 \text{ l/min}$   
 $p_1 = 100...180 \text{ bar}$



Pressure-relief valve.  
Discharge returned to suction line  
 $p_1 = 5...250 \text{ bar}$

## Ordering code

S	xxx17
---	-------

E	xxx12
---	-------

V	15011
---	-------

D	180xx
---	-------

# Design calculations for pumps

The design calculations for pumps are based on the following parameters:

- $V$  [ $\text{cm}^3/\text{rev}$ ] Displacement
- $Q$  [ $\text{l}/\text{min}$ ] Delivery
- $p$  [ $\text{bar}$ ] Pressure
- $M$  [ $\text{Nm}$ ] Drive torque
- $n$  [ $\text{rev}/\text{min}$ ] Drive speed
- $P$  [ $\text{kW}$ ] Drive power

It is also necessary to allow for different efficiencies such as:

- $\eta_v$  Volumetric efficiency
- $\eta_{hm}$  Hydraulic-mechanical efficiency
- $\eta_t$  Overall efficiency

The following formulas describe the various relationships.

They include correction factors for adapting the parameters to the usual units encountered in practice.

**Caution:** Diagrams providing approximate selection data will be found on subsequent pages.

$$Q = V \cdot n \cdot \eta_v \cdot 10^{-5}$$

$$p = \frac{M \cdot \eta_{hm}}{1.59 \cdot V}$$

$$P = \frac{p \cdot Q}{6 \cdot \eta_t}$$

$$V = \frac{Q}{n \cdot \eta_v} \cdot 10^5$$

$$V = \frac{M \cdot \eta_{hm}}{159 \cdot p}$$

$$Q = \frac{6 \cdot P \cdot \eta_t}{p}$$

$$n = \frac{Q}{V \cdot \eta_v} \cdot 10^5$$

$$M = \frac{1.59 \cdot V \cdot p}{\eta_{hm}}$$

$$p = \frac{6 \cdot P \cdot \eta_t}{Q}$$

[%]


$n \xrightarrow{\eta_v} Q$      $V \text{ [cm}^3/\text{rev}] \quad Q \text{ [l/min]} \quad p \text{ [bar]}$

$M \xrightarrow{\eta_{hm}} p$

$P \xrightarrow{\eta_t} p \cdot Q$      $n \text{ [rev/min]} \quad P \text{ [kW]} \quad M \text{ [Nm]}$



**Caution:**  $\eta$  [%] e.g. 95 [%]

# Performance charts




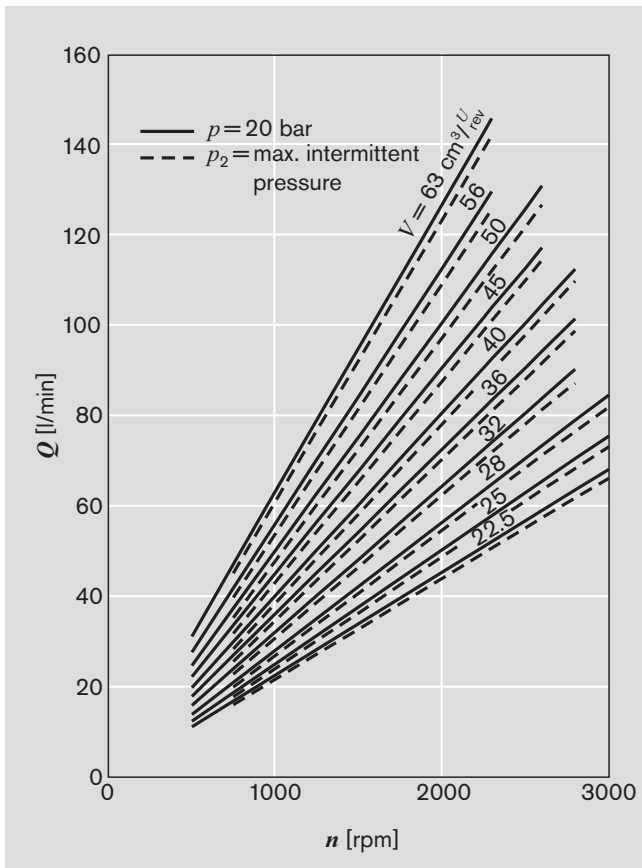


$\nu = 35 \text{ mm}^2/\text{s}, \vartheta = 50^\circ\text{C}$

$Q = f(n, V)$  incl.  $\eta_v$   
 $P = f(n, p)$  ——— incl.  $\eta_t$   
 $M = f(n, p)$  - - - - - incl.  $\eta_{hm}$



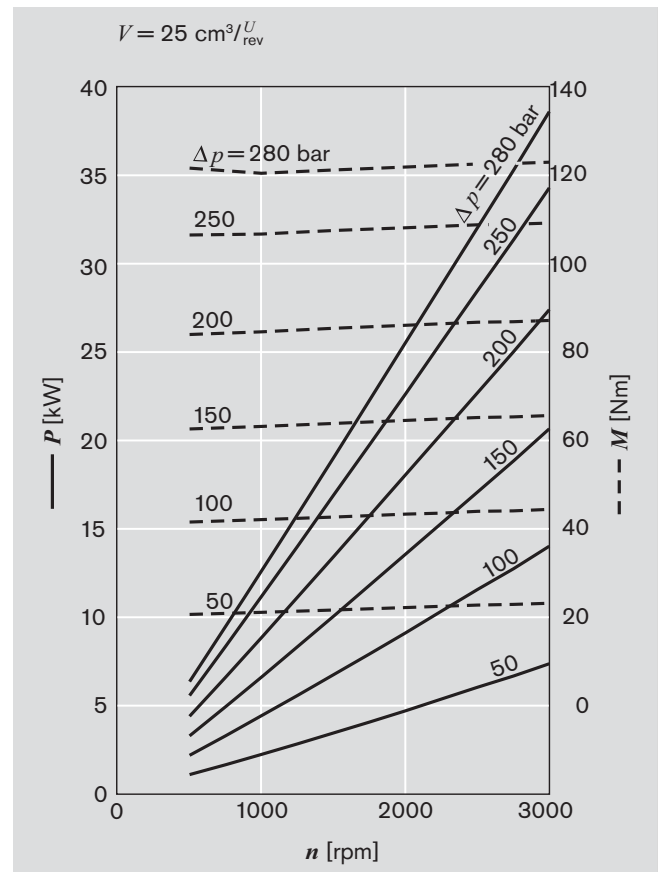
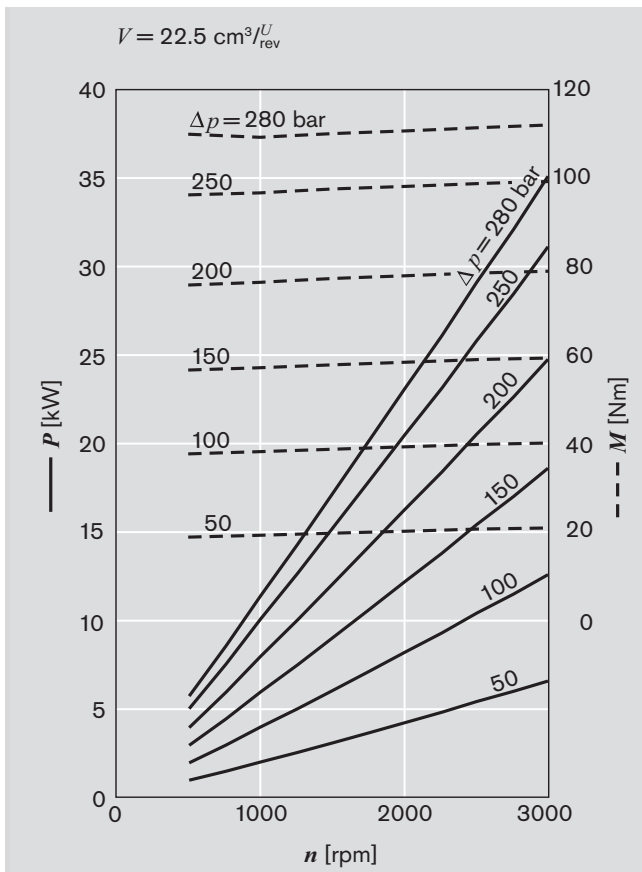


Performance charts (continued)

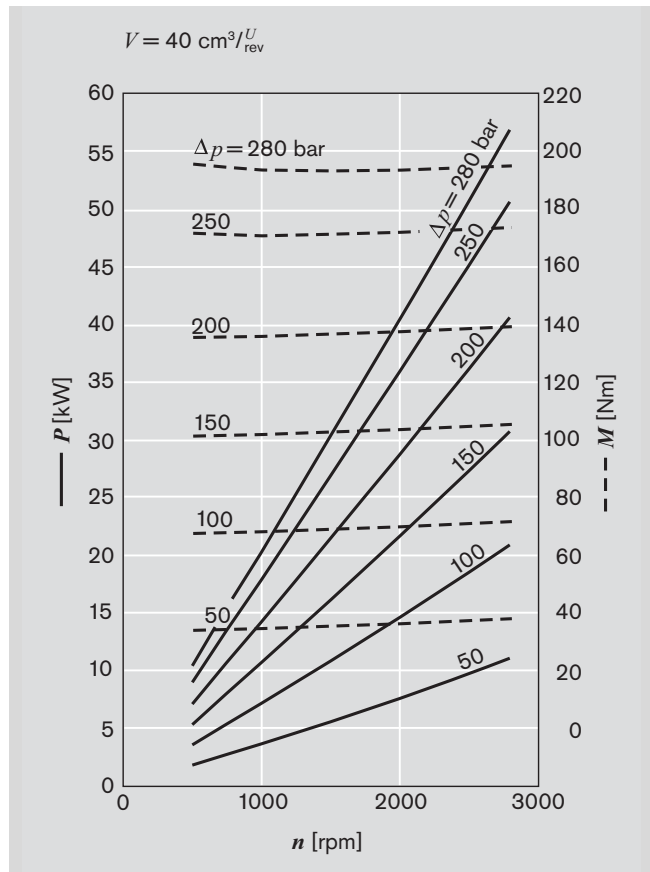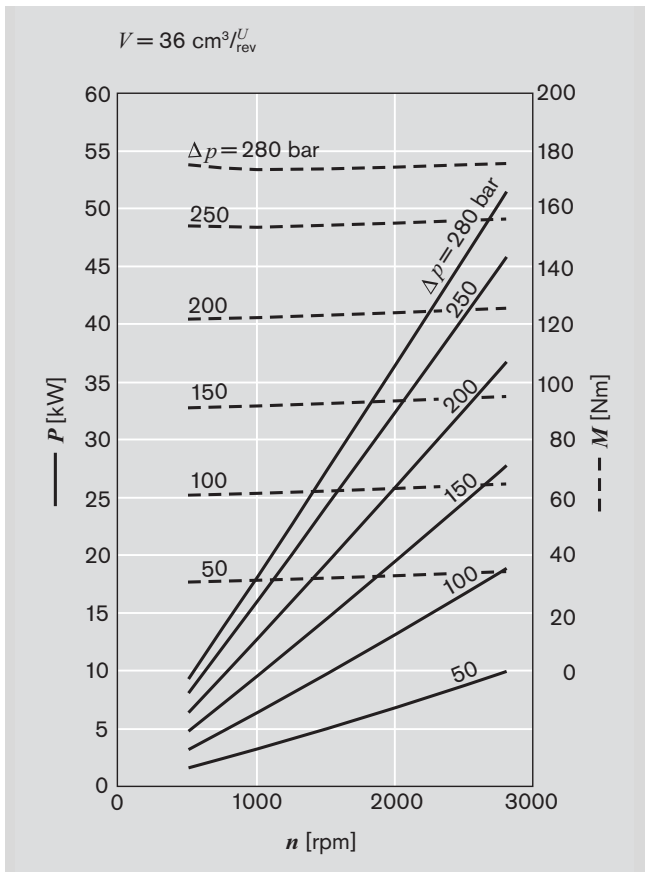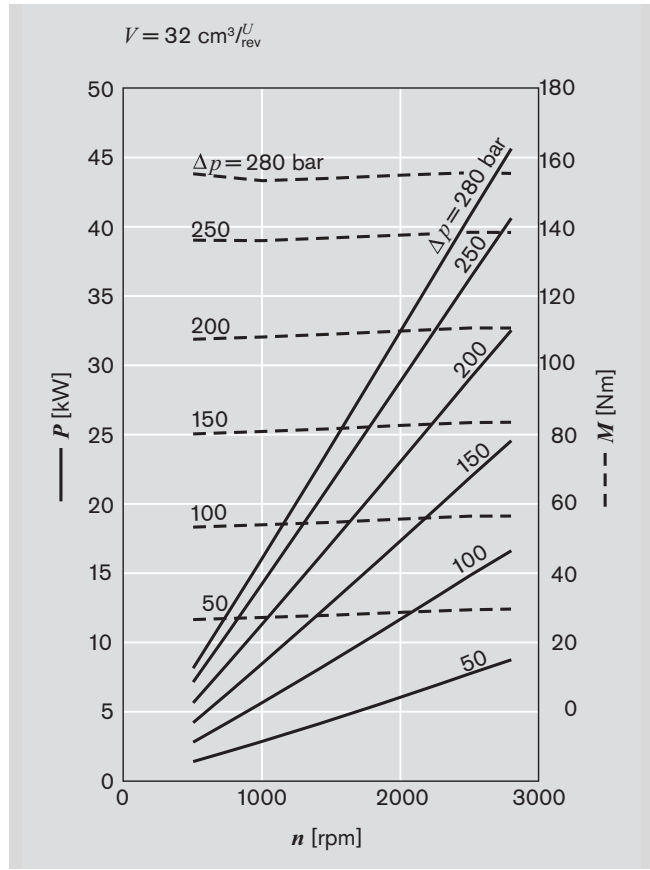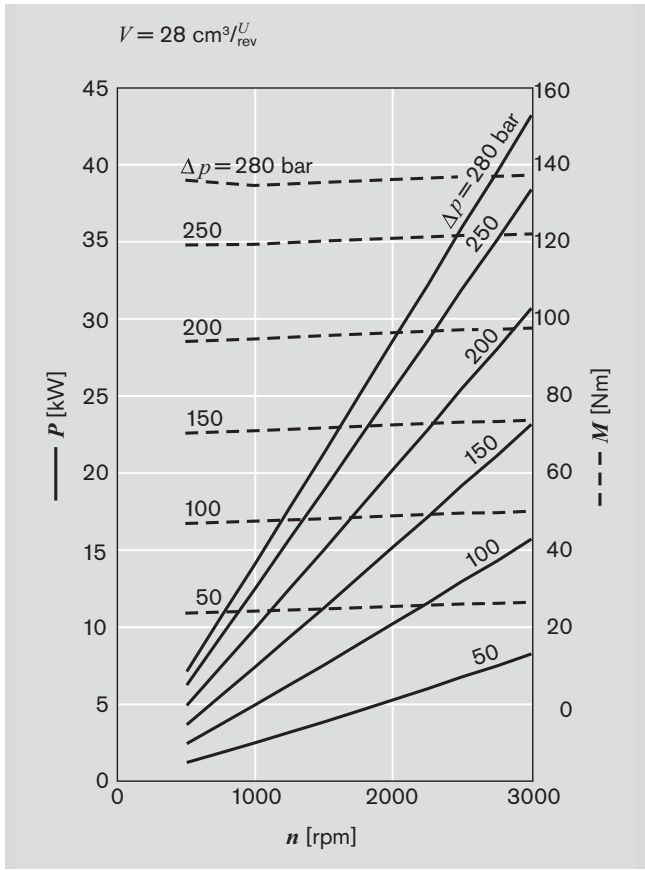



Performance charts (continued),  $V = 70, 80, 100 \text{ cm}^3/\text{rev}$  on request

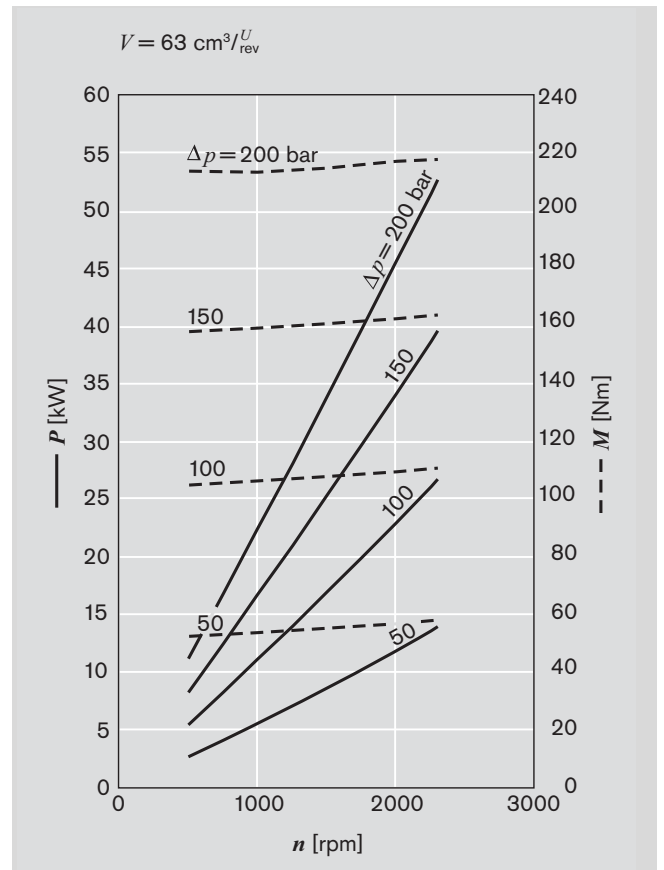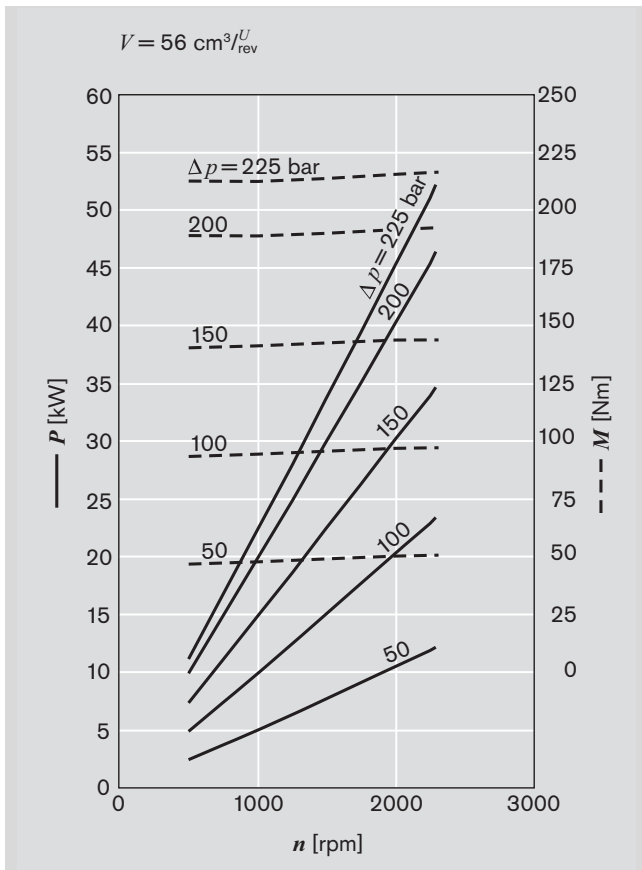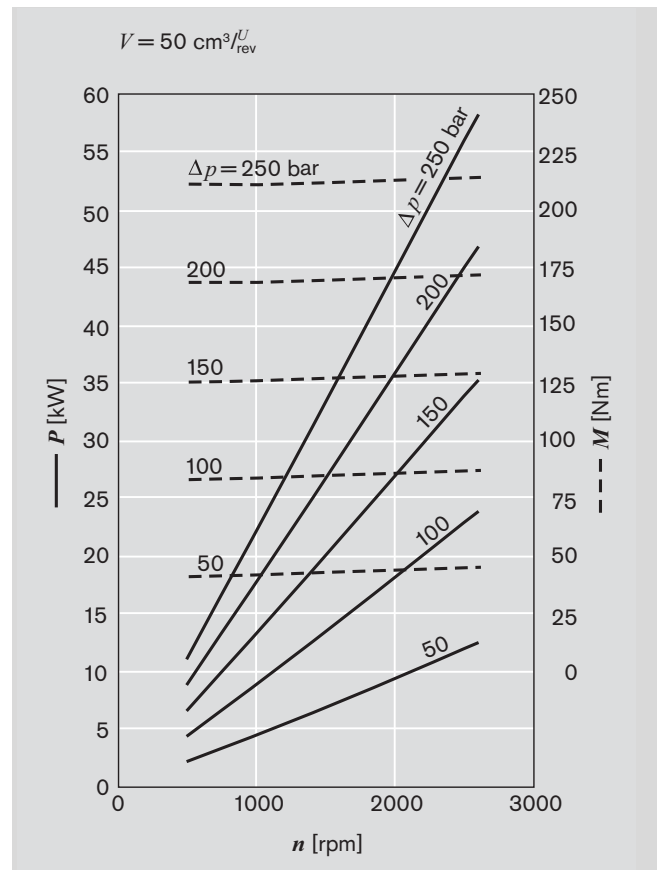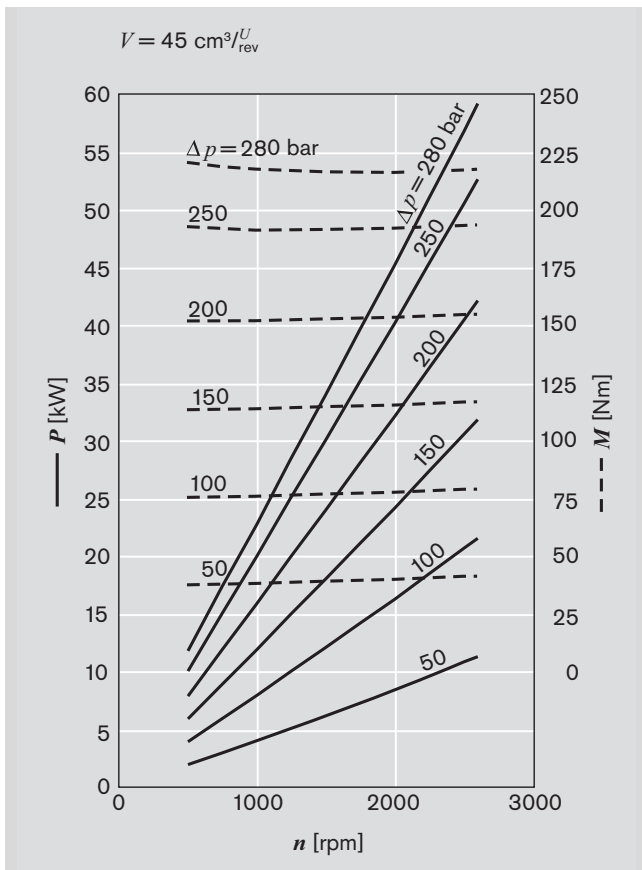

6

# Noise charts







**Noise level** dependent on rotational speed, pressure range between 10 bar and pressure value  $p_2$  (see page 14 Specifications table).

Oil data:  $\nu = 32 \text{ mm}^2/\text{s}$ ,  $\vartheta = 50^\circ\text{C}$ .





Sound pressure level calculated from noise measurements made in the sound absorbent measuring room compliant with DIN 45 635, Part 26.

Spacing between measuring sensor – pump: 1 m.

These are typical characteristic values for the respective model. They describe the airborne sound emitted solely by the pump. Environmental influences (installation site, piping, further system components) are not taken into consideration. Each value applies for a single pump.

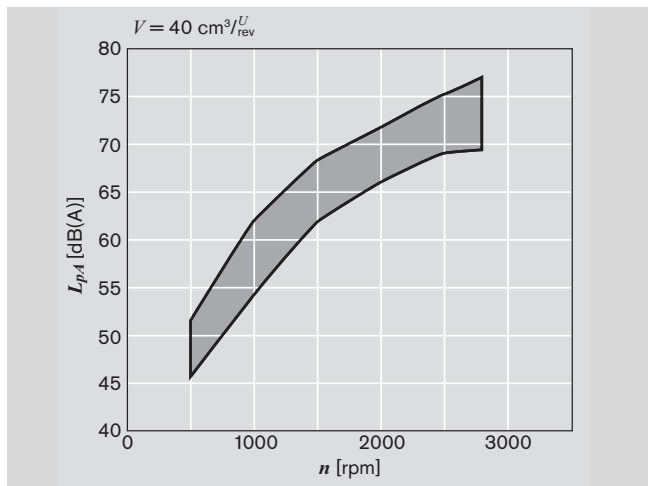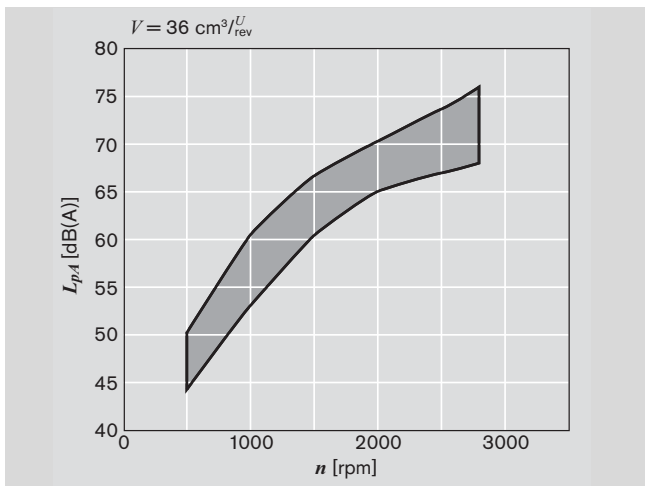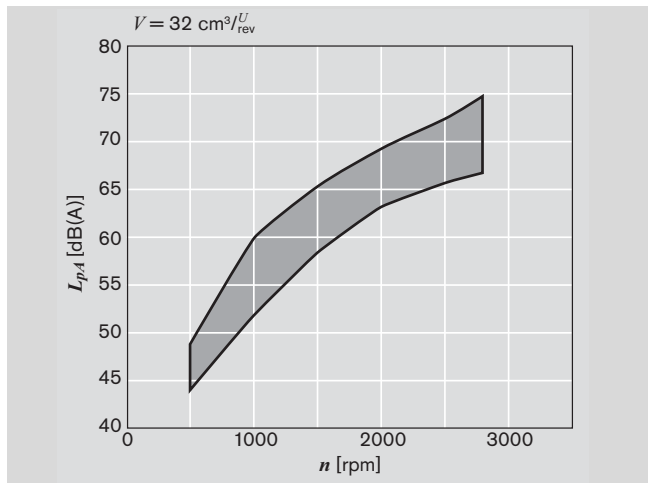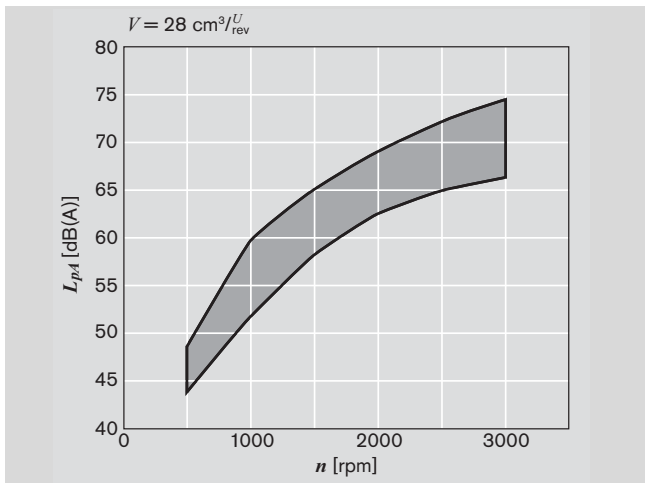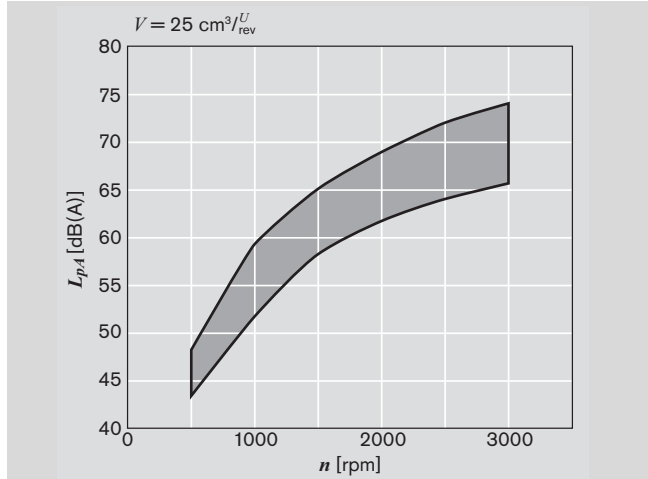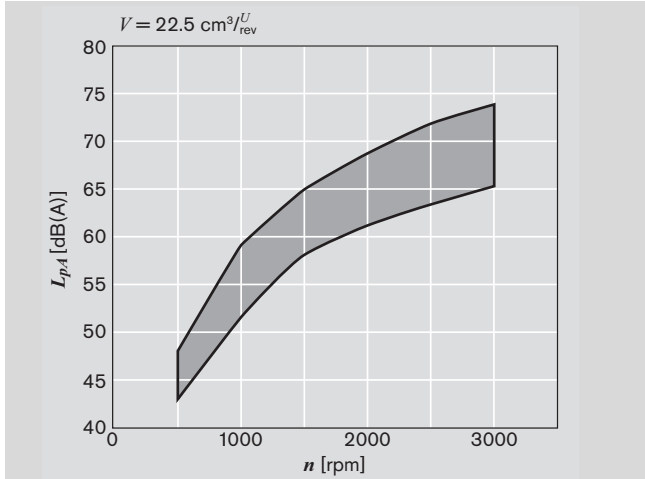

Noise charts (continued),  $V = 70, 80, 100 \text{ cm}^3/U_{rev}$  on request

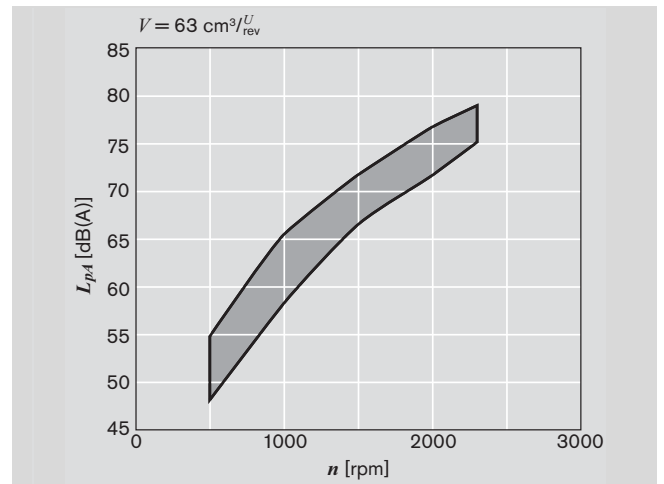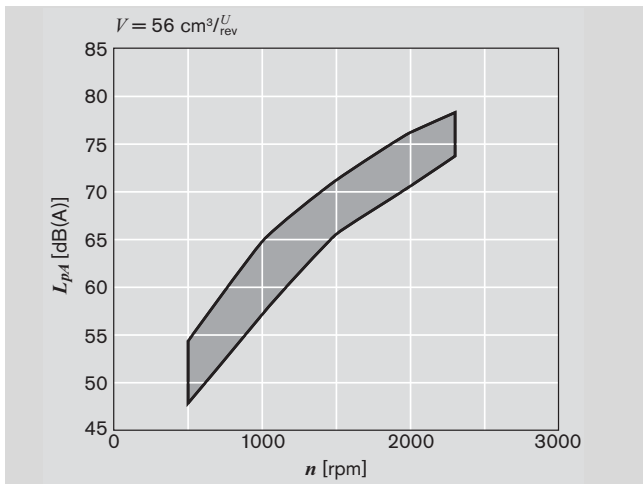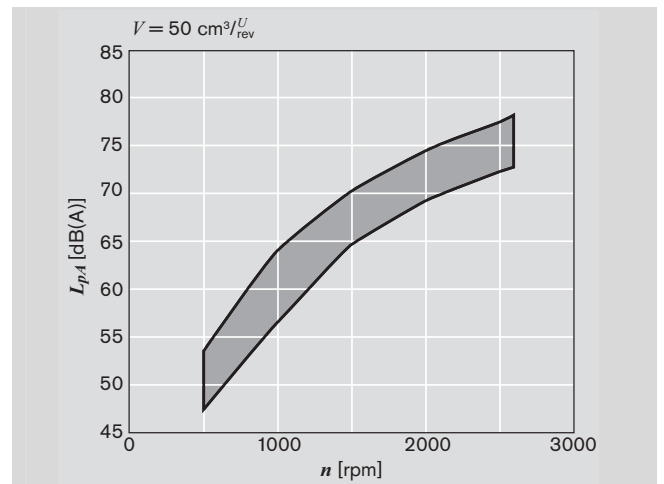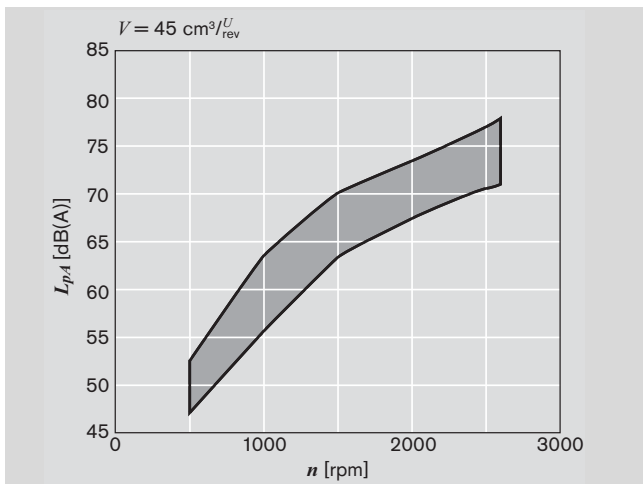

# Specification

General	
Construction	External gear pump
Mounting	Flange or through-bolting with spigot
Line ports	Flange
Direction of rotation (looking on shaft)	Clockwise or counter-clockwise, the pump may only be driven in the direction indicated
Installation position	Any
Load on shaft	Radial and axial forces after consulting
Ambient temperature range	-30°C...+80°C with NBR seals or -20°C...+110°C with FKM seals
Hydraulic fluid	- Mineral oil compliant with DIN 51 524, 1-3, however under higher load at least HLP compliant with DIN 51 524 Part 2 recommended. - Comply with RE 90220 - Further operating fluids possible after consultation
Viscosity	12...800 mm <sup>2</sup> /s permitted range 20...100 mm <sup>2</sup> /s recommended range ...2000 mm <sup>2</sup> /s range permitted for starting
Hydraulic fluid temperature range	max. +80°C with NBR seals *) max. +110°C with FKM seals **)
Filtration ***)	At least cleanliness level 20/18/15 compliant with ISO 4406 (1999)

\*) NBR = Perbunan®  
 \*\*) FKM = Viton®  
 \*\*\*) On hydraulic systems or devices with critical counter-reaction, such as steering and counterbalance valves, the type of filtration selected must be adapted to the sensitivity of these devices/systems.


Safety requirements pertaining to the whole systems are to be observed.

In the case of applications with high numbers of load cycles please consulting.


## Definition of direction of rotation

Always look on the drive shaft.

**Caution:** Dimensions drawings always show clockwise-rotation pumps. On counterclockwise-rotation pumps the positions of the drive shaft and the suction and pressure ports are different.

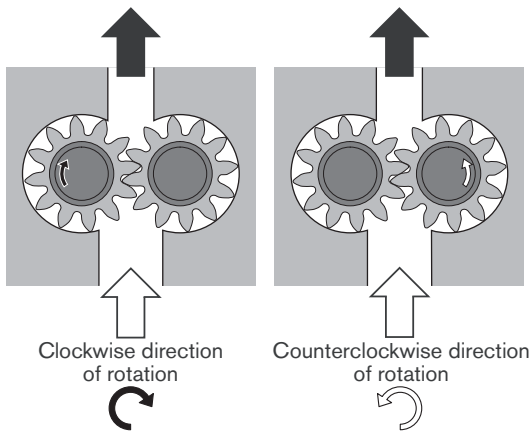

## Definitions of pressures

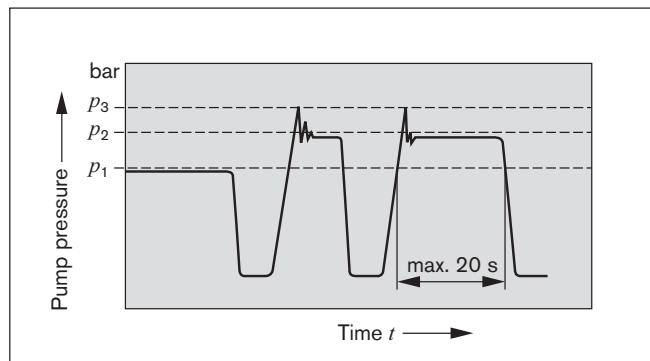

$p_1$  max. continuous pressure  
 $p_2$  max. intermittent pressure  
 $p_3$  max. peak pressure

## Model AZPG

Displacement	V	cm <sup>3</sup> /rev	22.5	25	28	32	36	40	45	50	56	63	70	80	100	
Suction pressure	$p_e$		0.7...3 (absolute), with tandem pumps: $p_e (p_2) = \max. 0.5 > p_e (p_1)$													
max. continuous pressure	$p_1$	bar	250								220	195	170	120	90	80
max. intermittent pressure	$p_2$		280								250	225	200	150	120	100
max. peak pressure	$p_3$		300								280	250	230	180	150	120
min.	< 100	rpm	500	500	500	500	500	500	500	500	500	500	500	500	500	
rpm at bar	12 mm <sup>2</sup> /s	100...180	1200	1200	1000	1000	1000	800	800	800	800	800	800	800	800	
		180... $p_2$	1400	1400	1400	1400	1200	1200	1000	1000	1000	1000	1000	1000	1000	
	25 mm <sup>2</sup> /s	$p_2$	600	600	500	500	500	500	500	500	500	500	500	600	800	
max. rpm at	$p_2$		3000	3000	3000	2800	2800	2800	2600	2600	2300	2300	2200	2000	1700	


# Drive arrangement

## 1. Flexible couplings

The coupling must not transfer any radial or axial forces to the pump.


The maximum radial runout of shaft spigot is 0.2 mm.

Refer to the fitting instructions provided by the coupling manufacturer for details of the maximum permitted shaft misalignment.

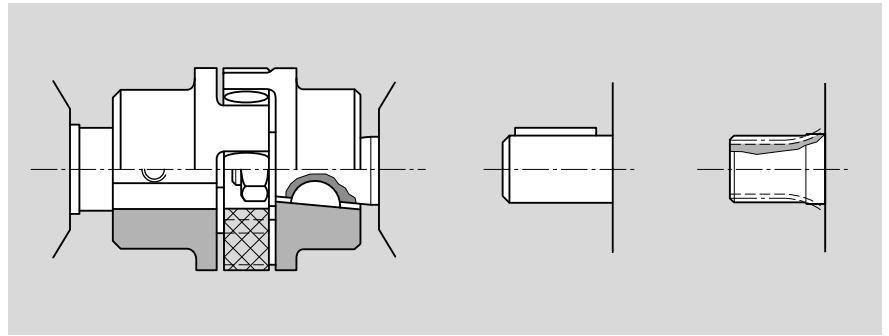

## 2. Coupling sleeve

Used on shafts with DIN or SAE splining. Caution: There must be no radial or axial forces exerted on the pump shaft or coupling sleeve. The coupling sleeve must be free to move axially. The distance between the pump shaft and drive shaft must be  $3.5^{+1.5}$ . Oil-bath or oil-mist lubrications is necessary.

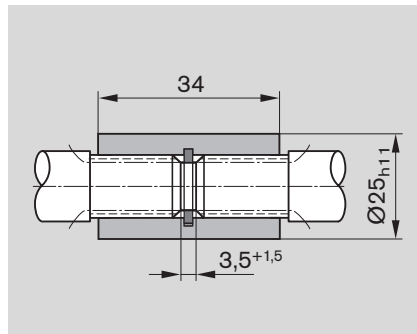

Splined shaft	$M_{max}$ [Nm]	$V$ [cm <sup>3</sup> /rev]
SAE-B 13 teeth	300	12.5...100
SAE-C 15 teeth	450	

## 3. Drive shaft with tang

For the close-coupling of the pumps to electric motor or internal-combustion engine, gear, etc. The pump shaft has a special tang and driver ③ (not included in supply). There is no shaft sealing.

The recommended arrangements and dimensions for the drive end and sealing are as follows.


### ① Drive shaft

Case-hardening steel DIN 17 210  
e.g. 20 MnCrS 5  
case-hardened 1.0 deep; HRA 83 $\pm$ 2  
Surface for sealing ring  
ground without rifling  $R_t \leq 4\mu\text{m}$

### ② Radial shaft seal

with rubber covered seal  
(see DIN 3760, Type AS, or double-lipped ring).

Cut 15° chamfer or fit shaft seal ring with protection sleeve.

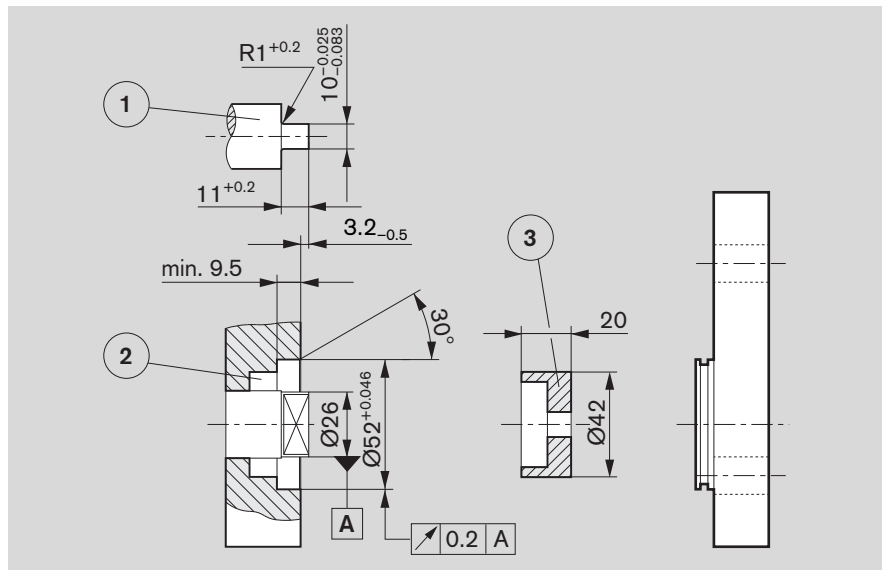


### Drive with special tang

$M_{max}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{max}$ [bar]
130	28	270
	36	210
	40	190
	45	160
	50	150
	56	135
	63	120
	70	110
	80	95
	100	75

For drive shaft with tang


**4. V-belts and straight gearwheels or helical toothed gear drives without outboard bearing**

When proposing to use V-belt or gear drive, please submit details of the application for our comments (especially dimensions  $a$ ,  $d_m$ ,  $d_w$  and angle  $\alpha$ ). For helical toothed gear drives, details of the helix angle  $\beta$  are also required.

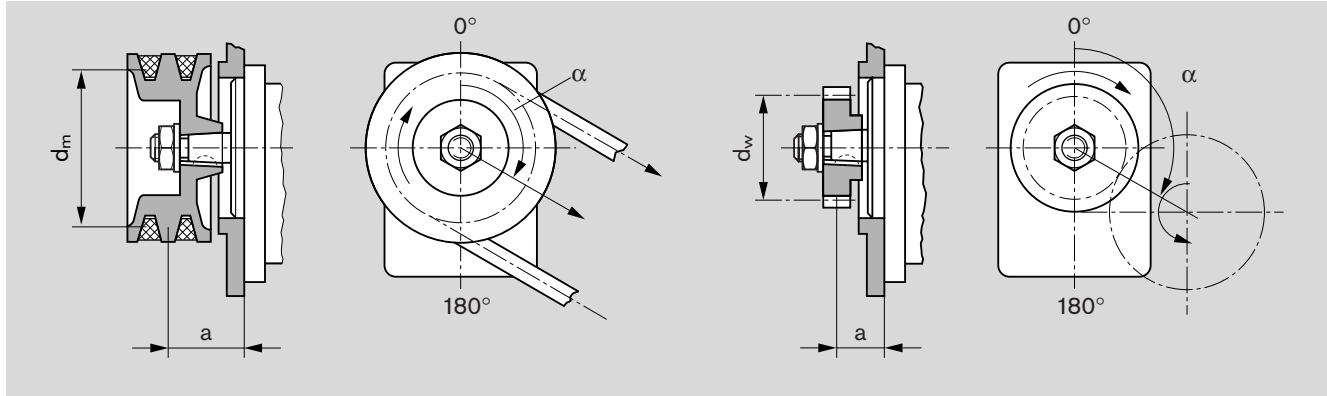

**5. Outboard bearing**

Outboard bearing eliminate possible problems when the pumps are driven by V-belts or gearwheels. The diagrams below show the maximum radial and axial loads that can be tolerated based on a bearing life of  $L_H = 1000$  h.

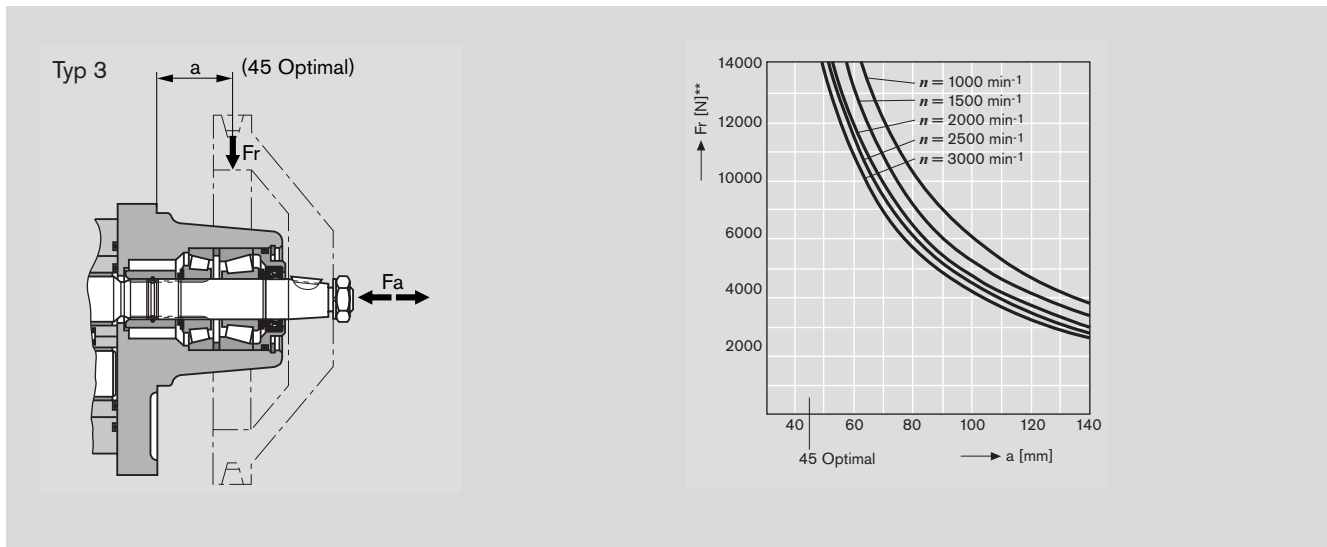

# Multiple gear pumps

Gear pumps are well-suited to tandem combinations of pumps in which the drive shaft of the first pump is extended to drive a second pump and sometimes a third pump in the same manner. A coupling is fitted between each pair of pumps. In most cases each pump is isolated from its neighbor, i.e. the suction ports are separate from one another. A common suction port is also possible as an option.

**Caution:** Basically, the specifications for the single pumps apply, but with certain restrictions:

**Max. speed:** This is determined by the highest rated pump speed in use.


**Pressures:** These are restricted by the strength of the drive shaft, the through drives and the drivers. Appropriate data is given in the dimensional drawings.

### Pressure restrictions during standard through drive

In the case of series G, the driver for the second pumping stage can carry a load of up to  $M_{max.} = 130 \text{ Nm}$ , i.e. there is a pressure restriction for the second stage and any further stages.


$M_{max.}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{max}$ [bar]
65 Series F, S	16	230
	19	190
	22.5	160
	25	140
130 Series G, U	22.5	280
	25	280
	28	260
	32	230
	36	200
	40	180
	45	160
	50	150
	56	130
	63	110
	70	100
80	90	
100	70	

### Reinforced through drive

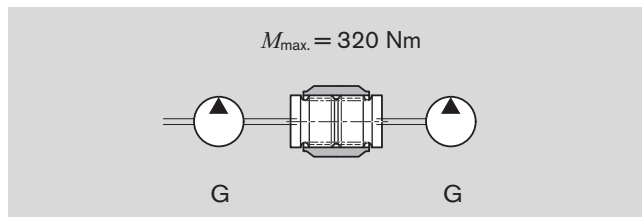

If the first stage is driven through a tang (driver) or outboard bearing type 1, pressure restrictions apply as indicated in the formula below.

Reinforced through drives are available for applications with higher transfer torques and/or rotational vibrations. Customized designs available on request.

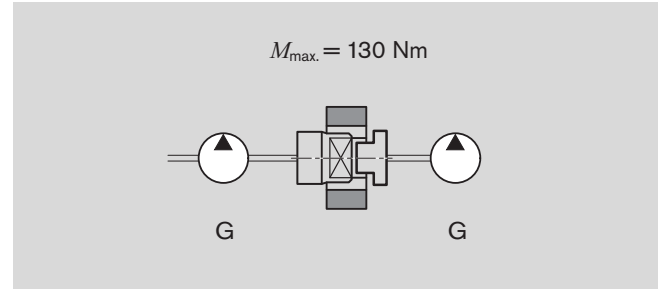

### Combinations


Series pump 1	$M_{max.}$ [Nm]	Series pump 2
G	130	G, U
G	65	F
G	65	S

For configuration of multiple pumps we recommend the pump is positioned with the largest displacement on the drive side.

### Max. transferrable drive torque

Function	Code letter	Designation	Max. transferrable drive torque* [Nm]
Splined shafts	D	SAE J744 22-4 (13T 16/32 DL)	300
	E	SAE J744 22-4 (15T 16/32 DL)	450
Tapered key shaft	C	1:5	290
	H	1:8	240

\* These figures are valid providing the conditions defined on pages 15 and 16 are observed. Bosch Rexroth is to be consulted if the stated values are exceeded.

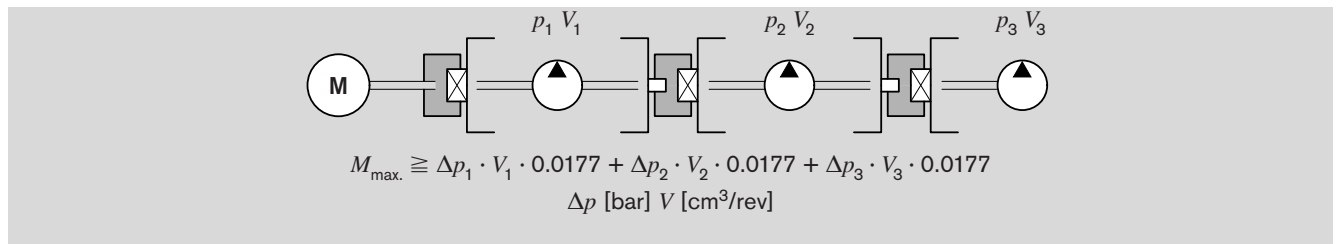






# Dimensions

## Standard range

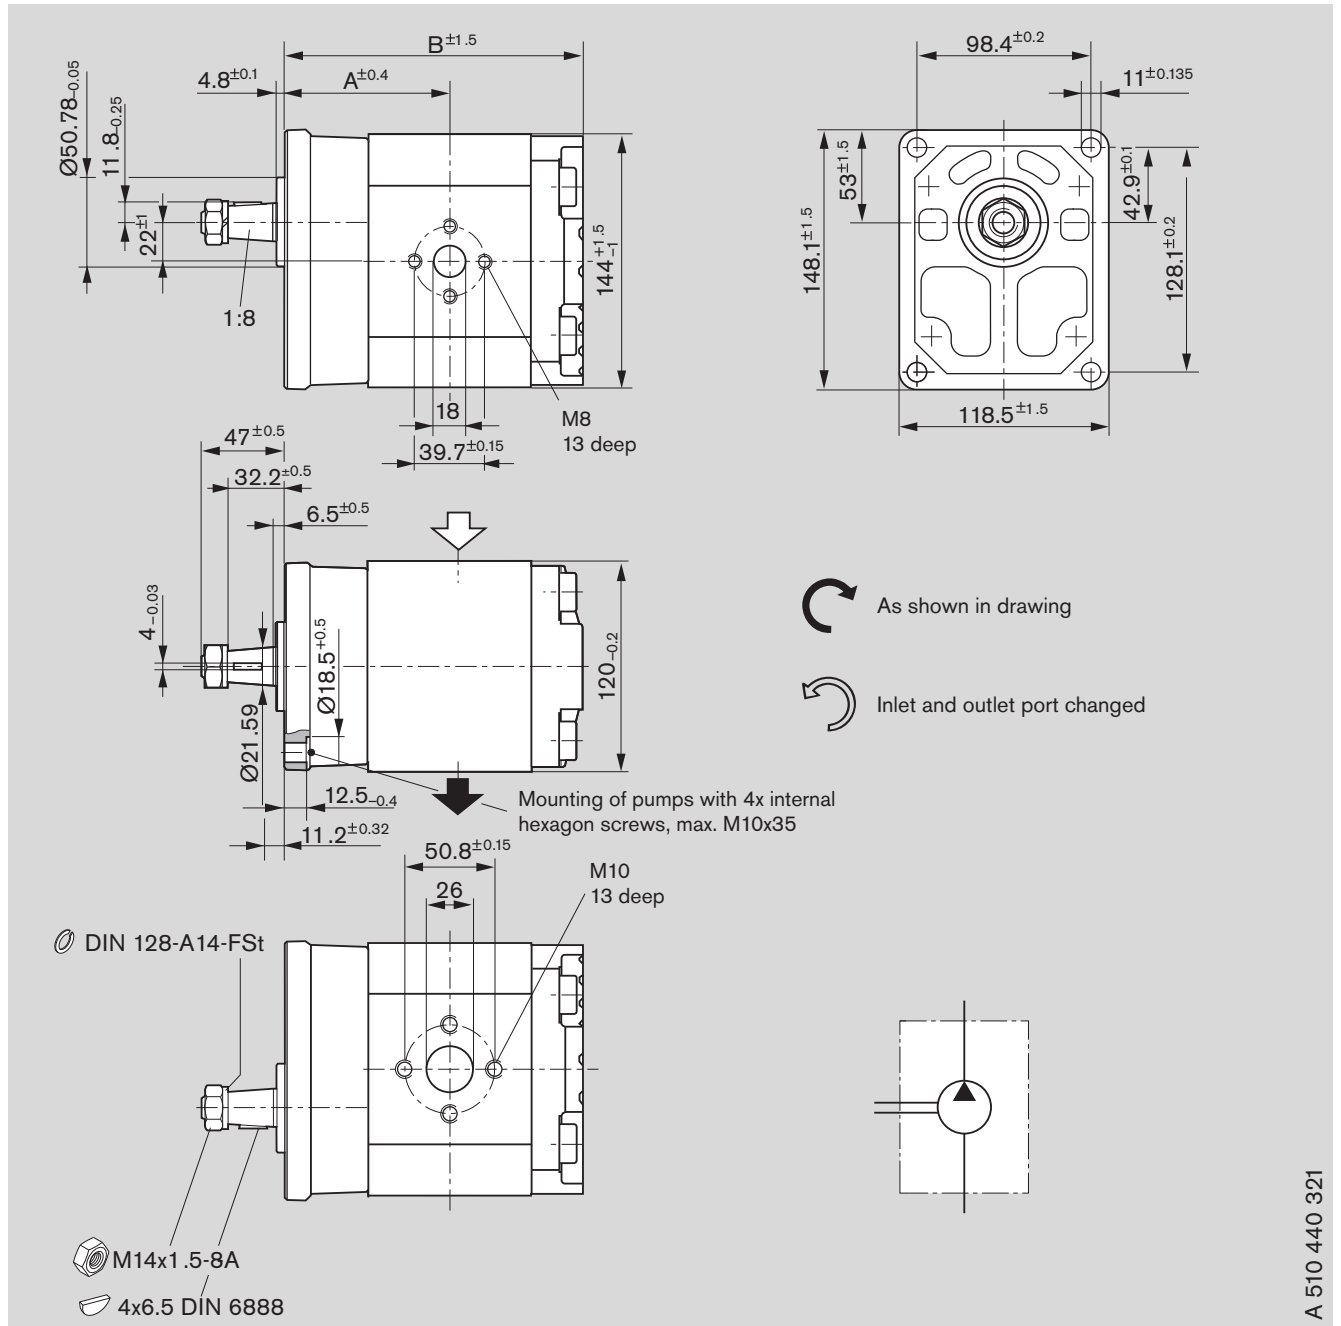

**Ordering code:**


AZPG - 22 -     H O 30 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]	
	L	R				A	B
22.5	0 510 725 448	0 510 725 171	280	3000	9.6	63.9	147.8
25	0 510 725 449	0 510 725 172	280	3000	9.7	84.9	149.8
28	0 510 725 450	0 510 725 173	280	3000	9.8	86.2	152.3
32	0 510 725 451	0 510 725 174	280	2800	10.0	87.8	155.6
36	0 510 725 452	0 510 725 175	280	2800	10.1	89.4	158.9
40	0 510 725 453	0 510 725 176	280	2800	10.3	91.1	162.3
45	0 510 725 454	0 510 725 177	280	2600	10.5	93.1	166.3
50	0 510 825 327	0 510 825 027	250	2600	10.7	95.2	170.5
56	0 510 825 328	0 510 825 028	225	2300	11.0	97.7	175.4
63	0 510 825 329	0 510 825 029	200	1800	11.2	100.6	181.3

A 510 440 321



# Dimensions
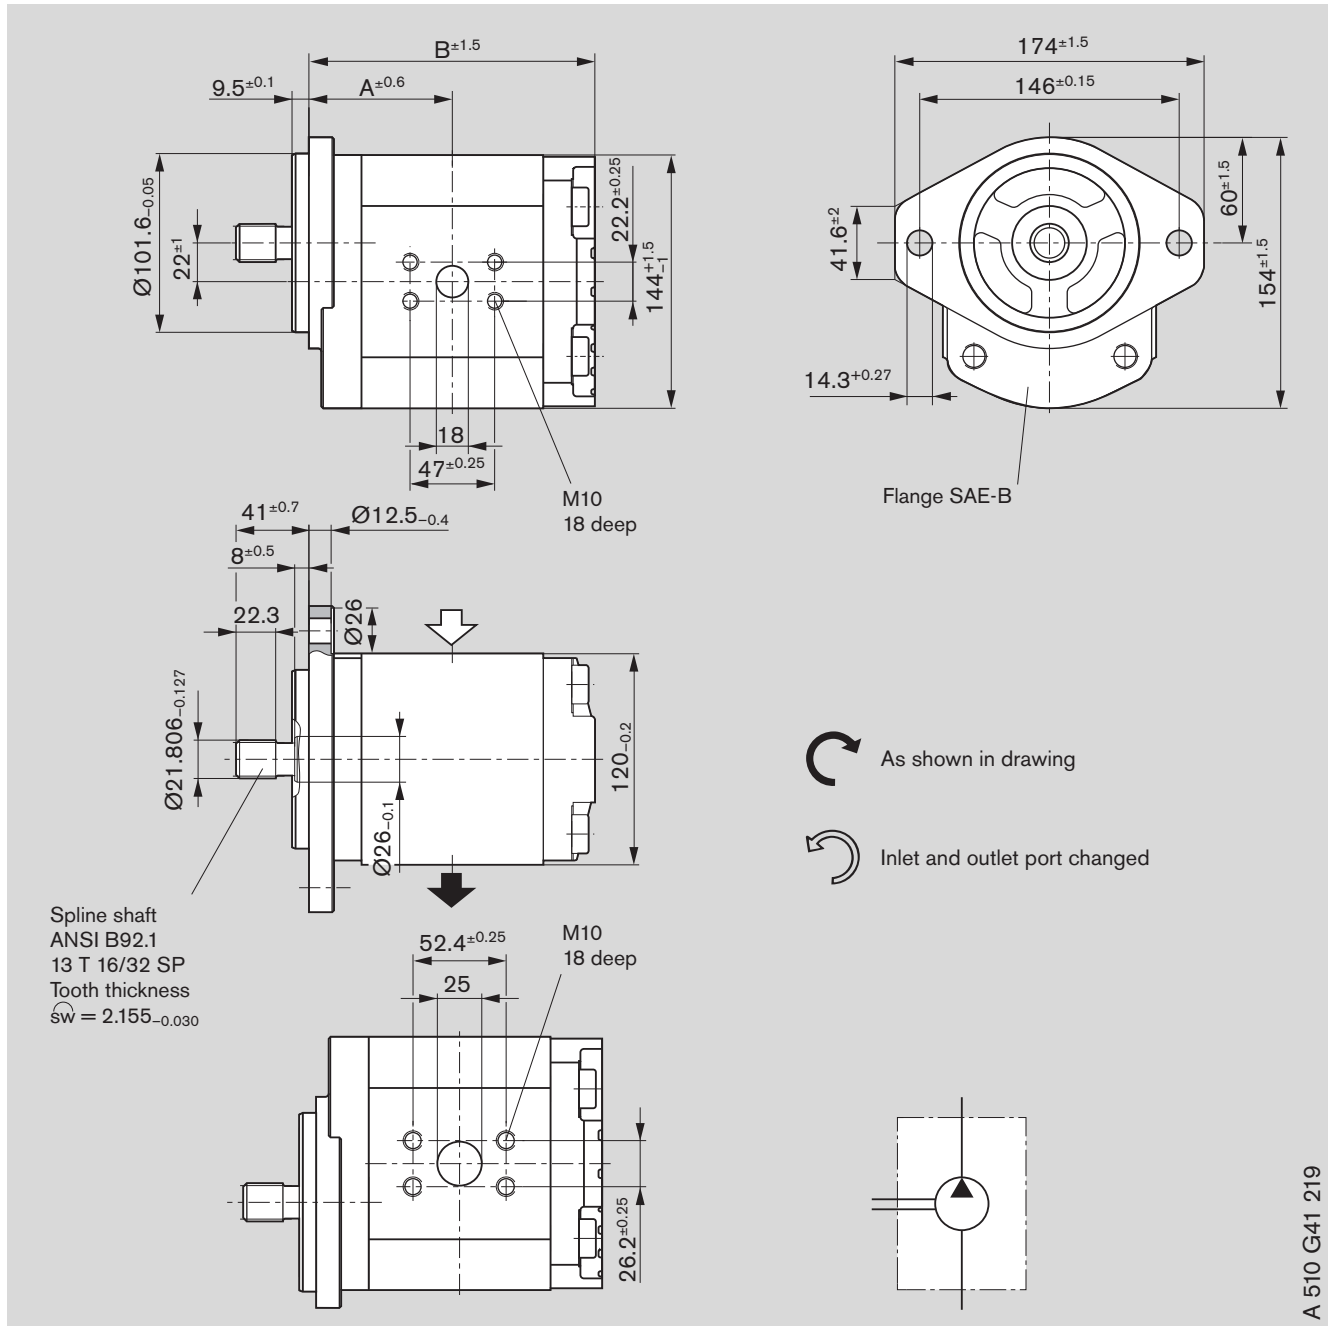
## Standard range




**Ordering code:**

AZPG - 22 -     D C 07 K B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]	
	 L	 R				A	B
22.5	0 510 725 434	0 510 725 157	280	3000	9.6	66.4	130.1
25	0 510 725 435	0 510 725 158	280	3000	9.7	67.4	132.1
28	0 510 725 436	0 510 725 159	280	3000	9.8	68.7	134.6

# Dimensions

## Standard range

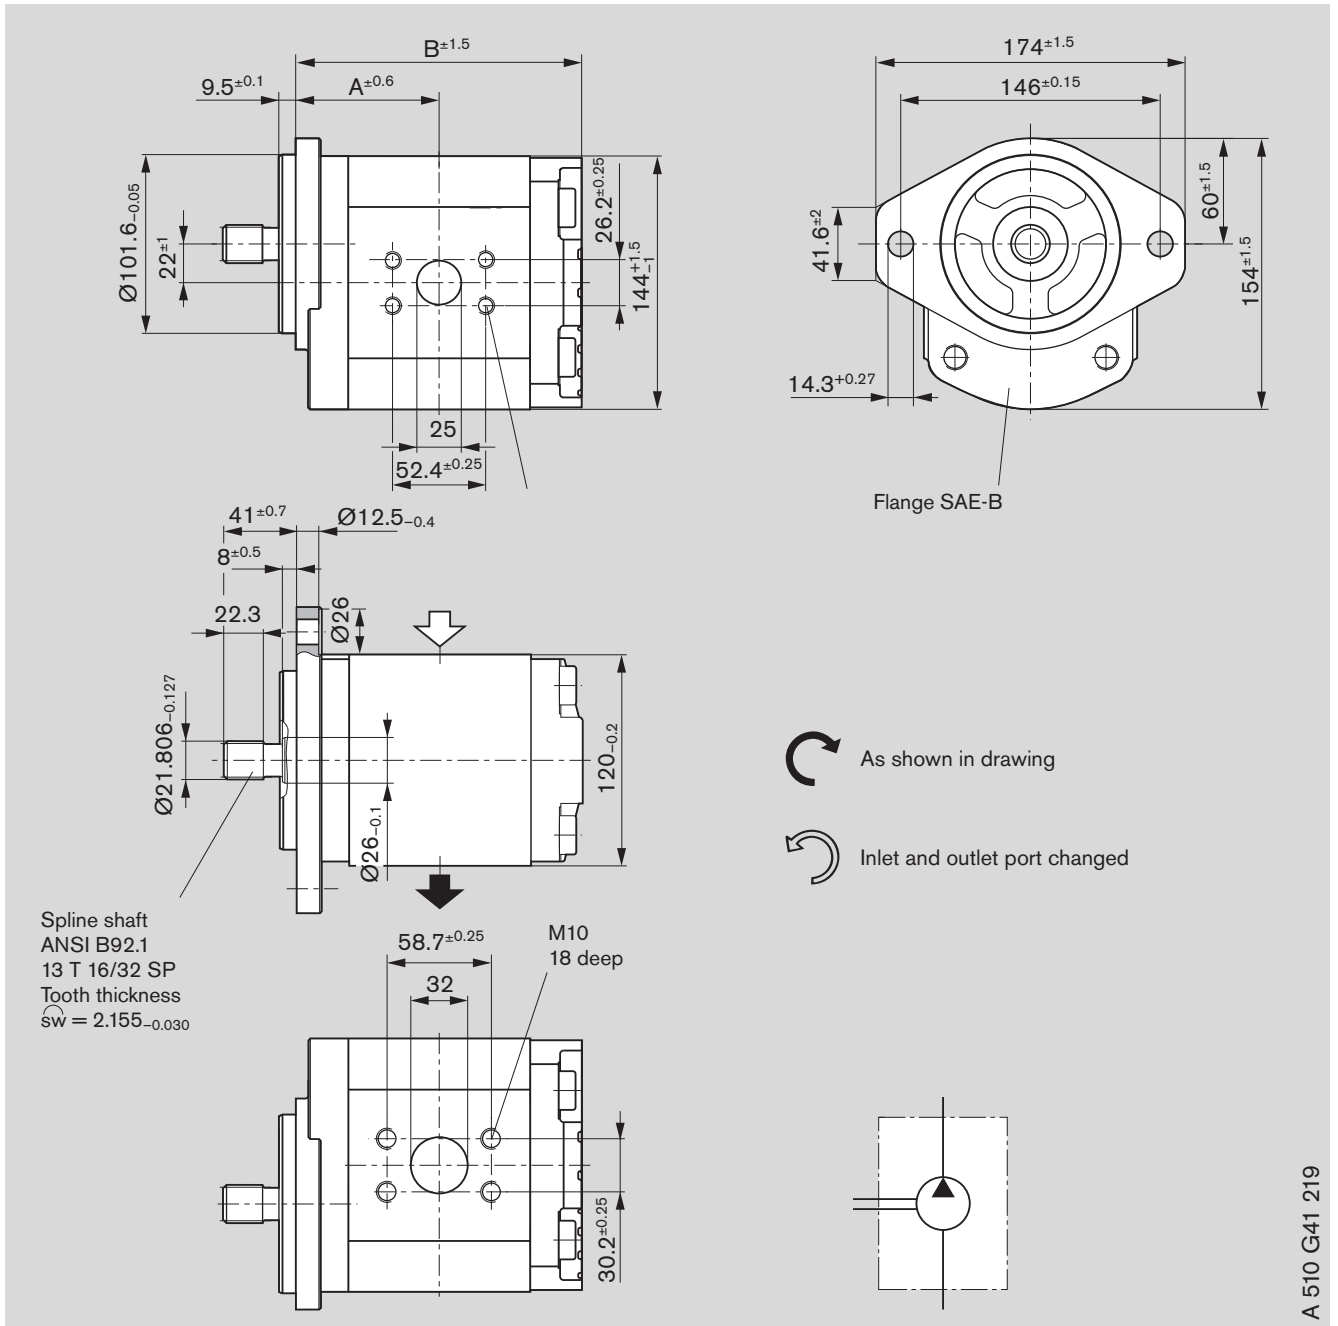

**Ordering code:**


AZPG - 22 -     D C 07 K B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]	
	↻ L	↻ R				A	B
32	0 510 725 437	0 510 725 160	280	2800	10.0	70.3	137.9
36	0 510 725 438	0 510 725 161	280	2800	10.1	71.9	141.2
40	0 510 725 439	0 510 725 162	280	2800	10.3	73.6	144.5
45	0 510 725 440	0 510 725 163	280	2600	10.5	75.6	148.6
50	0 510 825 321	0 510 825 021	250	2600	10.7	77.7	152.7

A 510 G41 219

# Dimensions

## Standard range

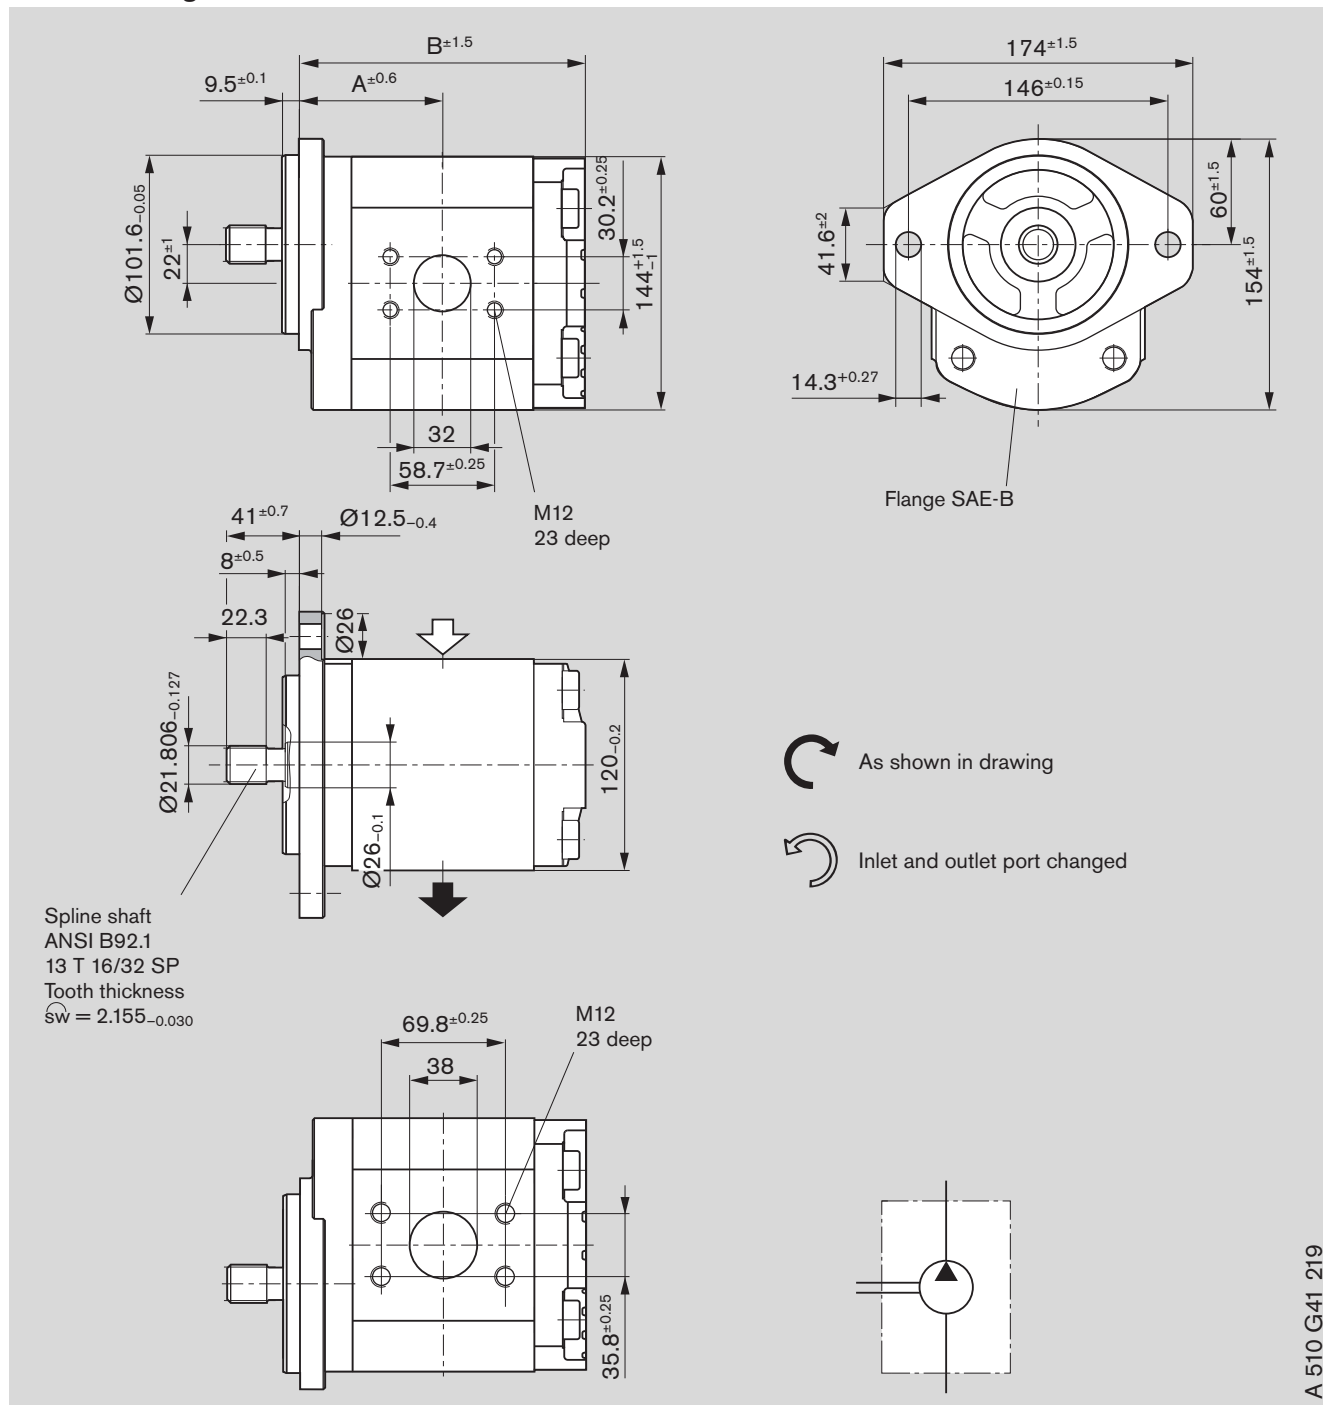


**Ordering code:**

AZPG - 22 -     DC 07 KB

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]	
	L	R				A	B
56	0 510 825 322	0 510 825 022	225	2300	11.0	80.2	157.7
63	0 510 825 323	0 510 825 023	200	2300	11.3	83.1	163.5

# Dimensions

## Standard range

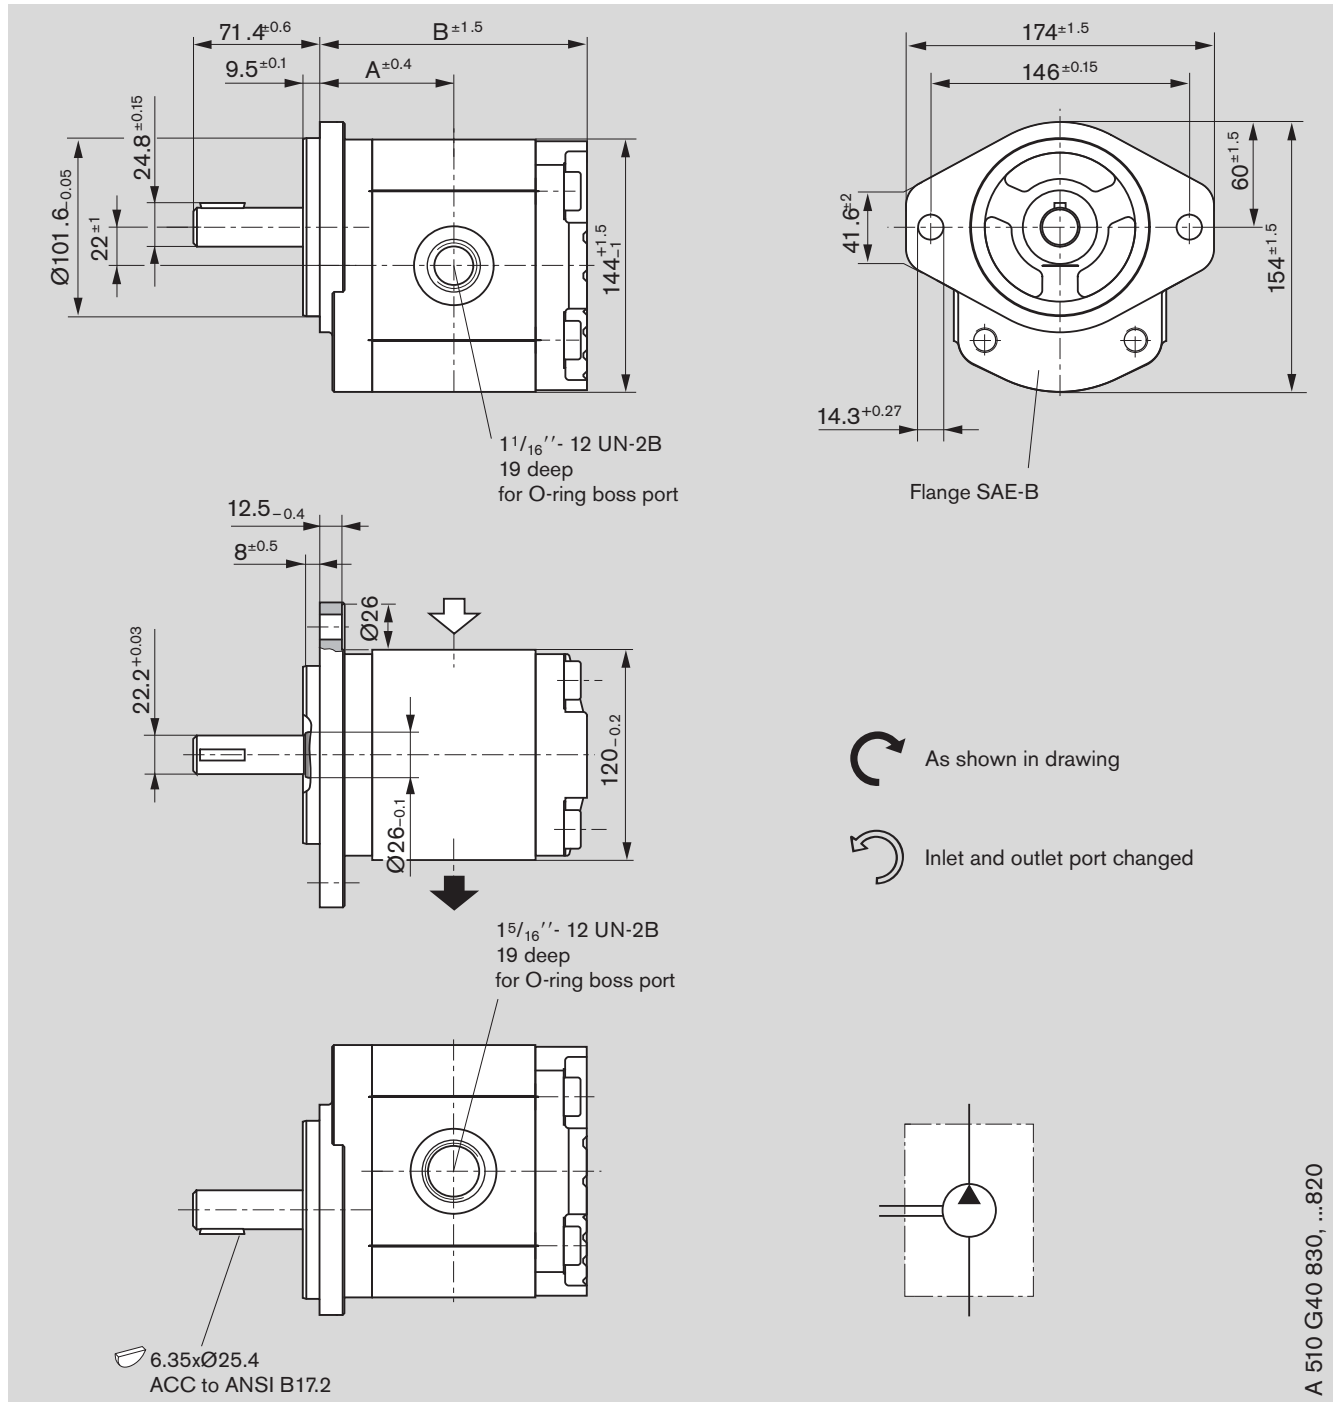

A 510 G40 830, ...820


### Ordering code:

AZPG - 22 -     Q C 12 M B - S 0662

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	L	R			A	B	Suction port	Pressure port
22.5	9 510 490 132	9 510 490 122	250	3000	66.4	130.3	S1	P1
25	9 510 490 133	9 510 490 123	250	3000	67.4	132.3	S1	P1
28	9 510 490 134	9 510 490 124	250	3000	68.7	134.8	S1	P1

# Dimensions

## Standard range

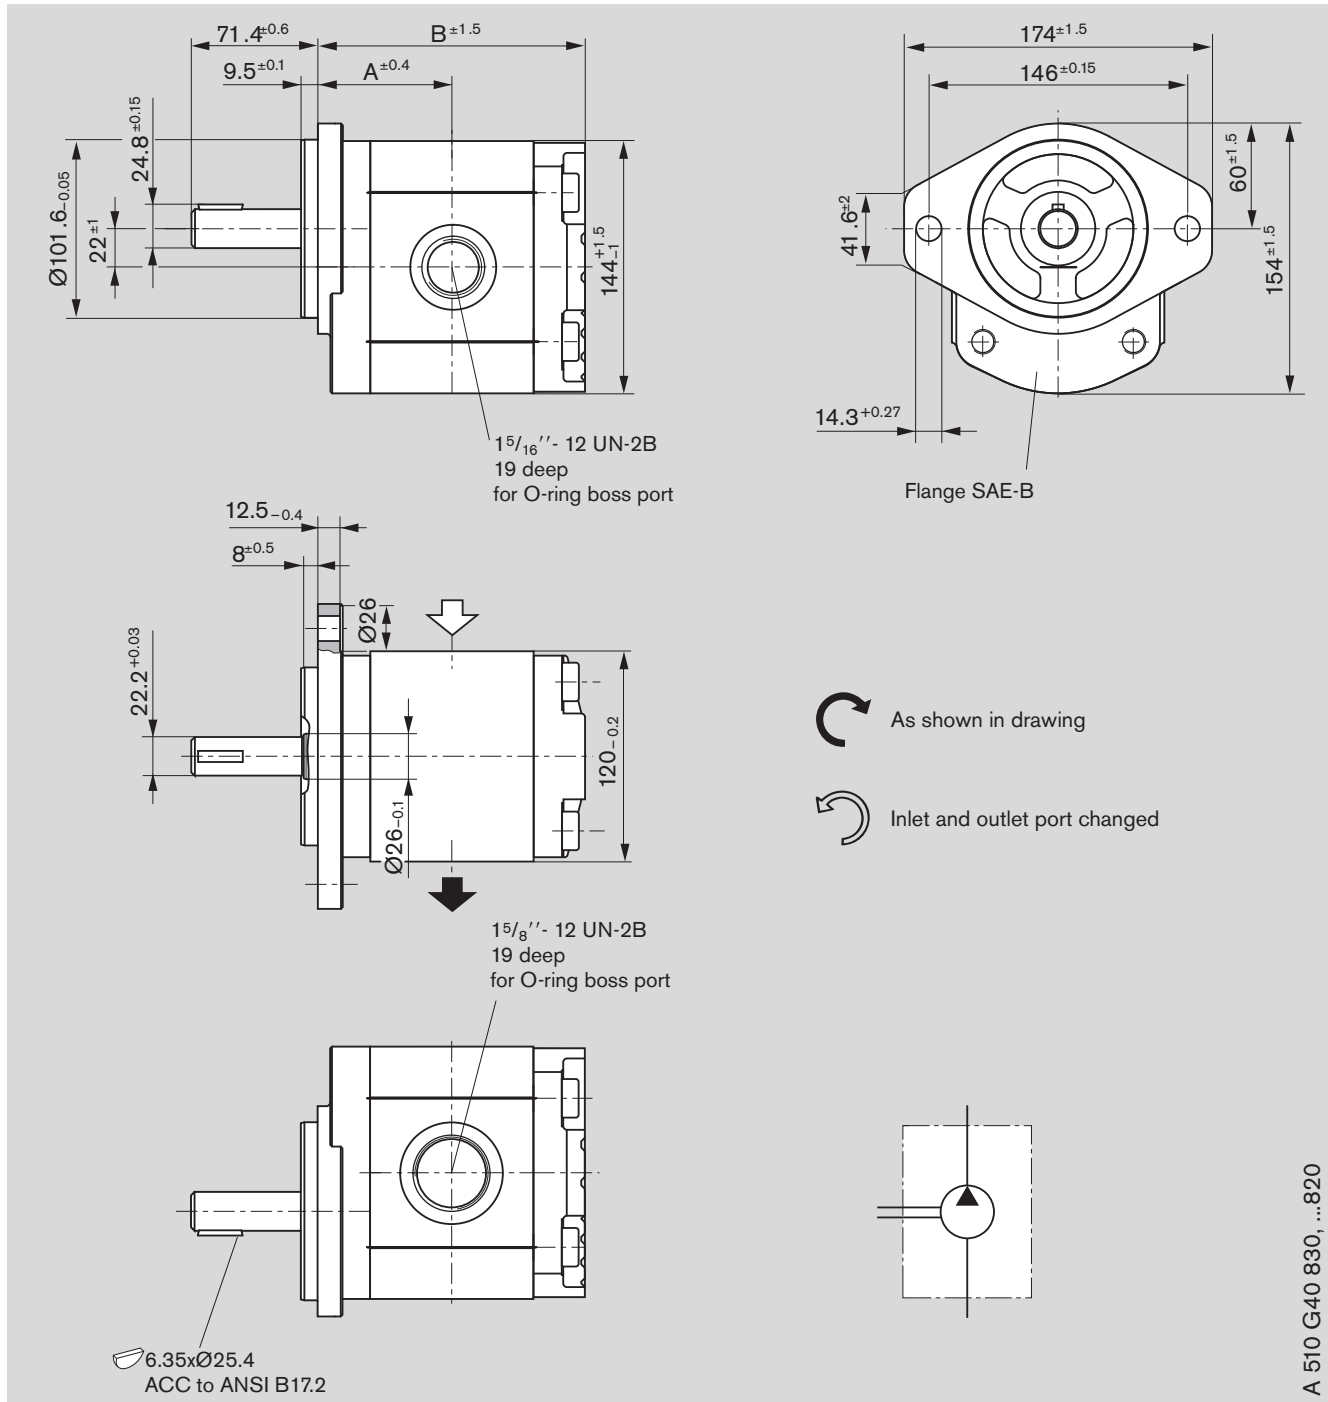

A 510 G40 830, ...820


### Ordering code:

AZPG - 22 -     Q C 12 M B - S 0662

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	L	R			A	B	Suction port	Pressure port
32	9 510 490 135	9 510 490 125	250	2800	70.3	138.1	S2	P2
36	9 510 490 136	9 510 490 126	250	2800	71.9	141.5	S2	P2
40	9 510 490 137	9 510 490 127	250	2800	73.6	144.8	S2	P2
45	9 510 490 138	9 510 490 128	250	2600	75.6	148.8	S2	P2

# Dimensions

## Standard range

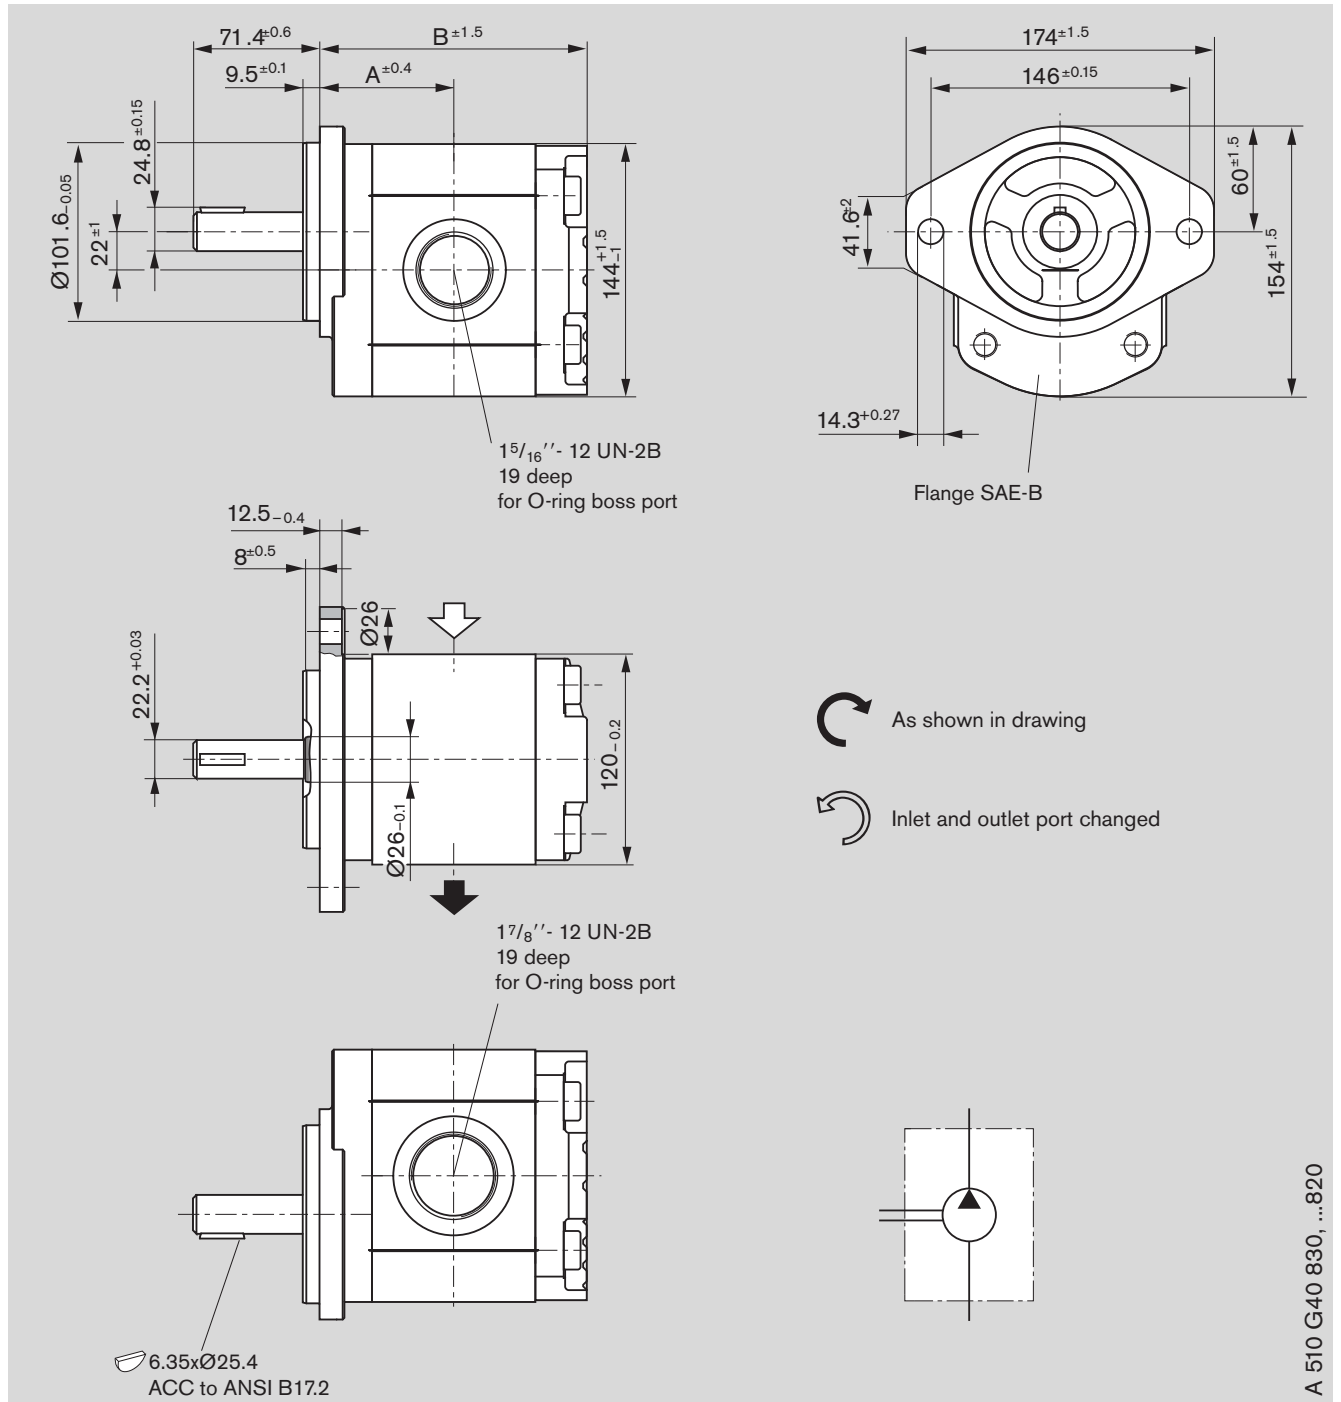

A 510 G40 830, ...820


**Ordering code:**

AZPG - 22 -     Q C 12 M B - S 0662

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	L	R			A	B	Suction port	Pressure port
50	9 510 490 139	9 510 490 129	220	2600	77.7	153.0	S3	P3
56	9 510 490 140	9 510 490 130	195	2300	80.2	157.9	S3	P3
63	9 510 490 141	9 510 490 131	170	2300	83.1	163.8	S3	P3

# Dimensions

## Standard range

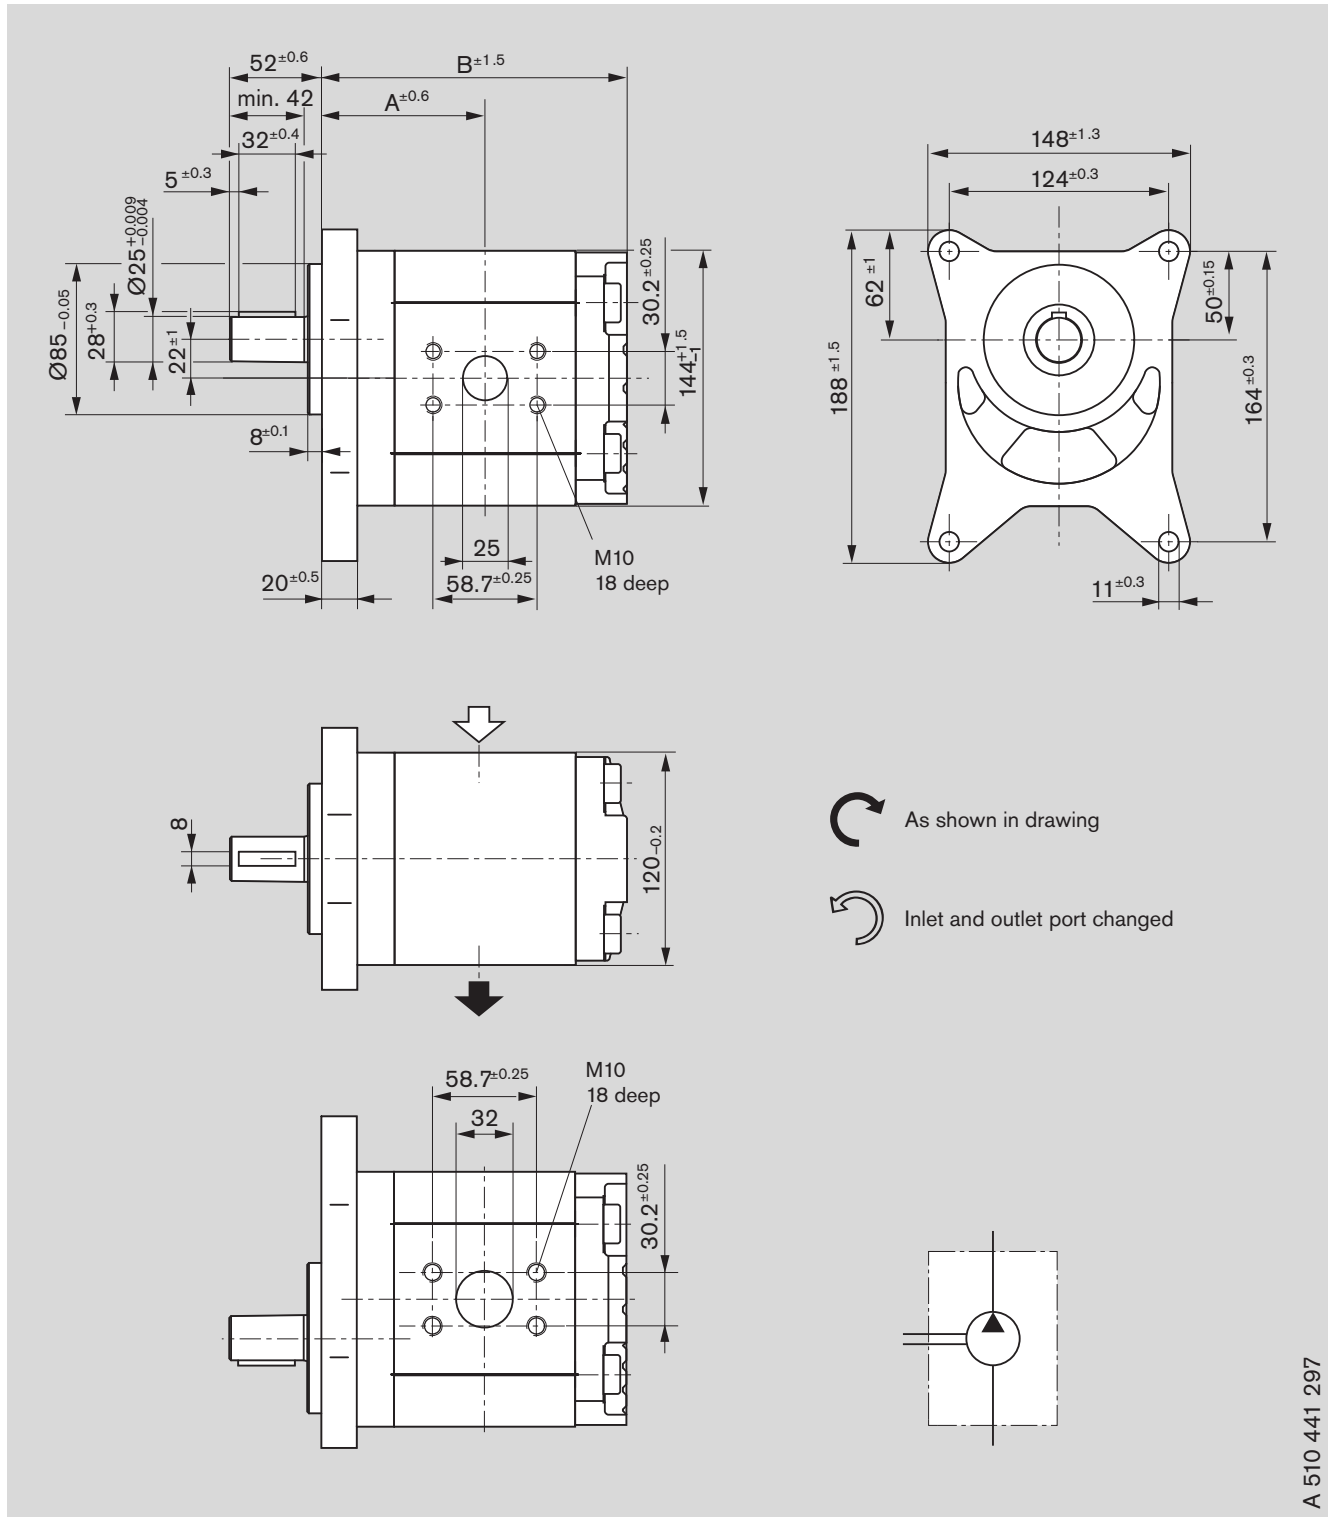

**Ordering code:**


AZPG - 22 -     A X 07 K B - S 0303

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	L	R			A	B	Suction port	Pressure port
40	0 510 725 432	0 510 725 147	280	2800	85.1	157.7	S1	P1
50	0 510 825 314	0 510 825 015	250	2600	89.2	165.9	S1	P1





# Dimensions
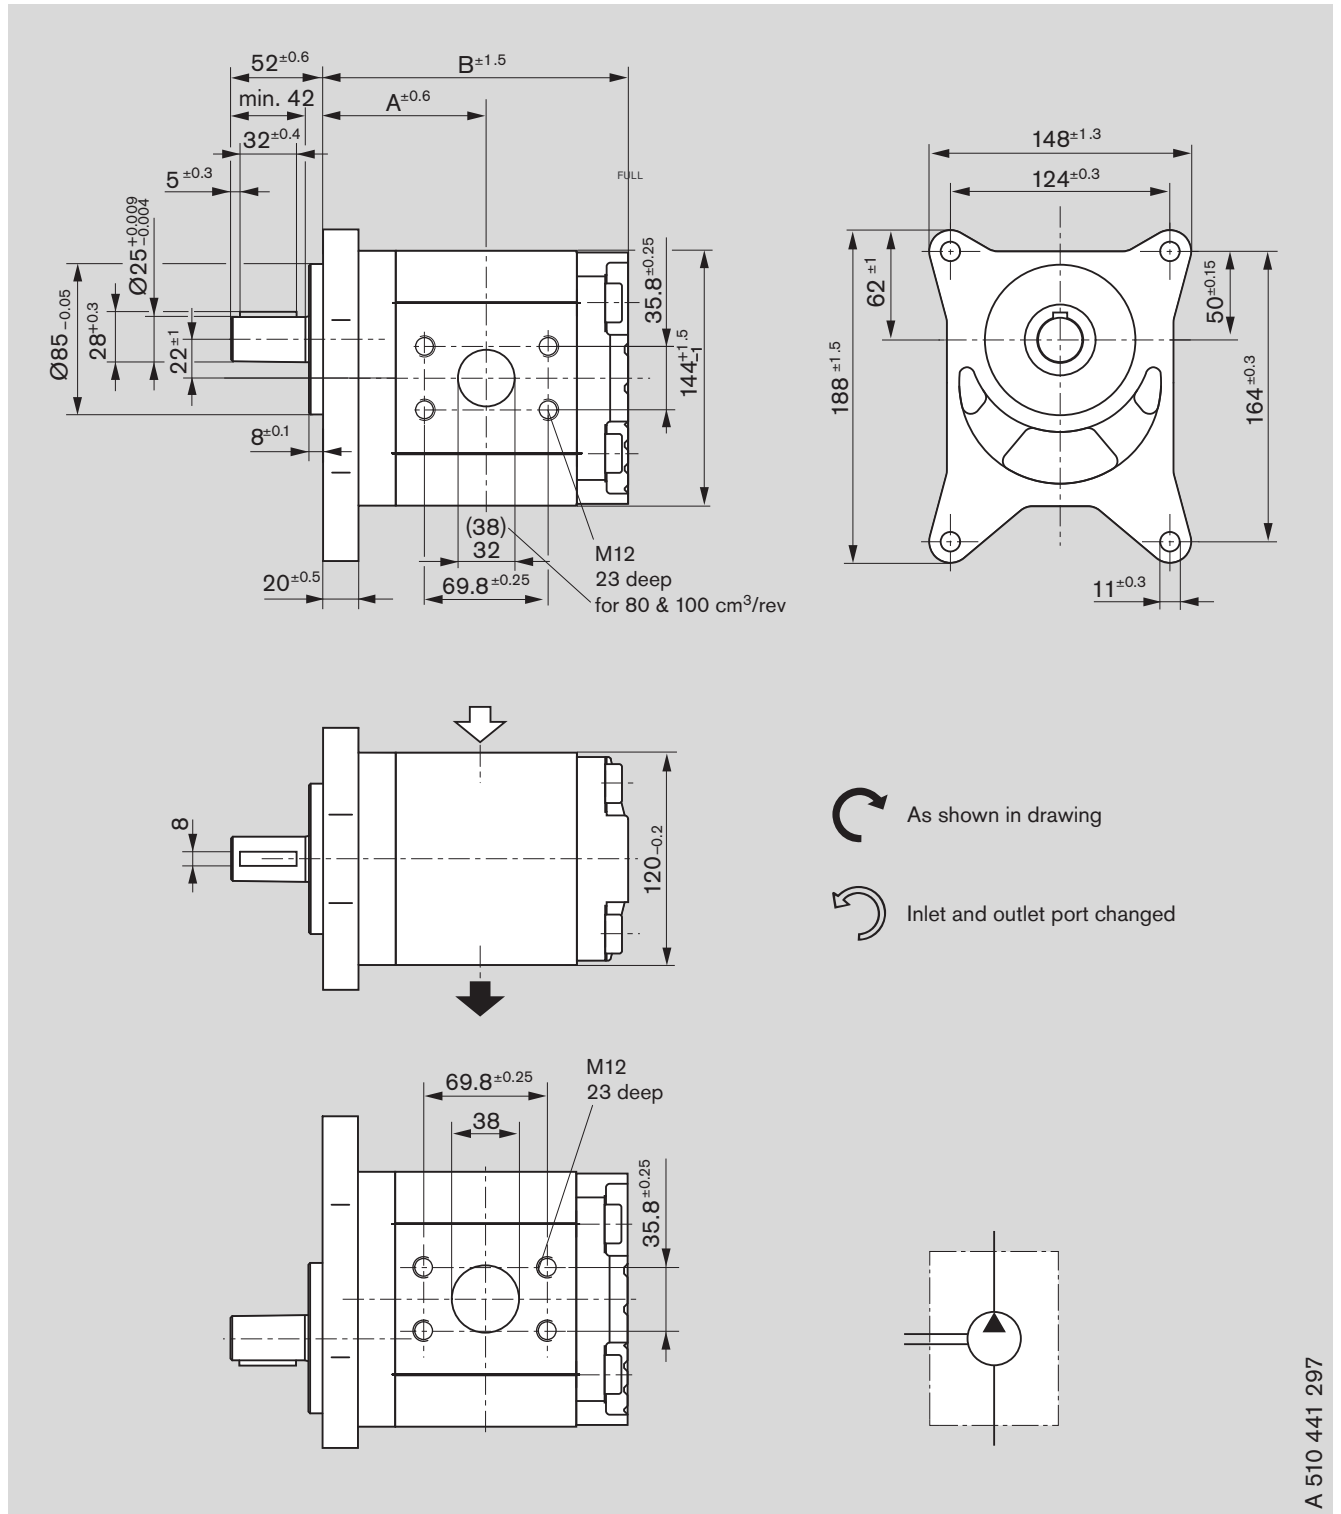
## Standard range



**Ordering code:**


AZPG - 22 -     A X 07 K B - S 0303

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	 L	 R			A	B	Suction port	Pressure port
63	0 510 825 315	0 510 825 016	200	2300	94.6	176.7	S2	P2
70	0 510 825 316	0 510 825 017	150	2200	97.5	182.5	S2	P2

A 510 441 297

# Dimensions

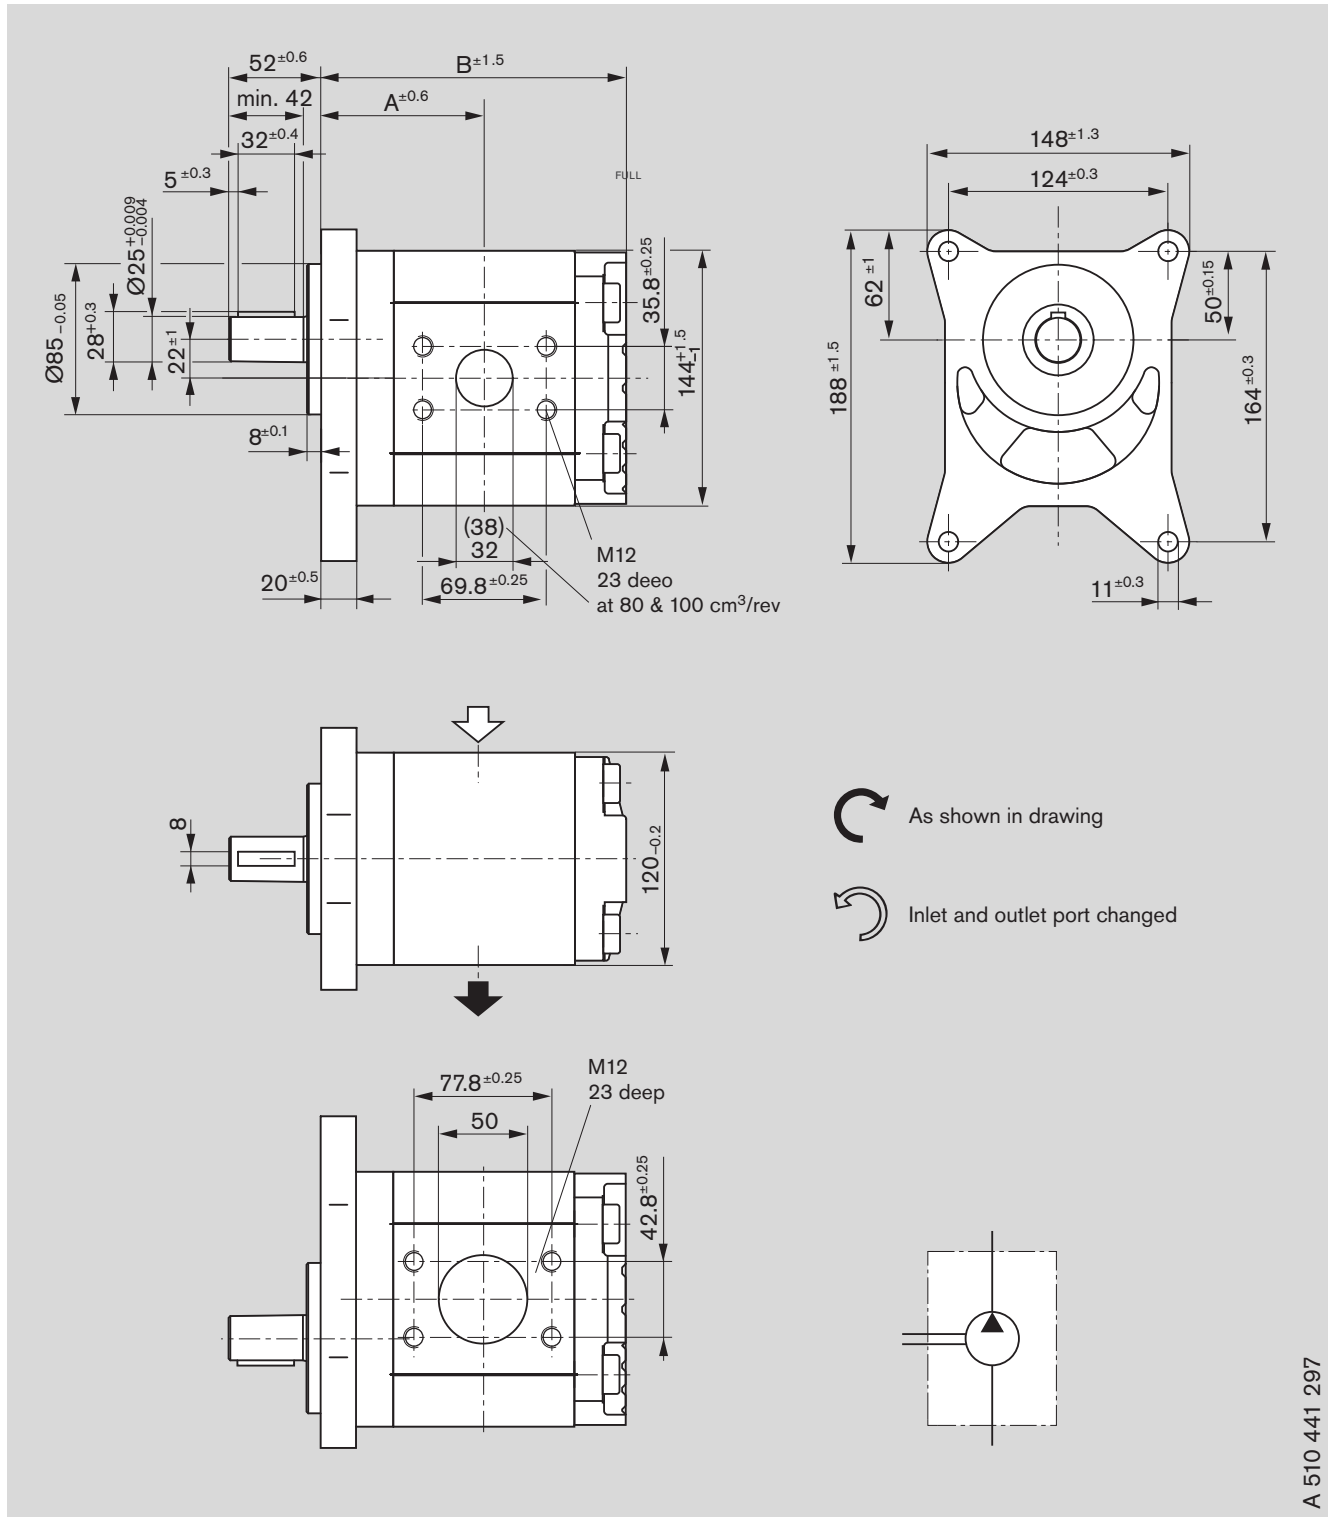

## Standard range



A 510 441 297


**Ordering code:**

**AZPG - 22 -**     **A X 07 K B - S 0303**

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	 L	 R			A	B	Suction port	Pressure port
80	<b>0 510 825 317</b>	<b>0 510 825 018</b>	120	2200	100.6	190.7	S3	P2
100	<b>0 510 825 318</b>	<b>0 510 825 019</b>	100	1700	109.8	207.2	S3	P2

# Dimensions

## Standard range

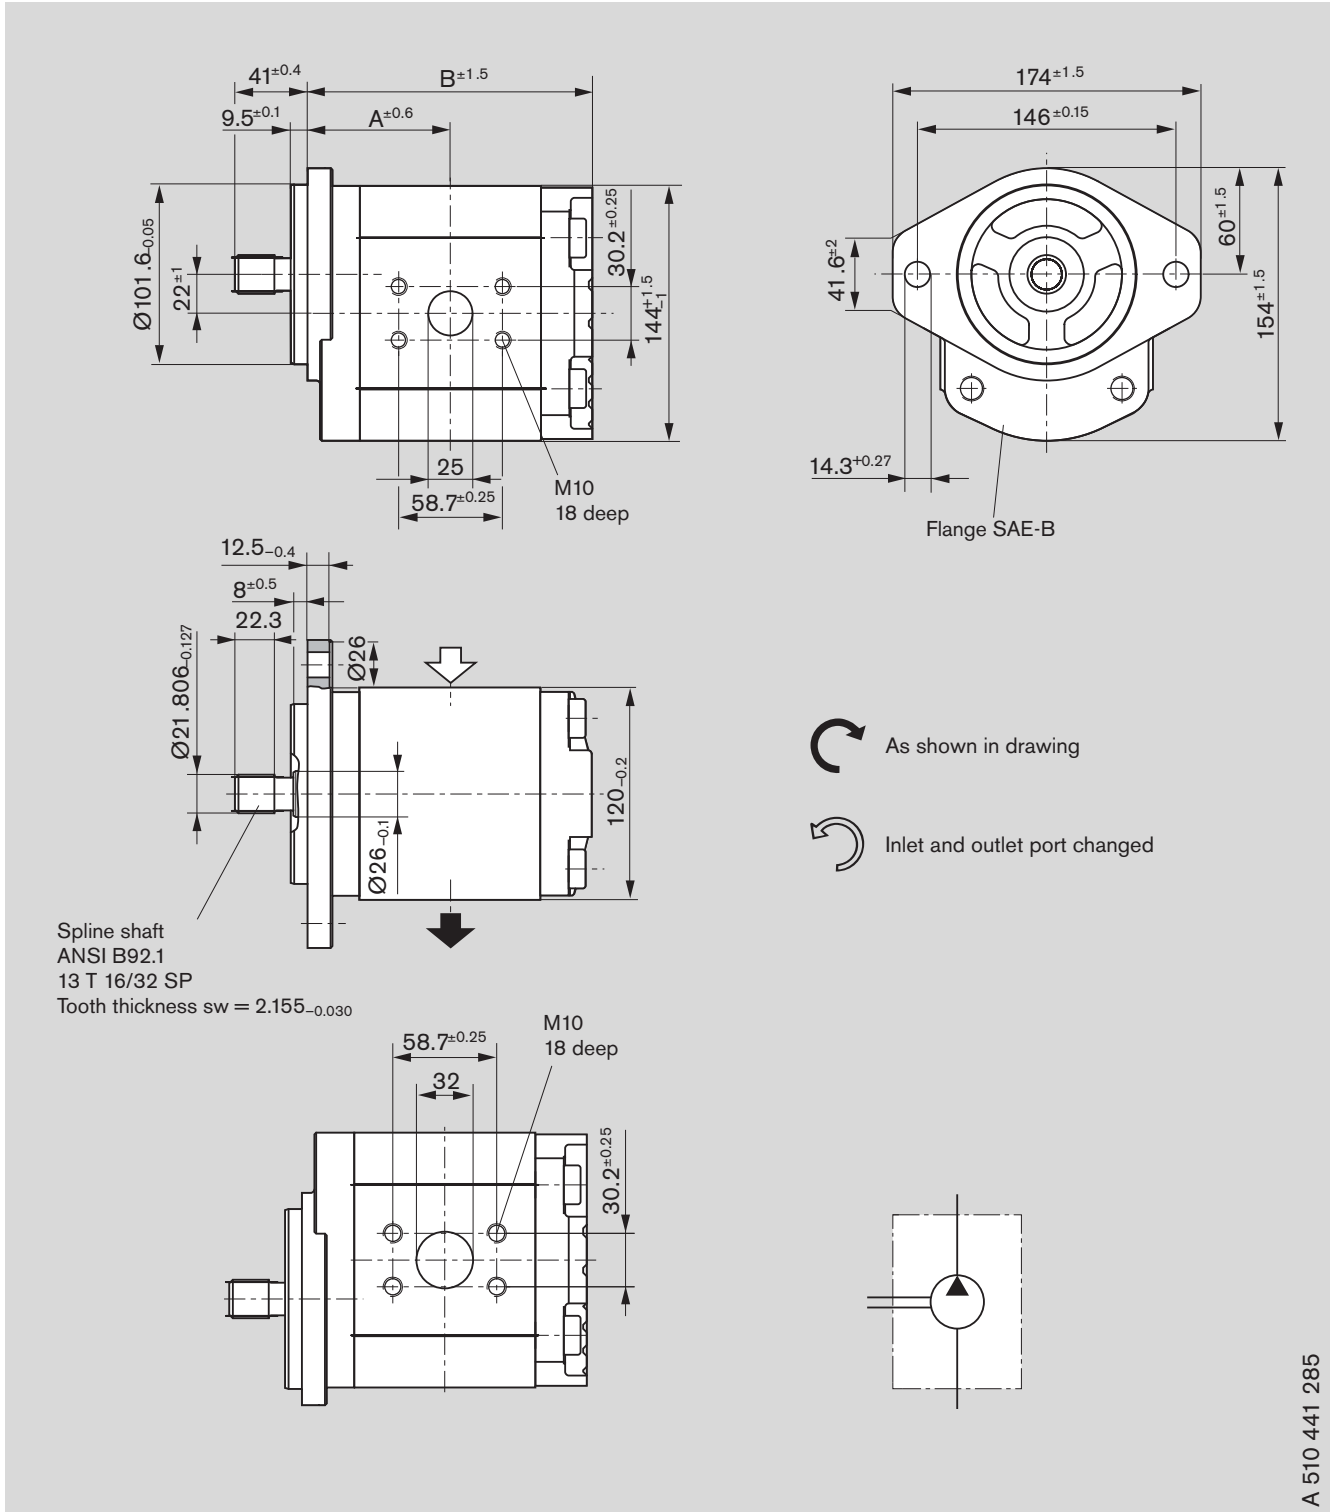

**Ordering code:**


AZPG - 22 -     D C 07 K B - S 0039

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	L	R			A	B	Suction port	Pressure port
40	0 510 725 421	0 510 725 136	280	2800	73.6	144.8	S1	P1
50	0 510 725 420	0 510 725 135	250	2600	77.7	153.0	S1	P1

A 510 441 285

# Dimensions

## Standard range

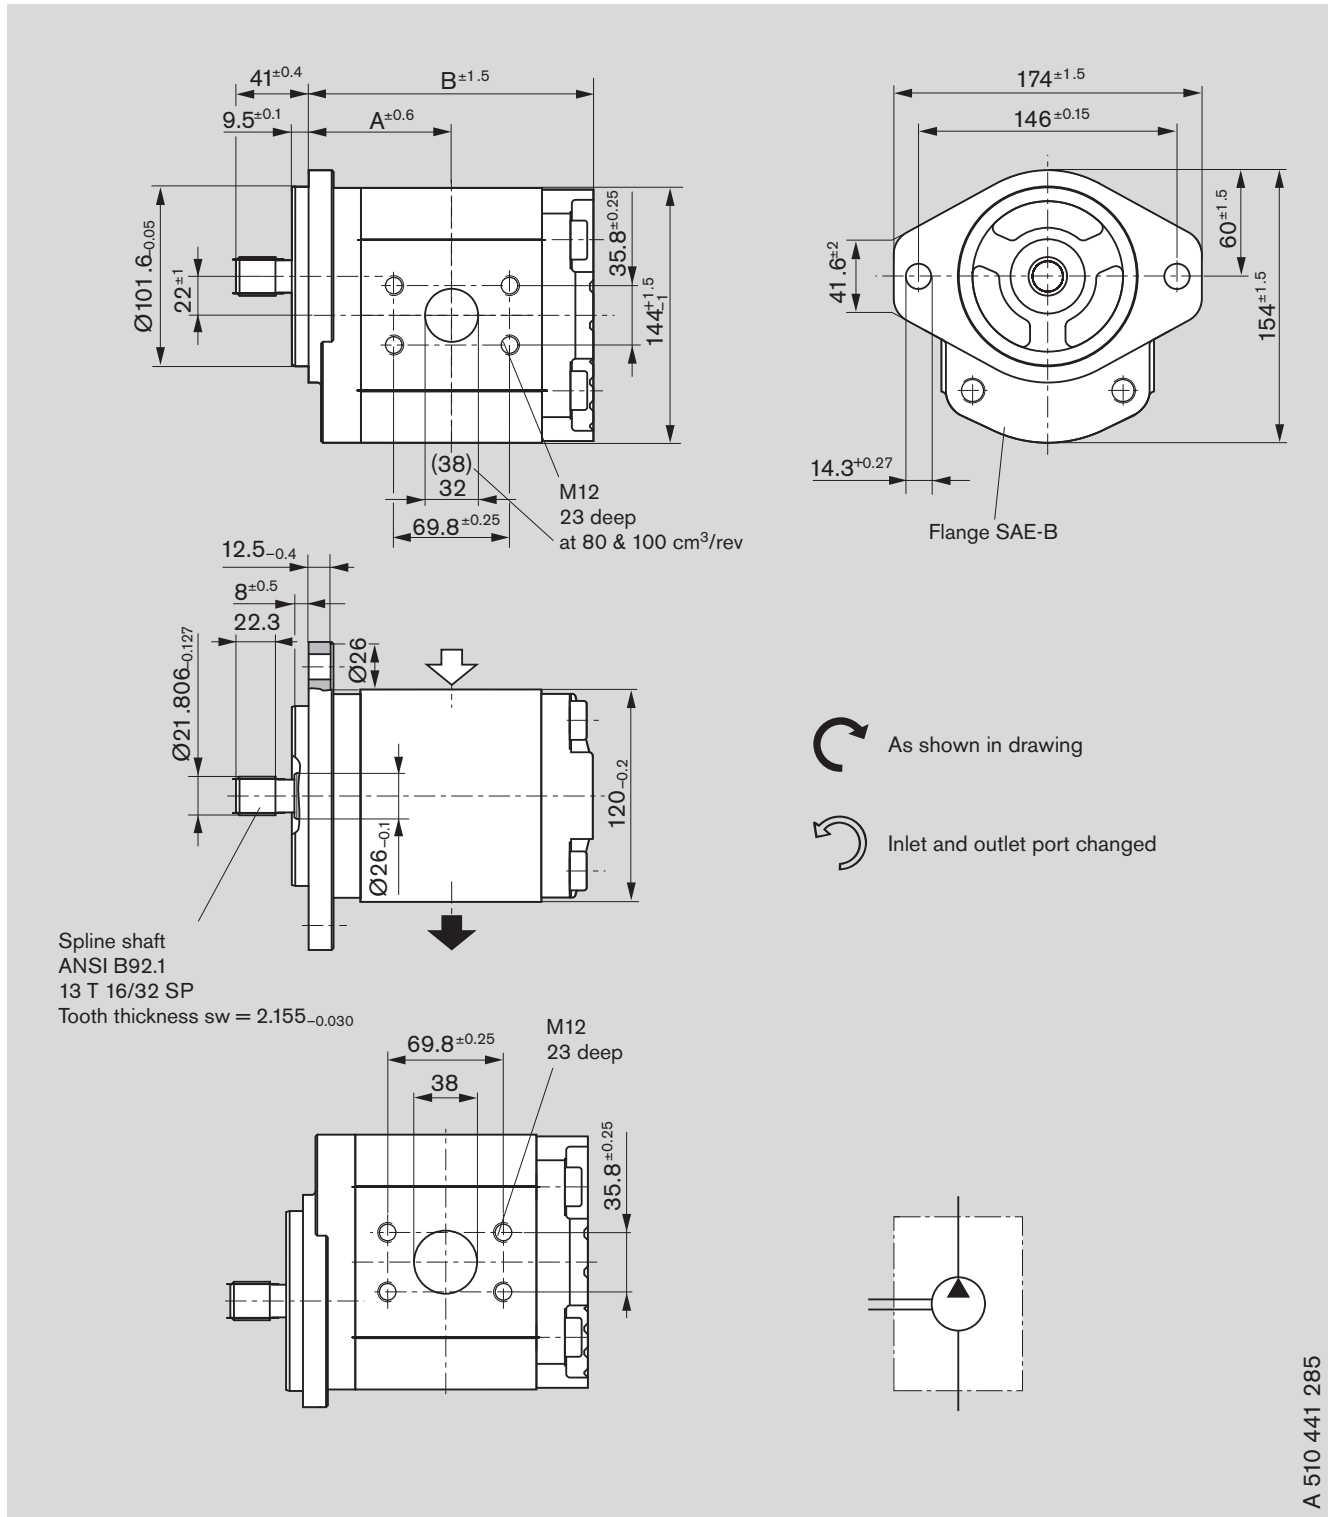

A 510 441 285


**Ordering code:**

AZPG - 22 -     D C 07 K B - S 0039

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	L	R			A	B	Suction port	Pressure port
63	0 510 825 313	0 510 825 011	200	2300	83.1	163.8	S2	P2
70	0 510 825 312	0 510 825 014	150	2200	86.0	169.5	S2	P2

# Dimensions

## Standard range

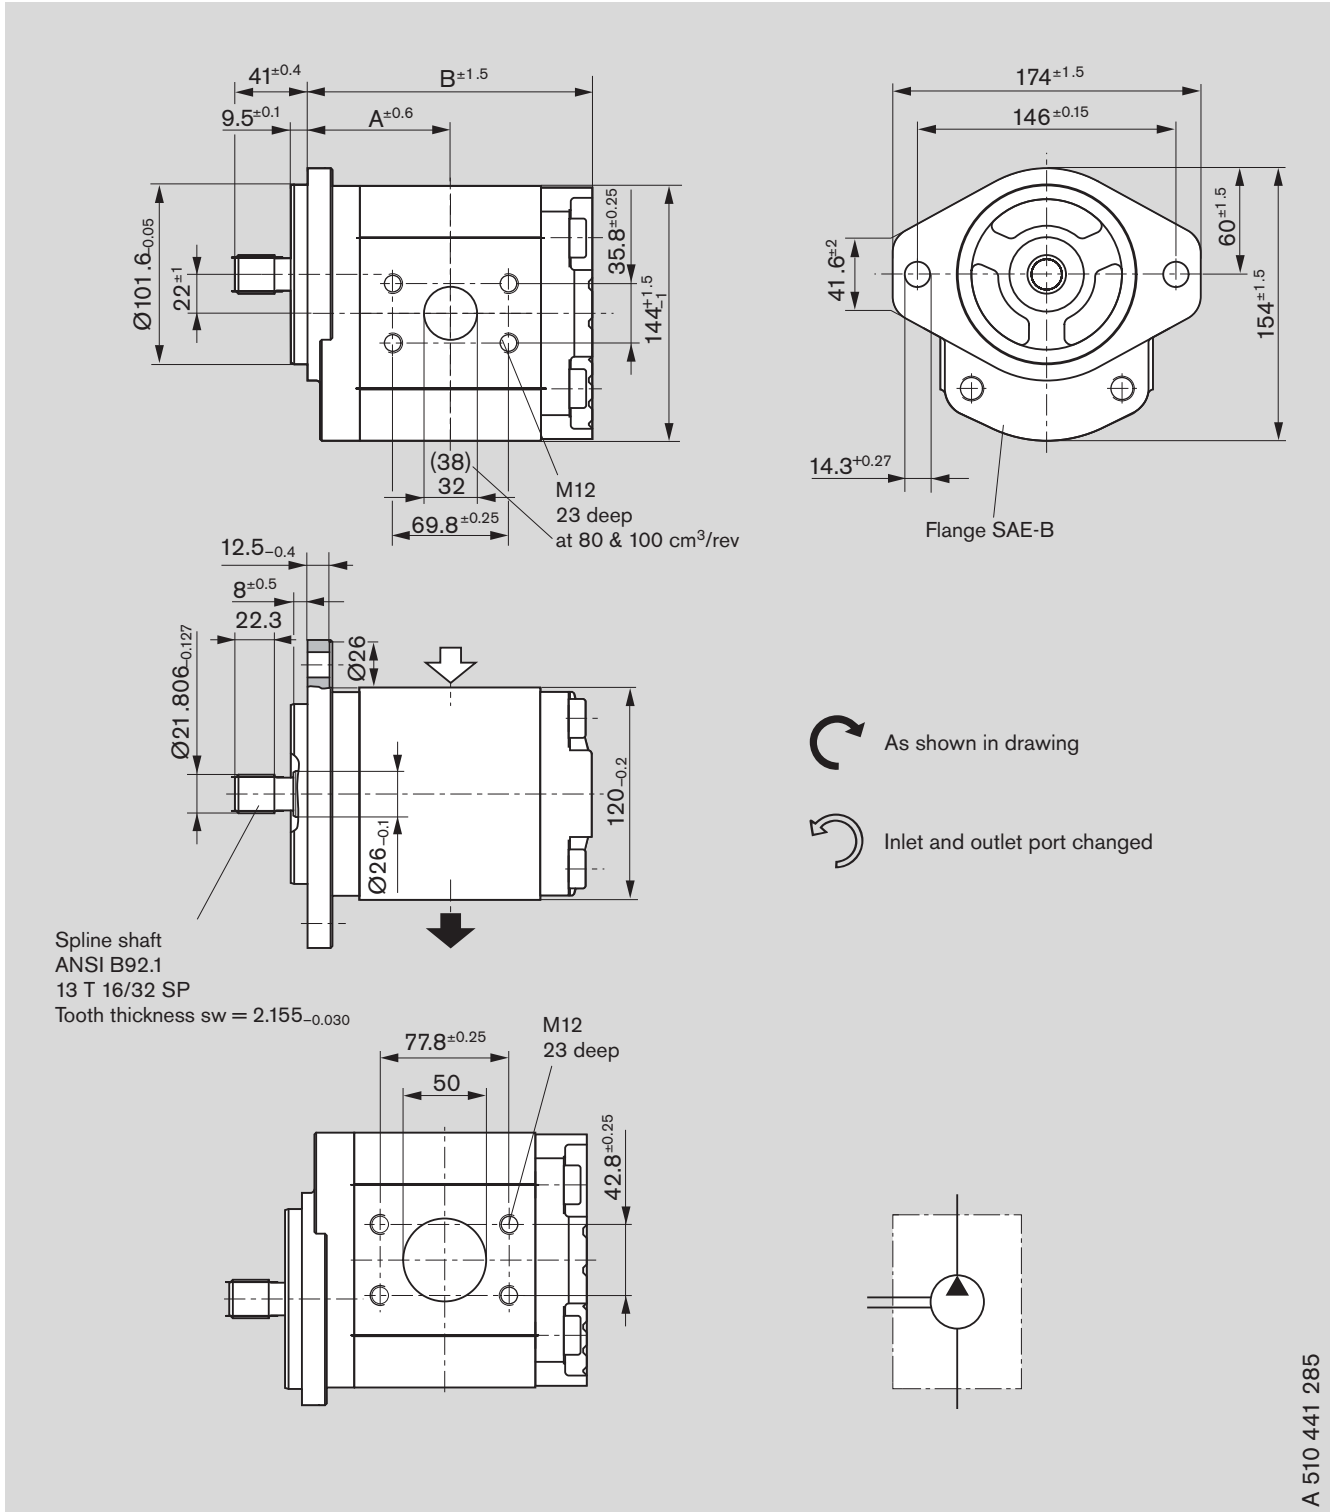


**Ordering code:**

AZPG - 22 -     D C 07 K B - S 0039

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	L	R			A	B	Suction port	Pressure port
80	0 510 825 311	0 510 825 012	120	2200	90.1	177.8	S3	P2
100	0 510 825 310	0 510 825 013	100	1700	98.3	194.3	S3	P2

# Dimensions

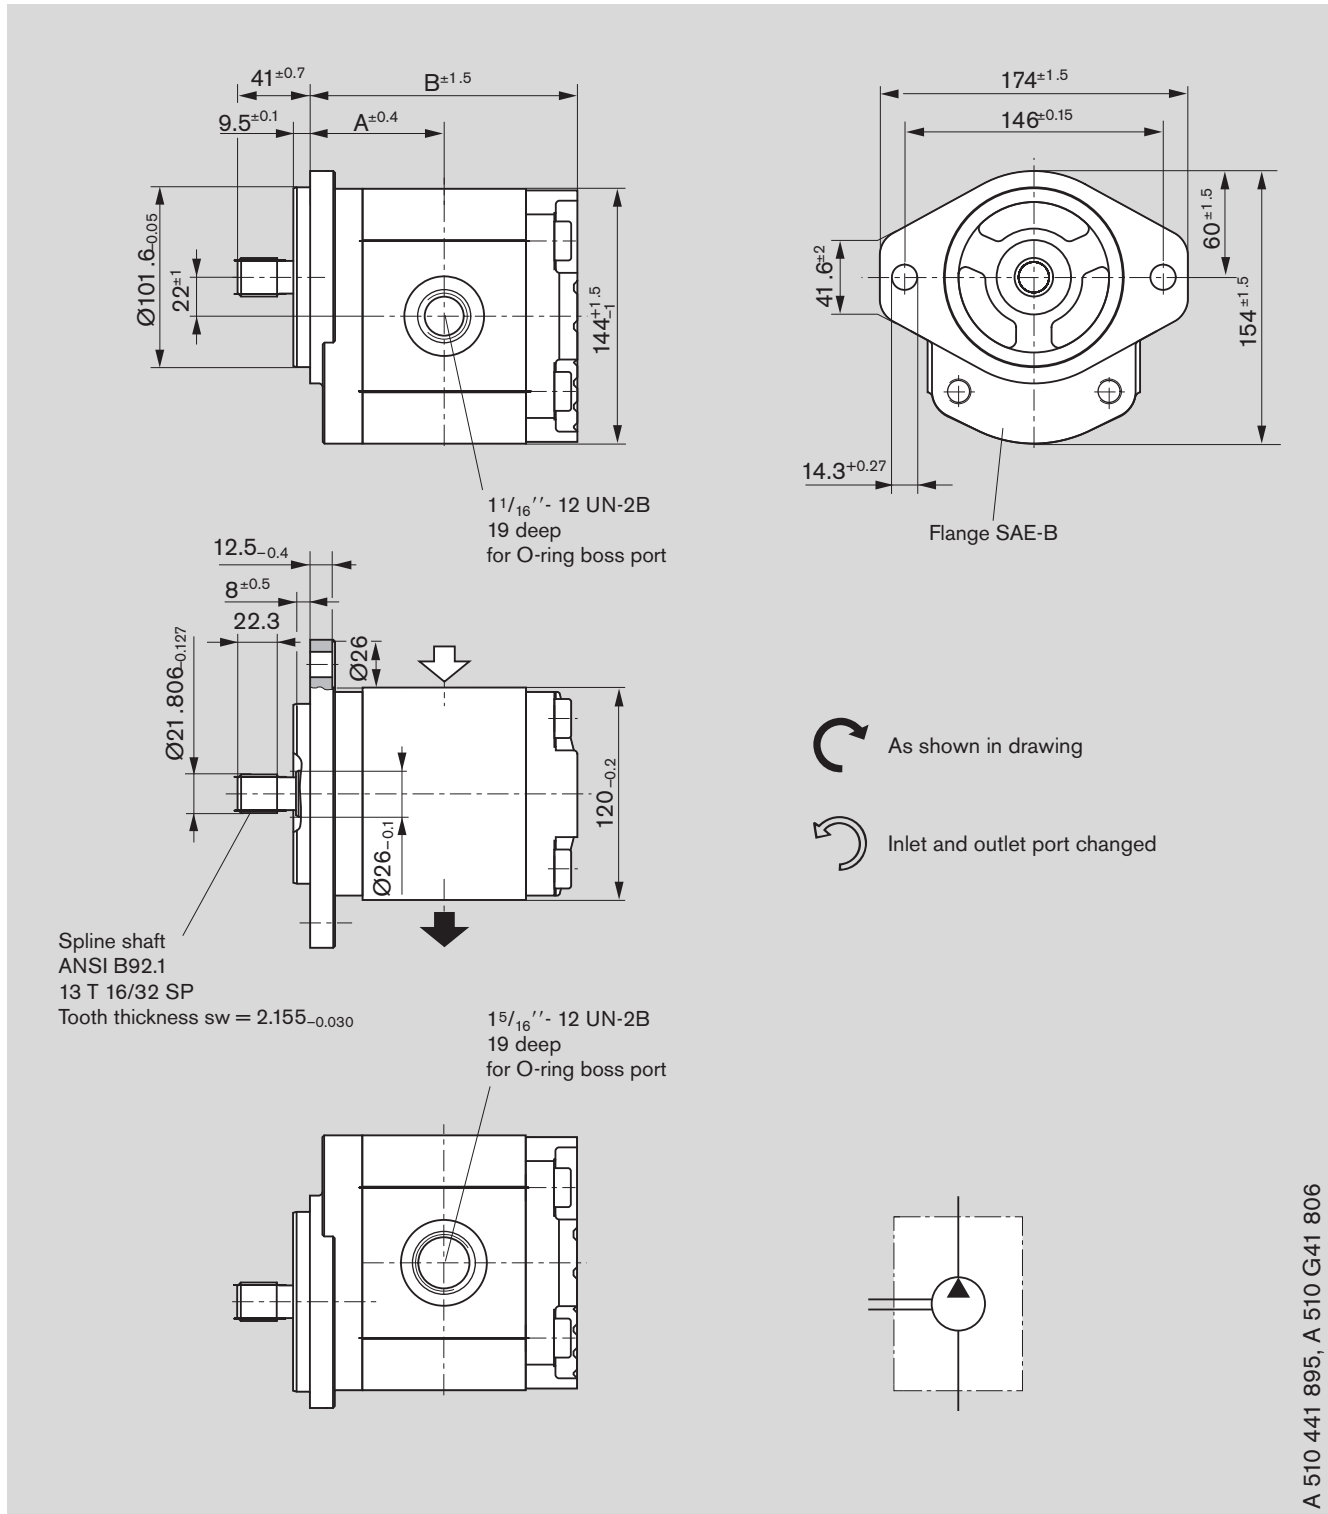

## Standard range



A 510 441 895, A 510 G41 806


**Ordering code:**

AZPG - 22 -     D C 12 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	 L	 R			A	B	Suction port	Pressure port
22.5	9 510 490 011	9 510 490 001	250	3000	66.4	130.3	S1	P1
25	9 510 490 012	9 510 490 002	250	3000	67.4	132.3	S1	P1
28	9 510 490 013	9 510 490 003	250	3000	68.7	134.8	S1	P1

# Dimensions

## Standard range

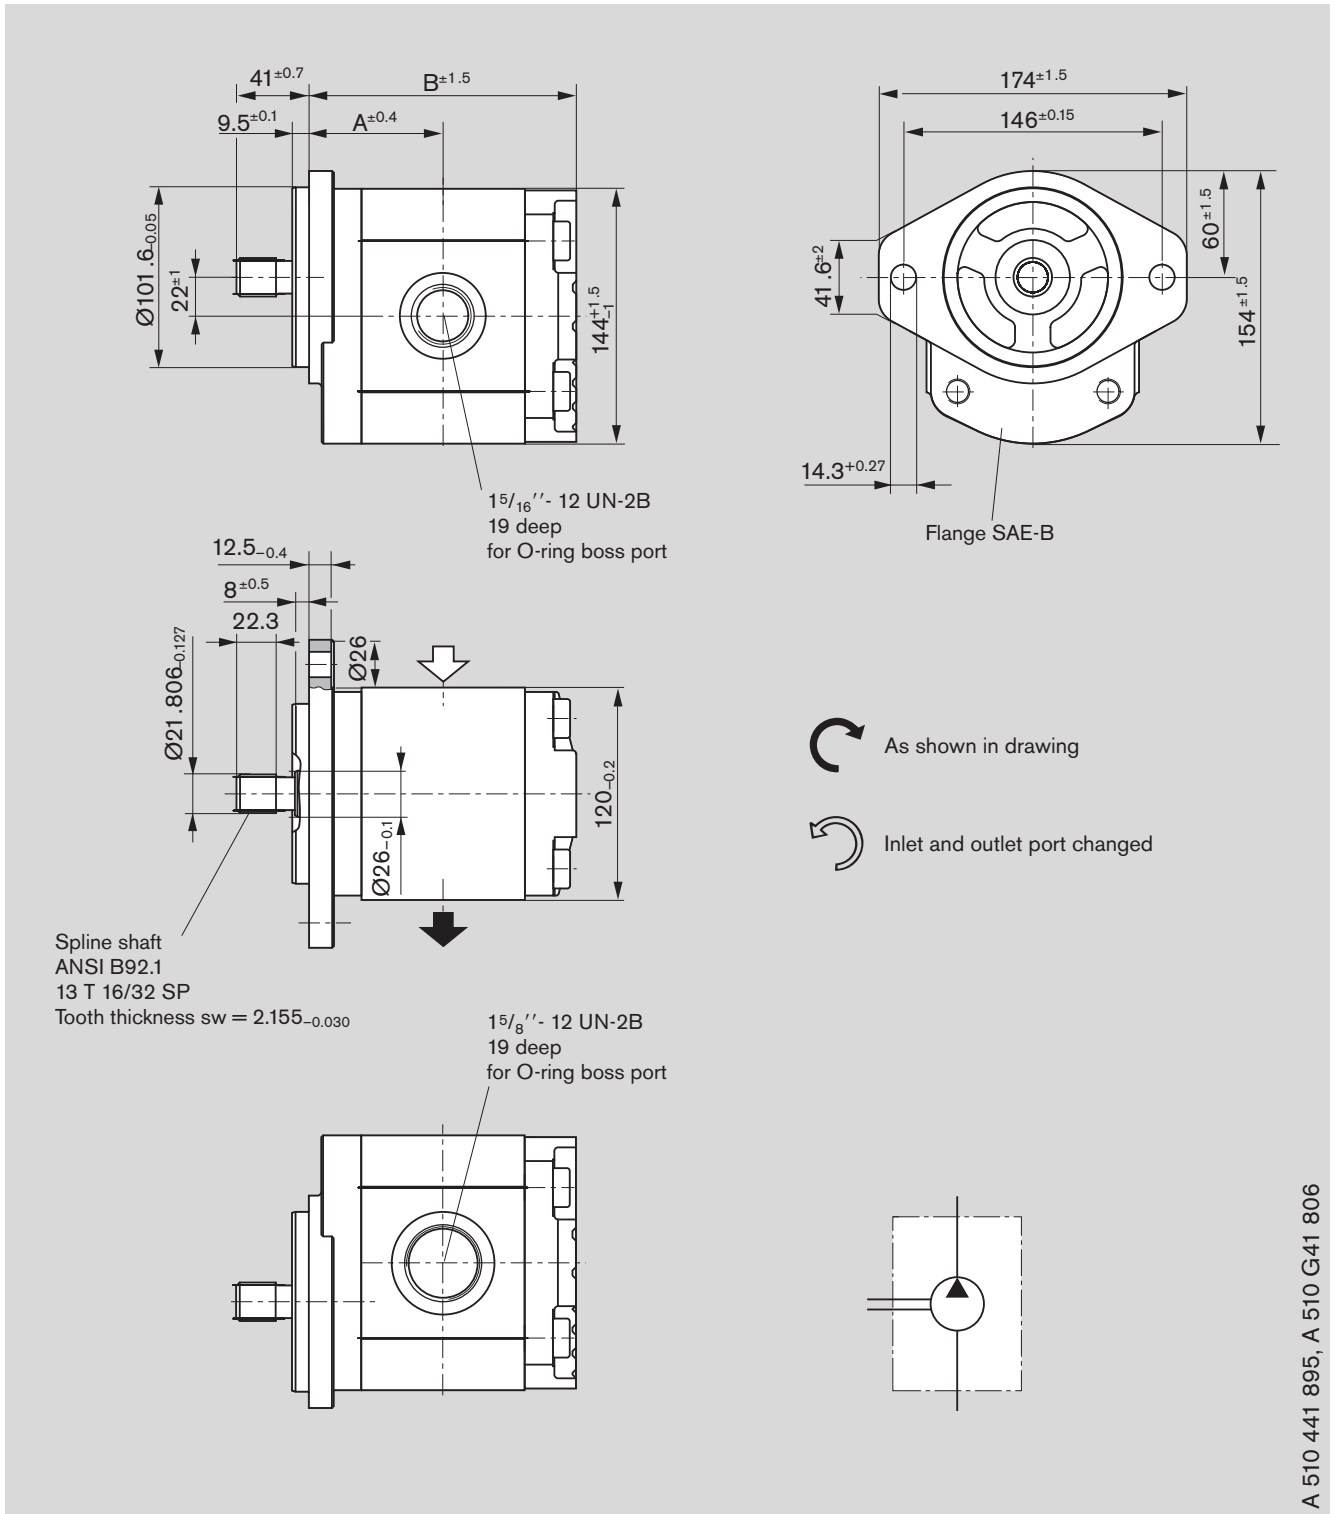

**Ordering code:**

AZPG - 22 -     D C 12 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	L	R			A	B	Suction port	Pressure port
32	9 510 490 014	9 510 490 004	250	2800	70.3	138.1	S2	P2
36	9 510 490 015	9 510 490 005	250	2800	71.9	141.5	S2	P2
40	9 510 490 016	9 510 490 006	250	2800	73.6	144.8	S2	P2
45	9 510 490 017	9 510 490 007	250	2600	75.6	148.8	S2	P2


A 510 441 895, A 510 G41 806







# Dimensions
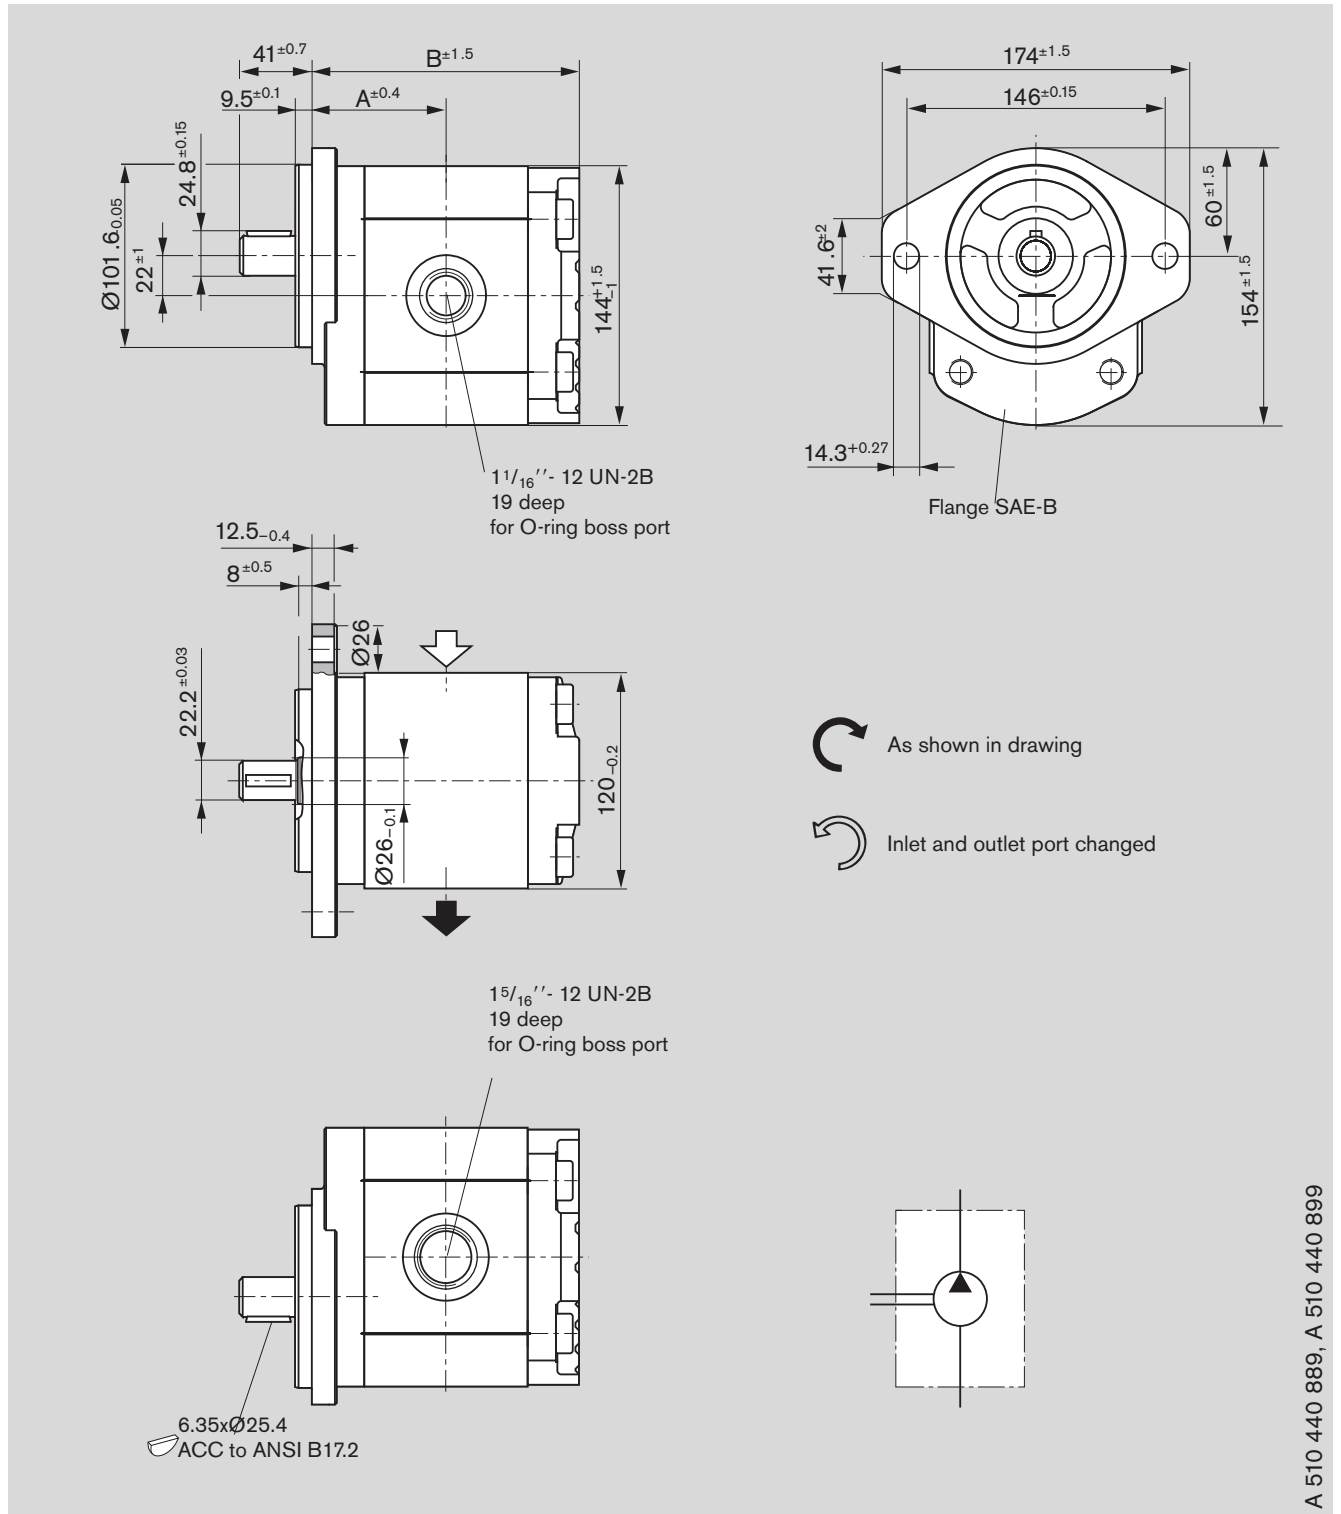
## Standard range



**Ordering code:**


**AZPG - 22** -     **Q C 12 M B**

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	 L	 R			A	B	Suction port	Pressure port
22.5		<b>9 510 490 021</b>	250	3000	66.4	130.3	S1	P1
25		<b>9 510 490 022</b>	250	3000	67.4	132.3	S1	P1
28		<b>9 510 490 023</b>	250	3000	68.7	134.8	S1	P1

A 510 440 889, A 510 440 899

# Dimensions

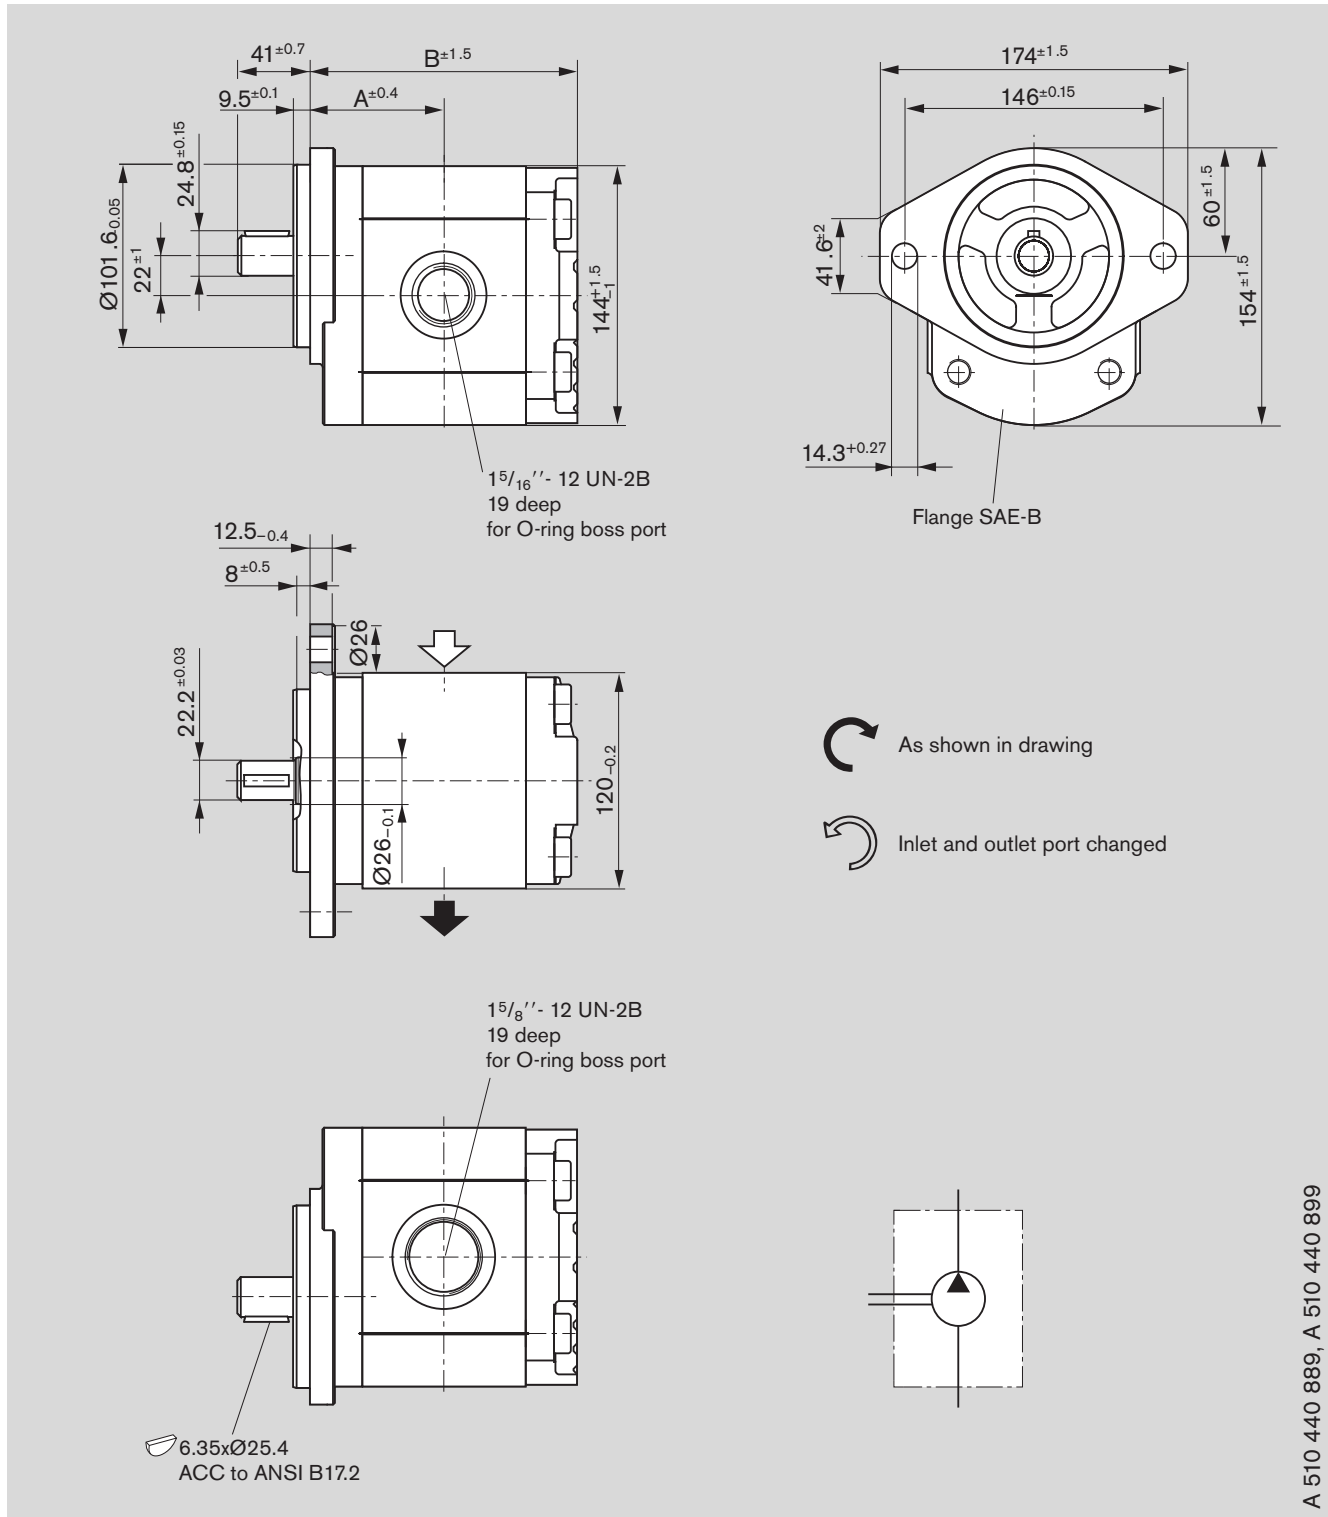

## Standard range



A 510 440 889, A 510 440 899


### Ordering code:

AZPG - 22 -     Q C 12 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	 L	 R			A	B	Suction port	Pressure port
32	9 510 490 034	9 510 490 024	250	2800	70.3	138.1	S2	P2
36	9 510 490 035	9 510 490 025	250	2800	71.9	141.5	S2	P2
40		9 510 490 026	250	2800	73.6	144.8	S2	P2
45	9 510 490 037	9 510 490 027	250	2600	75.6	148.8	S2	P2

# Dimensions

## Standard range

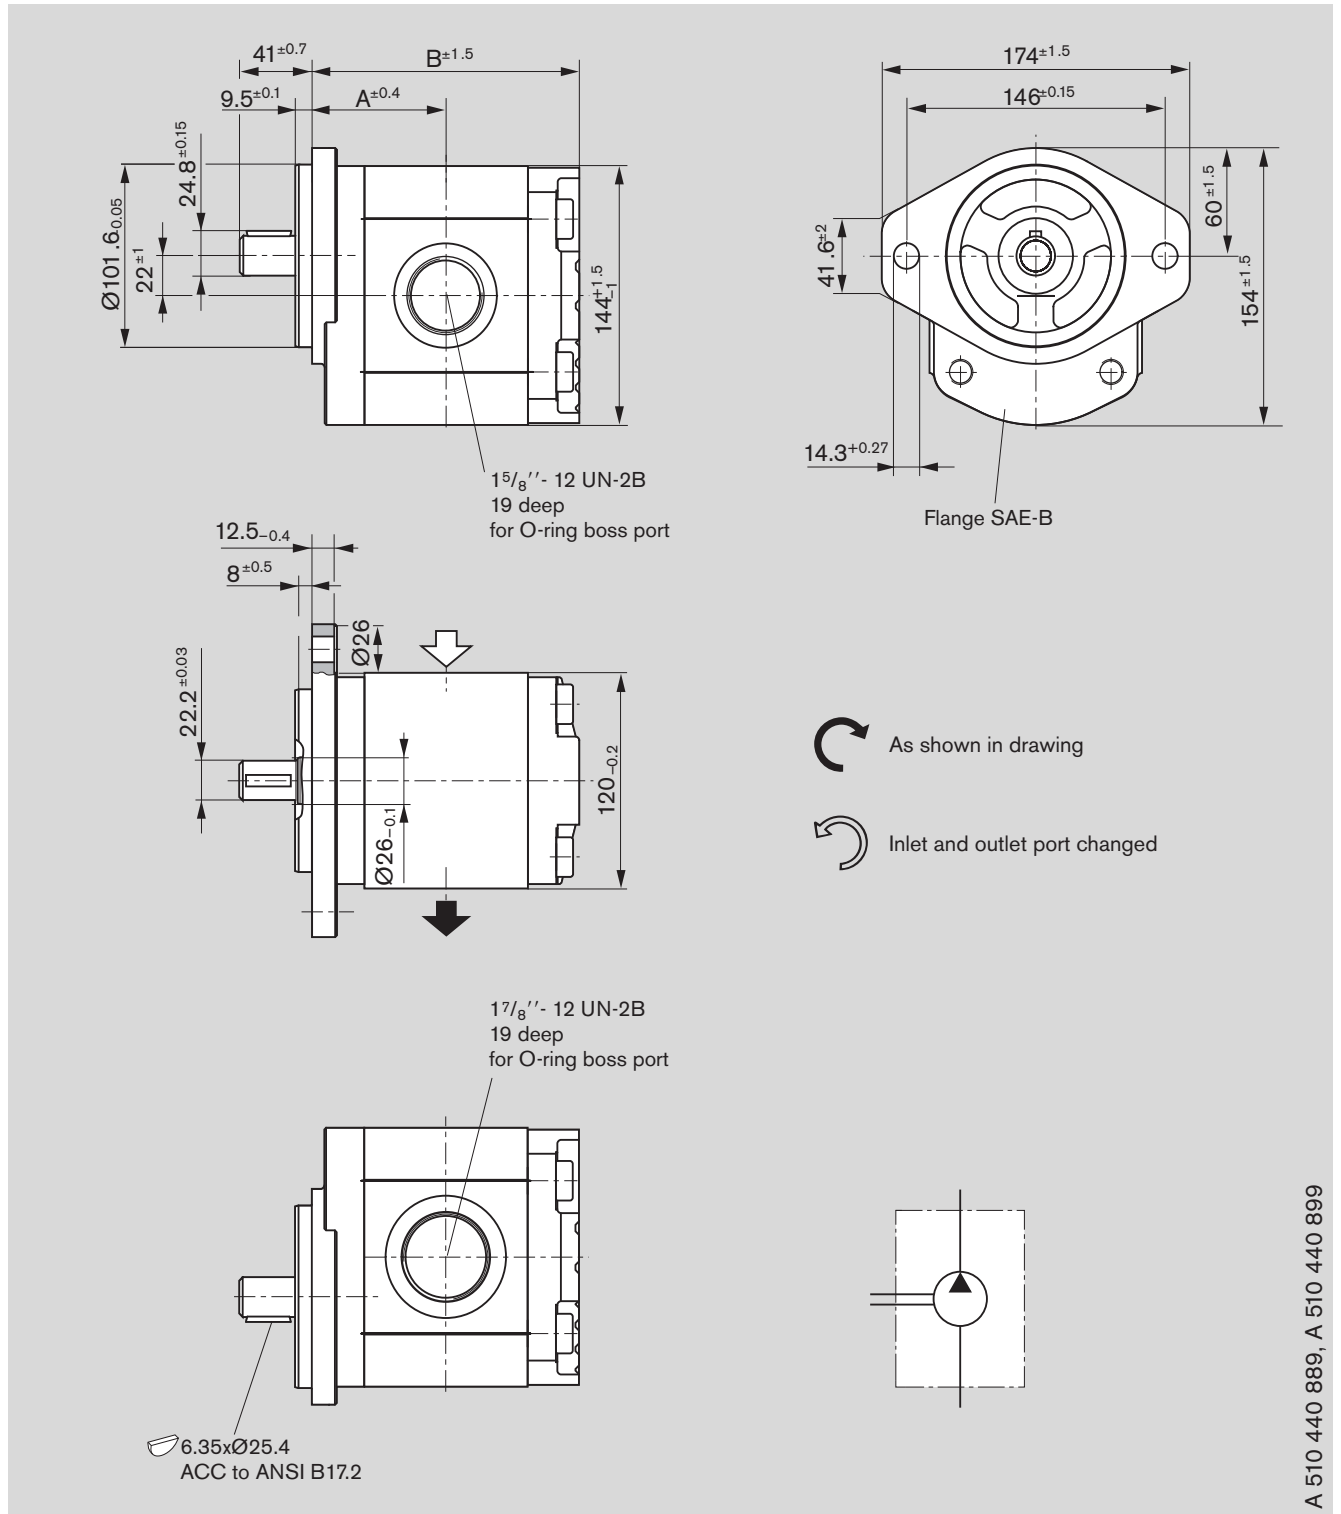

**Ordering code:**


AZPG - 22 -     Q C 12 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]		Execution	
	L	R			A	B	Suction port	Pressure port
50	9 510 490 038	9 510 490 028	220	2600	77.7	153.0	S3	P3
56	9 510 490 039	9 510 490 029	195	2300	80.2	157.9	S3	P3
63	9 510 490 040	9 510 490 030	170	2300	63.1	163.8	S3	P3

A 510 440 889, A 510 440 899

# Dimensions

## Standard range

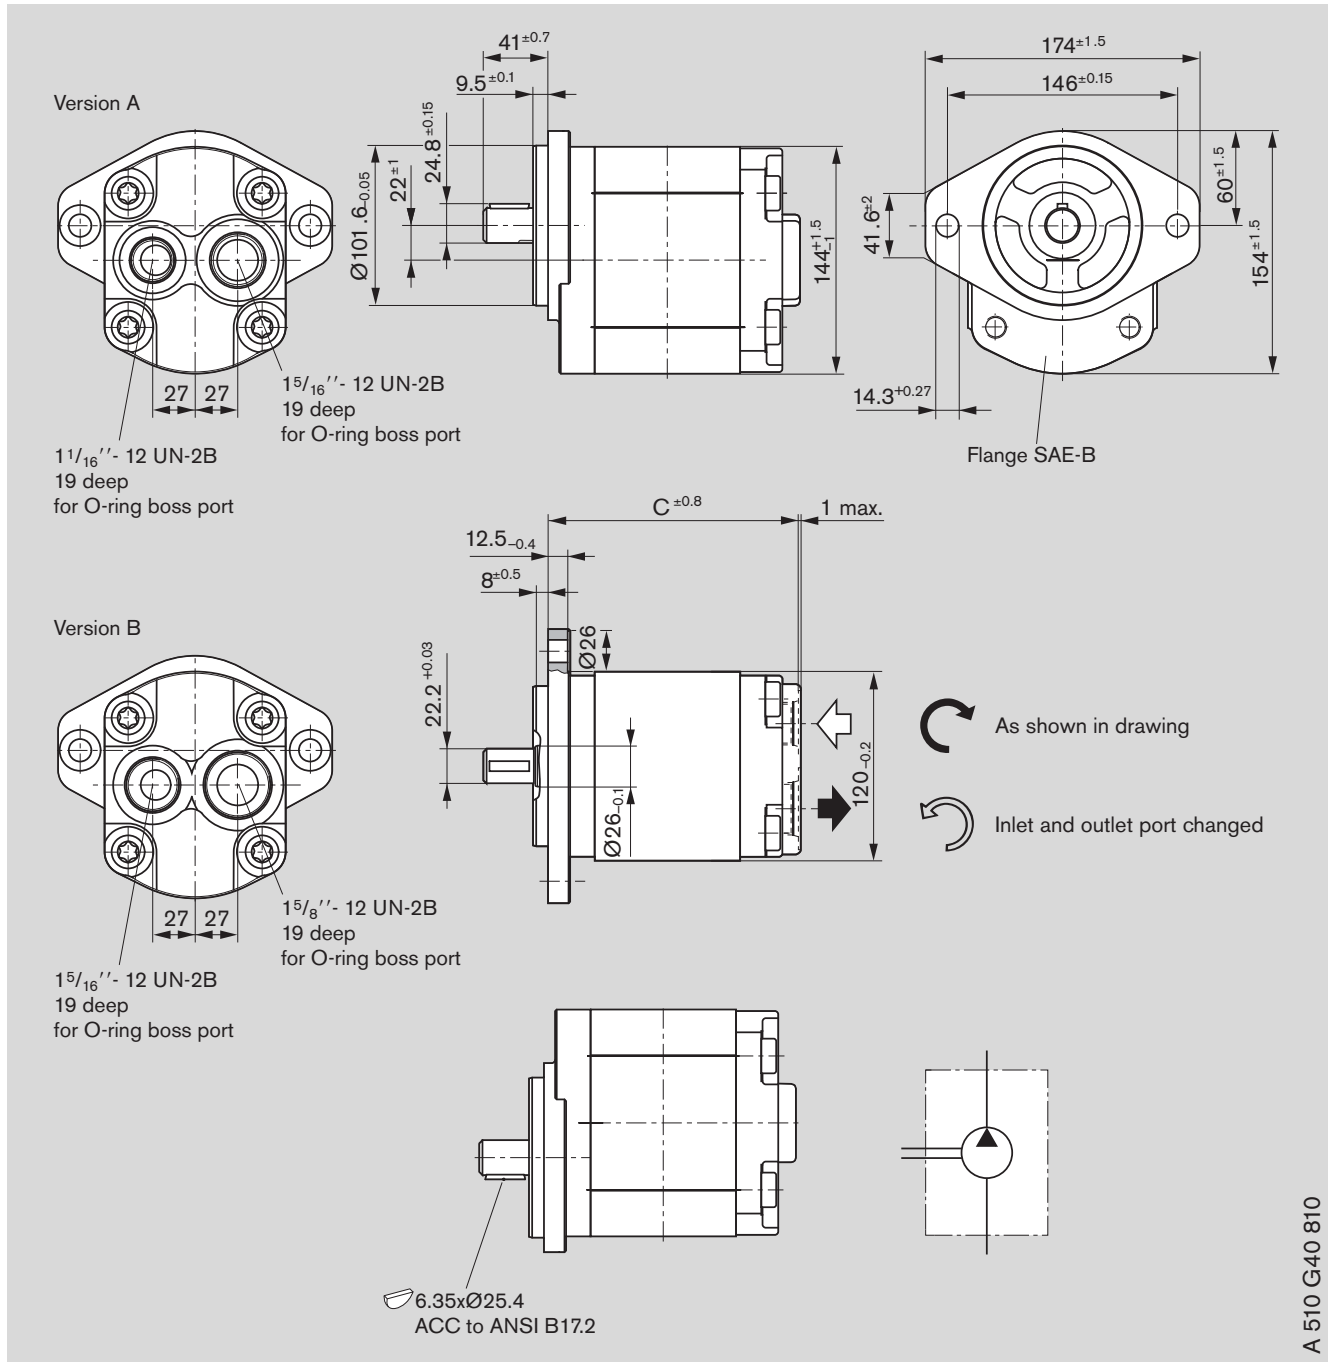


**Ordering code:**

**AZPG - 22 - □ □ □ R Q C 12 M A**

Displacement [cm³/rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm] C	Version
	L	R				
22.5		<b>9 510 490 101</b>	250	3000	141.2	A
25		<b>9 510 490 102</b>	250	3000	143.2	A
28		<b>9 510 490 103</b>	250	3000	145.7	A
32		<b>9 510 490 104</b>	250	2800	149.0	B
36		<b>9 510 490 105</b>	250	2800	152.4	B
40		<b>9 510 490 106</b>	250	2800	155.7	B
45		<b>9 510 490 107</b>	250	2600	159.7	B
50		<b>9 510 490 108</b>	220	2600	163.9	B
56		<b>9 510 490 109</b>	195	2300	169.8	B
63		<b>9 510 490 110</b>	170	2300	174.7	B

# Dimensions

## Standard range

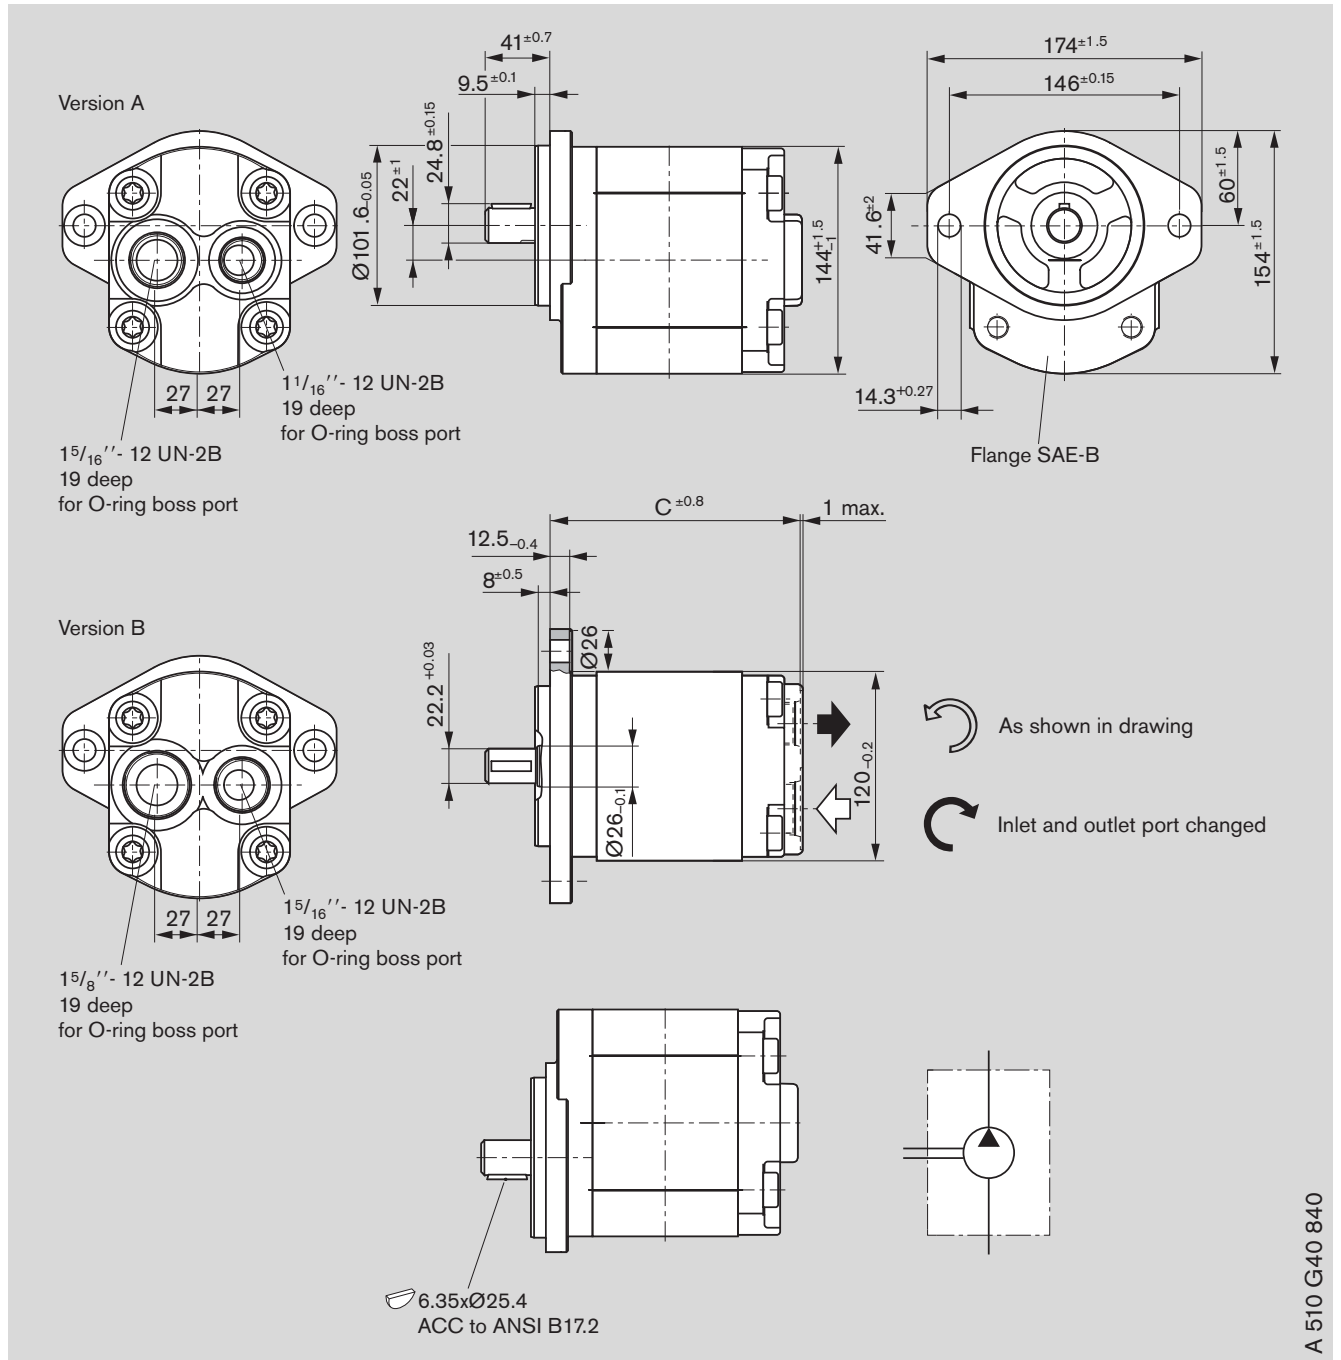


**Ordering code:**

**AZPG - 22 - □ □ □ L Q C 12 M A**

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm] C	Version
22.5	9 510 490 111		250	3000	141.2	A
25	9 510 490 112		250	3000	143.2	A
28	9 510 490 113		250	3000	145.7	A
32	9 510 490 114		250	2800	149.0	B
36	9 510 490 115		250	2800	152.4	B
40	9 510 490 116		250	2800	155.7	B
45	9 510 490 117		250	2600	159.7	B
50	9 510 490 118		220	2600	163.9	B
56	9 510 490 119		195	2300	169.8	B
63	9 510 490 120		170	2300	174.7	B

# Dimensions

## Standard range

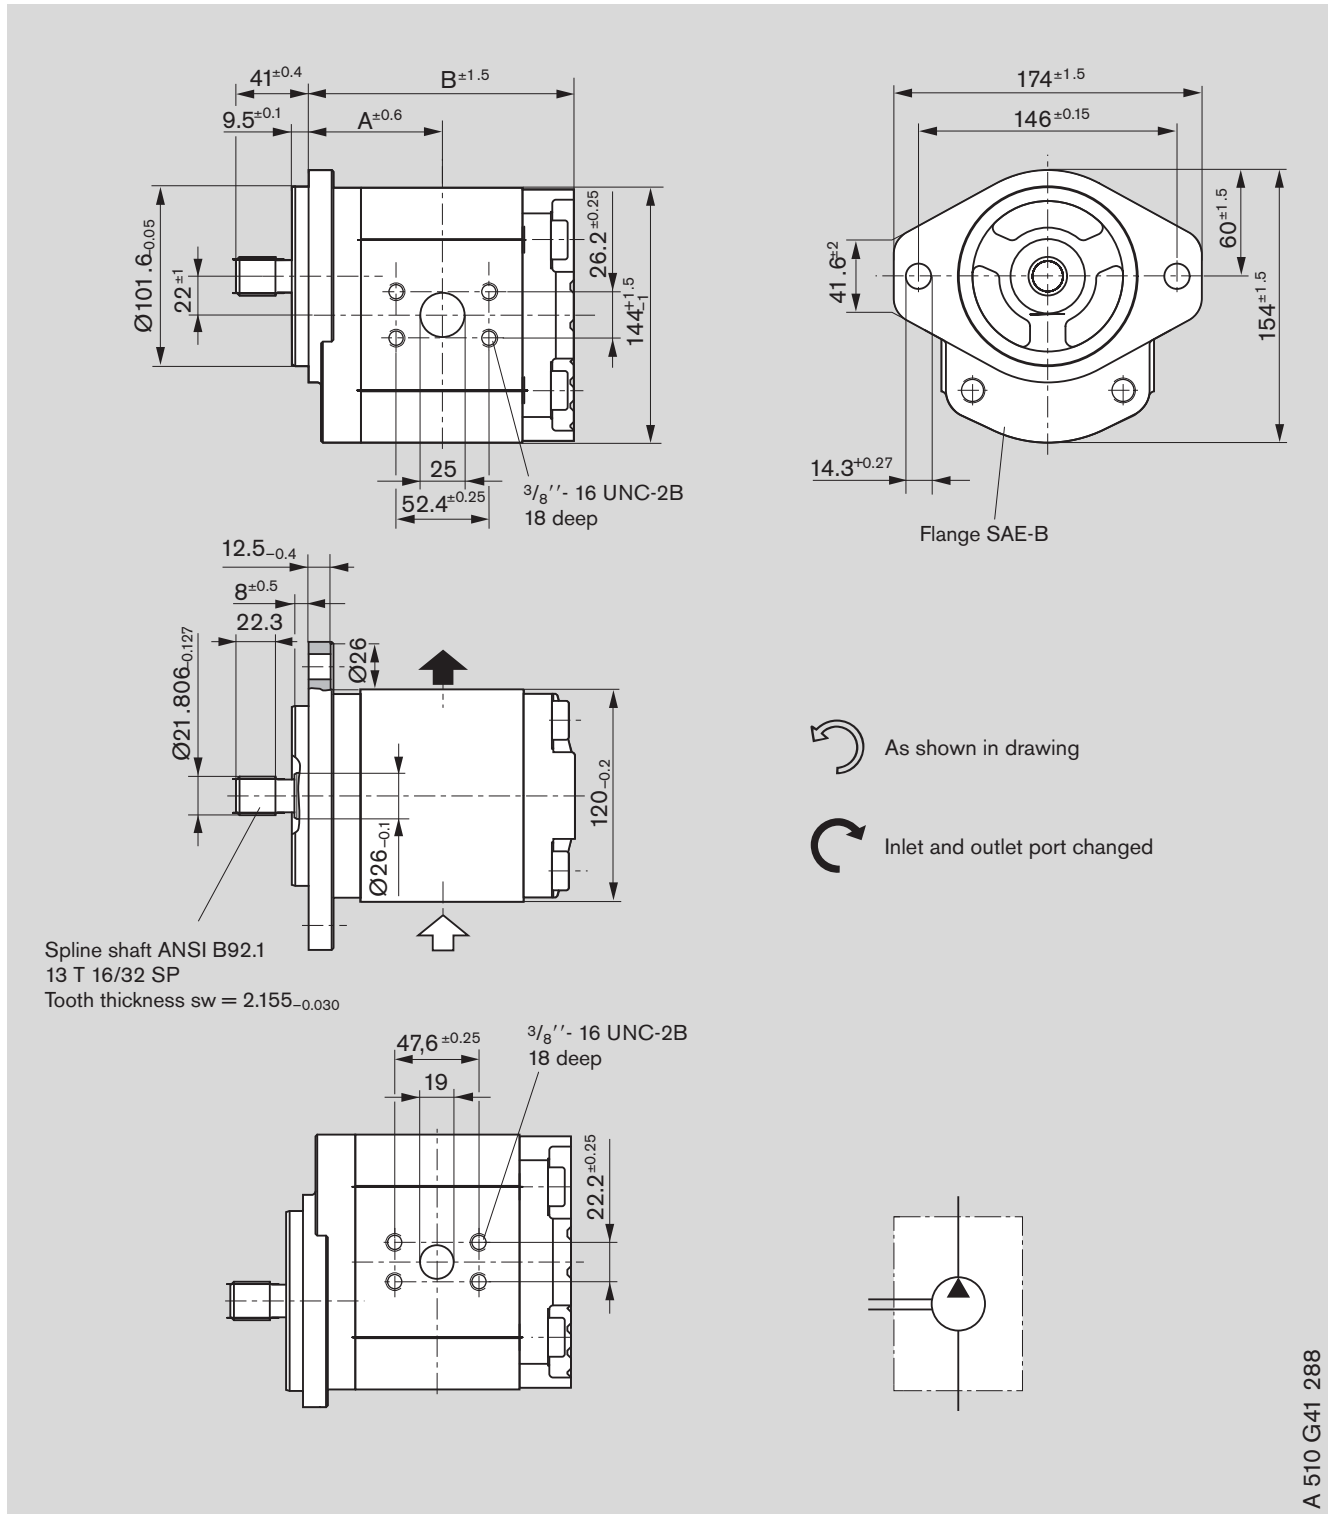

A 510 G41 288


### Ordering code:

AZPG - 22 -    L D C 40 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]	
	L	R			A	B
22.5	<b>9 510 490 051</b>		250	3000	66.4	130.3
25	<b>9 510 490 052</b>		250	3000	67.4	132.3
28	<b>9 510 490 053</b>		250	3000	68.7	134.8
32	<b>9 510 490 054</b>		250	2800	70.3	138.1
36	<b>9 510 490 055</b>		250	2800	71.9	141.5



# Dimensions
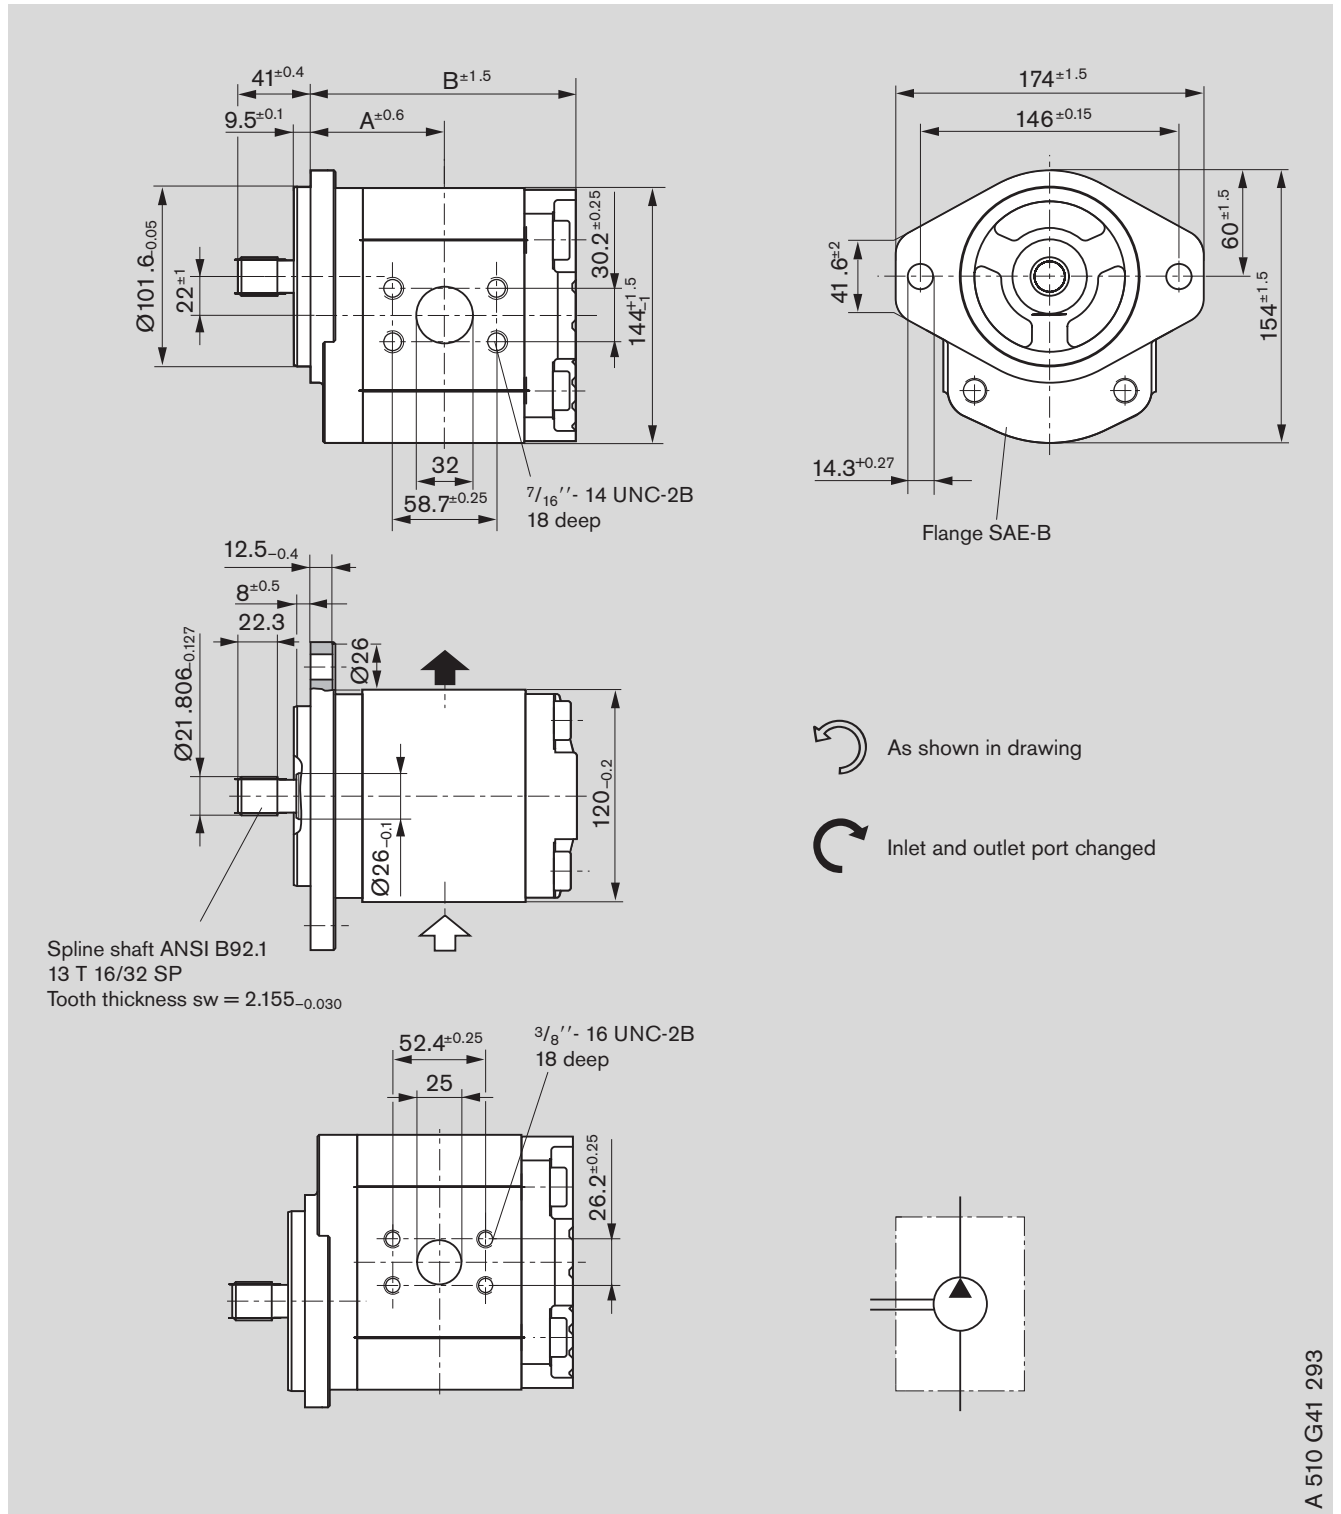
## Standard range



**Ordering code:**


**AZPG - 22 -    L D C 40 M B**

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]	
	 L	 R			A	B
40	<b>9 510 490 056</b>		250	2800	73.6	144.8
45	<b>9 510 490 057</b>		250	2600	75.6	148.8
50	<b>9 510 490 058</b>		220	2600	77.7	153.0

A 510 G41 293

# Dimensions

## Standard range

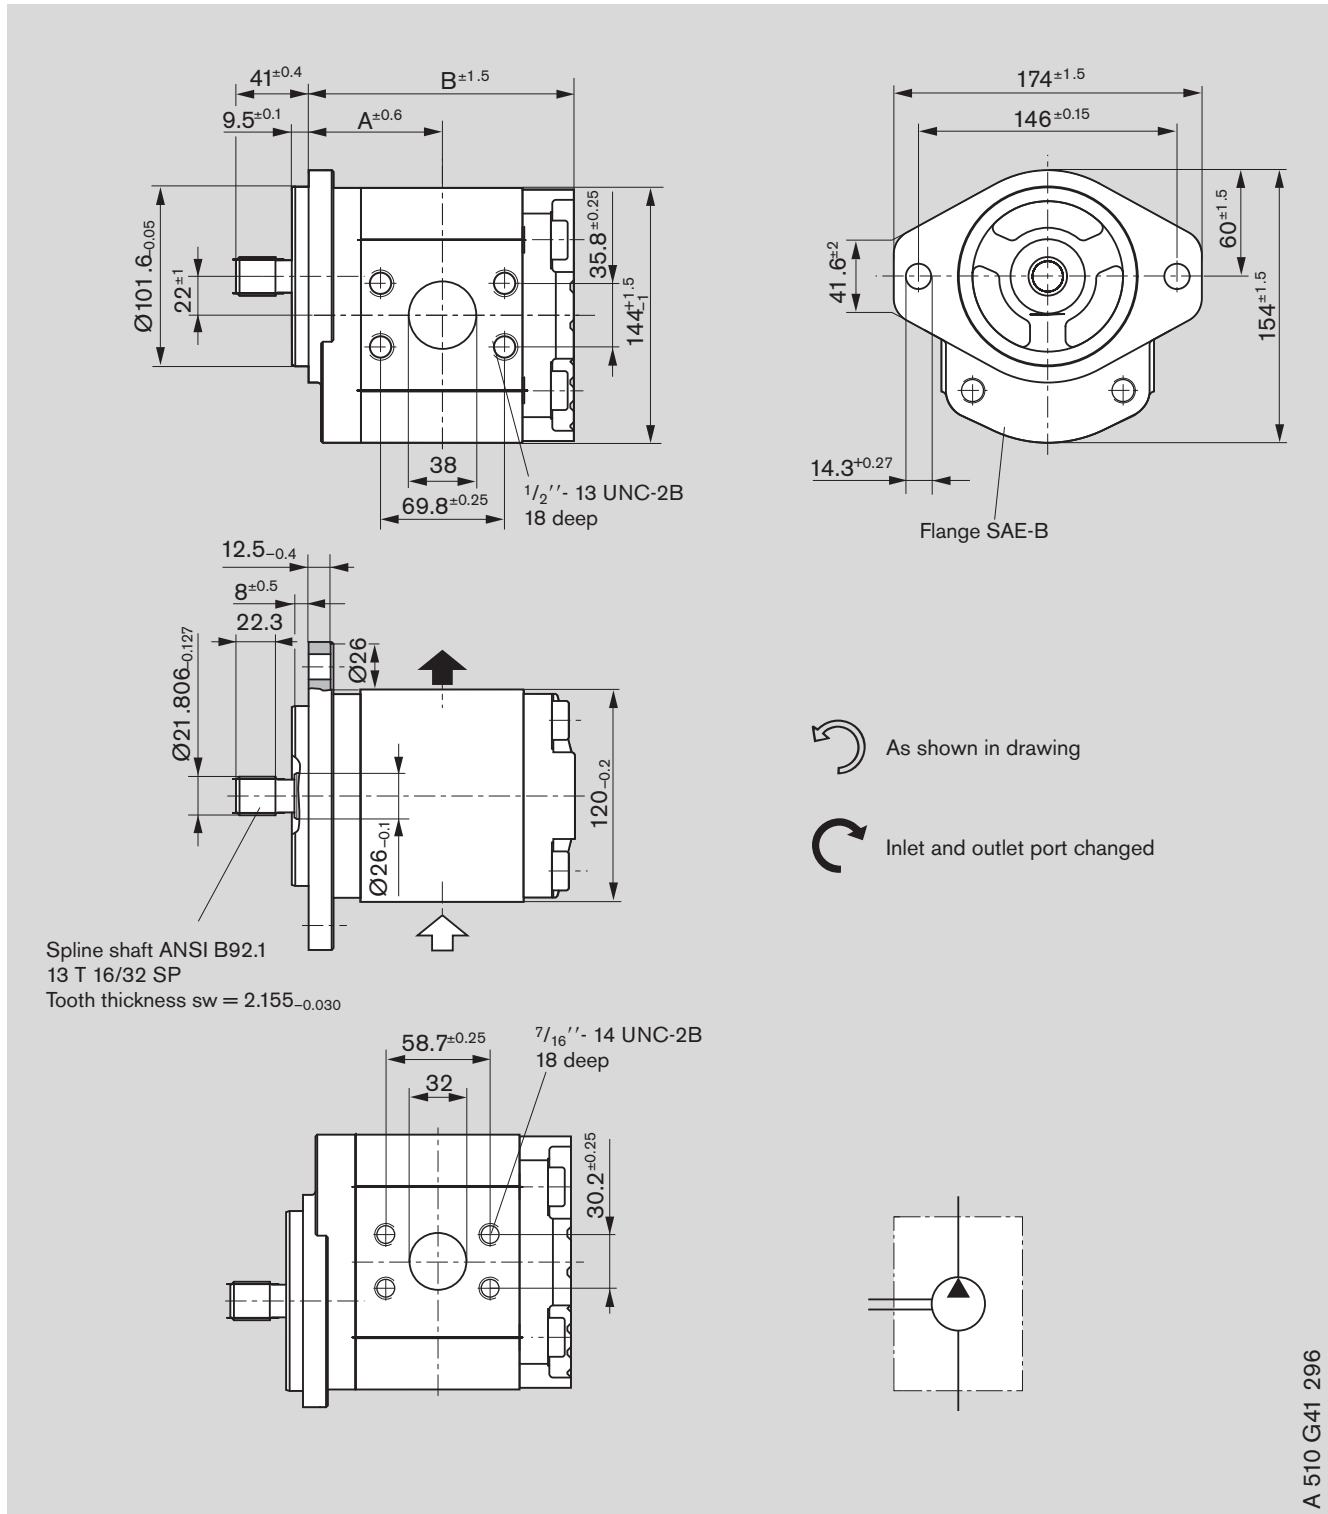

A 510 G41 296

### Ordering code:


AZPG - 22 -    L D C 40 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]	
	L	R			A	B
56	<b>9 510 490 059</b>		195	2300	80.2	157.9
63	<b>9 510 490 060</b>		170	2300	83.1	163.8



# Dimensions

## Standard range

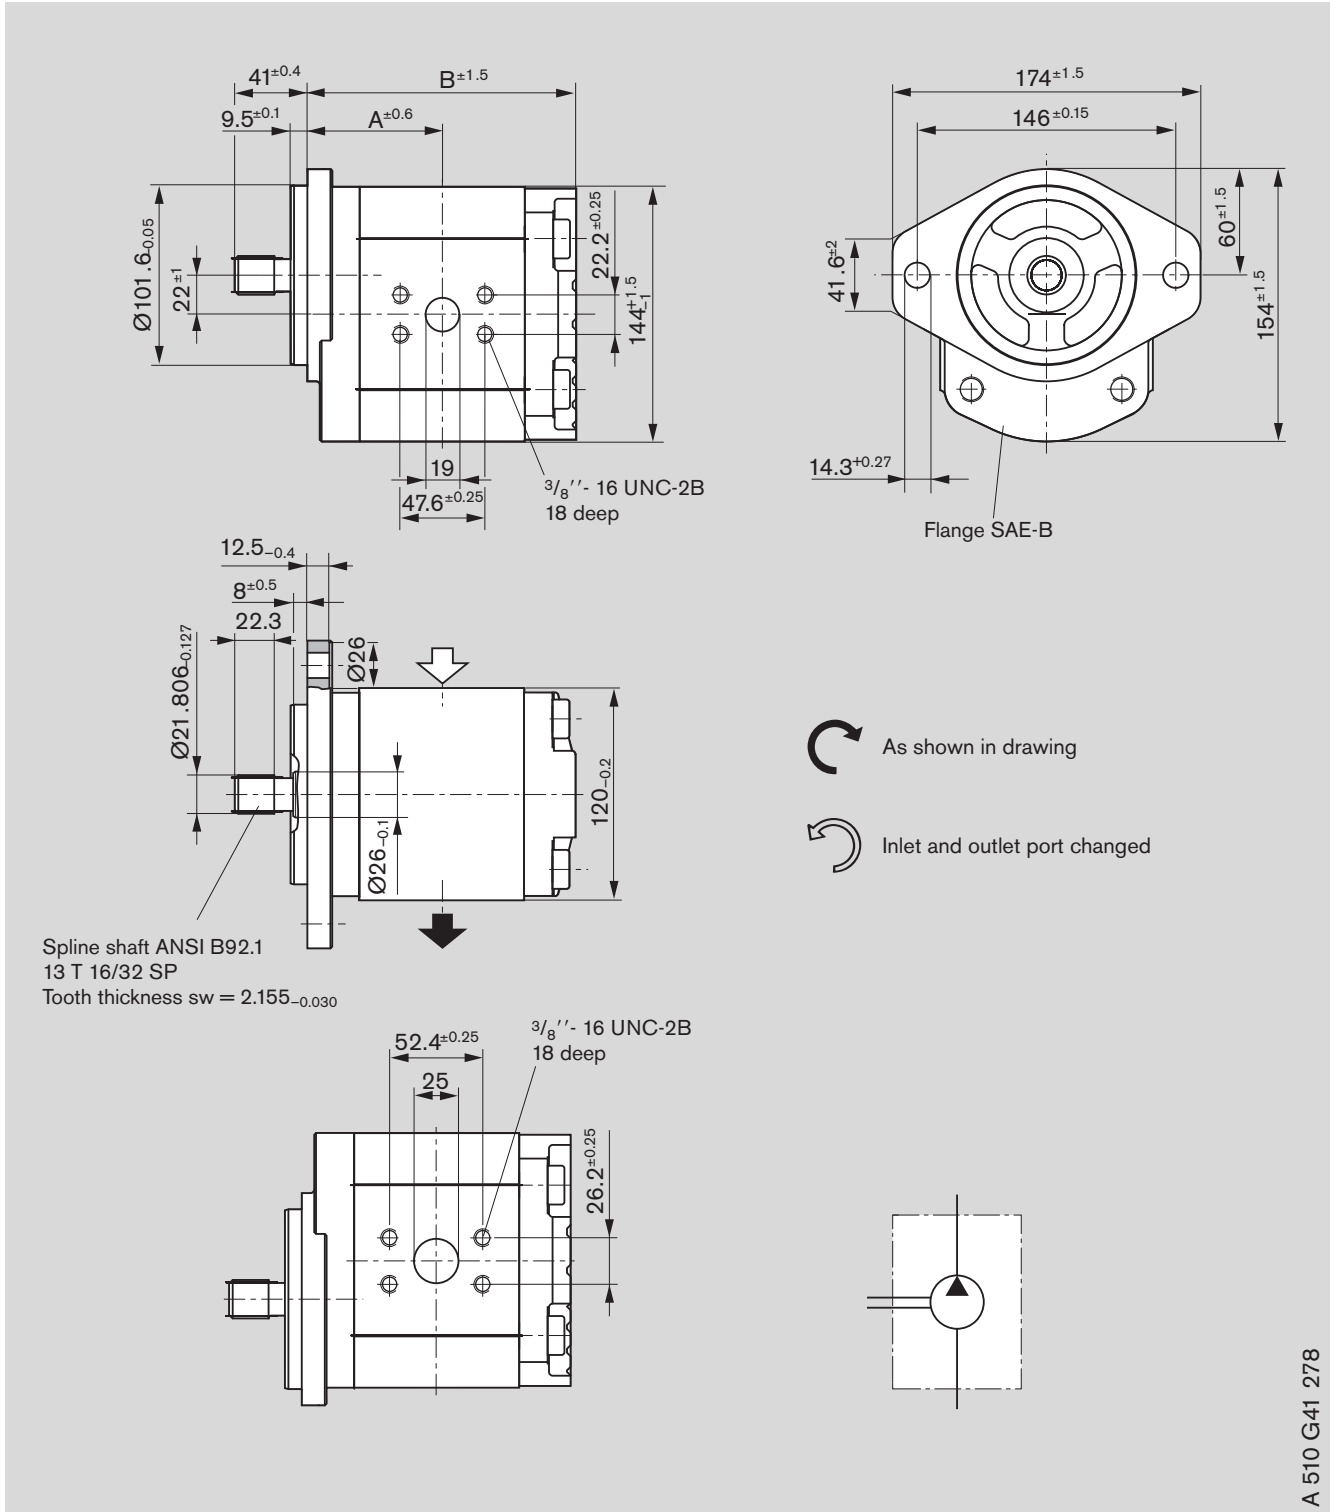


**Ordering code:**

AZPG - 22 -    R D C 40 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]	
	L	R			A	B
22.5		9 510 490 041	250	3000	66.4	130.3
25		9 510 490 042	250	3000	67.4	132.3
28		9 510 490 043	250	3000	68.7	134.8
32		9 510 490 044	250	2800	70.3	138.1
36		9 510 490 045	250	2800	71.9	141.5

# Dimensions

## Standard range

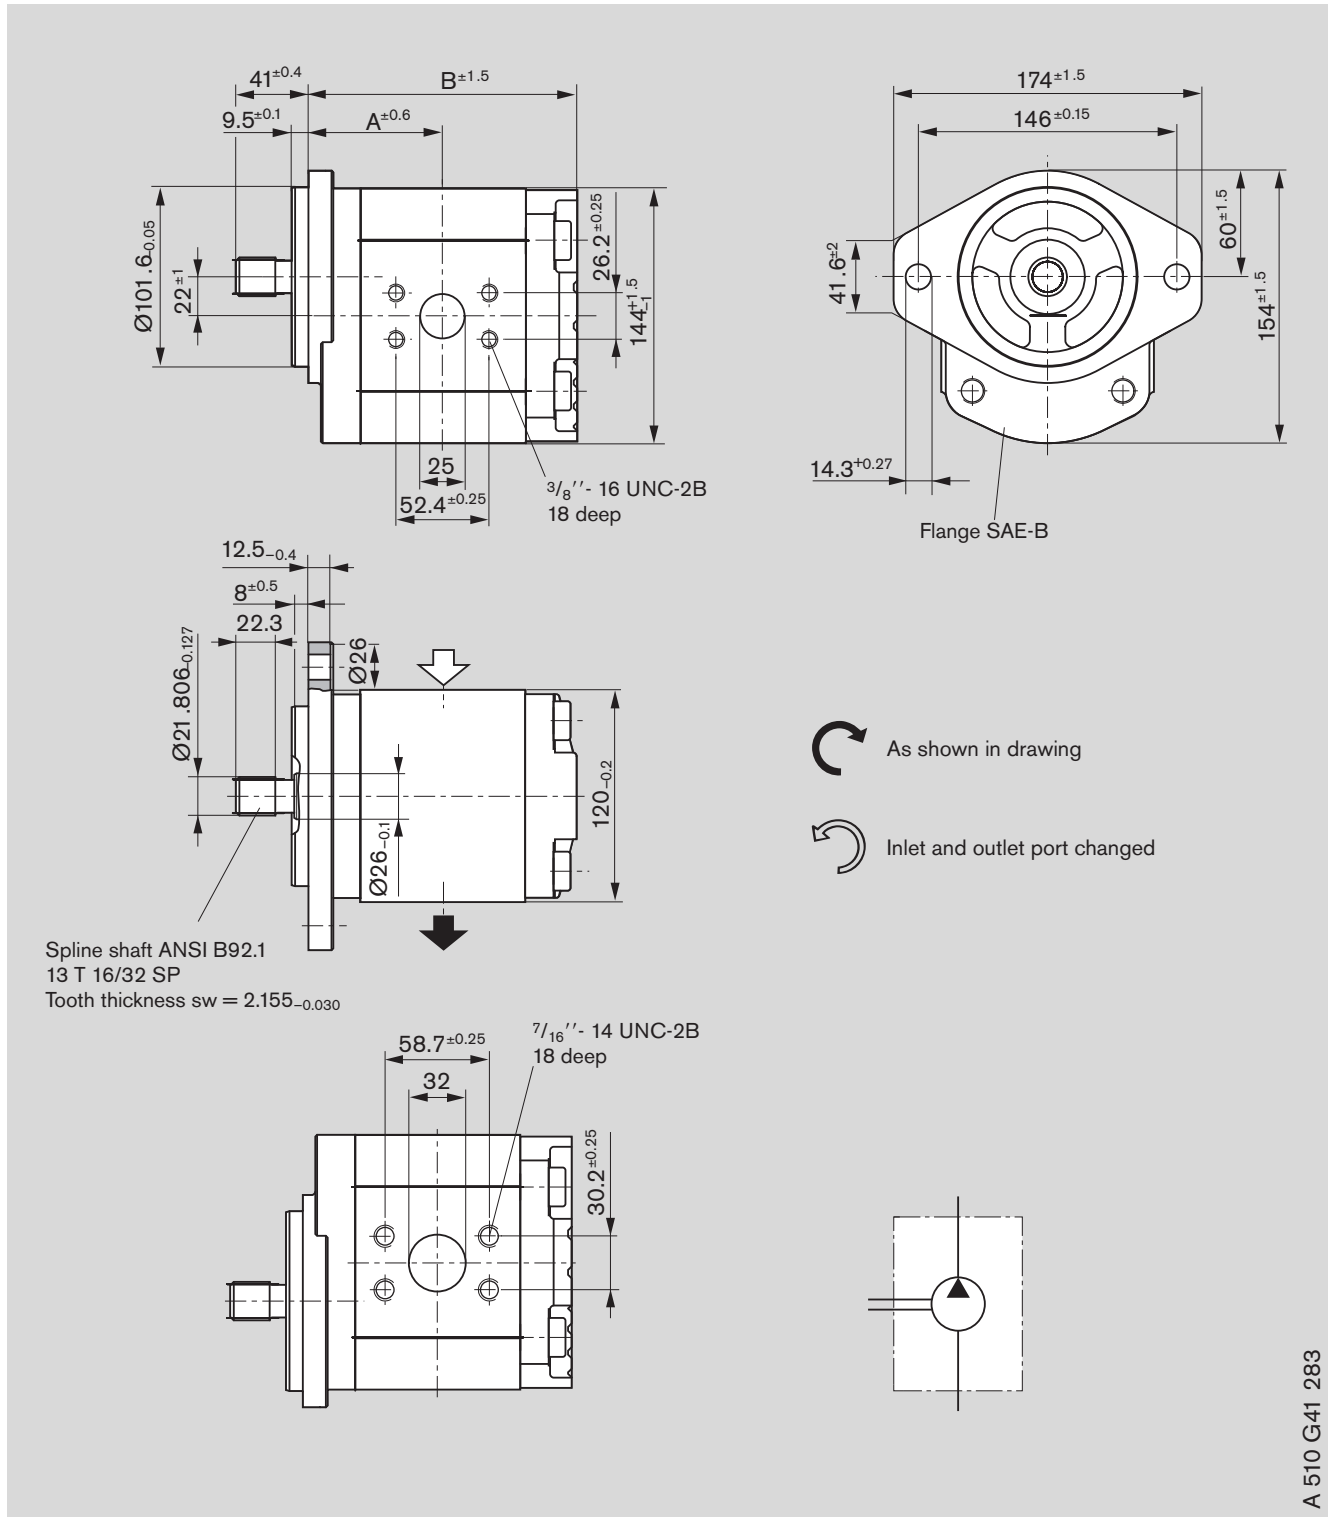

A 510 G41 283


**Ordering code:**

AZPG - 22 -    R D C 40 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]	
	L	R			A	B
40		<b>9 510 490 046</b>	250	2800	73.6	144.8
45		<b>9 510 490 047</b>	250	2600	75.6	148.8
50		<b>9 510 490 048</b>	220	2600	77.7	153.0

# Dimensions

## Standard range

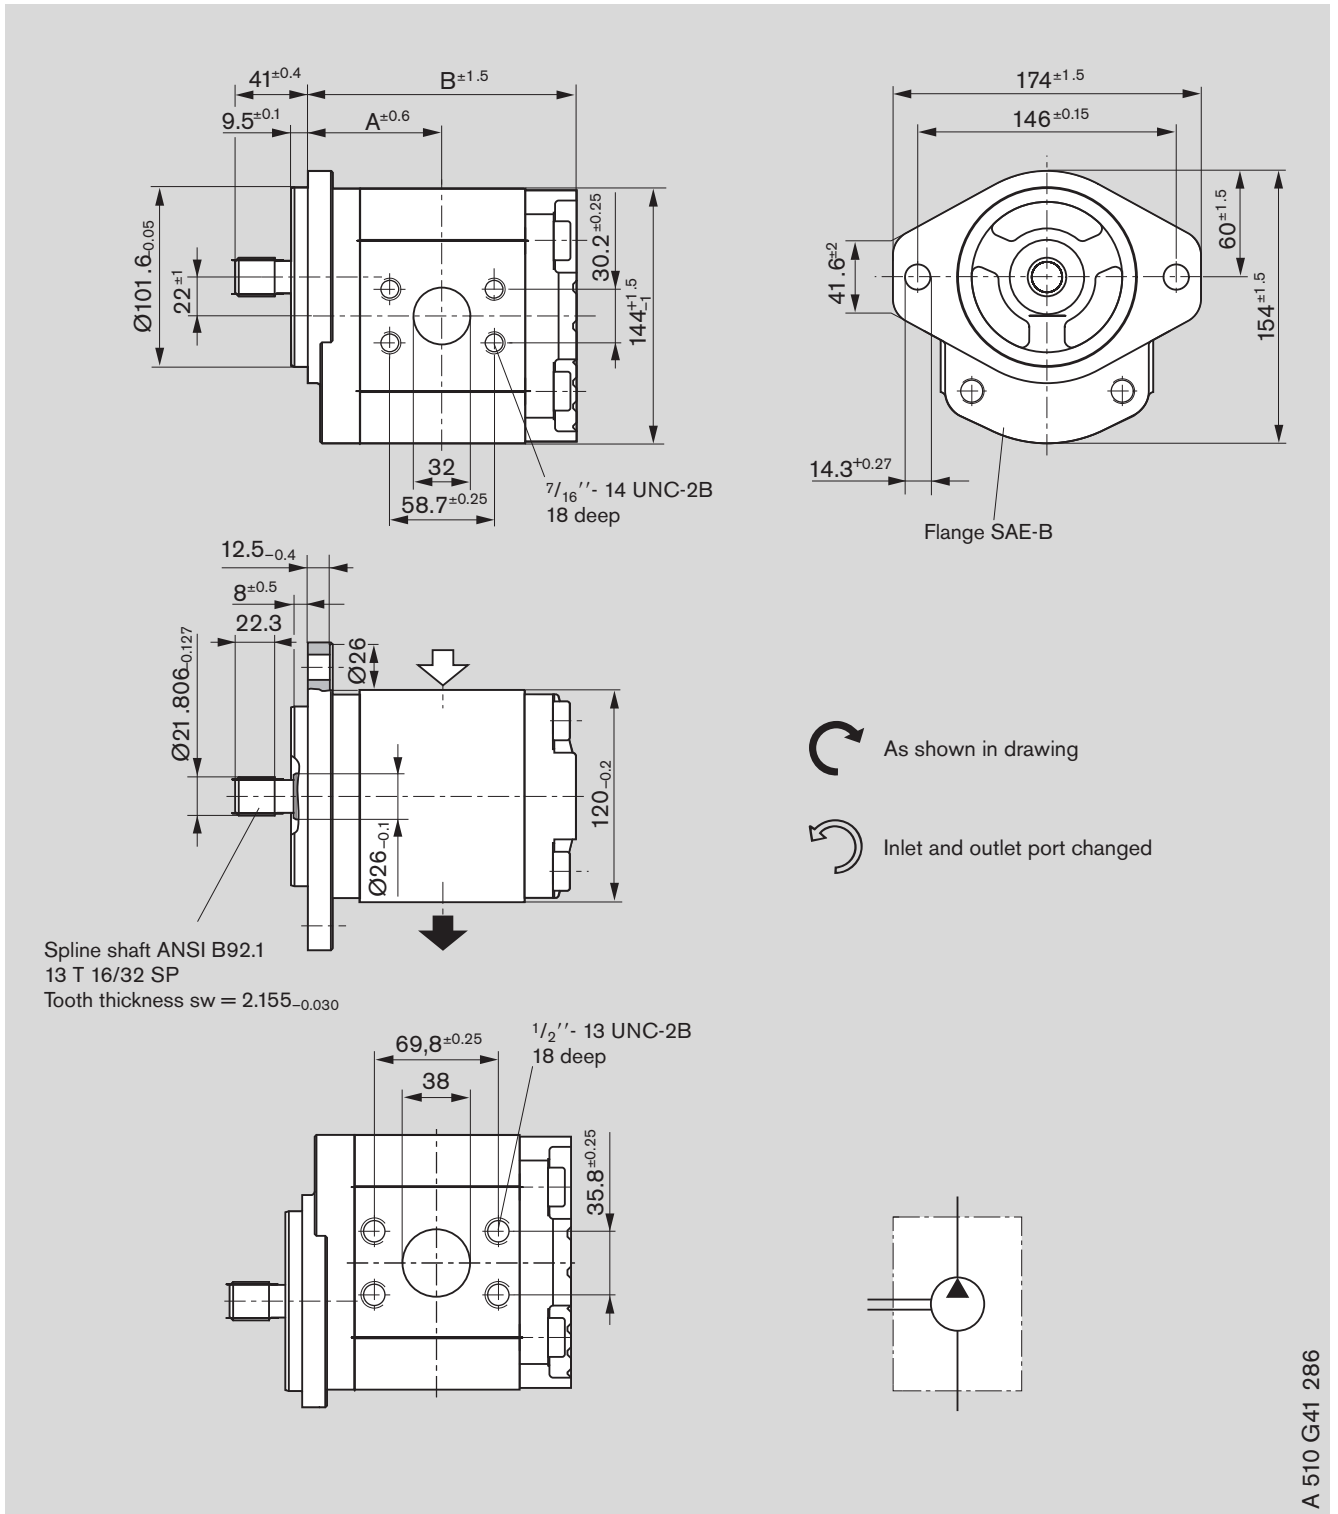

**Ordering code:**


AZPG - 22 -     D C 40 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]	
	L	R			A	B
56		<b>9 510 490 049</b>	195	2300	80.2	157.9
63		<b>9 510 490 050</b>	170	2300	83.1	163.8

A 510 G41 286

# Dimensions

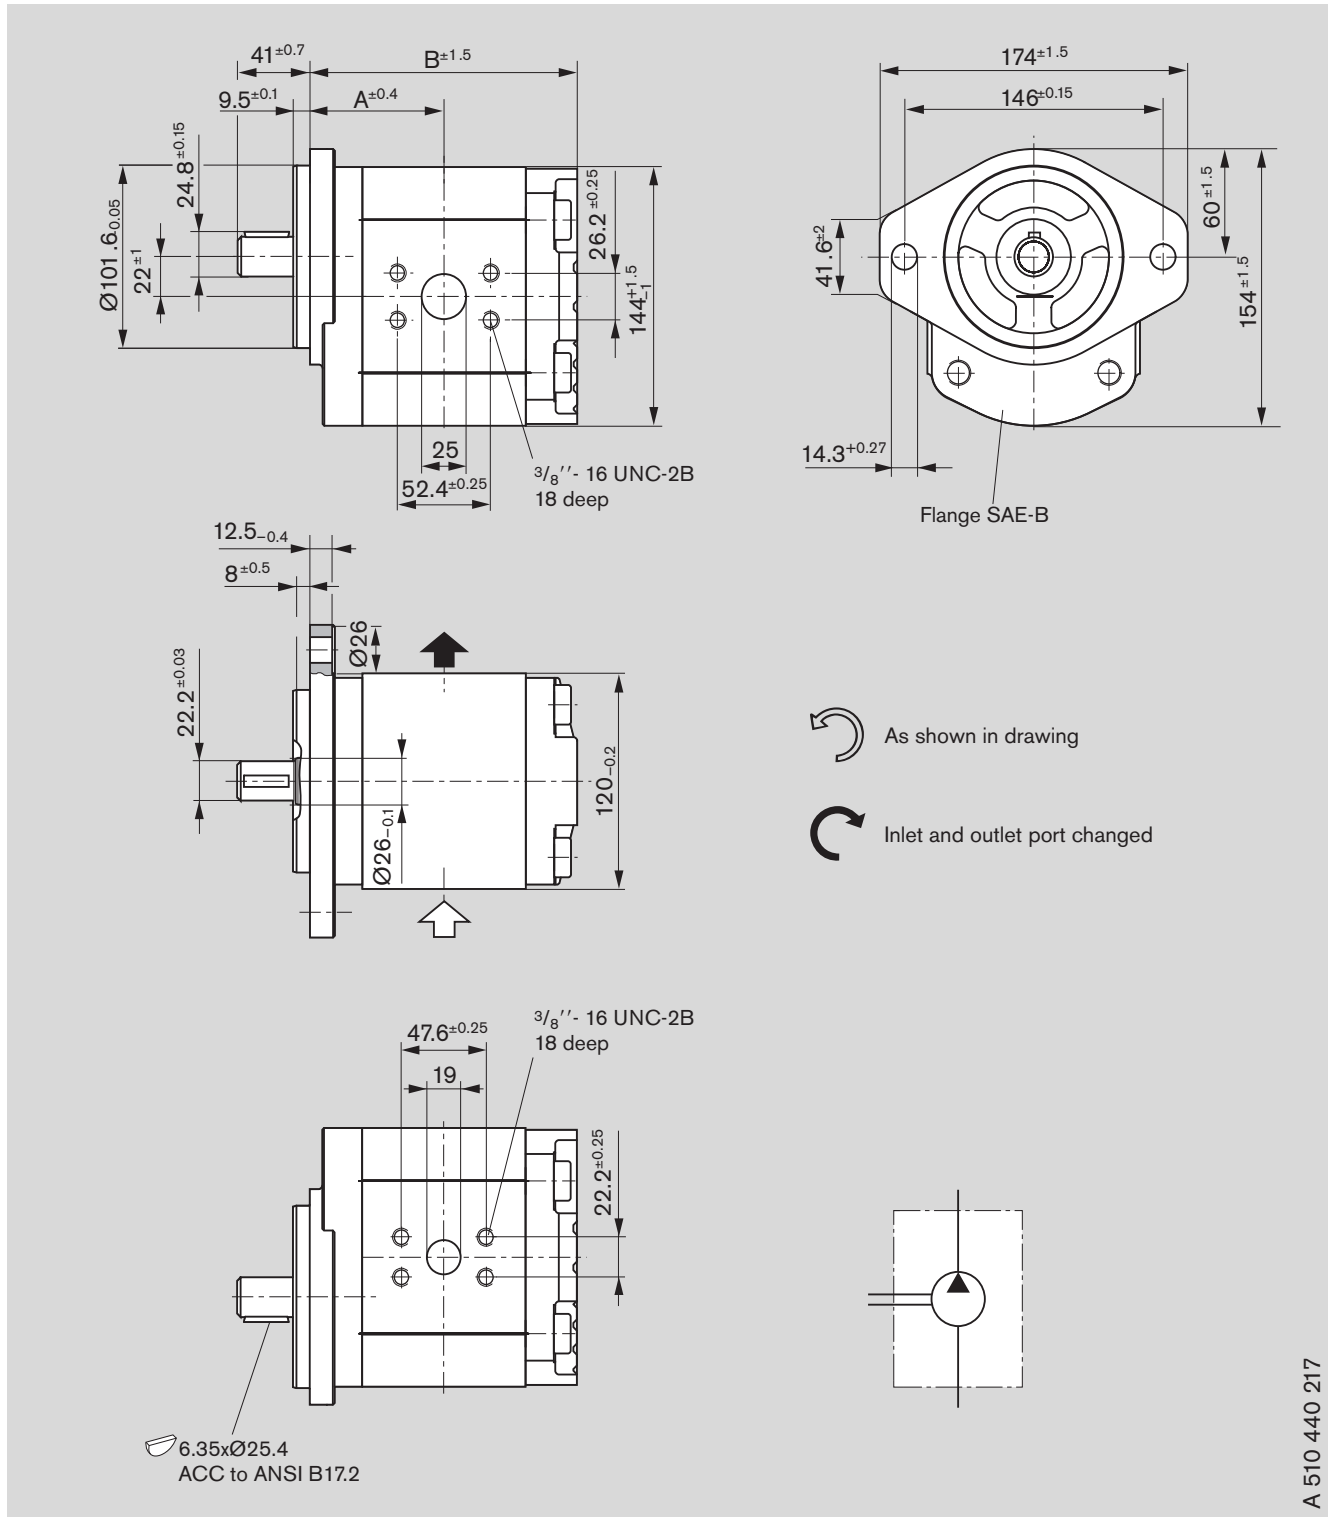

## Standard range



A 510 440 217


**Ordering code:**

**AZPG - 22 -    L Q C 40 M B**

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]	
	 L	 R			A	B
22.5	<b>9 510 490 091</b>		250	3000	66.4	130.3
25	<b>9 510 490 092</b>		250	3000	67.4	132.3
28	<b>9 510 490 093</b>		250	3000	68.7	134.8
32	<b>9 510 490 094</b>		250	2800	70.3	138.1
36	<b>9 510 490 095</b>		250	2800	71.9	141.5



# Dimensions
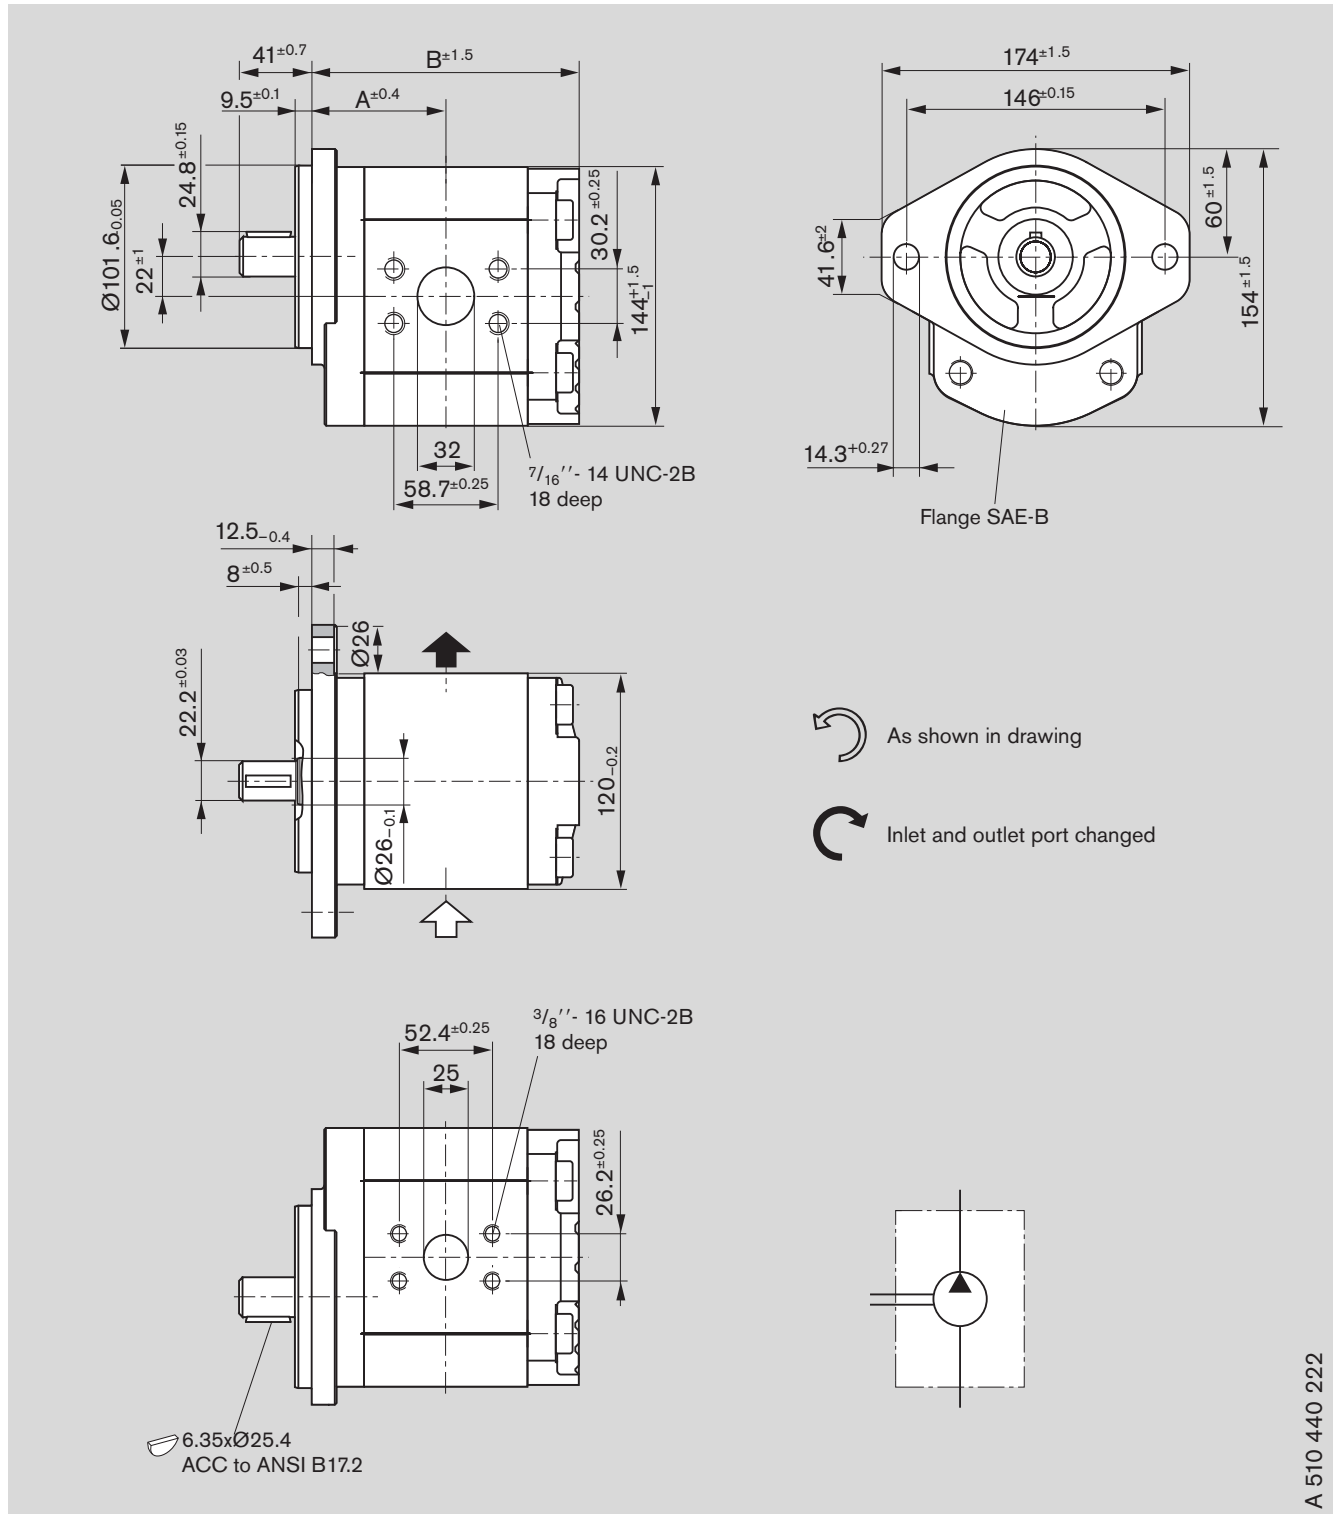
## Standard range



**Ordering code:**


**AZPG - 22 -    L Q C 40 M B**

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]	
	 L	 R			A	B
40	<b>9 510 490 096</b>		250	2800	73.6	144.8
45	<b>9 510 490 097</b>		250	2600	75.6	148.8
50	<b>9 510 490 098</b>		220	2600	77.7	153.0

A 510 440 222

# Dimensions

## Standard range

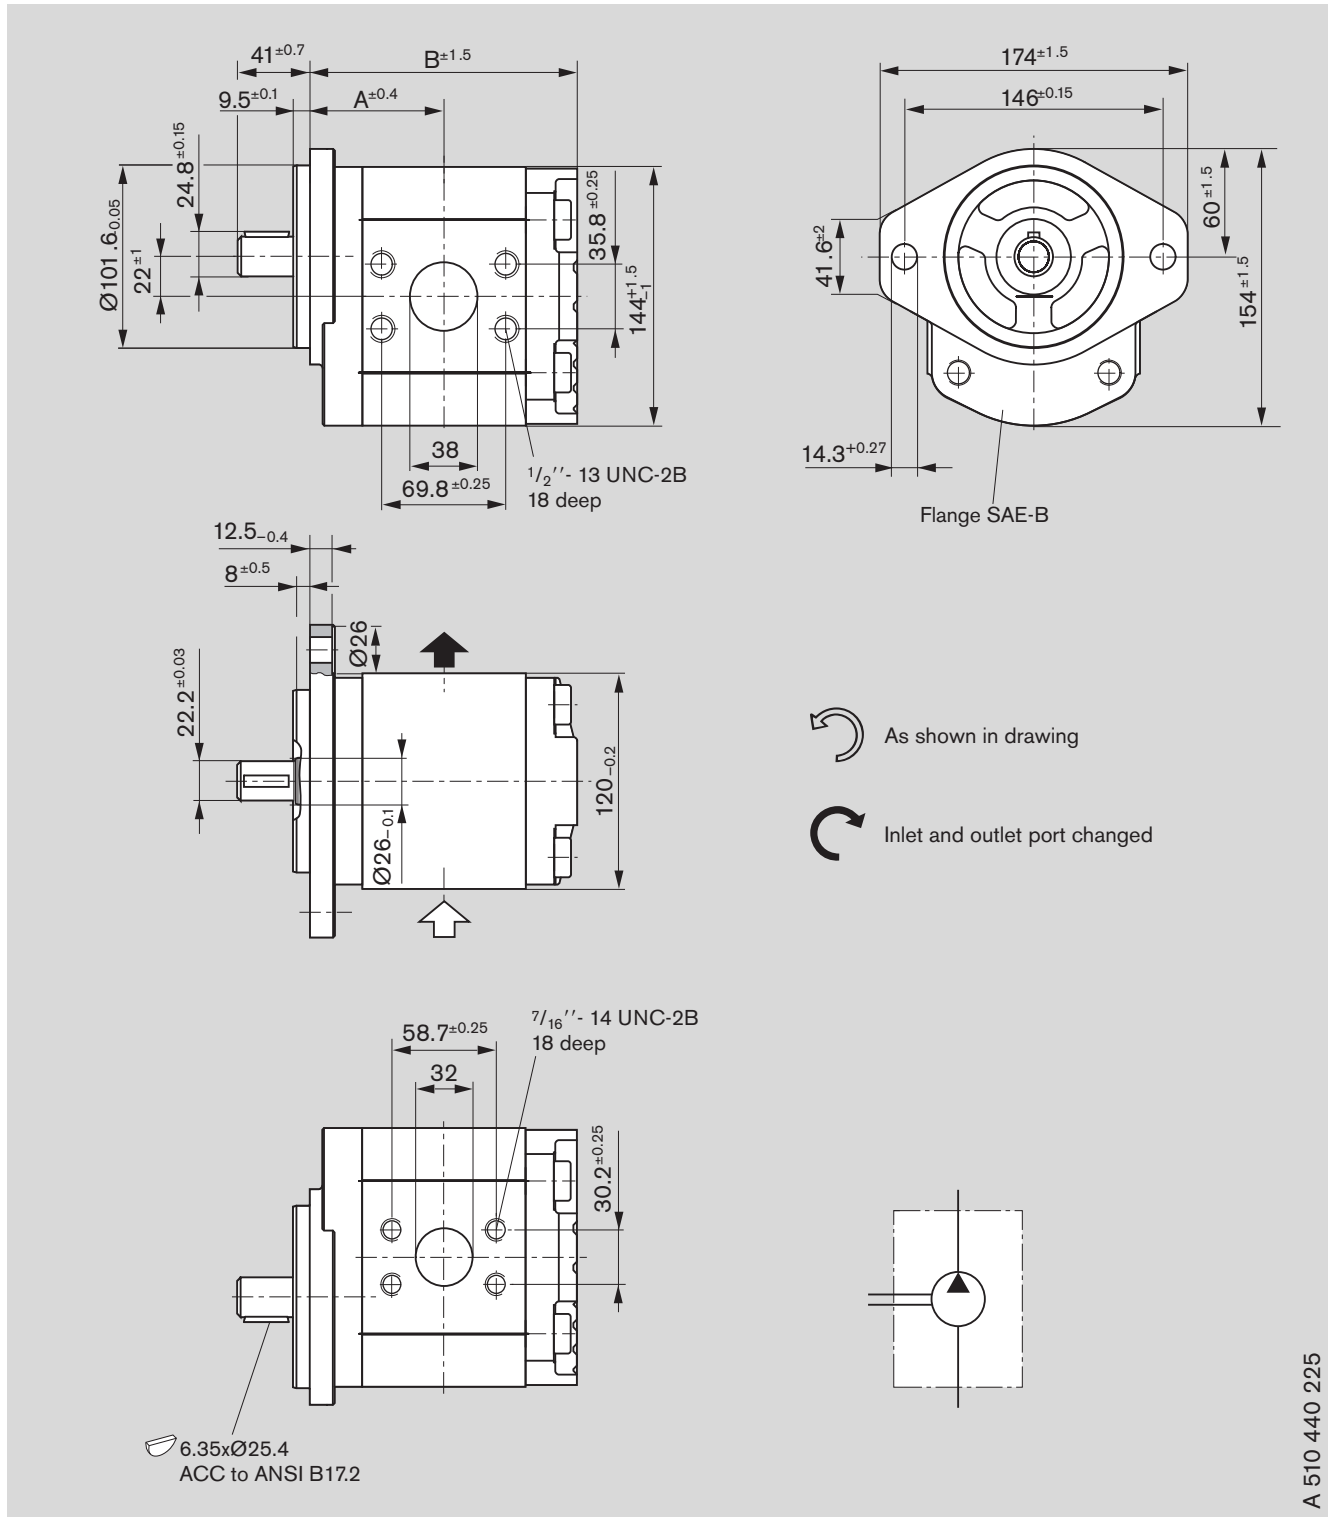

A 510 440 225


**Ordering code:**

**AZPG - 22 -    L Q C 40 M B**

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]	
	L	R			A	B
56	<b>9 510 490 099</b>		195	2300	80.2	157.9
63	<b>9 510 490 100</b>		170	2300	83.1	163.8

# Dimensions

## Standard range

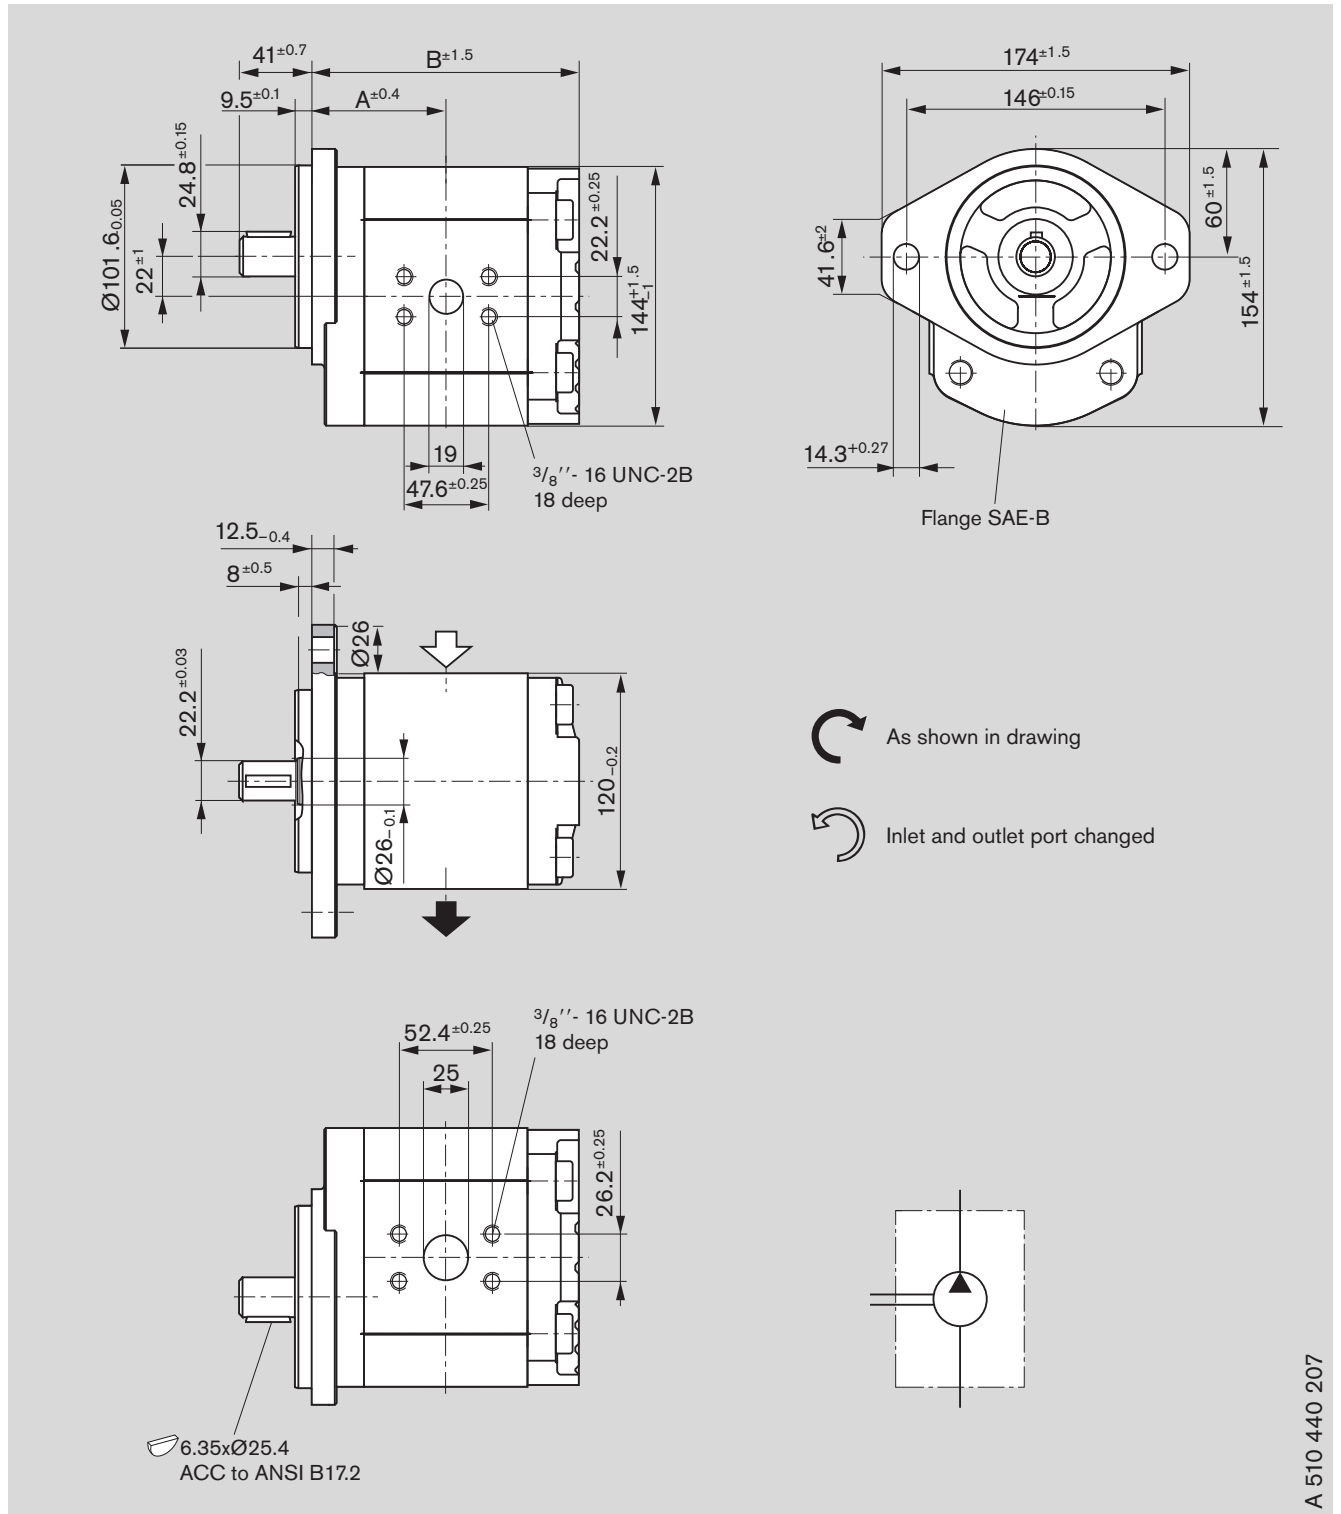

**Ordering code:**


**AZPG - 22 -    R Q C 40 M B**

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]	
	L	R			A	B
22.5		<b>9 510 490 081</b>	250	3000	66.4	130.3
25		<b>9 510 490 082</b>	250	3000	67.4	132.3
28		<b>9 510 490 083</b>	250	3000	68.7	134.8
32		<b>9 510 490 084</b>	250	2800	70.3	138.1
36		<b>9 510 490 085</b>	250	2800	71.9	141.5

A 510 440 207

# Dimensions

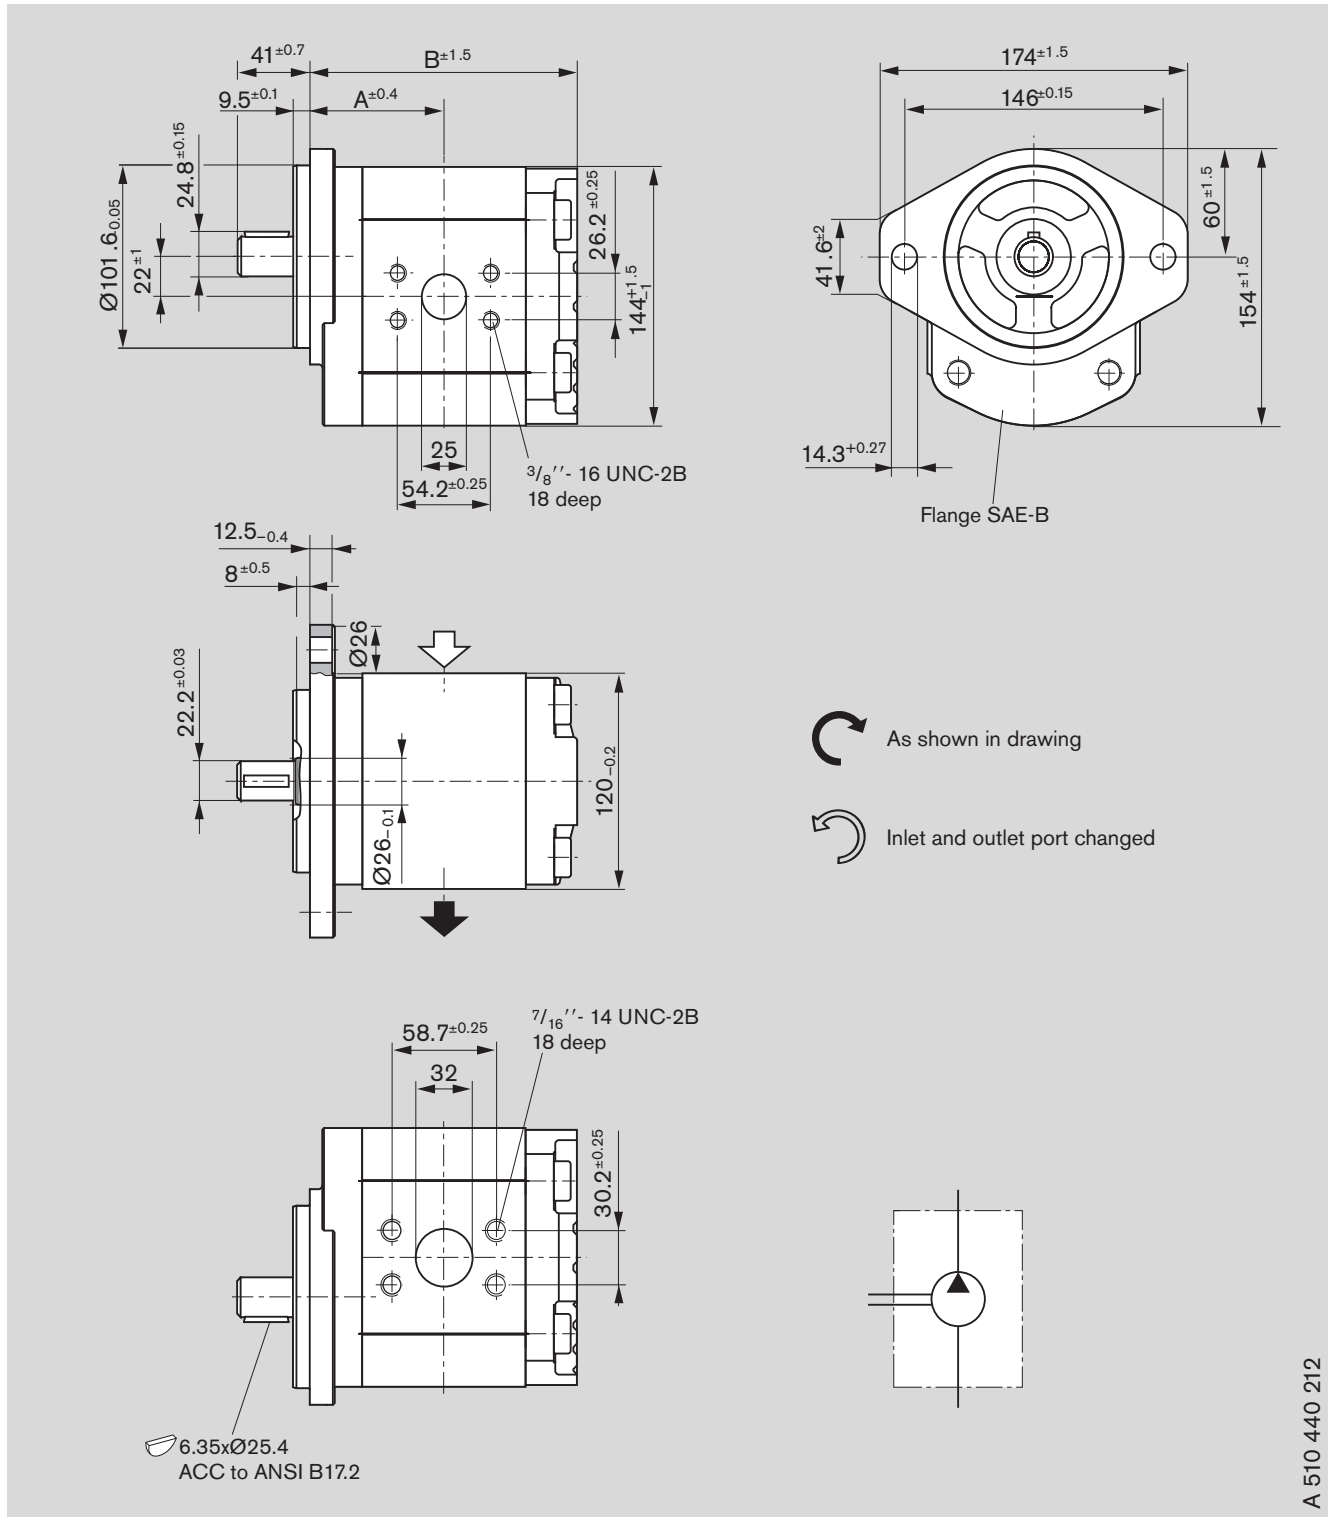

## Standard range



A 510 440 212

### Ordering code:


AZPG - 22 -    R Q C 40 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]	
	 L	 R			A	B
40		9 510 490 086	250	2800	73.6	144.8
45		9 510 490 087	250	2600	75.6	148.8
50		9 510 490 088	220	2600	77.7	153.0





# Dimensions
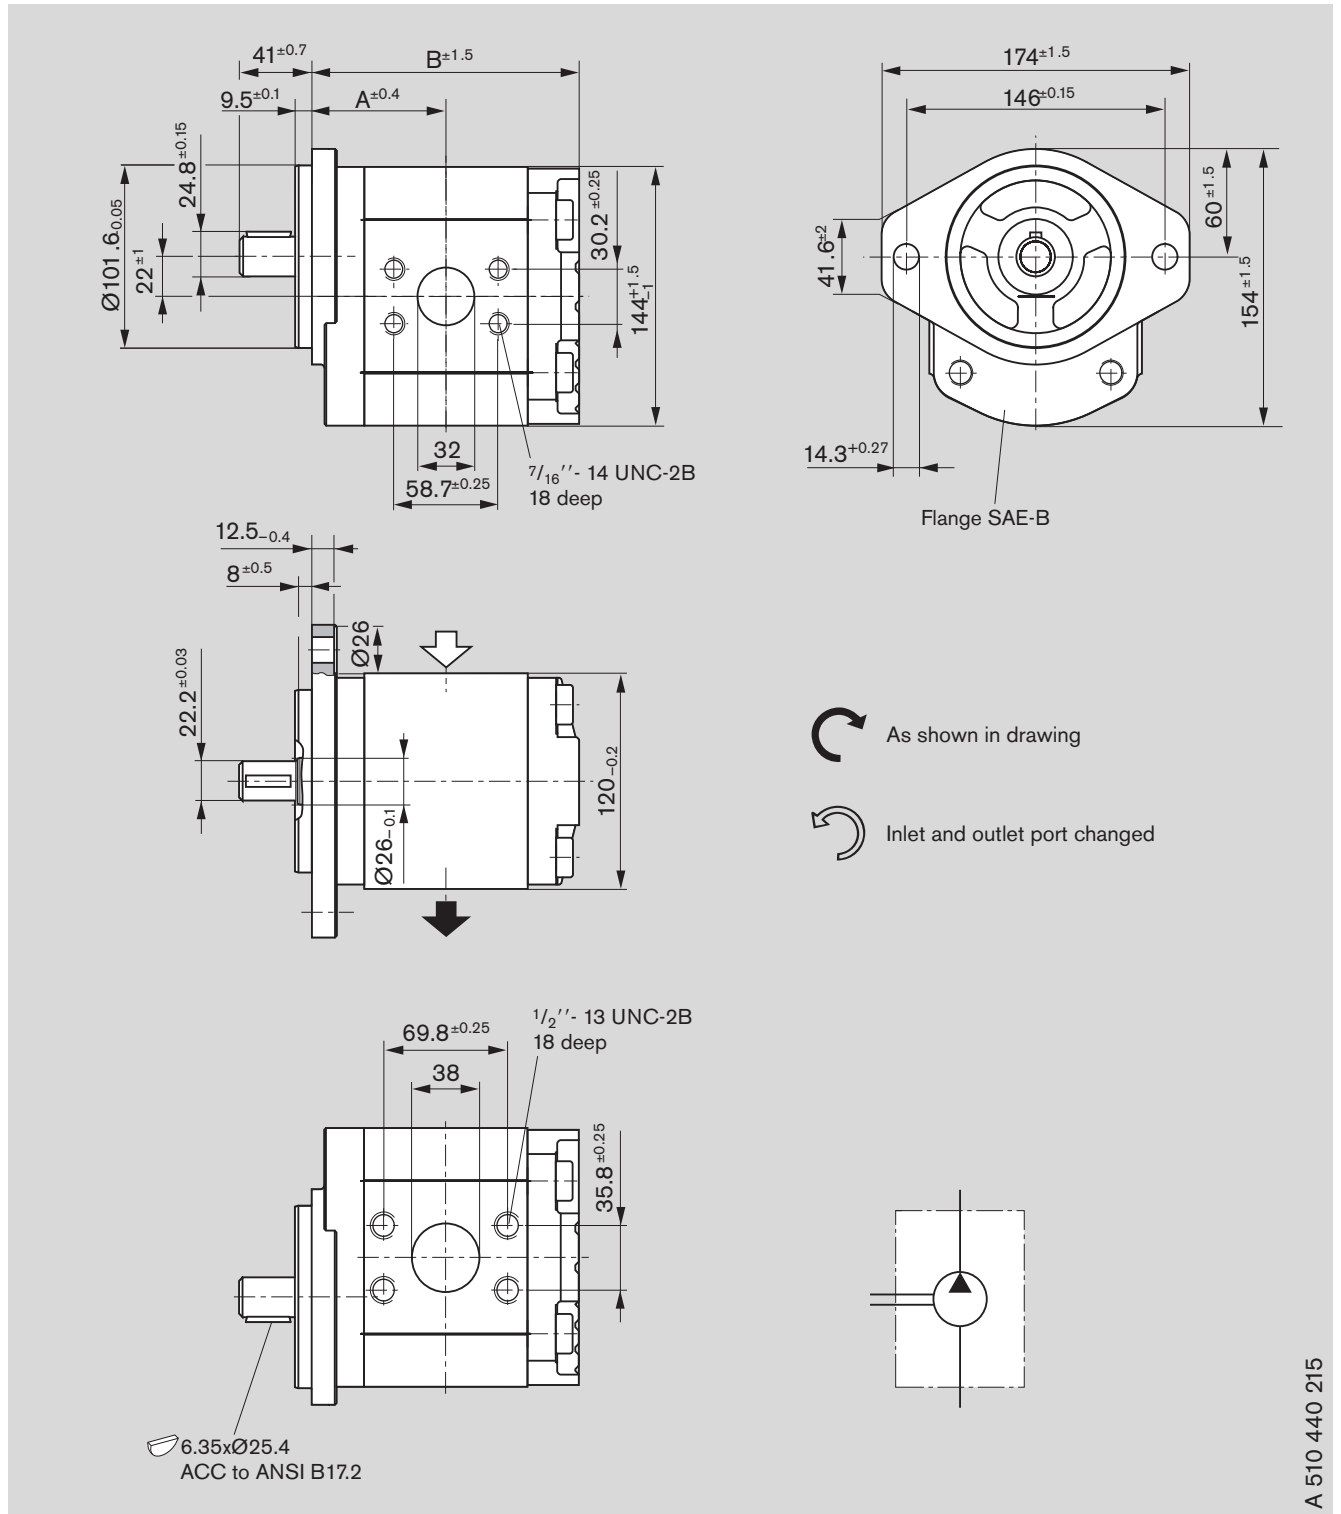
## Standard range




**Ordering code:**

**AZPG - 22 -    R Q C 40 M B**

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm]	
	 L	 R			A	B
56		<b>9 510 490 089</b>	195	2300	80.2	157.9
63		<b>9 510 490 090</b>	170	2300	83.1	163.8

# Dimensions

## Standard range

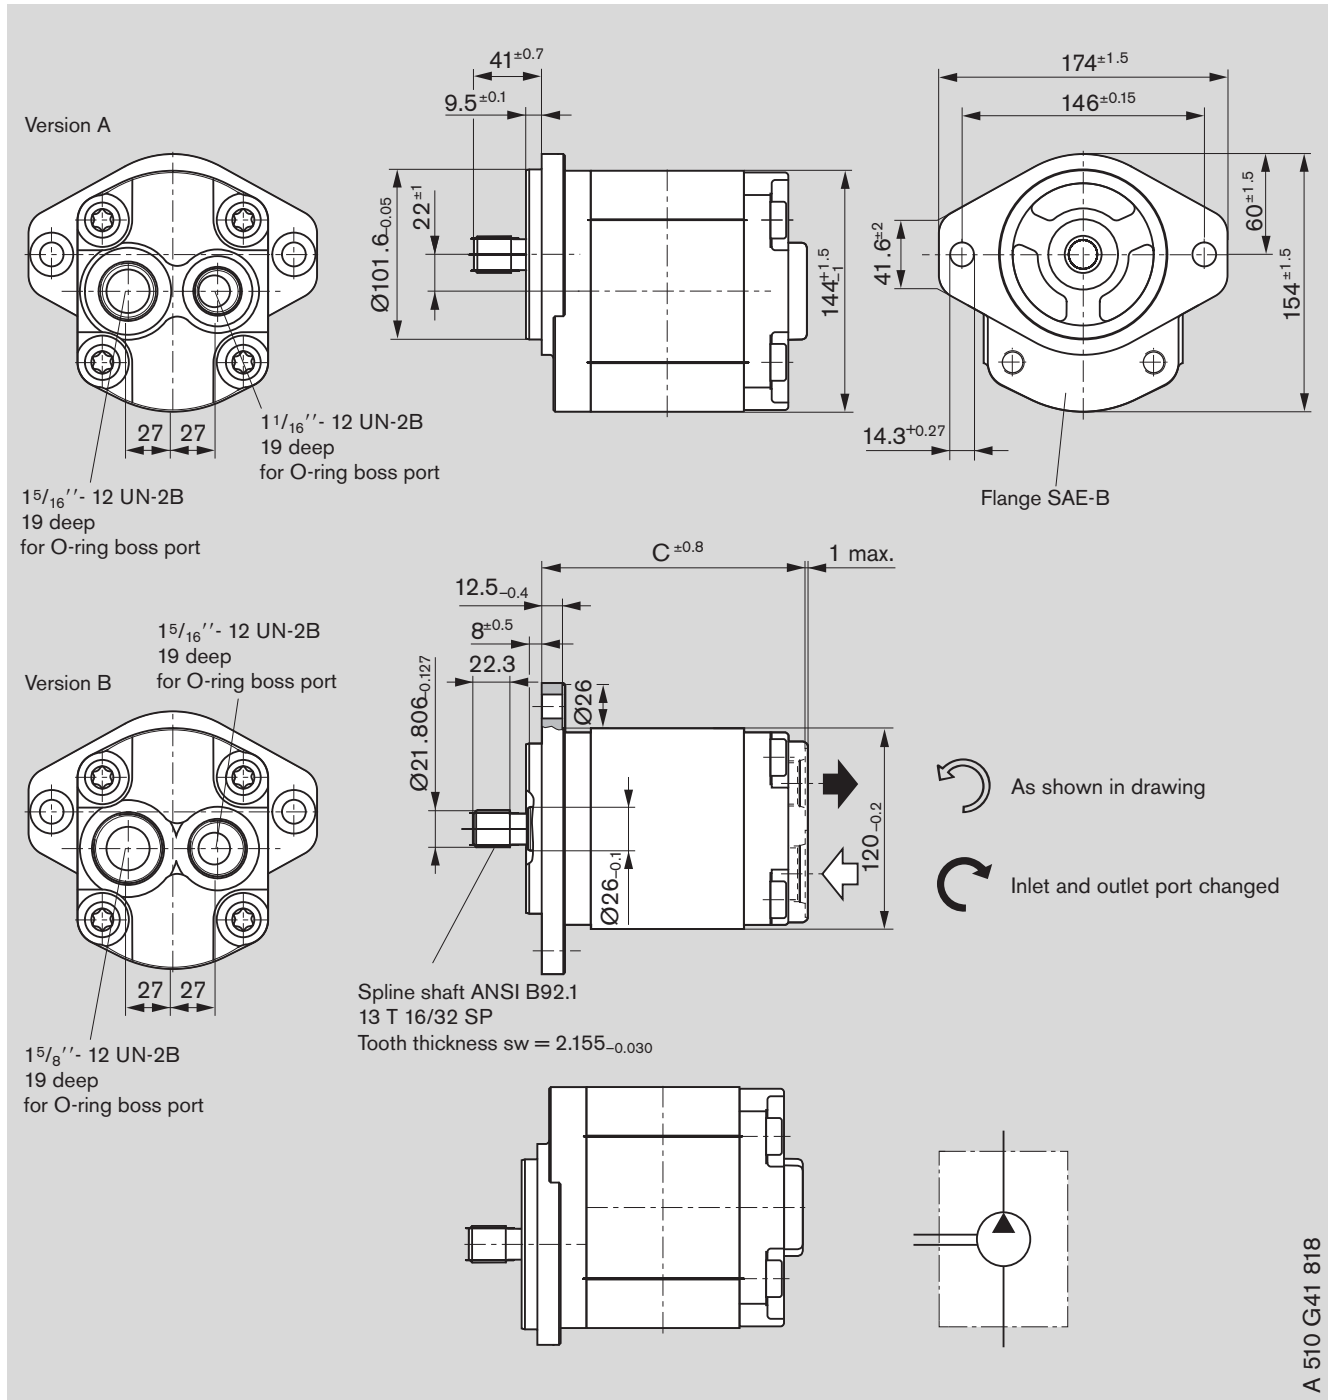


**Ordering code:**

**AZPG - 22 - □ □ □ L D C 12 M A**

Displacement [cm <sup>3</sup> /rev]	Ordering-No. 	Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm] C	Version
22.5	9 510 490 071	250	3000	141.2	A
25	9 510 490 072	250	3000	143.2	A
28	9 510 490 073	250	3000	145.7	A
32	9 510 490 074	250	2800	149.0	B
36	9 510 490 075	250	2800	152.4	B
40	9 510 490 076	250	2800	155.6	B
45	9 510 490 077	250	2600	159.7	B
50	9 510 490 078	220	2600	163.9	B
56	9 510 490 079	195	2300	169.8	B
63	9 510 490 080	170	2300	174.6	B

# Dimensions

## Standard range

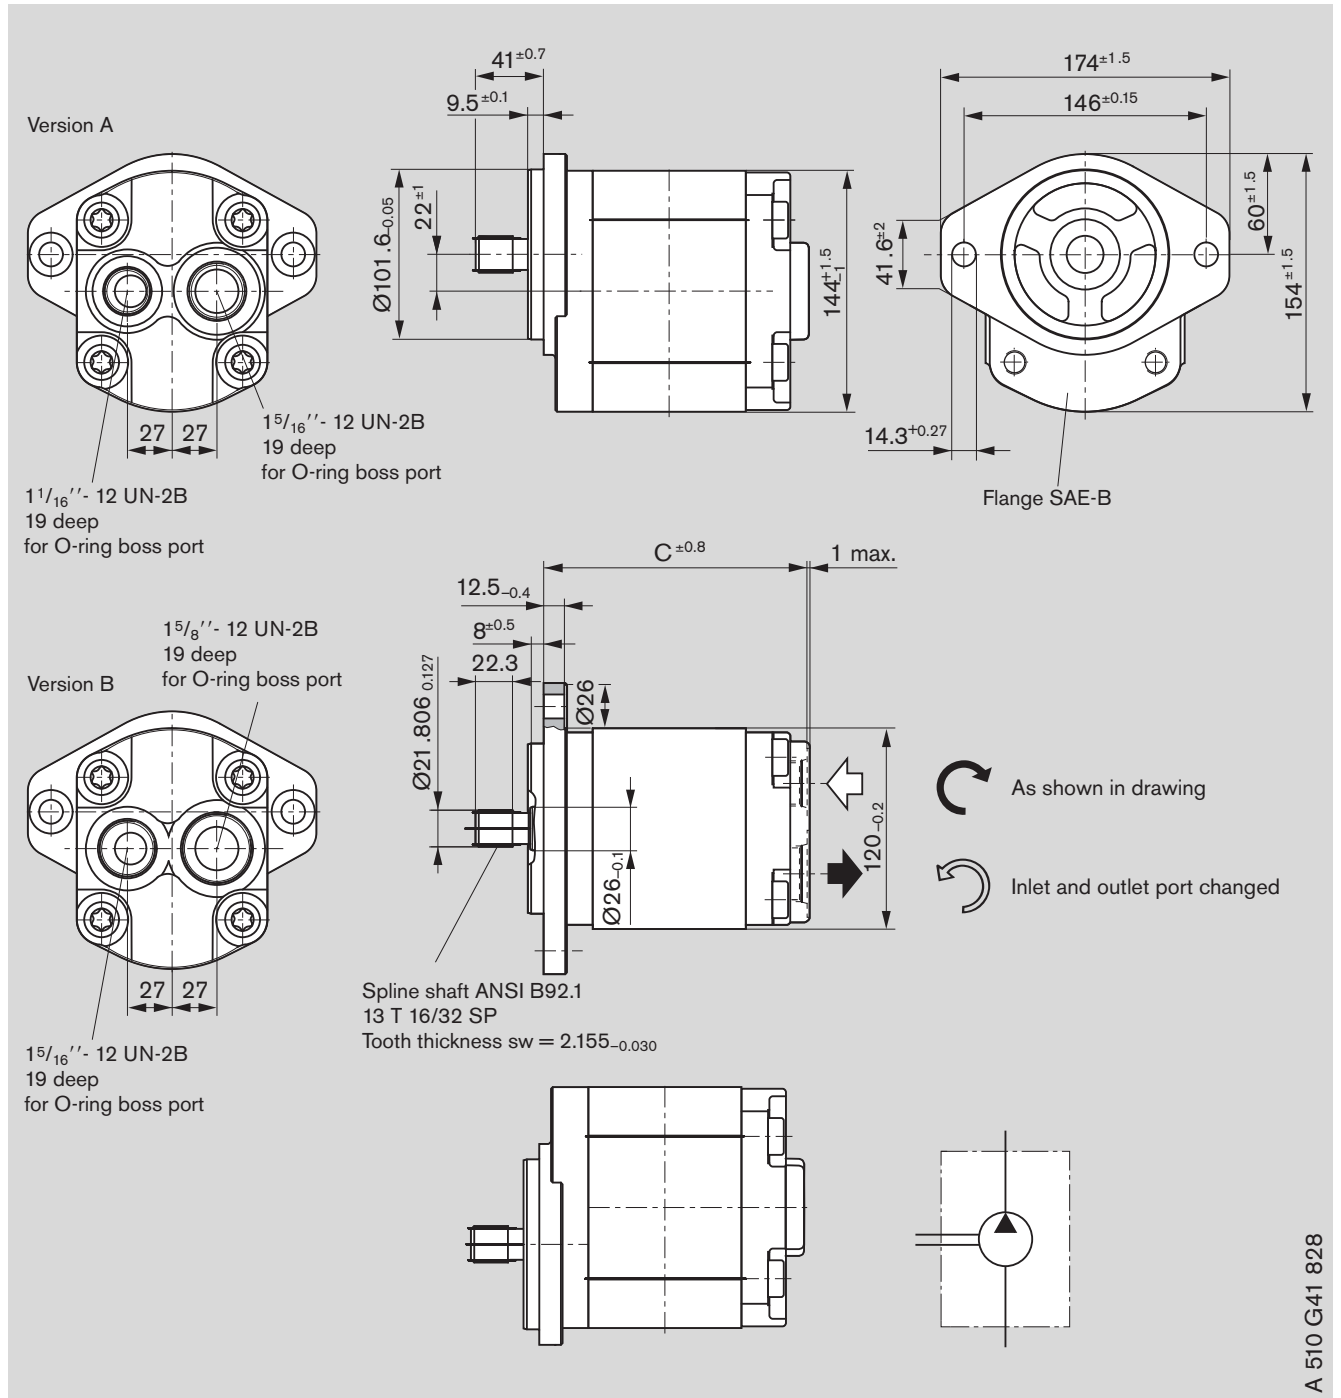

**Ordering code:**


**AZPG - 22 -    R D C 12 M A**

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	Dimension [mm] C	Version
22.5		<b>9 510 490 061</b>	250	3000	141.2	A
25		<b>9 510 490 062</b>	250	3000	143.2	A
28		<b>9 510 490 063</b>	250	3000	145.7	A
32		<b>9 510 490 064</b>	250	2800	149.0	B
36		<b>9 510 490 065</b>	250	2800	152.4	B
40		<b>9 510 490 066</b>	250	2800	155.6	B
45		<b>9 510 490 067</b>	250	2600	159.7	B
50		<b>9 510 490 068</b>	220	2600	163.9	B
56		<b>9 510 490 069</b>	195	2300	169.8	B
63		<b>9 510 490 070</b>	170	2300	174.6	B

A 510 G41 828

# Dimensions

## Standard range

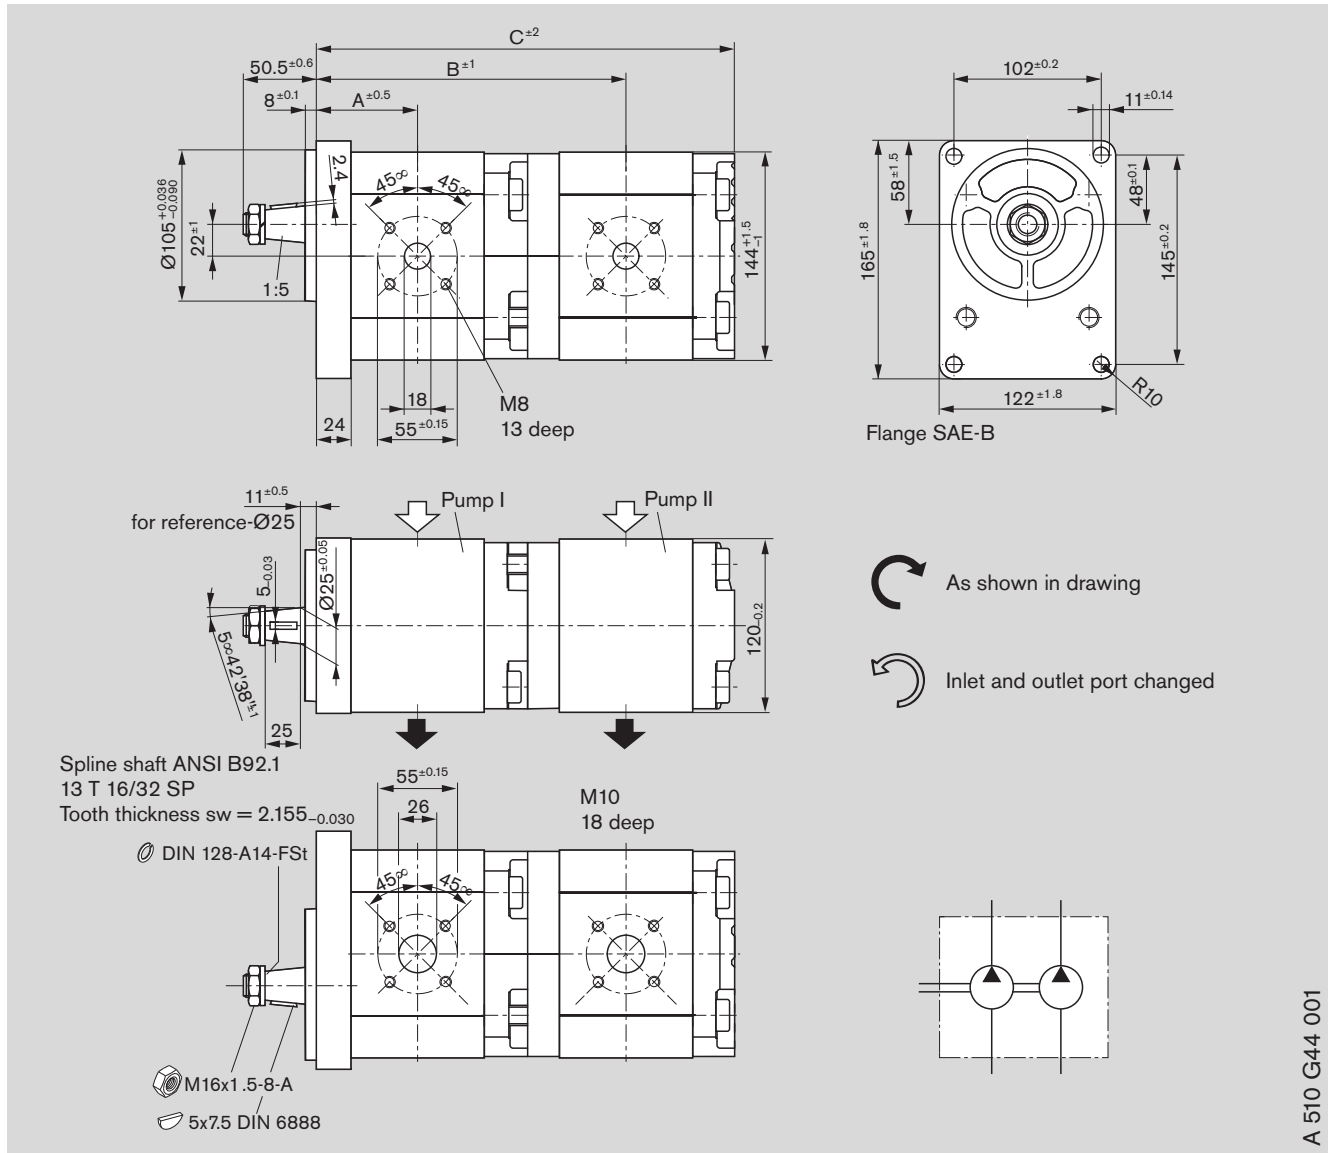

A 510 G44 001


### Ordering code:

AZPGG - 22 - □□□ / □□□ □ C B 20 20 M B

Displacement [cm <sup>3</sup> /rev]		Ordering-No.		Max. operating pressure [bar]		Max. rotation speed [rpm]	Dimension [mm]		
P <sub>I</sub>	P <sub>II</sub>	L	R	P <sub>I</sub>	P <sub>II</sub>		A	B	C
22.5	22.5		0 510 765 115	280	280	3000	60.9	186.4	250.4
22.5	22.5	0 510 765 430		280	280	3000	60.9	186.4	250.4
32	22.5		0 510 767 079	280	280	2800	64.8	194.2	258.2
32	22.5	0 510 767 337		280	280	2800	64.8	194.2	258.2
32	32		0 510 767 078	280	230	2800	64.8	198.1	266.0
32	32	0 510 767 336		280	230	2800	64.8	198.1	266.0
40	22.5		0 510 768 051	260	280	2800	68.1	200.9	264.8
40	22.5	0 510 768 332		260	280	2800	68.1	200.9	264.8
40	32		0 510 768 050	230	230	2800	68.1	204.8	272.6
40	32	0 510 768 331		230	230	2800	68.1	204.8	272.6
40	40		0 510 768 049	230	180	2800	68.1	208.1	279.3
40	40	0 510 768 330		230	180	2800	68.1	208.1	279.3
45	22.5		0 510 769 033	230	280	2600	70.1	204.9	268.9
45	32		0 510 769 032	200	230	2600	70.1	208.9	276.7
45	45	0 510 769 325		200	160	2600	70.1	214.2	287.4
45	45		0 510 769 030	200	160	2600	70.1	214.2	287.4
45	40		0 510 769 031	200	180	2600	70.1	212.2	283.3
56	40		0 510 865 013	170	180	2300	74.7	221.3	292.4

# Dimensions

## Standard range

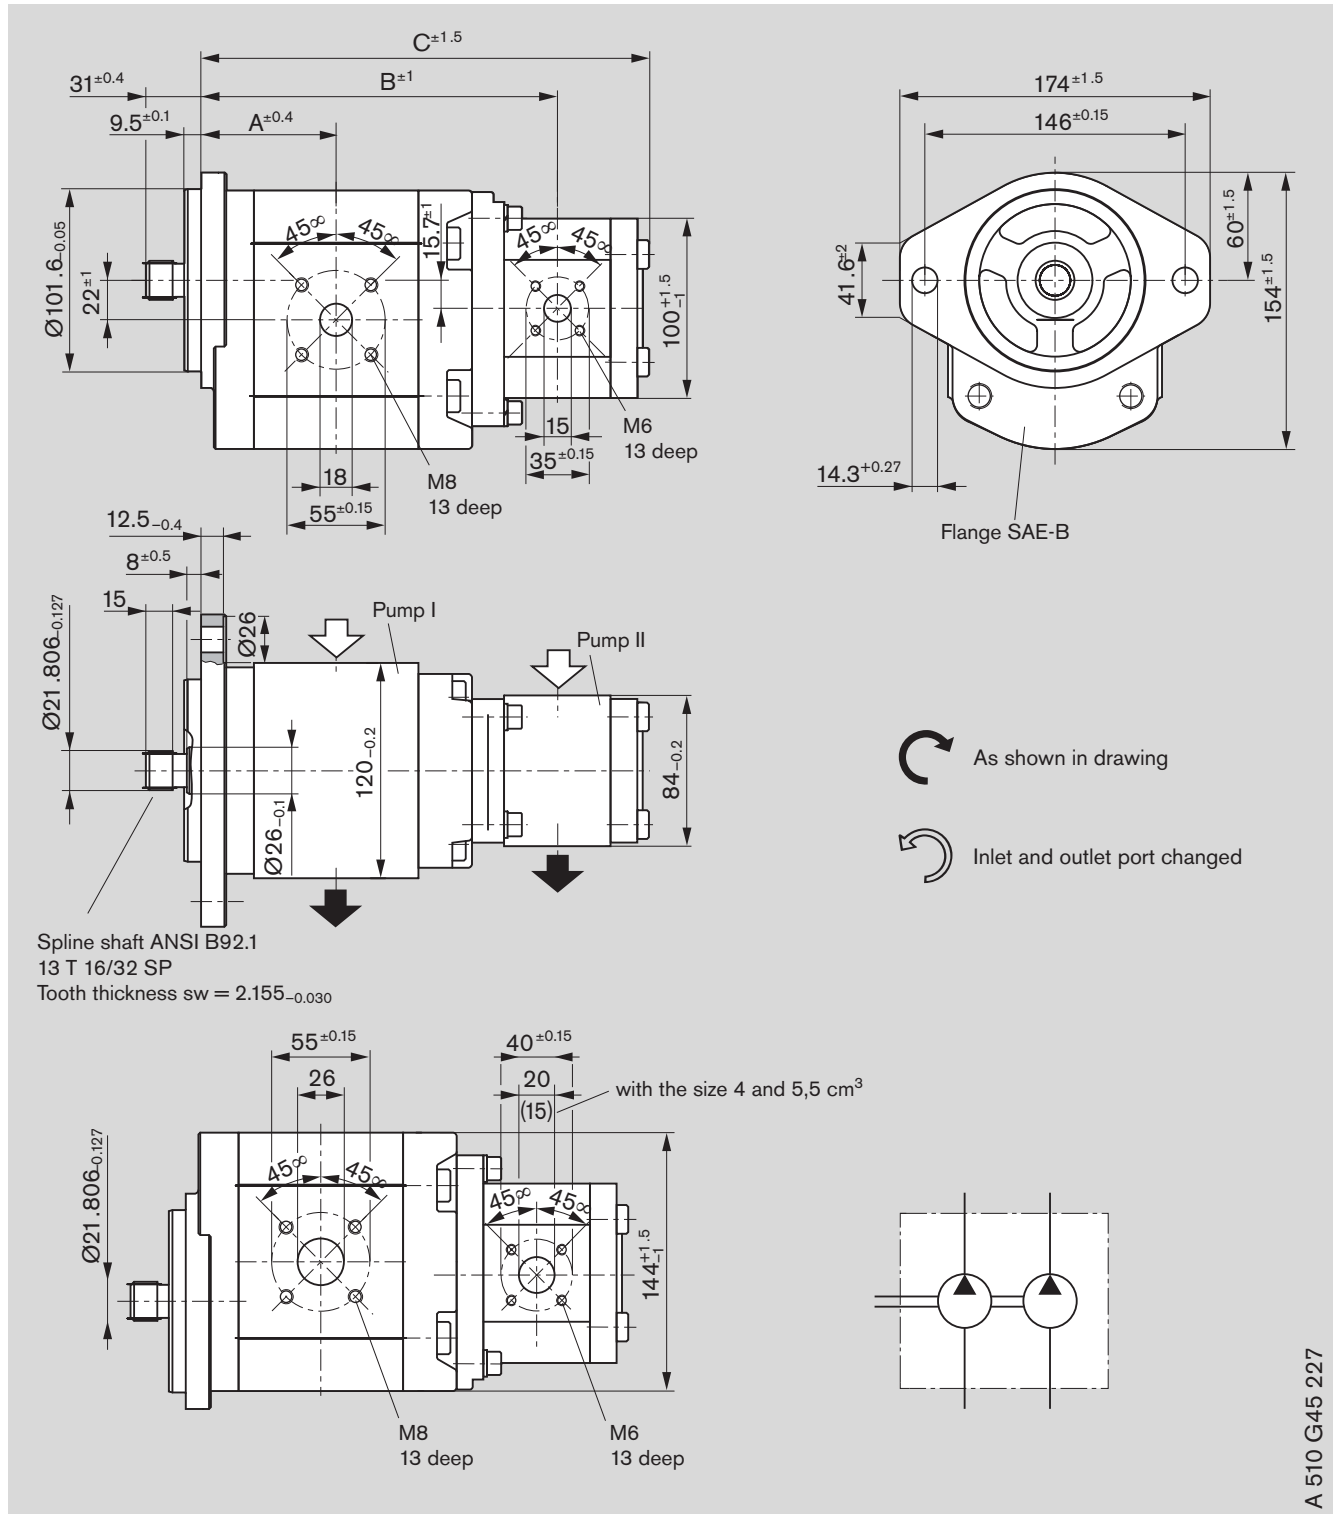

### Ordering code:

AZPGF - 22 - □ □ □ □ / □ □ □ □ □ D C 20 20 M B

Displacement [cm <sup>3</sup> /rev]		Ordering-No.		Max. operating pressure [bar]		Max. rotation speed [rpm]	Dimension [mm]		
P <sub>I</sub>	P <sub>II</sub>	L	R	P <sub>I</sub>	P <sub>II</sub>		A	B	C
22.5	16		<b>0 510 765 118</b>	250	230	3000	66.4	181.2	236.2
32	16		<b>0 510 767 067</b>	250	230	2800	70.3	189.0	244.0
56	16	<b>0 510 665 320</b>		200	230	2300	80.2	208.8	263.8
56	19	<b>0 510 865 319</b>		200	190	2300	80.2	208.8	268.8
56	22.5		<b>0 510 865 016</b>	200	160	2300	80.2	216.4	274.2






# Fittings

Fittings can be used for rectangular flange **20** see page 7

Gear pump flange, 90° angle

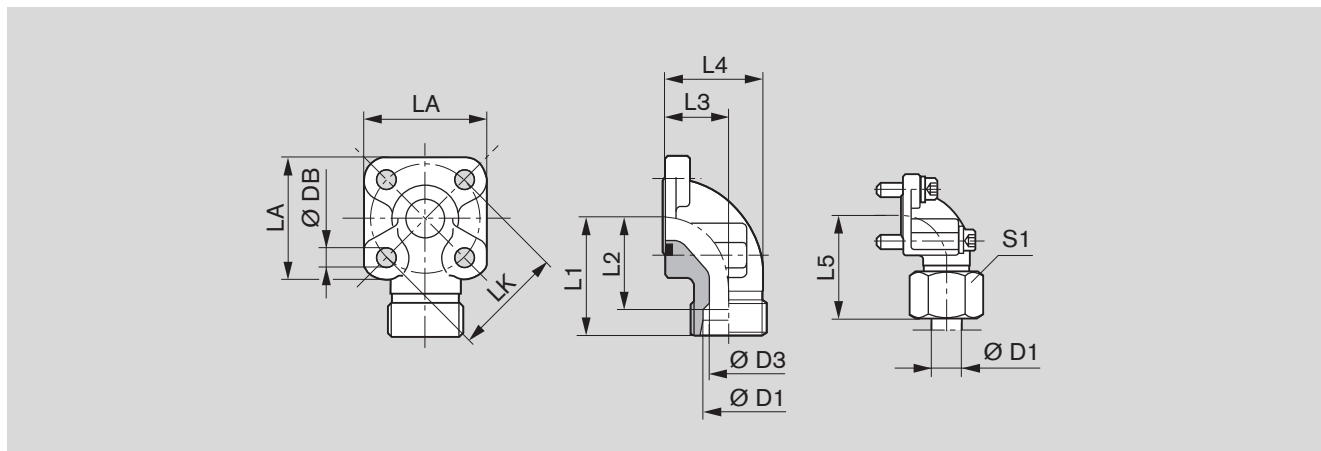

LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws 2x	2x	Seal ring	Mass kg	Part number	<i>p</i> (bar)
55	20S	17	45	34.5	24.0	40.0	56.0	58	36	8.4	M8x25	M8x50	33x2.5	0.44	<b>1 515 702 004</b>	250
55	30S	26	49	35.5	32.0	50.0	62.0	58	50	8.4	M8x25	M8x50	33x2.5	0.50	<b>1 545 719 006</b>	250
55	35L	31	49	38.5	32.0	51.5	62.0	58	50	8.4	M8x25	M8x60	32x2.5	0.47	<b>1 515 702 005</b>	100
55	42L	38	49	38.0	40.0	64.5	61.0	58	60	8.4	M8x25	M8x70	32x2.5	0.60	<b>1 515 702 019</b>	100

Complete fittings with seal ring, metric screw set, nuts and olive.

## Note


The permissible tightening torques can be found in our publication:

“General operating instructions for external gear units”

RE 07 012-B1.



# Spare parts

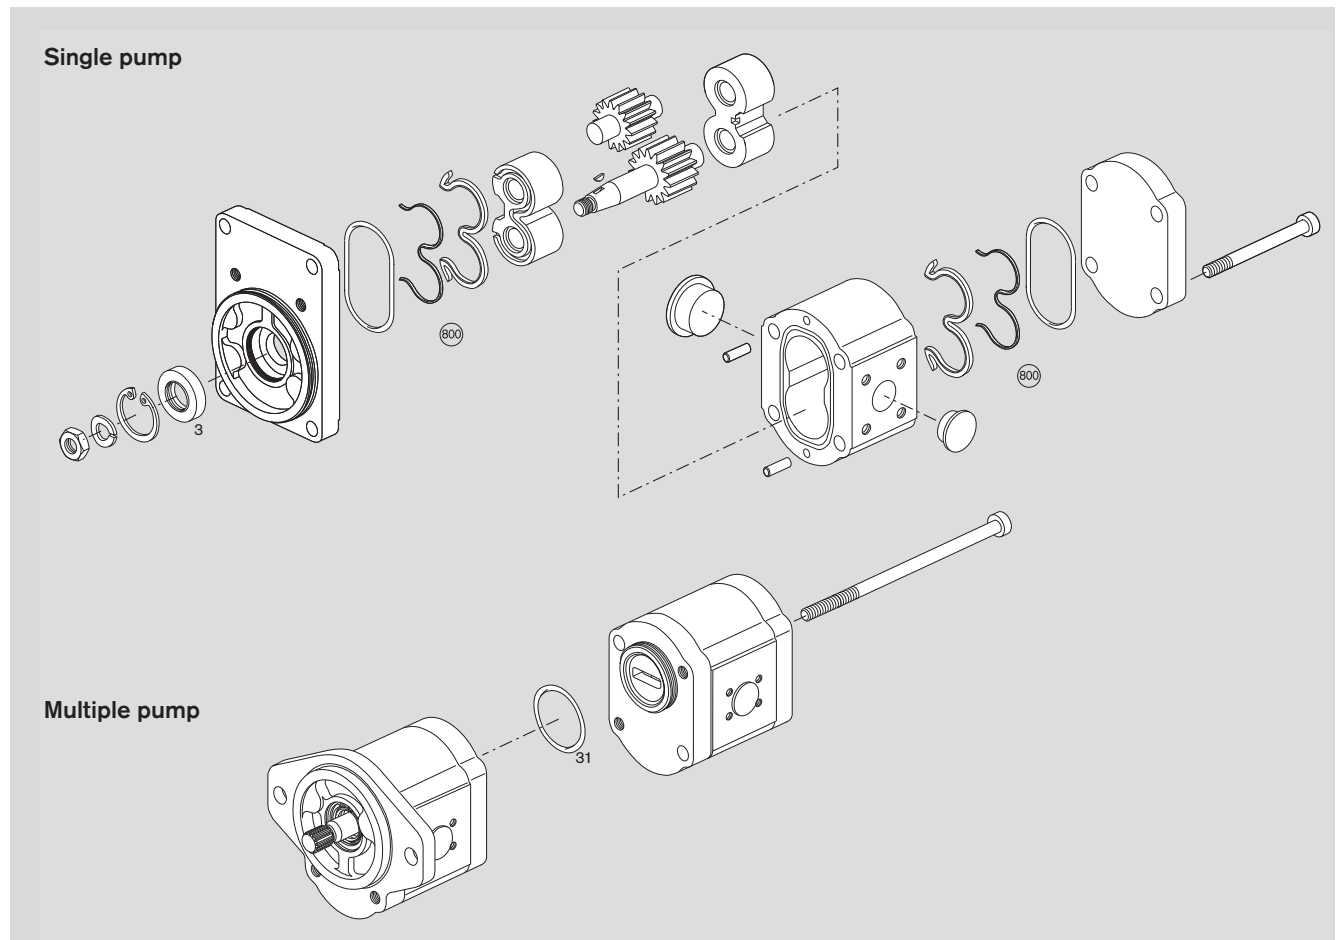

Page	Ordering code	Seal kit „G“ NBR	Shaft seal ring Pos. 3	Qty.	Dimension	Material
18	AZPG – 22 – □□□□ □ C B 20 M B	1517010231	1510283072	1	42x26x7	NBR
19	AZPG – 22 – □□□□ □ H O 30 M B	1517010231	1510283072	1	42x26x7	NBR
20, 21, 22	AZPG – 22 – □□□□ □ D C 07 K B	1517010231	1510283069	1	42x26x7	FKM
23, 24, 25	AZPG – 22 – □□□□ □ Q C 12 M B – S 06 62	1517010231	1510283072	1	42x26x7	NBR
26, 27, 28	AZPG – 22 – □□□□ □ X 07 K B – S 03 03	1517010231	1510283069	1	42x26x7	FKM
29, 30, 31	AZPG – 22 – □□□□ □ D C 07 K B – S 00 39	1517010231	1510283069	1	42x26x7	FKM
32, 33, 34, 35, 36, 37	AZPG – 22 – □□□□ □ D C 12 M B	1517010231	1510283072	1	42x26x7	NBR
38, 39	AZPG – 22 – □□□□ □ Q C 12 M A	1517010234	1510283072	1	42x26x7	NBR
40, 41, 42, 43, 44, 45	AZPG – 22 – □□□□ □ D C 40 M B	1517010231	1510283072	1	42x26x7	NBR
46, 47, 48, 49, 50, 51						
52, 53	AZPG – 22 – □□□□ □ D C 12 M A	1517010234	1510283072		42x26x7	NBR
54	AZPG – 22 – □□□□ / □□□□ □ C B 20 20 M B					
	Pump section 1	1517010231	1510283072	1	42x26x7	NBR
			1510283075	1	42x26x7	FKM
	Pump section 2	1517010208				
55	AZPG – 22 – □□□□ / □□□□ □ D C 20 20 K B					
	Pump section 1	1517010231	1510283069	2	42x26x7	FKM
	Pump section 2	1517010208				
56	AZPG – 22 – □□□□ / □□□□ □ D C 07 07 M B					
	Pump section 1	1517010231	1510283072	1	42x26x7	NBR
			1510283075	1	42x26x7	FKM
	Pump section 2	1517010231				
57	AZPG – 22 – □□□□ / □□□□ □ D C 20 20 M B					
	Pump section 1	1517010231	1510283069	2	42x26x7	FKM
	Pump section 2	1517010208				

NBR = Perbunan®

FKM = Viton®

**For multiple pumps**

Seal ring Item 31 NBR	1 900 210 145
-----------------------------	---------------

# Notes for commissioning

## Filter recommendation

The major share of premature failures in external gear pumps is caused by contaminated hydraulic fluid.

As a warranty cannot be issued for dirt-specific wear, we recommend filtration compliant with cleanliness level 20/18/15 ISO 4406, which reduces the degree of contamination to a permissible dimension in terms of the size and concentration of dirt particles:

Operating pressure [bar ]	>160	<160
Contamination class ISO 4406	18/15	19/16
To be reached with $\beta_x = 75$	20	25

We recommend that a full-flow filter always be used. Basic contamination of the hydraulic fluid used may not exceed class 20/18/15 according to ISO 4406. Experience has shown that new fluid quite often lies above this value. In such instances a filling device with special filter should be used.

## General

- The pumps supplied by us have been checked for function and performance. No modifications of any kind may be made to the pumps; any such changes will render the warranty null and void!
- Pump may only be operated in compliance with permitted data (see pages 14 – 17).

## Project planning notes

Comprehensive notes and suggestions are available in Hydraulics Trainer, Volume 3 RE 00 281, "Project planning notes and design of hydraulic systems". Where external gear pumps are used we recommend that the following note be adhered to.

## Technical data

All stated technical data is dependent on production tolerances and is valid for specific marginal conditions.

Note that, as a consequence, scattering is possible, and at certain marginal conditions (e.g. viscosity) **the technical data may change.**

## Characteristics

When designing the external gear pump, note the maximum possible service data based on the characteristics displayed on pages 9 – 11.

Additional information on the proper handling of hydraulic products from Bosch Rexroth is available in our document: "General product information for hydraulic products" RE 07 008.

## Contained in delivery

The components with characteristics as described under ordering code and device measurements, pages 18 – 57, are contained in delivery.

**You can find further information in our publication: "General Operating Instructions for External Gear Units" RE 07 012-B1.**

# Ordering-No.


Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page
0 510 665 320	55	0 510 767 066	57	0 510 825 321	21
0 510 725 135	29	0 510 767 067	55	0 510 825 322	22
0 510 725 136	29	0 510 767 078	54	0 510 825 323	22
0 510 725 147	26	0 510 767 079	54	0 510 825 324	18
0 510 725 157	20	0 510 767 324	57	0 510 825 325	18
0 510 725 158	20	0 510 767 328	57	0 510 825 326	18
0 510 725 159	20	0 510 767 330	57	0 510 825 327	19
0 510 725 160	21	0 510 767 336	54	0 510 825 328	19
0 510 725 161	21	0 510 767 337	54	0 510 825 329	19
0 510 725 162	21	0 510 768 043	57	0 510 865 013	54
0 510 725 163	21	0 510 768 049	54	0 510 865 016	55
0 510 725 164	18	0 510 768 050	54	0 510 865 319	55
0 510 725 165	18	0 510 768 051	54	9 510 490 001	32
0 510 725 166	18	0 510 768 330	54	9 510 490 002	32
0 510 725 167	18	0 510 768 331	54	9 510 490 003	32
0 510 725 168	18	0 510 768 332	54	9 510 490 004	33
0 510 725 169	18	0 510 769 022	57	9 510 490 005	33
0 510 725 170	18	0 510 769 023	57	9 510 490 006	33
0 510 725 171	19	0 510 769 030	54	9 510 490 007	33
0 510 725 172	19	0 510 769 031	54	9 510 490 008	34
0 510 725 173	19	0 510 769 032	54	9 510 490 009	34
0 510 725 174	19	0 510 769 033	54	9 510 490 010	34
0 510 725 175	19	0 510 769 318	57	9 510 490 011	32
0 510 725 176	19	0 510 769 319	57	9 510 490 012	32
0 510 725 177	19	0 510 769 321	57	9 510 490 013	32
0 510 725 420	29	0 510 769 325	54	9 510 490 014	33
0 510 725 421	29	0 510 825 011	30	9 510 490 015	33
0 510 725 432	26	0 510 825 012	31	9 510 490 016	33
0 510 725 434	20	0 510 825 013	31	9 510 490 017	33
0 510 725 435	20	0 510 825 014	30	9 510 490 018	34
0 510 725 436	20	0 510 825 015	26	9 510 490 019	34
0 510 725 437	21	0 510 825 016	27	9 510 490 020	34
0 510 725 439	21	0 510 825 017	27	9 510 490 021	35
0 510 725 440	21	0 510 825 018	28	9 510 490 022	35
0 510 725 441	18	0 510 825 019	28	9 510 490 023	35
0 510 725 442	18	0 510 825 021	21	9 510 490 024	36
0 510 725 443	18	0 510 825 022	22	9 510 490 025	36
0 510 725 444	18	0 510 825 023	22	9 510 490 026	36
0 510 725 445	18	0 510 825 024	18	9 510 490 027	36
0 510 725 446	18	0 510 825 025	18	9 510 490 028	37
0 510 725 447	18	0 510 825 026	18	9 510 490 029	37
0 510 725 448	19	0 510 825 027	19	9 510 490 030	37
0 510 725 449	19	0 510 825 028	19	9 510 490 034	36
0 510 725 450	19	0 510 825 029	19	9 510 490 035	36
0 510 725 451	19	0 510 825 310	31	9 510 490 037	36
0 510 725 452	19	0 510 825 311	31	9 510 490 038	37
0 510 725 453	19	0 510 825 312	30	9 510 490 039	37
0 510 725 454	19	0 510 825 313	30	9 510 490 040	37
0 510 765 115	54	0 510 825 314	26	9 510 490 041	43
0 510 765 118	55	0 510 825 315	27	9 510 490 042	43
0 510 765 430	54	0 510 825 316	27	9 510 490 043	43
0 510 766 016	56	0 510 825 317	28	9 510 490 044	43
0 510 767 064	57	0 510 825 318	28	9 510 490 045	43

# Ordering-No.


Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page
9 510 490 046	44	9 510 490 078	52	9 510 490 110	38
9 510 490 047	44	9 510 490 079	52	9 510 490 111	39
9 510 490 048	44	9 510 490 080	52	9 510 490 112	39
9 510 490 049	45	9 510 490 081	49	9 510 490 113	39
9 510 490 050	45	9 510 490 082	49	9 510 490 114	39
9 510 490 051	40	9 510 490 083	49	9 510 490 115	39
9 510 490 052	40	9 510 490 084	49	9 510 490 116	39
9 510 490 053	40	9 510 490 085	49	9 510 490 117	39
9 510 490 054	40	9 510 490 086	50	9 510 490 118	39
9 510 490 055	40	9 510 490 087	50	9 510 490 119	39
9 510 490 056	41	9 510 490 088	50	9 510 490 120	39
9 510 490 057	41	9 510 490 089	51	9 510 490 122	23
9 510 490 058	41	9 510 490 090	51	9 510 490 123	23
9 510 490 059	42	9 510 490 091	46	9 510 490 124	23
9 510 490 060	42	9 510 490 092	46	9 510 490 125	24
9 510 490 061	53	9 510 490 093	46	9 510 490 126	24
9 510 490 062	53	9 510 490 094	46	9 510 490 127	24
9 510 490 063	53	9 510 490 095	46	9 510 490 128	24
9 510 490 064	53	9 510 490 096	47	9 510 490 129	25
9 510 490 065	53	9 510 490 097	47	9 510 490 130	25
9 510 490 066	53	9 510 490 098	47	9 510 490 131	25
9 510 490 067	53	9 510 490 099	48	9 510 490 132	23
9 510 490 068	53	9 510 490 100	48	9 510 490 133	23
9 510 490 069	53	9 510 490 101	38	9 510 490 134	23
9 510 490 070	53	9 510 490 102	38	9 510 490 135	24
9 510 490 071	52	9 510 490 103	38	9 510 490 136	24
9 510 490 072	52	9 510 490 104	38	9 510 490 137	24
9 510 490 073	52	9 510 490 105	38	9 510 490 138	24
9 510 490 074	52	9 510 490 106	38	9 510 490 139	25
9 510 490 075	52	9 510 490 107	38	9 510 490 140	25
9 510 490 076	52	9 510 490 108	38	9 510 490 141	25
9 510 490 077	52	9 510 490 109	38		

# The AZ configurator at [www.boschrexroth.com/azconfigurator](http://www.boschrexroth.com/azconfigurator)


The AZ configurator assists you to configure your individual external gear unit easily and user-friendly. You only need to specify your requirements: From the displacement, direction of rotation, drive shaft, connection flange right up to the required rear cover. You immediately receive a project drawing (PDF format) if a configuration already exists. You receive the price of the configured external gear unit upon request.



The AZ configurator assists you to configure your individual external gear unit easily and user-friendly – all data needed for project planning are acquired thru menu guidance.

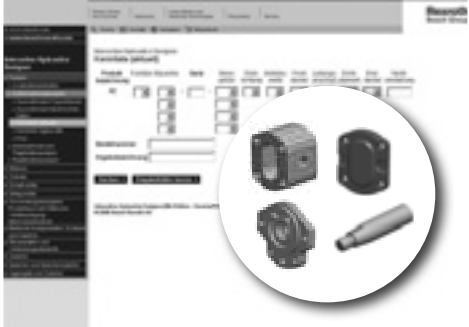

Selection is made either on an ordering code or your technical requirements. This means that you can search for external gear units that have already been configured, or you specify the configuration variant of the external gear unit based upon the operating parameters you require.



If the external gear unit you selected has been released you will receive the part number, ordering code and a detailed installation drawing. If your special configuration is not available please send your specification to Rexroth. One of our employees will then contact you.

Bosch Rexroth AG  
External Gear Units  
Robert-Bosch-Straße 2  
D-71701 Schwieberdingen  
Phone +49 (0) 711-811 10 63  
Fax +49 (0) 711-811 17 98  
brm-az.info@boschrexroth.de  
www.boschrexroth.com/brm

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# External gear pumps

## SILENCE / SILENCE PLUS

Designation	Type	Size	Series	Data sheet	Page
<b>SILENCE</b>					
External gear pump SILENCE	AZPS	4...28	1x/2x	10095	1487
External gear pump SILENCE	AZPT	20...36	2x	10092	1519
External gear pump SILENCE	AZPU	22...63	2x	10098	1541
<b>SILENCE PLUS</b>					
External gear pump SILENCE PLUS	AZPJ	12...28	2x	10094	1567






# External Gear Pumps Series S

**RE 10 095/02.12**  
Replaces:  
RE 10 095/09.09

AZPS-...

Fixed pumps  
 $V = 4.0 \dots 28 \text{ cm}^3/\text{rev}$

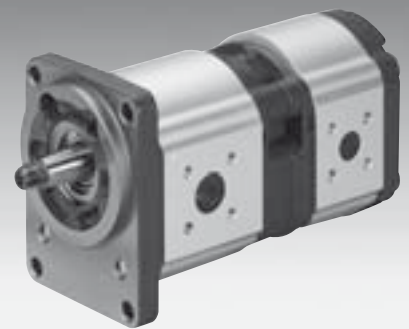

## Overview of contents

Contents	Page
General	2
Product overview	3
Ordering code single pumps	4
Ordering code multiple pumps	5
Drive shaft	6
Front cover	7
Line ports	8
Pumps with integral valves	9
Design calculations for pumps	9
Performance charts	10
Noise charts	13
Specifications	15
Drive arrangements	16
Multiple pumps through drives	18
Dimensions	19
Fittings	28
Overview of part numbers	29
Notes for commissioning	30
Service parts	31

## Features




- Nominal pressure 280 bar
- Slide bearings for heavy duty applications
- Drive shafts to ISO or SAE
- Combination of several pumps possible
- Line ports:
  - connection flange or screw thread
- Optimized pressure pulsation with reduced noise emissions and vibration excitation in the system
- Consistent high quality
- Considerably longer service life due to reinforced shaft and case

## General

The key task of external gear units is to convert mechanical energy (torque and rotational speed) into hydraulic energy (flow and pressure). In external gear motors this is the other way round. These machines are required to be highly efficient in order to avoid unnecessary heat. This efficiency is achieved by means of precision production engineering and pressure-sensitive gap sealing.

Moreover, in the low-noise SILENCE pumps, the dual-flank principle helps to reduce flow pulsation by up to 75%.

### The displacement method

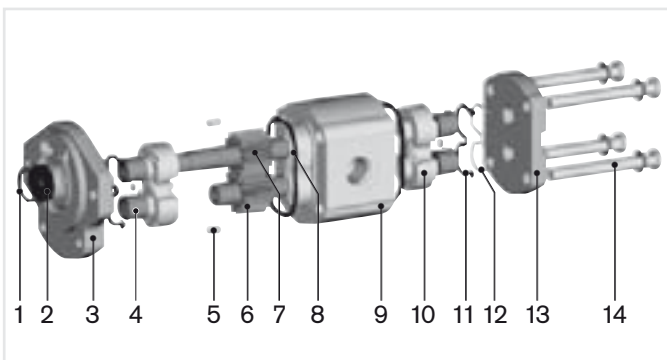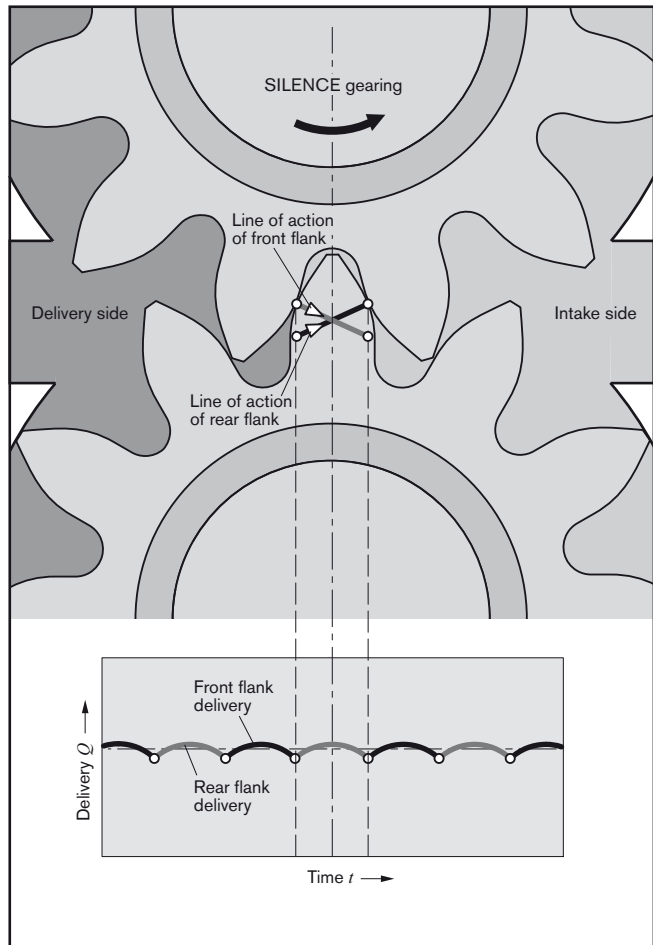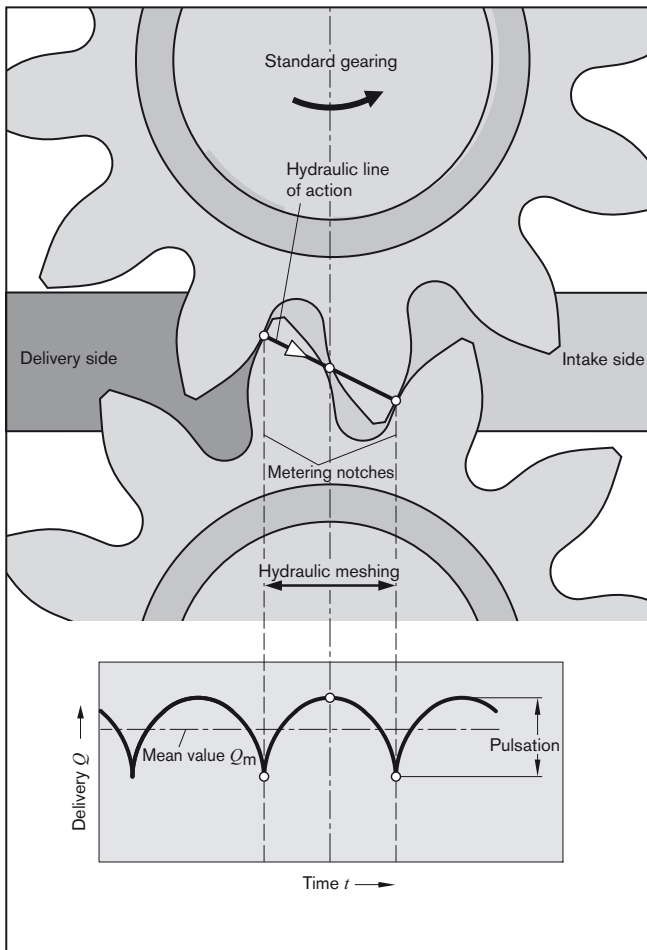


- |                     |                    |
|---------------------|--------------------|
| 1 Retaining ring    | 8 Case seal        |
| 2 Shaft seal ring   | 9 Pump case        |
| 3 Front cover       | 10 Bearing         |
| 4 Slide bearing     | 11 Axial zone seal |
| 5 Centering pin     | 12 Support         |
| 6 Gear              | 13 End cover       |
| 7 Gear (frictional) | 14 Fixing screws   |

The geometry of the displacement gearing, matched in form by the rotation of the drive shaft, results in the parabolic flow characteristic shown here on the left. In a standard pump, this characteristic is repeated each time a gear tooth meshes. With their dual-flank system, the flow pulsation of SILENCE pumps is reduced by 75% – with correspondingly lower excitation of downstream system components – at double the fundamental frequency. During this process, the gear pair exhibits an extremely reduced rear flank backlash, so that hydraulic sealing is provided not just by the front flank of the driven gear, but also by the rear flanks. In this way, the front and rear flanks alternately contribute to flow displacement. And by adapting the shape of the metering notches, the expansion of the hydraulic line of action is half that of the standard pump.










### Construction

The external gear unit consists essentially of a pair of gears supported in bearing bushings and the case with a front and a rear cover. The drive shaft protrudes from the front cover where it is sealed by the shaft seal ring. The bearing forces are absorbed by special bearing bushings with sufficient elasticity to produce surface contact instead of line contact. They also ensure excellent resistance to galling – especially at low speed. The gears have 12 teeth. This keeps both flow pulsation and noise emission to a minimum.

The internal sealing is achieved by forces which are proportional to delivery pressure. This ensures optimum efficiency. The bearings provide the seal at the ends of the gaps between the teeth which carry the pressurized oil. The sealing zone between the gear teeth and the bearings is controlled by the admission of operating pressure to the rear of the bearing bushings. Special seals form the boundary of the zone. The radial clearance at the tips of the gear teeth is sealed by internal forces pushing them against the case.

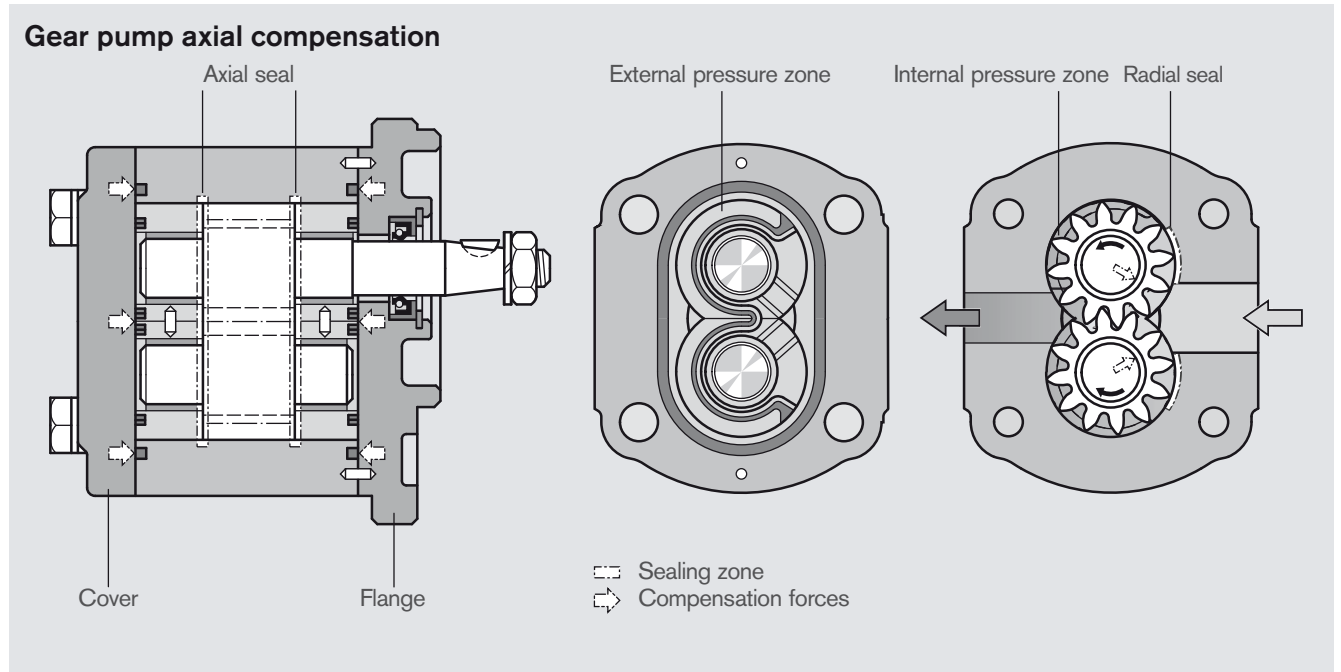






















### Product overview of “SILENCE standard range”

Version	Page	Version	Page	Version	Page
	19		22		25
	20		23		26
	21		24		27

# Ordering code

## External gear units Single pumps "SILENCE"

<b>AZ</b>	<b>P</b>	<b>S</b>	<b>-</b>	<b>x</b>	<b>x</b>	<b>-</b>	<b>016</b>	<b>R</b>	<b>C</b>	<b>B</b>	<b>20</b>	<b>M</b>	<b>B</b>	<b>18009</b>	<b>S xxxx</b>																																																																																																																																																																																																																	
<table border="1"> <tr> <td><b>Function</b></td> <td rowspan="2">Special design *)</td> </tr> <tr> <td><b>P = Pump</b></td> </tr> <tr> <td><b>Series</b></td> <td rowspan="2"></td> </tr> <tr> <td><b>1x = Standard bearing</b></td> </tr> <tr> <td><b>2x = Reinforced bearing</b></td> </tr> <tr> <td><b>Version</b></td> <td rowspan="2"></td> </tr> <tr> <td><b>1 = Phosphatized, pinned</b></td> </tr> <tr> <td><b>2 = Chromatized, pinned</b></td> </tr> <tr> <td><b>Size (S)</b></td> <td rowspan="8">*) Some of the special designs shown on pages 19–27 are not covered in the illustration of the ordering code.</td> </tr> <tr> <td><b>004 = 4.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>005 = 5.5 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>008 = 8.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>011 = 11.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>014 = 14.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>016 = 16.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>019 = 19.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>022 = 22.5 cm<sup>3</sup>/rev</b></td> <td rowspan="4"></td> </tr> <tr> <td><b>025 = 25.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>028 = 28.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>Direction of rotation</b></td> </tr> <tr> <td><b>R = Clockwise</b></td> <td rowspan="2"></td> </tr> <tr> <td><b>L = Counter-clockwise</b></td> </tr> </table>															<b>Function</b>	Special design *)	<b>P = Pump</b>	<b>Series</b>		<b>1x = Standard bearing</b>	<b>2x = Reinforced bearing</b>	<b>Version</b>		<b>1 = Phosphatized, pinned</b>	<b>2 = Chromatized, pinned</b>	<b>Size (S)</b>	*) Some of the special designs shown on pages 19–27 are not covered in the illustration of the ordering code.	<b>004 = 4.0 cm<sup>3</sup>/rev</b>	<b>005 = 5.5 cm<sup>3</sup>/rev</b>	<b>008 = 8.0 cm<sup>3</sup>/rev</b>	<b>011 = 11.0 cm<sup>3</sup>/rev</b>	<b>014 = 14.0 cm<sup>3</sup>/rev</b>	<b>016 = 16.0 cm<sup>3</sup>/rev</b>	<b>019 = 19.0 cm<sup>3</sup>/rev</b>	<b>022 = 22.5 cm<sup>3</sup>/rev</b>		<b>025 = 25.0 cm<sup>3</sup>/rev</b>	<b>028 = 28.0 cm<sup>3</sup>/rev</b>	<b>Direction of rotation</b>	<b>R = Clockwise</b>		<b>L = Counter-clockwise</b>																																																																																																																																																																																						
<b>Function</b>	Special design *)																																																																																																																																																																																																																															
<b>P = Pump</b>																																																																																																																																																																																																																																
<b>Series</b>																																																																																																																																																																																																																																
<b>1x = Standard bearing</b>																																																																																																																																																																																																																																
<b>2x = Reinforced bearing</b>																																																																																																																																																																																																																																
<b>Version</b>																																																																																																																																																																																																																																
<b>1 = Phosphatized, pinned</b>																																																																																																																																																																																																																																
<b>2 = Chromatized, pinned</b>																																																																																																																																																																																																																																
<b>Size (S)</b>	*) Some of the special designs shown on pages 19–27 are not covered in the illustration of the ordering code.																																																																																																																																																																																																																															
<b>004 = 4.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																																																
<b>005 = 5.5 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																																																
<b>008 = 8.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																																																
<b>011 = 11.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																																																
<b>014 = 14.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																																																
<b>016 = 16.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																																																
<b>019 = 19.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																																																
<b>022 = 22.5 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																																																
<b>025 = 25.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																																																
<b>028 = 28.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																																																
<b>Direction of rotation</b>																																																																																																																																																																																																																																
<b>R = Clockwise</b>																																																																																																																																																																																																																																
<b>L = Counter-clockwise</b>																																																																																																																																																																																																																																
<table border="1"> <tr> <td colspan="15"><b>Valve adjustment</b></td> </tr> <tr> <td colspan="15"><b>200 xx = PRV 200 bar</b></td> </tr> <tr> <td colspan="15"><b>xxx 11 = FCV 11 l/min</b></td> </tr> <tr> <td colspan="15"><b>18009 = PRV + FCV 180 bar, 9 l/min</b></td> </tr> <tr> <td colspan="15"><b>Rear cover</b></td> </tr> <tr> <td colspan="15"><b>B = Standard</b></td> </tr> <tr> <td colspan="15"><b>D = PRV residual flow internal</b></td> </tr> <tr> <td colspan="15"><b>E = FCV residual flow external</b></td> </tr> <tr> <td colspan="15"><b>S = FCV residual flow internal</b></td> </tr> <tr> <td colspan="15"><b>V = PRV + FCV</b></td> </tr> <tr> <td colspan="15"><b>Seals</b></td> </tr> <tr> <td colspan="15"><b>M = NBR</b></td> </tr> <tr> <td colspan="15"><b>P = FKM</b></td> </tr> <tr> <td colspan="15"><b>K = NBR, SSR in FKM</b></td> </tr> </table>															<b>Valve adjustment</b>															<b>200 xx = PRV 200 bar</b>															<b>xxx 11 = FCV 11 l/min</b>															<b>18009 = PRV + FCV 180 bar, 9 l/min</b>															<b>Rear cover</b>															<b>B = Standard</b>															<b>D = PRV residual flow internal</b>															<b>E = FCV residual flow external</b>															<b>S = FCV residual flow internal</b>															<b>V = PRV + FCV</b>															<b>Seals</b>															<b>M = NBR</b>															<b>P = FKM</b>															<b>K = NBR, SSR in FKM</b>														
<b>Valve adjustment</b>																																																																																																																																																																																																																																
<b>200 xx = PRV 200 bar</b>																																																																																																																																																																																																																																
<b>xxx 11 = FCV 11 l/min</b>																																																																																																																																																																																																																																
<b>18009 = PRV + FCV 180 bar, 9 l/min</b>																																																																																																																																																																																																																																
<b>Rear cover</b>																																																																																																																																																																																																																																
<b>B = Standard</b>																																																																																																																																																																																																																																
<b>D = PRV residual flow internal</b>																																																																																																																																																																																																																																
<b>E = FCV residual flow external</b>																																																																																																																																																																																																																																
<b>S = FCV residual flow internal</b>																																																																																																																																																																																																																																
<b>V = PRV + FCV</b>																																																																																																																																																																																																																																
<b>Seals</b>																																																																																																																																																																																																																																
<b>M = NBR</b>																																																																																																																																																																																																																																
<b>P = FKM</b>																																																																																																																																																																																																																																
<b>K = NBR, SSR in FKM</b>																																																																																																																																																																																																																																

Drive shafts			Front cover			Line ports				
Suitable front cover										
<b>C</b>	Tapered key shaft 1 : 5		<b>B</b>	<b>P</b>	<b>B</b>	Square flange Centering Ø 80 mm		<b>20</b>	Rectangular flange	
<b>H</b>	Tapered key shaft 1 : 8		<b>O</b>		<b>R</b>	SAE J 744 82-2 A 2-bolt flange Ø 82.55 mm		<b>12</b>	Thread (UN-2B) SAE seal ring BOSS	
<b>N</b>	Dihedral claw		<b>M</b>		<b>P</b>	2-bolt mounting Centering Ø 50 mm		<b>30</b>	Rectangular flange	
<b>Q</b>	Straight keyed shaft SAE J 744 16-1		<b>R</b>		<b>O</b>	Square flange Centering Ø 36.47 mm		<b>01</b>	Pipe thread ISO 228/1	
<b>R</b>	Splined shaft SAE J 744 16-4 9T		<b>R</b>	<b>C</b>	<b>C</b>	SAE J 744 101-2 B 2-bolt flange Ø 101.6 mm		<b>03</b>	Thread, metric ISO 6149 with seal ring	
<b>P</b>	Splined shaft SAE J 744 19-4 11T		<b>R</b>	<b>C</b>	<b>M</b>	2-bolt mounting Centering Ø 52 mm with seal ring				
<b>F</b>	Splined shaft DIN 5482 B 17 x 14		<b>B</b>	<b>P</b>	<b>A</b>	Outboard bearing Ø 80 mm, Type 1				
<b>S</b>	Tapered key shaft 1 : 5 for flange A		<b>A</b>		<b>N</b>	2-bolt mounting Centering Ø 50 mm				



























Not all variants can be selected by using ordering code!

Please select the required pump by using the selection tables (standard types) or after consultation with Bosch Rexroth!

Special options are possible upon request.

# Ordering code

## External gear units Multiple pumps "SILENCE"

<b>AZ</b>	<b>P</b>	<b>GGSS</b>	<b>-</b>	<b>x</b>	<b>x</b>	<b>-</b>	<b>032/022/016/005</b>	<b>R</b>	<b>C</b>	<b>B</b>	<b>20</b>	<b>20</b>	<b>20</b>	<b>20</b>	<b>K</b>	<b>B</b>
<b>Function</b> P = Pump <b>Series</b> B = 1.0...7.1 cm <sup>3</sup> /rev S = 4.0...28 cm <sup>3</sup> /rev F = 4.0...28 cm <sup>3</sup> /rev N = 20.0...36 cm <sup>3</sup> /rev G = 22.5...63 cm <sup>3</sup> /rev <b>Series</b> , relates to pump section 1 1x = Standard bearing 2x = Reinforced bearing <b>Version</b> , relates to pump section 1 1 = Phosphatized, pinned 2 = Chromatized, pinned <b>Size</b> corresponding to each series <b>Direction of rotation</b> R = Clockwise, L = Counter-clockwise							<b>Rear cover</b> relates to last pump section B = Standard <b>Seals</b> M = NBR P = FKM K = NBR, SSR in FKM Shaft seal relate to pump section 1									
<b>Drive shafts</b> relates to pump part 1							<b>Front cover</b> relates to pump part 1				<b>Line ports</b> every pump parts					
Series B:							Suitable front cover									
<b>H</b>	Tapered key shaft 1 : 8			<b>O</b>			<b>O</b>	Square flange Centering Ø 25.38 mm			<b>02</b>	Thread, metric DIN 3852 T1				
Series F, S:																
<b>C</b>	Tapered key shaft 1 : 5			<b>B</b>			<b>B</b>	Square flange Centering Ø 80 mm			<b>20</b>	Rectangular flange				
<b>H</b>	Tapered key shaft 1 : 8			<b>O</b>			<b>O</b>	Square flange Centering Ø 36.47 mm								
<b>R</b>	Splined shaft SAE J 744 16-4 9T			<b>R</b>			<b>R</b>	SAE J 744 82-2 A Centering Ø 82.55 mm 2-bolt mounting								
Series N, T:																
<b>C</b>	Tapered key shaft 1 : 5			<b>B</b>			<b>B</b>	Square flange Centering Ø 100 mm			<b>07</b>	Square flange SAE Thread, metric				
<b>D</b>	Splined shaft SAE J 744 22-4 13T			<b>C</b>			<b>C</b>	SAE J 744 101-2 B Centering Ø 101.6 mm 2-bolt mounting			<b>20</b>	Rectangular flange				
<b>N</b>	Dihedral claw			<b>M</b>			<b>M</b>	Centering Ø 52 mm with seal ring								
Series G, U:																
<b>C</b>	Tapered key shaft 1 : 5			<b>B</b>			<b>B</b>	Square flange Centering Ø 105 mm			<b>07</b>	Square flange SAE Thread, metric				
<b>D</b>	Splined shaft SAE J 744 22-4 13T			<b>C</b>			<b>C</b>	SAE J 744 101-2 B Centering Ø 101.6 mm 2-bolt mounting			<b>20</b>	Rectangular flange				
<b>H</b>	Tapered key shaft 1 : 8			<b>O</b>			<b>O</b>	Square flange Centering Ø 50.78 mm								


Not all variants can be selected by using ordering code!

Please select the required pump by using the selection tables (standard types) or after consultation with Bosch Rexroth!


Special options are possible upon request.

Drive shafts


**C**

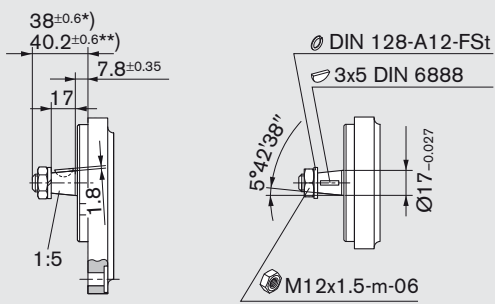


**H**

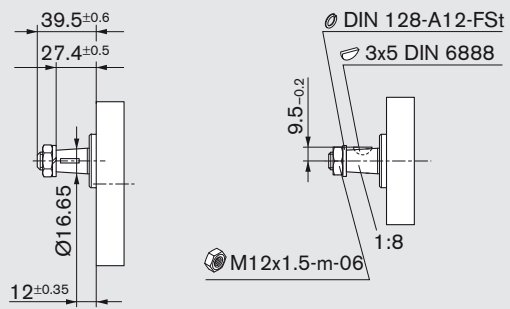


**N**

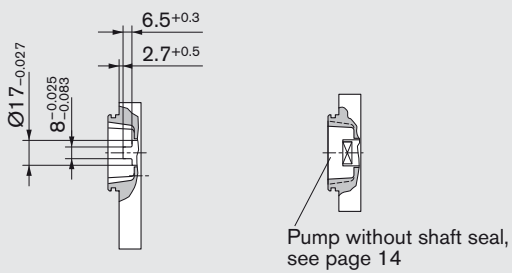


**Q**

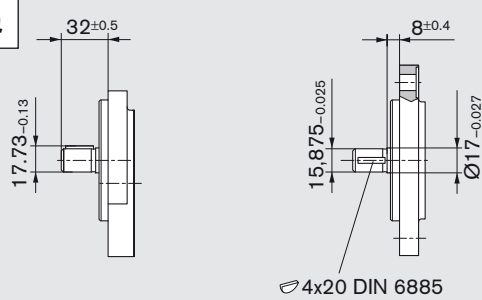


**R**

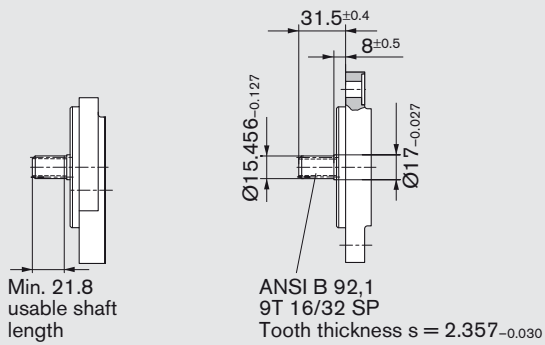

**P**

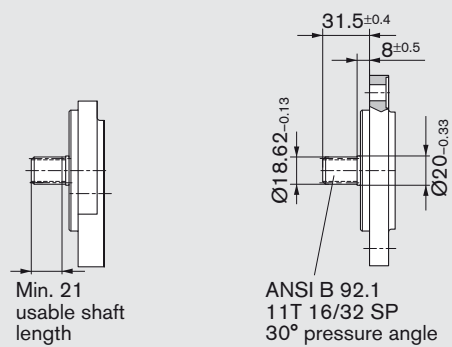


**F**

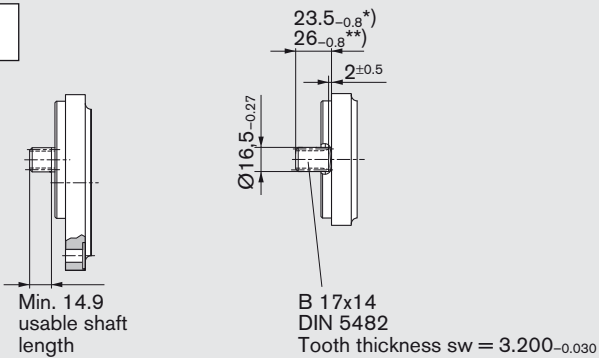


\*) in combination with front cover **B**  
 \*\*) in combination with front cover **P**


**S**

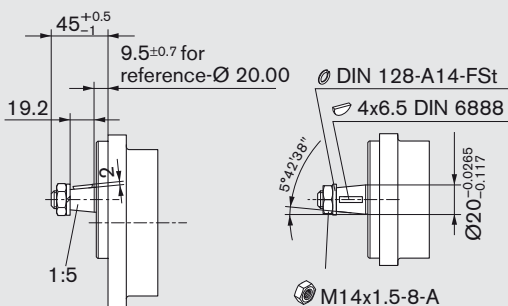

Front cover

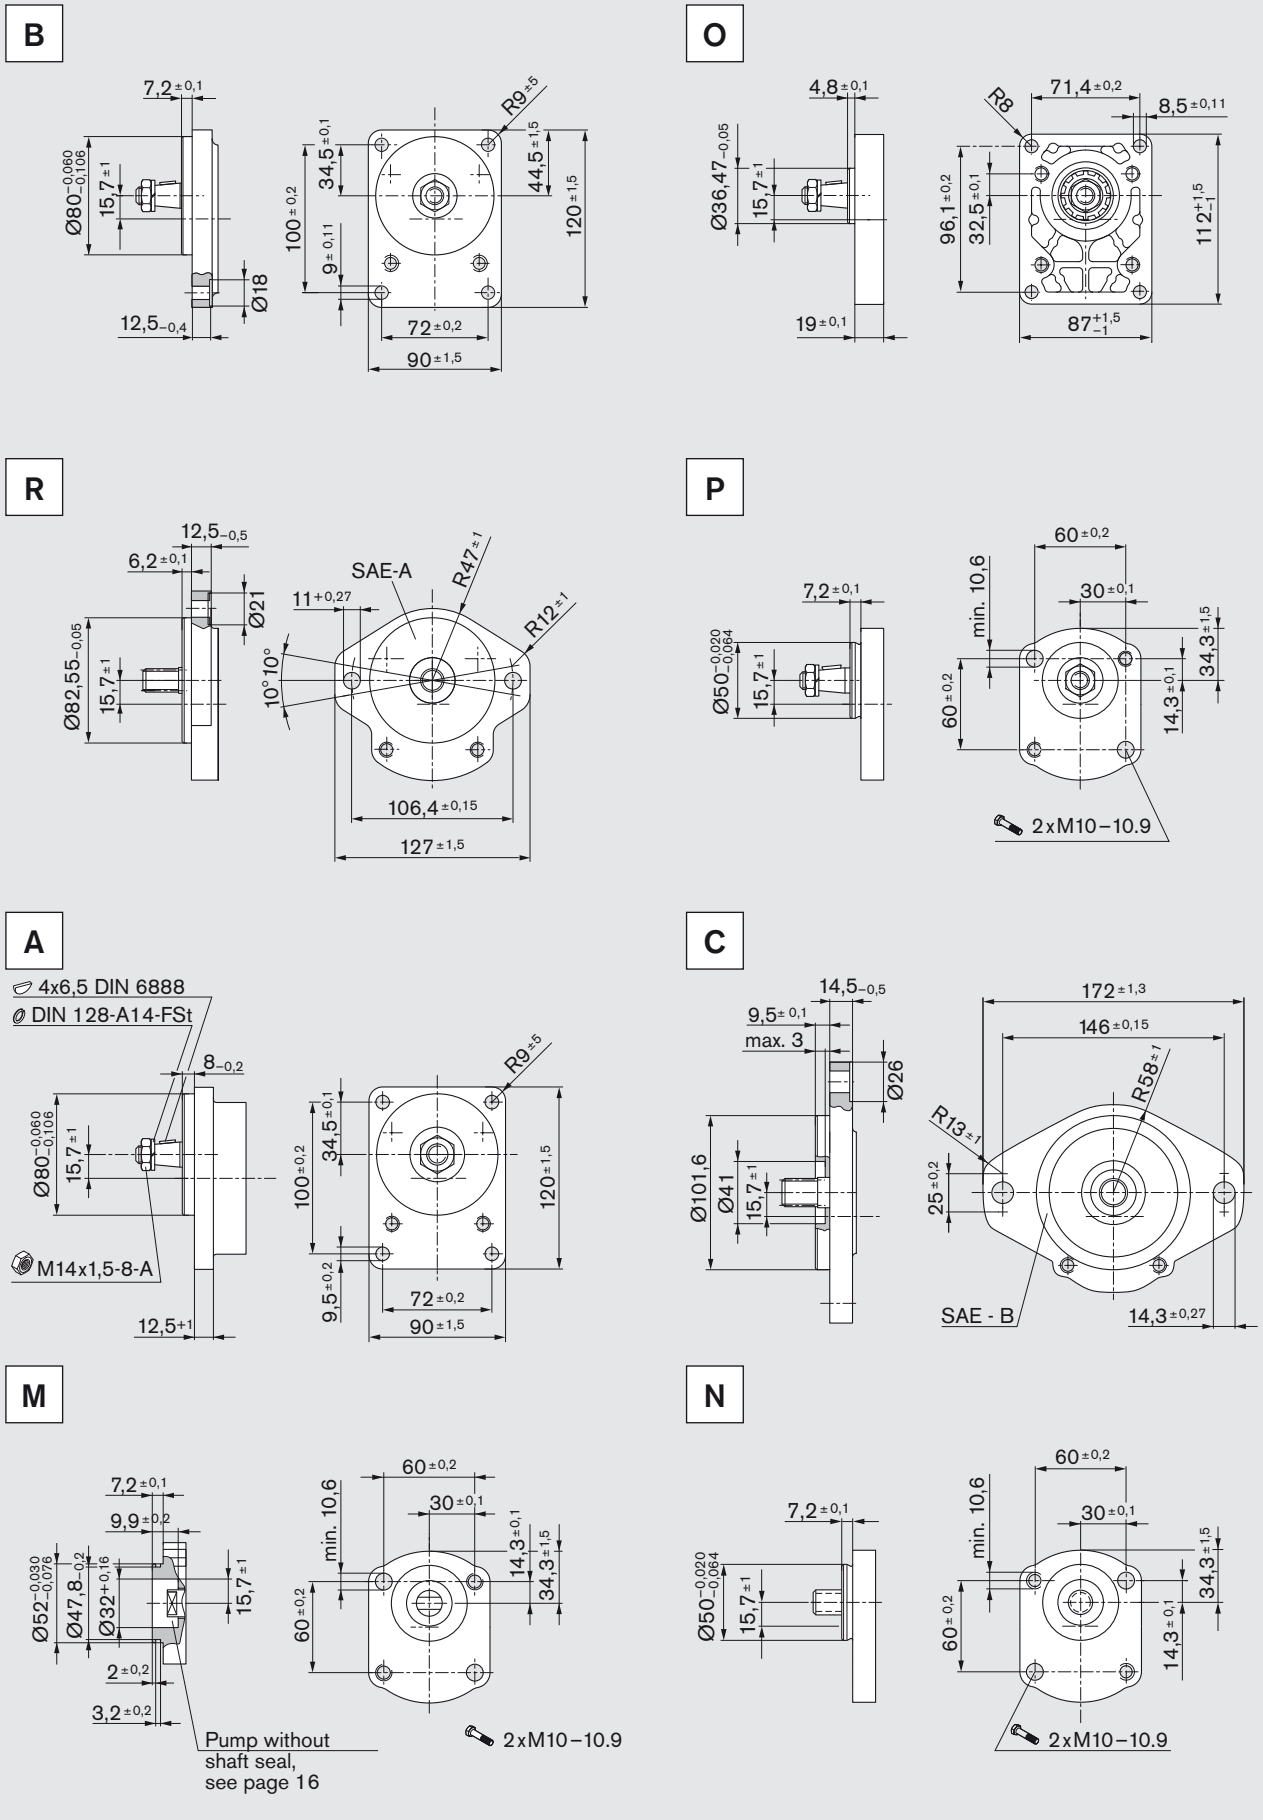


Line ports



**01** Pipe thread  
ISO 228/1

At pressures  $p_2 > 210$  bar  
limited service life


Ordering code	Size	Pressure side		Suction side	
		G	F	G	F
01	4...16 cm <sup>3</sup>	G 1/2	16	G 3/4	16
	19...28 cm <sup>3</sup>	G 3/4		G 1	19



**03** Thread, metric  
ISO 6149 with seal ring

At pressures  $p_2 > 210$  bar  
limited service life


Ordering code	Size	Pressure side				Suction side			
		M	D	E	F	M	D	E	F
03	4...5.5 cm <sup>3</sup>	M 18 x 1.5	29	0.5	16	M 18 x 1.5	29	0.5	16
	8...16 cm <sup>3</sup>	M 22 x 1.5	34		18	M 27 x 1.5	40		19
	19...28 cm <sup>3</sup>					M 33 x 2	46		22



**12** Thread (UN-2B, UNF-2B) SAE  
Seal ring BOSS


At pressures  $p_2 > 210$  bar  
limited service life

Ordering code	Size	Pressure side				Suction side			
		G	D	E	F	G	D	E	F
12	4...5.5 cm <sup>3</sup>	9/16-18 UNF-2B	25	0.5	13	9/16-18 UNF-2B	25	0.5	13
	8 cm <sup>3</sup>	7/8-14 UNF-2B	35		16	7/8-14 UNF-2B	35		16
	11...28 cm <sup>3</sup>					1 1/16-12 UN-2B	45		19



**20** Rectangular flange

Ordering code	Size	Pressure side			Suction side		
		C	D	E	C	D	E
20	4...5.5 cm <sup>3</sup>	15	35	M6, depth 13	15	40	M6, depth 13
	20						
	19...28 cm <sup>3</sup>	26	55	M8, depth 13			




**30** Rectangular flange

Ordering code	Size	Pressure side			Suction side		
		C	D	E	C	D	E
30	4...8 cm <sup>3</sup>	13.5	30.2	M6, depth 13	13.5	30.2	M6, depth 13
	11...28 cm <sup>3</sup>				20.0		




# Gear pumps with integral valves


In order to reduce external pipework it is possible to incorporate a flow-control valve or pressure-relief valve in the rear cover of the gear pump. A typical application of this is in the supply of hydraulic oil in power steering systems. The pump delivers a constant flow irrespective of the speed at which it is driven. The excess flow is either returned internally to the suction port or distributed externally to other items of equipment.




3-way flow-control valve.  
Excess flow returned to suction line  
 $Q_{const.} = 2...30 \text{ l/min}$



3-way flow-control valve.  
Excess flow distributed externally; loadable  
 $Q_{const.} = 2...30 \text{ l/min}$



3-way flow-control valve with pressure-relief valve.  
Excess flow returned to suction line  
 $Q_{const.} = 2...30 \text{ l/min}$   
 $p_1 = 100...180 \text{ bar}$



Pressure-relief valve.  
Discharge returned to suction line  
 $p_1 = 5...250 \text{ bar}$

## Ordering code

S	xxx17
---	-------

E	xxx12
---	-------

V	15011
---	-------

D	180xx
---	-------

# Design calculations for pumps

The design calculations for pumps are based on the following parameters:

$V$ [cm <sup>3</sup> /rev]	Displacement
$Q$ [l/min]	Delivery
$p$ [bar]	Pressure
$M$ [Nm]	Drive torque
$n$ [rev/min]	Drive speed
$P$ [kW]	Drive power

It is also necessary to allow for different efficiencies such as:

$\eta_v$	Volumetric efficiency
$\eta_{hm}$	Hydraulic-mechanical efficiency
$\eta_t$	Overall efficiency

The following formulas describe the various relationships. They include correction factors for adapting the parameters to the usual units encountered in practice.

**Caution:** Diagrams providing approximate selection data will be found on subsequent pages.

$$Q = V \cdot n \cdot \eta_v \cdot 10^{-5}$$

$$p = \frac{M \cdot \eta_{hm}}{1.59 \cdot V}$$

$$P = \frac{p \cdot Q}{6 \cdot \eta_t}$$

$$V = \frac{Q}{n \cdot \eta_v} \cdot 10^5$$

$$M = \frac{1.59 \cdot V \cdot p}{\eta_{hm}}$$

$$Q = \frac{6 \cdot P \cdot \eta_t}{p}$$

$$n = \frac{Q}{V \cdot \eta_v} \cdot 10^5$$

$$M = \frac{1.59 \cdot V \cdot p}{\eta_{hm}}$$




$$p = \frac{6 \cdot P \cdot \eta_t}{Q}$$

[%]	$n$	$\eta_v$	$\rightarrow$	$Q$	$V$ [cm <sup>3</sup> /rev]	$Q$ [l/min]	$p$ [bar]
	$M$	$\eta_{hm}$	$\rightarrow$	$P$	$n$ [rev/min]	$P$ [kW]	$M$ [Nm]
	$P$	$\eta_t$	$\rightarrow$	$p \cdot Q$			





**Caution:**  $\eta$  [%] e.g. 95 [%]

# Performance charts





$\nu = 35 \text{ mm}^2/\text{s}, \vartheta = 50^\circ\text{C}$

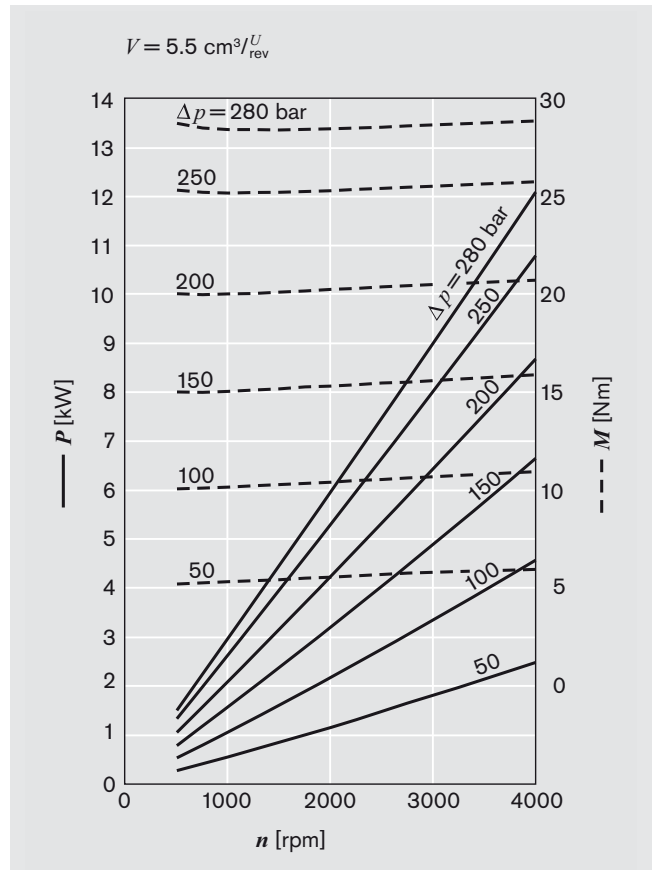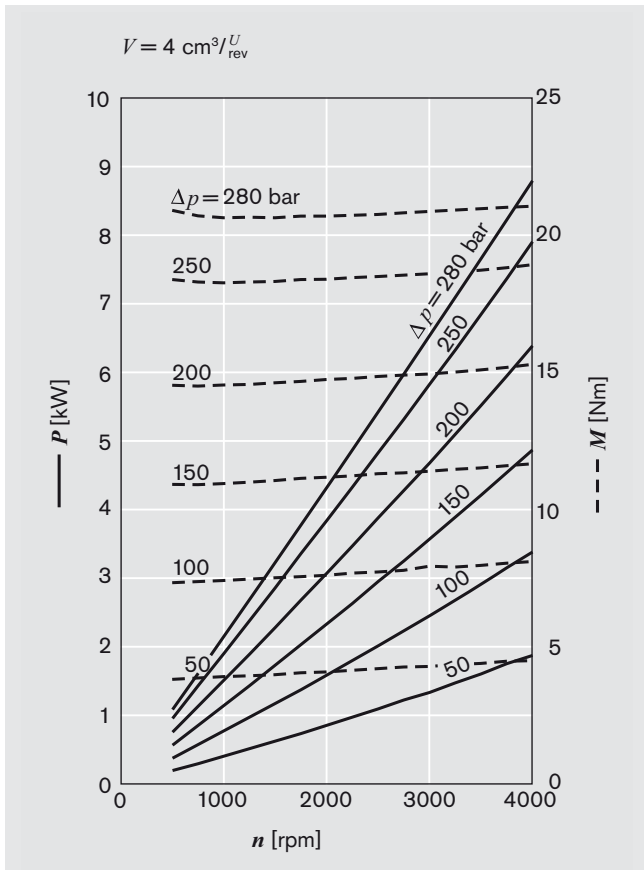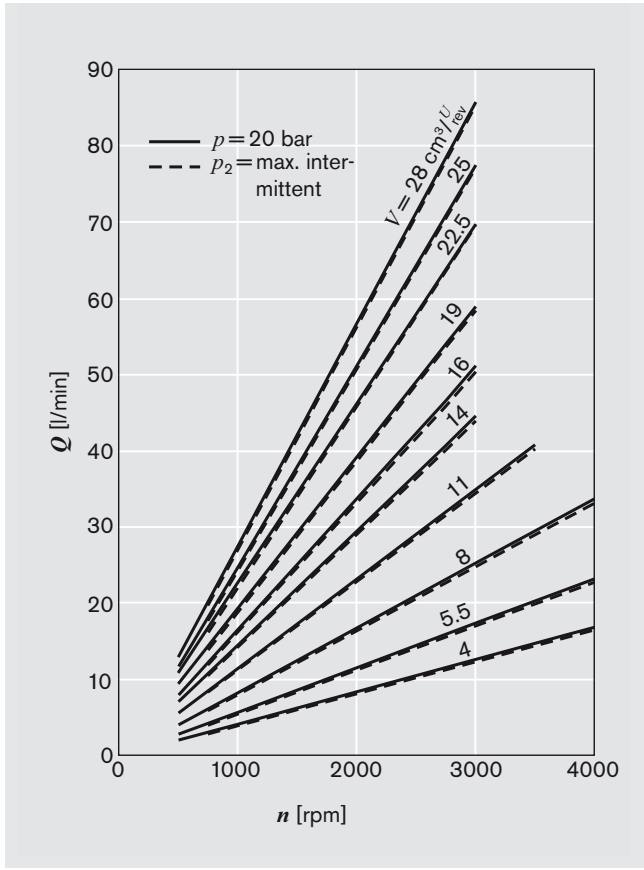

Performance charts (continued)

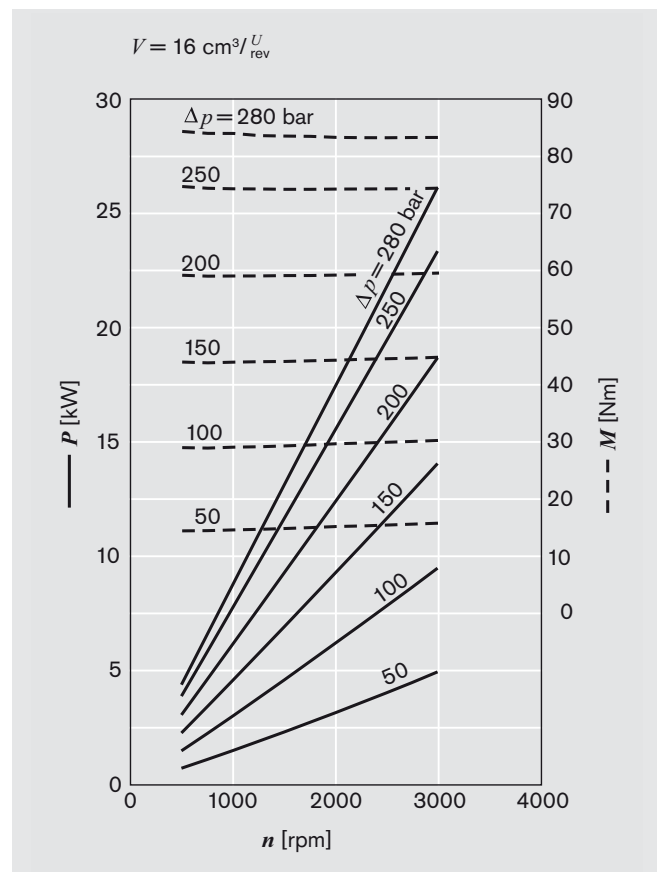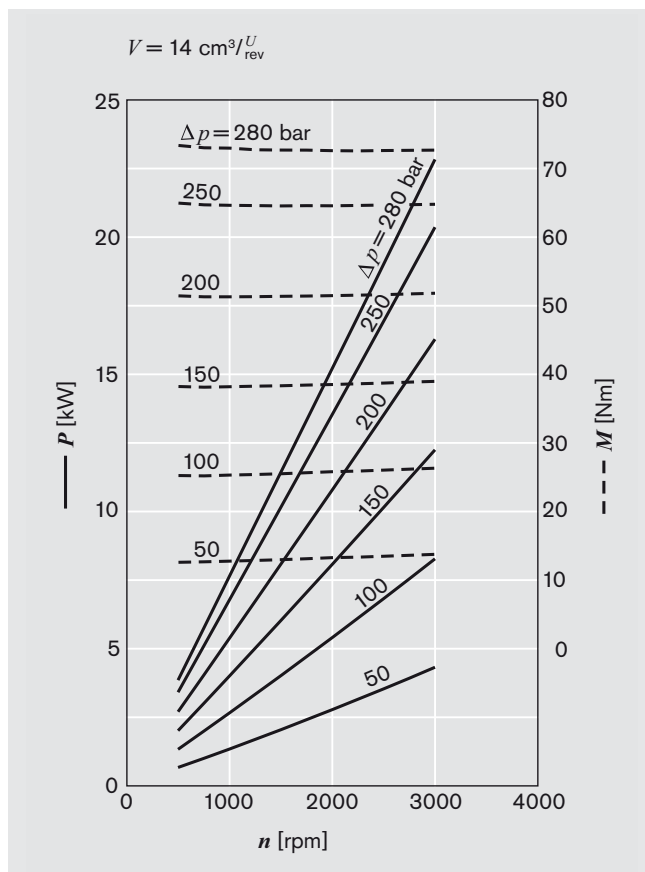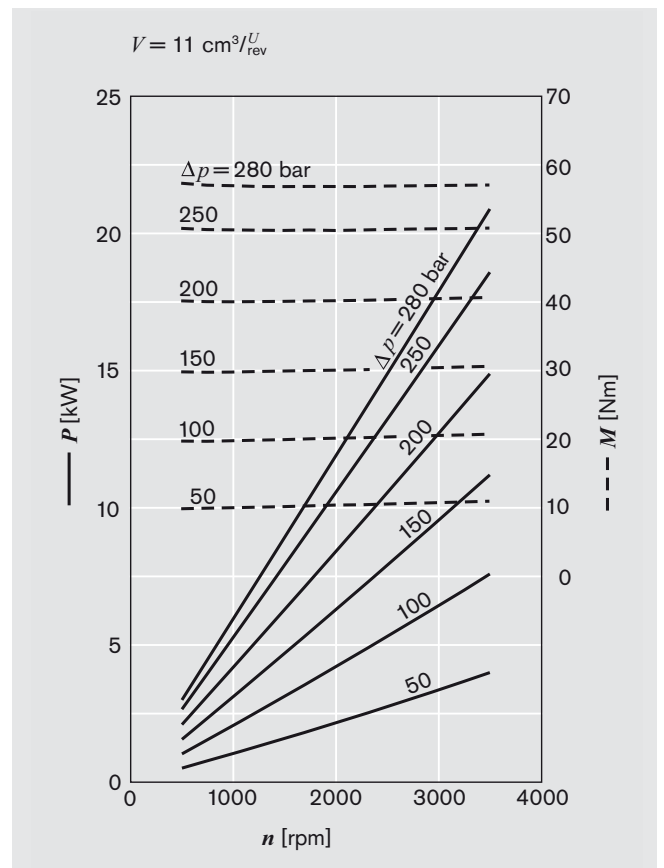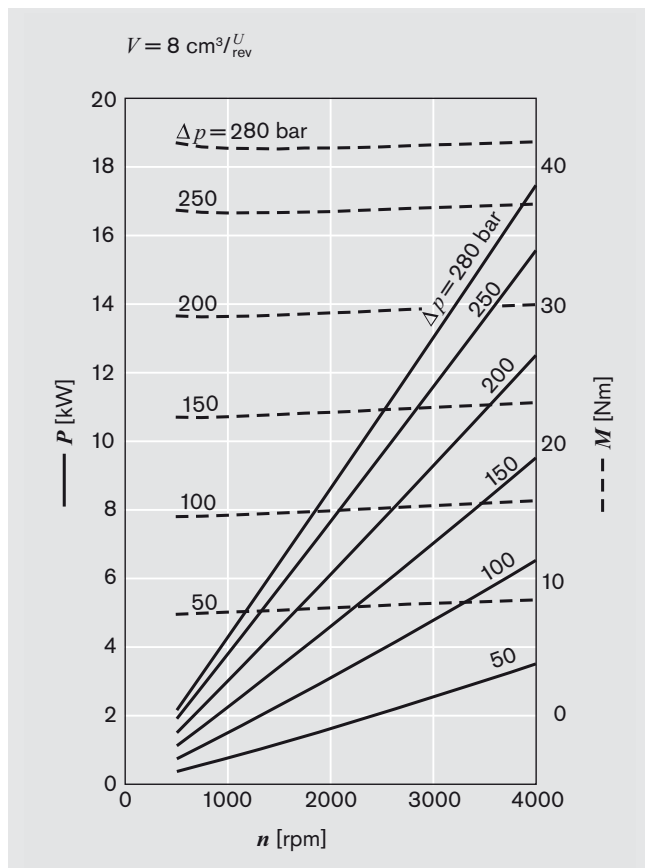

Performance charts (continued)

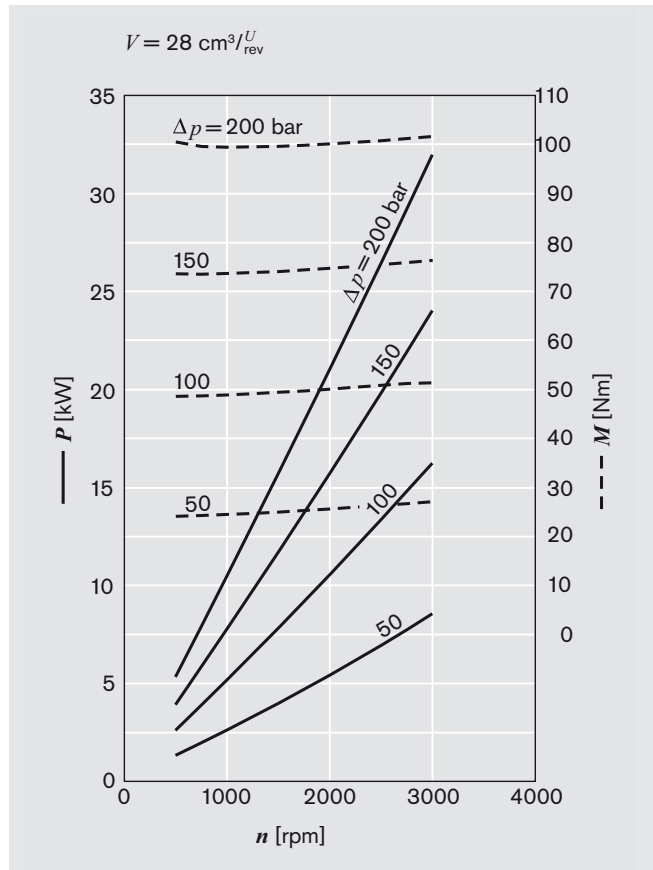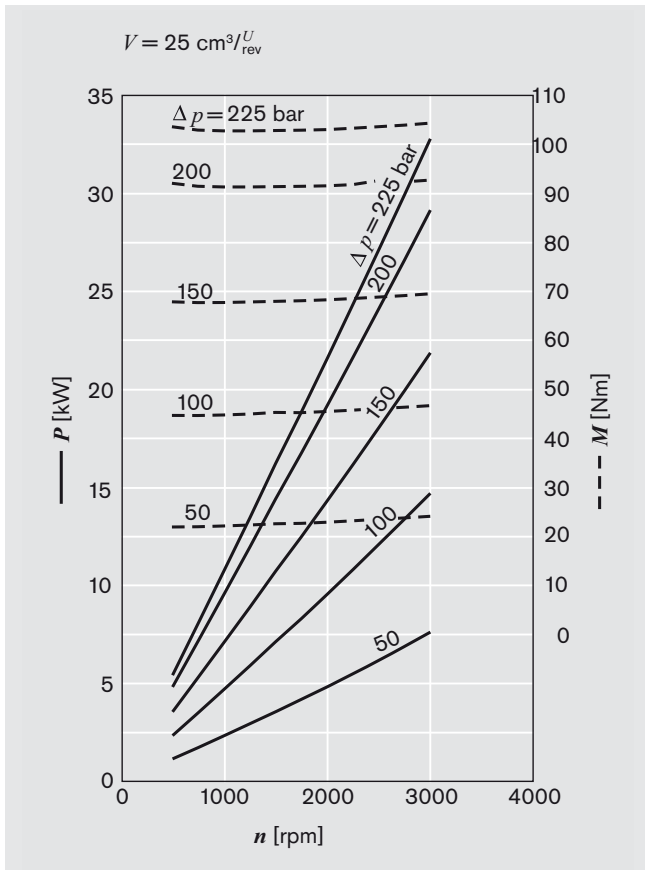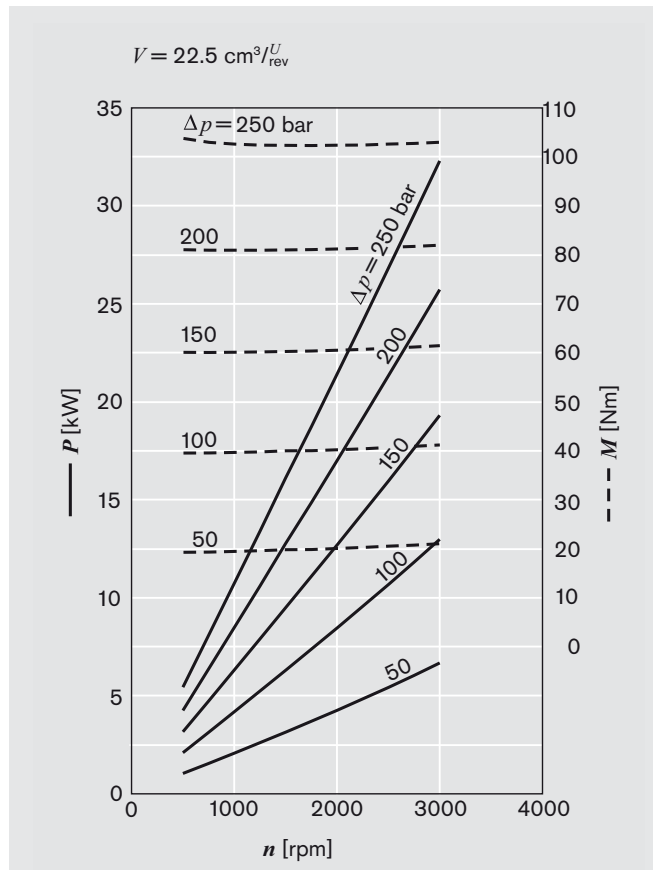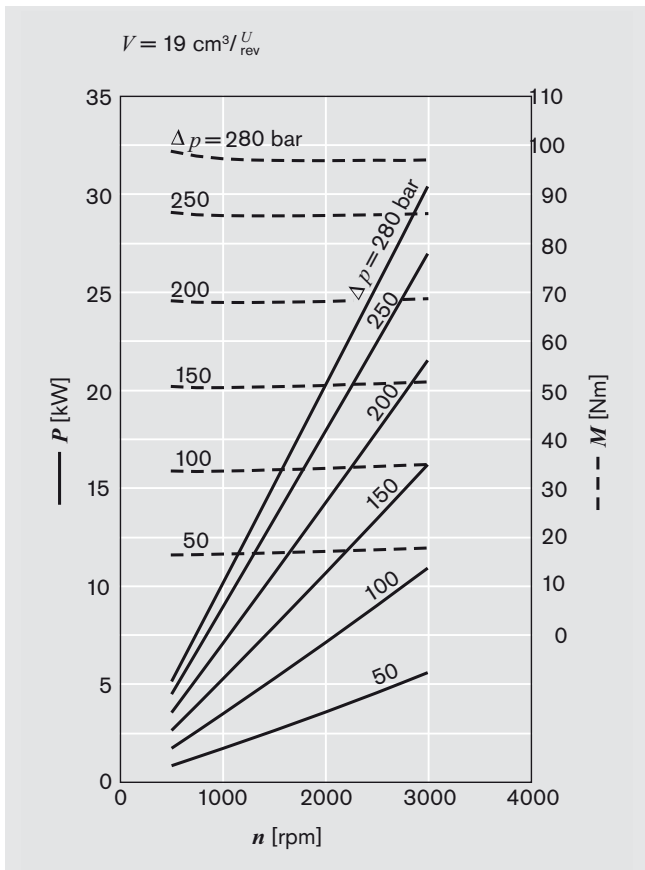

# Noise charts







**Noise level** dependent on rotational speed, pressure range between 10 bar and pressure value  $p_2$  (see page 15 Specifications table).

Oil data:  $\nu = 32 \text{ mm}^2/\text{s}$ ,  $\vartheta = 50^\circ\text{C}$ .

Sound pressure level calculated from noise measurements made in the sound absorbent measuring room compliant with DIN 45635, Part 26.





Spacing between measuring sensor – pump: 1 m.

These are typical characteristic values for the respective model. They describe the airborne sound emitted solely by the pump. Environmental influences (installation site, piping, further system components) are not taken into consideration. Each value applies for a single pump.

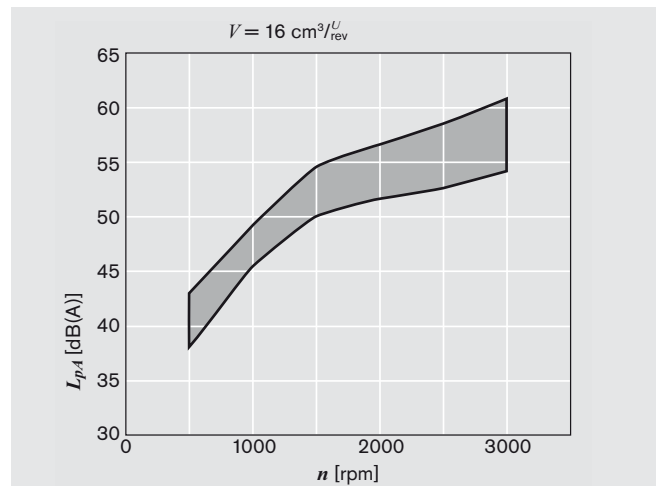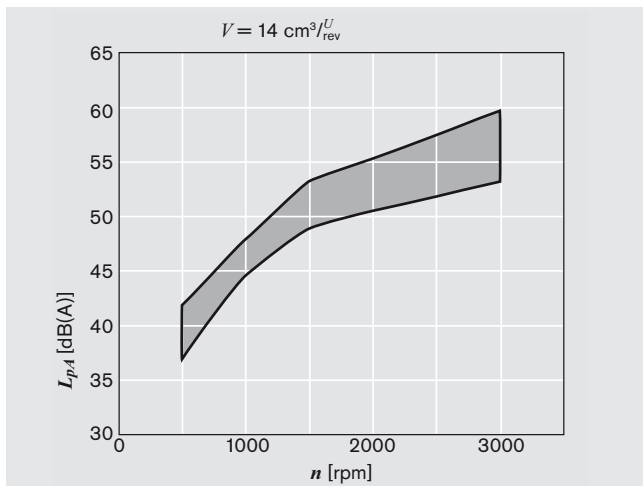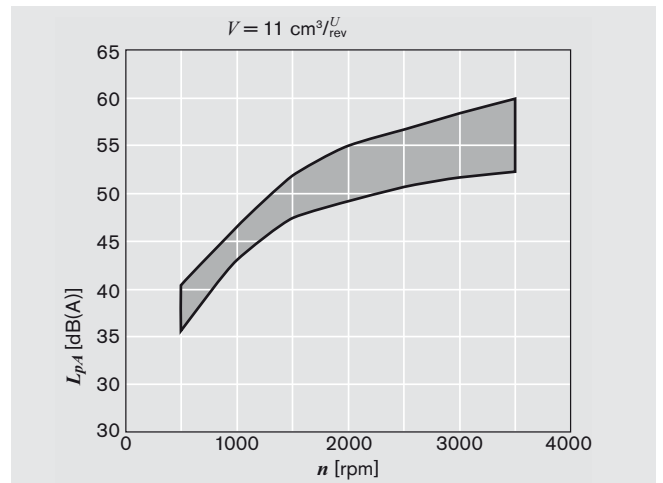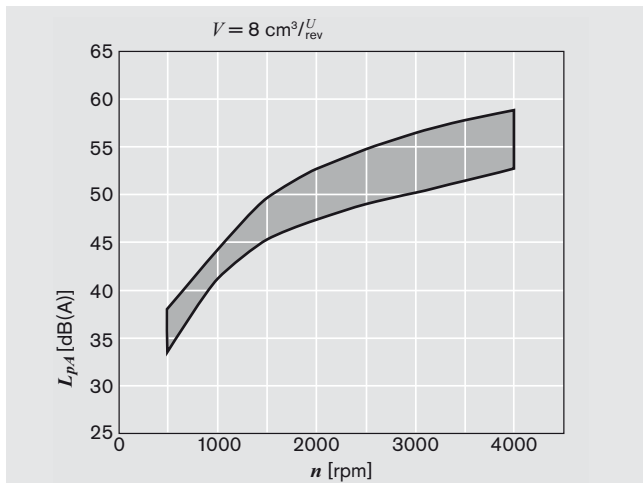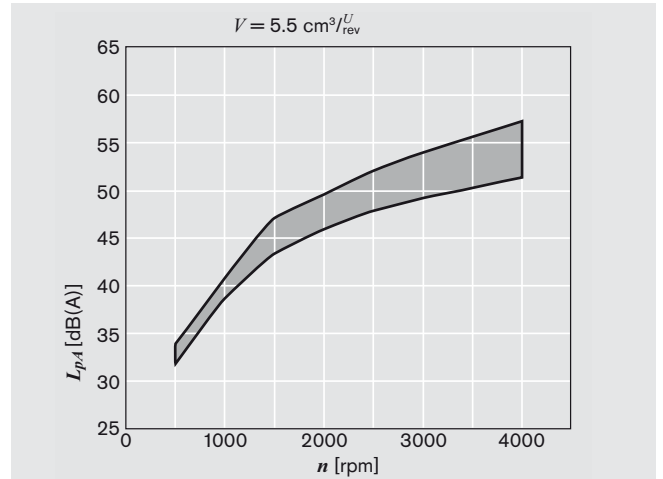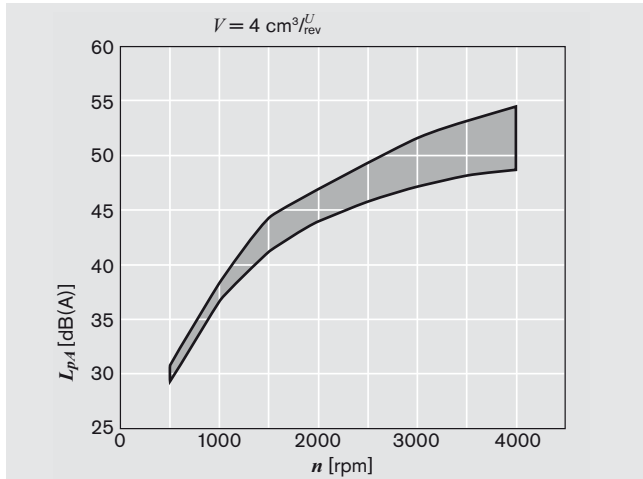

7

Noise charts (continued)

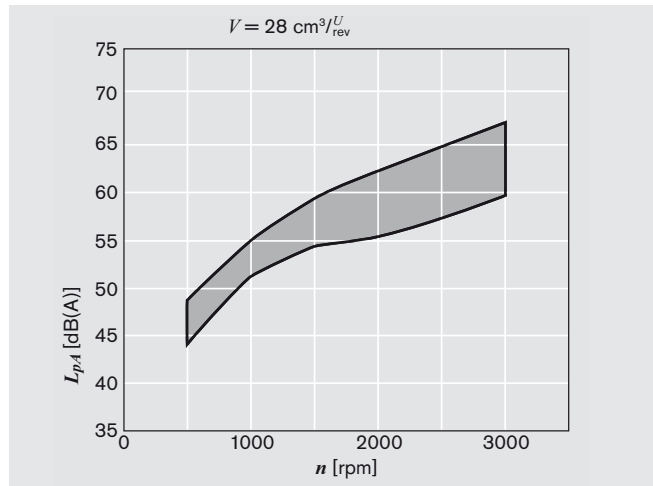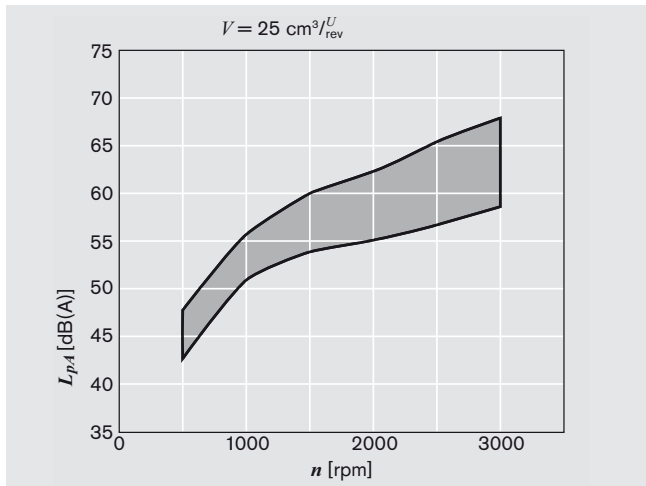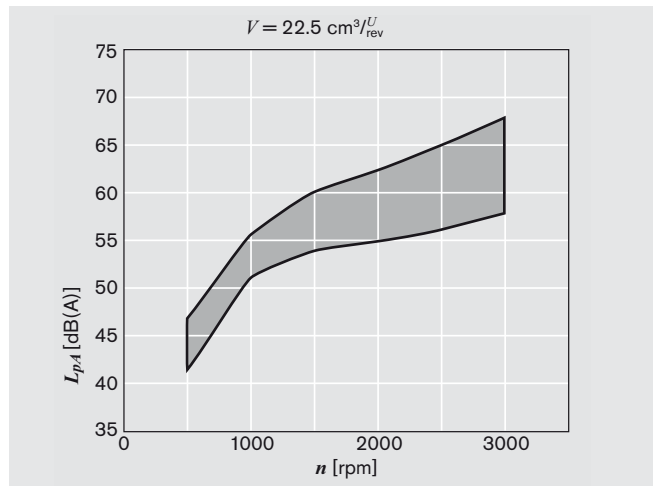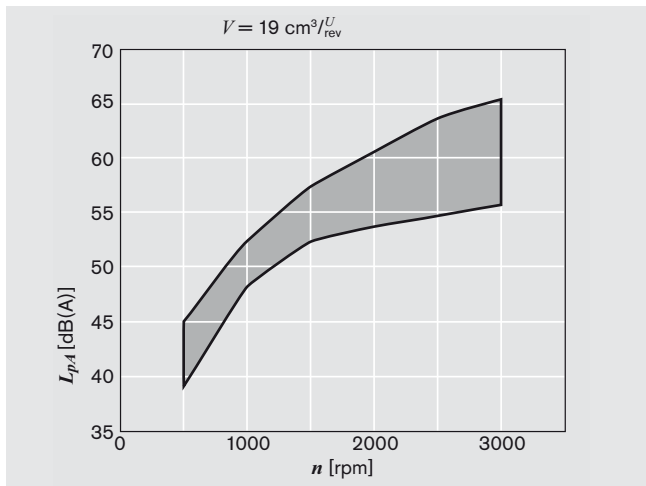

# Specification

General	
Construction	External gear pump
Mounting	Flange or through-bolting with spigot
Line ports	Screw, flange
Direction of rotation (looking on shaft)	Clockwise or counter-clockwise, the pump may only be driven in the direction indicated
Installation position	Any
Load on shaft	Radial and axial forces after consulting
Ambient temperature range	-30°C...+80°C or max. 110°C with FKM seal
Hydraulic fluid	- Mineral oil compliant with DIN 51 524, 1-3, however under higher load at least HLP compliant with DIN 51 524 Part 2 recommended. - Comply with RE 90220 - Further operating fluids possible after consultation
Viscosity	12...800 mm <sup>2</sup> /s permitted range 20...100 mm <sup>2</sup> /s recommended range ...2000 mm <sup>2</sup> /s range permitted for starting
Hydraulic fluid temperature range	max. +80°C with NBR seals*) max. +110°C with FKM seals**)
Filtration ***)	At least cleanliness level 20/18/15 compliant with ISO 4406 (1999)

\*) NBR = Perbunan®  
 \*\*) FKM = Viton®  
 \*\*\*) During the application of control systems or devices with critical counter-reaction, such as steering and brake valves, the type of filtration selected must be adapted to the sensitivity of these devices/systems.


Safety requirements pertaining to the whole systems are to be observed.

In the case of applications with high numbers of load cycles please consulting.


## Definition of direction of rotation

Always look on the drive shaft.

**Caution:** Dimensions drawings always show clockwise-rotation pumps. On counter-clockwise-rotation pumps the positions of the drive shaft and the suction and pressure ports are different.

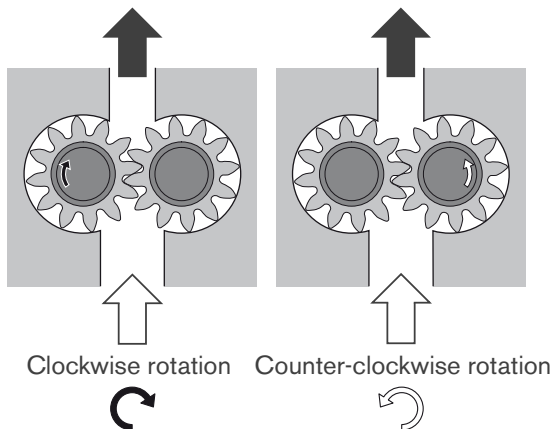

## Definitions of pressures

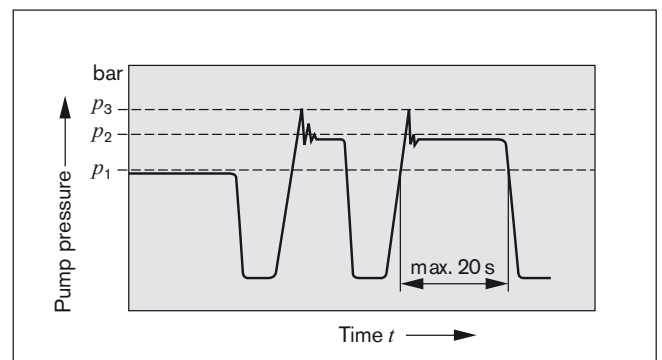

$p_1$  max. continuous pressure  
 $p_2$  max. intermittent pressure  
 $p_3$  max. peak pressure

Series			AZPS-1x						AZPS-2x			
Displacement	V	cm <sup>3</sup> /rev	4	5.5	8	11	14	16	19	22.5	25	28
Suction pressure	$p_e$	bar	0.7...3 (absolute), with tandem pumps: $p_e (p_2) = \max. 0.5 > p_e (p_1)$									
Max. continuous pressure	$p_1$		250						220	195	170	
Max. intermittent pressure	$p_2$		280						250	225	200	
Max. peak pressure	$p_3$		300						290	265	240	
Min. rotational speed	<100	rpm	600	500	500	500	500	500	500	500	500	500
at bar	12 mm <sup>2</sup> /s		100...180	1200	1200	1000	1000	800	800	800	800	800
			180... $p_2$	1400	1400	1400	1200	1000	1000	1000	1000	1000
	25 mm <sup>2</sup> /s		$p_2$	700	700	700	600	500	500	500	500	500
Max. rotational speed at	$p_2$			4000			3500	3000	3000	3500	3500	3000


# Drive arrangement

## 1. Flexible couplings

The coupling must not transfer any radial or axial forces to the pump.


The maximum radial runout of shaft pigot is 0.2 mm.

Refer to the fitting instructions provided by the coupling manufacturer for details of the maximum permitted shaft misalignment.

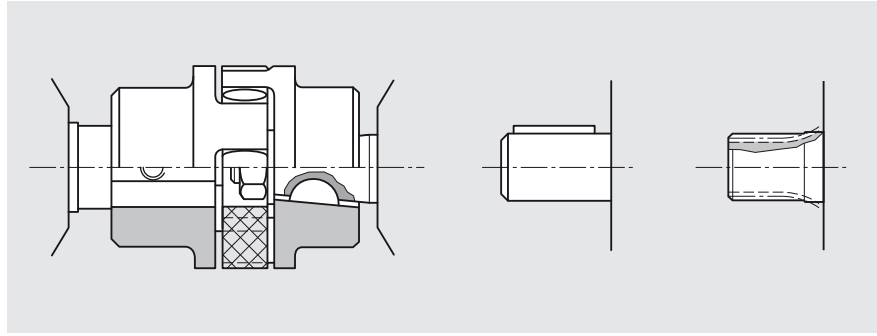

## 2. Coupling sleeve

Used on shafts with DIN or SAE splining. Caution: There must be no radial or axial forces exerted on the pump shaft or coupling sleeve. The coupling sleeve must be free to move axially. The distance between the pump shaft and drive shaft must be  $2^{+1}$ . Oil-bath or oil-mist lubrications is necessary.

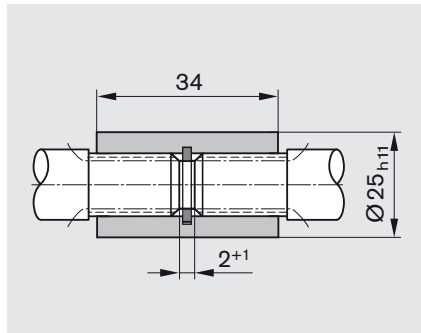

Splined shaft	$M_{max}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{max}$ [bar]
DIN	100	4...28	$p_{max}$
SAE 9t	110		
SAE 11t	180		

## 3. Drive shaft with tang

For the close-coupling of the pumps to electric motor or internal-combustion engine, gear, etc. The pump shaft has a special tang and driver ③ (not included in supply).

There is no shaft sealing.


The recommended arrangements and dimensions for the drive end and sealing are as follows.

### ① Drive shaft

Case-hardening steel DIN 17 210  
 e.g. 20 MnCrS 5  
 case-hardened 0.6 deep; HRC 60 $\pm$ 3  
 Surface for sealing ring  
 ground without rifling  $R_{max} \leq 4\mu\text{m}$

### ② Radial shaft seal ring

Rubber-covered seal (see DIN 3760, Type AS, or double-lipped ring).  
 Cut 15° chamfer or fit shaft seal ring with protection sleeve.

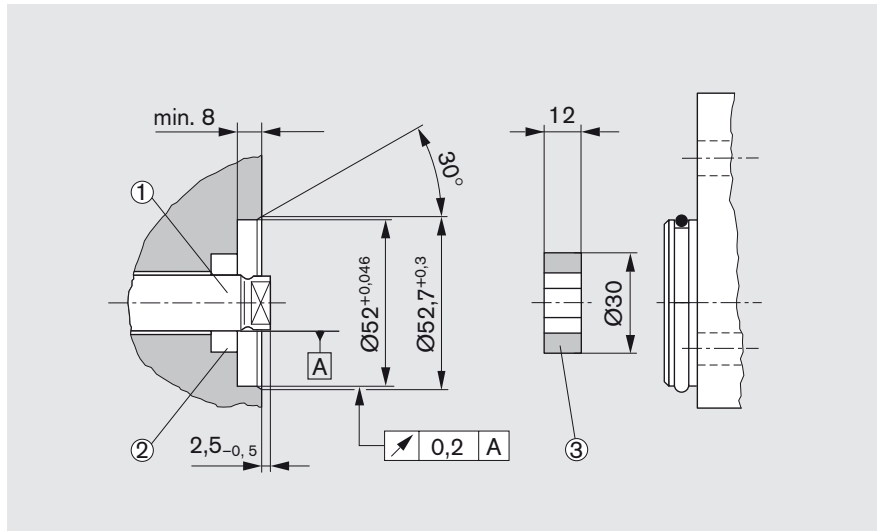


$M_{max}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{max}$ [bar]
65	4...14	280
	16	230
85	19	250
	22.5	210
	25	190
	28	170



**4. V-belts and straight gearwheels or helical toothed gear drives without outboard bearing**



When proposing to use V-belt or gear drive, please submit details of the application for our comments (especially dimensions  $a$ ,  $d_m$ ,  $d_w$  and angle  $\alpha$ ). For helical toothed gear drives, details of the helix angle  $\beta$  are also required.

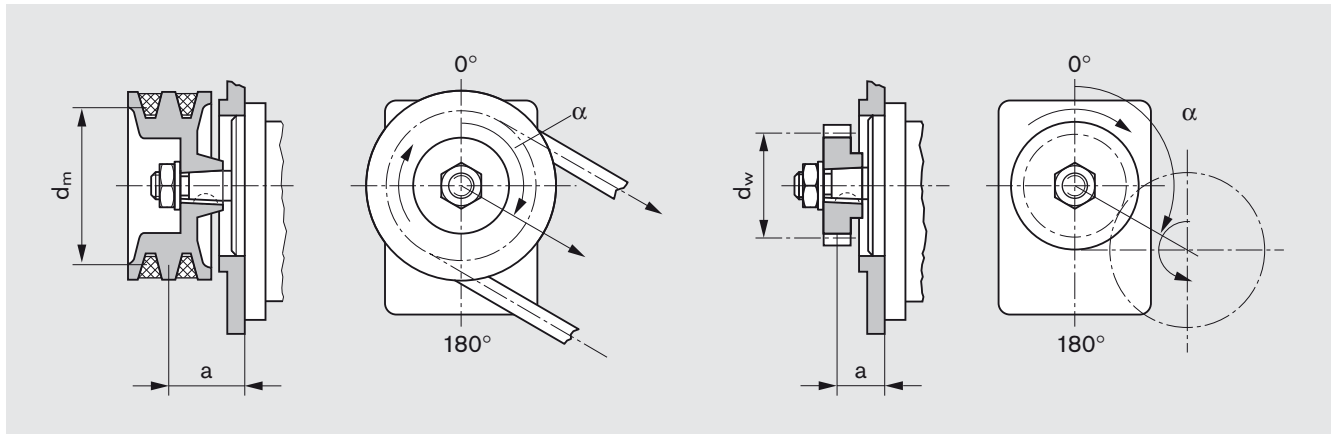

**5. Outboard bearing**

Outboard bearing eliminate possible problems when the pumps are driven by V-belts or gearwheels. The diagrams below show the maximum radial and axial loads that can be tolerated based on a bearing life of  $L_H = 1,000$  hours.

$M_{max}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{max}$ [bar]
65	4...14	280
	16	230

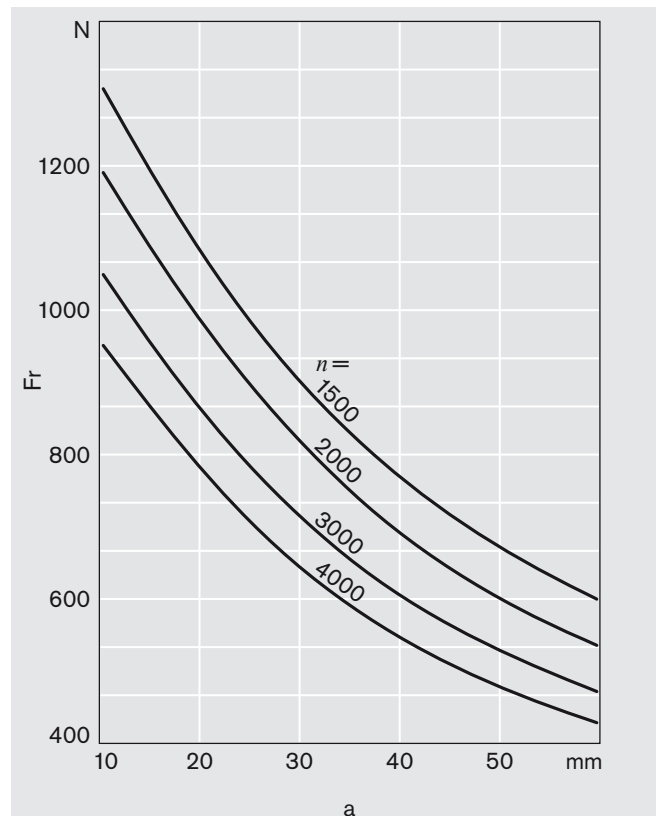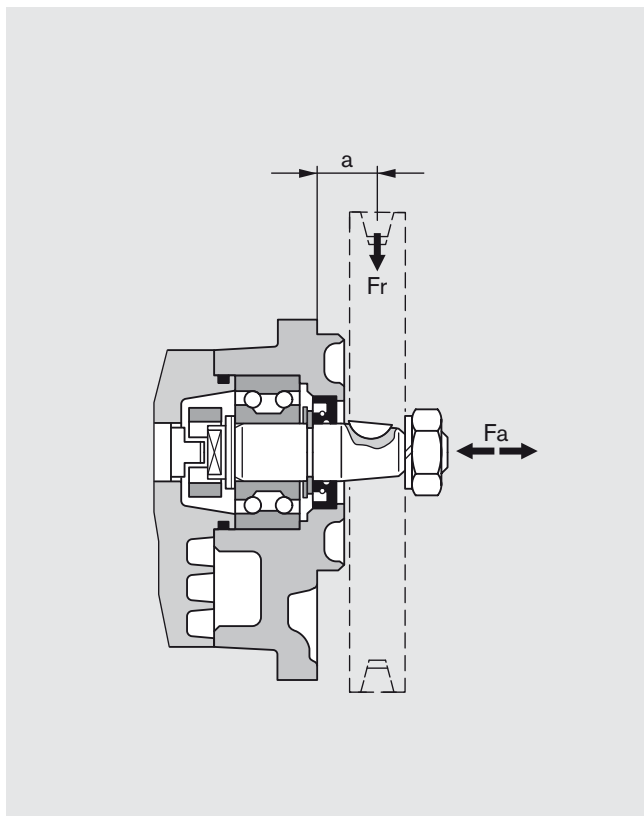

# Multiple gear pumps

Gear pumps are well-suited to tandem combinations of pumps in which the drive shaft of the first pump is extended to drive a second pump and sometimes a third pump in the same manner. A coupling is fitted between each pair of pumps. In most cases each pump is isolated from its neighbor, i.e. the suction ports are separate from one another. A common suction port is also possible as an option.

**Caution:** Basically, the specifications for the single pumps apply, but with certain restrictions:

**Max. speed:** This is determined by the highest rated pump speed in use.

**Pressures:** These are restricted by the strength of the drive shaft, the through drives and the drivers. Appropriate data is given in the dimensional drawings.

### Pressure restrictions during standard through drive


In the case of series N, the driver for the second pumping stage can carry a load of up to  $S_{max.} = 95 \text{ Nm}$ , i.e. there is a pressure restriction for the second stage and any further stages.

Drive shaft		Max. transferrable drive torque * [Nm]
C	1:5	155
N	Claw	65 or 85
D	SAE 13t	320
P	SAE 11t	180

\* These values only apply when the conditions described above are complied with. Bosch Rexroth is to be consulted if the stated values are exceeded.

If the first stage is driven through a tang (driver) or outboard bearing type 1, pressure restrictions apply as indicated in the formula below.



Reinforced through drives are available for applications with higher transfer torques and/or rotational vibrations. Customized designs available on request.

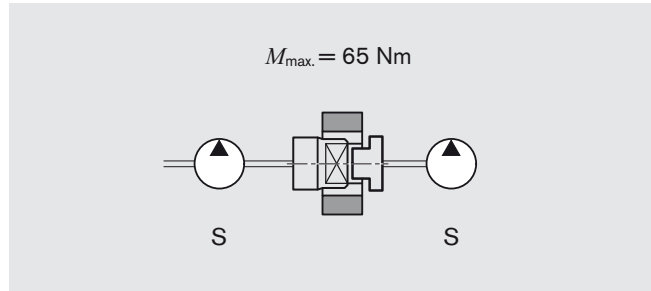

### Combinations

Series pump 1	$M_{max.}$ [Nm]	Series pump 2
S	65	S
S	65	F
S	12	B - 1x
F	65	S
S	25	B - 2x

For configuration of multiple pumps we recommend the pump is positioned with the largest displacement on the drive side.

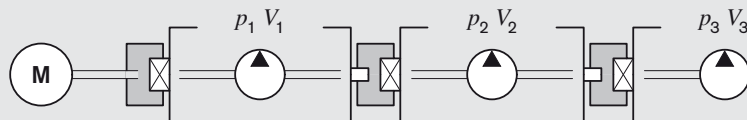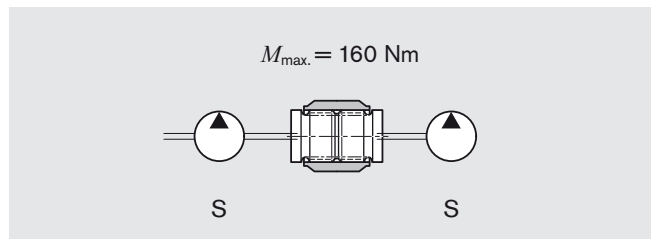


$$M_{max.} \cong \Delta p_1 \cdot V_1 \cdot 0.0177 + \Delta p_2 \cdot V_2 \cdot 0.0177 + \Delta p_3 \cdot V_3 \cdot 0.0177$$

$\Delta p$  [bar]  $V$  [cm<sup>3</sup>/rev]

# Dimensions

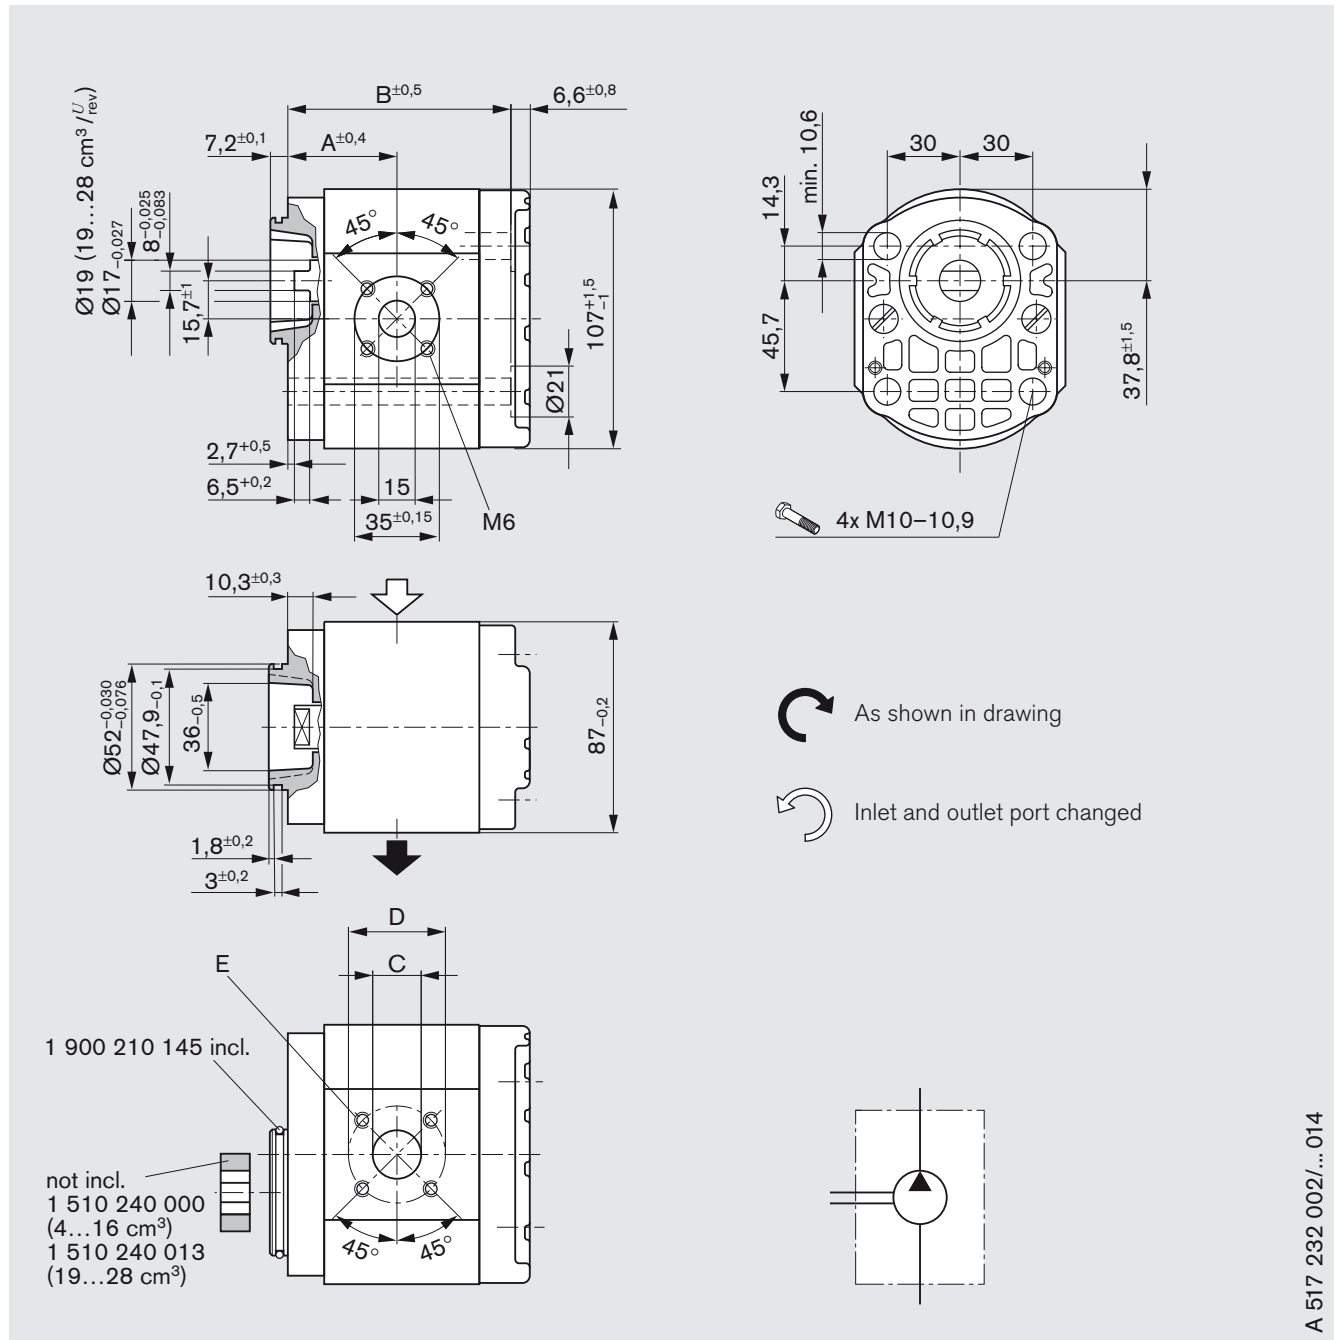

## Standard range



A 517 232 002/... 014


### Ordering code:

AZPS - xx -    N M 20 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	 L	 R				A	B	C	D	E
4	0 517 215 301	0 517 215 001	280	4000	2.15	37.4	73.7	15	40	M6
5.5	0 517 315 301	0 517 315 001	280	4000	2.2	38.6	76.2	15	40	13 depth
8	0 517 415 301	0 517 415 001	280	4000	2.3	40.7	80.3	20	40	
11	0 517 515 302	0 517 515 001	280	3500	2.4	44.5	85.3	20	40	
14	0 517 515 303	0 517 515 002	280	3000	2.55	45	90.3	20	40	
16	0 517 615 301	0 517 615 001	230	3000	2.6	45	93.7	20	40	M8 13 depth
19	0 517 615 302	0 517 615 002	250	3500	3.0	55.8	110.7	26	55	
22.5	0 517 715 301	0 517 715 001	210	3500	3.2	58.5	116.1	26	55	
25	0 517 715 302	0 517 715 002	190	3000	3.3	60.6	120.3	26	55	
28	0 517 715 303	0 517 715 003	170	3000	3.4	63	125.1	26	55	

# Dimensions

## Standard range

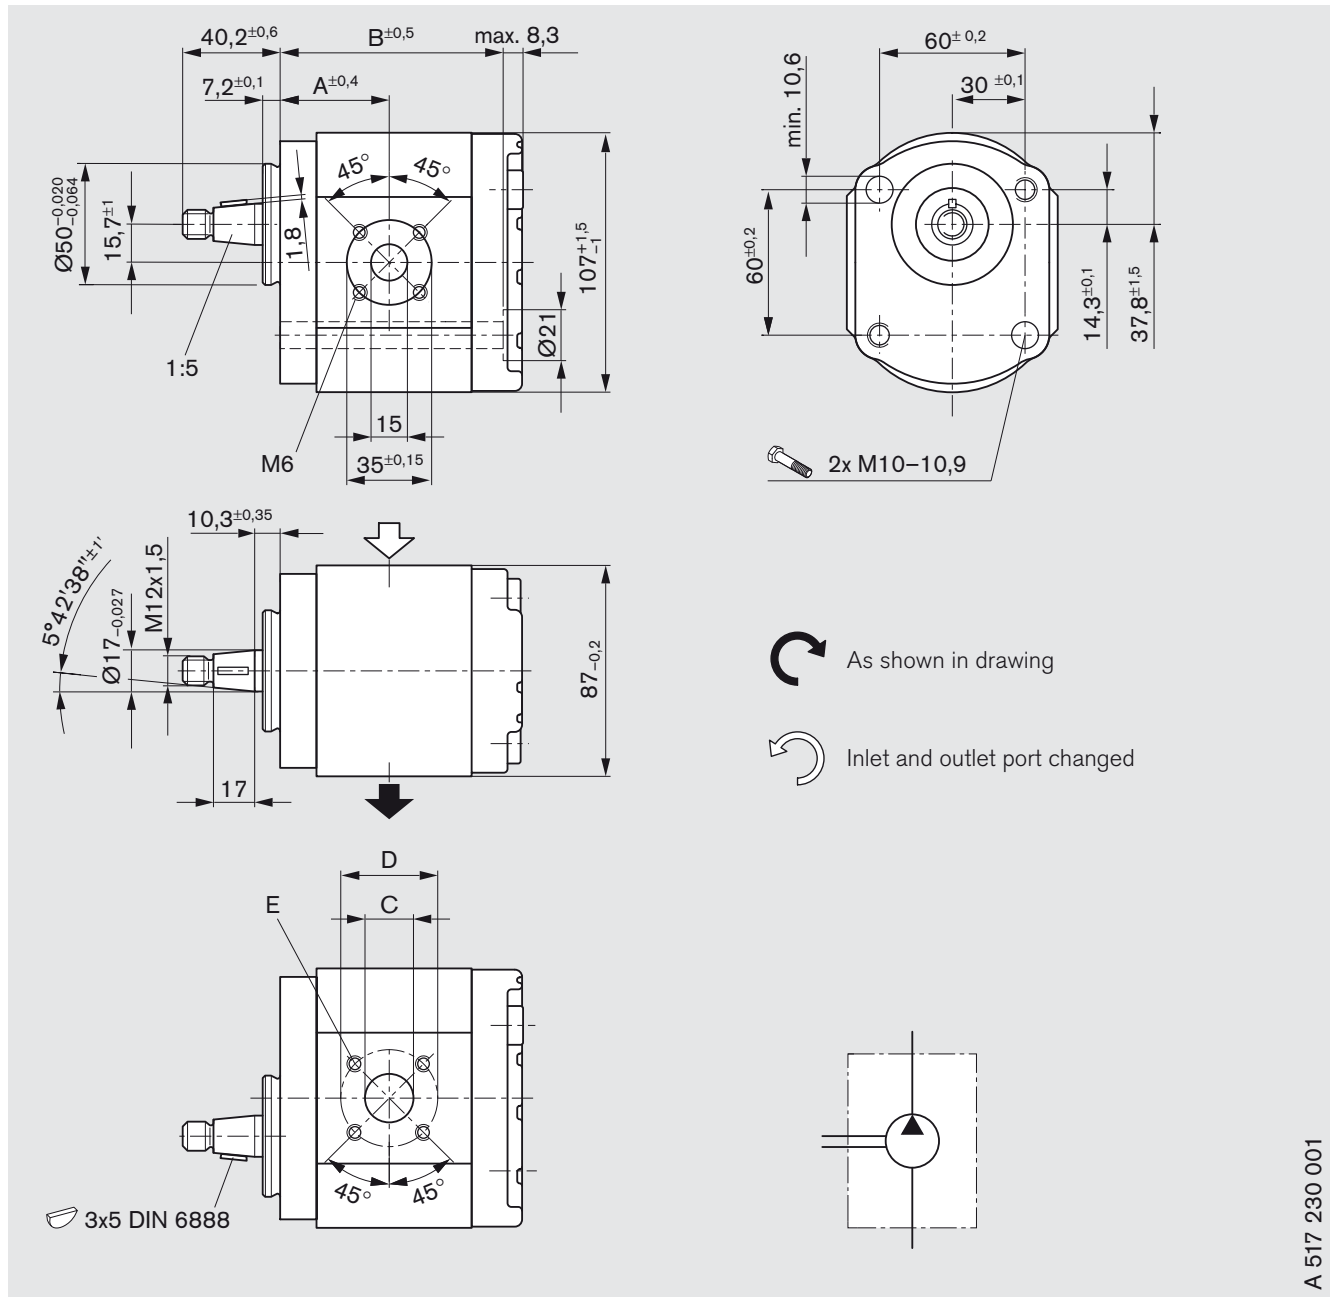

A 517 230 001


**Ordering code:**

AZPS - xx -     C P 20 K B

Displacement [cm <sup>3</sup> /rev]	Ordering-No. 	Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
					A	B	C	D	E
4		280	4000						M6 13 depth
5.5		280	4000						
8		280	4000						
11	<b>0 517 515 304</b>	280	3500	3.1	44.5	85.3	20	40	
14	<b>0 517 515 306</b>	280	3000	3.3	45	90.3	20	40	
16	<b>0 517 615 303</b>	280	3000	3.4	45	93.7	20	40	
19		280	3500						
22.5		250	3500						
25		225	3000						
28		200	3000						

# Dimensions

## Standard range

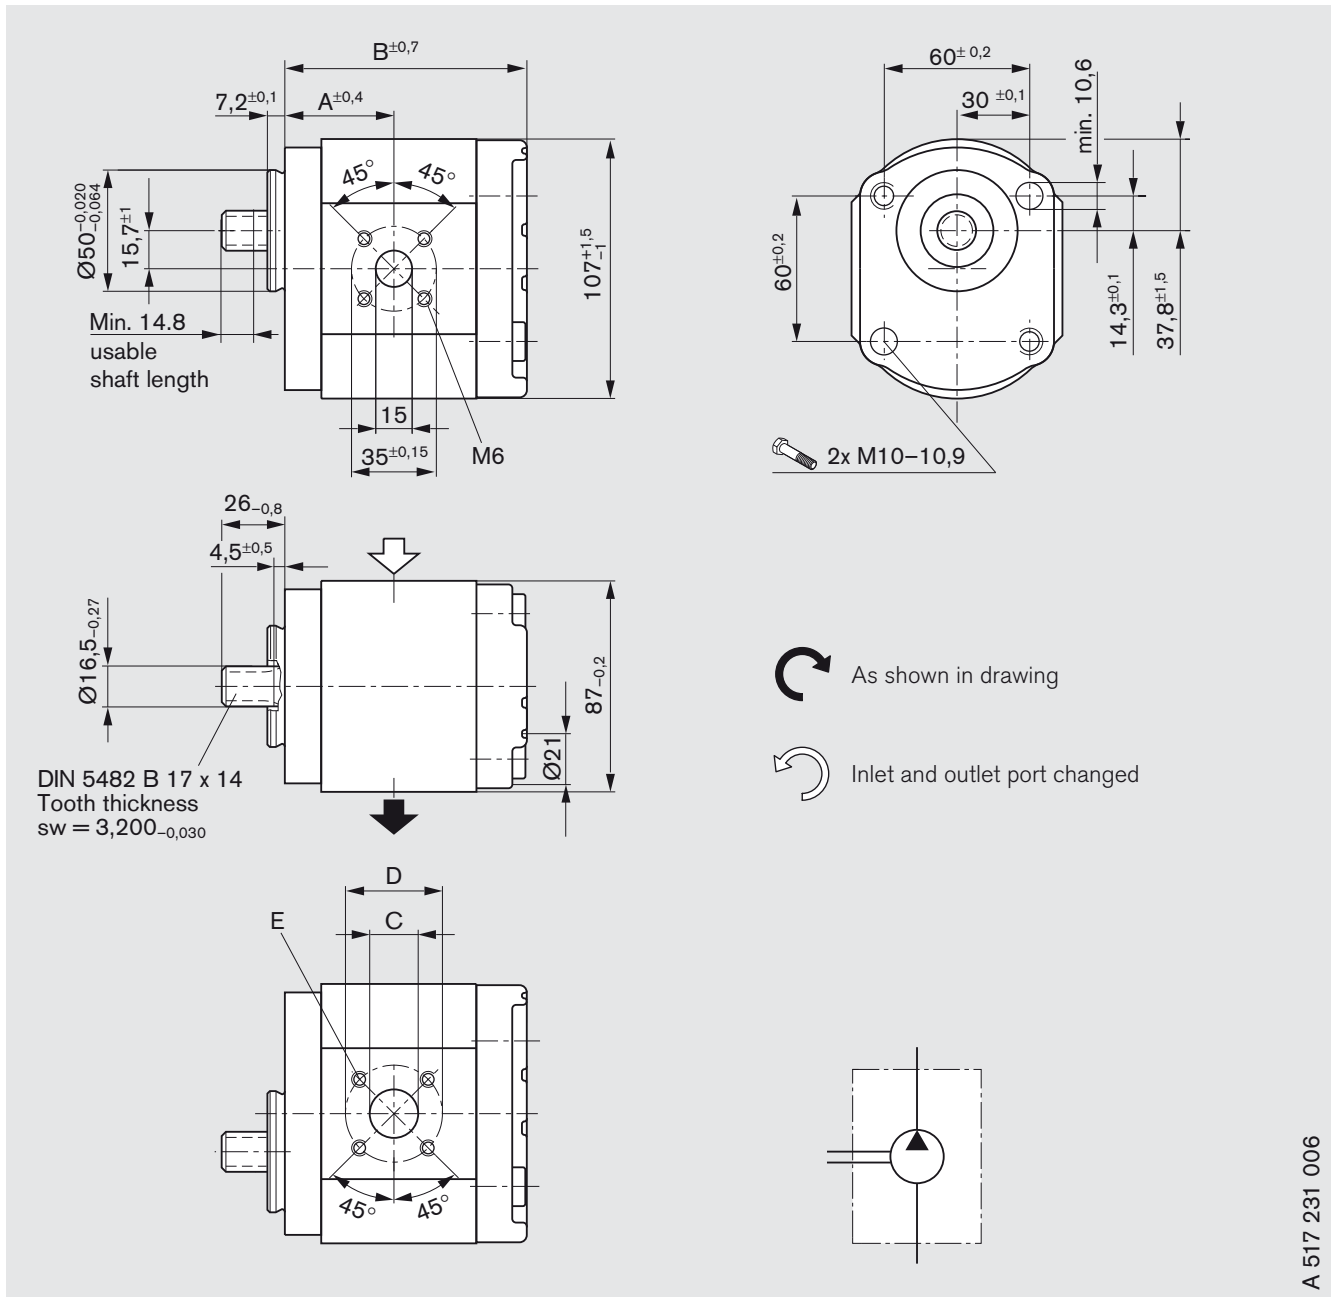

A 517 231 006


**Ordering code:**

AZPS - xx -     FN 20 K B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
						A	B	C	D	E
4			280	4000						M6
5.5			280	4000						13 depth
8			280	4000						
11			280	3500						
14			280	3000						
16		<b>0 517 615 003</b>	280	3000	3.3	45	100.5	20	40	
19			280	3500						
22.5			250	3500						
25			225	3000						
28			200	3000						

# Dimensions

## Standard range

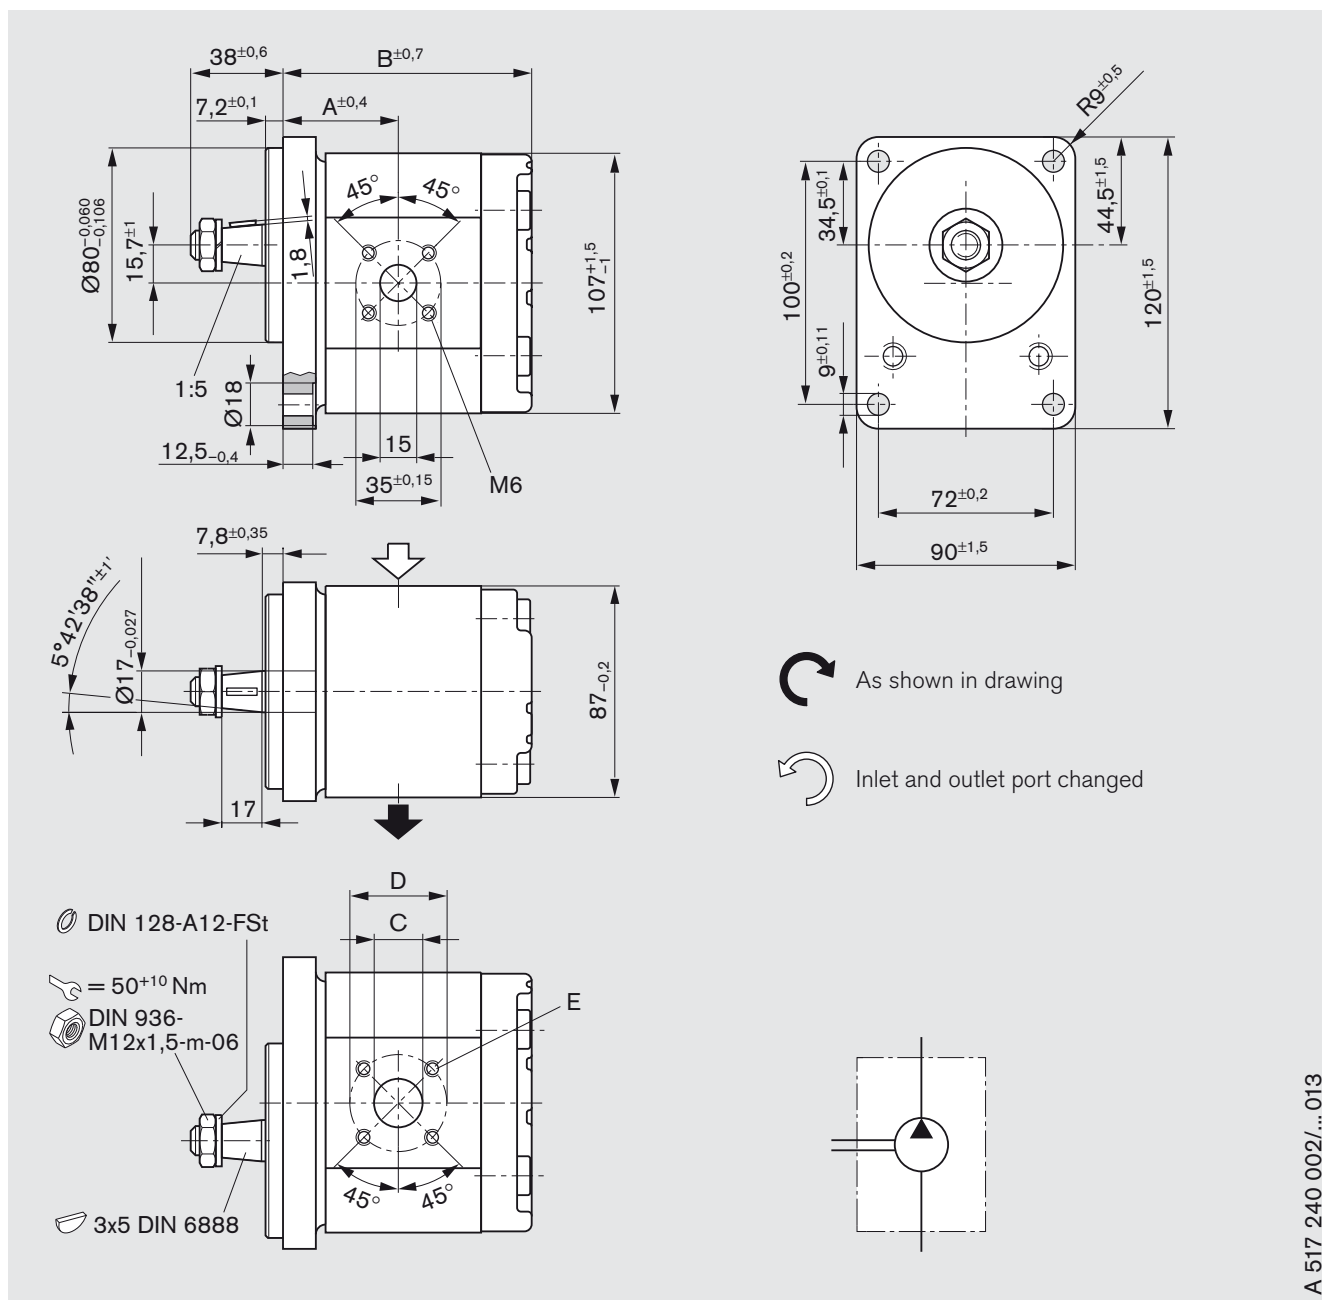

A 517 240 002/... 013


### Ordering code:

AZPS - xx -     C B 20 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
						A	B	C	D	E
4	0 517 225 301	0 517 225 001	280	4000	3.4	39.9	83	15	40	M6
5.5	0 517 325 301	0 517 325 001	280	4000	3.5	41.1	85.5	15	40	13 depth
8	0 517 425 301	0 517 425 001	280	4000	3.6	43.2	89.6	20	40	
11	0 517 525 301	0 517 525 001	280	3500	3.8	47	94.6	20	40	
14	0 517 525 302	0 517 525 002	280	3000	3.9	47.5	99.6	20	40	
16	0 517 625 301	0 517 625 001	280	3000	-	47.5	103	20	40	M8 13 depth
19	0 517 625 302	0 517 625 002	280	3500	4.5	58.3	120	26	55	
22.5	0 517 725 301	0 517 725 001	250	3500	4.6	61	125.4	26	55	
25	0 517 725 302	0 517 725 002	225	3000	4.8	63.1	129.6	26	55	
28	0 517 725 303	0 517 725 003	200	3000	4.9	65.5	134.4	26	55	

# Dimensions

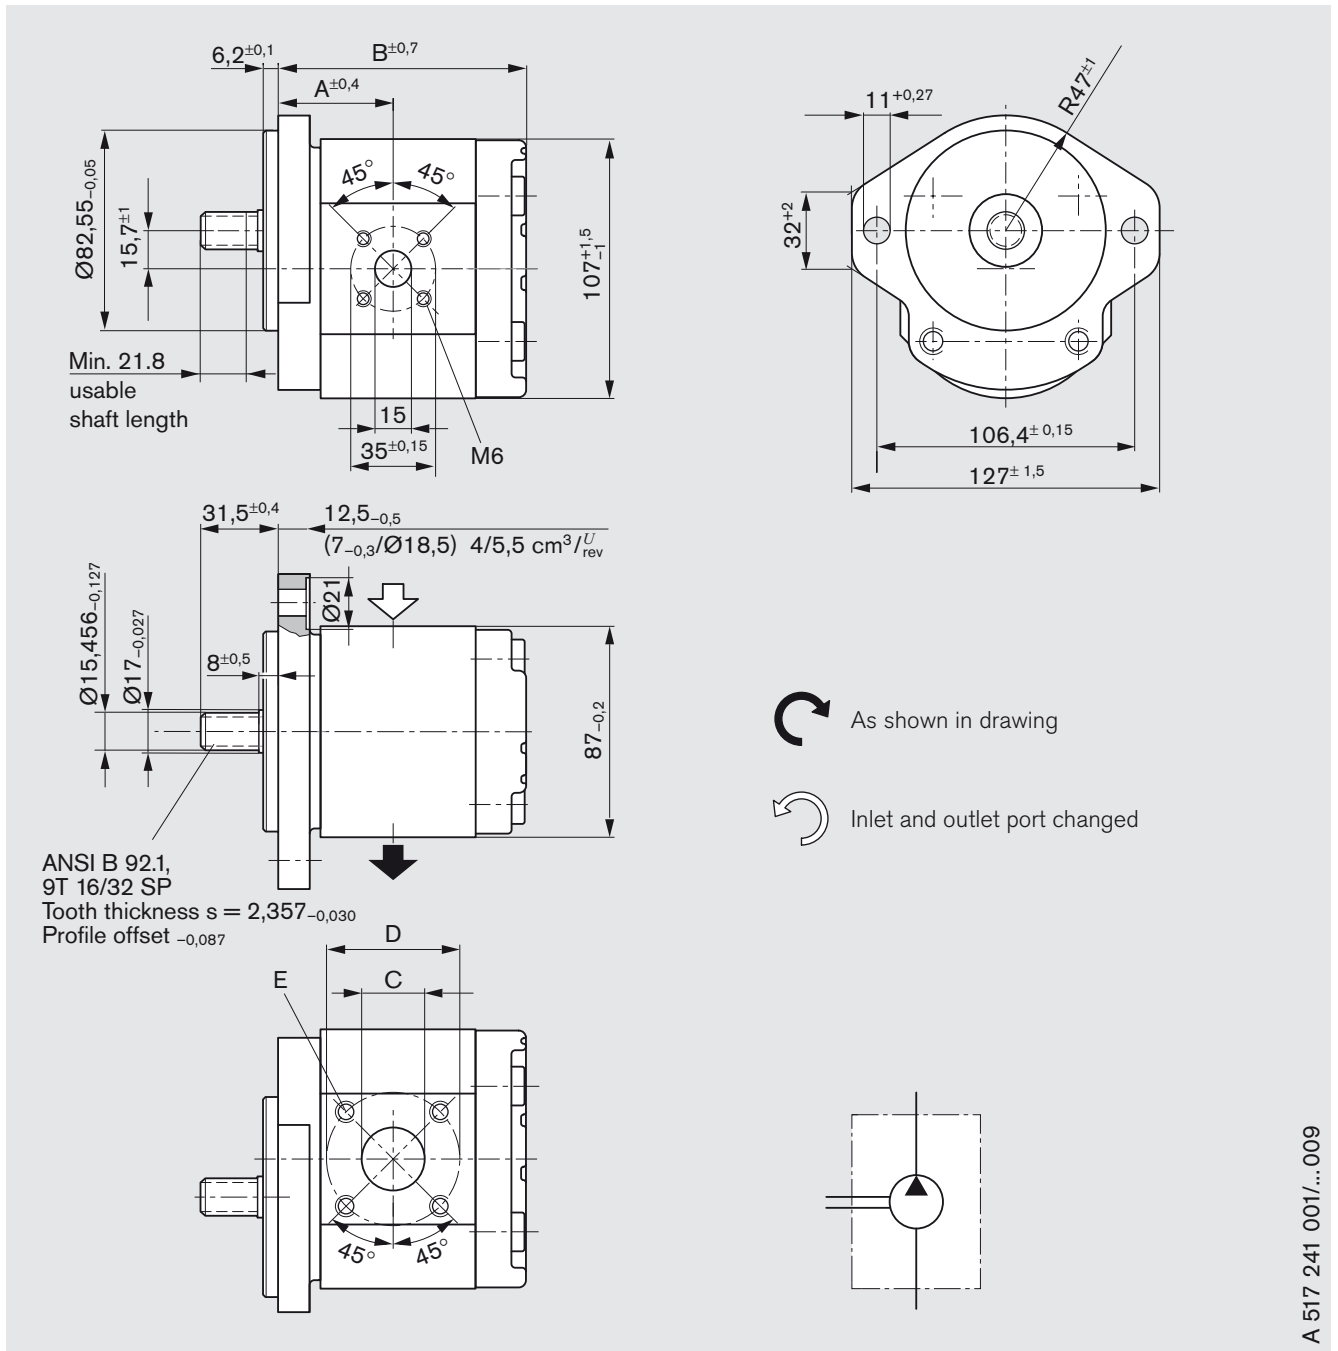

## Standard range



A 517 241 001/... 009


### Ordering code:

AZPS - xx -     R R 20 M B  
 AZPS - 1x - 0 1 6 L R R 20 P B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
	 L	 R				A	B	C	D	E
4	0 517 225 302	0 517 225 002	280	4000	3.4	39.9	83	15	40	M6
5.5	0 517 325 302	0 517 325 002	280	4000	3.5	41.1	85.5	15	40	13 depth
8	0 517 425 302	0 517 425 002	280	4000	3.6	43.2	89.6	20	40	
11	0 517 525 303	0 517 525 003	280	3500	3.7	47	94.6	20	40	
14	0 517 525 304	0 517 525 004	280	3000	3.9	47.5	99.6	20	40	
16	0 517 625 303	0 517 625 003	280	3000	3.9	47.5	103	20	40	M8 13 depth
19	0 517 625 304	0 517 625 004	280	3500	4.4	58.3	120	26	55	
22.5	0 517 725 304	0 517 725 004	250	3500	4.6	61	125.4	26	55	
25	0 517 725 305	0 517 725 005	225	3000	4.7	63.1	129.6	26	55	
28	0 517 725 306	0 517 725 006	200	3000	4.8	65.5	134.4	26	55	

# Dimensions

## Standard range

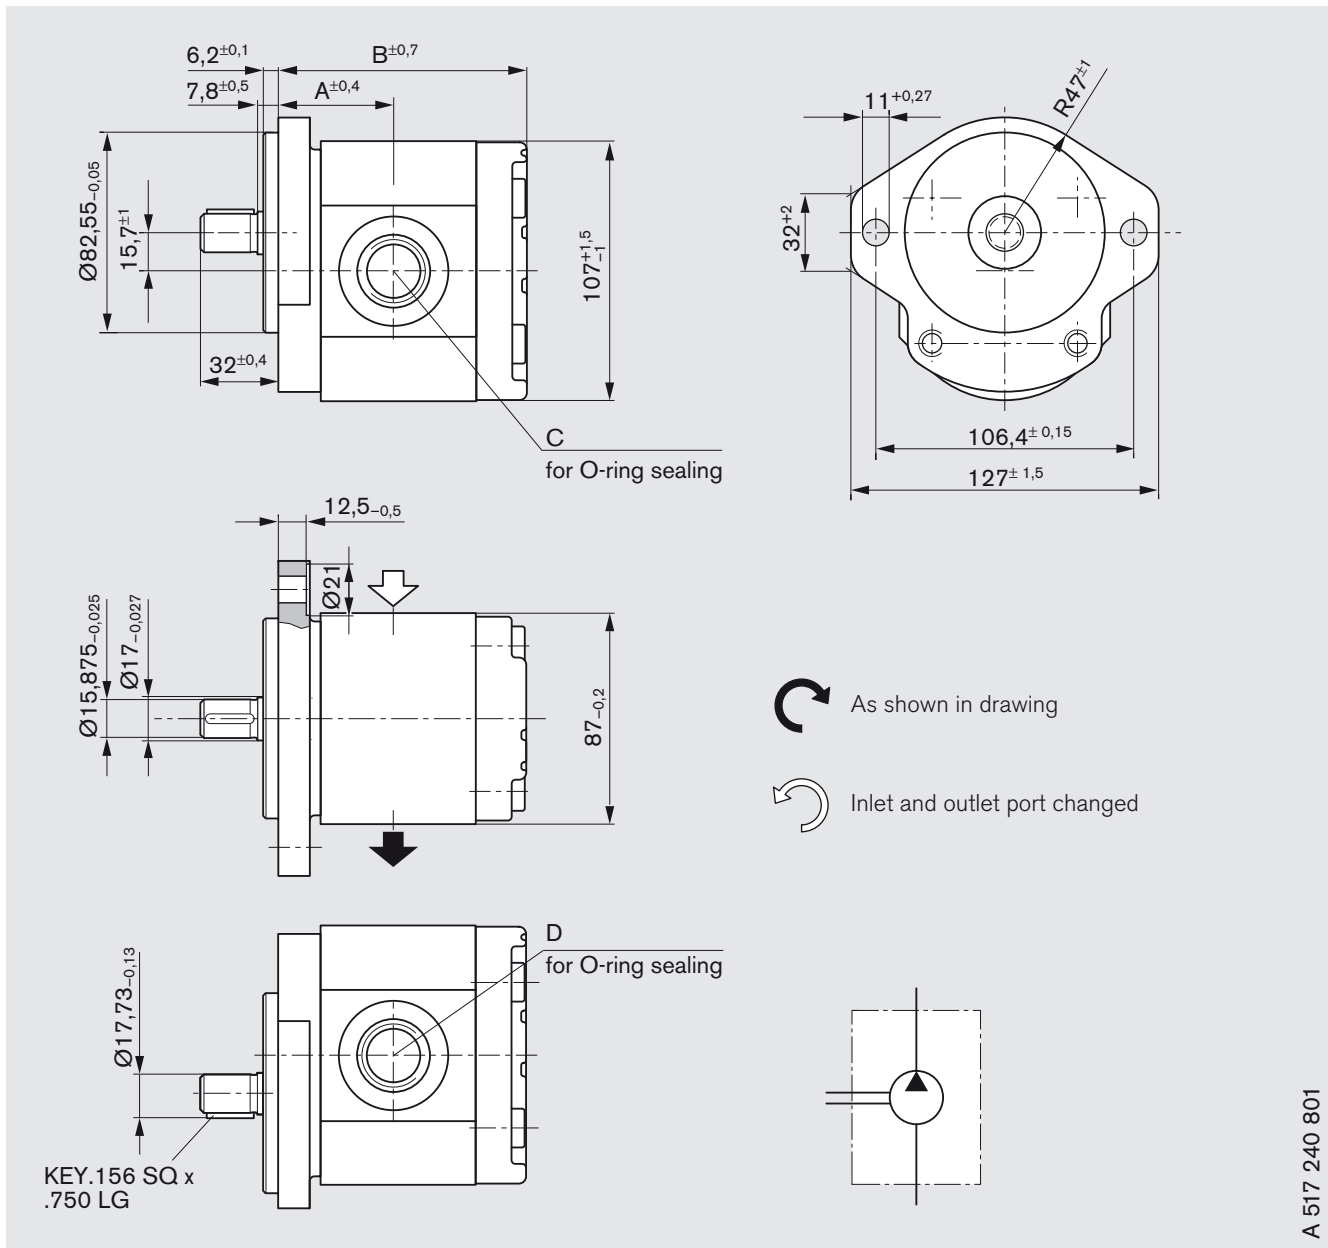

A 517 240 801

### Ordering code:


AZPS - xx -     Q R 12 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]			
						A	B	C	D
4			260	4000					
5.5			260	4000					
8		<b>0 517 425 003</b>	260	4000	3.6	43.2	89.6	7/8"-14 UNF-2B 16 depth	
11			260	3500					
14			230	3000					
16			200	3000					
19			210	3500					
22.5			180	3500					
25			160	3000					
28			140	3000					



# Dimensions

## Standard range

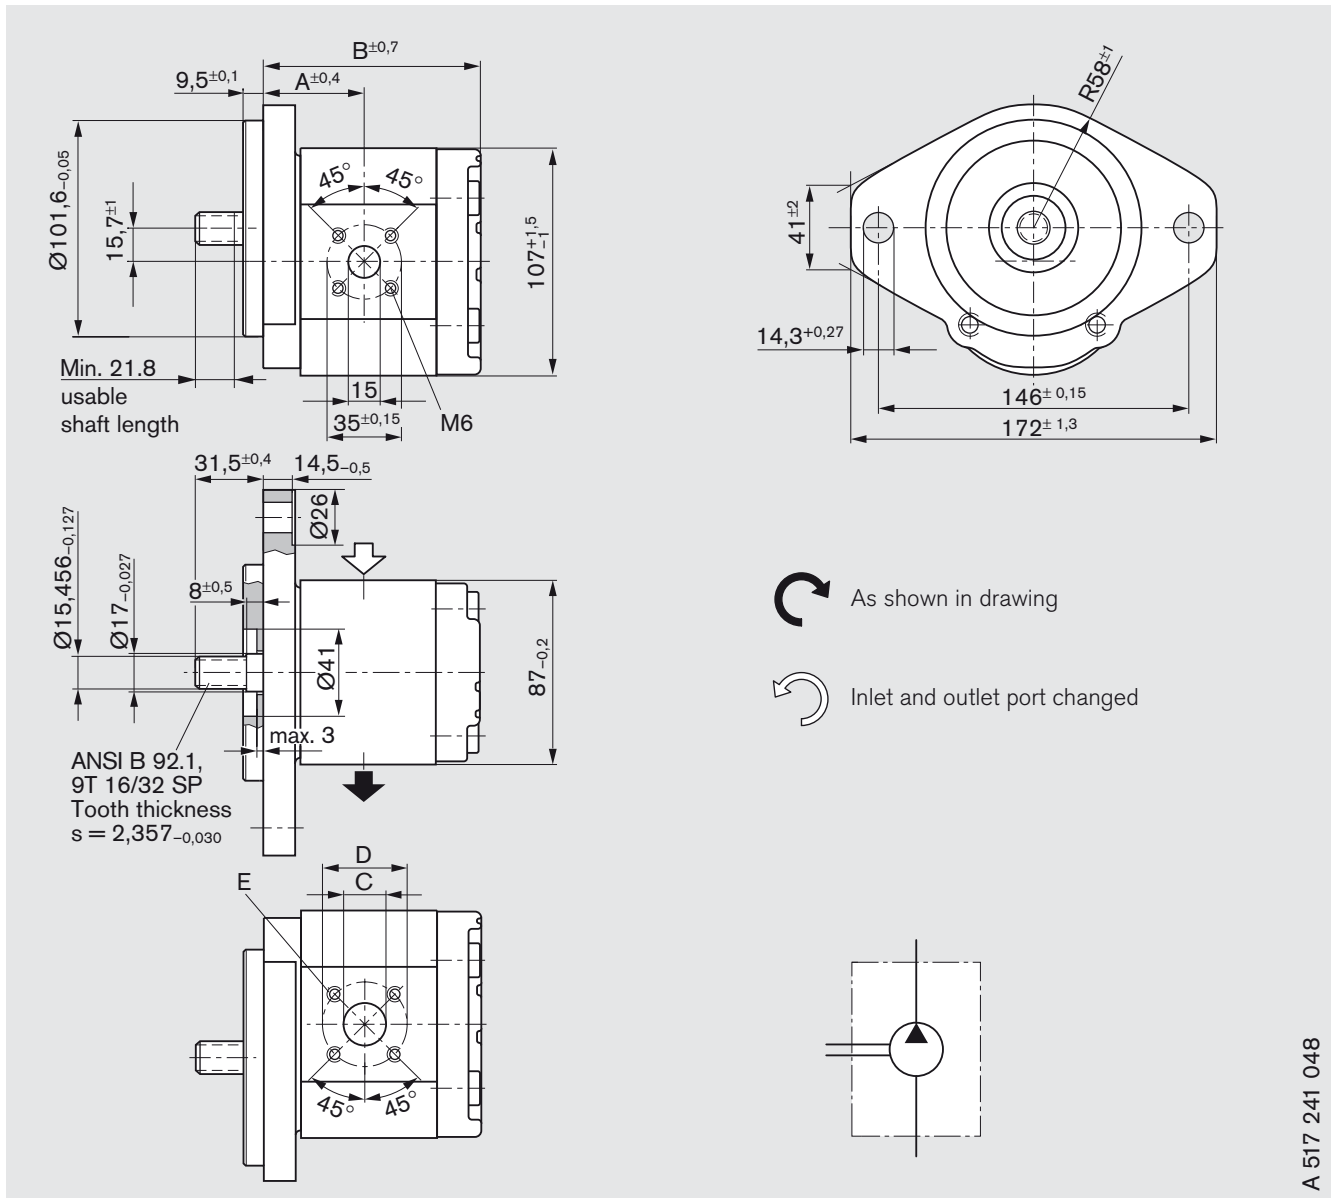

A 517 241 048


**Ordering code:**

AZPS - xx -     RC 20 KB

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				
						A	B	C	D	E
4			280	4000						M6
5.5			280	4000						13 depth
8			280	4000						
11		<b>0 517 525 306</b>	280	3500	4.3	47	95.2	20	40	
14			280	3000						
16			280	3000						
19			280	3500						M8
22.5			250	3500						13 depth
25		<b>0 517 725 008</b>	225	3000	5.2	63.1	130.2	26	55	
28			200	3000						

# Dimensions

## Standard range

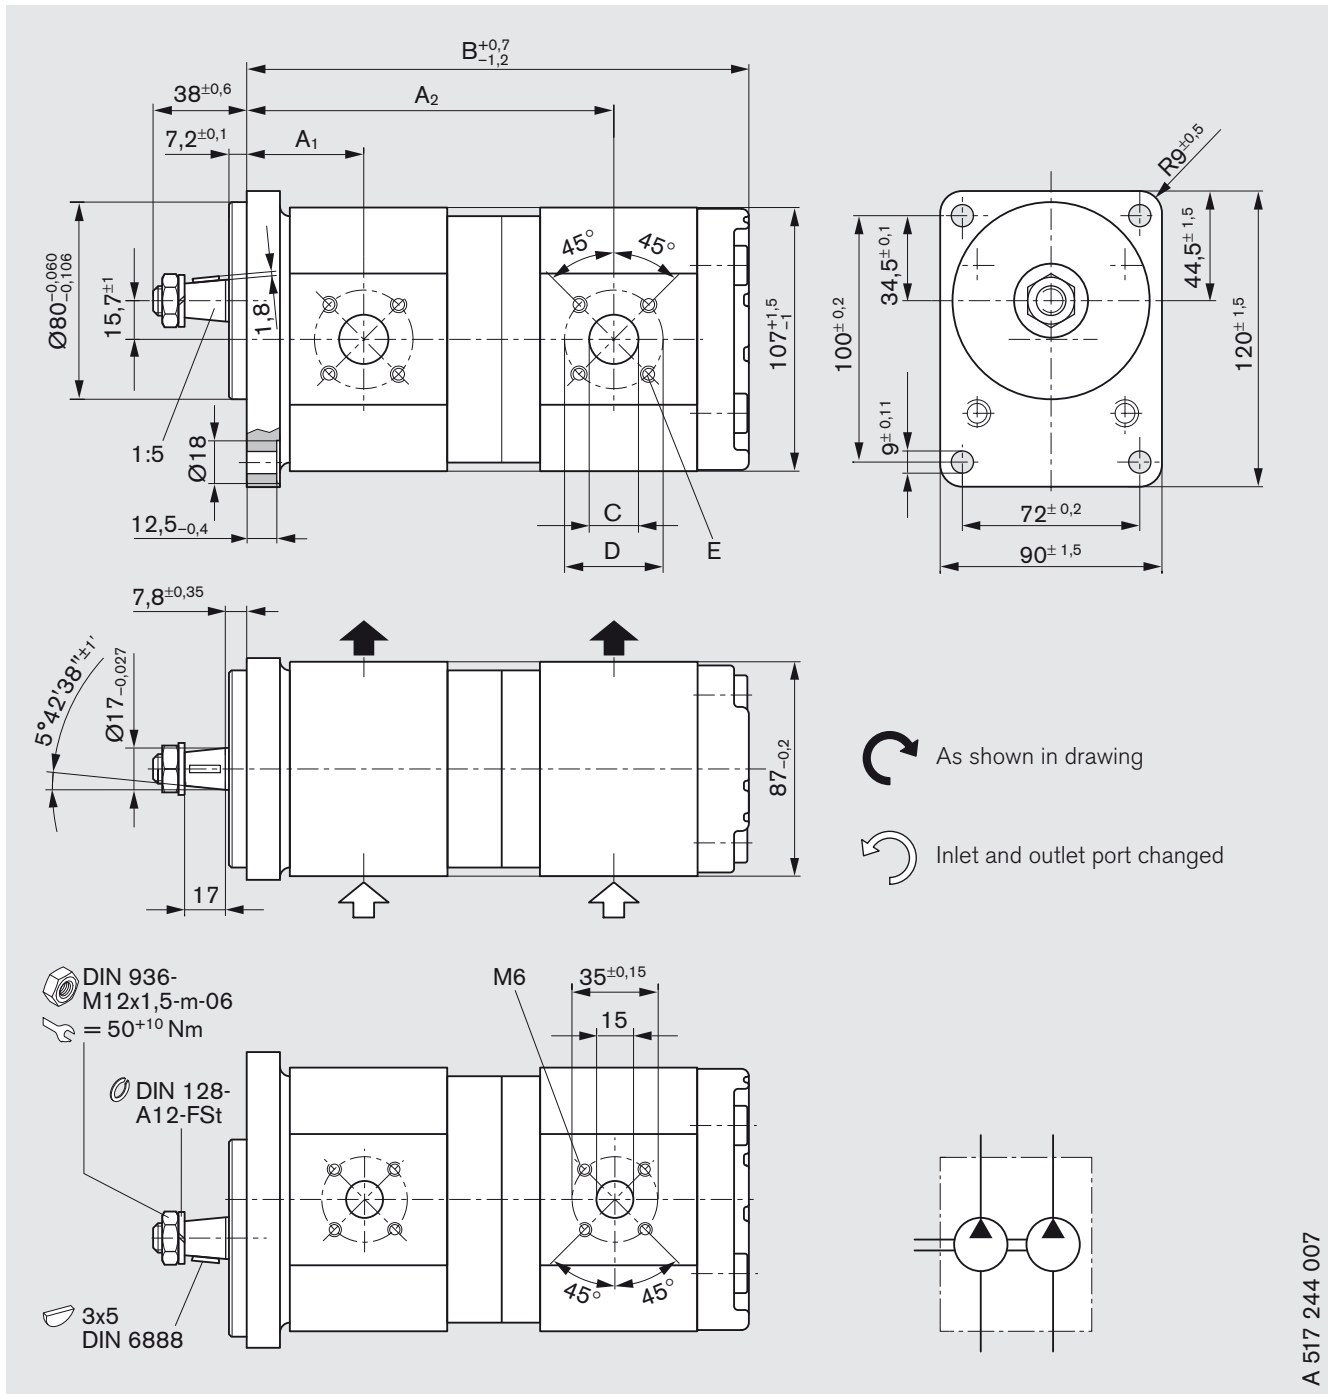

A 517 244 007

**Ordering code:**


**AZPSS - xx -**  /  **C B 20 20 M B**

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]						
	P1	P2				A <sub>1</sub>	A <sub>2</sub>	B	C*)	D	E	
16	5.5	<b>0 517 665 304</b>	280	280	3000	5.8	47.5	142.8	187.0	20	40	M6
16	8		280	280	3000							13 depth
16	11	<b>0 517 665 305</b>	280	280	3000	6.1	47.5	148.7	196.3	20	40	
14	11	<b>0 517 565 011</b>	280	260	3000	5.9	47.5	145.3	192.5	20	40	

\*) at 4 and 5.5 cm<sup>3</sup> Ø15

# Dimensions

## Standard range

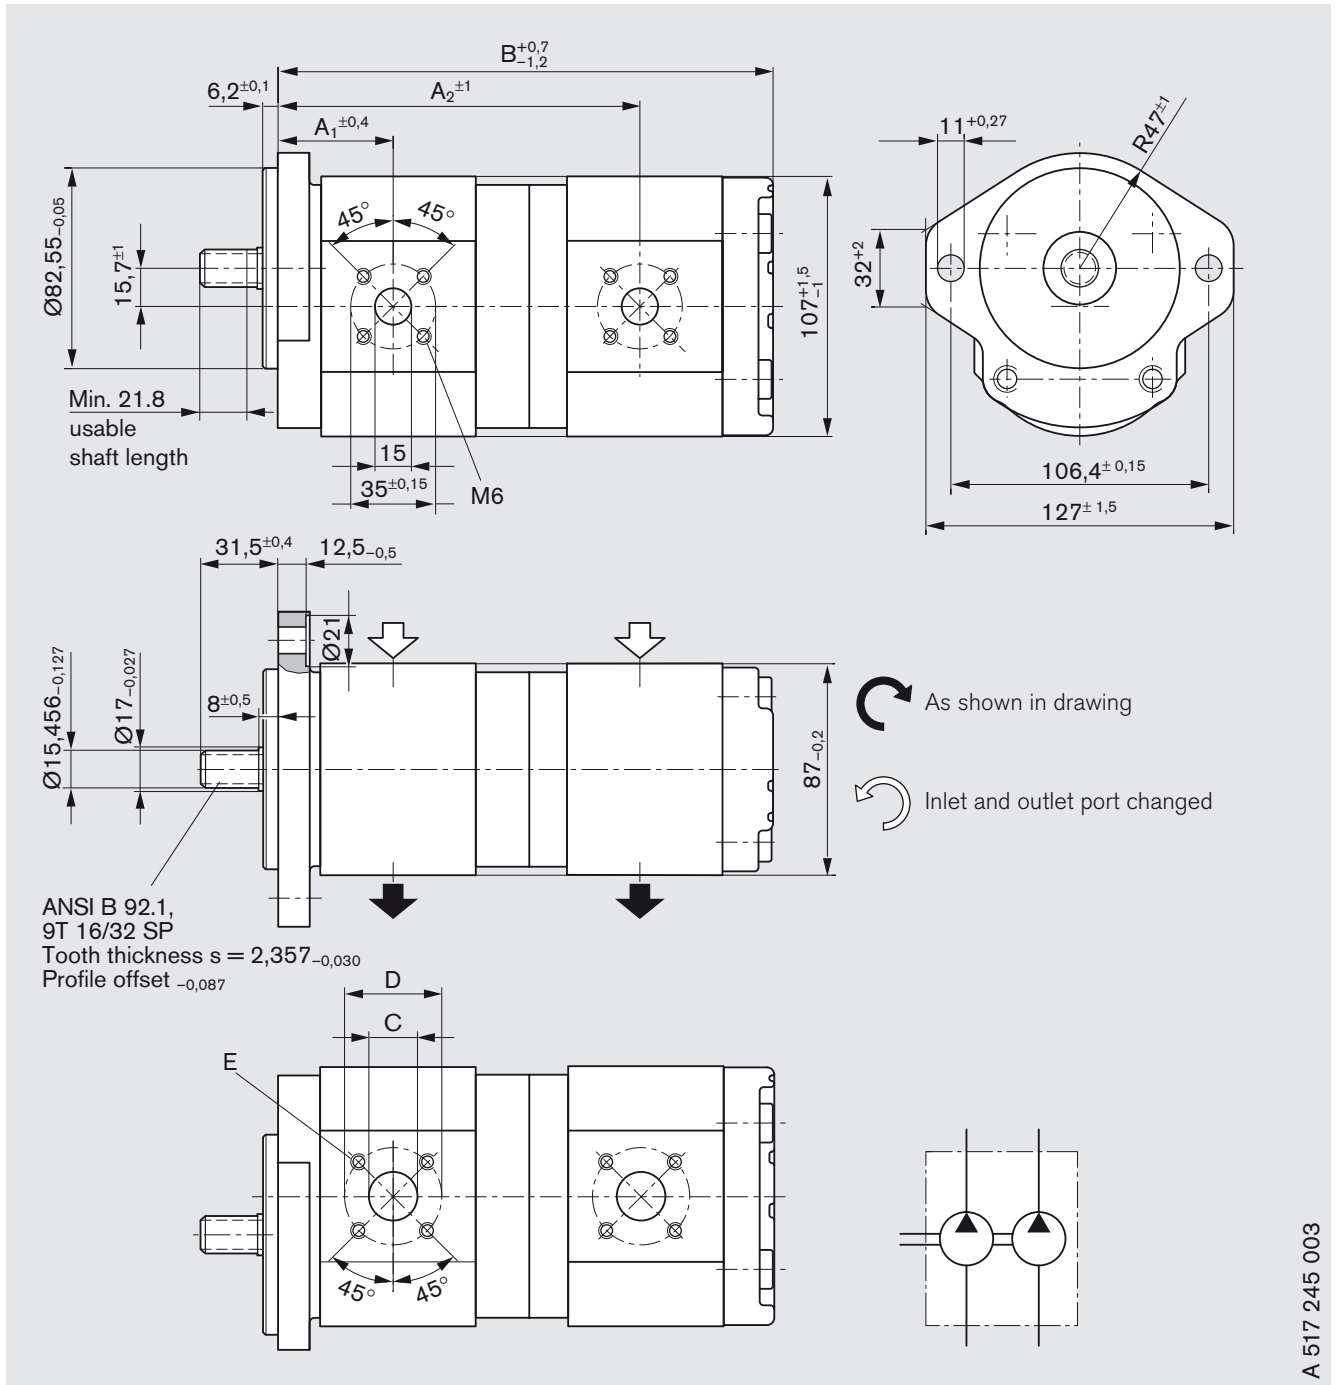

A 517 245 003

7

**Ordering code:**


**AZPSS - xx - [ ] [ ] [ ] / [ ] [ ] [ ] [ ] R R 20 20 M B**

Displacement [cm <sup>3</sup> /rev] P1 P2	Ordering-No.		Max. operating pressure [bar]		Max. rotation speed [rpm]	kg	Dimension [mm]					
			P1	P2			A <sub>1</sub>	A <sub>2</sub>	B	C*)	D	E
16 5.5		<b>0 517 665 007</b>	280	280	3000	5.8	47.5	142.8	186.9	20	40	M6
												13 depth

\*) at 4 and 5.5 cm<sup>3</sup> Ø15

# Fittings


Gear pump flange, straight, for rectangular flange **20** see page 8

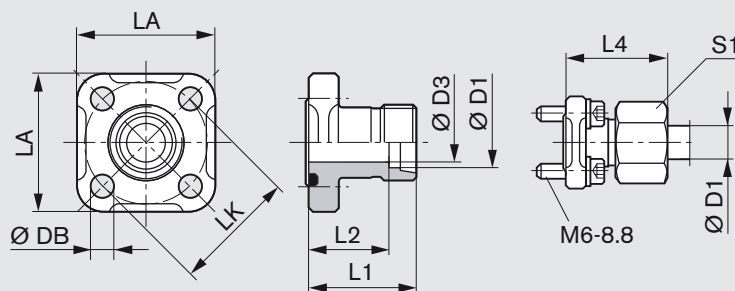

LK	D1	D3	L1	L2	L4	LA	S1	DB	Screws 4x	Seal ring NBR *)	Mass [kg]	Part number	p [bar]
35	10L	8	30	23.0	39.0	40	19	6.4	M6x22	20x2.5	0.09	1 515 702 064	315
35	12L	10	30	23.0	39.0	40	22	6.4	M6x22	20x2.5	0.10	1 515 702 065	315
35	15L	12	30	23.0	38.0	40	27	6.4	M6x22	20x2.5	0.10	1 515 702 066	250
40	15L	12	35	28.0	43.0	42	27	6.4	M6x22	24x2.5	0.12	1 515 702 067	100
40	18L	15	35	27.5	44.0	42	32	6.4	M6x22	24x2.5	0.13	1 515 702 068	100
40	22L	19	35	27.5	44.5	42	36	6.4	M6x22	24x2.5	0.12	1 515 702 069	100
40	28L	24	42	27.5	34.5	42	41	6.4	M6x22	24x2.5	0.15	1 515 702 008	100


Complete fittings with seal ring, metric screw set, nuts and olive. \*) NBR = Perbunan®

Gear pump flange, 90° angle, for rectangular flange **20** see page 8

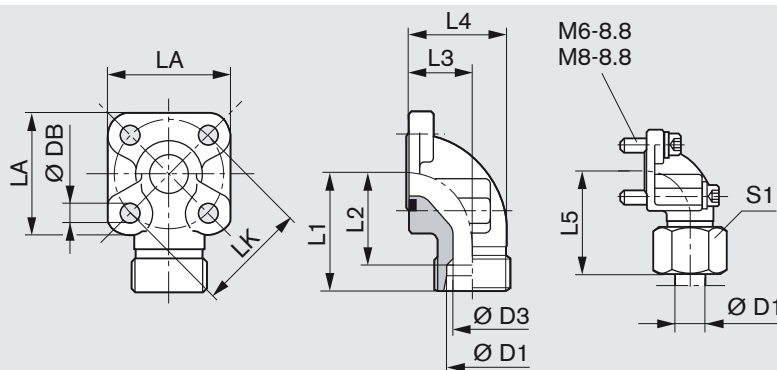

LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws		Seal ring NBR *)	Mass [kg]	Part number	p (bar)
											2x	2x				
35	10L	8	38	31.0	16.5	26.5	47.0	40	19	6.4	M6x22	M6x35	20x2.5	0.16	1 515 702 070	315
35	12L	10	38	31.0	16.5	26.5	47.0	40	22	6.4	M6x22	M6x35	20x2.5	0.16	1 515 702 071	315
35	15L	12	38	31.0	16.5	26.5	46.0	40	27	6.4	M6x22	M6x35	20x2.5	0.15	1 515 702 072	250
35	16S	12	38	29.5	20.0	31.0	48.0	40	30	6.4	M6x22	M6x40	20x2.5	0.18	1 515 702 002	315
35	18L	15	38	29.5	20.0	31.0	47.0	40	32	6.4	M6x22	M6x40	20x2.5	0.18	1 545 702 006	250
35	20S	16	45	34.5	25.0	38.0	56.0	40	36	6.4	M6x22	M6x45	20x2.5	0.24	1 515 702 017	315
40	15L	12	38	31.0	22.5	36.5	46.0	42	27	6.4	M6x22	M6x22	24x2.5	0.15	1 515 702 073	100
40	18L	15	38	30.5	22.5	36.5	47.0	42	32	6.4	M6x22	M6x22	24x2.5	0.17	1 515 702 074	100
40	20S	16	40	29.5	22.5	35.5	50.0	42	36	6.4	M6x22	M6x45	24x2.5	0.20	1 515 702 011	250
40	22L	19	38	30.5	22.5	36.5	47.5	42	36	6.4	M6x22	M6x22	24x2.5	0.17	1 515 702 075	100
40	28L	22	40	32.5	28.0	43.0	49.0	42	41	6.4	M6x20	M6x50	24x2.5	0.24	1 515 702 010	100
40	35L	31	41	30.5	34.0	55.0	52.0	42	50	6.4	M6x22	M6x60	24x2.5	0.33	1 515 702 018	100

Complete fittings with seal ring, metric screw set, nuts and olive. \*) NBR = Perbunan®

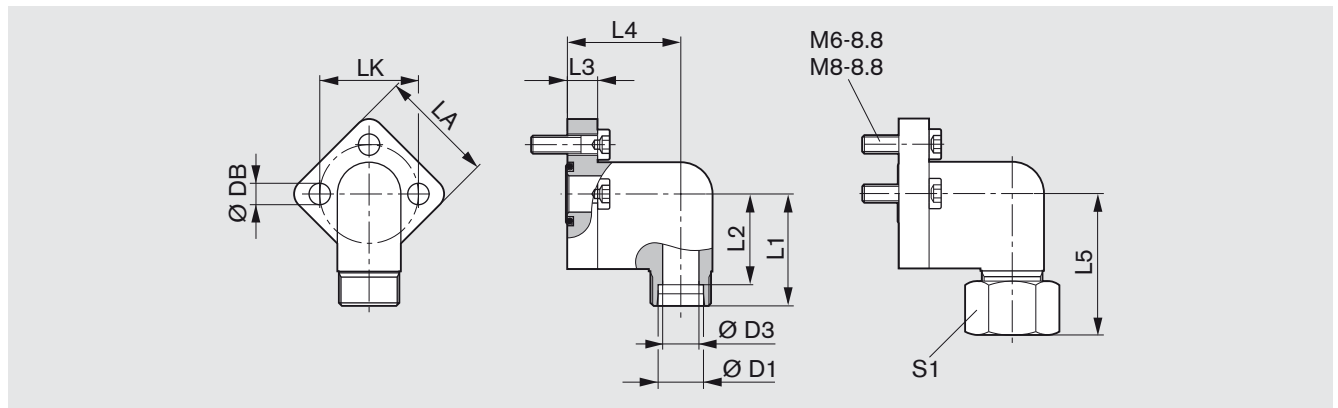**Gear pump flange, 3-hole, 90° angle, for rectangular flange 30 see page 8**


LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws 3x	Seal ring NBR *)	Mass [kg]	Part number	p [bar]
30	12L	10	37	30.0	10	37.5	46	38	22	6.4	M6x22	16x2.5	0.13	<b>1 515 702 146</b>	250
30	15L	12	37	30.0	10	37.5	47	38	27	6.4	M6x22	16x2.5	0.14	<b>1 515 702 147</b>	250
30	18L	15	37	30.0	10	37.5	47	38	32	6.4	M6x22	16x2.5	0.17	<b>1 515 702 148</b>	160
40	22L	19	43	35.5	14	41.0	53	48	36	8.4	M8x30	24x2.5	0.29	<b>1 515 702 149</b>	160
40	28L	24	43	35.5	14	41.0	53	48	41	8.4	M8x30	24x2.5	0.40	<b>1 515 702 150</b>	160

Complete fittings with seal ring, metric screw set, nuts and olive. \*) NBR = Perbunan®

**Note**

You can find the permissible tightening torques in our publication:  
 "General Operating Instructions for External Gear Units"  
 RE 07 012-B1.

## Ordering-No.

Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page
0 517 215 001	19	0 517 515 306	20	0 517 625 304	23
0 517 215 301	19	0 517 525 001	22	0 517 665 007	27
0 517 225 001	22	0 517 525 002	22	0 517 665 304	26
0 517 225 002	23	0 517 525 003	23	0 517 665 305	26
0 517 225 301	22	0 517 525 004	23	0 517 715 001	19
0 517 225 302	23	0 517 525 301	22	0 517 715 002	19
0 517 315 001	19	0 517 525 302	22	0 517 715 003	19
0 517 315 301	19	0 517 525 303	23	0 517 715 301	19
0 517 325 001	22	0 517 525 304	23	0 517 715 302	19
0 517 325 002	23	0 517 525 306	25	0 517 715 303	19
0 517 325 301	22	0 517 565 011	26	0 517 725 001	22
0 517 325 302	23	0 517 615 001	19	0 517 725 002	22
0 517 415 001	19	0 517 615 002	19	0 517 725 003	22
0 517 415 301	19	0 517 615 003	21	0 517 725 004	23
0 517 425 001	22	0 517 615 301	19	0 517 725 005	23
0 517 425 002	23	0 517 615 303	19	0 517 725 006	23
0 517 425 003	24	0 517 615 303	20	0 517 725 008	25
0 517 425 301	22	0 517 625 001	22	0 517 725 301	22
0 517 425 302	23	0 517 625 002	22	0 517 725 302	22
0 517 515 001	19	0 517 625 003	23	0 517 725 303	22
0 517 515 002	19	0 517 625 004	23	0 517 725 304	23
0 517 515 302	19	0 517 625 301	22	0 517 725 305	23
0 517 515 303	19	0 517 625 302	22	0 517 725 306	23
0 517 515 304	20	0 517 625 303	23		

# Notes for commissioning

## Filter recommendation

The major share of premature failures in external gear pumps is caused by contaminated hydraulic fluid.

As a warranty cannot be issued for dirt-specific wear, we recommend filtration compliant with cleanliness level 20/18/15 ISO 4406, which reduces the degree of contamination to a permissible dimension in terms of the size and concentration of dirt particles:

Operating pressure [bar ]	>160	<160
Contamination class ISO 4406	18/15	19/16
To be reached with $\beta_x = 75$	20	25

We recommend that a full-flow filter always be used. Basic contamination of the hydraulic fluid used may not exceed class 20/18/15 according to ISO 4406. Experience has shown that new fluid quite often lies above this value. In such instances a filling device with special filter should be used.

## General

- The pumps supplied by us have been checked for function and performance. No modifications of any kind may be made to the pumps; any such changes will render the warranty null and void!
- Pump may only be operated in compliance with permitted data (see pages 15 – 18).

## Project planning notes

Comprehensive notes and suggestions are available in Hydraulics Trainer, Volume 3 RE 00 281, "Project planning notes and design of hydraulic systems". Where external gear pumps are used we recommend that the following note be adhered to.

## Technical data

All stated technical data is dependent on production tolerances and is valid for specific marginal conditions.

Note that, as a consequence, scattering is possible, and at certain marginal conditions (e.g. viscosity) **the technical data may change.**

## Characteristics

When designing the external gear pump, note the maximum possible service data based on the characteristics displayed on pages 10 to 12.

Additional information on the proper handling of hydraulic products from Bosch Rexroth is available in our document: "General product information for hydraulic products" RE 07 008.

## Contained in delivery


The components with characteristics as described under ordering code and device measurements, pages 19 – 27, are contained in delivery.

**You can find further information in our publication: "General Operating Instructions for External Gear Units" RE 07 012-B1.**

# Service parts

Page	Ordering code	Seal kit Pos. 800 1 517 010...	Shaft seal ring Pos. 3 1 510 283...	Dimension	Seal ring Pos. 31 1 900 210...	Material	Dimen- sion	Driver Pos. 30 1 510 240...
19	AZPS - 1x - □□□ □ N M 20 M B	208	-		145	NBR	45x2.5	000
19	AZPS - 2x - □□□ □ N M 20 K B	212	-		145	NBR	45x2.5	013
20	AZPS - 1x - □□□ □ C P 20 K B	208	027 FKM	17x30x7/8	-	-	-	-
21	AZPS - 1x - □□□ □ F N 20 K B	208	027 FKM	17x30x7/8	-	-	-	-
22	AZPS - 1x - □□□ □ C B 20 M B	208	008 NBR	17x30x7/8	-	-	-	-
22	AZPS - 2x - □□□ □ C B 20 M B	212	008 NBR	17x30x7/8	-	-	-	-
23	AZPS - 1x - □□□ □ R R 20 M B	208	008 NBR	17x30x7/8	-	-	-	-
23	AZPS - 1x - 0 1 6 L R R 20 P B	206	027 FKM	17x30x7/8	-	-	-	-
23	AZPS - 2x - □□□ □ R R 20 M B	212	008 NBR	17x30x7/8	-	-	-	-
24	AZPS - 1x - □□□ □ Q R 12 M B	208	008 NBR	17x30x7/8	-	-	-	-
25	AZPS - 1x - □□□ □ R C 20 K B	208	027 FKM	17x30x7/8	-	-	-	-
25	AZPS - 2x - □□□ □ R C 20 K B	212	027 FKM	17x30x7/8	-	-	-	-
26	AZPSS - 1x - □□□ □□□ □ C B 20 20 M B	208	008 NBR	17x30x7/8	145	NBR	45x2.5	-
27	AZPSS - 1x - □□□ □□□ □ R R 20 20 M B	208	008 NBR	17x30x7/8	145	NBR	45x2.5	-

NBR = Perbunan® FKM = Viton®

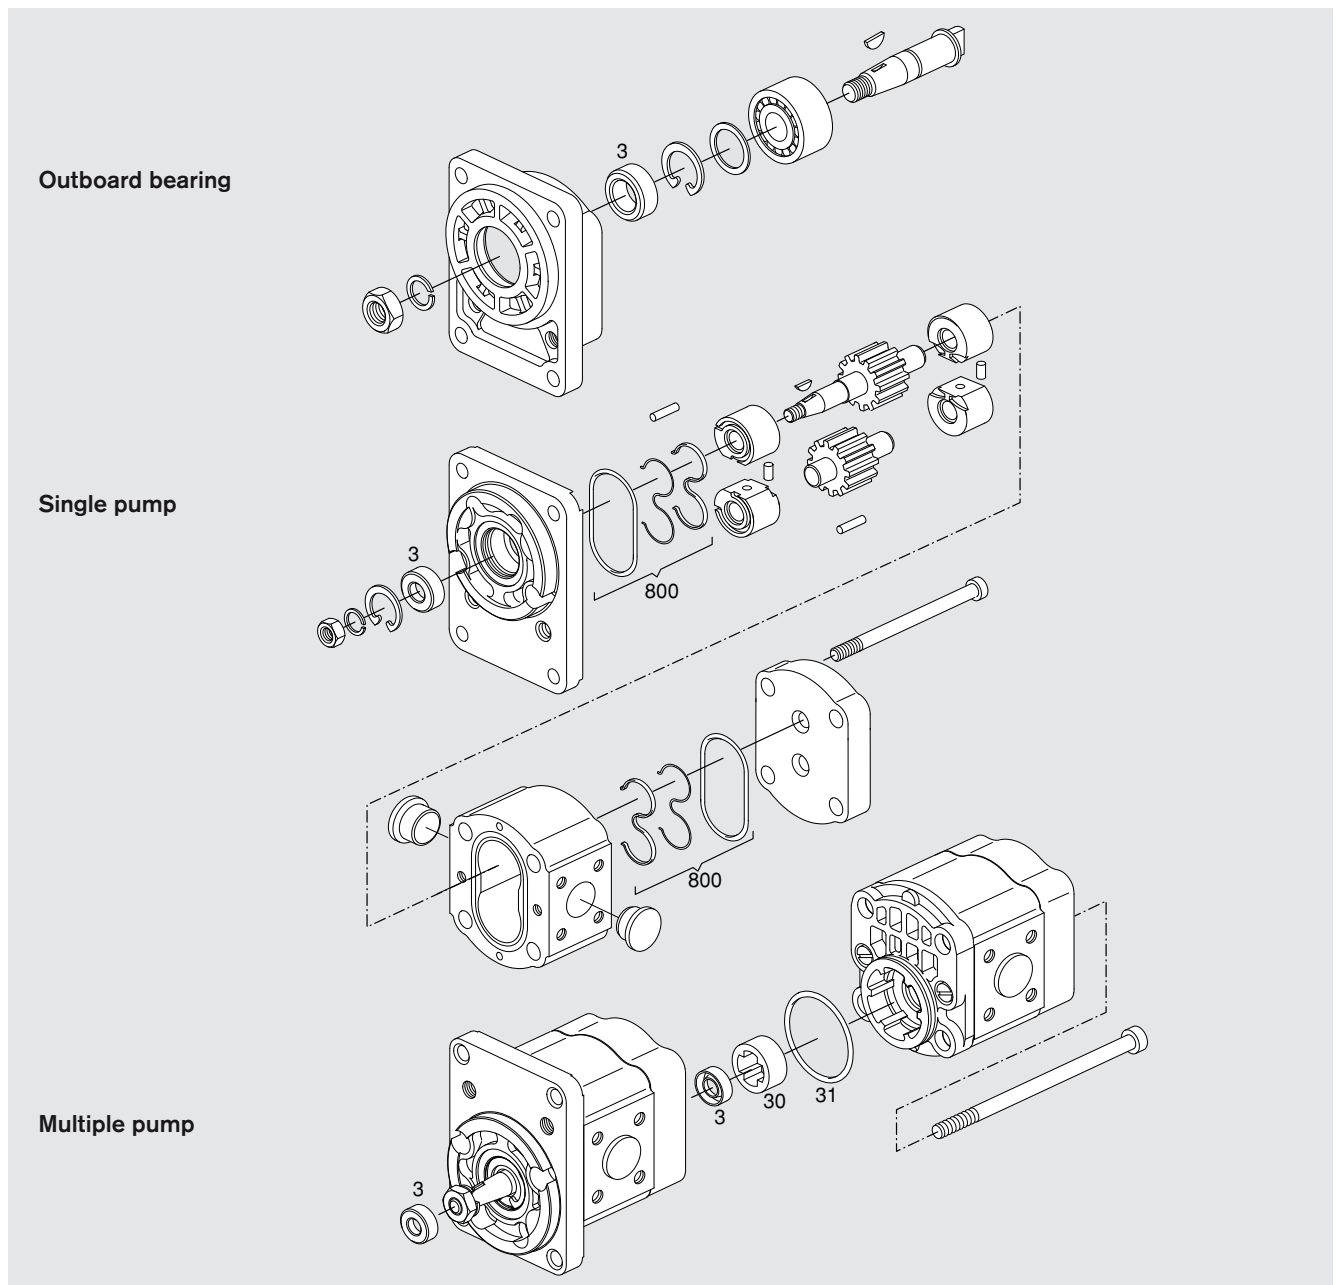


## The AZ configurator at [www.boschrexroth.com/azconfigurator](http://www.boschrexroth.com/azconfigurator)

The AZ configurator assists you to configure your individual external gear unit easily and user-friendly. You only need to specify your requirements: From the displacement, direction of rotation, drive shaft, connection flange right up to the required rear cover. You immediately receive a project drawing (PDF format) if a configuration already exists. You receive the price of the configured external gear unit upon request.



The AZ configurator assists you to configure your individual external gear unit easily and user-friendly – all data needed for project planning are acquired thru menu guidance.

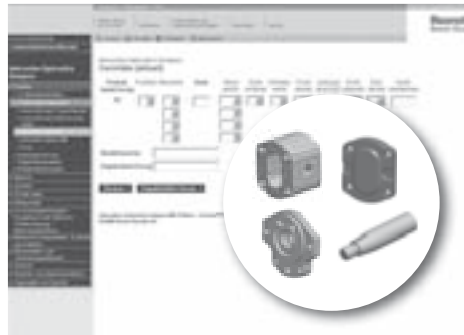

Selection is made either on an ordering code or your technical requirements. This means that you can search for external gear units that have already been configured, or you specify the configuration variant of the external gear unit based upon the operating parameters you require.



If the external gear unit you selected has been released you will receive the part number, ordering code and a detailed installation drawing. If your special configuration is not available please send your specification to Rexroth. One of our employees will then contact you.

Bosch Rexroth AG  
 External Gear Units  
 Robert-Bosch-Straße 2  
 D-71701 Schwieberdingen  
 Phone +49 (0) 711-811 10 63  
 Fax +49 (0) 711-811 17 98  
[brm-az.info@boschrexroth.de](mailto:brm-az.info@boschrexroth.de)  
[www.boschrexroth.com/brm](http://www.boschrexroth.com/brm)

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that our products are subject to a natural process of wear and aging.



# External Gear Pumps Series T

**RE 10 092/02.12**  
Replaces  
RE 10 092/02.07

AZPT-...

Fixed pumps  
 $V = 20 \dots 36 \text{ cm}^3/\text{rev}$



## Overview of contents

### Contents

General	2
Product overview	3
Ordering code single pumps	4
Ordering code multiple pumps	5
Drive shaft	6
Front cover	6
Line ports	7
Gear pumps with integral valves	8
Design calculations for pumps	8
Performance charts	9
Noise charts	11
Specifications	12
Drive arrangements	13
Multiple gear pumps	15
Dimensions	16
Fittings	18
Service parts	19
Notes for commissioning	20
Fittings	21
Ordering-No.	22

## Features




- Nominal pressure 280 bar
- Slide bearings for heavy duty applications
- Drive shafts to ISO or SAE
- Combination of several pumps possible
- Line ports:
  - connection flange or screw thread
- Optimized pressure pulsation with reduced noise emissions and vibration excitation in the system
- Consistent high quality
- Considerably longer service life due to reinforced shaft and case

# General

The key task of external gear units is to convert mechanical energy (torque and rotational speed) into hydraulic energy (flow and pressure). In external gear motors this is the other way round. These machines are required to be highly efficient in order to avoid unnecessary heat. This efficiency is achieved by means of precision production engineering and pressure-sensitive gap sealing.

Moreover, in the low-noise SILENCE pumps, the dual-flank principle helps to reduce flow pulsation by up to 75%.

## The displacement method

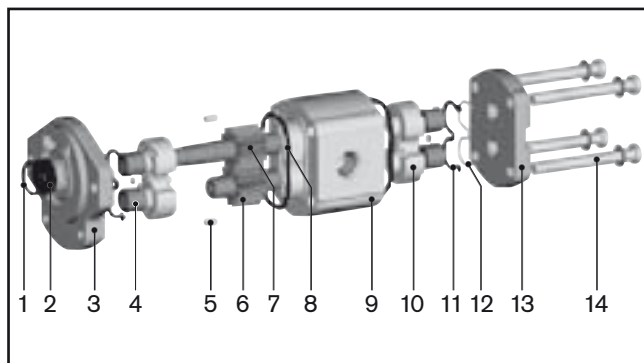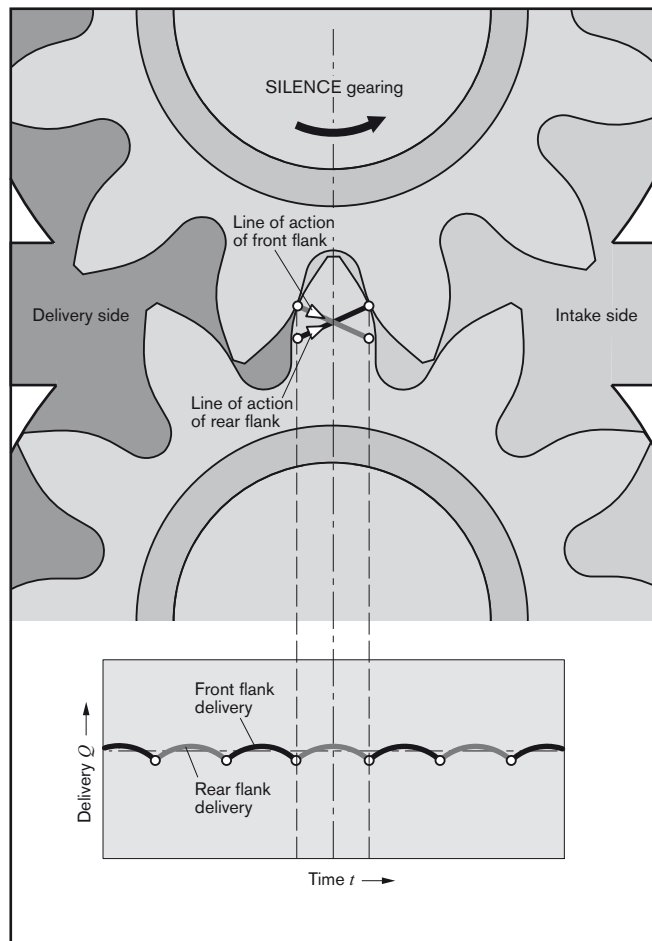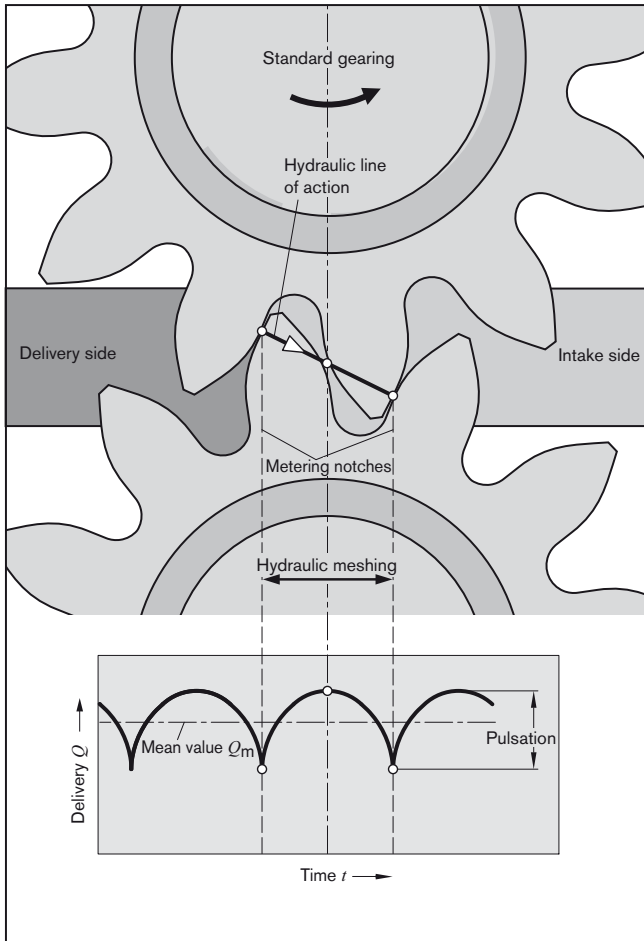


- 1 Retaining ring
- 2 Shaft seal ring
- 3 Front cover
- 4 Slide bearing
- 5 Centering pin
- 6 Gear
- 7 Gear (frictional)
- 8 Case seal
- 9 Pump case
- 10 Bearing
- 11 Axial zone seal
- 12 Support
- 13 End cover
- 14 Fixing screws

The geometry of the displacement gearing, matched in form by the rotation of the drive shaft, results in the parabolic flow characteristic shown here on the left. In a standard pump, this characteristic is repeated each time a gear tooth meshes. With their dual-flank system, the flow pulsation of SILENCE pumps is reduced by 75% – with correspondingly lower excitation of downstream system components – at double the fundamental frequency. During this process, the gear pair exhibits an extremely reduced rear flank backlash, so that hydraulic sealing is provided not just by the front flank of the driven gear, but also by the rear flanks. In this way, the front and rear flanks alternately contribute to flow displacement. And by adapting the shape of the metering notches, the expansion of the hydraulic line of action is half that of the standard pump.


### Construction


The external gear pump consists essentially of a pair of gears supported in bearing bushings or bearing, dependent on the series, and the case with a front and a rear cover. The drive shaft protrudes from the front cover where it is sealed by the shaft seal ring. The bearing forces are absorbed by special bearing bushings with sufficient elasticity to produce surface contact instead of line contact. They also ensure excellent resistance to galling – especially at low speed. The gears have 12 teeth. This keeps both flow pulsation and noise emission to a minimum.

The internal sealing is achieved by forces which are proportional to delivery pressure. This ensures optimum efficiency. The bearings provide the seal at the ends of the gaps between the teeth which carry the pressurized oil. The sealing zone between the gear teeth and the bearings is controlled by the admission of operating pressure to the rear of the bearing bushings. Special seals form the boundary of the zone. The radial clearance at the tips of the gear teeth is sealed by internal forces pushing them against the case.

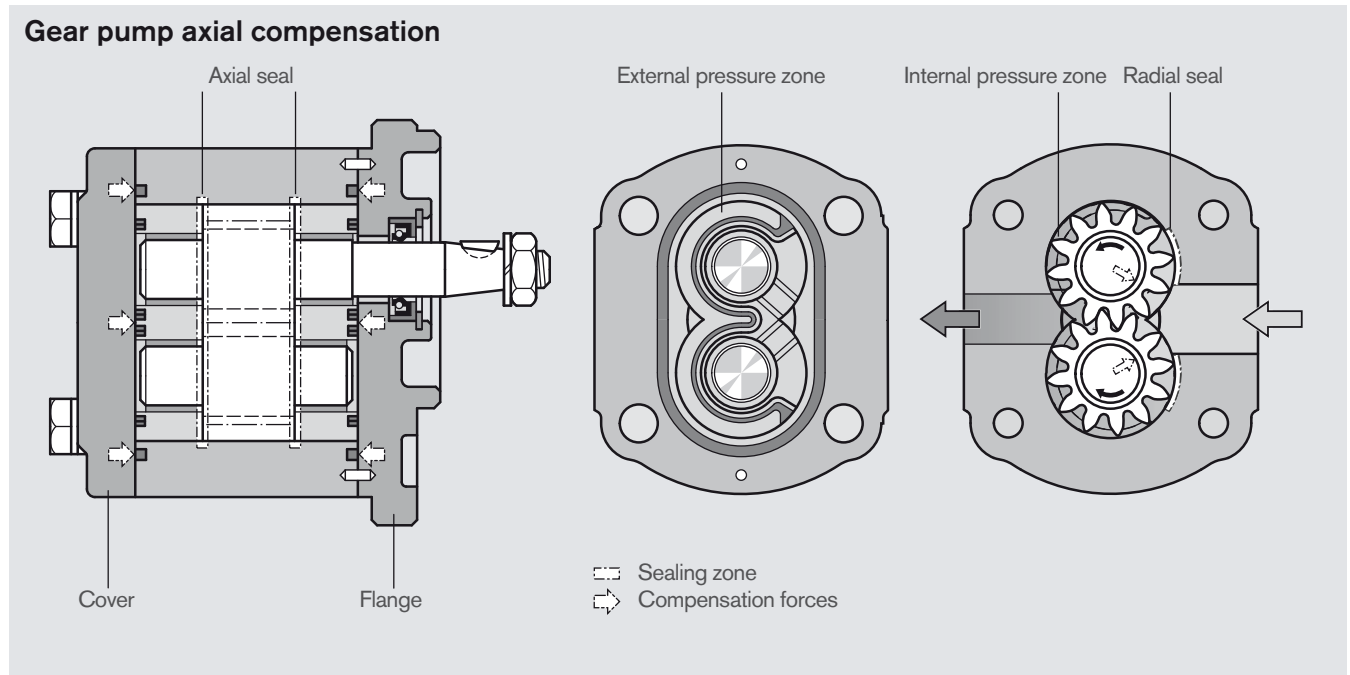

### Overview of “Series T” standard types

Version	Page
	16

Version	Page
	17

# Ordering code


## External gear units Single pumps "SILENCE"

AZ	P	T	-	x	x	-	020	R	C	B	20	M	B	18009	S xxxx																																																																																																																																																																																	
<table border="1"> <tr> <td><b>Function</b></td> <td rowspan="15" style="vertical-align: middle; text-align: center;"> </td> <td colspan="10"></td> <td>Special design</td> </tr> <tr> <td><b>P = Pump</b></td> <td colspan="10"></td> </tr> <tr> <td><b>Series</b></td> <td colspan="10"></td> </tr> <tr> <td><b>2 = Case width 110 mm</b></td> <td colspan="10"></td> </tr> <tr> <td><b>Version</b></td> <td colspan="10"></td> </tr> <tr> <td><b>2 = Chromatized, pinned</b></td> <td colspan="10"></td> </tr> <tr> <td><b>Size T</b></td> <td colspan="10"></td> </tr> <tr> <td><b>020 = 20.0 cm<sup>3</sup>/rev</b></td> <td colspan="10"></td> </tr> <tr> <td><b>022 = 22.5 cm<sup>3</sup>/rev</b></td> <td colspan="10"></td> </tr> <tr> <td><b>025 = 25.0 cm<sup>3</sup>/rev</b></td> <td colspan="10"></td> </tr> <tr> <td><b>028 = 28.0 cm<sup>3</sup>/rev</b></td> <td colspan="10"></td> </tr> <tr> <td><b>032 = 32.0 cm<sup>3</sup>/rev</b></td> <td colspan="10"></td> </tr> <tr> <td><b>036 = 36.0 cm<sup>3</sup>/rev</b></td> <td colspan="10"></td> </tr> <tr> <td><b>Direction of rotation</b></td> <td colspan="10"></td> </tr> <tr> <td><b>R = Clockwise</b></td> <td colspan="10"></td> </tr> <tr> <td><b>L = Counter-clockwise</b></td> <td colspan="10"></td> </tr> </table>															<b>Function</b>												Special design	<b>P = Pump</b>											<b>Series</b>											<b>2 = Case width 110 mm</b>											<b>Version</b>											<b>2 = Chromatized, pinned</b>											<b>Size T</b>											<b>020 = 20.0 cm<sup>3</sup>/rev</b>											<b>022 = 22.5 cm<sup>3</sup>/rev</b>											<b>025 = 25.0 cm<sup>3</sup>/rev</b>											<b>028 = 28.0 cm<sup>3</sup>/rev</b>											<b>032 = 32.0 cm<sup>3</sup>/rev</b>											<b>036 = 36.0 cm<sup>3</sup>/rev</b>											<b>Direction of rotation</b>											<b>R = Clockwise</b>											<b>L = Counter-clockwise</b>										
<b>Function</b>												Special design																																																																																																																																																																																				
<b>P = Pump</b>																																																																																																																																																																																																
<b>Series</b>																																																																																																																																																																																																
<b>2 = Case width 110 mm</b>																																																																																																																																																																																																
<b>Version</b>																																																																																																																																																																																																
<b>2 = Chromatized, pinned</b>																																																																																																																																																																																																
<b>Size T</b>																																																																																																																																																																																																
<b>020 = 20.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																
<b>022 = 22.5 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																
<b>025 = 25.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																
<b>028 = 28.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																
<b>032 = 32.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																
<b>036 = 36.0 cm<sup>3</sup>/rev</b>																																																																																																																																																																																																
<b>Direction of rotation</b>																																																																																																																																																																																																
<b>R = Clockwise</b>																																																																																																																																																																																																
<b>L = Counter-clockwise</b>																																																																																																																																																																																																
<table border="1"> <tr> <td colspan="5"><b>Valve adjustment</b></td> <td colspan="6"></td> </tr> <tr> <td colspan="5"><b>200 xx = PRV 200 bar</b></td> <td colspan="6"></td> </tr> <tr> <td colspan="5"><b>xxx 11 = FCV 11 l/min</b></td> <td colspan="6"></td> </tr> <tr> <td colspan="5"><b>18009 = PRV + FCV</b></td> <td colspan="6"></td> </tr> <tr> <td colspan="5"></td> <td colspan="6" style="text-align: right;">180 bar, 9 l/min</td> </tr> <tr> <td colspan="5"><b>Rear cover</b></td> <td colspan="6"></td> </tr> <tr> <td colspan="5"><b>B = Standard</b></td> <td colspan="6"></td> </tr> <tr> <td colspan="5"><b>E = FCV residual flow external</b></td> <td colspan="6"></td> </tr> <tr> <td colspan="5"><b>S = FCV residual flow internal</b></td> <td colspan="6"></td> </tr> <tr> <td colspan="5"><b>V = PRV + FCV</b></td> <td colspan="6"></td> </tr> <tr> <td colspan="5"><b>Seals</b></td> <td colspan="6"></td> </tr> <tr> <td colspan="5"><b>M = NBR</b></td> <td colspan="6"></td> </tr> <tr> <td colspan="5"><b>K = NBR, SSR in FKM</b></td> <td colspan="6"></td> </tr> </table>															<b>Valve adjustment</b>											<b>200 xx = PRV 200 bar</b>											<b>xxx 11 = FCV 11 l/min</b>											<b>18009 = PRV + FCV</b>																180 bar, 9 l/min						<b>Rear cover</b>											<b>B = Standard</b>											<b>E = FCV residual flow external</b>											<b>S = FCV residual flow internal</b>											<b>V = PRV + FCV</b>											<b>Seals</b>											<b>M = NBR</b>											<b>K = NBR, SSR in FKM</b>																																													
<b>Valve adjustment</b>																																																																																																																																																																																																
<b>200 xx = PRV 200 bar</b>																																																																																																																																																																																																
<b>xxx 11 = FCV 11 l/min</b>																																																																																																																																																																																																
<b>18009 = PRV + FCV</b>																																																																																																																																																																																																
					180 bar, 9 l/min																																																																																																																																																																																											
<b>Rear cover</b>																																																																																																																																																																																																
<b>B = Standard</b>																																																																																																																																																																																																
<b>E = FCV residual flow external</b>																																																																																																																																																																																																
<b>S = FCV residual flow internal</b>																																																																																																																																																																																																
<b>V = PRV + FCV</b>																																																																																																																																																																																																
<b>Seals</b>																																																																																																																																																																																																
<b>M = NBR</b>																																																																																																																																																																																																
<b>K = NBR, SSR in FKM</b>																																																																																																																																																																																																
<b>Drive shafts</b>							<b>Front cover</b>					<b>Line ports</b>																																																																																																																																																																																				
Suitable front cover																																																																																																																																																																																																
<b>C</b>	Tapered key shaft 1 : 5		<b>B</b>	<b>B</b>	Square flange Centering Ø 100 mm		<b>07</b>	Square flange SAE Thread, metric																																																																																																																																																																																								
<b>N</b>	Dihedral claw		<b>M</b>	<b>C</b>	SAE J 744 101-2 B 2-bolt flange Ø 101.6 mm		<b>20</b>	Rectangular flange																																																																																																																																																																																								
<b>D</b>	Splined shaft SAE J 744 22-4 13T		<b>C</b>	<b>M</b>	2-bolt mounting Centering Ø 52 mm with seal ring																																																																																																																																																																																											
<b>P</b>	Splined shaft SAE J 744 19-4 11T		<b>C</b>																																																																																																																																																																																													


Not all variants can be selected by using ordering code!  
 Please select the required pump by using the selection tables (standard types) or after consultation with Bosch Rexroth!  
 Special options are possible upon request.




Drive shafts

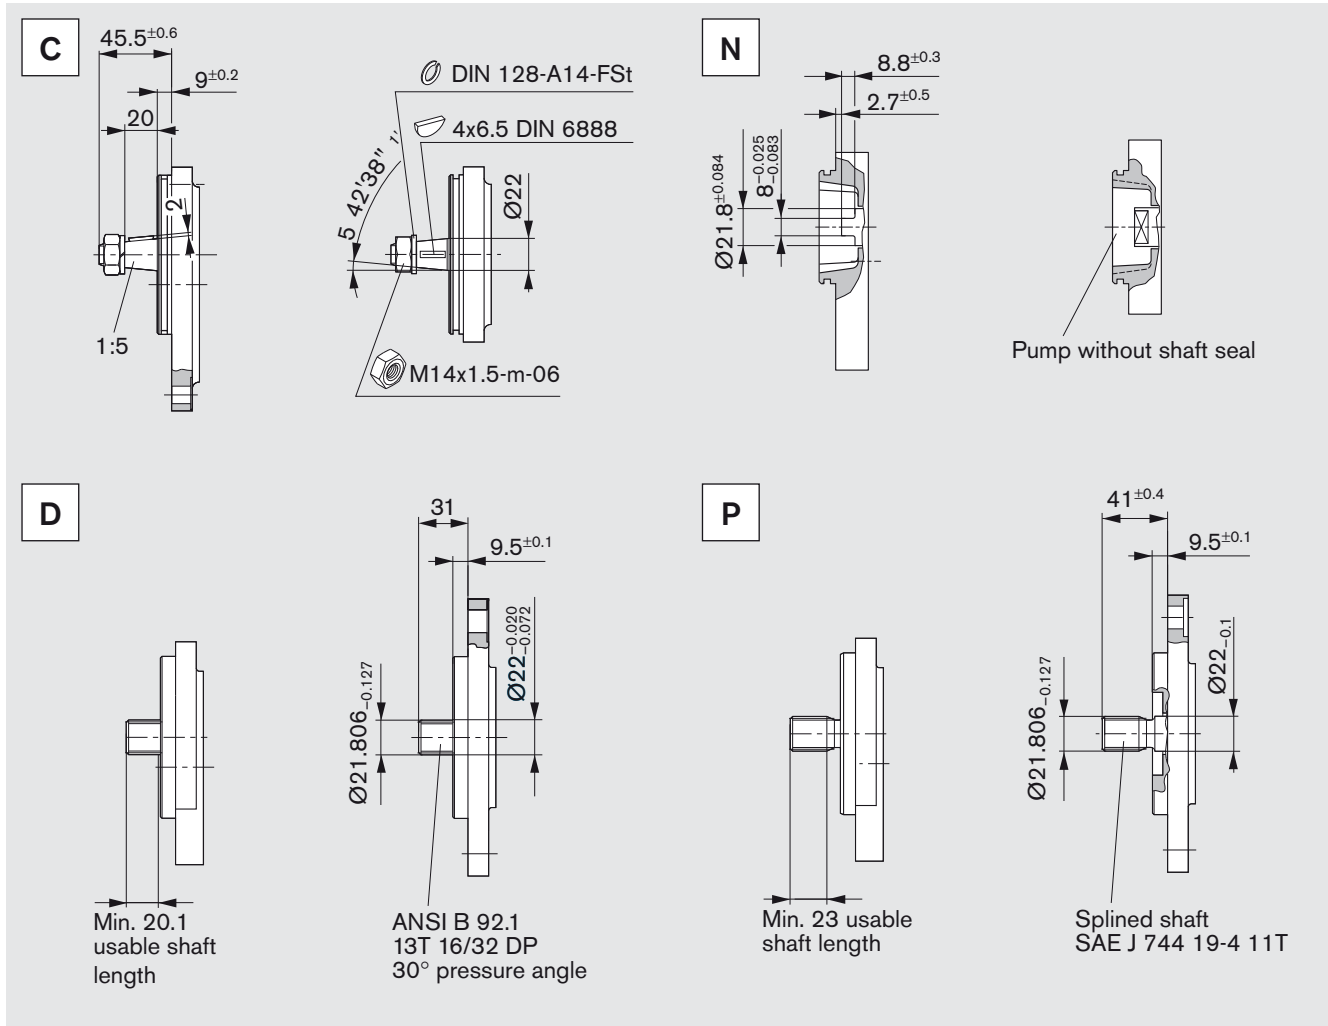


Front cover

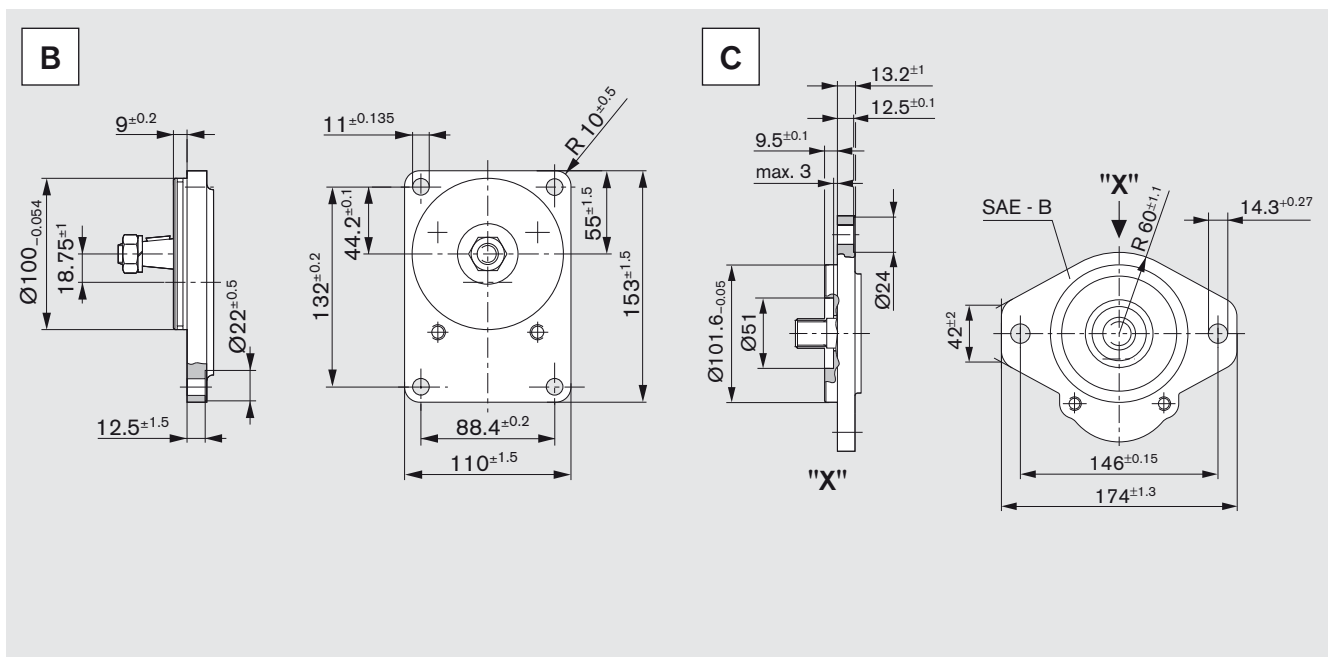

Front cover (continued)

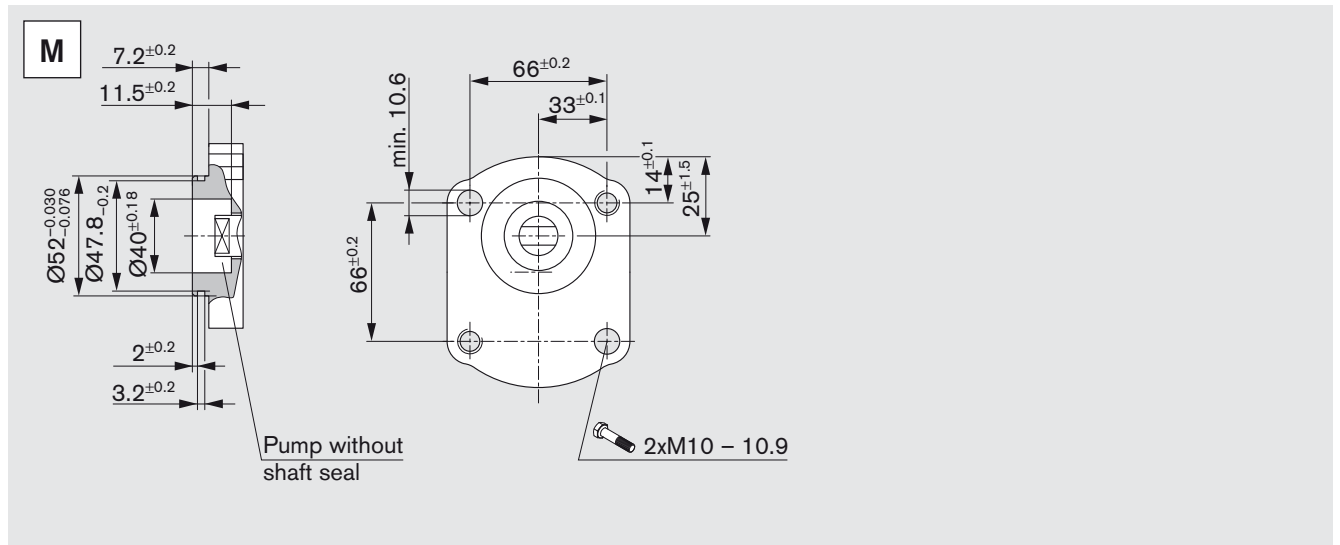


Line ports



**07** Square flange SAE, thread, metric

Ordering code	Size	Pressure side				Suction side			
		C	D	E	F	C	D	E	F
07	20 cm <sup>3</sup>	18	47.6	M10	22.2	25	47.6	M10	22.2
	22.5...36 cm <sup>3</sup>			depth 14			52.4	depth 14	26.2





**20** Rectangular flange


Ordering code	Size	Pressure side			Suction side		
		C	D	E	C	D	E
20	20...36 cm <sup>3</sup>	18	55	M8 depth 13	26	55	M8 depth 13

# Gear pumps with integral valves


In order to reduce external pipework it is possible to incorporate a flow-control valve or pressure-relief valve in the rear cover of the gear pump. A typical application of this is in the supply of hydraulic oil in power steering systems. The pump delivers a constant flow irrespective of the speed at which it is driven. The excess flow is either returned internally to the suction port or distributed externally to other items of equipment.

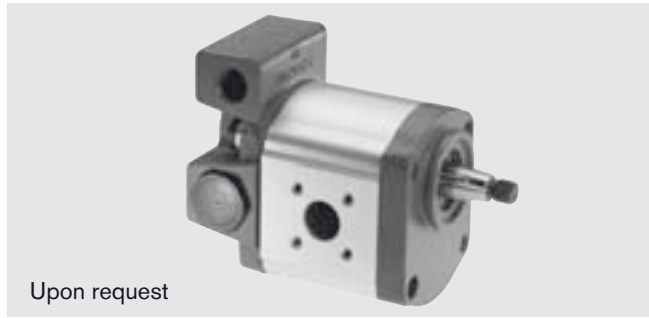


3-way flow-control valve.  
Excess flow returned to suction line  
 $Q_{const.} = 2...30 \text{ l/min}$



3-way flow-control valve.  
Excess flow distributed externally; loadable  
 $Q_{const.} = 2...30 \text{ l/min}$



3-way flow-control valve with pressure-relief valve.  
Excess flow returned to suction line  
 $Q_{const.} = 2...30 \text{ l/min}$   
 $p_1 = 100...180 \text{ bar}$



Pressure-relief valve.  
Discharge returned to suction line  
 $p_1 = 5...250 \text{ bar}$

## Ordering code

S	xxx17
---	-------

E	xxx12
---	-------

V	15011
---	-------

# Design calculations for pumps

The design calculations for pumps are based on the following parameters:

$V$ [ $\text{cm}^3/\text{rev}$ ]	Displacement
$Q$ [ $\text{l/min}$ ]	Delivery
$p$ [ $\text{bar}$ ]	Pressure
$M$ [ $\text{Nm}$ ]	Drive torque
$n$ [ $\text{rev/min}$ ]	Drive speed
$P$ [ $\text{kW}$ ]	Drive power

It is also necessary to allow for different efficiencies such as:

$\eta_v$	Volumetric efficiency
$\eta_{hm}$	Hydraulic-mechanical efficiency
$\eta_t$	Overall efficiency

The following formulas describe the various relationships.

They include correction factors for adapting the parameters to the usual units encountered in practice.

**Caution:** Diagrams providing approximate selection data will be found on subsequent pages.

$$Q = V \cdot n \cdot \eta_v \cdot 10^{-5}$$

$$p = \frac{M \cdot \eta_{hm}}{1.59 \cdot V}$$

$$P = \frac{p \cdot Q}{6 \cdot \eta_t}$$

$$V = \frac{Q}{n \cdot \eta_v} \cdot 10^5$$

$$V = \frac{M \cdot \eta_{hm}}{159 \cdot p}$$

$$Q = \frac{6 \cdot P \cdot \eta_t}{p}$$

$$n = \frac{Q}{V \cdot \eta_v} \cdot 10^5$$

$$M = \frac{1.59 \cdot V \cdot p}{\eta_{hm}}$$

$$p = \frac{6 \cdot P \cdot \eta_t}{Q}$$


[%]

$n$	$\eta_v$	$Q$	$V$ [ $\text{cm}^3/\text{rev}$ ]	$Q$ [ $\text{l/min}$ ]	$p$ [ $\text{bar}$ ]
$M$	$\eta_{hm}$	$p$	$n$ [ $\text{rev/min}$ ]	$P$ [ $\text{kW}$ ]	$M$ [ $\text{Nm}$ ]
$P$	$\eta_t$	$p \cdot Q$			

**Caution:**  $\eta$  [%] e.g. 95 [%]





# Performance charts




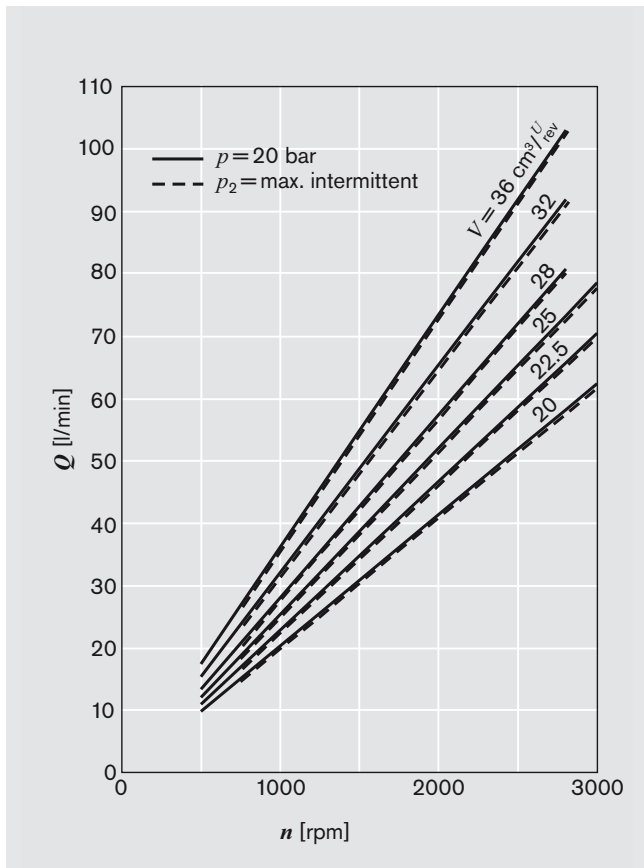


$\nu = 35 \text{ mm}^2/\text{s}, \vartheta = 50^\circ\text{C}$

$Q = f(n, V)$  incl.  $\eta_v$   
 $P = f(n, p)$  ——— incl.  $\eta_t$   
 $M = f(n, p)$  - - - incl.  $\eta_{hm}$

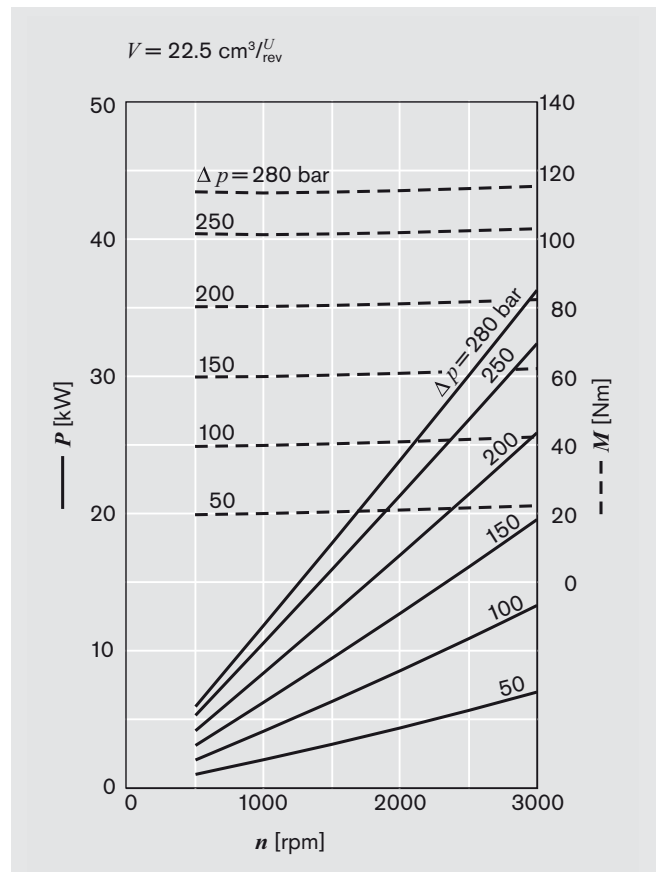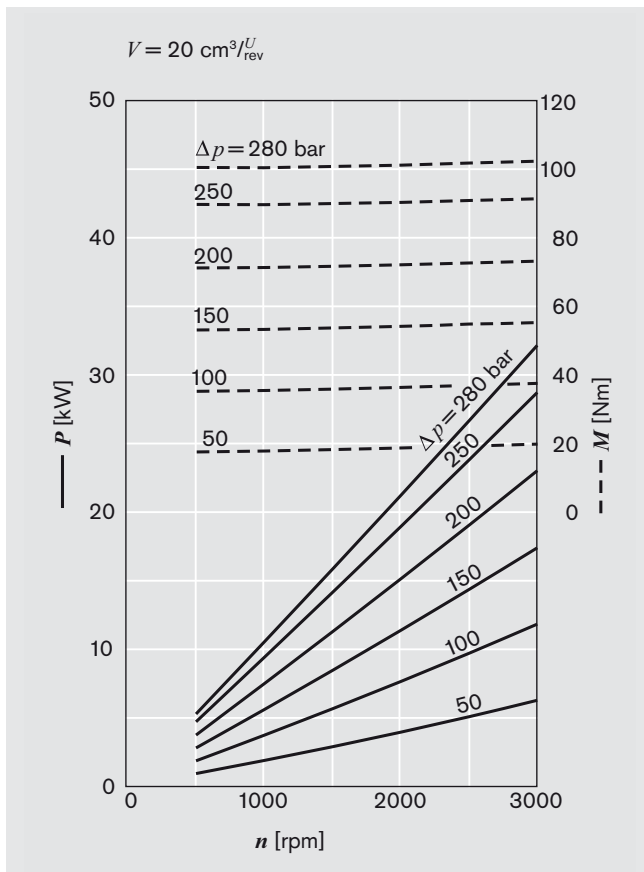

Performance charts (continued)

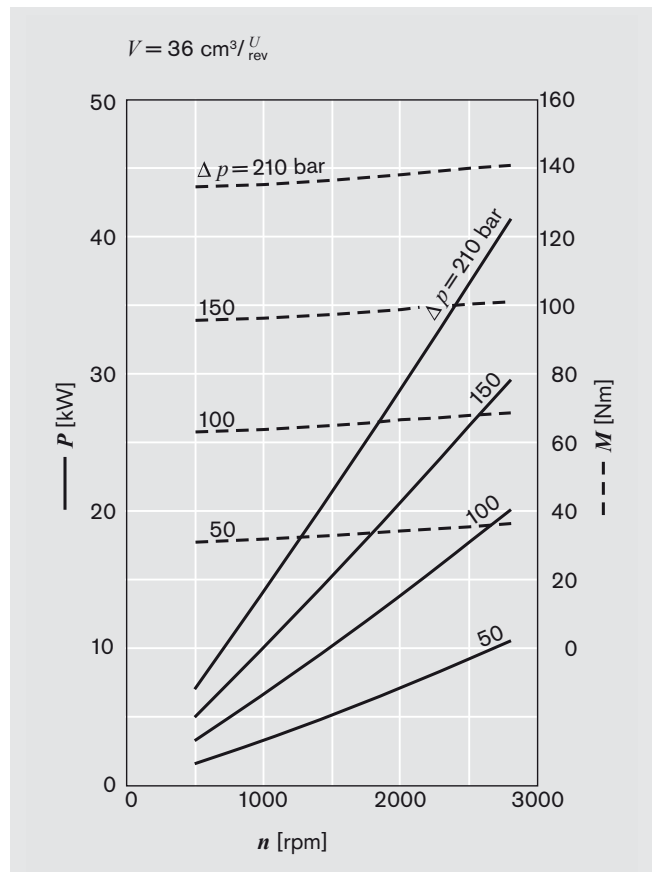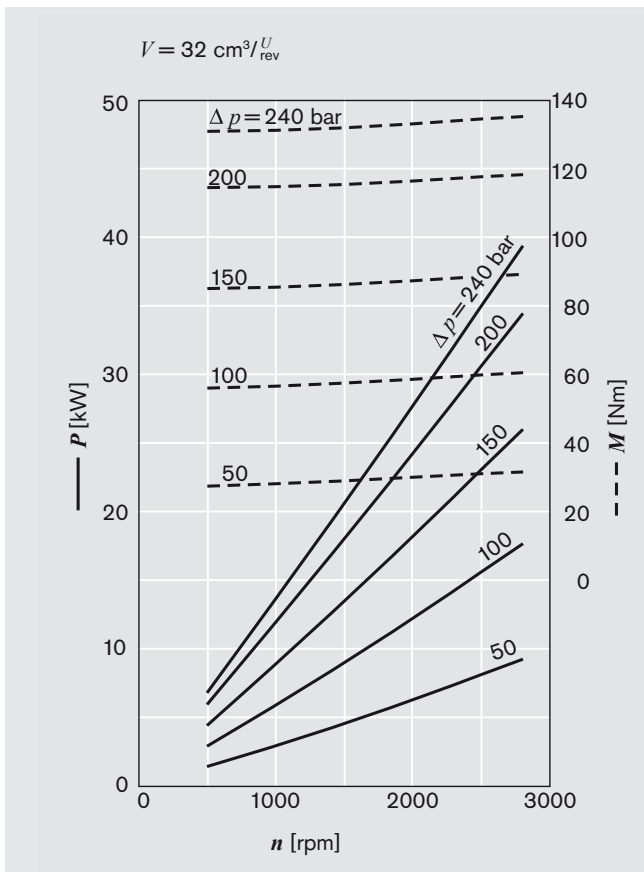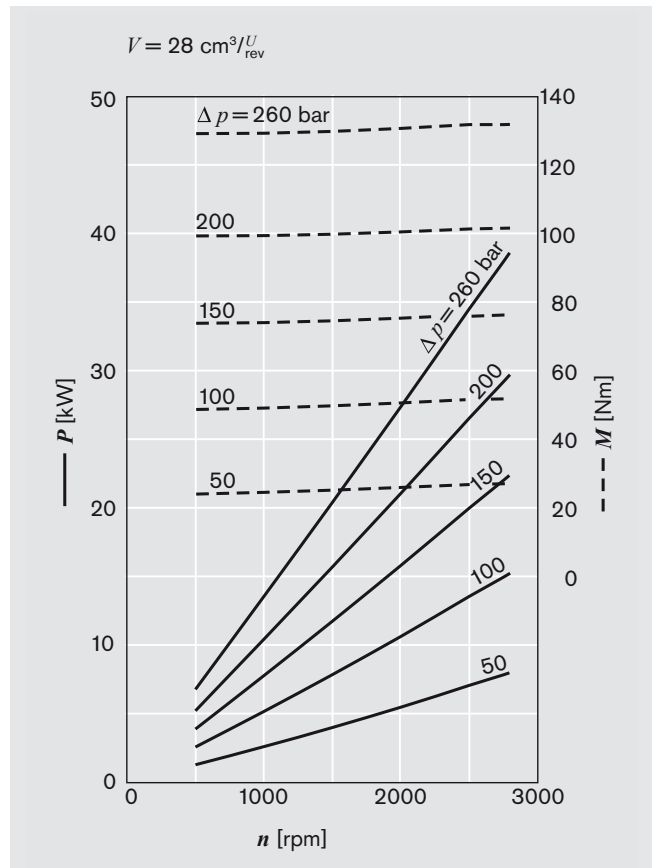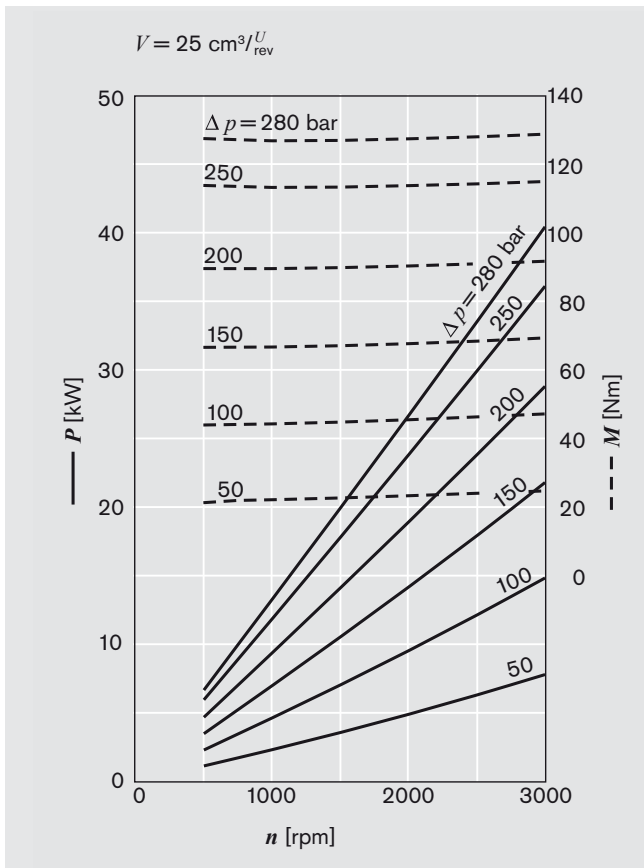

# Noise charts







**Noise level** dependent on rotational speed, pressure range between 10 bar and pressure value  $p_2$  (see page 12 Specifications table).

Oil data:  $\nu = 32 \text{ mm}^2/\text{s}$ ,  $\vartheta = 50^\circ\text{C}$ .

Sound pressure level calculated from noise measurements made in the sound absorbent measuring room compliant with DIN 45635, Part 26.

Spacing between measuring sensor – pump: 1 m.

These are typical characteristic values for the respective model. They describe the airborne sound emitted solely by the pump. Environmental influences (installation site, piping, further system components) are not taken into consideration. Each value applies for a single pump.

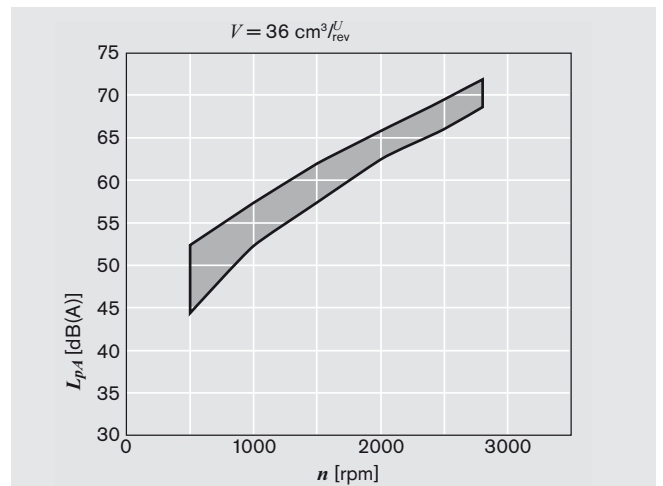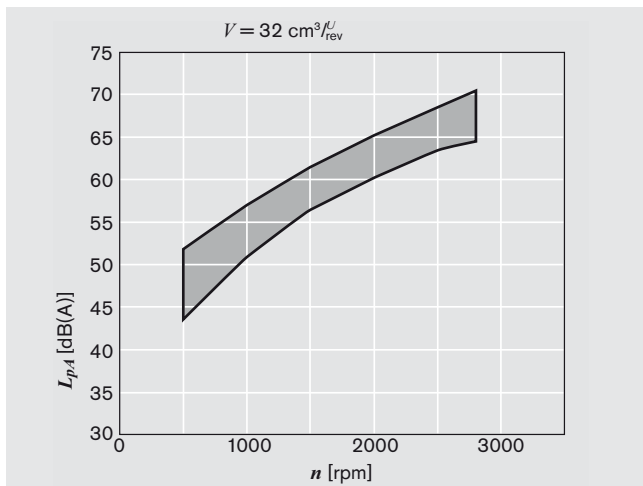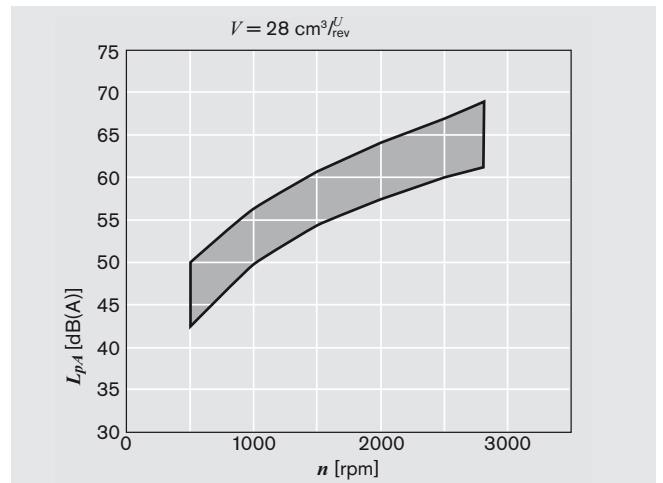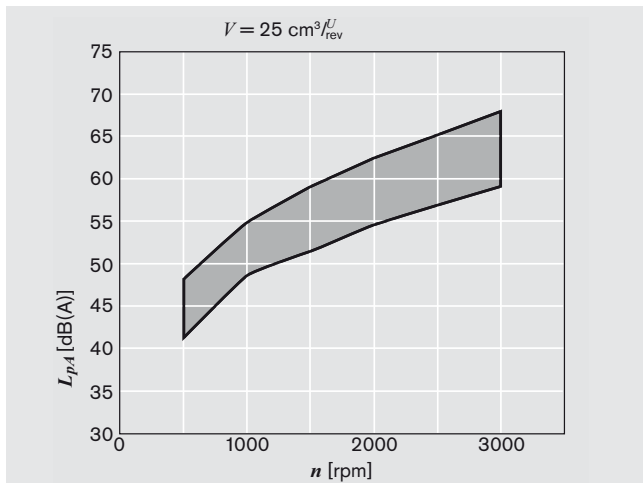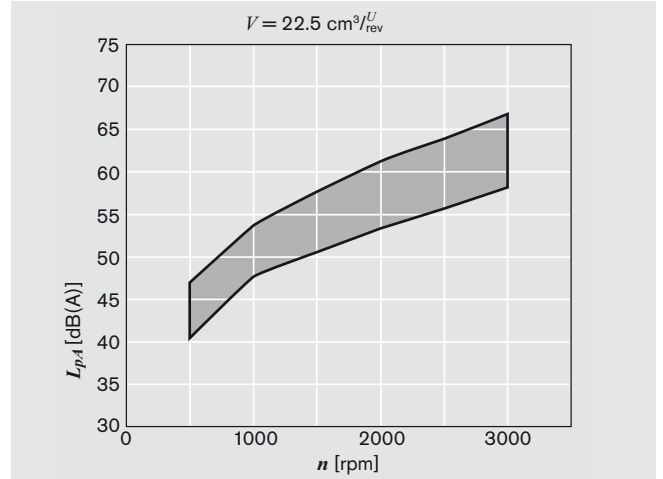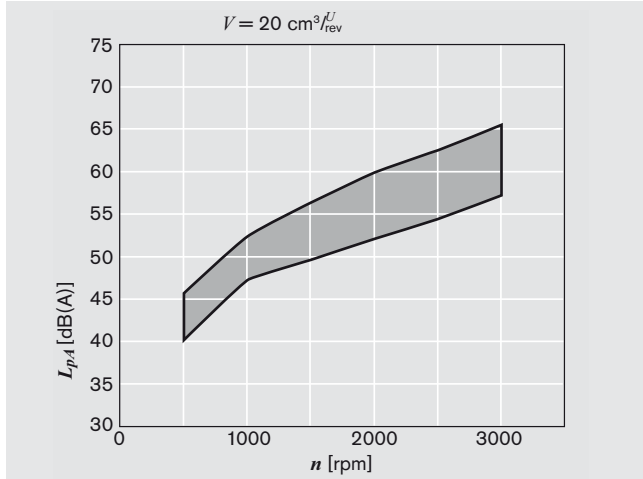

# Specification

General	
Construction	External gear pump
Mounting	Flange or through-bolting with spigot
Line ports	Flange
Direction of rotation (looking on shaft)	Clockwise or counter-clockwise, the pump may only be driven in the direction indicated
Installation position	Any
Load on shaft	Radial and axial forces after consulting
Ambient temperature range	-30°C...+80°C or max. +110°C with FKM seals
Hydraulic fluid	- Mineral oil compliant with DIN 51 524, 1-3, however under higher load at least HLP compliant with DIN 51 524 Part 2 recommended. - Comply with RE 90220 - Further operating fluids possible after consultation
Viscosity	12...800 mm <sup>2</sup> /s permitted range 20...100 mm <sup>2</sup> /s recommended range ...2000 mm <sup>2</sup> /s range permitted for starting
Hydraulic fluid temperature range	max. +80°C with NBR seals *) max. +110°C with FKM seals **)
Filtration ***)	At least cleanliness level 20/18/15 compliant with ISO 4406 (1999)

\*) NBR = Perbunan®  
 \*\*) FKM = Viton®  
 \*\*\*) On hydraulic systems or devices with critical counter-reaction, such as steering and counterbalance valves, the type of filtration selected must be adapted to the sensitivity of these devices/ systems.


Safety requirements pertaining to the whole systems are to be observed.

In the case of applications with high numbers of load cycles please consulting.


## Definition of direction of rotation

Always look on the drive shaft.

**Caution:** Dimensions drawings always show clockwise-rotation pumps. On counter-clockwise-rotation pumps the positions of the drive shaft and the suction and pressure ports are different.

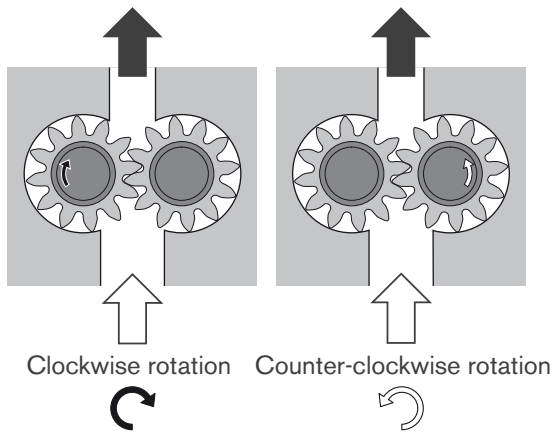

## Definitions of pressures

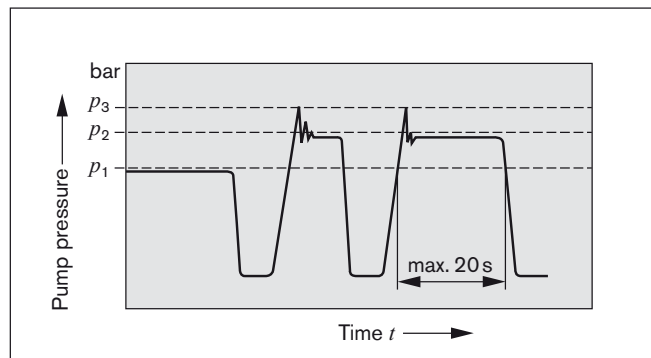

$p_1$  max. continuous pressure  
 $p_2$  max. intermittent pressure  
 $p_3$  max. peak pressure

## AZPT-2x

Displacement	V	cm <sup>3</sup> /rev	20	22,5	25	28	32	36
Suction pressure	$p_e$	bar	0.7...3 (absolute), with tandem pumps $p_e(p_2) = \max. 0.5 p_e(p_1)$					
Max. continuous pressure	$p_1$		250	250	250	230	210	180
Max. intermittent pressure	$p_2$		280	280	280	260	240	210
Max. peak pressure	$p_3$		300	300	300	280	260	230
Min. rotational speed at bar 12 mm <sup>2</sup> /s	< 100	rpm	500	500	500	500	500	500
	100...180		600	600	600	600	600	600
	180... $p_2$		800	800	800	800	800	800
	25 mm <sup>2</sup> /s $p_2$		500	500	500	500	500	500
Max. rotational speed at	$p_2$		3000	3000	3000	2800	2800	2800


# Drive arrangement

## 1. Flexible couplings

The coupling must not transfer any radial or axial forces to the pump.


The maximum radial runout of shaft spigot is 0.2 mm.

Refer to the fitting instructions provided by the coupling manufacturer for details of the maximum permitted shaft misalignment.

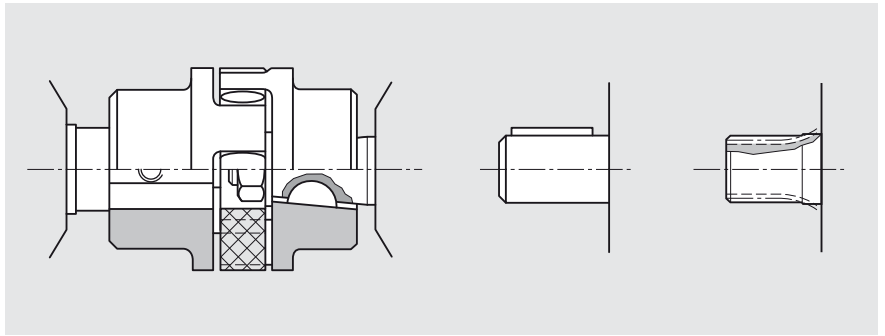

## 2. Coupling sleeve

Used on shafts with DIN or SAE splining. Caution: There must be no radial or axial forces exerted on the pump shaft or coupling sleeve. The coupling sleeve must be free to move axially. The distance between the pump shaft and drive shaft must be  $2^{+1}$ . Oil-bath or oil-mist lubrications is necessary.

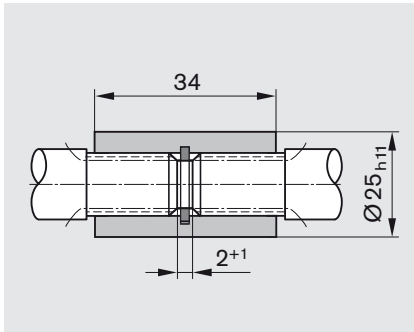

Splined shaft	Ordering code	$M_{max}$ [Nm]
SAE-B 13 teeth	D	320
SAE-C 11 teeth	P	180

## 3. Drive shaft with tang

For the close-coupling of the pumps to electric motor or internal-combustion engine, gear, etc. The pump shaft has a special tang and driver © (not included in supply). There is no shaft sealing.


The recommended arrangements and dimensions for the drive end and sealing are as follows.

### Ⓐ Drive shaft

Case-hardening steel DIN 17 210  
 e.g. 20 MnCrS 5  
 case-hardened 1.0 deep; HRA 83±2  
 Surface for sealing ring  
 ground without rifling  $R_t \leq 4\mu\text{m}$

### Ⓑ Radial shaft seal ring


Rubber-covered seal (see DIN 3760, Type AS, or double-lipped ring).  
 Cut 15° chamfer or fit shaft seal ring with protection sleeve.

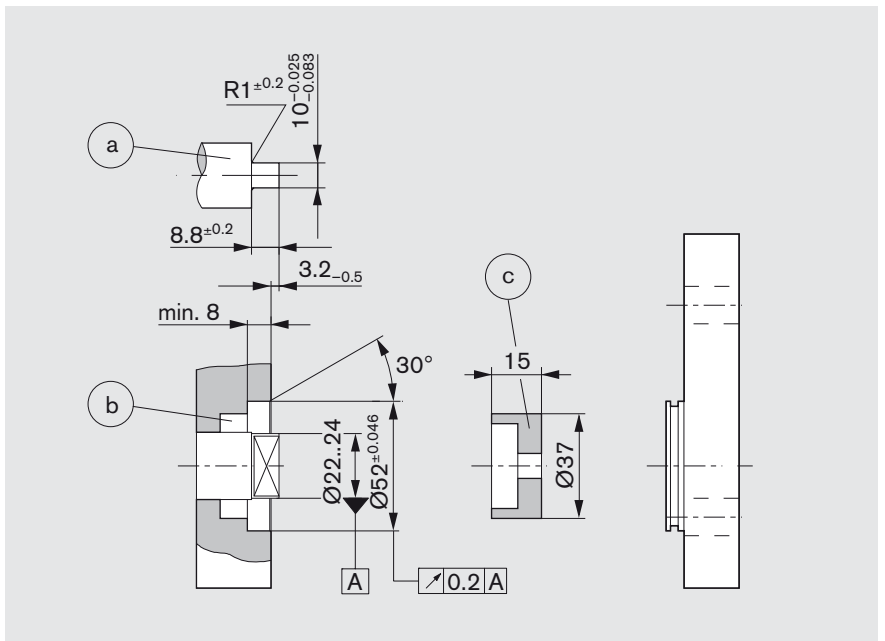

$M_{max}$ [Nm]	V [cm³/rev]	$p_{max}$ [bar]
95	20	270
	22.5	240
	25	220
	28	190
	32	170
	36	150

#### 4. V-belts and straight gearwheels or helical toothed gear drives without outboard bearing

When proposing to use V-belt or gear drive, please submit details of the application for our comments (especially dimensions  $a$ ,  $d_m$ ,  $d_w$  and angle  $\alpha$ ). For helical toothed gear drives, details of the helix angle  $\beta$  are also required.

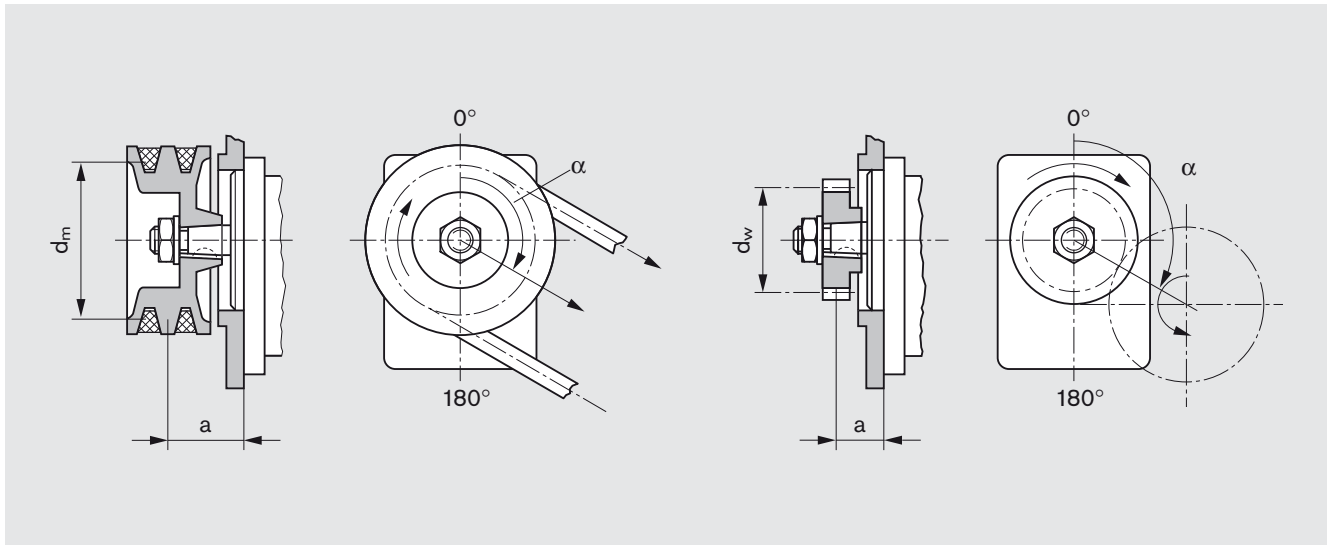

# Multiple gear pumps

Gear pumps are well-suited to tandem combinations of pumps in which the drive shaft of the first pump is extended to drive a second pump and sometimes a third pump in the same manner. A coupling is fitted between each pair of pumps. In most cases each pump is isolated from its neighbor, i.e. the suction ports are separate from one another. A common suction port is also possible as an option.

**Caution:** Basically, the specifications for the single pumps apply, but with certain restrictions:

**Max. speed:** This is determined by the highest rated pump speed in use.

**Pressures:** These are restricted by the strength of the drive shaft, the through drives and the drivers. Appropriate data is given in the dimensional drawings.

### Pressure restrictions during standard through drive


In the case of series T, the driver for the second pumping stage can carry a load of up to  $M_{max.} = 95 \text{ Nm}$ , i.e. there is a pressure restriction for the second stage and any further stages.

Drive shaft		Max. transferrable drive torque * [Nm]
C	1:5	200
N	Claw	95
D	SAE 13t	320
P	SAE 11t	180

\* These values only apply when the conditions described above are complied with. Bosch Rexroth is to be consulted if the stated values are exceeded.

If the first stage is driven through a tang (driver) or outboard bearing type 1, pressure restrictions apply as indicated in the formula below.


Reinforced through drives are available for applications with higher transfer torques and/or rotational vibrations. Customized designs available on request.

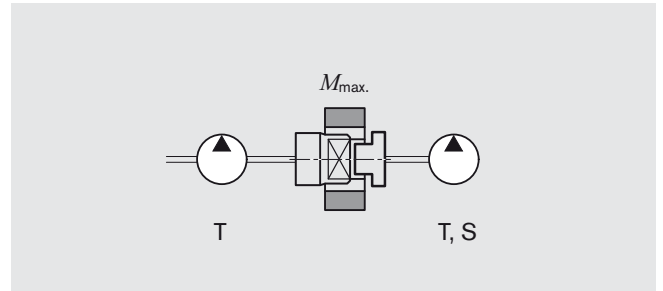

### Combinations

Series pump 1	$M_{max.}$ [Nm]	Series pump 2
T	95	T
T	65	S

For configuration of multiple pumps we recommend the pump is positioned with the largest displacement on the drive side.

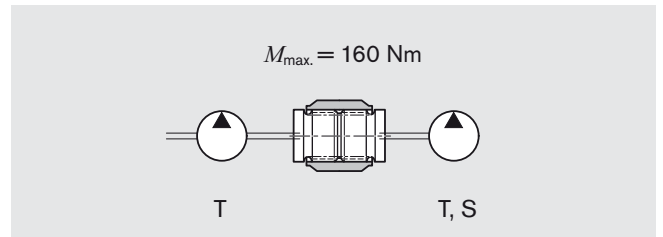
$$M_{max.} \cong \Delta p_1 \cdot V_1 \cdot 0.0177 + \Delta p_2 \cdot V_2 \cdot 0.0177 + \Delta p_3 \cdot V_3 \cdot 0.0177$$



$\Delta p$  [bar]  $V$  [cm<sup>3</sup>/rev]





# Dimensions

## Standard range

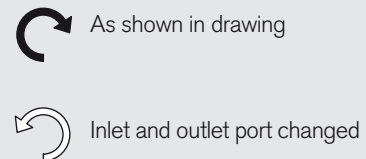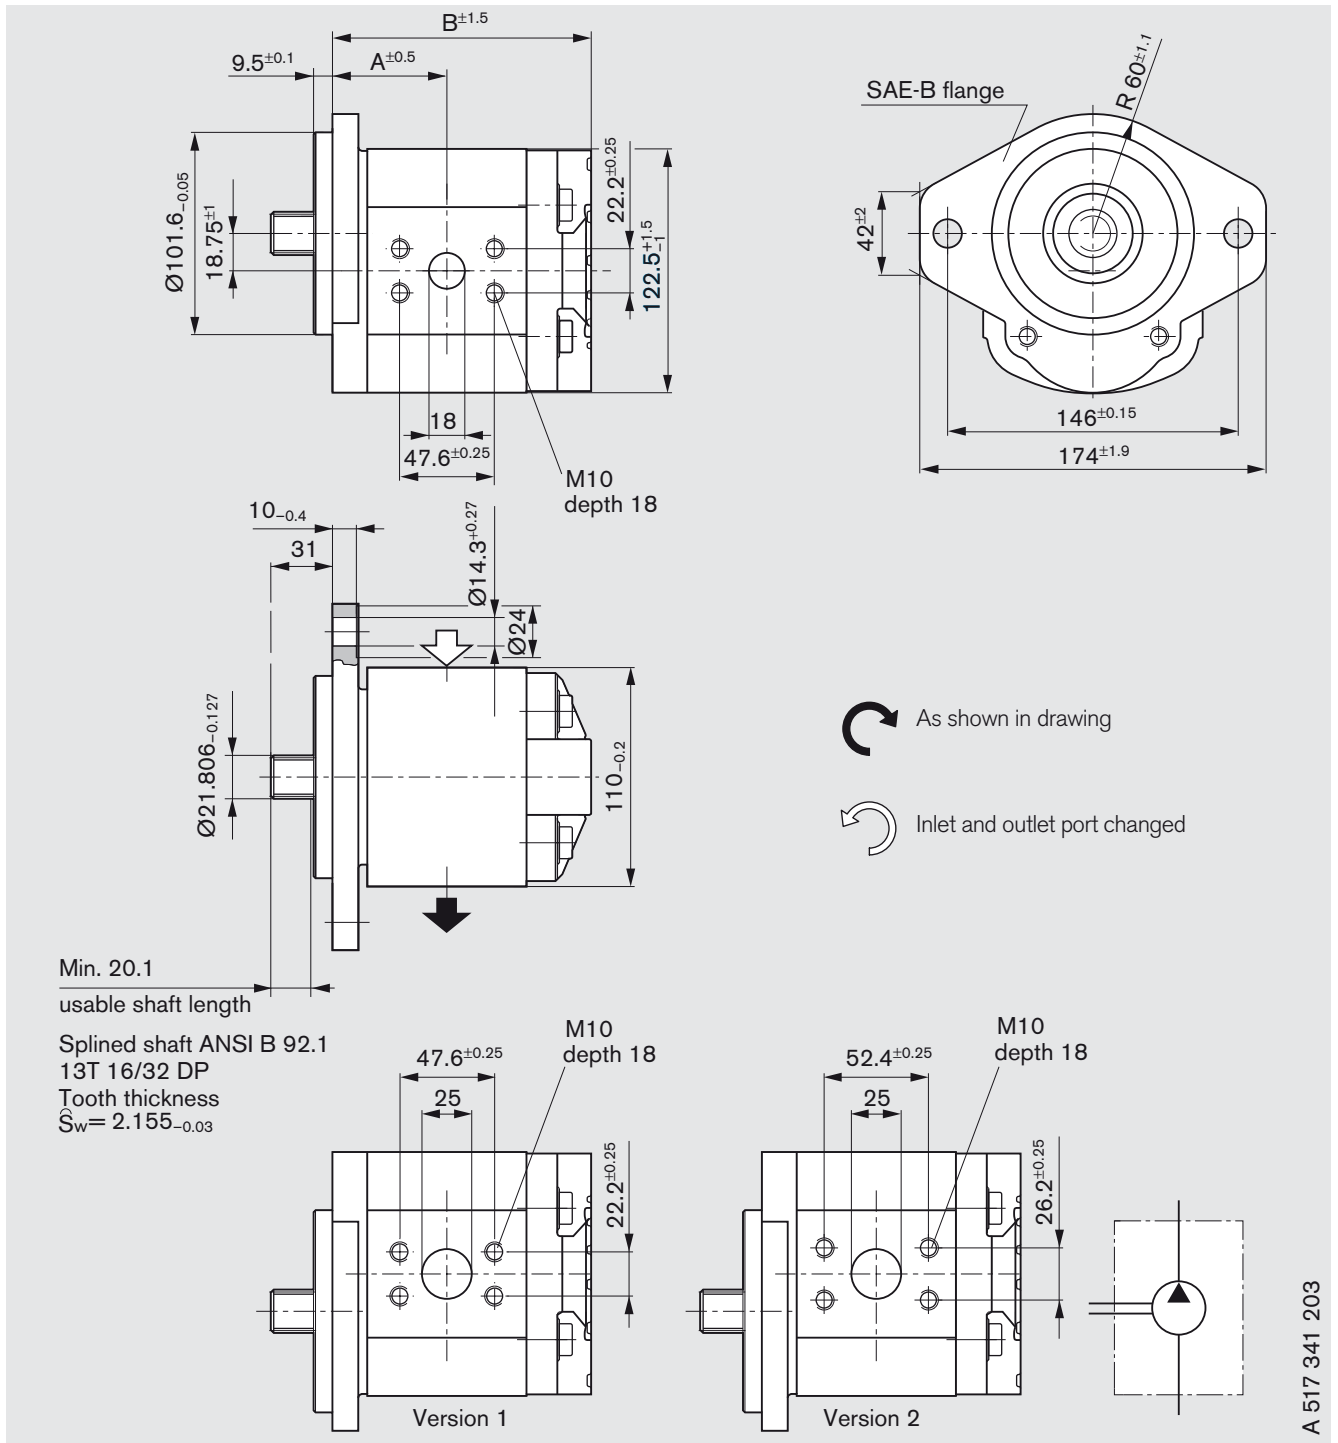

**Ordering code:**

AZPT - 22 -     DC 07 KB


Displacement [cm <sup>3</sup> /rev]	Ordering-No.		Max. operating pressure [bar]	Max. rotation speed [rpm]	kg	Dimension [mm]				Version	
	L	R				A	B	C	D		
20	<b>0 517 625 310</b>	<b>0 517 625 009</b>	280	3000		52.0	119.1	25	47.6	M10 18 depth	1
22.5	<b>0 517 725 317</b>	<b>0 517 725 021</b>	280	3000		53.0	122.1	25	52.4		2
25	<b>0 517 725 318</b>	<b>0 517 725 022</b>	280	3000		55.0	125.1	25	52.4		
28	<b>0 517 725 319</b>	<b>0 517 725 023</b>	260	3000		56.5	128.1	25	52.4		
32	<b>0 517 725 320</b>	<b>0 517 725 024</b>	240	2800		59.0	132.6	25	52.4		
36	<b>0 517 725 321</b>	<b>0 517 725 025</b>	210	2600		61.0	137.1	25	52.4		

A 517 341 203

# Fittings

Fittings can be used for rectangular flange **20** see page 7

Gear pump flange, 90° angle

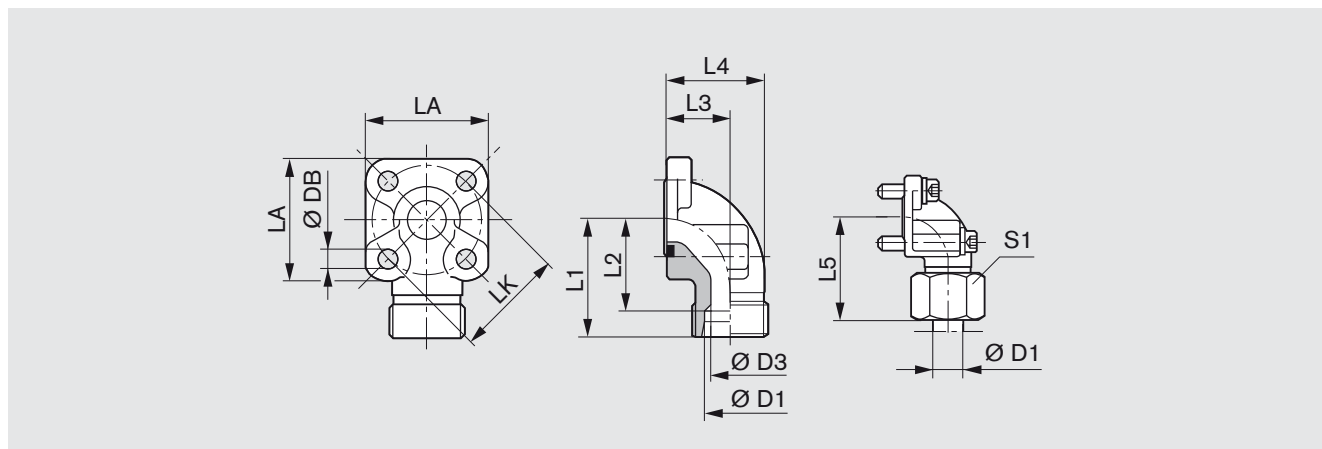

LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws		Seal ring	Mass kg	Part number	p (bar)
											2 pcs.	2 pcs.				
55	20S	17	45	34.5	24.0	40.0	56.0	58	36	8.4	M8x25	M8x50	33x2.5	0.44	<b>1 515 702 004</b>	250
55	30S	26	49	35.5	32.0	50.0	62.0	58	50	8.4	M8x25	M8x50	33x2.5	0.50	<b>1 515 702 006</b>	250
55	35L	31	49	38.5	32.0	51.5	62.0	58	50	8.4	M8x25	M8x60	32x2.5	0.47	<b>1 515 702 005</b>	100
55	42L	38	49	38.0	40.0	64.5	61.0	58	60	8.4	M8x25	M8x70	32x2.5	0.60	<b>1 515 702 019</b>	100

Complete fittings with seal ring, metric screw set, nuts and olive.


## Note

You can find the permissible tightening torques in our publication:

“General Operating Instructions for External Gear Units”

RE 07 012-B1.

# Service parts

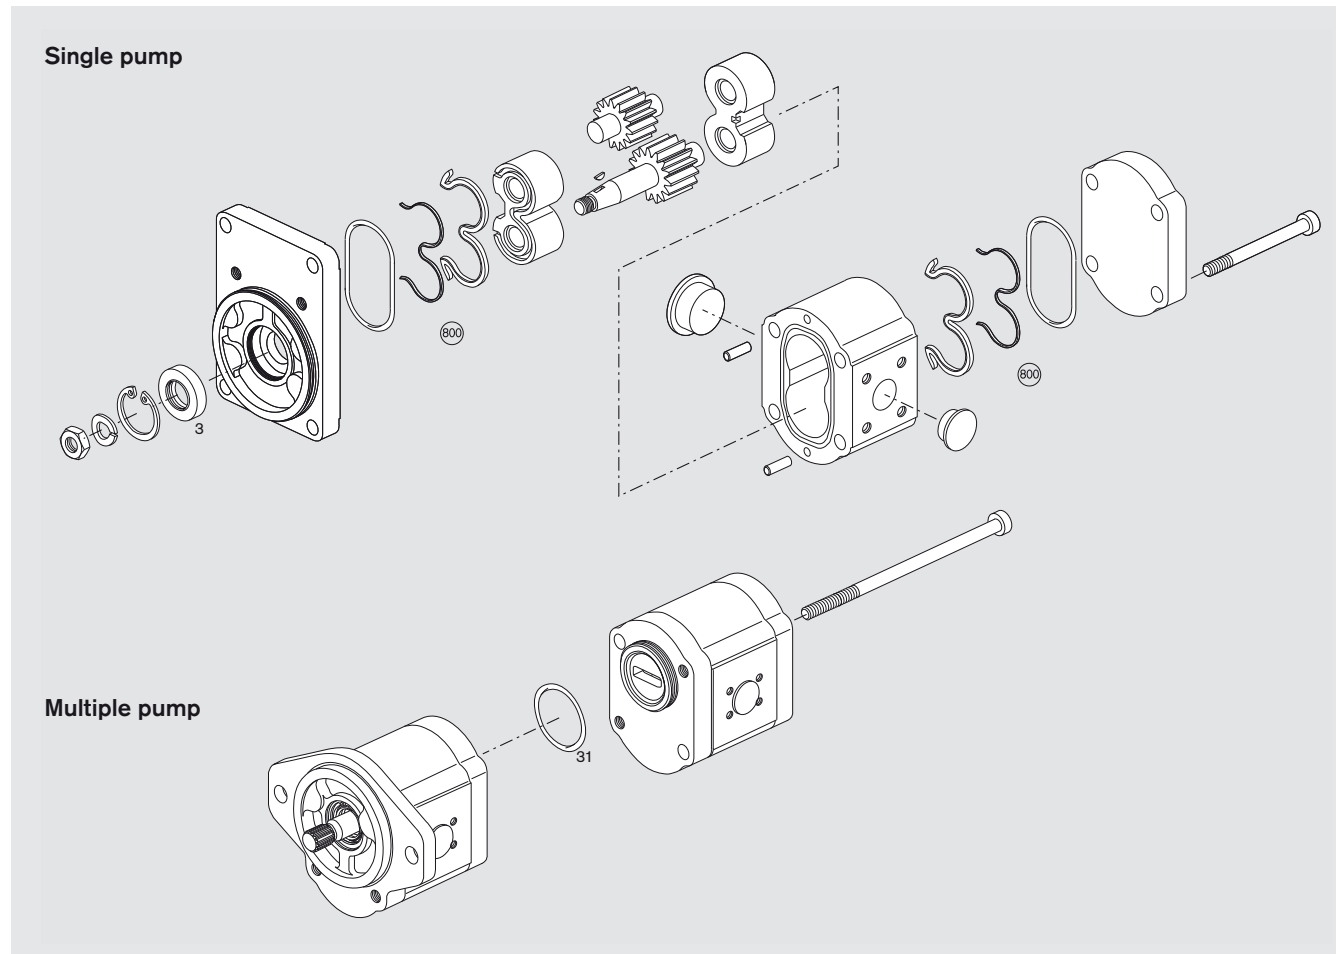

Page	Ordering code	Seal kit "T" Pos. 800 NBR	Shaft seal ring Pos. 3 Dimension	Seal ring Pos. 31 Material	Dimension
16	AZPT - 22 - □□□ □ C B 20 M B	1517010226	1510283023	40x22x7	- NBR
17	AZPT - 22 - □□□ □ D C 20 K B	1517010226	1510283028	40x22x7	- FKM (SSR)

NBR = Perbunan® FKM = Viton®

# Notes for commissioning

## Filter recommendation

The major share of premature failures in external gear pumps is caused by contaminated hydraulic fluid.

As a warranty cannot be issued for dirt-specific wear, we recommend filtration compliant with cleanliness level 20/18/15 ISO 4406, which reduces the degree of contamination to a permissible dimension in terms of the size and concentration of dirt particles:

Operating pressure [bar ]	>160	<160
Contamination class ISO 4406	18/15	19/16
To be reached with $\beta_x = 75$	20	25

We recommend that a full-flow filter always be used. Basic contamination of the hydraulic fluid used may not exceed class 20/18/15 according to ISO 4406. Experience has shown that new fluid quite often lies above this value. In such instances a filling device with special filter should be used.

## General

- The pumps supplied by us have been checked for function and performance. No modifications of any kind may be made to the pumps; any such changes will render the warranty null and void!
- Pump may only be operated in compliance with permitted data (see pages 15 – 18).

## Project planning notes

Comprehensive notes and suggestions are available in Hydraulics Trainer, Volume 3 RE 00 281, "Project planning notes and design of hydraulic systems". Where external gear pumps are used we recommend that the following note be adhered to.

## Technical data

All stated technical data is dependent on production tolerances and is valid for specific marginal conditions.

Note that, as a consequence, scattering is possible, and at certain marginal conditions (e.g. viscosity) **the technical data may change.**

## Characteristics

When designing the external gear pump, note the maximum possible service data based on the characteristics displayed on pages 10 to 12.

Additional information on the proper handling of hydraulic products from Bosch Rexroth is available in our document: "General product information for hydraulic products" RE 07 008.

## Contained in delivery

The components with characteristics as described under ordering code and device measurements, pages 16 – 17, are contained in delivery.


**You can find further information in our publication: "General Operating Instructions for External Gear Units" RE 07 012-B1.**

## The AZ configurator at [www.boschrexroth.com/azconfigurator](http://www.boschrexroth.com/azconfigurator)

The AZ configurator assists you to configure your individual external gear unit easily and user-friendly. You only need to specify your requirements: From the displacement, direction of rotation, drive shaft, connection flange right up to the required rear cover. You immediately receive a project drawing (PDF format) if a configuration already exists. You receive the price of the configured external gear unit upon request.



The AZ configurator assists you to configure your individual external gear unit easily and user-friendly – all data needed for project planning are acquired thru menu guidance.

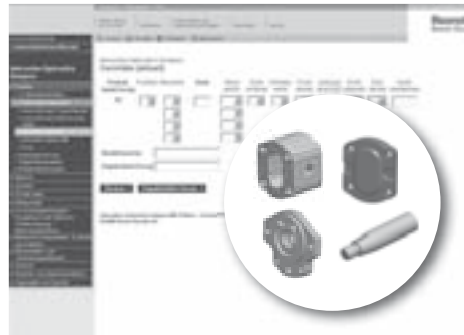

Selection is made either on an ordering code or your technical requirements. This means that you can search for external gear units that have already been configured, or you specify the configuration variant of the external gear unit based upon the operating parameters you require.



If the external gear unit you selected has been released you will receive the part number, ordering code and a detailed installation drawing. If your special configuration is not available please send your specification to Rexroth. One of our employees will then contact you.

# Ordering-No.

Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page
0 517 625 008	16	0 517 725 020	16	0 517 725 314	16
0 517 625 009	17	0 517 725 021	17	0 517 725 315	16
0 517 625 309	16	0 517 725 022	17	0 517 725 316	16
0 517 625 310	17	0 517 725 023	17	0 517 725 317	17
0 517 725 016	16	0 517 725 024	17	0 517 725 318	17
0 517 725 017	16	0 517 725 025	17	0 517 725 319	17
0 517 725 018	16	0 517 725 302	16	0 517 725 320	17
0 517 725 019	16	0 517 725 313	16	0 517 725 321	17

Bosch Rexroth AG  
 External Gear Units  
 Robert-Bosch-Straße 2  
 D-71701 Schwieberdingen  
 Telefon +49 (0) 711-811 10 63  
 Telefax +49 (0) 711-811 17 98  
 brm-az.info@boschrexroth.de  
 www.boschrexroth.com/brm

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that our products are subject to a natural process of wear and aging.

# External gear pump Series U

**RE 10 098/02.12**

Replaces  
RE 10 098/08.07

AZPU-...

Fixed pumps  
 $V = 22.5...63 \text{ cm}^3/\text{rev}$



## Overview of contents

### Contents

General	2
Product overview	3
Ordering code single pumps	4
Ordering code multiple pumps	5
Drive shaft	6
Front cover	6
Line ports	7
Pumps with integral valves	8
Design calculations for pumps	8
Performance charts	9
Noise charts	12
Specifications	14
Drive arrangements	15
Multiple pumps through drives	17
Dimensions	18
Fittings	22
Notes on commissioning and maintenance	23
Service parts	24
Ordering-No.	26

## Features




- Nominal pressure 280 bar
- Slide bearings for heavy duty applications
- Drive shafts to ISO or SAE
- Combination of several pumps possible
- Line ports: connection flanges
- Optimized pressure pulsation, which reduces noise emissions and vibration input in system
- Long service life thru reinforced design of shafts and case
- Consistent high quality thru mass production
- Numerous configuration variants available

# General

The key task of external gear units is to convert mechanical energy (torque and rotational speed) into hydraulic energy (flow and pressure). In external gear motors this is the other way round. These machines are required to be highly efficient in order to avoid unnecessary heat. This efficiency is achieved by means of precision production engineering and pressure-sensitive gap sealing.

Moreover, in the low-noise SILENCE pumps, the dual-flank principle helps to reduce flow pulsation by up to 75 %.

## The displacement method

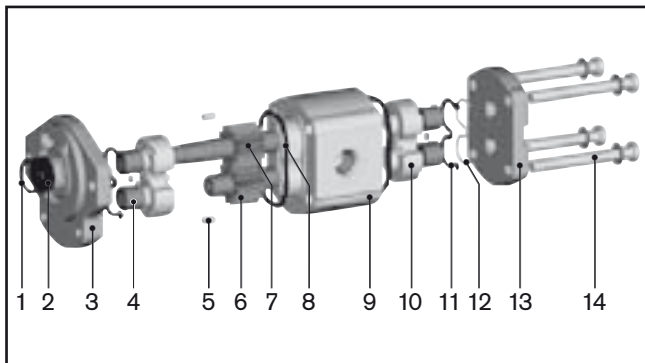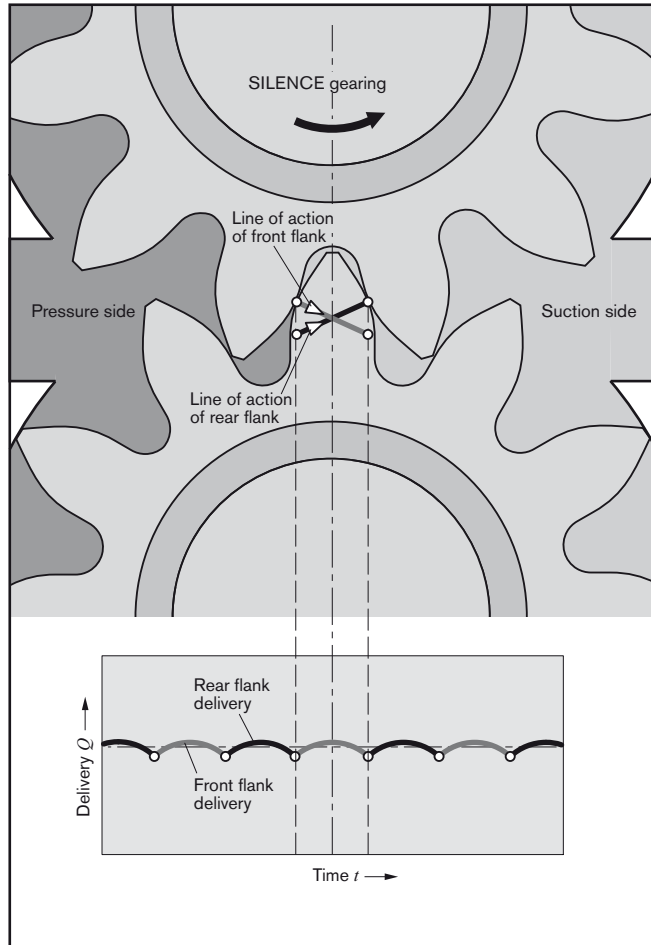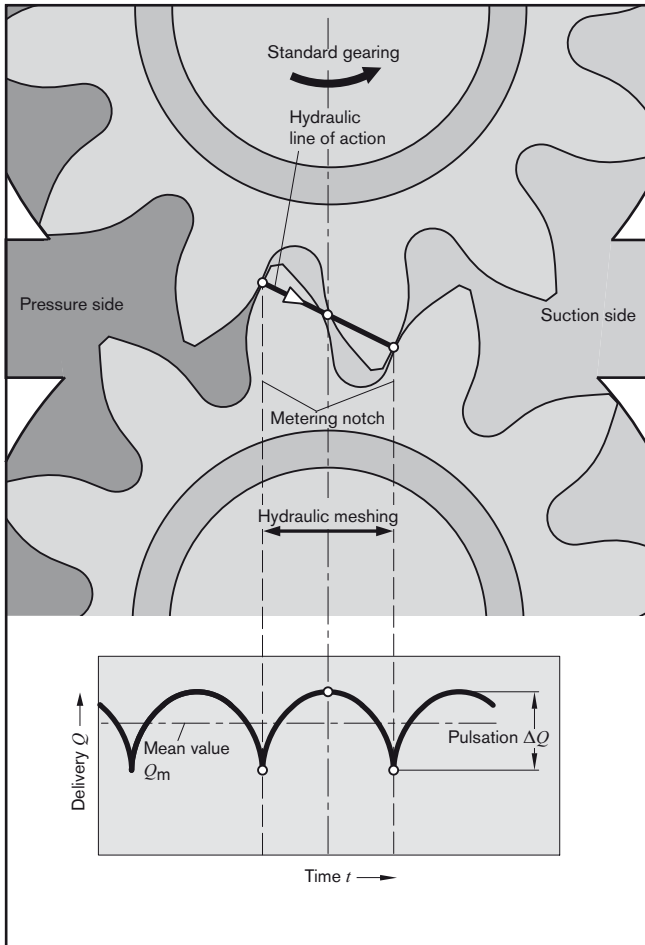

- 1 Retaining ring
- 2 Shaft seal ring
- 3 Front cover
- 4 Slide bearing
- 5 Centering pin
- 6 Gear
- 7 Gear (frictional)
- 8 Case seal
- 9 Pump case
- 10 Bearing
- 11 Axial zone seal
- 12 Support
- 13 End cover
- 14 Fixing screws


The geometry of the displacement gearing, matched in form by the rotation of the drive shaft, results in the parabolic flow characteristic shown here on the left. In a standard pump, this characteristic is repeated each time a gear tooth meshes. With their dual-flank system, the flow pulsation of SILENCE pumps is reduced by 75 % – with correspondingly lower excitation of downstream system components – at double the fundamental frequency. During this process, the gear pair exhibits an extremely reduced rear flank backlash, so that hydraulic sealing is provided not just by the front flank of the driven gear, but also by the rear flanks. In this way, the front and rear flanks alternately contribute to flow displacement. And by adapting the shape of the metering notches, the expansion of the hydraulic line of action is half that of the standard pump.




### Construction


The external gear pump consists essentially of a pair of gears supported in bearing bushings or bearing, dependent on the series, and the case with a front and rear cover. The drive shaft protrudes from the front cover where it is sealed by the shaft seal ring. The bearing forces are absorbed by special slide bearings with sufficient elasticity to produce surface contact instead of line contact. They also ensure excellent resistance to galling – especially at low speed. The gears have 12 teeth. This keeps both flow pulsation and noise emission to a minimum.

The internal sealing is achieved by forces which are proportional to delivery pressure. This ensures optimum efficiency. The sealing zone between the gear teeth and the bearings is controlled by the admission of operating pressure to the rear of the bearing bushings. Special seals form the boundary of the zone. The radial clearance at the tips of the gear teeth is sealed by internal forces pushing them against the case.

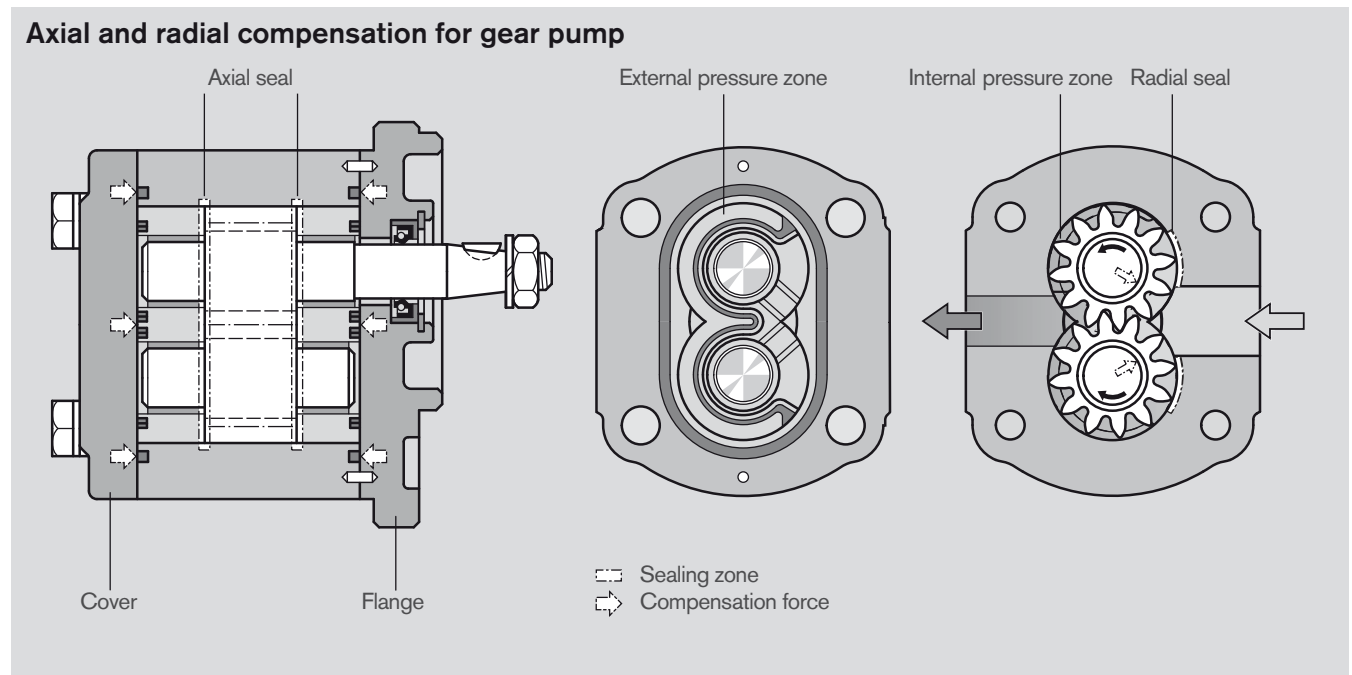










### Overview of “Series U” standard types

Version	Page
	18

Version	Page
	19 20 21

# Ordering code

## External gear units Single pumps "SILENCE"





























<b>AZ</b>	<b>P</b>	<b>U</b>	<b>-</b>	<b>2</b>	<b>2</b>	<b>-</b>	<b>063</b>	<b>R</b>	<b>C</b>	<b>B</b>	<b>20</b>	<b>M</b>	<b>D</b>	<b>18009</b>	<b>S xxxx</b>																									
<table border="1"> <tr> <td><b>Function</b></td> <td rowspan="2">Special design *)</td> </tr> <tr> <td><b>P = Pump</b></td> </tr> <tr> <td><b>Series</b></td> <td rowspan="2"></td> </tr> <tr> <td><b>2 = 2nd generation</b></td> </tr> <tr> <td><b>Version</b></td> <td rowspan="2"></td> </tr> <tr> <td><b>2 = corrosion-resistant, pinned</b></td> </tr> <tr> <td><b>Size G</b></td> <td rowspan="8"></td> </tr> <tr> <td><b>022 = 22.5 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>025 = 25.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>028 = 28.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>032 = 32.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>036 = 36.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>040 = 40.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>045 = 45.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>050 = 50.0 cm<sup>3</sup>/rev</b></td> <td rowspan="2"></td> </tr> <tr> <td><b>056 = 56.0 cm<sup>3</sup>/rev</b></td> </tr> <tr> <td><b>063 = 63.0 cm<sup>3</sup>/rev</b></td> <td rowspan="2"></td> </tr> <tr> <td><b>Direction of rotation</b></td> </tr> <tr> <td><b>R = Clockwise</b></td> <td rowspan="2"></td> </tr> <tr> <td><b>L = Counterclockwise</b></td> </tr> </table>														<b>Function</b>	Special design *)	<b>P = Pump</b>	<b>Series</b>		<b>2 = 2nd generation</b>	<b>Version</b>		<b>2 = corrosion-resistant, pinned</b>	<b>Size G</b>		<b>022 = 22.5 cm<sup>3</sup>/rev</b>	<b>025 = 25.0 cm<sup>3</sup>/rev</b>	<b>028 = 28.0 cm<sup>3</sup>/rev</b>	<b>032 = 32.0 cm<sup>3</sup>/rev</b>	<b>036 = 36.0 cm<sup>3</sup>/rev</b>	<b>040 = 40.0 cm<sup>3</sup>/rev</b>	<b>045 = 45.0 cm<sup>3</sup>/rev</b>	<b>050 = 50.0 cm<sup>3</sup>/rev</b>		<b>056 = 56.0 cm<sup>3</sup>/rev</b>	<b>063 = 63.0 cm<sup>3</sup>/rev</b>		<b>Direction of rotation</b>	<b>R = Clockwise</b>		<b>L = Counterclockwise</b>
<b>Function</b>	Special design *)																																							
<b>P = Pump</b>																																								
<b>Series</b>																																								
<b>2 = 2nd generation</b>																																								
<b>Version</b>																																								
<b>2 = corrosion-resistant, pinned</b>																																								
<b>Size G</b>																																								
<b>022 = 22.5 cm<sup>3</sup>/rev</b>																																								
<b>025 = 25.0 cm<sup>3</sup>/rev</b>																																								
<b>028 = 28.0 cm<sup>3</sup>/rev</b>																																								
<b>032 = 32.0 cm<sup>3</sup>/rev</b>																																								
<b>036 = 36.0 cm<sup>3</sup>/rev</b>																																								
<b>040 = 40.0 cm<sup>3</sup>/rev</b>																																								
<b>045 = 45.0 cm<sup>3</sup>/rev</b>																																								
<b>050 = 50.0 cm<sup>3</sup>/rev</b>																																								
<b>056 = 56.0 cm<sup>3</sup>/rev</b>																																								
<b>063 = 63.0 cm<sup>3</sup>/rev</b>																																								
<b>Direction of rotation</b>																																								
<b>R = Clockwise</b>																																								
<b>L = Counterclockwise</b>																																								
<table border="1"> <tr> <td><b>Valve adjustment</b></td> </tr> <tr> <td><b>200 xx = PRV 200 bar</b></td> </tr> <tr> <td><b>xxx 11 = FCV 11 l/min</b></td> </tr> <tr> <td><b>18009 = PRV + FCV 180 bar, 9 l/min</b></td> </tr> <tr> <td><b>Rear cover</b></td> </tr> <tr> <td><b>B = Standard</b></td> </tr> <tr> <td><b>D = PRV residual flow internal</b></td> </tr> <tr> <td><b>E = FCV residual flow external</b></td> </tr> <tr> <td><b>S = FCV residual flow internal</b></td> </tr> <tr> <td><b>V = PRV + FCV</b></td> </tr> <tr> <td><b>Seals</b></td> </tr> <tr> <td><b>M = NBR</b></td> </tr> <tr> <td><b>K = NBR, SSR in FKM</b></td> </tr> </table>														<b>Valve adjustment</b>	<b>200 xx = PRV 200 bar</b>	<b>xxx 11 = FCV 11 l/min</b>	<b>18009 = PRV + FCV 180 bar, 9 l/min</b>	<b>Rear cover</b>	<b>B = Standard</b>	<b>D = PRV residual flow internal</b>	<b>E = FCV residual flow external</b>	<b>S = FCV residual flow internal</b>	<b>V = PRV + FCV</b>	<b>Seals</b>	<b>M = NBR</b>	<b>K = NBR, SSR in FKM</b>														
<b>Valve adjustment</b>																																								
<b>200 xx = PRV 200 bar</b>																																								
<b>xxx 11 = FCV 11 l/min</b>																																								
<b>18009 = PRV + FCV 180 bar, 9 l/min</b>																																								
<b>Rear cover</b>																																								
<b>B = Standard</b>																																								
<b>D = PRV residual flow internal</b>																																								
<b>E = FCV residual flow external</b>																																								
<b>S = FCV residual flow internal</b>																																								
<b>V = PRV + FCV</b>																																								
<b>Seals</b>																																								
<b>M = NBR</b>																																								
<b>K = NBR, SSR in FKM</b>																																								
<p>*) Some of the special designs shown on pages 18–21 are not covered in the illustration of the ordering code.</p>																																								
<b>Drive shafts</b>				<b>Front cover</b>				<b>Line ports</b>																																
Suitable front cover																																								
<b>C</b>	Tapered key shaft 1 : 5		<b>B</b>	<b>B</b>	Rectangular flange Centering Ø 105 mm		<b>20</b>	Rectangular flange																																
<b>D</b>	Splined shaft SAE J 744 22-4 13T		<b>C</b>	<b>C</b>	SAE J 744 101-2 B 2-hole flange Ø 101.6 mm		<b>07</b>	Square flange SAE thread, metric																																
<b>H</b>	Tapered key shaft 1 : 8		<b>O</b>	<b>O</b>	Rectangular flange Centering Ø 50.78 mm		<b>30</b>	Rectangular flange																																

Not all variants can be selected by using ordering code!

Please select the required pump by using the selection tables (standard types) or after consultation with Bosch Rexroth! Special options are possible upon request.

# Ordering code

## External gear units Multiple pumps "SILENCE"


<b>AZ</b>	<b>P</b>	<b>UUSS</b>	<b>-</b>	<b>x</b>	<b>x</b>	<b>-</b>	<b>032/022/016/005</b>	<b>R</b>	<b>C</b>	<b>B</b>	<b>20</b>	<b>20</b>	<b>20</b>	<b>20</b>	<b>K</b>	<b>B</b>				
<b>Function</b> P = Pump <b>Series</b> B = 1.0...7.1 cm <sup>3</sup> /rev S = 4.0...28 cm <sup>3</sup> /rev F = 4.0...28 cm <sup>3</sup> /rev T = 20.0...36 cm <sup>3</sup> /rev N = 20.0...36 cm <sup>3</sup> /rev U = 22.5...63 cm <sup>3</sup> /rev G = 22.5...63 cm <sup>3</sup> /rev <b>Series</b> , relates to pump section 1 2 = 2nd generation <b>Version</b> , relates to pump section 1 2 = corrosion-resistant, pinned <b>Size</b> as per individual Series <b>Direction of rotation</b> R = Clockwise L = Counterclockwise							<b>Rear cover</b> relates to last pump part B = Standard <b>Seals</b> M = NBR P = FKM K = NBR, WDR in FKM WDR relates to pump part 1													
<b>Drive shafts</b> relates to pump part 1 Series B: <b>H</b> Tapered key shaft 1:5  <b>O</b> Suitable front cover  <b>O</b> Series F, S: <b>C</b> Tapered key shaft 1:5  <b>B</b> <b>H</b> Tapered key shaft 1:8  <b>O</b> <b>R</b> Splined shaft SAE J 744 16-4 9T  <b>R</b> Series N, T: <b>C</b> Tapered key shaft 1:5  <b>B</b> <b>D</b> Splined shaft SAE J 744 22-4 13T  <b>C</b> Series G, U: <b>C</b> Tapered key shaft 1:5  <b>B</b> <b>D</b> Splined shaft SAE J 744 22-4 13T  <b>C</b> <b>H</b> Tapered key shaft 1:8  <b>O</b>							<b>Front cover</b> relates to pump part 1 <b>O</b> Square flange Centering Ø 25.38 mm  <b>B</b> Square flange Centering Ø 80 mm  <b>O</b> Square flange Centering Ø 36.47 mm SAE J 744 82-2 A  <b>R</b> 2-bolt flange Ø 82.55 mm  <b>B</b> Square flange Centering Ø 100 mm  <b>C</b> SAE J 744 101-2 B 2-bolt flange Centering Ø 101.6 mm  <b>B</b> Square flange Centering Ø 105 mm  <b>C</b> SAE J 744 101-2 B 2-bolt flange Centering Ø 101.6 mm  <b>O</b> Square flange Centering Ø 50.78 mm 							<b>Line ports</b> every pump parts <b>01</b> Pipe thread ISO 228/1  <b>20</b> Rectangular flange  <b>20</b> Rectangular flange  <b>30</b> Rectangular flange  <b>07</b> Square flange SAE Thread, metric  <b>20</b> Rectangular flange  <b>07</b> Square flange SAE Thread, metric  <b>20</b> Rectangular flange  <b>30</b> Rectangular flange 						

Not all variants can be selected by using ordering code!


Please select the required pump by using the selection tables (standard types) or after consultation with Bosch Rexroth!

Special options are possible upon request.


Drive shafts

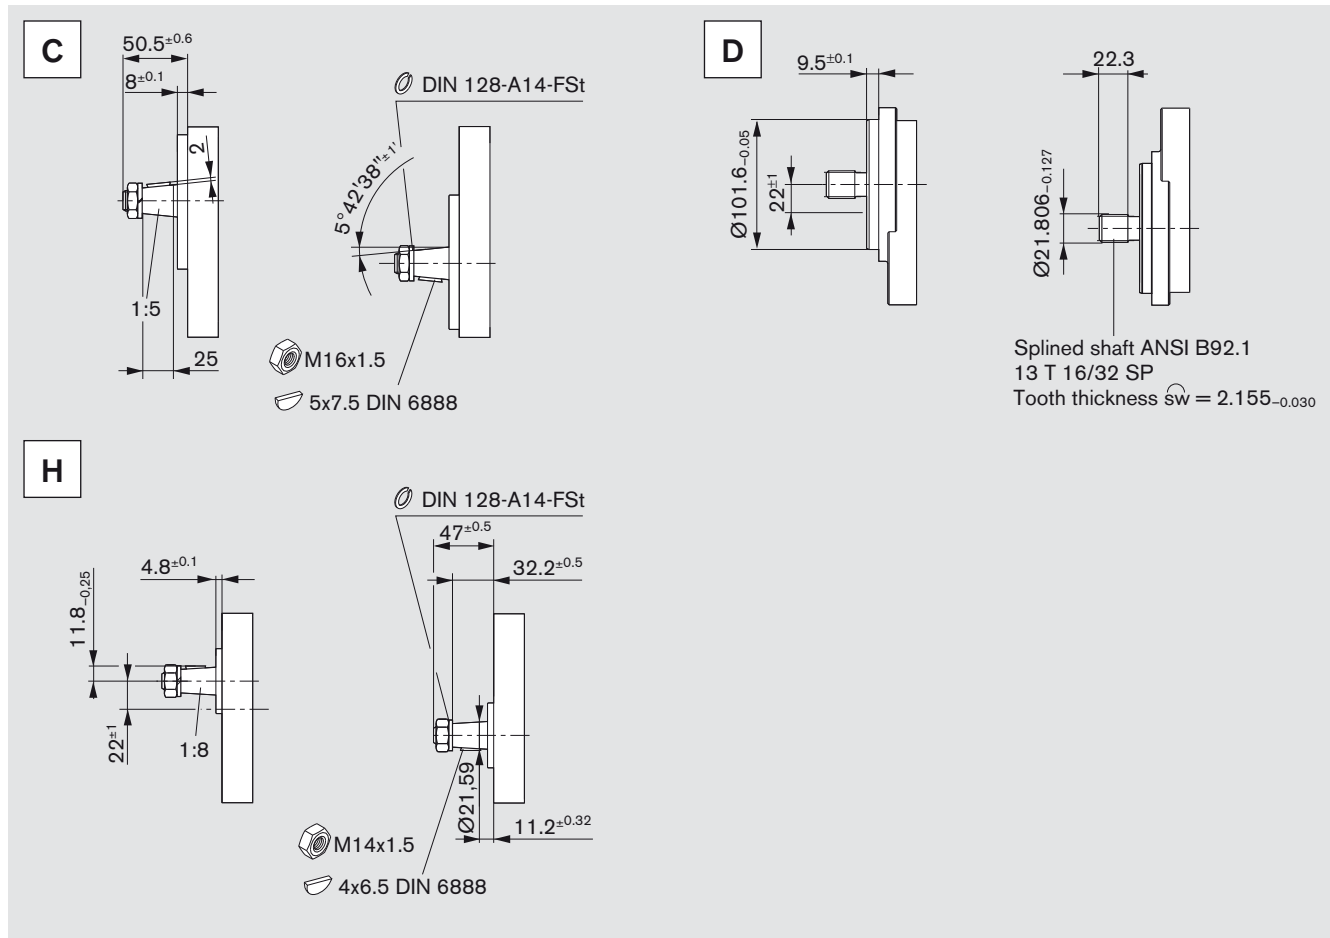

Front cover

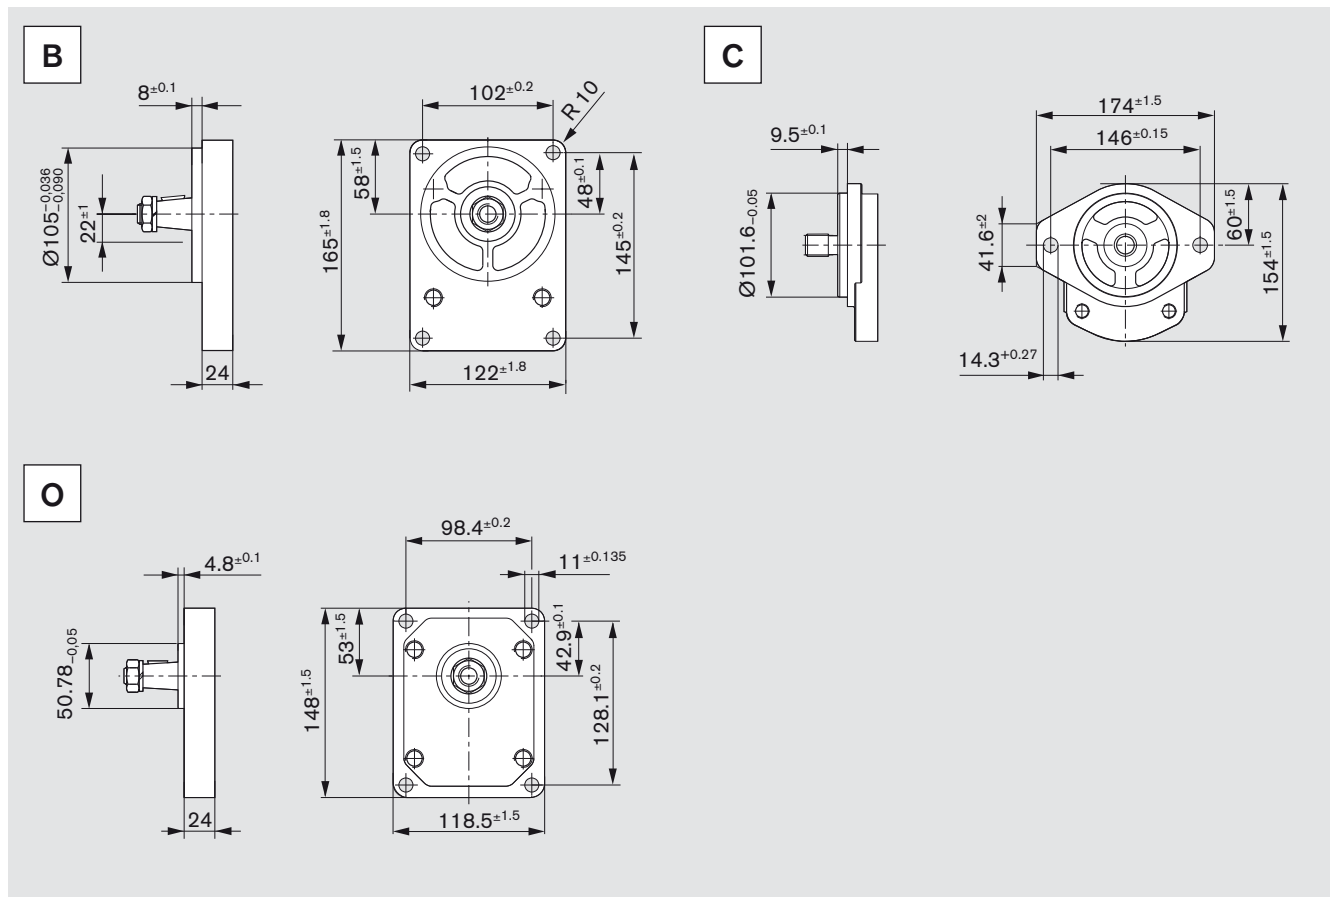


Line ports




**07** Square flange SAE, thread, metric

Ordering code	Size	Pressure side				Suction side			
		C	D	E	F	C	D	E	F
07	22.5...28 cm <sup>3</sup>	18	47.6	M10 depth 18	22.2	25	52.4	M10 depth 14	26.2
	32.0...50 cm <sup>3</sup>	25	52.4		26.2	32	58.7		30.2
	56.0...63 cm <sup>3</sup>	32	58.7		30.2	38	69.8		35.8



**20** Rectangular flange

Ordering code	Size	Pressure side			Suction side		
		C	D	E	C	D	E
20	22.5...63 cm <sup>3</sup>	18	55	M8 depth 13	26	55	M8 depth 13





**30** Rectangular flange


Ordering code	Size	Pressure side			Suction side		
		C	D	E	C	D	E
30		18	39.7	M8 depth 13	26	50.8	M10 depth 13

# Gear pumps with integral valves


In order to reduce external pipework it is possible to incorporate a flow-control valve or pressure-relief valve in the cover of the gear pump. Such solutions are used, for example for supplying hydraulic oil to power steering systems. The pump delivers a constant flow irrespective of the speed at which it is driven. The excess flow is either returned internally to the suction port or distributed externally to other items of equipment.

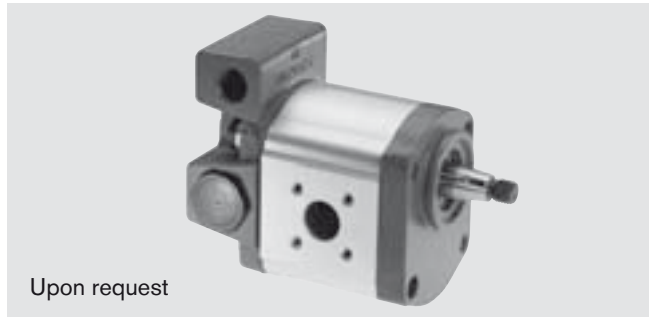


3-way flow-control valve.  
Excess flow returned to suction line  
 $Q_{const.} = 2...30 \text{ l/min}$



3-way flow-control valve.  
Excess flow distributed externally; loadable  
 $Q_{const.} = 2...30 \text{ l/min}$



3-way flow-control valve with pressure-relief valve.  
Excess flow returned to suction line  
 $Q_{const.} = 2...30 \text{ l/min}$   
 $p_1 = 100...180 \text{ bar}$



Pressure-relief valve.  
Discharge returned to suction line  
 $p_1 = 5...250 \text{ bar}$

## Ordering code

S	xxx17
---	-------

E	xxx12
---	-------

V	15011
---	-------

D	180xx
---	-------

# Design calculations for pumps

The design calculations for pumps are based on the following parameters:

$V$ [ $\text{cm}^3/\text{rev}$ ]	Displacement
$Q$ [ $\text{l/min}$ ]	Delivery
$p$ [ $\text{bar}$ ]	Pressure
$M$ [ $\text{Nm}$ ]	Drive torque
$n$ [ $\text{rev/min}$ ]	Drive speed
$P$ [ $\text{kW}$ ]	Drive power

It is also necessary to allow for different efficiencies such as:

$\eta_v$	Volumetric efficiency
$\eta_{hm}$	Hydraulic-mechanical efficiency
$\eta_t$	Overall efficiency

The following formulas describe the various relationships. They include correction factors for adapting the parameters to the usual units encountered in practice.

**Caution:** Diagrams providing approximate selection data will be found on subsequent pages.

$$Q = V \cdot n \cdot \eta_v \cdot 10^{-5}$$

$$p = \frac{M \cdot \eta_{hm}}{1.59 \cdot V}$$

$$P = \frac{p \cdot Q}{6 \cdot \eta_t}$$

$$V = \frac{Q}{n \cdot \eta_v} \cdot 10^5$$

$$V = \frac{M \cdot \eta_{hm}}{159 \cdot p}$$

$$Q = \frac{6 \cdot P \cdot \eta_t}{p}$$

$$n = \frac{Q}{V \cdot \eta_v} \cdot 10^5$$

$$M = \frac{1.59 \cdot V \cdot p}{\eta_{hm}}$$


$$p = \frac{6 \cdot P \cdot \eta_t}{Q}$$

[%]

$n$	→	$Q$	$V$ [ $\text{cm}^3/\text{rev}$ ]	$Q$ [ $\text{l/min}$ ]	$p$ [ $\text{bar}$ ]
$M$	→	$p$	$n$ [ $\text{rev/min}$ ]	$P$ [ $\text{kW}$ ]	$M$ [ $\text{Nm}$ ]
$P$	→	$p \cdot Q$			



**Caution:**  $\eta$  [%] e.g. 95 [%]

# Performance charts




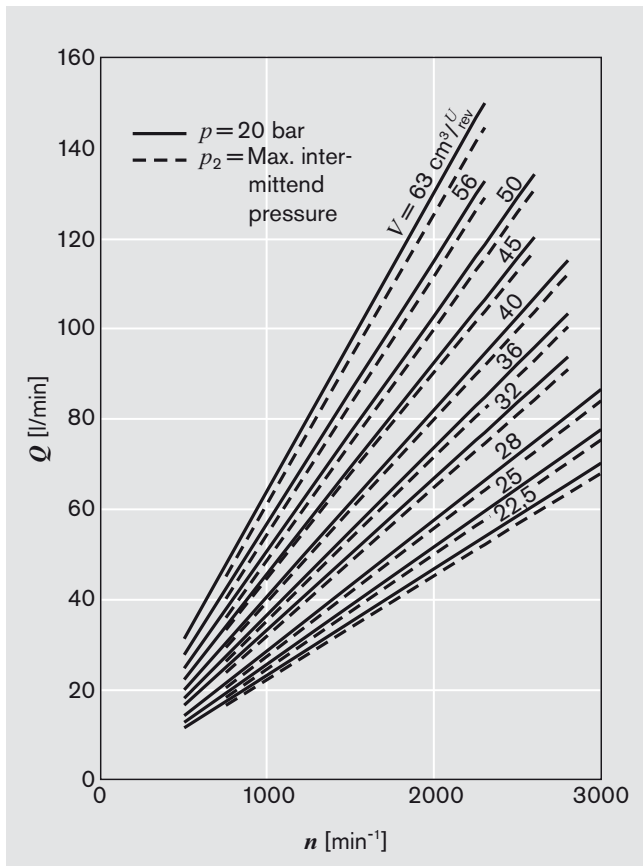


$\nu = 35 \text{ mm}^2/\text{s}, \vartheta = 50^\circ\text{C}$

$Q = f(n, V)$  incl.  $\eta_v$   
 $P = f(n, p)$  ——— incl.  $\eta_t$   
 $M = f(n, p)$  - - - incl.  $\eta_{hm}$



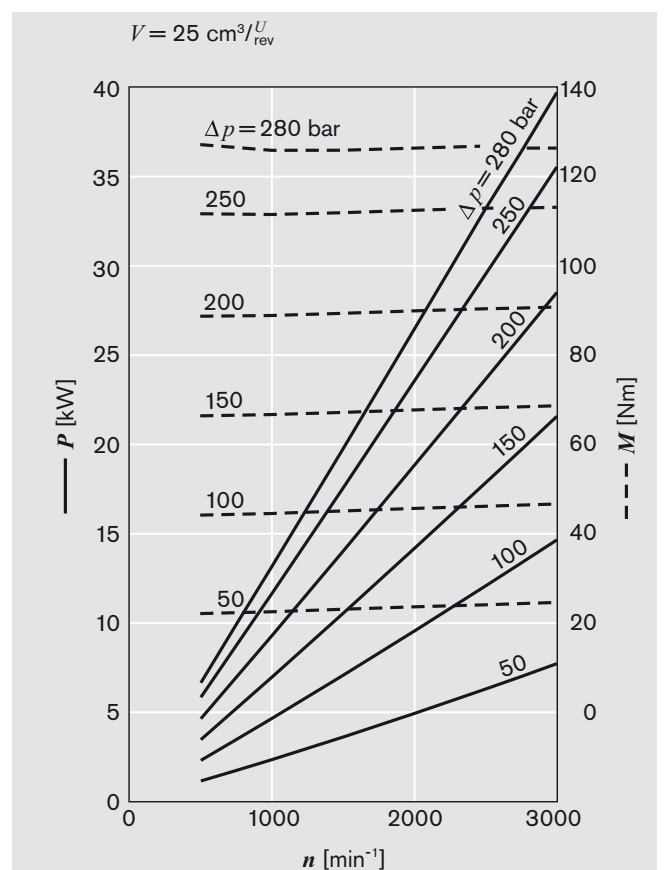
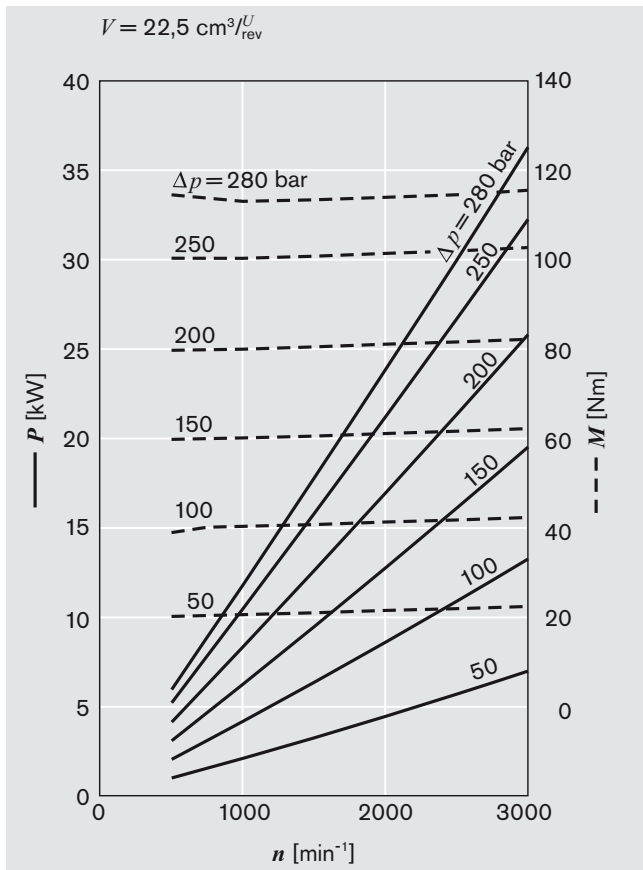


Performance charts (continued)

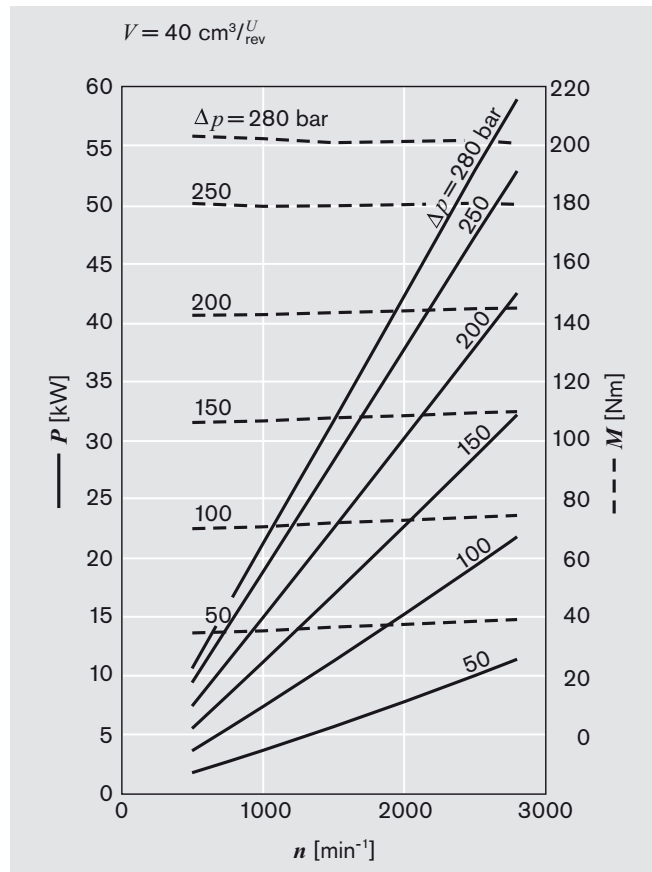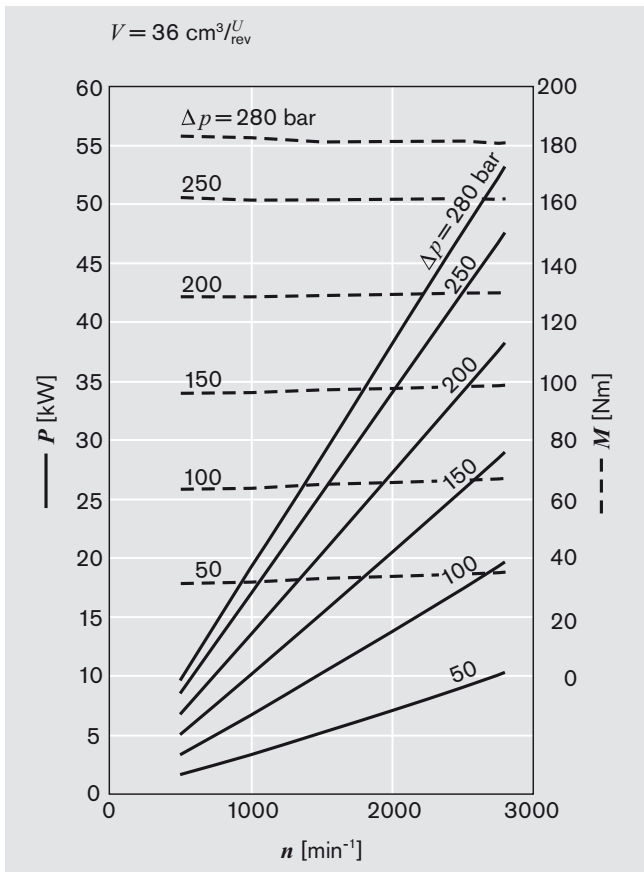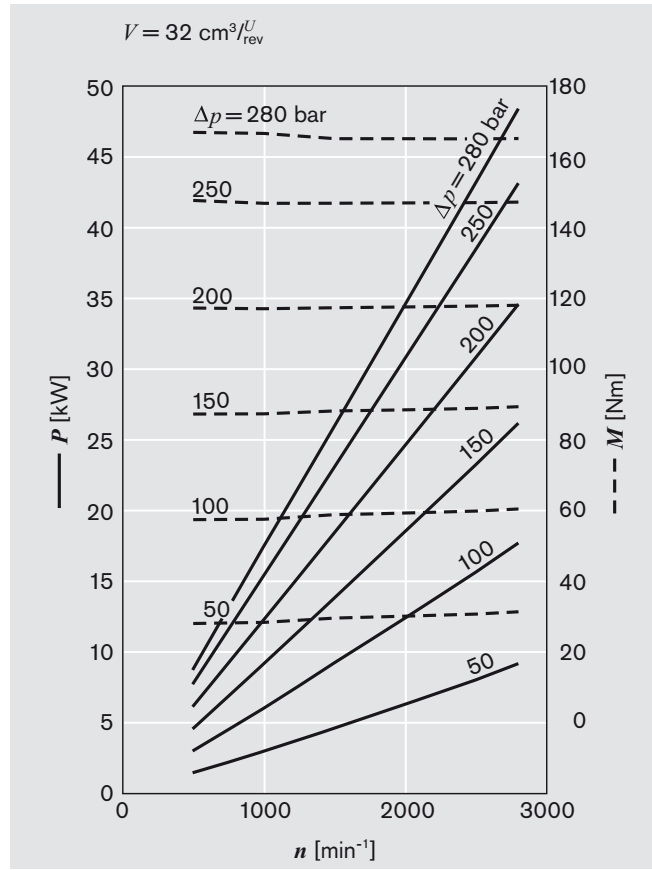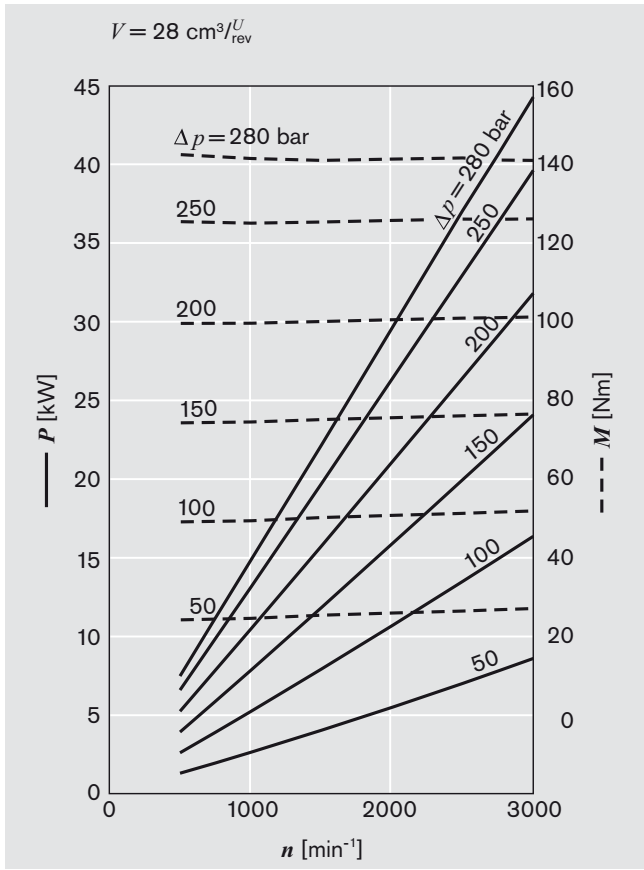









Performance charts (continued)

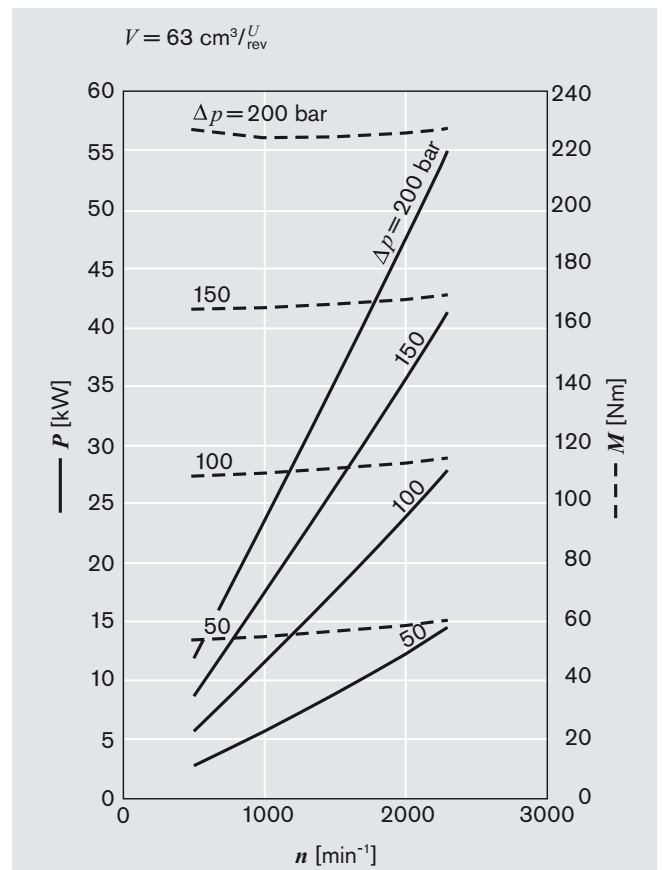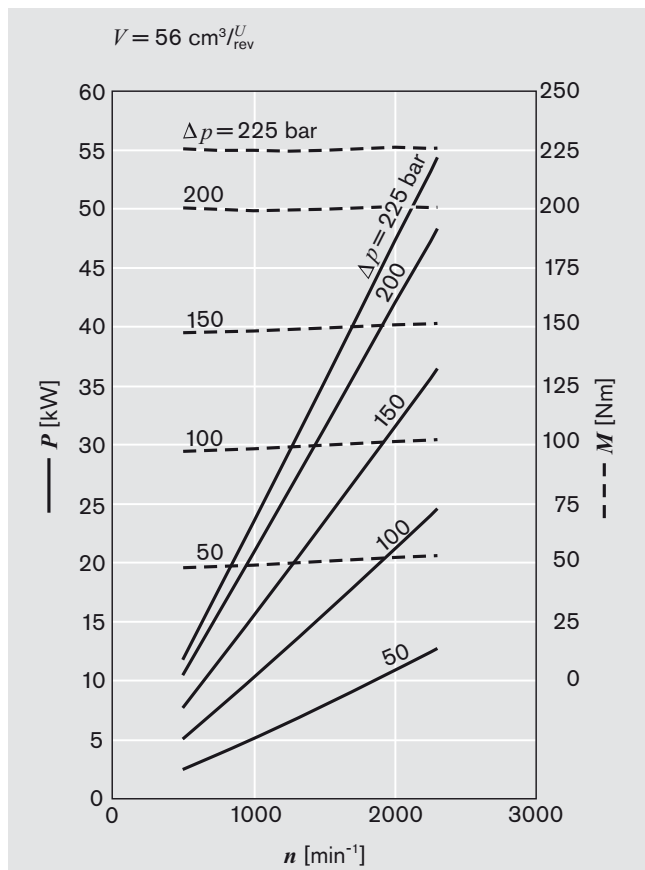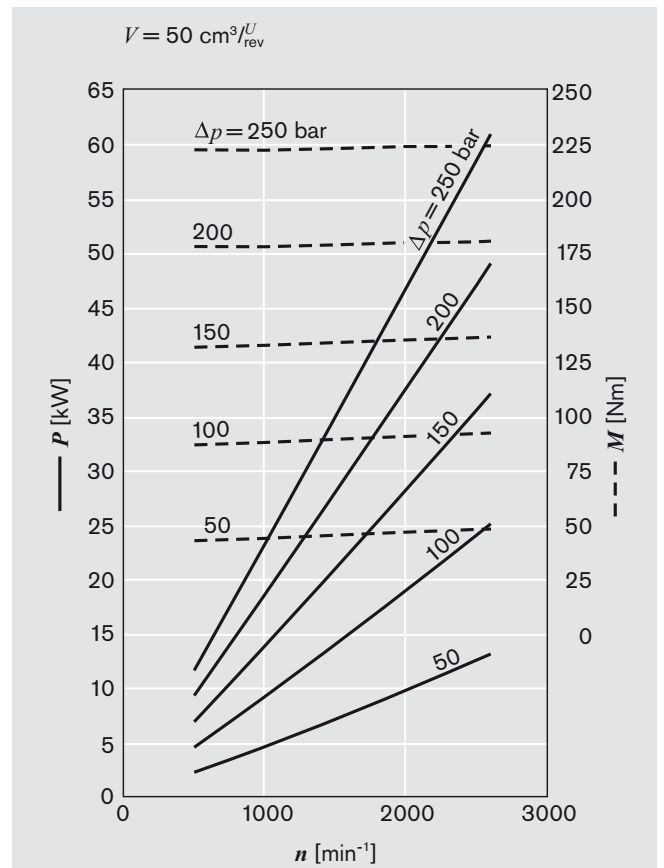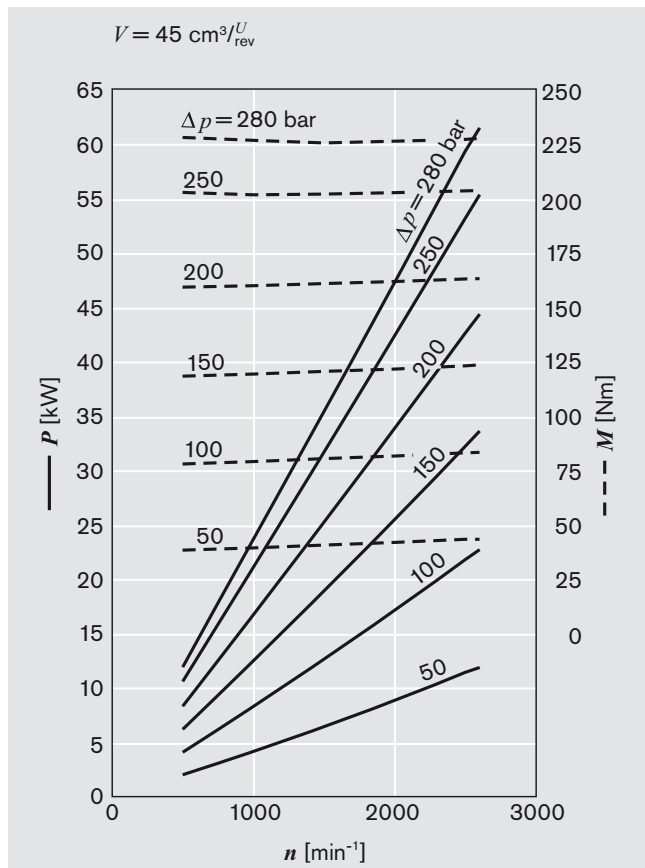





# Noise charts

**Noise level** dependent on rotational speed, pressure range between 10 bar and pressure value  $p_2$  (see page 14 Specifications table).  
 Oil data:  $\nu = 32 \text{ mm}^2/\text{s}$ ,  $\vartheta = 50^\circ\text{C}$ .  
 Sound pressure level calculated from noise measurements made in the sound absorbent measuring room compliant with DIN 45 635, Part 26.  
 Spacing between measuring sensor – pump: 1 m.

These are typical characteristic values for the respective model. They describe the airborne sound emitted solely by the pump. Environmental influences (installation site, piping, further system components) are not taken into consideration. Each value applies for a single pump.

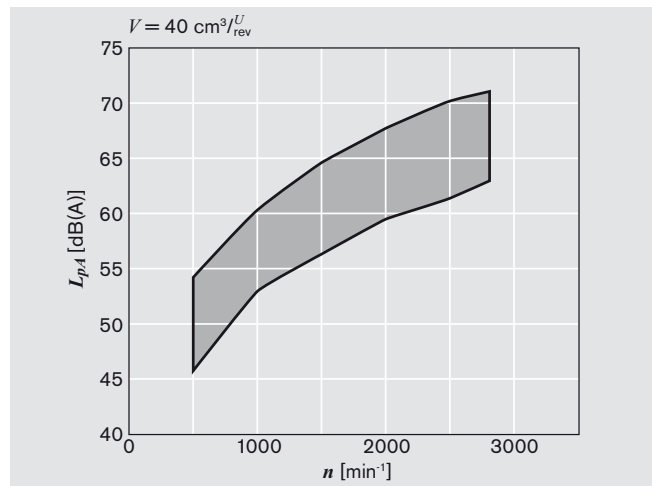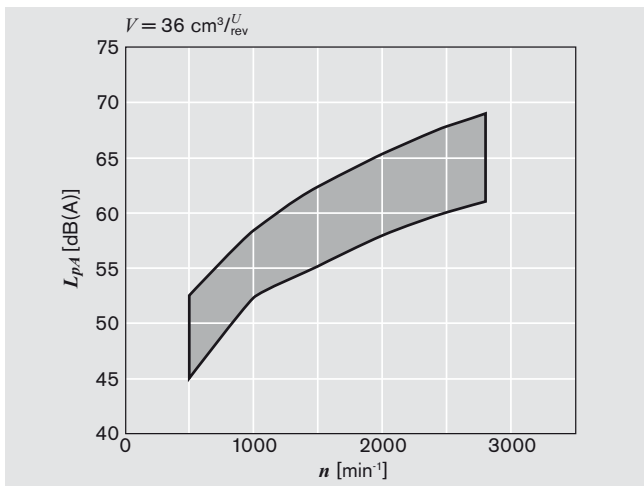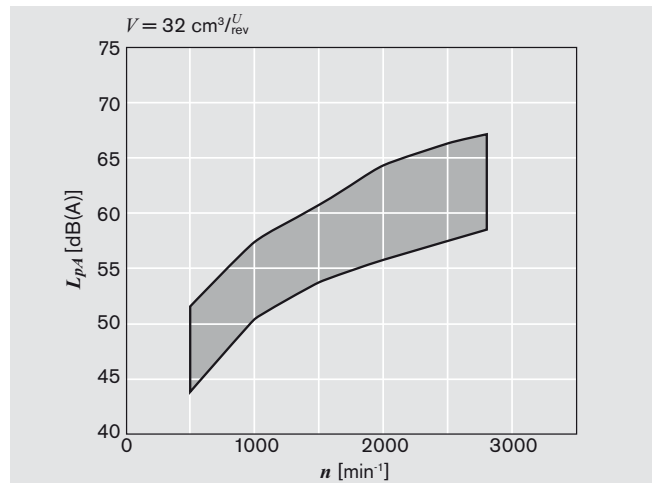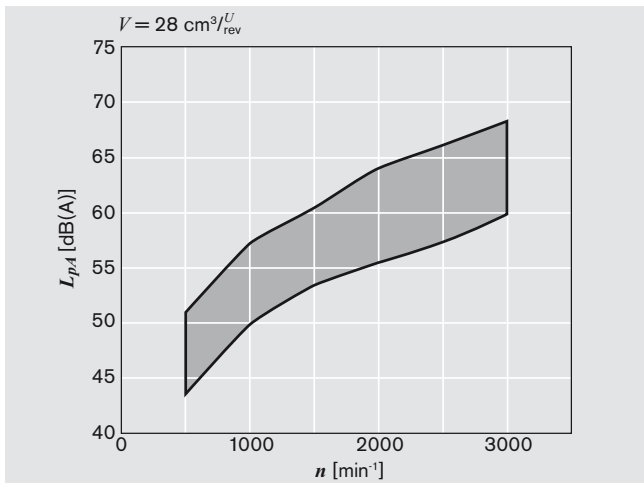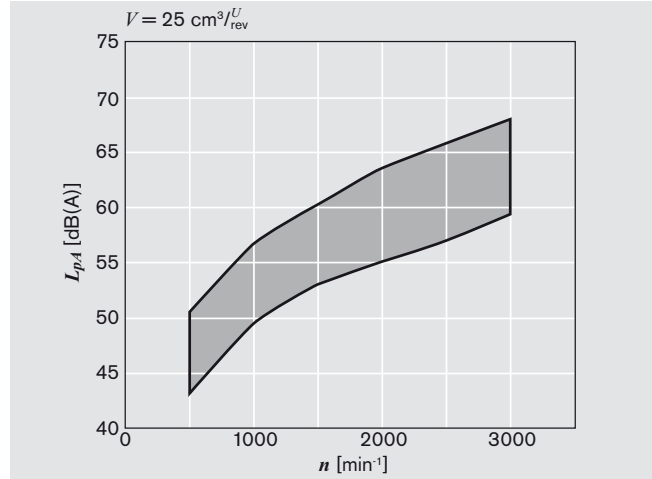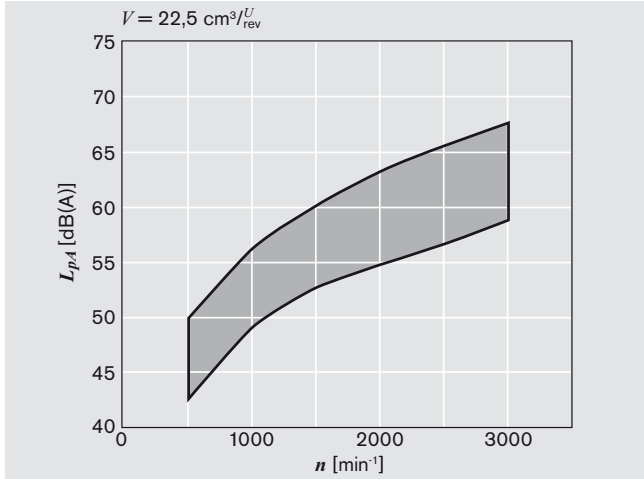

Noise charts (continued)

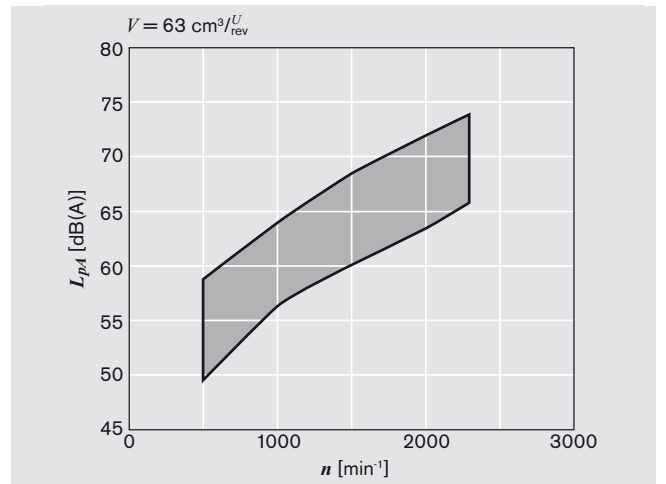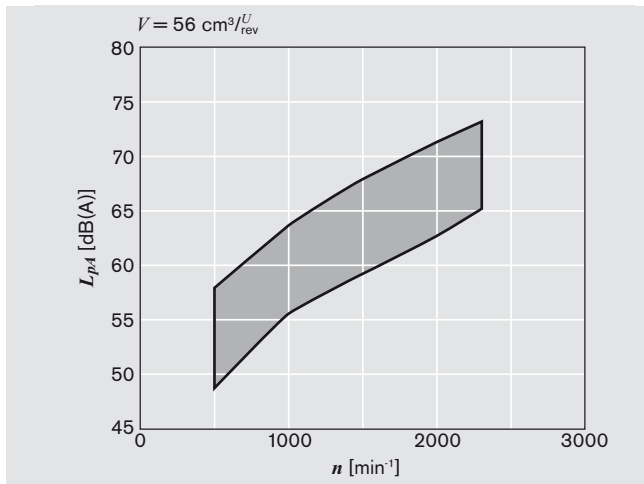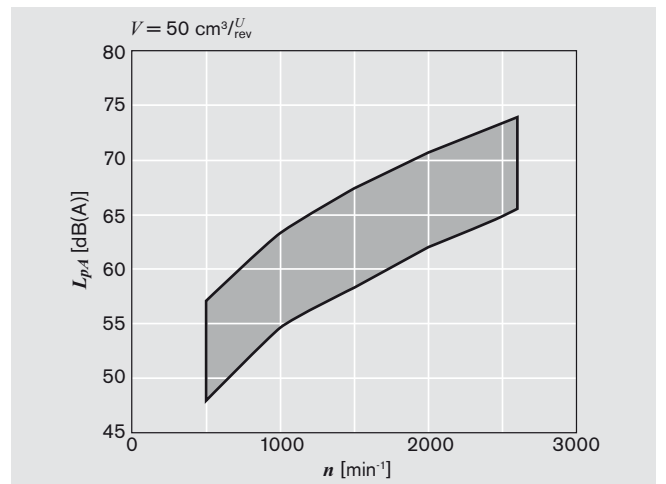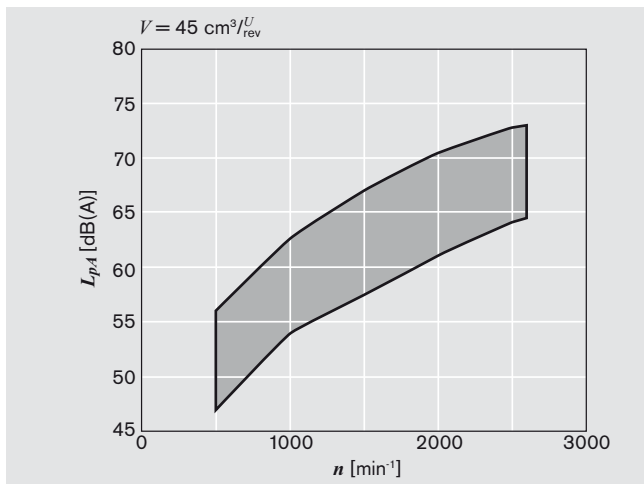

# Specification

General	
Construction	External gear pump
Mounting	Flange or through-bolting with spigot
Line ports	Flange
Direction of rotation (looking on shaft)	Clockwise or counter-clockwise, the pump may only be driven in the direction indicated
Installation position	Any
Load on shaft	Radial and axial forces after consulting
Ambient temperature range	-30°C...+80°C or max. +110°C with FKM seals
Hydraulic fluid	- Mineral oil compliant with DIN 51 524, 1-3, however under higher load at least HLP compliant with DIN 51 524 Part 2 recommended. - Comply with RE 90220 - Further operating fluids possible after consultation
Viscosity	12...800 mm <sup>2</sup> /s permitted range 20...100 mm <sup>2</sup> /s recommended range ...2000 mm <sup>2</sup> /s range permitted for starting
Hydraulic fluid temperature range	max. +80°C with NBR seals *) max. +110°C with FKM seals **)
Filtration ***)	At least cleanliness level 20/18/15 compliant with ISO 4406 (1999)

\*) NBR = Perbunan®  
 \*\*) FKM = Viton®  
 \*\*\*) On hydraulic systems or devices with critical counter-reaction, such as steering and counterbalance valves, the type of filtration selected must be adapted to the sensitivity of these devices/systems.


Safety requirements pertaining to the whole systems are to be observed.

In the case of applications with high numbers of load cycles please consulting.


## Definition of direction of rotation

Always look on the drive shaft.

**Caution:** Dimensions drawings always show clockwise-rotation pumps. On counterclockwise-rotation pumps the positions of the drive shaft and the suction and pressure ports are different.

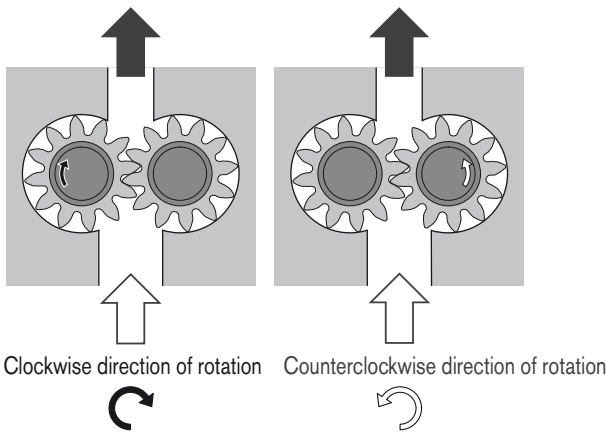

## Definitions of pressures

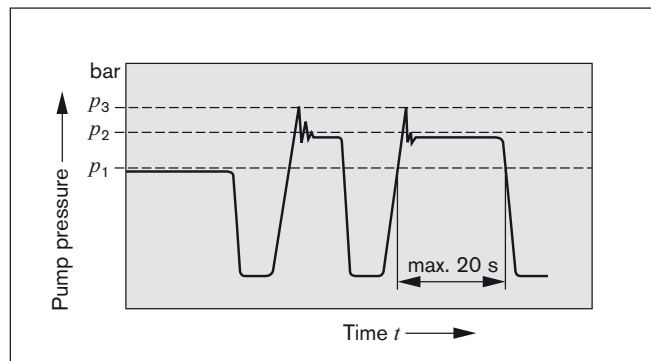

$p_1$  max. continuous pressure  
 $p_2$  max. intermittend pressure  
 $p_3$  max. peak pressure

## Size AZPU


Displacement	V	cm <sup>3</sup> /rev	22.5	25	28	32	36	40	45	50	56	63
Suction pressure	$p_e$		0,7...3 (absolute), with tandem pumps: $p_e (p_2) = \max. 0.5 > p_e (p_1)$									
max. continuous pressure	$p_1$	bar	250							220	195	170
max. intermittent pressure	$p_2$		280							250	225	200
max. peak pressure	$p_3$		300							280	250	230
min. rpm	< 100	rpm	500	500	500	500	500	500	500	500	500	500
rpm at bar	12 mm <sup>2</sup> /s		1,200	1,200	1,000	1,000	1,000	800	800	800	800	800
	180... $p_2$		1,400	1,400	1,400	1,400	1,200	1,200	1,000	1,000	1,000	1,000
	25 mm <sup>2</sup> /s	$p_2$	600	600	500	500	500	500	500	500	500	500
max. rotational speed at	$p_2$		3,000	3,000	3,000	2,800	2,800	2,800	2,600	2,600	2,300	2,300

# Drive arrangement

## 1. Flexible couplings


The coupling must not transfer any radial or axial forces to the pump.

Refer to the fitting instructions provided by the coupling manufacturer for details of the maximum permitted shaft misalignment.

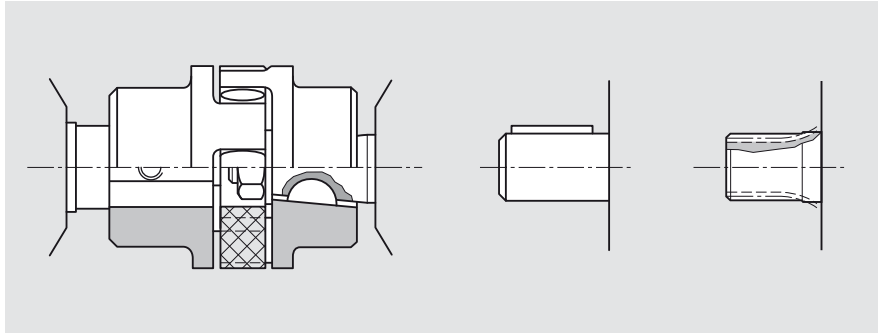

## 2. Coupling sleeve

Used on shafts with DIN or SAE splining. Caution: There must be no radial or axial forces exerted on the pump shaft or coupling sleeve. The coupling sleeve must be free to move axially. The distance between the pump shaft and drive shaft must be  $3.5^{+1.5}$ . Oil-bath or oil-mist lubrications is necessary.

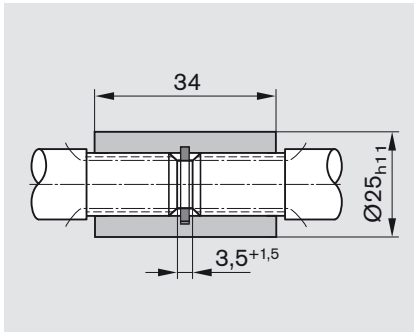

Splined shaft	Ordering code	$M_{max}$ [Nm]
SAE-B 13 teeth	D	300

## 3. Drive shaft with tang

For the close-coupling of the pumps to electric motor or internal-combustion engine, gear, etc. The pump shaft has a special tang and driver ③ (not included in supply).

There is no shaft sealing.


The recommended arrangements and dimensions for the drive end and sealing are as follows.

### ① Drive shaft

Case-hardening steel DIN 17 210  
 e.g. 20 MnCrS 5  
 case-hardened 1.0 deep; HRA 83 $\pm$ 2  
 Surface for sealing ring  
 ground without rifling  $R_t \leq 4\mu\text{m}$

### ② Radial shaft seal


with rubber covered seal  
 (see DIN 3760, Type AS, or double-lipped ring).  
 Cut 15° chamfer or fit shaft seal ring with protection sleeve.

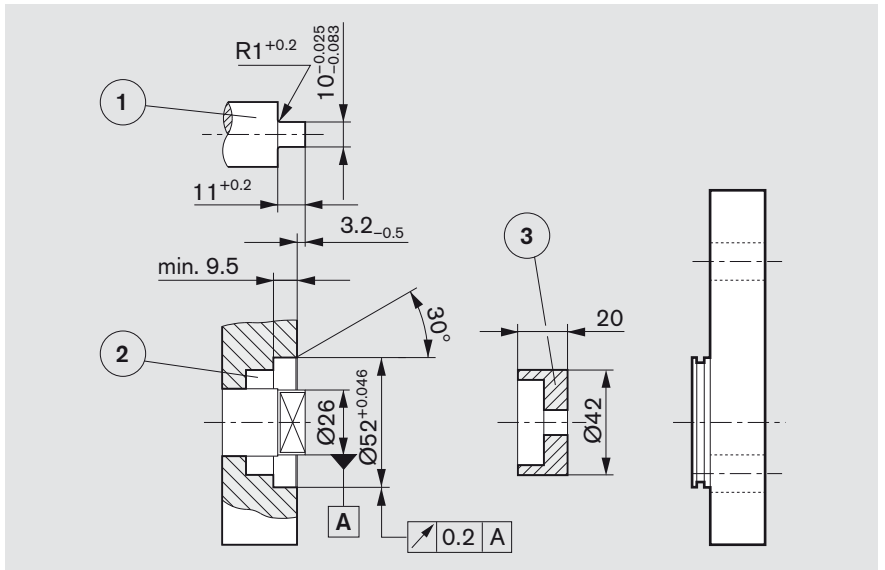

$M_{max}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{max}$ [bar]
130	28	260
	36	200
	40	180
	45	160
	50	150
	56	130
	63	110
	70	100
	80	90
100	70	


**4. V-belts and straight gearwheels or helical toothed gear drives without outboard bearing**

When proposing to use V-belt or gear drive, please submit details of the application for our comments (especially dimensions  $a$ ,  $d_m$ ,  $d_w$  and angle  $\alpha$ ). For helical toothed gear drives, details of the helix angle  $\beta$  are also required.

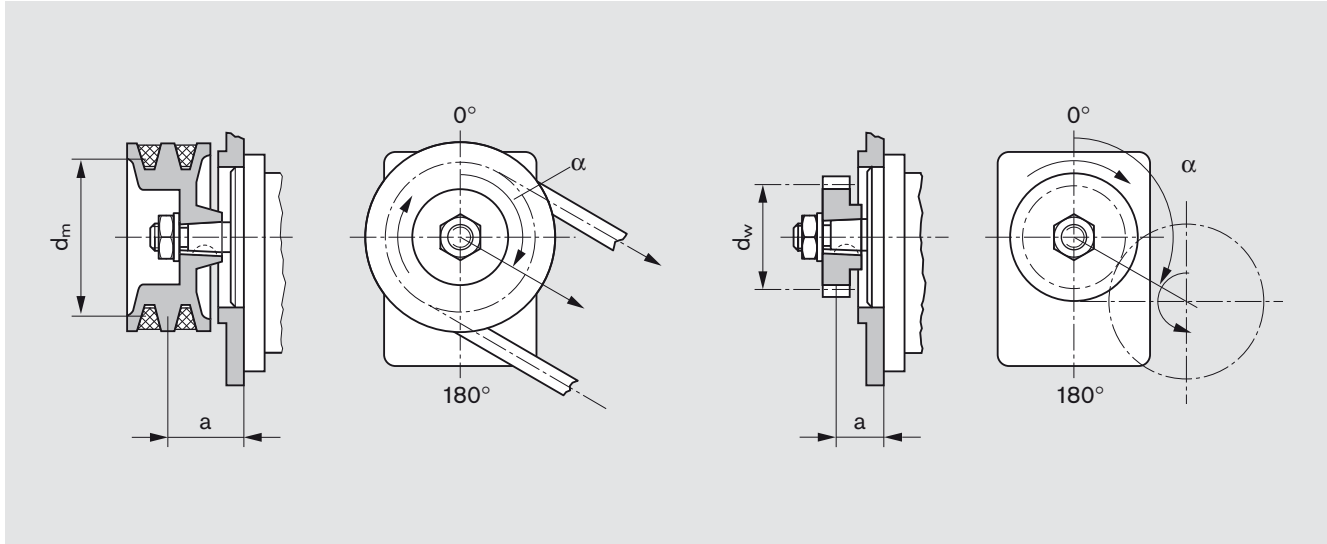

**5. Outboard bearing**

Outboard bearing eliminate possible problems when the pumps are driven by V-belts or gearwheels. The diagrams below show the maximum radial and axial loads that can be tolerated based on a bearing life of  $L_H = 1000$  h.

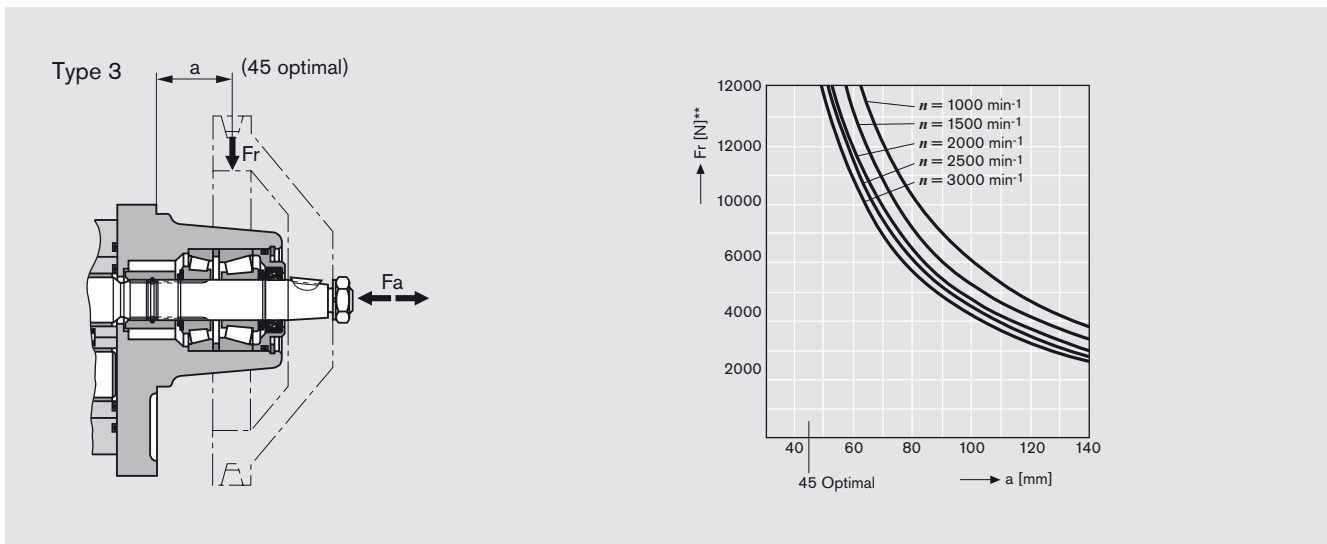

# Multiple gear pumps

Gear pumps are suitable for multiple setups, whereby the drive shaft for the 1st pump is extended to a second and even a 3rd pump. A coupling is fitted between each pair of pumps.

In most cases each pump is isolated from its neighbor, i.e. the suction ports are separate from one another. A common suction port is also possible as an option.

**Caution:** Basically, the specifications for the single pumps apply, but with certain restrictions:

**Max. speed:** This is determined by the highest rated pump speed in use.

**Pressures:** These are restricted by the strength of the drive shaft, the through drives and the drivers. Appropriate data is given in the dimensional drawings.

### Pressure restrictions during standard through drive



In the case of series U, the driver for the second pumping stage can carry a load of up to  $M_{max.} = 130 \text{ Nm}$ , i.e. there is a pressure restriction for the second stage and any further stages.

$M_{max.}$ [Nm]	$V$ [cm <sup>3</sup> /rev]	$p_{max}$ [bar]
65 Series F, S	16	230
	19	190
	22.5	160
	25	140
	28	130
130 Series G, U	22.5	280
	25	280
	28	260
	32	230
	36	200
	40	180
	45	160
	50	150
	56	130
	63	110


If the 1st stage is driven through a tang (driver) or outboard bearing type 1, pressure restrictions apply as indicated in the formula below.

Reinforced through drives are available for applications with higher transfer torques and/or rotational vibrations. Customized designs available on request.

### Reinforced through drive

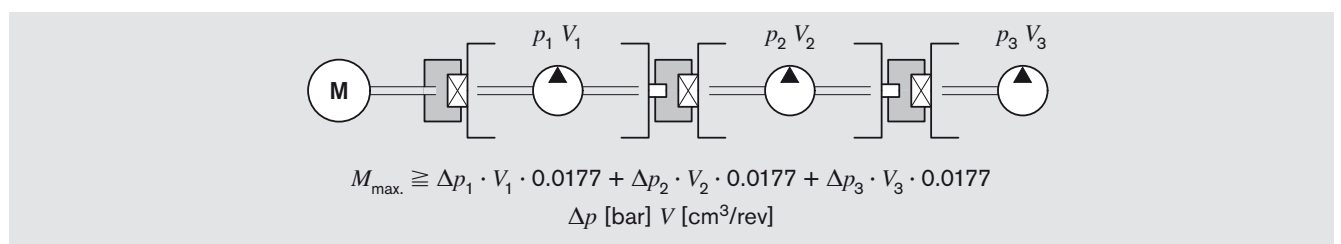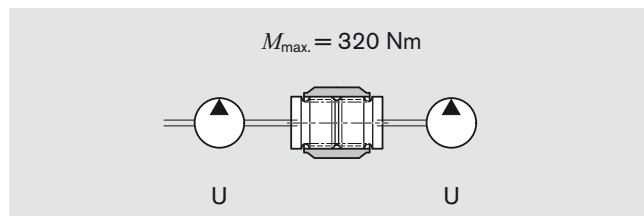

### Standard through drive

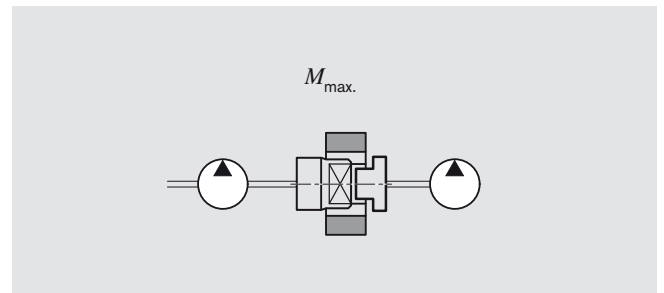

### Combinations

Series Pump 1	$M_{max.}$ [Nm]	Series Pump 2
U	130	G, U
U	65	F, S

For configuration of multiple pumps we recommend the pump is positioned with the largest displacement on the drive side.


### Max. transferrable drive torque

Function	Code	Designation	Max. transferrable drive torque * [Nm]
Splined shafts	D	SAE J744 22-4 (13T 16/32 DL)	300
	E	SAE-C 15 teeth	450
Tapered key shaft	C	1:5	290
	H	1:8	240

\* These figures are valid providing the conditions defined on pages 15 and 16 are observed. Bosch Rexroth is to be consulted if the stated values are exceeded.

# Dimensions

## Standard range

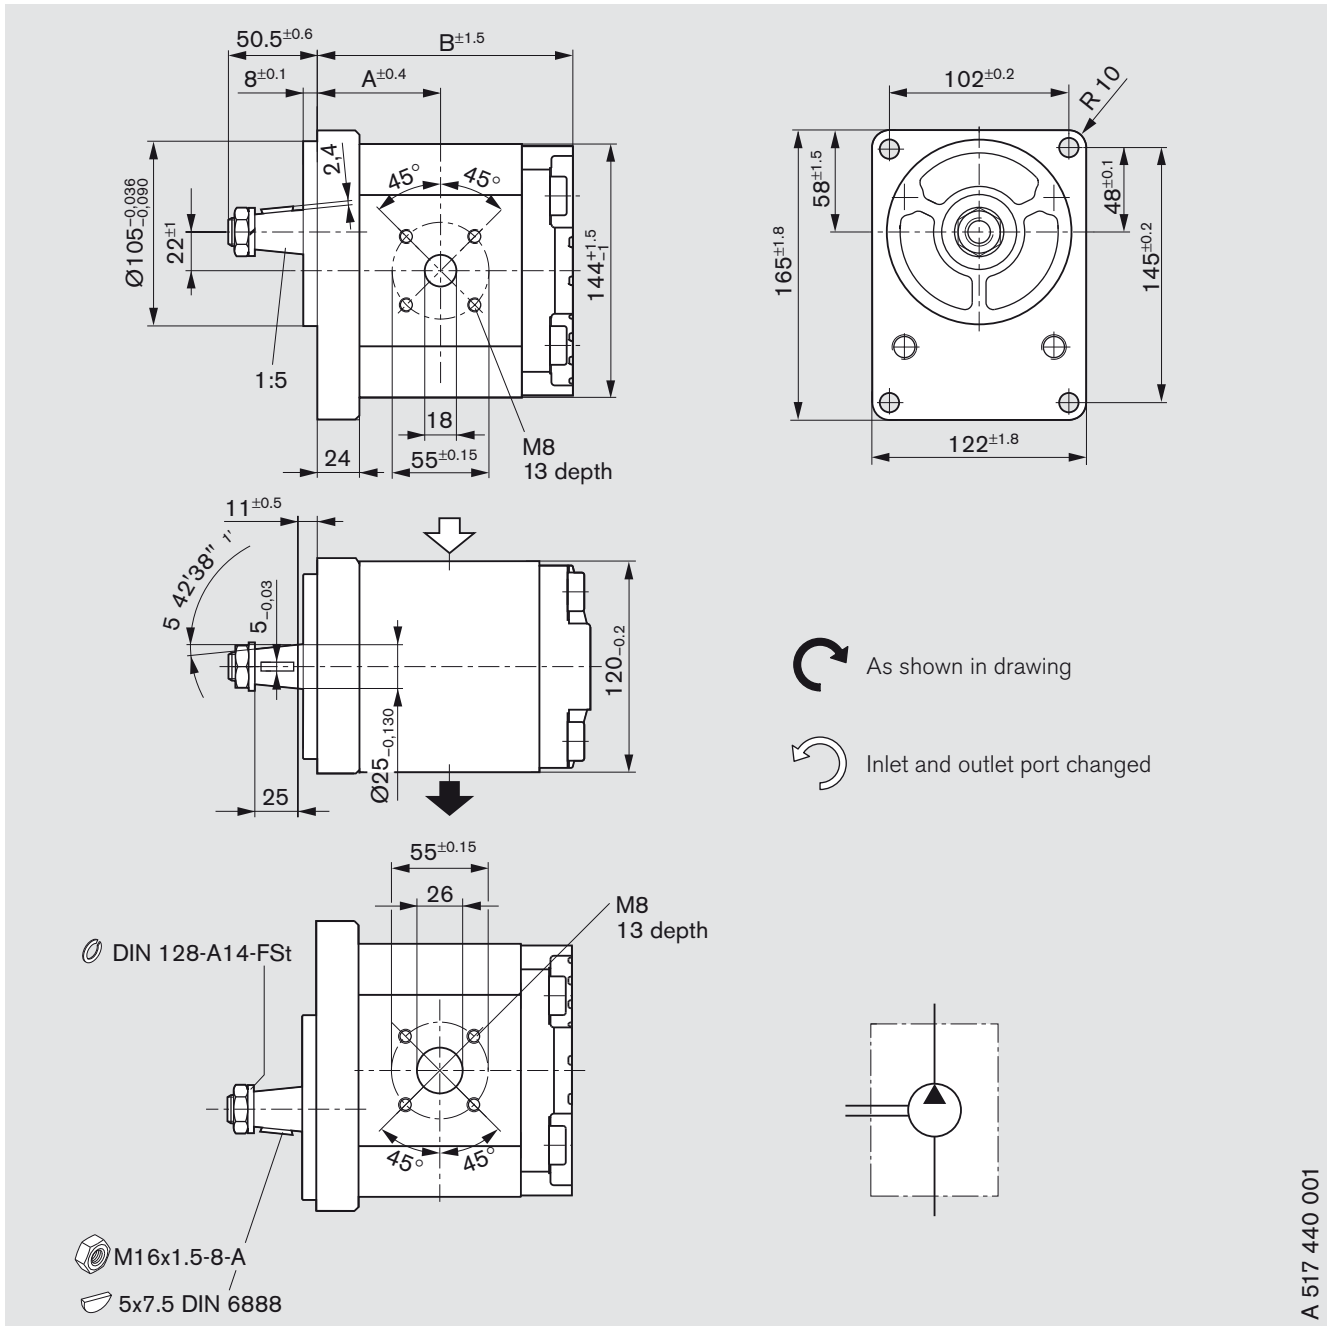

A 517 440 001

### Ordering code:


AZPU - 22 -     C B 20 M B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]	
	L	R				A	B
22.5	0 517 725 322	0 517 725 026	280	3,000	10.3	60.9	124.6
25	0 517 725 323	0 517 725 027	280	3,000	10.4	61.9	126.6
28	0 517 725 324	0 517 725 028	280	3,000	10.5	63.2	129.1
32	0 517 725 325	0 517 725 029	280	2,800	10.7	64.8	132.4
36	0 517 725 326	0 517 725 030	280	2,800	10.9	66.4	135.7
40	0 517 725 327	0 517 725 031	280	2,800	11.0	68.1	139.0
45	0 517 725 328	0 517 725 032	280	2,600	11.2	70.1	143.1
50	0 517 825 301	0 517 825 001	250	2,600	11.4	72.2	147.2
56	0 517 825 302	0 517 825 002	225	2,300	11.7	74.7	152.2
63	0 517 825 303	0 517 825 003	200	2,300	12.0	77.6	158.0



# Dimensions

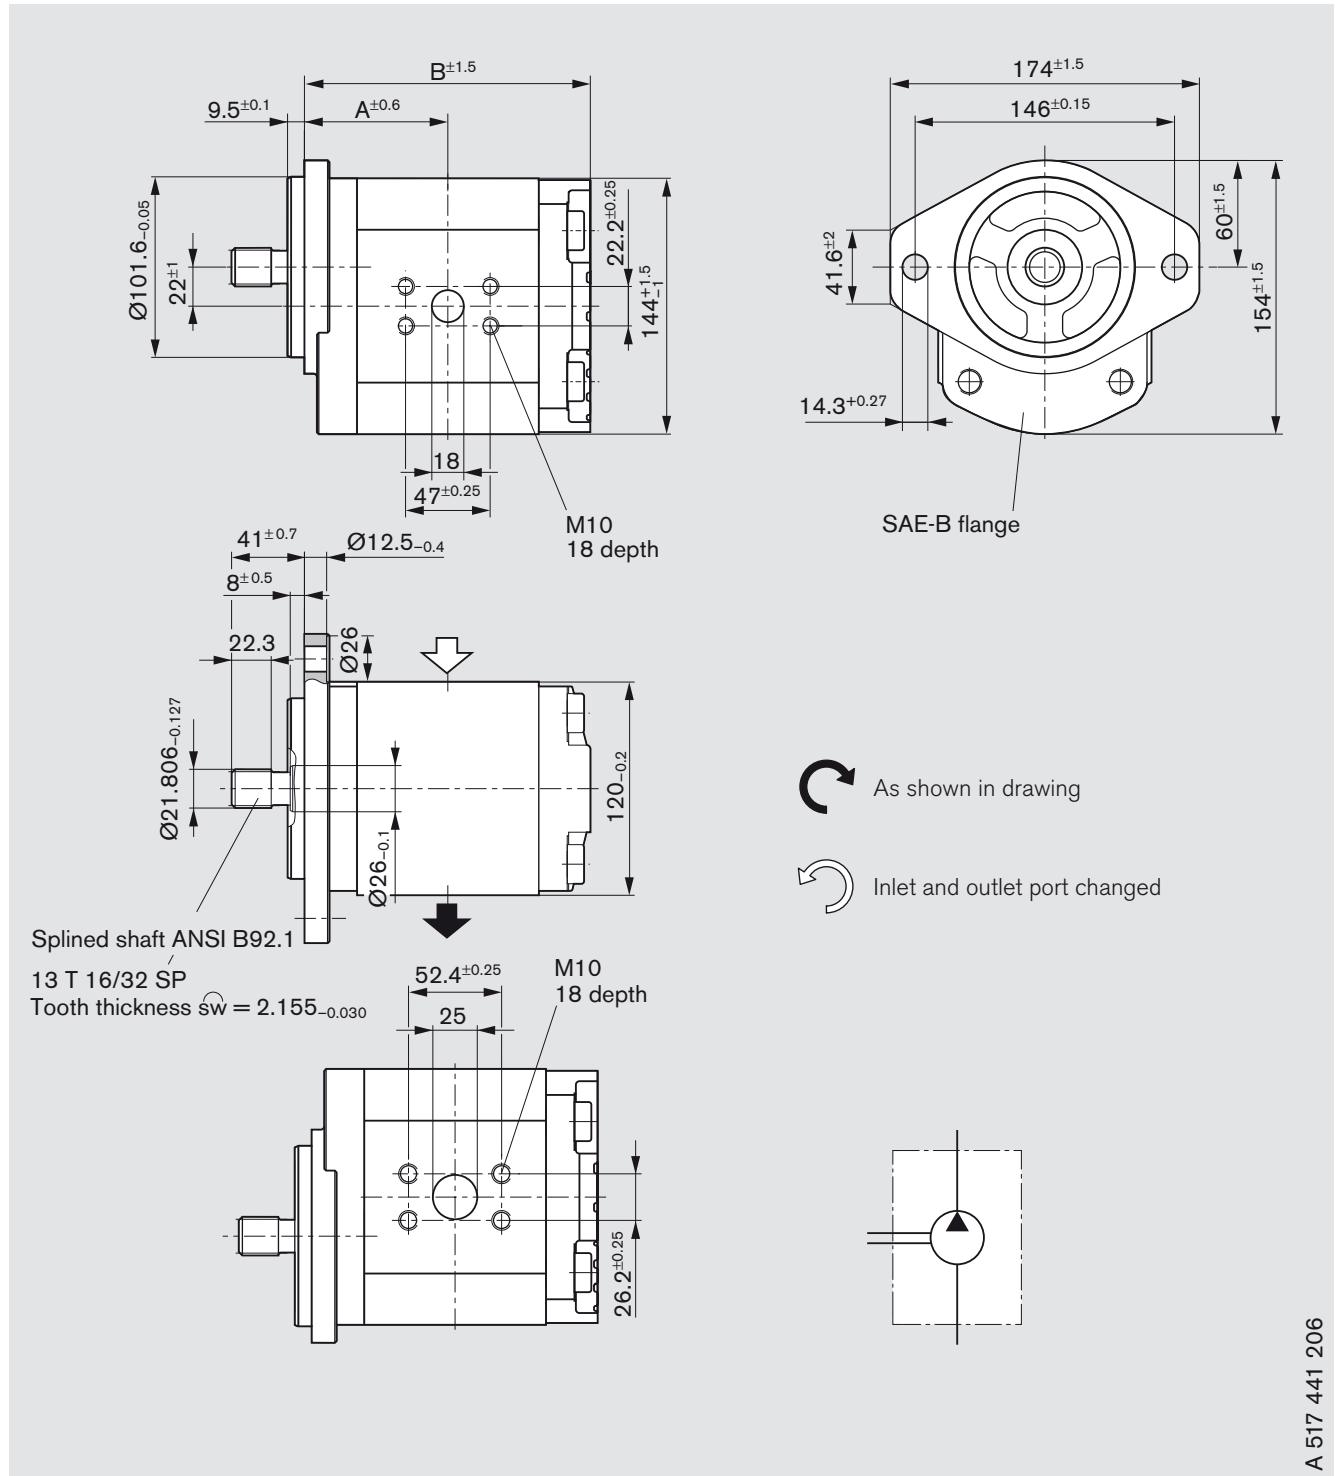

## Standard range



A 517 441 206


**Ordering code:**

AZPU - 22 -     D C 07 K B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]	
	 L	 R				A	B
22.5	0 517 725 329	0 517 725 033	280	3,000	9.6	66.4	130.1
25	0 517 725 330	0 517 725 034	280	3,000	9.7	67.4	132.1
28	0 517 725 331	0 517 725 035	280	3,000	9.8	68.7	134.6

# Dimensions

## Standard range

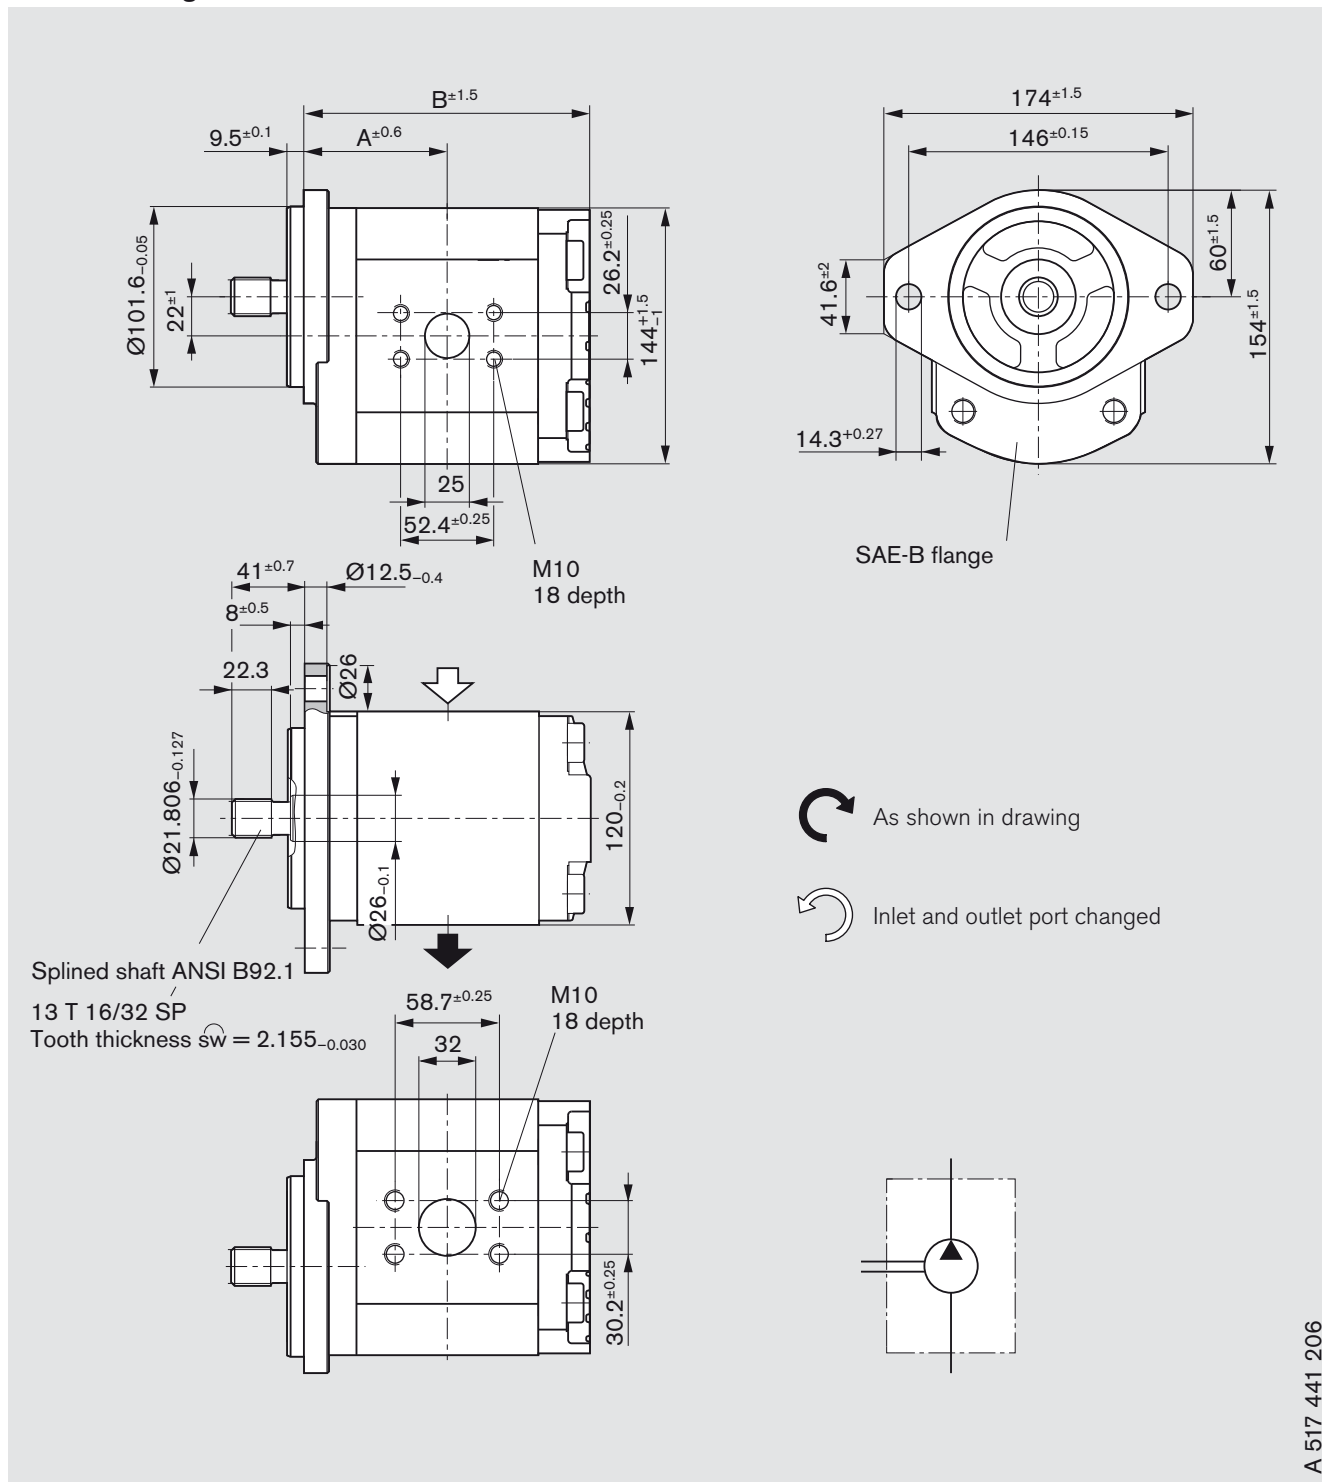

A 517 441 206


**Ordering code:**

AZPU - 22 -     D C 07 K B

Displacement [cm <sup>3</sup> /rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]	
	L	R				A	B
32	0 517 725 332	0 517 725 036	280	2,800	10.0	70.3	137.9
36	0 517 725 333	0 517 725 037	280	2,800	10.1	71.9	141.2
40	0 517 725 334	0 517 725 038	280	2,800	10.3	73.6	144.5
45	0 517 725 335	0 517 725 039	280	2,600	10.5	75.6	148.6
50	0 517 825 304	0 517 825 004	250	2,600	10.7	77.7	152.7

# Dimensions

## Standard range

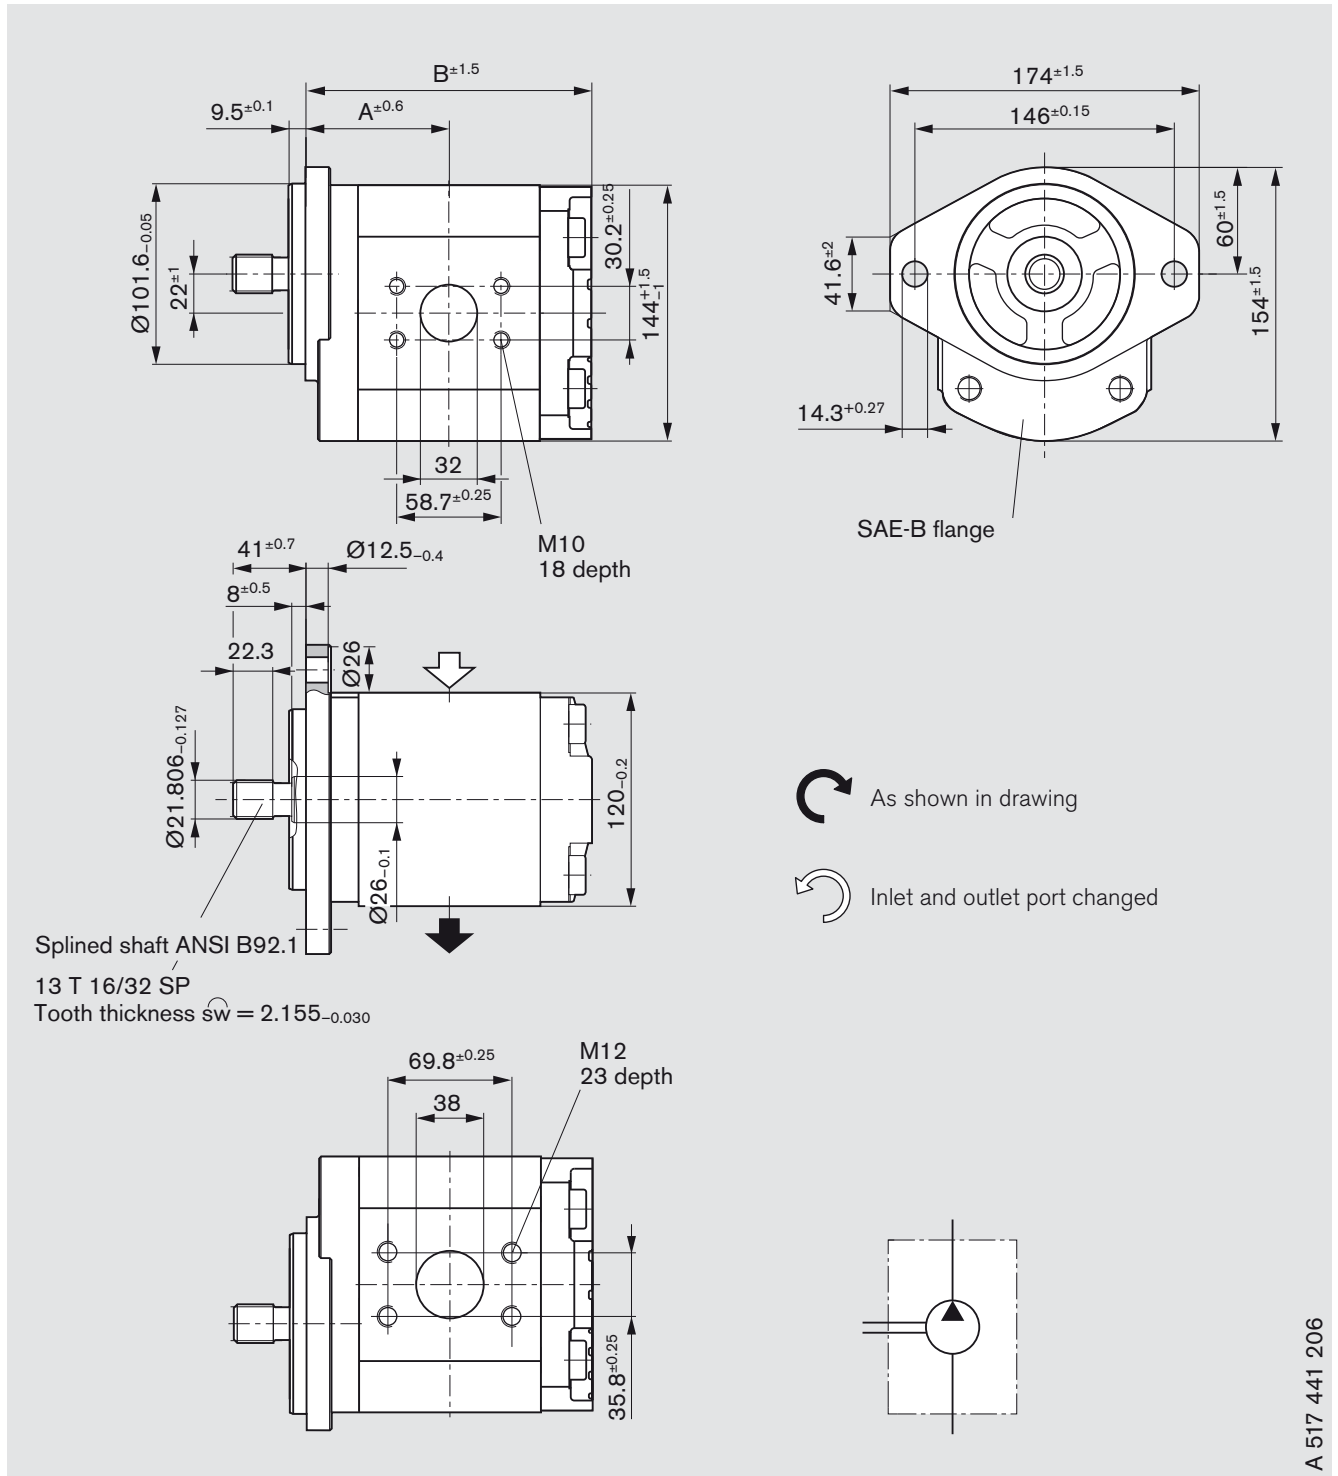

**Ordering code:**

AZPU - 22 -     D C 07 K B


Displacement [cm³/rev]	Ordering-No.		max. operating pressure [bar]	max. rotation speed [rpm]	Mass [kg]	Dimension [mm]	
	L	R				A	B
56	0 517 825 305	0 517 825 005	225	2,300	11.0	80.2	157.7
63	0 517 825 306	0 517 825 006	200	2,300	11.3	83.1	163.5

A 517 441 206

# Fittings

Fittings can be used for rectangular flange **20** see page 7

Gear pump flange, 90° angle

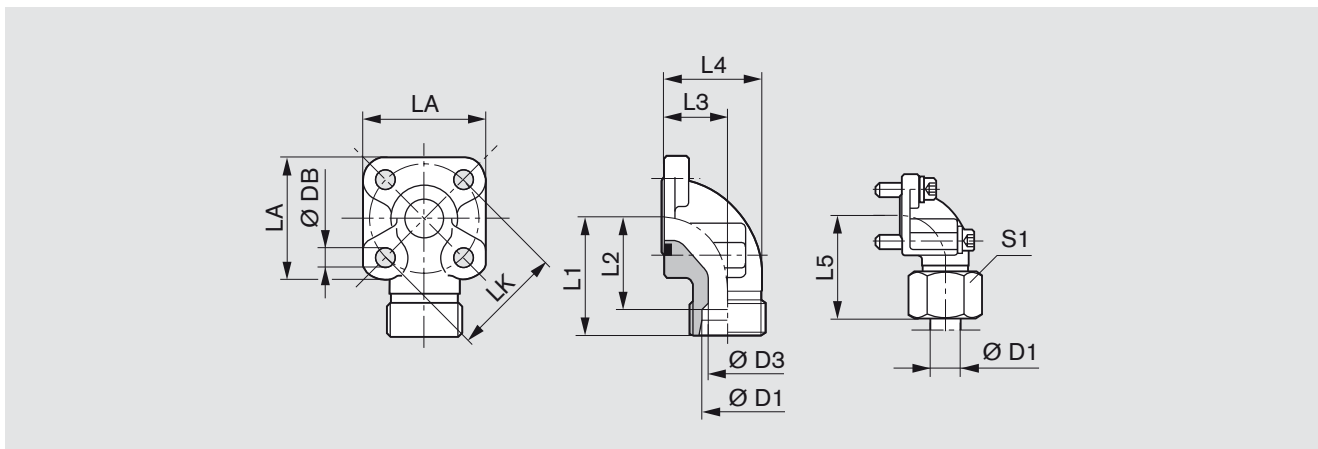

LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws 2 pcs.	2 pcs.	Seal ring	Mass kg	Part number	<i>p</i> (bar)
55	20S	17	45	34.5	24.0	40.0	56.0	58	36	8.4	M8x25	M8x50	33x2.5	0.44	<b>1 515 702 004</b>	250
55	30S	26	49	35.5	32.0	50.0	62.0	58	50	8.4	M8x25	M8x50	33x2.5	0.50	<b>1 515 702 006</b>	250
55	35L	31	49	38.5	32.0	51.5	62.0	58	50	8.4	M8x25	M8x60	32x2.5	0.47	<b>1 515 702 005</b>	100
55	42 L	38	49	38.0	40.0	64.5	61.0	58	60	8.4	M8x25	M8x70	32x2.5	0.60	<b>1 515 702 019</b>	100

Complete fittings with seal ring, metric screw set, nuts and olive.

## Note

The permissible tightening torques can be found in our publication:

“General operating instructions for external gear units”

RE 07 012-B1.

# Notes for commissioning

## Filter recommendation

The major share of premature failures in external gear pumps is caused by contaminated hydraulic fluid.

As a warranty cannot be issued for dirt-specific wear, we recommend filtration compliant with cleanliness level 20/18/15 ISO 4406, which reduces the degree of contamination to a permissible dimension in terms of the size and concentration of dirt particles:

Operating pressure [bar ]	>160	<160
Contamination class ISO 4406	18/15	19/16
To be reached with $\beta_x = 75$	20	25

We recommend that a full-flow filter always be used. Basic contamination of the hydraulic fluid used may not exceed class 20/18/15 according to ISO 4406. Experience has shown that new fluid quite often lies above this value. In such instances a filling device with special filter should be used.

## General

- The pumps supplied by us have been checked for function and performance. No modifications of any kind may be made to the pumps; any such changes will render the warranty null and void!
- Pump may only be operated in compliance with permitted data (see pages 15 – 18).

## Project planning notes

Comprehensive notes and suggestions are available in Hydraulics Trainer, Volume 3 RE 00 281, "Project planning notes and design of hydraulic systems". Where external gear pumps are used we recommend that the following note be adhered to.

## Technical data

All stated technical data is dependent on production tolerances and is valid for specific marginal conditions.

Note that, as a consequence, scattering is possible, and at certain marginal conditions (e.g. viscosity) **the technical data may change.**

## Characteristics

When designing the external gear pump, note the maximum possible service data based on the characteristics displayed on pages 10 to 12.


Additional information on the proper handling of hydraulic products from Bosch Rexroth is available in our document: "General product information for hydraulic products" RE 07 008.

## Contained in delivery

The components with characteristics as described under ordering code and device measurements, pages 18 – 21, are contained in delivery.

**You can find further information in our publication: "General Operating Instructions for External Gear Units" RE 07 012-B1.**

# Service parts

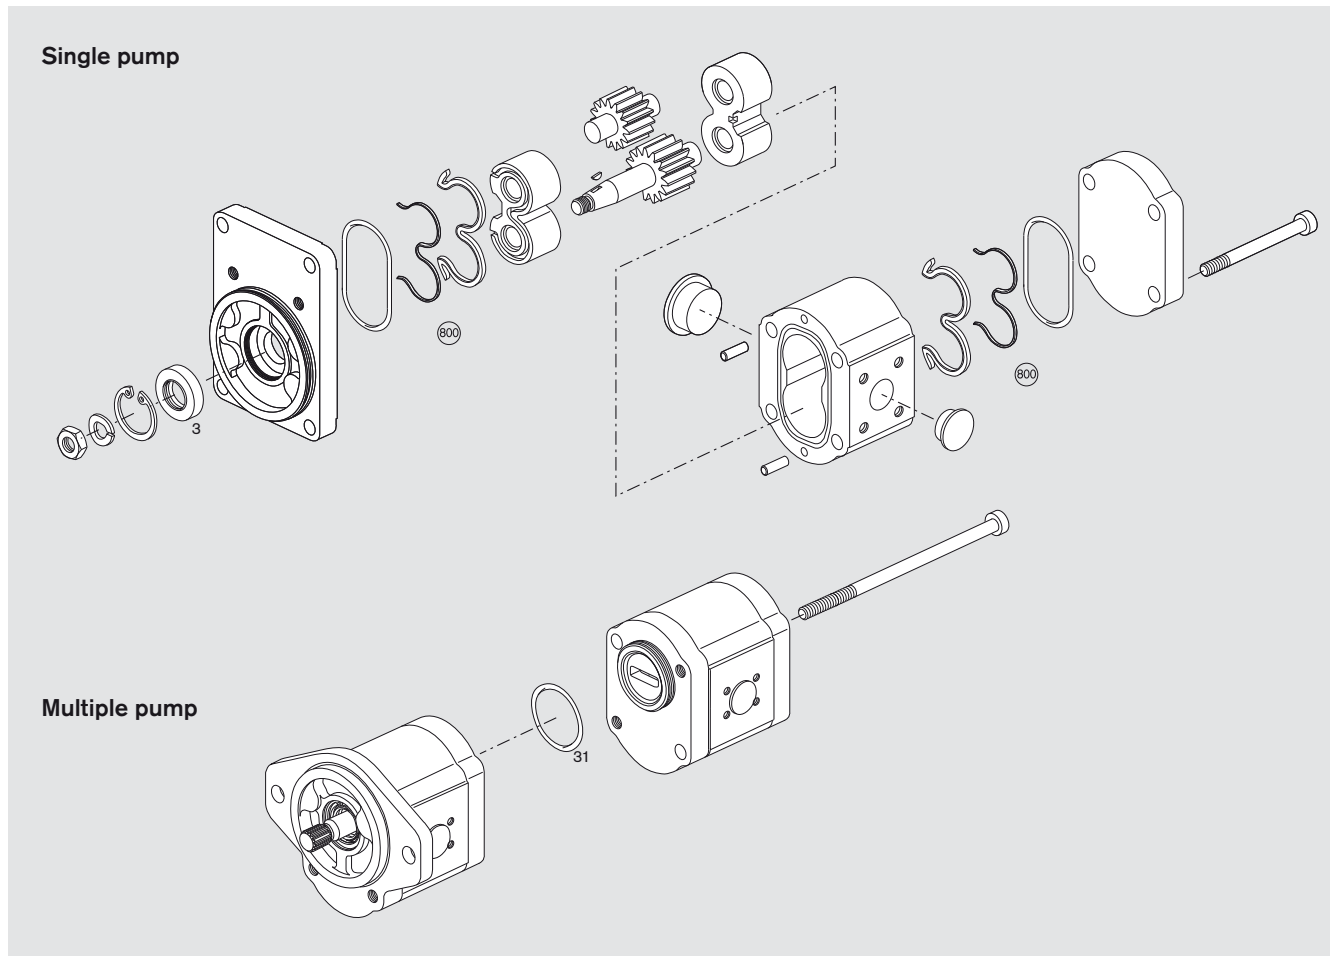

Page	Ordering code	Seal kit "U" Item 800 NBR	Shaft seal ring Item 3	Dimension	Material
18	AZPU - 22 - □□□ □ C B 20 M B	1 517 010 231	1 510 283 072	42 x 26 x 7	NBR
19, 20, 21	AZPU - 22 - □□□ □ D C 07 K B	1 517 010 231	1 510 283 069	42 x 26 x 7	FKM

NBR = Perbunan® FKM = Viton®


For multiple pumps	
Seal ring Item 31 NBR	1 900 210 145

## The AZ configurator at [www.boschrexroth.com/azconfigurator](http://www.boschrexroth.com/azconfigurator)

The AZ configurator assists you to configure your individual external gear unit easily and user-friendly. You only need to specify your requirements: From the displacement, direction of rotation, drive shaft, connection flange right up to the required rear cover. You immediately receive a project drawing (PDF format) if a configuration already exists. You receive the price of the configured external gear unit upon request.



The AZ configurator assists you to configure your individual external gear unit easily and user-friendly – all data needed for project planning are acquired thru menu guidance.

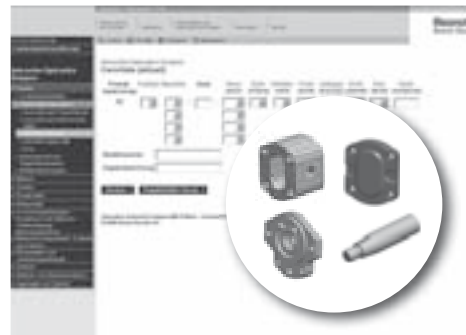

Selection is made either on an ordering code or your technical requirements. This means that you can search for external gear units that have already been configured, or you specify the configuration variant of the external gear unit based upon the operating parameters you require.



If the external gear unit you selected has been released you will receive the part number, ordering code and a detailed installation drawing. If your special configuration is not available please send your specification to Rexroth. One of our employees will then contact you.

## Ordering-No.

Ordering-No.	Page	Ordering-No.	Page	Ordering-No.	Page
0 517 725 004	20	0 517 725 039	20	0 517 725 334	20
0 517 725 026	18	0 517 725 304	20	0 517 725 335	20
0 517 725 027	18	0 517 725 322	18	0 517 825 001	18
0 517 725 028	18	0 517 725 323	18	0 517 825 002	18
0 517 725 029	18	0 517 725 324	18	0 517 825 003	18
0 517 725 030	18	0 517 725 325	18	0 517 825 005	21
0 517 725 031	18	0 517 725 326	18	0 517 825 006	21
0 517 725 032	18	0 517 725 327	18	0 517 825 301	18
0 517 725 033	19	0 517 725 328	18	0 517 825 302	18
0 517 725 034	19	0 517 725 329	19	0 517 825 303	18
0 517 725 035	19	0 517 725 330	19	0 517 825 305	21
0 517 725 036	20	0 517 725 331	19	0 517 825 306	21
0 517 725 037	20	0 517 725 332	20		
0 517 725 038	20	0 517 725 333	20		

Bosch Rexroth AG  
 External Gear Units  
 Robert-Bosch-Straße 2  
 D-71701 Schwieberdingen  
 Telefon +49 (0) 711-811 10 63  
 Telefax +49 (0) 711-811 17 98  
 brm-az.info@boschrexroth.de  
 www.boschrexroth.com/brm

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.  
 The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.



# External gear pump SILENCE PLUS AZPJ

**RE 10094**

Edition: 07.2016

Replaces: 03.2016



- ▶ Platform F
- ▶ Low-noise fixed pump
- ▶ Sizes 12 to 28
- ▶ Continuous pressure up to 250 bar
- ▶ Intermittent pressure up to 280 bar

**Features**

- ▶ Very low inherent noise
- ▶ Optimized pressure pulsation reduces noise emissions and oscillations in the system
- ▶ Pleasant tone due to low frequency
- ▶ Consistently high quality due to high-volume series production
- ▶ Long service life
- ▶ Slide bearings for high loads
- ▶ Drive shafts according to ISO or SAE and customer-specific solutions
- ▶ Line connections: Connection flanges
- ▶ Combinations of several pumps possible

**Contents**

Functional description	2
Type code single pump	4
Type code multiple pump	6
Technical data	8
Flow and power characteristic curves	10
Noise charts	12
Drives	14
Multiple gear pumps	16
Gear pumps with integrated valves	17
Dimensions – drive shafts	18
Dimensions – front cover	19
Dimensions – line ports	20
Dimensions – preferred series	21
Accessories	27
Spare parts	29
Notes for commissioning	30
Order number overview	31
AZ configurator	32
Fit4SILENCE app	32

## Functional description

### General

The key task of external gear units is to convert mechanical energy (torque and rotational speed) into hydraulic energy (flow and pressure). To avoid unnecessarily high heat losses, units with high efficiencies are sought after. These are realized by means of pressure-dependent gap sealing and high-precision manufacturing technology.

With extremely low-noise SILENCE PLUS pumps, the intrinsic noise is reduced by 15 dB (A) on average as compared with standard external gear pumps and the flow pulsation is also decreased by 75%.

### Pumping principle

Continuous tooth contact reduces operating noise:

A non-involute rounded tooth profile, combined with helical gearing, forms the heart of the SILENCE PLUS. Thanks to permanent tooth contact, the hydraulic fluid is transported almost continuously and noiselessly. The possibility of noise developing from trapped oil between the tooth flanks is prevented in the first place.

A hydrostatic bearing ensures long service life:

The high performance and long service life of the SILENCE PLUS is due to a Rexroth patented solution: Hydrostatic grooves provide wear-free compensation for the internal axial forces generated in the helical gearing – even at pressures up to 280 bar.


#### ▼ Standard




#### ▼ SILENCE PLUS



#### ▼ Flow pulsation

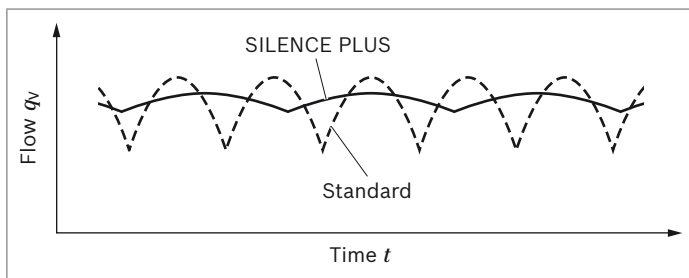

#### ▼ Hydrostatic bearing SILENCE PLUS

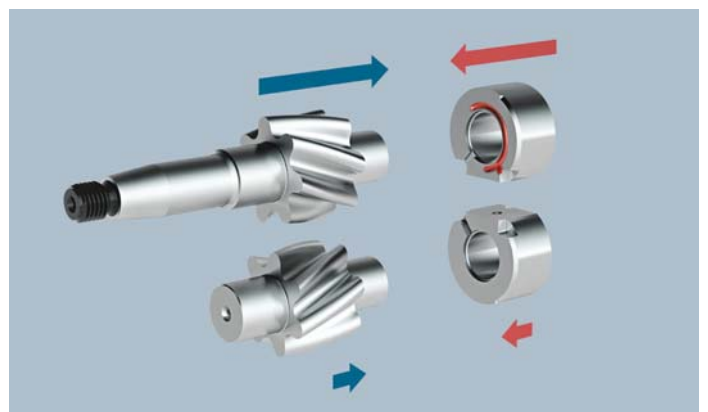


**Construction**


The external gear pump consists essentially of a pair of gear wheels supported in bearing bushes and the housing with a front and a rear cover. The drive shaft protrudes from the front cover where it is sealed by the shaft seal ring. The bearing forces are absorbed by slide bearings. These were designed for high pressures and have excellent emergency running properties, especially at low rotational speeds. The gear wheels have 7 teeth. This keeps both flow pulsation and noise emission to a minimum.

The internal sealing of the pressure chambers is achieved by pressure-dependent forces. This ensures optimum efficiency. On the outside, the movable bearing bushes are pressurized with operating pressure and pressed as seals against the gear wheels. The pressurized compression springs are limited by special seals. The seal on the area between the gear teeth and the housing is ensured by the smallest of gaps that adjust depending on the pressure between the gear teeth and housing.

▼ **Axial compensation SILENCE PLUS**

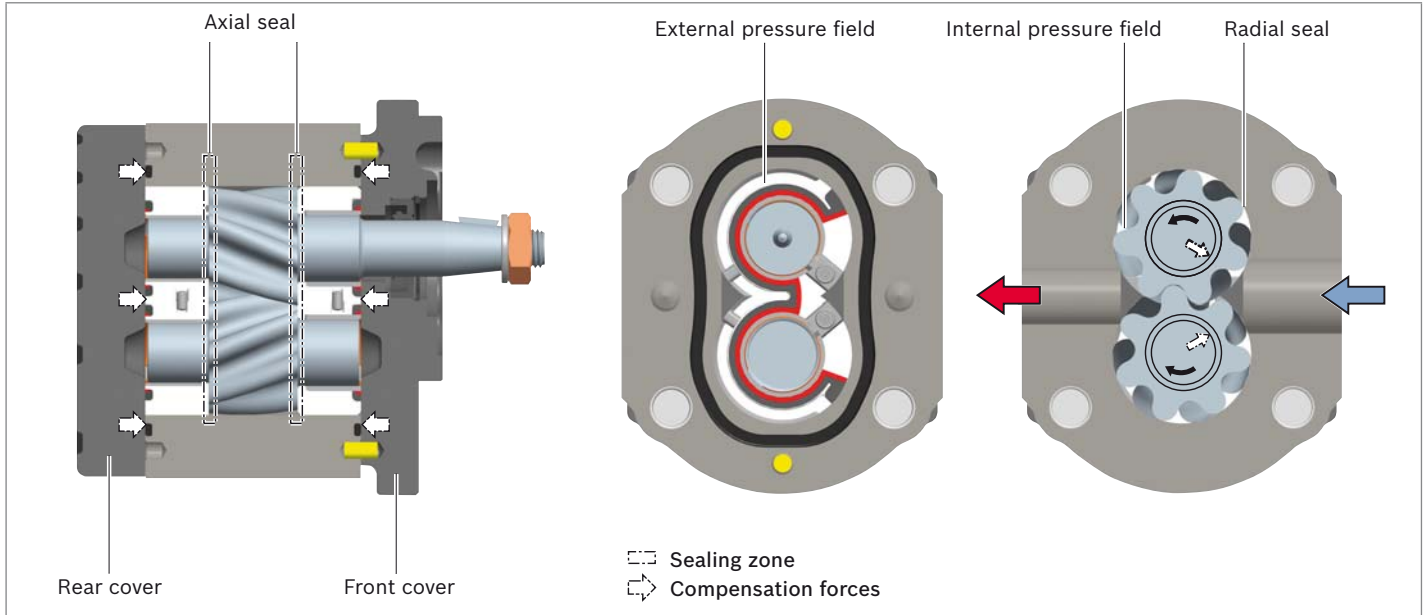

▼ **Assembly AZPJ**

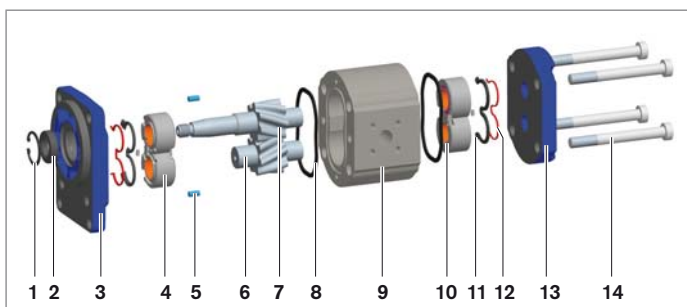

- 1 Snap ring
- 2 Shaft seal
- 3 Front cover
- 4 Slide bearing
- 5 Centering pin
- 6 Gear wheel
- 7 Drive shaft
- 8 Housing seal ring
- 9 Pump housing
- 10 Bearing bushing
- 11 Axial field seal
- 12 Supporting element
- 13 Rear cover
- 14 Torx screws

▼ **Product overview AZPJ preferred types**

Version	
Page 21	Page 22
Page 23, 24	Page 25
	Page 26

4 **AZPJ** | External gear pump  
Type code single pump

**Type code single pump**

01	02	03	04	05	06	07	08	09	10	11	12	13	14
<b>AZP</b>	<b>J</b>	-			-								

**External gear unit**

01	External gear pump	<b>AZP</b>
----	--------------------	------------

**Series**

02	SILENCE PLUS, platform F	<b>J</b>
----	--------------------------	----------

**Series**

03	Shaft Ø20	<b>2</b>
----	-----------	----------

**Version**

04	Phosphated, pinned	<b>1</b>
	Chromated, pinned	<b>2</b>

**Size (NG)**

05	Geometric displacement $V_g$ [cm <sup>3</sup> ], see "Technical data" on page 9	<b>012</b>	<b>014</b>	<b>016</b>	<b>019</b>	<b>022</b>	<b>025</b>	<b>028</b>
----	---	------------	------------	------------	------------	------------	------------	------------

**Direction of rotation**

06	Viewed on drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

**Drive shaft**



**Suitable front cover**

07	Tapered shaft	1 : 5	<b>B, P</b>	<b>C</b>
		1 : 5	<b>A, G</b>	<b>S</b>
		1 : 8	<b>O</b>	<b>H</b>
	Dihedral, claw		<b>M, T</b>	<b>N</b>
	Splined shaft	SAE J744 16-4 9T	<b>R, C</b>	<b>R</b>
		SAE J744 19-4 11T	<b>R, C</b>	<b>P</b>
		DIN 5482 B17 × 14	<b>B, P</b>	<b>F</b>
	Parallel keyed shaft	SAE J744 16-1 A	<b>R</b>	<b>Q</b>
		ISO Ø18 mm	<b>B</b>	<b>A</b>

**Front cover**

08	Rectangular flange	Ø80 mm	<b>B</b>	
		Ø36.47 mm	<b>O</b>	
2-bolt flange		Ø82.55 mm	SAE J744 82-2 A	<b>R</b>
		Ø101.6 mm	SAE J744 101-2 B	<b>C</b>
2-bolt mounting		Ø52 mm	With O-ring	<b>M</b>
		Ø50 mm	Connection variant 1	<b>N</b>
		Ø50 mm	Connection variant 2	<b>P</b>
4-bolt mounting		Ø52 mm	With O-ring	<b>T</b>
Outboard bearing		Ø80 mm	Type 1	<b>A</b>
			Type 2	<b>G</b>

01	02	03	04	05	06	07	08	09	10	11	12	13	14
<b>AZP</b>	<b>J</b>	-			-								

Line connection		012	014	016	019	022	025	028	
09	Square flange 	•	•	•	•	•	•	•	20
	Square flange 	•	•	•	-	-	-	-	30

Sealing material		
10	NBR (nitrile rubber)	M
	FKM (fluoroelastomer)	P
	NBR (nitrile rubber), shaft seal in FKM (fluoroelastomer)	K

Rear cover			
11	Without valve (standard)	B	
	With pressure relief valve	Residual flow internal	D
		Residual flow external	T
	With flow control valve	Residual flow external	E
		Residual flow internal	S
With pressure relief valve and flow control valve		V	

Valve setting pressure relief valve (parameter only required for rear cover with pressure relief and/or flow control valve)		
12	Without pressure relief valve	XXX
	Cracking pressure in bar, 3-digit, e.g. 180 bar	180

Valve setting flow control valve (parameter only required for rear cover with pressure relief and/or flow control valve)		
13	Without flow control valve	XX
	Flow in l/min, 2-digit, e.g. 9 l/min	09

Special version		
14	Special version	SXXXX

• = Available    - = Not available

**Note**

- ▶ Not all of the variants according to the type code are possible.
- ▶ Please select the desired pump with the help of the selection table (preferred types ) or after consultation with Bosch Rexroth.
- ▶ Special options are available on request.

## Type code multiple pump

01	02	03	04	05	06	07	08	09	10	11	12
<b>AZP</b>		-			-						

### External gear unit

01	External gear pump	<b>AZP</b>
----	--------------------	------------

### Series<sup>1)</sup>

02	High-performance	1.0 to 7.1 cm <sup>3</sup> /rev	Data sheet 10087	<b>B</b>
		4.0 to 28 cm <sup>3</sup> /rev	Data sheet 10089	<b>F</b>
		20.0 to 36 cm <sup>3</sup> /rev	Data sheet 10091	<b>N</b>
		22.5 to 100 cm <sup>3</sup> /rev	Data sheet 10093	<b>G</b>
	SILENCE	4.0 to 28 cm <sup>3</sup> /rev	Data sheet 10095	<b>S</b>
		20.0 to 36 cm <sup>3</sup> /rev	Data sheet 10092	<b>T</b>
		22.5 to 63 cm <sup>3</sup> /rev	Data sheet 10098	<b>U</b>
	SILENCE PLUS	12.0 to 28 cm <sup>3</sup> /rev	Data sheet 10094	<b>J</b>

### Series (relates to pump stage 1)

03	Standard bearing	<b>1</b>
	Reinforced bearing	<b>2</b>

### Version (relates to pump stage 1)

04	Phosphated, pinned	<b>1</b>
	Chromated, pinned	<b>2</b>

### Size (NG)<sup>2)</sup>

05	In accordance with data sheet for the individual series	
----	---	--

### Direction of rotation

06	Viewed on drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

### Drive shaft (relates to pump stage 1)

07	In accordance with data sheet of pump stage 1	
----	---	--

### Front cover (relates to pump stage 1)

08	In accordance with data sheet of pump stage 1	
----	---	--

### Line connection (per pump stage)<sup>3)</sup>

09	In accordance with data sheet for the individual series	
----	---	--

### Sealing material

10	NBR (nitrile rubber)	<b>M</b>
	FKM (fluoroelastomer)	<b>P</b>
	NBR (nitrile rubber), shaft seal in FKM (fluoroelastomer)	<b>K</b>

### Rear cover (relates to last pump stage)

11	In accordance with data sheet for the last pump stage	
----	---	--

### Special version

12	Special version	<b>SXXXX</b>
----	-----------------	--------------

<sup>1)</sup> A letter is to be selected for each pump stage, e.g.

3-way pump AZPJ + AZPJ + AZPB: **JJB**

<sup>2)</sup> A numerical value is to be selected for each pump stage, e.g.

3-way pump **028/016/2.0**

<sup>3)</sup> A numerical value is to be selected for each pump stage, e.g.

3-way pump **202002**

**Note**

- ▶ Not all of the variants according to the type code are possible.
- ▶ Please select the desired pump with the help of the selection table (preferred types ) or after consultation with Bosch Rexroth.
- ▶ Special options are available on request.

**Example 4-way pump:**

AZPG...032... + AZPG...022... + AZPJ...016... + AZPJ...012...

01	02		03	04		05	06	07	08	09	10	11
<b>AZP</b>	<b>GGJJ</b>	<b>-</b>	<b>2</b>	<b>2</b>	<b>-</b>	<b>032/022/016/012</b>	<b>R</b>	<b>C</b>	<b>B</b>	<b>202020</b>	<b>K</b>	<b>B</b>


## Technical data

General			
Weight	kg	See dimensions starting on page 21	
Installation position		Any	
Mounting type		Flange or through-bolting with spigot	
Line ports		Flange	
Direction of rotation (viewed on drive shaft)		Clockwise or counter-clockwise, the pump may only be driven in the direction indicated	
Drive shaft bearing		Radial and axial forces only after consultation	
Ambient temperature range $\theta$	°C	-30 to +80 with NBR seals -20 to +110 with FKM seals	
Hydraulic			
Hydraulic fluid		Mineral oil according to DIN 51524, 1-3, however under higher load at least HLP compliant with DIN 51524 Part 2 is recommended. Please observe data sheet 90220. Other hydraulic fluids on request	
Hydraulic fluid temperature range	$\theta$	°C	-30 to +80 with NBR seals (NBR = nitrile rubber) -20 to +110 with NBR seals (FKM = fluoroelastomer)
Viscosity range	permissible in continuous operation	$\nu$	mm <sup>2</sup> /s 12 to 800
	recommended in continuous operation	$\nu_{opt}$	mm <sup>2</sup> /s 20 to 100
	permissible for cold start	$\nu_{max}$	mm <sup>2</sup> /s $\leq 2000$
Maximum admissible degree of contamination of the hydraulic fluid, Cleanliness level according to ISO 4406 (c)			20/18/15 <sup>1)</sup>

### Note

- ▶ Safety requirements pertaining to the whole systems are to be observed.
- ▶ Please contact us for applications with frequent load changes.
- ▶ The dimensions represent pumps for clockwise rotation. The position of the drive shaft or suction and pressure port changes for counter-clockwise rotation.

### ▼ Direction of rotation, viewed on drive shaft

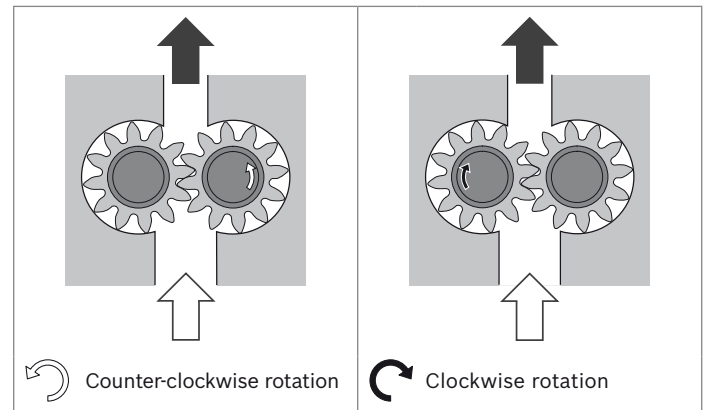


1) For hydraulic systems or devices with function-related, critical failure effects, such as steering and brake valves, the type of filtration selected must be adapted to the sensitivity of these devices.



AZPJ-2x		Size	12	14	16	19	22	25	28
Displacement, geometric, per revolution	$V_g$	cm <sup>3</sup>	12	14	16	19	22.5	25	28
Pressure in suction port <sup>1)</sup>	absolute $p_e$	bar	0.7 to 3						
Maximum continuous pressure	$p_1$	bar	250	250	250	250	210	185	130
Maximum intermittent pressure	$p_2$	bar	280	280	280	280	240	215	160
Maximum pressure peak	$p_3$	bar	300	300	300	300	260	235	180
Minimum rotational speed at bar	12 mm <sup>2</sup> /s	< 100	rpm	500	500	500	500	500	500
		100 to 180	rpm	1000	800	800	800	800	800
		180 to $p_2$	rpm	1200	1000	1000	1000	1000	1000
	25 mm <sup>2</sup> /s	$p_2$	rpm	600	500	500	500	500	500
Maximum rotational speed at	$p_2$	rpm	3500	3000	3000	3000	3000	2800	2600

▼ Pressure definition

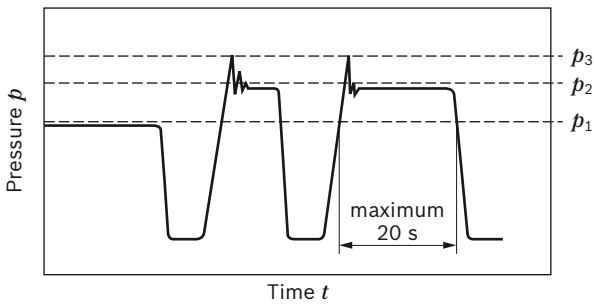


- $p_1$  Maximum continuous pressure
- $p_2$  Maximum intermittent pressure
- $p_3$  Maximum pressure peak

Design calculations for pumps		
Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$M = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$	[Nm]
Power	$P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]
Pressure	$\Delta p = \frac{M \times 20 \times \pi \times \eta_{hm}}{V_g}$	[bar]
	$\Delta p = \frac{P \times 600 \times \eta_t}{q_v}$	[bar]
Displacement	$V_g = \frac{q_v \times 1000}{n \times \eta_v}$	[cm <sup>3</sup> ]
	$V_g = \frac{M \times 20 \times \pi \times \eta_{hm}}{\Delta p}$	[cm <sup>3</sup> ]
Rotational speed	$n = \frac{q_v \times 1000}{V_g \times \eta_v}$	[min <sup>-1</sup> ]

Key

- $V_g$  Displacement per revolution [cm<sup>3</sup>]
- $\Delta p$  Differential pressure [bar] ( $\Delta p = p - p_e$ )
- $n$  Rotational speed [rpm]
- $q_v$  Flow [l/min]
- $M$  Torque [Nm]
- $P$  Power [kW]
- $\eta_v$  Volumetric efficiency<sup>2)</sup>
- $\eta_{hm}$  Hydraulic mechanical efficiency<sup>2)</sup>
- $\eta_t$  Total efficiency ( $\eta_t = \eta_v \times \eta_{hm}$ )<sup>2)</sup>

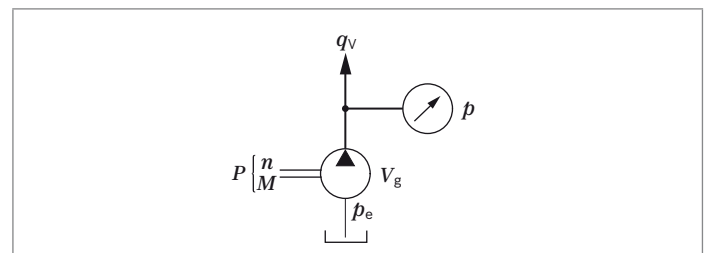


Note

On the following pages you can find diagrams for a rough calculation.


1) In the case of tandem pumps, the suction-side pressure difference between the individual pump stages must not exceed 0.5 bar.  
 2) Parameter as a decimal, e.g. 0.9

### Flow and power characteristic curves


▼ **Flow**

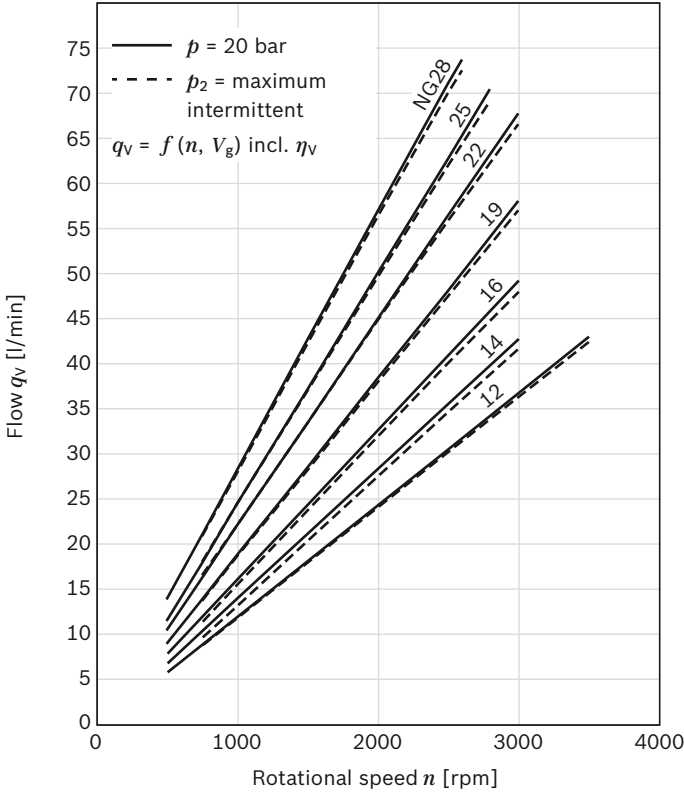


▼ **Size 12**

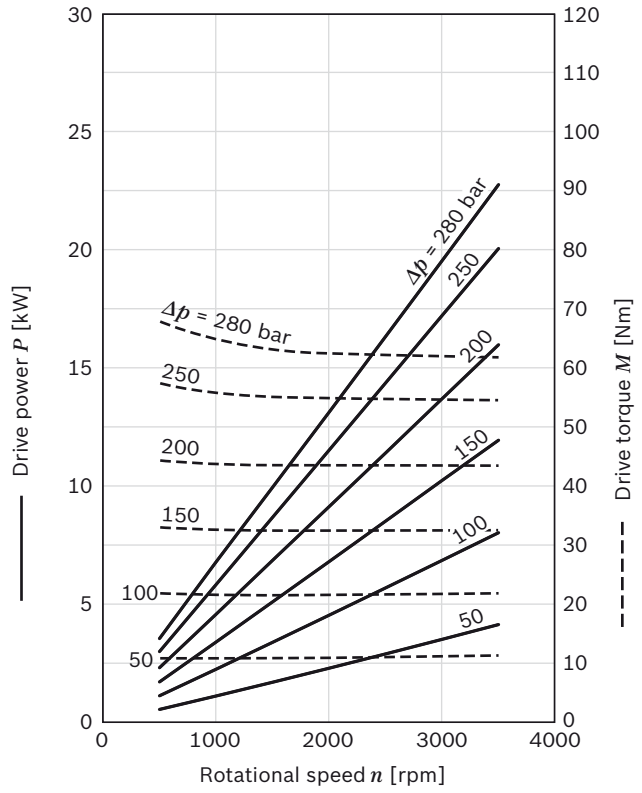


▼ **Size 14**

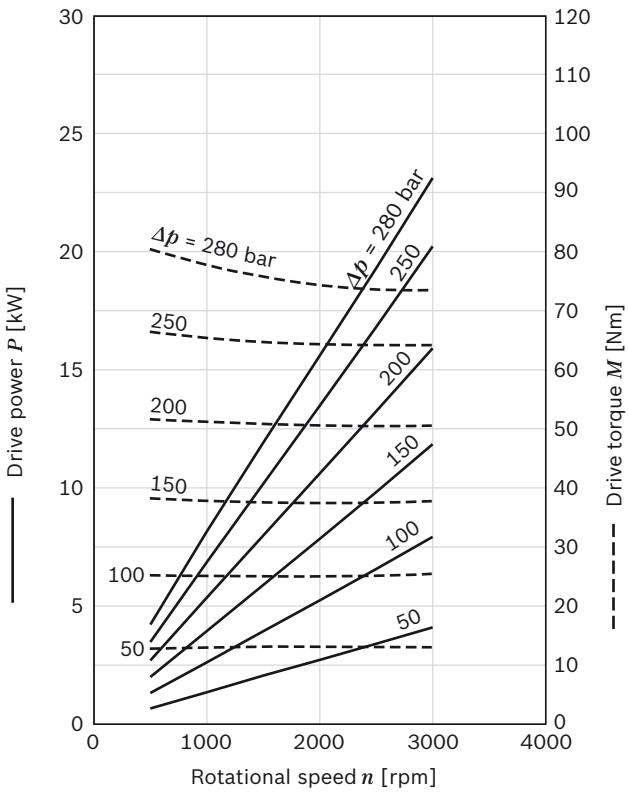


▼ **Size 16**

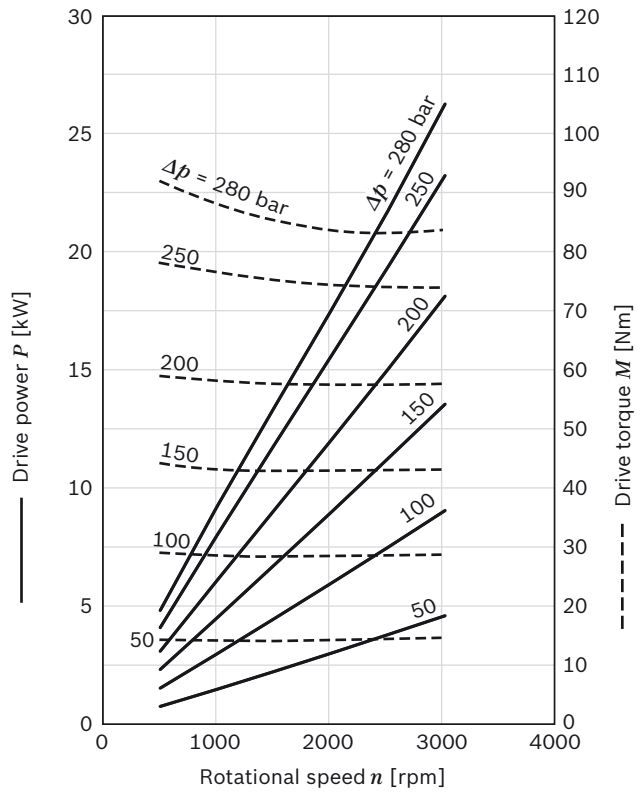


▼ Size 19

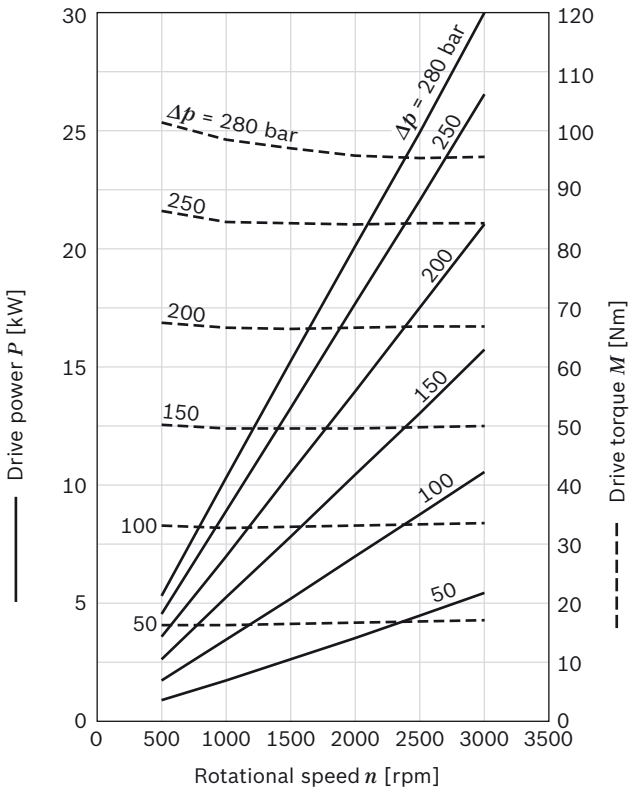


▼ Size 22

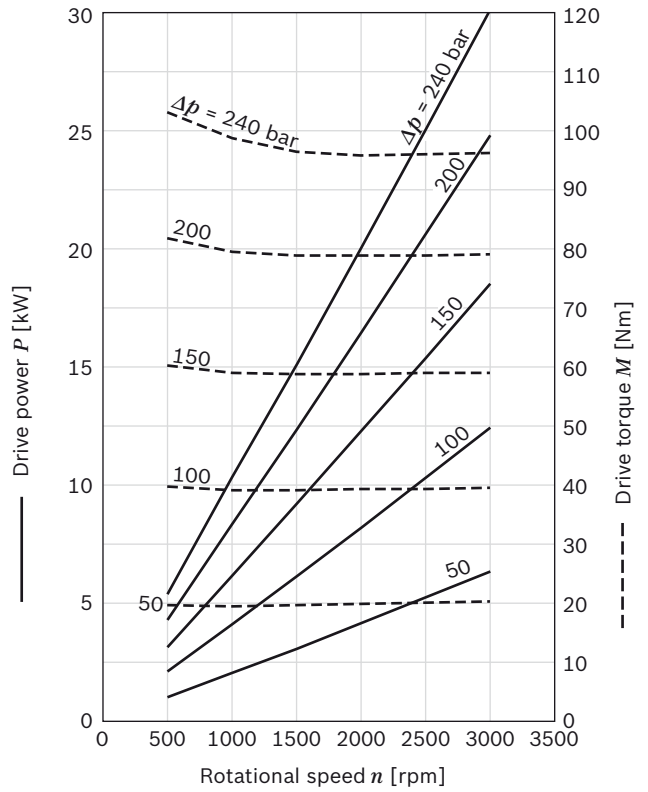

▼ Size 25

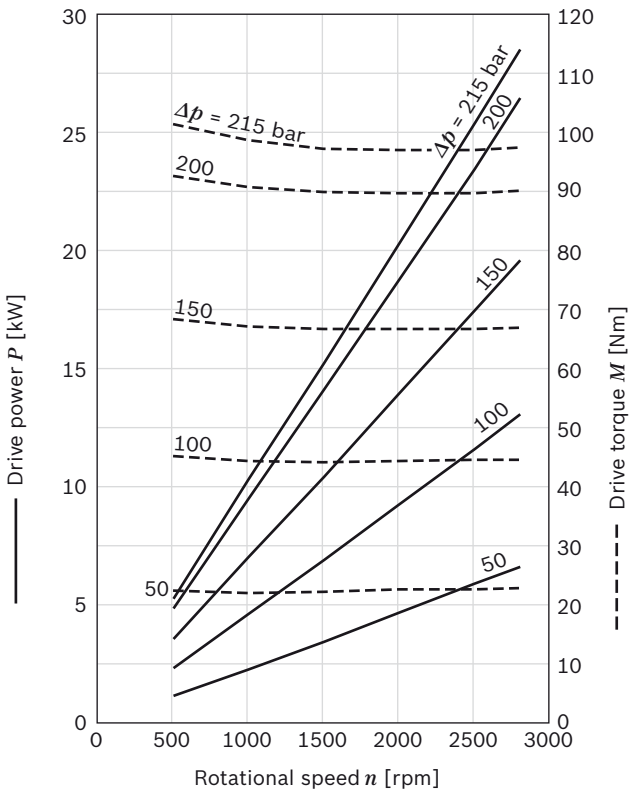

▼ Size 28

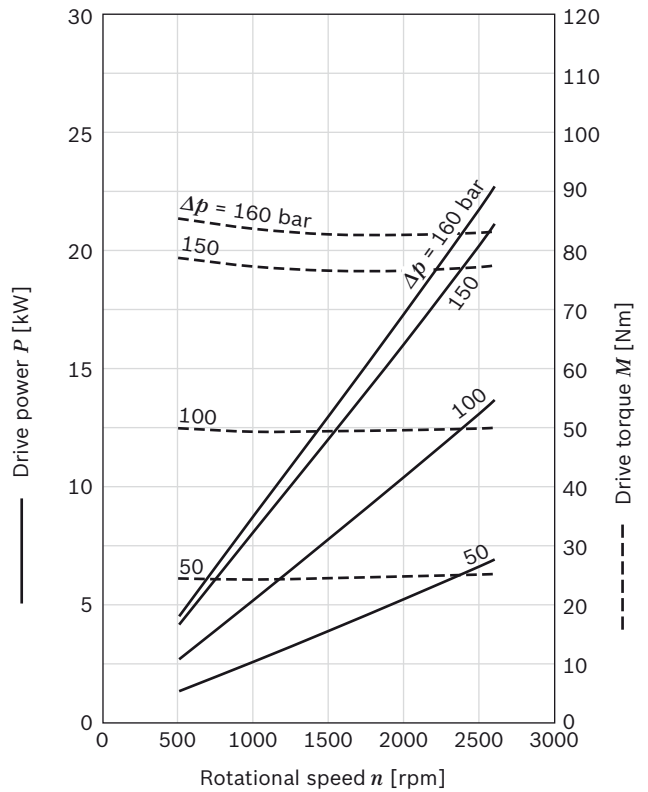

**Note**

Characteristic curves measured at  $\nu = 32 \text{ mm}^2/\text{s}$  and  $\theta = 50 \text{ }^\circ\text{C}$ .

$P = f(n, p)$  incl.  $\eta_t$  ———  
 $M = f(n, p)$  incl.  $\eta_{hm}$  - - - - -

## Noise charts

Apart from the low levels, the much lower frequency also contributes to the substantial noise benefits of the SILENCE PLUS compared with other pump designs.

Noise levels dependent on the rotational speed, pressure range between 10 bar and pressure value  $p_2$  (see technical data on page 9).

These are typical characteristic values for the respective size. They describe the airborne sound emitted solely by the pump.

Ambient influences (installation site, piping, other system components) were not taken into account.

The values refer to one individual pump.


### Note

Characteristic curves measured at  $\nu = 32 \text{ mm}^2/\text{s}$  and  $\theta = 50 \text{ }^\circ\text{C}$ .


Sound pressure level calculated from noise measurements made in the low reflection measuring room according to DIN 45635, Part 26.

Distance from measuring sensor to pump: 1 m.


### ▼ Size 12

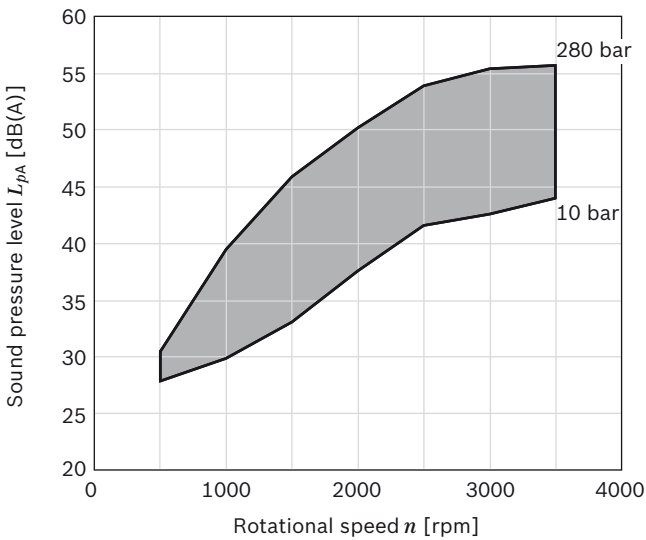


### ▼ Size 16

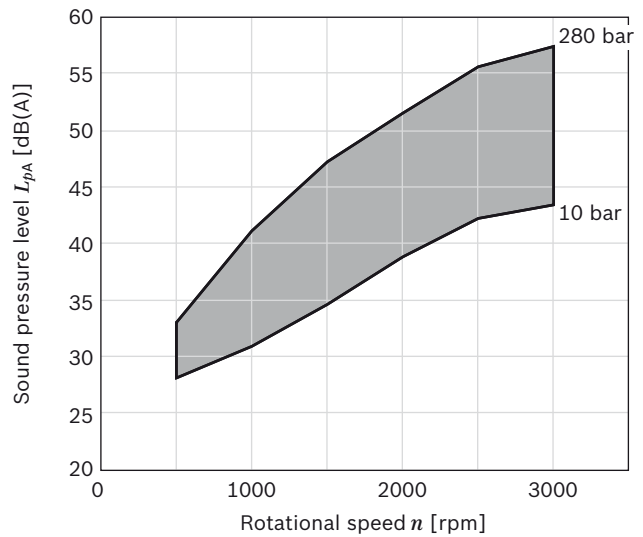


### ▼ Size 14

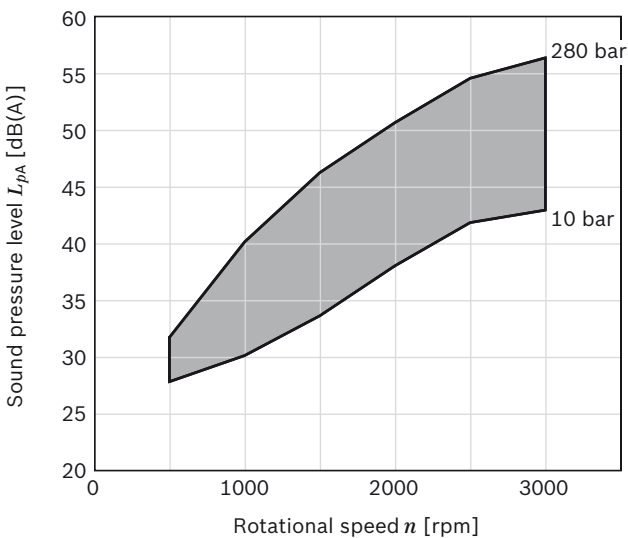


### ▼ Size 19

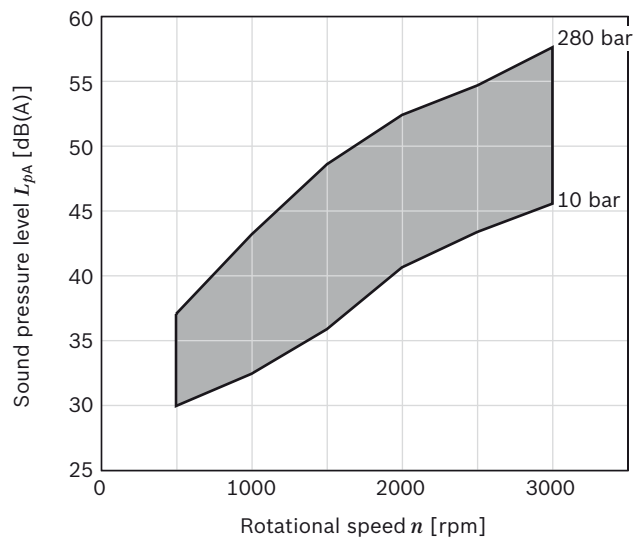


▼ **Size 22**

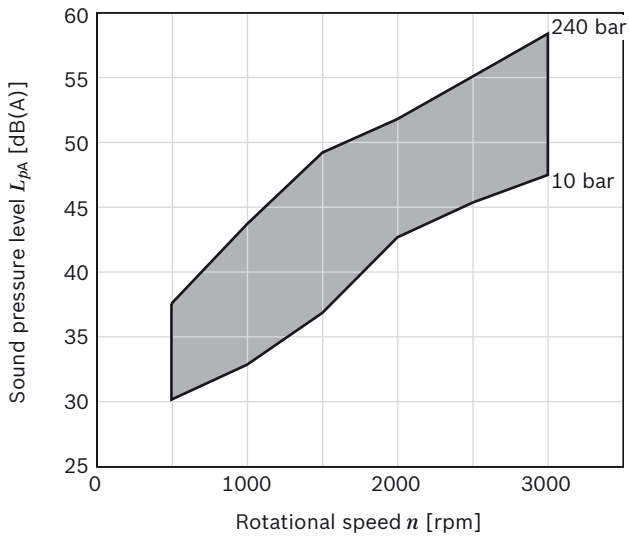

▼ **Size 25**

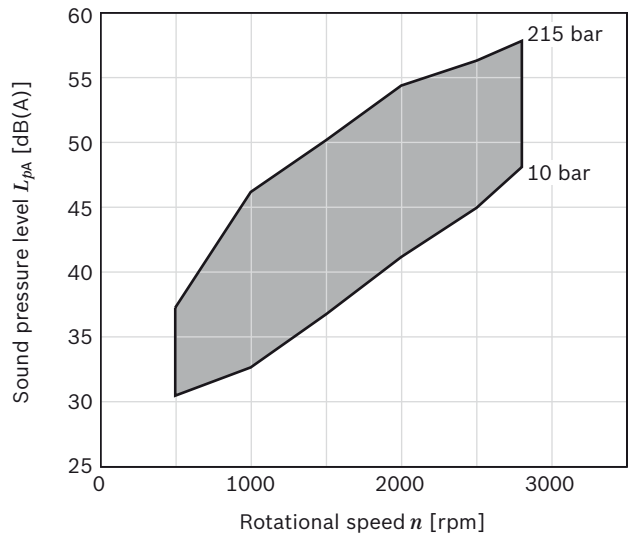


▼ **Size 28**

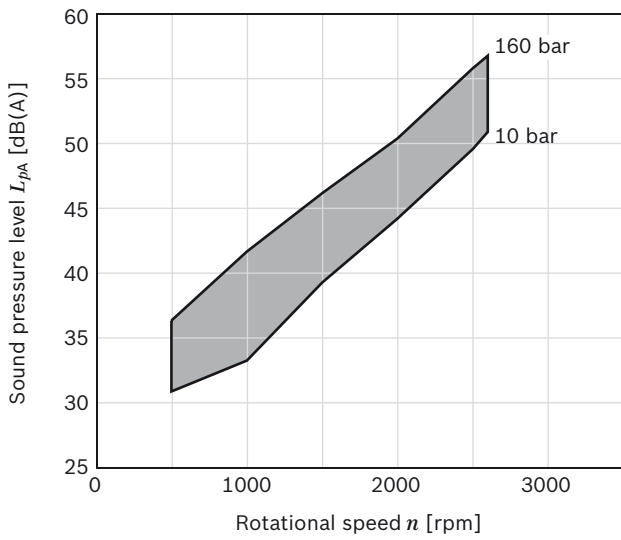

## Drives


### 1. Elastic coupling

- ▶ The coupling must not transfer any radial or axial forces to the pump.
- ▶ The maximum radial runout from the shaft to the spigot may not exceed 0.2 mm.
- ▶ See the coupling manufacturer's assembly instructions for permissible shaft misalignments.

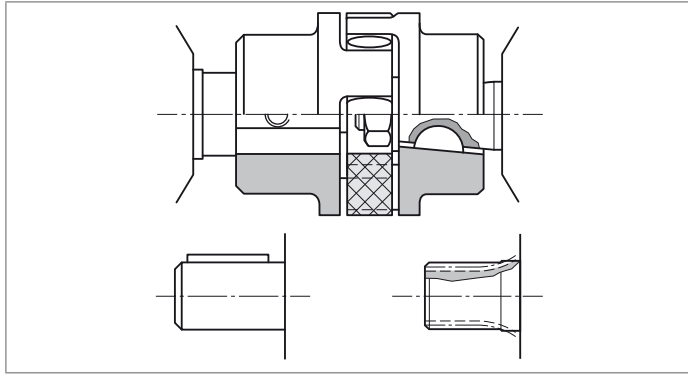

### 2. Coupling sleeve


- ▶ To be used on splined shaft profile according to DIN and SAE
- ▶ Attention: No radial or axial forces are permitted on the pump shaft or coupling sleeve. The coupling sleeve must be free to move axially.
- ▶ The distance between the pump drive shaft and drive shaft on the customer side must be  $2^{+1}$  mm
- ▶ Provide installation space for the snap ring.
- ▶ Oil-bath or oil-mist lubrication is required

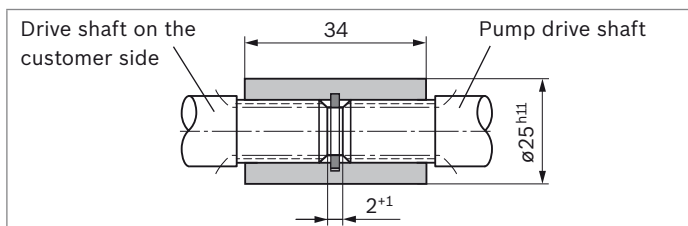

Drive shaft	$M_{max}$ [Nm]	Size	$p_{max}$ [bar]
<b>F</b>	100	12 to 19	300
		22	250
		25	225
		28	180
		28	180
<b>R</b>	110	12 to 19	300
		22	260
		25	235
		28	180
<b>P</b>	180	12 to 19	300
		22	260
		25	235
		28	180

### 3. Coupling dog

- ▶ For attaching the pump directly to an electric motor or combustion engine, gear, etc.
- ▶ The pump shaft has a special coupling dog and driver (3)
- ▶ There is no shaft sealing
- ▶ Drive-side installation and sealing according to the following recommendations and dimensions

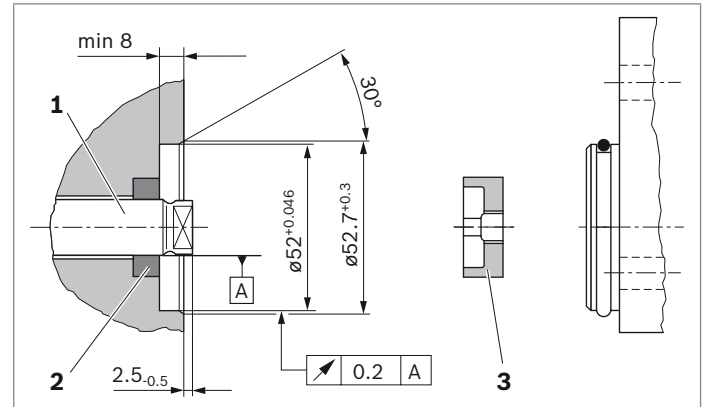

Drive shaft	$M_{max}$ [Nm]	Size	$p_{max}$ [bar]	
<b>N</b>	65	12, 14	280	
		16	230	
		85	19	250
		22	210	
		25	190	
		28	170	

#### ▶ Drive shaft on the customer side (1)


- Case-hardening steel DIN 17210 e.g. 20 MnCrS 5 case-hardened 0.6 deep; HRC  $60^{\pm 3}$
- Seal ring running surface ground without rifling  
 $R_{max} \leq 4 \mu m$
- The maximal transmissible torque of 85 Nm applies to a claw height of 19 mm. With lower claw heights, e.g. 17 mm, the transmissible torque decreases to 65 Nm.

#### ▶ Radial shaft seals on the customer side (2)

- Provide with rubber cover (see DIN 3760, type AS, or double-lipped ring)
- Provide installation edge with  $15^\circ$  slant or install shaft seal with protection sleeve

**4. V-belts and straight gear wheels or helical toothed gear drives without outboard bearing**


For V-belt or gear wheel drives, please contact us specifying the application and mounting conditions (dimensions  $a$ ,  $d_m$ ,  $d_w$  and angle  $\alpha$ ). For helical toothed gear drives, details of the helix angle  $\beta$  are also required.

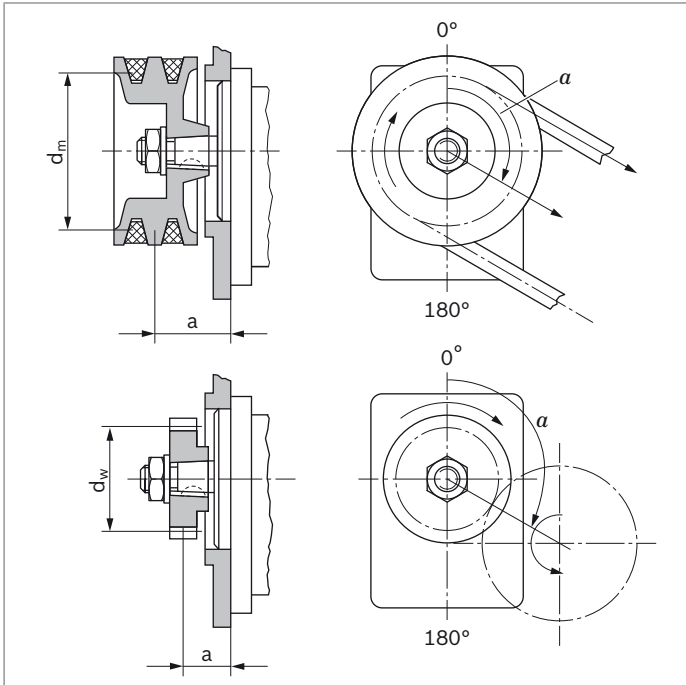


**5. Outboard bearing**

Outboard bearing are offered to eliminate possible problems when the pumps are driven by V-belts or gear wheels. The diagrams show the radial and axial load capacity in relation to a bearing service life of  $L_H = 1000$  h.


**▼ Front cover A, standard (type 1 with claw)**

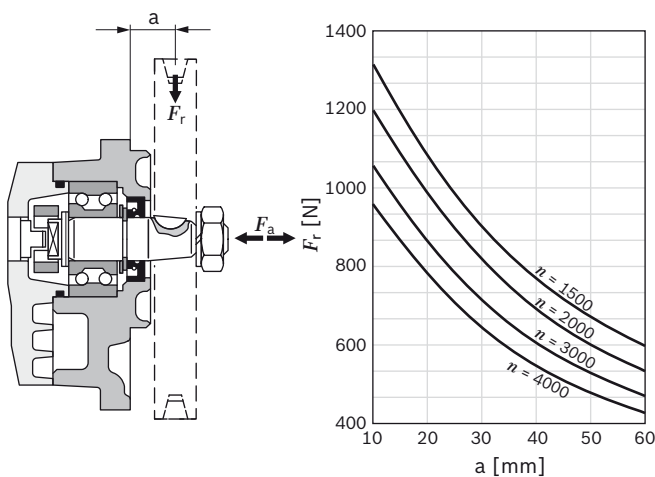

**▼ Front cover A, option (type 1 with sleeve)**

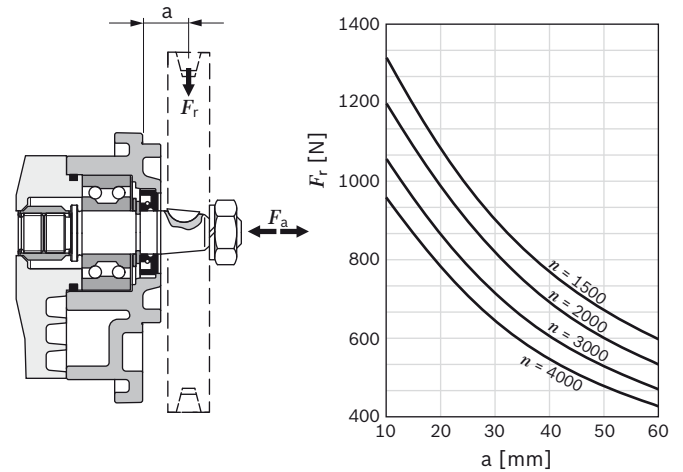

**▼ Front cover G (type 2)**

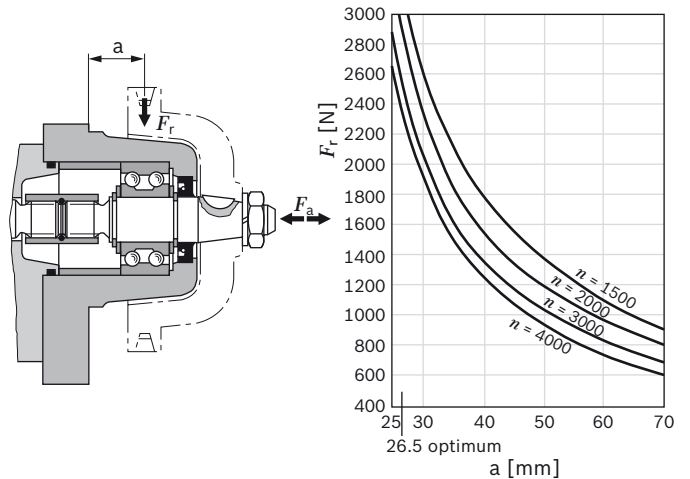

Front cover	$M_{max}$ [Nm]	Size	$p_{max}$ [bar]
A with claw	65	12	300
		14	260
		16	230
		19	190
		22	160
		25	150
		28	130
A with sleeve	160	12 to 19	300
		22	260
		25	235
		28	180
G	160	12 to 19	300
		22	260
		25	235
		28	180

## Multiple gear pumps

Gear pumps are well-suited to multiple arrangements, whereby the drive shaft of the first pump stage is extended to a second and possibly third pump stage. The shaft of the individual pump sections are connected via a driver. In most cases, each pump stage is isolated from its neighbor, i.e. the suction ports are separate from one another.

### Note

Basically, the parameters of the single pumps apply, however certain restrictions need to be observed:

#### ► Maximum rotational speed

This is determined by the largest pump stage used.

#### ► Pressures

These are restricted by the load capacity of the drive shaft, the through drive and the driver.

See the dimensional drawings for the parameters.

### Pressure restriction for standard through drive

In the case of series AZPJ, the driver for the second pump stage can carry a load of up to  $M_{max} = 65 \text{ Nm}$ , i.e. there is a pressure restriction for the second stage and potentially additional stages.


### Maximum transferable drive torque

Drive shaft	Designation	$M_{max}$ [Nm] <sup>1)</sup>
Splined shafts	<b>R</b> SAE J744 16-4 9T	110
	<b>P</b> SAE J744 19-4 11T	180
	<b>F</b> DIN 5482 B17 × 14	100
Tapered shaft	<b>C</b> 1 : 5	155
	<b>H</b> 1 : 8	160
Parallel keyed shaft	<b>Q</b> SAE J744 16-1 A	55
	<b>A</b> Shaft Ø18	75
Claw	<b>N</b> Dihedral claw	65 for sizes 12 and 14 85 for sizes 16 to 28


If the first stage is driven by a coupling dog (driver) or outboard bearing type 1, pressure restrictions apply as indicated in the formula.

Reinforced through drives are available for applications with higher transfer torques or torsional vibrations. Design available on request.


#### ▼ Standard through drive

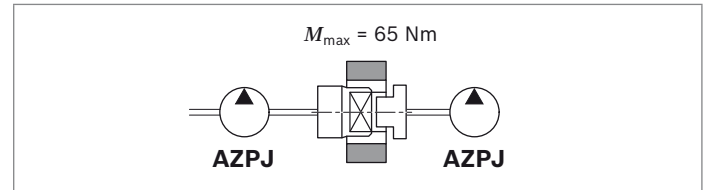

#### ▼ Reinforced through drive

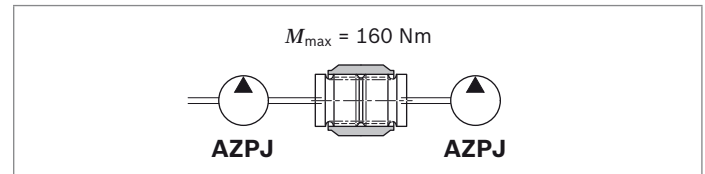

#### ▼ Formula

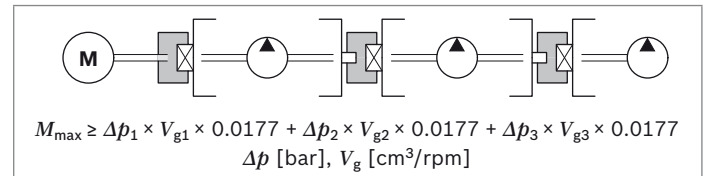

### Combinations (coupling dog)

Pump stage 1	$M_{max}$ [Nm]	Pump stage 2
AZPJ	65	AZPJ
AZPJ	65	AZPF
AZPF	65	AZPJ
AZPJ	25	AZPB-2x


For the configuration of multiple pumps, Bosch Rexroth recommends arranging the pump stage with the largest displacement on the drive side.

1) These values only apply while adhering to the defined conditions on page 8. Please consult Bosch Rexroth if the specified values are to be exceeded.



## Gear pumps with integrated valves


In order to reduce piping complexity, a flow control valve or pressure-relief valve can be integrated in the cover of the gear pump. Such solutions are used, for instance, for the hydraulic oil supply of power steering systems. The pump delivers a constant flow irrespective of the rotational speed. The residual flow is either returned internally to the suction port or distributed externally to other consumers.

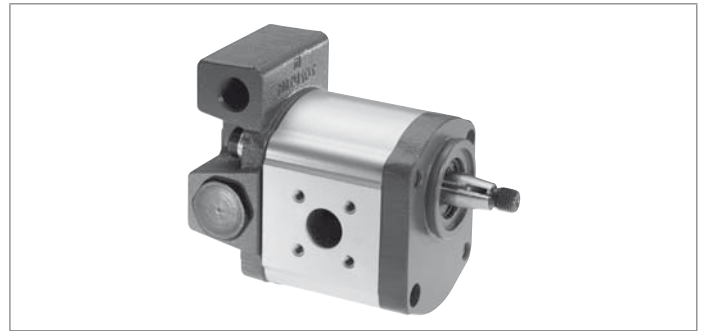

### Valves


- ▼ **3-way flow control valve, residual flow returned in suction line**  
 $q_{const} = 2 \text{ to } 30 \text{ l/min}$

**SXXX17** (example)




- ▼ **3-way flow control valve, residual flow distributed externally; loadable**  
 $q_{const} = 2 \text{ to } 30 \text{ l/min}$

**EXXX12** (example)




- ▼ **3-way flow control valve with pressure relief valve, residual flow returned in suction line**  
 $q_{const} = 2 \text{ to } 30 \text{ l/min}$   
 $p_1 = 100 \text{ to } 180 \text{ bar}$

**V15011** (example)




- ▼ **Pressure relief valve, pressure guide in suction line**  
 $p_1 = 5 \text{ to } 250 \text{ bar}$

**D180XX** (example)




## Dimensions – drive shafts


### ▼ Tapered shaft 1 : 5

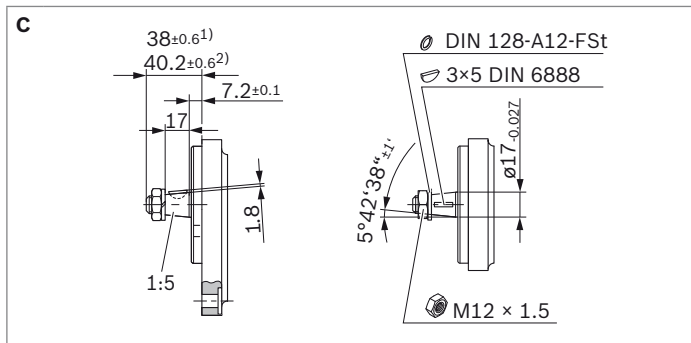


### ▼ Splined shaft (SAE J744 16-4 9T)

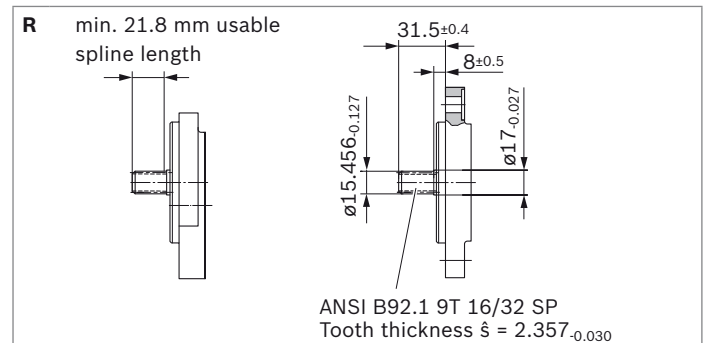


### ▼ Tapered shaft 1 : 5 (for front cover A, G)

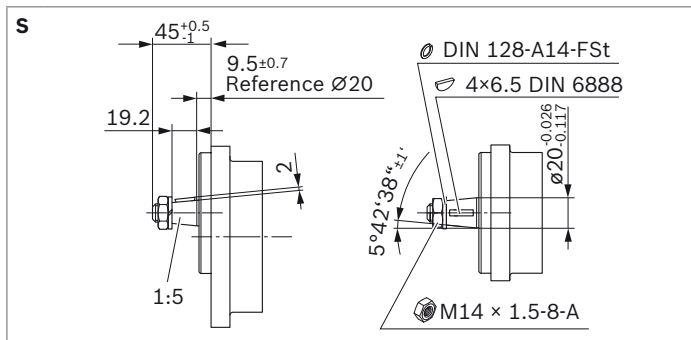


### ▼ Splined shaft (SAE J744 19-4 11T)

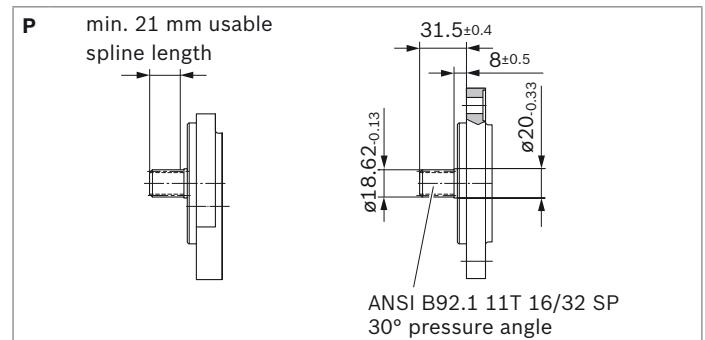


### ▼ Tapered shaft 1 : 8

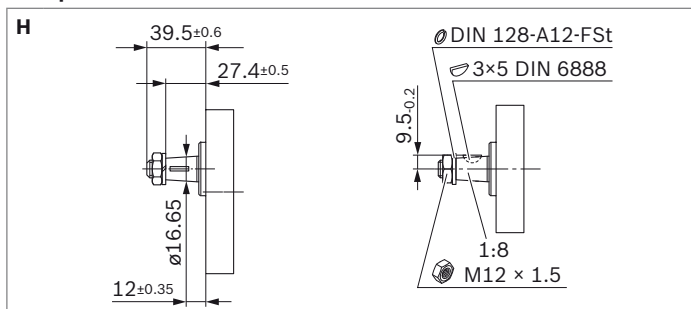


### ▼ Splined shaft / (DIN 5582 B17 x 14)

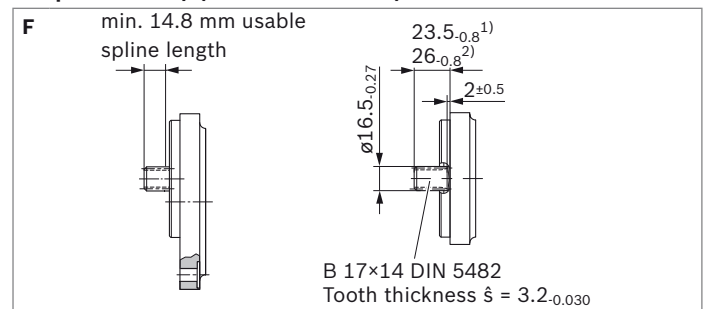


### ▼ Dihedral claw

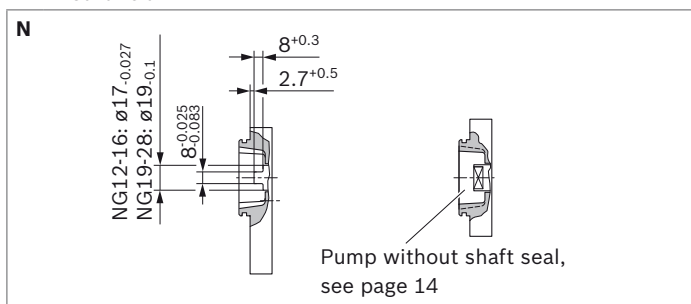

### ▼ Parallel keyed shaft (SAE J744 16-1 A)

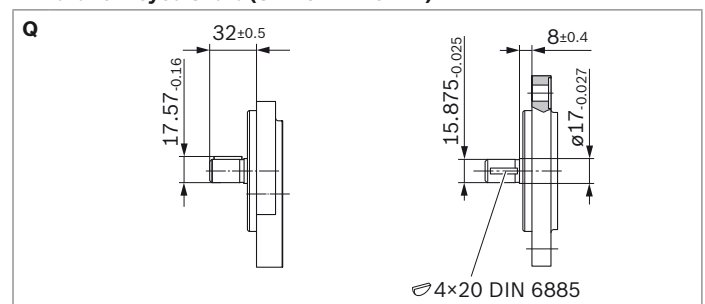


### ▼ Parallel keyed shaft (ISO Ø18 mm)

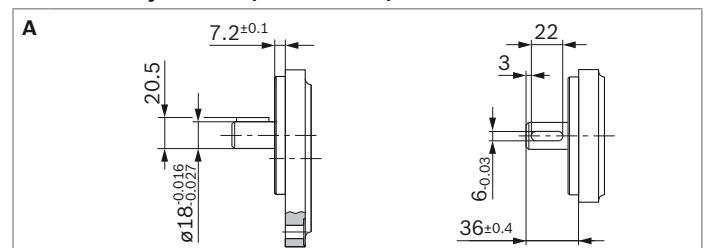


1) In combination with front cover B  
2) In combination with front cover P

**Dimensions – front cover**


▼ Rectangular flange Ø80 mm

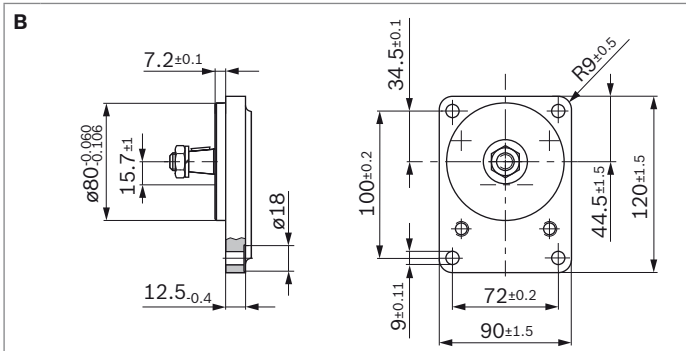


▼ Rectangular flange Ø36.47 mm

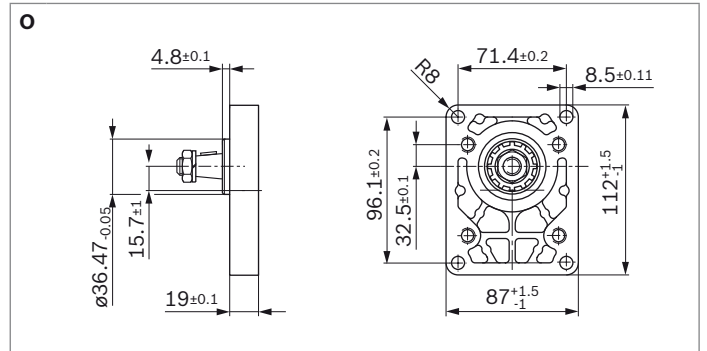


▼ 2-bolt flange Ø82.55 mm, SAE J744 82-2 A

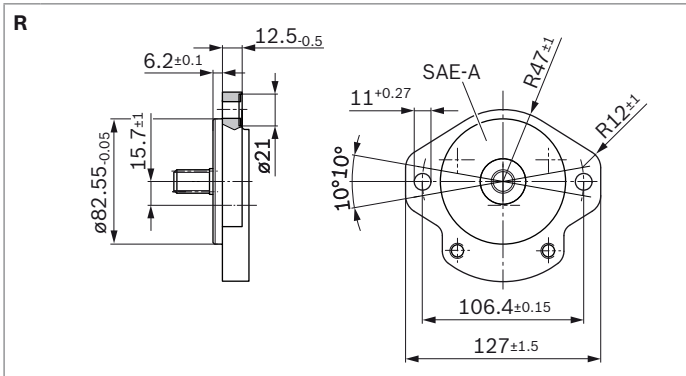


▼ 2-bolt flange Ø101.6 mm, SAE J744 101-2 B

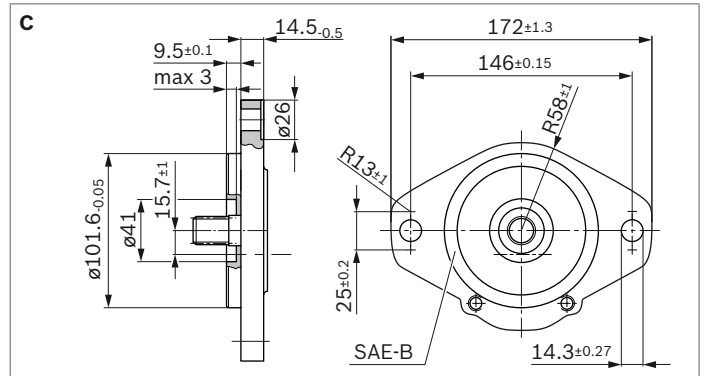


▼ 2-bolt mounting Ø52 mm with O-ring

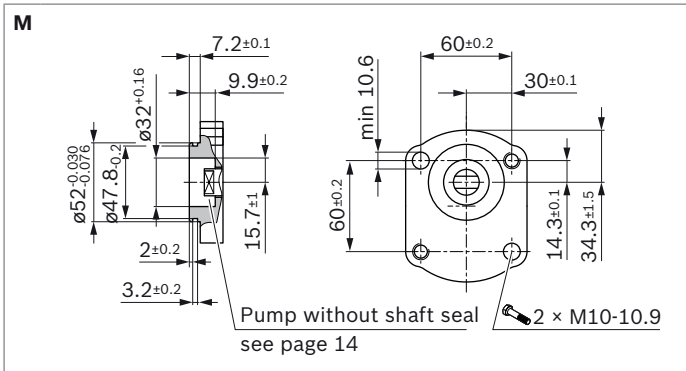


▼ 4-bolt mounting Ø52 mm with O-ring

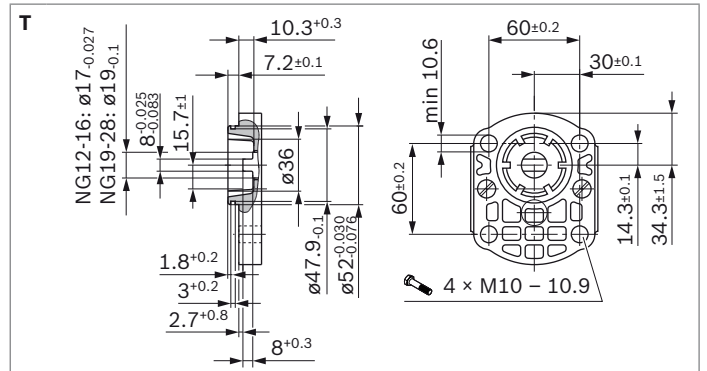


▼ 2-bolt mounting Ø50 mm, connection variant 1

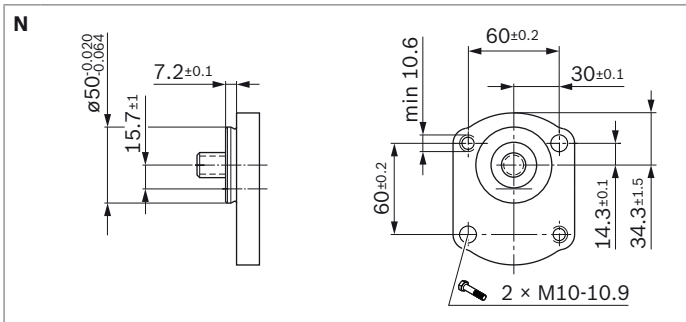


▼ 2-bolt mounting Ø50 mm, connection variant 2

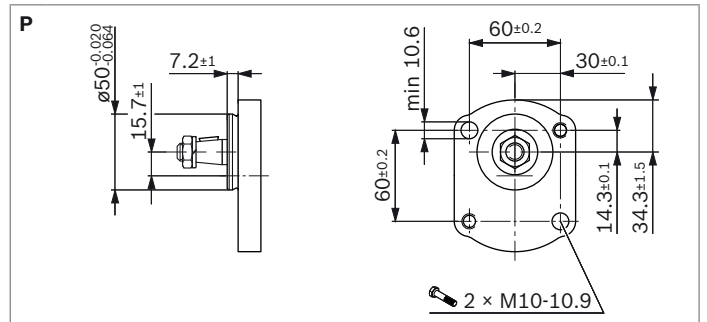

▼ **Outboard bearing Ø80 mm, type 1**

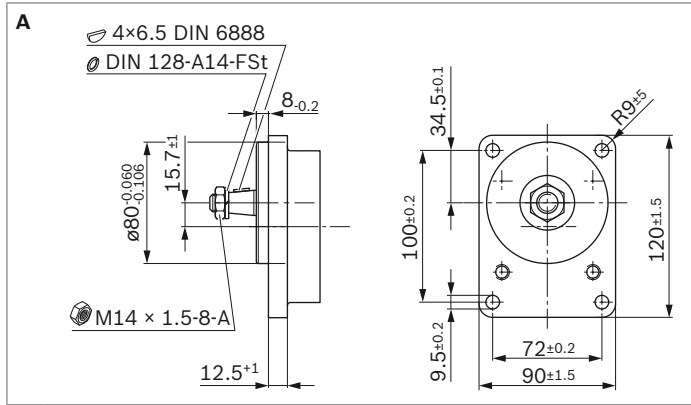


▼ **Outboard bearing Ø80 mm, type 2**

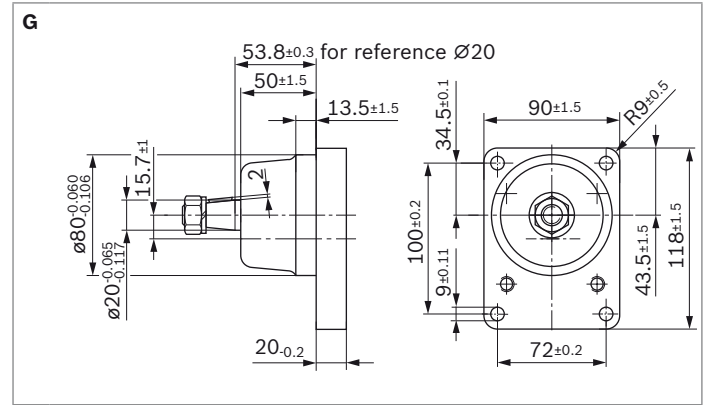


**Dimensions – line ports**

▼ **Square flange**

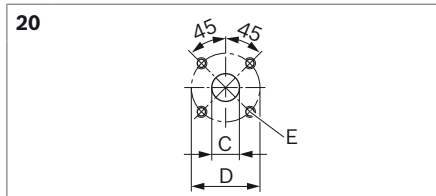


Size	Pressure side			Suction side		
	C	D	E	C	D	E
12 to 16	15	35	M6; 13 deep	20	40	M6; 13 deep
19	15	35	M6; 13 deep	22	55	M8; 13 deep
22 to 28	15	35	M6; 13 deep	26	55	M8; 13 deep

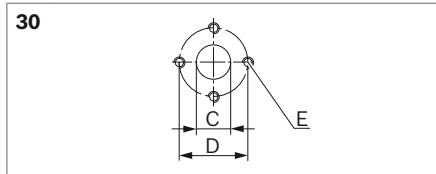

Size	Pressure side			Suction side		
	C	D	E	C	D	E
12 to 16	13.5	30.2	M6; 13 deep	20	39.7	M8; 13 deep

### Dimensions – preferred series


▼ **Tapered shaft 1:5 with rectangular flange  $\varnothing 80$  mm**  
AZPJ-22- ... **CB20MB**

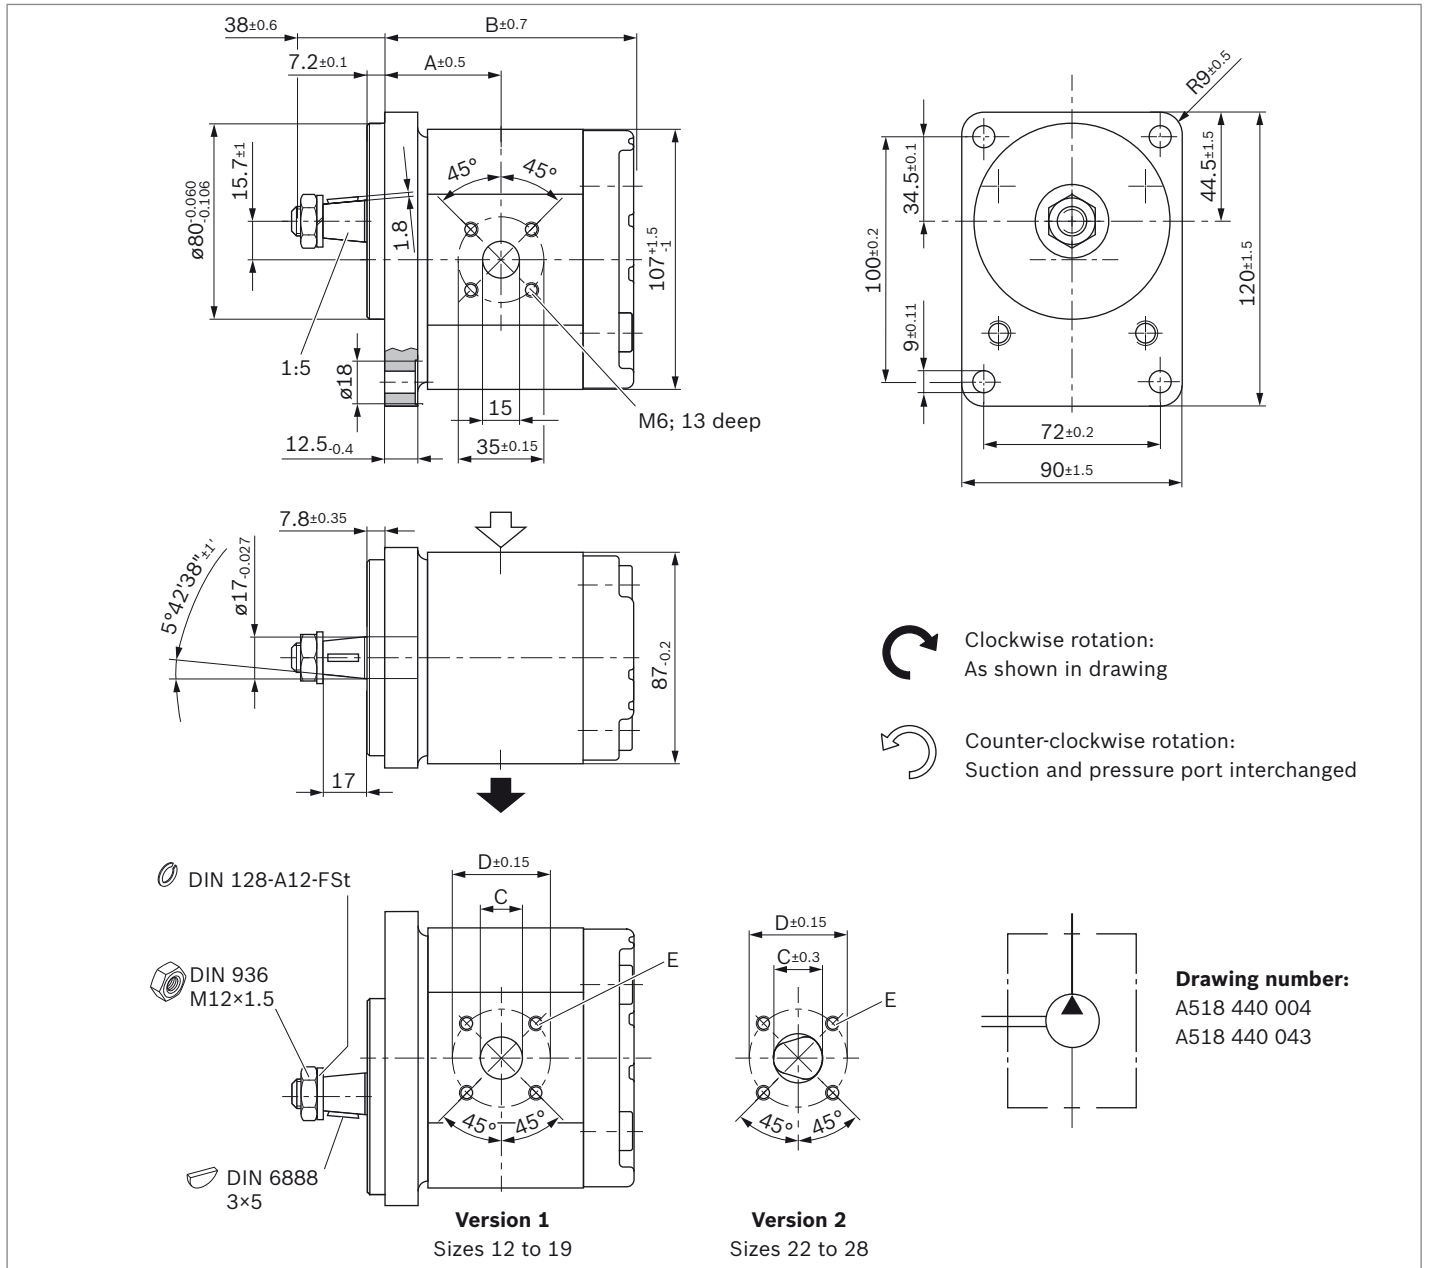

Size	Order number	Direction of rotation		Maximum intermittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Weight [kg]	Dimensions [mm]				
		Counter-clockwise	Clockwise				A	B	C	D	E
12	0 518 525 302		0 518 525 001	280	3500	3.9	46.5	96.3	20	40	M6;
14	0 518 525 303		0 518 525 002	280	3000	4.0	47.5	99.5	20	40	13 deep
16	0 518 625 301		0 518 625 001	280	3000	4.1	47.5	102.9	20	40	
19	0 518 625 309		0 518 625 010	280	3000	4.5	57.9	107.9	22	55	M8;
22	0 518 725 310		0 518 725 011	240	3000	4.6	60.6	113.3	26	55	13 deep
25	0 518 725 311		0 518 725 012	215	2800	4.8	64.8	117.5	26	55	
28	0 518 725 312		0 518 725 013	160	2600	4.9	69.6	122.3	26	55	




▼ **Tapered shaft 1:8 with rectangular flange  $\varnothing 36.47$  mm**  
AZPJ – 22 – ... HO30MB

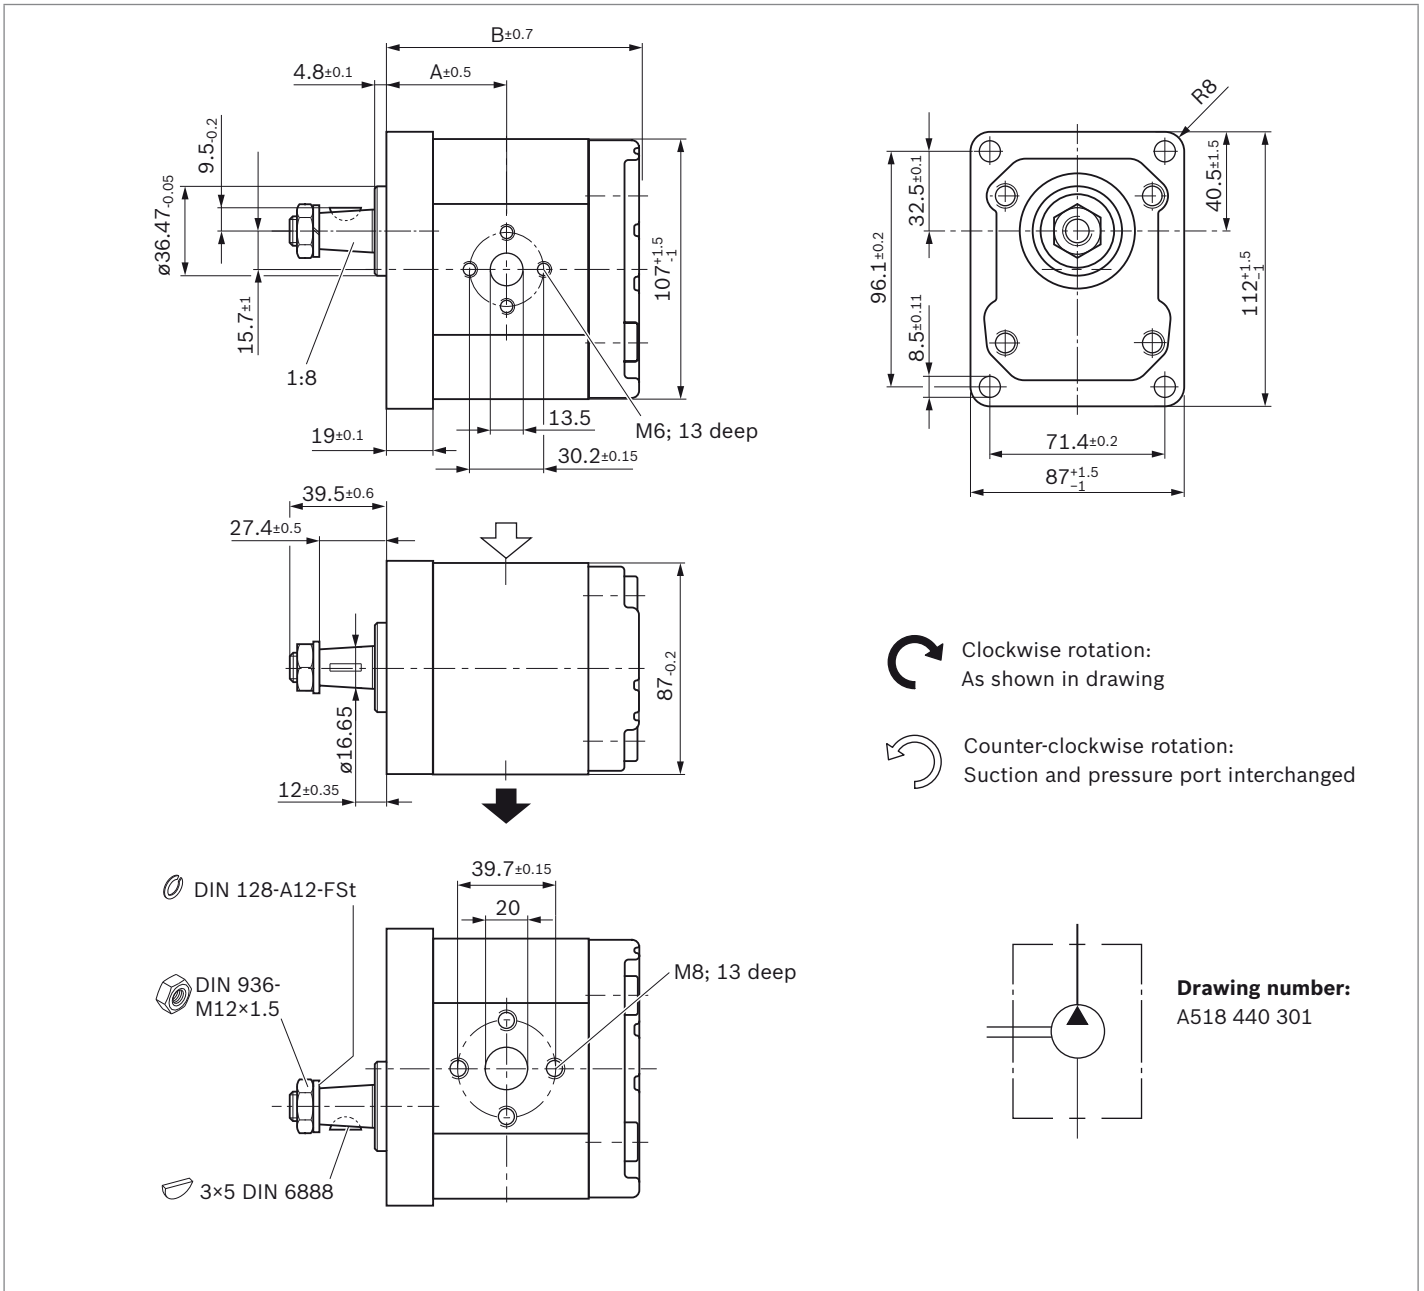

Size	Order number	Direction of rotation		Maximum intermittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Weight [kg]	Dimensions [mm]	
		Counter-clockwise	Clockwise				A	B
12	0 518 525 308	0 518 525 007	0 518 525 007	280	3500	3.7	48.0	97.8
14	0 518 525 309	0 518 525 008	0 518 525 008	280	3000	2.8	49.0	101.0
16	0 518 625 304	0 518 625 004	0 518 625 004	280	3000	3.9	49.0	104.4


▼ **Tapered shaft 1:8 with rectangular flange  $\varnothing 36.47$  mm**  
AZPJ – 22 – ... HO20MB

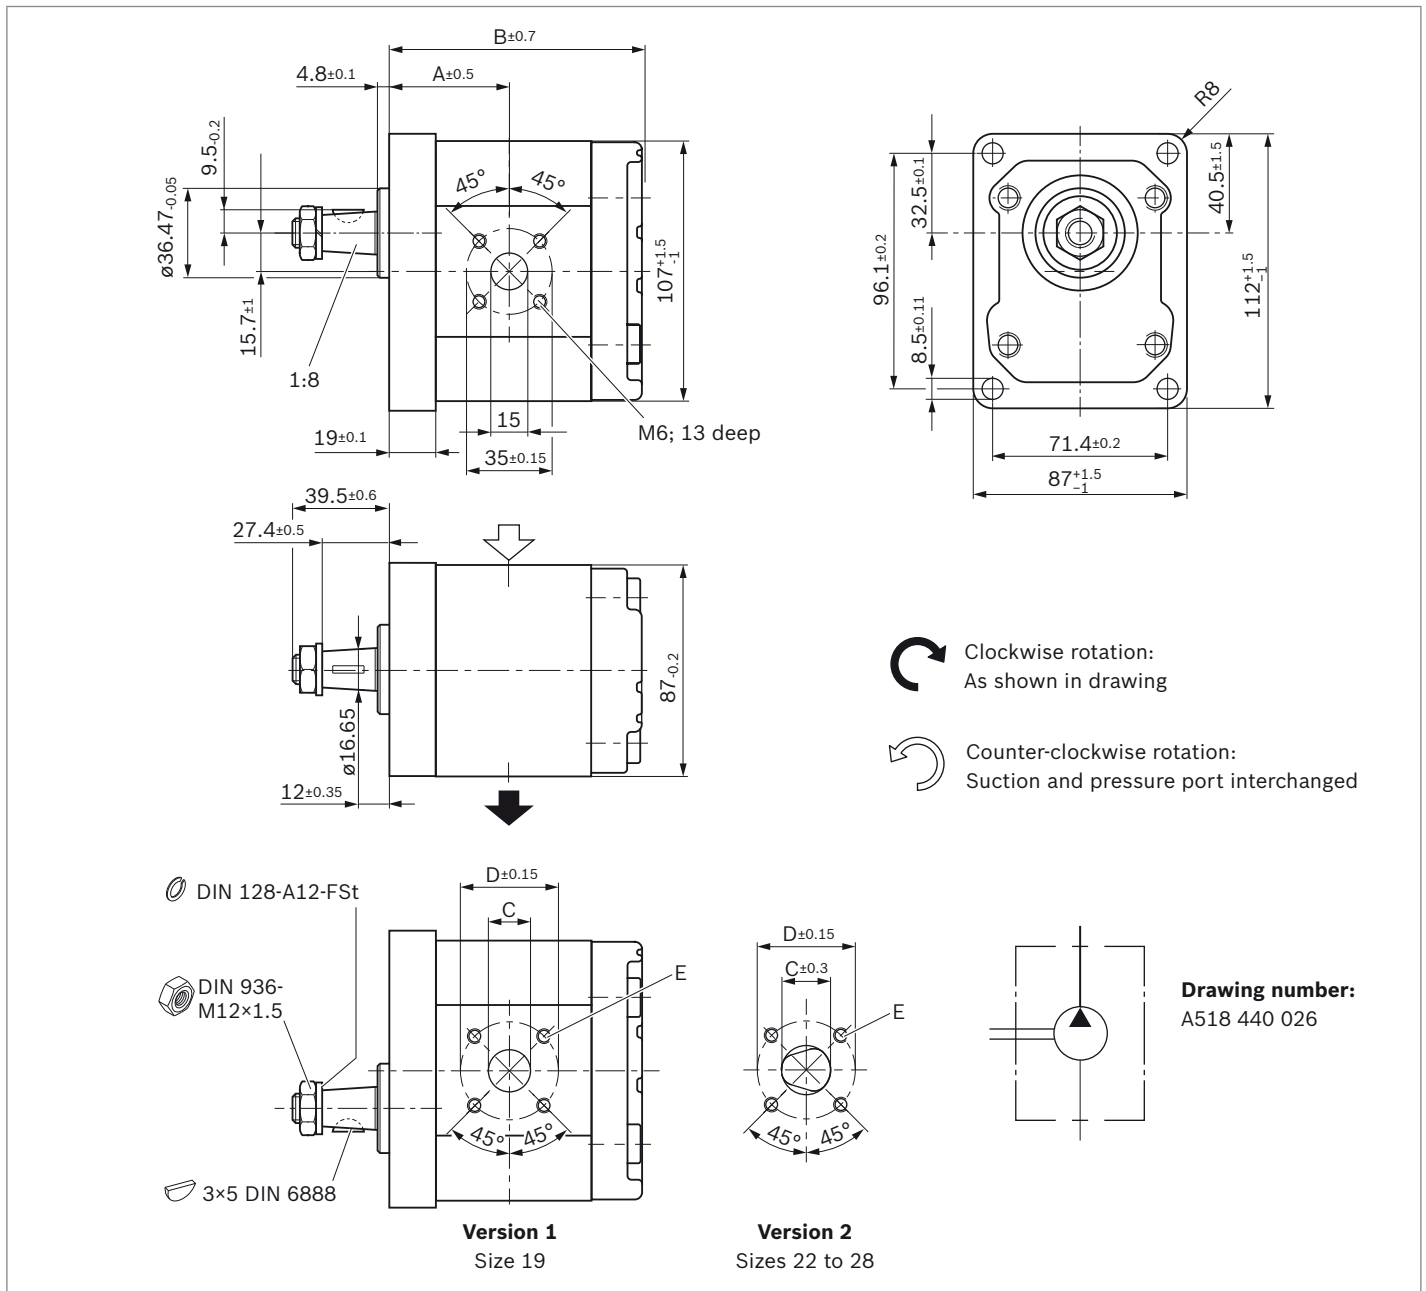

Size	Order number	Direction of rotation		Maximum intermittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Weight [kg]	Dimensions [mm]				
		Counter-clockwise	Clockwise				A	B	C	D	E
19	0 518 625 307	0 518 625 008	0 518 625 008	280	3000	4.5	59.4	109.4	22	55	M8;
22	0 518 725 304	0 518 725 005	0 518 725 005	240	3000	4.6	62.1	114.8	26	55	13 deep
25	0 518 725 305	0 518 725 006	0 518 725 006	215	2800	4.8	66.3	119.0	26	55	
28	0 518 725 306	0 518 725 007	0 518 725 007	160	2600	4.9	71.1	123.8	26	55	




▼ **Cylindrical shaft (ISO Ø18) with rectangular flange Ø80 mm**  
AZPJ – 22 – ... AB20MB

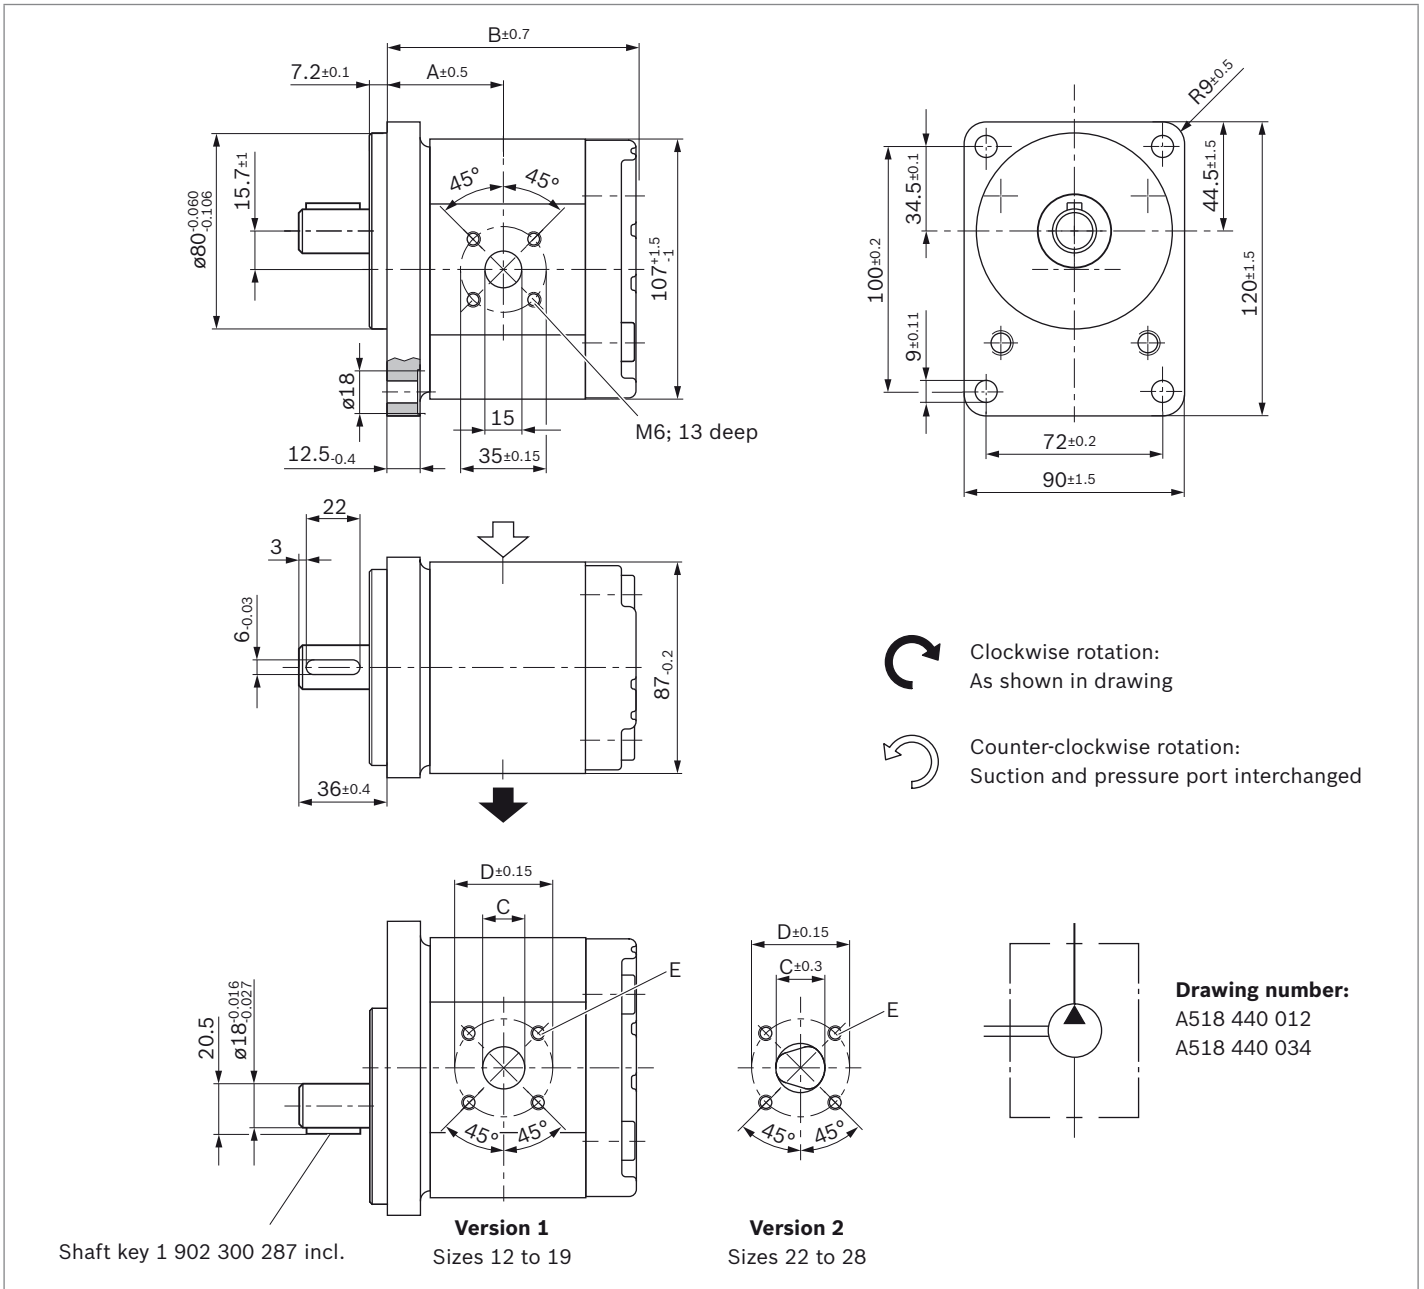

Size	Order number	Direction of rotation		Maximum intermittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Weight [kg]	Dimensions [mm]				
		Counter-clockwise	Clockwise				A	B	C	D	E
12	0 518 525 304		0 518 525 003	280	3500	3.9	46.5	96.3	20	40	M6;
14	0 518 525 305		0 518 525 004	280	3000	4.0	47.5	99.5	20	40	13 deep
16	0 518 625 302		0 518 625 002	270	3000	4.1	47.5	102.9	20	40	
19	0 518 625 308		0 518 625 009	230	3000	4.5	57.9	107.9	22	55	M8;
22	0 518 725 307		0 518 725 008	190	3000	4.6	60.6	113.3	26	55	13 deep
25	0 518 725 308		0 518 725 009	170	2800	4.8	64.8	117.5	26	55	
28	0 518 725 309		0 518 725 010	150	2600	4.9	69.6	122.3	26	55	

▼ **Dihedral claw with 4-bolt mounting Ø82.55 mm**

AZPJ – 22 – ... NT20MB

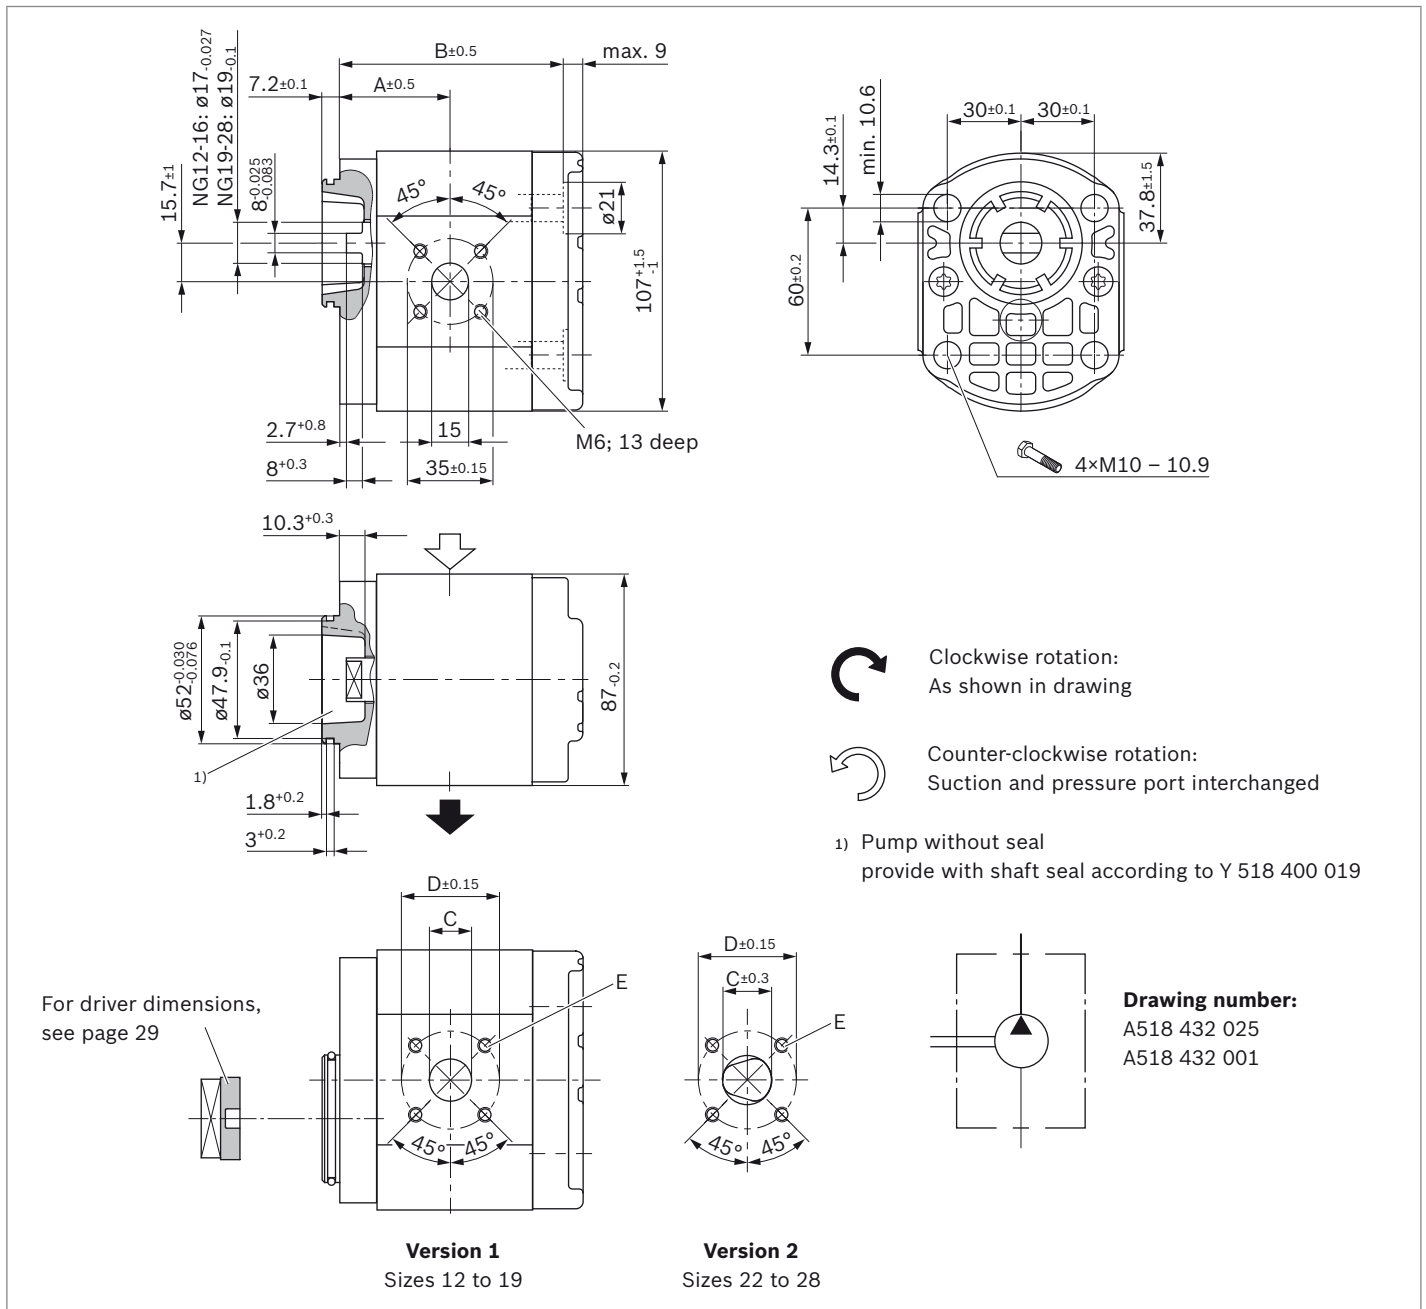


Size	Order number		Maximum intermittent pressure $p_2$ [bar]	Maximum rotational speed [rpm]	Weight [kg]	Dimensions [mm]				
	Direction of rotation Counter-clockwise	Clockwise				A	B	C	D	E
12	0 518 515 301	0 518 515 001	280	3500	2.5	44.0	87.1	20	40	M6; 13 deep
14	0 518 515 302	0 518 515 002	280	3000	2.6	45.0	90.3	20	40	
16	0 518 615 301	0 518 615 001	280	3000	2.7	45.0	93.7	20	40	
19	0 518 615 303	0 518 615 003	250	3000	3.0	55.4	98.7	22	55	M8; 13 deep
22	0 518 715 301	0 518 715 001	215	3000	3.2	58.1	104.1	26	55	
25	0 518 715 302	0 518 715 002	190	2800	3.3	62.3	108.3	26	55	
28	0 518 715 303	0 518 715 003	160	2600	3.4	67.1	113.1	26	55	

**Accessories**

**Gear pump flanges, straight, for square flange 20 (see page 20)**


Complete screw connections with O-ring, metric screw set, nuts and olive.

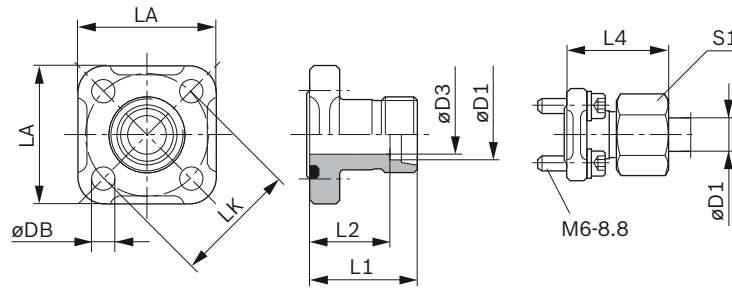

LK	D1	D3	L1	L2	L4	LA	S1	DB	Screws 4x	O-ring NBR	Weight [kg]	Order number	p [bar]
35	10L	8	30	23.0	39.0	40	19	6.4	M6 × 22	20 × 2.5	0.09	1 515 702 064	315
35	12L	10	30	23.0	39.0	40	22	6.4	M6 × 22	20 × 2.5	0.10	1 515 702 065	315
35	15L	12	30	23.0	38.0	40	27	6.4	M6 × 22	20 × 2.5	0.10	1 515 702 066	250
40	15L	12	35	28.0	43.0	42	27	6.4	M6 × 22	24 × 2.5	0.12	1 515 702 067	100
40	18L	15	35	27.5	44.0	42	32	6.4	M6 × 22	24 × 2.5	0.13	1 515 702 068	100
40	22L	19	35	27.5	44.5	42	36	6.4	M6 × 22	24 × 2.5	0.12	1 515 702 069	100
40	28L	24	42	27.5	34.5	42	41	6.4	M6 × 22	24 × 2.5	0.15	1 515 702 008	100


**Gear pump flanges, 90° angle, for square flange 20 (see page 20)**

Complete screw connections with O-ring, metric screw set, nuts and olive.

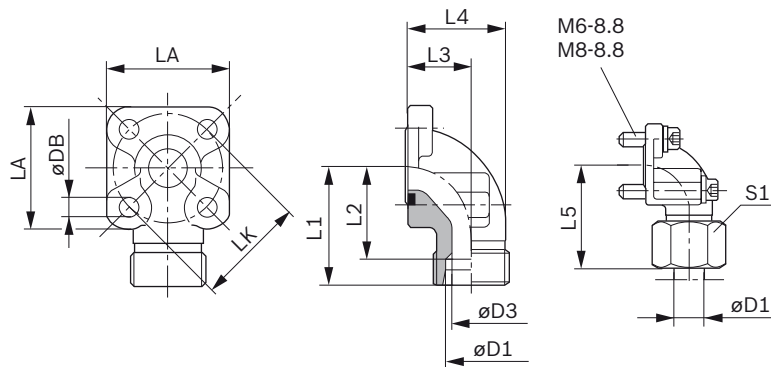

LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws 2x	Screws 2x	O-ring NBR	Weight [kg]	Order number	p [bar]
35	10L	8	38	31.0	16.5	26.5	47.0	40	19	6.4	M6 × 22	M6 × 35	20 × 2.5	0.16	1 515 702 070	315
35	12L	10	38	31.0	16.5	26.5	47.0	40	22	6.4	M6 × 22	M6 × 35	20 × 2.5	0.16	1 515 702 071	315
35	15L	12	38	31.0	16.5	26.5	46.0	40	27	6.4	M6 × 22	M6 × 35	20 × 2.5	0.15	1 515 702 072	250
35	16S	12	38	29.5	20.0	31.0	48.0	40	30	6.4	M6 × 22	M6 × 40	20 × 2.5	0.18	1 515 702 002	315
35	18L	15	38	29.5	20.0	31.0	47.0	40	32	6.4	M6 × 22	M6 × 40	20 × 2.5	0.18	1 545 702 006	250
35	20S	16	45	34.5	25.0	38.0	56.0	40	36	6.4	M6 × 22	M6 × 45	20 × 2.5	0.24	1 515 702 017	315
40	15L	12	38	31.0	22.5	36.5	46.0	42	27	6.4	M6 × 22	M6 × 22	24 × 2.5	0.15	1 515 702 073	100
40	18L	15	38	30.5	22.5	36.5	47.0	42	32	6.4	M6 × 22	M6 × 22	24 × 2.5	0.17	1 515 702 074	100
40	20S	16	40	29.5	22.5	35.5	50.0	42	36	6.4	M6 × 22	M6 × 45	24 × 2.5	0.20	1 515 702 011	250
40	22L	19	38	30.5	22.5	36.5	47.5	42	36	6.4	M6 × 22	M6 × 22	24 × 2.5	0.17	1 515 702 075	100
40	28L	22	40	32.5	28.0	43.0	49.0	42	41	6.4	M6 × 20	M6 × 50	24 × 2.5	0.24	1 515 702 010	100
40	35L	31	41	30.5	34.0	55.0	52.0	42	50	6.4	M6 × 22	M6 × 60	24 × 2.5	0.33	1 515 702 018	100

**Gear pump flange, 3-hole, 90° angle, for square flange 30 (see page 20)**

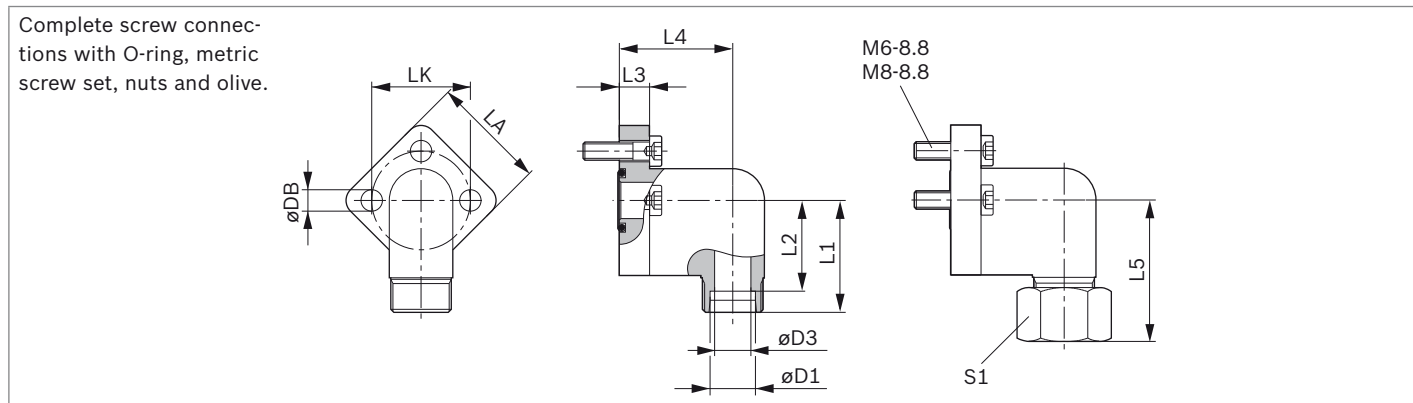

LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws 3x	O-ring NBR	Weight [kg]	Order number	p [bar]
30	12L	10	37	30.0	10	37.5	46	38	22	6.4	M6 × 22	16 × 2.5	0.13	1 515 702 146	250
30	15L	12	37	30.0	10	37.5	47	38	27	6.4	M6 × 22	16 × 2.5	0.14	1 515 702 147	250
30	18L	15	37	30.0	10	37.5	47	38	32	6.4	M6 × 22	16 × 2.5	0.17	1 515 702 148	160
40	22L	19	43	35.5	14	41.0	53	48	36	8.4	M8 × 30	24 × 2.5	0.29	1 515 702 149	160
40	28L	24	43	35.5	14	41.0	53	48	41	8.4	M8 × 30	24 × 2.5	0.40	1 515 702 150	160

**Note**

You can find the permissible tightening torques in our publication 07012-B1 “General Operating Instructions for External Gear Units”.

### Spare parts


**Note**

Spare parts can be found online at [www.boschrexroth.com/spc](http://www.boschrexroth.com/spc)


AZPJ-22 - ... CB...	AZPJ-22 - ... RR...	AZPJ-22 - ... HO...	AZPJ-22 - ... AB...	AZPJ-22 - ... NT...
---------------------	---------------------	---------------------	---------------------	---------------------

Pos.	Designation	Order number	Dimensions	Material	AZPJ-22 - ... CB...	AZPJ-22 - ... RR...	AZPJ-22 - ... HO...	AZPJ-22 - ... AB...	AZPJ-22 - ... NT...
3	Shaft seal	1 510 283 008	17 × 30 × 7	NBR	x	x	-	-	-
		1 510 283 027	17 × 30 × 7	FKM	x	x	-	-	-
		1 510 283 037	18 × 30 × 7	NBR	-	-	x	x	-
		1 510 283 077	18 × 30 × 7	FKM	-	-	x	x	-
30	Driver for sizes 12 to 16	1 510 240 011			-	-	-	-	x
	Driver for sizes 19 to 28	1 510 240 013			-	-	-	-	x
31	O-ring	1 900 210 145	45 × 2.5	NBR	-	-	-	-	x
		1 510 210 062	45 × 2.5	FKM	-	-	-	-	x
800	Seal kit	1 517 010 247		NBR	x	x	x	x	x
		1 517 010 269		FKM	x	x	x	x	x


▼ Schematic diagram

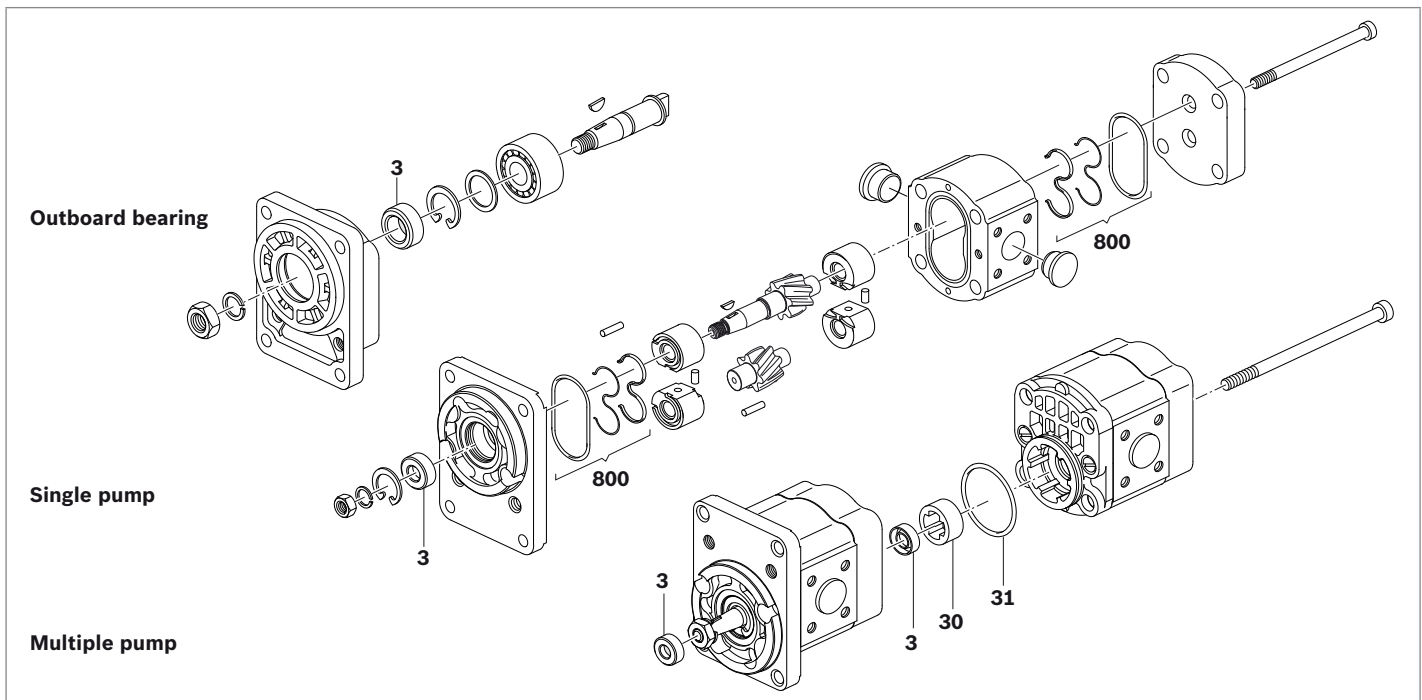

▼ Driver (Pos. 30) for sizes 12 to 16

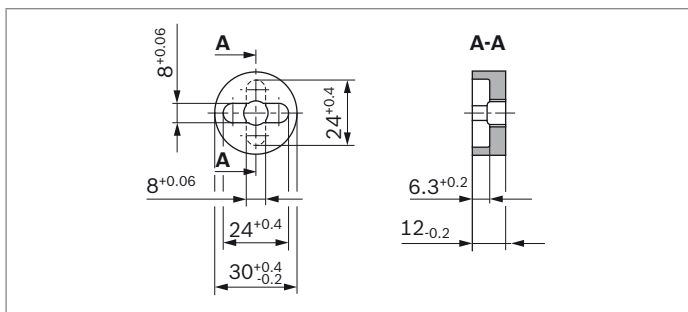

▼ Driver (Pos. 30) for sizes 19 to 28

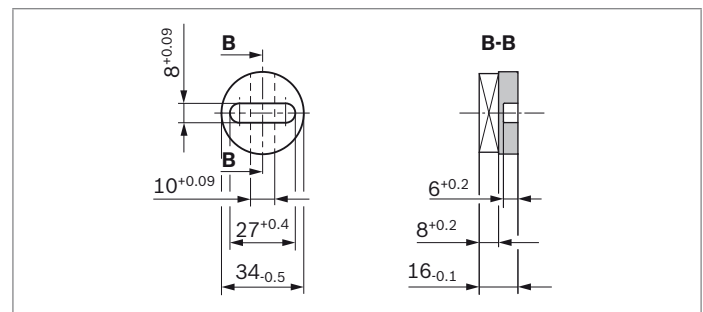

## Notes for commissioning

### General

Pumps delivered by Bosch Rexroth are tested for function and performance. No changes of any nature may be made, otherwise the warranty is rendered void.

The pump may only be operated with the permissible data (see page 8).

### Technical data

All mentioned technical data are dependent on manufacturing tolerances and are applicable for certain boundary conditions.

Note that certain deviations are therefore possible and that technical data may vary when certain boundary conditions (e.g., viscosity) change.

### Characteristic curves

When dimensioning the gear pump, observe the maximum possible application data on the basis of the characteristic curves shown starting on page 10.

### Scope of delivery

The scope of delivery contains the components with the properties as described under type codes and dimensions starting on page 21.

### Further information

- ▶ Further information on installation, commissioning, and operation can be found in the publication 07012-B1: "General Operating Instructions for External Gear Units".
- ▶ Extensive notes and suggestions can be found in the Hydraulic Trainer, volume 3: "Planning and Design of Hydraulic Power Systems", order number R900018547.

### Filter recommendation

Since the majority of premature failures in gear motors occur due to contaminated hydraulic fluid, filtration should maintain a cleanliness class of 20/18/15 as defined by ISO 4406.

Cleanliness class 20/18/15 can reduce contamination to an acceptable degree in terms of particle size and concentration.

Bosch Rexroth generally recommends full-flow filtration. Basic contamination of the hydraulic fluid should not exceed class 20/18/15 as defined by ISO 4406. New fluids are often above this value. In such instances, a filling device with a special filter should be used.

Bosch Rexroth is not liable for wear due to contamination.

## Order number overview

Order number	Page
0 518 515 001	26
0 518 515 002	26
0 518 515 301	26
0 518 515 302	26
0 518 525 001	21
0 518 525 002	21
0 518 525 003	25
0 518 525 004	25
0 518 525 005	22
0 518 525 006	22
0 518 525 007	23
0 518 525 008	23
0 518 525 302	21
0 518 525 303	21
0 518 525 304	25
0 518 525 305	25
0 518 525 306	22
0 518 525 307	22
0 518 525 308	23
0 518 525 309	23
0 518 615 001	26
0 518 615 003	26
0 518 615 301	26
0 518 615 303	26
0 518 625 001	21
0 518 625 002	25
0 518 625 003	22
0 518 625 004	23
0 518 625 007	22
0 518 625 008	24
0 518 625 009	25
0 518 625 010	21
0 518 625 301	21
0 518 625 302	25
0 518 625 303	22

Order number	Page
0 518 625 304	23
0 518 625 306	22
0 518 625 307	24
0 518 625 308	25
0 518 625 309	21
0 518 715 001	26
0 518 715 002	26
0 518 715 003	26
0 518 715 301	26
0 518 715 302	26
0 518 715 303	26
0 518 725 002	22
0 518 725 003	22
0 518 725 004	22
0 518 725 005	24
0 518 725 006	24
0 518 725 007	24
0 518 725 008	25
0 518 725 009	25
0 518 725 010	25
0 518 725 011	21
0 518 725 012	21
0 518 725 013	21
0 518 725 301	22
0 518 725 302	22
0 518 725 303	22
0 518 725 304	24
0 518 725 305	24
0 518 725 306	24
0 518 725 307	25
0 518 725 308	25
0 518 725 309	25
0 518 725 310	21
0 518 725 311	21
0 518 725 312	21

## AZ configurator

With our practical product selector, it will take you next to no time to find the right solution for your applications, no matter whether it is SILENCE PLUS or another external gear unit.


The selector guides you through a selection of features to all of the products available for order. By clicking on the order number, you can view and download the following product information: Data sheet, dimension sheet, operating conditions, and tightening torques.

You can order your selection directly via our online shop and at the same time benefit from an additional discount of 2%. And if you need something really quickly, simply use our fast delivery and preferred programs (GoTo). Then the goods will be sent within 10 working days.

You also have the possibility to easily and conveniently configure your individual external gear unit with our AZ configurator. All the necessary data that you need for the project planning of external gear units is requested by means of the menu navigation.

For an already existing configuration you receive as a result the order number, the type code, as well as further information. If your configuration does not lead to a product that is available for order, our online tools provide you with the possibility of sending a project request directly to Bosch Rexroth. We will then get in contact with you.

Link: [www.boschrexroth.com/az-configurator](http://www.boschrexroth.com/az-configurator)

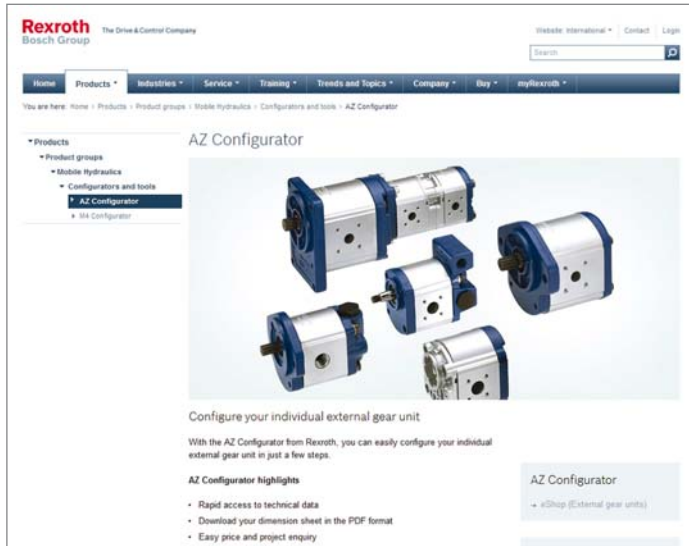

## Fit4SILENCE app

You want to quickly determine the noise level of an application but don't have a measuring device at hand? No problem with Fit4SILENCE! Our new noise measurement app for all Android devices can be immediately downloaded free of charge. After calibration, you can start using it straight away and conduct fast, accurate noise measurements with different weightings in no time at all. An additional measuring device is no longer necessary, because calibrated smartphones using the app can achieve an accuracy that approximates professional measuring devices.

Last but not least, the app contains interesting information about the SILENCE PLUS technology, including an audio sample.

Link: [www.boschrexroth.com/silence-plus](http://www.boschrexroth.com/silence-plus)

### ▼ Download the Android app:



**Bosch Rexroth AG**  
Mobile applications  
Robert-Bosch-Straße 2  
71701 Schwieberdingen, Germany  
Tel. +49 711 811-10063  
[brm-az.info@boschrexroth.de](mailto:brm-az.info@boschrexroth.de)  
[www.boschrexroth.com](http://www.boschrexroth.com)

© Bosch Rexroth AG 2016. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.



# Electrohydraulic pumps

<b>Designation</b>	<b>Type</b>	<b>Size</b>		<b>Data sheet</b>	<b>Page</b>
Electrohydraulic pumps	EHP	1...22		10104	1601



# Electrohydraulic pumps

**RE 10 104/12.12**  
Replaces:  
RE 10 104/03.10

1/70

## EHP

Nominal voltage (DC): 12...110 V  
Size of pump: 1.0...22.5 cm<sup>3</sup>/rev



## Table of contents

---

Content	Page
Ordering code	2
Program overview	4
Technical data	5
Project planning notes	6
Commissioning	7
Unit dimensions	8...62
Characteristics	9...63
Accessories, spare parts	64...65
Project specifications	66...69

## Features

---

The staged modular principle means that electric motor and pump can be combined according to the required performance, guaranteeing:


- high efficiency
- low noise
- high operating pressure
- compact dimensions
- long service life
- consistent quality

### Application areas

As drive groups in vehicles, they are employed primarily for the lifting and steering functions.

# Ordering code


## Electro-hydraulic single pump

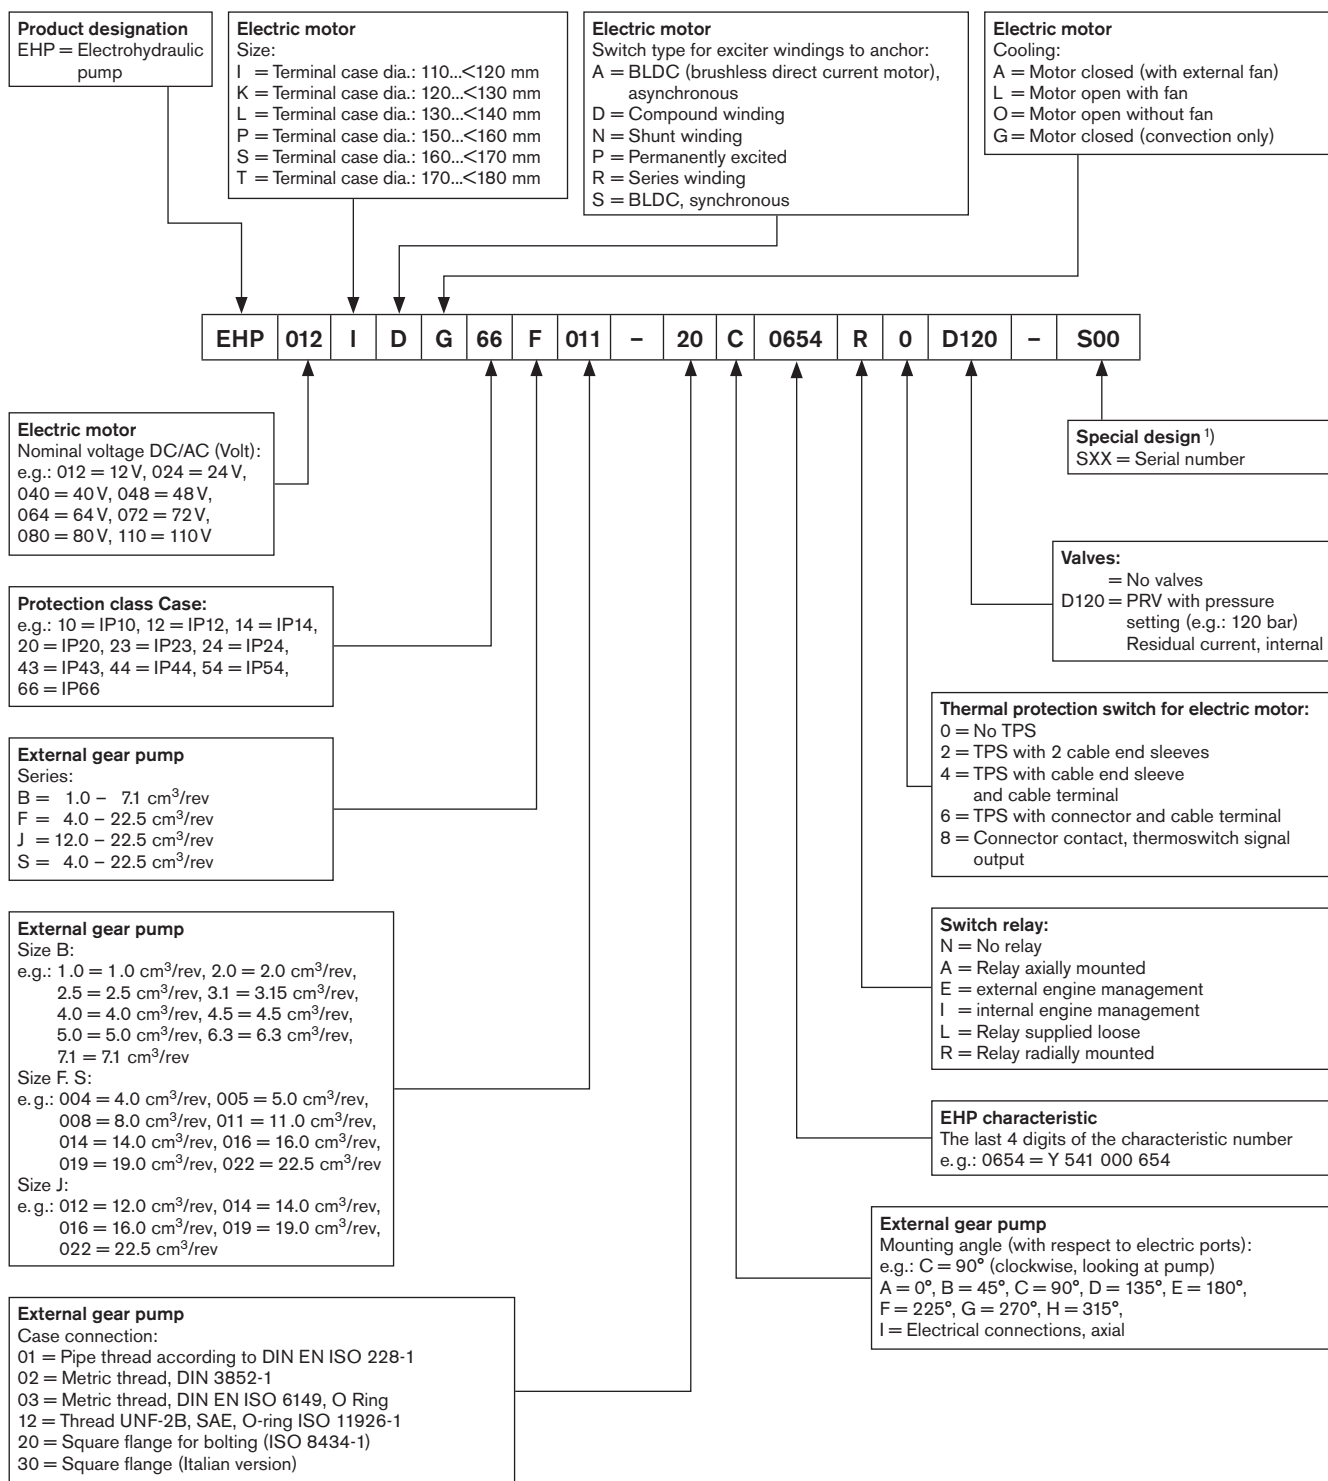

<sup>1)</sup> In case of deviation from the standard version (for front/end cover and line connections), additional identification shall be provided in the form of a special number.

# Ordering code

## Electrohydraulic multiple pump

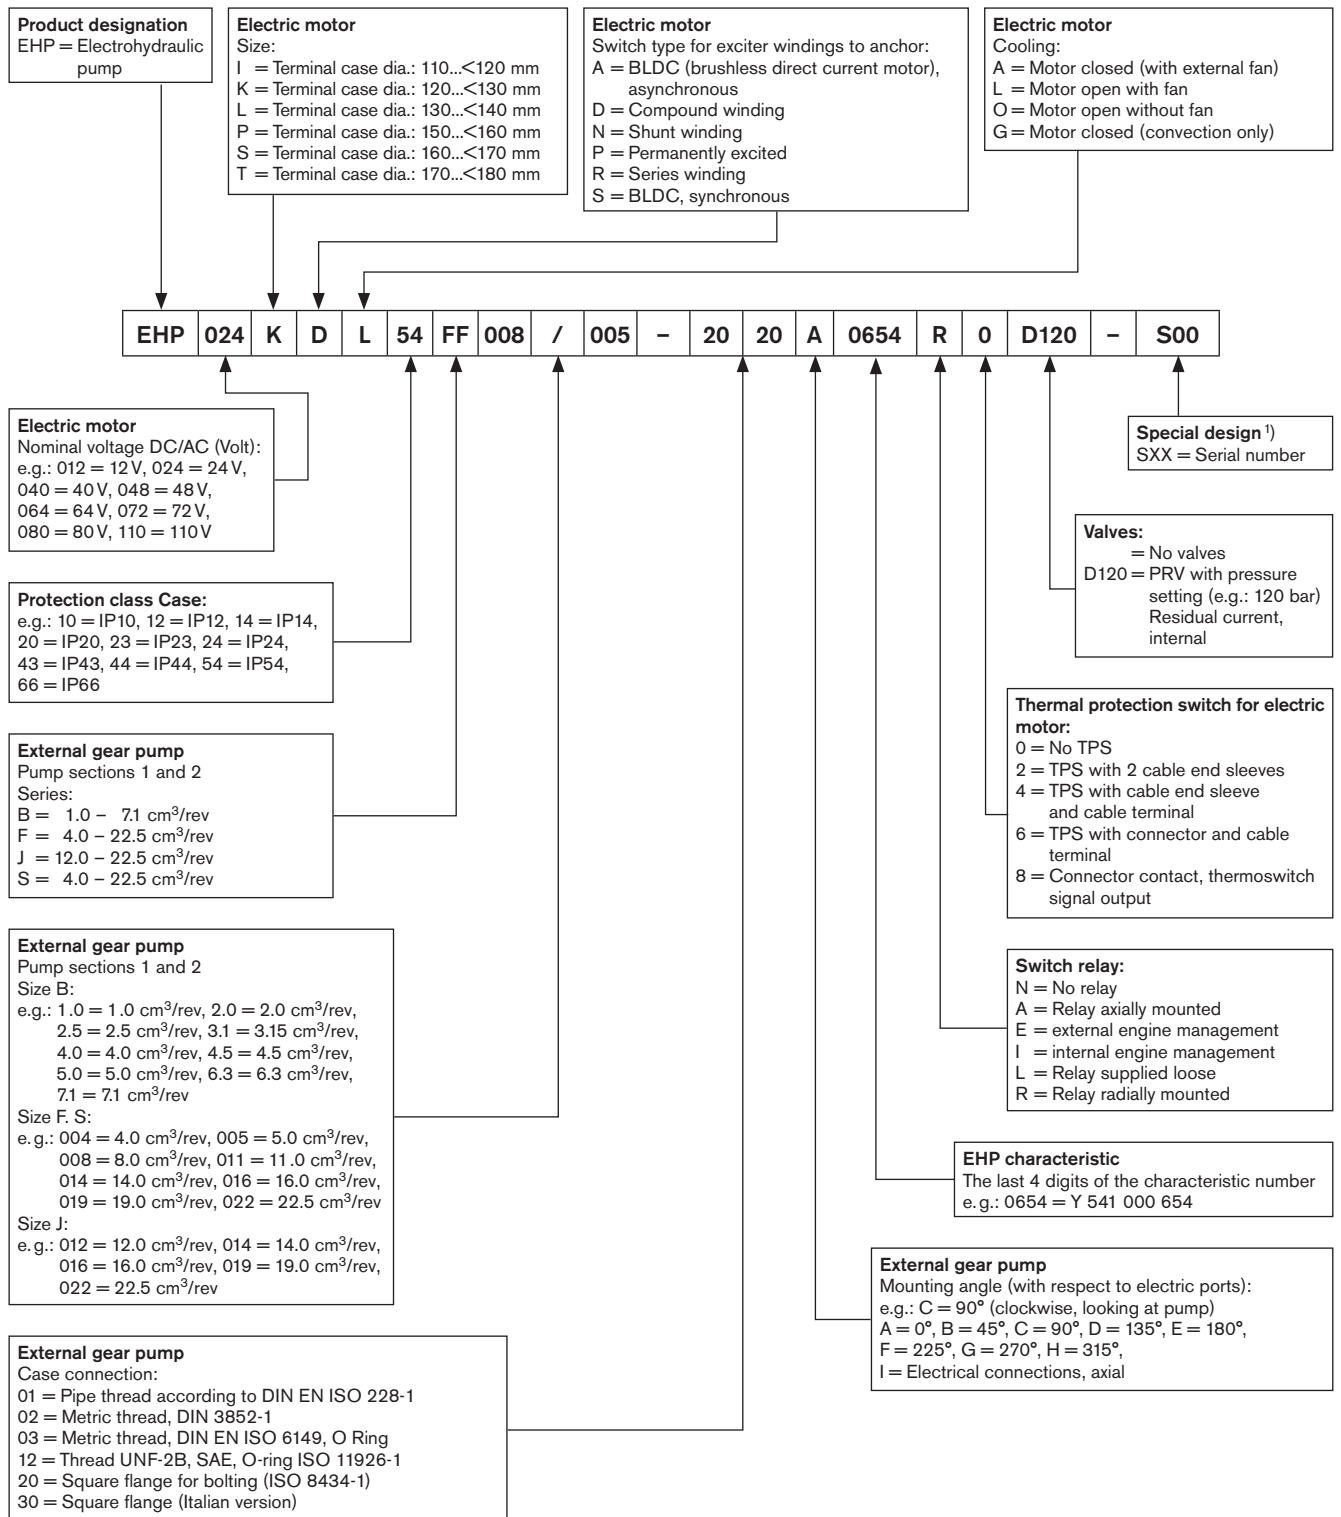

<sup>1)</sup> In case of deviation from the standard version (for front/end cover and line connections), additional identification shall be provided in the form of a special number.

## Program overview

Part number	Page	Characteristic	Quotation drawing	Ordering code
<b>0 541 200 082</b>	8	Y 541 001 049	A 541 020 330	EHP12IDG54F004-20E1049A0D040
<b>0 541 000 026</b>	10	Y 541 001 414	A 541 110 111	EHP12IDG66B1.0-02A0414N0
<b>0 541 100 075</b>	10	Y 541 000 416	A 541 110 111	EHP12IDG66B3.0-02A0416N0
<b>0 541 000 024</b>	14	Y 541 001 015	A 541 110 190	EHP24IDG54B1.0-02A1015L4
<b>0 541 100 070</b>	14	Y 541 001 016	A 541 110 190	EHP24IDG54B2.0-02A1016L4
<b>0 541 100 067</b>	12	Y 541 001 018	A 541 110 190	EHP24IDG54B3.0-02A1018N0
<b>0 541 100 071</b>	14	Y 541 001 018	A 541 110 190	EHP24IDG54B3.0-02A1018L4
<b>0 541 100 072</b>	13	Y 541 001 018	A 541 110 190	EHP24IDG54B3.0-02A1018R0
<b>0 541 100 074</b>	14	Y 541 001 018	A 541 110 190	EHP24IDG54B3.0-02A1018N2
<b>0 541 200 063</b>	16	Y 541 000 388	A 541 020 083	EHP24IDG43F004-20A0388N0
<b>0 541 300 057</b>	18	Y 541 000 402	A 541 020 085	EHP24IDG54F005-20A0402N6
<b>0 541 300 081</b>	20	Y 541 001 042	A 541 020 305	EHP24IDG54F005-20A1042A6
<b>0 541 400 065</b>	20	Y 541 001 043	A 541 020 305	EHP24IDG54F008-20A1043N0
<b>0 541 100 046</b>	22	Y 541 000 406	A 541 110 101	EHP24IDG43B2.0-02A0406N0
<b>0 541 100 052</b>	24	Y 541 000 902	A 541 110 130	EHP24IDL12B3.0-20C0902N0
<b>0 541 100 053</b>		Y 541 000 903	A 541 110 130	EHP24IDL12B3.8-20C0903N0
<b>0 541 200 068</b>	26	Y 541 000 904	A 541 110 154	EHP24IDL12B4.6-20A0904N0
<b>0 541 100 058</b>	28	Y 541 000 902	A 541 110 162	EHP24IDL12B3.0-02A0902N0
<b>0 541 500 071</b>	30	Y 541 000 656	A 541 023 062	EHP24KDG66F011-12A0656N0D060
<b>0 541 500 078</b>	32	Y 541 000 656	A 541 023 066	EHP24KDG66F011-20A0656L0D050
<b>0 541 300 058</b>	34	Y 541 001 096	A 541 026 001	EHP24KDL20FB005/1.0-2002A0096N0
<b>0 541 100 055</b>	36	Y 541 000 611	A 541 114 010	EHP24KDG43B3.0-02A0611N0
<b>0 541 200 067</b>	38	Y 541 000 613	A 541 114 014	EHP24KDG43B4.6-20C0613N0
<b>0 541 100 054</b>	40	Y 541 000 612	A 541 114 016	EHP24KDG43B3.8-20C0612N0
<b>0 541 200 083</b>	42	Y 541 001 325	A 541 021 351	EHP24PRL20F004-20E1325N0
<b>0 541 300 068</b>		Y 541 001 326	A 541 021 351	EHP24PRL20F005-20E1326N0
<b>0 541 400 075</b>		Y 541 001 327	A 541 021 351	EHP24PRL20F008-20E1327N0
<b>0 541 500 082</b>		Y 541 001 328	A 541 021 351	EHP24PRL24F011-20E1328N0
<b>0 541 600 043</b>		Y 541 001 338	A 541 021 351	EHP24PRL24F016-20E1338N0
<b>0 541 400 079</b>		Y 541 001 327	A 541 021 367	EHP24PRL20F008-20C1327N0
<b>0 541 400 083</b>	48	Y 541 001 327	A 541 021 383	EHP24PRL20F008-01E1327N0
<b>0 541 400 077</b>	48	Y 541 001 335	A 541 021 358	EHP24PRL20S008-20E1335N0
<b>0 541 500 083</b>	48	Y 541 001 337	A 541 021 358	EHP24PRL20S011-20E1337N0
<b>0 541 400 082</b>	50	Y 541 001 335	A 541 021 382	EHP24PRL24S008-20G1335N0
<b>0 541 300 069</b>	52	Y 541 001 324	A 541 021 357	EHP24PRL20FB005/3.0-2002E1324N0
<b>0 541 300 074</b>	54	Y 541 001 341	A 541 021 368	EHP48PRL20F005-20E1341N0
<b>0 541 400 080</b>	54	Y 541 001 344	A 541 021 368	EHP48PRL20F008-20E1344N0
<b>0 541 300 079</b>	56	Y 541 001 341	A 541 021 379	EHP48PRL20F005-20A1341N0
<b>0 541 400 078</b>	58	Y 541 001 339	A 541 021 366	EHP48PRL20S008-20C1339N0
<b>0 541 500 074</b>	60	Y 541 001 173	A 541 022 166	EHP48SDL14S011-20A1173N0
<b>0 541 300 032</b>	62	Y 541 001 003	A 541 023 013	EHP72KDO14F005-20A1003N0

Other versions on request.

**Technical data****General**

Installation position	Vertical, hydraulic pump at bottom; horizontal as shown in dimensions drawing. Condensation opening, if fitted, at bottom
Ambient temperature range	between -25 °C and +60 °C
Mounting	Saddle mounting with wire tie

**Pump**

Design	External gear pump				
Type	AZPB...	AZPF...	AZPJ...	AZPS...	
Displacement	cm <sup>3</sup> /rev	1.0 – 7.1	4.0 – 22.5	12.0 – 22.5	4.0 – 22.5
Suction pressure	bar	min. 0.7 max. 3 (absolute)			
max. continuous pressure $p_1^{**}$		200 – 250	180 – 250	250	220 – 250
max. intermittent pressure $p_2^{**}$		230 – 280	210 – 280	280	250 – 280
max. peak pressure $p_3^{**}$		250 – 300	230 – 300	300	290 – 300
Line ports	AZPB/F/S: Thread, flange, others on request				
Fluids	<ul style="list-style-type: none"> <li>- Mineral oil compliant with DIN 51524, 1–3, however under higher load at least HLP compliant with DIN 51524 Part 2 recommended.</li> <li>- Comply with RE 90220</li> <li>- Further operating fluids possible after consultation</li> </ul>				
Viscosity	12 ... 800 mm <sup>2</sup> /s permitted range 20 ... 100 mm <sup>2</sup> /s recommended range ... 2000 mm <sup>2</sup> /s permitted for start up				
Temperature of hydraulic fluid	-25 ... +80 °C				
Filtration *)	At least cleanliness level 21/18/15 compliant with ISO 4406 (1999)				

**Electric motor**

Design	DC motor with compound or series winding					
Size (code)	I	K	L	P	S	T
Terminal case Ø mm	110 ... < 120	120 ... < 130	130 ... < 140	150 ... < 160	160 ... < 170	170 ... < 180
Voltage (volts)	12, 24, 40, 48, 72, 80 see overview of range					
Power output (kW)	1.5 ... 8.1, other outputs on request					
Protection class	see Program overview					
<b>Diagrams</b>	These are valid for operation under the following conditions: Ambient temperature +20 °C Electrolyte temperature +20 °C Motor temperature +20 °C Oil temperature +50 °C Viscosity $\nu = 32$ mm <sup>2</sup> /s S2, S3 see VDE 0530					

**Relay** (not available in every version)

Voltage	12 V	24 V
Exciter current	1.5 A	0.9 A
Contact current at S3 = 12 %	350 A	
Contact current, continuous	150 A	
Protection class	IP54 / IP6K9K / IP66 auf Anfrage	

\*\*) On hydraulic systems or devices with critical counter-reaction, such as steering valves, brake valves, the type of filtration selected must be adapted to the sensitivity of these devices/systems.

Safety requirements pertaining to the whole systems are to be observed.

Please contact us with respect to applications with high numbers of load cycles.

\*\*) Detailed information, see series B: RE10087

F: RE10089

J: RE10094

S: RE10095

# Project planning notes

## 1. Operating modes

The starting points for dimensioning electrohydraulic pump are pressure  $p$  and flow rate  $Q$ . However, the resulting power output  $P$  depends on the **operating mode**. Here, a distinction is made between:

### Continuous operation S 1


Operation with constant load, with a duration long enough for thermal equilibrium to be reached.

### Short-term operation S 2

Operation with constant load. Of short duration so that thermal equilibrium is not reached. Example: S 2–60 min.

### Intermittent operation S 3

Operation comprising a series of similar cycles (cycle duration 10 min), which include a time with constant load and a pause. Example: S 3–10%

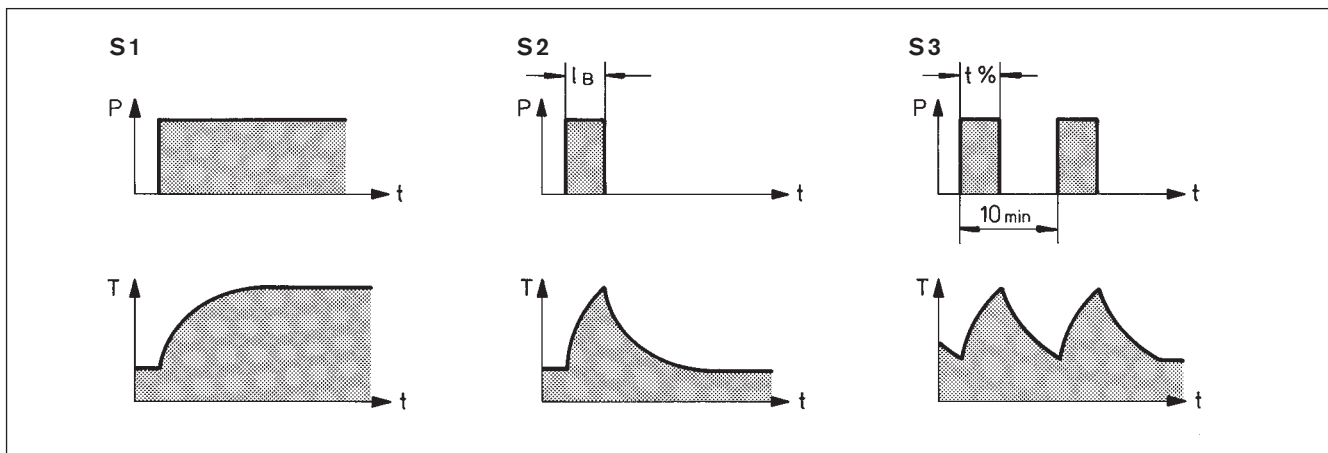

## 2. Motor characteristics

Speed and torque of a DC motor and thus the flow rate and pressure of the pump being driven are interdependent in accordance with the curves shown. The curve is determined by both the power output and the type of winding. A distinction is made between:

### Shunt winding


Benefit: Small change in speed with load fluctuation.  
Drawback: Low start-up torque, current peaks.

### Series winding

Benefit: High start-up torque  
Drawback: "Motor overspeeding" without load

### Compound winding

Compromise between shunt and series winding.

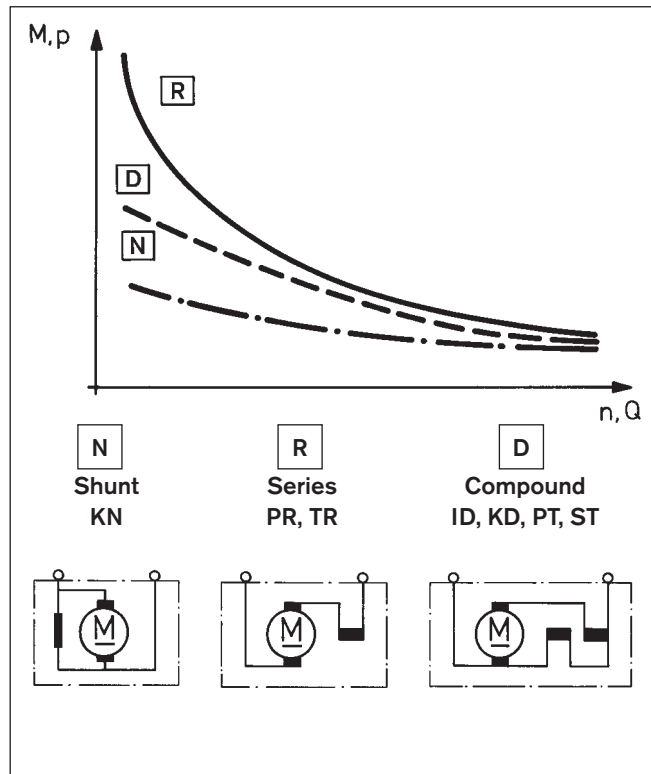




## Project planning notes (continued)



### 3. Selection

It is not the power output figure (in watts) that is decisive for the selection, but rather the actuated time under the required operating conditions, see Characteristics. This prevents the motor from being either overloaded or dimensioned too large. It is expedient to select a suitable electrohydraulic pump on the basis of the diagrams for the different combinations. These show:

a) the flow rate  $Q$  (l/min) and the electric current consumption  $I$  (A) depending on pressure  $p$ .

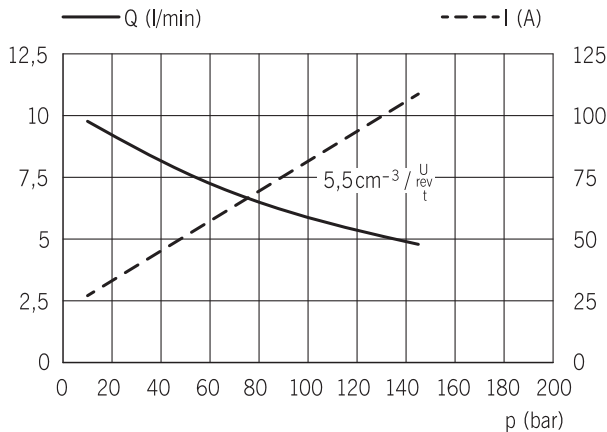

b) the permissible pressure  $p$  depending on the operating mode S3 (% ED) or S2 (min).

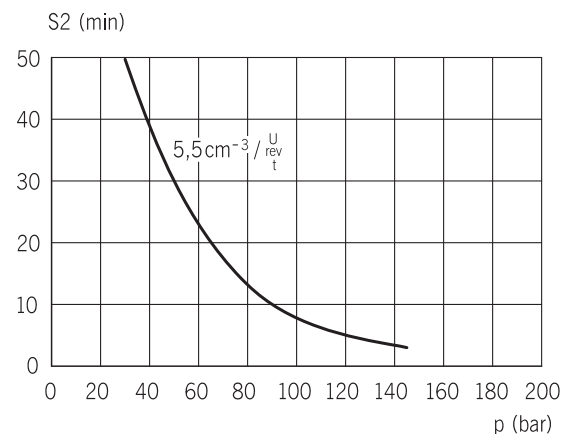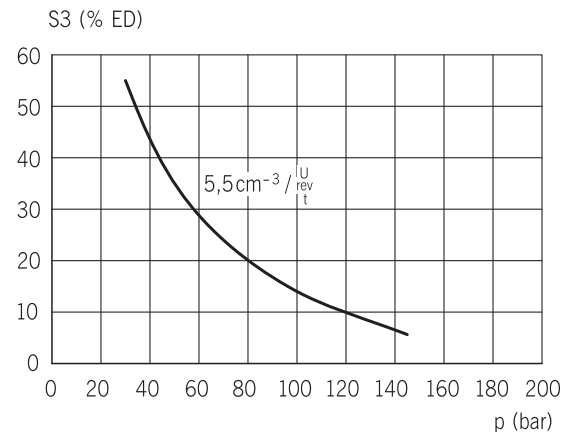

### Commissioning

#### Installation and commissioning

- Fill pump with hydraulic fluid before installation.
- Pipelines to be cleaned of dirt, cinders, sand, chips etc. before installation.  
Pipes, in particular must be pickled or rinsed.
- Before the 1st commissioning, the overall hydraulic system is to be carefully vented.
- Cover up the radial lip-type shaft seal ring and the air vents when spraying and painting.
- Observe characteristics, in particular, speeds and pressures as well as negative pressure in the suction line.

You can find further information in our publication:  
"General Operating Instructions for External Gear Units"  
RE 07 012-B1.

#### Filter recommendation


We recommend that a full-flow filter always be used.

#### Electrical installation

Dimension the line cross section in accordance with the maximum current.

Polarity without influence on the direction of rotation.




Note the protection class and environmental conditions.

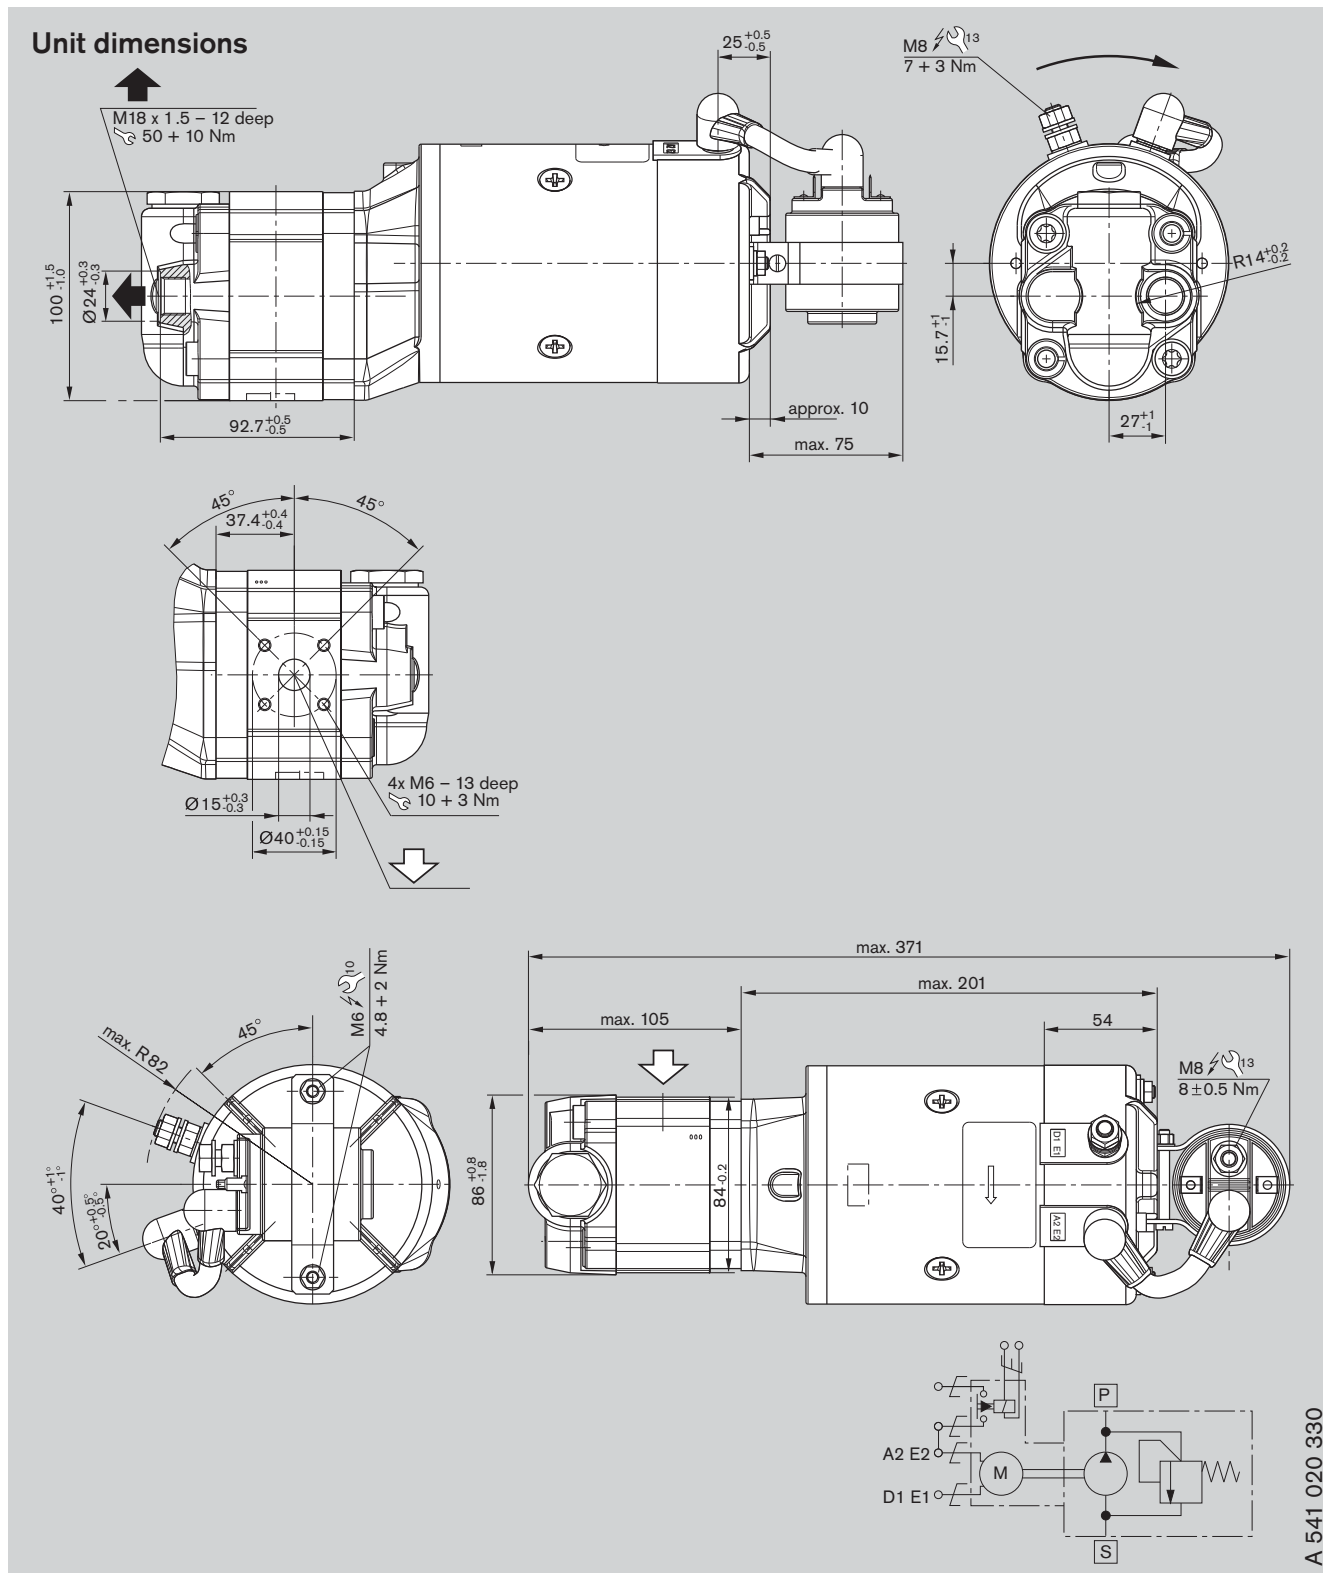


Type of protection:  
 Motor case IP 54  
 Ports IP 00

Ordering code	Displacement V [cm <sup>3</sup> /rev]	Dimension [mm]			PRV [bar]	Weight [kg]	Part number
		A	B	C			
EHP12IDG54F004-20E1049A0D040	4	-	-	-	40 <sup>+5</sup>	2.7	<b>0 541 200 082</b>

**Characteristics  
for A 541 020 330**

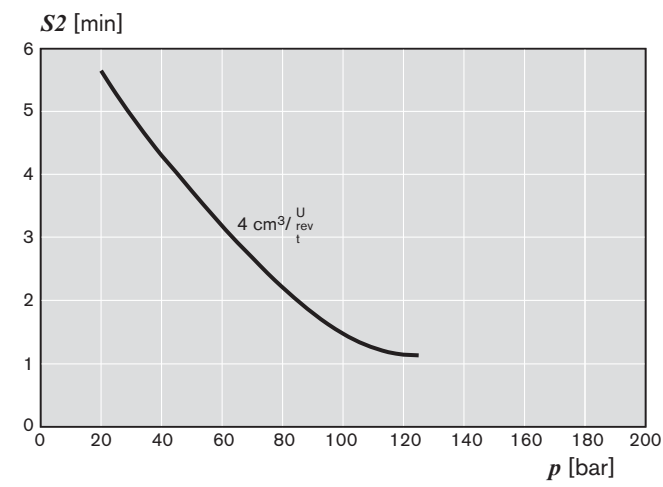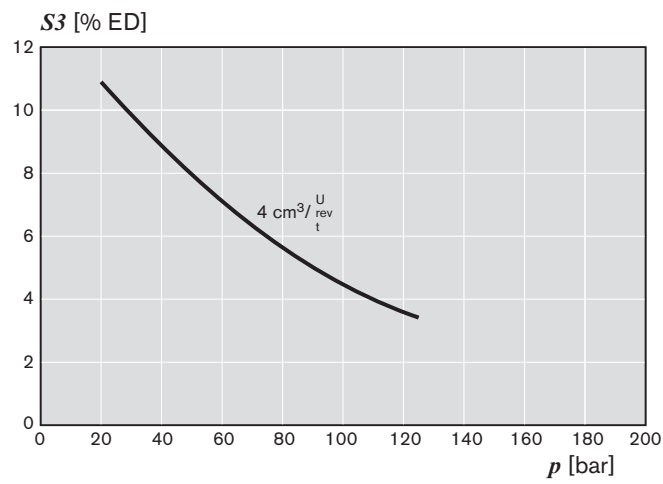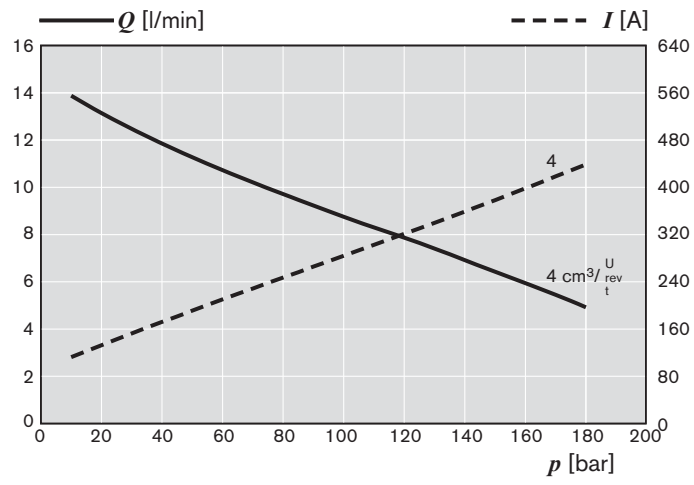

Unit dimensions

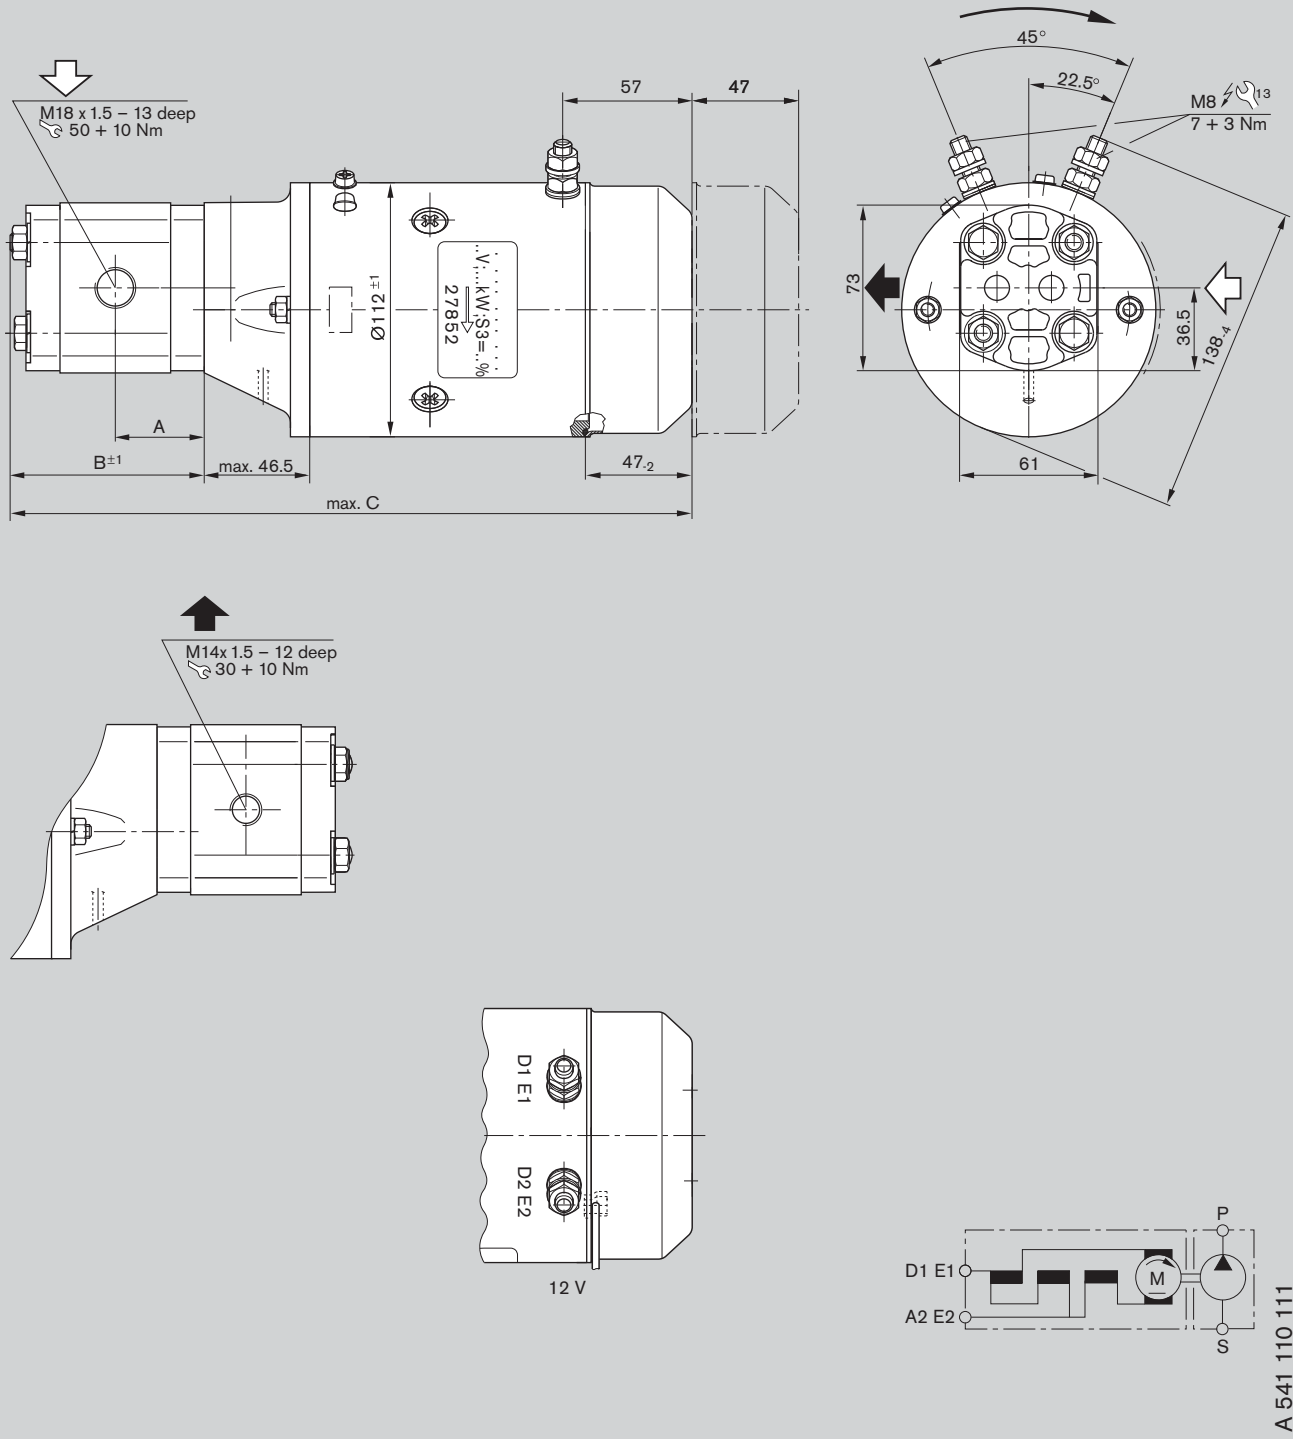

A 541 110 111




Type of protection:

Motor case IP 66


Ports IP 00

Ordering code	Displacement $V$ [cm <sup>3</sup> /rev]	Dimension [mm]			Weight [kg]	Part number
		A	B	C		
EHP12IDG66B1.0-02A0414N0	1.0	35.0	76	292	8.5	<b>0 541 000 026</b>
EHP12IDG66B3.0-02A0416N0	3.0	39.2	86	302	8.5	<b>0 541 100 075</b>

**Characteristics  
for A 541 110 111**

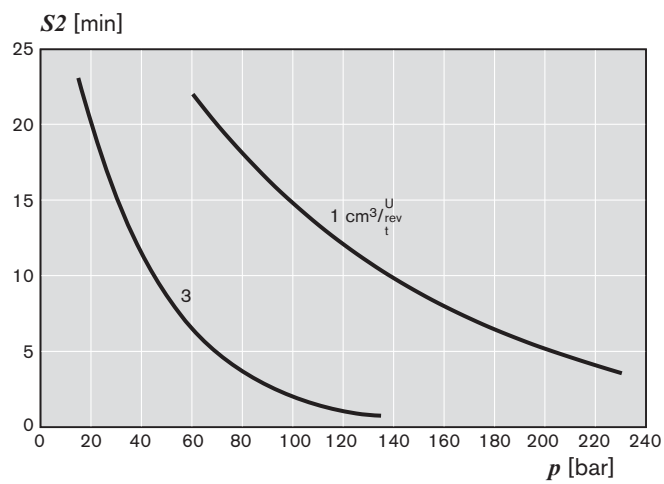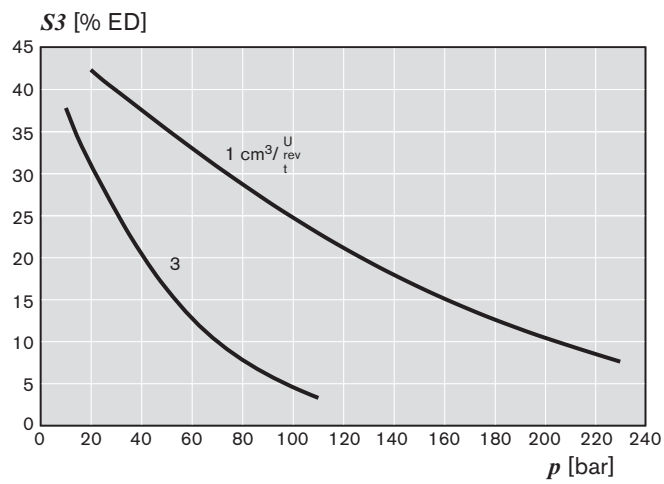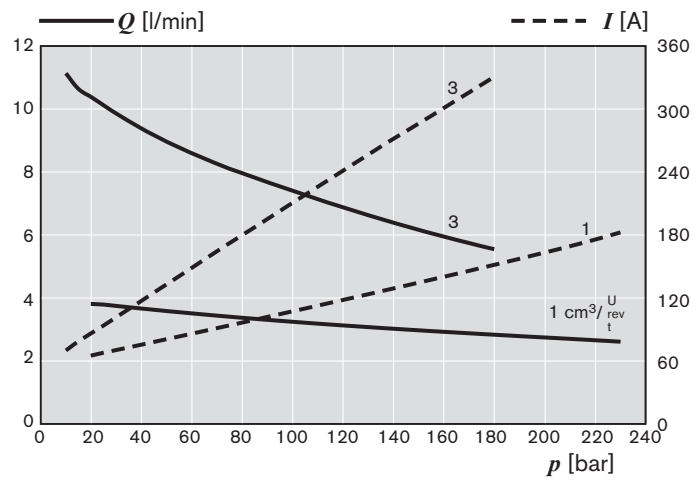

**Unit dimensions**

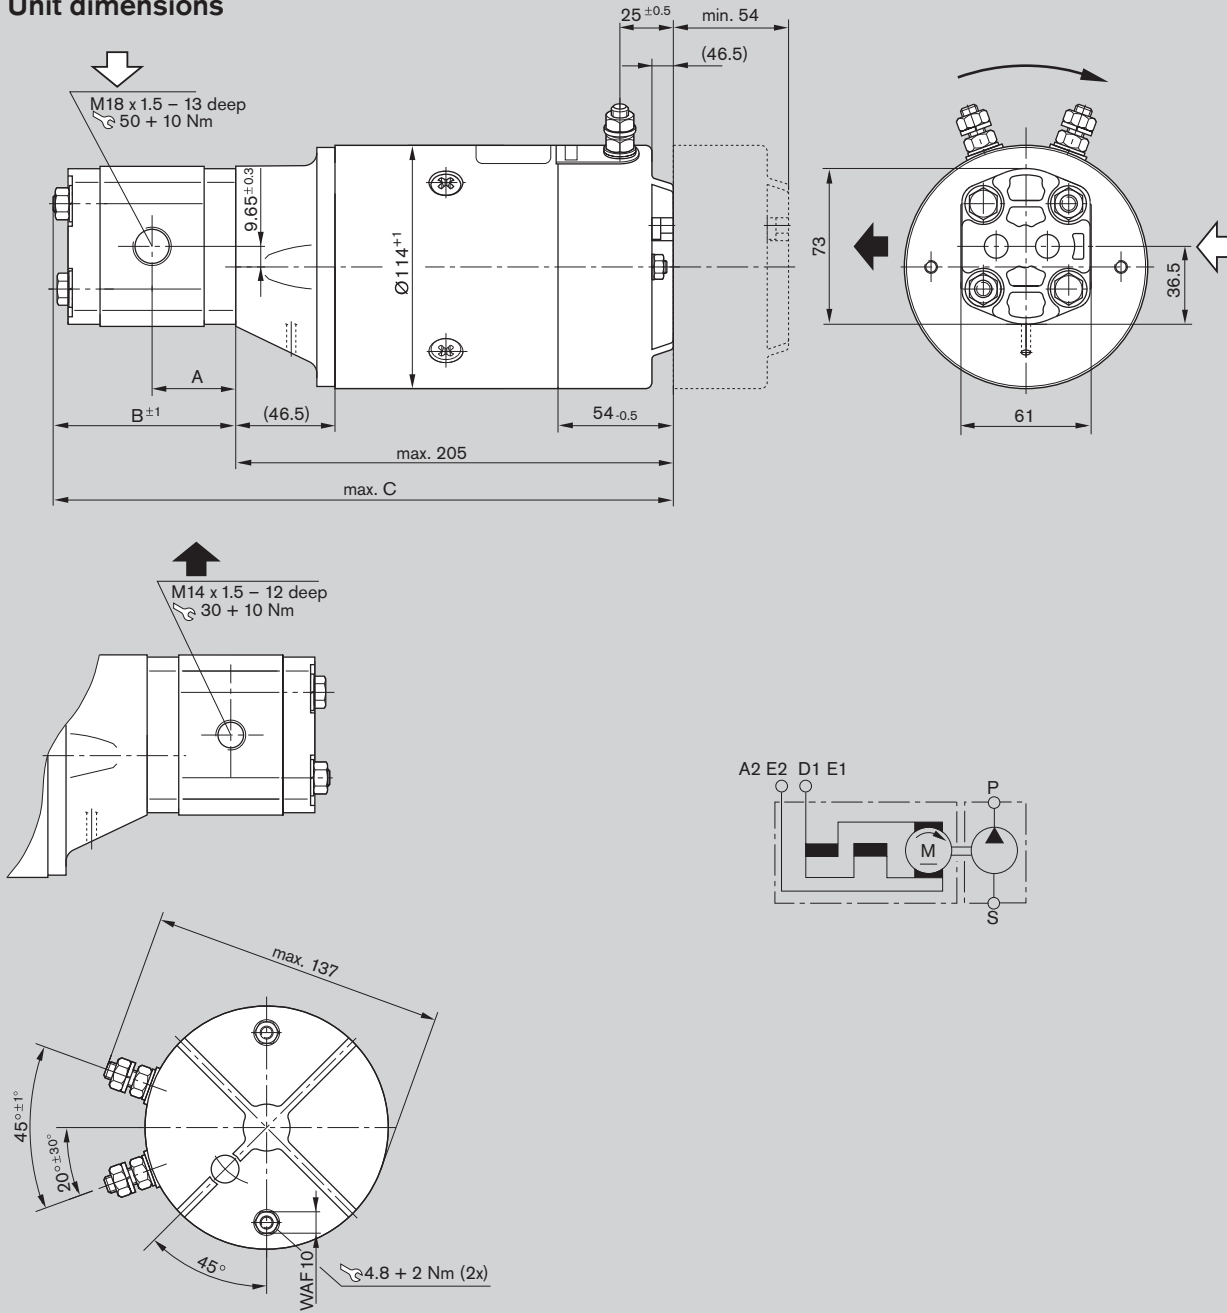

A 541 110 190\_1

Type of protection:


Motor case IP 54

Ports IP 00

Ordering code	Displacement V [cm³/rev]	Dimension [mm]			TPS *)	Relay mounted	Relay loose	Weight [kg]	Part number
		A	B	C					
EHP24IDG54B3.0-02A1018N0	3.0	39.2	86	292	–	–	8.7	<b>0 541 100 067</b>	

\*) Thermal protection switch

Unit dimensions

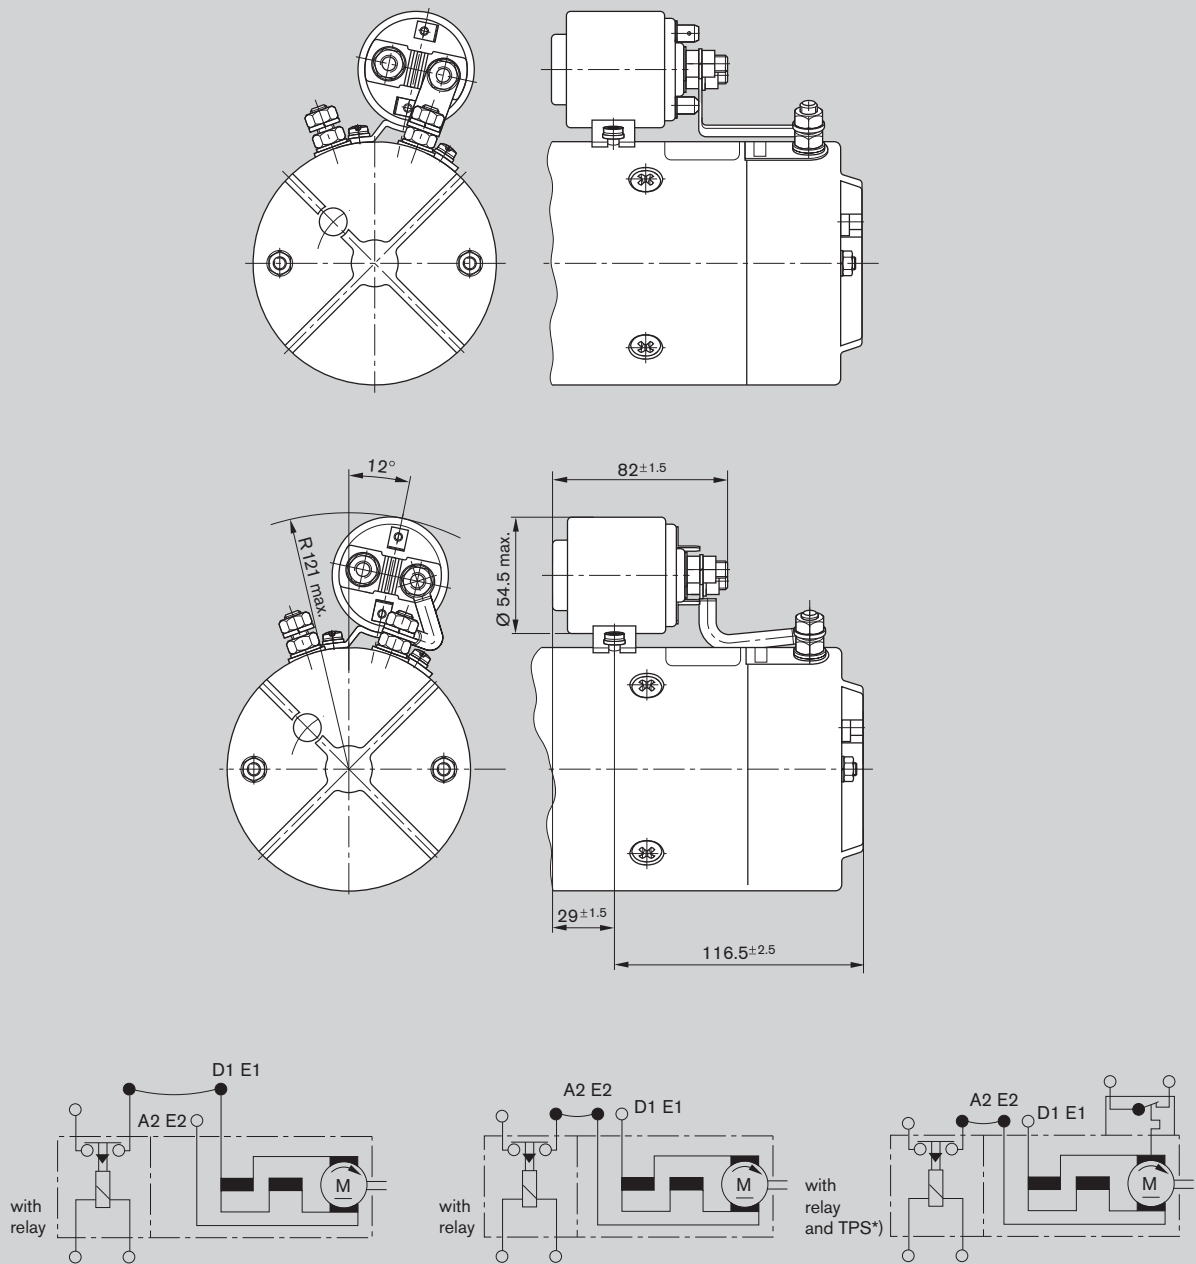

A 541 110 190\_2

Type of protection:




Motor case IP 54

Ports IP 00

Ordering code	Displacement V [cm <sup>3</sup> /rev]	Dimension [mm]			TPS *)	Relay mounted	Relay loose	Weight [kg]	Part number
		A	B	C					
EHP24IDG54B3.0-02A1018R0	3.0	39	86	292	-	x		9.4	<b>0 541 100 072</b>


\*) Thermal protection switch

Unit dimensions

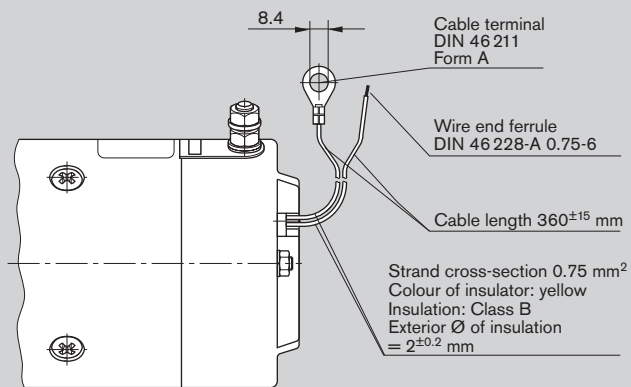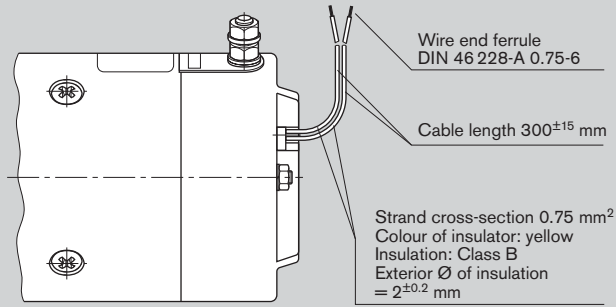

TPS contacts\*)

$I_{Nom} = 2.5 A$   
(max. 5 A / 250 V)



A 541 110 190\_3

Type of protection:

Motor case IP 54




Ports IP 00

Ordering code	Displacement $V [cm^3/rev]$	Dimension [mm]			TPS*)	Relay mounted	Relay loose	Weight [kg]	Part number
		A	B	C					
EHP24IDG54B1.0-02A1015L4	1.0	35.0	76.0	282	x	-	1 547 211 007	8.4	<b>0 541 000 024</b>
EHP24IDG54B2.0-02A1016L4	2.0	37.1	81.0	287	x	-	1 547 211 007	8.5	<b>0 541 100 070</b>
EHP24IDG54B3.0-02A1018L4	3.0	39.0	86.0	292	x	-	1 547 211 007	8.7	<b>0 541 100 071</b>
EHP24IDG54B3.0-02A1018N2	3.0	39.2	86.0	292	x	-		8.7	<b>0 541 100 074</b>


\*) Thermal protection switch



**Characteristics  
for A 541 110 190**

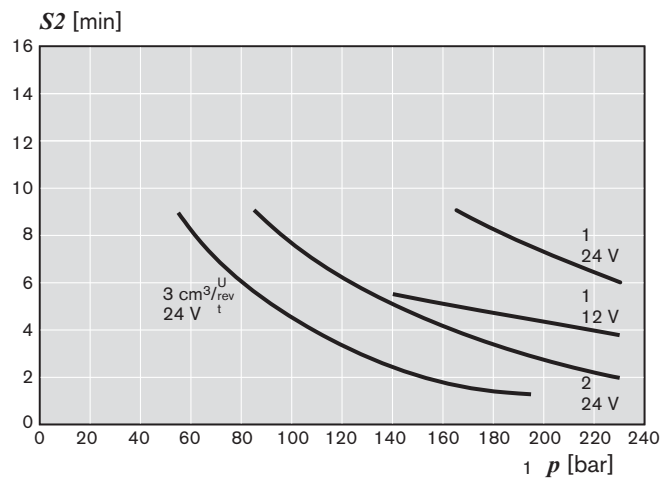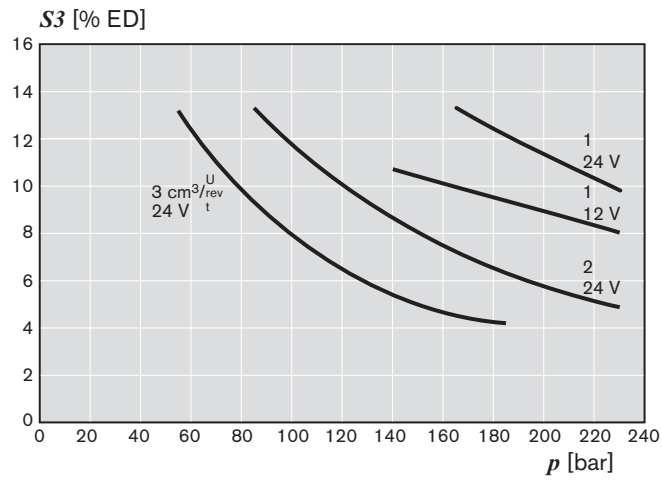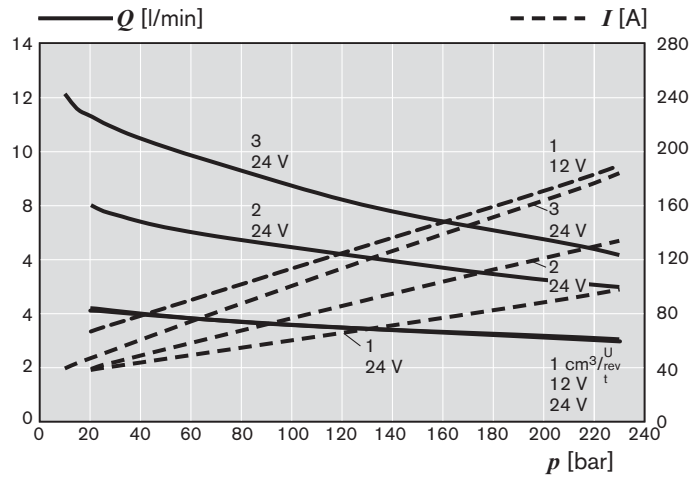

Unit dimensions

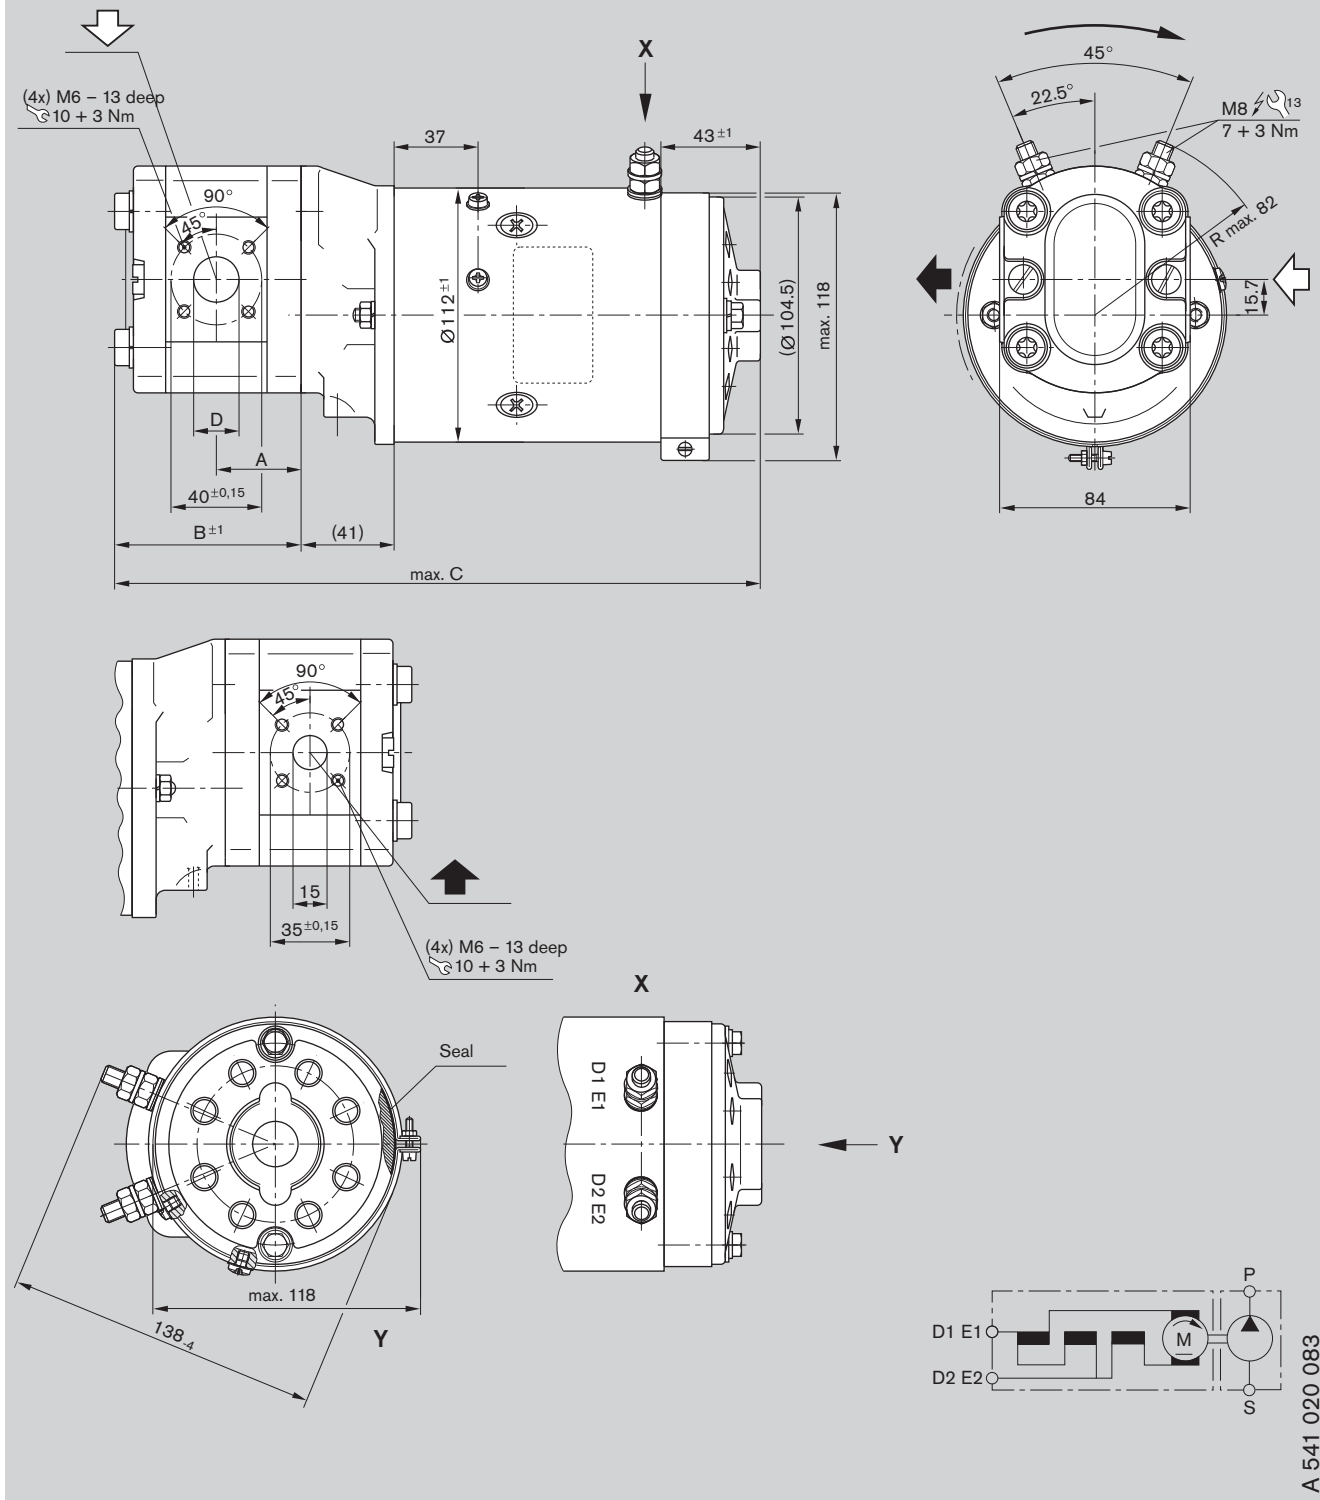

A 541 020 083




Type of protection:

Motor case IP 43


Ports IP 00

Ordering code	Displacement V [cm <sup>3</sup> /rev]	Dimension [mm]				Weight [kg]	Part number
		A	B	C	D		
EHP24IDG43F004-20A0388N0	4.0	37.3	82.5	293.5	15.0	10.0	<b>0 541 200 063</b>

**Characteristics  
for A 541 020 083**

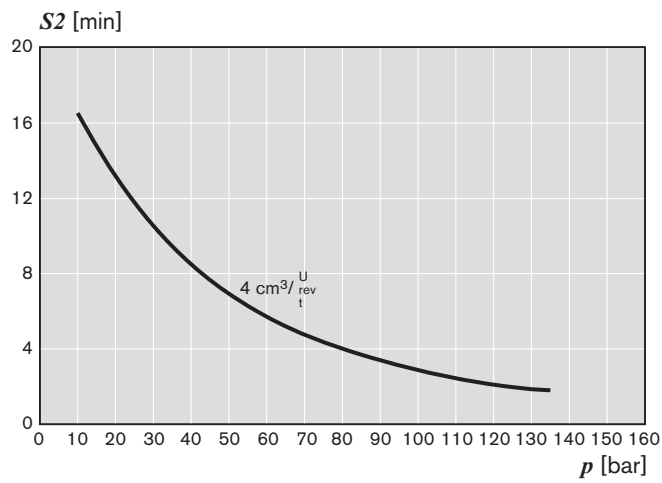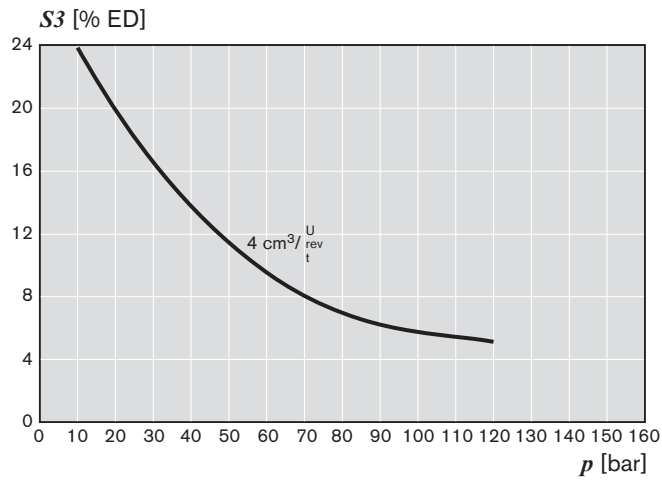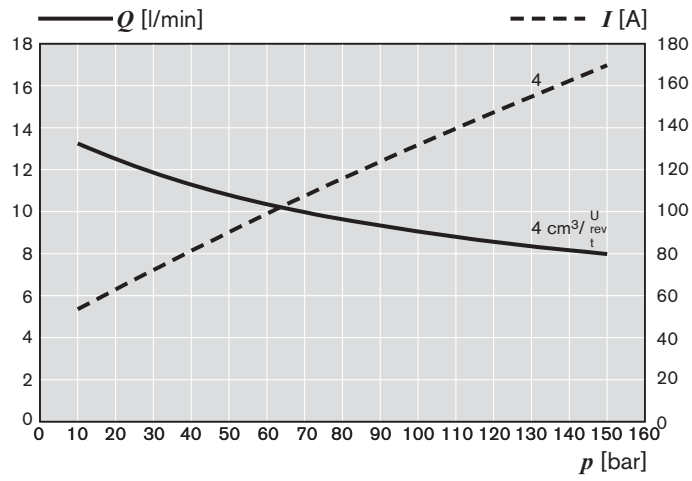

Unit dimensions

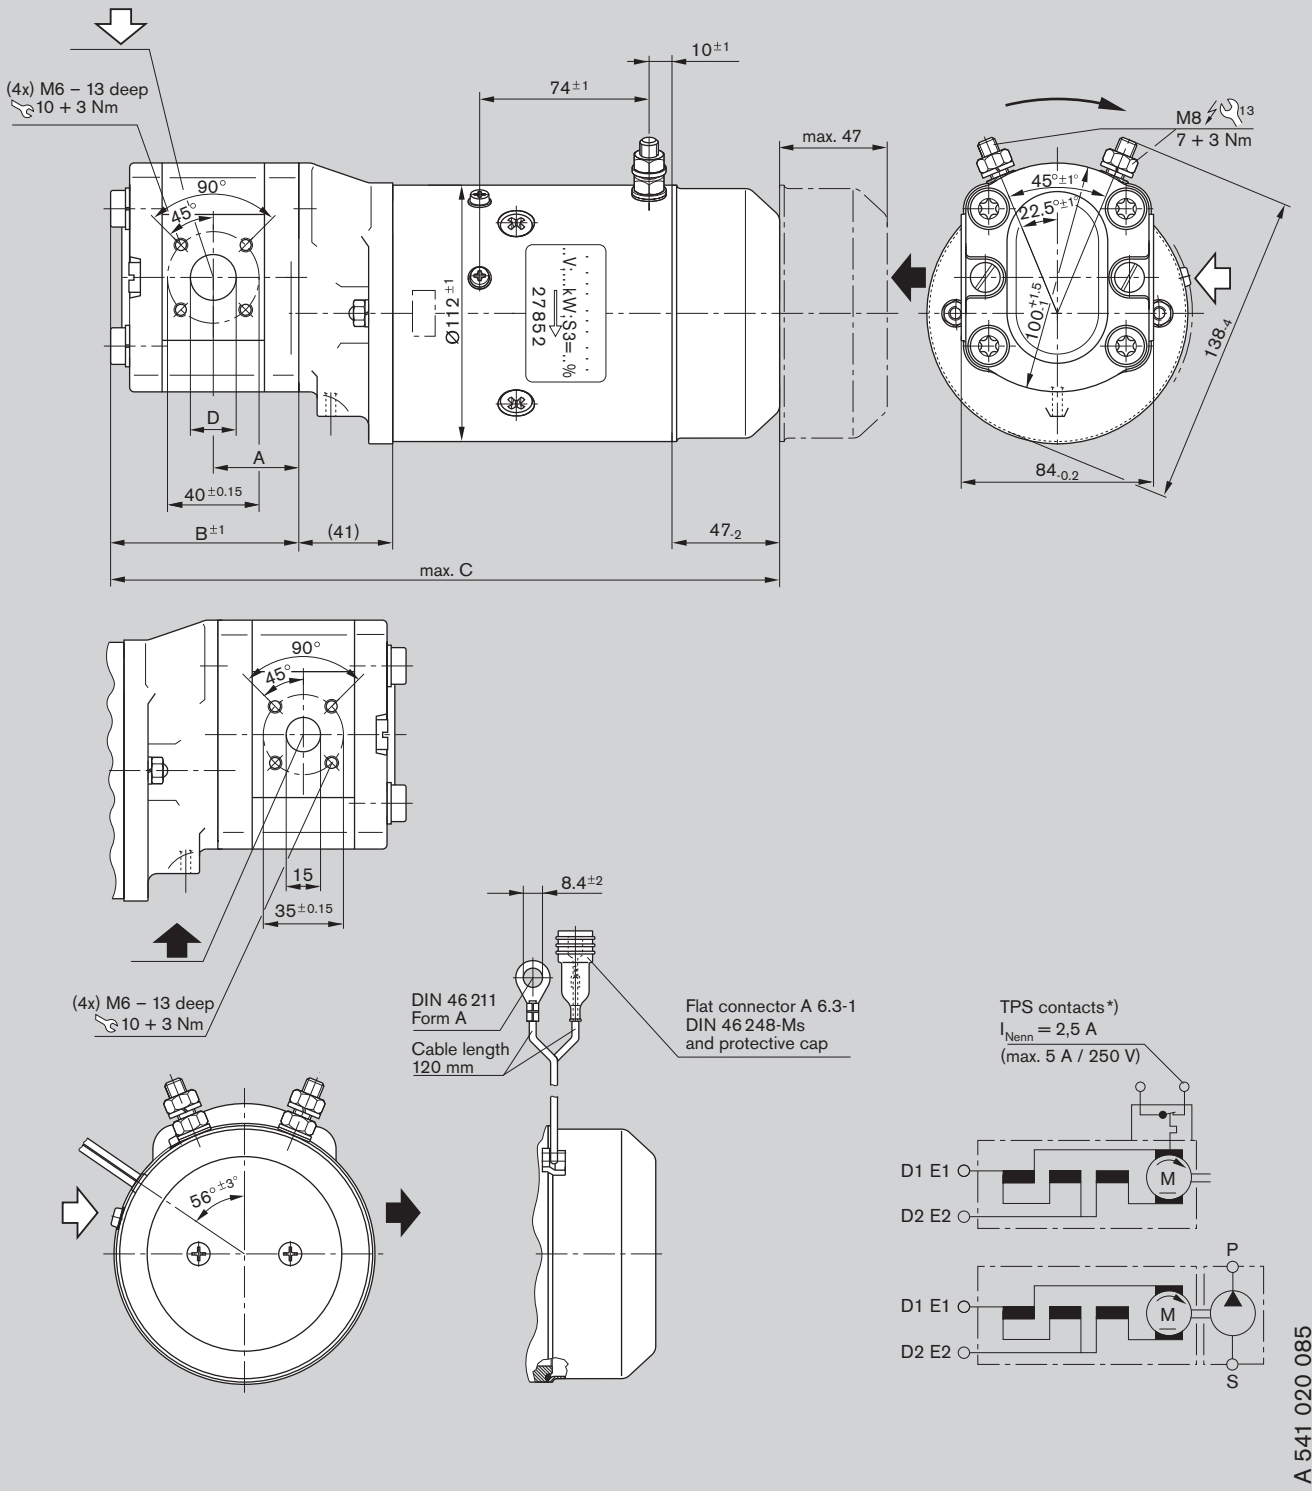

A 541 020 085

Type of protection:




Motor case IP 54

Ports IP 00


Ordering code	Displacement $V$ [cm <sup>3</sup> /rev]	Dimension [mm]				TPS *)	Weight [kg]	Part number
		A	B	C	D			
EHP24IDG54F005-20A0402N6	5.5	38.6	85.0	296.0	15.0	×	10.1	<b>0 541 300 057</b>

\*) Thermal protection switch

**Characteristics  
for A 541 020 085**

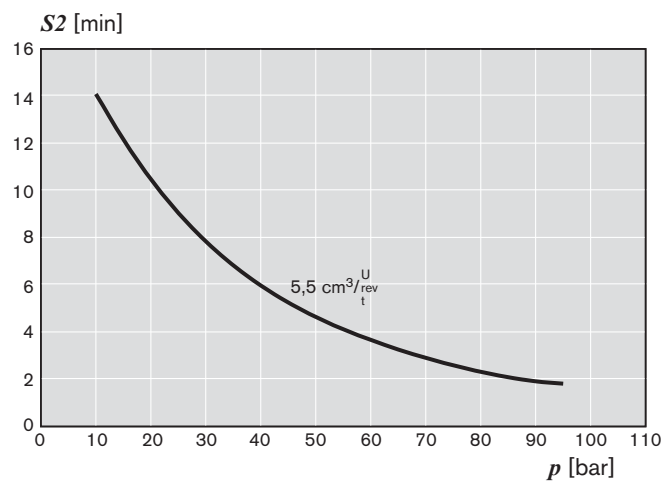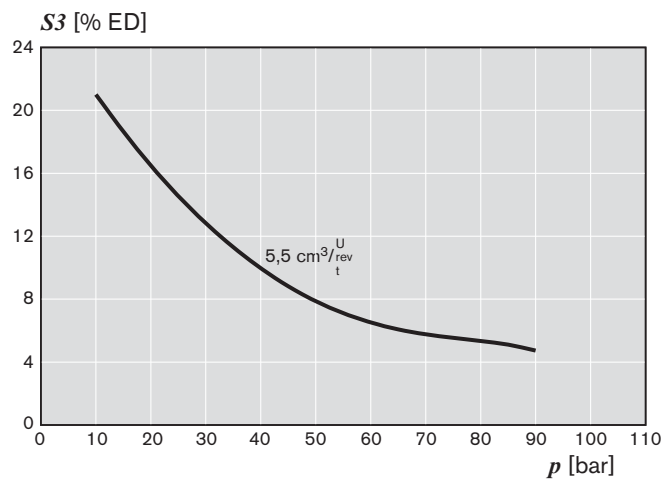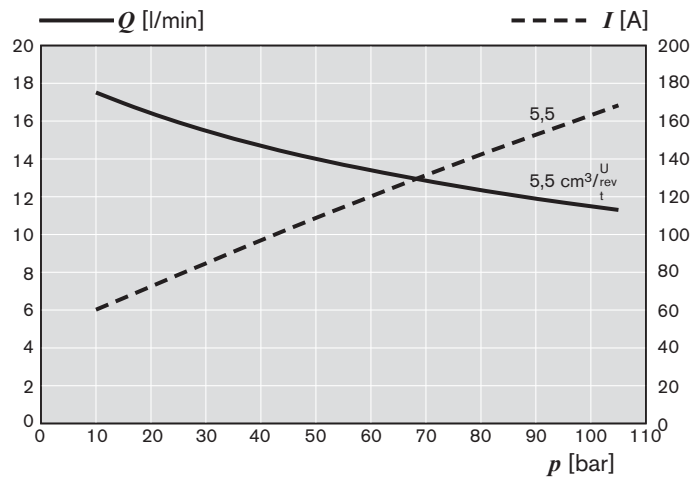

Unit dimensions

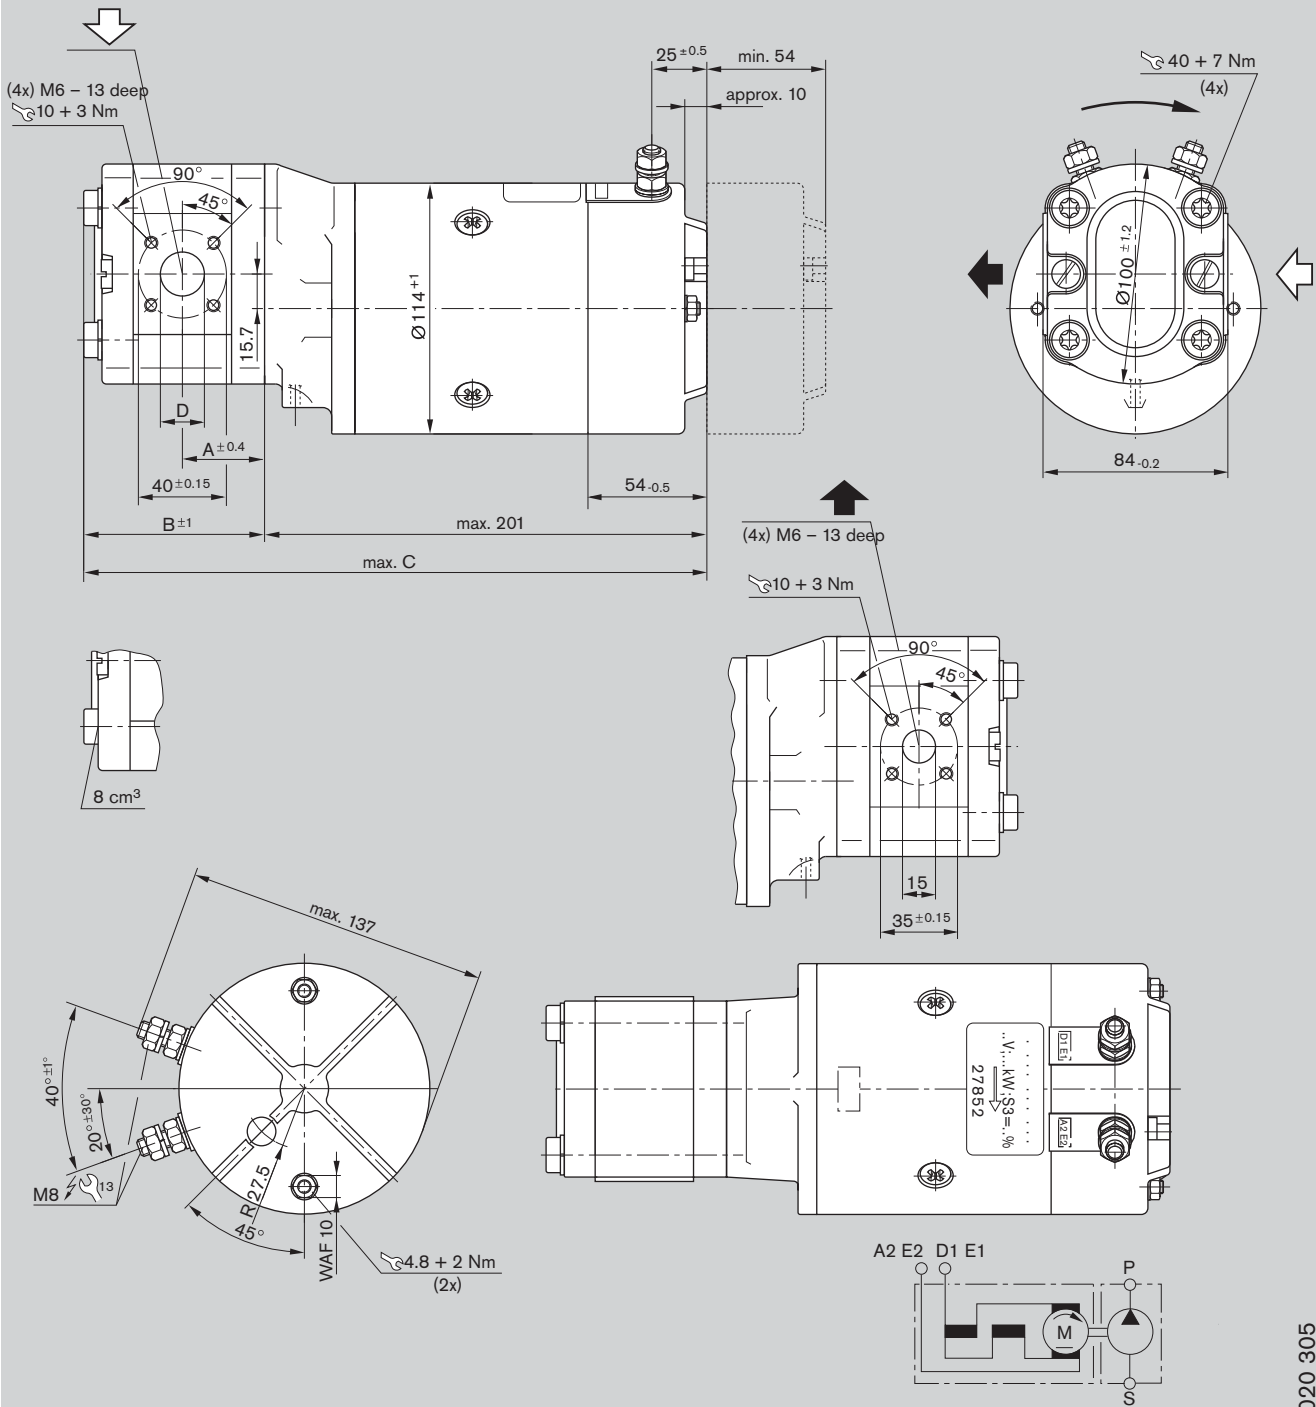

A 541 020 305




Type of protection:

Motor case IP 54


Ports IP 00

Ordering code	Displacement $V$ [cm <sup>3</sup> /rev]	Dimension [mm]				Weight [kg]	Part number
		A	B	C	D		
EHP24IDG54F005-20A1042A6	5.5	38.6	84.5	286.5	15.0	10.9	<b>0 541 300 081</b>
EHP24IDG54F008-20A1043N0	8.0	40.7	88.6	290.6	20.0	10.4	<b>0 541 400 065</b>

**Characteristics  
for A 541 020 305**

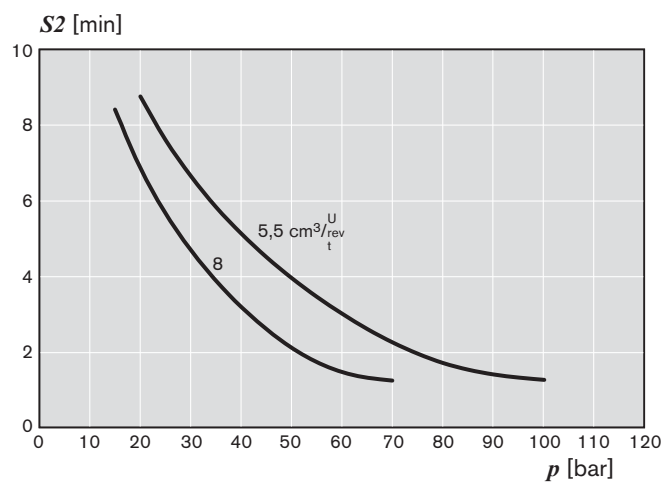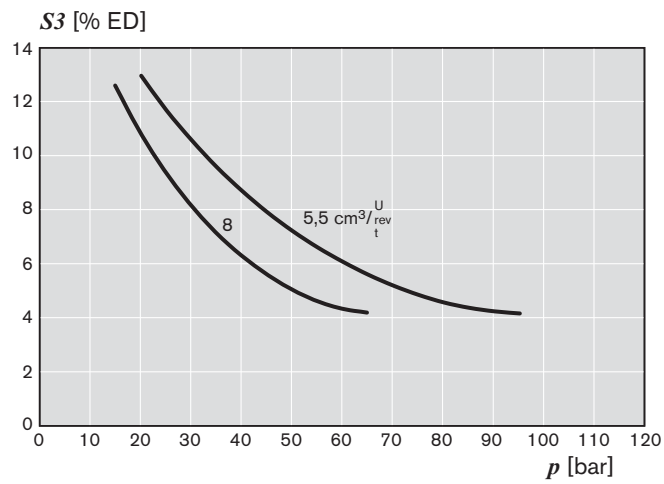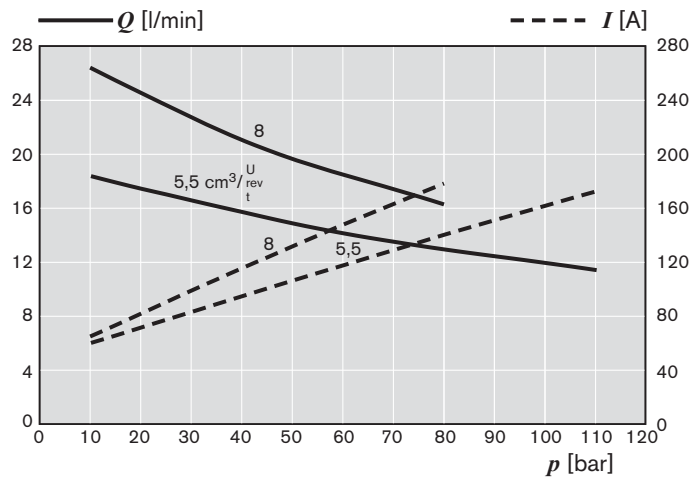

Unit dimensions

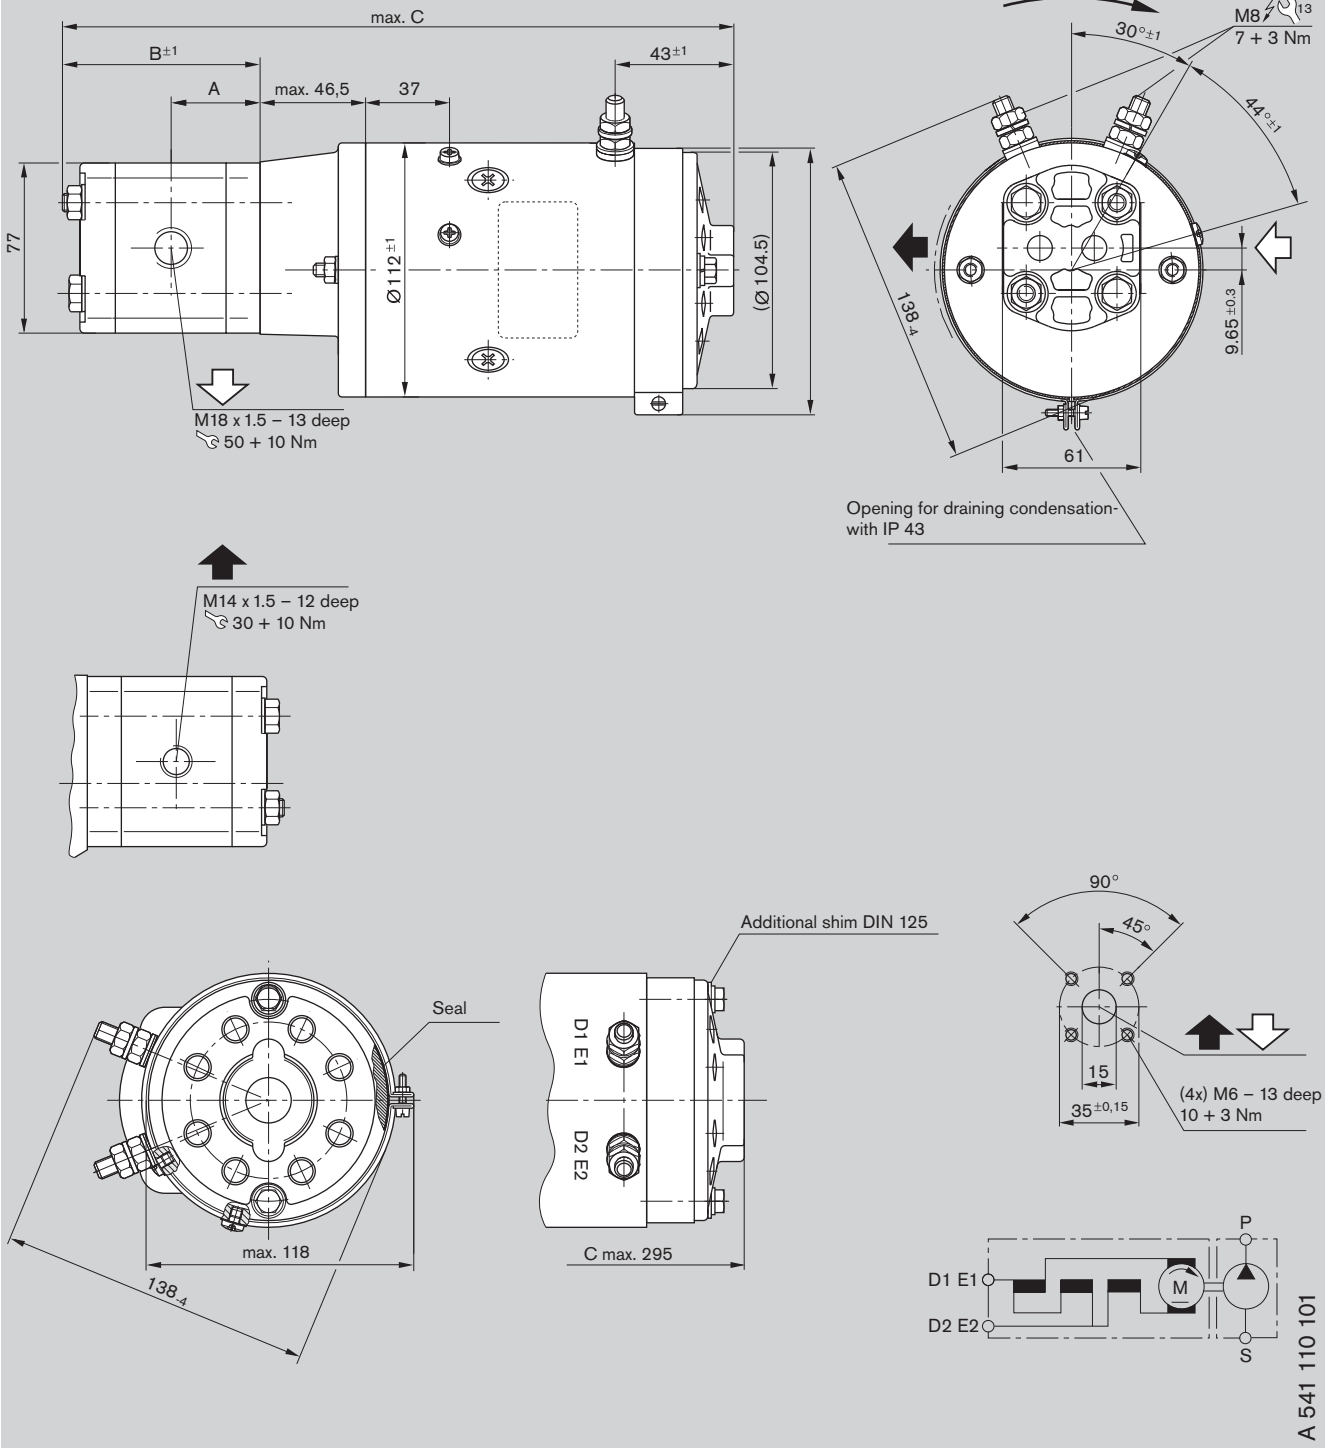

A 541 110 101

Type of protection:




Motor case IP 43

Ports IP 00


Ordering code	Displacement $V$ [cm <sup>3</sup> /rev]	Dimension [mm]			Weight [kg]	Part number
		A	B	C		
EHP24IDG43B2.0-02A0406N0	2.0	37.0	81.0	297.0	9.25	<b>0 541 100 046</b>



**Characteristics  
for A 541 110 101**

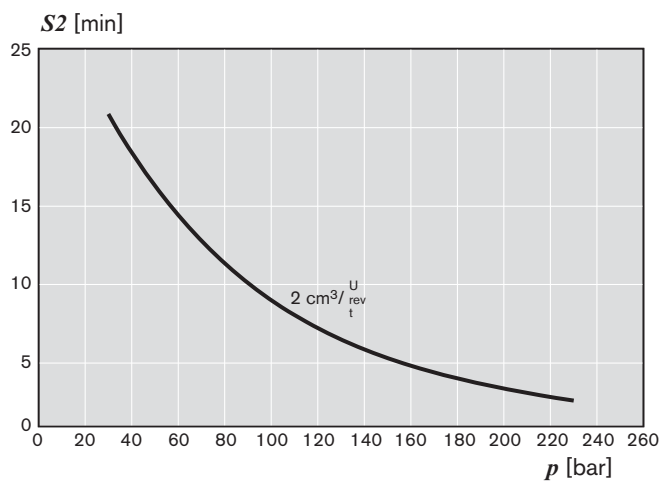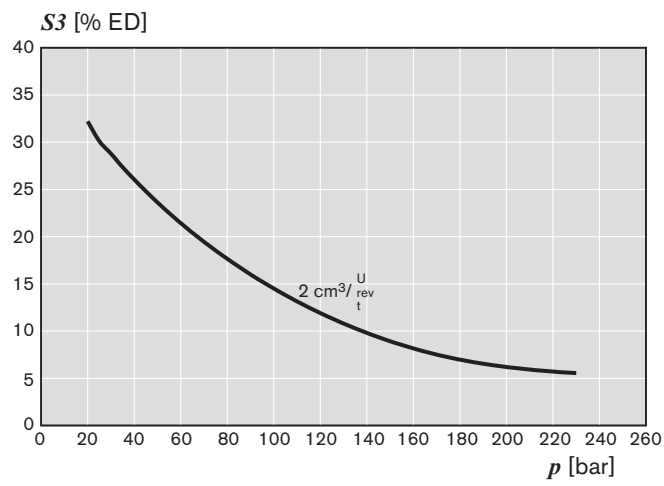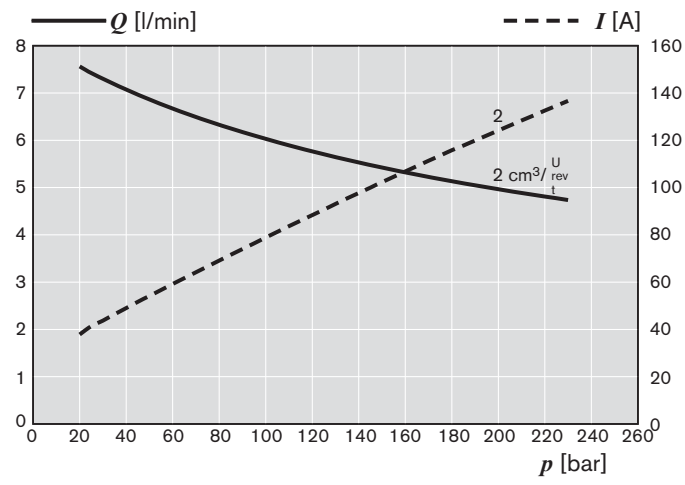

Unit dimensions

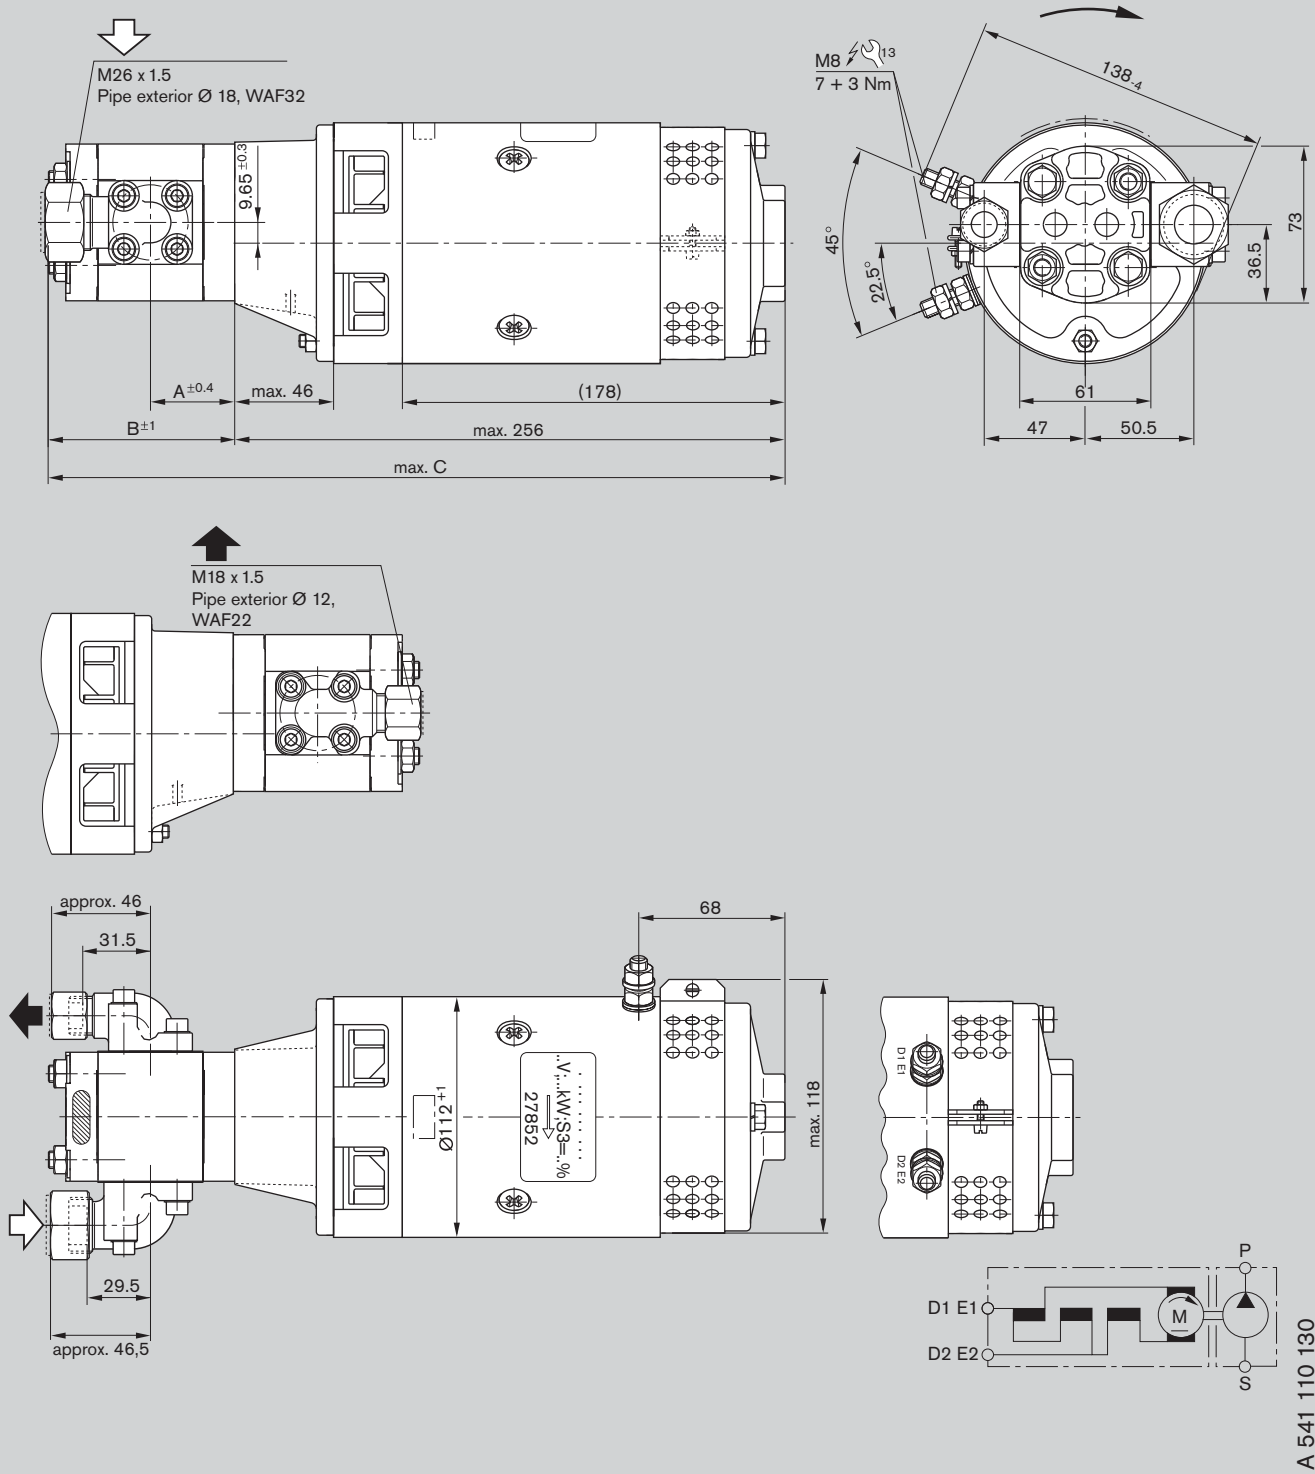




A 541 110 130

Type of protection:




Motor case IP 10  
 Ports IP 00

Ordering code	Displacement V [cm³/rev]	Dimension [mm]			Weight [kg]	Part number
		A	B	C		
EHP24IDL12B3.0-20C0902N0	3.0	39.2	86.0	343.0	10.5	0 541 100 052
EHP24IDL12B3.8-20C0903N0	3.8	40.7	91.0	348.0	10.6	0 541 100 053

**Characteristics  
for A 541 110 130**

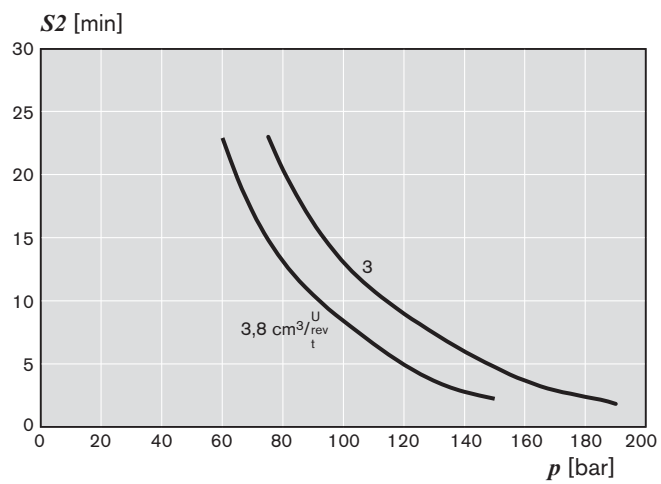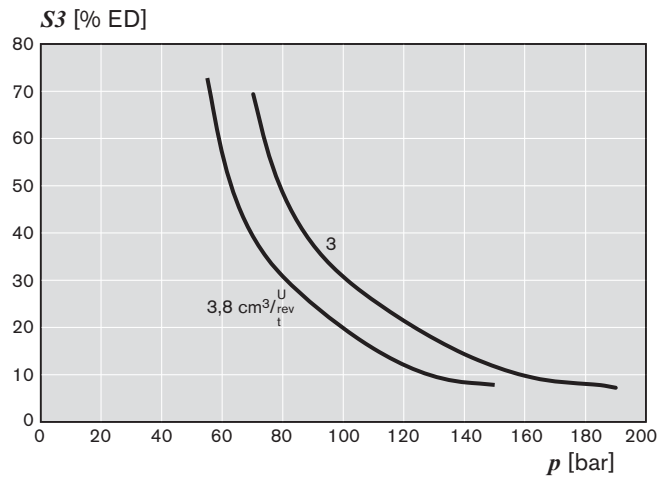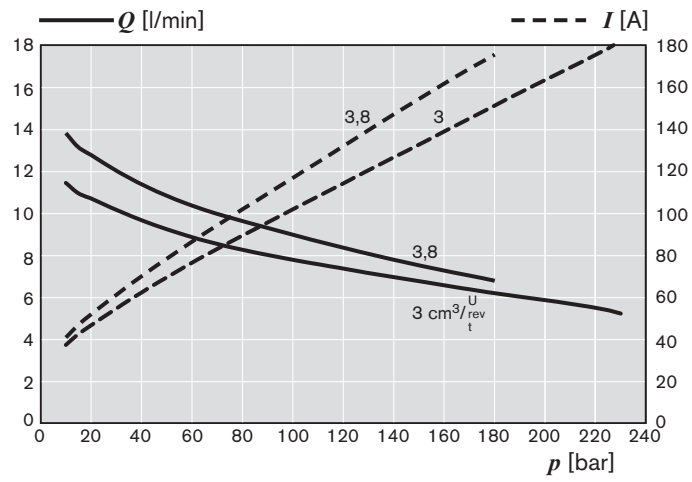

Unit dimensions

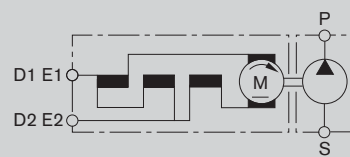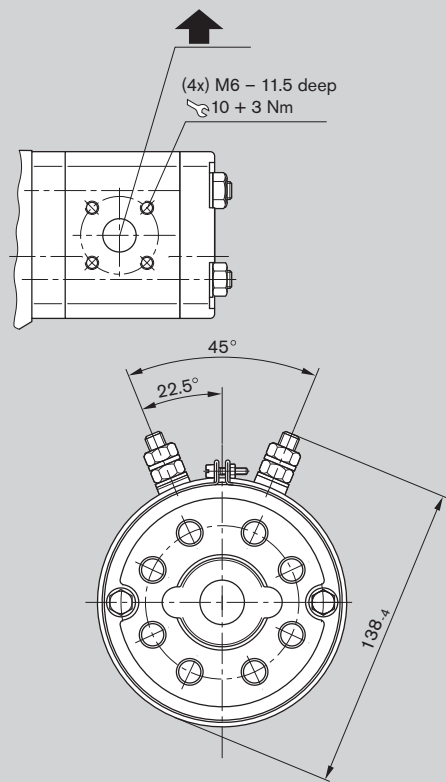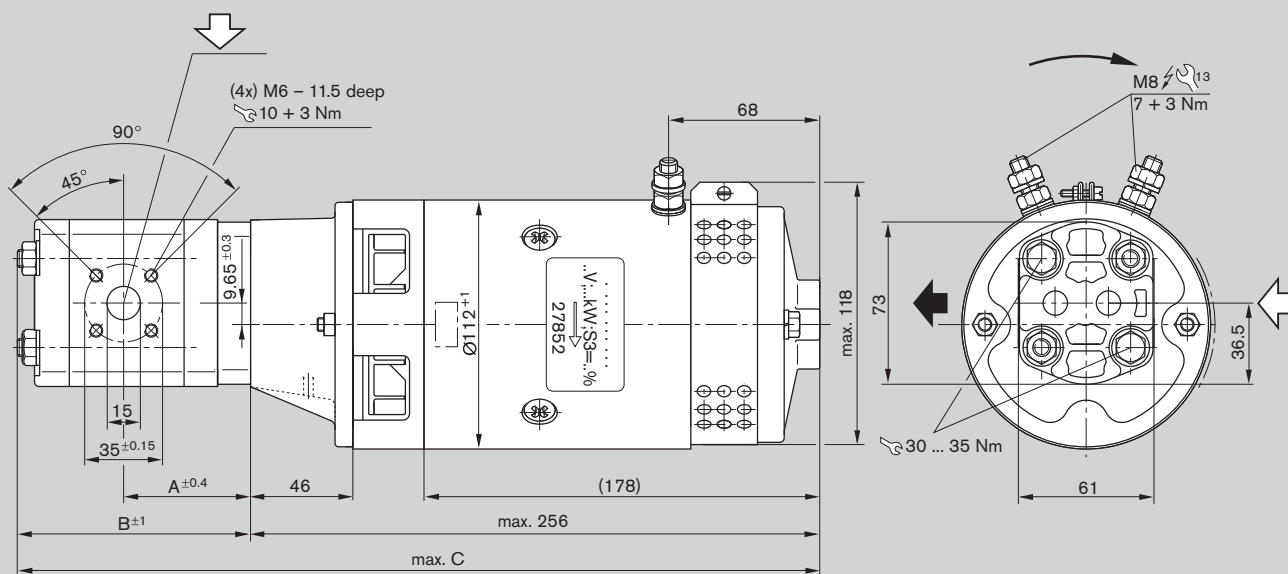

A 541 110 154




Type of protection:

Motor case IP 10


Ports IP 00

Ordering code	Displacement V [cm <sup>3</sup> /rev]	Dimension [mm]			Weight [kg]	Part number
		A	B	C		
EHP24IDL12B4.6-20A0904N0	4.6	42.0	91.0	348.0	10.7	<b>0 541 200 068</b>

### Characteristics for A 541 110 154

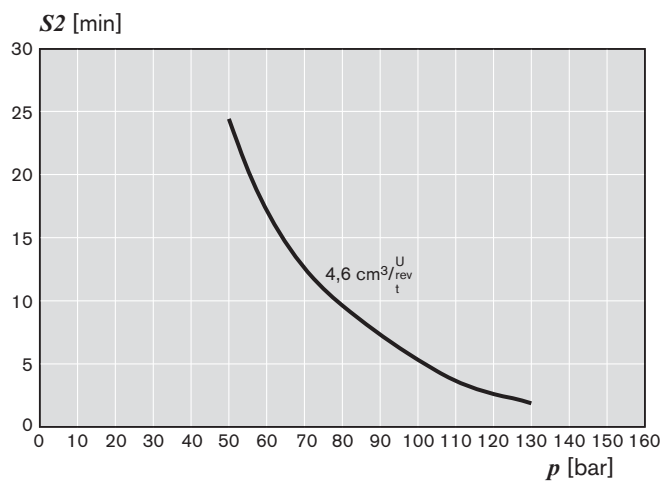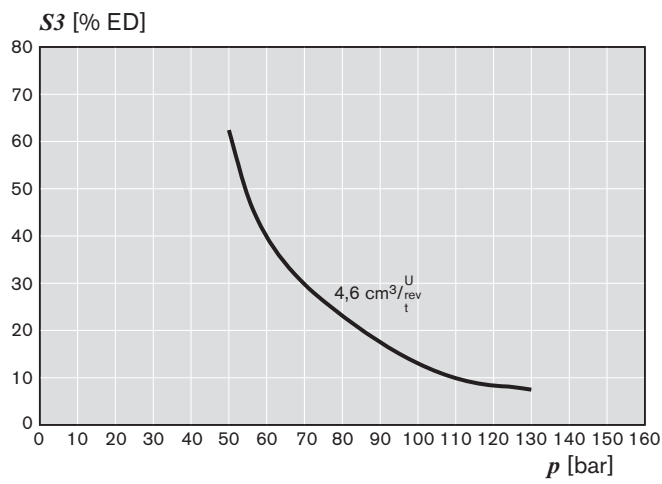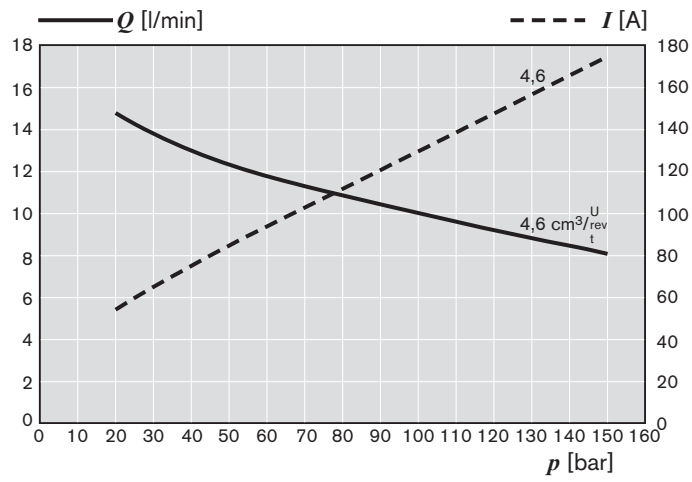

Unit dimensions

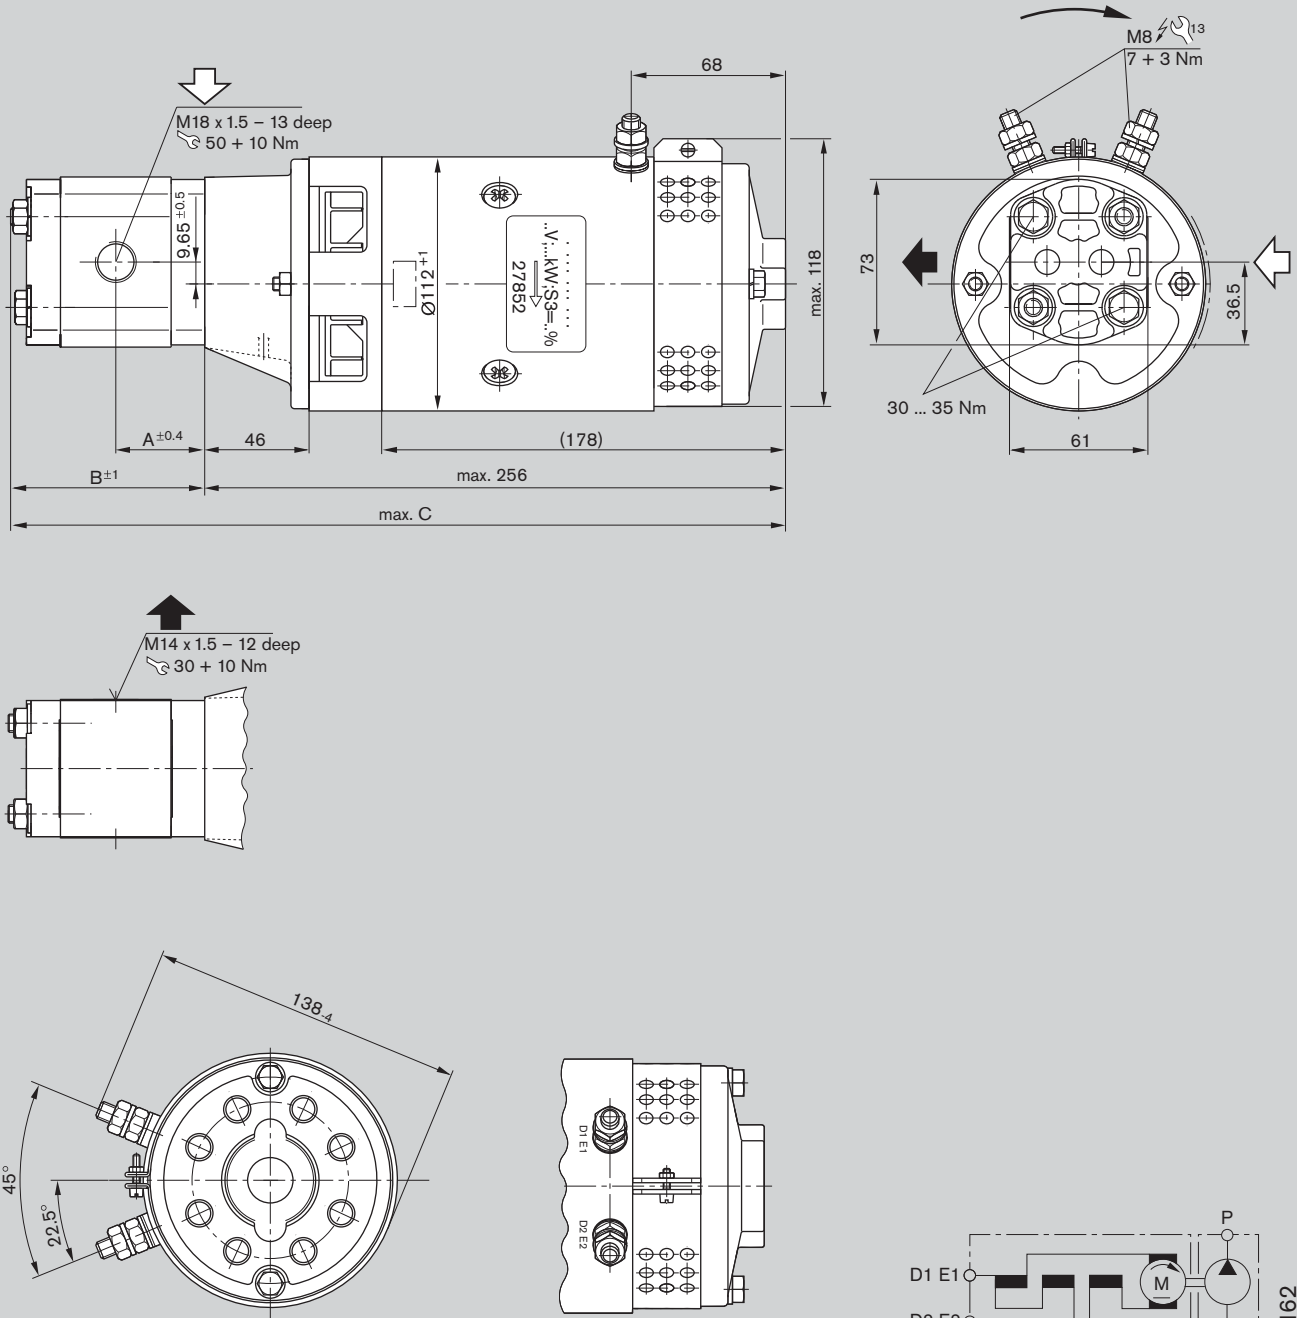




A 541 110 162

Type of protection:





Motor case IP 10  
 Ports IP 00

Ordering code	Displacement V [cm³/rev]	Dimension [mm]			Weight [kg]	Part number
		A	B	C		
EHP24IDL12B3.0-02A0902N0	3.0	39.0	86.0	343.0	9.9	<b>0 541 100 058</b>

**Characteristics  
for A 541 110 162**

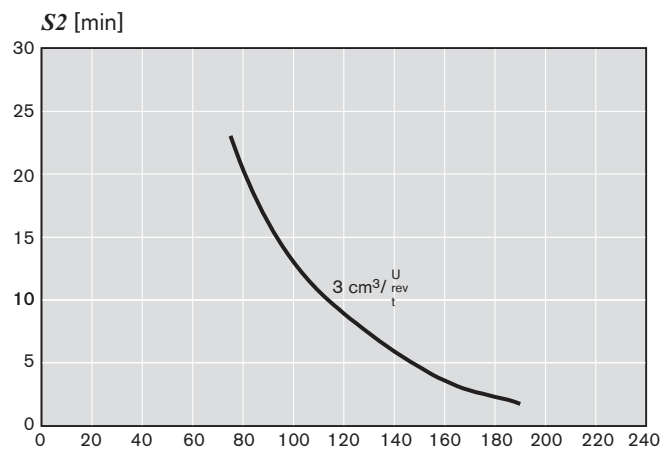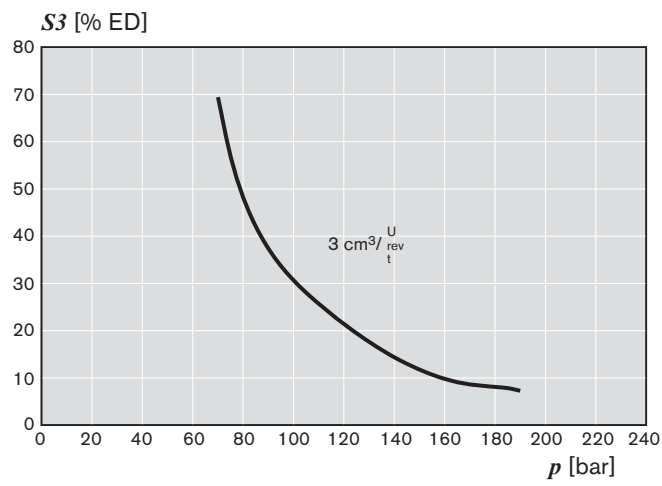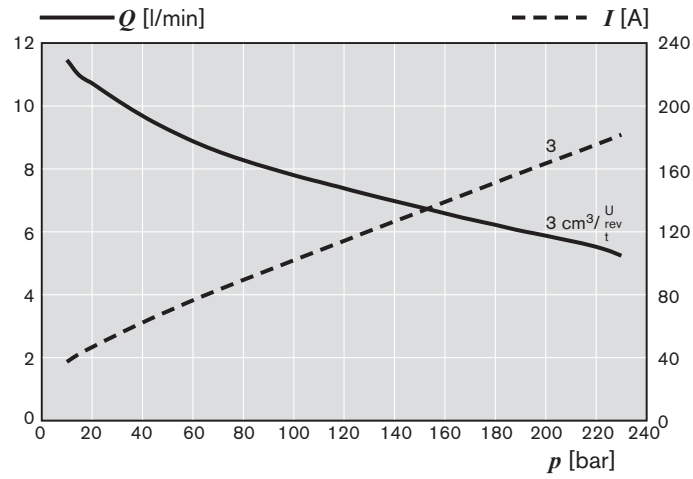

Unit dimensions

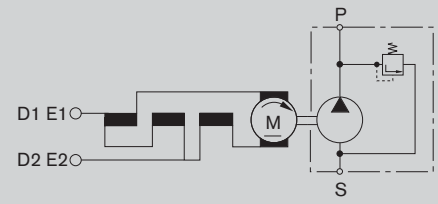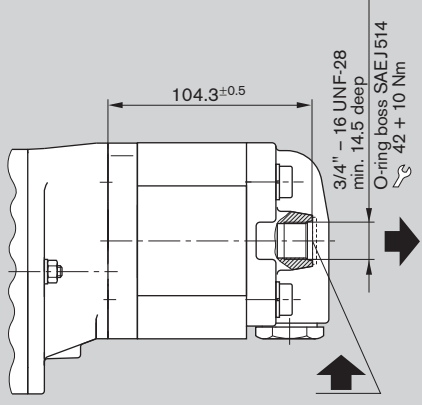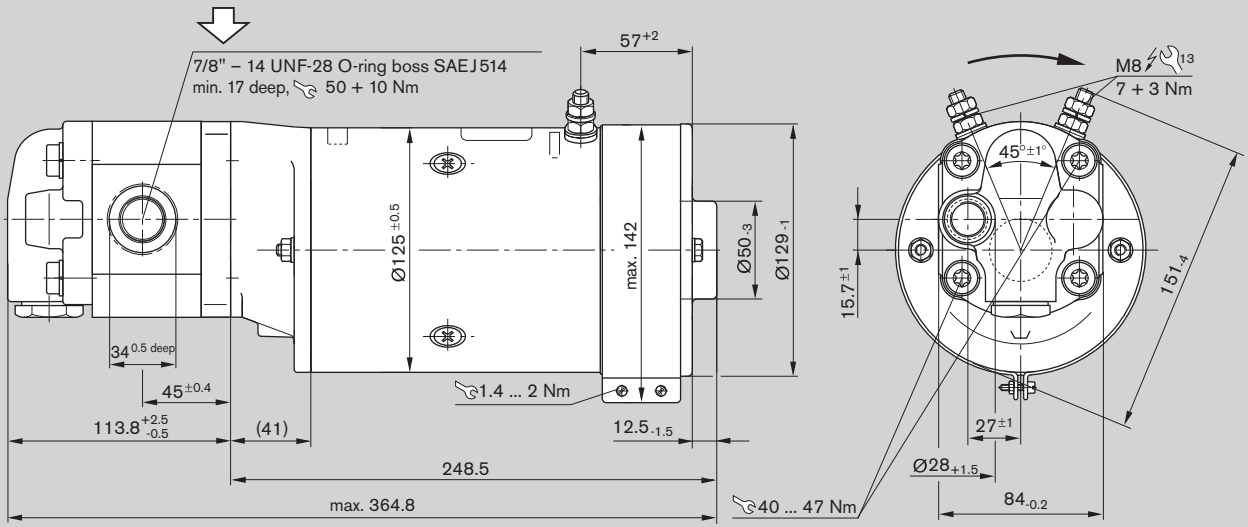

A 541 023 062

Type of protection:




Motor case IP 66

Ports IP 00





Ordering code	Displacement V [cm <sup>3</sup> /rev]	Dimension [mm]			PRV [bar]	Weight [kg]	Part number
		A	B	C			
EHP24KDG66F011-12A0656N0D060	11.0	-	-	-	60 <sup>+5</sup>	16.7	<b>0 541 500 071</b>



**Characteristics  
for A 541 023 062**

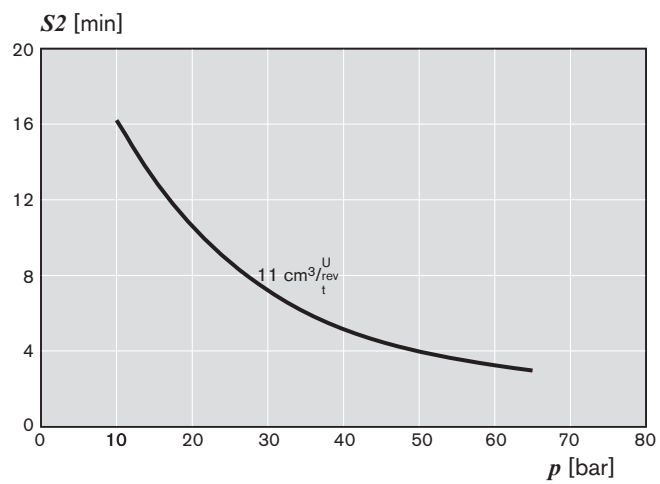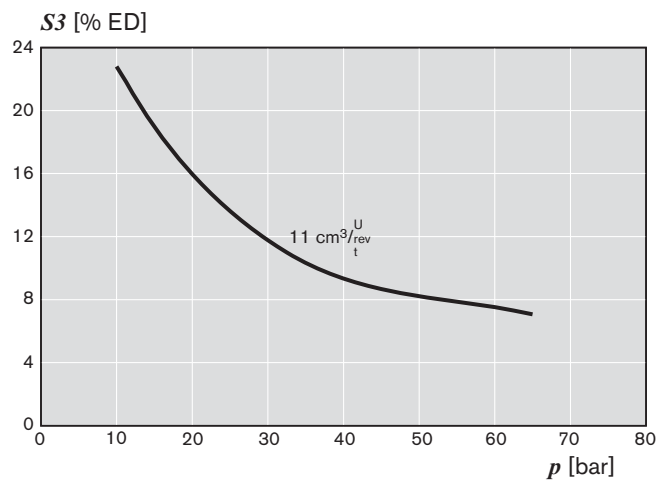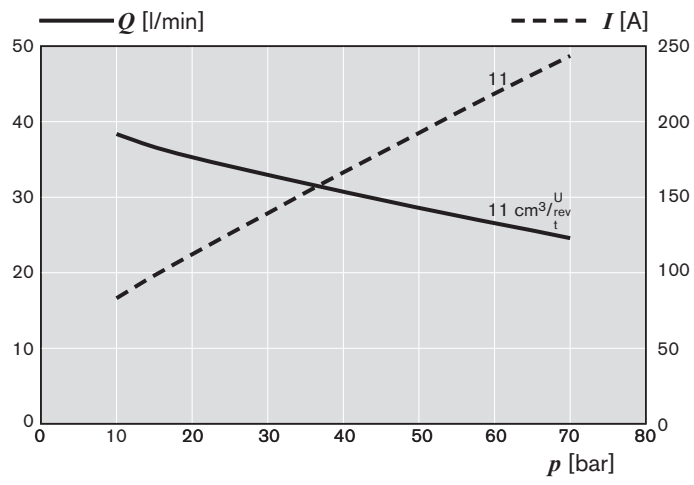

Unit dimensions

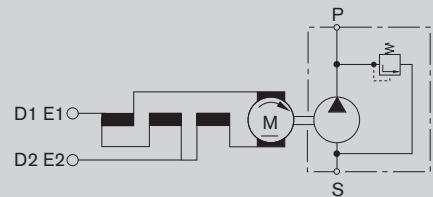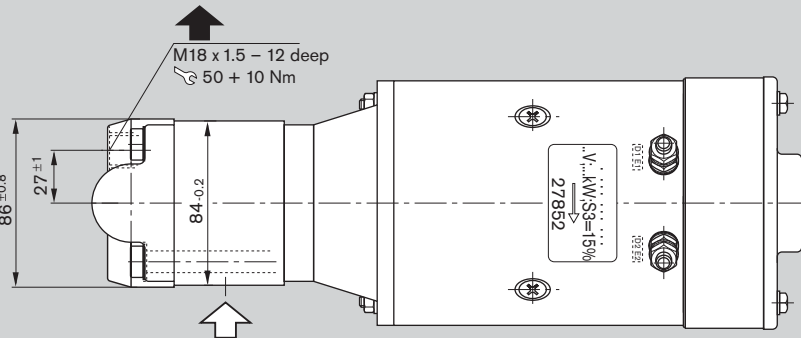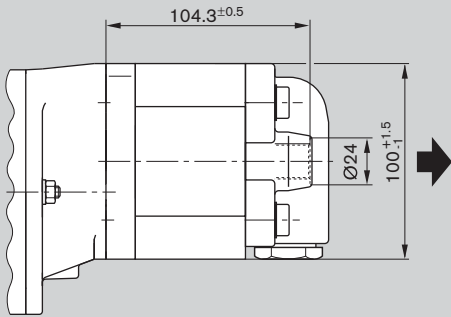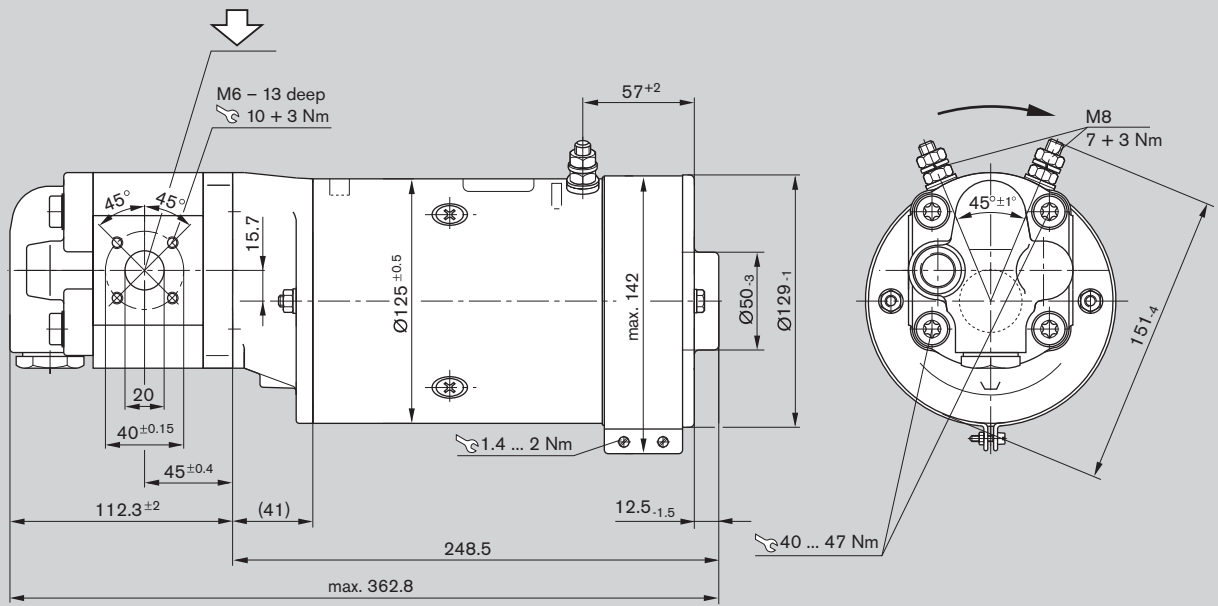

A 541 023 066




Type of protection:

Motor case IP 66




Ports IP 00

Ordering code	Displacement V [cm <sup>3</sup> /rev]	Dimension [mm]			Relay, supplied loose	PRV [bar]	Weight [kg]	Part number
		A	B	C				
EHP24KDG66F011-20A0656L0D050	11.0	-	-	-	1 547 211 007	50 <sup>+5</sup>	16.7	0 541 500 078

**Characteristics  
for A 541 023 066**

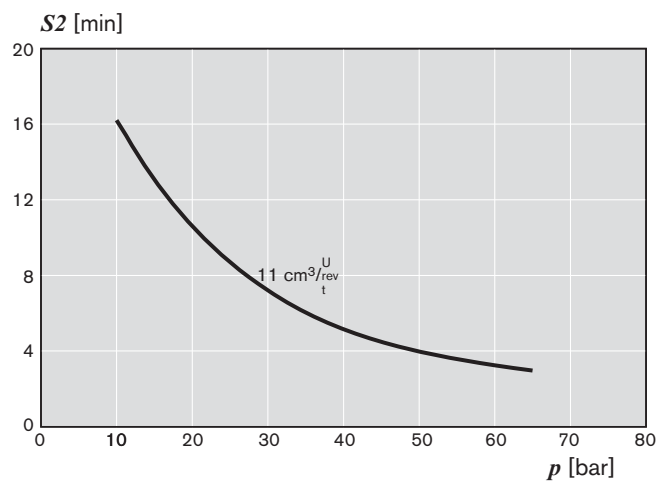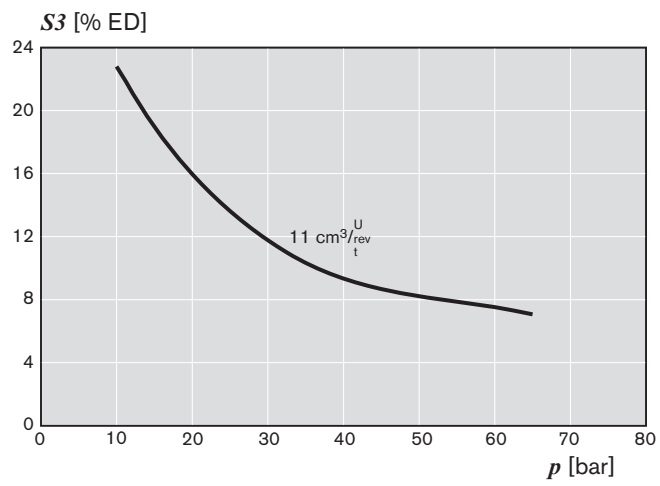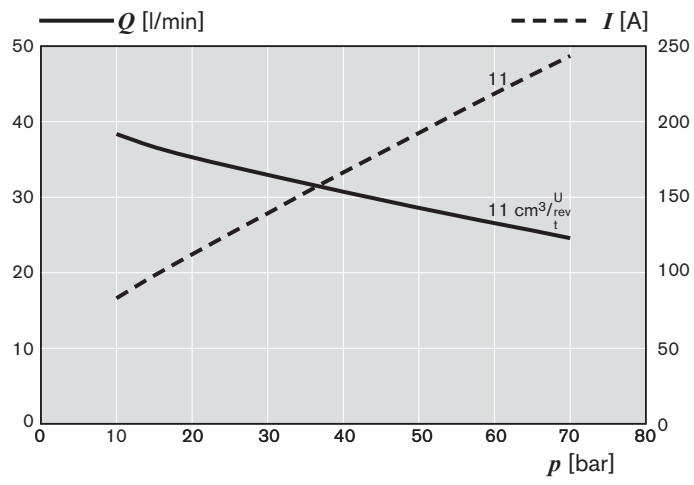

Unit dimensions

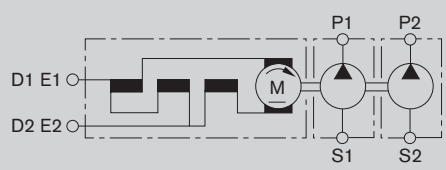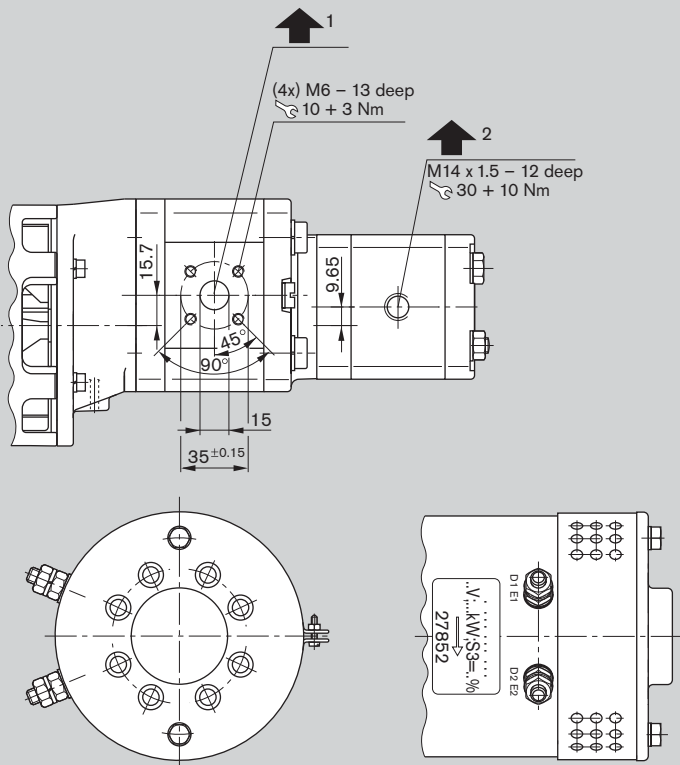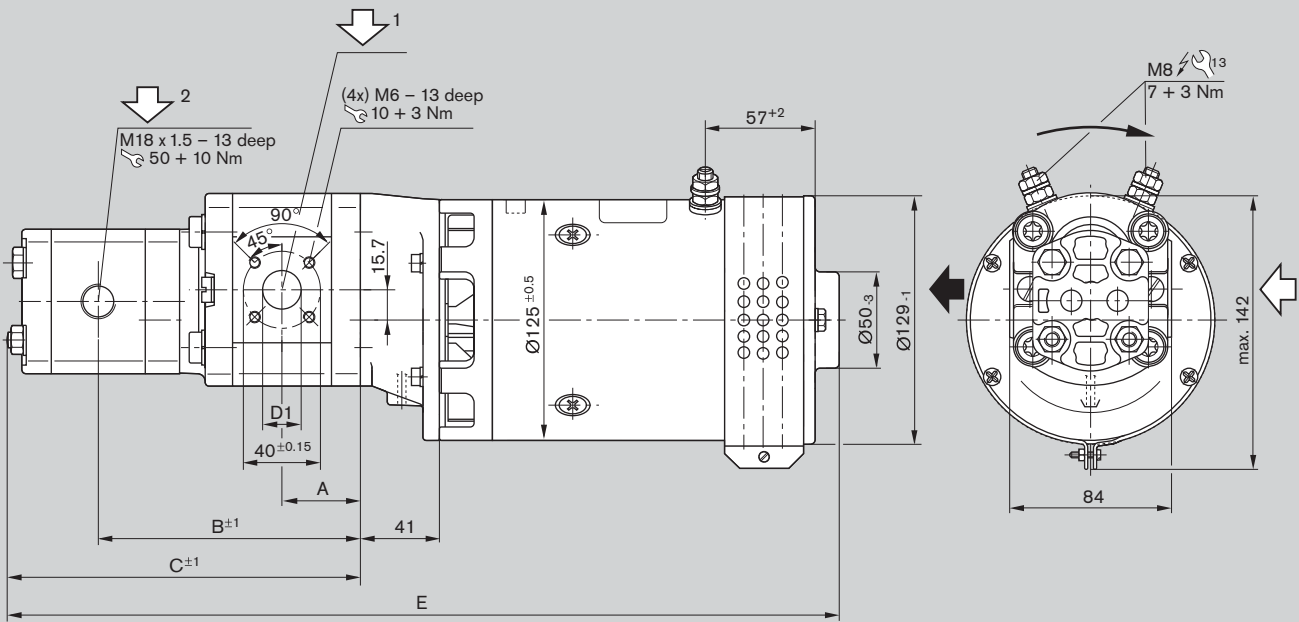




A 541 026 001

Type of protection:


Motor case IP 20  
Ports IP 00

Ordering code	Displacement V [cm <sup>3</sup> /rev]	Dimension [mm]					Weight [kg]	Part number
		A	B	C	D	E		
EHP24KDL20FB005/1.0-2002A1096N0	5.5 + 1.0	39.0	124.7	165.7	15.0	443.3	20	<b>0 541 300 058</b>

Characteristics  
for A 541 001 096

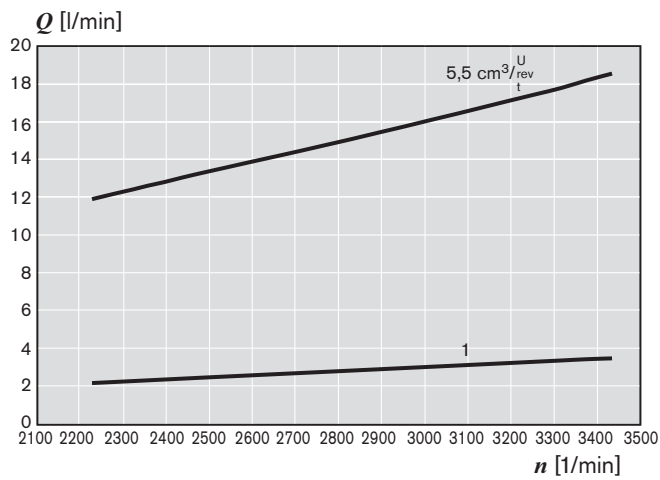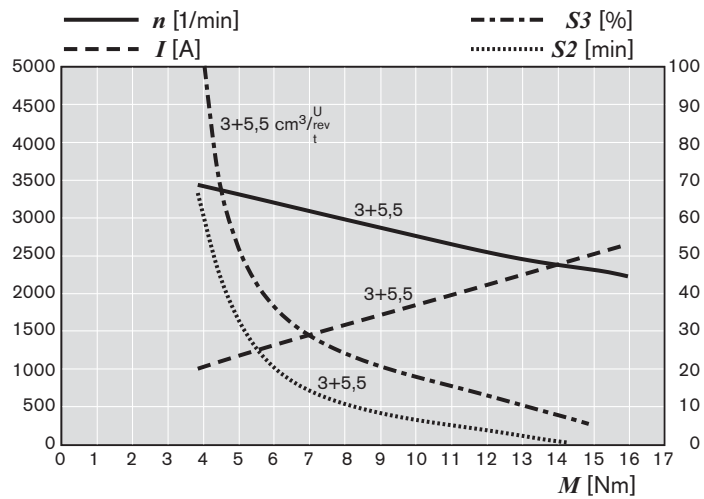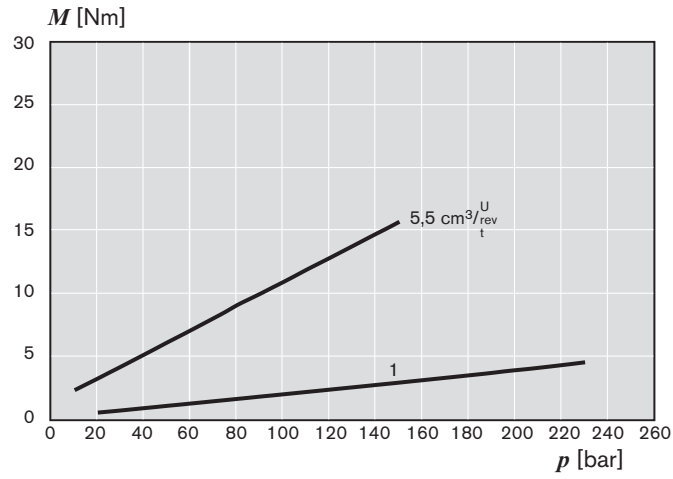

### Unit dimensions

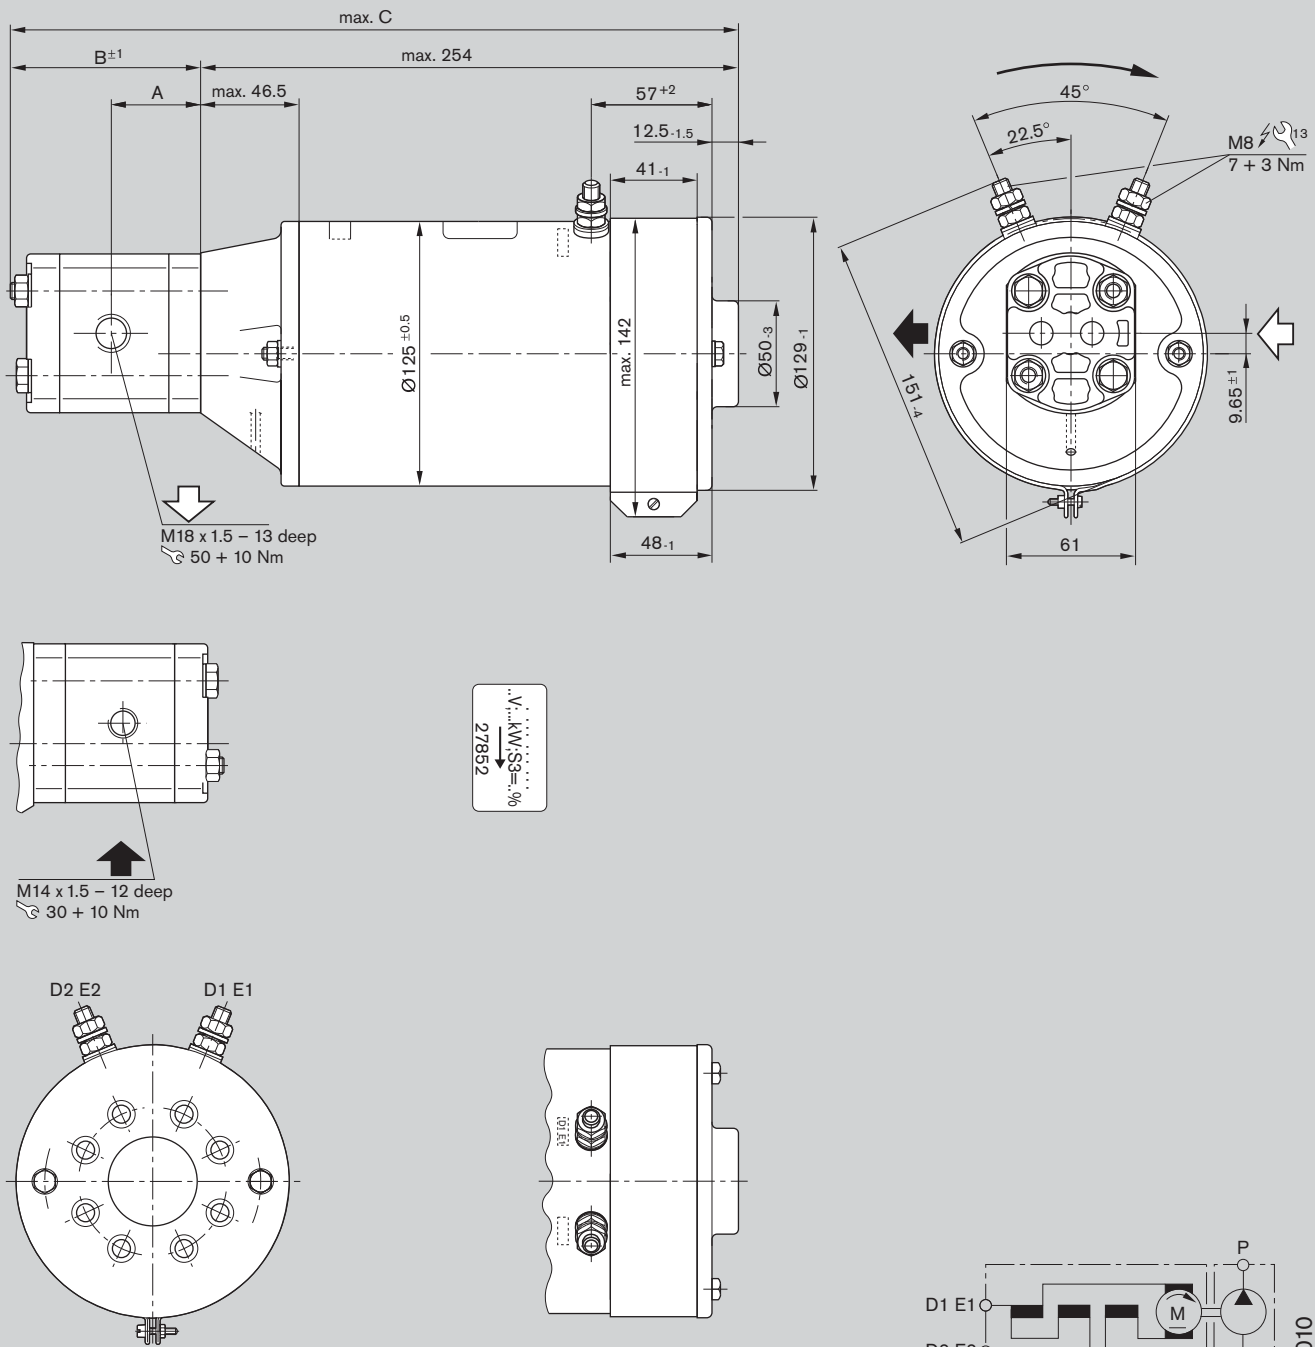

A 541 114 010




Type of protection:

Motor case IP 43


Ports IP 00

Ordering code	Displacement <i>V</i> [cm <sup>3</sup> /rev]	Dimension [mm]			Weight [kg]	Part number
		A	B	C		
EHP24KDG43B3.0-02A0611N0	3.0	39.2	86.0	341.0	13.5	<b>0 541 100 055</b>

**Characteristics  
for A 541 114 010**

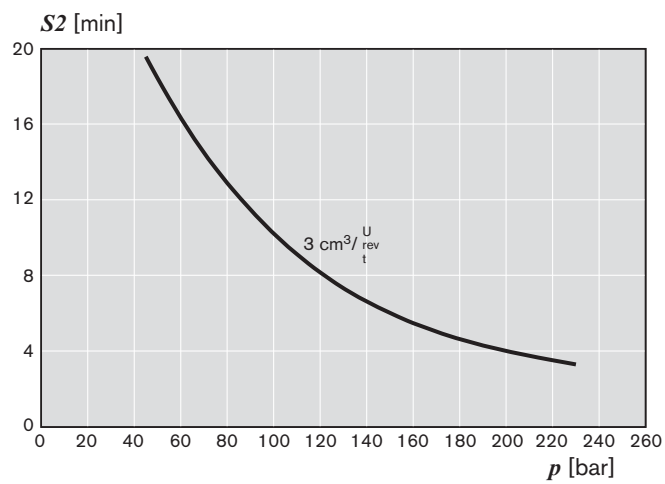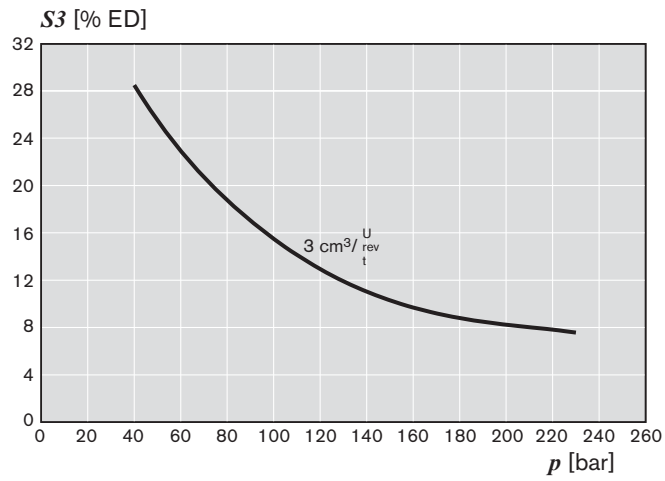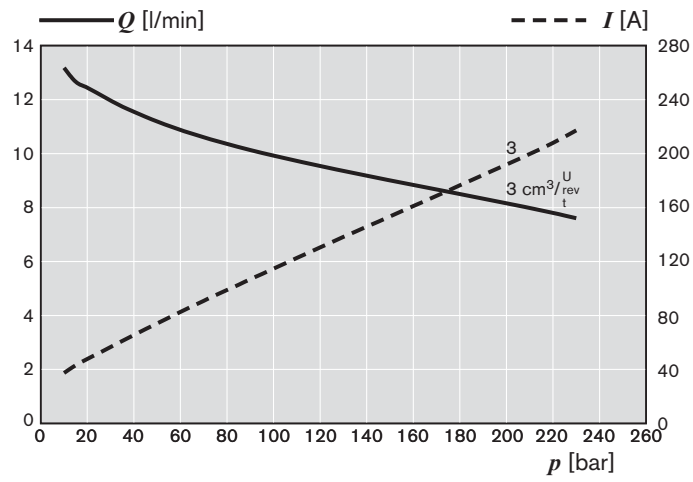

Unit dimensions

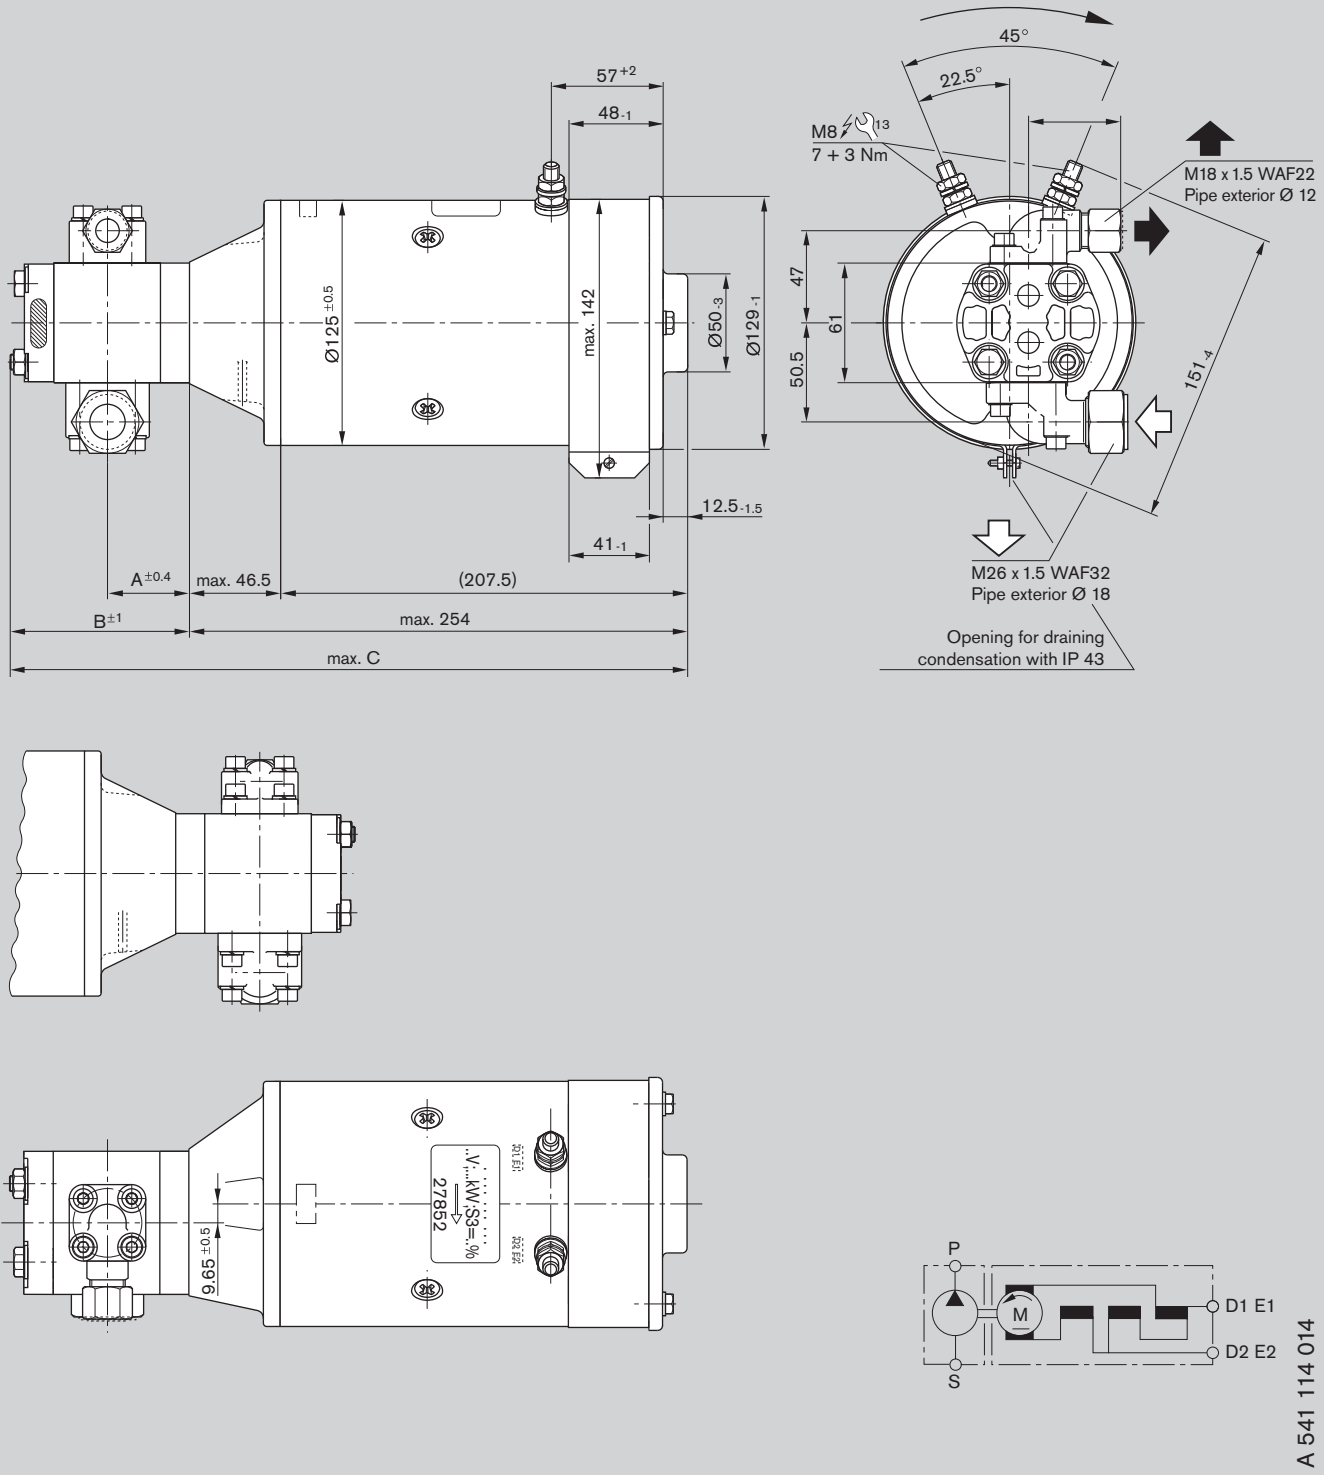

A 541 114 014

Type of protection:




Motor case IP 43

Ports IP 00





Ordering code	Displacement $V$ [cm <sup>3</sup> /rev]	Dimension [mm]			Weight [kg]	Part number
		A	B	C		
EHP24KDG43B4.6-20C0613N0	4.6	42.0	91.0	346.0	14.1	<b>0 541 200 067</b>



**Characteristics  
for A 541 114 014**

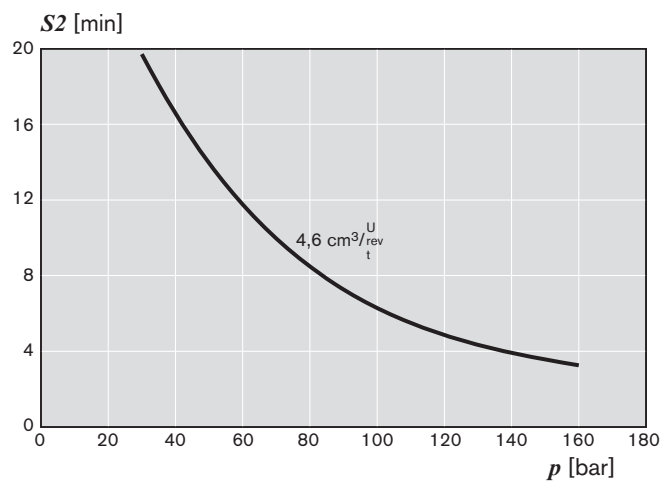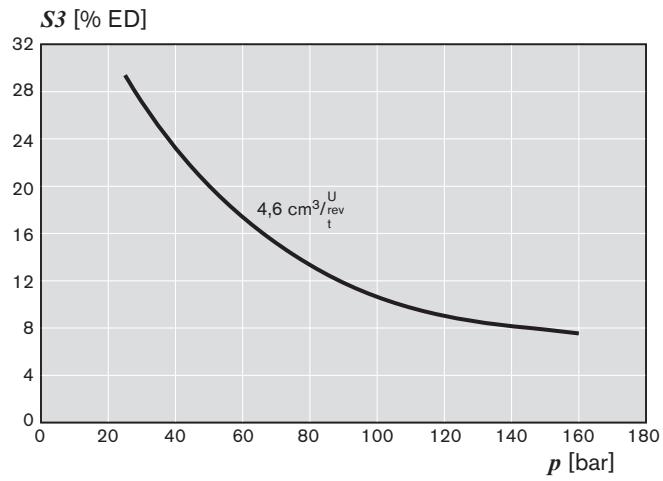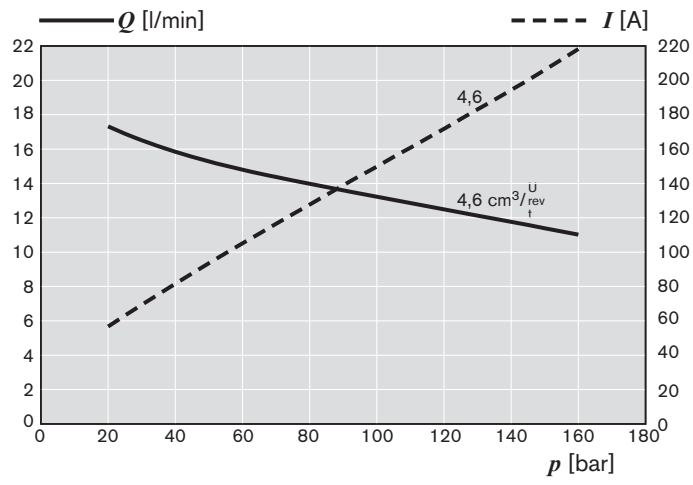

Unit dimensions

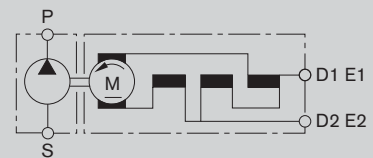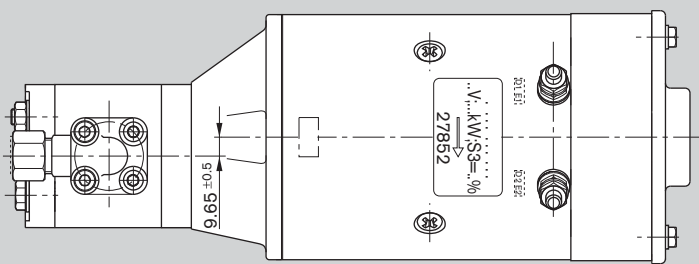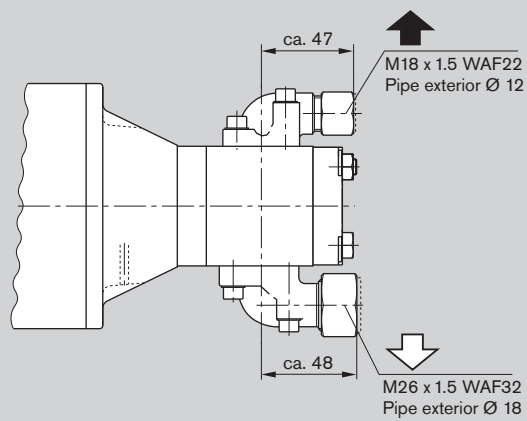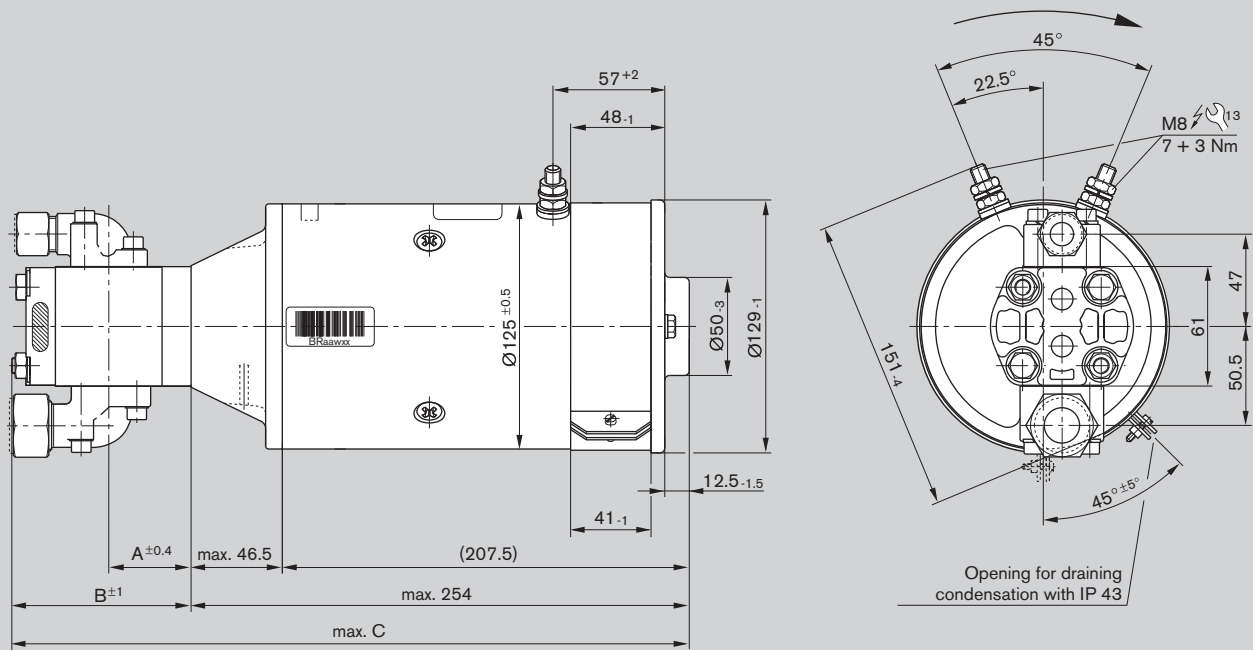

A 541 114 016




Type of protection:

Motor case IP 43


Ports IP 00

Ordering code	Displacement V [cm <sup>3</sup> /rev]	Dimension [mm]			Weight [kg]	Part number
		A	B	C		
EHP24KDG43B3.8-20C0612N0	3.8	41.0	91.0	346.0	14.3	0 541 100 054

**Characteristics  
for A 541 114 016**

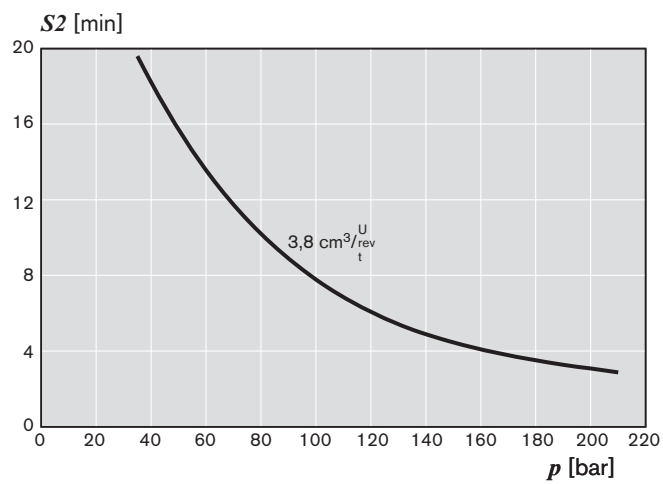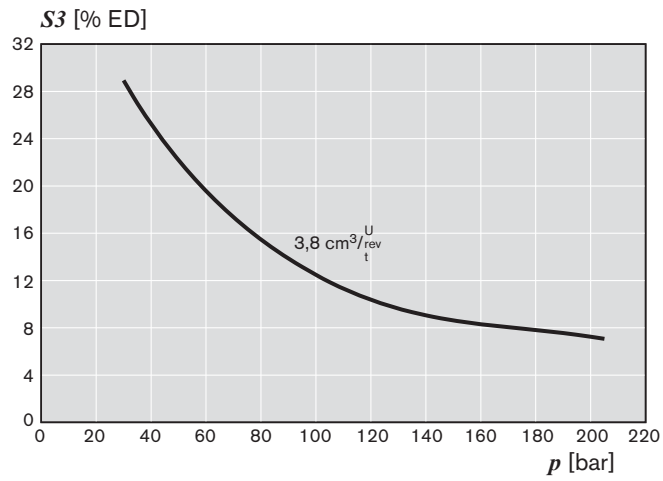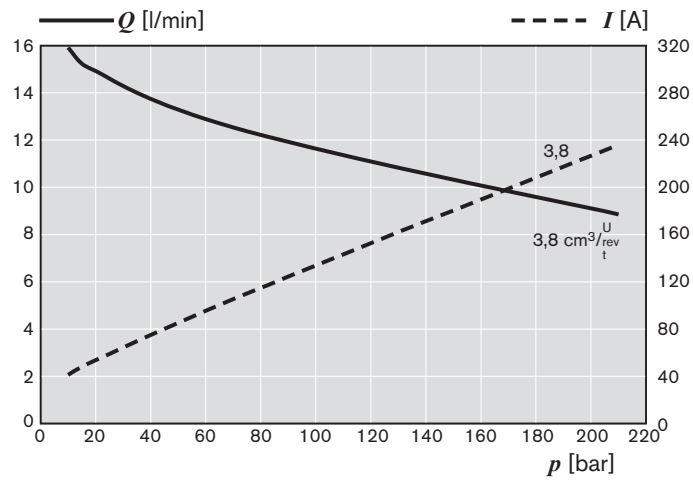

### Unit dimensions

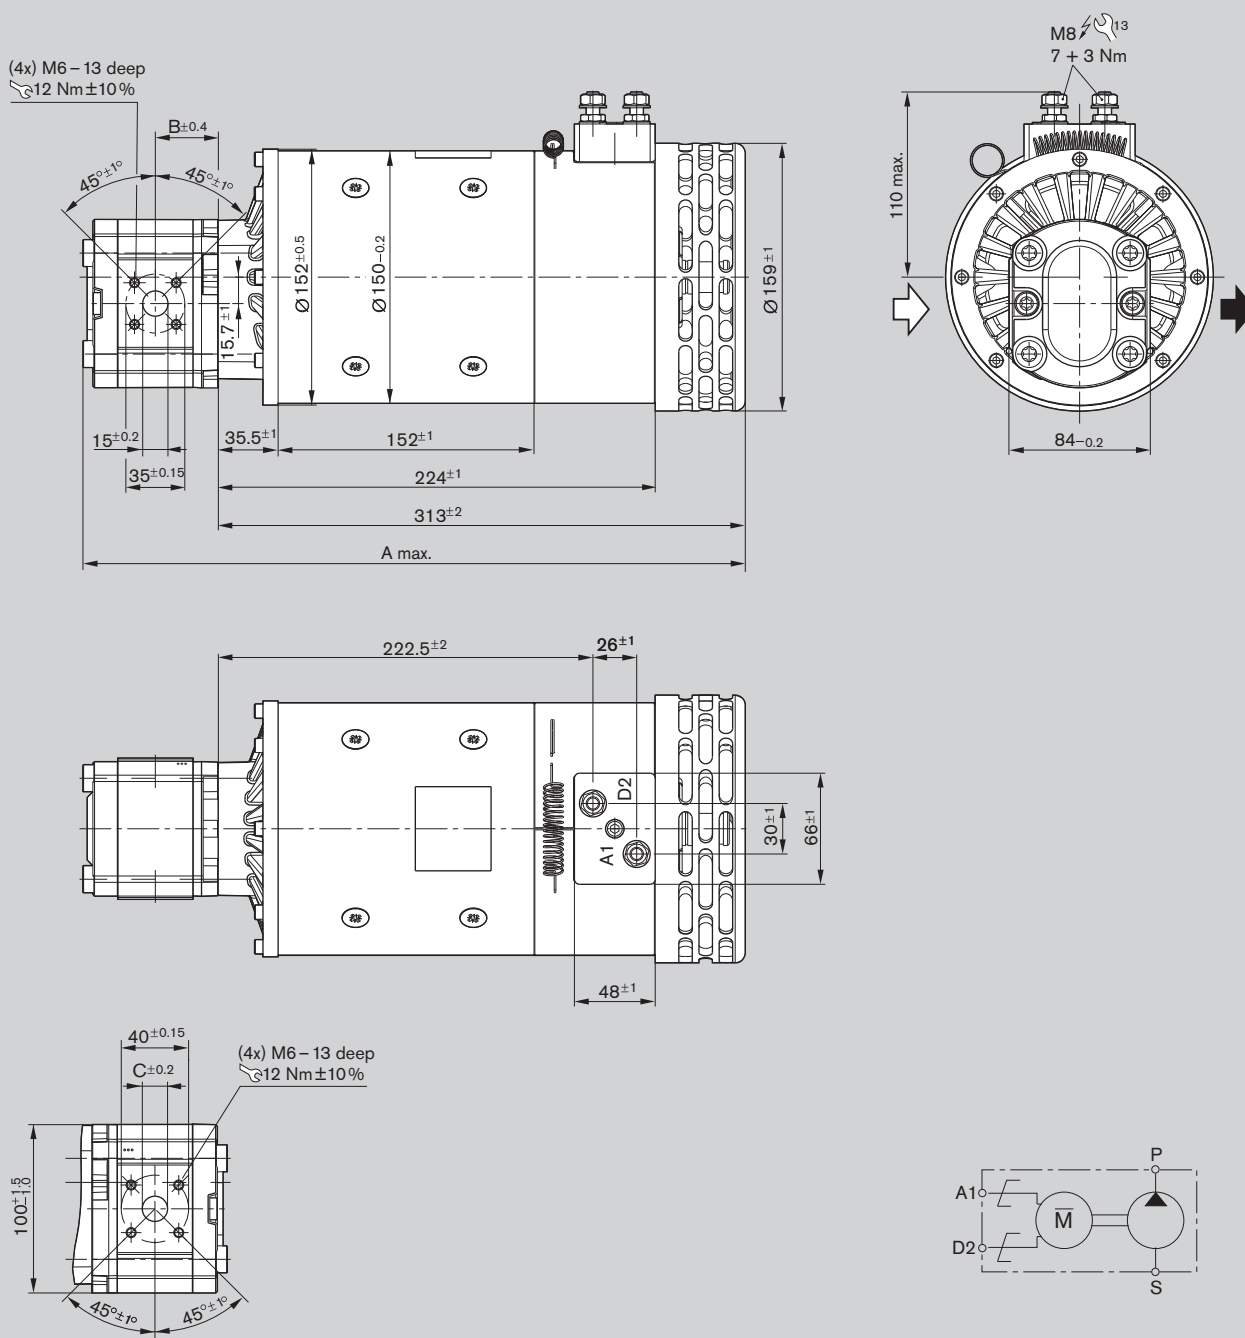

A 541 021 351




Type of protection:

Motor case IP 20





Ports IP 00

Ordering code	Displacement $V \text{ [cm}^3\text{/rev]}$	Dimension [mm]			Weight [kg]	Part number
		A	B	C		
EHP24PRL20F004-20E1325N0	4.0	396.0	37.4	15.0	20.4	<b>0 541 200 083</b>
EHP24PRL20F005-20E1326N0	5.5	399.0	38.6	15.0	20.4	<b>0 541 300 068</b>
EHP24PRL20F008-20E1327N0	8.0	403.0	40.7	20.0	20.5	<b>0 541 400 075</b>
EHP24PRL20F011-20E1328N0	11.0	408.0	44.5	20.0	20.7	<b>0 541 500 082</b>
EHP24PRL20F016-20E1338N0	16.0	416.0	45.0	20.0	20.9	<b>0 541 600 043</b>

**Characteristics  
for A 541 021 351**

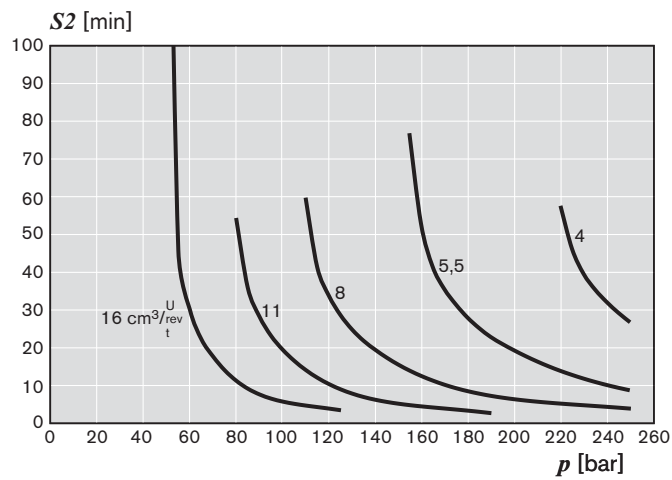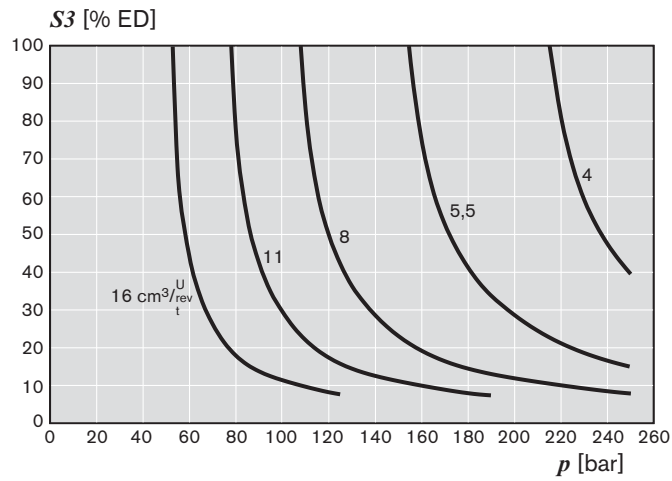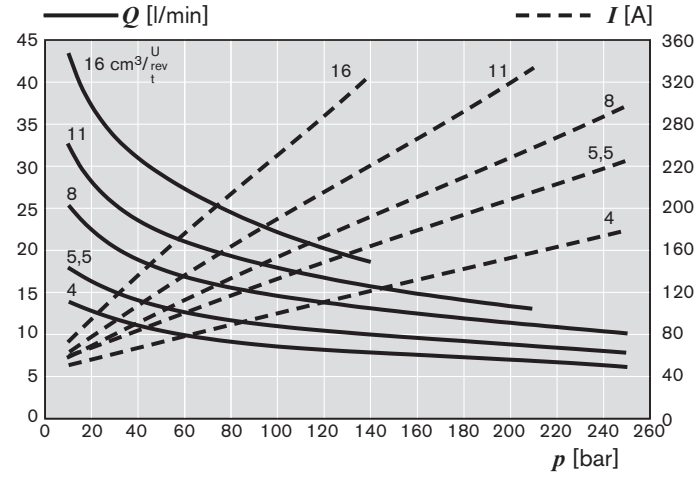

Unit dimensions

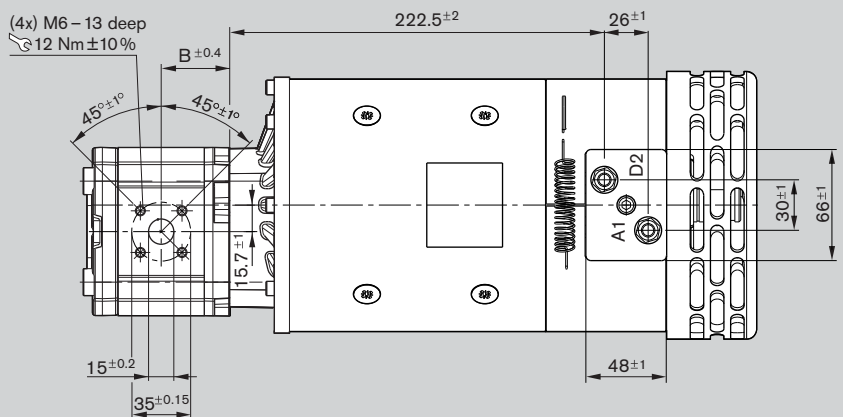

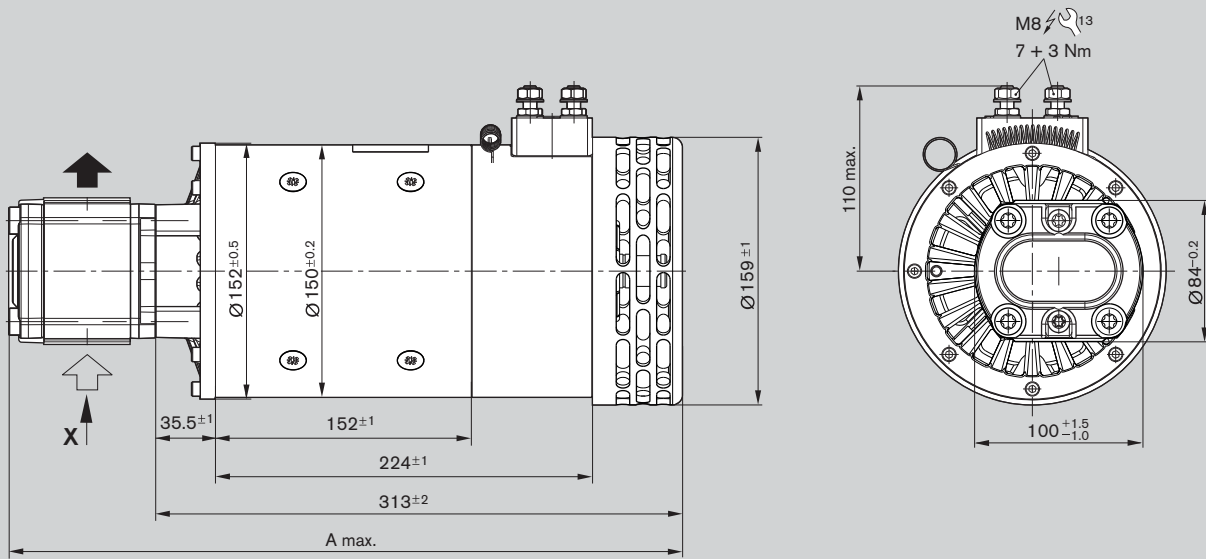


A 541 021 367


Type of protection:  
 Motor case IP 20  
 Ports IP 00

Ordering code	Displacement V [cm <sup>3</sup> /rev]	Dimension [mm]			kg	Part number
		A	B	C		
EHP24PRL20F008-20C1327N0	8.0	403	40.7	20	20.5	<b>0 541 400 079</b>

**Characteristics  
for A 541 021 367**

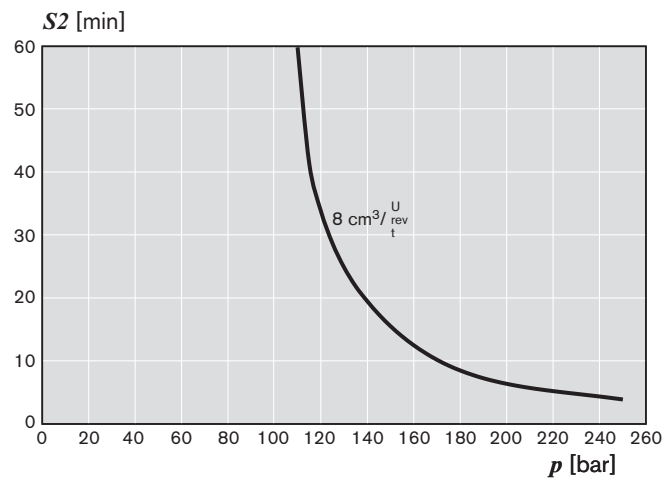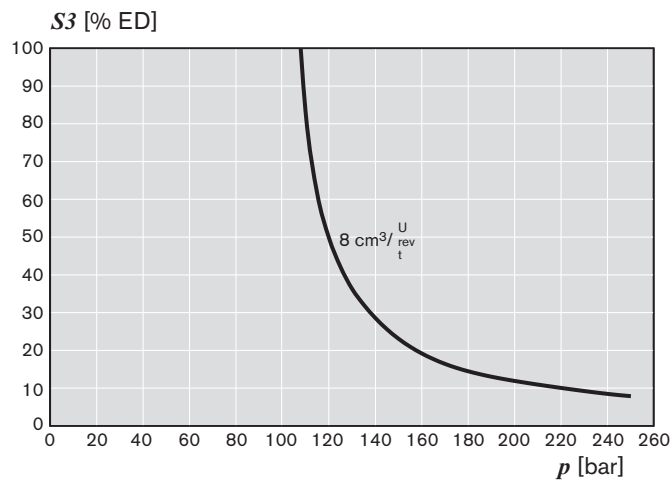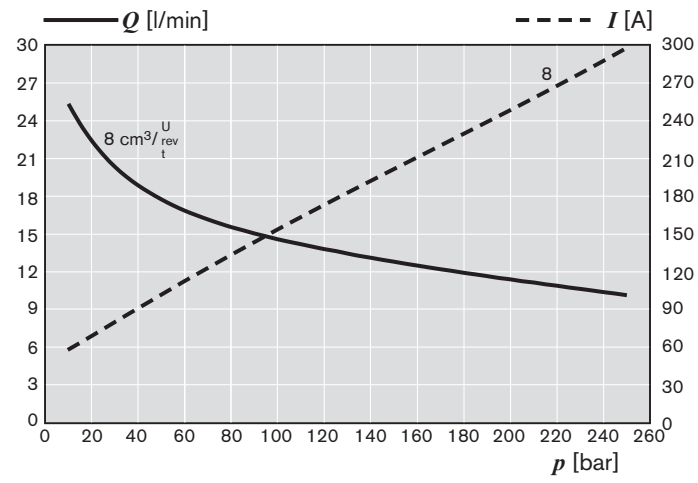

Unit dimensions

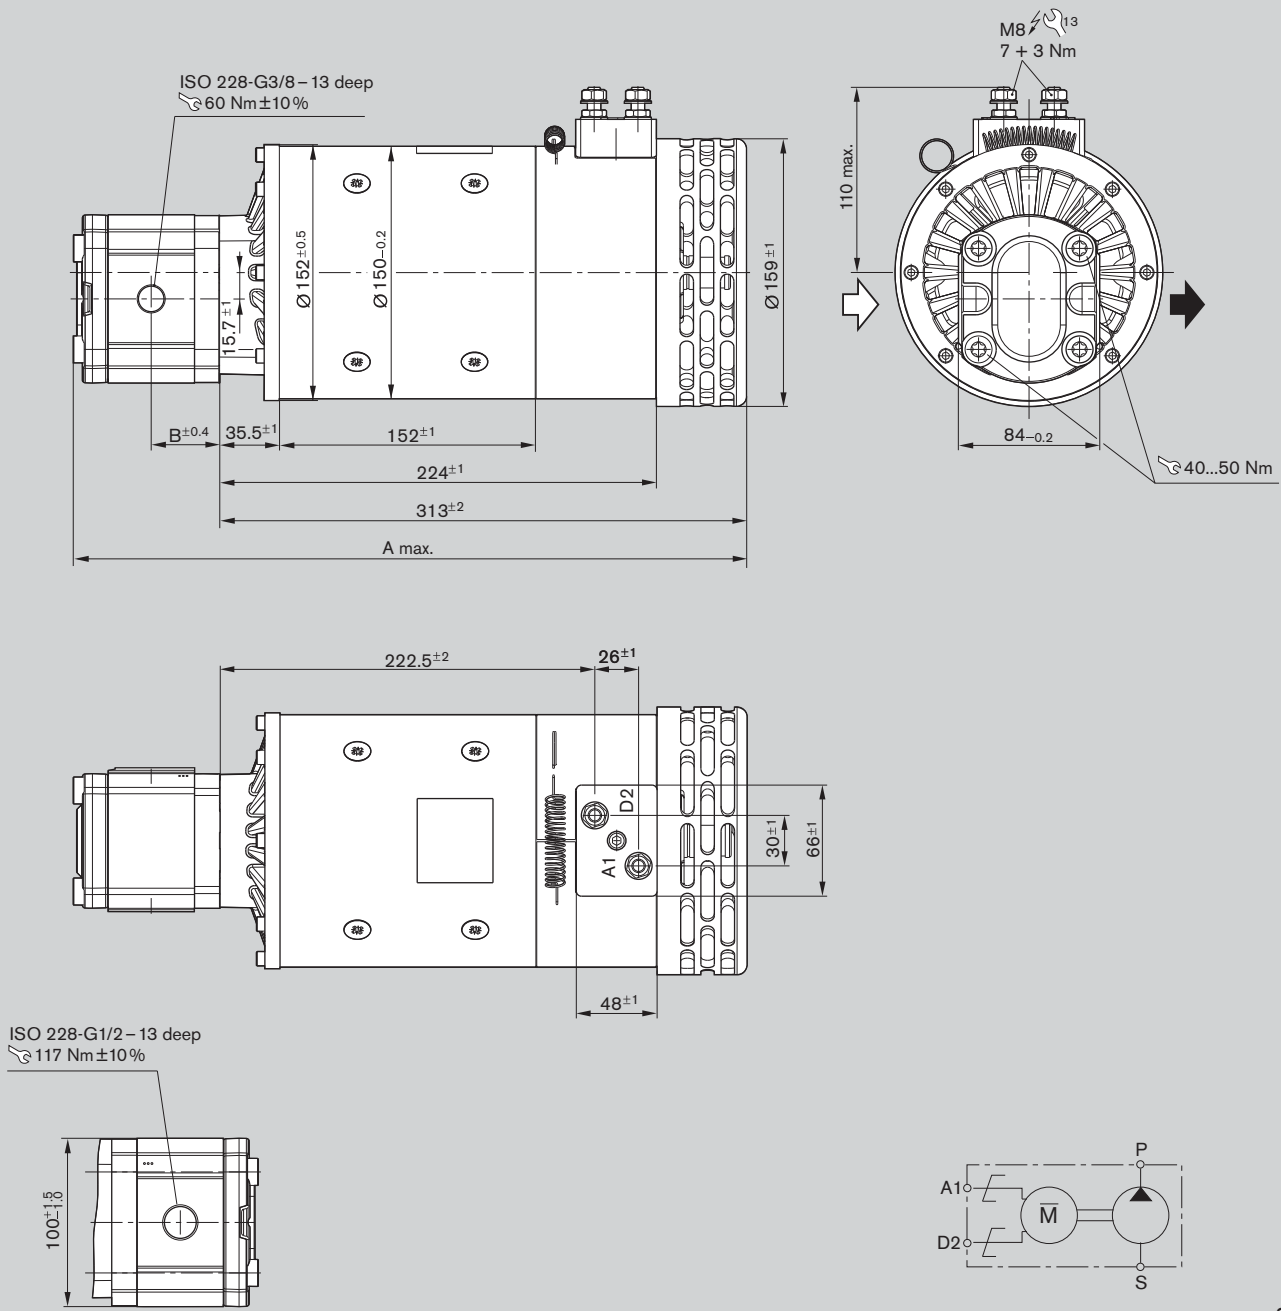

A 541 021 383




Type of protection:

Motor case IP 20  
 Ports IP 00


Ordering code	Displacement V [cm <sup>3</sup> /rev]	Dimension [mm]		Weight [kg]	Part number
		A	B		
EHP24PRL20F008-01E1327N0	8.0	403	40.7	20.5	<b>0 541 400 083</b>



**Characteristics  
for A 541 021 383**

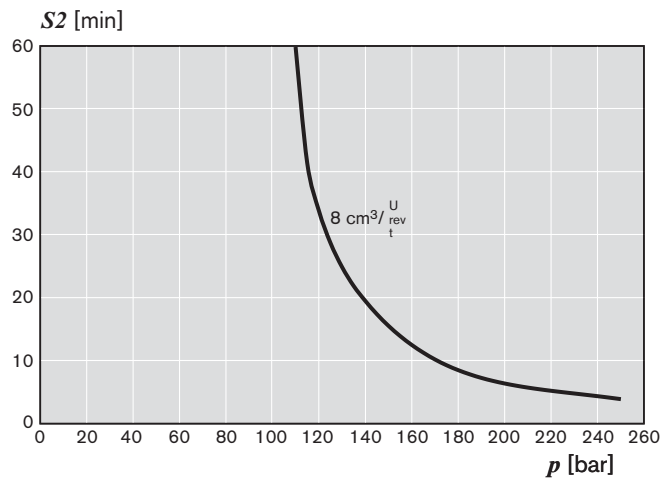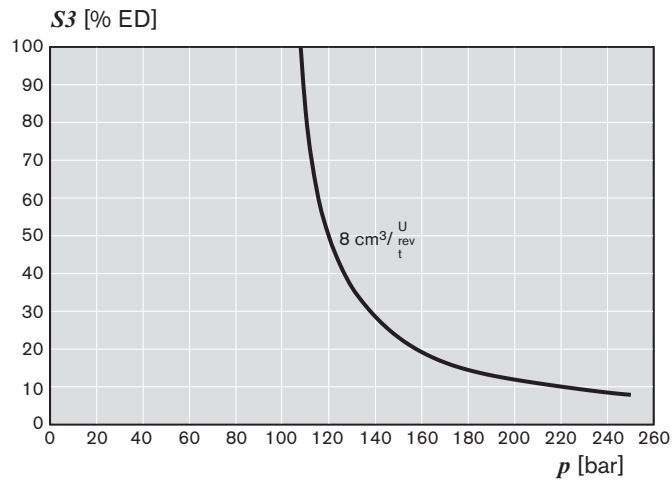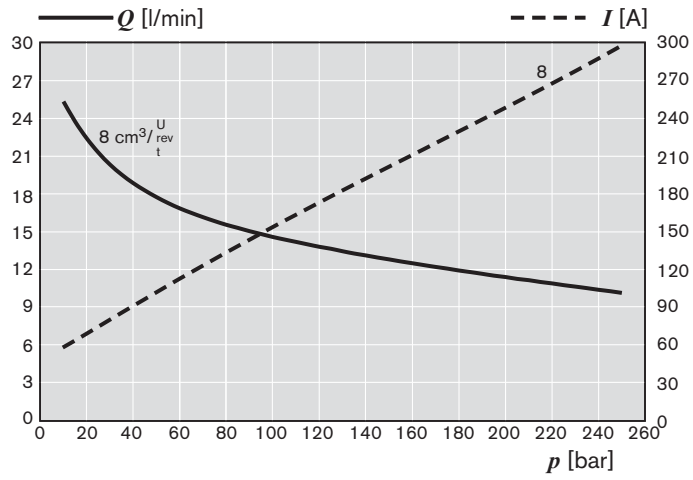

Unit dimensions

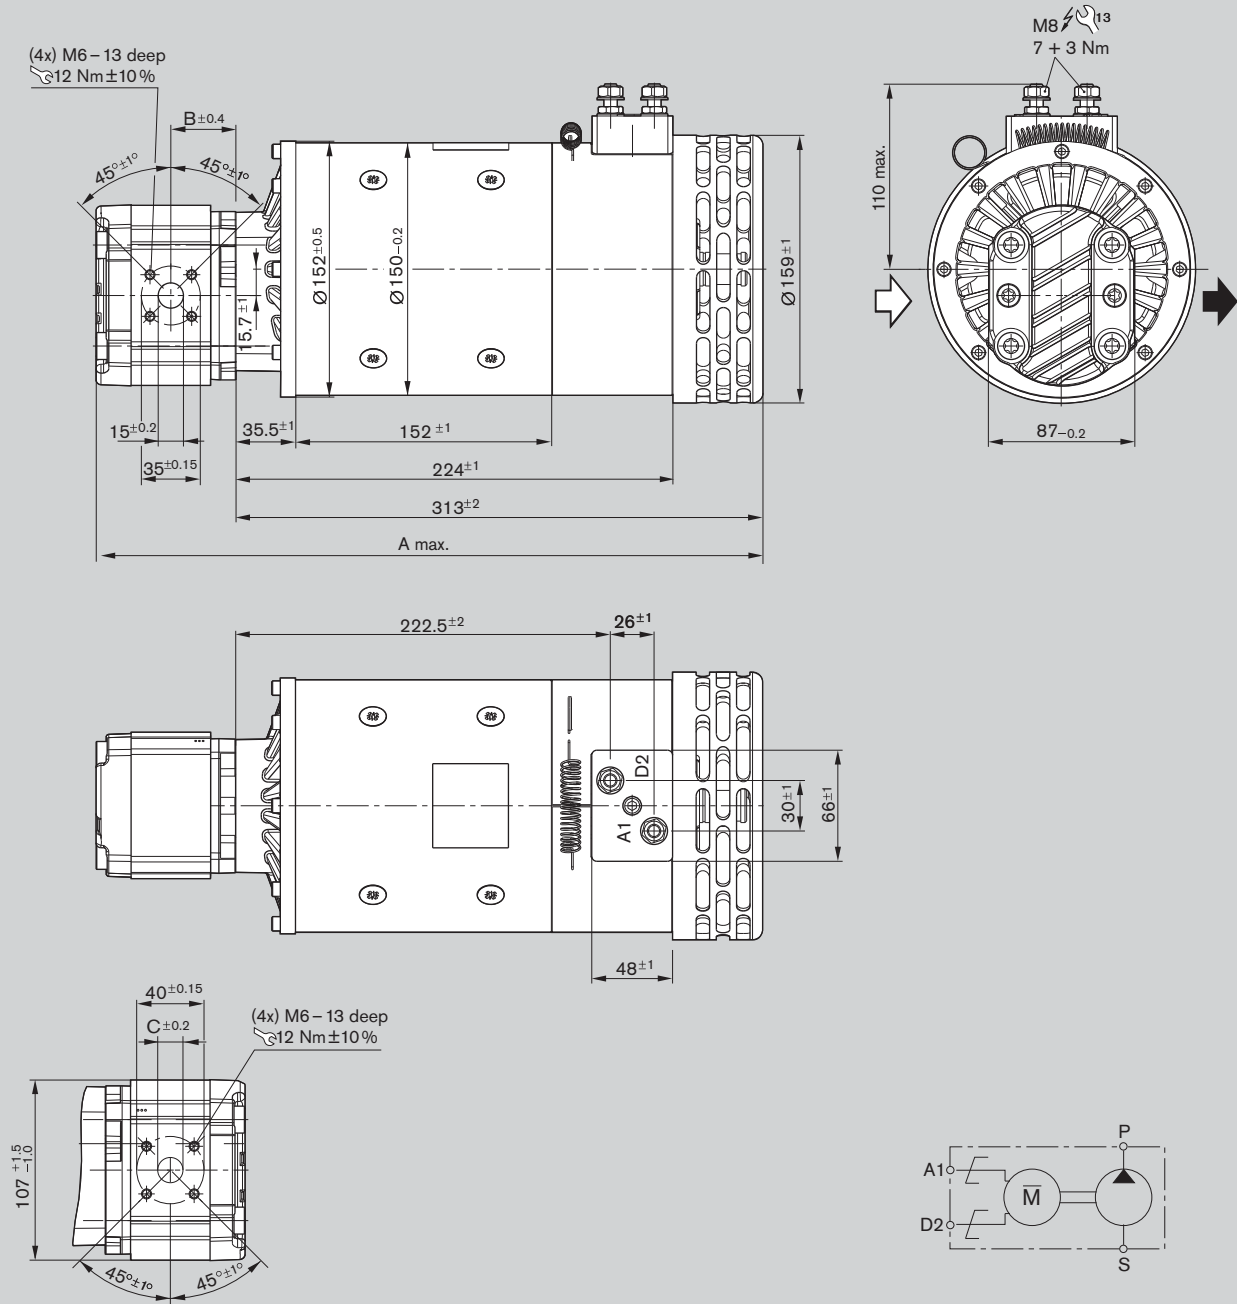

A 541 021 358




Type of protection:

Motor case IP 20


Ports IP 00

Ordering code	Displacement V [cm <sup>3</sup> /rev]	Dimension [mm]			Weight [kg]	Part number
		A	B	C		
EHP24PRL24S008-20E1335N0	8.0	403	40.7	20	20.6	<b>0 541 400 077</b>
EHP24PRL24S011-20E1337N0	11.0	408	44.5	20	20.7	<b>0 541 500 083</b>

**Characteristics  
for A 541 021 358**

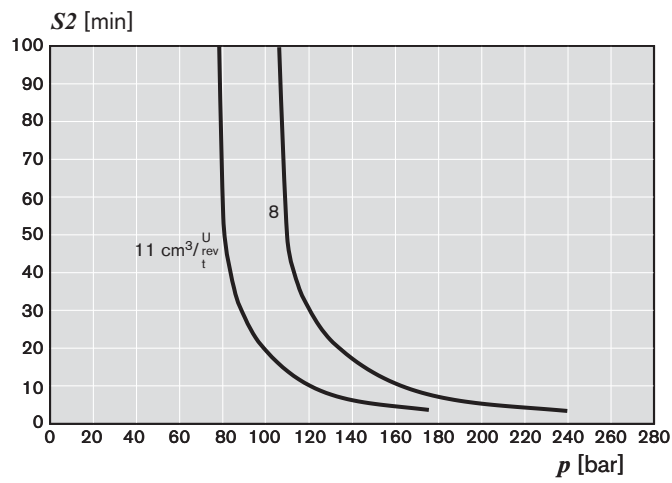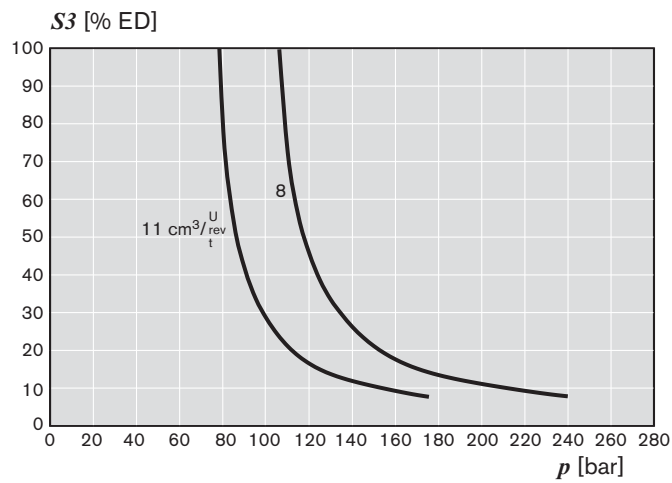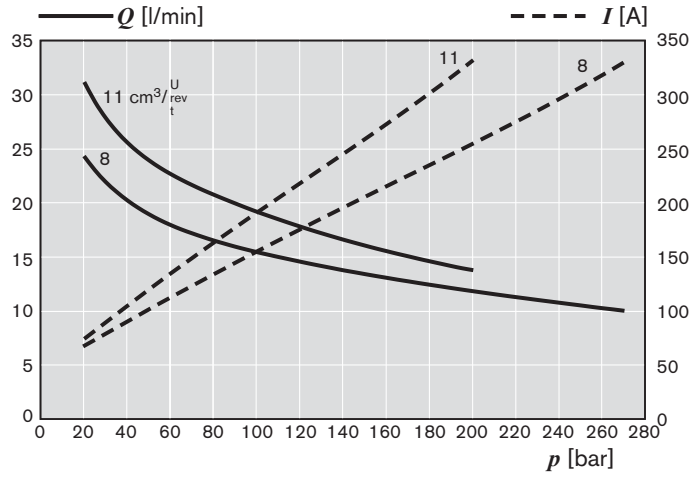

Unit dimensions

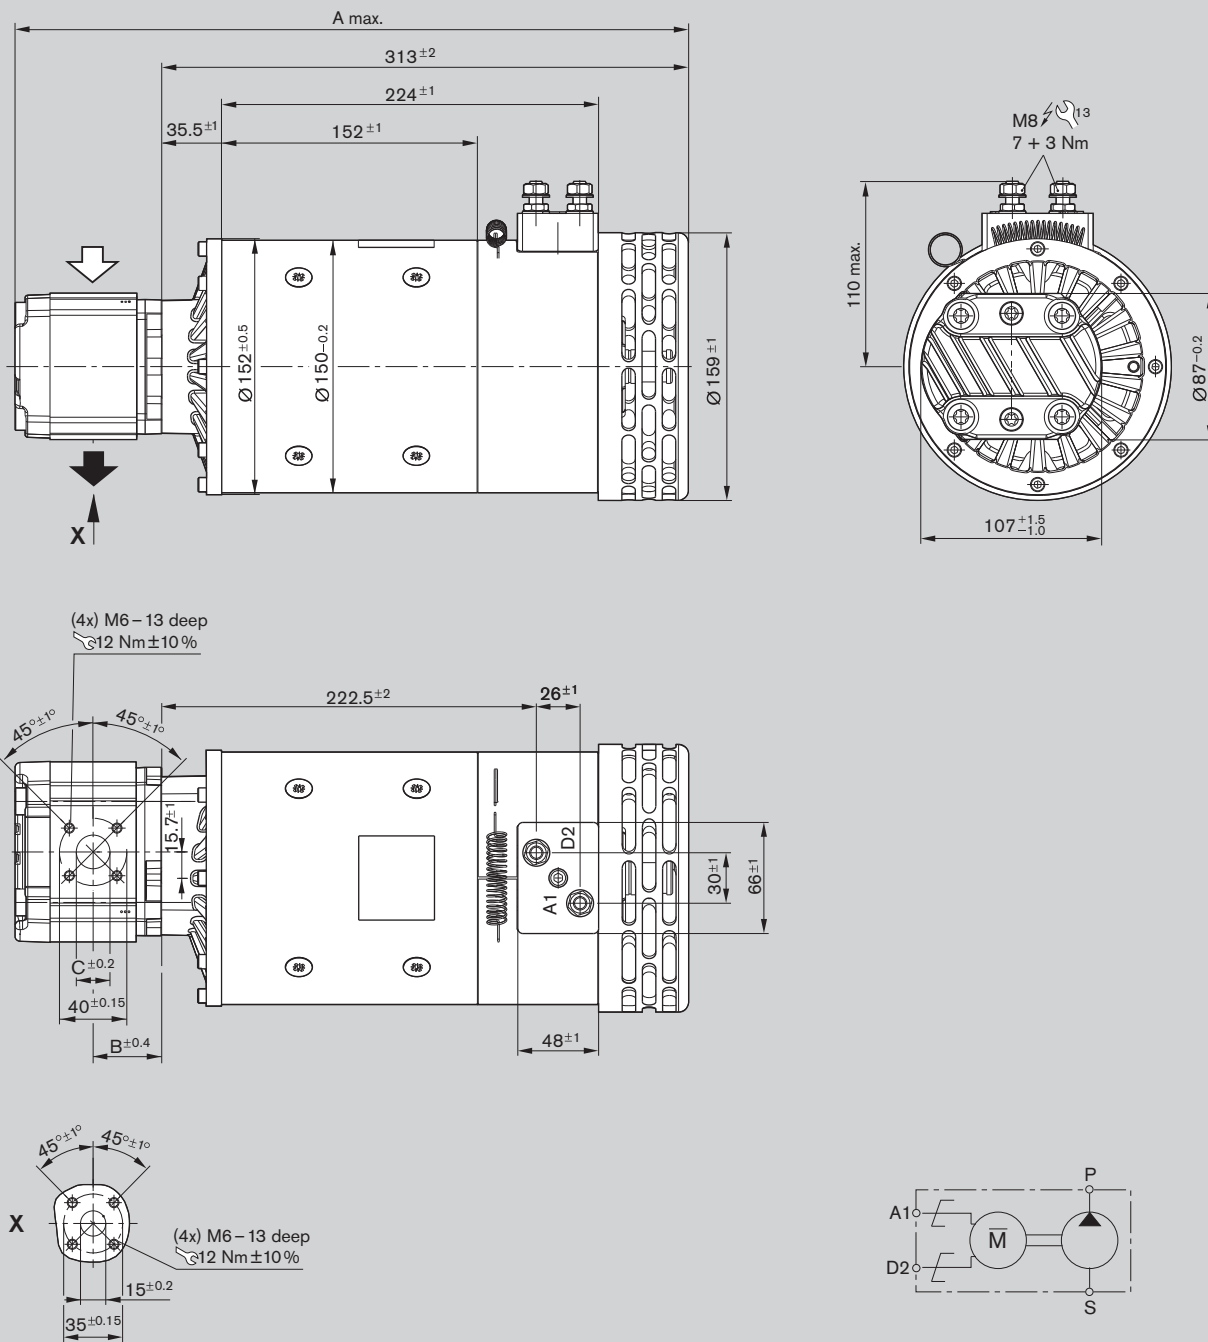

A 541 021 382




Type of protection:

Motor case IP 20


Ports IP 00

Ordering code	Displacement $V$ [cm <sup>3</sup> /rev]	Dimension [mm]			Weight [kg]	Part number
		A	B	C		
EHP24PRL20S008-20G1335N0	8.0	403	40.7	20	20.6	<b>0 541 400 082</b>

**Characteristics  
for A 541 021 382**

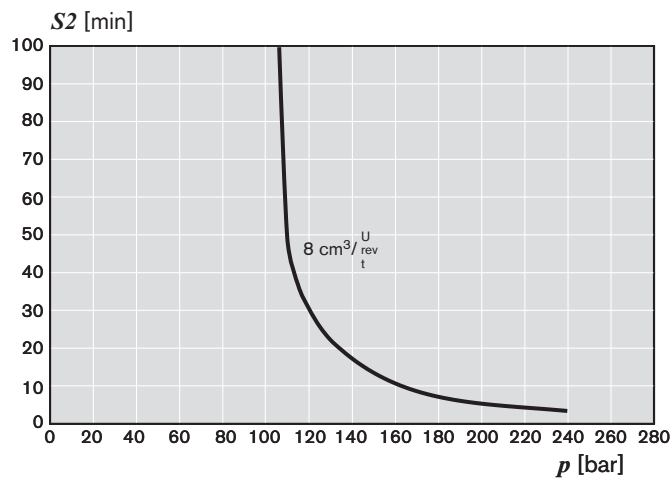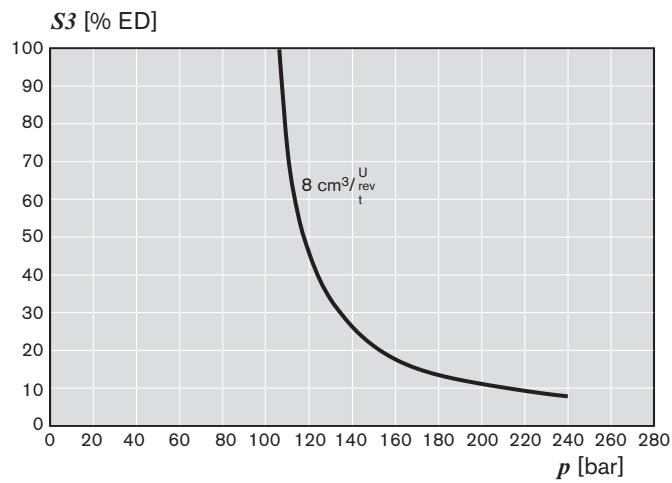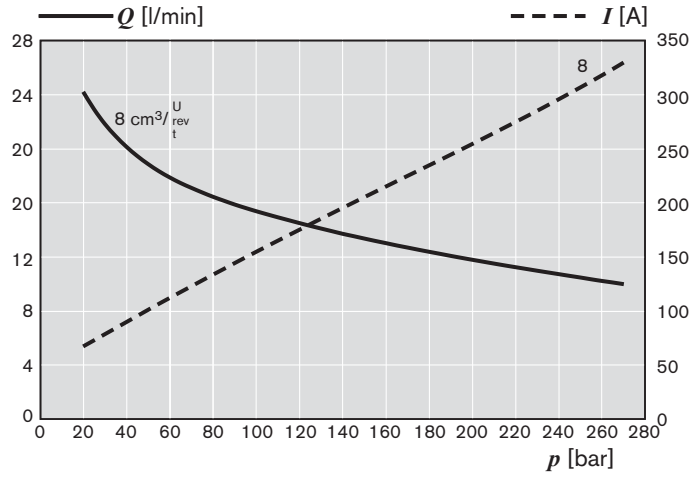

Unit dimensions

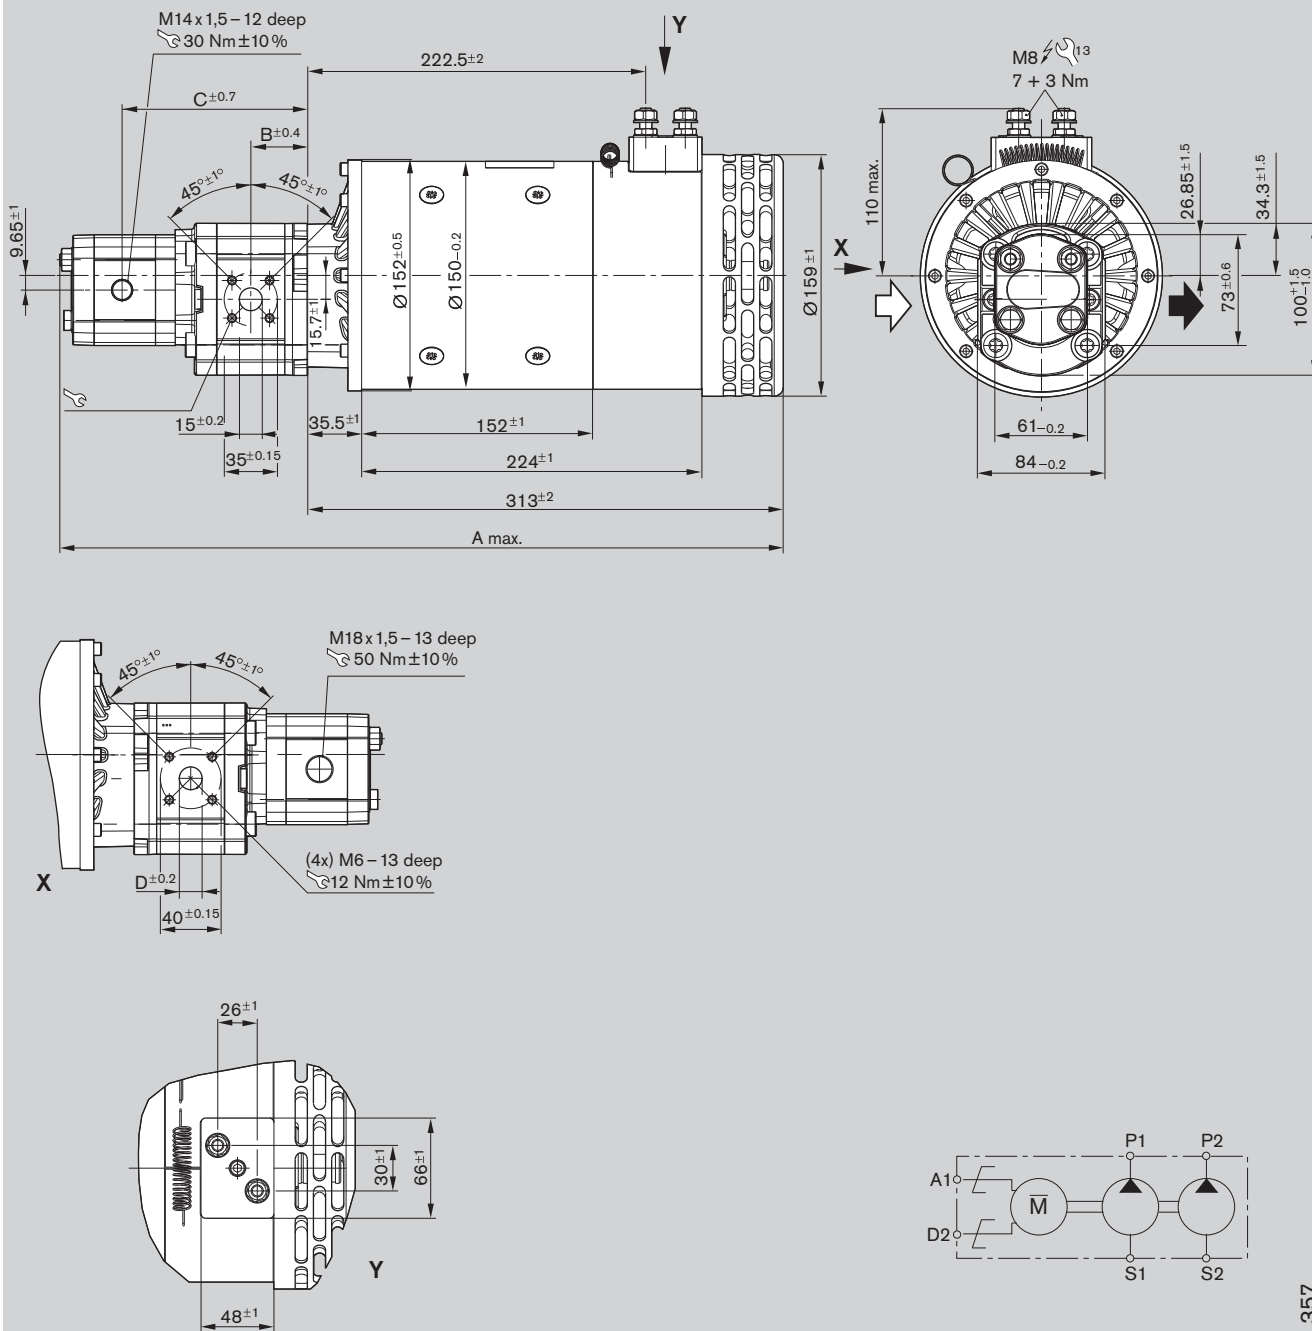

A 541 021 357




Type of protection:

Motor case IP 20

Ports IP 00

Ordering code	Förder- volumen V [cm³/rev]	Dimension [mm]				Weight [kg]	Part number
		A	B	C	D		
EHP24PRL20FB005/3.0-2002E1324N0	5.5 + 3.0	492	38.6	128.9	15	21.6	0 541 300 069




**Characteristics  
for A 541 021 357**

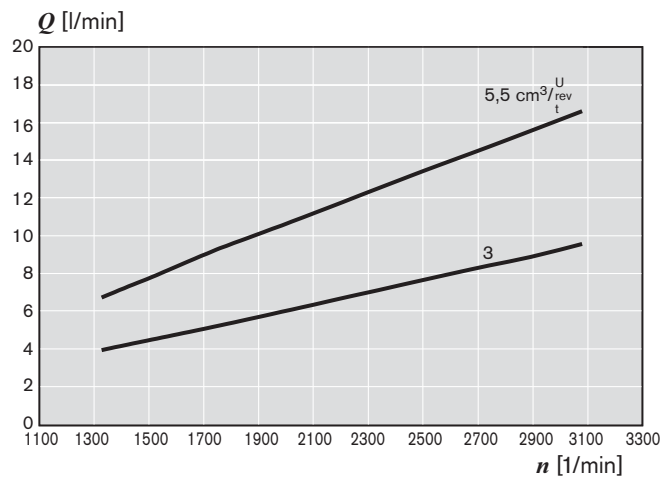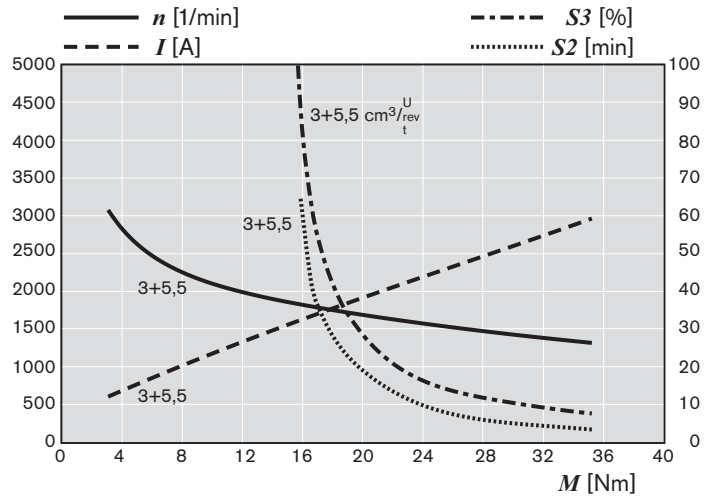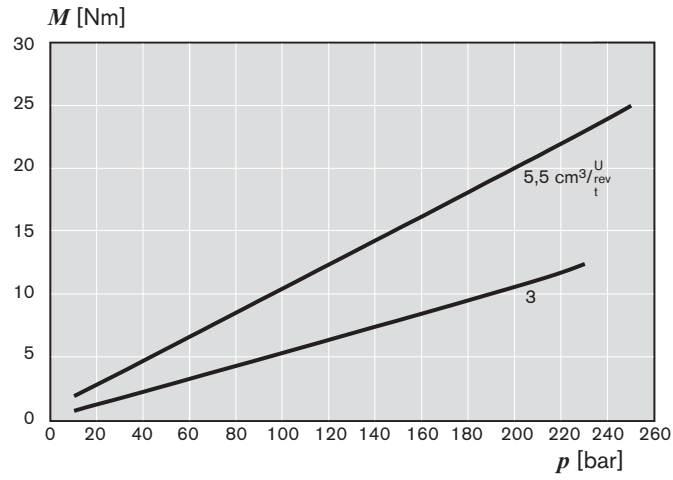






**Characteristics  
for A 541 021 368**

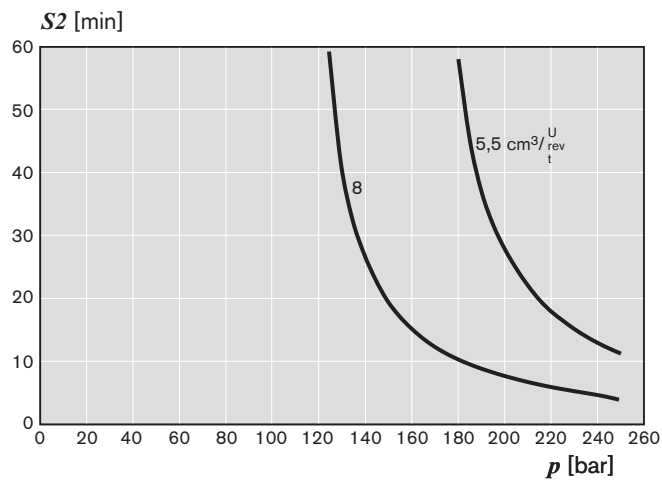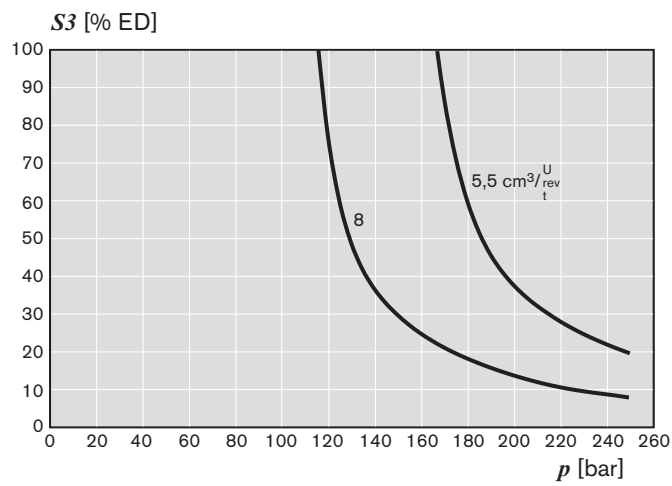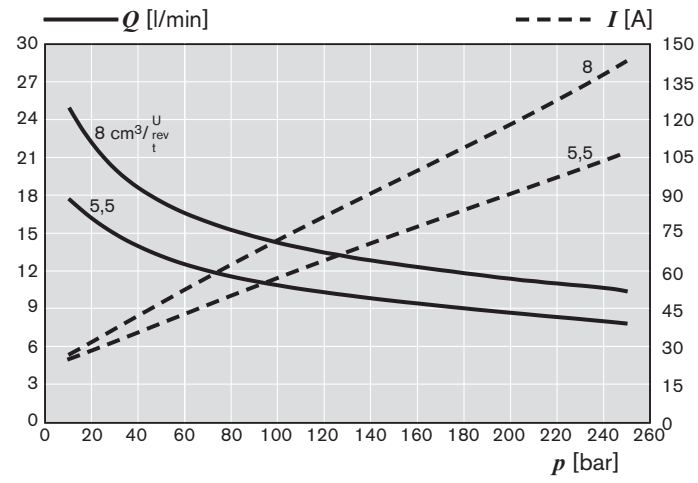

Unit dimensions

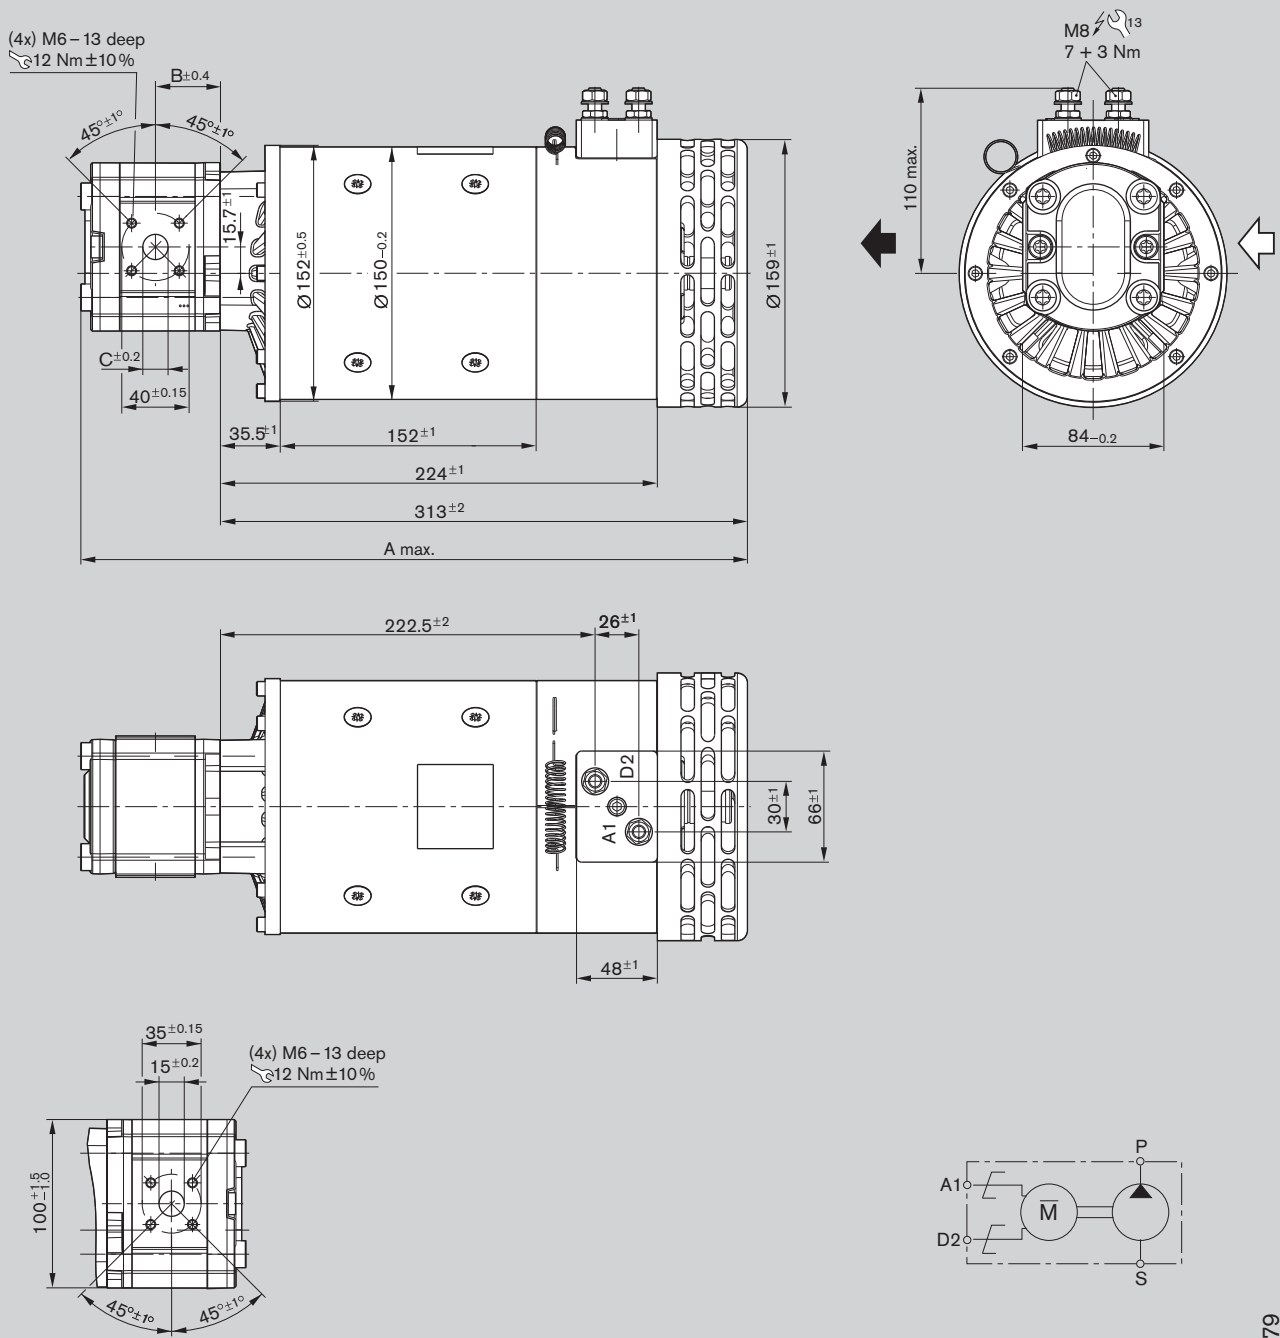

A 541 021 379




Type of protection:

Motor case IP 20

Ports IP 00




Ordering code	Displacement $V \text{ [cm}^3/\text{rev]}$	Dimension [mm]			Weight [kg]	Part number
		A	B	C		
EHP48PRL20F005-20A1341N0	5.5	399	38.6	15	20.4	<b>0 541 300 079</b>

**Characteristics  
for A 541 021 379**

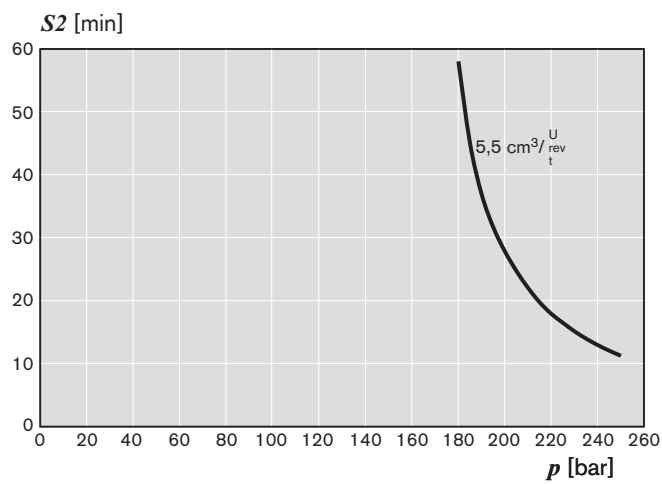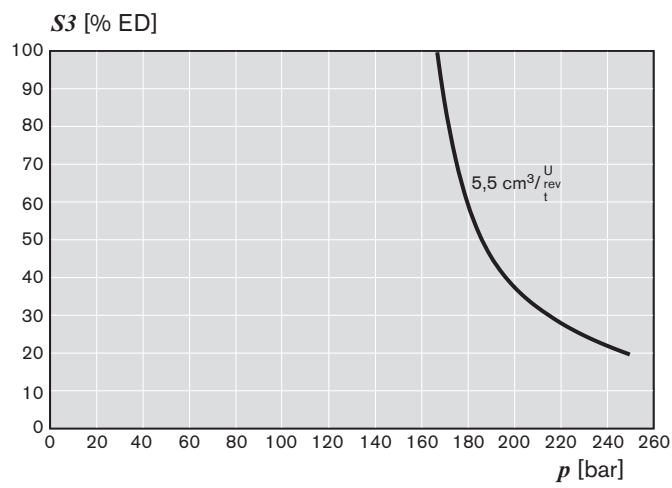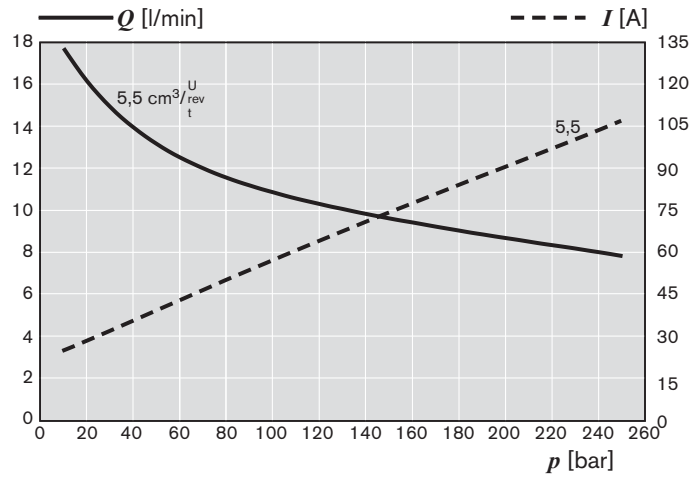




**Characteristics  
for A 541 021 366**

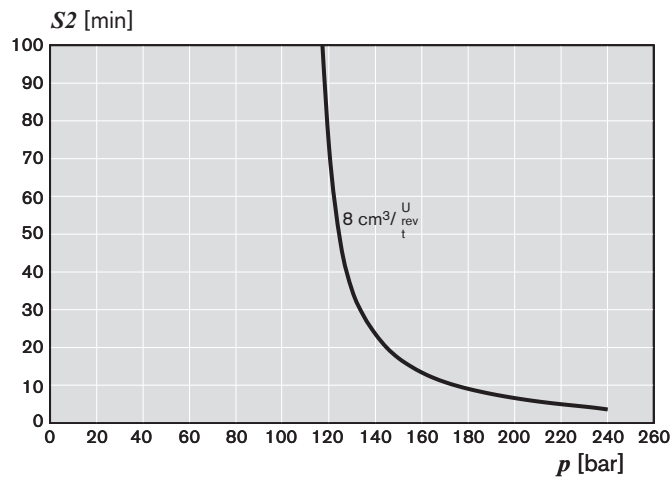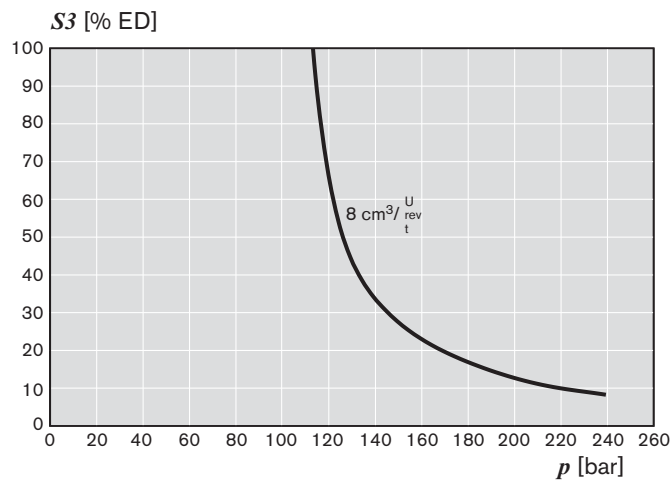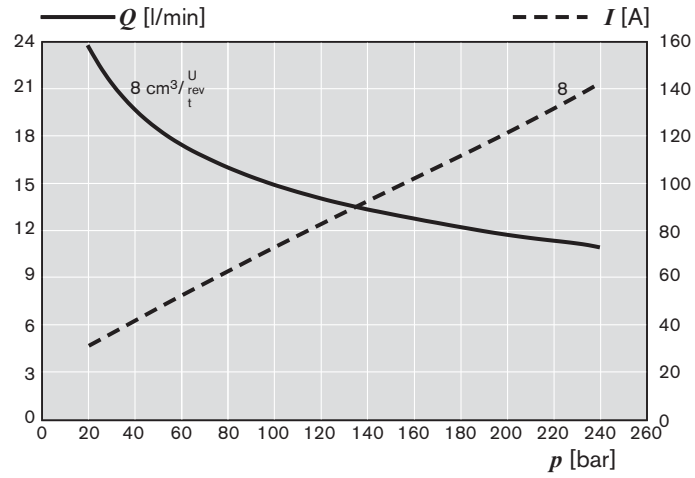

Unit dimensions

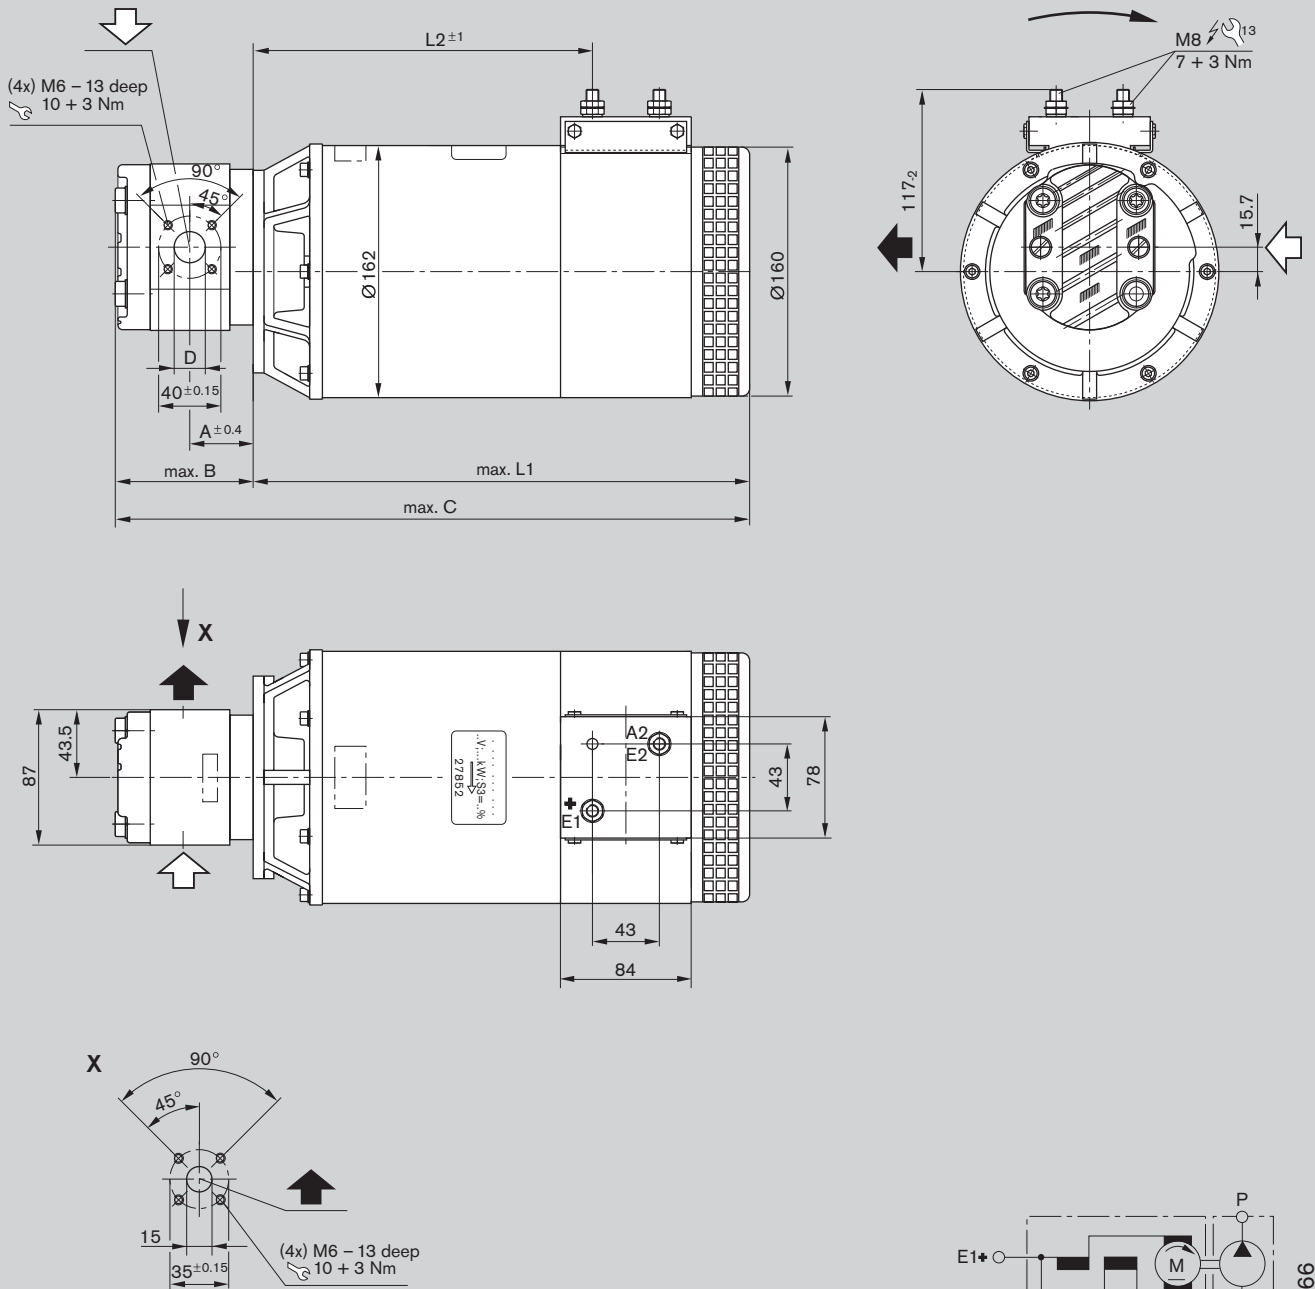

A 541 022 166




Type of protection:

Motor case IP 10

Ports IP 00

Ordering code	Displacement $V$ [cm <sup>3</sup> /rev]	Dimension [mm]						Weight [kg]	Part number
		A	B	C	D	L1	L2		
EHP48SDL14S011-20A1173N0	11.0	45.5	94.2	461.0	20.0	366.0	262.5	26	<b>0 541 500 074</b>




**Characteristics  
for A 541 022 166**

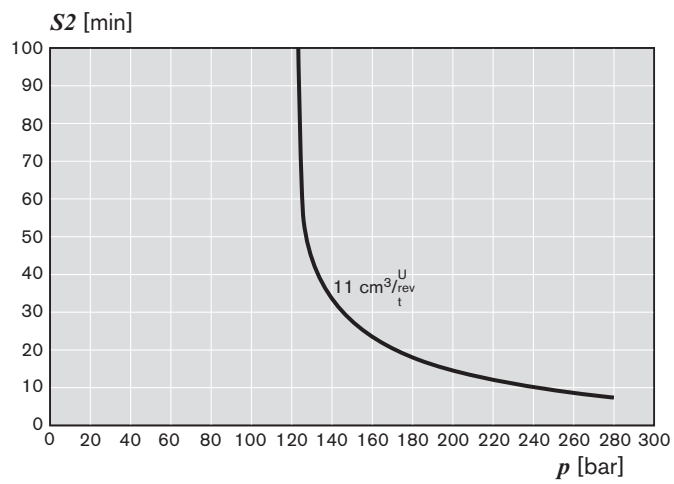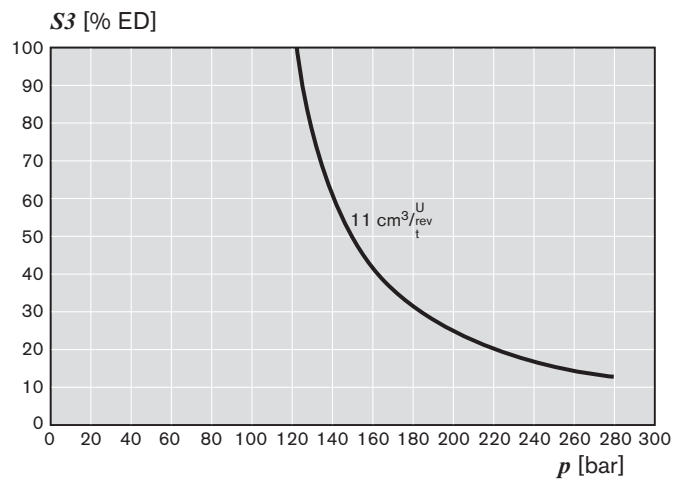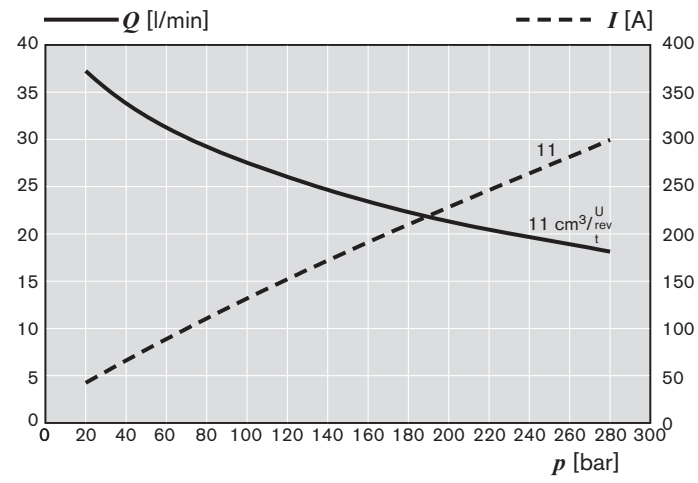






**Characteristics  
for A 541 023 013**

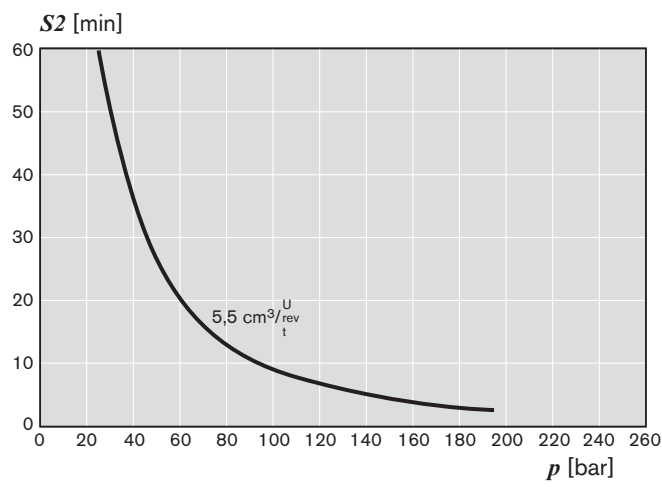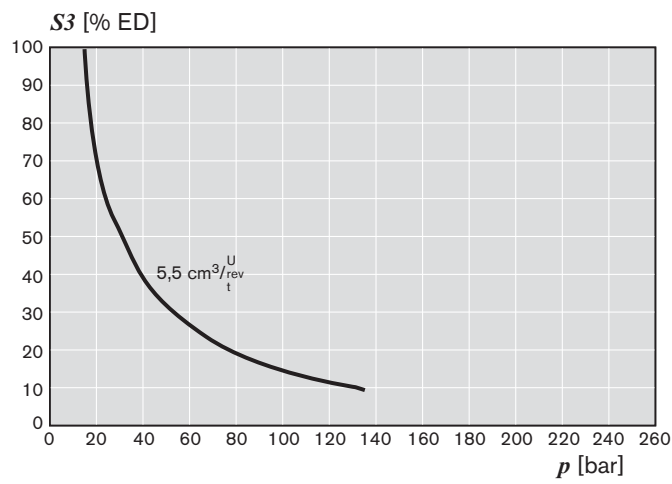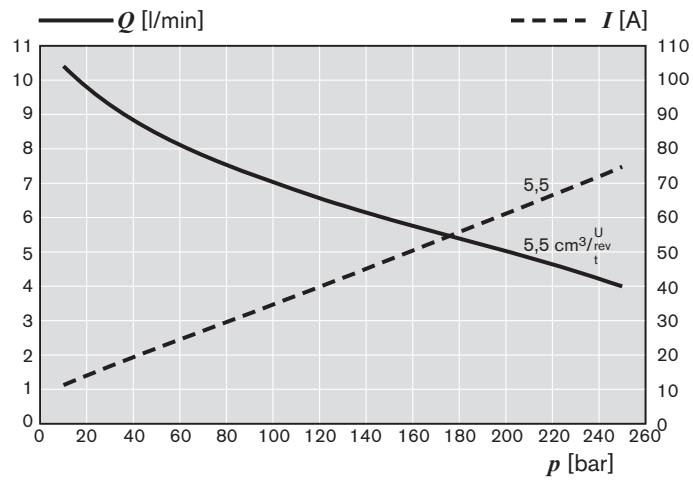

## Accessories

### Fittings that can be used for square flange 20

#### Gear pump flange, straight

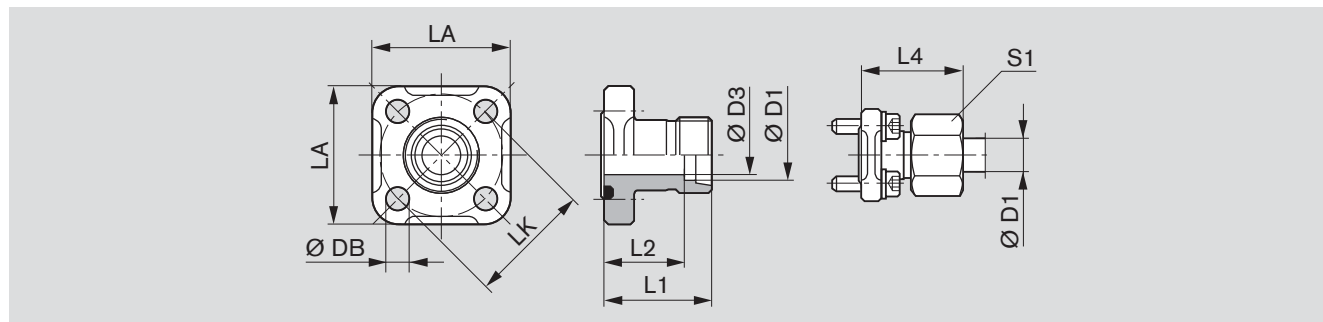


LK	D1	D3	L1	L2	L4	LA	S1	DB	Screws (metric) 4x	Seal ring	Part number	<i>p</i> [bar]
35	10L	8	30	23.0	39.0	40	19	6.4	M 6 x 22	20 x 2.5	<b>1 515 702 064</b>	315
35	12L	10	30	23.0	39.0	40	22	6.4	M 6 x 22	20 x 2.5	<b>1 515 702 065</b>	315
35	15L	12	30	23.0	38.0	40	27	6.4	M 6 x 22	20 x 2.5	<b>1 515 702 066</b>	250
40	15L	12	35	28.0	43.0	42	27	6.4	M 6 x 22	24 x 2.5	<b>1 515 702 067</b>	100
40	18L	15	35	27.5	44.0	42	32	6.4	M 6 x 22	24 x 2.5	<b>1 515 702 068</b>	100
40	22L	19	35	27.5	44.5	42	36	6.4	M 6 x 22	24 x 2.5	<b>1 515 702 069</b>	100
40	28L	24	42	27.5	44.5	42	41	6.4	M 6 x 22	24 x 2.5	<b>1 515 702 008</b>	100

Complete fittings with seal ring, metric screw set, nuts and olive.

### Fittings that can be used for square flange 20

#### Gear pump flange, 90° angle

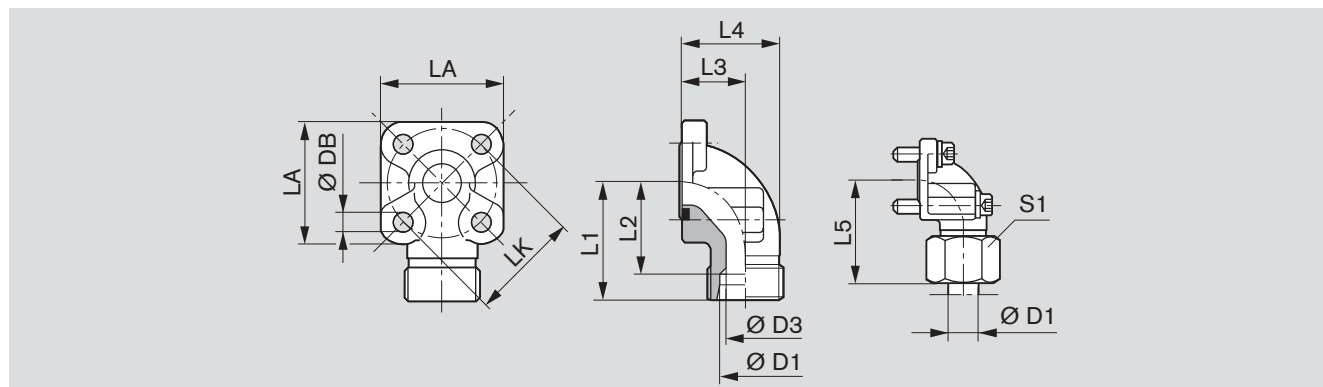


LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws 2x	2x	Seal ring	Part number	<i>p</i> [bar]
35	10L	8	38	31.0	16.5	26.5	47.0	40	19	6.4	M 6 x 22	M 6 x 35	20 x 2.5	<b>1 515 702 070</b>	315
35	12L	10	38	31.0	16.5	26.5	47.0	40	22	6.4	M 6 x 22	M 6 x 35	20 x 2.5	<b>1 515 702 071</b>	315
35	15L	12	38	31.0	16.5	26.5	46.0	40	27	6.4	M 6 x 22	M 6 x 35	20 x 2.5	<b>1 515 702 072</b>	250
35	16S	12	38	29.5	20.0	31.0	48.0	40	30	6.4	M 6 x 22	M 6 x 40	20 x 2.5	<b>1 515 702 002</b>	315
35	18L	15	38	29.5	20.0	31.0	47.0	40	32	6.4	M 6 x 22	M 6 x 40	20 x 2.5	<b>1 545 702 006</b>	250
35	20S	16	45	34.5	25.0	38.0	56.0	40	36	6.4	M 6 x 22	M 6 x 45	20 x 2.5	<b>1 515 702 017</b>	315
40	15L	12	38	31.0	22.5	36.5	46.0	42	27	6.4	M 6 x 22	M 6 x 22	24 x 2.5	<b>1 515 702 076</b>	100
40	18L	15	38	30.5	22.5	36.5	47.0	42	32	6.4	M 6 x 22	M 6 x 22	24 x 2.5	<b>1 515 702 074</b>	100
40	20S	16	40	29.5	22.5	35.5	50.0	42	36	6.4	M 6 x 22	M 6 x 45	24 x 2.5	<b>1 515 702 011</b>	250
40	22L	19	38	30.5	22.5	36.5	47.5	42	36	6.4	M 6 x 22	M 6 x 22	24 x 2.5	<b>1 515 702 075</b>	100
40	28L	22	40	32.5	28.0	43.0	49.0	42	41	6.4	M 6 x 20	M 6 x 50	24 x 2.5	<b>1 515 702 010</b>	100
40	35L	31	41	30.5	32.0	55.0	52.0	42	50	6.4	M 6 x 22	M 6 x 60	24 x 2.5	<b>1 515 702 018</b>	100

Complete fittings with seal ring, metric screw set, nuts and olive.

Fittings that can be used for square flange **30**

Gear pump flange, 3-hole, 90° angle

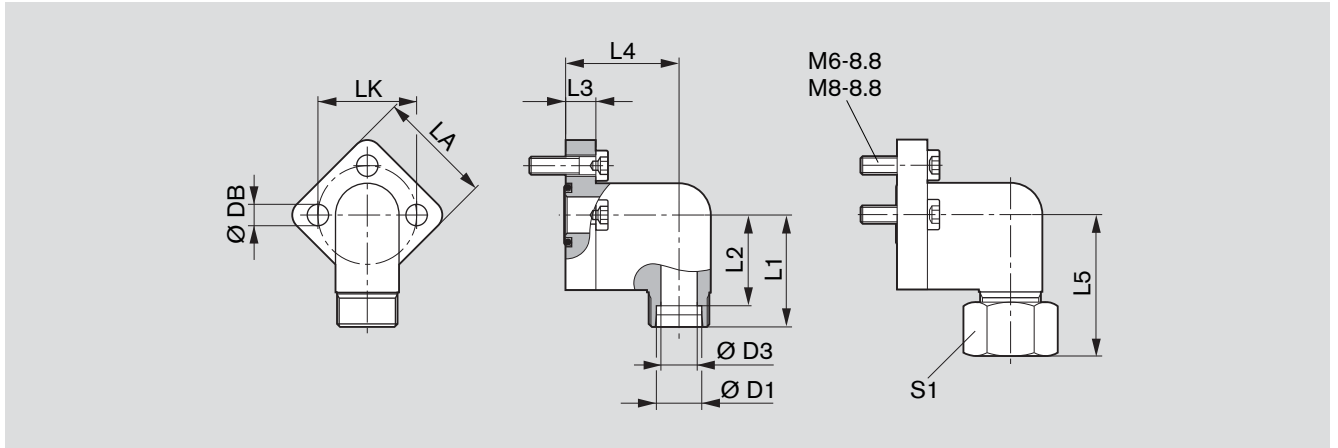

LK	D1	D3	L1	L2	L3	L4	L5	LA	S1	DB	Screws 3x	Seal ring NBR *)	Weight [kg]	Part number	p [bar]
30	12L	10	37	30.0	10	37.5	46	38	22	6.4	M 6 x 22	16 x 2.5	0.13	<b>1 515 702 146</b>	250
30	15L	12	37	30.0	10	37.5	47	38	27	6.4	M 6 x 22	16 x 2.5	0.14	<b>1 515 702 147</b>	250
30	18L	15	37	30.0	10	37.5	47	38	32	6.4	M 6 x 22	16 x 2.5	0.17	<b>1 515 702 148</b>	160
40	22L	19	43	35.5	14	41.0	53	48	36	8.4	M 8 x 30	24 x 2.5	0.29	<b>1 515 702 149</b>	160
40	28L	24	43	35.5	14	41.0	53	48	41	8.4	M 8 x 30	24 x 2.5	0.40	<b>1 515 702 150</b>	160

Complete fittings with seal ring, metric screw set, nuts and olive. \*) NBR = Perbunan®

**Note**

The permissible tightening torques can be found in our publication:  
 “General operating instructions for external gear units”  
 RE 07 012-B1.

For further information about the product electrohydraulic pump with regard to new projects, accessories and spare parts, and for general questions, please contact

**BRM-AZ.info@boschrexroth.de**

You will also find the EHP configurator in the internet, at:

**www.boschrexroth.com/azconfigurator**

<b>Rexroth</b> Bosch Group	<b>Project specification</b> <b>Electrohydraulic pump (EHP)</b>	Hydraulics DC-MA/SPP3 1/4
-------------------------------	--	---------------------------------

This project specification is intended as a guide for customer-specific projects, from the initial inquiry to the approval for a new product.

Full details under **1. Project details** are the basis for effective project management.

Detailed figures are the requirement for optimal design.

**2. Project management** is maintained internally by DC-MA/SPP3.

If any details are missing under **3. Technical data**, the Bosch Rexroth AG terms and conditions of supply and the figures stated in the catalogs and general operating conditions shall apply.

**4. Customer requirements** are to be submitted as completely as possible.

<b>1. Project details</b>	Sales person: e-mail: Telephone:						Department: Date: Customer number:				
	Customer/contact: e-mail:						Customer number: Telephone:				
	Customer vehicle/project										
	Application, project description (task of EHP in the system, e.g. implement hydraulics, emergency steering, etc.)										
		Proposal	A sample	B sample	C sample	D sample	SOP	Year 1	Year 2	Year 3	Year 4
	Deadline							/	/	/	/
	Quantity										
	€/unit										
	Additional business		<input type="checkbox"/>		Competition						
	Replacement business		<input type="checkbox"/>		Target price						
Description of product (e.g. EHP24KDG66F004-20A0653N0)											
<b>Particular technical requirements and application conditions to be stated in section 3.</b> <b>If any details are missing, compliance with the operating conditions Y 541... (see table on page 4)</b> <b>and the figures in the catalog will be assumed.</b>											
Particular features (ZA 08916) and systems (remarks, sketches, notes, specifications, drawings, etc.)											

<b>2. Project management</b>	Development location			Project category* S			N = Platform/new development A = Application development S = Series			
				* R = Fundamental R&D development V = Variant development M = Modification to series						
	Modification no.	Description		Date		Originator		Checked		
Produceability declaration required?				Project Manager:						
Yes <input type="checkbox"/> No <input type="checkbox"/>				Project number:						

<b>Rexroth</b> Bosch Group	<b>Project specification</b> <b>Electrohydraulic pump (EHP)</b>	Hydraulics DC-MA/SPP3 2/4
-------------------------------	--	---------------------------------

3. Technical data	Operating voltage of motor (volts)					
	Motor voltage type    Direct current (DC) <input type="checkbox"/> Alternating current (AC) <input type="checkbox"/>					
	Protection class Motor (IP)					
	Thermal contact (yes/no)					
	Relay (yes/no) If yes: axial or radial					
	Displacement [l/min] at working pressure [bar]		PT1	PT2	PT3	PT4
	Displacement [l/min] at maximum pressure [bar]		PT1	PT2	PT3	PT4
	Actuated time S2 in min					
	Actuated time S3 in %					
	Seals            FPM <input type="checkbox"/> NBR <input type="checkbox"/> HNBR <input type="checkbox"/> Radial shaft seal ring FPM/otherwise NBR <input type="checkbox"/>					
	Multiple pumps		Tang (light through drive) <input type="checkbox"/>			
			Splined shaft (heavy through drive) <input type="checkbox"/>			
			Separation of medium <input type="checkbox"/>			
			Common suction port <input type="checkbox"/>			
	Auxiliary function		PRV adjustment            ±            bar at            l/min			
			SRV adjustment            ±            l/min			
			Residual current, external <input type="checkbox"/> Residual current, internal <input type="checkbox"/>			
			Electrical connection    Prop. PRV 12 V <input type="checkbox"/> 24 V <input type="checkbox"/>			
			Connector                    AMP Junior Timer (C4) <input type="checkbox"/> DEUTSCH (K40) <input type="checkbox"/>			
	Particular notes (e.g. surface protection ...)					
Other (load complex etc.)						
Medium temperature		min	°C	max	°C	
Ambient temperature		min	°C	max	°C	
Operating medium						
Viscosity range						
Cleanliness level						
Filter grade		β	≧	– Suction filter		
		β	≧	– Pressure filter		
Ambient conditions (e.g. dust, spray water)						
Additional stress						
Noise requirements						
Installation position						
Interfaces						



<b>Rexroth</b> Bosch Group	<b>Project specification</b> <b>Electrohydraulic pump (EHP)</b>	Hydraulics DC-MA/SPP3 3/4
-------------------------------	--	---------------------------------

## Operating conditions

EHP	Y 541 ... ... or quotation drawing
Information Tightening torque	Y 510 202 040

Remarks:

Bosch Rexroth AG  
Hydraulics  
AußenzahnradEinheiten  
Robert-Bosch-Straße 2  
D-71701 Schwieberdingen  
Telefon +49 (0) 711-811 10 63  
Telefax +49 (0) 711-811 17 98  
brm-az.info@boschrexroth.de  
www.boschrexroth.com/brm

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.



## Gerotor pumps

<b>Designation</b>	<b>Type</b>	<b>Size</b>	<b>Series</b>	<b>Data sheet</b>	<b>Page</b>
Gerotor pump, fixed displacement volume	PGZ	20...140	1x	10545	1673

For the latest information on gerotor pumps, please visit our website:  
[www.boschrexroth.com/products](http://www.boschrexroth.com/products)




# Gerotor pump, fixed displacement volume

RE 10545/12.11

1/12

## Type PGZ

Component series 1X  
Maximum operating pressure 15 bar  
Maximum displacement 140 cm<sup>3</sup>

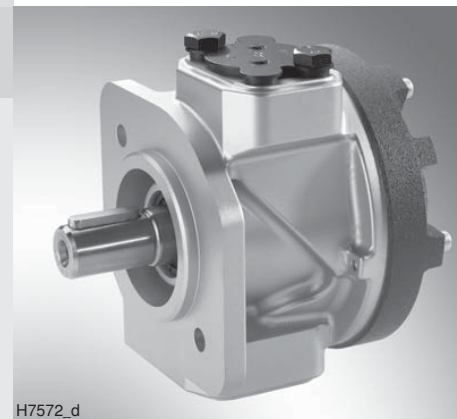

H7572\_d

## Table of contents

Contents	Page
Features	1
Ordering code	2
Function, section, symbol	3
Technical data	4 and 5
Unit dimensions, standard types	6 to 9
Ports	10
Project planning information	10 to 12

## Features

- Low-pressure pump with fixed displacement
- Very low operating noise
- Suitable for wide viscosity and speed ranges
- Very good suction behavior
- Flexible combination possibilities with Rexroth axial piston, internal gear and vane pumps
- Use:  
For cooling, filtration or lubrication circuits at low pressures in industrial or mobile applications, e.g. plastics processing machines, machine tools, presses and wind turbines.

Information on available spare parts:  
[www.boschrexroth.com/spc](http://www.boschrexroth.com/spc)

## Ordering code

PG	Z	-1X/	R	07	V	*
----	---	------	---	----	---	---

### Series

Gerotor pump, low-pressure = Z

### Frame size

BG4 = 4  
BG5 = 5

**Component series:** Component series 10 to 19 = 1X  
(10 to 19: Unchanged installation and connection dimensions)

### Size

	Size	Displacement volume/ rotation	
<b>BG4</b>	20	21.0 cm <sup>3</sup>	= 20
	32	33.4 cm <sup>3</sup>	= 32
	40	42.1 cm <sup>3</sup>	= 40
	50	52.0 cm <sup>3</sup>	= 50
	63	64.4 cm <sup>3</sup>	= 63
<b>BG5</b>	80	84.2 cm <sup>3</sup>	= 80
	63	64.4 cm <sup>3</sup>	= 63
	80	84.2 cm <sup>3</sup>	= 80
	100	105.3 cm <sup>3</sup>	= 100
	140	136.3 cm <sup>3</sup>	= 140

### Direction of rotation

Clockwise (viewed on the shaft end) = R

Further details in the plain text  
e.g. special designs

### Type of connection

**E4 =** ISO 4-hole mounting flange  
according to ISO 3019-2 and  
VDMA 24560

**U2 =** SAE 2-hole mounting flange

**B2 =** ISO 2-hole mounting flange  
according to ISO 3019-2,  
secondary pump for  
through-drive KB2

**B3 =** ISO 2-hole mounting flange  
according to ISO 3019-2,  
secondary pump for  
through-drive KB3

### Seal material

**V =** FKM seals

### Line connection

**07 =** SAE flange standard pressure series

### Shaft design

**A =** Cylindrical

**T =** SAE involute gear 11T

**R =** SAE involute gear 13T

### Standard types PGZ-1X

Type	Size	Material No.
PGZ4-1X/020RA07VE4		R901230020
PGZ4-1X/032RA07VE4		R901230024
PGZ4-1X/040RA07VE4		R901230028
PGZ4-1X/050RA07VE4		R901230032
PGZ4-1X/063RA07VE4		R901230036
PGZ4-1X/080RA07VE4		R901230040
PGZ5-1X/100RA07VE4		R901230052
PGZ5-1X/140RA07VE4		R901230056

The possible flange shaft configurations can be found in the selection tables on the pages 6 to 9.

## Function, section

### Construction

Hydraulic pumps of the PGZ type are gerotor pumps with fixed displacement.

They mainly consist of: Flange housing (1), shaft (2), the displacer elements inner rotor (3) and outer rotor (4), as well as driving disk (5) and cover (6).

### Suction and displacement procedure

Via the driving disk the shaft drives the inner rotor in the direction of rotation shown. The inner rotor meshes with the outer rotor and causes the same to rotate as well.

The tooth clearances opening in the suction area (S) prime the hydraulic fluid. The suction and pressure area are separated on the opposite side of the meshing area (Z) by a radial gap (R) created by the tooth profile of the outer and the inner rotor sliding against each other.

Within the pressure area (P) the hydraulic fluid is pumped into the pressure port as the chambers become.

### Properties

The gearing with cycloid contour is characterized by a large meshing length. Filling zone and displacement area cover a large rotation angle. This results in low flow pulsation and thus very low operating noise.

The shaft and the displacer are supported by a slide bearing and work in a wear-free manner when used as intended.


Gerotor pumps PGZ are self-priming.

### Materials used


Flange housing (1): Aluminum

Shaft (2), inner rotor (3), outer rotor (4), and driving disk (5): Steel

Cover (6): Cast iron

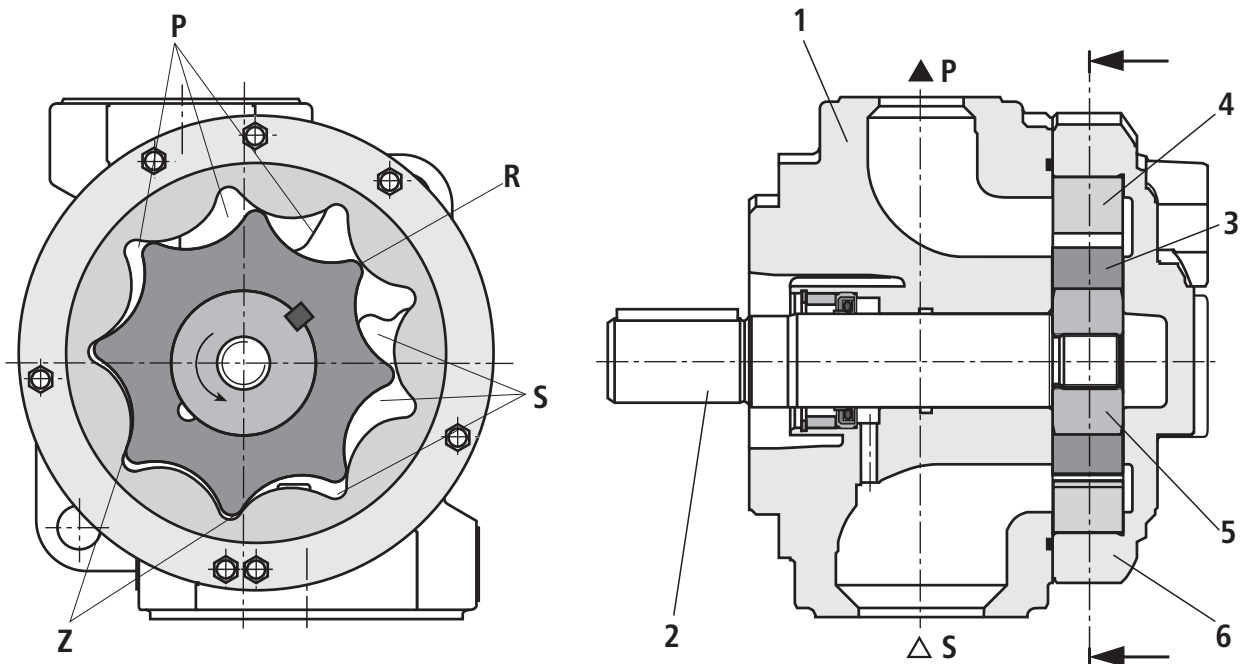

## Symbol



**Technical data** (For applications outside these parameters, please consult us!)**general**

Type	Gerotor pump
Type of connection	ISO 4-hole mounting flange according to ISO 3019-2 and VDMA 24560 SAE 2-hole mounting flange ISO 2-hole mounting flange according to ISO 3019-2, matching through-drive KB2 ISO 2-hole mounting flange according to ISO 3019-2, matching through-drive KB3
Line connection	Flange connection
Shaft load	Radial and axial forces cannot be transmitted
Direction of rotation (viewed on shaft end)	Clockwise

**hydraulic**

Hydraulic fluid	HLP - mineral oil according to DIN 51524 part 2 <b>Please observe our specification according to data sheet RE 90220</b> <b>Other fluids upon request!</b>							
Hydraulic fluid temperature range	°C	-20 to +80, observe the admissible viscosity range!						
Ambient temperature range	°C	-20 to +80						
Viscosity range	mm <sup>2</sup> /s	10 to 2000						
Max admissible degree of contamination of the hydraulic fluid - cleanliness class according to ISO 4406 (c)	Class 21/18/15 <sup>1)</sup>							
<b>Frame size 4</b>	<b>Frame size</b>	<b>PGZ4</b>						
<b>Size</b>	<b>Size</b>	<b>20</b>	<b>32</b>	<b>40</b>	<b>50</b>	<b>63</b>	<b>80</b>	
Displacement	<i>V</i> cm <sup>3</sup>	21.0	33.4	42.1	52.0	64.4	84.2	
Weight	<i>m</i> kg	4.7	5.3	5.6	6.0	6.7	7.8	
Flow <sup>2)</sup>	<i>q<sub>v</sub></i> l/min	28	46	58	71	88	116	
Mass moment of inertia (around drive axis)	<i>J</i> kgm <sup>2</sup>	0.00086	0.00134	0.00167	0.00205	0.00253	0.00329	
Speed range	<i>n<sub>min</sub></i> rpm	200	200	200	200	200	200	
	<i>n<sub>max</sub></i> rpm	3000	3000	3000	3000	2300	1800	
Operating pressure, absolute – Inlet	<i>p</i> bar	0.7 to 2 (short-time during start 0.5 bar)						
Nominal pressure – Outlet, continuous	<i>p<sub>N</sub></i> bar	15						
Min required driving power – at $\Delta p \approx 1$ bar, $n = 1,450$ min <sup>-1</sup>	kW	0.75	1.1	1.1	1.1	1.1	1.1	
– at $\Delta p \approx 10$ bar, $n = 1,450$ min <sup>-1</sup>		1.5	2.2	2.2	2.2	3.0	3.0	
Sound pressure level at 0 – 15 bar <sup>3)</sup>	dB(A)	55	56	57	59	60	62	

<sup>1)</sup> The cleanliness classes specified for the components must be adhered to in hydraulic systems.  
An efficient filtration prevents failures and simultaneously increases the lifetime of the components.  
For the selection of filters, see data sheets RE 50070, RE 50076, RE 50081, RE 50086 and RE 50088.

<sup>2)</sup> Measured at  $n = 1.450$  rpm,  $p = 10$  bar, and  $v = 30$  mm<sup>2</sup>/s

<sup>3)</sup> Measured in sound-absorbent acoustic room at  $n = 1450$  rpm and  $v = 30$  mm<sup>2</sup>/s

**Technical data** (For applications outside these parameters, please consult us!)

Frame size 5	Frame size		PGZ5			
Size	Size		63	80	100	140
Displacement	$V$	cm <sup>3</sup>	64.4	84.2	105.3	136.3
Weight	$m$	kg	6,6	7,7	8,9	10,7
Flow <sup>1)</sup>	$q_V$	l/min	88	116	144	186
Mass moment of inertia (around drive axis)	$J$	kgm <sup>2</sup>	0.00253	0.00329	0.00410	0.00529
Speed range	$n_{min}$	rpm	200	200	200	200
	$n_{max}$	rpm	3000	2300	1800	1500
Operating pressure, absolute – Inlet	$p$	bar	0.7 to 2 (short-time during start 0.5 bar)			
Nominal pressure – Outlet, continuous	$p_N$	bar	15			
Min required driving power		kW				
– at $\Delta p \approx 1$ bar, $n = 1,450$ min <sup>-1</sup>			1.1	1.1	1.5	1.5
– at $\Delta p \approx 10$ bar, $n = 1,450$ min <sup>-1</sup>			3.0	3.0	4.0	5.5
Sound pressure level at 0 – 15 bar <sup>2)</sup>		dB(A)	60	62	63	66


<sup>1)</sup> Measured at  $n = 1,450$  rpm,  $p = 10$  bar, and  $v = 30$  mm<sup>2</sup>/s

<sup>2)</sup> Measured in sound-absorbent acoustic room at  $n = 1450$  rpm and  $v = 30$  mm<sup>2</sup>/s

## Unit dimensions frame sizes 4 and 5, type...VE4 (dimensions in mm)

### PGZ $\frac{4}{5}$ -1X/ ... RA07VE4

Drive shaft cylindrical,  
4-hole mounting flange according to ISO 3019-2  
and VDMA 24560

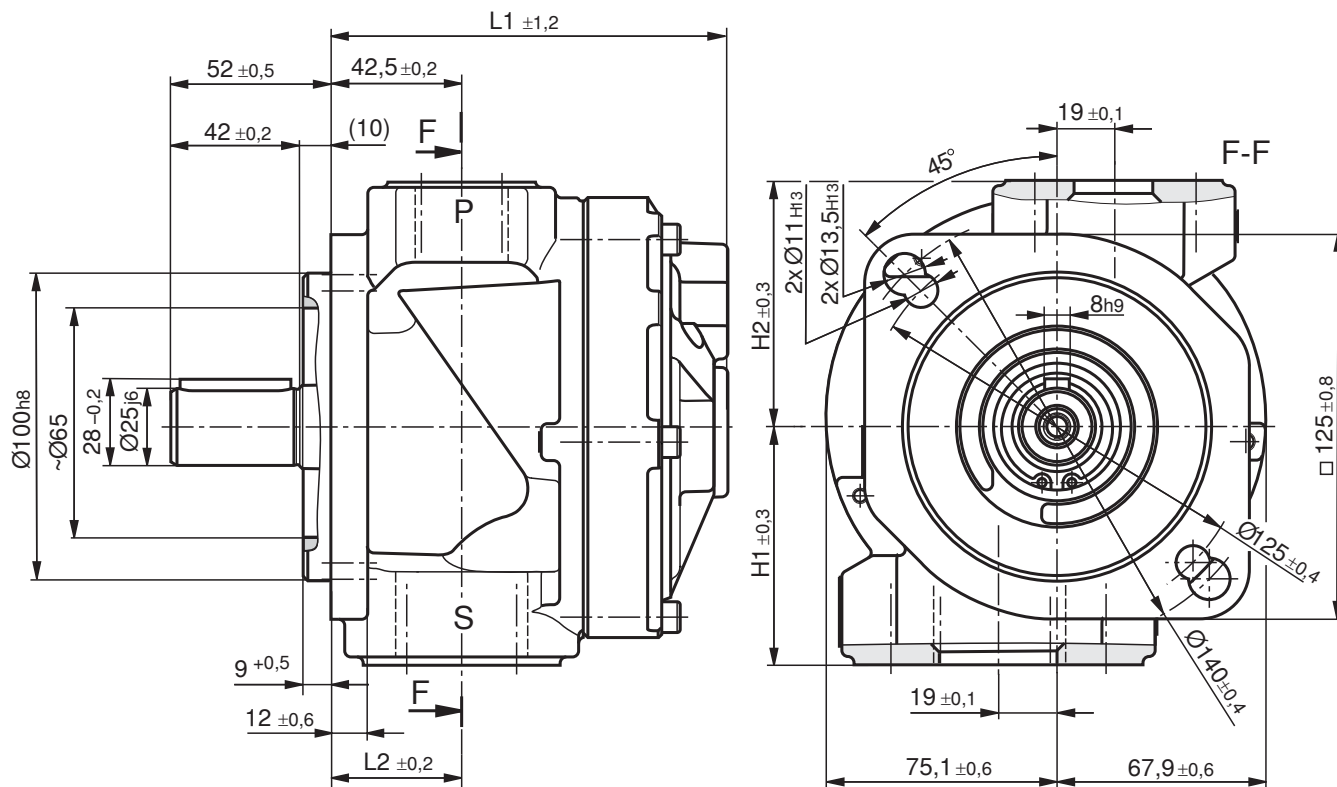

Type	Size	Material No.	L1	L2	H1	H2	S <sup>1)</sup>	P <sup>1)</sup>
PGZ4-1X/020RA07VE4		R901230020	116,5	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/032RA07VE4		R901230024	121,5	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/040RA07VE4		R901230028	125	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/050RA07VE4		R901230032	129	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/063RA07VE4		R901230036	134	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/080RA07VE4		R901230040	142	42,5	77,4	79,6	1 1/2"	1"
PGZ5-1X/063RA07VE4		R901230044	134	48,5	72,9	76,1	2"	1 1/4"
PGZ5-1X/080RA07VE4		R901230048	142	48,5	72,9	76,1	2"	1 1/4"
PGZ5-1X/100RA07VE4		R901230052	150,5	48,5	72,9	76,1	2"	1 1/4"
PGZ5-1X/140RA07VE4		R901230056	163	48,5	72,9	76,1	2"	1 1/4"


<sup>1)</sup> Exact dimensions see table page 10



## Unit dimensions frame sizes 4 and 5, type...VU2 (dimensions in mm)

PGZ<sup>4</sup><sub>5</sub>-1X/ ... RT07VU2

Drive shaft splined,  
SAE 2-hole mounting flange

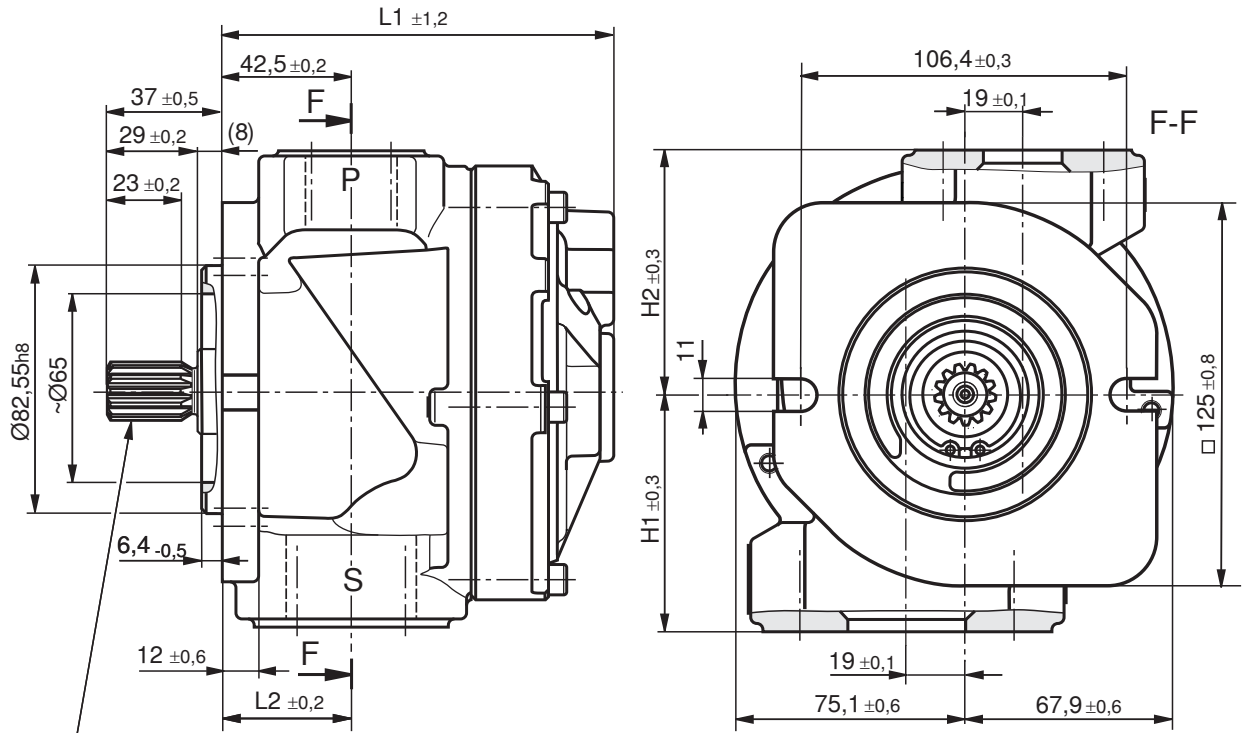

Involute gear ANSI B92.1-1996  
11T 16/32 DP30°

Type	Size	Material No.	L1	L2	H1	H2	S <sup>1)</sup>	P <sup>1)</sup>
PGZ4-1X/020RT07VU2		R901230021	116,5	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/032RT07VU2		R901230025	121,5	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/040RT07VU2		R901230029	125	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/050RT07VU2		R901230033	129	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/063RT07VU2		R901230037	134	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/080RT07VU2		R901230041	142	42,5	77,4	79,6	1 1/2"	1"
PGZ5-1X/063RT07VU2		R901230045	134	48,5	72,9	76,1	2"	1 1/4"
PGZ5-1X/080RT07VU2		R901230049	142	48,5	72,9	76,1	2"	1 1/4"
PGZ5-1X/100RT07VU2		R901230053	150,5	48,5	72,9	76,1	2"	1 1/4"
PGZ5-1X/140RT07VU2		R901230057	163	48,5	72,9	76,1	2"	1 1/4"


<sup>1)</sup> Exact dimensions see table page 10

## Unit dimensions frame sizes 4 and 5, type...VB2 (dimensions in mm)

### PGZ<sup>4</sup><sub>5</sub>-1X/ ... RT07VB2

Drive shaft splined,  
ISO 2-hole mounting flange according to ISO 3019-2

(Secondary pump for through-drive KB2)

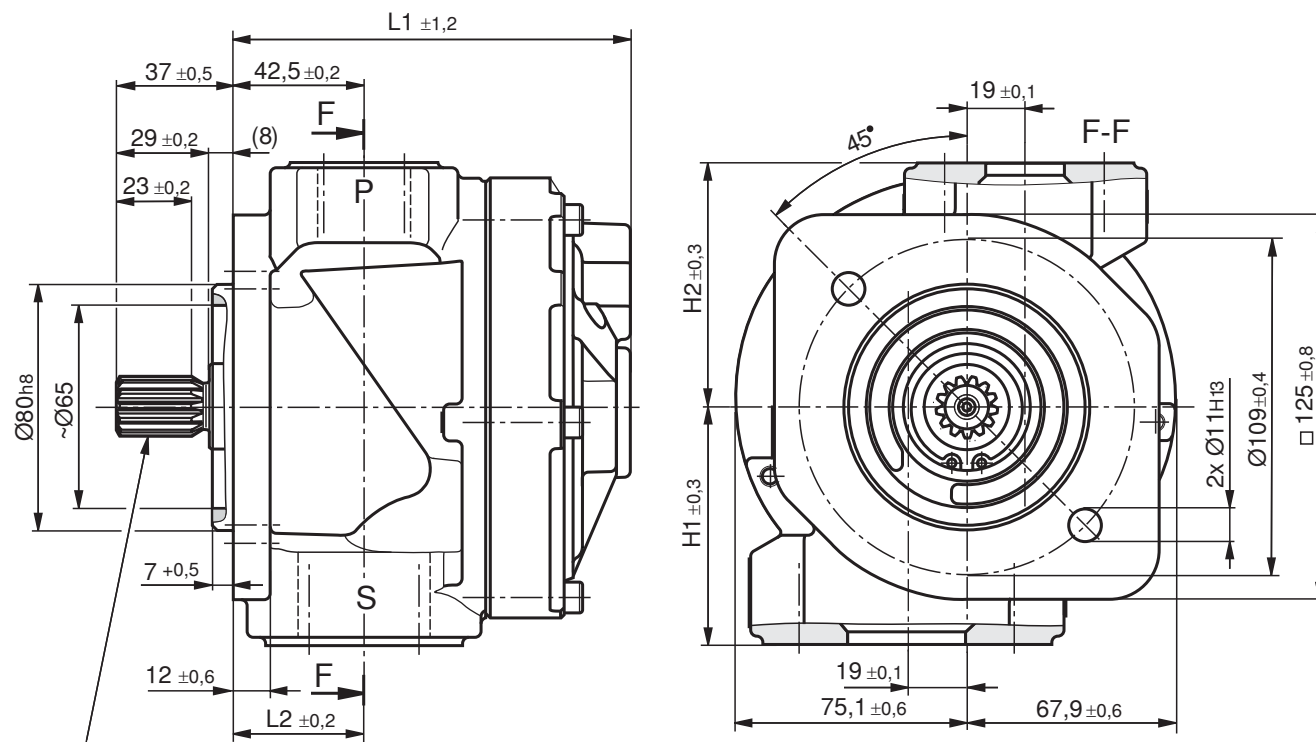

Involute gear ANSI B92.1-1996  
11T 16/32 DP30°

Type	Size	Material No.	L1	L2	H1	H2	S <sup>1)</sup>	P <sup>1)</sup>
PGZ4-1X/020RT07VB2		R901230022	116,5	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/032RT07VB2		R901230026	121,5	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/040RT07VB2		R901230030	125	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/050RT07VB2		R901230034	129	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/063RT07VB2		R901230038	134	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/080RT07VB2		R901230042	142	42,5	77,4	79,6	1 1/2"	1"
PGZ5-1X/063RT07VB2		R901230046	134	48,5	72,9	76,1	2"	1 1/4"
PGZ5-1X/080RT07VB2		R901230050	142	48,5	72,9	76,1	2"	1 1/4"
PGZ5-1X/100RT07VB2		R901230054	150,5	48,5	72,9	76,1	2"	1 1/4"
PGZ5-1X/140RT07VB2		R901230058	163	48,5	72,9	76,1	2"	1 1/4"


<sup>1)</sup> Exact dimensions see table page 10

## Unit dimensions frame sizes 4 and 5, type...VB3 (dimensions in mm)

### PGZ $\frac{4}{5}$ -1X/ ... RR07VB3

Drive shaft splined,  
ISO 2-hole mounting flange according to ISO 3019-2

(Secondary pump for through-drive KB3)

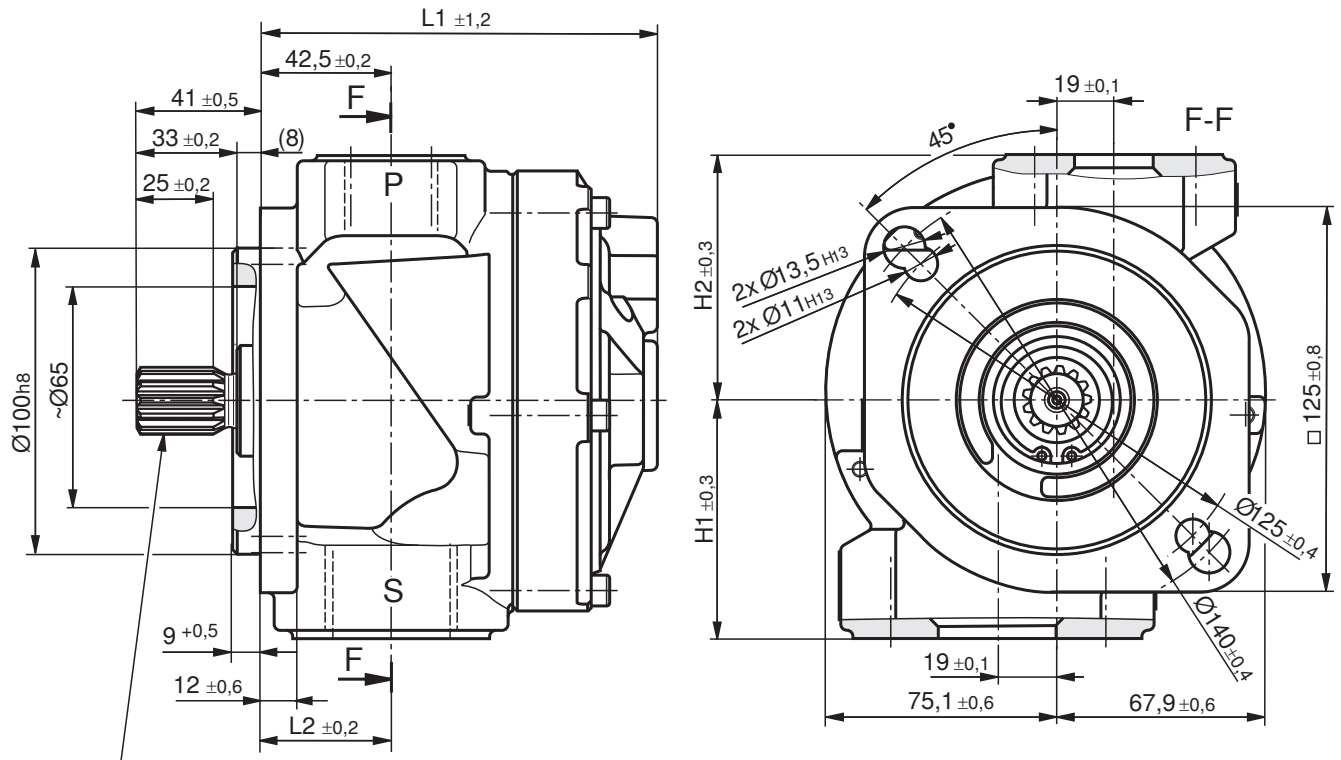


Involute gear ANSI B92.1-1996  
13T 16/32 DP30°

Type	Size	Material No.	L1	L2	H1	H2	S <sup>1)</sup>	P <sup>1)</sup>
PGZ4-1X/020RR07VB3		R901230023	116,5	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/032RR07VB3		R901230027	121,5	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/040RR07VB3		R901230031	125	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/050RR07VB3		R901230035	129	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/063RR07VB3		R901230039	134	42,5	77,4	79,6	1 1/2"	1"
PGZ4-1X/080RR07VB3		R901230043	142	42,5	77,4	79,6	1 1/2"	1"
PGZ5-1X/063RR07VB3		R901230047	134	48,5	72,9	76,1	2"	1 1/4"
PGZ5-1X/080RR07VB3		R901230051	142	48,5	72,9	76,1	2"	1 1/4"
PGZ5-1X/100RR07VB3		R901230055	150,5	48,5	72,9	76,1	2"	1 1/4"
PGZ5-1X/140RR07VB3		R901230059	163	48,5	72,9	76,1	2"	1 1/4"


<sup>1)</sup> Exact dimensions see table page 10

## Ports (dimensions in mm)

### Hole pattern of suction port "S"

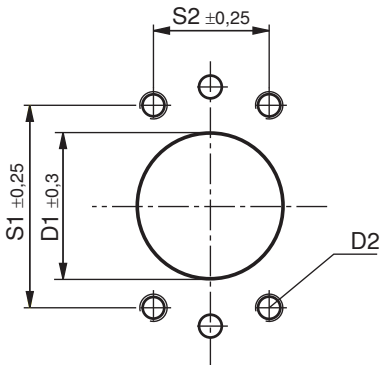

### Hole pattern of discharge port "P"

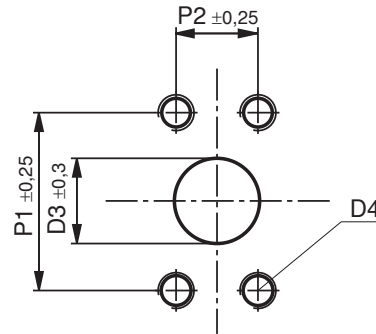

Frame size	Hole pattern / suction port S	D1	D2	S1	S2	Hole pattern / discharge port P	D3	D4	P1	P2
4	1 1/2"	Ø38,1	M12; 21	69,9	35,7	1"	Ø25,4	M10; 16	52,4	26,2
5	2"	Ø50,8	M12; 21	77,8	42,9	1 1/4"	Ø31,8	M10; 18	58,7	30,2

## Project planning information

### 1. General notes

This project planning information relates to the specific properties of the Rexroth PGZ.-1X gerotor pump. Please find comprehensive general information and suggestions in The Hydraulic Trainer, Volume 3 "Planning and Design of Hydraulic Power Systems", RE 00281.

#### 1.1 Intended use

Rexroth gerotor pumps are intended for the use in cooling, filtration, and lubrication circuits in the fields of machine and plant engineering. During project planning, the basic principles of the EU Machinery Directive or comparable national regulations outside of the EU have to be observed.

The pumps must not be used in potentially explosive atmospheres in accordance with Directive 94/9/EC (ATEX). The use as hydraulic motor is inadmissible!

#### 1.2 Technical data

The plant or machine manufacturer has to ensure the compliance with the admissible technical data and operating conditions. The pump itself does not contain a device to prevent operation outside of the admissible data.

All mentioned technical features are average values and are applicable for the specified boundary conditions. In case of modifications to the boundary conditions (e.g. viscosity), the technical data may change as well. Tolerances are possible in accordance with state of the art.

Operating the pump outside of the admissible technical data (pages 4, 5) is possible to a certain extent, however, this requires an explicit written approval of Bosch Rexroth.

### 2. Hydraulic project planning

#### 2.1 Installation location

When installing the pump more than 10 m below the tank, take additional measures to ensure that the inlet pressure is reduced to the maximum admissible value.

#### 2.2 Suction line

The line cross-sections have to be dimensioned for the rated flows in a manner that an ideal suction speed of 0.6 to 1.2 m/s is achieved on average. The suction speed must not exceed a maximum value of 2 m/s.

The suction cross-sections at the very pump are dimensioned for the maximum flow and thus are a reference only. During continuous operation at speeds lower than the admissible maximum speed, the suction tube diameter is to be dimensioned smaller than the suction port of the pump in accordance with the actual suction speed.

All in all the suction line has to be designed in a way that the admissible inlet operating pressure is complied with (0.7 to 2 bar absolute)! Bends and a combination of the suction tubes of several pumps must be avoided.

If suction filters have to be used, it has to be ensured on the system side that the lowest admissible inlet operating pressure is not exceeded even when the filter is clogged.


Please observe air tightness of the transitions and dimensional stability of the suction hose as regards to the external air pressure.

## Project planning information

(continuation of 2.2 Suction line)

The value for the immersion depth of the suction tube should be selected as high as possible. Depending on the internal tank pressure, the viscosity of the hydraulic fluid, and the flow situation within the tank, no vortex must be formed even at maximum flow. Otherwise there is the risk of aspirating air.

We recommend selecting suction tubes according to AB 23-03.

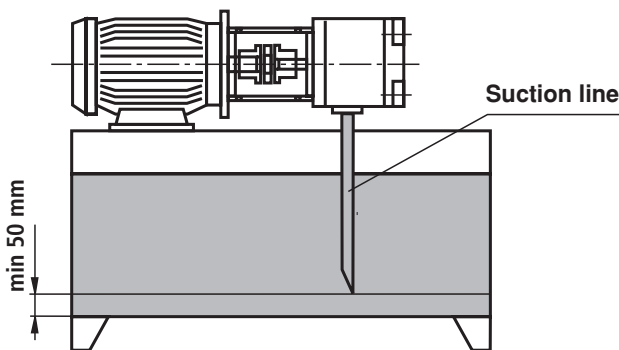

### 2.3 Pressure limitation

The gerotor pump PGZ is not equipped with devices for not exceeding the maximum operating pressure. Setting and limiting the admissible operating pressure has to be ensured on the system side.

## 3. Mechanical project planning

### 3.1 Installation and disassembly option

For installing and disassembling the pump on or from the drive the accessibility has to be provided for on the system side.

Screws of the property class 8.8 or 10.9 have to be provided for mounting purposes.

### 3.2 Mounting

On the machine side, the screws have to be accessible in a way that the required tightening torque can be applied. The tightening torque is oriented on the operating conditions and elements involved in the screw connection and has to be specified by the manufacturer when engineering the power unit, the machine, or the plant.

### 3.3 Required power unit functions

Hydraulic power units should be equipped with the following features at least:


- Tanks, the internal pressure of which corresponds to the ambient pressure in accordance with the design, have to be equipped with breather filters for pressure compensation purposes.
- The hydraulic fluid should be filled in through filling connections with rule out filling with unfiltered hydraulic fluid.
- The ingress of contaminants or moisture into the system must be avoided. When using the pump in a highly contaminated environment, the tank is to be pre-loaded by means of air pressure for this. If external cleansing of the tank is intended or to be expected during the period of use, tank fittings for tubes, lines, or hoses have to be selected ensuring a safe seal against external pressurization with water jet.

### 3.4 Ambient conditions


When operating the pump in salt-containing or corrosive environments or when the pump can be exposed to strongly abrasive substances, it has to be ensured on the system side that the shaft seal and the sealing area of the shaft do not make direct contact with the environment and that the pump is equipped with a suitable corrosion protection.

### 3.5 Installation positions


IM B3




IM B5



IM V1



IM V2



## Project planning information

---

### 4. Maintenance schedule and operational safety

For safe operation and a long lifetime of the pump a maintenance schedule has to be developed for the power unit, the machine, or the plant. The maintenance schedule has to ensure that the planned or admissible operating conditions of the pump are complied with during the period of use.

In particular, compliance with the following operating parameters has to be ensured:

- The required oil cleanliness
- The operating temperature range
- The level of the hydraulic fluid

Furthermore, the pump and the plant have to be checked for modifications of the following parameters on a regular basis:

- Vibrations
- Noise
- Temperature pump – hydraulic fluid in tank
- Foam formation in the tank
- Leak-proofness
- Operating pressure when using lubrication systems

Modifications of these parameters indicate wear of components (e.g. drive motor, coupling, pump, etc.). The reason has to be determined and remedied immediately.

In order to achieve high operational safety of the pump in the machine or plant we recommend checking the parameters mentioned above continuously and automatically and the automatic shut-down in case of changes exceeding the usual fluctuations in the designed operating range.

Plastic components of drive couplings should be replaced regularly, however, after 5 years at the latest. The corresponding information of the manufacturer is paramount.

For preventive maintenance of the pump we recommend having the seals replaced after an operating period of 5 years at the most by an authorized Bosch Rexroth service company.

### 5. Accessories

#### 5.1 SAE connection flanges

We recommend selecting the SAE flanges for suction and pressure port according to AB 22-15 (with welded connection) or AB 22-13 (with threaded connection).

#### 5.2 Other accessories

To install the Rexroth PGZ.-1X gerotor pump on electric motors we recommend selecting the pump mounting brackets according to AB 41-20 and torsionally flexible couplings according to AB 33-22.

### Note!

Please observe the following documentation in addition:

- **Data sheet RE 07008** General information on hydraulic products
- **Data sheet RE 07900** General information on installation, commissioning, and maintenance of hydraulic systems
- **Data sheet RE 90220** General information on hydraulic fluids on mineral oil basis

Bosch Rexroth AG  
Hydraulics  
Zum Eisengießer 1  
97816 Lohr am Main, Germany  
Phone +49 (0) 93 52 / 18-0  
Fax +49 (0) 93 52 / 18-23 58  
documentation@boschrexroth.de  
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.



**Bosch Rexroth AG**

Mobile Applications  
Glockeraustrasse 4  
89275 Elchingen  
Germany  
Tel. +49 7308 82-0  
info.ma@boschrexroth.de  
www.boschrexroth.com

**Your local contact person can be found at:**

[www.boschrexroth.com/addresses](http://www.boschrexroth.com/addresses)